

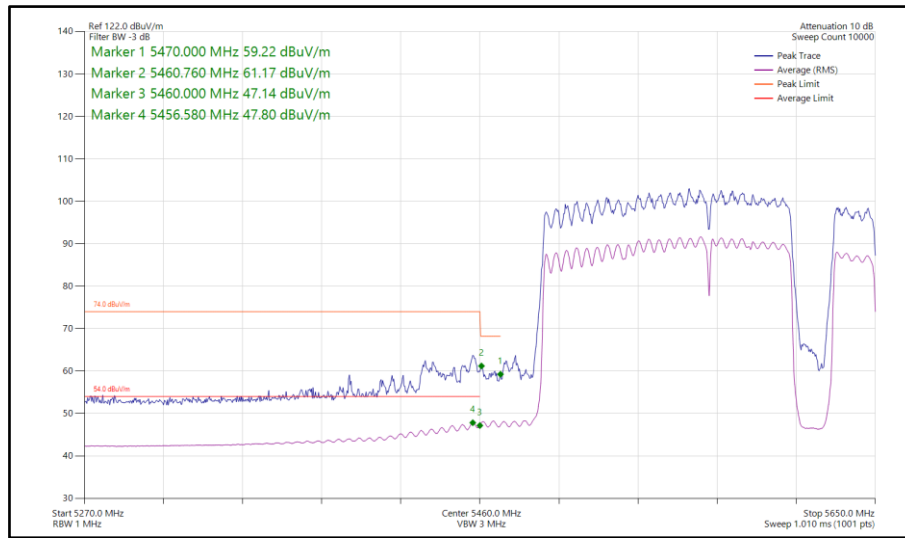


**Figure 281 - 802.11be EHT160, RU 996+484+242-98S, SDM, Core 0-1 - 5570 MHz
Band Edge Frequency 5460 MHz**



160 MHz Bandwidth - Core 0-1 (TxBF)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT160	MCS 4x1	-	-	5250	5150	64.13	51.46
802.11ax HE160	MCS 4x1	SU	-	5250	5150	63.37	51.08
802.11ac VHT160	MCS 4x1	-	-	5250	5350	63.37	49.88
802.11ax HE160	MCS 4x1	SU	-	5250	5350	64.18	48.90
802.11ac VHT160	MCS 2x1	-	-	5570	5460	62.32	49.95
802.11ax HE160	MCS 4x1	SU	-	5570	5460	63.07	51.07

Table 26 - TxBF Restricted Band Edge Results

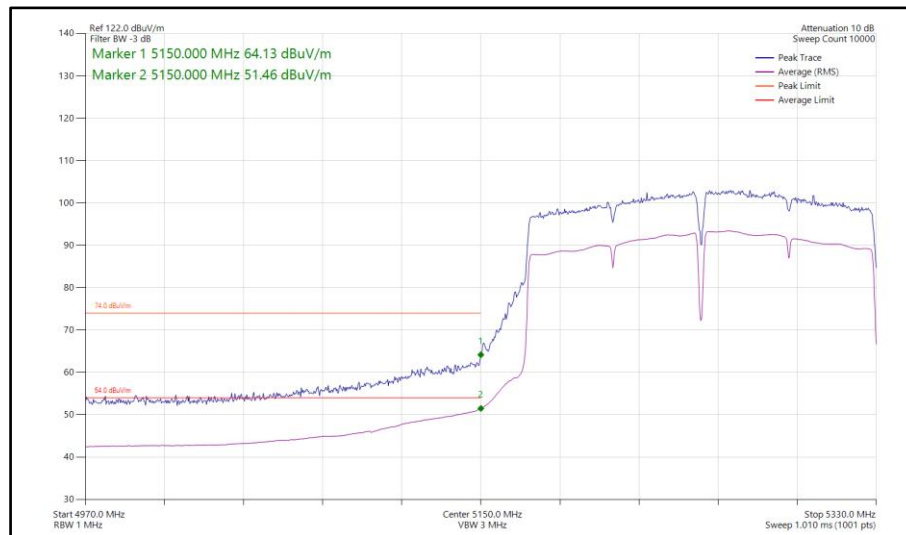


Figure 282 - 802.11ac VHT160, TxBF, Core 0-1 - 5250 MHz
Band Edge Frequency 5150 MHz

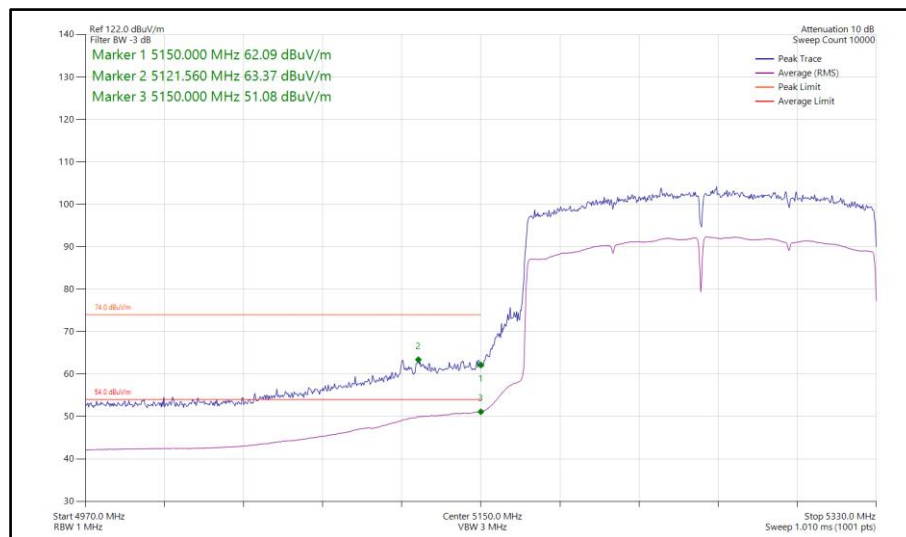


**Figure 283 - 802.11ax HE160, SU, TxBF, Core 0-1 - 5250 MHz
Band Edge Frequency 5150 MHz**

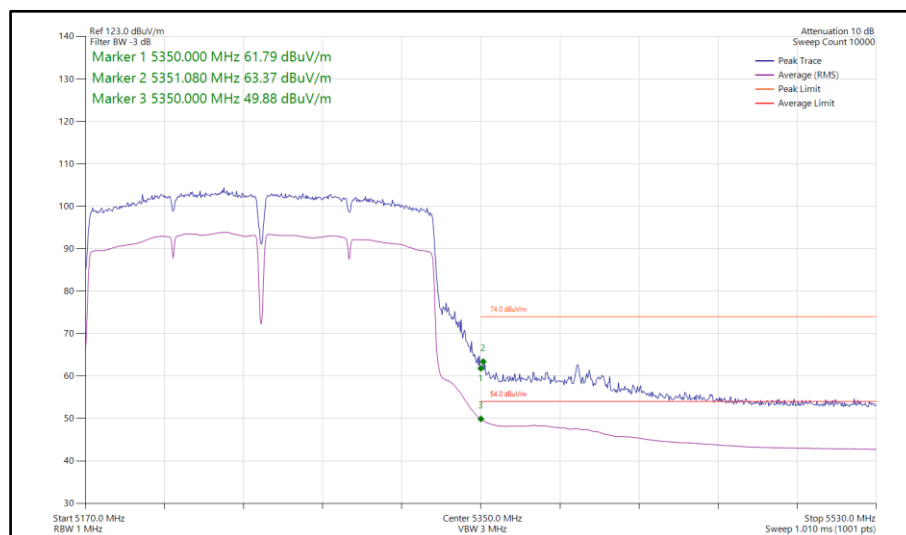


**Figure 284 - 802.11ac VHT160, TxBF, Core 0-1 - 5250 MHz
Band Edge Frequency 5350 MHz**

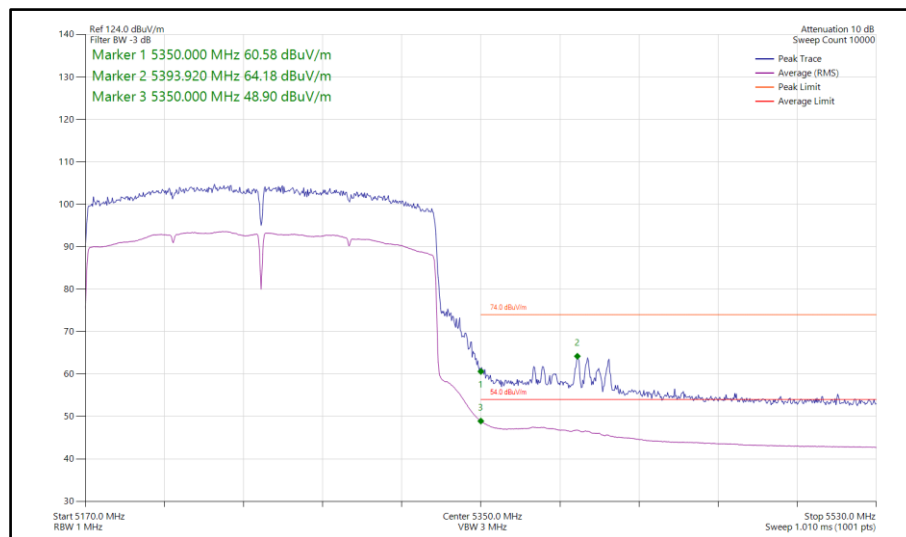


**Figure 285 - 802.11ax HE160, SU, TxBF, Core 0-1 - 5250 MHz
Band Edge Frequency 5350 MHz**

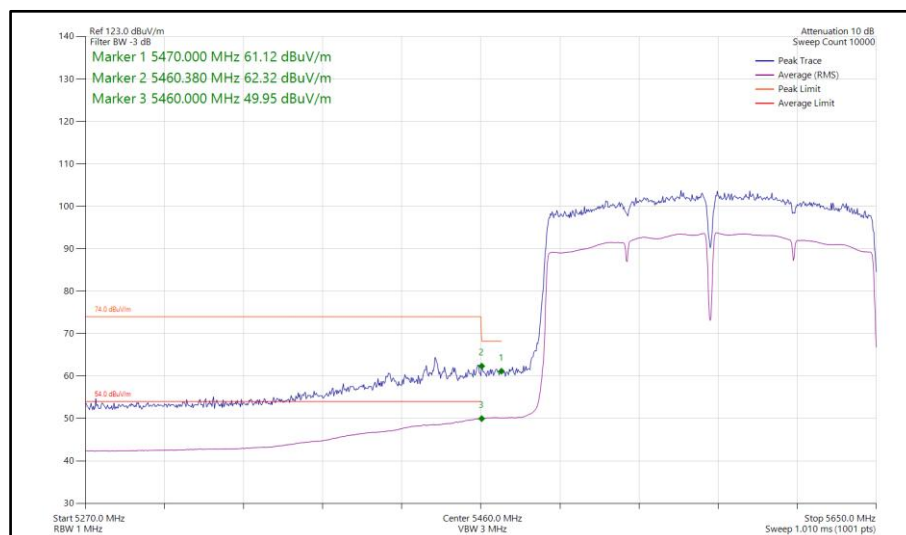


**Figure 286 - 802.11ac VHT160, TxBF, Core 0-1 - 5570 MHz
Band Edge Frequency 5460 MHz**

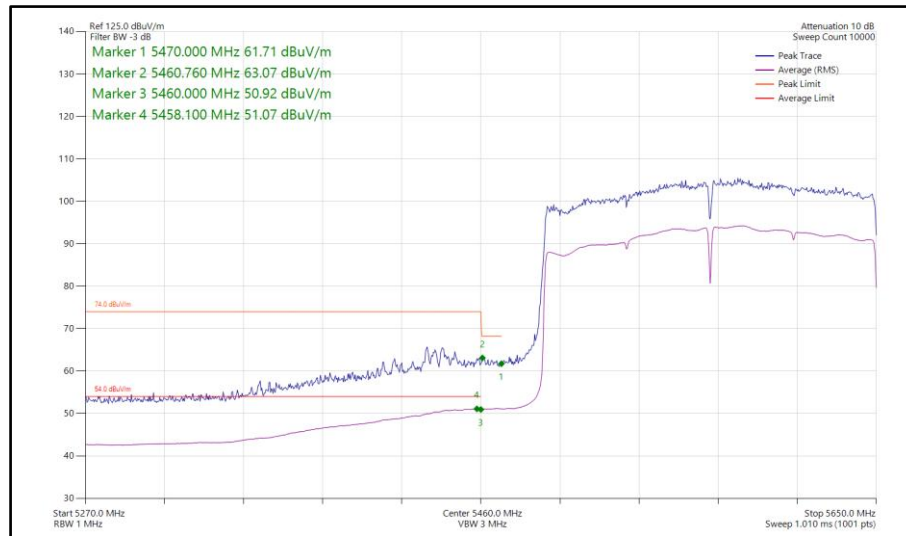


**Figure 287 - 802.11ax HE160, SU, TxBF, Core 0-1 - 5570 MHz
Band Edge Frequency 5460 MHz**

FCC 47 CFR Part 15, Limit Clause 15.205 and ISED RSS-GEN Limit Clause 8.10

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54

Table 27 - Restricted Band Edge Limit Table

2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 15, RF Chamber 16, RF Chamber 17 and RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.6.3	5125	-	O/P Mon
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	29-Oct-2026
Test Receiver	Rohde & Schwarz	ESW44	5914	12	17-Jun-2026*
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	23-Apr-2028
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
3m Semi-Anechoic Chamber, Chamber16	Albatross Projects	RF Chamber 16	5972	36	07-May-2028
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5974	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5975	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6018	12	20-Jun-2027
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	14-Sep-2026
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	14-Sep-2026
SAC Switch Unit	TUV SUD	TUV_SSU_001	6144	12	05-Dec-2026
Digital Multimeter	Fluke	115	6145	12	02-Jun-2027
Digital Multimeter	Fluke	115	6146	12	03-Jun-2027
Humidity & Temperature meter	R.S Components	1364	6149	12	28-Aug-2026
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	18-Dec-2026
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	23-Mar-2027
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	18-May-2027
Horn Antenna (1–10.5 GHz)	Schwarzbeck	BBHA 9120 B	6457	12	14-Sep-2026
Humidity and Temperature Meter	R.S Components	1364	6486	12	01-Jul-2026*
3m Semi-Anechoic Chamber	Albatross Projects	Chamber 18	6597	36	08-May-2028
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	07-May-2028
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6797	-	TU
EMI Test Receiver	Rohde & Schwarz	ESW44	6805	12	24-Jul-2026
AC Programmable Power Supply	iTech	IT7324	6812	-	O/P Mon
Broad-Band Horn Antenna 1-10GHz N	Schwarzbeck	BBHA9120B	6825	12	14-Sep-2026
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6833	12	18-Aug-2026
Handheld Hygrometer	Fluke	971	6837	12	16-Sep-2026
1m SMA-Type Cable	Junkosha	MWX221-01000AMSAMS/B	6840	12	23-Sep-2026
1m SMA-Type Cable	Junkosha	MWX221-01000AMSAMS/B	6841	12	23-Sep-2026
1m SMA-Type Cable	Junkosha	MWX221-01000AMSAMS/B	6844	12	06-Sep-2026



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
1m SMA-Type Cable	Junkosha	MWX221-01000AMSAMS/B	6845	12	06-Sep-2026
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6849	12	06-Nov-2026
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6850	12	23-Oct-2026
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6851	12	06-Nov-2026
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6886	12	02-Dec-2026

Table 28

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment

* Equipment was only employed during its calibration period



2.2 Maximum Conducted Output Power

2.2.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a),
ISED RSS-247, Clause 7.3

2.2.2 Equipment Under Test and Modification State

A3546, S/N: JKVTY791F6 - Modification State 0

2.2.3 Date of Test

29-June-2026 to 27-July-2026

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10 2020 clause 12.4.3.2 (method PM-G) for channels contained entirely within the band under test. Clause 12.4.2.2 (method SA-1) or 12.4.2.4 (method SA-2) was used for “straddle” channels.

SISO mode was tested on all ports. The antenna gain for each relevant core was included, and the resulting values were reported as EIRP output power.

MIMO output port summing was performed in accordance with KDB 662911 D01. For the CDD results the directional gain was calculated using clause F)2)f)(ii) required for CDD with unequal antenna gains with equal transmit powers. The first F)2)f)(ii) option was taken to calculate using the equation from clause F)2)f)(i) for equal antenna gains, but using the highest individual gain. Since the EUT is an 802.11 device with $N_{\text{ANTS}} < 4$, this resulted in a total directional gain of the highest individual antenna gain plus an array gain of zero. This resulted in the formula reducing to:

$$\text{CDD Directional Gain} = \text{Highest of the two individual gains}$$

Note this is different to the PSD CDD directional gain calculation, since the unintentional beamforming produced by CDD operation is a narrowband effect that averages out over a wideband signal.

SDM uses 2 uncorrelated spatial streams. For SDM modes Directional Gain was hence calculated in accordance with clause F)2)d)(ii) for completely uncorrelated signals with unequal antenna gains and equal transmit powers. The formula therefore reduced to:

$$\text{SDM Directional Gain} = 10 \cdot \log((10^{(G_1/10)} + 10^{(G_2/10)})/2)$$

TxBF uses 1 spatial stream over 2 transmit cores. Therefore the signal was correlated and the gain was calculated in accordance with clause F)2)d)(i) for correlated signals with unequal antenna gains and equal transmit powers. The formula reduces to:

$$\text{TxBF Directional Gain} = 10 \cdot \log((10^{(G_1/20)} + 10^{(G_2/20)})^{2/2})$$



These results in the following gain calculations for output power:

Frequency Range (MHz)	Core 0 Peak Gain (dBi)	Core 1 Peak Gain (dBi)	CDD Directional Gain (Wideband) (dBi)	SDM Directional Gain (dBi)	TxBF Directional Gain (dBi)
5150 to 5250	1.30	2.00	2.00	1.66	4.67
5250 to 5350	2.20	1.30	2.20	1.77	4.77
5470 to 5725	1.70	0.90	1.70	1.32	4.32
5725 to 5850	1.20	0.40	1.20	0.82	3.82

Table 29 - Output Power Antenna Gain Calculations

2.2.5 Environmental Conditions

Ambient Temperature 21.1 - 24.2 °C
Relative Humidity 51.7 - 66.7 %



2.2.6 Test Results

5 GHz WLAN

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	19.87	-	-	-	19.87	24.00	-4.13
5200	19.86	-	-	-	19.86	24.00	-4.14
5240	19.93	-	-	-	19.93	24.00	-4.07

Table 30 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	16.476	17.65	-	-	-	17.65	1.30	18.95	22.17	-3.22
5200	16.368	17.66	-	-	-	17.66	1.30	18.96	22.14	-3.18
5240	16.362	17.65	-	-	-	17.65	1.30	18.95	22.14	-3.19

Table 31 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.7
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	17.04	-	-	-	17.04	24.00	-6.96
5230	20.05	-	-	-	20.05	24.00	-3.95

Table 32 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	36.250	17.05	-	-	-	17.05	1.30	18.35	23.00	-4.65
5230	37.392	20.07	-	-	-	20.07	1.30	21.37	23.00	-1.63

Table 33 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	18.40	-	-	-	18.40	24.00	-5.60

Table 34 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	75.636	18.47	-	-	-	18.47	1.30	19.77	23.00	-3.23

Table 35 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	11.69	-	-	-	11.69	24.00	-12.31

Table 36 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250	77.238	11.63	-	-	-	11.63	1.30	12.93	23.00	-10.07

Table 37 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	20.25	-	-	-	20.25	24.00	-3.75
5200	20.23	-	-	-	20.23	24.00	-3.77
5240	20.16	-	-	-	20.16	24.00	-3.84

Table 38 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	17.616	18.05	-	-	-	18.05	1.30	19.35	22.46	-3.11
5200	17.616	18.00	-	-	-	18.00	1.30	19.30	22.46	-3.16
5240	17.610	17.69	-	-	-	17.69	1.30	18.99	22.46	-3.47

Table 39 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	18.29	-	-	-	18.29	24.00	-5.71
5230	20.16	-	-	-	20.16	24.00	-3.84

Table 40 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	36.130	18.09	-	-	-	18.09	1.30	19.39	23.00	-3.61
5230	36.130	20.17	-	-	-	20.17	1.30	21.47	23.00	-1.53

Table 41 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	18.16	-	-	-	18.16	24.00	-5.84

Table 42 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	75.108	18.41	-	-	-	18.41	1.30	19.71	23.00	-3.29

Table 43 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	12.74	-	-	-	12.74	24.00	-11.26

Table 44 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250	76.944	12.73	-	-	-	12.73	1.30	14.03	23.00	-8.97

Table 45 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	19.53	-	-	-	19.53	24.00	-4.47
5200	20.20	-	-	-	20.20	24.00	-3.80
5240	20.22	-	-	-	20.22	24.00	-3.78

Table 46 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	18.786	18.02	-	-	-	18.02	1.30	19.32	22.74	-3.41
5200	18.792	18.00	-	-	-	18.00	1.30	19.30	22.74	-3.44
5220	18.912	17.97	-	-	-	17.97	1.30	19.27	22.77	-3.49
5240	18.792	17.95	-	-	-	17.95	1.30	19.25	22.74	-3.49

Table 47 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	18.10	-	-	-	18.10	24.00	-5.90
5230	20.12	-	-	-	20.12	24.00	-3.88

Table 48 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	37.584	18.05	-	-	-	18.05	1.30	19.35	23.00	-3.65
5230	37.608	20.06	-	-	-	20.06	1.30	21.36	23.00	-1.64

Table 49 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	17.00	-	-	-	17.00	24.00	-7.00

Table 50 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	76.670	17.23	-	-	-	17.23	1.30	18.53	23.00	-4.47

Table 51 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	12.79	-	-	-	12.79	24.00	-11.21

Table 52 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250	77.700	12.79	-	-	-	12.79	1.30	14.09	23.00	-8.91

Table 53 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	11.99	-	-	-	11.99	24.00	-12.01
5200 (RU26.0)	12.01	-	-	-	12.01	24.00	-11.99
5240 (RU26.8)	12.03	-	-	-	12.03	24.00	-11.97

Table 54 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU26.0)	17.736	9.65	-	-	-	9.65	1.30	10.95	22.49	-11.54
5200 (RU26.0)	17.598	9.74	-	-	-	9.74	1.30	11.04	22.45	-11.42
5240 (RU26.8)	17.442	9.74	-	-	-	9.74	1.30	11.04	22.42	-11.38

Table 55 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	14.55	-	-	-	14.55	24.00	-9.45
5200 (RU52.37)	14.41	-	-	-	14.41	24.00	-9.59
5240 (RU52.40)	14.08	-	-	-	14.08	24.00	-9.92

Table 56 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU52.37)	17.298	12.33	-	-	-	12.33	1.30	13.63	22.38	-8.75
5200 (RU52.37)	17.340	12.40	-	-	-	12.40	1.30	13.70	22.39	-8.69
5240 (RU52.40)	17.034	12.08	-	-	-	12.08	1.30	13.38	22.31	-8.93

Table 57 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	16.93	-	-	-	16.93	24.00	-7.07
5200 (RU106.53)	16.70	-	-	-	16.70	24.00	-7.30
5240 (RU106.54)	17.18	-	-	-	17.18	24.00	-6.82

Table 58 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU106.53)	17.034	14.62	-	-	-	14.62	1.30	15.92	22.31	-6.39
5200 (RU106.53)	17.100	14.73	-	-	-	14.73	1.30	16.03	22.33	-6.30
5240 (RU106.54)	16.962	14.61	-	-	-	14.61	1.30	15.91	22.29	-6.38

Table 59 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 52 + RU Size 26.70)	16.17	-	-	-	16.17	24.00	-7.83
5200 (RU Size 52 + RU Size 26.70)	16.43	-	-	-	16.43	24.00	-7.57
5240 (RU Size 52 + RU Size 26.72)	16.07	-	-	-	16.07	24.00	-7.93

Table 60 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU Size 52 + RU Size 26.70)	16.242	14.11	-	-	-	14.11	1.30	15.41	22.11	-6.70
5200 (RU Size 52 + RU Size 26.70)	16.194	13.90	-	-	-	13.90	1.30	15.20	22.09	-6.90
5240 (RU Size 52 + RU Size 26.72)	15.930	13.84	-	-	-	13.84	1.30	15.14	22.02	-6.88

Table 61 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 106 + RU Size 26.82)	17.08	-	-	-	17.08	24.00	-6.92
5200 (RU Size 106 + RU Size 26.82)	17.55	-	-	-	17.55	24.00	-6.45
5220 (RU Size 106 + RU Size 26.82)	17.89	-	-	-	17.89	24.00	-6.11
5240 (RU Size 106 + RU Size 26.83)	17.65	-	-	-	17.65	24.00	-6.35

Table 62 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU Size 106 + RU Size 26.82)	17.622	15.73	-	-	-	15.73	1.30	17.03	22.46	-5.43
5200 (RU Size 106 + RU Size 26.82)	17.616	15.31	-	-	-	15.31	1.30	16.61	22.46	-5.85
5220 (RU Size 106 + RU Size 26.82)	17.676	15.68	-	-	-	15.68	1.30	16.98	22.47	-5.49
5240 (RU Size 106 + RU Size 26.83)	17.178	15.45	-	-	-	15.45	1.30	16.75	22.35	-5.60

Table 63 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210 (RU Size 484 + RU Size 242.90)	16.18	-	-	-	16.18	24.00	-7.82
5210 (RU Size 484 + RU Size 242.91)	16.26	-	-	-	16.26	24.00	-7.74
5210 (RU Size 484 + RU Size 242.92)	16.15	-	-	-	16.15	24.00	-7.85
5210 (RU Size 484 + RU Size 242.93)	16.07	-	-	-	16.07	24.00	-7.93

Table 64 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210 (RU Size 484 + RU Size 242.90)	58.160	16.24	-	-	-	16.24	1.30	17.54	23.00	-5.46
5210 (RU Size 484 + RU Size 242.91)	77.220	16.17	-	-	-	16.17	1.30	17.47	23.00	-5.53
5210 (RU Size 484 + RU Size 242.92)	77.286	16.11	-	-	-	16.11	1.30	17.41	23.00	-5.59
5210 (RU Size 484 + RU Size 242.93)	58.160	16.15	-	-	-	16.15	1.30	17.45	23.00	-5.55

Table 65 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	10.30	-	-	-	10.30	24.00	-13.70
5250 (RU Size 996 + RU Size 484.95)	9.54	-	-	-	9.54	24.00	-14.46

Table 66 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	38.840	10.47	-	-	-	10.47	1.30	11.77	23.00	-11.23
5250 (RU Size 996 + RU Size 484.95)	78.750	9.72	-	-	-	9.72	1.30	11.02	23.00	-11.98

Table 67 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	13.77	-	-	-	13.77	24.00	-10.23
5250 (RU Size 996 + RU Size 484.95)	13.51	-	-	-	13.51	24.00	-10.49

Table 68 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	77.742	13.78	-	-	-	13.78	1.30	15.08	23.00	-7.92
5250 (RU Size 996 + RU Size 484.95)	77.880	13.23	-	-	-	13.23	1.30	14.53	23.00	-8.47

Table 69 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	11.48	-	-	-	11.48	24.00	-12.52
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	11.46	-	-	-	11.46	24.00	-12.54
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	11.31	-	-	-	11.31	24.00	-12.69
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	11.12	-	-	-	11.12	24.00	-12.88

Table 70 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	59.040	11.66	-	-	-	11.66	1.30	12.96	23.00	-10.04
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	78.036	11.43	-	-	-	11.43	1.30	12.73	23.00	-10.27
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	78.246	11.28	-	-	-	11.28	1.30	12.58	23.00	-10.42
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	78.204	11.05	-	-	-	11.05	1.30	12.35	23.00	-10.65

Table 71 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	12.69	-	-	-	12.69	24.00	-11.31

Table 72 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	77.760	12.90	-	-	-	12.90	1.30	14.20	23.00	-8.80

Table 73 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	19.992	20.01	-	-	-	20.01	24.00	-3.99
5280	20.358	20.12	-	-	-	20.12	24.00	-3.88
5320	19.932	19.09	-	-	-	19.09	24.00	-4.91

Table 74 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	16.362	20.01	-	-	-	20.01	23.14	-3.13	2.20	22.21	29.14	-6.93
5280	16.476	20.12	-	-	-	20.12	23.17	-3.05	2.20	22.32	29.17	-6.85
5320	16.362	19.09	-	-	-	19.09	23.14	-4.05	2.20	21.29	29.14	-7.85

Table 75 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	55.788	20.06	-	-	-	20.06	24.00	-3.94
5310	41.590	16.52	-	-	-	16.52	24.00	-7.48

Table 76 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	37.392	20.06	-	-	-	20.06	24.00	-3.94	2.20	22.26	30.00	-7.74
5310	36.230	16.52	-	-	-	16.52	24.00	-7.48	2.20	18.72	30.00	-11.28

Table 77 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	97.284	18.17	-	-	-	18.17	24.00	-5.83

Table 78 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	75.702	18.17	-	-	-	18.17	24.00	-5.83	2.20	20.37	30.00	-9.63

Table 79 - ISSED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250	81.816	11.61	-	-	-	11.61	24.00	-12.39

Table 80 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250	77.154	11.55	-	-	-	11.55	24.00	-12.45	2.20	13.75	30.00	-16.25

Table 81 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.096	20.10	-	-	-	20.10	24.00	-3.90
5280	21.090	19.90	-	-	-	19.90	24.00	-4.10
5320	21.126	20.21	-	-	-	20.21	24.00	-3.79

Table 82 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	17.610	20.10	-	-	-	20.10	23.46	-3.36	2.20	22.30	29.46	-7.16
5280	17.616	19.90	-	-	-	19.90	23.46	-3.56	2.20	22.10	29.46	-7.36
5320	17.604	20.21	-	-	-	20.21	23.46	-3.25	2.20	22.41	29.46	-7.05

Table 83 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.980	20.06	-	-	-	20.06	24.00	-3.94
5310	41.620	18.07	-	-	-	18.07	24.00	-5.93

Table 84 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	36.150	20.06	-	-	-	20.06	24.00	-3.94	2.20	22.26	30.00	-7.74
5310	36.130	18.07	-	-	-	18.07	24.00	-5.93	2.20	20.27	30.00	-9.73

Table 85 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	80.366	16.62	-	-	-	16.62	24.00	-7.38

Table 86 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	75.108	16.62	-	-	-	16.62	24.00	-7.38	2.20	18.82	30.00	-11.18

Table 87 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250	81.564	12.74	-	-	-	12.74	24.00	-11.26

Table 88 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250	76.902	12.72	-	-	-	12.72	24.00	-11.28	2.20	14.92	30.00	-15.08

Table 89 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.672	20.11	-	-	-	20.11	24.00	-3.89
5280	21.606	20.19	-	-	-	20.19	24.00	-3.81
5320	21.924	19.50	-	-	-	19.50	24.00	-4.50

Table 90 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	18.798	20.11	-	-	-	20.11	23.74	-3.63	2.20	22.31	29.74	-7.43
5280	18.798	20.19	-	-	-	20.19	23.74	-3.55	2.20	22.39	29.74	-7.35
5320	18.798	19.50	-	-	-	19.50	23.74	-4.24	2.20	21.70	29.74	-8.04

Table 91 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	42.360	20.03	-	-	-	20.03	24.00	-3.97
5310	42.720	17.61	-	-	-	17.61	24.00	-6.39

Table 92 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	37.620	20.03	-	-	-	20.03	24.00	-3.97	2.20	22.23	30.00	-7.77
5310	37.632	17.61	-	-	-	17.61	24.00	-6.39	2.20	19.81	30.00	-10.19

Table 93 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	81.686	16.25	-	-	-	16.25	24.00	-7.75

Table 94 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	76.692	16.25	-	-	-	16.25	24.00	-7.75	2.20	18.45	30.00	-11.55

Table 95 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250	81.942	12.78	-	-	-	12.78	24.00	-11.22

Table 96 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250	77.700	12.75	-	-	-	12.75	24.00	-11.25	2.20	14.95	30.00	-15.05

Table 97 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU52.37)	19.998	14.11	-	-	-	14.11	24.00	-9.89
5280 (RU52.37)	19.644	14.34	-	-	-	14.34	23.93	-9.59
5320 (RU52.40)	19.872	14.31	-	-	-	14.31	23.98	-9.68

Table 98 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU52.37)	17.334	14.11	-	-	-	14.11	23.39	-9.28	2.20	16.31	29.39	-13.08
5280 (RU52.37)	17.478	14.34	-	-	-	14.34	23.42	-9.09	2.20	16.54	29.42	-12.89
5320 (RU52.40)	17.124	14.31	-	-	-	14.31	23.34	-9.03	2.20	16.51	29.34	-12.83

Table 99 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU106.53)	19.908	16.95	-	-	-	16.95	23.99	-7.04
5280 (RU106.53)	19.860	16.94	-	-	-	16.94	23.98	-7.04
5320 (RU106.54)	19.704	16.79	-	-	-	16.79	23.95	-7.16

Table 100 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU106.53)	17.004	16.95	-	-	-	16.95	23.31	-6.35	2.20	19.15	29.31	-10.15
5280 (RU106.53)	17.214	16.94	-	-	-	16.94	23.36	-6.42	2.20	19.14	29.36	-10.22
5320 (RU106.54)	16.452	16.79	-	-	-	16.79	23.16	-6.37	2.20	18.99	29.16	-10.17

Table 101 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	18.426	16.12	-	-	-	16.12	23.65	-7.53
5280 (RU Size 52 + RU Size 26.70)	18.348	15.96	-	-	-	15.96	23.64	-7.68
5320 (RU Size 52 + RU Size 26.72)	18.360	16.01	-	-	-	16.01	23.64	-7.63

Table 102 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU Size 52 + RU Size 26.70)	16.152	16.12	-	-	-	16.12	23.08	-6.96	2.20	18.32	29.08	-10.76
5280 (RU Size 52 + RU Size 26.70)	15.996	15.96	-	-	-	15.96	23.04	-7.08	2.20	18.16	29.04	-10.88
5320 (RU Size 52 + RU Size 26.72)	16.164	16.01	-	-	-	16.01	23.09	-7.08	2.20	18.21	29.09	-10.88

Table 103 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	20.310	17.77	-	-	-	17.77	24.00	-6.23
5280 (RU Size 106 + RU Size 26.82)	20.436	17.73	-	-	-	17.73	24.00	-6.27
5300 (RU Size 106 + RU Size 26.82)	19.926	18.04	-	-	-	18.04	23.99	-5.96
5320 (RU Size 106 + RU Size 26.83)	19.878	17.43	-	-	-	17.43	23.98	-6.55

Table 104 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU Size 106 + RU Size 26.82)	17.634	17.77	-	-	-	17.77	23.46	-5.69	2.20	19.97	29.46	-9.49
5280 (RU Size 106 + RU Size 26.82)	17.670	17.73	-	-	-	17.73	23.47	-5.74	2.20	19.93	29.47	-9.54
5300 (RU Size 106 + RU Size 26.82)	17.604	18.04	-	-	-	18.04	23.46	-5.42	2.20	20.24	29.46	-9.22
5320 (RU Size 106 + RU Size 26.83)	17.412	17.43	-	-	-	17.43	23.41	-5.98	2.20	19.63	29.41	-9.78

Table 105 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	62.900	15.68	-	-	-	15.68	24.00	-8.32
5290 (RU Size 484 + RU Size 242.93)	62.920	15.45	-	-	-	15.45	24.00	-8.55

Table 106 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290 (RU Size 484 + RU Size 242.90)	58.160	15.68	-	-	-	15.68	24.00	-8.32	2.20	17.88	30.00	-12.12
5290 (RU Size 484 + RU Size 242.93)	58.160	15.45	-	-	-	15.45	24.00	-8.55	2.20	17.65	30.00	-12.35

Table 107 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	82.400	13.27	-	-	-	13.27	24.00	-10.73
5250 (RU Size 996 + RU Size 484.95)	87.738	13.71	-	-	-	13.71	24.00	-10.29

Table 108 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250 (RU Size 996 + RU Size 484.94)	77.800	13.27	-	-	-	13.27	24.00	-10.73	2.20	15.47	30.00	-14.53
5250 (RU Size 996 + RU Size 484.95)	77.742	13.70	-	-	-	13.70	24.00	-10.30	2.20	15.90	30.00	-14.10

Table 109 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	81.984	9.54	-	-	-	9.54	24.00	-14.46
5250 (RU Size 996 + RU Size 484.95)	42.400	10.51	-	-	-	10.51	24.00	-13.49

Table 110 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250 (RU Size 996 + RU Size 484.94)	78.750	9.67	-	-	-	9.67	24.00	-14.33	2.20	11.87	30.00	-18.13
5250 (RU Size 996 + RU Size 484.95)	38.840	10.22	-	-	-	10.22	24.00	-13.78	2.20	12.42	30.00	-17.58

Table 111 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	89.880	12.61	-	-	-	12.61	24.00	-11.39
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	87.990	12.57	-	-	-	12.57	24.00	-11.43
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	87.990	12.78	-	-	-	12.78	24.00	-11.22
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	88.074	12.87	-	-	-	12.87	24.00	-11.13

Table 112 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	77.800	12.81	-	-	-	12.81	24.00	-11.19	2.20	15.01	30.00	-14.99
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	77.700	12.54	-	-	-	12.54	24.00	-11.46	2.20	14.74	30.00	-15.26
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	77.700	12.79	-	-	-	12.79	24.00	-11.21	2.20	14.99	30.00	-15.01
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	77.742	12.83	-	-	-	12.83	24.00	-11.17	2.20	15.03	30.00	-14.97

Table 113 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	62.800	11.33	-	-	-	11.33	24.00	-12.67

Table 114 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	58.960	11.57	-	-	-	11.57	24.00	-12.43	2.20	13.77	30.00	-16.23

Table 115 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	19.692	19.22	-	-	-	19.22	23.94	-4.72
5600	21.762	20.28	-	-	-	20.28	24.00	-3.72
5700	19.824	18.82	-	-	-	18.82	23.97	-5.15
5720	14.906	19.25	-	-	-	19.25	22.73	-3.49

Table 116 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	16.362	19.22	-	-	-	19.22	23.14	-3.92	1.70	20.92	29.14	-8.22
5600	16.758	20.28	-	-	-	20.28	23.24	-2.97	1.70	21.98	29.24	-7.27
5700	16.362	18.82	-	-	-	18.82	23.14	-4.32	1.70	20.52	29.14	-8.62
5720	13.088	19.25	-	-	-	19.25	22.17	-2.92	1.70	20.95	28.17	-7.22

Table 117 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	41.690	15.14	-	-	-	15.14	24.00	-8.86
5590	70.764	20.08	-	-	-	20.08	24.00	-3.92
5670	62.328	20.16	-	-	-	20.16	24.00	-3.84
5710	42.228	19.78	-	-	-	19.78	24.00	-4.22

Table 118 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	36.210	15.14	-	-	-	15.14	24.00	-8.86	1.70	16.84	30.00	-13.16
5590	38.388	20.08	-	-	-	20.08	24.00	-3.92	1.70	21.78	30.00	-8.22
5670	37.524	20.16	-	-	-	20.16	24.00	-3.84	1.70	21.86	30.00	-8.14
5710	32.952	19.78	-	-	-	19.78	24.00	-4.22	1.70	21.48	30.00	-8.52

Table 119 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	88.660	16.80	-	-	-	16.80	24.00	-7.20
5610	97.834	20.14	-	-	-	20.14	24.00	-3.86
5690	92.882	20.02	-	-	-	20.02	24.00	-3.98

Table 120 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	75.482	16.80	-	-	-	16.80	24.00	-7.20	1.70	18.50	30.00	-11.50
5610	75.834	20.14	-	-	-	20.14	24.00	-3.86	1.70	21.84	30.00	-8.16
5690	72.488	20.02	-	-	-	20.02	24.00	-3.98	1.70	21.72	30.00	-8.28

Table 121 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570	163.170	16.59	-	-	-	16.59	24.00	-7.41

Table 122 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570	154.350	16.59	-	-	-	16.59	24.00	-7.41	1.70	18.29	30.00	-11.71

Table 123 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.222	20.04	-	-	-	20.04	24.00	-3.96
5600	22.872	20.22	-	-	-	20.22	24.00	-3.78
5700	21.048	18.19	-	-	-	18.19	24.00	-5.81
5720	15.614	19.18	-	-	-	19.18	22.94	-3.76

Table 124 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	17.610	20.04	-	-	-	20.04	23.46	-3.41	1.70	21.74	29.46	-7.71
5600	17.910	20.22	-	-	-	20.22	23.53	-3.31	1.70	21.92	29.53	-7.61
5700	17.610	18.19	-	-	-	18.19	23.46	-5.27	1.70	19.89	29.46	-9.57
5720	13.688	19.18	-	-	-	19.18	22.36	-3.19	1.70	20.88	28.36	-7.49

Table 125 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	41.976	18.68	-	-	-	18.68	24.00	-5.32
5590	44.196	20.08	-	-	-	20.08	24.00	-3.92
5670	41.950	19.17	-	-	-	19.17	24.00	-4.83
5710	36.216	19.85	-	-	-	19.85	24.00	-4.15

Table 126 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	36.132	18.68	-	-	-	18.68	24.00	-5.32	1.70	20.38	30.00	-9.62
5590	36.636	20.08	-	-	-	20.08	24.00	-3.92	1.70	21.78	30.00	-8.22
5670	36.150	19.17	-	-	-	19.17	24.00	-4.83	1.70	20.87	30.00	-9.13
5710	32.784	19.85	-	-	-	19.85	24.00	-4.15	1.70	21.55	30.00	-8.45

Table 127 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	80.366	18.47	-	-	-	18.47	24.00	-5.53
5610	80.740	20.08	-	-	-	20.08	24.00	-3.92
5690	75.414	20.07	-	-	-	20.07	24.00	-3.93

Table 128 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	75.064	18.47	-	-	-	18.47	24.00	-5.53	1.70	20.17	30.00	-9.83
5610	75.130	20.08	-	-	-	20.08	24.00	-3.92	1.70	21.78	30.00	-8.22
5690	71.960	20.07	-	-	-	20.07	24.00	-3.93	1.70	21.77	30.00	-8.23

Table 129 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570	162.918	16.35	-	-	-	16.35	24.00	-7.65

Table 130 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570	153.804	16.35	-	-	-	16.35	24.00	-7.65	1.70	18.05	30.00	-11.95

Table 131 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.480	20.24	-	-	-	20.24	24.00	-3.76
5600	23.220	20.34	-	-	-	20.34	24.00	-3.66
5700	21.726	17.57	-	-	-	17.57	24.00	-6.43
5720	15.860	19.29	-	-	-	19.29	23.00	-3.71

Table 132 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	18.804	20.24	-	-	-	20.24	23.74	-3.50	1.70	21.94	29.74	-7.80
5600	19.068	20.34	-	-	-	20.34	23.80	-3.47	1.70	22.04	29.80	-7.77
5700	18.798	17.57	-	-	-	17.57	23.74	-6.17	1.70	19.27	29.74	-10.47
5720	14.282	19.29	-	-	-	19.29	22.55	-3.25	1.70	20.99	28.55	-7.55

Table 133 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	42.084	18.45	-	-	-	18.45	24.00	-5.55
5590	44.148	20.09	-	-	-	20.09	24.00	-3.91
5670	42.288	18.66	-	-	-	18.66	24.00	-5.34
5710	36.336	19.76	-	-	-	19.76	24.00	-4.24

Table 134 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	37.608	18.45	-	-	-	18.45	24.00	-5.55	1.70	20.15	30.00	-9.85
5590	38.028	20.09	-	-	-	20.09	24.00	-3.91	1.70	21.79	30.00	-8.21
5670	37.620	18.66	-	-	-	18.66	24.00	-5.34	1.70	20.36	30.00	-9.64
5710	33.540	19.76	-	-	-	19.76	24.00	-4.24	1.70	21.46	30.00	-8.54

Table 135 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	81.598	18.10	-	-	-	18.10	24.00	-5.90
5610	81.664	20.20	-	-	-	20.20	24.00	-3.80
5690	75.942	20.14	-	-	-	20.14	24.00	-3.86

Table 136 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	76.670	18.10	-	-	-	18.10	24.00	-5.90	1.70	19.80	30.00	-10.20
5610	76.692	20.20	-	-	-	20.20	24.00	-3.80	1.70	21.90	30.00	-8.10
5690	72.774	20.14	-	-	-	20.14	24.00	-3.86	1.70	21.84	30.00	-8.16

Table 137 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570	163.842	16.19	-	-	-	16.19	24.00	-7.81

Table 138 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570	155.442	16.19	-	-	-	16.19	24.00	-7.81	1.70	17.89	30.00	-12.11

Table 139 - ISED Maximum Conducted (average) Output Power Results



Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU52.37)	19.758	14.63	-	-	-	14.63	23.96	-9.33
5600 (RU52.37)	19.986	14.75	-	-	-	14.75	24.00	-9.25
5620 (RU52.37)	21.036	14.93	-	-	-	14.93	24.00	-9.07
5700 (RU52.40)	19.776	14.35	-	-	-	14.35	23.96	-9.61
5720 (RU52.39)	14.066	13.95	-	-	-	13.95	22.48	-8.53
5720 (RU52.40)	14.132	-3.11	-	-	-	-3.11	22.50	-25.61

Table 140 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500 (RU52.37)	17.208	14.63	-	-	-	14.63	23.36	-8.72	1.70	16.33	29.36	-13.02
5600 (RU52.37)	17.376	14.75	-	-	-	14.75	23.40	-8.65	1.70	16.45	29.40	-12.95
5620 (RU52.37)	17.730	14.93	-	-	-	14.93	23.49	-8.56	1.70	16.63	29.49	-12.86
5700 (RU52.40)	17.106	14.35	-	-	-	14.35	23.33	-8.98	1.70	16.05	29.33	-13.28
5720 (RU52.39)	11.288	13.95	-	-	-	13.95	21.53	-7.57	1.70	15.65	27.53	-11.87
5720 (RU52.40)	13.556	-3.11	-	-	-	-3.11	22.32	-25.43	1.70	-1.41	28.32	-29.73

Table 141 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU106.53)	19.668	16.92	-	-	-	16.92	23.94	-7.02
5600 (RU106.53)	21.000	17.93	-	-	-	17.93	24.00	-6.07
5700 (RU106.54)	19.632	17.12	-	-	-	17.12	23.93	-6.81
5720 (RU106.53)	15.668	17.05	-	-	-	17.05	22.95	-5.90
5720 (RU106.54)	14.138	14.45	-	-	-	14.45	22.50	-8.06

Table 142 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500 (RU106.53)	17.196	16.92	-	-	-	16.92	23.35	-6.44	1.70	18.62	29.35	-10.74
5600 (RU106.53)	17.712	17.93	-	-	-	17.93	23.48	-5.55	1.70	19.63	29.48	-9.85
5700 (RU106.54)	16.782	17.12	-	-	-	17.12	23.25	-6.13	1.70	18.82	29.25	-10.43
5720 (RU106.53)	14.432	17.05	-	-	-	17.05	22.59	-5.54	1.70	18.75	28.59	-9.84
5720 (RU106.54)	12.284	14.45	-	-	-	14.45	21.89	-7.45	1.70	16.15	27.89	-11.75

Table 143 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	18.300	16.22	-	-	-	16.22	23.62	-7.41
5600 (RU Size 52 + RU Size 26.70)	19.266	16.82	-	-	-	16.82	23.85	-7.03
5700 (RU Size 52 + RU Size 26.72)	18.222	16.12	-	-	-	16.12	23.61	-7.49
5720 (RU Size 52 + RU Size 26.71)	14.106	16.16	-	-	-	16.16	22.49	-6.34
5720 (RU Size 52 + RU Size 26.72)	14.114	14.36	-	-	-	14.36	22.50	-8.14

Table 144 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500 (RU Size 52 + RU Size 26.70)	16.146	16.22	-	-	-	16.22	23.08	-6.87	1.70	17.92	29.08	-11.17
5600 (RU Size 52 + RU Size 26.70)	16.734	16.82	-	-	-	16.82	23.24	-6.41	1.70	18.52	29.24	-10.71
5700 (RU Size 52 + RU Size 26.72)	16.050	16.12	-	-	-	16.12	23.05	-6.94	1.70	17.82	29.05	-11.24
5720 (RU Size 52 + RU Size 26.71)	12.242	16.16	-	-	-	16.16	21.88	-5.72	1.70	17.86	27.88	-10.02
5720 (RU Size 52 + RU Size 26.72)	12.638	14.36	-	-	-	14.36	22.02	-7.66	1.70	16.06	28.02	-11.96

Table 145 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	19.968	16.99	-	-	-	16.99	24.00	-7.01
5600 (RU Size 106 + RU Size 26.82)	21.834	18.79	-	-	-	18.79	24.00	-5.21
5640 (RU Size 106 + RU Size 26.82)	21.654	18.58	-	-	-	18.58	24.00	-5.42
5700 (RU Size 106 + RU Size 26.83)	19.908	14.69	-	-	-	14.69	23.99	-9.30
5720 (RU Size 106 + RU Size 26.82)	15.644	17.88	-	-	-	17.88	22.94	-5.06
5720 (RU Size 106 + RU Size 26.83)	14.192	16.16	-	-	-	16.16	22.52	-6.36

Table 146 - FCC Maximum Conducted (average) Output Power Results



Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500 (RU Size 106 + RU Size 26.82)	17.628	16.99	-	-	-	16.99	23.46	-6.47	1.70	18.69	29.46	-10.77
5600 (RU Size 106 + RU Size 26.82)	18.036	18.79	-	-	-	18.79	23.56	-4.77	1.70	20.49	29.56	-9.07
5640 (RU Size 106 + RU Size 26.82)	18.084	18.58	-	-	-	18.58	23.57	-4.99	1.70	20.28	29.57	-9.29
5700 (RU Size 106 + RU Size 26.83)	17.418	14.69	-	-	-	14.69	23.41	-8.72	1.70	16.39	29.41	-13.02
5720 (RU Size 106 + RU Size 26.82)	14.366	17.88	-	-	-	17.88	22.57	-4.69	1.70	19.58	28.57	-8.99
5720 (RU Size 106 + RU Size 26.83)	12.584	16.16	-	-	-	16.16	22.00	-5.84	1.70	17.86	28.00	-10.14

Table 147 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	63.140	15.28	-	-	-	15.28	24.00	-8.72
5610 (RU Size 484 + RU Size 242.90)	86.920	19.30	-	-	-	19.30	24.00	-4.70
5690 (RU Size 484 + RU Size 242.90)	70.400	18.99	-	-	-	18.99	24.00	-5.01
5690 (RU Size 484 + RU Size 242.93)	63.200	19.09	-	-	-	19.09	24.00	-4.91

Table 148 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530 (RU Size 484 + RU Size 242.93)	58.140	15.28	-	-	-	15.28	24.00	-8.72	1.70	16.98	30.00	-13.02
5610 (RU Size 484 + RU Size 242.90)	58.240	19.30	-	-	-	19.30	24.00	-4.70	1.70	21.00	30.00	-9.00
5690 (RU Size 484 + RU Size 242.90)	54.120	18.99	-	-	-	18.99	24.00	-5.01	1.70	20.69	30.00	-9.31
5690 (RU Size 484 + RU Size 242.93)	73.300	19.09	-	-	-	19.09	24.00	-4.91	1.70	20.79	30.00	-9.21

Table 149 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	124.840	16.74	-	-	-	16.74	24.00	-7.26

Table 150 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570 (RU Size 996 + RU Size 484.94)	116.680	16.74	-	-	-	16.74	24.00	-7.26	1.70	18.44	30.00	-11.56

Table 151 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	124.800	16.62	-	-	-	16.62	24.00	-7.38

Table 152 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570 (RU Size 996 + RU Size 484.95)	116.760	16.62	-	-	-	16.62	24.00	-7.38	1.70	18.32	30.00	-11.68

Table 153 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	153.560	16.84	-	-	-	16.84	24.00	-7.16

Table 154 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	136.800	16.84	-	-	-	16.84	24.00	-7.16	1.70	18.54	30.00	-11.46

Table 155 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	144.520	16.55	-	-	-	16.55	24.00	-7.45

Table 156 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	136.800	16.55	-	-	-	16.55	24.00	-7.45	1.70	18.25	30.00	-11.75

Table 157 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	12.02	-	-	-	12.02	30.00	-17.98
5745	20.15	-	-	-	20.15	30.00	-9.85
5785	20.12	-	-	-	20.12	30.00	-9.88
5825	20.06	-	-	-	20.06	30.00	-9.94

Table 158 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	8.51	-	-	-	8.51	30.00	-21.49
5755	20.21	-	-	-	20.21	30.00	-9.79
5795	20.14	-	-	-	20.14	30.00	-9.86

Table 159 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	4.65	-	-	-	4.65	30.00	-25.35
5775	20.04	-	-	-	20.04	30.00	-9.96

Table 160 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	12.43	-	-	-	12.43	30.00	-17.57
5745	20.27	-	-	-	20.27	30.00	-9.73
5785	20.18	-	-	-	20.18	30.00	-9.82
5825	20.17	-	-	-	20.17	30.00	-9.83

Table 161 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	8.10	-	-	-	8.10	30.00	-21.90
5755	20.10	-	-	-	20.10	30.00	-9.90
5795	20.29	-	-	-	20.29	30.00	-9.71

Table 162 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	4.19	-	-	-	4.19	30.00	-25.81
5775	20.08	-	-	-	20.08	30.00	-9.92

Table 163 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	12.85	-	-	-	12.85	30.00	-17.15
5745	20.25	-	-	-	20.25	30.00	-9.75
5785	20.18	-	-	-	20.18	30.00	-9.82
5825	20.16	-	-	-	20.16	30.00	-9.84

Table 164 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	8.61	-	-	-	8.61	30.00	-21.39
5755	20.32	-	-	-	20.32	30.00	-9.68
5795	20.20	-	-	-	20.20	30.00	-9.80

Table 165 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	5.02	-	-	-	5.02	30.00	-24.98
5775	20.22	-	-	-	20.22	30.00	-9.78

Table 166 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.20
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	12.71	-	-	-	12.71	30.00	-17.29
5785 (RU26.0)	12.70	-	-	-	12.70	30.00	-17.30
5825 (RU26.8)	12.76	-	-	-	12.76	30.00	-17.24

Table 167 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.39)	3.18	-	-	-	3.18	30.00	-26.82
5720 (RU52.40)	14.22	-	-	-	14.22	30.00	-15.78
5745 (RU52.37)	15.52	-	-	-	15.52	30.00	-14.48
5785 (RU52.37)	15.69	-	-	-	15.69	30.00	-14.31
5825 (RU52.40)	15.58	-	-	-	15.58	30.00	-14.42

Table 168 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.53)	-10.16	-	-	-	-10.16	30.00	-40.16
5720 (RU106.54)	13.42	-	-	-	13.42	30.00	-16.58
5745 (RU106.53)	18.58	-	-	-	18.58	30.00	-11.42
5785 (RU106.53)	18.62	-	-	-	18.62	30.00	-11.38
5825 (RU106.54)	18.71	-	-	-	18.71	30.00	-11.29

Table 169 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 52 + RU Size 26.71)	-12.74	-	-	-	-12.74	30.00	-42.74
5720 (RU Size 52 + RU Size 26.72)	11.16	-	-	-	11.16	30.00	-18.84
5745 (RU Size 52 + RU Size 26.70)	17.09	-	-	-	17.09	30.00	-12.91
5785 (RU Size 52 + RU Size 26.70)	17.22	-	-	-	17.22	30.00	-12.78
5825 (RU Size 52 + RU Size 26.72)	17.23	-	-	-	17.23	30.00	-12.77

Table 170 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 106 + RU Size 26.82)	-4.96	-	-	-	-4.96	30.00	-34.96
5720 (RU Size 106 + RU Size 26.83)	13.05	-	-	-	13.05	30.00	-16.95
5745 (RU Size 106 + RU Size 26.82)	18.63	-	-	-	18.63	30.00	-11.37
5785 (RU Size 106 + RU Size 26.82)	18.69	-	-	-	18.69	30.00	-11.31
5825 (RU Size 106 + RU Size 26.83)	18.57	-	-	-	18.57	30.00	-11.43

Table 171 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.70
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690 (RU Size 484 + RU Size 242.90)	6.32	-	-	-	6.32	30.00	-23.68
5690 (RU Size 484 + RU Size 242.93)	-27.36	-	-	-	-27.36	30.00	-57.36
5775 (RU Size 484 + RU Size 242.90)	19.03	-	-	-	19.03	30.00	-10.97
5775 (RU Size 484 + RU Size 242.93)	19.14	-	-	-	19.14	30.00	-10.86

Table 172 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.4
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	-	20.22	-	-	20.22	24.00	-3.78
5200	-	20.00	-	-	20.00	24.00	-4.00
5240	-	19.96	-	-	19.96	24.00	-4.04

Table 173 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.4
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	16.368	-	16.85	-	-	16.85	2.00	18.85	22.14	-3.29
5200	16.488	-	17.01	-	-	17.01	2.00	19.01	22.17	-3.16
5240	16.476	-	17.11	-	-	17.11	2.00	19.11	22.17	-3.06

Table 174 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.4
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-	17.19	-	-	17.19	24.00	-6.81
5230	-	20.07	-	-	20.07	24.00	-3.93

Table 175 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.4
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	36.240	-	17.18	-	-	17.18	2.00	19.18	23.00	-3.82
5230	36.410	-	19.58	-	-	19.58	2.00	21.58	23.00	-1.42

Table 176 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.4
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-	17.53	-	-	17.53	24.00	-6.47

Table 177 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	75.592	-	17.50	-	-	17.50	2.00	19.50	23.00	-3.50

Table 178 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	10.66	-	-	10.66	24.00	-13.34

Table 179 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.7
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250	77.154	-	10.61	-	-	10.61	2.00	12.61	23.00	-10.39

Table 180 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	-	20.11	-	-	20.11	24.00	-3.89
5200	-	20.02	-	-	20.02	24.00	-3.98
5240	-	20.35	-	-	20.35	24.00	-3.65

Table 181 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	17.610	-	16.98	-	-	16.98	2.00	18.98	22.46	-3.48
5200	17.616	-	17.15	-	-	17.15	2.00	19.15	22.46	-3.31
5220	17.742	-	17.34	-	-	17.34	2.00	19.34	22.49	-3.15
5240	17.604	-	16.94	-	-	16.94	2.00	18.94	22.46	-3.51

Table 182 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-	18.14	-	-	18.14	24.00	-5.86
5230	-	20.34	-	-	20.34	24.00	-3.66

Table 183 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	36.130	-	18.16	-	-	18.16	2.00	20.16	23.00	-2.84
5230	36.130	-	19.84	-	-	19.84	2.00	21.84	23.00	-1.16

Table 184 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-	17.21	-	-	17.21	24.00	-6.79

Table 185 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	75.108	-	17.26	-	-	17.26	2.00	19.26	23.00	-3.74

Table 186 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	12.54	-	-	12.54	24.00	-11.46

Table 187 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250	76.902	-	12.57	-	-	12.57	2.00	14.57	23.00	-8.43

Table 188 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	-	19.59	-	-	19.59	24.00	-4.41
5200	-	20.04	-	-	20.04	24.00	-3.96
5240	-	20.31	-	-	20.31	24.00	-3.69

Table 189 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	18.798	-	17.39	-	-	17.39	2.00	19.39	22.74	-3.35
5200	18.798	-	17.40	-	-	17.40	2.00	19.40	22.74	-3.35
5240	18.804	-	17.09	-	-	17.09	2.00	19.09	22.74	-3.65

Table 190 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-	18.16	-	-	18.16	24.00	-5.84
5230	-	20.04	-	-	20.04	24.00	-3.96

Table 191 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	37.584	-	18.15	-	-	18.15	2.00	20.15	23.00	-2.85
5230	37.596	-	19.80	-	-	19.80	2.00	21.80	23.00	-1.20

Table 192 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-	16.09	-	-	16.09	24.00	-7.91

Table 193 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	76.714	-	16.12	-	-	16.12	2.00	18.12	23.00	-4.88

Table 194 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	11.98	-	-	11.98	24.00	-12.02

Table 195 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250	77.742	-	11.98	-	-	11.98	2.00	13.98	23.00	-9.02

Table 196 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	-	11.86	-	-	11.86	24.00	-12.14
5200 (RU26.0)	-	12.02	-	-	12.02	24.00	-11.98
5240 (RU26.8)	-	11.93	-	-	11.93	24.00	-12.07

Table 197 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU26.0)	17.712	-	8.55	-	-	8.55	2.00	10.55	22.48	-11.93
5200 (RU26.0)	17.826	-	9.01	-	-	9.01	2.00	11.01	22.51	-11.50
5240 (RU26.8)	17.364	-	8.61	-	-	8.61	2.00	10.61	22.40	-11.79

Table 198 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	-	14.42	-	-	14.42	24.00	-9.58
5200 (RU52.37)	-	14.55	-	-	14.55	24.00	-9.45
5240 (RU52.40)	-	14.21	-	-	14.21	24.00	-9.79

Table 199 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU52.37)	17.364	-	11.42	-	-	11.42	2.00	13.42	22.40	-8.97
5200 (RU52.37)	17.226	-	11.33	-	-	11.33	2.00	13.33	22.36	-9.03
5240 (RU52.40)	17.076	-	11.25	-	-	11.25	2.00	13.25	22.32	-9.08

Table 200 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	-	16.78	-	-	16.78	24.00	-7.22
5200 (RU106.53)	-	16.81	-	-	16.81	24.00	-7.19
5220 (RU106.53)	-	17.11	-	-	17.11	24.00	-6.89
5240 (RU106.54)	-	16.92	-	-	16.92	24.00	-7.08

Table 201 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU106.53)	17.130	-	13.54	-	-	13.54	2.00	15.54	22.34	-6.79
5200 (RU106.53)	17.070	-	13.67	-	-	13.67	2.00	15.67	22.32	-6.65
5220 (RU106.53)	17.034	-	14.16	-	-	14.16	2.00	16.16	22.31	-6.15
5240 (RU106.54)	16.920	-	13.79	-	-	13.79	2.00	15.79	22.28	-6.50

Table 202 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 52 + RU Size 26.70)	-	16.46	-	-	16.46	24.00	-7.54
5200 (RU Size 52 + RU Size 26.70)	-	15.85	-	-	15.85	24.00	-8.15
5240 (RU Size 52 + RU Size 26.72)	-	15.74	-	-	15.74	24.00	-8.26

Table 203 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU Size 52 + RU Size 26.70)	16.242	-	13.12	-	-	13.12	2.00	15.12	22.11	-6.99
5200 (RU Size 52 + RU Size 26.70)	16.128	-	12.97	-	-	12.97	2.00	14.97	22.08	-7.11
5240 (RU Size 52 + RU Size 26.72)	15.948	-	12.77	-	-	12.77	2.00	14.77	22.03	-7.26

Table 204 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 106 + RU Size 26.82)	-	17.12	-	-	17.12	24.00	-6.88
5200 (RU Size 106 + RU Size 26.82)	-	17.97	-	-	17.97	24.00	-6.03
5240 (RU Size 106 + RU Size 26.83)	-	17.53	-	-	17.53	24.00	-6.47

Table 205 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU Size 106 + RU Size 26.82)	17.598	-	14.93	-	-	14.93	2.00	16.93	22.45	-5.52
5200 (RU Size 106 + RU Size 26.82)	17.616	-	14.95	-	-	14.95	2.00	16.95	22.46	-5.51
5240 (RU Size 106 + RU Size 26.83)	17.112	-	14.57	-	-	14.57	2.00	16.57	22.33	-5.77

Table 206 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210 (RU Size 484 + RU Size 242.90)	-	15.62	-	-	15.62	24.00	-8.38
5210 (RU Size 484 + RU Size 242.91)	-	15.66	-	-	15.66	24.00	-8.34
5210 (RU Size 484 + RU Size 242.92)	-	15.68	-	-	15.68	24.00	-8.32
5210 (RU Size 484 + RU Size 242.93)	-	15.75	-	-	15.75	24.00	-8.25

Table 207 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210 (RU Size 484 + RU Size 242.90)	58.160	-	15.63	-	-	15.63	2.00	17.63	23.00	-5.37
5210 (RU Size 484 + RU Size 242.91)	77.220	-	15.61	-	-	15.61	2.00	17.61	23.00	-5.39
5210 (RU Size 484 + RU Size 242.92)	77.220	-	15.69	-	-	15.69	2.00	17.69	23.00	-5.31
5210 (RU Size 484 + RU Size 242.93)	58.140	-	15.51	-	-	15.51	2.00	17.51	23.00	-5.49

Table 208 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-	10.51	-	-	10.51	24.00	-13.49
5250 (RU Size 996 + RU Size 484.95)	-	9.47	-	-	9.47	24.00	-14.53

Table 209 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	38.880	-	10.55	-	-	10.55	2.00	12.55	23.00	-10.45
5250 (RU Size 996 + RU Size 484.95)	78.792	-	9.49	-	-	9.49	2.00	11.49	23.00	-11.51

Table 210 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-	13.73	-	-	13.73	24.00	-10.27
5250 (RU Size 996 + RU Size 484.95)	-	13.23	-	-	13.23	24.00	-10.77

Table 211 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	77.658	-	13.75	-	-	13.75	2.00	15.75	23.00	-7.25
5250 (RU Size 996 + RU Size 484.95)	77.800	-	13.17	-	-	13.17	2.00	15.17	23.00	-7.83

Table 212 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-	11.47	-	-	11.47	24.00	-12.53
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-	11.45	-	-	11.45	24.00	-12.55
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-	11.26	-	-	11.26	24.00	-12.74
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-	11.02	-	-	11.02	24.00	-12.98

Table 213 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	59.000	-	11.43	-	-	11.43	2.00	13.43	23.00	-9.57
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	78.036	-	11.42	-	-	11.42	2.00	13.42	23.00	-9.58
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	78.204	-	11.27	-	-	11.27	2.00	13.27	23.00	-9.73
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	78.204	-	10.99	-	-	10.99	2.00	12.99	23.00	-10.01

Table 214 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-	12.60	-	-	12.60	24.00	-11.40

Table 215 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	77.720	-	12.62	-	-	12.62	2.00	14.62	23.00	-8.38

Table 216 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	19.782	-	20.06	-	-	20.06	23.96	-3.90
5280	19.968	-	19.96	-	-	19.96	24.00	-4.04
5320	19.776	-	19.46	-	-	19.46	23.96	-4.50

Table 217 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	16.368	-	20.06	-	-	20.06	23.14	-3.08	1.30	21.36	29.14	-7.78
5280	16.374	-	19.96	-	-	19.96	23.14	-3.18	1.30	21.26	29.14	-7.88
5320	16.368	-	19.46	-	-	19.46	23.14	-3.68	1.30	20.76	29.14	-8.38

Table 218 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	54.720	-	20.12	-	-	20.12	24.00	-3.88
5310	41.510	-	16.20	-	-	16.20	24.00	-7.80

Table 219 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	37.320	-	20.12	-	-	20.12	24.00	-3.88	1.30	21.42	30.00	-8.58
5310	36.230	-	16.20	-	-	16.20	24.00	-7.80	1.30	17.50	30.00	-12.50

Table 220 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	98.340	-	18.15	-	-	18.15	24.00	-5.85

Table 221 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	75.680	-	18.15	-	-	18.15	24.00	-5.85	1.30	19.45	30.00	-10.55

Table 222 - ISED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250	81.942	-	10.74	-	-	10.74	24.00	-13.26

Table 223 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.7
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250	77.196	-	10.64	-	-	10.64	24.00	-13.36	2.00	12.64	30.00	-17.36

Table 224 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.108	-	20.12	-	-	20.12	24.00	-3.88
5280	21.162	-	20.10	-	-	20.10	24.00	-3.90
5320	21.048	-	20.23	-	-	20.23	24.00	-3.77

Table 225 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	17.610	-	20.12	-	-	20.12	23.46	-3.34	1.30	21.42	29.46	-8.04
5280	17.604	-	20.10	-	-	20.10	23.46	-3.36	1.30	21.40	29.46	-8.06
5320	17.610	-	20.23	-	-	20.23	23.46	-3.23	1.30	21.53	29.46	-7.93

Table 226 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.730	-	20.40	-	-	20.40	24.00	-3.60
5310	41.790	-	17.09	-	-	17.09	24.00	-6.91

Table 227 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	36.140	-	20.40	-	-	20.40	24.00	-3.60	1.30	21.70	30.00	-8.30
5310	36.140	-	17.09	-	-	17.09	24.00	-6.91	1.30	18.39	30.00	-11.61

Table 228 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	80.432	-	15.62	-	-	15.62	24.00	-8.38

Table 229 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	75.086	-	15.62	-	-	15.62	24.00	-8.38	1.30	16.92	30.00	-13.08

Table 230 - ISED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250	81.606	-	12.62	-	-	12.62	24.00	-11.38

Table 231 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250	76.860	-	12.62	-	-	12.62	24.00	-11.38	2.00	14.62	30.00	-15.38

Table 232 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.540	-	20.06	-	-	20.06	24.00	-3.94
5280	21.510	-	20.02	-	-	20.02	24.00	-3.98
5320	21.534	-	19.71	-	-	19.71	24.00	-4.29

Table 233 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	18.792	-	20.06	-	-	20.06	23.74	-3.68	1.30	21.36	29.74	-8.38
5280	18.792	-	20.02	-	-	20.02	23.74	-3.72	1.30	21.32	29.74	-8.42
5320	18.804	-	19.71	-	-	19.71	23.74	-4.03	1.30	21.01	29.74	-8.73

Table 234 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	42.360	-	20.07	-	-	20.07	24.00	-3.93
5310	42.024	-	17.10	-	-	17.10	24.00	-6.90

Table 235 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	37.596	-	20.07	-	-	20.07	24.00	-3.93	1.30	21.37	30.00	-8.63
5310	37.596	-	17.10	-	-	17.10	24.00	-6.90	1.30	18.40	30.00	-11.60

Table 236 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	81.862	-	15.23	-	-	15.23	24.00	-8.77

Table 237 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	76.714	-	15.23	-	-	15.23	24.00	-8.77	1.30	16.53	30.00	-13.47

Table 238 - ISSED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250	82.194	-	12.05	-	-	12.05	24.00	-11.95

Table 239 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250	77.742	-	12.05	-	-	12.05	24.00	-11.95	2.00	14.05	30.00	-15.95

Table 240 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU52.37)	19.680	-	14.01	-	-	14.01	23.94	-9.93
5280 (RU52.37)	19.716	-	14.57	-	-	14.57	23.95	-9.37
5320 (RU52.40)	19.584	-	14.11	-	-	14.11	23.92	-9.81

Table 241 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU52.37)	17.400	-	14.01	-	-	14.01	23.41	-9.40	1.30	15.31	29.41	-14.10
5280 (RU52.37)	17.292	-	14.57	-	-	14.57	23.38	-8.80	1.30	15.87	29.38	-13.50
5320 (RU52.40)	17.136	-	14.11	-	-	14.11	23.34	-9.23	1.30	15.41	29.34	-13.93

Table 242 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU106.53)	19.824	-	16.77	-	-	16.77	23.97	-7.20
5280 (RU106.53)	19.812	-	17.10	-	-	17.10	23.97	-6.87
5320 (RU106.54)	19.854	-	16.58	-	-	16.58	23.98	-7.40

Table 243 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU106.53)	17.022	-	16.77	-	-	16.77	23.31	-6.54	1.30	18.07	29.31	-11.24
5280 (RU106.53)	17.100	-	17.10	-	-	17.10	23.33	-6.23	1.30	18.40	29.33	-10.93
5320 (RU106.54)	16.842	-	16.58	-	-	16.58	23.26	-6.69	1.30	17.88	29.26	-11.39

Table 244 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	18.276	-	16.08	-	-	16.08	23.62	-7.54
5280 (RU Size 52 + RU Size 26.70)	18.450	-	15.87	-	-	15.87	23.66	-7.79
5300 (RU Size 52 + RU Size 26.70)	18.306	-	15.99	-	-	15.99	23.63	-7.63
5320 (RU Size 52 + RU Size 26.72)	18.306	-	15.90	-	-	15.90	23.63	-7.73

Table 245 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU Size 52 + RU Size 26.70)	16.116	-	16.08	-	-	16.08	23.07	-6.99	1.30	17.38	29.07	-11.69
5280 (RU Size 52 + RU Size 26.70)	16.134	-	15.87	-	-	15.87	23.08	-7.21	1.30	17.17	29.08	-11.91
5300 (RU Size 52 + RU Size 26.70)	16.002	-	15.99	-	-	15.99	23.04	-7.05	1.30	17.29	29.04	-11.75
5320 (RU Size 52 + RU Size 26.72)	15.912	-	15.90	-	-	15.90	23.02	-7.12	1.30	17.20	29.02	-11.82

Table 246 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	20.340	-	17.69	-	-	17.69	24.00	-6.31
5280 (RU Size 106 + RU Size 26.82)	19.974	-	17.50	-	-	17.50	24.00	-6.50
5320 (RU Size 106 + RU Size 26.83)	19.584	-	17.63	-	-	17.63	23.92	-6.29

Table 247 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU Size 106 + RU Size 26.82)	17.604	-	17.69	-	-	17.69	23.46	-5.77	1.30	18.99	29.46	-10.47
5280 (RU Size 106 + RU Size 26.82)	17.610	-	17.50	-	-	17.50	23.46	-5.95	1.30	18.80	29.46	-10.65
5320 (RU Size 106 + RU Size 26.83)	17.280	-	17.63	-	-	17.63	23.38	-5.74	1.30	18.93	29.38	-10.44

Table 248 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	1.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	63.060	-	15.73	-	-	15.73	24.00	-8.27
5290 (RU Size 484 + RU Size 242.93)	62.840	-	15.52	-	-	15.52	24.00	-8.48

Table 249 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290 (RU Size 484 + RU Size 242.90)	58.140	-	15.73	-	-	15.73	24.00	-8.27	1.30	17.03	30.00	-12.97
5290 (RU Size 484 + RU Size 242.93)	58.120	-	15.52	-	-	15.52	24.00	-8.48	1.30	16.82	30.00	-13.18

Table 250 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	82.120	-	13.45	-	-	13.45	24.00	-10.55
5250 (RU Size 996 + RU Size 484.95)	87.738	-	13.76	-	-	13.76	24.00	-10.24

Table 251 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250 (RU Size 996 + RU Size 484.94)	77.800	-	13.46	-	-	13.46	24.00	-10.54	2.00	15.46	30.00	-14.54
5250 (RU Size 996 + RU Size 484.95)	77.784	-	13.80	-	-	13.80	24.00	-10.20	2.00	15.80	30.00	-14.20

Table 252 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	88.242	-	9.63	-	-	9.63	24.00	-14.37
5250 (RU Size 996 + RU Size 484.95)	42.520	-	10.35	-	-	10.35	24.00	-13.65

Table 253 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250 (RU Size 996 + RU Size 484.94)	78.792	-	9.63	-	-	9.63	24.00	-14.37	2.00	11.63	30.00	-18.37
5250 (RU Size 996 + RU Size 484.95)	38.840	-	10.37	-	-	10.37	24.00	-13.63	2.00	12.37	30.00	-17.63

Table 254 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	89.840	-	12.74	-	-	12.74	24.00	-11.26
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	87.864	-	12.74	-	-	12.74	24.00	-11.26
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	87.864	-	12.87	-	-	12.87	24.00	-11.13
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	88.116	-	12.89	-	-	12.89	24.00	-11.11

Table 255 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	77.800	-	12.78	-	-	12.78	24.00	-11.22	2.00	14.78	30.00	-15.22
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	77.742	-	12.71	-	-	12.71	24.00	-11.29	2.00	14.71	30.00	-15.29
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	77.784	-	12.92	-	-	12.92	24.00	-11.08	2.00	14.92	30.00	-15.08
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	77.742	-	12.91	-	-	12.91	24.00	-11.09	2.00	14.91	30.00	-15.09

Table 256 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	62.840	-	11.43	-	-	11.43	24.00	-12.57

Table 257 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	2.00
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	59.040	-	11.48	-	-	11.48	24.00	-12.52	2.00	13.48	30.00	-16.52

Table 258 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	19.998	-	19.33	-	-	19.33	24.00	-4.67
5600	21.552	-	20.00	-	-	20.00	24.00	-4.00
5700	19.902	-	18.66	-	-	18.66	23.99	-5.33
5720	15.212	-	19.12	-	-	19.12	22.82	-3.70

Table 259 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	16.362	-	19.33	-	-	19.33	23.14	-3.80	0.90	20.23	29.14	-8.90
5600	16.770	-	20.00	-	-	20.00	23.25	-3.24	0.90	20.90	29.25	-8.34
5700	16.380	-	18.66	-	-	18.66	23.14	-4.48	0.90	19.56	29.14	-9.58
5720	13.088	-	19.12	-	-	19.12	22.17	-3.05	0.90	20.02	28.17	-8.15

Table 260 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	41.490	-	15.32	-	-	15.32	24.00	-8.68
5590	56.988	-	20.16	-	-	20.16	24.00	-3.84
5670	42.000	-	18.90	-	-	18.90	24.00	-5.10
5710	40.920	-	19.78	-	-	19.78	24.00	-4.22

Table 261 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	36.210	-	15.32	-	-	15.32	24.00	-8.68	0.90	16.22	30.00	-13.78
5590	38.016	-	20.16	-	-	20.16	24.00	-3.84	0.90	21.06	30.00	-8.94
5670	36.290	-	18.90	-	-	18.90	24.00	-5.10	0.90	19.80	30.00	-10.20
5710	32.880	-	19.78	-	-	19.78	24.00	-4.22	0.90	20.68	30.00	-9.32

Table 262 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	89.606	-	17.12	-	-	17.12	24.00	-6.88
5610	96.998	-	20.14	-	-	20.14	24.00	-3.86
5690	90.682	-	20.14	-	-	20.14	24.00	-3.86

Table 263 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	75.482	-	17.12	-	-	17.12	24.00	-6.88	0.90	18.02	30.00	-11.98
5610	75.746	-	20.14	-	-	20.14	24.00	-3.86	0.90	21.04	30.00	-8.96
5690	72.378	-	20.14	-	-	20.14	24.00	-3.86	0.90	21.04	30.00	-8.96

Table 264 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570	163.212	-	15.63	-	-	15.63	24.00	-8.37

Table 265 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570	154.350	-	15.63	-	-	15.63	24.00	-8.37	0.90	16.53	30.00	-13.47

Table 266 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.204	-	20.07	-	-	20.07	24.00	-3.93
5600	22.620	-	20.23	-	-	20.23	24.00	-3.77
5700	21.522	-	18.27	-	-	18.27	24.00	-5.73
5720	15.656	-	19.54	-	-	19.54	22.95	-3.41

Table 267 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	17.610	-	20.07	-	-	20.07	23.46	-3.38	0.90	20.97	29.46	-8.48
5600	17.928	-	20.23	-	-	20.23	23.54	-3.31	0.90	21.13	29.54	-8.41
5700	17.616	-	18.27	-	-	18.27	23.46	-5.19	0.90	19.17	29.46	-10.29
5720	13.682	-	19.54	-	-	19.54	22.36	-2.82	0.90	20.44	28.36	-7.92

Table 268 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	41.350	-	18.54	-	-	18.54	24.00	-5.46
5590	44.196	-	20.20	-	-	20.20	24.00	-3.80
5670	41.580	-	19.33	-	-	19.33	24.00	-4.67
5710	35.930	-	19.75	-	-	19.75	24.00	-4.25

Table 269 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	36.140	-	18.54	-	-	18.54	24.00	-5.46	0.90	19.44	30.00	-10.56
5590	36.636	-	20.20	-	-	20.20	24.00	-3.80	0.90	21.10	30.00	-8.90
5670	36.130	-	19.33	-	-	19.33	24.00	-4.67	0.90	20.23	30.00	-9.77
5710	32.760	-	19.75	-	-	19.75	24.00	-4.25	0.90	20.65	30.00	-9.35

Table 270 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	80.476	-	18.49	-	-	18.49	24.00	-5.51
5610	80.498	-	20.12	-	-	20.12	24.00	-3.88
5690	75.282	-	20.10	-	-	20.10	24.00	-3.90

Table 271 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	75.064	-	18.49	-	-	18.49	24.00	-5.51	0.90	19.39	30.00	-10.61
5610	75.086	-	20.12	-	-	20.12	24.00	-3.88	0.90	21.02	30.00	-8.98
5690	71.916	-	20.10	-	-	20.10	24.00	-3.90	0.90	21.00	30.00	-9.00

Table 272 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570	163.002	-	16.06	-	-	16.06	24.00	-7.94

Table 273 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570	153.804	-	16.06	-	-	16.06	24.00	-7.94	0.90	16.96	30.00	-13.04

Table 274 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.468	-	20.06	-	-	20.06	24.00	-3.94
5600	23.196	-	20.00	-	-	20.00	24.00	-4.00
5700	21.606	-	17.47	-	-	17.47	24.00	-6.53
5720	15.842	-	19.38	-	-	19.38	23.00	-3.62

Table 275 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	18.792	-	20.06	-	-	20.06	23.74	-3.68	0.90	20.96	29.74	-8.78
5600	19.080	-	20.00	-	-	20.00	23.81	-3.80	0.90	20.90	29.81	-8.90
5700	18.804	-	17.47	-	-	17.47	23.74	-6.28	0.90	18.37	29.74	-11.38
5720	14.288	-	19.38	-	-	19.38	22.55	-3.17	0.90	20.28	28.55	-8.27

Table 276 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	42.372	-	17.83	-	-	17.83	24.00	-6.17
5590	44.676	-	20.01	-	-	20.01	24.00	-3.99
5670	42.372	-	18.51	-	-	18.51	24.00	-5.49
5710	36.144	-	19.71	-	-	19.71	24.00	-4.29

Table 277 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	37.596	-	17.83	-	-	17.83	24.00	-6.17	0.90	18.73	30.00	-11.27
5590	38.016	-	20.01	-	-	20.01	24.00	-3.99	0.90	20.91	30.00	-9.09
5670	37.620	-	18.51	-	-	18.51	24.00	-5.49	0.90	19.41	30.00	-10.59
5710	33.540	-	19.71	-	-	19.71	24.00	-4.29	0.90	20.61	30.00	-9.39

Table 278 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	81.642	-	18.15	-	-	18.15	24.00	-5.85
5610	81.576	-	20.21	-	-	20.21	24.00	-3.79
5690	75.920	-	19.90	-	-	19.90	24.00	-4.10

Table 279 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	76.692	-	18.15	-	-	18.15	24.00	-5.85	0.90	19.05	30.00	-10.95
5610	76.714	-	20.21	-	-	20.21	24.00	-3.79	0.90	21.11	30.00	-8.89
5690	72.686	-	19.90	-	-	19.90	24.00	-4.10	0.90	20.80	30.00	-9.20

Table 280 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570	164.220	-	16.07	-	-	16.07	24.00	-7.93

Table 281 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5570	155.526	-	16.07	-	-	16.07	24.00	-7.93	0.90	16.97	30.00	-13.03

Table 282 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	0.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU52.37)	20.304	-	14.24	-	-	14.24	24.00	-9.76
5600 (RU52.37)	20.520	-	14.68	-	-	14.68	24.00	-9.32
5580 (RU52.37)	20.940	-	14.61	-	-	14.61	24.00	-9.39
5700 (RU52.40)	19.776	-	14.21	-	-	14.21	23.96	-9.76
5720 (RU52.39)	14.030	-	13.89	-	-	13.89	22.47	-8.58
5720 (RU52.40)	14.090	-	-3.39	-	-	-3.39	22.49	-25.88

Table 283 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500 (RU52.37)	17.412	-	14.24	-	-	14.24	23.41	-9.17	0.90	15.14	29.41	-14.27
5600 (RU52.37)	17.820	-	14.68	-	-	14.68	23.51	-8.83	0.90	15.58	29.51	-13.93
5580 (RU52.37)	17.688	-	14.61	-	-	14.61	23.48	-8.86	0.90	15.51	29.48	-13.96
5700 (RU52.40)	17.172	-	14.21	-	-	14.21	23.35	-9.14	0.90	15.11	29.35	-14.24
5720 (RU52.39)	11.102	-	13.89	-	-	13.89	21.45	-7.56	0.90	14.79	27.45	-12.66
5720 (RU52.40)	13.670	-	-3.39	-	-	-3.39	22.36	-25.75	0.90	-2.49	28.36	-30.85

Table 284 - ISSED Maximum Conducted (average) Output Power Results