

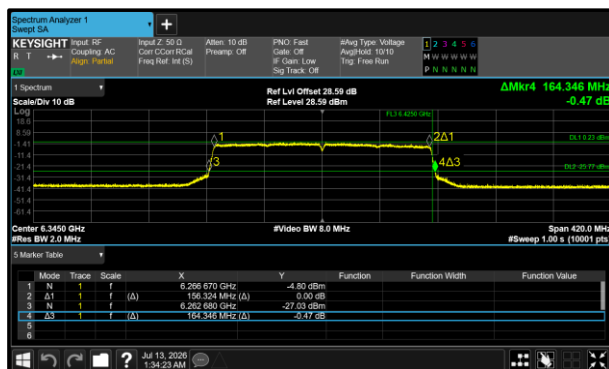


Figure 317- 802.11ax HE160 SU VLP
Minimum 26 dB EBW

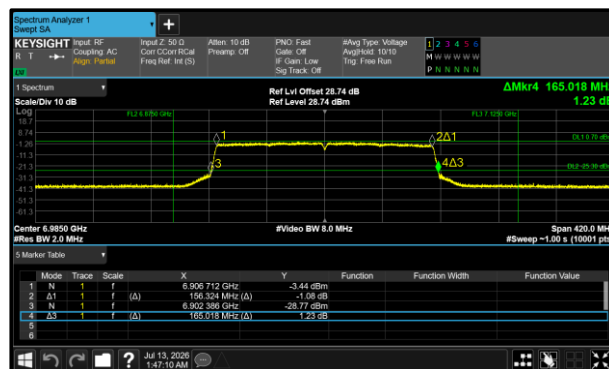


Figure 318- 802.11ax HE160 SU VLP
Maximum 26 dB EBW

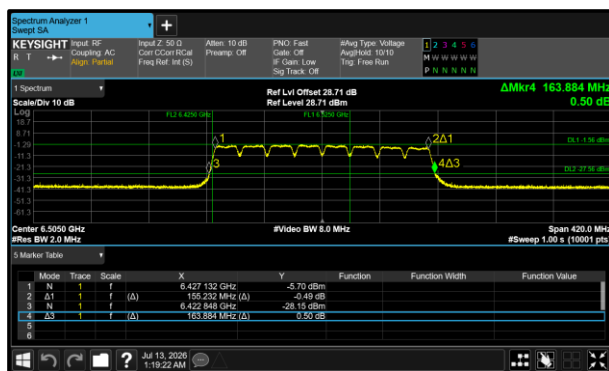


Figure 319- 802.11a160 VLP Minimum
26 dB EBW

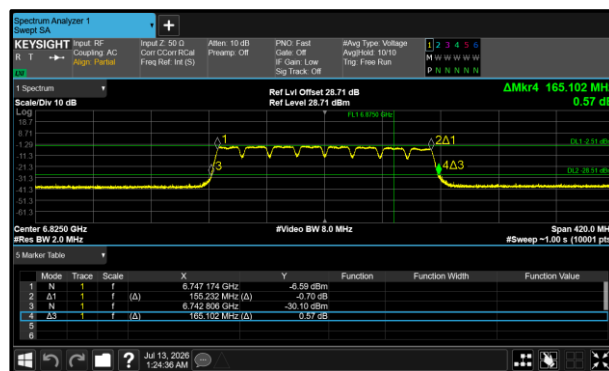


Figure 320- 802.11a160 VLP Maximum
26 dB EBW

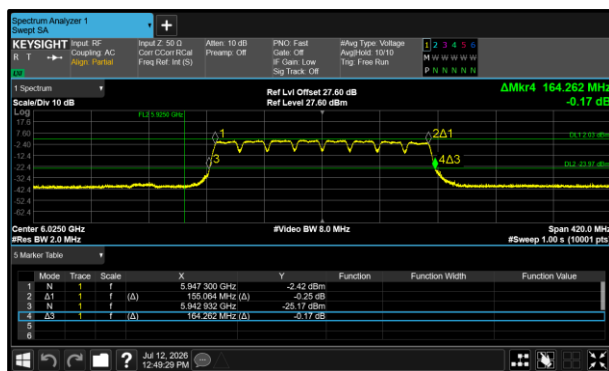


Figure 321- 802.11a160 LPI Minimum 26
dB EBW

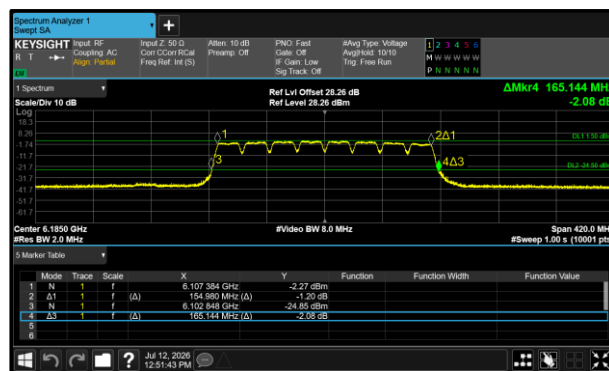


Figure 322- 802.11a160 LPI Maximum
26 dB EBW

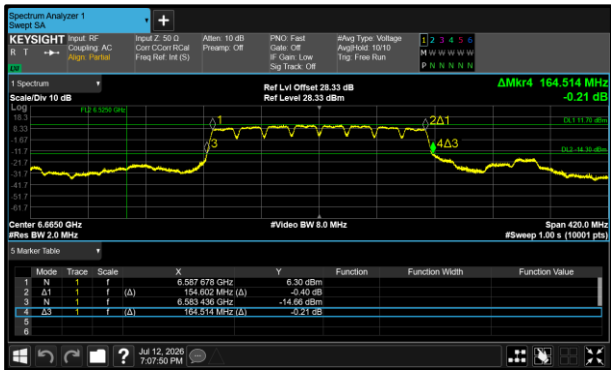


Figure 323- 802.11a160 SP Minimum 26
dB EBW

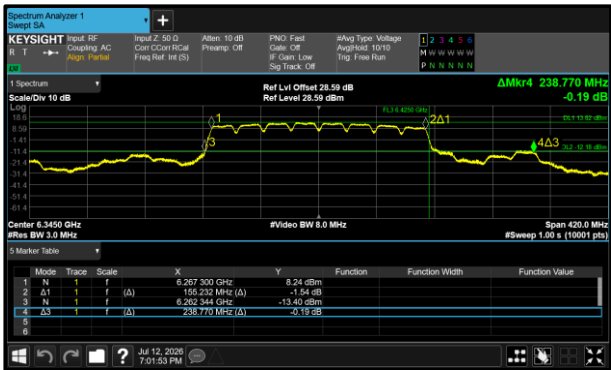


Figure 324- 802.11a160 SP Maximum 26
dB EBW



Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE160 SU LPI	164.094	165.060
802.11ax HE160 SU SP	163.842	164.346
802.11ax HE160 SU VLP	164.346	164.766

Table 631 - 26 dB Bandwidth Summary Results - MIMO SDM

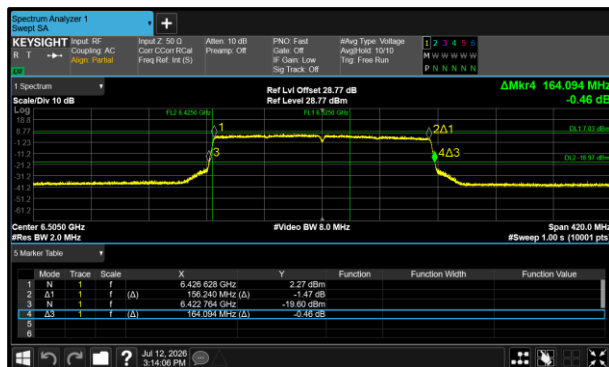


Figure 325- 802.11ax HE160 SU LPI
Minimum 26 dB EBW

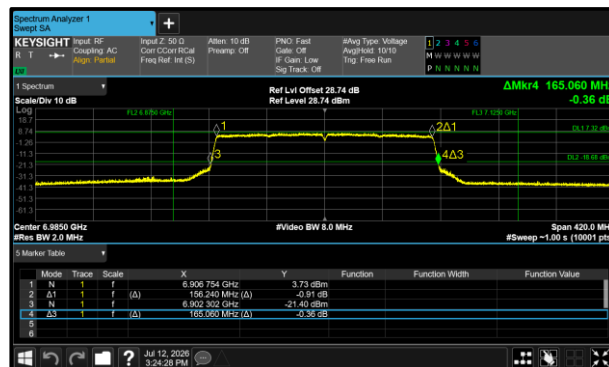


Figure 326- 802.11ax HE160 SU LPI
Maximum 26 dB EBW

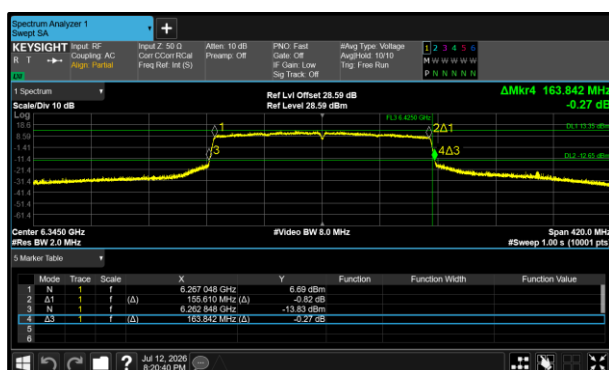


Figure 327- 802.11ax HE160 SU SP
Minimum 26 dB EBW

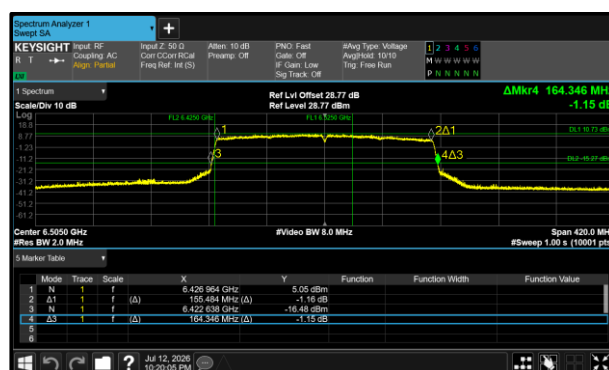


Figure 328- 802.11ax HE160 SU SP
Maximum 26 dB EBW

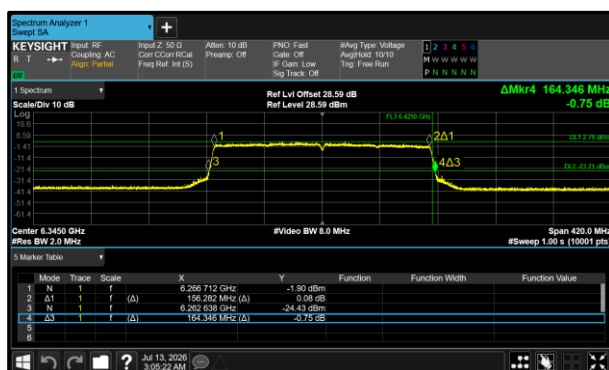


Figure 329- 802.11ax HE160 SU VLP
Minimum 26 dB EBW

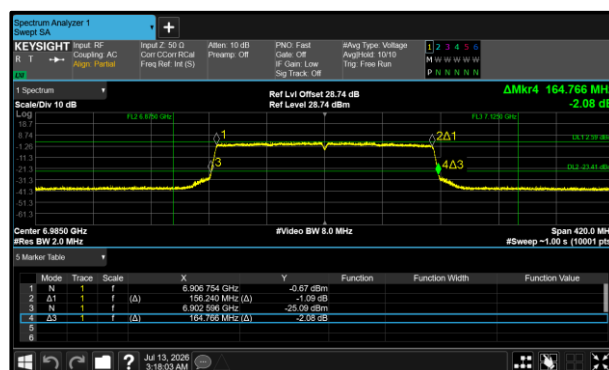


Figure 330- 802.11ax HE160 SU VLP
Maximum 26 dB EBW



Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE160 SU LPI	164.388	165.144
802.11ax HE160 SU SP	163.632	164.346
802.11ax HE160 SU VLP	164.556	165.144

Table 632 - 26 dB Bandwidth Summary Results - TxBF

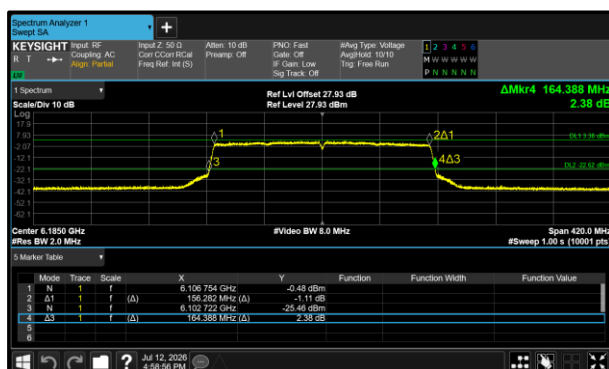


Figure 331- 802.11ax HE160 SU LPI
Minimum 26 dB EBW

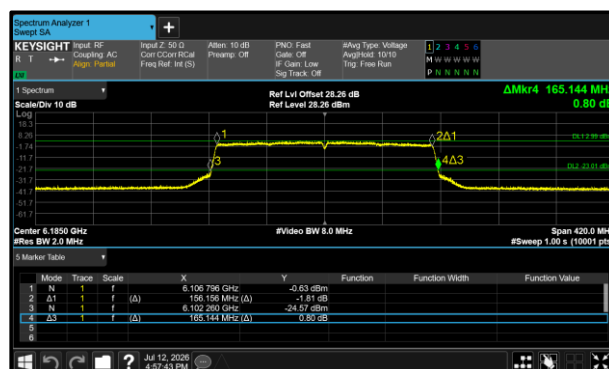


Figure 332- 802.11ax HE160 SU LPI
Maximum 26 dB EBW

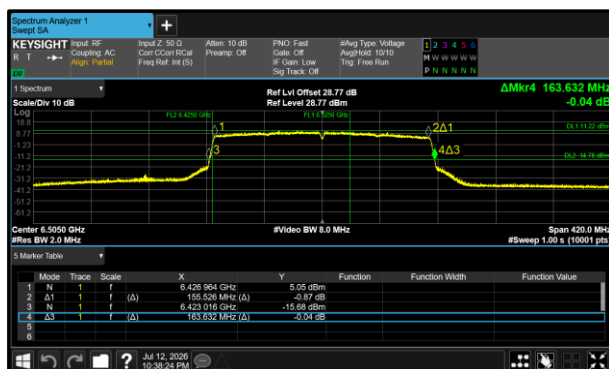


Figure 333- 802.11ax HE160 SU SP
Minimum 26 dB EBW



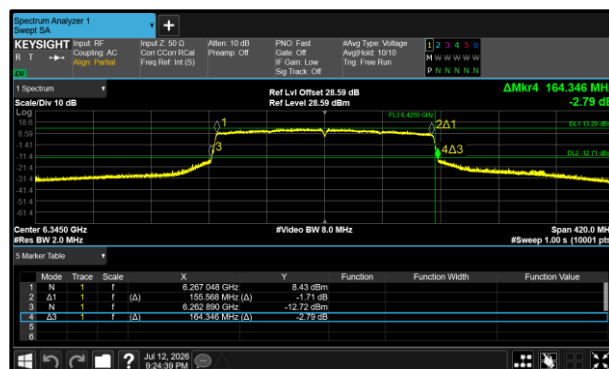


Figure 334- 802.11ax HE160 SU SP
Maximum 26 dB EBW

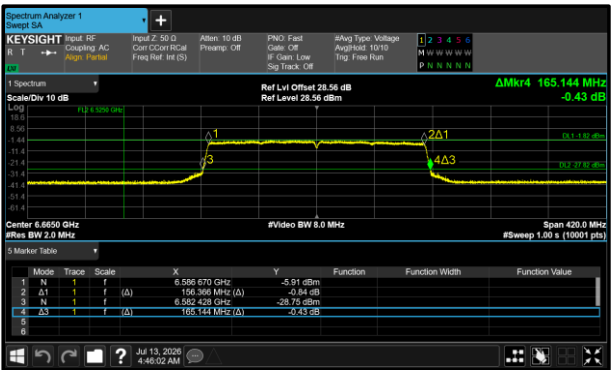

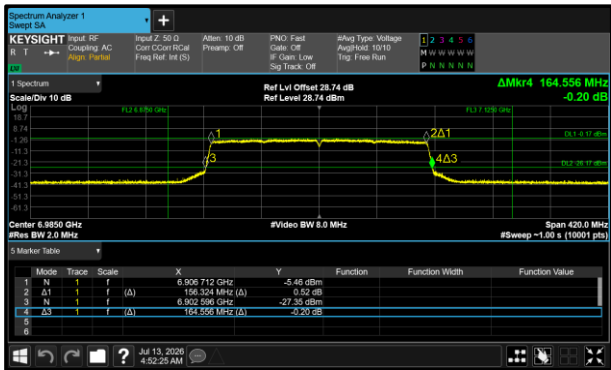

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE160 SU LPI	156.114	156.366
802.11ax HE160 SU SP	155.442	155.652
802.11ax HE160 SU VLP	156.156	156.408
802.11a160 LPI	154.980	155.148
802.11a160 SP	154.434	154.644
802.11a160 VLP	155.022	155.190

Table 633 - 99% Bandwidth Summary Results – SISO Core 0

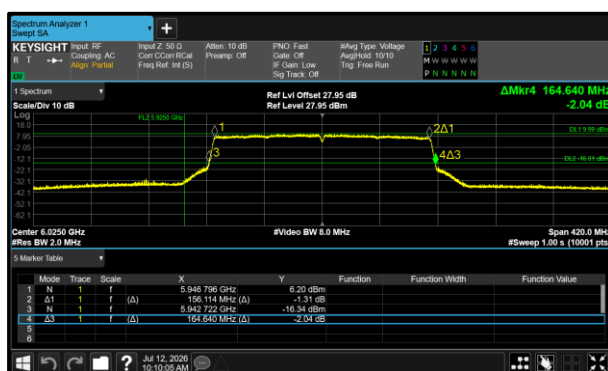


Figure 337- 802.11ax HE160 SU LPI
Minimum 99% OBW

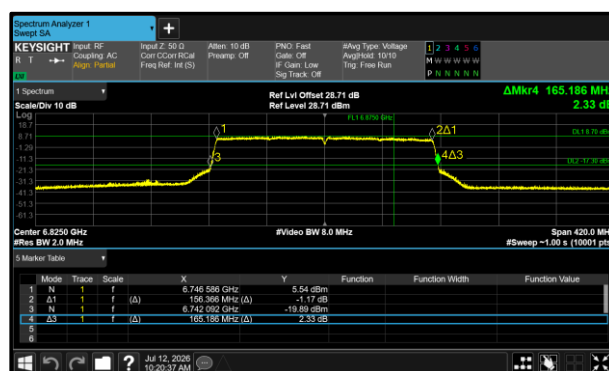


Figure 338- 802.11ax HE160 SU LPI
Maximum 99% OBW

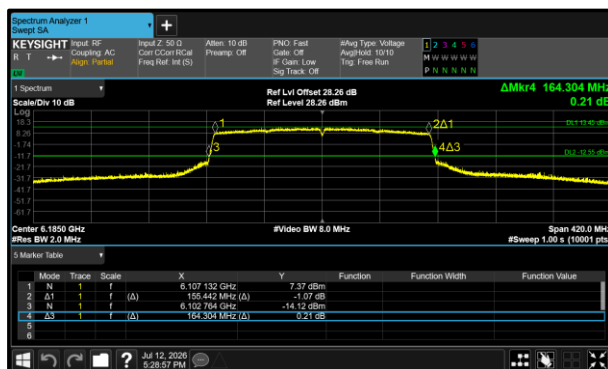


Figure 339- 802.11ax HE160 SU SP
Minimum 99% OBW

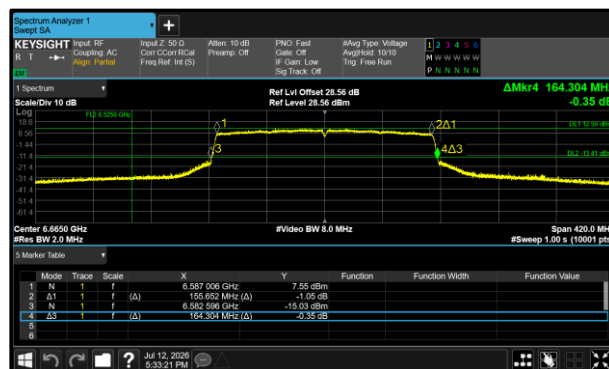


Figure 340- 802.11ax HE160 SU SP
Maximum 99% OBW

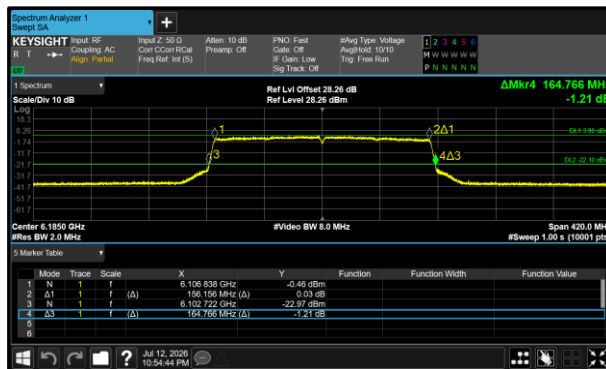


Figure 341- 802.11ax HE160 SU VLP
Minimum 99% OBW

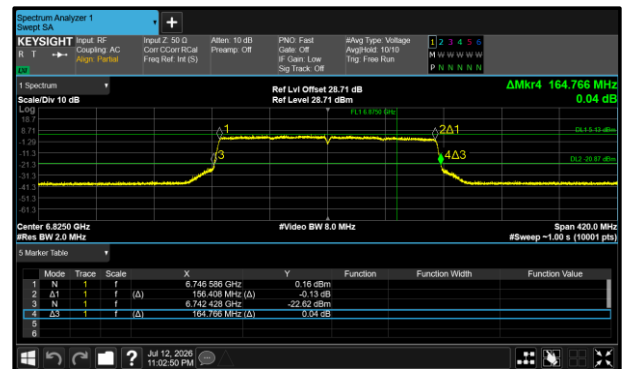


Figure 342- 802.11ax HE160 SU VLP
Maximum 99% OBW

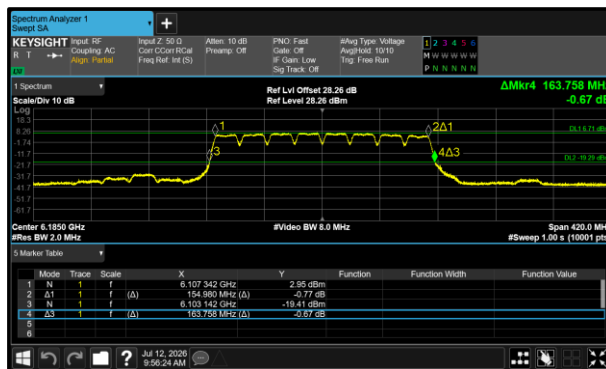


Figure 343- 802.11a160 LPI Minimum
99% OBW

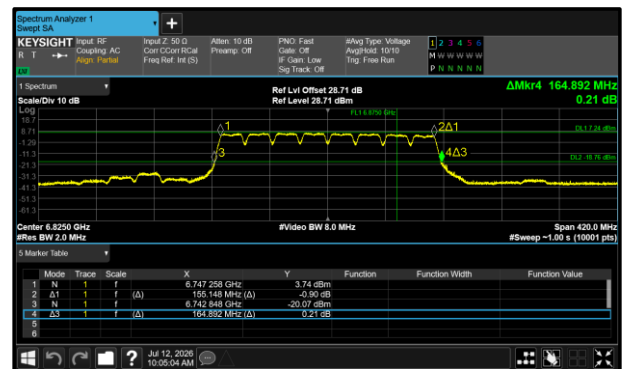


Figure 344- 802.11a160 LPI Maximum
99% OBW

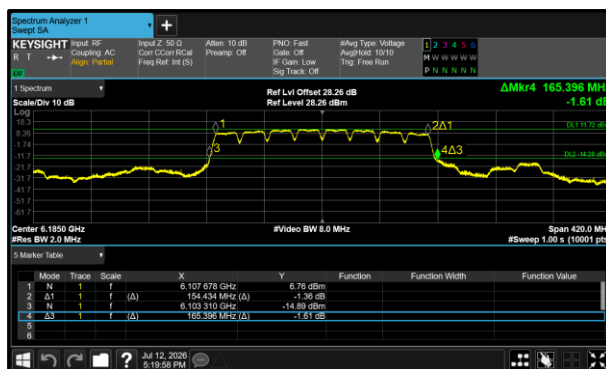


Figure 345- 802.11a160 SP Minimum
99% OBW

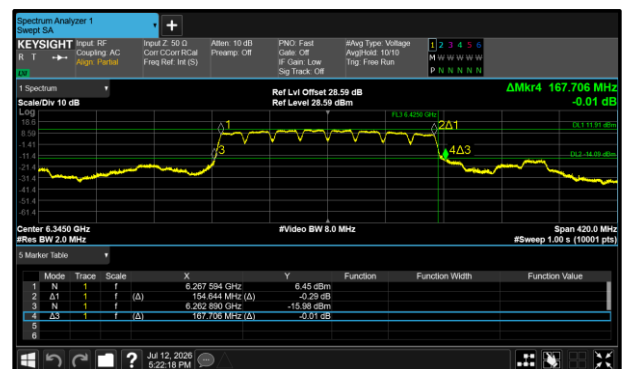


Figure 346- 802.11a160 SP Maximum
99% OBW

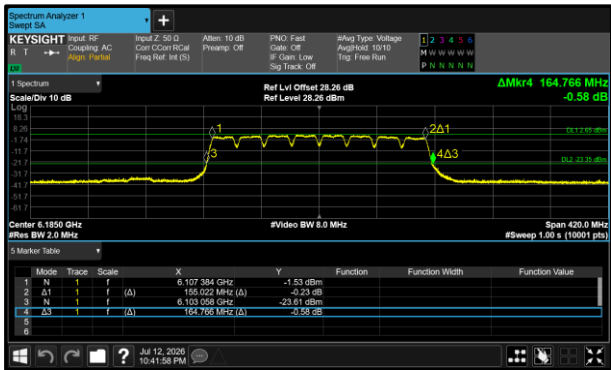


Figure 347- 802.11a160 VLP Minimum 99% OBW

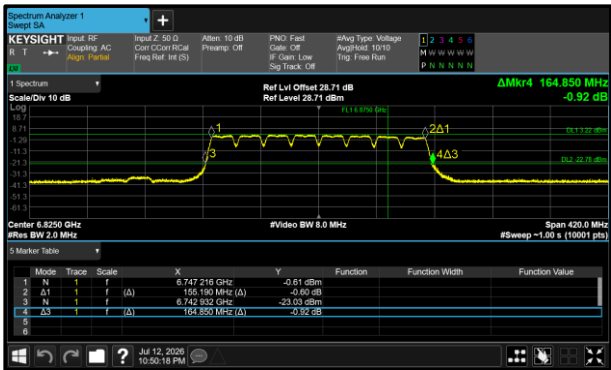


Figure 348- 802.11a160 VLP Maximum 99% OBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE160 SU LPI	156.240	156.366
802.11ax HE160 SU SP	155.526	155.610
802.11ax HE160 SU VLP	156.240	156.450
802.11a160 SP	154.476	154.602
802.11a160 LPI	155.022	155.274
802.11a160 VLP	155.022	155.148

Table 634 - 99% Bandwidth Summary Results – SISO Core 1

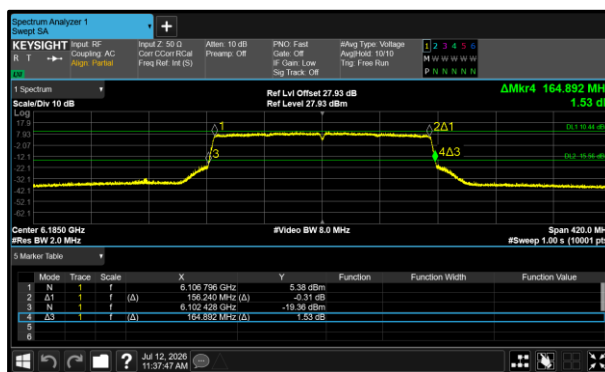


Figure 349- 802.11ax HE160 SU LPI
Minimum 99% OBW

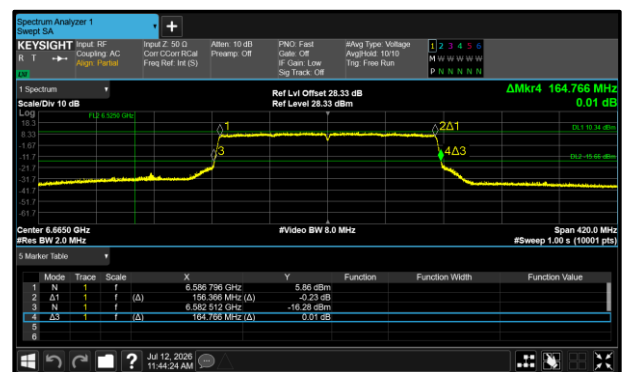


Figure 350- 802.11ax HE160 SU LPI
Maximum 99% OBW

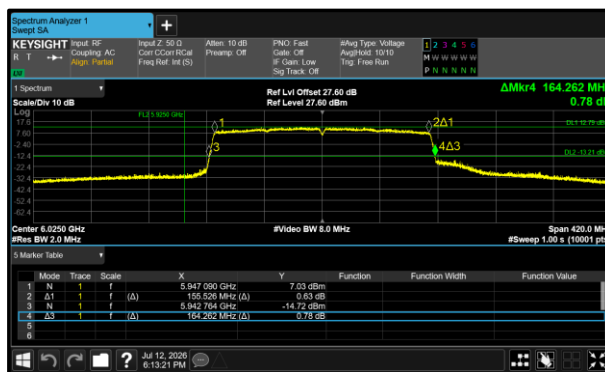


Figure 351- 802.11ax HE160 SU SP
Minimum 99% OBW

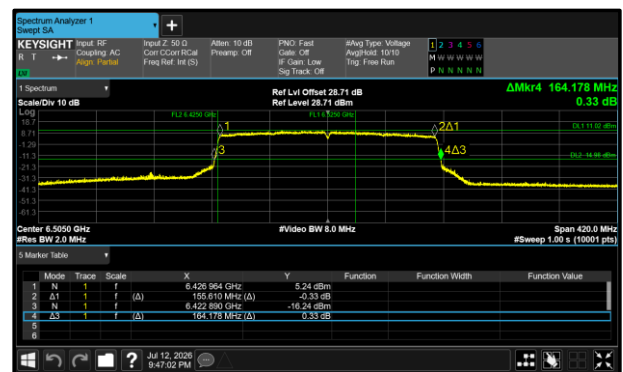


Figure 352- 802.11ax HE160 SU SP
Maximum 99% OBW

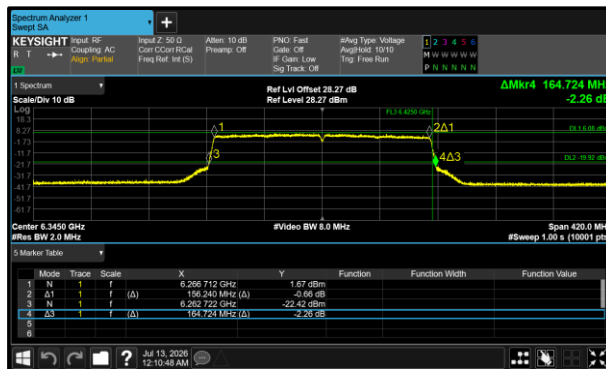


Figure 353- 802.11ax HE160 SU VLP
Minimum 99% OBW

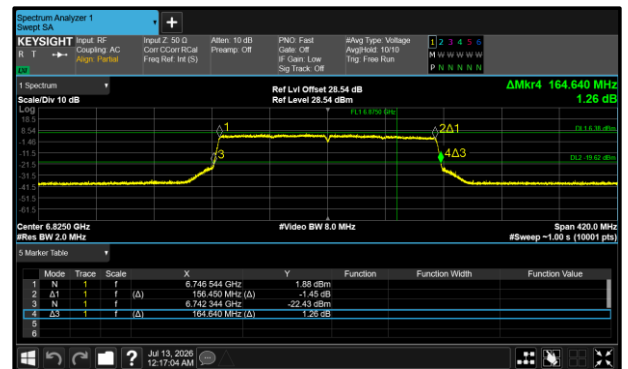


Figure 354- 802.11ax HE160 SU VLP
Maximum 99% OBW

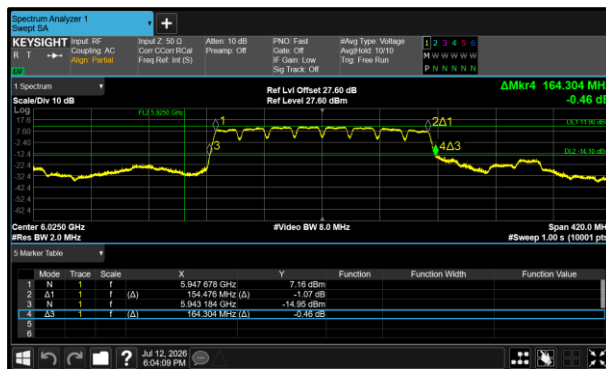


Figure 355- 802.11a160 SP Minimum
99% OBW

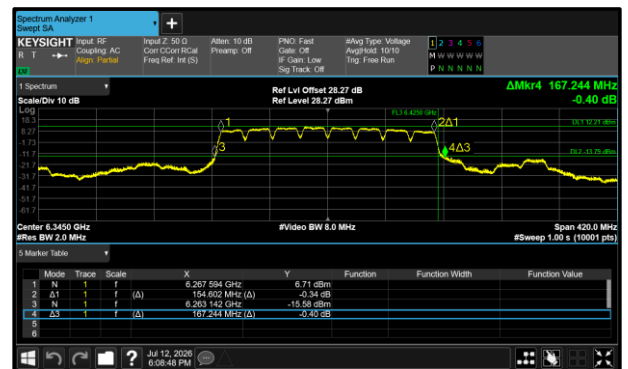


Figure 356- 802.11a160 SP Maximum
99% OBW

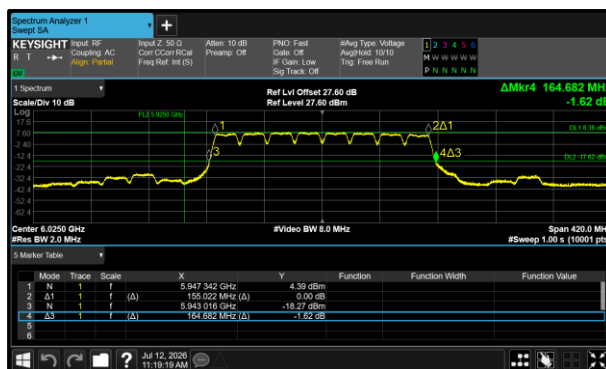


Figure 357- 802.11a160 LPI Minimum
99% OBW


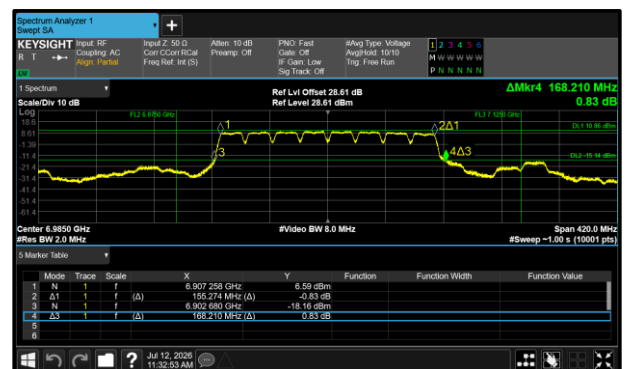


Figure 358- 802.11a160 LPI Maximum
99% OBW



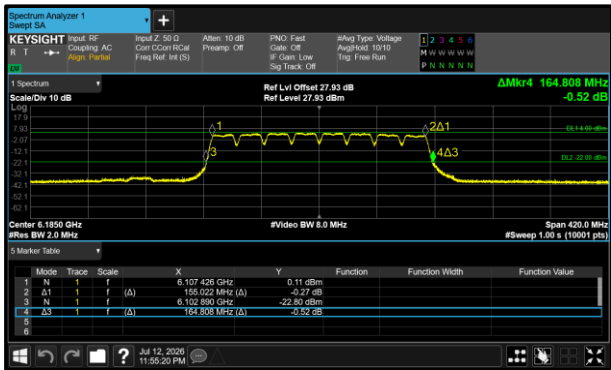

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE160 SU LPI	156.156	156.408
802.11ax HE160 SU SP	155.442	155.652
802.11ax HE160 SU VLP	156.282	156.492
802.11a160 VLP	155.106	155.274
802.11a160 LPI	154.980	155.232
802.11a160 SP	154.476	155.232

Table 635 - 99% Bandwidth Summary Results - MIMO CDD

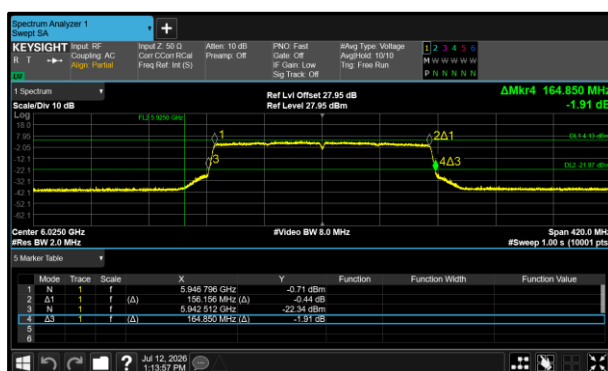


Figure 361- 802.11ax HE160 SU LPI
Minimum 99% OBW

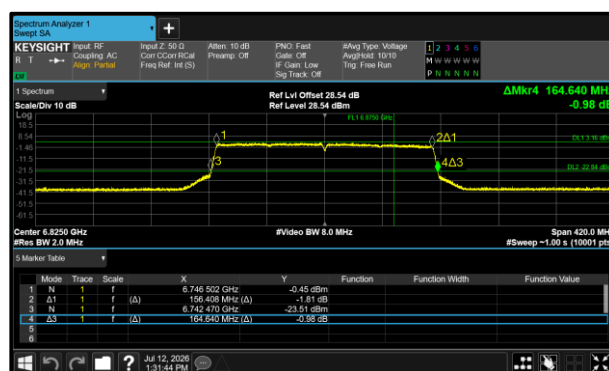


Figure 362- 802.11ax HE160 SU LPI
Maximum 99% OBW

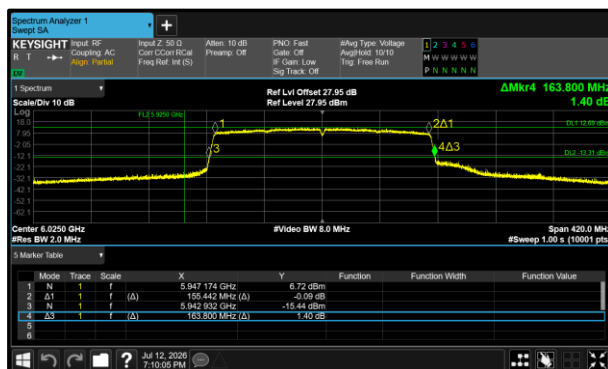


Figure 363- 802.11ax HE160 SU SP
Minimum 99% OBW

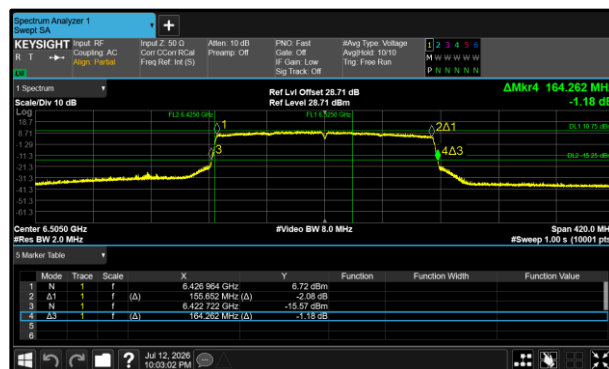


Figure 364- 802.11ax HE160 SU SP
Maximum 99% OBW

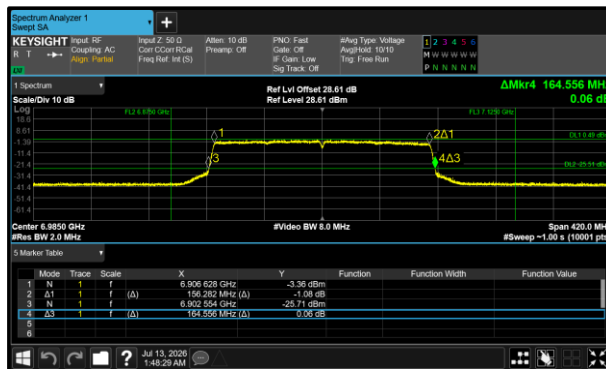


Figure 365- 802.11ax HE160 SU VLP
Minimum 99% OBW

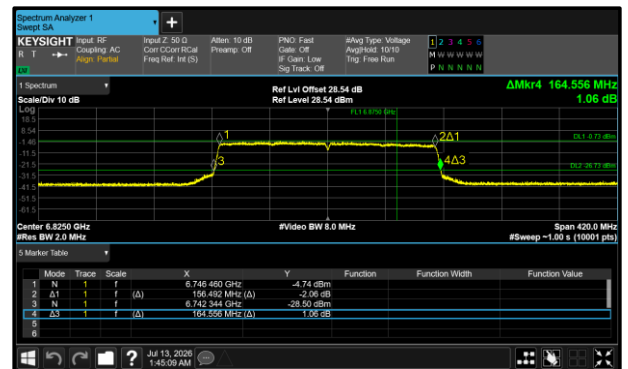


Figure 366- 802.11ax HE160 SU VLP
Maximum 99% OBW

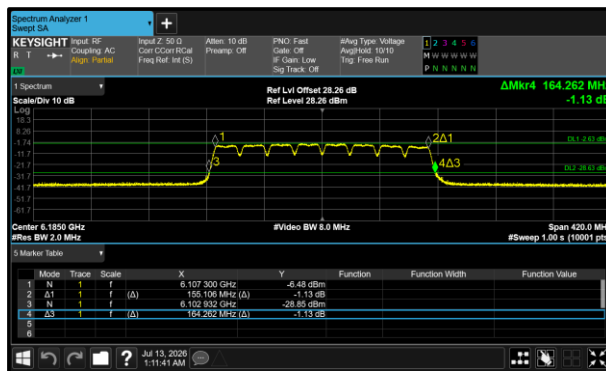


Figure 367- 802.11a160 VLP Minimum
99% OBW

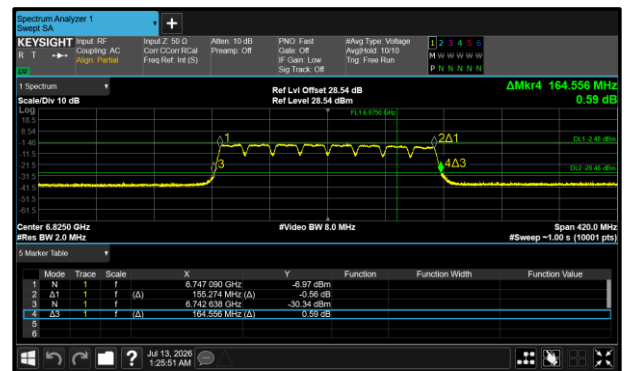


Figure 368- 802.11a160 VLP Maximum
99% OBW

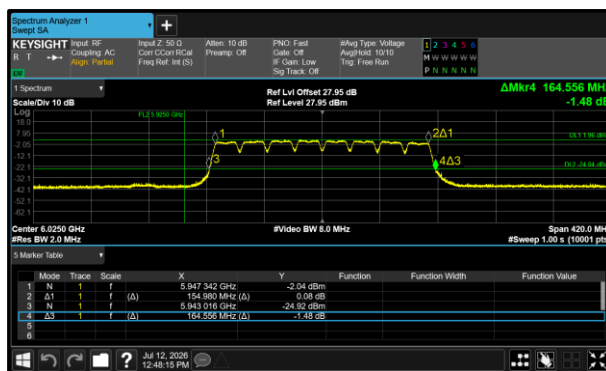


Figure 369- 802.11a160 LPI Minimum
99% OBW



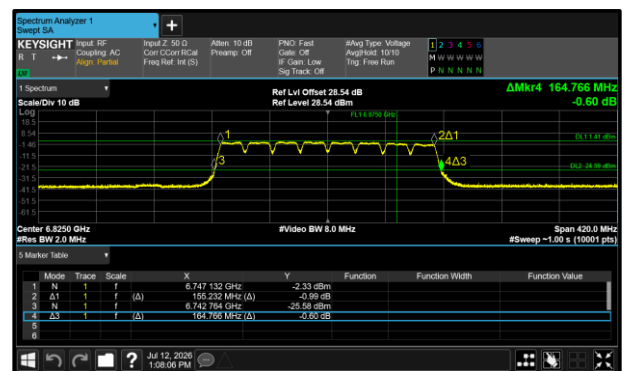


Figure 370- 802.11a160 LPI Maximum
99% OBW





Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE160 SU LPI	156.114	156.366
802.11ax HE160 SU SP	155.400	155.610
802.11ax HE160 SU VLP	156.198	156.408

Table 636 - 99% Bandwidth Summary Results - MIMO SDM

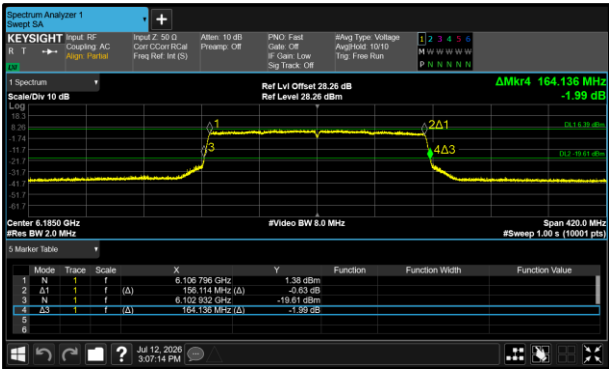


Figure 373- 802.11ax HE160 SU LPI
Minimum 99% OBW

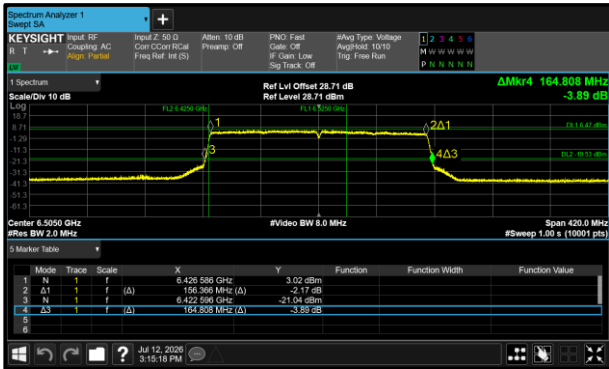


Figure 374- 802.11ax HE160 SU LPI
Maximum 99% OBW

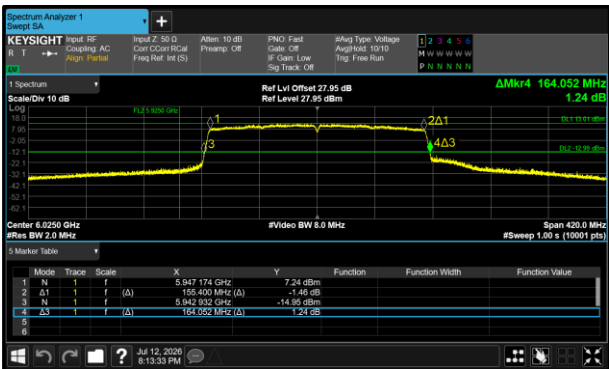


Figure 375- 802.11ax HE160 SU SP
Minimum 99% OBW

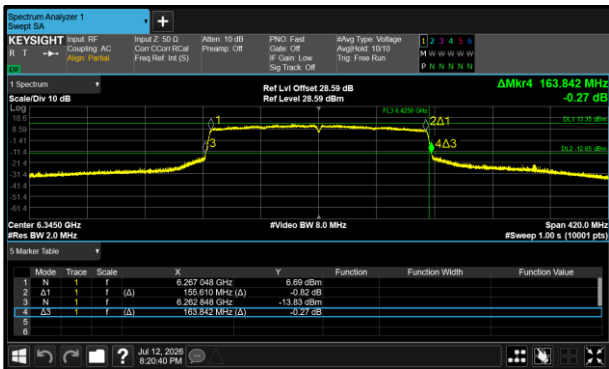


Figure 376- 802.11ax HE160 SU SP
Maximum 99% OBW

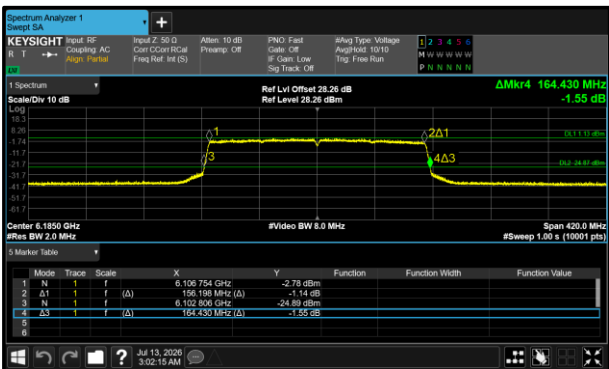


Figure 377- 802.11ax HE160 SU VLP
Minimum 99% OBW

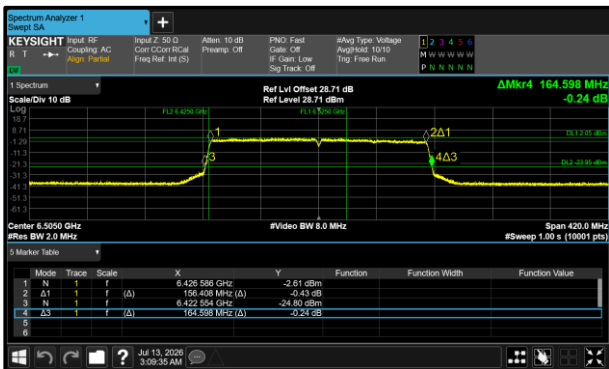


Figure 378- 802.11ax HE160 SU VLP
Maximum 99% OBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE160 SU LPI	156.156	156.450
802.11ax HE160 SU SP	155.400	155.652
802.11ax HE160 SU VLP	156.282	156.492

Table 637 - 99% Bandwidth Summary Results - TxBF

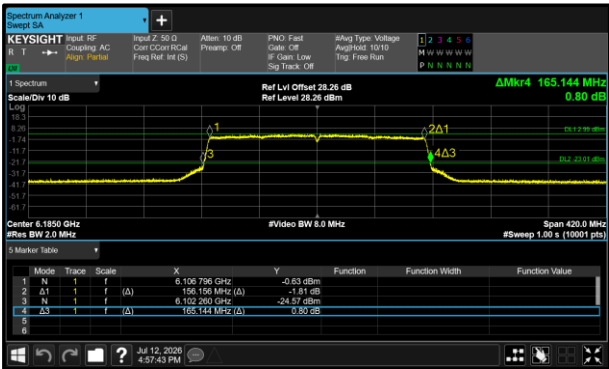


Figure 379- 802.11ax HE160 SU LPI
Minimum 99% OBW

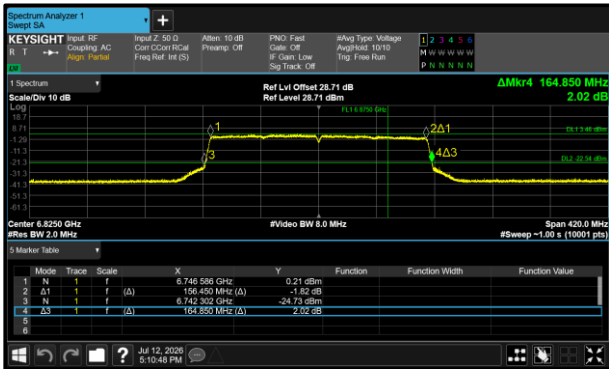


Figure 380- 802.11ax HE160 SU LPI
Maximum 99% OBW

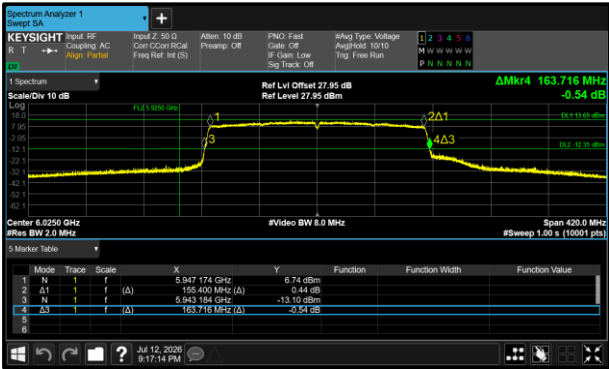


Figure 381- 802.11ax HE160 SU SP
Minimum 99% OBW



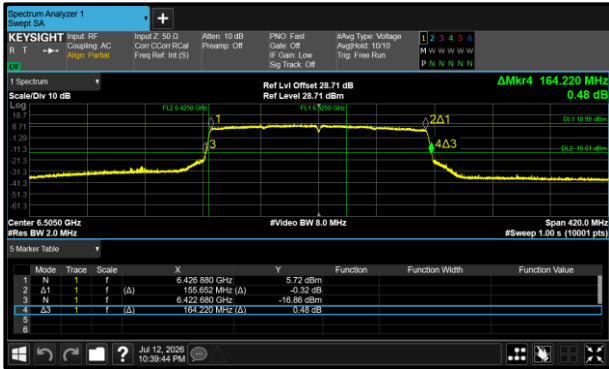


Figure 382- 802.11ax HE160 SU SP
Maximum 99% OBW

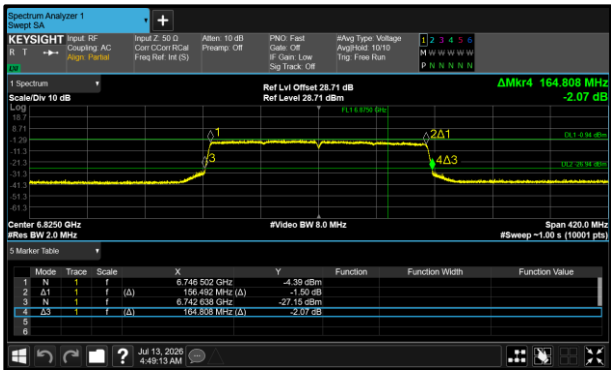

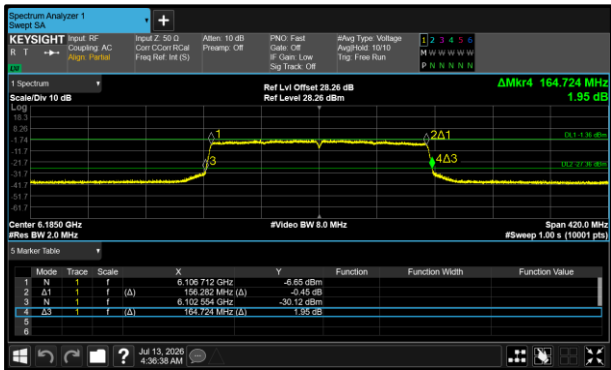

Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.804	-	-	-	320.0
5975	21.816	-	-	-	320.0
6175	21.954	-	-	-	320.0
6415	22.032	-	-	-	320.0
6435	21.786	-	-	-	320.0
6475	21.552	-	-	-	320.0
6515	21.762	-	-	-	320.0
6535	21.966	-	-	-	320.0
6695	21.888	-	-	-	320.0
6855	21.750	-	-	-	320.0
6875	22.002	-	-	-	320.0
6895	22.104	-	-	-	320.0
6995	21.750	-	-	-	320.0
7095	21.990	-	-	-	320.0
7115	19.914	-	-	-	320.0

Table 638 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.776	-	-	-	320.0
5975	16.758	-	-	-	320.0
6175	16.770	-	-	-	320.0
6415	16.788	-	-	-	320.0
6435	16.764	-	-	-	320.0
6475	16.776	-	-	-	320.0
6515	16.770	-	-	-	320.0
6535	16.770	-	-	-	320.0
6695	16.770	-	-	-	320.0
6855	16.764	-	-	-	320.0
6875	16.782	-	-	-	320.0
6895	16.770	-	-	-	320.0
6995	16.770	-	-	-	320.0
7095	16.770	-	-	-	320.0
7115	16.362	-	-	-	320.0

Table 639 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	23.040	-	-	-	320.0
6175	22.902	-	-	-	320.0
6415	23.034	-	-	-	320.0
6435	23.016	-	-	-	320.0
6475	22.830	-	-	-	320.0
6515	22.812	-	-	-	320.0
6535	22.890	-	-	-	320.0
6695	22.722	-	-	-	320.0
6855	22.752	-	-	-	320.0
6875	23.292	-	-	-	320.0
6895	23.178	-	-	-	320.0
6995	23.064	-	-	-	320.0
7095	22.944	-	-	-	320.0
7115	21.516	-	-	-	320.0

Table 640 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	19.068	-	-	-	320.0
6175	19.068	-	-	-	320.0
6415	19.080	-	-	-	320.0
6435	19.056	-	-	-	320.0
6475	19.074	-	-	-	320.0
6515	19.068	-	-	-	320.0
6535	19.068	-	-	-	320.0
6695	19.056	-	-	-	320.0
6855	19.068	-	-	-	320.0
6875	19.068	-	-	-	320.0
6895	19.074	-	-	-	320.0
6995	19.080	-	-	-	320.0
7095	19.080	-	-	-	320.0
7115	18.792	-	-	-	320.0

Table 641 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	20.418	-	-	-	320.0
6175	21.900	-	-	-	320.0
6415	21.900	-	-	-	320.0
6535	21.948	-	-	-	320.0
6695	21.666	-	-	-	320.0
6855	21.744	-	-	-	320.0

Table 642 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.482	-	-	-	320.0
6175	16.764	-	-	-	320.0
6415	16.770	-	-	-	320.0
6535	16.758	-	-	-	320.0
6695	16.764	-	-	-	320.0
6855	16.764	-	-	-	320.0

Table 643 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.372	-	-	-	320.0
6175	22.848	-	-	-	320.0
6415	22.620	-	-	-	320.0
6535	22.908	-	-	-	320.0
6695	22.668	-	-	-	320.0
6855	22.812	-	-	-	320.0

Table 644 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	18.798	-	-	-	320.0
6175	19.062	-	-	-	320.0
6415	19.074	-	-	-	320.0
6535	19.062	-	-	-	320.0
6695	19.068	-	-	-	320.0
6855	19.068	-	-	-	320.0

Table 645 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	21.804	-	-	-	320.0
6475	21.612	-	-	-	320.0
6515	21.918	-	-	-	320.0

Table 646 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	16.764	-	-	-	320.0
6475	16.764	-	-	-	320.0
6515	16.776	-	-	-	320.0

Table 647 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	22.908	-	-	-	320.0
6475	23.046	-	-	-	320.0
6515	23.106	-	-	-	320.0

Table 648 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	19.068	-	-	-	320.0
6475	19.074	-	-	-	320.0
6515	19.068	-	-	-	320.0

Table 649 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	21.810	-	-	-	320.0
6255	21.954	-	-	-	320.0
6415	21.792	-	-	-	320.0
6435	21.786	-	-	-	320.0
6475	22.158	-	-	-	320.0
6515	22.020	-	-	-	320.0
6535	22.020	-	-	-	320.0
6695	21.636	-	-	-	320.0
6855	21.990	-	-	-	320.0
6875	22.140	-	-	-	320.0
6895	21.786	-	-	-	320.0
6995	22.236	-	-	-	320.0
7095	22.020	-	-	-	320.0
7115	19.938	-	-	-	320.0

Table 650 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	16.770	-	-	-	320.0
6255	16.788	-	-	-	320.0
6415	16.782	-	-	-	320.0
6435	16.776	-	-	-	320.0
6475	16.782	-	-	-	320.0
6515	16.788	-	-	-	320.0
6535	16.782	-	-	-	320.0
6695	16.764	-	-	-	320.0
6855	16.770	-	-	-	320.0
6875	16.788	-	-	-	320.0
6895	16.776	-	-	-	320.0
6995	16.782	-	-	-	320.0
7095	16.776	-	-	-	320.0
7115	16.368	-	-	-	320.0

Table 651 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	23.322	-	-	-	320.0
6255	23.070	-	-	-	320.0
6415	23.052	-	-	-	320.0
6435	23.028	-	-	-	320.0
6475	23.070	-	-	-	320.0
6515	23.130	-	-	-	320.0
6535	22.698	-	-	-	320.0
6695	23.178	-	-	-	320.0
6855	23.268	-	-	-	320.0
6875	22.770	-	-	-	320.0
6895	22.872	-	-	-	320.0
6995	23.358	-	-	-	320.0
7095	23.082	-	-	-	320.0
7115	21.462	-	-	-	320.0

Table 652 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	19.062	-	-	-	320.0
6255	19.080	-	-	-	320.0
6415	19.074	-	-	-	320.0
6435	19.068	-	-	-	320.0
6475	19.080	-	-	-	320.0
6515	19.080	-	-	-	320.0
6535	19.068	-	-	-	320.0
6695	19.068	-	-	-	320.0
6855	19.056	-	-	-	320.0
6875	19.074	-	-	-	320.0
6895	19.080	-	-	-	320.0
6995	19.068	-	-	-	320.0
7095	19.068	-	-	-	320.0
7115	18.810	-	-	-	320.0

Table 653 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	21.864	-	-	320.0
6175	-	21.858	-	-	320.0
6395	-	21.786	-	-	320.0
6415	-	21.786	-	-	320.0
6435	-	21.894	-	-	320.0
6475	-	21.726	-	-	320.0
6515	-	21.906	-	-	320.0
6535	-	22.080	-	-	320.0
6695	-	21.738	-	-	320.0
6855	-	21.588	-	-	320.0
6875	-	22.026	-	-	320.0
6895	-	21.732	-	-	320.0
6995	-	21.822	-	-	320.0
7095	-	22.122	-	-	320.0
7115	-	19.842	-	-	320.0

Table 654 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	16.758	-	-	320.0
6175	-	16.764	-	-	320.0
6395	-	16.764	-	-	320.0
6415	-	16.770	-	-	320.0
6435	-	16.758	-	-	320.0
6475	-	16.770	-	-	320.0
6515	-	16.770	-	-	320.0
6535	-	16.770	-	-	320.0
6695	-	16.758	-	-	320.0
6855	-	16.758	-	-	320.0
6875	-	16.764	-	-	320.0
6895	-	16.758	-	-	320.0
6995	-	16.752	-	-	320.0
7095	-	16.758	-	-	320.0
7115	-	16.362	-	-	320.0

Table 655 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	23.028	-	-	320.0
6175	-	22.776	-	-	320.0
6415	-	23.352	-	-	320.0
6435	-	23.178	-	-	320.0
6475	-	22.878	-	-	320.0
6515	-	23.124	-	-	320.0
6535	-	23.178	-	-	320.0
6695	-	22.956	-	-	320.0
6855	-	22.980	-	-	320.0
6875	-	22.722	-	-	320.0
6895	-	22.914	-	-	320.0
6995	-	23.046	-	-	320.0
7095	-	23.226	-	-	320.0
7115	-	21.714	-	-	320.0

Table 656 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	19.068	-	-	320.0
6175	-	19.056	-	-	320.0
6415	-	19.074	-	-	320.0
6435	-	19.068	-	-	320.0
6475	-	19.068	-	-	320.0
6515	-	19.068	-	-	320.0
6535	-	19.068	-	-	320.0
6695	-	19.056	-	-	320.0



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6855	-	19.062	-	-	320.0
6875	-	19.062	-	-	320.0
6895	-	19.062	-	-	320.0
6995	-	19.050	-	-	320.0
7095	-	19.068	-	-	320.0
7115	-	18.780	-	-	320.0

Table 657 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	19.902	-	-	320.0
6175	-	21.660	-	-	320.0
6415	-	22.074	-	-	320.0
6535	-	21.540	-	-	320.0
6695	-	21.606	-	-	320.0
6855	-	21.810	-	-	320.0

Table 658 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	16.362	-	-	320.0
6175	-	16.752	-	-	320.0
6415	-	16.764	-	-	320.0
6535	-	16.746	-	-	320.0
6695	-	16.758	-	-	320.0
6855	-	16.764	-	-	320.0

Table 659 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCC (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	21.492	-	-	320.0
6175	-	22.782	-	-	320.0
6415	-	22.722	-	-	320.0
6535	-	22.962	-	-	320.0
6695	-	23.172	-	-	320.0
6855	-	23.016	-	-	320.0

Table 660 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	18.786	-	-	320.0
6175	-	19.062	-	-	320.0
6415	-	19.062	-	-	320.0
6535	-	19.068	-	-	320.0
6695	-	19.056	-	-	320.0
6855	-	19.074	-	-	320.0

Table 661 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	21.900	-	-	320.0
6475	-	21.666	-	-	320.0
6515	-	21.984	-	-	320.0

Table 662 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	16.758	-	-	320.0
6475	-	16.752	-	-	320.0
6515	-	16.764	-	-	320.0

Table 663 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-6
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	22.698	-	-	320.0
6475	-	22.710	-	-	320.0
6515	-	22.968	-	-	320.0

Table 664 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6435	-	19.056	-	-	320.0
6475	-	19.062	-	-	320.0
6515	-	19.062	-	-	320.0

Table 665 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	21.876	-	-	320.0
6255	-	21.594	-	-	320.0
6395	-	21.612	-	-	320.0
6415	-	22.050	-	-	320.0
6435	-	22.176	-	-	320.0
6475	-	21.708	-	-	320.0
6515	-	21.864	-	-	320.0
6535	-	21.738	-	-	320.0
6695	-	21.678	-	-	320.0
6855	-	22.044	-	-	320.0
6875	-	21.714	-	-	320.0
6895	-	21.978	-	-	320.0
6995	-	21.912	-	-	320.0
7095	-	21.636	-	-	320.0
7115	-	19.752	-	-	320.0

Table 666 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	16.776	-	-	320.0
6255	-	16.776	-	-	320.0
6395	-	16.770	-	-	320.0
6415	-	16.770	-	-	320.0
6435	-	16.764	-	-	320.0
6475	-	16.770	-	-	320.0
6515	-	16.776	-	-	320.0



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6535	-	16.770	-	-	320.0
6695	-	16.770	-	-	320.0
6855	-	16.776	-	-	320.0
6875	-	16.776	-	-	320.0
6895	-	16.752	-	-	320.0
6995	-	16.764	-	-	320.0
7095	-	16.776	-	-	320.0
7115	-	16.368	-	-	320.0

Table 667 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	23.034	-	-	320.0
6255	-	22.926	-	-	320.0
6415	-	23.100	-	-	320.0
6435	-	22.896	-	-	320.0
6475	-	22.890	-	-	320.0
6515	-	22.692	-	-	320.0
6535	-	23.238	-	-	320.0
6695	-	23.268	-	-	320.0
6855	-	23.010	-	-	320.0
6875	-	22.824	-	-	320.0
6895	-	23.268	-	-	320.0
6995	-	22.950	-	-	320.0
7095	-	22.932	-	-	320.0
7115	-	21.462	-	-	320.0

Table 668 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	-	19.068	-	-	320.0
6255	-	19.080	-	-	320.0
6415	-	19.074	-	-	320.0
6435	-	19.062	-	-	320.0
6475	-	19.062	-	-	320.0
6515	-	19.068	-	-	320.0
6535	-	19.068	-	-	320.0
6695	-	19.056	-	-	320.0



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6855	-	19.062	-	-	320.0
6875	-	19.062	-	-	320.0
6895	-	19.068	-	-	320.0
6995	-	19.068	-	-	320.0
7095	-	19.074	-	-	320.0
7115	-	18.798	-	-	320.0

Table 669 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.768	22.038	-	-	320.0
6175	21.906	22.176	-	-	320.0
6395	21.942	22.122	-	-	320.0
6415	21.642	22.428	-	-	320.0
6435	22.266	22.470	-	-	320.0
6475	21.918	22.410	-	-	320.0
6515	22.170	22.068	-	-	320.0
6535	22.152	22.014	-	-	320.0
6695	22.134	21.882	-	-	320.0
6855	22.074	21.912	-	-	320.0
6875	21.804	22.152	-	-	320.0
6895	21.840	22.020	-	-	320.0
6995	21.594	22.242	-	-	320.0
7095	21.732	21.858	-	-	320.0
7115	20.490	20.400	-	-	320.0

Table 670 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.788	16.800	-	-	320.0
6175	16.788	16.806	-	-	320.0
6395	16.776	16.800	-	-	320.0
6415	16.782	16.812	-	-	320.0
6435	16.764	16.794	-	-	320.0
6475	16.782	16.800	-	-	320.0
6515	16.776	16.800	-	-	320.0



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6535	16.782	16.800	-	-	320.0
6695	16.782	16.794	-	-	320.0
6855	16.782	16.800	-	-	320.0
6875	16.794	16.812	-	-	320.0
6895	16.782	16.806	-	-	320.0
6995	16.788	16.782	-	-	320.0
7095	16.770	16.806	-	-	320.0
7115	16.500	16.506	-	-	320.0

Table 671 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	22.650	22.716	-	-	320.0
6175	22.974	23.190	-	-	320.0
6415	23.130	22.866	-	-	320.0
6435	23.136	22.926	-	-	320.0
6475	22.758	22.872	-	-	320.0
6515	23.076	23.058	-	-	320.0
6535	22.938	23.304	-	-	320.0
6695	22.848	23.148	-	-	320.0
6855	23.598	22.698	-	-	320.0
6875	23.250	23.010	-	-	320.0
6895	23.004	22.818	-	-	320.0
6995	22.794	23.016	-	-	320.0
7095	23.250	23.388	-	-	320.0
7115	21.498	21.702	-	-	320.0

Table 672 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	19.074	19.068	-	-	320.0
6175	19.074	19.068	-	-	320.0
6415	19.092	19.074	-	-	320.0
6435	19.068	19.050	-	-	320.0
6475	19.074	19.080	-	-	320.0
6515	19.080	19.056	-	-	320.0
6535	19.080	19.062	-	-	320.0
6695	19.068	19.062	-	-	320.0



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6855	19.080	19.080	-	-	320.0
6875	19.074	19.062	-	-	320.0
6895	19.062	19.050	-	-	320.0
6995	19.074	19.068	-	-	320.0
7095	19.056	19.068	-	-	320.0
7115	18.792	18.780	-	-	320.0

Table 673 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	19.884	20.418	-	-	320.0
6175	21.816	22.098	-	-	320.0
6415	21.630	22.116	-	-	320.0
6535	21.768	22.302	-	-	320.0
6695	22.008	22.050	-	-	320.0
6855	21.708	22.008	-	-	320.0

Table 674 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	16.380	16.488	-	-	320.0
6175	16.746	16.770	-	-	320.0
6415	16.758	16.782	-	-	320.0
6535	16.752	16.782	-	-	320.0
6695	16.758	16.782	-	-	320.0
6855	16.758	16.788	-	-	320.0

Table 675 - 99% Bandwidth Results