



ePA - Core 0-1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)
Static	2DH5	2402	2390	56.56	44.70
Static	3DH5	2402	2390	56.48	44.74
Static	HDR4	2404	2390	56.16	44.52
Static	HDR8	2404	2390	56.48	44.65
Static	LE1M	2402	2390	56.49	44.78
Static	LE2M	2404	2390	56.06	44.36
Static	HDT3	2404	2390	56.23	44.69
Static	HDT4	2404	2390	56.45	44.79
Static	HDT6	2404	2390	56.71	44.68
Static	HDRPS2	2404	2390	56.46	44.54
Static	HDRPM12	2404	2390	56.32	44.41
Static	XHDRPM8	2404	2390	56.22	44.70
Static	2DH5	2480	2483.5	60.69	48.31
Static	3DH5	2480	2483.5	62.60	48.88
Static	HDR4	2476	2483.5	57.10	45.38
Static	HDR8	2476	2483.5	64.92	50.39
Static	LE1M	2480	2483.5	59.94	47.41
Static	LE2M	2478	2483.5	58.12	45.41
Static	HDT3	2476	2483.5	57.69	46.00
Static	HDT4	2476	2483.5	59.75	46.28
Static	HDT6	2476	2483.5	61.89	46.63
Static	HDRPS2	2476	2483.5	56.67	45.22
Static	HDRPM12	2475	2483.5	66.46	50.10
Static	XHDRPM8	2475	2483.5	62.08	49.32

Table 13 - MIMO Restricted Band Edge Results

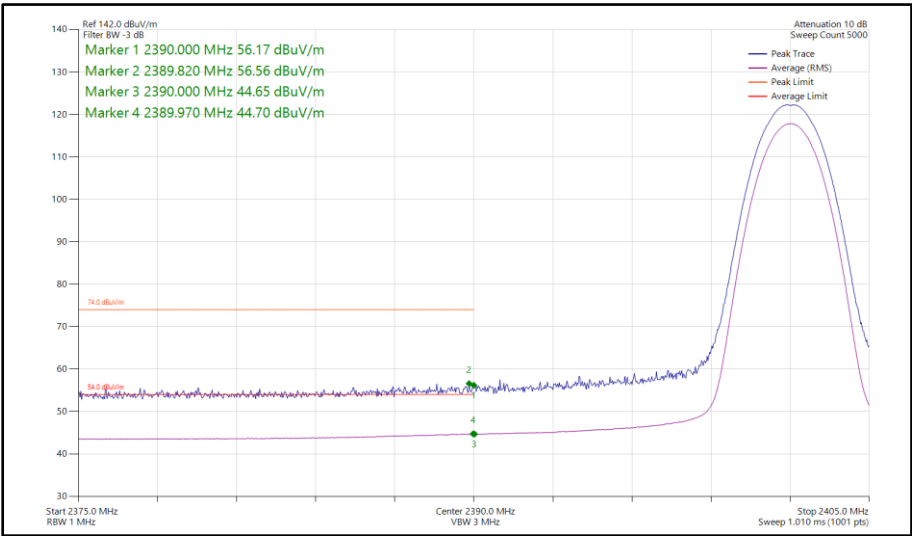


Figure 145 - Bluetooth 2DH5, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2390 MHz

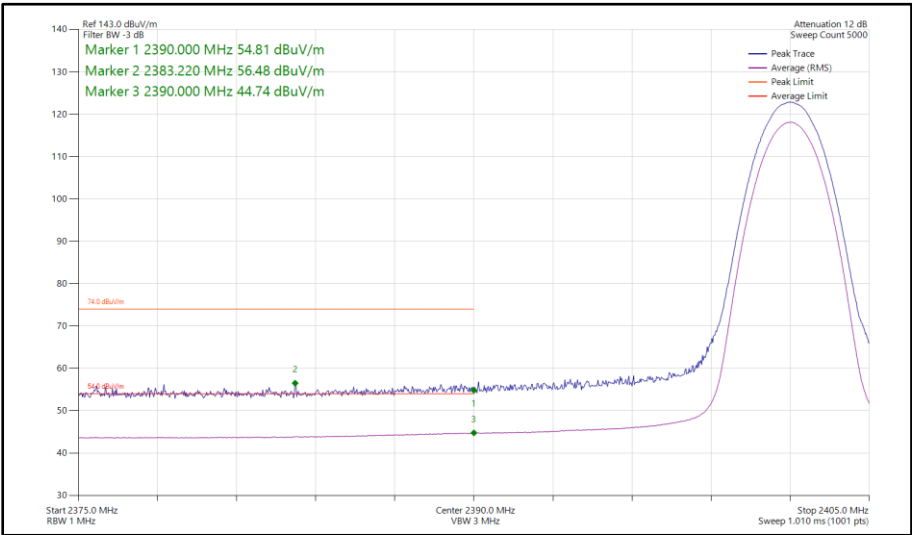


Figure 146 - Bluetooth 3DH5, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2390 MHz

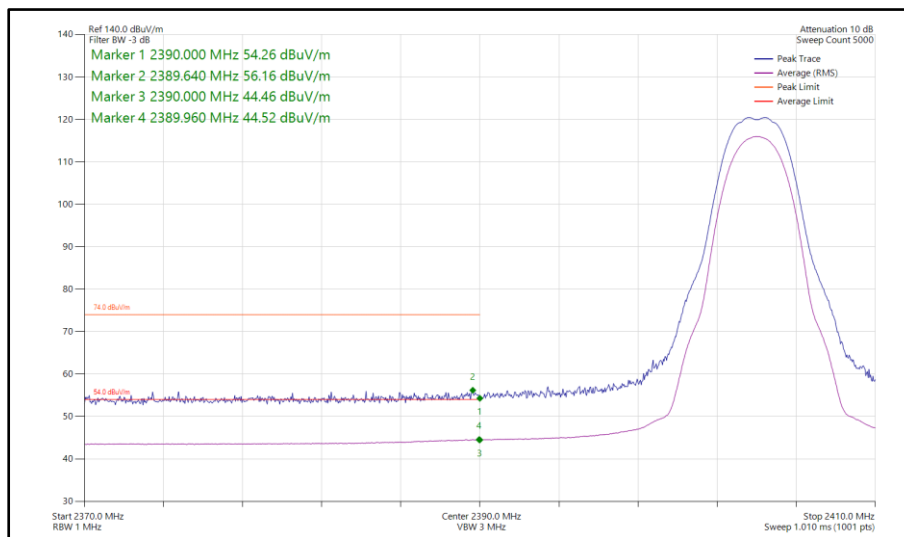


**Figure 147 - Bluetooth HDR4, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

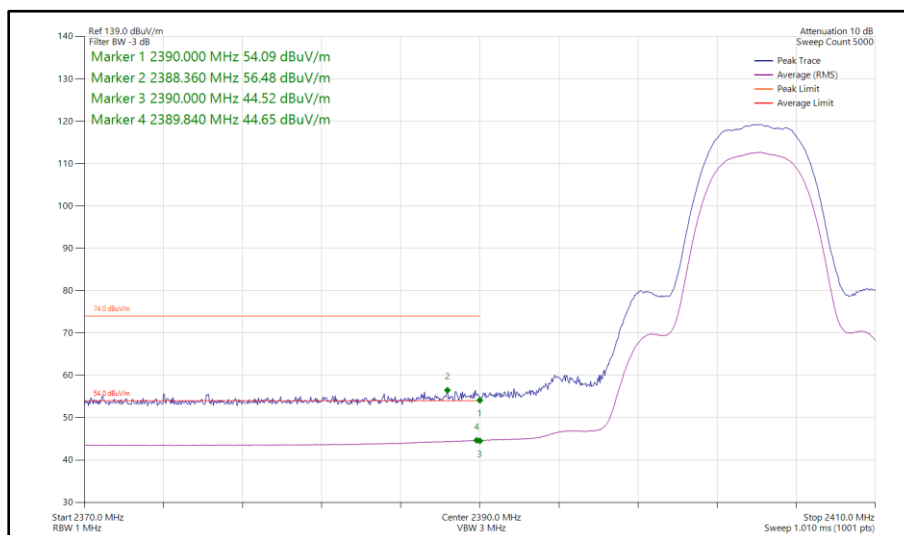


**Figure 148 - Bluetooth HDR8, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

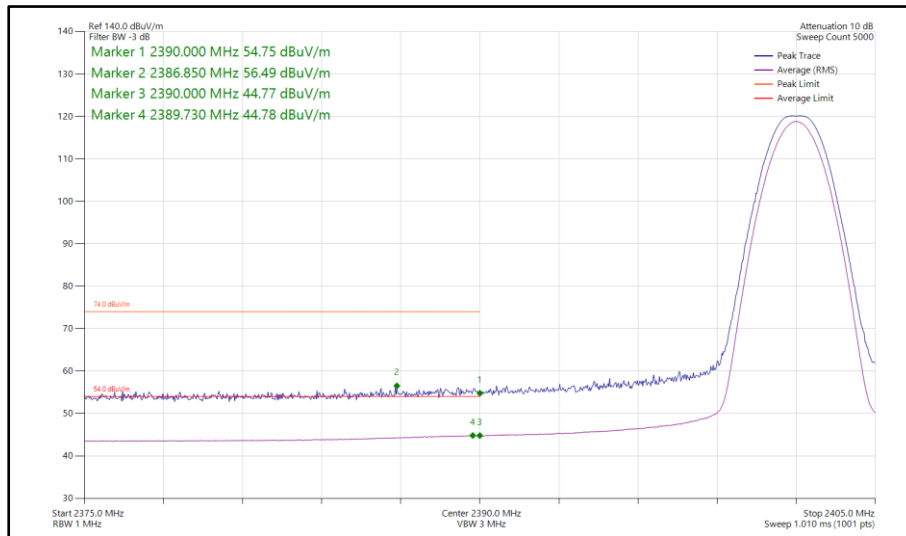


**Figure 149 - Bluetooth LE1M, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2390 MHz**

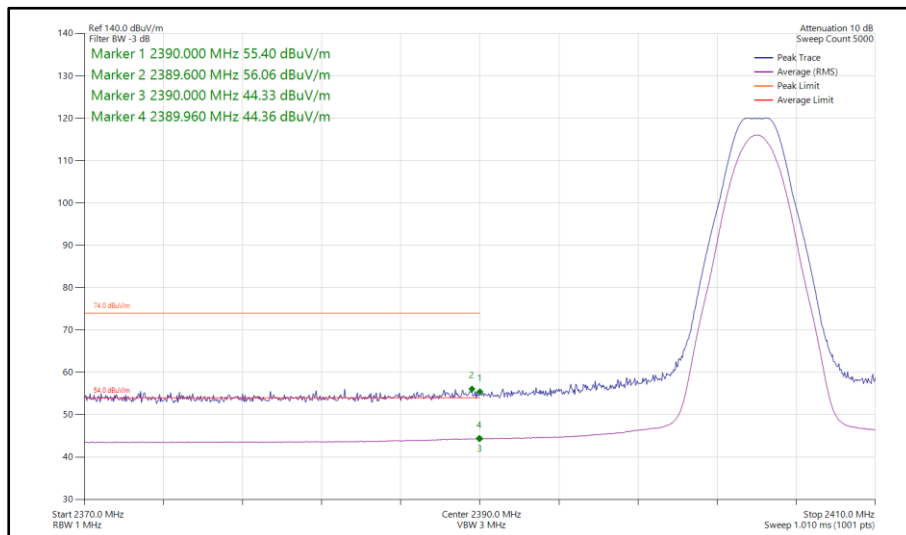


**Figure 150 - Bluetooth LE2M, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

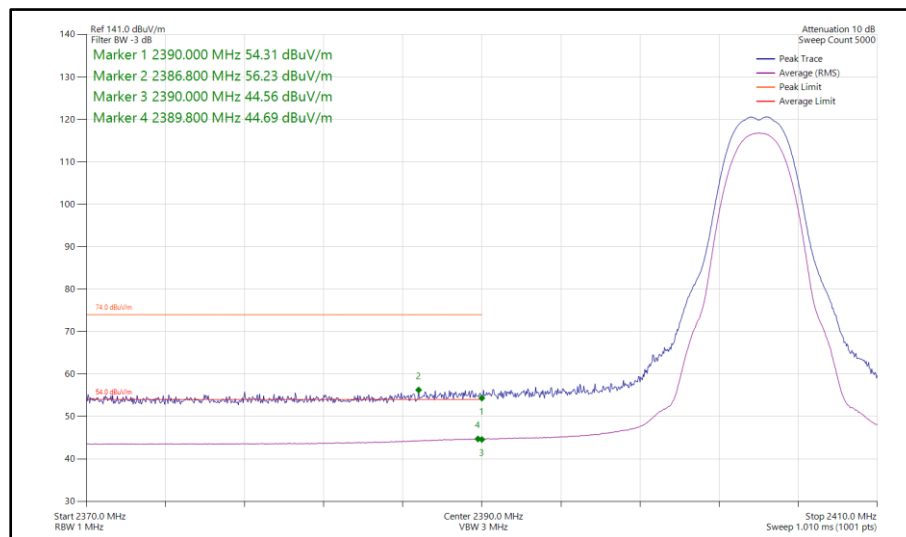


**Figure 151 - Bluetooth HDT3, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

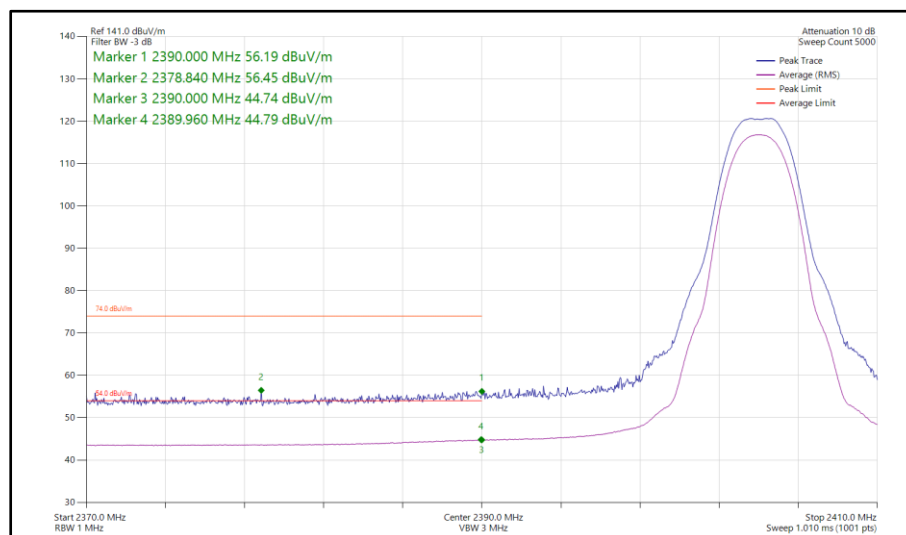


**Figure 152 - Bluetooth HDT4, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

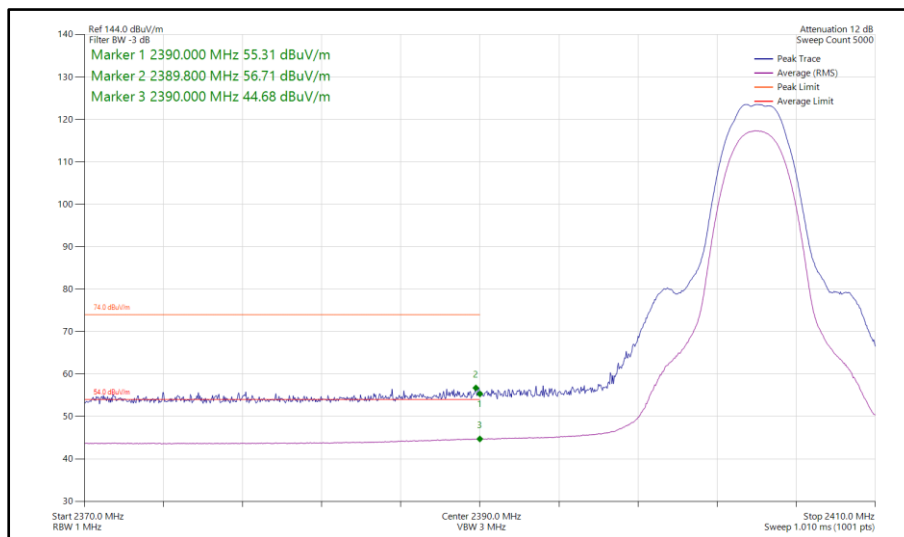


**Figure 153 - Bluetooth HDT6, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

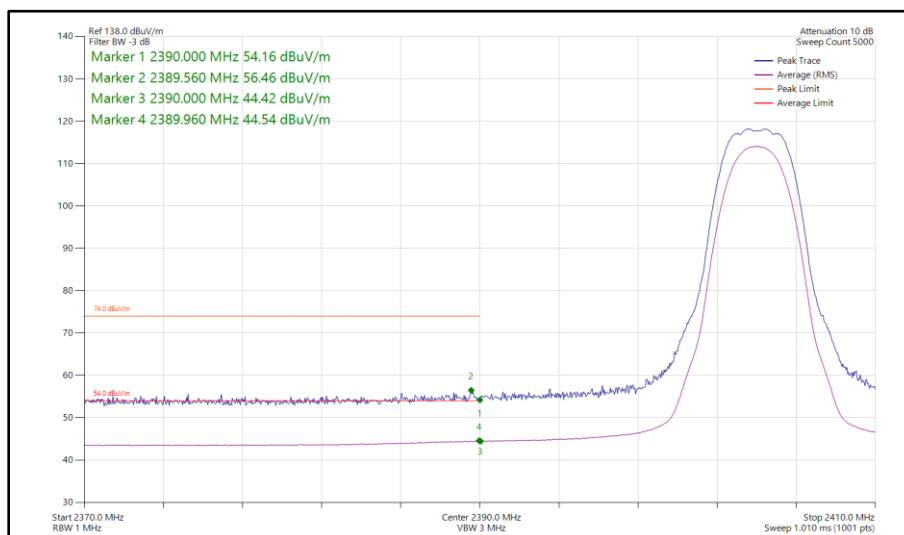


**Figure 154 - Bluetooth HDRPS2, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

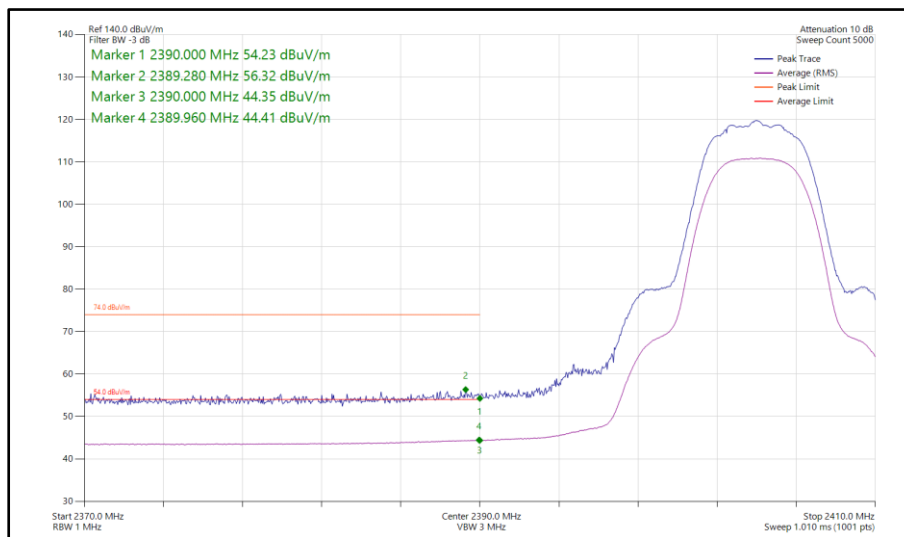


**Figure 155 - Bluetooth HDRPM12, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

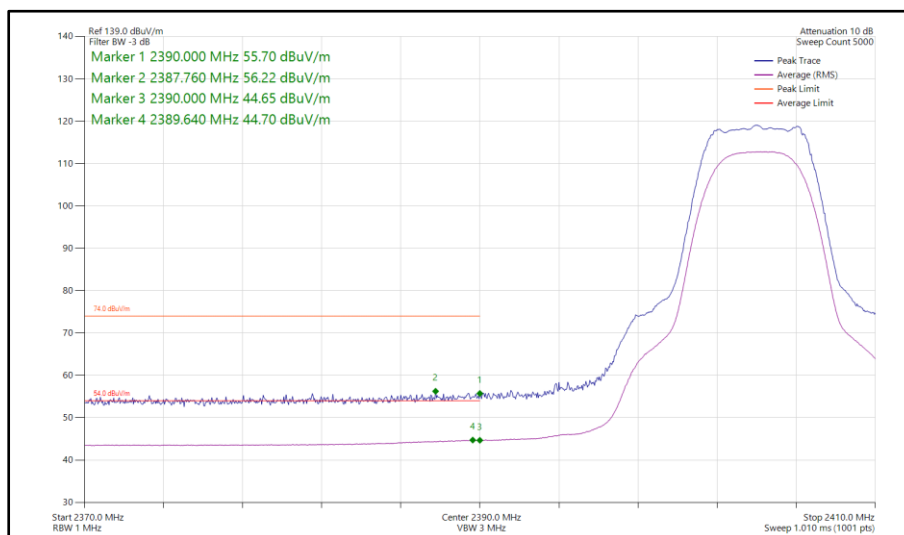


**Figure 156 - Bluetooth XHDRPM8, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

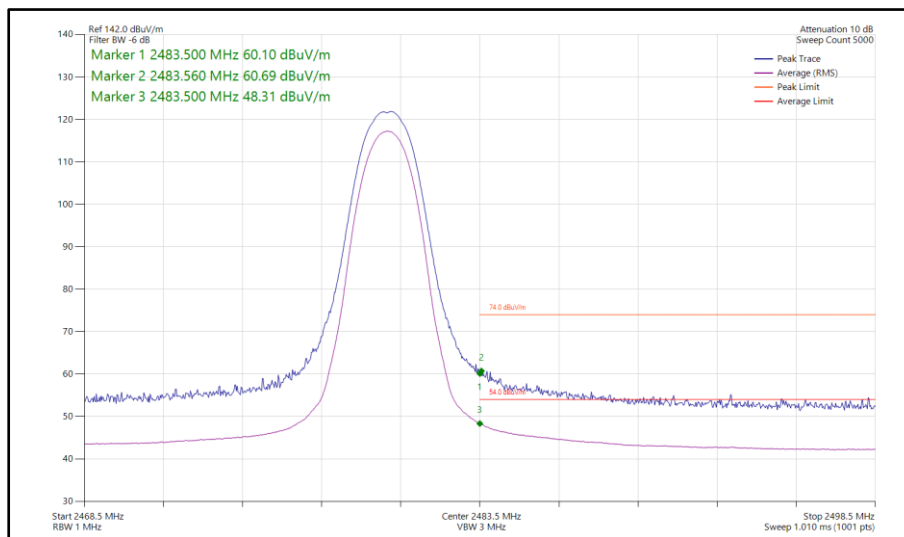


**Figure 157 - Bluetooth 2DH5, MIMO, Core 0-1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

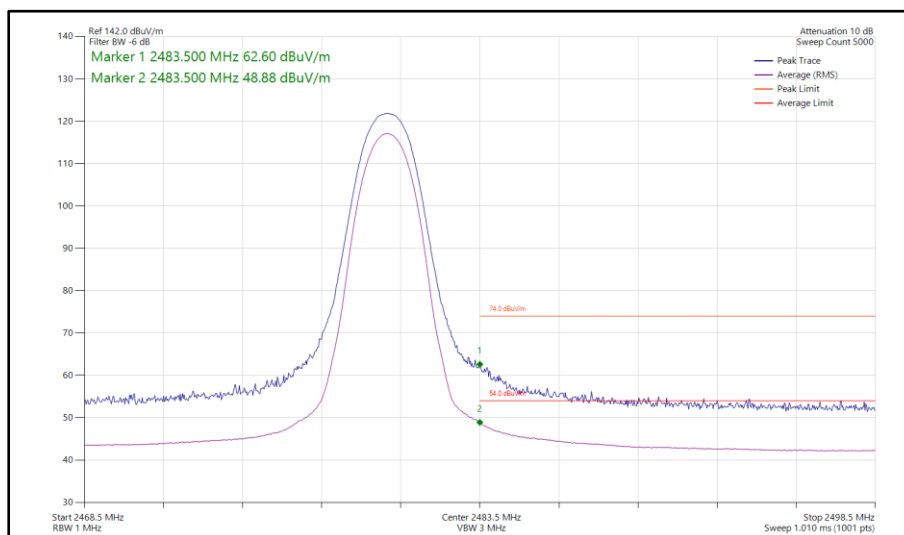


**Figure 158 - Bluetooth 3DH5, MIMO, Core 0-1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

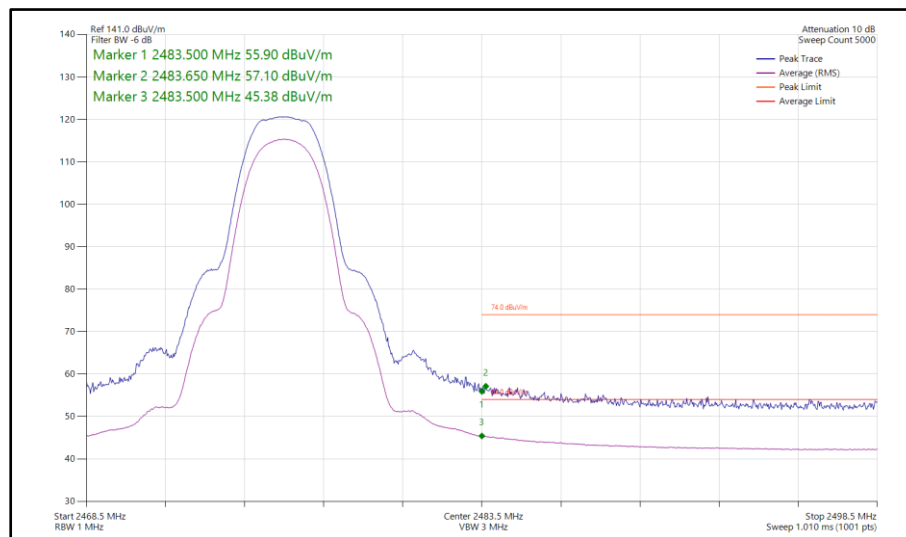


**Figure 159 - Bluetooth HDR4, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

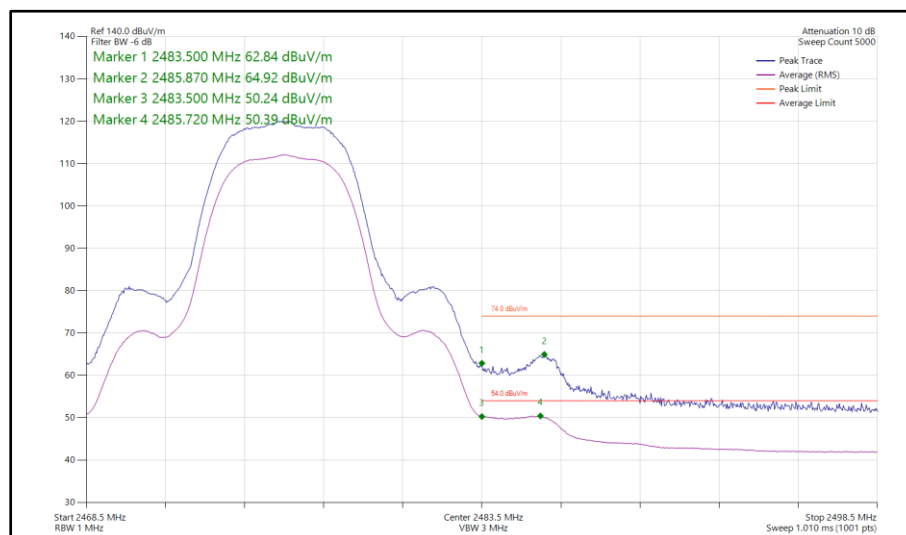


**Figure 160 - Bluetooth HDR8, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

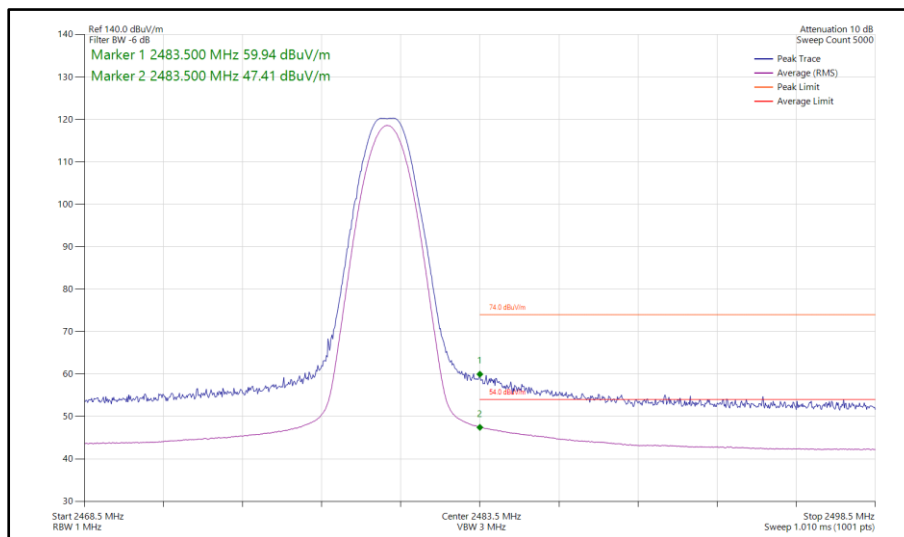


**Figure 161 - Bluetooth LE1M, MIMO, Core 0-1 - 2480 MHz
Band Edge Frequency 2483.5 MHz**

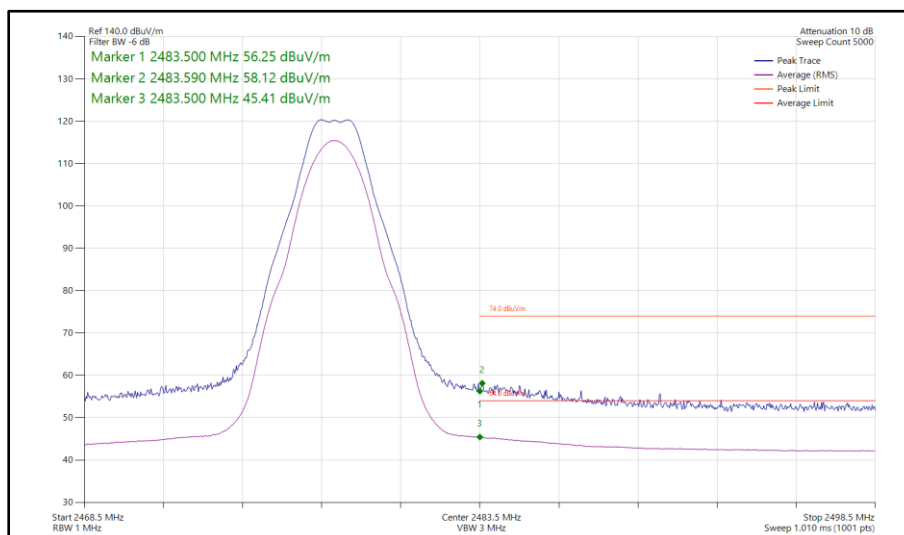


**Figure 162 - Bluetooth LE2M, MIMO, Core 0-1 - 2478 MHz
Band Edge Frequency 2483.5 MHz**

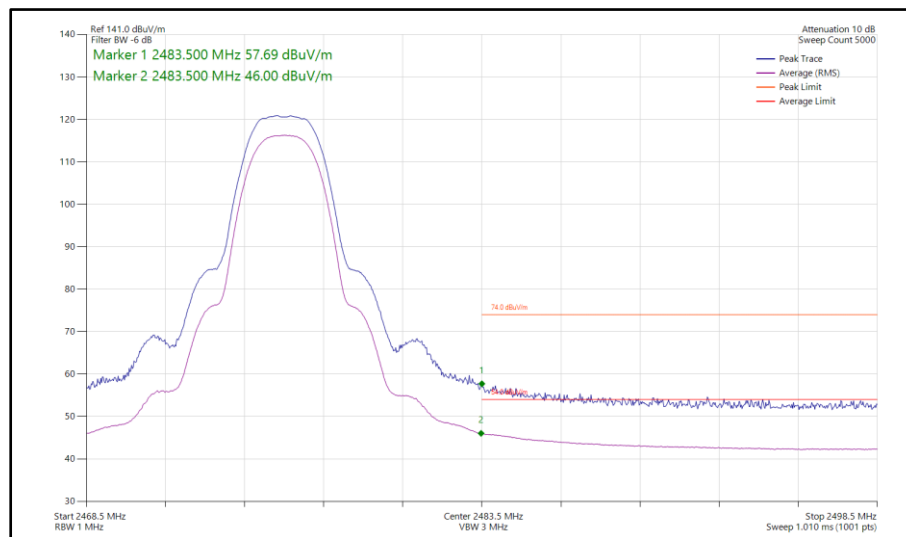


**Figure 163 - Bluetooth HDT3, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

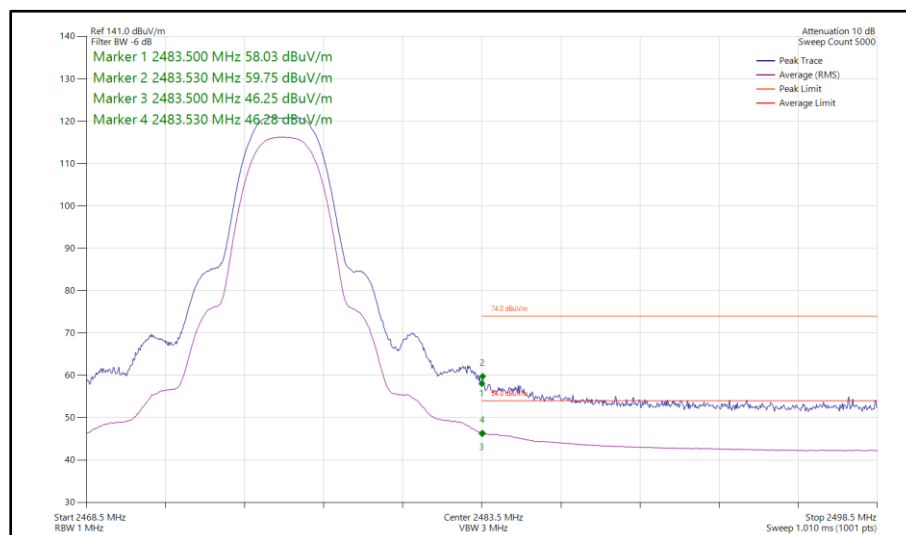


**Figure 164 - Bluetooth HDT4, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

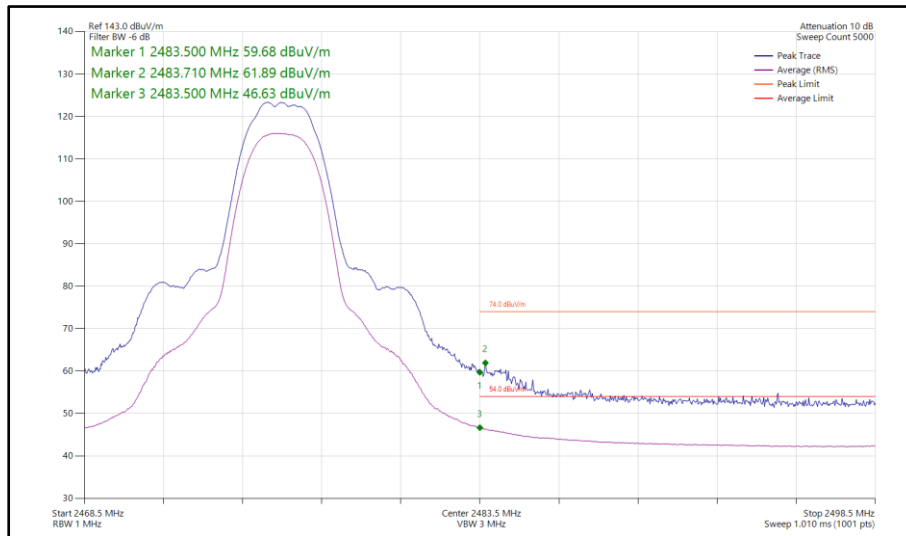


**Figure 165 - Bluetooth HDT6, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

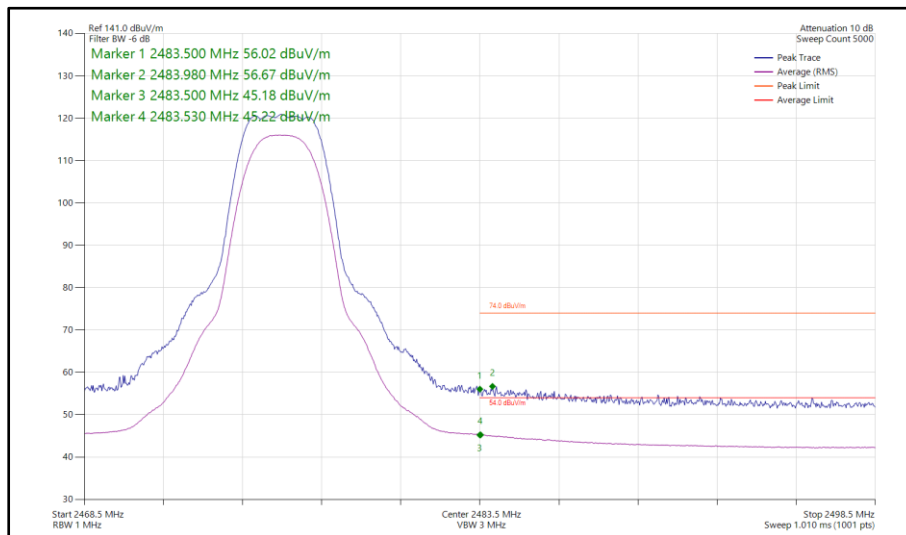


**Figure 166 - Bluetooth HDRPS2, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

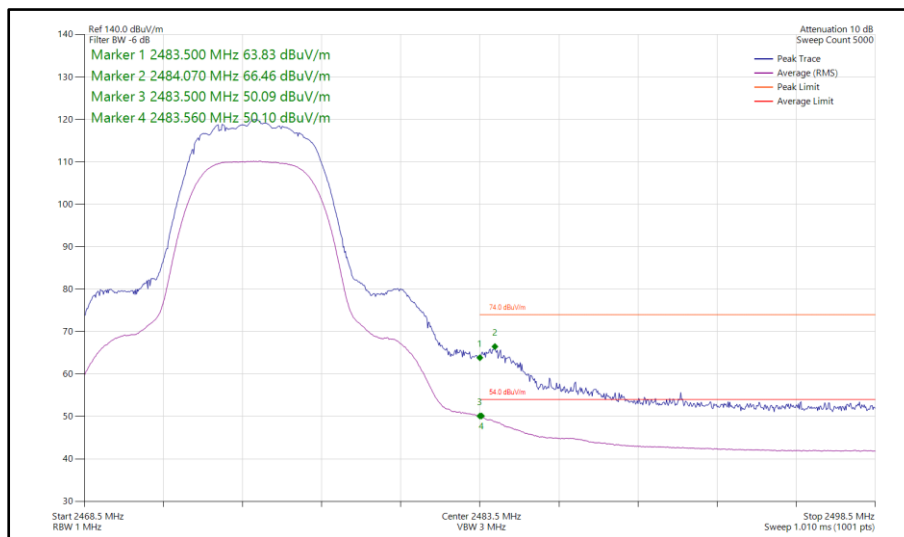


**Figure 167 - Bluetooth HDRPM12, MIMO, Core 0-1 - 2475 MHz
Band Edge Frequency 2483.5 MHz**

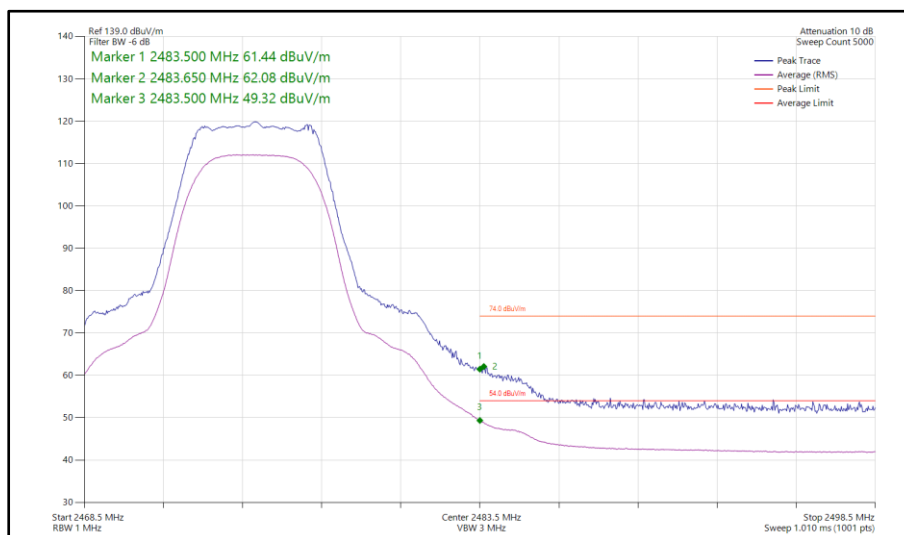


**Figure 168 - Bluetooth XHDRPM8, MIMO, Core 0-1 - 2475 MHz
Band Edge Frequency 2483.5 MHz**



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 14

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 15

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 & RF Chamber 18

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.6.1 V.	5125	-	O/P Mon
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	29-Oct-2026
EMI Test Receiver	Rohde & Schwarz	ESW44	5912	12	04-Sep-2026
AC Power Supply	iTech	IT7324	5955	-	O/P Mon
5m Semi-Anechoic	Albatross Projects	RF Chamber 14	5958	36	23-Apr-2028
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX22101000AMSAMS/A	6007	12	06-Jun-2026
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6008	12	23-May-2026
Horn Antenna (1-10.5 GHz)	Schwarzbeck	BBHA9120B	6140	12	14-Sep-2026
Digital Multimeter	Fluke	115	6145	12	06-Jun-2026
Digital Multimeter	Fluke	115	6147	12	05-Jun-2026
Humidity & Temperature meter	R.S Components	1364	6149	12	28-Aug-2026
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	11-Dec-2026
Cable (SMA to SMA 1m)	Junkosha	MWX221/B	6305	12	23-May-2026
3m Semi-Anechoic	Albatross Projects	Chamber 18	6597	36	08-May-2028
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	6795	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6796	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6797	-	TU
AC Power Supply	iTech	IT7324	6812	-	O/P Mon
Broad-Band Horn Antenna 1-10GHz N	Schwarzbeck	BBHA9120B	6825	12	14-Sep-2026
Handheld Hygrometer	Fluke	971	6838	12	16-Sep-2026
1m SMA-Type Cable	Junkosha	MWX22101000AMSAMS/B	6841	12	23-Sep-2026
8m SMA-Type Cable	Junkosha	MWX22108000AMSAMS/B	6848	12	23-Oct-2026
8m SMA-Type Cable	Junkosha	MWX22108000AMSAMS/B	6850	12	23-Oct-2026
SAC Switch Unit	TUV SUD	TUV_SSU_004	6886	12	02-Dec-2026

Table 16

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



2.2 Emission Bandwidth

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)
ISED RSS-247, Clause 6.3.1
ISED RSS-GEN, Clause 6.7

2.2.2 Equipment Under Test and Modification State

A3589, S/N: KHM3W2DDV2 - Modification State 0
A3589, S/N: LQ92DX7F6M - Modification State 0

2.2.3 Date of Test

06-May-2026 to 27-May-2026

2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.8.1 for 6 dB BW and 6.9.3 for 99% occupied bandwidth measurements.

2.2.5 Environmental Conditions

Ambient Temperature	21.9 - 23.8 °C
Relative Humidity	39.2 - 53.1 %



2.2.6 Test Results

2.4 GHz Bluetooth - DTS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	0.570	-	-	-	≥ 500.0
2440	0.570	-	-	-	≥ 500.0
2476	0.570	-	-	-	≥ 500.0

Table 17 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.635	-	-	-	-
2440	4.650	-	-	-	-
2476	4.650	-	-	-	-

Table 18 - 99% Bandwidth Results

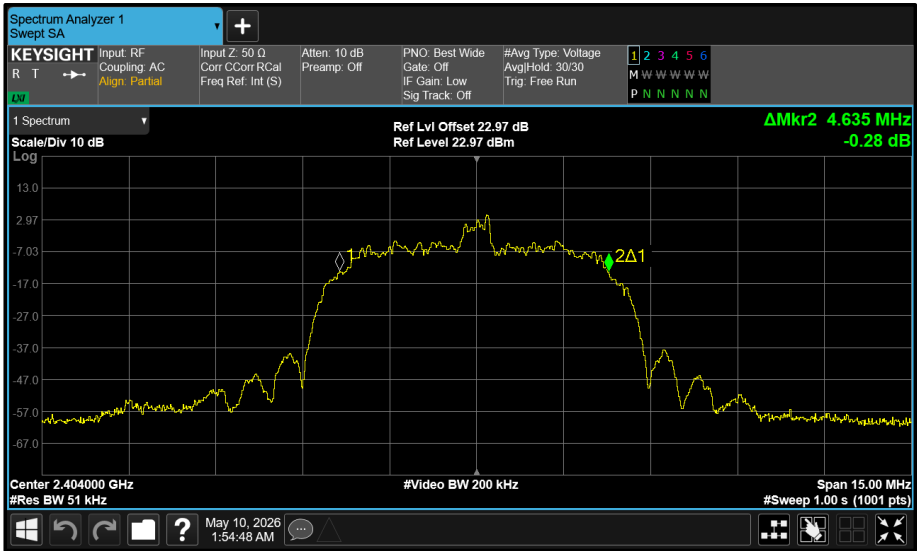


Figure 169 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

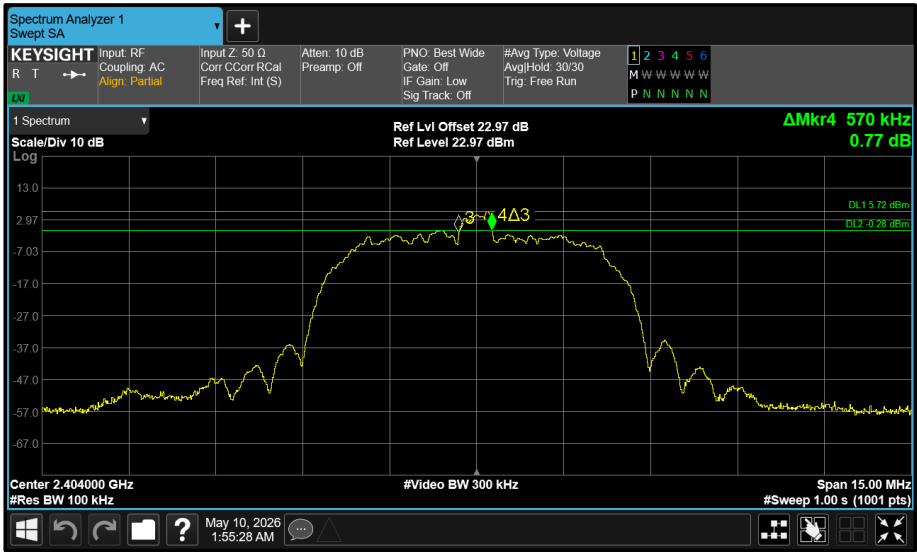


Figure 170 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

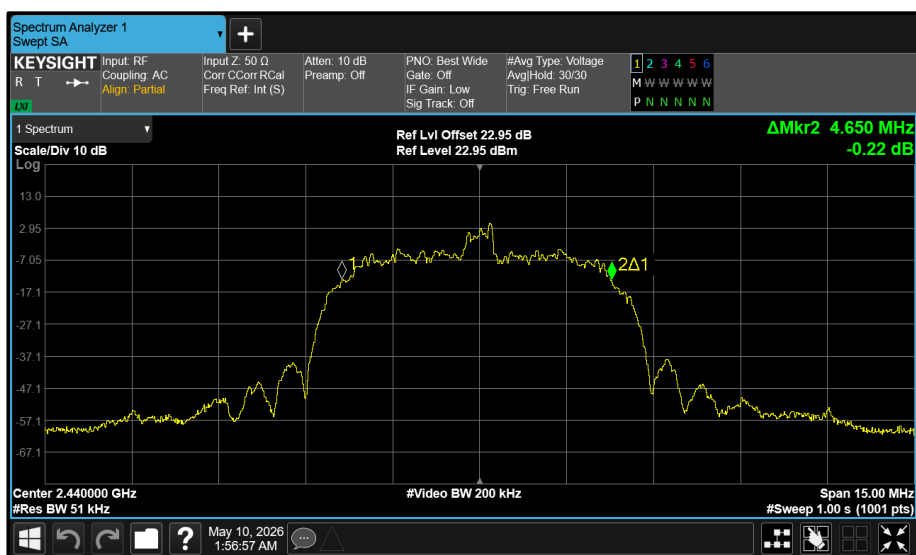


Figure 171 - Core 0 (A) 2440 MHz (CH38) 99% Bandwidth

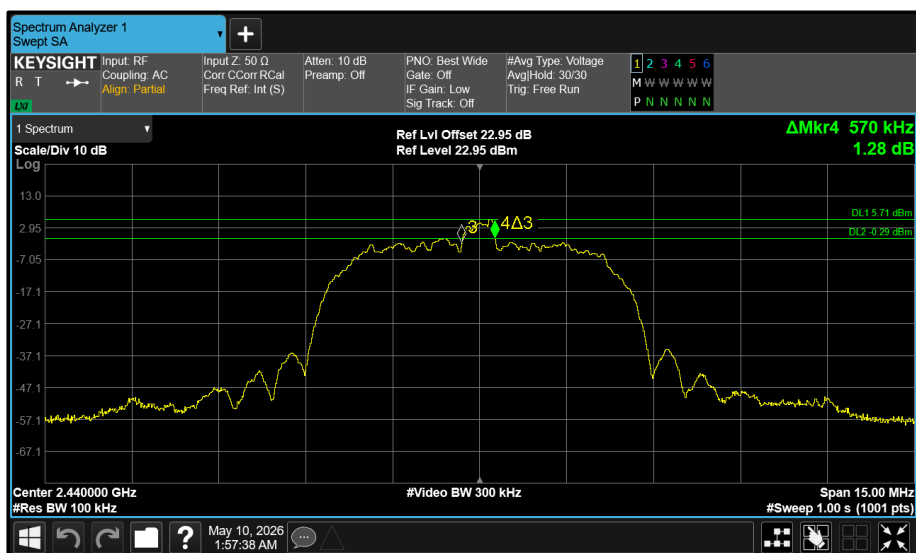


Figure 172 - Core 0 (A) 2440 MHz (CH38) 6 dB Bandwidth

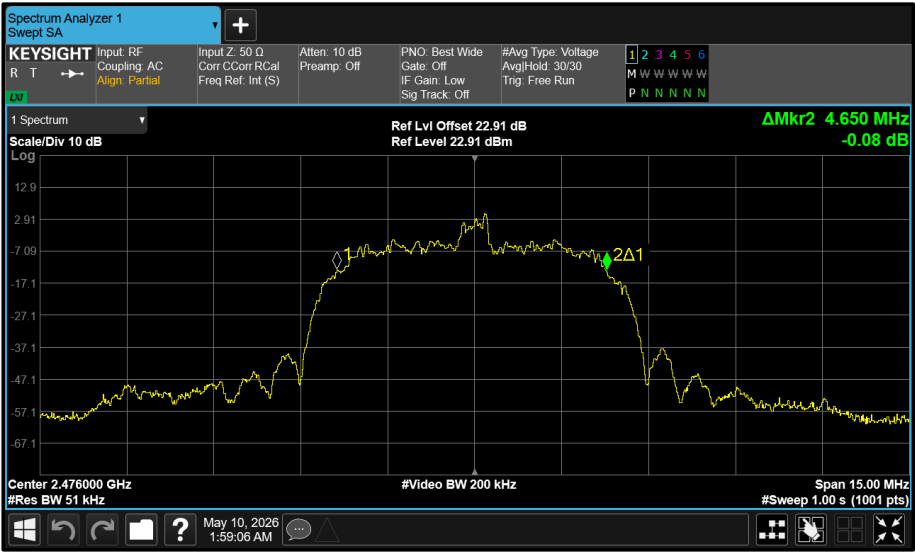


Figure 173 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

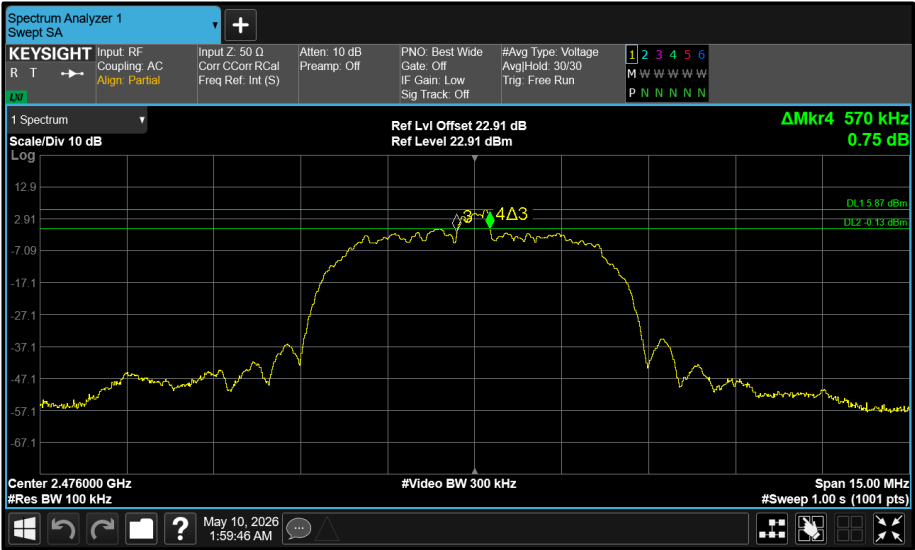


Figure 174 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	0.555	-	-	≥ 500.0
2440	-	0.570	-	-	≥ 500.0
2476	-	0.555	-	-	≥ 500.0

Table 19 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	4.650	-	-	-
2440	-	4.650	-	-	-
2476	-	4.650	-	-	-

Table 20 - 99% Bandwidth Results

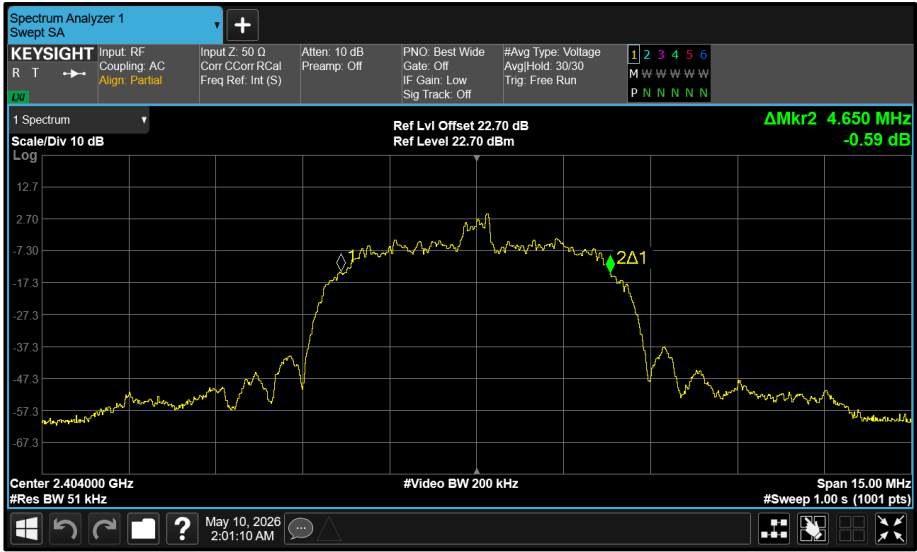


Figure 175 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

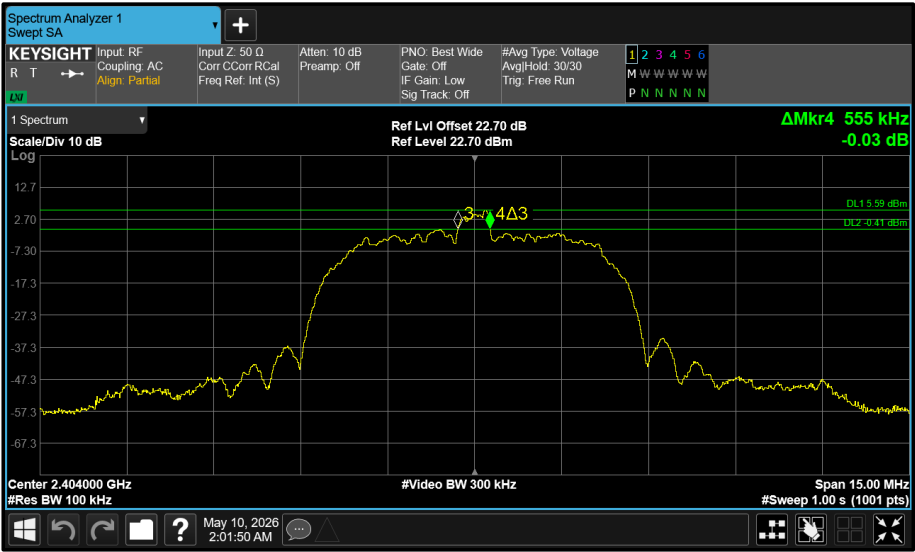


Figure 176 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

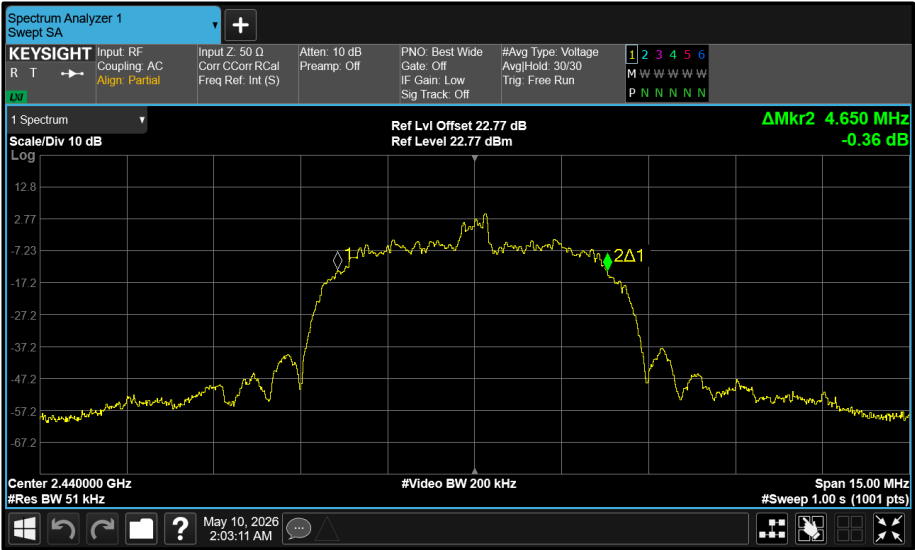


Figure 177 - Core 1 (B) 2440 MHz (CH38) 99% Bandwidth

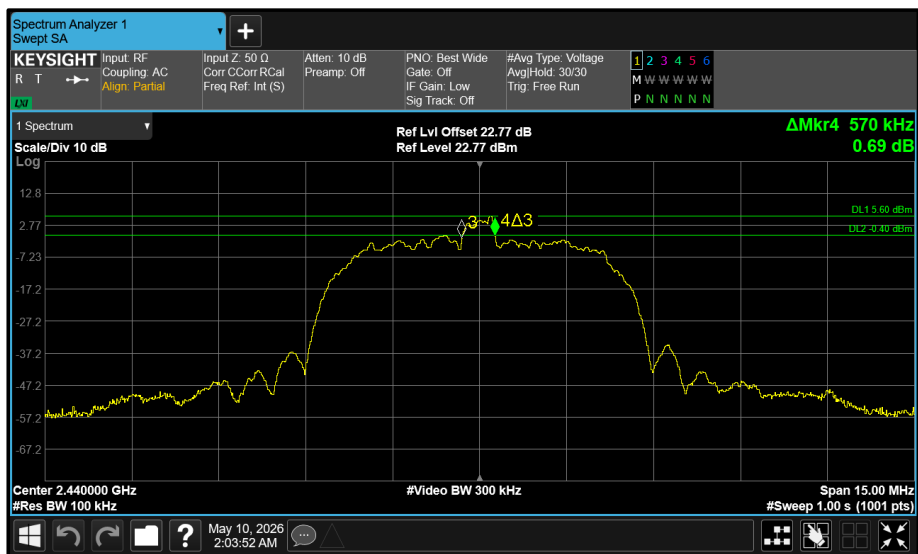


Figure 178 - Core 1 (B) 2440 MHz (CH38) 6 dB Bandwidth

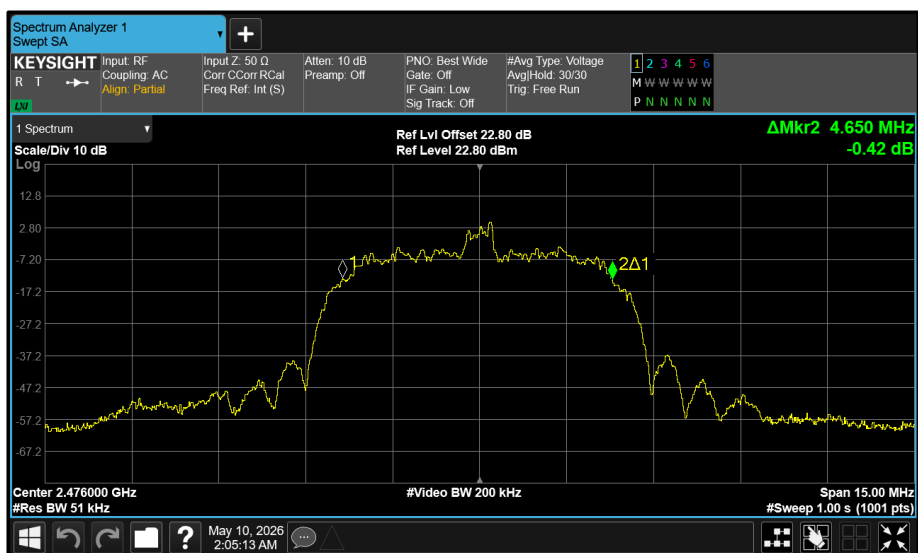


Figure 179 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

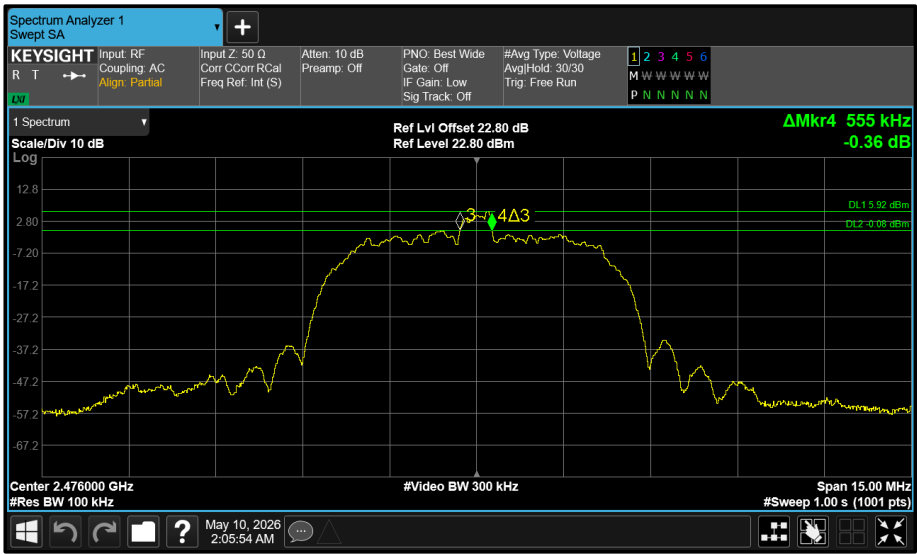


Figure 180 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	0.555	-	≥ 500.0
2440	-	-	0.570	-	≥ 500.0
2476	-	-	0.570	-	≥ 500.0

Table 21 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	4.635	-	-
2440	-	-	4.635	-	-
2476	-	-	4.635	-	-

Table 22 - 99% Bandwidth Results

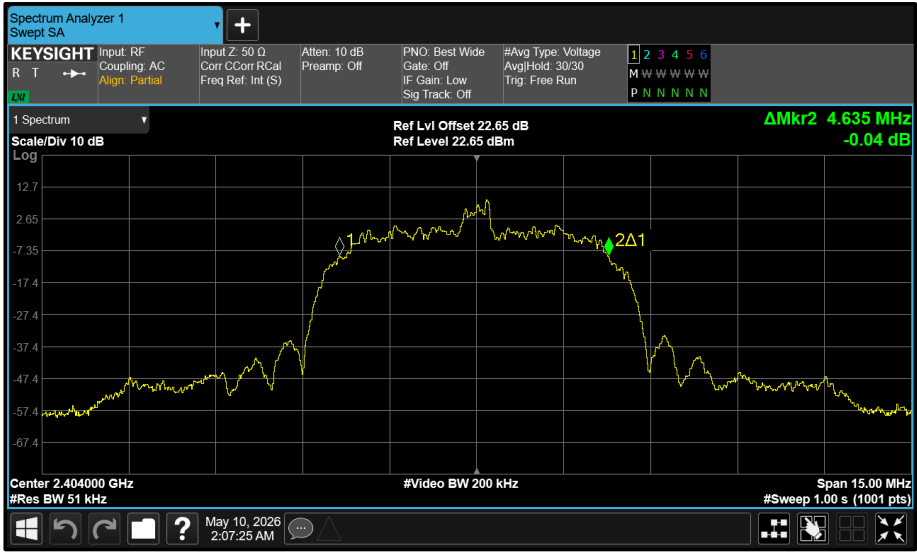


Figure 181 - Core 2 (C) 2404 MHz (CH2) 99% Bandwidth

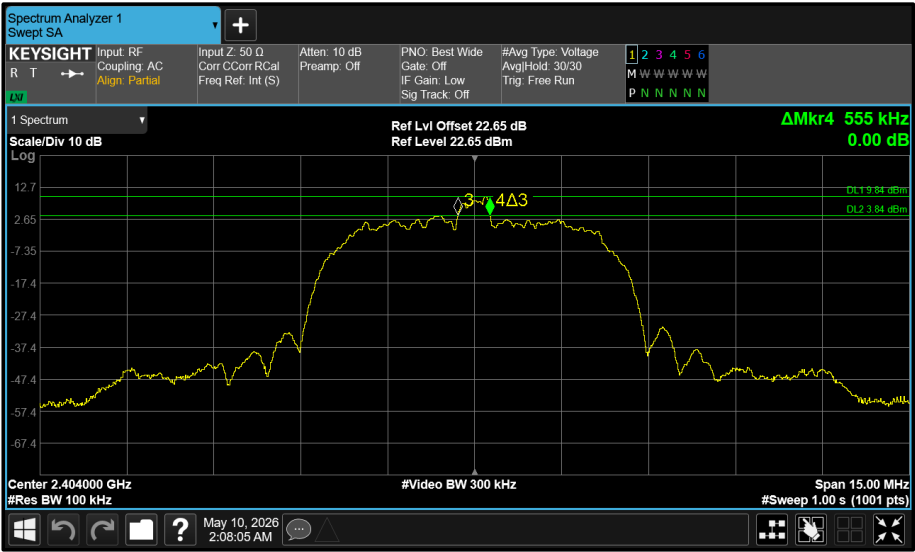


Figure 182 - Core 2 (C) 2404 MHz (CH2) 6 dB Bandwidth

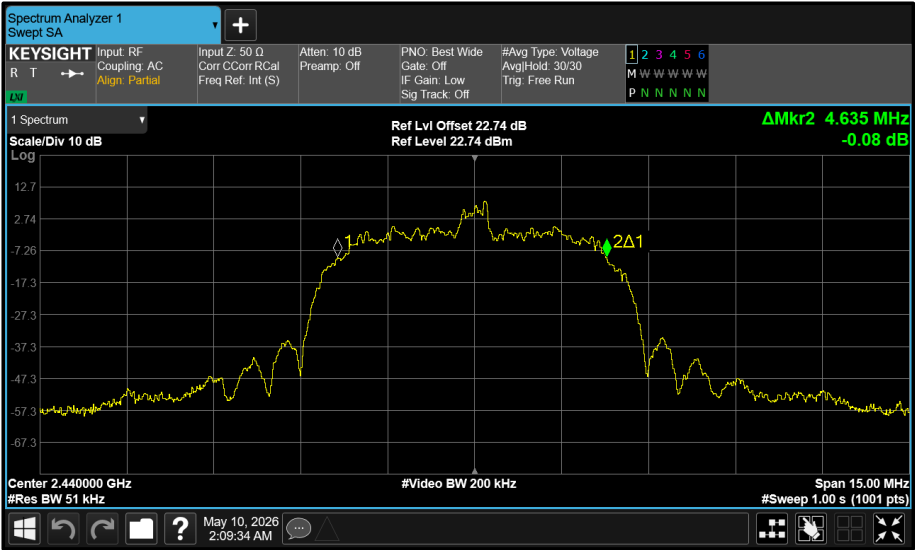


Figure 183 - Core 2 (C) 2440 MHz (CH38) 99% Bandwidth

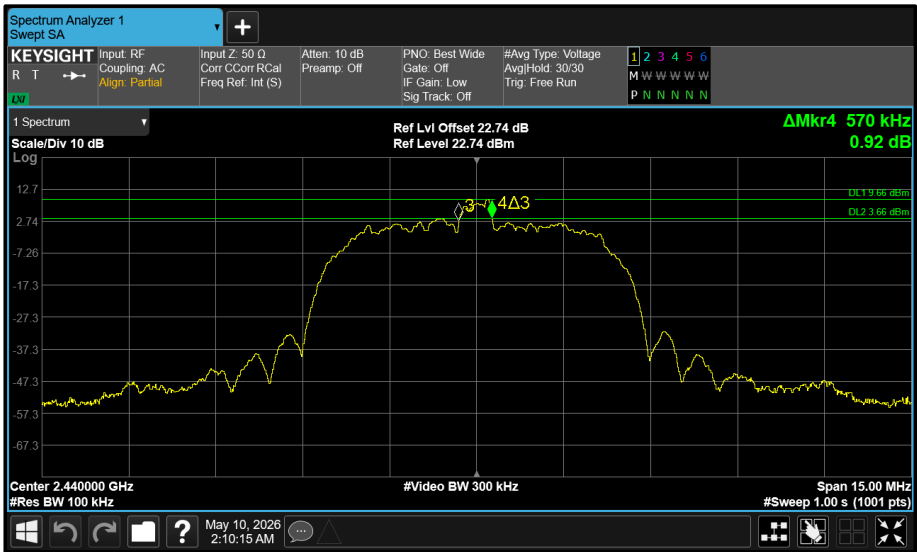


Figure 184 - Core 2 (C) 2440 MHz (CH38) 6 dB Bandwidth

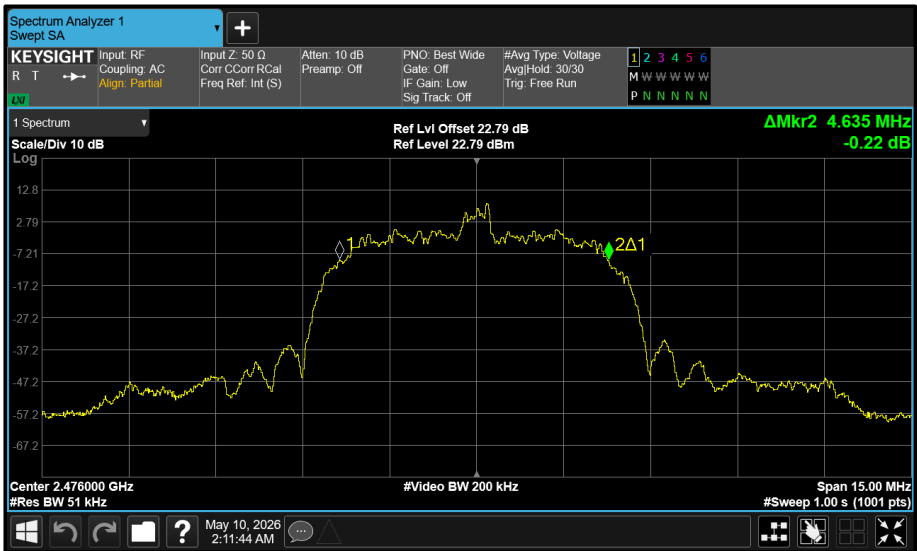


Figure 185 - Core 2 (C) 2476 MHz (CH74) 99% Bandwidth

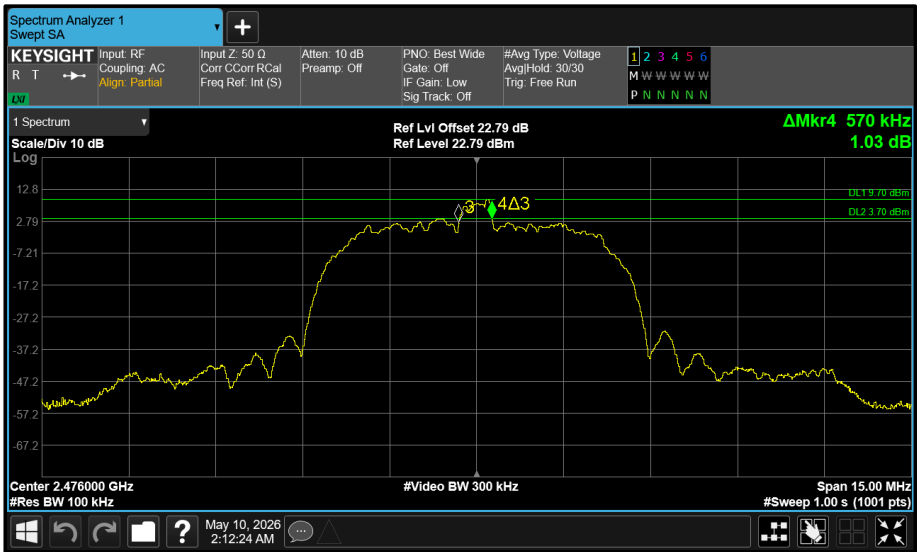


Figure 186 - Core 2 (C) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8PSK (HDT4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.136	-	-	-	≥500.0
2440	2.144	-	-	-	≥500.0
2476	2.144	-	-	-	≥500.0

Table 23 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.368	-	-	-	-
2440	2.368	-	-	-	-
2476	2.368	-	-	-	-

Table 24 - 99% Bandwidth Results

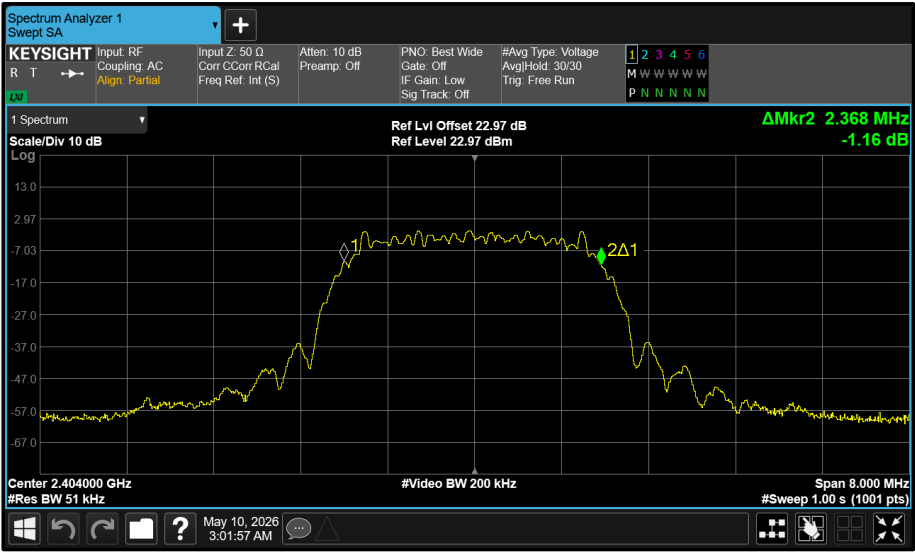


Figure 187 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

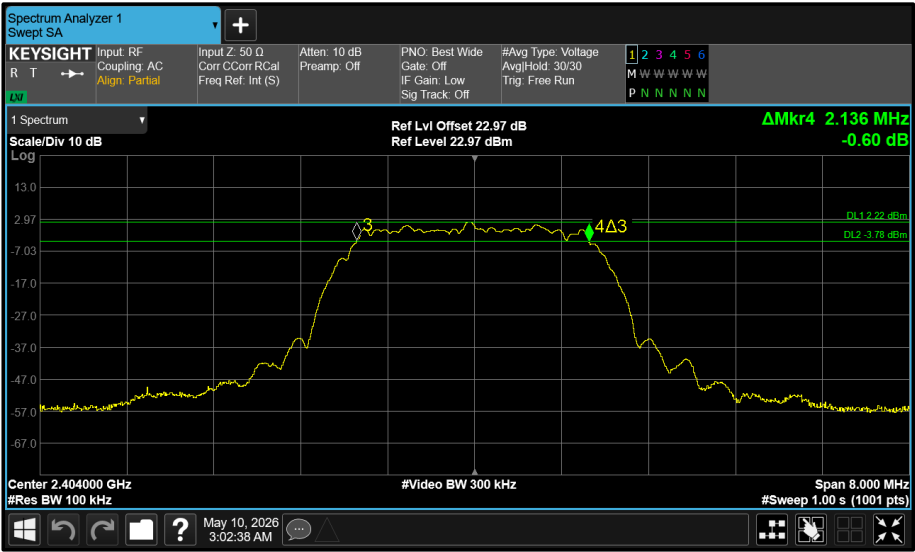


Figure 188 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

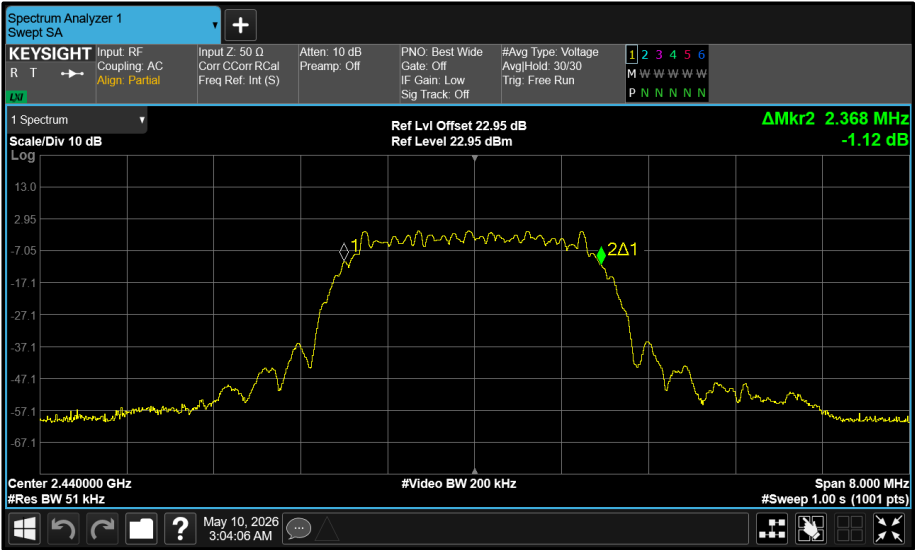


Figure 189 - Core 0 (A) 2440 MHz (CH38) 99% Bandwidth

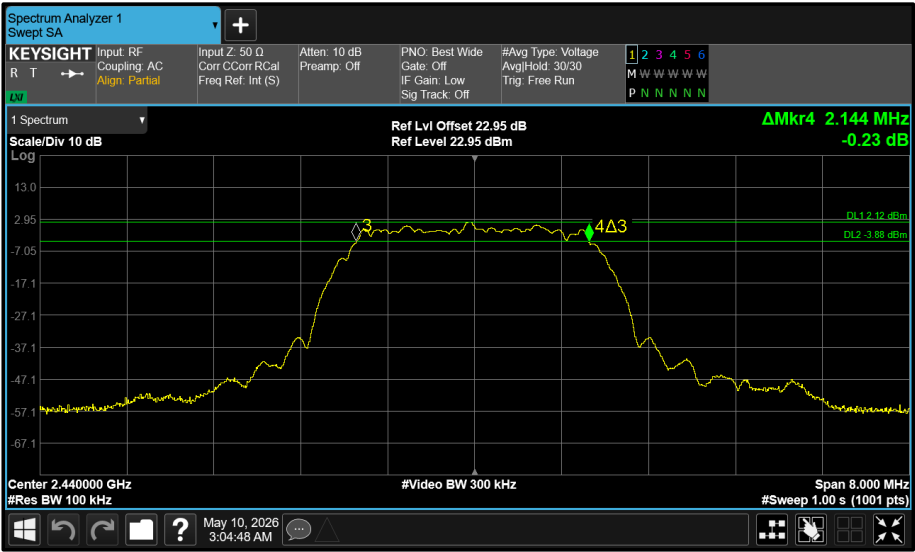


Figure 190 - Core 0 (A) 2440 MHz (CH38) 6 dB Bandwidth

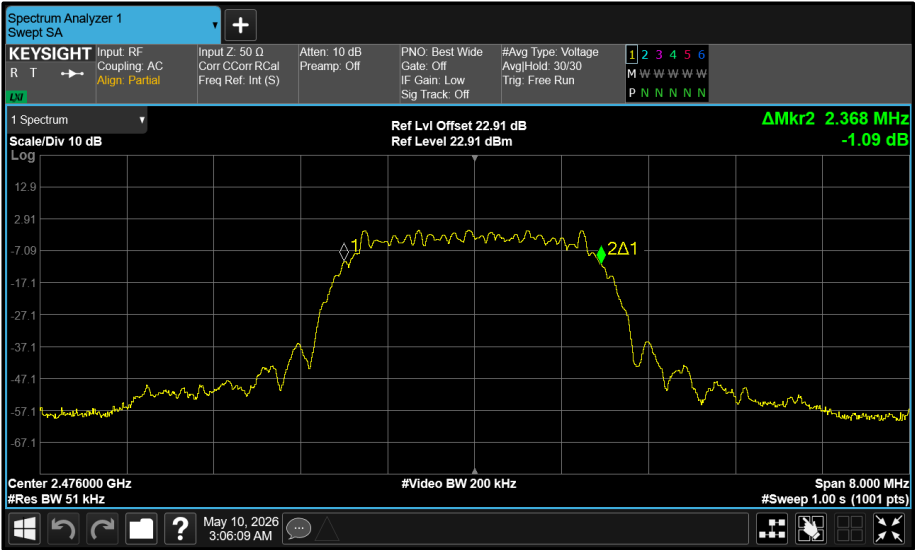


Figure 191 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

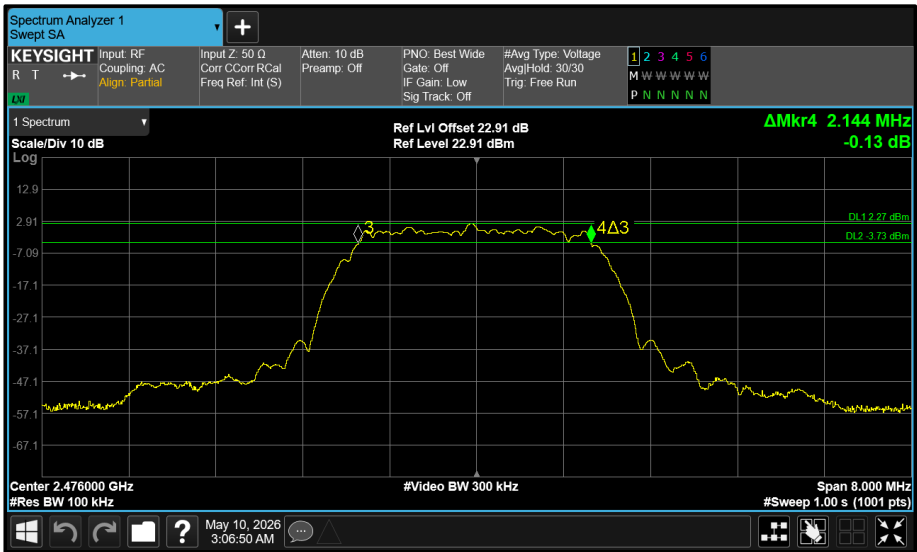


Figure 192 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8PSK (HDT4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	2.136	-	-	≥500.0
2440	-	2.136	-	-	≥500.0
2476	-	2.136	-	-	≥500.0

Table 25 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	2.368	-	-	-
2440	-	2.368	-	-	-
2476	-	2.368	-	-	-

Table 26 - 99% Bandwidth Results

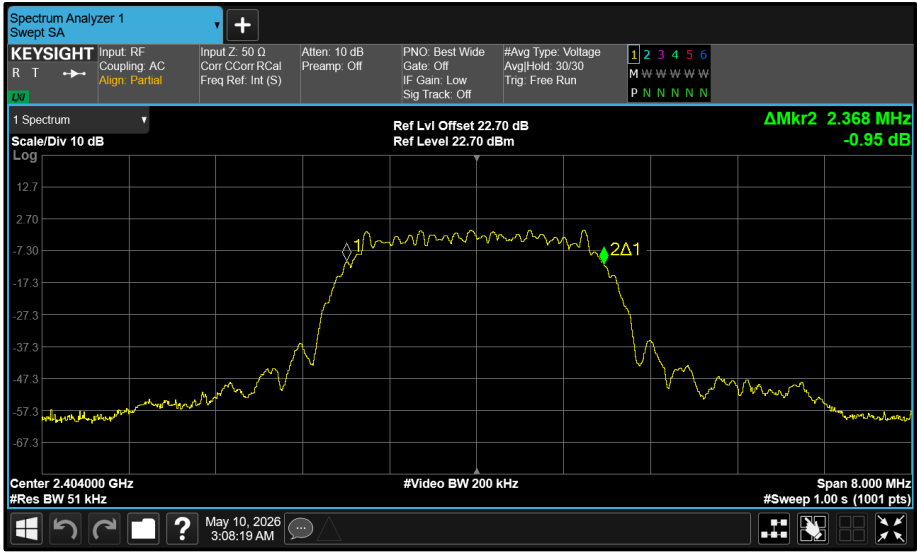


Figure 193 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

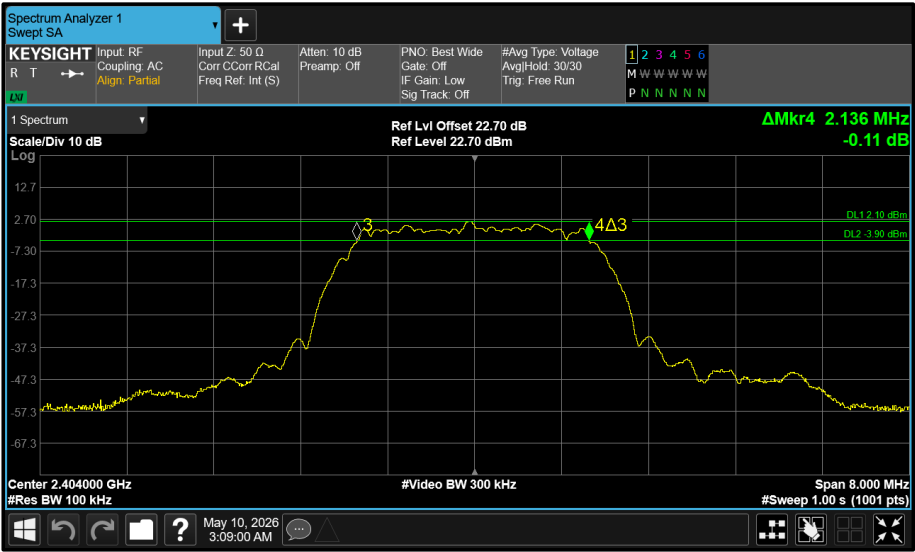


Figure 194 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

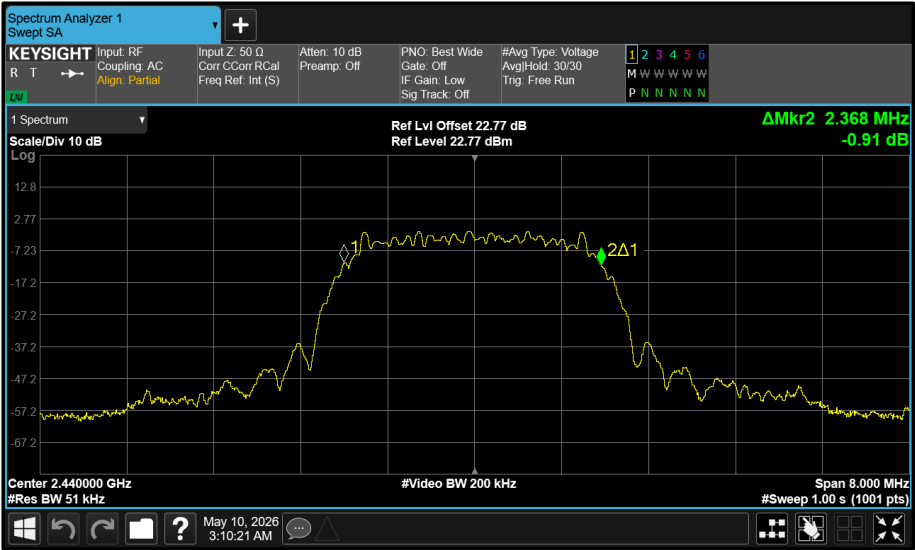


Figure 195 - Core 1 (B) 2440 MHz (CH38) 99% Bandwidth

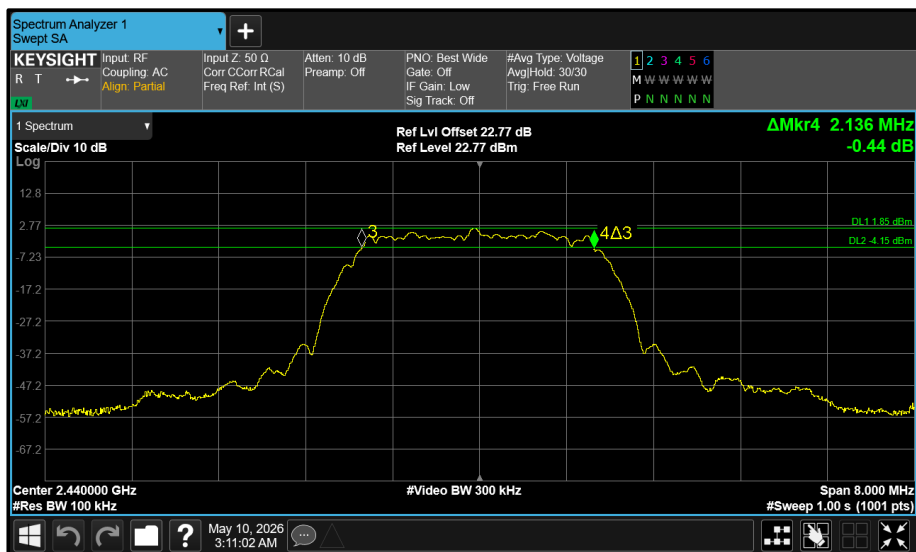


Figure 196 - Core 1 (B) 2440 MHz (CH38) 6 dB Bandwidth

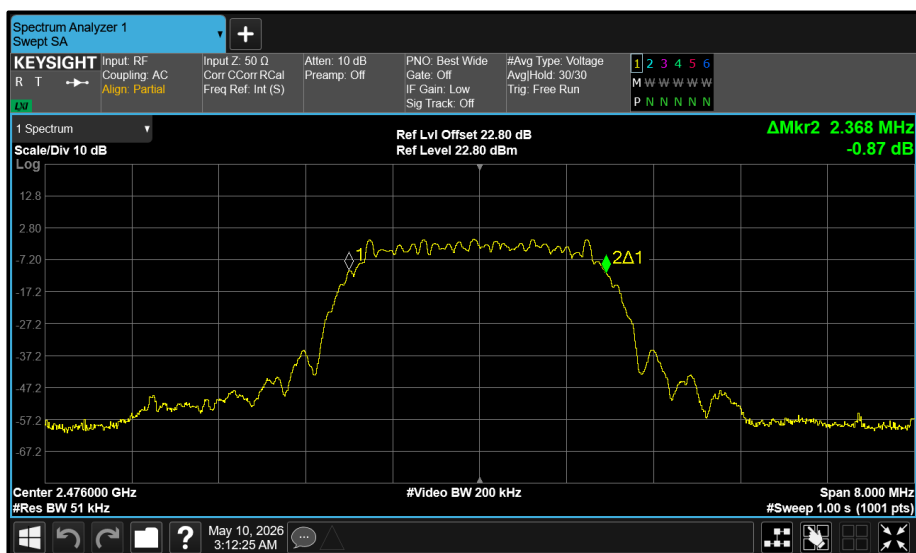


Figure 197 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

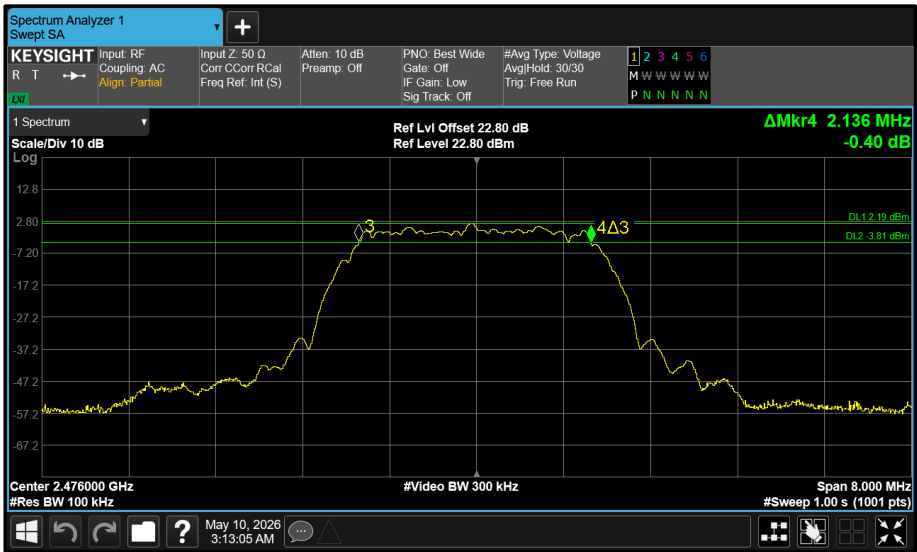


Figure 198 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8PSK (HDT4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	2.144	-	≥500.0
2440	-	-	2.136	-	≥500.0
2476	-	-	2.144	-	≥500.0

Table 27 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	2.368	-	-
2440	-	-	2.368	-	-
2476	-	-	2.368	-	-

Table 28 - 99% Bandwidth Results

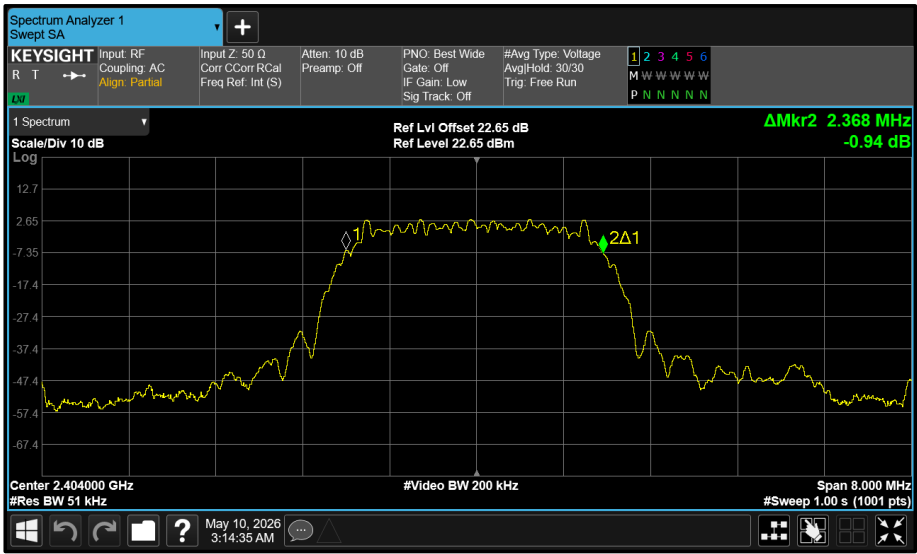


Figure 199 - Core 2 (C) 2404 MHz (CH2) 99% Bandwidth

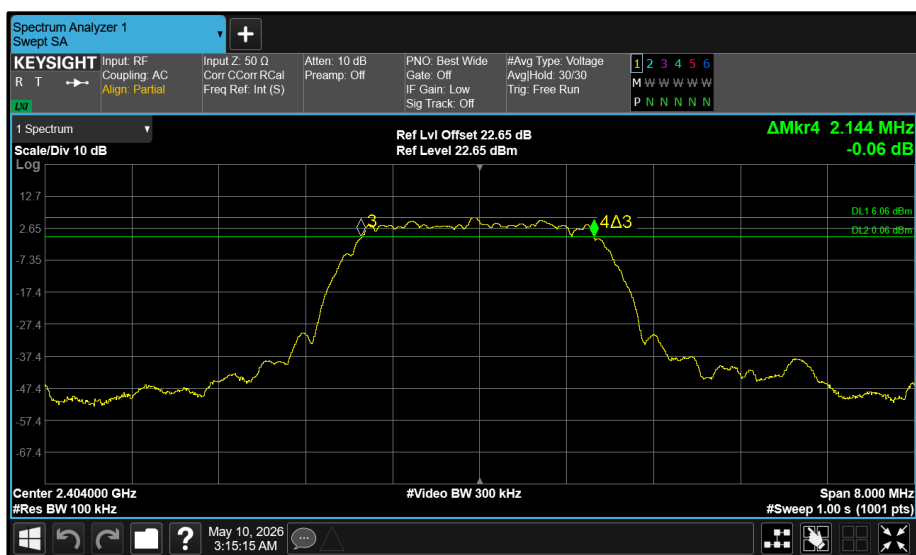


Figure 200 - Core 2 (C) 2404 MHz (CH2) 6 dB Bandwidth

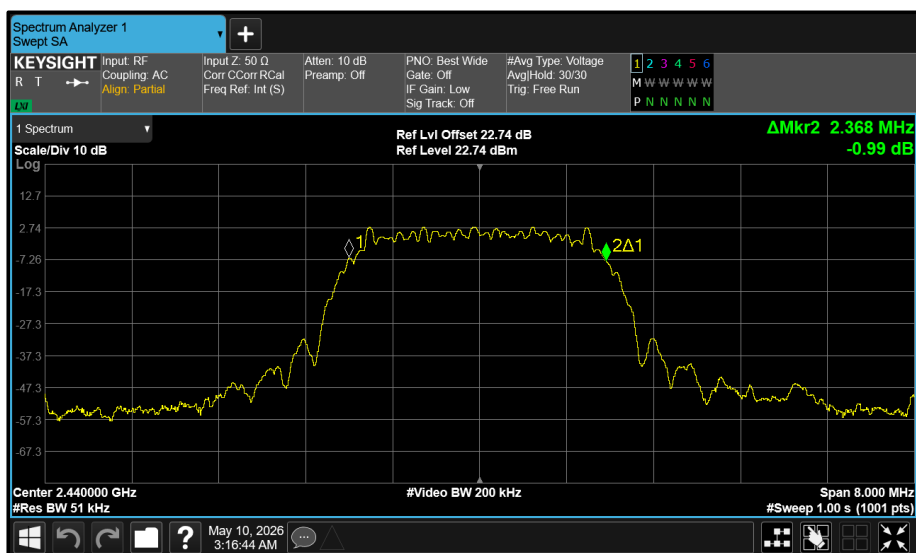


Figure 201 - Core 2 (C) 2440 MHz (CH38) 99% Bandwidth

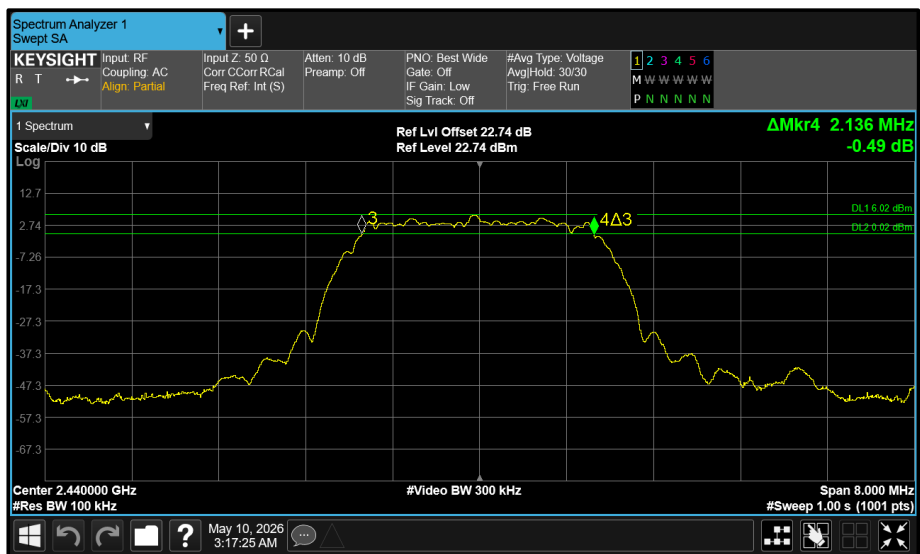


Figure 202 - Core 2 (C) 2440 MHz (CH38) 6 dB Bandwidth

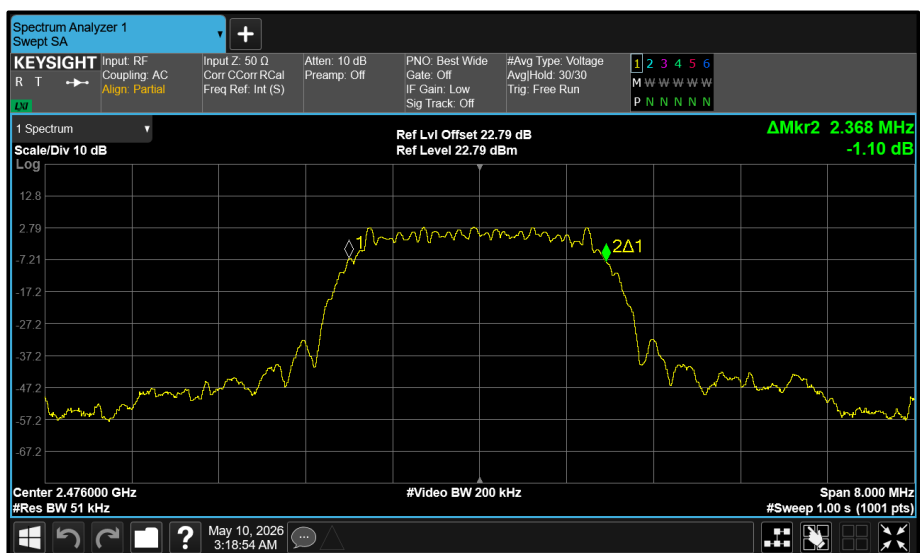


Figure 203 - Core 2 (C) 2476 MHz (CH74) 99% Bandwidth

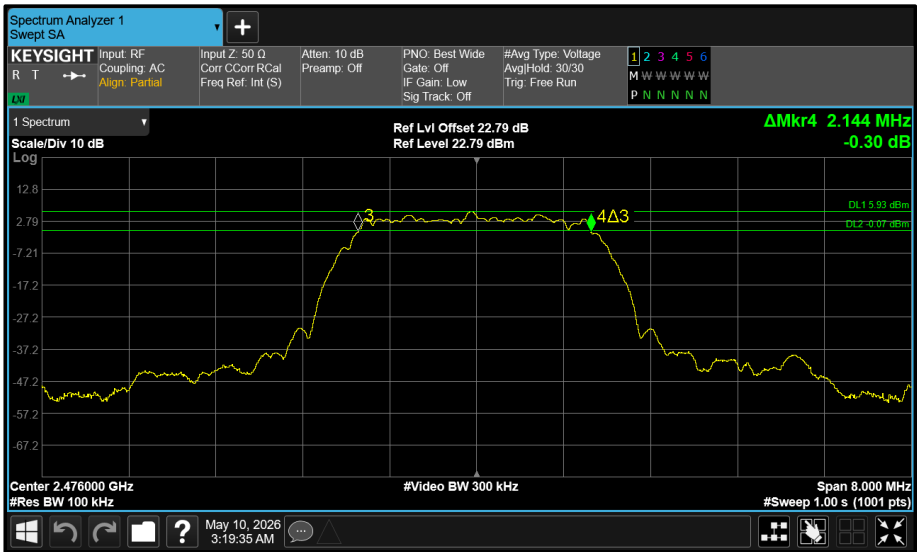


Figure 204 - Core 2 (C) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 16QAM (HDRPM12)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.080	-	-	-	≥500.0
2440	4.060	-	-	-	≥500.0
2475	4.080	-	-	-	≥500.0

Table 29 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.720	-	-	-	-
2440	4.720	-	-	-	-
2475	4.720	-	-	-	-

Table 30 - 99% Bandwidth Results

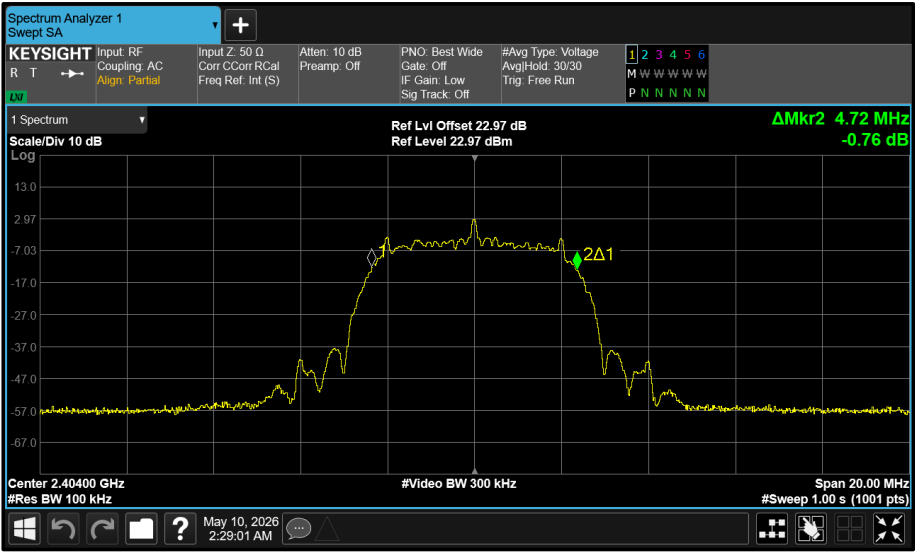


Figure 205 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

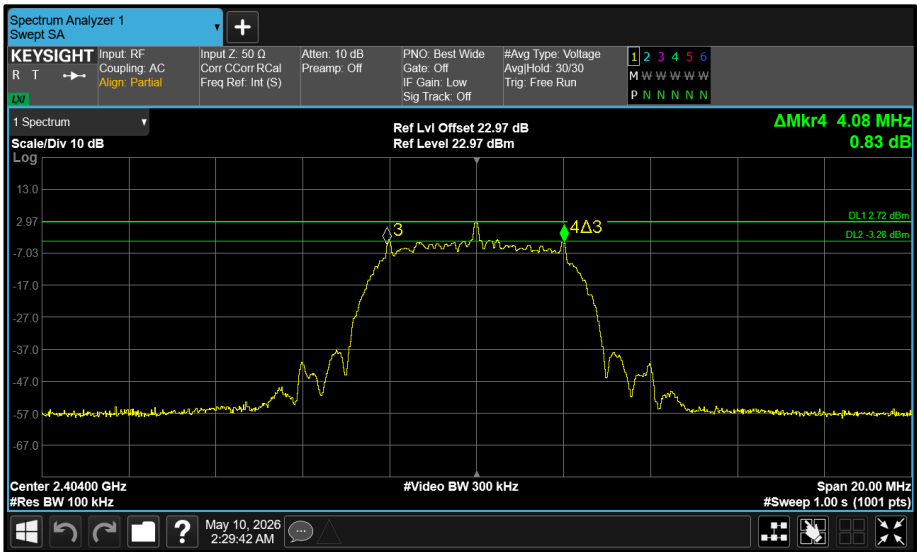


Figure 206 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

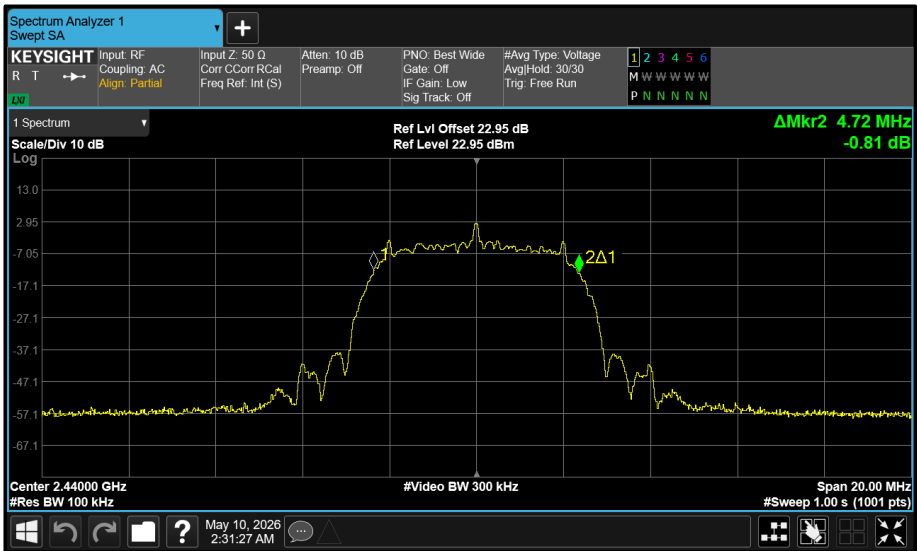


Figure 207 - Core 0 (A) 2440 MHz (CH38) 99% Bandwidth

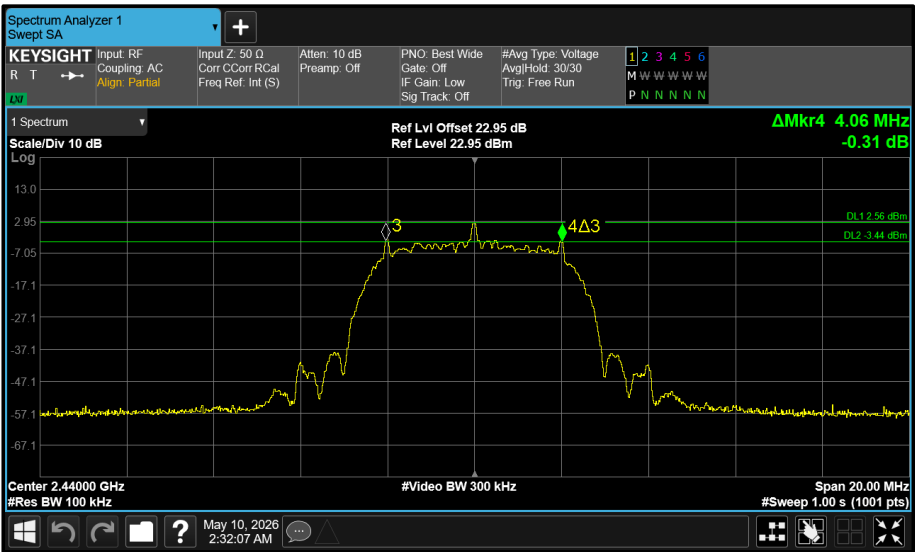


Figure 208 - Core 0 (A) 2440 MHz (CH38) 6 dB Bandwidth

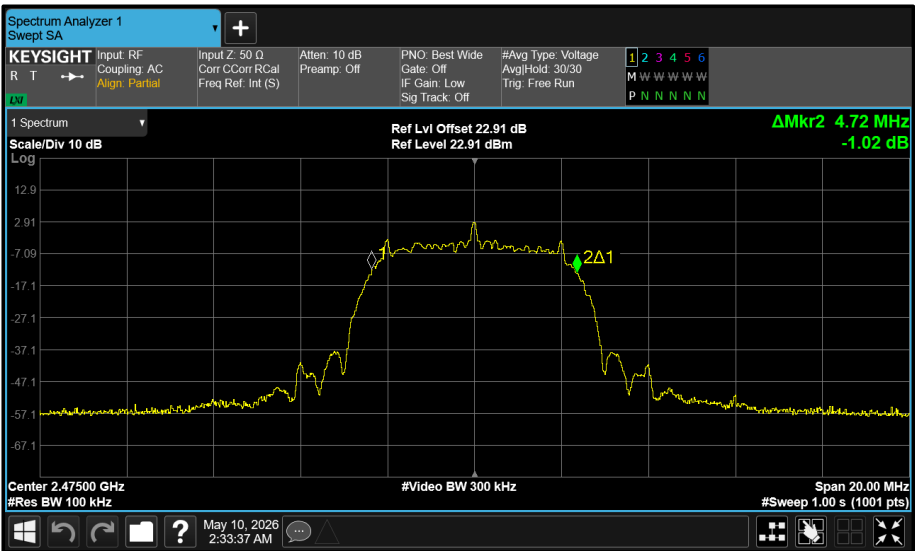


Figure 209 - Core 0 (A) 2475 MHz (CH73) 99% Bandwidth

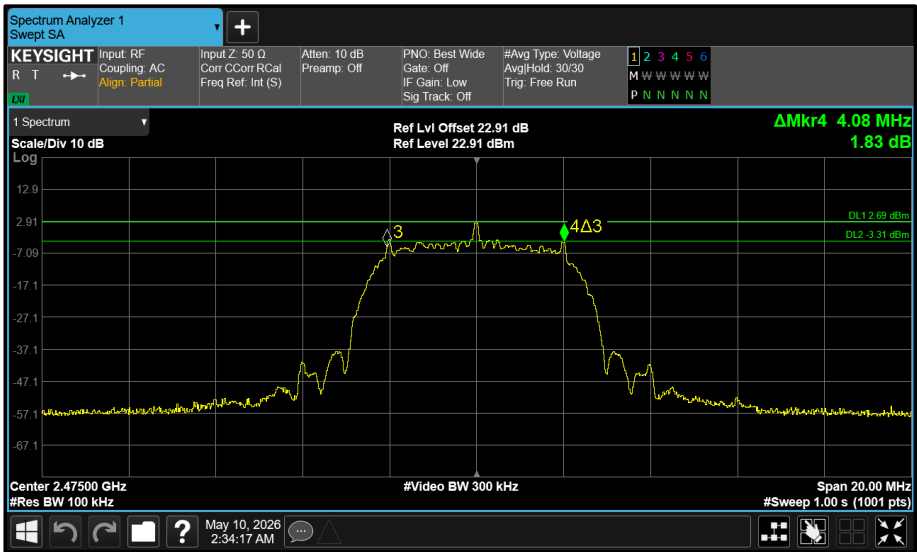


Figure 210 - Core 0 (A) 2475 MHz (CH73) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 16QAM (HDRPM12)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	2.180	-	-	≥500.0
2440	-	4.060	-	-	≥500.0
2475	-	4.060	-	-	≥500.0

Table 31 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	4.720	-	-	-
2440	-	4.720	-	-	-
2475	-	4.720	-	-	-

Table 32 - 99% Bandwidth Results

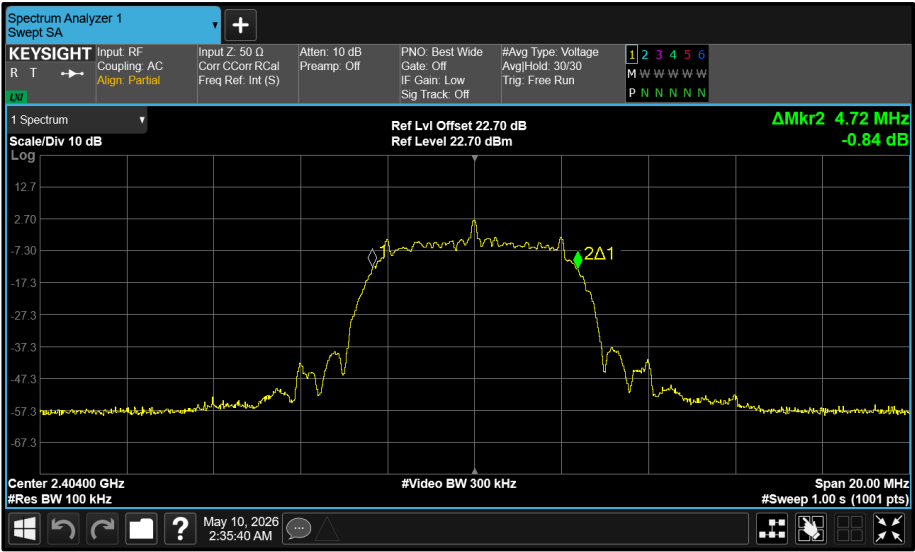


Figure 211 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

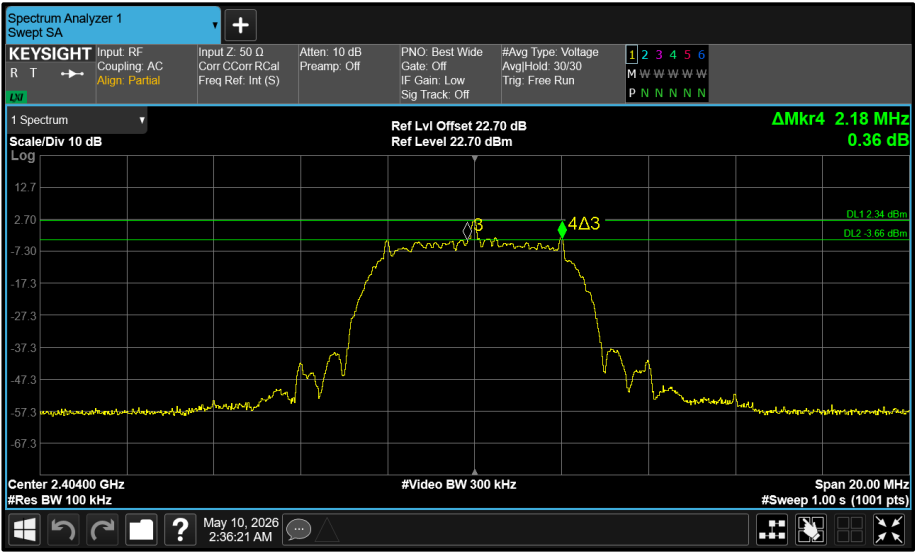


Figure 212 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

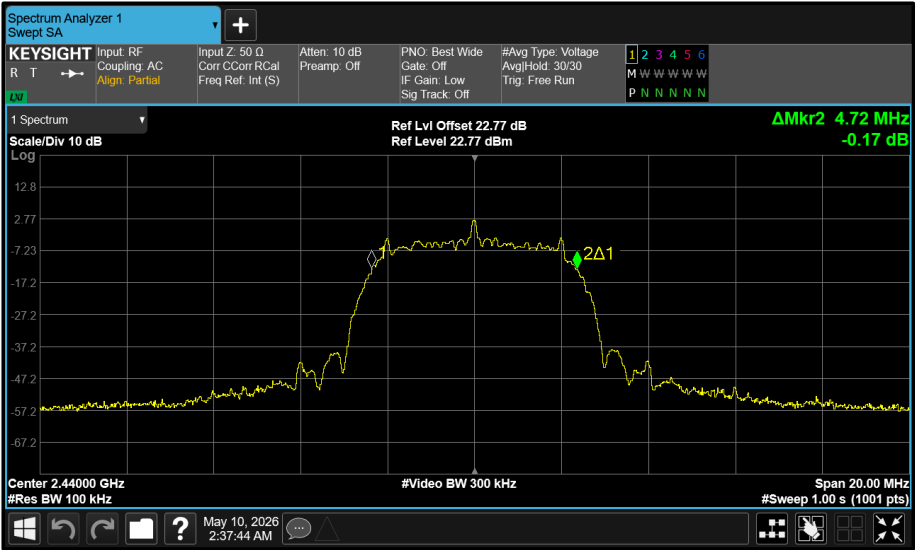


Figure 213 - Core 1 (B) 2440 MHz (CH38) 99% Bandwidth

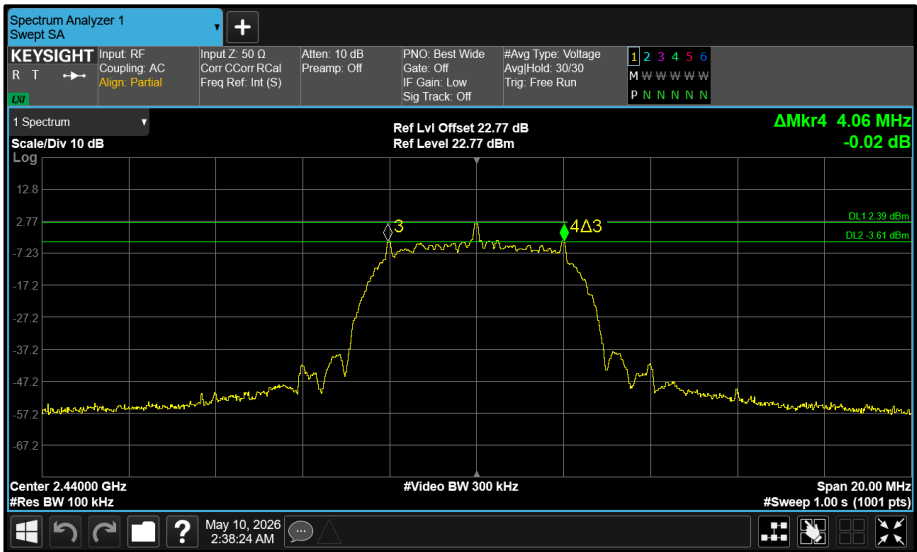


Figure 214 - Core 1 (B) 2440 MHz (CH38) 6 dB Bandwidth

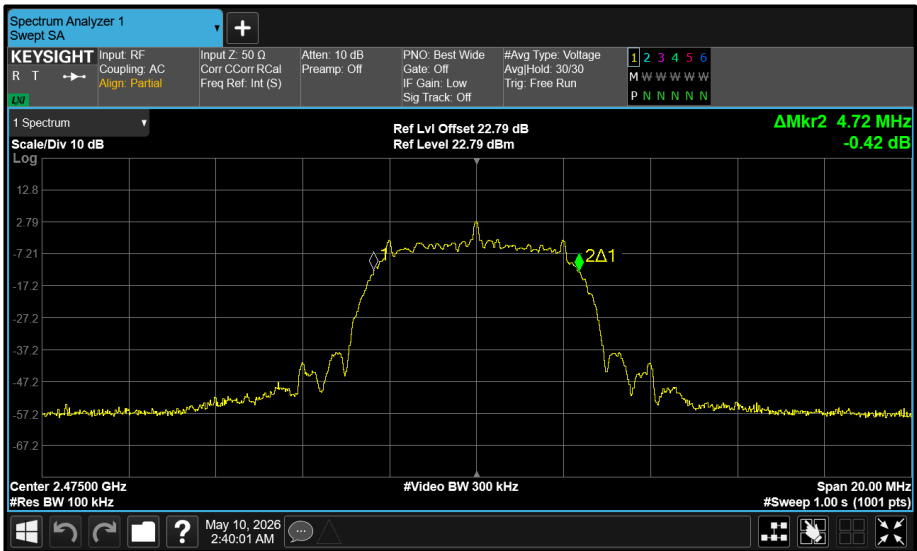


Figure 215 - Core 1 (B) 2475 MHz (CH73) 99% Bandwidth

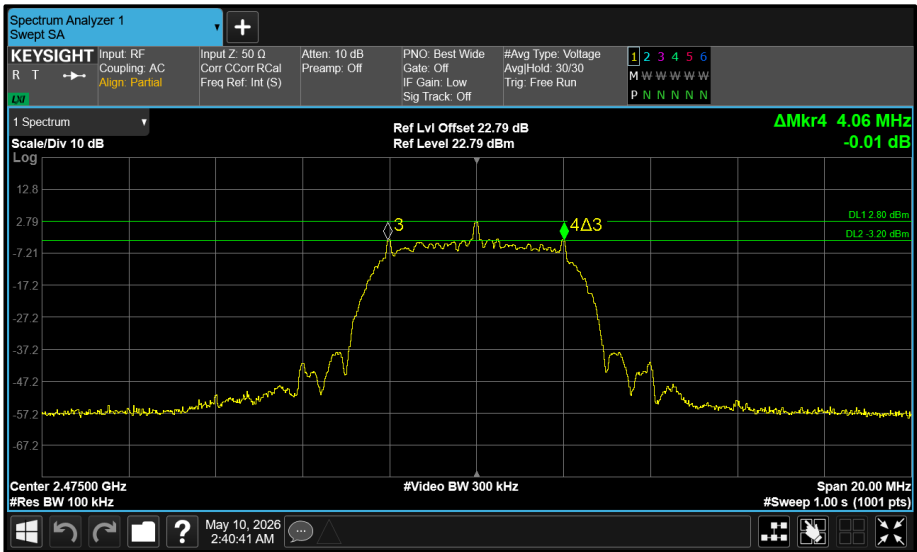


Figure 216 - Core 1 (B) 2475 MHz (CH73) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 16QAM (HDRPM12)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	4.060	-	≥500.0
2440	-	-	4.060	-	≥500.0
2475	-	-	4.060	-	≥500.0

Table 33 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	4.720	-	-
2440	-	-	4.720	-	-
2475	-	-	4.720	-	-

Table 34 - 99% Bandwidth Results

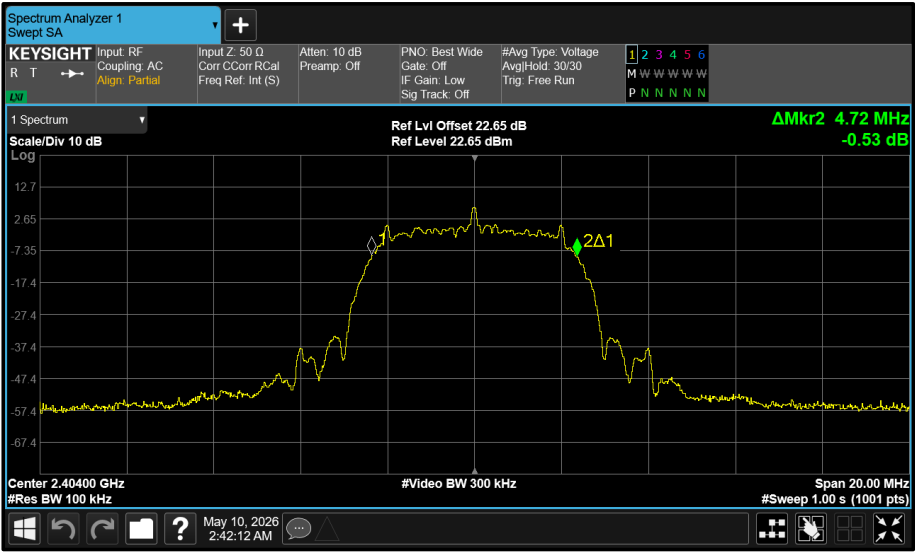


Figure 217 - Core 2 (C) 2404 MHz (CH2) 99% Bandwidth

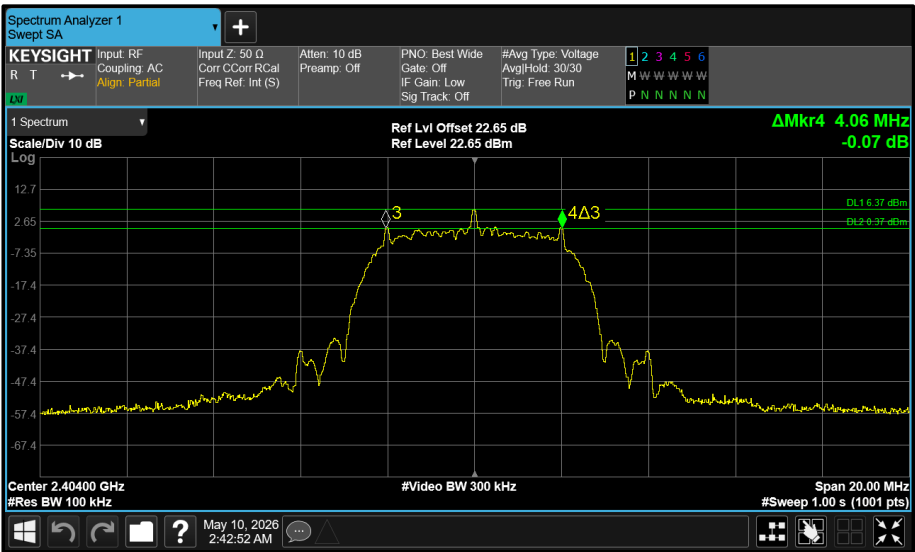


Figure 218 - Core 2 (C) 2404 MHz (CH2) 6 dB Bandwidth

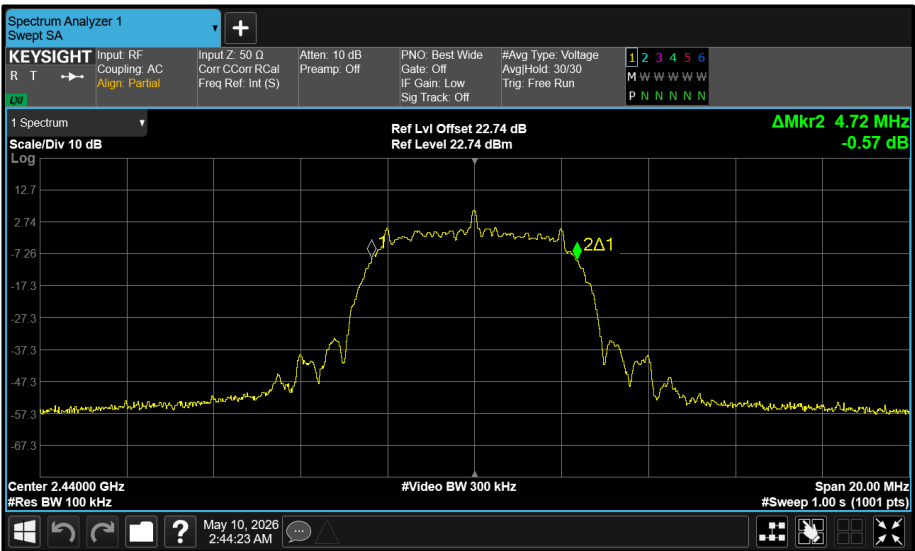


Figure 219 - Core 2 (C) 2440 MHz (CH38) 99% Bandwidth

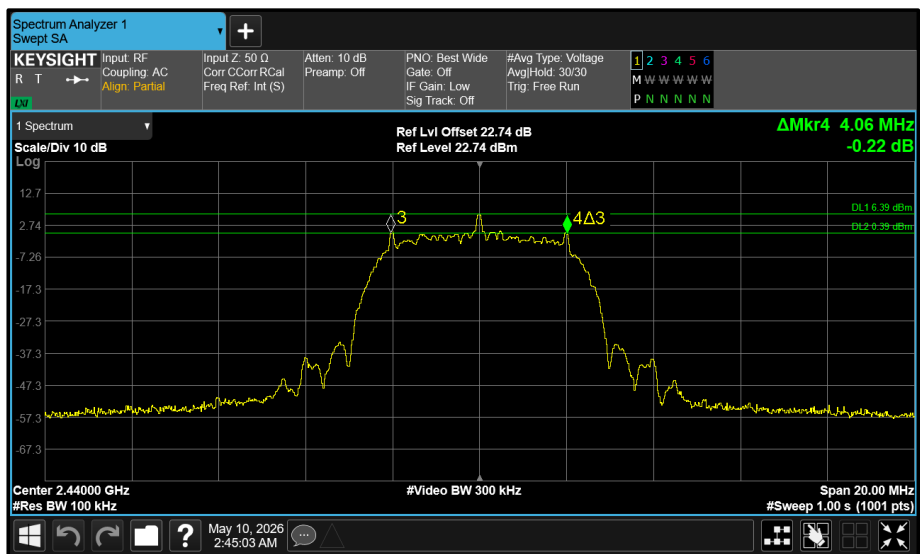


Figure 220 - Core 2 (C) 2440 MHz (CH38) 6 dB Bandwidth

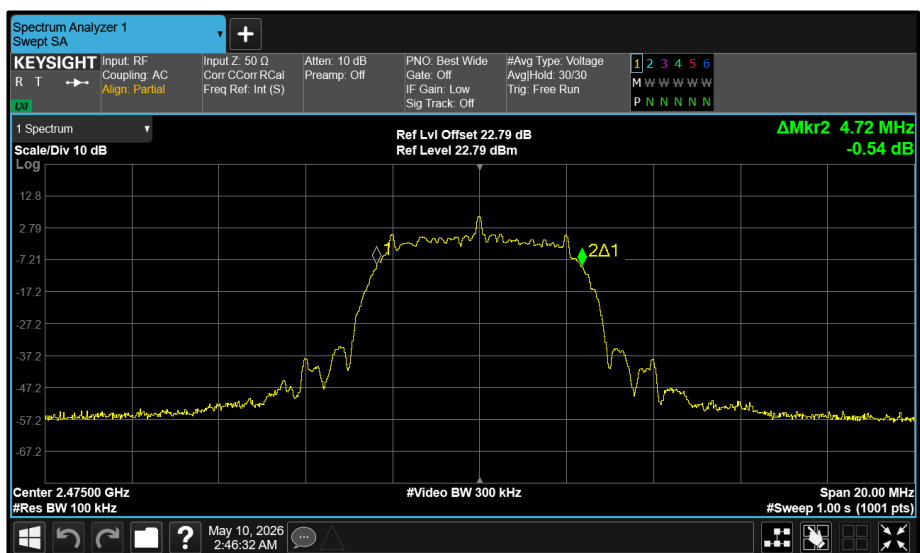


Figure 221 - Core 2 (C) 2475 MHz (CH73) 99% Bandwidth





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	0.672	-	-	-	≥500.0
2440	0.668	-	-	-	≥500.0
2480	0.668	-	-	-	≥500.0

Table 35 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.016	-	-	-	-
2440	1.016	-	-	-	-
2480	1.016	-	-	-	-

Table 36 - 99% Bandwidth Results

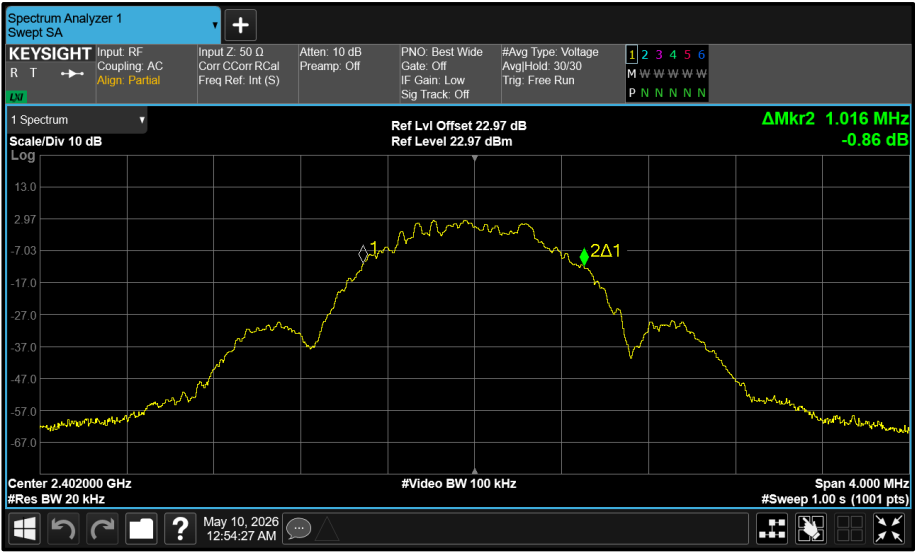


Figure 223 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

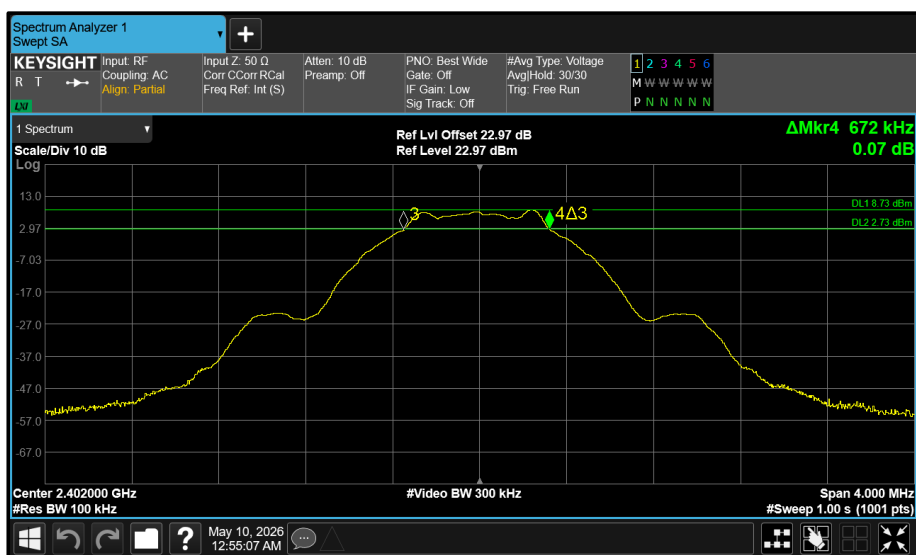


Figure 224 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

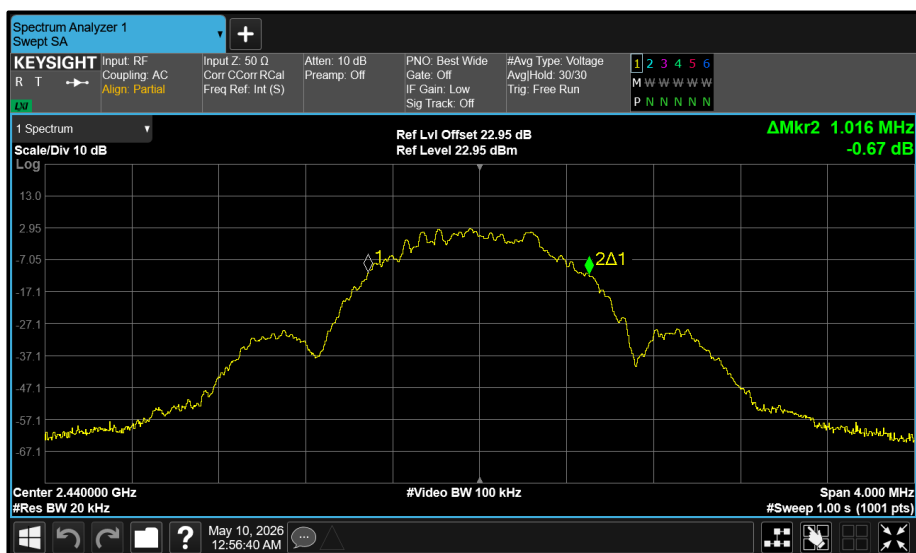


Figure 225 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth