



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-6.50	-5.53	-	-	-2.98	8.62	5.64	10.00	-4.36
5250 (RU Size 996 + RU Size 484.95)	-6.92	-5.85	-	-	-3.34	8.62	5.28	10.00	-4.72

Table 882 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.86	-6.45	-	-	-4.09	8.62	4.53	10.00	-5.47
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-7.83	-6.54	-	-	-4.13	8.62	4.49	10.00	-5.51
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.66	-6.50	-	-	-4.03	8.62	4.59	10.00	-5.41
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.12	-7.10	-	-	-4.57	8.62	4.05	10.00	-5.95

Table 883 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.67	-6.72	-	-	-4.16	8.62	4.46	10.00	-5.54

Table 884 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.48	3.30	-	-	5.92	8.23	-2.31
5280	2.45	3.46	-	-	5.99	8.23	-2.24
5320	2.52	3.70	-	-	6.16	8.23	-2.07

Table 885 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.48	3.30	-	-	5.92	11.00	-5.08
5280	2.45	3.46	-	-	5.99	11.00	-5.01
5320	2.52	3.70	-	-	6.16	11.00	-4.84

Table 886 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.82	4.00	-	-	6.46	8.23	-1.77
5310	-0.90	0.03	-	-	2.60	8.23	-5.63

Table 887 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.82	4.00	-	-	6.46	11.00	-4.54
5310	-0.90	0.03	-	-	2.60	11.00	-8.40

Table 888 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.58	-2.52	-	-	-0.01	8.23	-8.23

Table 889 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.58	-2.52	-	-	-0.01	11.00	-11.01

Table 890 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-7.87	-6.75	-	-	-4.27	8.23	-12.50

Table 891 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-7.93	-6.92	-	-	-4.39	11.00	-15.39

Table 892 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.29	3.59	-	-	5.99	8.23	-2.23
5280	2.25	3.35	-	-	5.84	8.23	-2.39
5320	2.17	3.34	-	-	5.80	8.23	-2.42

Table 893 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.29	3.59	-	-	5.99	11.00	-5.01
5280	2.25	3.35	-	-	5.84	11.00	-5.16
5320	2.17	3.34	-	-	5.80	11.00	-5.20

Table 894 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.25	3.45	-	-	5.90	8.23	-2.33
5310	-1.52	-0.53	-	-	2.01	8.23	-6.21

Table 895 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.25	3.45	-	-	5.90	11.00	-5.10
5310	-1.52	-0.53	-	-	2.01	11.00	-8.99

Table 896 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.26	-3.40	-	-	-0.80	8.23	-9.03

Table 897 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.26	-3.40	-	-	-0.80	11.00	-11.80

Table 898 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.23	-9.38	-	-	-6.78	8.23	-15.00

Table 899 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.35	-9.13	-	-	-6.69	11.00	-17.69

Table 900 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.41	3.58	-	-	6.05	8.23	-2.18
5280	2.22	3.42	-	-	5.87	8.23	-2.36
5320	1.98	2.85	-	-	5.45	8.23	-2.78

Table 901 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.41	3.58	-	-	6.05	11.00	-4.95
5280	2.22	3.42	-	-	5.87	11.00	-5.13
5320	1.98	2.85	-	-	5.45	11.00	-5.55

Table 902 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.14	3.17	-	-	5.70	8.23	-2.53
5310	-2.72	-1.76	-	-	0.80	8.23	-7.43

Table 903 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.14	3.17	-	-	5.70	11.00	-5.30
5310	-2.72	-1.76	-	-	0.80	11.00	-10.20

Table 904 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-5.59	-4.52	-	-	-2.01	8.23	-10.24

Table 905 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-5.59	-4.52	-	-	-2.01	11.00	-13.01

Table 906 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.94	-9.77	-	-	-7.30	8.23	-15.53

Table 907 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-11.00	-9.62	-	-	-7.24	11.00	-18.24

Table 908 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	2.80	3.84	-	-	6.36	8.23	-1.87
5280 (RU52.37)	2.81	3.85	-	-	6.37	8.23	-1.86
5320 (RU52.40)	2.65	3.90	-	-	6.33	8.23	-1.90

Table 909 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	2.80	3.84	-	-	6.36	11.00	-4.64
5280 (RU52.37)	2.81	3.85	-	-	6.37	11.00	-4.63
5320 (RU52.40)	2.65	3.90	-	-	6.33	11.00	-4.67

Table 910 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	2.57	3.86	-	-	6.27	8.23	-1.95
5280 (RU106.53)	2.66	3.77	-	-	6.26	8.23	-1.96
5320 (RU106.54)	2.90	3.69	-	-	6.32	8.23	-1.90

Table 911 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	2.57	3.86	-	-	6.27	11.00	-4.73
5280 (RU106.53)	2.66	3.77	-	-	6.26	11.00	-4.74
5320 (RU106.54)	2.90	3.69	-	-	6.32	11.00	-4.68

Table 912 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	2.50	3.65	-	-	6.13	8.23	-2.10
5280 (RU Size 52 + RU Size 26.70)	2.48	4.00	-	-	6.32	8.23	-1.91
5300 (RU Size 52 + RU Size 26.70)	2.72	3.87	-	-	6.34	8.23	-1.89
5320 (RU Size 52 + RU Size 26.72)	2.31	3.72	-	-	6.09	8.23	-2.14

Table 913 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	2.50	3.65	-	-	6.13	11.00	-4.87
5280 (RU Size 52 + RU Size 26.70)	2.48	4.00	-	-	6.32	11.00	-4.68
5300 (RU Size 52 + RU Size 26.70)	2.72	3.87	-	-	6.34	11.00	-4.66
5320 (RU Size 52 + RU Size 26.72)	2.31	3.72	-	-	6.09	11.00	-4.91

Table 914 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	2.42	3.55	-	-	6.03	8.23	-2.20
5280 (RU Size 106 + RU Size 26.82)	2.31	3.89	-	-	6.18	8.23	-2.04
5320 (RU Size 106 + RU Size 26.83)	2.48	3.47	-	-	6.02	8.23	-2.21

Table 915 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	2.42	3.55	-	-	6.03	11.00	-4.97
5280 (RU Size 106 + RU Size 26.82)	2.31	3.89	-	-	6.18	11.00	-4.82
5320 (RU Size 106 + RU Size 26.83)	2.48	3.47	-	-	6.02	11.00	-4.98

Table 916 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-3.16	-2.21	-	-	0.35	8.23	-7.88
5290 (RU Size 484 + RU Size 242.93)	-2.76	-1.92	-	-	0.69	8.23	-7.54

Table 917 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-3.16	-2.21	-	-	0.35	11.00	-10.65
5290 (RU Size 484 + RU Size 242.93)	-2.76	-1.92	-	-	0.69	11.00	-10.31

Table 918 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.38	-5.13	-	-	-2.70	8.23	-10.93
5250 (RU Size 996 + RU Size 484.95)	-5.33	-4.38	-	-	-1.82	8.23	-10.05

Table 919 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.46	-6.02	-	-	-3.67	11.00	-14.67
5250 (RU Size 996 + RU Size 484.95)	-6.70	-5.73	-	-	-3.18	11.00	-14.18

Table 920 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.12	-5.30	-	-	-2.68	8.23	-10.91
5250 (RU Size 996 + RU Size 484.95)	-6.47	-4.98	-	-	-2.65	8.23	-10.88

Table 921 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.72	-6.65	-	-	-4.14	11.00	-15.14
5250 (RU Size 996 + RU Size 484.95)	-7.27	-6.26	-	-	-3.73	11.00	-14.73

Table 922 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-6.75	-5.76	-	-	-3.22	8.23	-11.45
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-6.70	-5.48	-	-	-3.03	8.23	-11.26
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-6.04	-5.12	-	-	-2.54	8.23	-10.77
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-5.88	-4.82	-	-	-2.31	8.23	-10.53

Table 923 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.84	-6.54	-	-	-4.13	11.00	-15.13
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-7.52	-6.54	-	-	-4.00	11.00	-15.00
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.47	-6.27	-	-	-3.82	11.00	-14.82
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.27	-6.46	-	-	-3.84	11.00	-14.84

Table 924 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-6.62	-5.54	-	-	-3.04	8.23	-11.27

Table 925 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.55	-6.65	-	-	-4.07	11.00	-15.07

Table 926 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.54	4.11	-	-	6.85	8.79	-1.94
5600	3.35	4.08	-	-	6.74	8.79	-2.05
5620	4.09	4.36	-	-	7.24	8.79	-1.55
5700	3.25	3.73	-	-	6.51	8.79	-2.28
5720	3.18	3.88	-	-	6.56	8.79	-2.23

Table 927 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.54	4.11	-	-	6.85	11.00	-4.15
5600	3.35	4.08	-	-	6.74	11.00	-4.26
5620	4.09	4.36	-	-	7.24	11.00	-3.76
5700	3.25	3.73	-	-	6.51	11.00	-4.49
5720	3.18	3.88	-	-	6.56	11.00	-4.44

Table 928 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.96	-1.52	-	-	1.28	8.79	-7.51
5590	3.63	4.30	-	-	6.99	8.79	-1.80
5630	3.87	4.43	-	-	7.17	8.79	-1.62
5670	2.33	2.89	-	-	5.63	8.79	-3.16
5710	3.91	4.32	-	-	7.13	8.79	-1.66

Table 929 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.96	-1.52	-	-	1.28	11.00	-9.72
5590	3.63	4.30	-	-	6.99	11.00	-4.01
5630	3.87	4.43	-	-	7.17	11.00	-3.83
5670	2.33	2.89	-	-	5.63	11.00	-5.37
5710	3.91	4.32	-	-	7.13	11.00	-3.87

Table 930 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.30	-4.10	-	-	-1.19	8.79	-9.98
5610	0.01	0.47	-	-	3.26	8.79	-5.53
5690	3.19	3.57	-	-	6.39	8.79	-2.39

Table 931 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.30	-4.10	-	-	-1.19	11.00	-12.19
5610	0.01	0.47	-	-	3.26	11.00	-7.74
5690	3.19	3.57	-	-	6.39	11.00	-4.61

Table 932 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-6.93	-6.64	-	-	-3.77	8.79	-12.56

Table 933 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-6.93	-6.64	-	-	-3.77	11.00	-14.77

Table 934 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.80	3.27	-	-	6.06	8.79	-2.73
5580	3.51	4.22	-	-	6.89	8.79	-1.90
5600	3.06	3.70	-	-	6.40	8.79	-2.39
5700	2.94	3.75	-	-	6.38	8.79	-2.41
5720	3.26	3.78	-	-	6.54	8.79	-2.25

Table 935 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.80	3.27	-	-	6.06	11.00	-4.94
5580	3.51	4.22	-	-	6.89	11.00	-4.11
5600	3.06	3.70	-	-	6.40	11.00	-4.60
5700	2.94	3.75	-	-	6.38	11.00	-4.62
5720	3.26	3.78	-	-	6.54	11.00	-4.46

Table 936 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.01	0.73	-	-	3.39	8.79	-5.39
5590	3.18	3.89	-	-	6.56	8.79	-2.23
5630	3.59	3.99	-	-	6.81	8.79	-1.98
5670	2.65	3.11	-	-	5.90	8.79	-2.89
5710	3.23	3.62	-	-	6.44	8.79	-2.35

Table 937 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.01	0.73	-	-	3.39	11.00	-7.61
5590	3.18	3.89	-	-	6.56	11.00	-4.44
5630	3.59	3.99	-	-	6.81	11.00	-4.19
5670	2.65	3.11	-	-	5.90	11.00	-5.10
5710	3.23	3.62	-	-	6.44	11.00	-4.56

Table 938 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.90	-3.43	-	-	-0.65	8.79	-9.44
5610	1.10	1.62	-	-	4.38	8.79	-4.41
5690	2.24	2.42	-	-	5.34	8.79	-3.45

Table 939 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.90	-3.43	-	-	-0.65	11.00	-11.65
5610	1.10	1.62	-	-	4.38	11.00	-6.62
5690	2.24	2.42	-	-	5.34	11.00	-5.66

Table 940 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.56	-6.87	-	-	-4.19	8.79	-12.98

Table 941 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.56	-6.87	-	-	-4.19	11.00	-15.19

Table 942 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.72	3.22	-	-	5.99	8.79	-2.80
5600	3.52	4.23	-	-	6.90	8.79	-1.89
5700	3.08	3.67	-	-	6.40	8.79	-2.39
5720	3.55	3.55	-	-	6.56	8.79	-2.23

Table 943 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.72	3.22	-	-	5.99	11.00	-5.01
5600	3.52	4.23	-	-	6.90	11.00	-4.10
5700	3.08	3.67	-	-	6.40	11.00	-4.60
5720	3.55	3.55	-	-	6.56	11.00	-4.44

Table 944 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.53	0.11	-	-	2.81	8.79	-5.98
5590	3.43	3.60	-	-	6.52	8.79	-2.26
5670	1.60	2.24	-	-	4.94	8.79	-3.85
5710	3.57	3.79	-	-	6.69	8.79	-2.09

Table 945 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.53	0.11	-	-	2.81	11.00	-8.19
5590	3.43	3.60	-	-	6.52	11.00	-4.48
5670	1.60	2.24	-	-	4.94	11.00	-6.06
5710	3.57	3.79	-	-	6.69	11.00	-4.31

Table 946 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.73	-4.08	-	-	-1.38	8.79	-10.17
5610	1.38	1.90	-	-	4.66	8.79	-4.13
5690	2.09	2.70	-	-	5.42	8.79	-3.37

Table 947 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.73	-4.08	-	-	-1.38	11.00	-12.38
5610	1.38	1.90	-	-	4.66	11.00	-6.34
5690	2.09	2.70	-	-	5.42	11.00	-5.58

Table 948 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.58	-7.98	-	-	-5.26	8.79	-14.05

Table 949 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.58	-7.98	-	-	-5.26	11.00	-16.26

Table 950 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	4.02	4.67	-	-	7.37	8.79	-1.42
5600 (RU52.37)	3.73	4.16	-	-	6.96	8.79	-1.82
5700 (RU52.40)	3.89	4.60	-	-	7.27	8.79	-1.52
5720 (RU52.39)	3.35	4.08	-	-	6.74	8.79	-2.05
5720 (RU52.40)	-4.25	-4.25	-	-	-1.24	8.79	-10.03

Table 951 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	4.02	4.67	-	-	7.37	11.00	-3.63
5600 (RU52.37)	3.73	4.16	-	-	6.96	11.00	-4.04
5700 (RU52.40)	3.89	4.60	-	-	7.27	11.00	-3.73
5720 (RU52.39)	3.35	4.08	-	-	6.74	11.00	-4.26
5720 (RU52.40)	-4.25	-4.25	-	-	-1.24	11.00	-12.24

Table 952 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	3.82	4.57	-	-	7.22	8.79	-1.57
5600 (RU106.53)	3.82	4.12	-	-	6.98	8.79	-1.80
5700 (RU106.54)	3.43	4.27	-	-	6.88	8.79	-1.91
5720 (RU106.53)	3.75	4.52	-	-	7.16	8.79	-1.62
5720 (RU106.54)	3.68	4.58	-	-	7.16	8.79	-1.62

Table 953 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	3.82	4.57	-	-	7.22	11.00	-3.78
5600 (RU106.53)	3.82	4.12	-	-	6.98	11.00	-4.02
5700 (RU106.54)	3.43	4.27	-	-	6.88	11.00	-4.12
5720 (RU106.53)	3.75	4.52	-	-	7.16	11.00	-3.84
5720 (RU106.54)	3.68	4.58	-	-	7.16	11.00	-3.84

Table 954 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	3.41	4.42	-	-	6.95	8.79	-1.83
5600 (RU Size 52 + RU Size 26.70)	3.31	3.69	-	-	6.52	8.79	-2.27
5700 (RU Size 52 + RU Size 26.72)	3.89	4.80	-	-	7.38	8.79	-1.41
5720 (RU Size 52 + RU Size 26.71)	3.15	3.78	-	-	6.48	8.79	-2.31
5720 (RU Size 52 + RU Size 26.72)	4.10	4.25	-	-	7.19	8.79	-1.60

Table 955 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	3.41	4.42	-	-	6.95	11.00	-4.05
5600 (RU Size 52 + RU Size 26.70)	3.31	3.69	-	-	6.52	11.00	-4.48
5700 (RU Size 52 + RU Size 26.72)	3.89	4.80	-	-	7.38	11.00	-3.62
5720 (RU Size 52 + RU Size 26.71)	3.15	3.78	-	-	6.48	11.00	-4.52
5720 (RU Size 52 + RU Size 26.72)	4.10	4.25	-	-	7.19	11.00	-3.81

Table 956 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	4.16	4.44	-	-	7.31	8.79	-1.47
5600 (RU Size 106 + RU Size 26.82)	3.82	4.02	-	-	6.93	8.79	-1.86
5620 (RU Size 106 + RU Size 26.82)	3.86	4.18	-	-	7.03	8.79	-1.75
5700 (RU Size 106 + RU Size 26.83)	3.21	3.82	-	-	6.54	8.79	-2.25
5720 (RU Size 106 + RU Size 26.82)	3.83	4.31	-	-	7.08	8.79	-1.70
5720 (RU Size 106 + RU Size 26.83)	3.68	4.37	-	-	7.05	8.79	-1.74

Table 957 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	4.16	4.44	-	-	7.31	11.00	-3.69
5600 (RU Size 106 + RU Size 26.82)	3.82	4.02	-	-	6.93	11.00	-4.07
5620 (RU Size 106 + RU Size 26.82)	3.86	4.18	-	-	7.03	11.00	-3.97
5700 (RU Size 106 + RU Size 26.83)	3.21	3.82	-	-	6.54	11.00	-4.46
5720 (RU Size 106 + RU Size 26.82)	3.83	4.31	-	-	7.08	11.00	-3.92
5720 (RU Size 106 + RU Size 26.83)	3.68	4.37	-	-	7.05	11.00	-3.95

Table 958 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-4.15	-3.76	-	-	-0.94	8.79	-9.73
5610 (RU Size 484 + RU Size 242.90)	0.15	0.78	-	-	3.49	8.79	-5.30
5690 (RU Size 484 + RU Size 242.90)	2.31	2.50	-	-	5.42	8.79	-3.37
5690 (RU Size 484 + RU Size 242.93)	2.12	2.59	-	-	5.37	8.79	-3.42

Table 959 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-4.15	-3.76	-	-	-0.94	11.00	-11.94
5610 (RU Size 484 + RU Size 242.90)	0.15	0.78	-	-	3.49	11.00	-7.51
5690 (RU Size 484 + RU Size 242.90)	2.31	2.50	-	-	5.42	11.00	-5.58
5690 (RU Size 484 + RU Size 242.93)	2.12	2.59	-	-	5.37	11.00	-5.63

Table 960 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-6.39	-5.65	-	-	-2.99	8.79	-11.78

Table 961 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-6.39	-5.65	-	-	-2.99	11.00	-13.99

Table 962 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-6.07	-5.85	-	-	-2.95	8.79	-11.73

Table 963 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-6.07	-5.85	-	-	-2.95	11.00	-13.95

Table 964 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-6.02	-6.00	-	-	-3.00	8.79	-11.79

Table 965 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-6.02	-6.00	-	-	-3.00	11.00	-14.00

Table 966 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-6.12	-5.89	-	-	-2.99	8.79	-11.78

Table 967 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-6.12	-5.89	-	-	-2.99	11.00	-13.99

Table 968 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.28	-0.68	-	-	2.04	27.79	-25.75
5745	6.17	6.53	-	-	9.36	29.14	-19.78
5785	6.38	6.50	-	-	9.45	29.14	-19.69
5825	6.47	6.34	-	-	9.41	29.14	-19.73

Table 969 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-1.67	-1.13	-	-	1.62	27.79	-26.17
5755	3.57	4.10	-	-	6.86	29.14	-22.28
5795	3.55	3.76	-	-	6.66	29.14	-22.48

Table 970 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-3.46	-3.24	-	-	-0.34	27.79	-28.12
5775	1.18	1.19	-	-	4.20	29.14	-24.94

Table 971 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.01	-0.56	-	-	2.23	27.79	-25.56
5745	6.28	6.23	-	-	9.27	29.14	-19.87
5785	6.17	6.26	-	-	9.23	29.14	-19.91
5825	6.16	6.15	-	-	9.17	29.14	-19.97

Table 972 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-2.14	-2.23	-	-	0.83	27.79	-26.96
5755	3.17	3.29	-	-	6.24	29.14	-22.90
5795	3.31	3.42	-	-	6.38	29.14	-22.76

Table 973 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.57	-3.97	-	-	-1.25	27.79	-29.04
5775	-1.04	-0.87	-	-	2.06	29.14	-27.08

Table 974 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.12	-0.71	-	-	2.10	27.79	-25.69
5745	6.22	6.24	-	-	9.24	29.14	-19.90
5785	6.16	6.29	-	-	9.24	29.14	-19.90
5825	6.10	6.60	-	-	9.37	29.14	-19.77

Table 975 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-2.41	-1.97	-	-	0.82	27.79	-26.96
5755	3.40	3.32	-	-	6.37	29.14	-22.77
5795	3.30	3.25	-	-	6.28	29.14	-22.86

Table 976 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.35	-4.19	-	-	-1.26	27.79	-29.05
5775	-0.47	-0.14	-	-	2.71	29.14	-26.43

Table 977 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.86
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	5.35	5.70	-	-	8.54	29.14	-20.60
5785 (RU26.0)	5.70	5.82	-	-	8.77	29.14	-20.37
5825 (RU26.8)	5.73	5.96	-	-	8.86	29.14	-20.28

Table 978 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.39)	-0.94	-0.60	-	-	2.24	27.79	-25.54
5720 (RU52.40)	1.20	1.62	-	-	4.42	27.79	-23.36
5745 (RU52.37)	5.67	6.11	-	-	8.91	29.14	-20.23
5785 (RU52.37)	5.89	6.62	-	-	9.28	29.14	-19.86
5825 (RU52.40)	6.03	6.61	-	-	9.34	29.14	-19.80

Table 979 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.53)	-18.04	-17.77	-	-	-14.89	27.79	-42.68
5720 (RU106.54)	0.32	0.42	-	-	3.38	27.79	-24.41
5745 (RU106.53)	6.21	6.79	-	-	9.52	29.14	-19.62
5785 (RU106.53)	6.45	7.03	-	-	9.76	29.14	-19.38
5825 (RU106.54)	6.40	6.62	-	-	9.52	29.14	-19.62

Table 980 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 52 + RU Size 26.71)	-17.69	-16.95	-	-	-14.30	27.79	-42.08
5720 (RU Size 52 + RU Size 26.72)	-0.49	0.17	-	-	2.87	27.79	-24.92
5745 (RU Size 52 + RU Size 26.70)	5.59	6.21	-	-	8.92	29.14	-20.22
5785 (RU Size 52 + RU Size 26.70)	5.60	5.76	-	-	8.69	29.14	-20.45
5825 (RU Size 52 + RU Size 26.72)	5.48	6.25	-	-	8.89	29.14	-20.25

Table 981 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 106 + RU Size 26.82)	-17.94	-15.49	-	-	-13.54	27.79	-41.32
5720 (RU Size 106 + RU Size 26.83)	-0.52	0.15	-	-	2.84	27.79	-24.95
5745 (RU Size 106 + RU Size 26.82)	6.04	5.94	-	-	9.00	29.14	-20.14
5785 (RU Size 106 + RU Size 26.82)	5.97	6.05	-	-	9.02	29.14	-20.12
5825 (RU Size 106 + RU Size 26.83)	5.89	6.52	-	-	9.23	29.14	-19.91

Table 982 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690 (RU Size 484 + RU Size 242.90)	-2.79	-2.68	-	-	0.28	27.79	-27.51
5690 (RU Size 484 + RU Size 242.93)	-49.92	-50.35	-	-	-47.12	27.79	-74.91
5775 (RU Size 484 + RU Size 242.90)	-0.28	-0.09	-	-	2.83	29.14	-26.31
5775 (RU Size 484 + RU Size 242.93)	-0.10	-0.21	-	-	2.86	29.14	-26.28

Table 983 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	5.01	5.90	-	-	8.49	11.00	-2.51
5200	5.12	5.86	-	-	8.52	11.00	-2.48
5240	5.15	6.14	-	-	8.68	11.00	-2.32

Table 984 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-0.60	0.66	-	-	3.09	11.00	-7.91
5230	4.63	5.63	-	-	8.17	11.00	-2.83

Table 985 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-4.63	-3.43	-	-	-0.98	11.00	-11.98

Table 986 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.49	-9.46	-	-	-6.94	11.00	-17.94

Table 987 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	4.43	5.78	-	-	8.17	11.00	-2.83
5200	5.25	6.35	-	-	8.84	11.00	-2.16
5240	5.21	6.17	-	-	8.73	11.00	-2.27

Table 988 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-1.16	-0.20	-	-	2.36	11.00	-8.64
5230	4.89	5.41	-	-	8.17	11.00	-2.83

Table 989 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-5.13	-4.00	-	-	-1.52	11.00	-12.52

Table 990 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.08
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-11.17	-10.12	-	-	-7.60	11.00	-18.60

Table 991 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	5.41	6.37	-	-	8.93	11.00	-2.07
5200 (RU26.0)	5.23	6.49	-	-	8.91	11.00	-2.09
5240 (RU26.8)	4.63	5.98	-	-	8.37	11.00	-2.63

Table 992 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	5.44	6.68	-	-	9.11	11.00	-1.89
5200 (RU52.37)	5.35	6.66	-	-	9.07	11.00	-1.93
5240 (RU52.40)	5.21	6.51	-	-	8.92	11.00	-2.08

Table 993 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	5.46	6.60	-	-	9.08	11.00	-1.92
5200 (RU106.53)	5.60	6.79	-	-	9.25	11.00	-1.75
5240 (RU106.54)	5.09	6.36	-	-	8.78	11.00	-2.22

Table 994 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 52 + RU Size 26.70)	5.28	6.74	-	-	9.08	11.00	-1.92
5200 (RU Size 52 + RU Size 26.70)	5.64	6.72	-	-	9.23	11.00	-1.77
5240 (RU Size 52 + RU Size 26.72)	5.04	6.60	-	-	8.90	11.00	-2.10

Table 995 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 106 + RU Size 26.82)	5.71	7.07	-	-	9.45	11.00	-1.55
5200 (RU Size 106 + RU Size 26.82)	5.16	6.65	-	-	8.98	11.00	-2.02
5240 (RU Size 106 + RU Size 26.83)	5.19	6.44	-	-	8.87	11.00	-2.13

Table 996 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210 (RU Size 484 + RU Size 242.90)	-3.11	-2.01	-	-	0.48	11.00	-10.52
5210 (RU Size 484 + RU Size 242.91)	-2.23	-1.38	-	-	1.22	11.00	-9.78
5210 (RU Size 484 + RU Size 242.92)	-2.09	-1.41	-	-	1.28	11.00	-9.72
5210 (RU Size 484 + RU Size 242.93)	-2.92	-1.89	-	-	0.64	11.00	-10.36

Table 997 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.71	-5.63	-	-	-3.13	11.00	-14.13
5250 (RU Size 996 + RU Size 484.95)	-6.80	-5.39	-	-	-3.03	11.00	-14.03

Table 998 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-5.21	-4.06	-	-	-1.58	11.00	-12.58
5250 (RU Size 996 + RU Size 484.95)	-6.11	-5.02	-	-	-2.52	11.00	-13.52

Table 999 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-6.68	-5.82	-	-	-3.22	11.00	-14.22
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-6.76	-5.71	-	-	-3.19	11.00	-14.19
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-6.65	-5.32	-	-	-2.92	11.00	-13.92
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.00	-6.04	-	-	-3.49	11.00	-14.49

Table 1000 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-6.74	-5.44	-	-	-3.03	11.00	-14.03

Table 1001 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-1.75	-0.29	-	-	2.05	5.62	7.67	10.00	-2.33
5200	-1.57	-0.66	-	-	1.92	5.62	7.54	10.00	-2.46
5240	-1.68	-0.45	-	-	1.99	5.62	7.61	10.00	-2.39

Table 1002 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-2.53	-1.19	-	-	1.20	5.62	6.82	10.00	-3.18
5230	-2.07	-1.11	-	-	1.45	5.62	7.07	10.00	-2.93

Table 1003 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-5.21	-4.17	-	-	-1.65	5.62	3.97	10.00	-6.03

Table 1004 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-10.48	-9.46	-	-	-6.93	5.62	-1.31	10.00	-11.31

Table 1005 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-1.66	-0.32	-	-	2.07	5.62	7.69	10.00	-2.31
5200	-1.47	-0.48	-	-	2.06	5.62	7.68	10.00	-2.32
5240	-1.55	-0.69	-	-	1.91	5.62	7.53	10.00	-2.47

Table 1006 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-2.41	-1.08	-	-	1.31	5.62	6.93	10.00	-3.07
5230	-2.25	-1.07	-	-	1.39	5.62	7.01	10.00	-2.99

Table 1007 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-5.27	-4.41	-	-	-1.81	5.62	3.81	10.00	-6.19

Table 1008 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-11.14	-10.07	-	-	-7.56	5.62	-1.94	10.00	-11.94

Table 1009 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU26.0)	-2.37	-1.07	-	-	1.34	5.62	6.96	10.00	-3.04
5200 (RU26.0)	-1.85	-0.95	-	-	1.63	5.62	7.25	10.00	-2.75
5240 (RU26.8)	-2.61	-1.11	-	-	1.21	5.62	6.83	10.00	-3.17

Table 1010 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU52.37)	-1.71	-0.41	-	-	2.00	5.62	7.62	10.00	-2.38
5200 (RU52.37)	-1.34	0.08	-	-	2.44	5.62	8.06	10.00	-1.94
5240 (RU52.40)	-1.42	-0.28	-	-	2.20	5.62	7.82	10.00	-2.18

Table 1011 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU106.53)	-1.36	-0.19	-	-	2.27	5.62	7.89	10.00	-2.11
5200 (RU106.53)	-1.27	0.07	-	-	2.46	5.62	8.08	10.00	-1.92
5240 (RU106.54)	-1.32	-0.24	-	-	2.26	5.62	7.88	10.00	-2.12

Table 1012 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU Size 52 + RU Size 26.70)	-1.58	0.11	-	-	2.36	5.62	7.97	10.00	-2.03
5200 (RU Size 52 + RU Size 26.70)	-0.75	0.75	-	-	3.08	5.62	8.69	10.00	-1.31
5240 (RU Size 52 + RU Size 26.72)	-1.32	-0.12	-	-	2.33	5.62	7.95	10.00	-2.05

Table 1013 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU Size 106 + RU Size 26.82)	-1.22	0.43	-	-	2.69	5.62	8.31	10.00	-1.69
5200 (RU Size 106 + RU Size 26.82)	-0.81	0.18	-	-	2.73	5.62	8.35	10.00	-1.65
5240 (RU Size 106 + RU Size 26.83)	-1.86	-0.14	-	-	2.09	5.62	7.71	10.00	-2.29

Table 1014 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210 (RU Size 484 + RU Size 242.90)	-4.19	-3.59	-	-	-0.87	5.62	4.75	10.00	-5.25
5210 (RU Size 484 + RU Size 242.91)	-3.29	-2.04	-	-	0.39	5.62	6.01	10.00	-3.99
5210 (RU Size 484 + RU Size 242.92)	-3.22	-2.25	-	-	0.30	5.62	5.92	10.00	-4.08
5210 (RU Size 484 + RU Size 242.93)	-4.47	-3.48	-	-	-0.93	5.62	4.68	10.00	-5.32

Table 1015 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-7.28	-6.12	-	-	-3.65	5.62	1.97	10.00	-8.03
5250 (RU Size 996 + RU Size 484.95)	-7.50	-6.56	-	-	-4.00	5.62	1.62	10.00	-8.38

Table 1016 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-6.17	-5.20	-	-	-2.64	5.62	2.97	10.00	-7.03
5250 (RU Size 996 + RU Size 484.95)	-6.48	-5.50	-	-	-2.95	5.62	2.67	10.00	-7.33

Table 1017 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.15	-6.44	-	-	-3.77	5.62	1.84	10.00	-8.16
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-7.13	-6.12	-	-	-3.58	5.62	2.03	10.00	-7.97
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.01	-5.92	-	-	-3.42	5.62	2.20	10.00	-7.80
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.67	-6.21	-	-	-3.87	5.62	1.75	10.00	-8.25

Table 1018 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.25	-6.09	-	-	-3.62	5.62	2.00	10.00	-8.00

Table 1019 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	5.10	5.73	-	-	8.44	11.00	-2.56
5280	4.92	5.80	-	-	8.39	11.00	-2.61
5320	4.78	5.70	-	-	8.27	11.00	-2.73

Table 1020 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	4.80	5.45	-	-	8.14	11.00	-2.86
5310	-1.70	-0.64	-	-	1.87	11.00	-9.13

Table 1021 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.50	-3.32	-	-	-0.86	11.00	-11.86

Table 1022 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.14	-9.25	-	-	-6.66	11.00	-17.66

Table 1023 - Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.31	-9.18	-	-	-6.70	11.00	-17.70

Table 1024 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	5.42	6.12	-	-	8.79	11.00	-2.21
5280	4.95	5.97	-	-	8.50	11.00	-2.50
5320	4.98	5.71	-	-	8.37	11.00	-2.63

Table 1025 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	4.77	5.39	-	-	8.10	11.00	-2.90
5310	-2.22	-1.37	-	-	1.24	11.00	-9.76

Table 1026 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.88	-3.81	-	-	-1.30	11.00	-12.30

Table 1027 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.08
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.89	-9.80	-	-	-7.30	11.00	-18.30

Table 1028 - Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.86	-9.71	-	-	-7.24	11.00	-18.24

Table 1029 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	5.48	6.52	-	-	9.04	11.00	-1.96
5280 (RU52.37)	5.59	7.10	-	-	9.42	11.00	-1.58
5320 (RU52.40)	4.22	5.10	-	-	7.69	11.00	-3.31

Table 1030 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	5.36	6.35	-	-	8.89	11.00	-2.11
5280 (RU106.53)	5.05	6.26	-	-	8.71	11.00	-2.29
5320 (RU106.54)	4.75	5.70	-	-	8.26	11.00	-2.74

Table 1031 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	5.65	6.73	-	-	9.24	11.00	-1.76
5280 (RU Size 52 + RU Size 26.70)	5.51	6.53	-	-	9.06	11.00	-1.94
5300 (RU Size 52 + RU Size 26.70)	5.45	6.55	-	-	9.05	11.00	-1.95
5320 (RU Size 52 + RU Size 26.72)	6.05	6.79	-	-	9.44	11.00	-1.56

Table 1032 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	5.33	6.45	-	-	8.94	11.00	-2.06
5280 (RU Size 106 + RU Size 26.82)	5.24	6.28	-	-	8.80	11.00	-2.20
5320 (RU Size 106 + RU Size 26.83)	5.26	6.46	-	-	8.91	11.00	-2.09

Table 1033 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-3.27	-2.29	-	-	0.26	11.00	-10.74
5290 (RU Size 484 + RU Size 242.93)	-3.32	-2.36	-	-	0.20	11.00	-10.80

Table 1034 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.40	-5.29	-	-	-2.80	11.00	-13.80
5250 (RU Size 996 + RU Size 484.95)	-5.35	-4.02	-	-	-1.62	11.00	-12.62

Table 1035 - Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.84	-5.92	-	-	-3.35	11.00	-14.35
5250 (RU Size 996 + RU Size 484.95)	-5.94	-4.66	-	-	-2.25	11.00	-13.25

Table 1036 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.42	-5.26	-	-	-2.79	11.00	-13.79
5250 (RU Size 996 + RU Size 484.95)	-6.19	-5.40	-	-	-2.77	11.00	-13.77

Table 1037 - Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.87	-6.38	-	-	-3.61	11.00	-14.61
5250 (RU Size 996 + RU Size 484.95)	-6.79	-5.62	-	-	-3.16	11.00	-14.16

Table 1038 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-6.72	-5.72	-	-	-3.18	11.00	-14.18
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-6.80	-5.52	-	-	-3.11	11.00	-14.11
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-6.54	-5.49	-	-	-2.97	11.00	-13.97
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-5.95	-5.31	-	-	-2.61	11.00	-13.61

Table 1039 - Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.33	-6.13	-	-	-3.68	11.00	-14.68
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-6.97	-5.95	-	-	-3.42	11.00	-14.42
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-6.93	-5.70	-	-	-3.26	11.00	-14.26
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-6.36	-5.45	-	-	-2.87	11.00	-13.87

Table 1040 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-6.77	-5.41	-	-	-3.03	11.00	-14.03

Table 1041 - Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.27	-6.10	-	-	-3.64	11.00	-14.64

Table 1042 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.23	5.86	-	-	8.57	11.00	-2.43
5580	5.80	6.40	-	-	9.12	11.00	-1.88
5600	5.81	6.23	-	-	9.03	11.00	-1.97
5700	3.85	4.56	-	-	7.23	11.00	-3.77
5720	5.74	6.19	-	-	8.98	11.00	-2.02

Table 1043 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.15	0.58	-	-	3.38	11.00	-7.62
5590	4.55	4.86	-	-	7.72	11.00	-3.28
5670	2.34	2.97	-	-	5.67	11.00	-5.33
5710	4.87	5.49	-	-	8.20	11.00	-2.80

Table 1044 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.80	-3.29	-	-	-0.53	11.00	-11.53
5610	0.24	0.93	-	-	3.61	11.00	-7.39
5690	2.43	2.56	-	-	5.50	11.00	-5.50

Table 1045 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.08	-6.65	-	-	-3.85	11.00	-14.85

Table 1046 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	4.98	5.66	-	-	8.34	11.00	-2.66
5600	5.54	6.07	-	-	8.82	11.00	-2.18
5700	3.08	3.71	-	-	6.42	11.00	-4.58
5720	5.62	5.98	-	-	8.82	11.00	-2.18

Table 1047 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.52	0.11	-	-	2.81	11.00	-8.19
5590	4.36	4.94	-	-	7.67	11.00	-3.33
5670	0.89	1.49	-	-	4.21	11.00	-6.79
5710	5.16	5.61	-	-	8.40	11.00	-2.60

Table 1048 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.81	-4.23	-	-	-1.50	11.00	-12.50
5610	0.32	0.78	-	-	3.57	11.00	-7.43
5690	2.23	2.55	-	-	5.40	11.00	-5.60

Table 1049 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.08
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.24	-7.76	-	-	-4.98	11.00	-15.98

Table 1050 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	5.69	6.22	-	-	8.97	11.00	-2.03
5600 (RU52.37)	5.72	6.07	-	-	8.91	11.00	-2.09
5700 (RU52.40)	4.25	5.00	-	-	7.65	11.00	-3.35
5720 (RU52.39)	5.63	5.98	-	-	8.82	11.00	-2.18
5720 (RU52.40)	-2.80	-1.86	-	-	0.70	11.00	-10.30

Table 1051 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	5.90	6.63	-	-	9.29	11.00	-1.71
5600 (RU106.53)	5.78	6.32	-	-	9.06	11.00	-1.94
5700 (RU106.54)	5.82	6.58	-	-	9.23	11.00	-1.77
5720 (RU106.53)	6.12	6.49	-	-	9.32	11.00	-1.68
5720 (RU106.54)	5.90	6.48	-	-	9.21	11.00	-1.79

Table 1052 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	5.77	6.93	-	-	9.40	11.00	-1.60
5600 (RU Size 52 + RU Size 26.70)	5.85	6.61	-	-	9.26	11.00	-1.74
5700 (RU Size 52 + RU Size 26.72)	6.29	7.14	-	-	9.74	11.00	-1.26
5720 (RU Size 52 + RU Size 26.71)	5.85	5.91	-	-	8.89	11.00	-2.11
5720 (RU Size 52 + RU Size 26.72)	6.21	6.76	-	-	9.50	11.00	-1.50

Table 1053 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	5.97	6.57	-	-	9.29	11.00	-1.71
5600 (RU Size 106 + RU Size 26.82)	5.68	6.28	-	-	9.00	11.00	-2.00
5620 (RU Size 106 + RU Size 26.82)	5.76	6.46	-	-	9.13	11.00	-1.87
5700 (RU Size 106 + RU Size 26.83)	5.73	6.28	-	-	9.02	11.00	-1.98
5720 (RU Size 106 + RU Size 26.82)	5.84	6.42	-	-	9.15	11.00	-1.85
5720 (RU Size 106 + RU Size 26.83)	6.02	6.51	-	-	9.28	11.00	-1.72

Table 1054 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-4.41	-3.95	-	-	-1.16	11.00	-12.16
5610 (RU Size 484 + RU Size 242.90)	1.07	1.59	-	-	4.35	11.00	-6.65
5690 (RU Size 484 + RU Size 242.90)	2.25	2.23	-	-	5.25	11.00	-5.75
5690 (RU Size 484 + RU Size 242.93)	2.23	2.55	-	-	5.40	11.00	-5.60

Table 1055 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-5.55	-5.29	-	-	-2.41	11.00	-13.41

Table 1056 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-5.44	-5.19	-	-	-2.30	11.00	-13.30

Table 1057 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-5.72	-5.21	-	-	-2.45	11.00	-13.45

Table 1058 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-5.48	-5.07	-	-	-2.26	11.00	-13.26

Table 1059 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	1.51	2.17	-	-	4.86	30.00	-25.14
5745	6.30	6.33	-	-	9.33	30.00	-20.67
5785	5.93	6.09	-	-	9.02	30.00	-20.98
5825	6.27	6.24	-	-	9.27	30.00	-20.73

Table 1060 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.51	-0.39	-	-	2.56	30.00	-27.44
5755	3.52	3.26	-	-	6.40	30.00	-23.60
5795	3.38	3.35	-	-	6.37	30.00	-23.63

Table 1061 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.19	-4.28	-	-	-1.23	30.00	-31.23
5775	-0.13	0.43	-	-	3.17	30.00	-26.83

Table 1062 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	1.62	1.92	-	-	4.78	30.00	-25.22
5745	6.08	6.20	-	-	9.15	30.00	-20.85
5785	6.46	6.41	-	-	9.45	30.00	-20.55
5825	6.25	6.21	-	-	9.24	30.00	-20.76

Table 1063 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.35	0.19	-	-	2.94	30.00	-27.06
5755	3.30	3.06	-	-	6.19	30.00	-23.81
5795	3.11	3.08	-	-	6.10	30.00	-23.90

Table 1064 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.38	-3.97	-	-	-1.16	30.00	-31.16
5775	0.03	-0.25	-	-	2.90	30.00	-27.10

Table 1065 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	3.85
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	5.02	5.58	-	-	8.32	30.00	-21.68
5785 (RU26.0)	5.70	5.78	-	-	8.75	30.00	-21.25
5825 (RU26.8)	5.69	5.96	-	-	8.84	30.00	-21.16

Table 1066 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.39)	0.82	1.21	-	-	4.03	30.00	-25.97
5720 (RU52.40)	3.27	4.53	-	-	6.95	30.00	-23.05
5745 (RU52.37)	5.99	6.55	-	-	9.29	30.00	-20.71
5785 (RU52.37)	5.93	6.05	-	-	9.00	30.00	-21.00
5825 (RU52.40)	6.03	6.43	-	-	9.24	30.00	-20.76

Table 1067 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.53)	-18.23	-14.60	-	-	-13.04	30.00	-43.04
5720 (RU106.54)	1.93	2.50	-	-	5.23	30.00	-24.77
5745 (RU106.53)	6.27	6.79	-	-	9.54	30.00	-20.46
5785 (RU106.53)	6.49	6.63	-	-	9.57	30.00	-20.43
5825 (RU106.54)	6.39	6.94	-	-	9.69	30.00	-20.31

Table 1068 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 52 + RU Size 26.71)	-20.13	-13.38	-	-	-12.55	30.00	-42.55
5720 (RU Size 52 + RU Size 26.72)	1.78	3.19	-	-	5.56	30.00	-24.44
5745 (RU Size 52 + RU Size 26.70)	5.76	6.07	-	-	8.93	30.00	-21.07
5785 (RU Size 52 + RU Size 26.70)	5.85	6.09	-	-	8.98	30.00	-21.02
5825 (RU Size 52 + RU Size 26.72)	5.40	5.64	-	-	8.53	30.00	-21.47

Table 1069 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 106 + RU Size 26.82)	-13.83	-16.31	-	-	-11.88	30.00	-41.88
5720 (RU Size 106 + RU Size 26.83)	1.69	2.11	-	-	4.91	30.00	-25.09
5745 (RU Size 106 + RU Size 26.82)	5.77	6.11	-	-	8.95	30.00	-21.05
5785 (RU Size 106 + RU Size 26.82)	5.78	6.30	-	-	9.06	30.00	-20.94
5825 (RU Size 106 + RU Size 26.83)	6.02	6.55	-	-	9.30	30.00	-20.70

Table 1070 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690 (RU Size 484 + RU Size 242.90)	-3.02	-3.10	-	-	-0.05	30.00	-30.05
5690 (RU Size 484 + RU Size 242.93)	-48.80	-49.09	-	-	-45.93	30.00	-75.93
5775 (RU Size 484 + RU Size 242.90)	-0.22	-0.29	-	-	2.76	30.00	-27.24
5775 (RU Size 484 + RU Size 242.93)	-0.10	-0.31	-	-	2.81	30.00	-27.19

Table 1071 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	2.41	3.76	-	-	6.15	8.38	-2.23
5200	2.24	3.35	-	-	5.84	8.38	-2.54
5240	2.17	3.32	-	-	5.79	8.38	-2.59

Table 1072 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-1.72	-0.45	-	-	1.97	8.38	-6.41
5230	1.72	2.75	-	-	5.27	8.38	-3.11

Table 1073 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-6.27	-4.87	-	-	-2.50	8.38	-10.88

Table 1074 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.66	-9.64	-	-	-7.11	8.38	-15.49

Table 1075 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	2.21	3.42	-	-	5.86	8.38	-2.52
5200	2.17	3.58	-	-	5.94	8.38	-2.44
5240	2.36	3.55	-	-	6.00	8.38	-2.38

Table 1076 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-3.42	-2.06	-	-	0.32	8.38	-8.06
5230	1.91	2.98	-	-	5.49	8.38	-2.89

Table 1077 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.02
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-6.09	-4.96	-	-	-2.48	8.38	-10.86

Table 1078 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	99.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.97	-9.95	-	-	-7.42	8.38	-15.80

Table 1079 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-4.63	-3.24	-	-	-0.87	8.62	7.75	10.00	-2.25
5200	-4.83	-3.58	-	-	-1.15	8.62	7.47	10.00	-2.53
5240	-4.83	-3.34	-	-	-1.01	8.62	7.61	10.00	-2.39

Table 1080 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-5.52	-4.39	-	-	-1.91	8.62	6.71	10.00	-3.29
5230	-5.25	-3.83	-	-	-1.47	8.62	7.15	10.00	-2.85

Table 1081 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-8.17	-7.14	-	-	-4.62	8.62	4.00	10.00	-6.00

Table 1082 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-10.78	-9.93	-	-	-7.33	8.62	1.29	10.00	-8.71

Table 1083 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-4.65	-3.55	-	-	-1.06	8.62	7.56	10.00	-2.44
5200	-4.66	-3.49	-	-	-1.02	8.62	7.60	10.00	-2.40
5240	-4.41	-3.30	-	-	-0.81	8.62	7.81	10.00	-2.19

Table 1084 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-5.67	-4.41	-	-	-1.98	8.62	6.64	10.00	-3.36
5230	-5.47	-4.18	-	-	-1.77	8.62	6.85	10.00	-3.15

Table 1085 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-8.53	-7.30	-	-	-4.86	8.62	3.76	10.00	-6.24

Table 1086 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	99.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.62
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-10.78	-9.93	-	-	-7.33	8.62	1.29	10.00	-8.71

Table 1087 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.49	3.51	-	-	6.04	8.23	-2.19
5280	2.43	3.43	-	-	5.97	8.23	-2.26
5320	2.22	3.44	-	-	5.88	8.23	-2.34

Table 1088 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.49	3.51	-	-	6.04	11.00	-4.96
5280	2.43	3.43	-	-	5.97	11.00	-5.03
5320	2.22	3.44	-	-	5.88	11.00	-5.12

Table 1089 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.95	3.08	-	-	5.56	8.23	-2.67
5310	-1.50	-0.40	-	-	2.09	8.23	-6.14

Table 1090 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.95	3.08	-	-	5.56	11.00	-5.44
5310	-1.50	-0.40	-	-	2.09	11.00	-8.91

Table 1091 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-5.98	-4.84	-	-	-2.36	8.23	-10.59

Table 1092 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-5.98	-4.84	-	-	-2.36	11.00	-13.36

Table 1093 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.61	-9.54	-	-	-7.03	8.23	-15.26

Table 1094 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.88	-9.54	-	-	-7.15	11.00	-18.15

Table 1095 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.54	3.44	-	-	6.02	8.23	-2.21
5280	2.16	3.19	-	-	5.71	8.23	-2.51
5320	1.79	3.07	-	-	5.49	8.23	-2.74

Table 1096 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.54	3.44	-	-	6.02	11.00	-4.98
5280	2.16	3.19	-	-	5.71	11.00	-5.29
5320	1.79	3.07	-	-	5.49	11.00	-5.51

Table 1097 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.79	2.75	-	-	5.31	8.23	-2.92
5310	-2.32	-1.61	-	-	1.06	8.23	-7.17

Table 1098 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.79	2.75	-	-	5.31	11.00	-5.69
5310	-2.32	-1.61	-	-	1.06	11.00	-9.94

Table 1099 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-6.78	-6.03	-	-	-3.38	8.23	-11.60

Table 1100 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-6.78	-6.03	-	-	-3.38	11.00	-14.38

Table 1101 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	99.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.77
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.94	-9.96	-	-	-7.42	8.23	-15.64

Table 1102 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.99	-9.78	-	-	-7.33	11.00	-18.33

Table 1103 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.13	3.51	-	-	6.33	8.79	-2.45
5580	3.66	4.09	-	-	6.89	8.79	-1.90
5600	3.42	3.75	-	-	6.59	8.79	-2.19
5700	3.12	3.54	-	-	6.35	8.79	-2.44
5720	3.30	3.70	-	-	6.52	8.79	-2.27

Table 1104 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.13	3.51	-	-	6.33	11.00	-4.67
5580	3.66	4.09	-	-	6.89	11.00	-4.11
5600	3.42	3.75	-	-	6.59	11.00	-4.41
5700	3.12	3.54	-	-	6.35	11.00	-4.65
5720	3.30	3.70	-	-	6.52	11.00	-4.48

Table 1105 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.52	-1.24	-	-	1.63	8.79	-7.16
5590	2.48	2.89	-	-	5.70	8.79	-3.09
5670	1.21	1.13	-	-	4.18	8.79	-4.61
5710	3.22	3.63	-	-	6.44	8.79	-2.35

Table 1106 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.52	-1.24	-	-	1.63	11.00	-9.37
5590	2.48	2.89	-	-	5.70	11.00	-5.30
5670	1.21	1.13	-	-	4.18	11.00	-6.82
5710	3.22	3.63	-	-	6.44	11.00	-4.56

Table 1107 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-5.33	-4.76	-	-	-2.03	8.79	-10.82
5610	-0.91	-0.39	-	-	2.37	8.79	-6.42
5690	-0.01	0.31	-	-	3.16	8.79	-5.63

Table 1108 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-5.33	-4.76	-	-	-2.03	11.00	-13.03
5610	-0.91	-0.39	-	-	2.37	11.00	-8.63
5690	-0.01	0.31	-	-	3.16	11.00	-7.84

Table 1109 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.44	-7.17	-	-	-4.30	8.79	-13.08

Table 1110 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.44	-7.17	-	-	-4.30	11.00	-15.30

Table 1111 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.02	3.32	-	-	6.18	8.79	-2.60
5600	3.86	4.17	-	-	7.03	8.79	-1.76
5700	3.03	3.42	-	-	6.24	8.79	-2.55
5720	3.72	3.62	-	-	6.68	8.79	-2.11

Table 1112 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.02	3.32	-	-	6.18	11.00	-4.82
5600	3.86	4.17	-	-	7.03	11.00	-3.97
5700	3.03	3.42	-	-	6.24	11.00	-4.76
5720	3.72	3.62	-	-	6.68	11.00	-4.32

Table 1113 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-2.67	-2.49	-	-	0.43	8.79	-8.36
5590	2.47	2.81	-	-	5.65	8.79	-3.13
5670	-0.93	-0.41	-	-	2.35	8.79	-6.44
5710	3.05	3.19	-	-	6.14	8.79	-2.65

Table 1114 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-2.67	-2.49	-	-	0.43	11.00	-10.57
5590	2.47	2.81	-	-	5.65	11.00	-5.35
5670	-0.93	-0.41	-	-	2.35	11.00	-8.65
5710	3.05	3.19	-	-	6.14	11.00	-4.86

Table 1115 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-5.91	-5.99	-	-	-2.94	8.79	-11.72
5610	-0.45	-0.18	-	-	2.70	8.79	-6.09
5690	0.21	0.25	-	-	3.24	8.79	-5.55

Table 1116 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-5.91	-5.99	-	-	-2.94	11.00	-13.94
5610	-0.45	-0.18	-	-	2.70	11.00	-8.30
5690	0.21	0.25	-	-	3.24	11.00	-7.76

Table 1117 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.47	-8.06	-	-	-5.25	8.79	-14.04

Table 1118 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.47	-8.06	-	-	-5.25	11.00	-16.25

Table 1119 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-0.71	-0.28	-	-	2.52	27.79	-25.27
5745	6.42	6.35	-	-	9.40	29.14	-19.74
5785	6.19	6.54	-	-	9.38	29.14	-19.76
5825	6.04	6.03	-	-	9.05	29.14	-20.09

Table 1120 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-2.45	-1.99	-	-	0.80	27.79	-26.99
5755	3.43	3.22	-	-	6.33	29.14	-22.80
5795	3.36	3.40	-	-	6.39	29.14	-22.75

Table 1121 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-6.40	-6.03	-	-	-3.20	27.79	-30.99
5775	-1.85	-1.61	-	-	1.28	29.14	-27.86

Table 1122 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-0.67	-0.48	-	-	2.44	27.79	-25.35
5745	6.01	5.94	-	-	8.99	29.14	-20.15
5785	6.23	6.20	-	-	9.22	29.14	-19.92
5825	6.29	6.57	-	-	9.44	29.14	-19.70

Table 1123 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-2.87	-2.51	-	-	0.33	27.79	-27.46
5755	3.28	3.59	-	-	6.45	29.14	-22.69
5795	3.40	3.21	-	-	6.32	29.14	-22.82

Table 1124 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-6.19	-6.45	-	-	-3.31	27.79	-31.09
5775	-1.13	-1.25	-	-	1.82	29.14	-27.32

Table 1125 - Maximum Power Spectral Density Results



FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted Power Spectral Density	17 dBm/MHz for master device 11 dBm/MHz for mobile/portable client device	11 dBm/MHz		30 dBm/500 kHz

Table 1126

ISED RSS-247, Limit Clause 7.3.1.2, 7.3.2.2, 7.3.3.2, 7.3.4.3 and 7.3.5.3

Device	Frequency Range (MHz)				
	5150-5250	5250-5350	5470-5725	5725-5850	5850-5895
OEM installed in vehicles	-	-	-	-	-
Other	≤10 dBm/MHz*	≤11 dBm/MHz	≤11 dBm/MHz	≤30 dBm/500kHz	Fixed Outdoor Access Point: 23 dBm/MHz* Fixed Outdoor Client: 17 dBm/MHz Indoor Access Point: 20 dBm/MHz Indoor Subordinate: 20 dBm/MHz Indoor Client: 14 dBm/MHz

Table 1127

*Maximum power spectral density specified as EIRP.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Humidity & Temperature meter	R.S Components	1364	6148	12	28-Aug-2026
AC Programmable Power Supply	iTech	IT7324	5227	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	5759	12	05-Mar-2027
USB Power Sensor	Boonton	RTP5008	5830	12	05-Mar-2027
USB Power Sensor	Boonton	RTP5008	5832	12	05-Mar-2027
MXA Signal Analyser	Keysight Technologies	N9020B	5919	24	31-Mar-2027
USB Wideband Power Sensor	Boonton	RTP5008	6592	12	05-Mar-2027
Digital Thermometer	R.S Components	RS 5511	6739	12	02-Mar-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6903	12	05-Mar-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6904	12	05-Mar-2027
Humidity & Temperature meter	Fluke	971	7103	12	05-Aug-2026*
Multimeter	Fluke	115	7115	12	13-Aug-2026
6dB Attenuator cable assembly for SCU.	TUV SUD	SPECTRUM_SCU_CA	7214	12	05-Mar-2027

Table 1128

O/P Mon - Output Monitored using calibrated equipment

*NOTE: Only used within calibration period.



2.3 Emission Bandwidth

2.3.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
FCC 47 CFR Part 15E, Clause 15.407 (e)
ISED RSS-247, Clause 7.3

2.3.2 Equipment Under Test and Modification State

A3590, S/N: G3KM4XYX3Q - Modification State 0
A3590, S/N: FCY5FXQDLV - Modification State 0

2.3.3 Date of Test

27-May-2026 to 05-August-2026

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10 2020 clause 12.5.1 for 6 dB bandwidth, clause 12.5.2 for 26 dB bandwidth, and clause 12.5.3 for 99% occupied bandwidth measurements.

For modes of operation using multiple cores, measurements were made on each core but only the worst case results are reported. Worst case was considered as the narrowest results for 6 dB bandwidth and the widest result for 26 dB bandwidth and 99% occupied bandwidth.

2.3.5 Environmental Conditions

Ambient Temperature	20.2 - 23.8 °C
Relative Humidity	44.2 - 58.6 %

2.3.6 Test Results

5 GHz WLAN

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	20.928	22.434
802.11n HT40	41.420	43.932
802.11ac VHT80	80.564	81.686
802.11ac VHT160	163.128	163.128
802.11ax HE20 SU	21.462	22.974
802.11ax HE40 SU	42.216	44.592
802.11ax HE80 SU	81.620	82.984
802.11ax HE160 SU	164.094	164.094
802.11a20	19.710	21.906
802.11a40	41.450	68.196
802.11a80	87.494	132.216
802.11a160	163.212	163.212

Table 1129 - 26 dB Bandwidth Summary Results - SISO

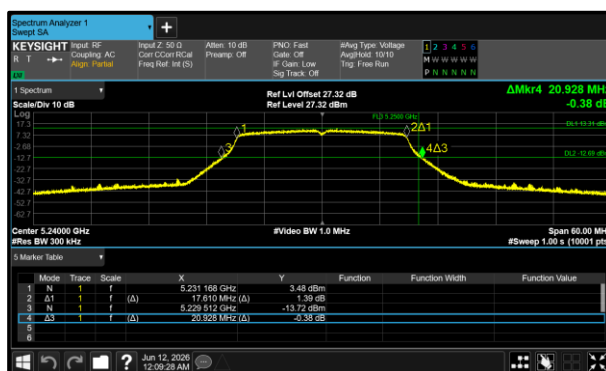


Figure 1 - 802.11n HT20 Minimum 26 dB EBW

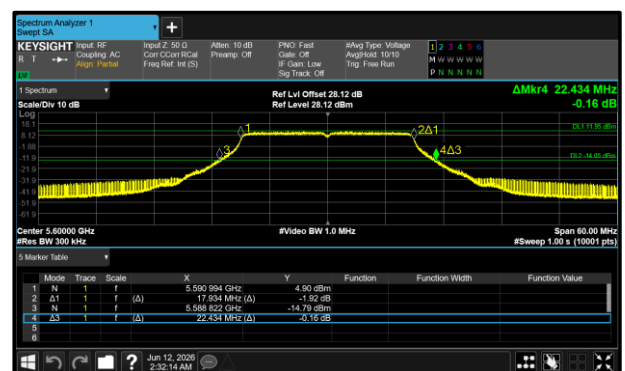


Figure 2 - 802.11n HT20 Maximum 26 dB EBW

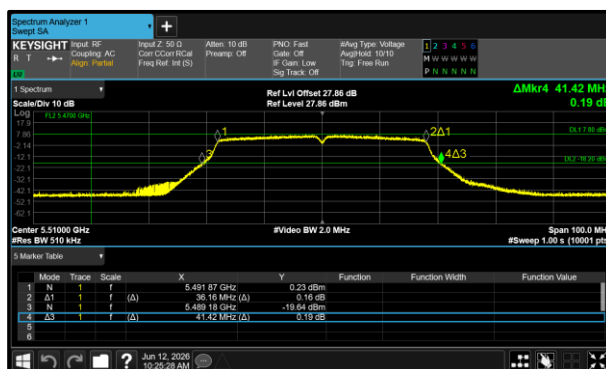


Figure 3 - 802.11n HT40 Minimum 26 dB EBW

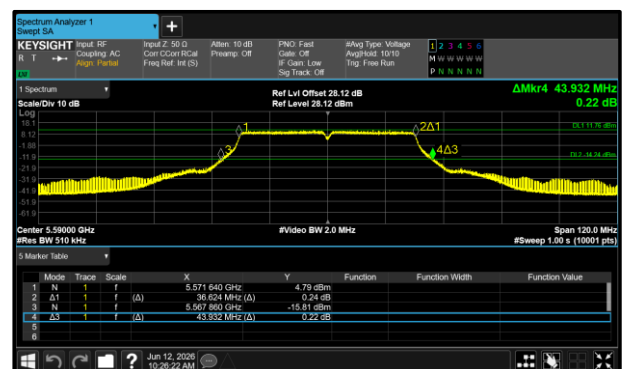


Figure 4 - 802.11n HT40 Maximum 26 dB EBW

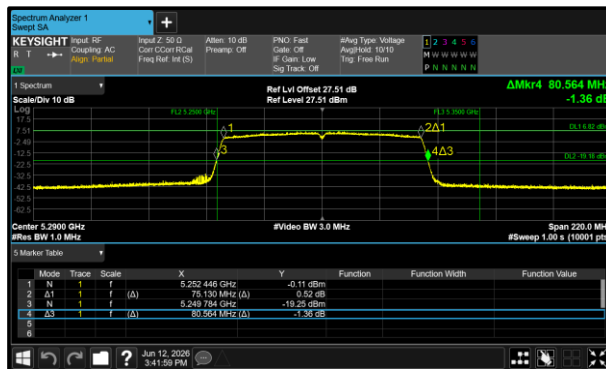


Figure 5 - 802.11ac VHT80 Minimum 26 dB EBW

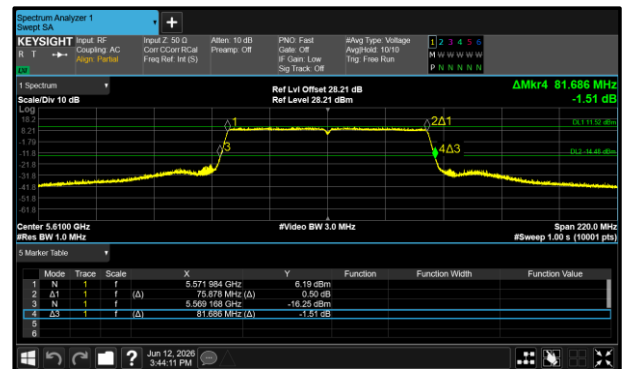


Figure 6 - 802.11ac VHT80 Maximum 26 dB EBW

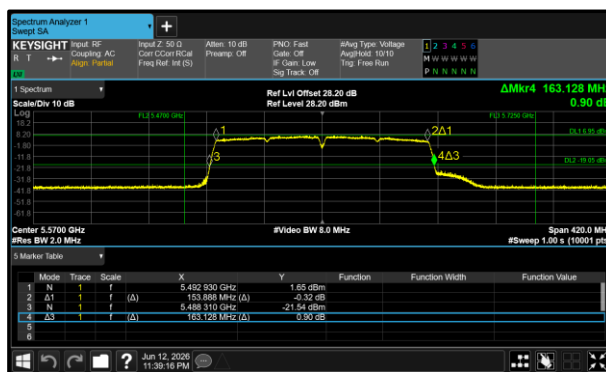


Figure 7 - 802.11ac VHT160 Minimum 26 dB EBW

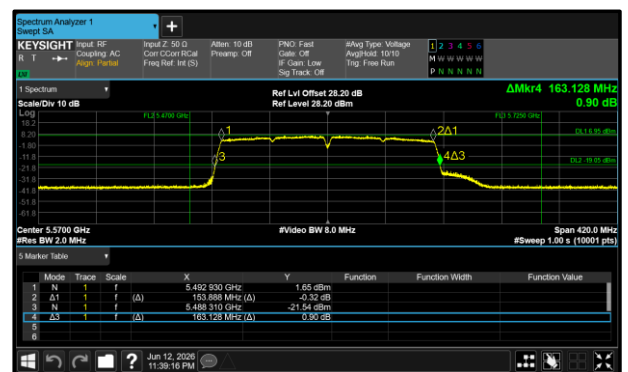


Figure 8 - 802.11ac VHT160 Maximum 26 dB EBW

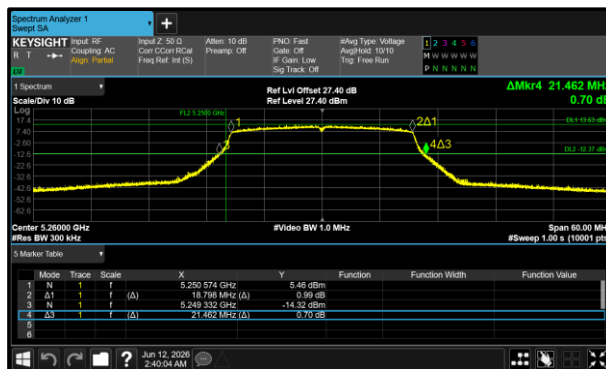


Figure 9 - 802.11ax HE20 SU Minimum 26 dB EBW

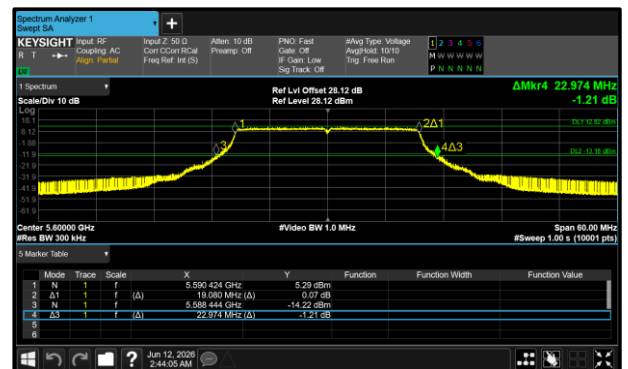


Figure 10 - 802.11ax HE20 SU Maximum 26 dB EBW

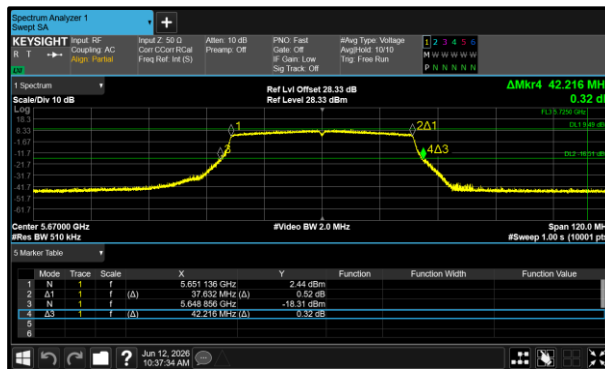


Figure 11 - 802.11ax HE40 SU Minimum 26 dB
EBW

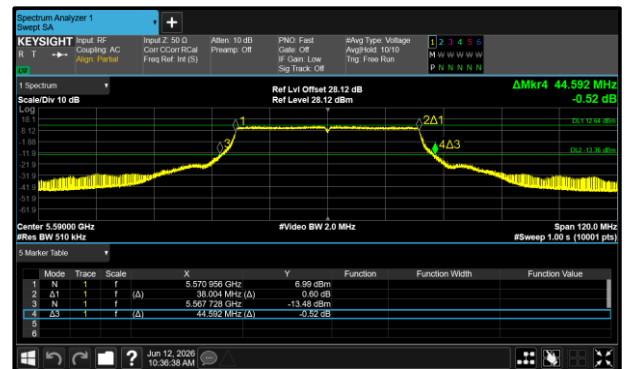


Figure 12 - 802.11ax HE40 SU Maximum 26 dB
EBW

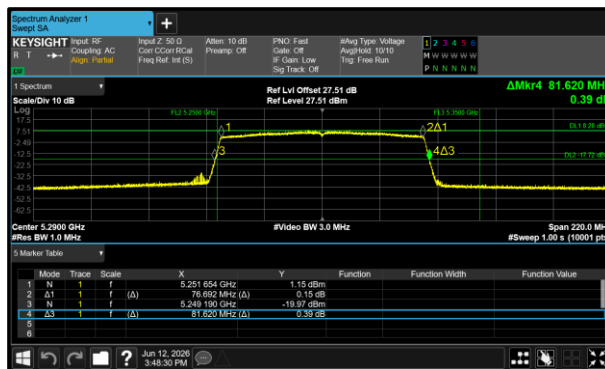


Figure 13 - 802.11ax HE80 SU Minimum 26 dB
EBW

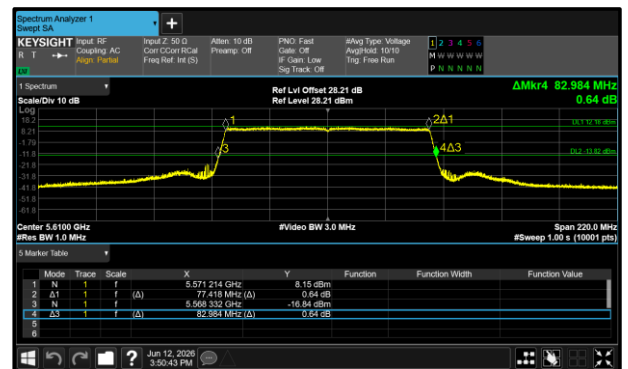


Figure 14 - 802.11ax HE80 SU Maximum 26 dB
EBW

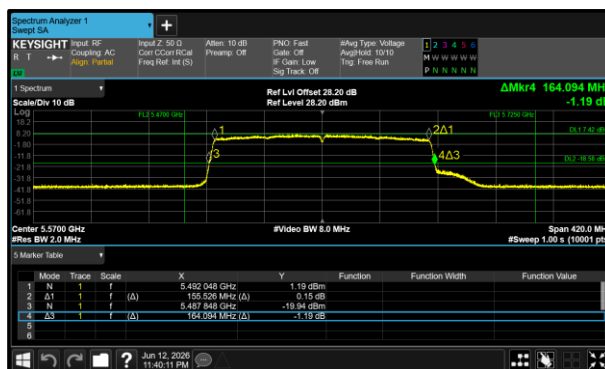


Figure 15 - 802.11ax HE160 SU Minimum 26 dB
EBW

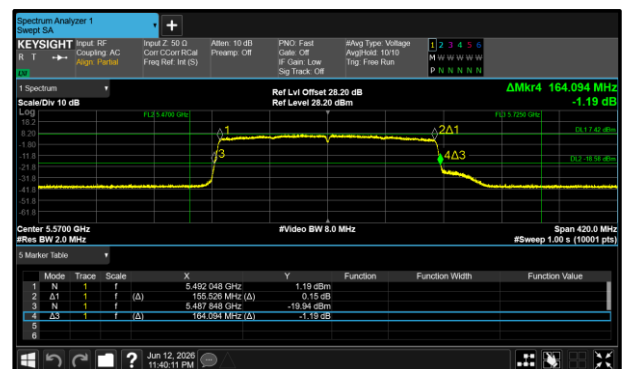


Figure 16 - 802.11ax HE160 SU Maximum 26 dB
EBW

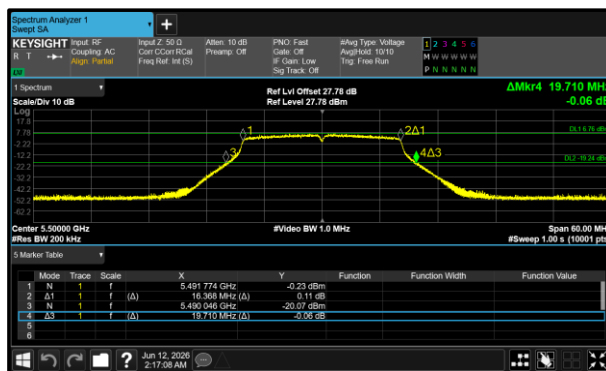


Figure 17 - 802.11a20 Minimum 26 dB EBW

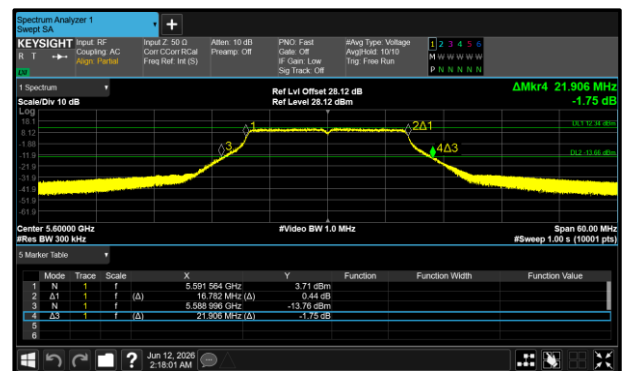


Figure 18 - 802.11a20 Maximum 26 dB EBW

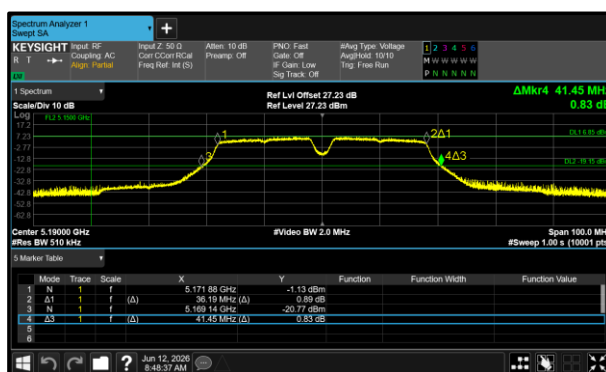


Figure 19 - 802.11a40 Minimum 26 dB EBW

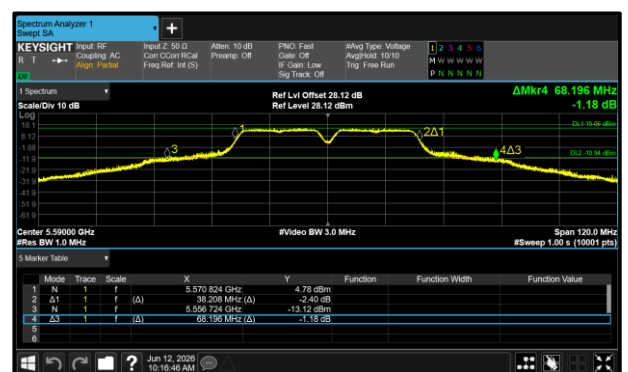


Figure 20 - 802.11a40 Maximum 26 dB EBW

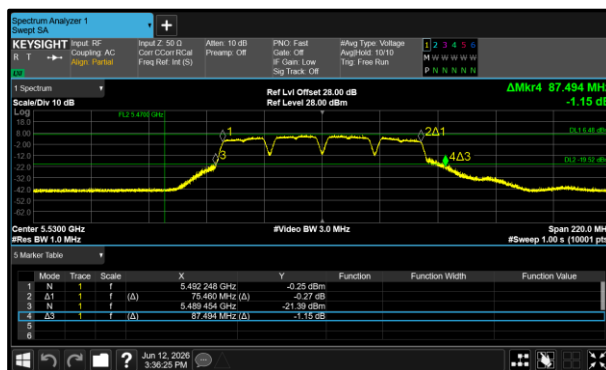


Figure 21 - 802.11a80 Minimum 26 dB EBW

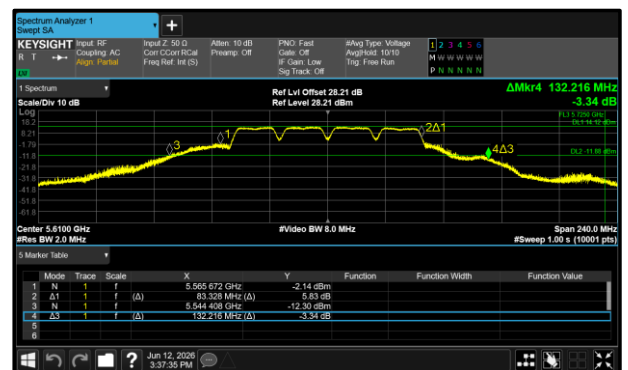


Figure 22 - 802.11a80 Maximum 26 dB EBW

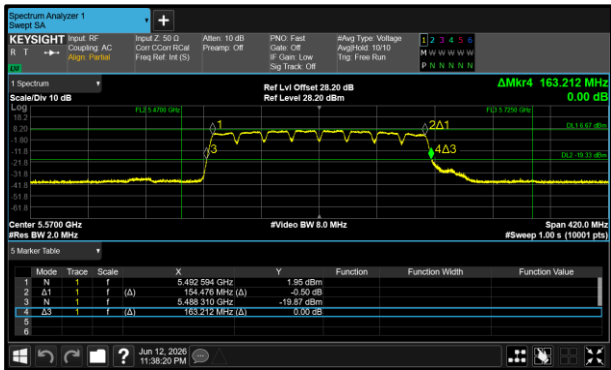


Figure 23 - 802.11a160 Minimum 26 dB EBW

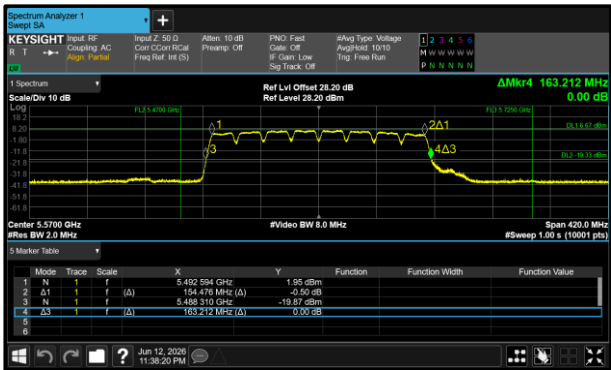


Figure 24 - 802.11a160 Maximum 26 dB EBW