



Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	21.054	22.950
802.11n HT40	41.544	44.100
802.11ac VHT80	80.366	81.686
802.11ac VHT160	163.044	163.044
802.11ax HE20 SU	21.114	22.968
802.11ax HE40 SU	42.192	44.688
802.11ax HE80 SU	81.620	82.852
802.11ax HE160 SU	164.220	164.220
802.11a20	19.824	21.846
802.11a40	41.340	75.180
802.11a80	87.648	114.456
802.11a160	163.212	163.212

Table 1183 - 26 dB Bandwidth Summary Results – SISO Core 1



Figure 452 - 802.11n HT20 Minimum 26 dB EBW

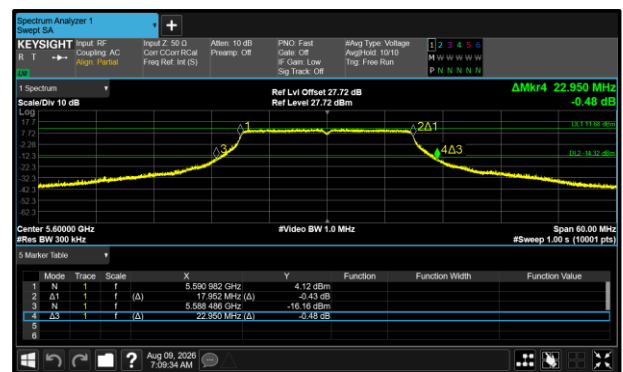


Figure 453 - 802.11n HT20 Maximum 26 dB EBW

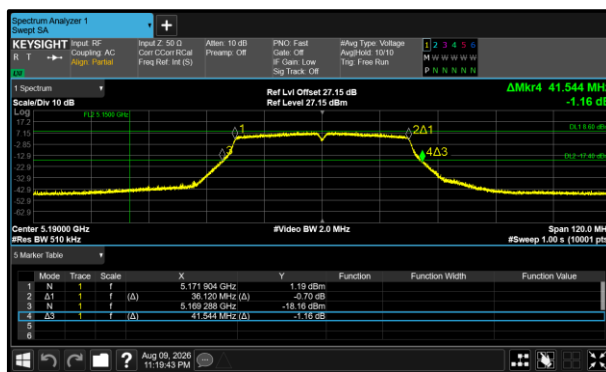


Figure 454 - 802.11n HT40 Minimum 26 dB EBW

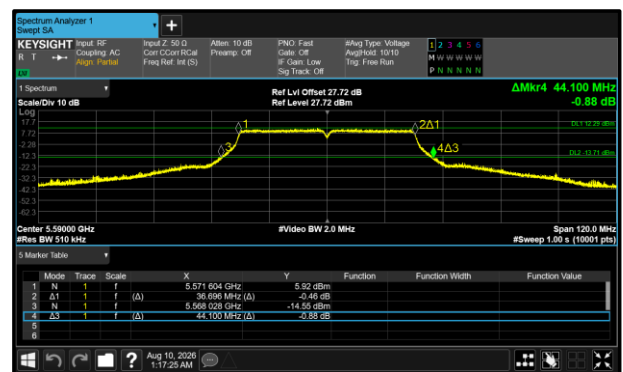


Figure 455 - 802.11n HT40 Maximum 26 dB EBW

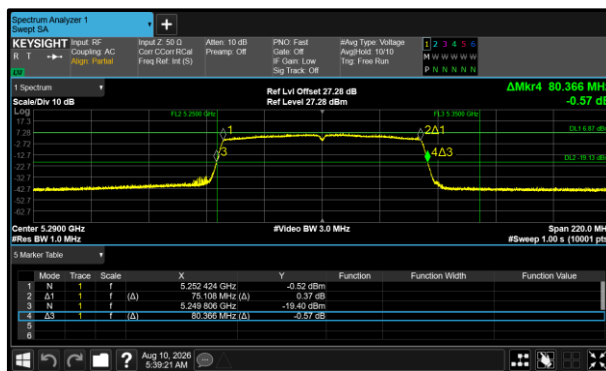


Figure 456 - 802.11ac VHT80 Minimum 26 dB
EBW

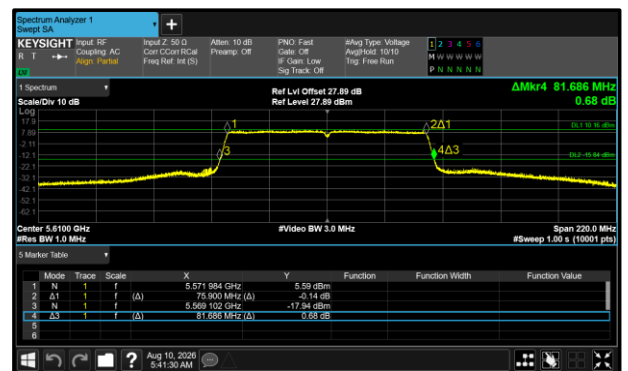


Figure 457 - 802.11ac VHT80 Maximum 26 dB
EBW

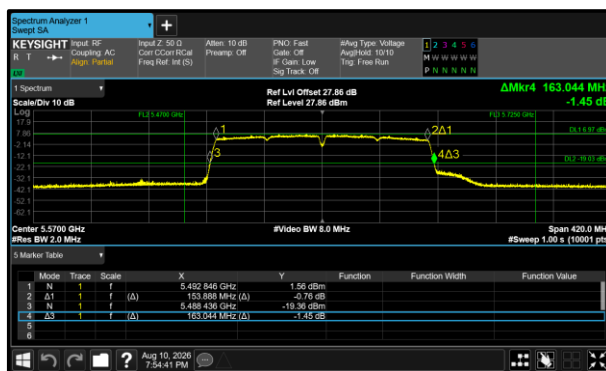


Figure 458 - 802.11ac VHT160 Minimum 26 dB
EBW

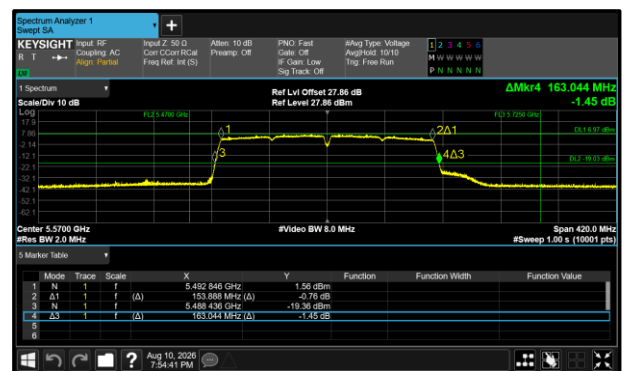


Figure 459 - 802.11ac VHT160 Maximum 26 dB
EBW

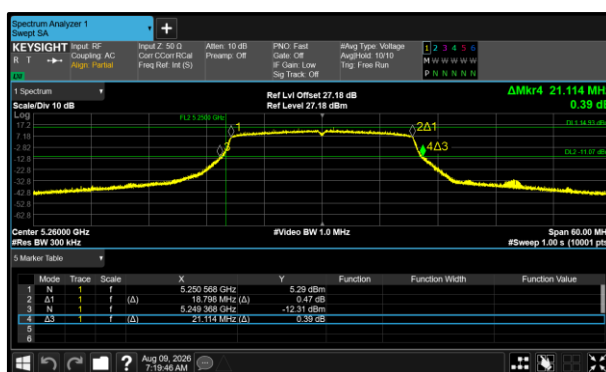


Figure 460 - 802.11ax HE20 SU Minimum 26 dB
EBW

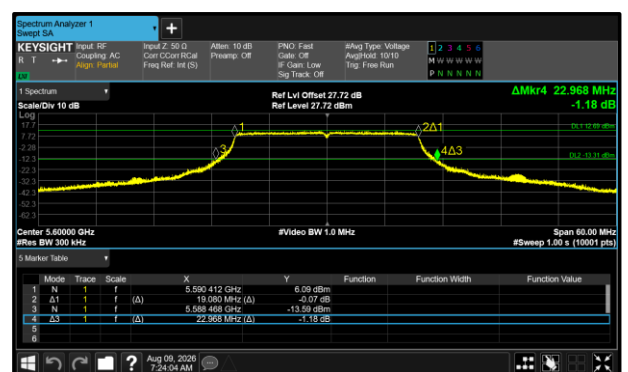


Figure 461 - 802.11ax HE20 SU Maximum 26 dB
EBW

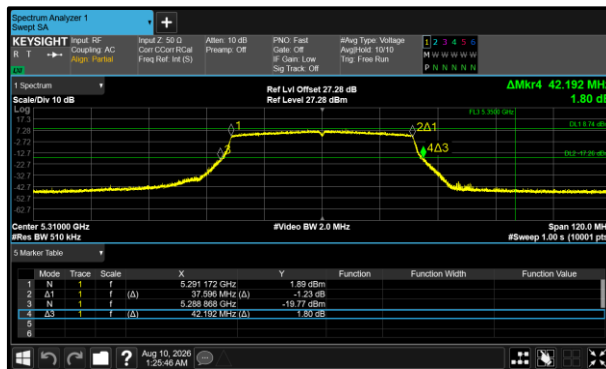


Figure 462 - 802.11ax HE40 SU Minimum 26 dB
EBW

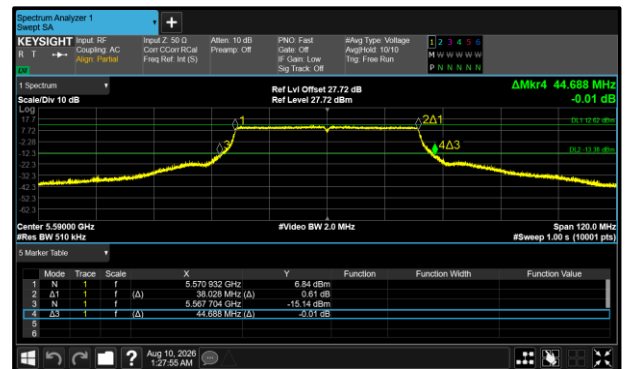


Figure 463 - 802.11ax HE40 SU Maximum 26 dB
EBW

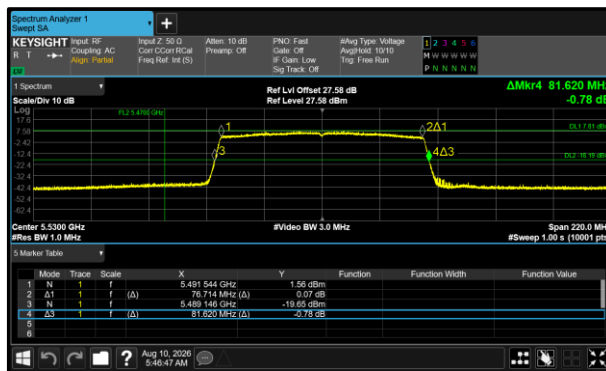


Figure 464 - 802.11ax HE80 SU Minimum 26 dB
EBW

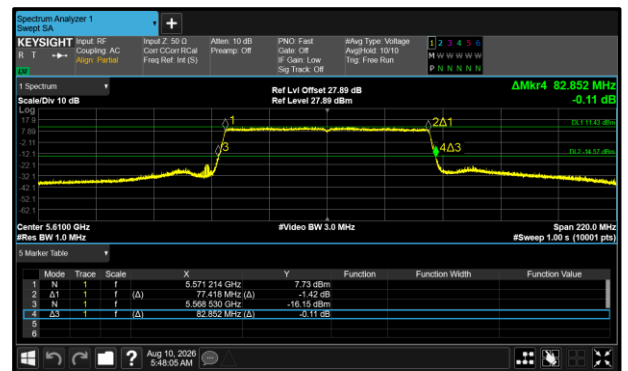


Figure 465 - 802.11ax HE80 SU Maximum 26 dB
EBW

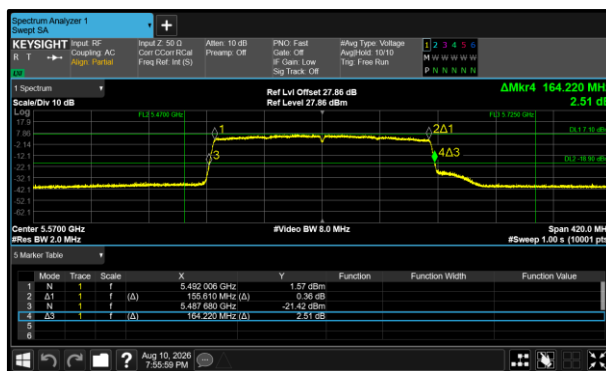


Figure 466 - 802.11ax HE160 SU Minimum 26 dB
EBW

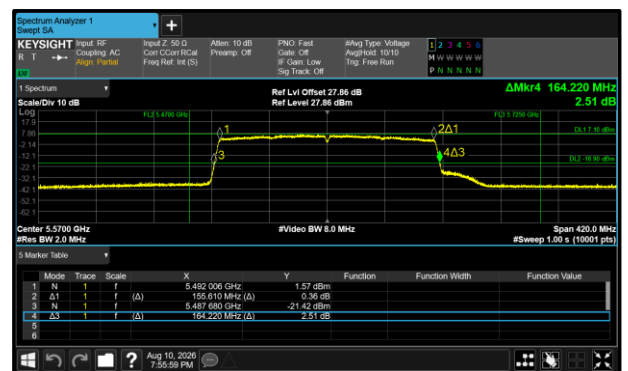
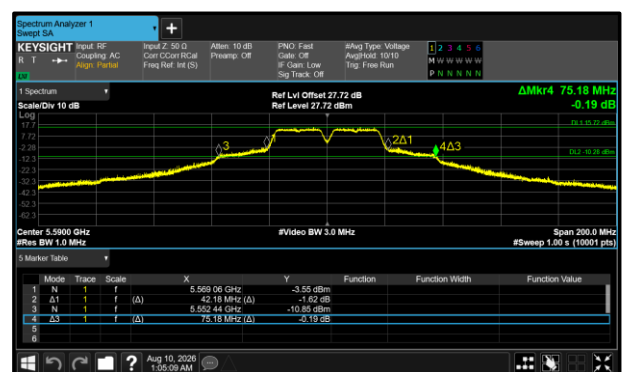
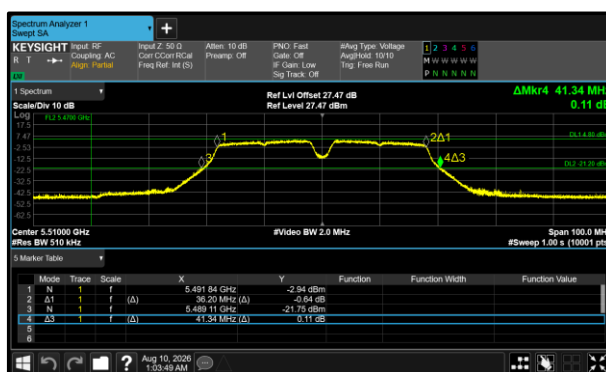
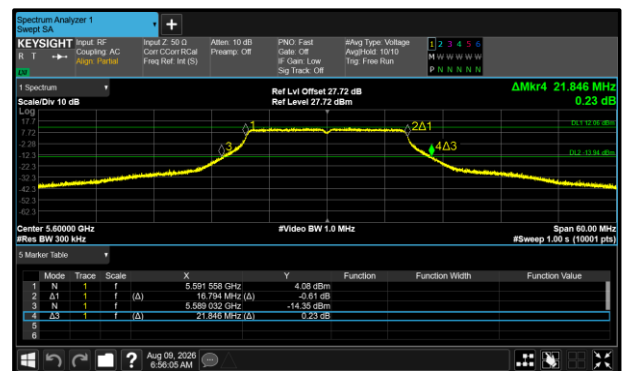
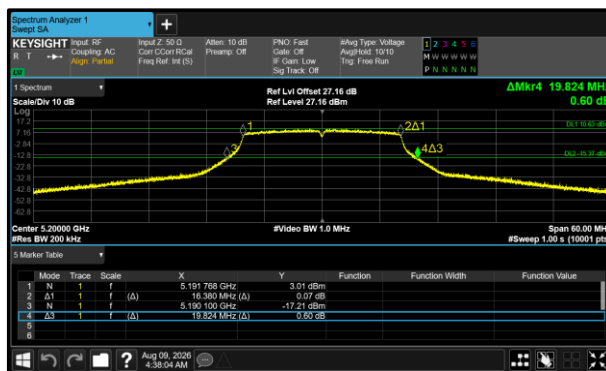


Figure 467 - 802.11ax HE160 SU Maximum 26 dB
EBW



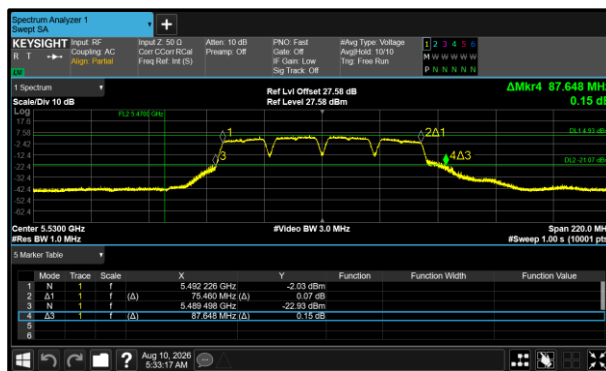


Figure 472 - 802.11a80 Minimum 26 dB EBW

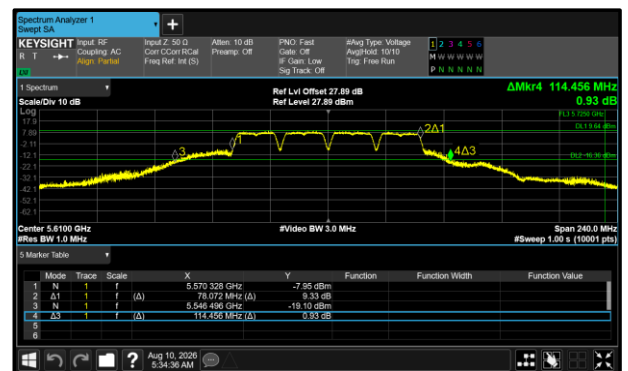


Figure 473 - 802.11a80 Maximum 26 dB EBW

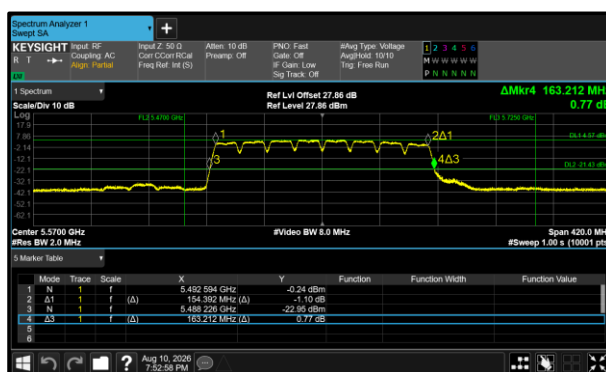


Figure 474 - 802.11a160 Minimum 26 dB EBW

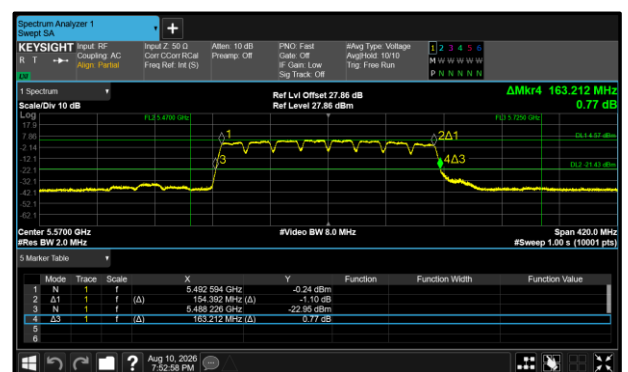


Figure 475 - 802.11a160 Maximum 26 dB EBW



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	19.968	-	-	-
5200	-	19.824	-	-	-
5240	-	20.244	-	-	-

Table 1184 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	41.620	-	-	-
5230	-	66.570	-	-	-

Table 1185 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	89.826	-	-	-

Table 1186 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	81.648	-	-	-

Table 1187 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	21.132	-	-	-
5200	-	21.144	-	-	-
5240	-	21.312	-	-	-

Table 1188 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	41.544	-	-	-
5230	-	41.910	-	-	-

Table 1189 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	80.388	-	-	-

Table 1190 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	81.606	-	-	-

Table 1191 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	21.876	-	-	-
5200	-	21.468	-	-	-
5240	-	21.426	-	-	-

Table 1192 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	42.564	-	-	-
5230	-	42.564	-	-	-

Table 1193 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	81.752	-	-	-

Table 1194 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	82.152	-	-	-

Table 1195 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	16.368	-	-	-
5200	-	16.362	-	-	-
5240	-	16.368	-	-	-

Table 1196 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	36.220	-	-	-
5230	-	36.480	-	-	-

Table 1197 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	75.504	-	-	-

Table 1198 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.196	-	-	-

Table 1199 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	17.526	-	-	-
5200	-	17.526	-	-	-
5240	-	17.616	-	-	-

Table 1200 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	36.130	-	-	-
5230	-	36.130	-	-	-

Table 1201 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	75.108	-	-	-

Table 1202 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	76.986	-	-	-

Table 1203 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	18.804	-	-	-
5200	-	18.786	-	-	-
5240	-	18.792	-	-	-

Table 1204 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	37.584	-	-	-
5230	-	37.620	-	-	-

Table 1205 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	76.736	-	-	-

Table 1206 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.742	-	-	-

Table 1207 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	20.220	-	-	-
5280	-	20.034	-	-	-
5320	-	19.884	-	-	-

Table 1208 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	16.368	-	-	-
5280	-	16.374	-	-	-
5320	-	16.356	-	-	-

Table 1209 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	60.240	-	-	-
5310	-	41.540	-	-	-

Table 1210 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	36.792	-	-	-
5310	-	36.200	-	-	-

Table 1211 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	93.016	-	-	-

Table 1212 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	75.526	-	-	-

Table 1213 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	81.480	-	-	-

Table 1214 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	21.054	-	-	-
5280	-	21.102	-	-	-
5320	-	21.114	-	-	-

Table 1215 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	17.604	-	-	-
5280	-	17.622	-	-	-
5320	-	17.616	-	-	-

Table 1216 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	41.952	-	-	-
5310	-	41.720	-	-	-

Table 1217 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	36.168	-	-	-
5310	-	36.140	-	-	-

Table 1218 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	80.366	-	-	-

Table 1219 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	75.108	-	-	-

Table 1220 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	81.522	-	-	-

Table 1221 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	21.114	-	-	-
5280	-	21.528	-	-	-
5320	-	21.672	-	-	-

Table 1222 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	18.798	-	-	-
5280	-	18.804	-	-	-
5320	-	18.792	-	-	-

Table 1223 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	42.216	-	-	-
5310	-	42.192	-	-	-

Table 1224 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	37.620	-	-	-
5310	-	37.596	-	-	-

Table 1225 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	81.818	-	-	-

Table 1226 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	76.670	-	-	-

Table 1227 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	82.278	-	-	-

Table 1228 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.154	-	-	-

Table 1229 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	76.902	-	-	-

Table 1230 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.742	-	-	-

Table 1231 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	19.950	-	-	-
5600	-	21.846	-	-	-
5700	-	19.926	-	-	-
5720	-	15.140	-	-	-

Table 1232 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	16.362	-	-	-
5600	-	16.794	-	-	-
5700	-	16.380	-	-	-
5720	-	13.112	-	-	-

Table 1233 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	41.340	-	-	-
5590	-	75.180	-	-	-
5670	-	42.690	-	-	-
5710	-	36.010	-	-	-

Table 1234 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	36.200	-	-	-
5590	-	42.180	-	-	-
5670	-	36.300	-	-	-
5710	-	32.860	-	-	-

Table 1235 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	87.648	-	-	-
5610	-	114.456	-	-	-
5690	-	89.428	-	-	-

Table 1236 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	75.460	-	-	-
5610	-	78.072	-	-	-
5690	-	72.334	-	-	-

Table 1237 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	163.212	-	-	-

Table 1238 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	154.392	-	-	-

Table 1239 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	21.336	-	-	-
5600	-	22.950	-	-	-
5700	-	21.480	-	-	-
5720	-	15.782	-	-	-

Table 1240 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	17.616	-	-	-
5600	-	17.952	-	-	-
5700	-	17.610	-	-	-
5720	-	13.706	-	-	-

Table 1241 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	41.904	-	-	-
5590	-	44.100	-	-	-
5670	-	42.130	-	-	-
5710	-	36.420	-	-	-

Table 1242 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	36.132	-	-	-
5590	-	36.696	-	-	-
5670	-	36.160	-	-	-
5710	-	32.808	-	-	-

Table 1243 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	80.454	-	-	-
5610	-	81.686	-	-	-
5690	-	75.612	-	-	-

Table 1244 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	75.086	-	-	-
5610	-	75.900	-	-	-
5690	-	72.026	-	-	-

Table 1245 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	163.044	-	-	-

Table 1246 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	153.888	-	-	-

Table 1247 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	21.390	-	-	-
5600	-	22.968	-	-	-
5700	-	21.420	-	-	-
5720	-	15.860	-	-	-

Table 1248 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	18.798	-	-	-
5600	-	19.080	-	-	-
5700	-	18.798	-	-	-
5720	-	14.312	-	-	-

Table 1249 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	42.624	-	-	-
5590	-	44.688	-	-	-
5670	-	42.648	-	-	-
5710	-	36.564	-	-	-

Table 1250 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	37.620	-	-	-
5590	-	38.028	-	-	-
5670	-	37.632	-	-	-
5710	-	33.552	-	-	-

Table 1251 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	81.620	-	-	-
5610	-	82.852	-	-	-
5690	-	76.074	-	-	-

Table 1252 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	76.714	-	-	-
5610	-	77.418	-	-	-
5690	-	72.796	-	-	-

Table 1253 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	164.220	-	-	-

Table 1254 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	155.610	-	-	-

Table 1255 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.160	-	-	≥500.0
5745	-	15.648	-	-	≥500.0
5785	-	15.642	-	-	≥500.0
5825	-	15.654	-	-	≥500.0

Table 1256 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.286	-	-	-
5745	-	16.398	-	-	-
5785	-	16.380	-	-	-
5825	-	16.398	-	-	-

Table 1257 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	3.170	-	-	≥500.0
5755	-	35.104	-	-	≥500.0
5795	-	35.088	-	-	≥500.0

Table 1258 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	3.390	-	-	-
5755	-	43.420	-	-	-
5795	-	41.440	-	-	-

Table 1259 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	3.192	-	-	≥500.0
5775	-	75.120	-	-	≥500.0

Table 1260 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	3.456	-	-	-
5775	-	76.416	-	-	-

Table 1261 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.766	-	-	≥500.0
5745	-	15.696	-	-	≥500.0
5785	-	15.618	-	-	≥500.0
5825	-	15.702	-	-	≥500.0

Table 1262 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.844	-	-	-
5745	-	17.640	-	-	-
5785	-	17.634	-	-	-
5825	-	17.634	-	-	-

Table 1263 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	3.180	-	-	≥500.0
5755	-	36.384	-	-	≥500.0
5795	-	35.000	-	-	≥500.0

Table 1264 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	3.636	-	-	-
5755	-	36.192	-	-	-
5795	-	36.170	-	-	-

Table 1265 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	3.214	-	-	≥500.0
5775	-	73.788	-	-	≥500.0

Table 1266 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	28.250	-	-	-
5775	-	75.350	-	-	-

Table 1267 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.384	-	-	≥500.0
5745	-	18.120	-	-	≥500.0
5785	-	18.096	-	-	≥500.0
5825	-	17.778	-	-	≥500.0

Table 1268 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.462	-	-	-
5745	-	18.810	-	-	-
5785	-	18.798	-	-	-
5825	-	18.810	-	-	-

Table 1269 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	4.008	-	-	≥500.0
5755	-	36.912	-	-	≥500.0
5795	-	36.012	-	-	≥500.0

Table 1270 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	4.044	-	-	-
5755	-	37.620	-	-	-
5795	-	37.632	-	-	-

Table 1271 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 7.3.4.3	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	4.050	-	-	≥500.0
5775	-	75.086	-	-	≥500.0

Table 1272 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	6.426	-	-	-
5775	-	76.780	-	-	-

Table 1273 - 99% Bandwidth Results



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	17.520	17.922
802.11n HT40	36.120	36.696
802.11ac VHT80	75.064	75.944
802.11ac VHT160	153.846	153.930
802.11ax HE20 SU	18.786	19.068
802.11ax HE40 SU	37.584	38.016
802.11ax HE80 SU	76.670	77.440
802.11ax HE160 SU	155.400	155.526
802.11a20	16.362	16.806
802.11a40	36.190	43.900
802.11a80	75.438	77.712
802.11a160	154.350	154.518

Table 1274 - 99% Bandwidth Summary Results - MIMO CDD

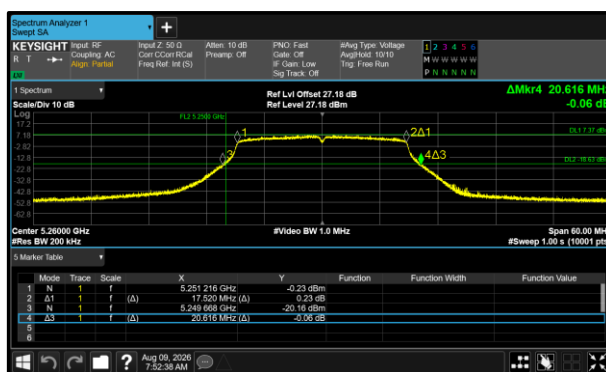


Figure 476 - 802.11n HT20 Minimum 99% OBW

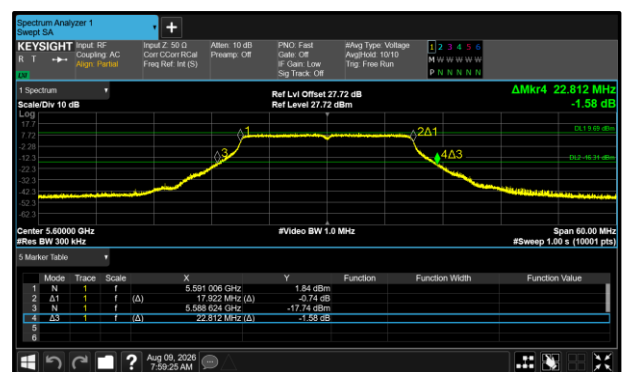


Figure 477 - 802.11n HT20 Maximum 99% OBW

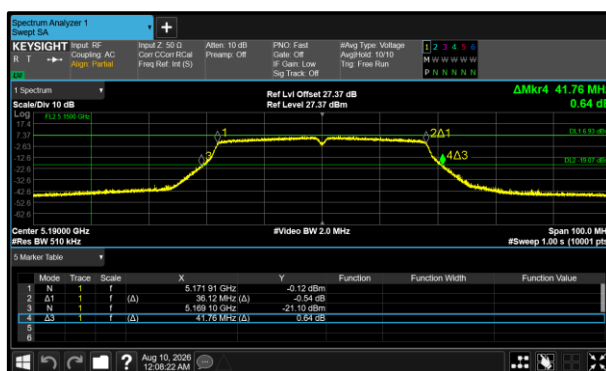


Figure 478 - 802.11n HT40 Minimum 99% OBW

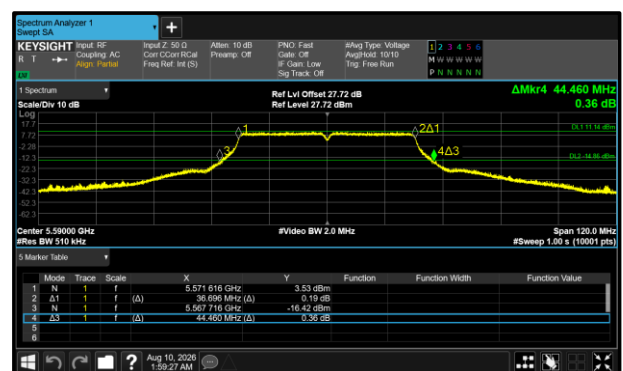


Figure 479 - 802.11n HT40 Maximum 99% OBW

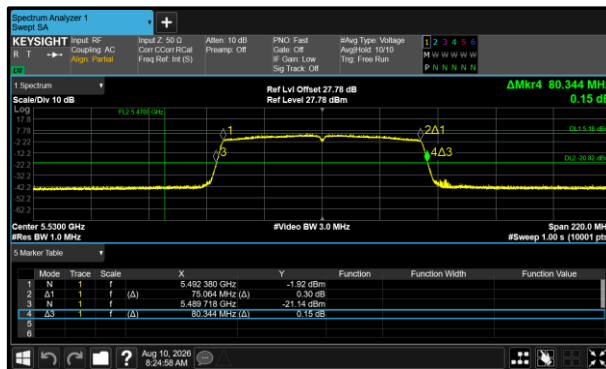


Figure 480 - 802.11ac VHT80 Minimum 99% OBW

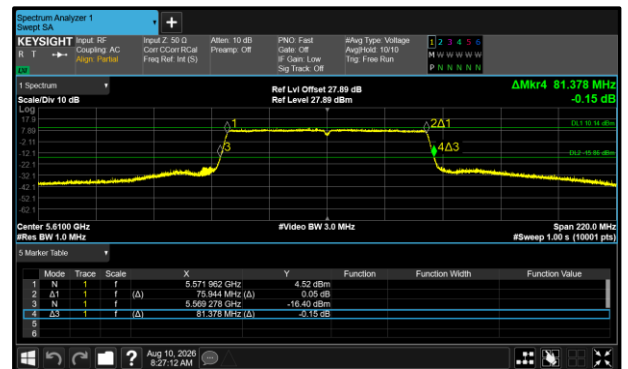


Figure 481 - 802.11ac VHT80 Maximum 99% OBW

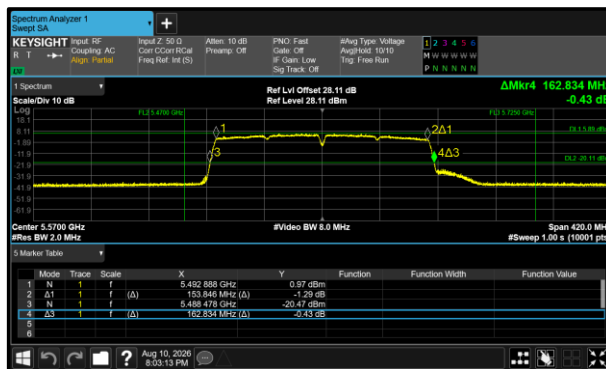


Figure 482 - 802.11ac VHT160 Minimum 99% OBW

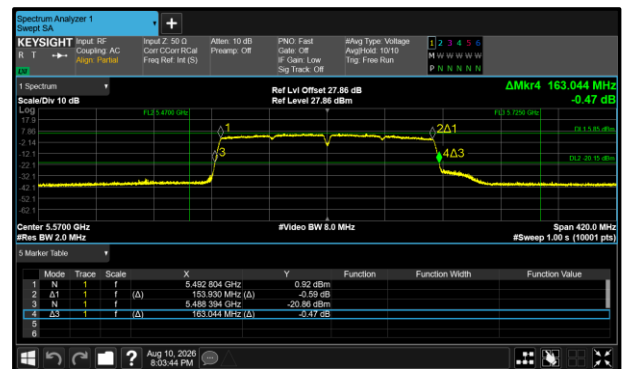


Figure 483 - 802.11ac VHT160 Maximum 99% OBW

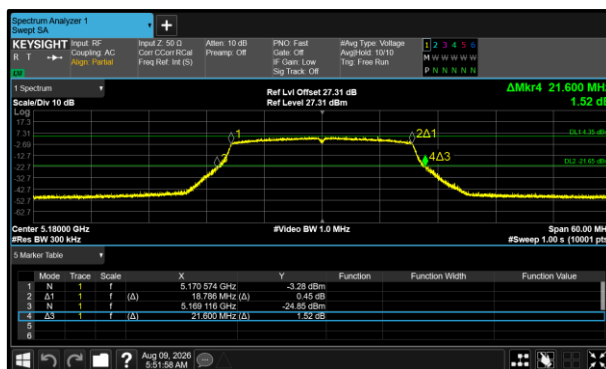


Figure 484 - 802.11ax HE20 SU Minimum 99% OBW

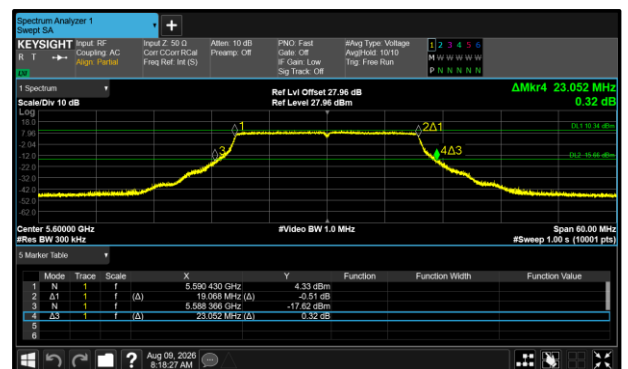


Figure 485 - 802.11ax HE20 SU Maximum 99% OBW

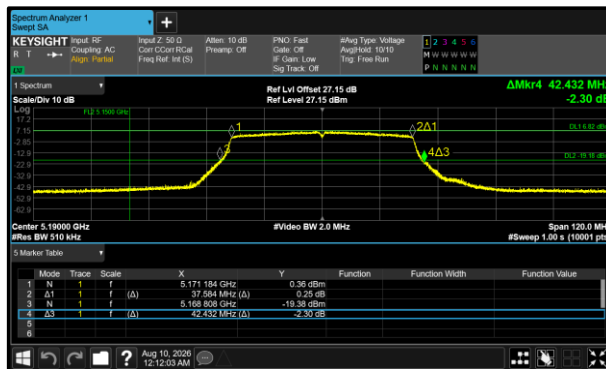


Figure 486 - 802.11ax HE40 SU Minimum 99% OBW

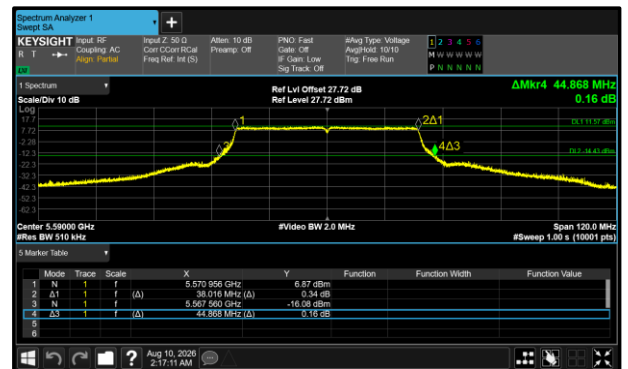


Figure 487 - 802.11ax HE40 SU Maximum 99% OBW

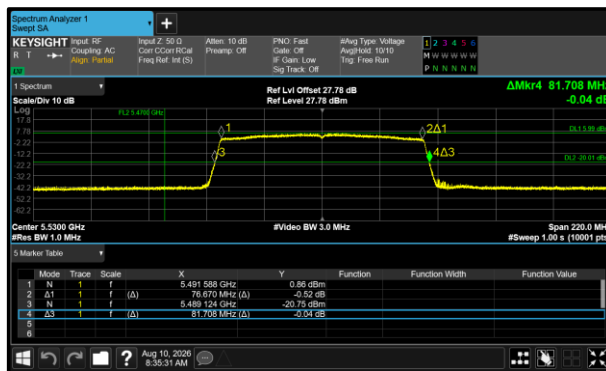


Figure 488 - 802.11ax HE80 SU Minimum 99% OBW

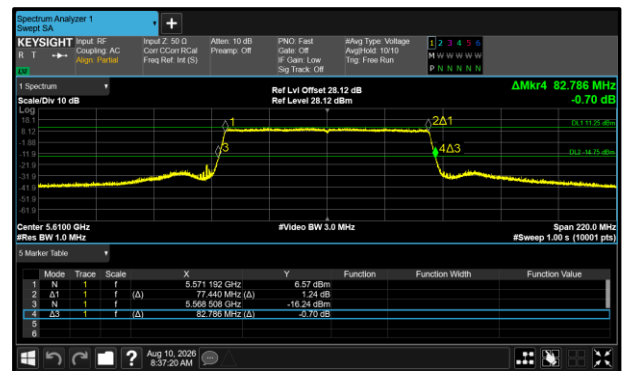


Figure 489 - 802.11ax HE80 SU Maximum 99% OBW

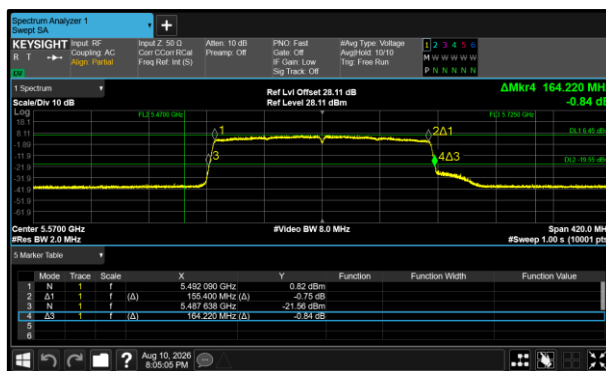


Figure 490 - 802.11ax HE160 SU Minimum 99% OBW

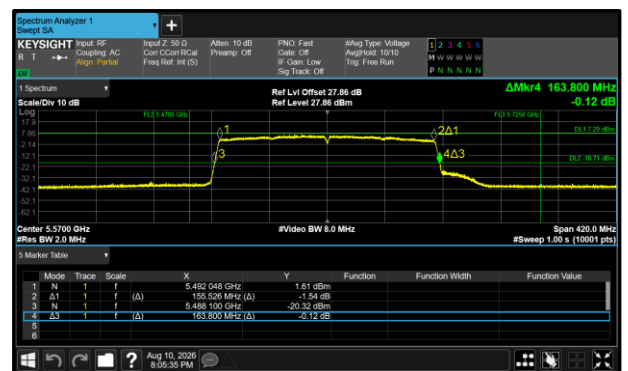


Figure 491 - 802.11ax HE160 SU Maximum 99% OBW

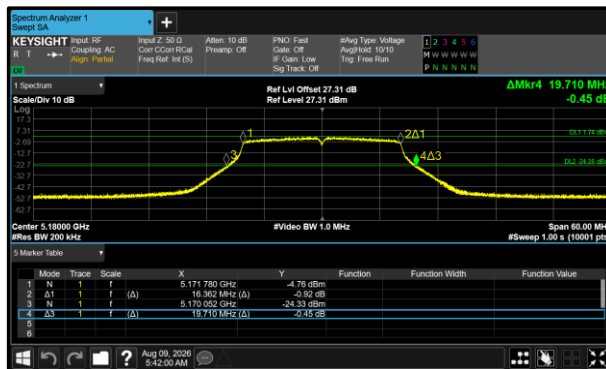


Figure 492 - 802.11a20 Minimum 99% OBW

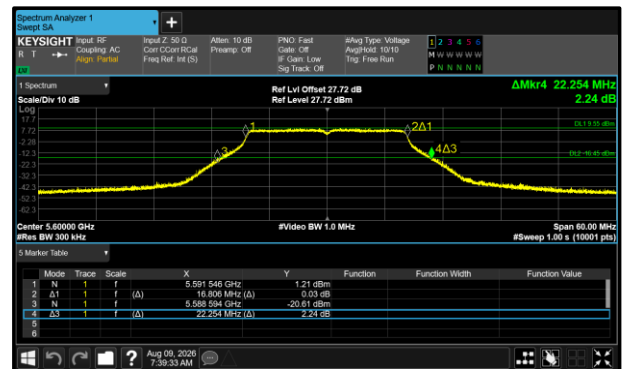


Figure 493 - 802.11a20 Maximum 99% OBW

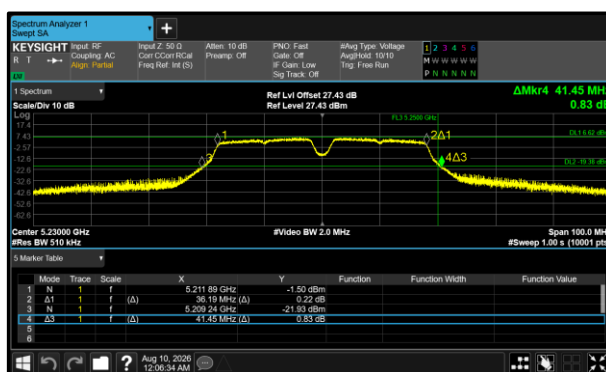


Figure 494 - 802.11a40 Minimum 99% OBW

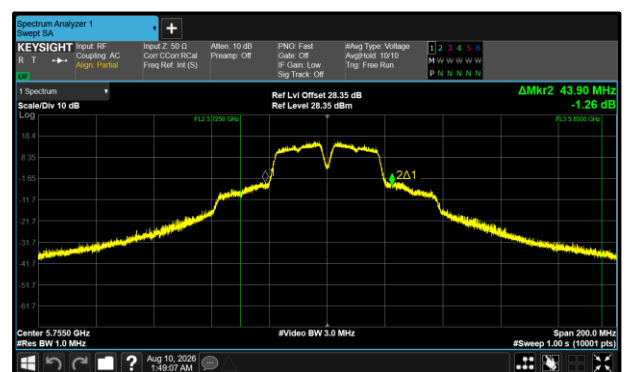


Figure 495 - 802.11a40 Maximum 99% OBW

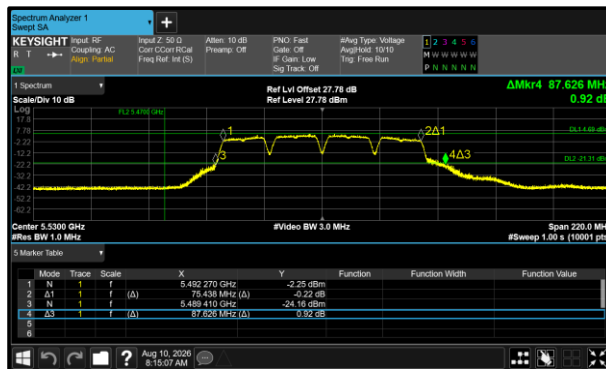


Figure 496 - 802.11a80 Minimum 99% OBW

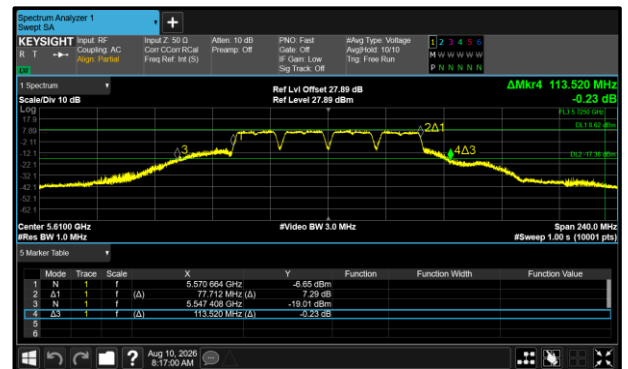


Figure 497 - 802.11a80 Maximum 99% OBW

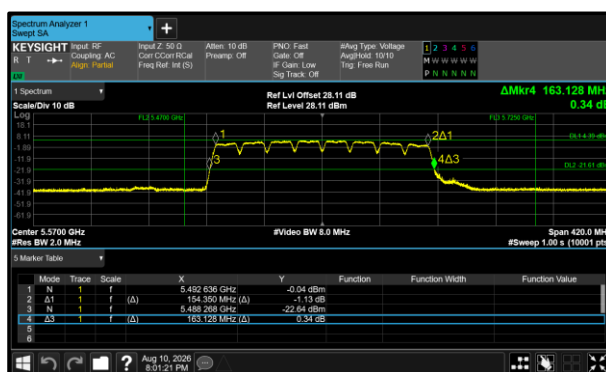


Figure 498 - 802.11a160 Minimum 99% OBW

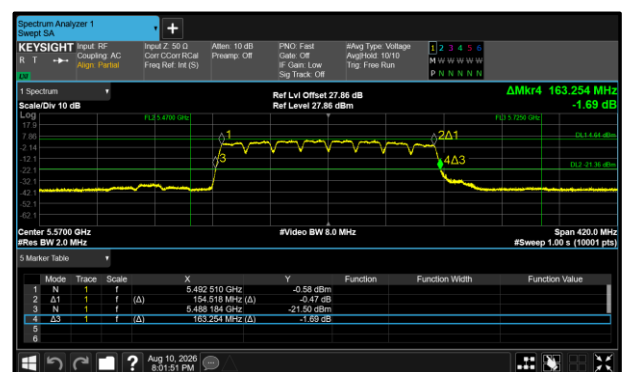


Figure 499 - 802.11a160 Maximum 99% OBW



Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	20.538	22.914
802.11n HT40	41.160	44.460
802.11ac VHT80	80.344	81.466
802.11ac VHT160	162.834	163.044
802.11ax HE20 SU	21.216	23.052
802.11ax HE40 SU	42.180	44.868
802.11ax HE80 SU	81.554	82.786
802.11ax HE160 SU	163.800	164.220
802.11a20	19.674	22.350
802.11a40	41.370	75.558
802.11a80	87.186	114.192
802.11a160	163.128	163.254

Table 1275 - 26 dB Bandwidth Summary Results - MIMO CDD

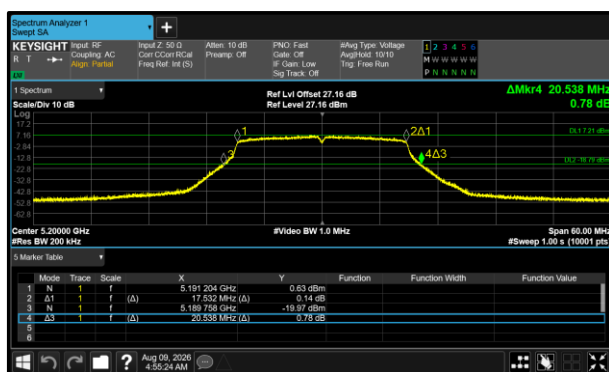


Figure 500 - 802.11n HT20 Minimum 26 dB EBW

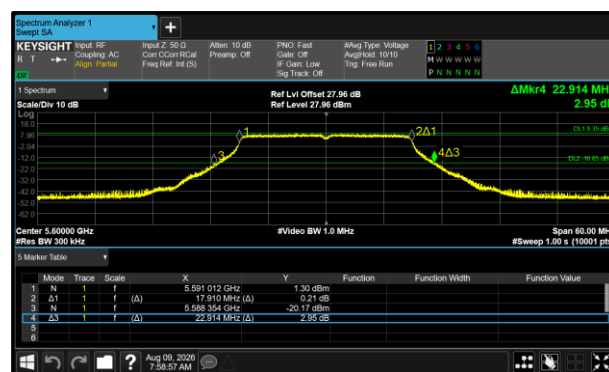


Figure 501 - 802.11n HT20 Maximum 26 dB EBW

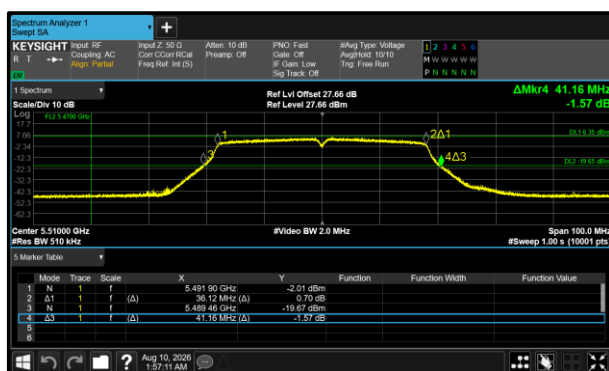


Figure 502 - 802.11n HT40 Minimum 26 dB EBW

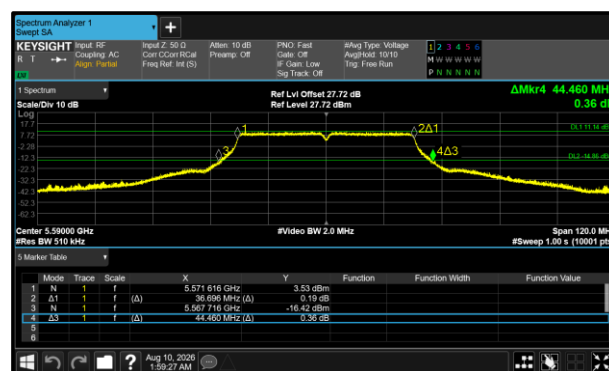


Figure 503 - 802.11n HT40 Maximum 26 dB EBW

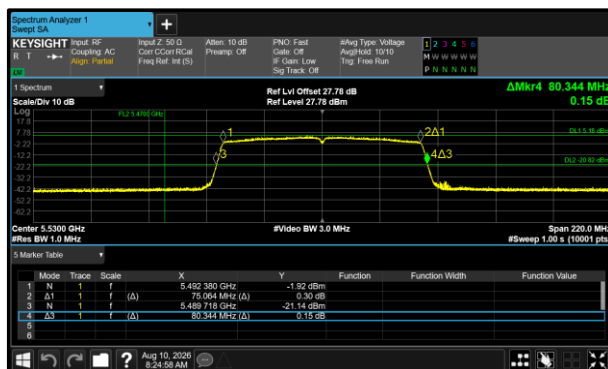


Figure 504 - 802.11ac VHT80 Minimum 26 dB
EBW

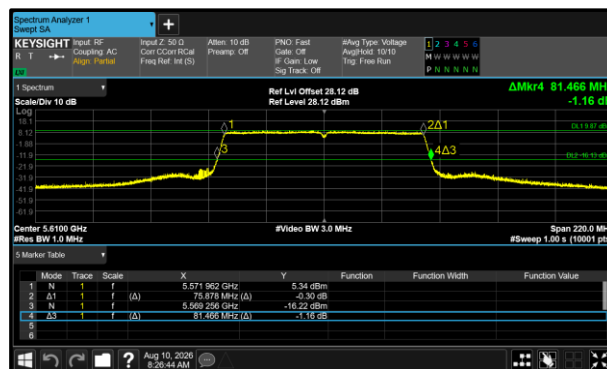


Figure 505 - 802.11ac VHT80 Maximum 26 dB
EBW

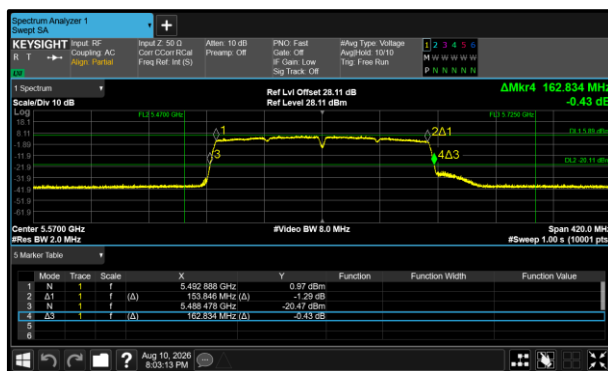


Figure 506 - 802.11ac VHT160 Minimum 26 dB
EBW

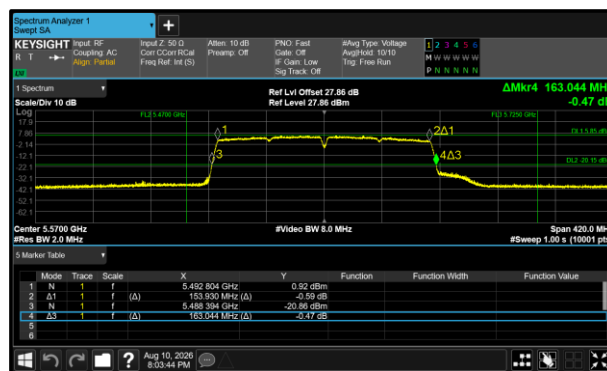


Figure 507 - 802.11ac VHT160 Maximum 26 dB
EBW

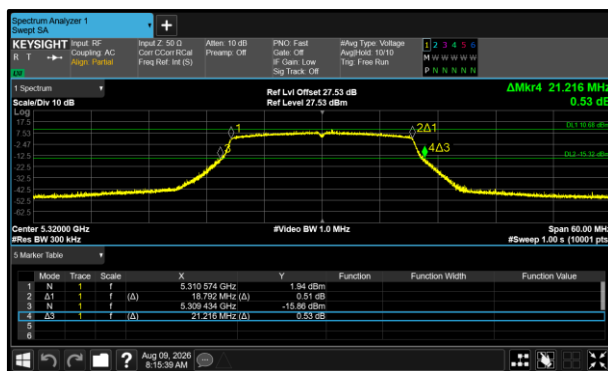


Figure 508 - 802.11ax HE20 SU Minimum 26 dB
EBW

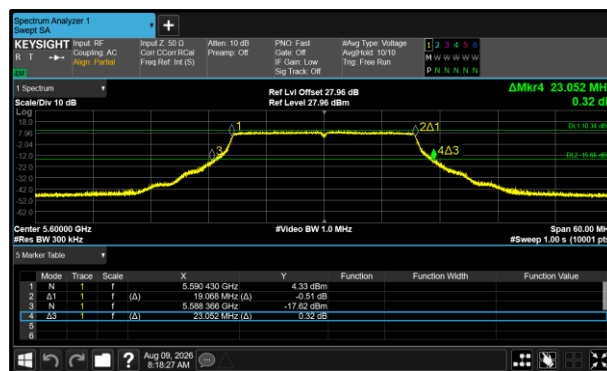


Figure 509 - 802.11ax HE20 SU Maximum 26 dB
EBW

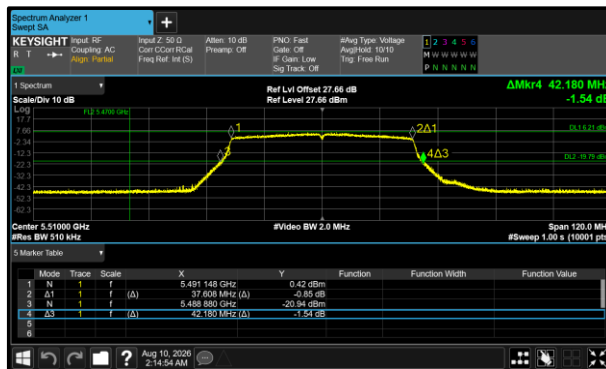


Figure 510 - 802.11ax HE40 SU Minimum 26 dB
EBW

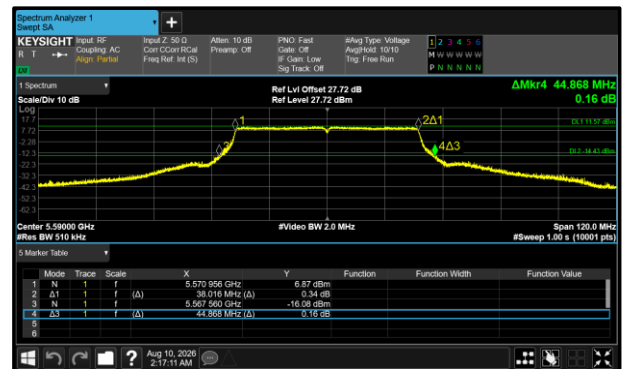


Figure 511 - 802.11ax HE40 SU Maximum 26 dB
EBW

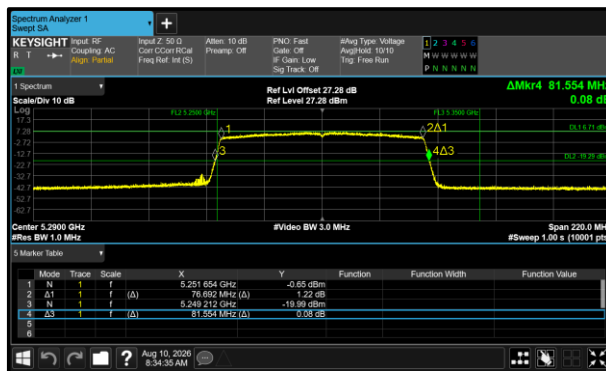


Figure 512 - 802.11ax HE80 SU Minimum 26 dB
EBW

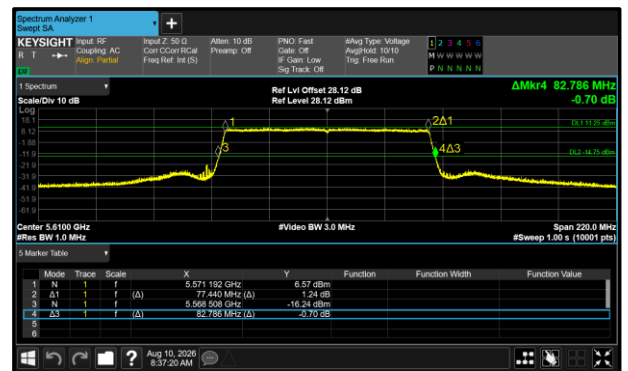


Figure 513 - 802.11ax HE80 SU Maximum 26 dB
EBW

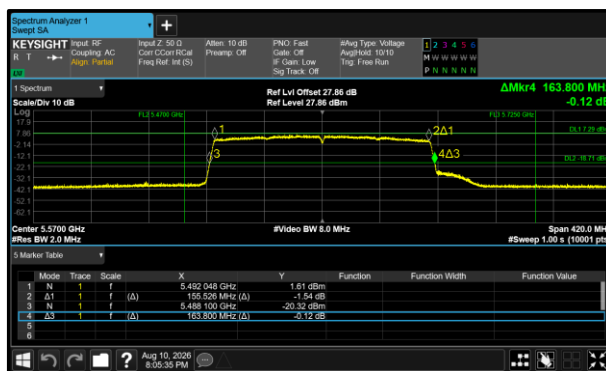


Figure 514 - 802.11ax HE160 SU Minimum 26 dB
EBW

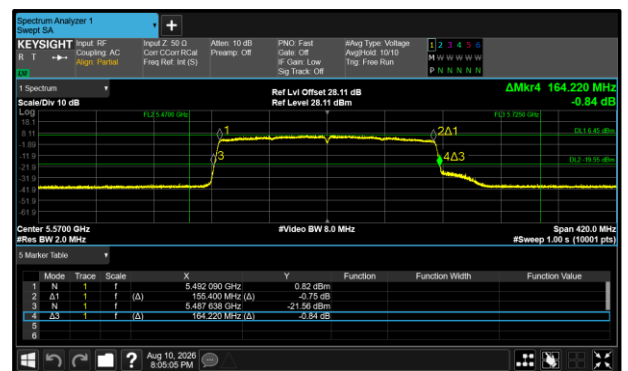
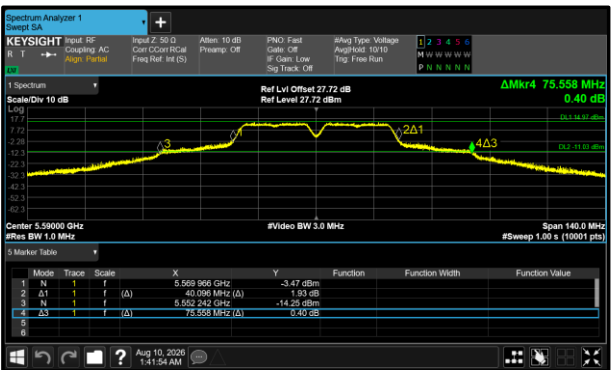
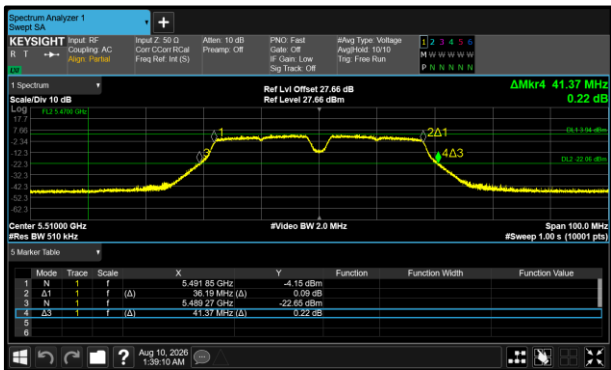
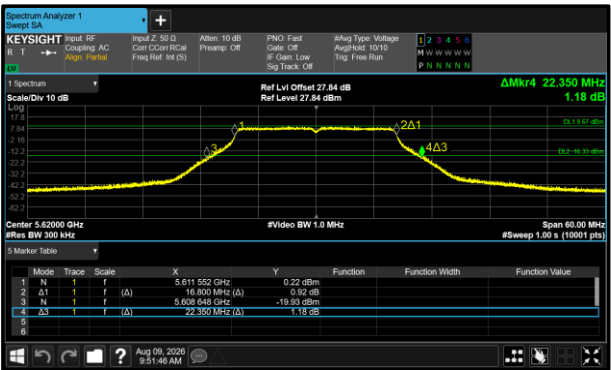
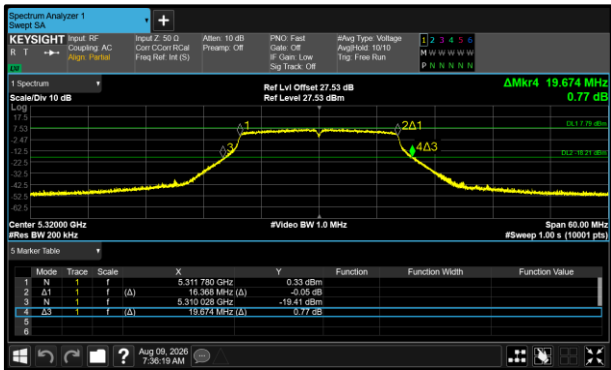


Figure 515 - 802.11ax HE160 SU Maximum 26 dB
EBW



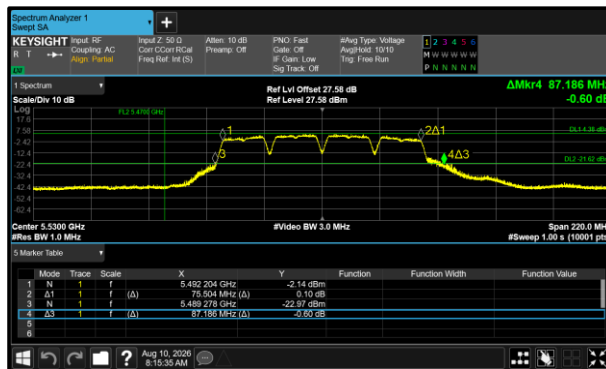


Figure 520 - 802.11a80 Minimum 26 dB EBW

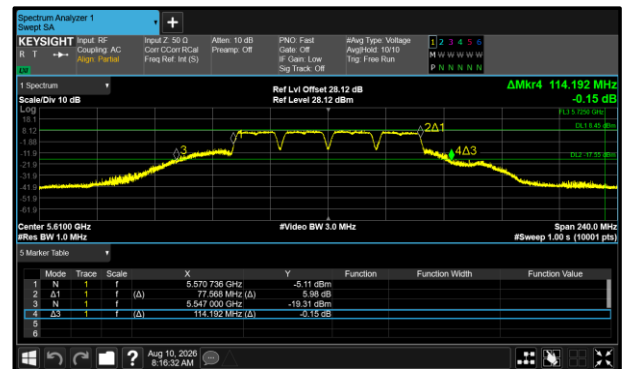


Figure 521 - 802.11a80 Maximum 26 dB EBW

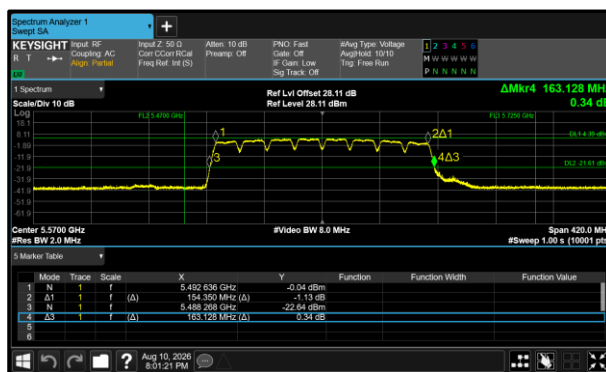


Figure 522 - 802.11a160 Minimum 26 dB EBW

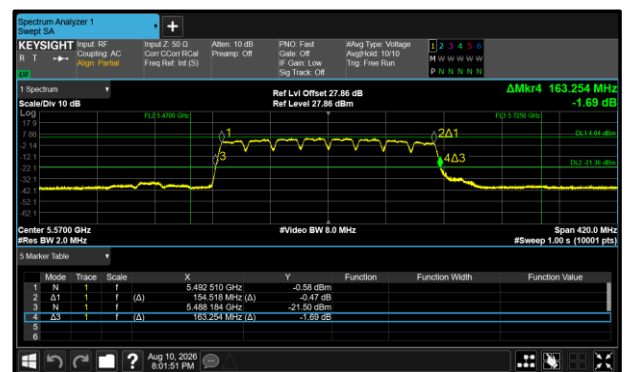


Figure 523 - 802.11a160 Maximum 26 dB EBW