


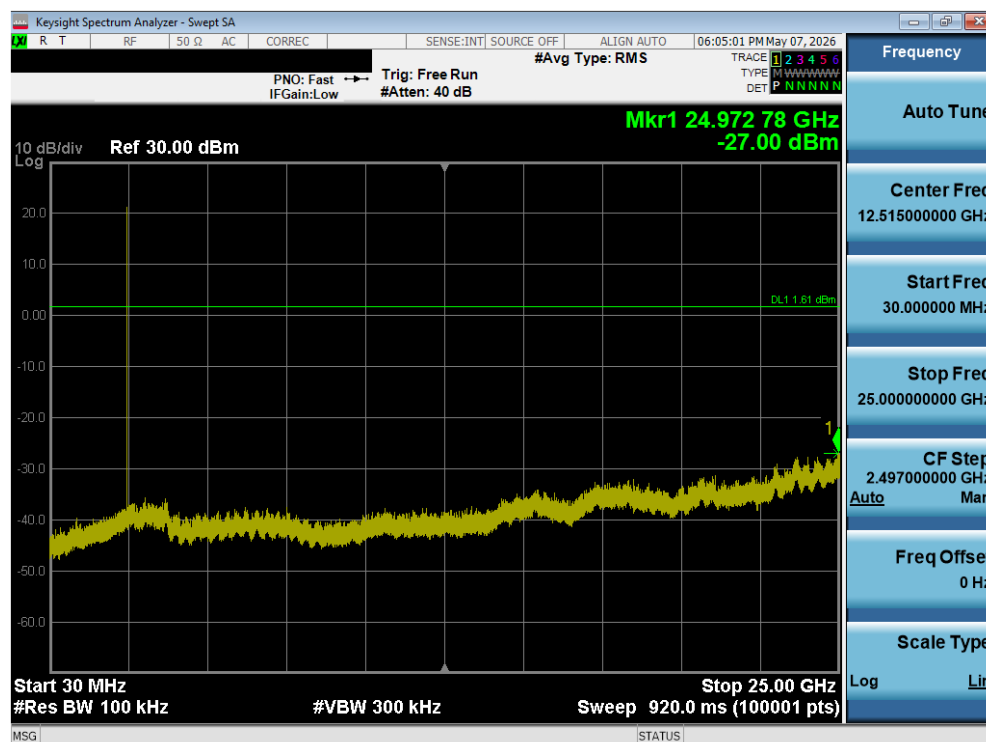

Plot 7-58. Conducted Spurious Plot Antenna WF7 (Bluetooth, GFSK, ePA – Ch. 78)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 63 of 98

V 12.0 03/03/2026

7.9 Simultaneous Tx

Description	Bluetooth	UNII
Antenna	Antenna WF8	Antenna WF8
Channel	78	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11be(SU)

Table 7-12. Worst Case Simultaneous Transmission Configuration

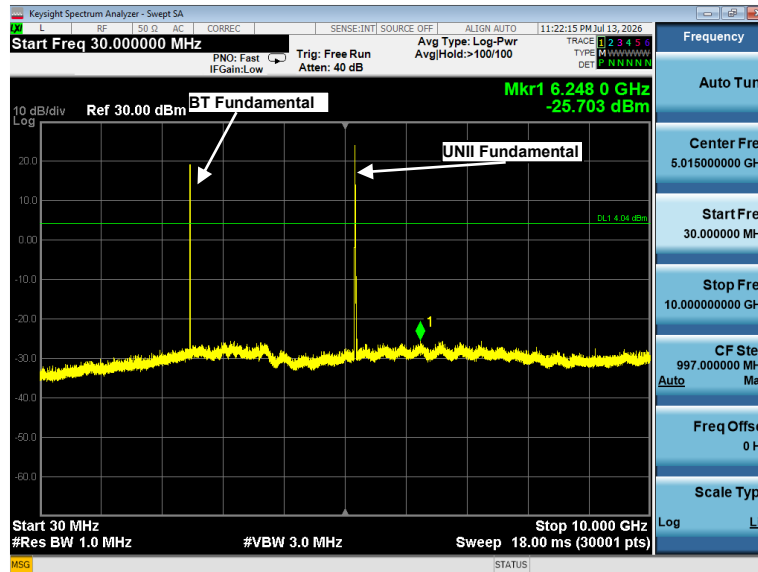

Plot 7-59. Conducted Simultaneous Tx Spurious Plot Antenna WF8 (Bluetooth + UNII)



Plot 7-60. Conducted Simultaneous Tx Spurious Plot Antenna WF8 (Bluetooth + UNII)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 64 of 98

7.10 Radiated Spurious Emissions – Above 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-13 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-13. Radiated Limits

Test Procedure Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 – Section 6.6.4.3

Test Settings

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 65 of 98

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

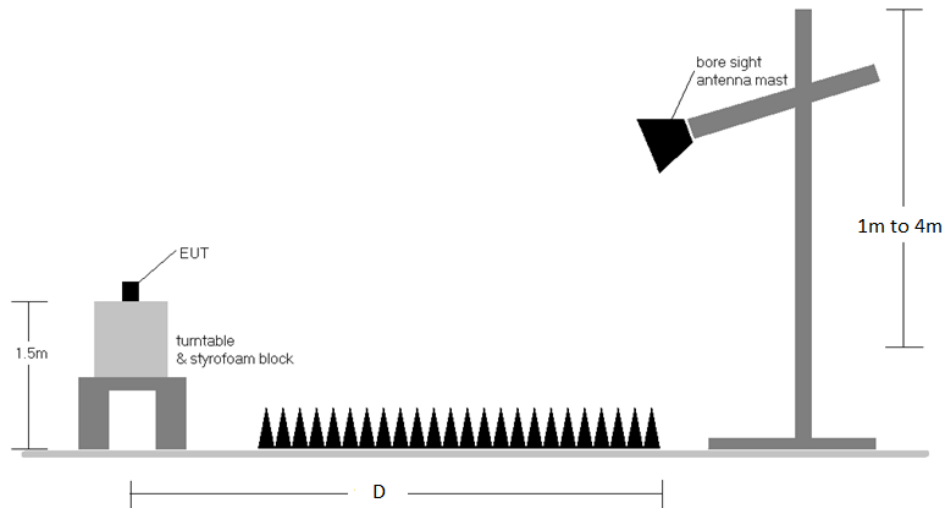


Figure 7-8. Radiated Test Setup >1 GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-13.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9 kHz to the 10th harmonic and the worst-case emissions are reported.
5. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20 dB of the limit are fully investigated and the results are shown in this section.
6. D is the measurement test distance and emissions 1-18 GHz were measured at a 3 meters test distance while emissions Above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
9. Average emissions were not reported since the duty cycle correction factor was greater than 20 dB.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 66 of 98

Sample Calculation

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.10.5 to 7.10.7 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Duty Cycle Correction Factor Calculation

- Channel hop rate = 800 hops/second (AFH Mode)
- Adjusted channel hop rate for DH5 mode = 133.33 hops/second
- Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels = $7.50 \times 20 \text{ channels} = 150 \text{ ms}$
- Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
- Worst case dwell time = 7.5 ms


$$\text{Duty cycle correction factor} = 20\log_{10}(7.5\text{ms}/100\text{ms}) = -22.5 \text{ dB}$$

Average Emission Calculation

- Average Emission = Measured Peak Emissions $_{[dB\mu V/m]} - \text{Duty Cycle Correction Factor }_{[dB]}$

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 67 of 98

7.10.1 Antenna WF8 Radiated Spurious Emission Measurements (Above 1 GHz)

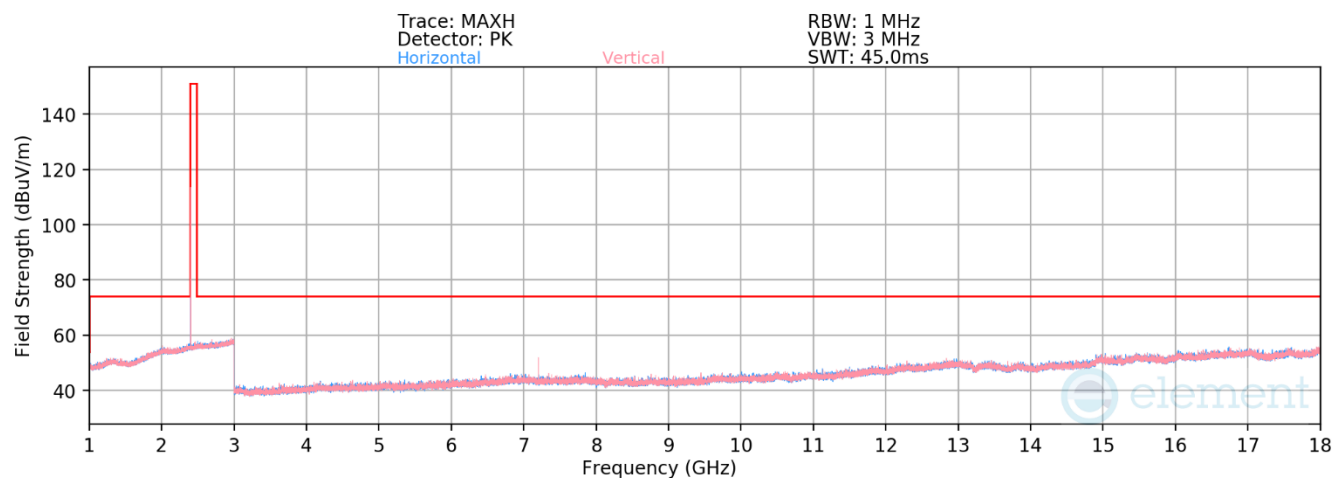


Plot 7-61. Radiated Spurious Emissions Above 1 GHz Antenna WF8 (BTCSM2 ePA – Ch. 0)

Bluetooth Mode:	BTCSM2
Data Rate:	1 Mbps
Power Scheme	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	2402 MHz
Channel:	0


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4804.00	Peak	V	-	-	-78.33	3.60	32.27	73.98	-41.71
12010.00	Peak	V	-	-	-69.35	11.46	49.11	73.98	-24.87

Table 7-14. Radiated Measurements Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 68 of 98

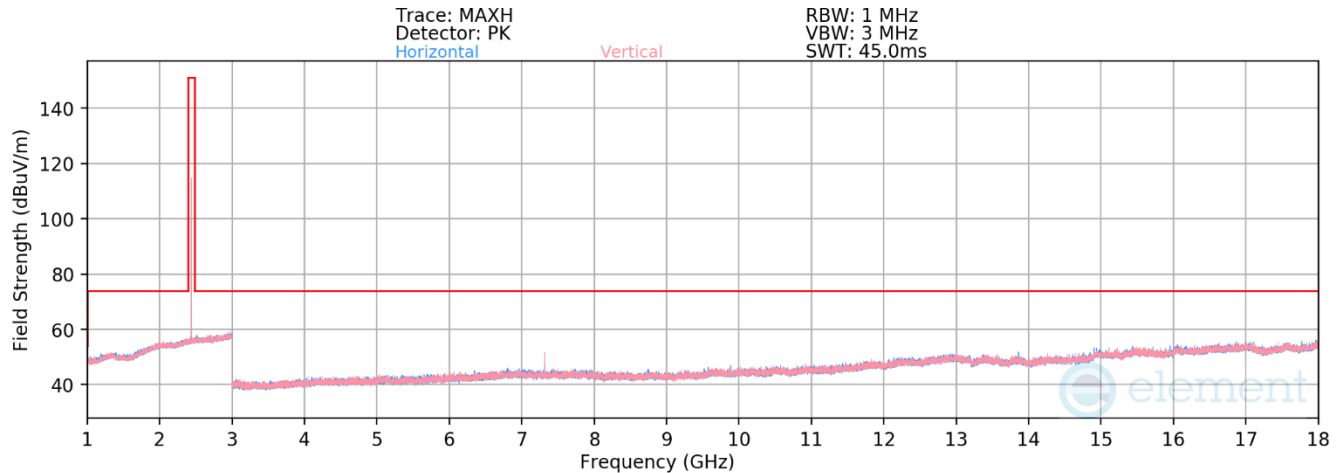

Plot 7-62. Radiated Spurious Emissions Above 1 GHz Antenna WF8 (BTCSM2 ePA – Ch. 38)

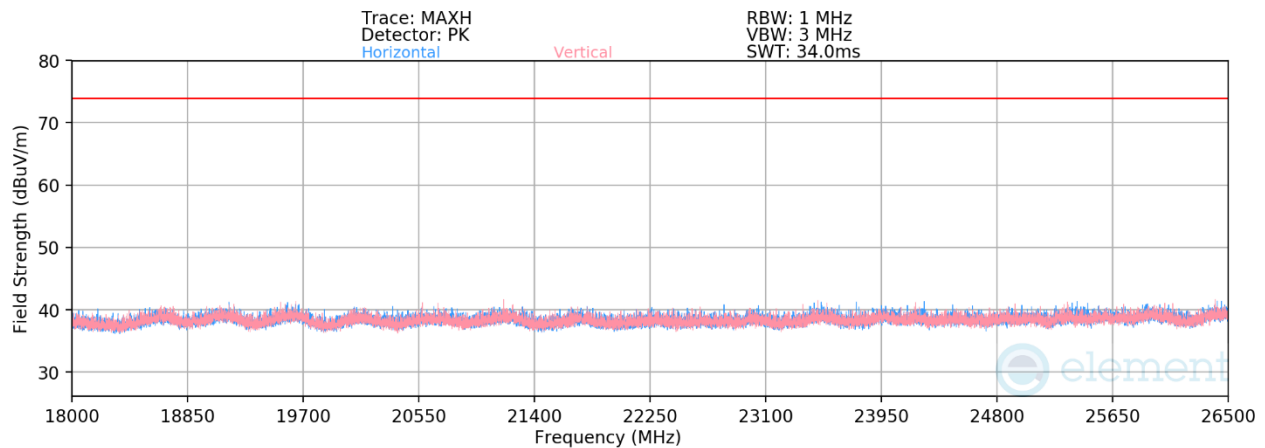


Plot 7-63. Radiated Spurious Emissions Above 18 GHz Antenna WF8 (BTCSM2 ePA – Ch. 38)

Bluetooth Mode:	BTCSM2
Data Rate:	1 Mbps
Power Scheme	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	2441 MHz
Channel:	38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4882.00	Peak	V	-	-	-78.26	3.25	0.00	31.99	73.98	-41.99
7323.00	Peak	V	193	217	-60.28	5.94	0.00	52.67	73.98	-21.31
12205.00	Peak	H	-	-	-69.78	11.92	0.00	49.15	73.98	-24.83
19528.00	Peak	V	-	-	-48.85	-7.97	-9.54	40.64	73.98	-33.34

Table 7-15. Radiated Measurements Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 69 of 98

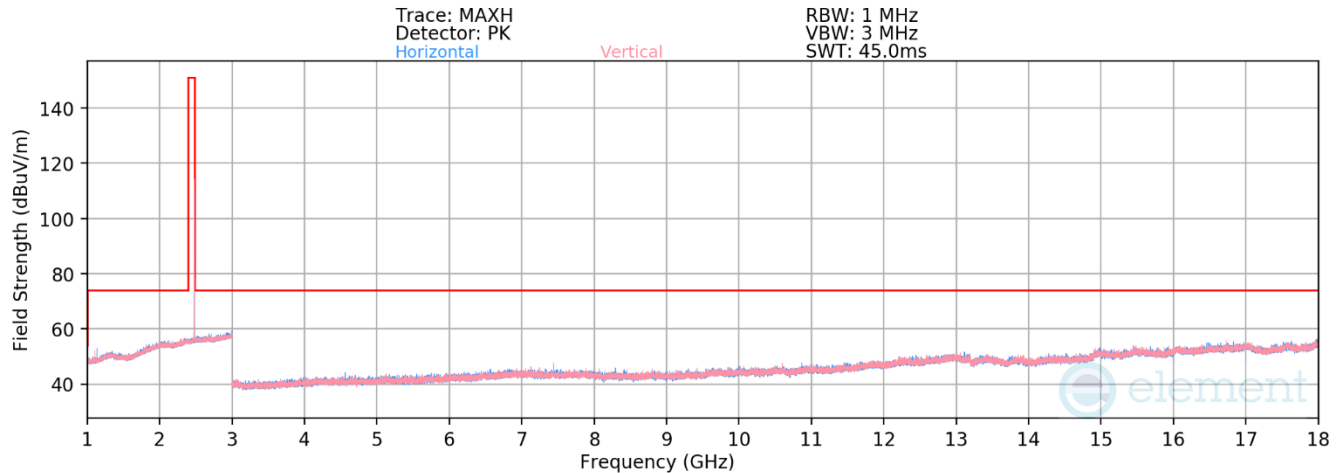

Plot 7-64. Radiated Spurious Emissions Above 1 GHz Antenna WF8 (BTCM2 ePA – Ch. 78)


Bluetooth Mode: BTCM2
Data Rate: 1 Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2480 MHz
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4960.00	Peak	H	-	-	-78.63	3.38	31.75	73.98	-42.23
7440.00	Peak	H	131	214	-63.06	6.67	50.61	73.98	-23.37
12400.00	Peak	H	-	-	-81.06	11.79	37.73	73.98	-36.25

Table 7-16. Radiated Measurements Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 70 of 98

7.10.2 Antenna WF7 Radiated Spurious Emission Measurements (Above 1 GHz)

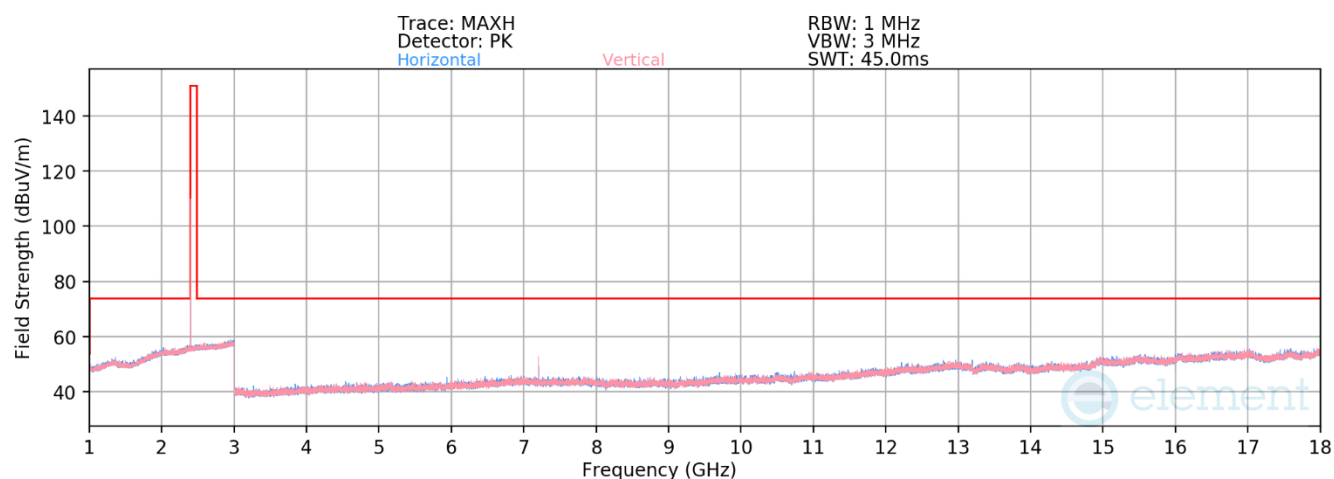

Plot 7-65. Radiated Spurious Emissions Above 1 GHz Antenna WF7 (BTCSM2 ePA – Ch. 0)


Bluetooth Mode: BTCSM2
Data Rate: 1 Mbps
Power Scheme ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2402 MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4804.00	Peak	V	305	220	-64.41	3.18	45.77	73.98	-28.21
12010.00	Peak	V	-	-	-69.85	11.50	48.65	73.98	-25.33


Table 7-17. Radiated Measurements Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 71 of 98

V 12.0 03/03/2026

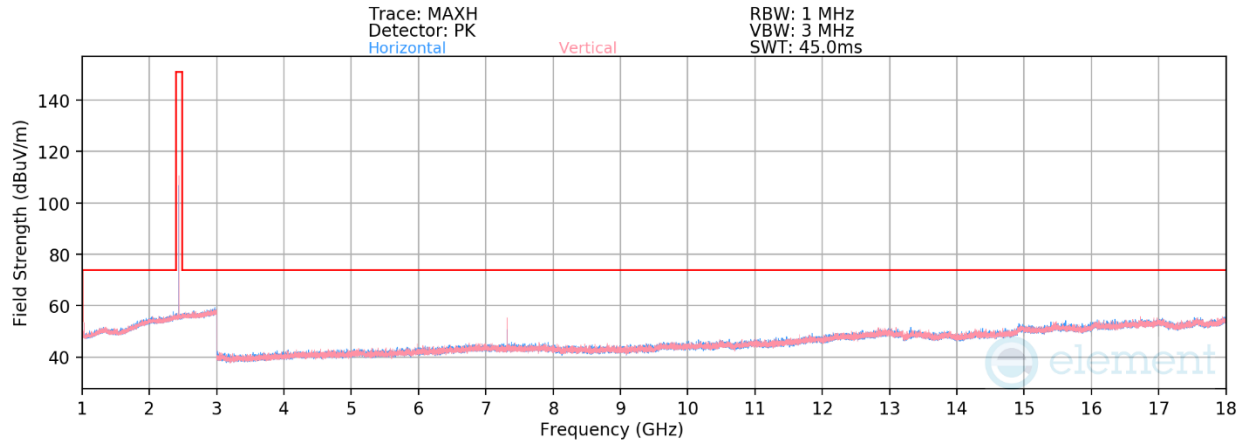

Plot 7-66. Radiated Spurious Emissions Above 1 GHz Antenna WF7 (BTCSCM2 ePA – Ch. 38)

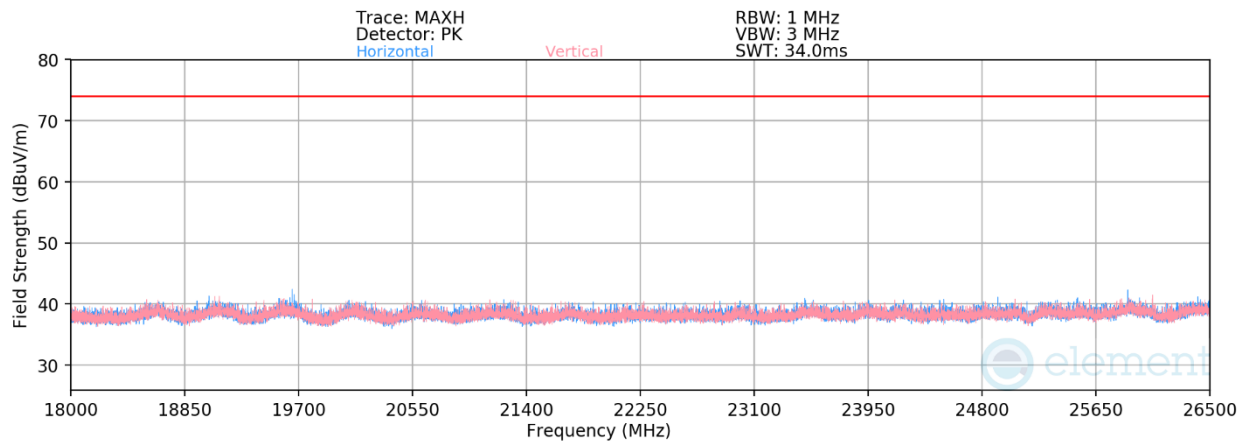

Plot 7-67. Radiated Spurious Emissions Above 18 GHz Antenna WF7 (BTCSCM2 ePA – Ch. 38)

Bluetooth Mode: BTCSCM2

Data Rate: 1 Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 2440 MHz

Channel: 38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4882.00	Peak	V	304	183	-64.41	3.25	0.00	45.85	73.98	-28.13
7323.00	Peak	V	339	250	-53.76	5.94	0.00	59.18	73.98	-14.80
12205.00	Peak	V	-	-	-81.70	11.92	0.00	37.23	73.98	-36.75
19528.00	Peak	V	-	-	-69.60	11.92	-9.54	39.79	73.98	-34.19

Table 7-18. Radiated Measurements Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 72 of 98

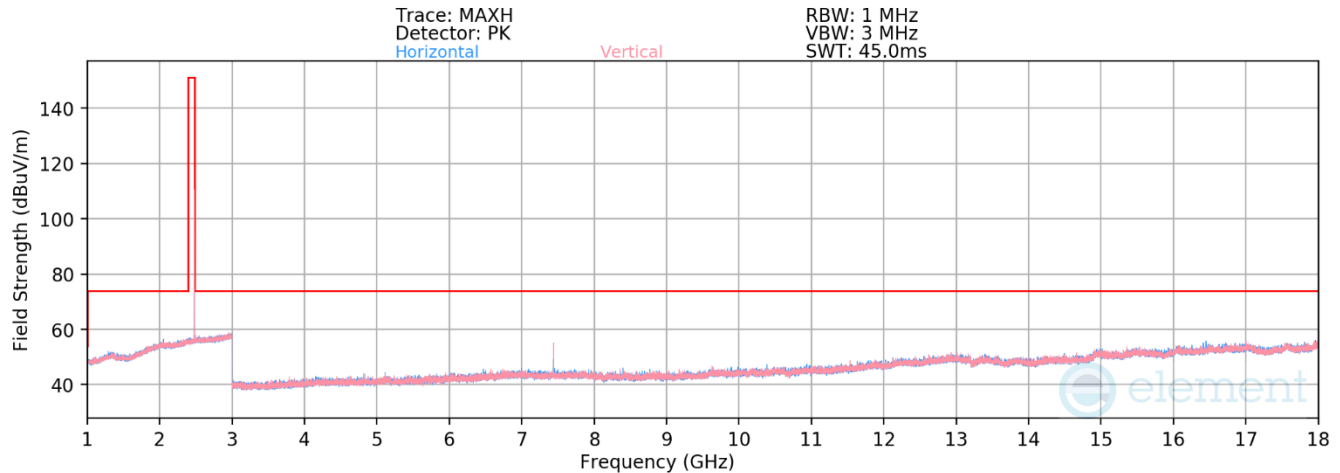

Plot 7-68. Radiated Spurious Emissions Above 1 GHz Antenna WF7 (BT BTCSM2 ePA – Ch. 78)


Bluetooth Mode: BTCSM2
Data Rate: 1 Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2480 MHz
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	V	310	178	-64.51	3.35	45.84	73.98	-28.14
7440.00	Peak	V	294	266	-56.17	6.67	57.50	73.98	-16.48
12400.00	Peak	H	-	-	-81.25	11.79	37.54	73.98	-36.44

Table 7-19. Radiated Measurements Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 73 of 98

7.10.3 TxBF Radiated Spurious Emission Measurements (Above 1 GHz)

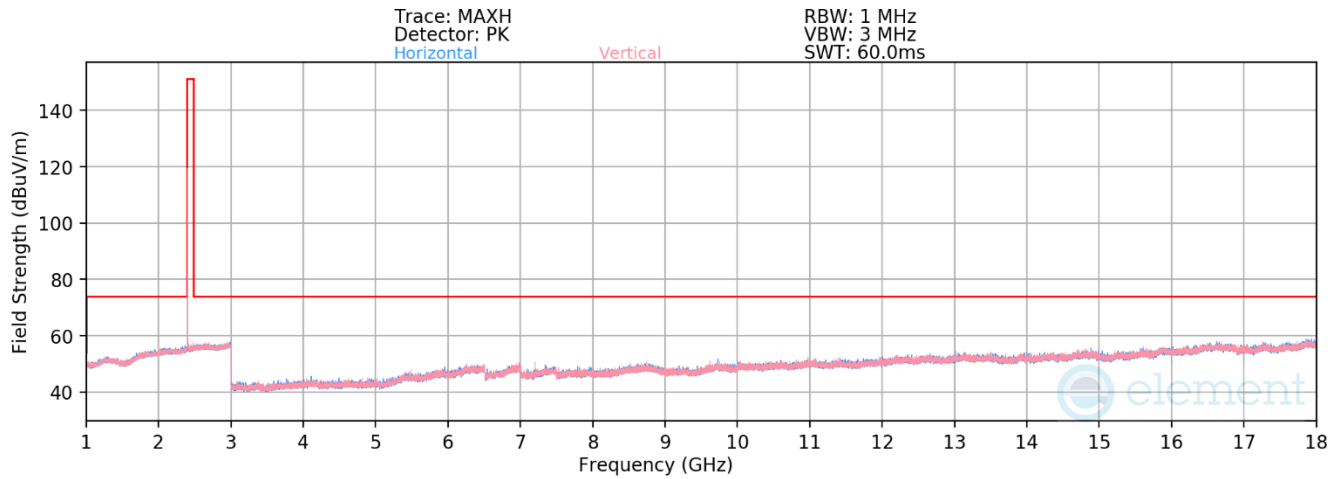


Plot 7-69. Radiated Spurious Emissions Above 1 GHz TxBF (BT GFSK ePA – Ch. 0)

Bluetooth Mode: GFSK
Data Rate: 1 Mbps
Power Scheme ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2402 MHz
Channel: 0


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4804.00	Peak	H	-	-	-66.81	5.15	45.34	73.98	-28.64
12010.00	Peak	H	-	-	-69.59	14.75	52.16	73.98	-21.82

Table 7-20. Radiated Measurements TxBF

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 74 of 98

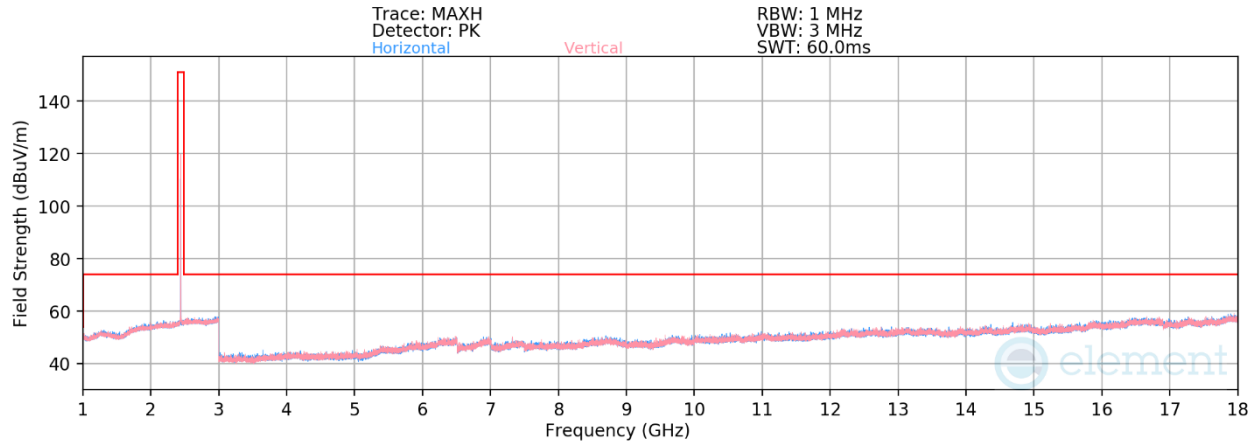

Plot 7-70. Radiated Spurious Emissions Above 1 GHz Tx BF (BT GFSK ePA – Ch. 39)

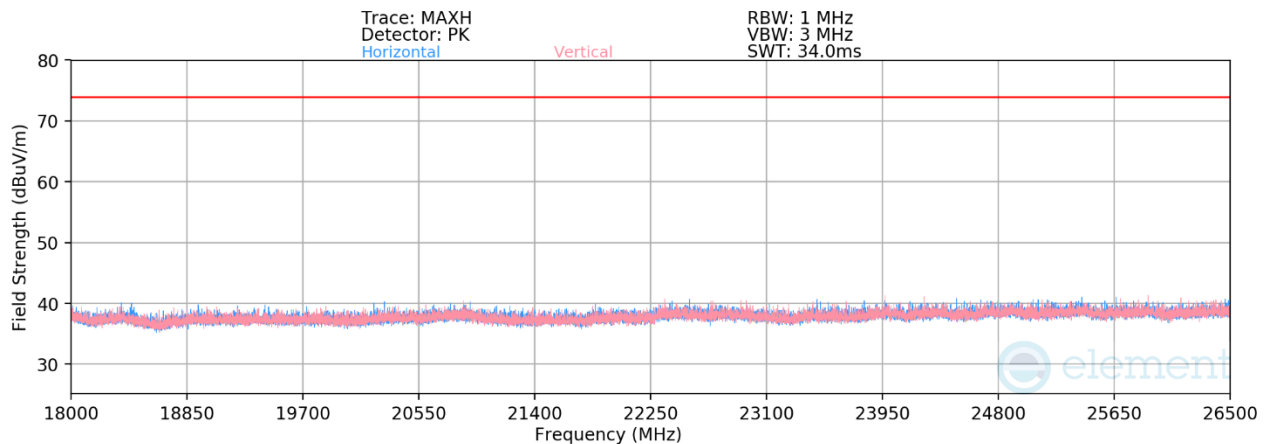


Plot 7-71. Radiated Spurious Emissions Above 18 GHz Tx BF (BT GFSK ePA – Ch. 39)

Bluetooth Mode:	<u>GFSK</u>
Data Rate:	<u>1 Mbps</u>
Power Scheme	<u>ePA</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>2441 MHz</u>
Channel:	<u>39</u>

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4880.00	Peak	V	214	154	-67.02	5.40	0.00	45.38	73.98	-28.60
7320.00	Peak	V	156	197	-64.45	10.20	0.00	52.75	73.98	-21.23
12200.00	Peak	V	-	-	-69.05	15.70	0.00	53.65	73.98	-20.33
19528.00	Peak	V	-	-	-51.56	-6.07	-9.54	39.83	73.98	-34.15

Table 7-21. Radiated Measurements Tx BF

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 75 of 98

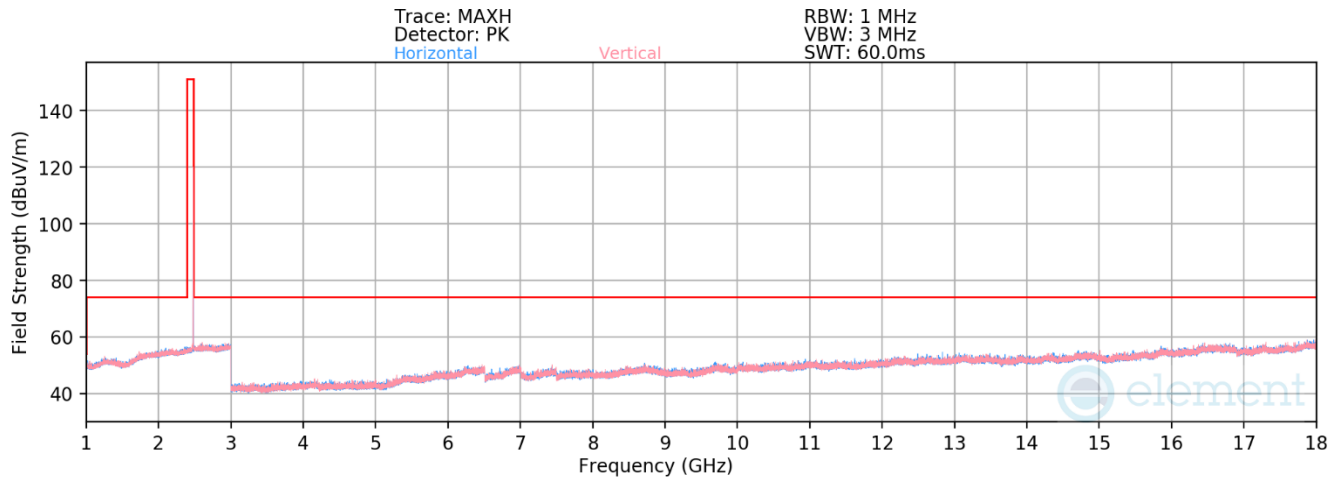

Plot 7-72. Radiated Spurious Emissions Above 1 GHz TxBF (BT GFSK ePA – Ch. 78)

Bluetooth Mode: GFSK
Data Rate: 1 Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2480 MHz
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4960.00	Peak	V	-	-	-68.45	5.71	44.26	73.98	-29.72
7440.00	Peak	V	249	183	-64.87	10.24	52.37	73.98	-21.61
12400.00	Peak	V	-	-	-68.87	15.25	53.38	73.98	-20.60


Table 7-22. Radiated Measurements TxBF

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 76 of 98


7.10.4 Simultaneous Tx Radiated Spurious Emission (Above 1 GHz)

Description	Bluetooth	UNII
Antenna	Antenna WF8	Antenna WF8
Channel	78	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11be(SU)

Table 7-23. Worst Case Simultaneous Transmission Configuration

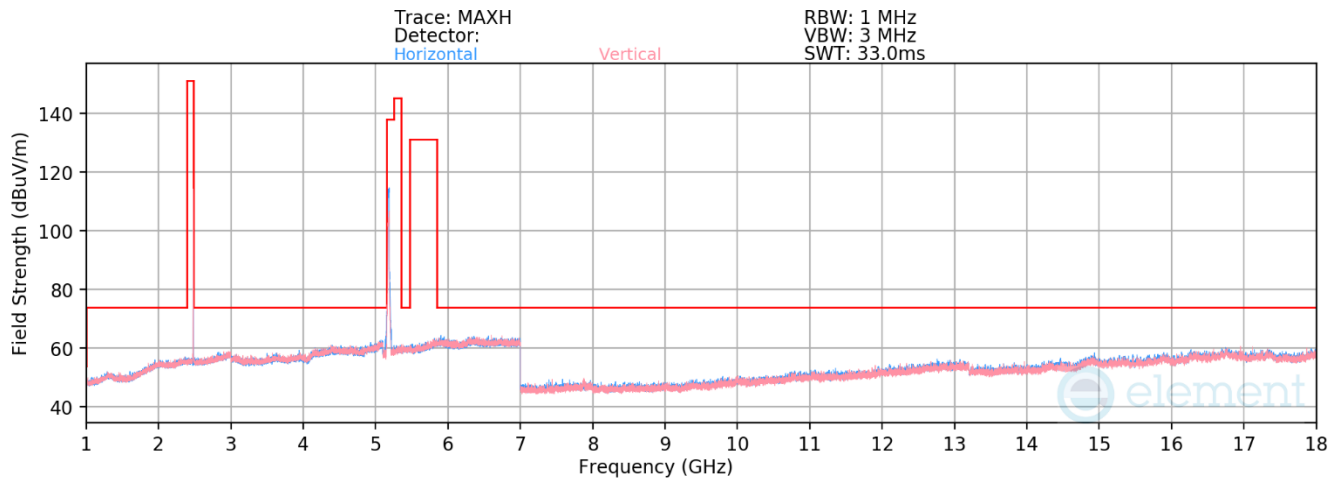

Plot 7-73. Radiated Spurious Emissions Above 1 GHz – Simultaneous Transmission

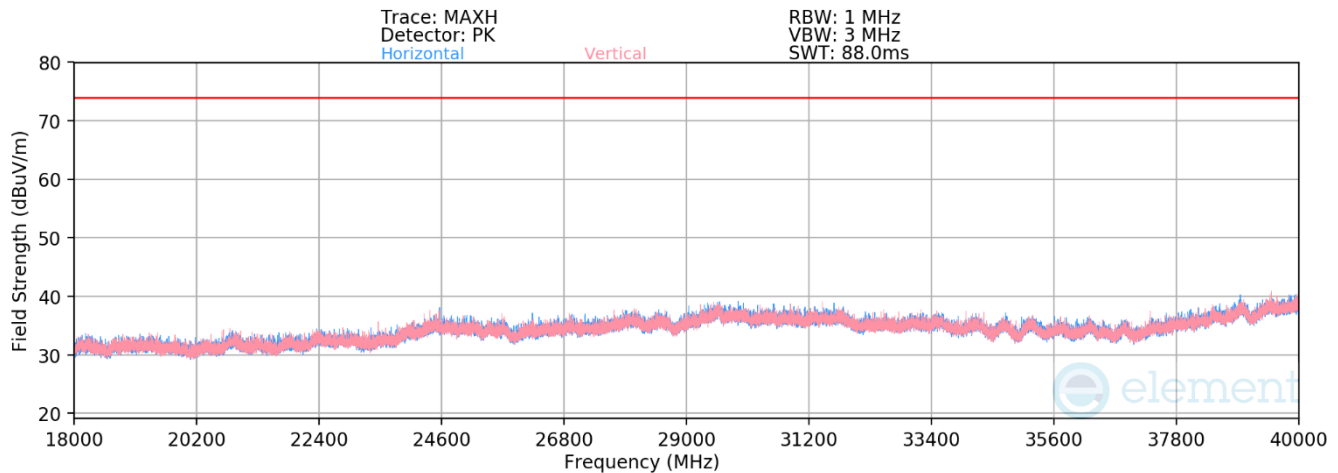

Plot 7-74. Radiated Spurious Emissions Above 18 GHz – Simultaneous Transmission

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 77 of 98

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	-	-	-	-71.84	17.36	0.00	52.52	73.98	-21.46
7440.00	Peak	V	118	178	-69.50	11.58	0.00	49.08	73.98	-24.90
12400.00	Peak	-	-	-	-75.25	18.99	0.00	50.74	73.98	-23.24
19840.00	Peak	-	-	-	-51.97	-6.04	-9.54	39.45	73.98	-34.53

Table 7-24. Bluetooth Harmonics Emissions Measurement - Simultaneous Transmission


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	-	-	-	-73.69	15.20	0.00	48.51	68.23	-19.72
* 15540.00	Avg	-	-	-	-85.60	23.09	0.00	44.49	53.98	-9.49
* 15540.00	Peak	-	-	-	-75.26	23.09	0.00	54.83	73.98	-19.15
* 20720.00	Avg	-	-	-	-63.48	-5.88	-9.54	28.10	53.98	-25.88
* 20720.00	Peak	-	-	-	-51.90	-5.88	-9.54	39.68	73.98	-34.30

Table 7-25. UNII Harmonics Emissions Measurement - Simultaneous Transmission

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 78 of 98


7.10.5 Antenna WF8 Radiated Restricted Band Edge Measurements

Bluetooth Mode:	GFSK
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402 MHz
Channel:	0

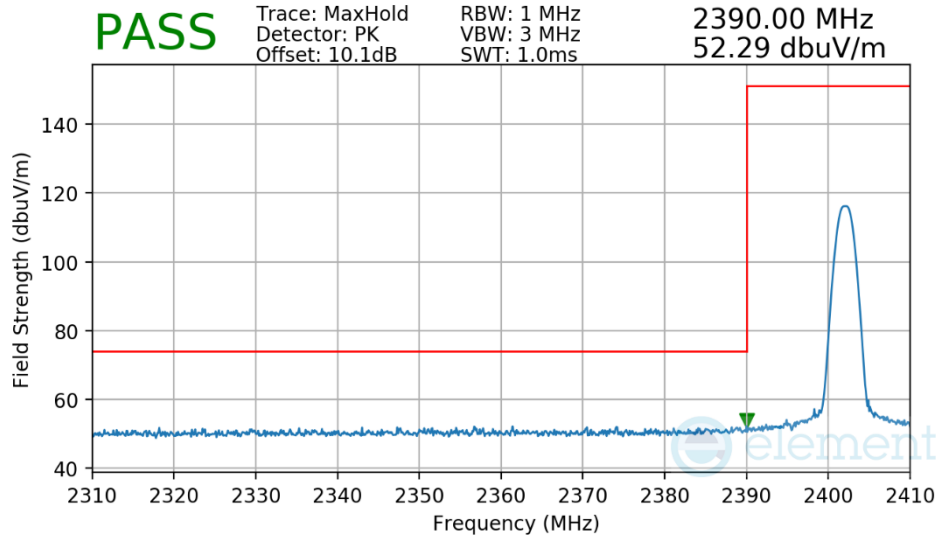

Plot 7-75. Radiated Restricted Lower Band Edge Measurement Antenna WF8


Bluetooth Mode:	8DPSK
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402 MHz
Channel:	0

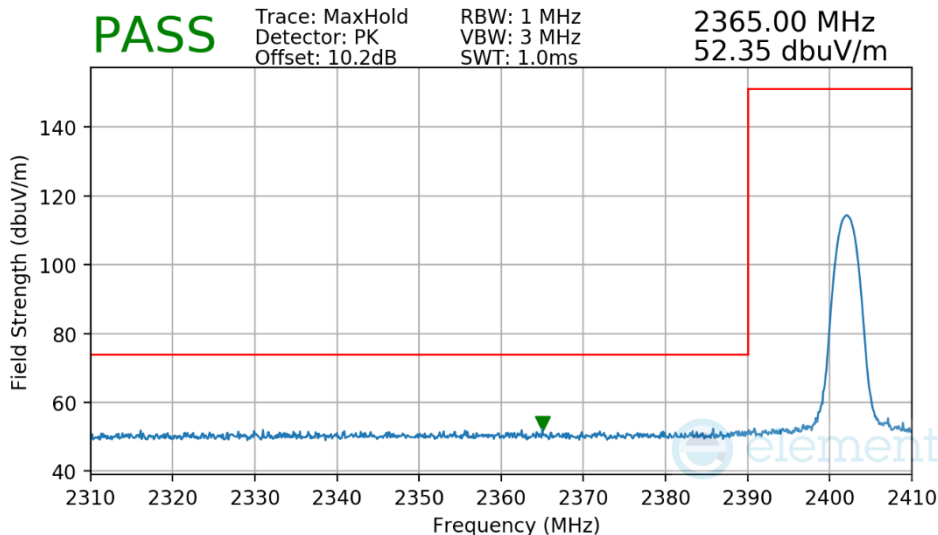

Plot 7-76. Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 79 of 98

Bluetooth Mode:	BTCSM2
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402 MHz
Channel:	0

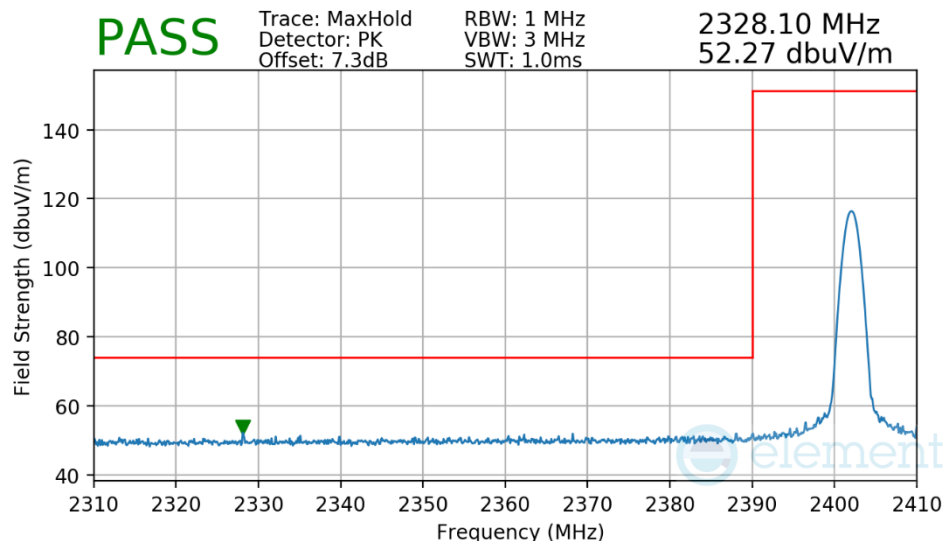


Plot 7-77. Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 80 of 98


V 12.0 03/03/2026

Bluetooth Mode:	GFSK
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480 MHz
Channel:	78

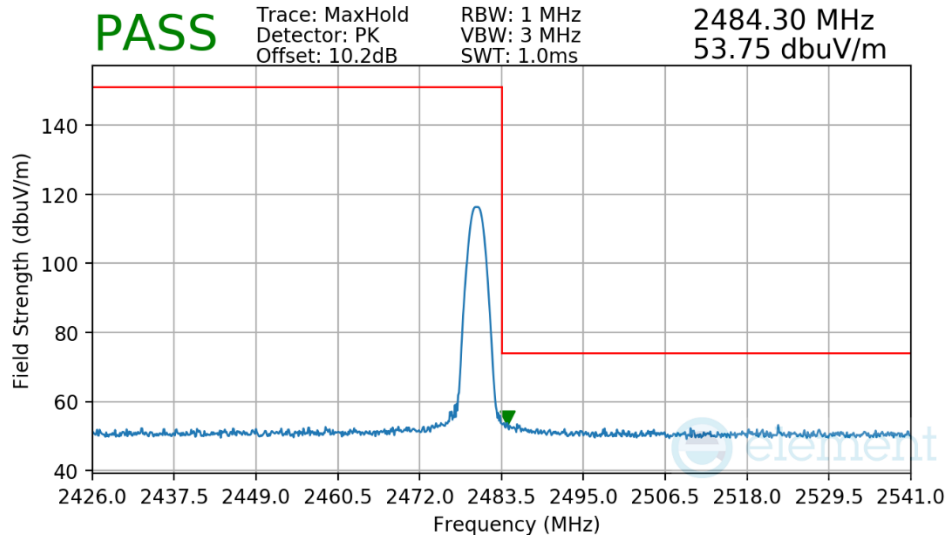

Plot 7-78. Radiated Restricted Upper Band Edge Measurement Antenna WF8


Bluetooth Mode:	8DPSK
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480 MHz
Channel:	78

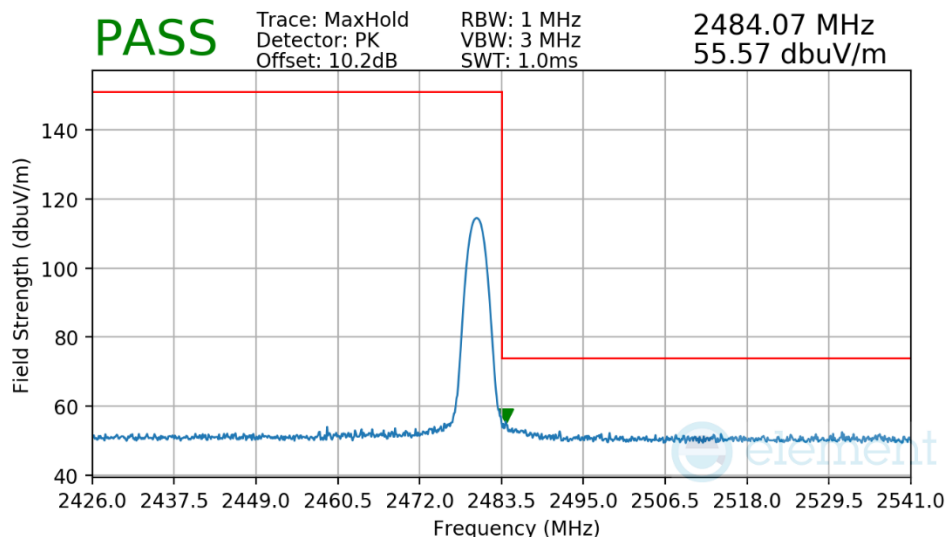

Plot 7-79. Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 81 of 98

Bluetooth Mode:	BTCSM2
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480 MHz
Channel:	78

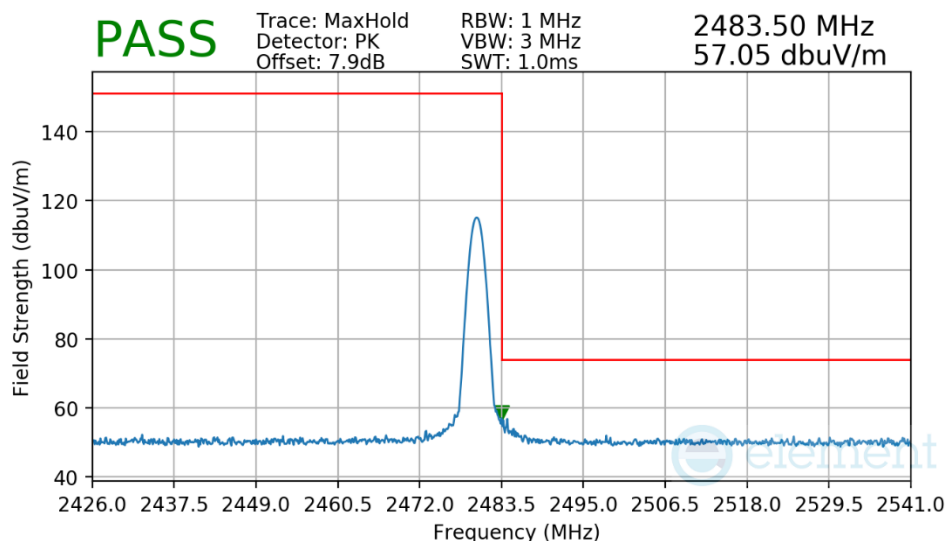


Plot 7-80. Radiated Restricted Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 82 of 98

V 12.0 03/03/2026


7.10.6 Antenna WF7 Radiated Restricted Band Edge Measurements

Bluetooth Mode:	GFSK
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402 MHz
Channel:	0

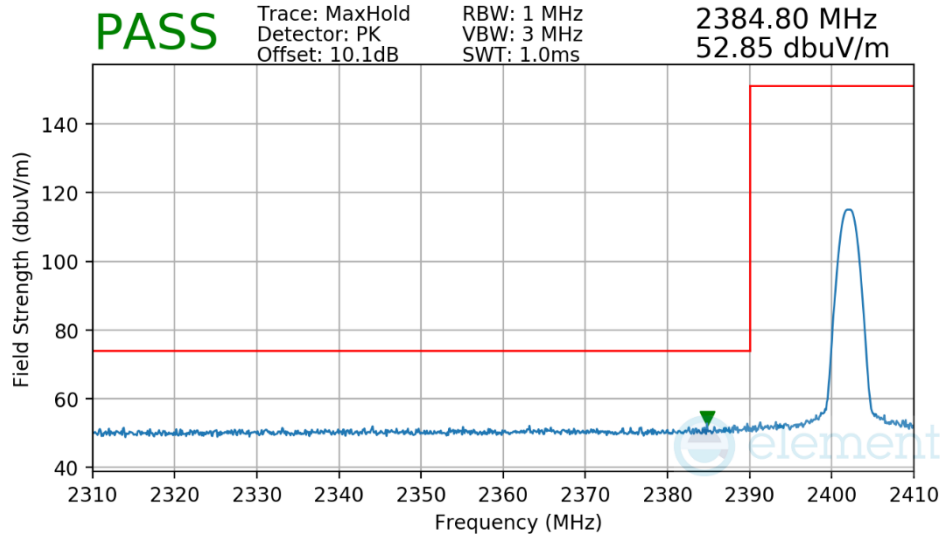

Plot 7-81. Radiated Restricted Lower Band Edge Measurement Antenna WF7


Bluetooth Mode:	8DPSK
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402 MHz
Channel:	0

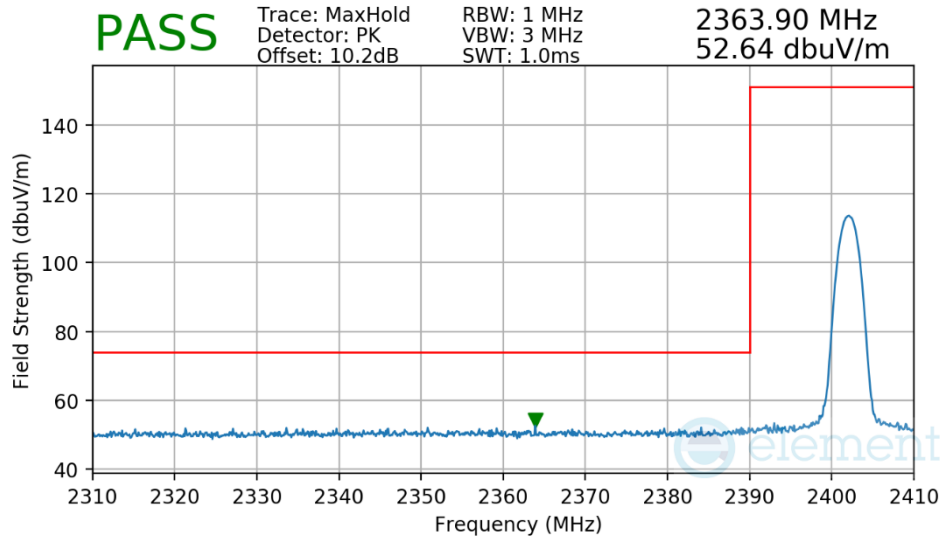

Plot 7-82. Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 83 of 98

Bluetooth Mode:	BTCSM2
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402 MHz
Channel:	0

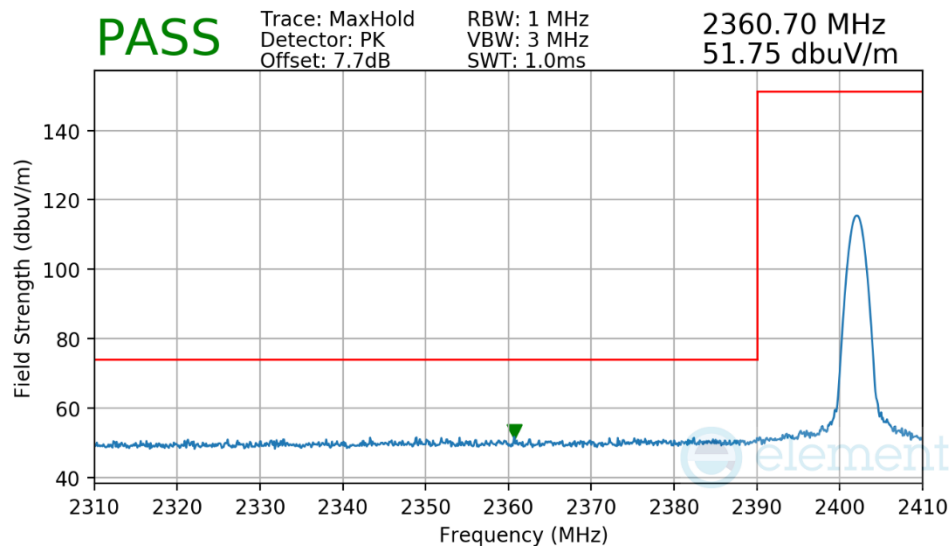


Plot 7-83. Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 84 of 98


V 12.0 03/03/2026

Bluetooth Mode:	GFSK
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480 MHz
Channel:	78

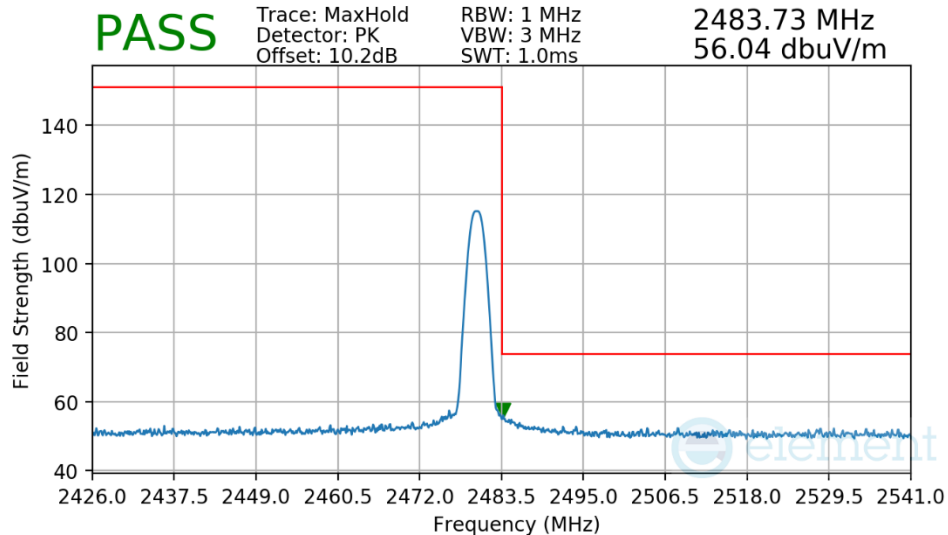

Plot 7-84. Radiated Restricted Upper Band Edge Measurement Antenna WF7


Bluetooth Mode:	8DPSK
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480 MHz
Channel:	78

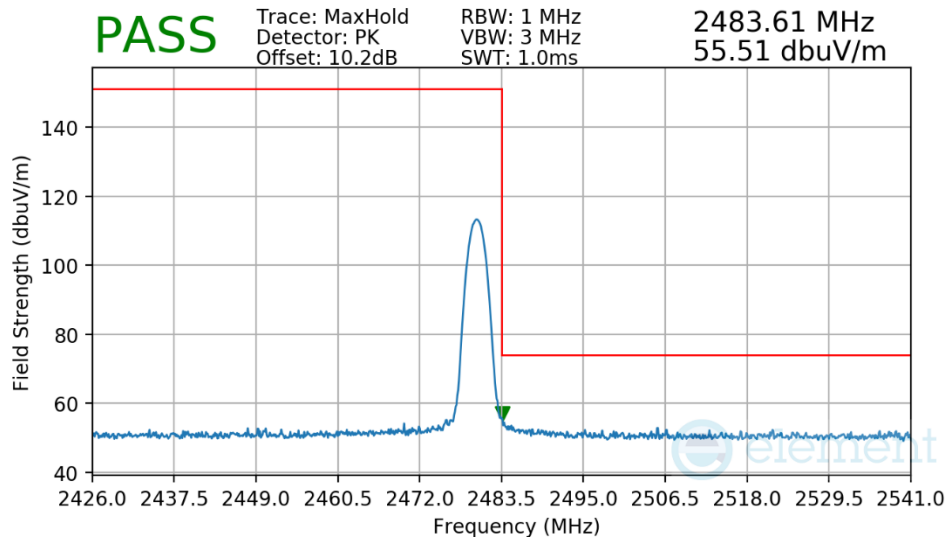

Plot 7-85. Radiated Restricted Upper Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 85 of 98

Bluetooth Mode:	BTCSM2
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480 MHz
Channel:	78

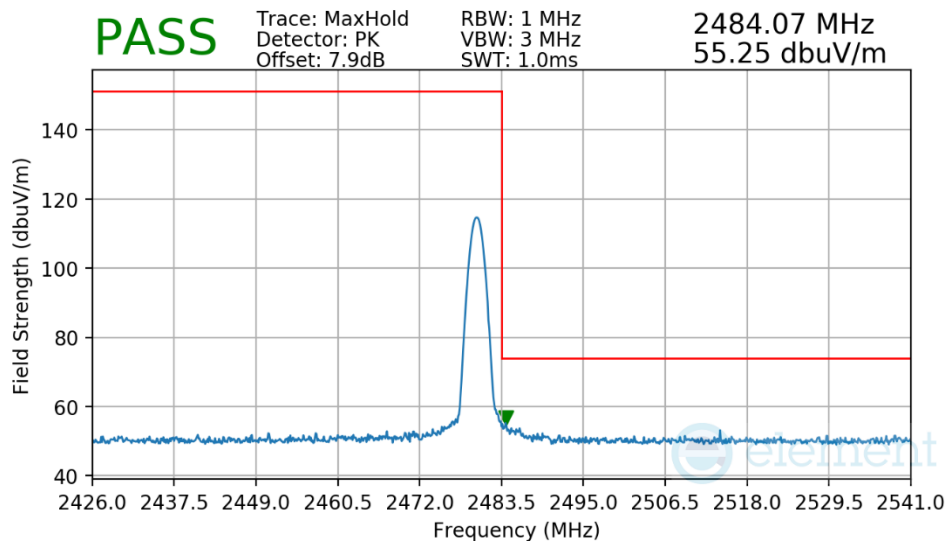


Plot 7-86. Radiated Restricted Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 86 of 98

V 12.0 03/03/2026


7.10.7 TxBF Radiated Restricted Band Edge Measurements

Bluetooth Mode: GFSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402 MHz
 Channel: 0

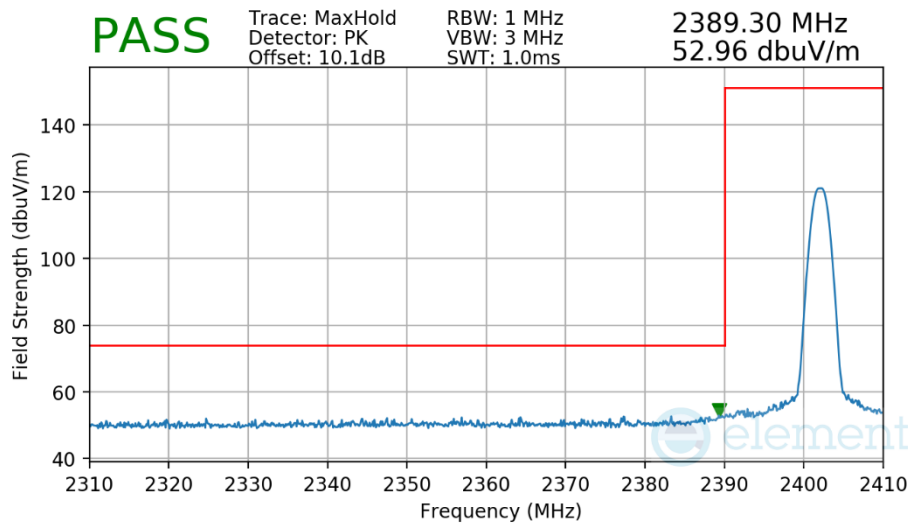

Plot 7-87. Radiated Restricted Lower Band Edge Measurement TxBF


Bluetooth Mode: 8DPSK
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2402 MHz
 Channel: 0

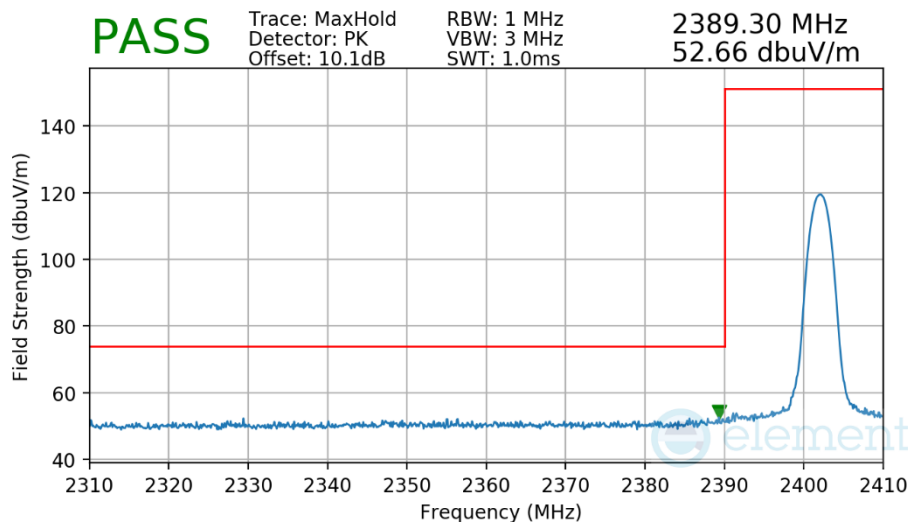

Plot 7-88. Radiated Restricted Lower Band Edge Measurement TxBF


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 87 of 98

Bluetooth Mode: GFSK
Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2480 MHz
Channel: 78

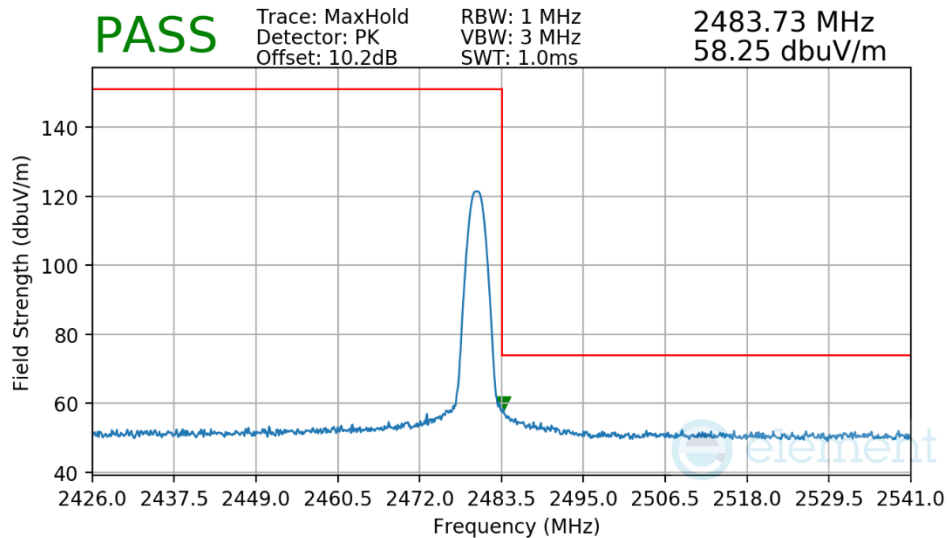

Plot 7-89. Radiated Restricted Upper Band Edge Measurement TxBF

Bluetooth Mode: 8DPSK
Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2480 MHz
Channel: 78

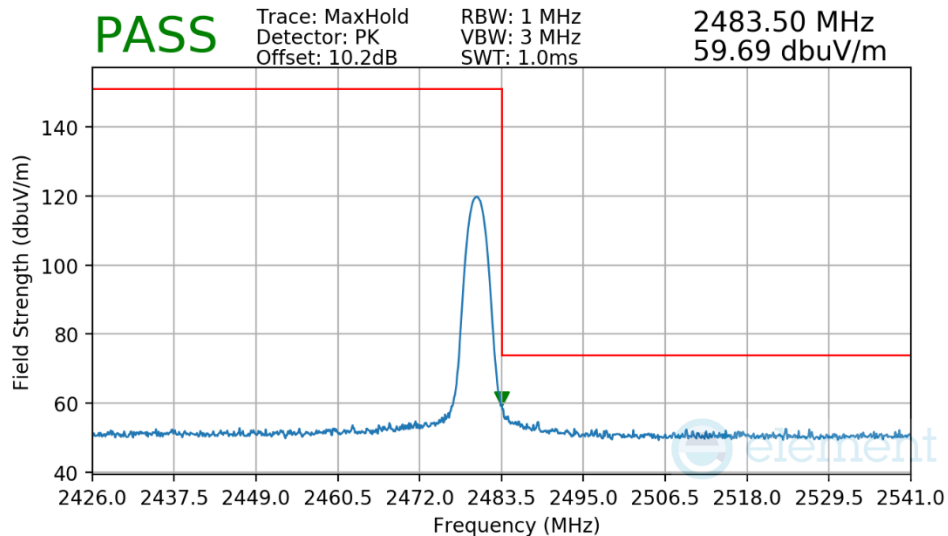

Plot 7-90. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 88 of 98

7.11 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-26 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-26. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 89 of 98

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

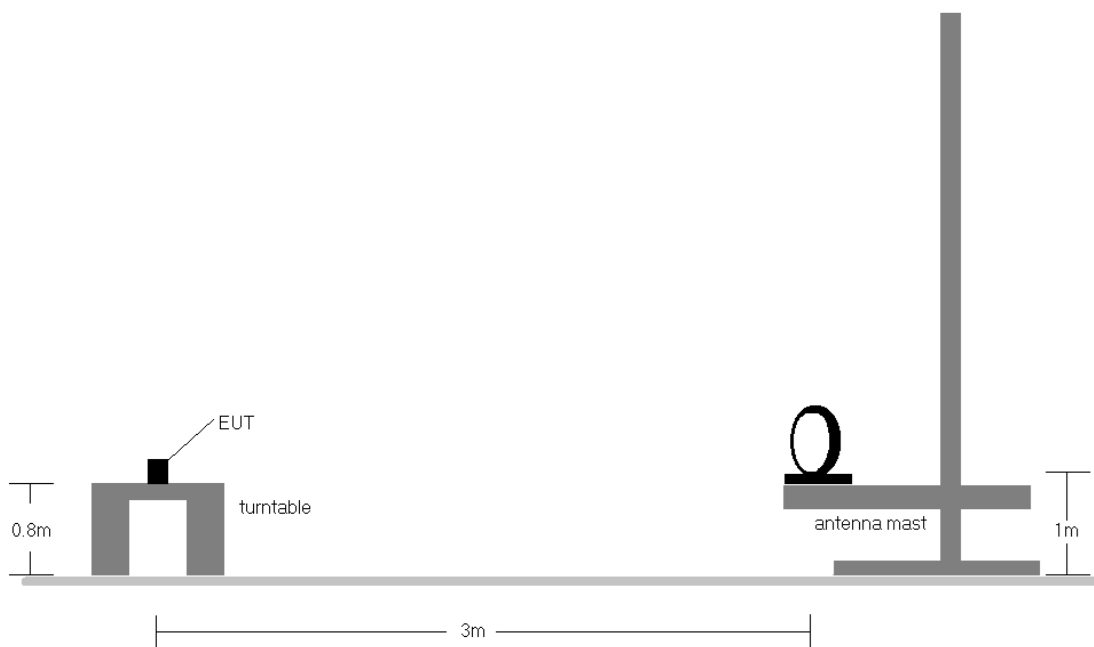


Figure 7-9. Radiated Test Setup < 30 MHz

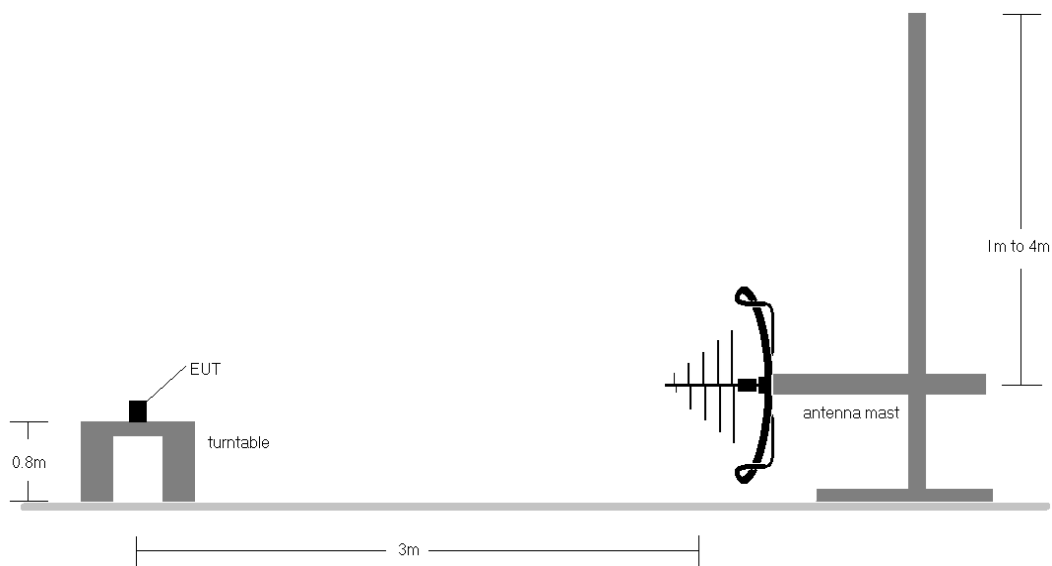


Figure 7-10. Radiated Test Setup < 1 GHz

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 90 of 98

V 12.0 03/03/2026

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-26.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL $[\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- Margin $[\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 91 of 98

7.11.1 TxBF Radiated Spurious Emissions Measurements (Below 1 GHz)

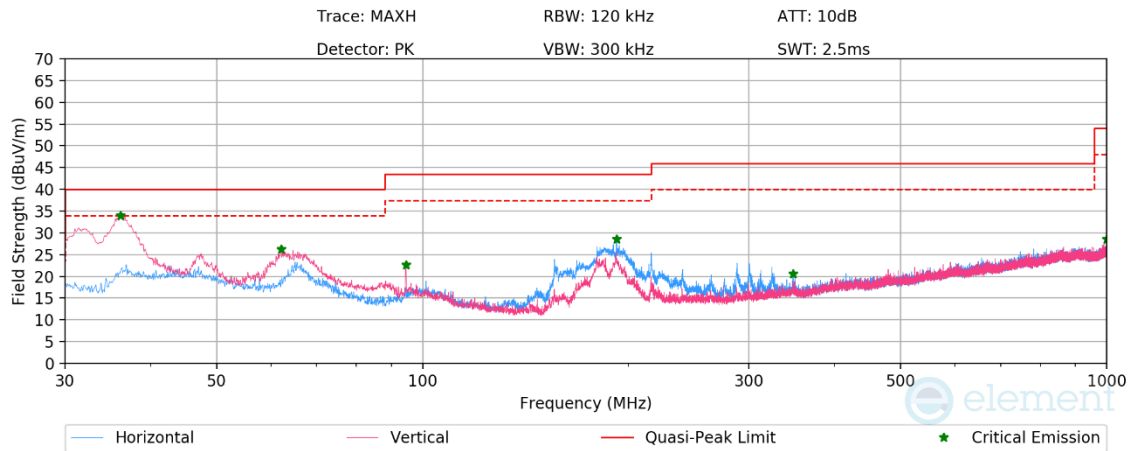

Plot 7-91. Radiated Spurious Emissions Below 1 GHz TxBF (GFSK ePA – Ch.39, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.18	Max-Peak	V	100	0	-52.88	-20.16	33.96	40.00	-6.04
62.16	Max-Peak	V	100	351	-61.60	-19.14	26.26	40.00	-13.74
94.50	Max-Peak	V	100	116	-64.15	-20.21	22.65	43.50	-20.85
192.19	Max-Peak	H	100	184	-59.67	-18.73	28.59	43.50	-14.91
347.83	Max-Peak	H	100	176	-72.35	-13.99	20.65	46.00	-25.35
999.34	Max-Peak	H	100	233	-75.23	-3.26	28.51	54.00	-25.49


Table 7-27. Radiated Measurements Below 1 GHz TxBF (GFSK ePA – Ch.39, with AC/DC Adapter)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 92 of 98

7.11.2 Simultaneous Tx Radiated Spurious Emission (Below 1 GHz)

Description	Bluetooth	UNII
Antenna	Antenna WF8	Antenna WF8
Channel	78	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11be(SU)

Table 7-22. Worst Case Simultaneous Transmission Configuration

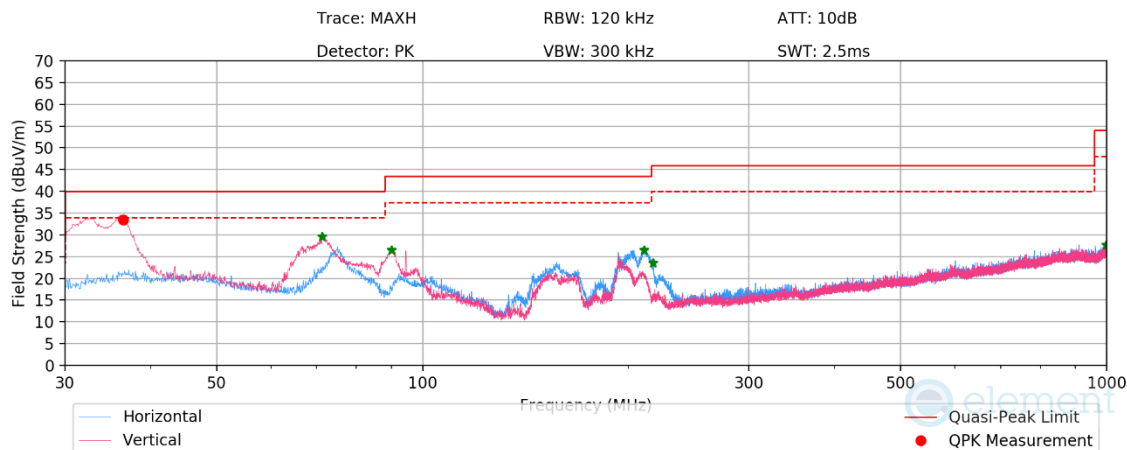

Plot 7-70. Radiated Spurious Emissions Below 1 GHz – Simultaneous Transmission (with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.49	Quasi-Peak	V	101	305	-54.48	-19.06	33.46	40.00	-6.54
71.28	Max-Peak	V	100	297	-56.09	-21.38	29.53	40.00	-10.47
90.12	Max-Peak	V	100	194	-60.11	-20.34	26.55	43.50	-16.95
210.91	Max-Peak	H	200	214	-62.45	-17.98	26.56	43.50	-16.94
217.03	Max-Peak	H	200	213	-65.77	-17.62	23.60	46.00	-22.40
997.48	Max-Peak	H	200	136	-76.52	-2.77	27.71	54.00	-26.29

Table 7-23. Radiated Measurements Below 1 GHz – Simultaneous Transmission (with AC/DC Adapter)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 93 of 98

7.12 AC Line-Conducted Emissions Measurement

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-28. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 94 of 98

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


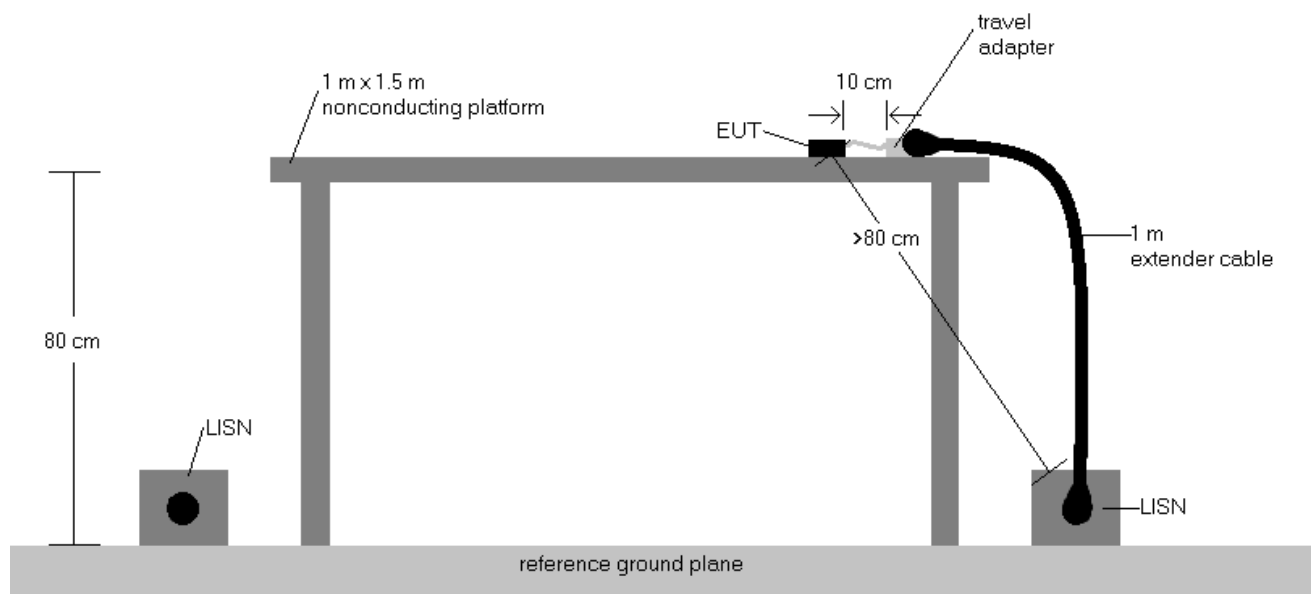


Figure 7-11. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150 kHz to 30 MHz are specified in Part 15.207 and RSS-Gen (7.4.2).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using a quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 95 of 98

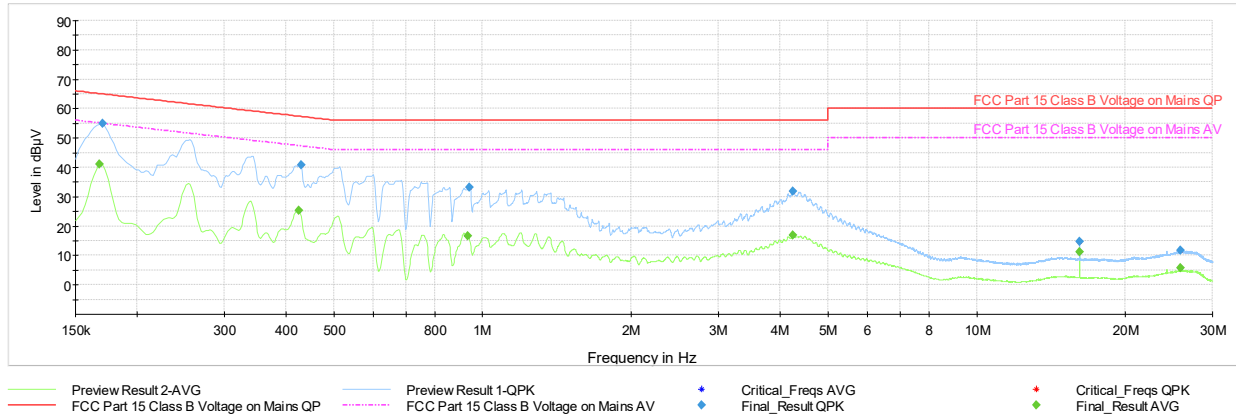


Plot 7-92. AC Line-Conducted Test Plot TxBF (L1, GFSK ePA – Ch.39, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	---	41.02	55.06	-14.04	L1	GND
0.170	FINAL	54.89	---	64.95	-10.05	L1	GND
0.425	FINAL	---	25.29	47.36	-22.07	L1	GND
0.429	FINAL	40.77	---	57.27	-16.51	L1	GND
0.933	FINAL	---	16.59	46.00	-29.41	L1	GND
0.942	FINAL	33.30	---	56.00	-22.70	L1	GND
4.241	FINAL	---	16.92	46.00	-29.08	L1	GND
4.252	FINAL	31.77	---	56.00	-24.23	L1	GND
16.166	FINAL	14.71	---	60.00	-45.29	L1	GND
16.166	FINAL	---	11.19	50.00	-38.81	L1	GND
25.874	FINAL	11.71	---	60.00	-48.29	L1	GND
25.877	FINAL	---	5.70	50.00	-44.30	L1	GND

Table 7-29. AC Line-Conducted Test Data TxBF (L1, GFSK ePA – Ch.39, with AC/DC Adapter)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 96 of 98

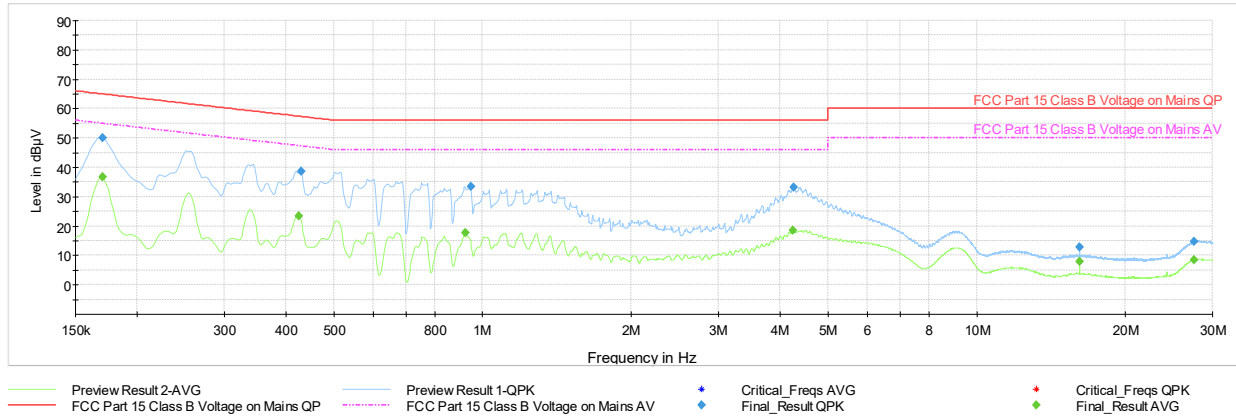

Plot 7-93. AC Line-Conducted Test Plot TxBF (N, GFSK ePA – Ch.39, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.170	FINAL	---	36.78	54.95	-18.16	N	GND
0.170	FINAL	50.14	---	64.95	-14.81	N	GND
0.425	FINAL	---	23.32	47.36	-24.04	N	GND
0.429	FINAL	38.77	---	57.27	-18.50	N	GND
0.922	FINAL	---	17.62	46.00	-28.38	N	GND
0.947	FINAL	33.53	---	56.00	-22.47	N	GND
4.250	FINAL	---	18.51	46.00	-27.49	N	GND
4.270	FINAL	33.34	---	56.00	-22.66	N	GND
16.168	FINAL	12.94	---	60.00	-47.06	N	GND
16.168	FINAL	---	7.97	50.00	-42.03	N	GND
27.492	FINAL	14.61	---	60.00	-45.39	N	GND
27.580	FINAL	---	8.60	50.00	-41.40	N	GND

Table 7-30. AC Line-Conducted Test Data TxBF (N, GFSK ePA – Ch.39, with AC/DC Adapter)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 97 of 98

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device**

FCC ID: BCGA3595 and IC: 579C-A3595 is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 06/26/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 98 of 98