



Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

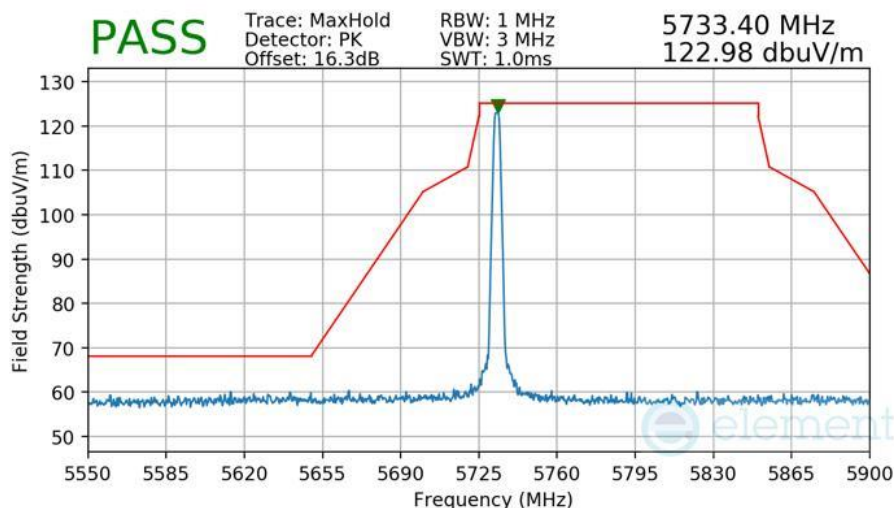

Plot 7-652 Radiated Lower Band Edge Measurement TxBF Primary


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

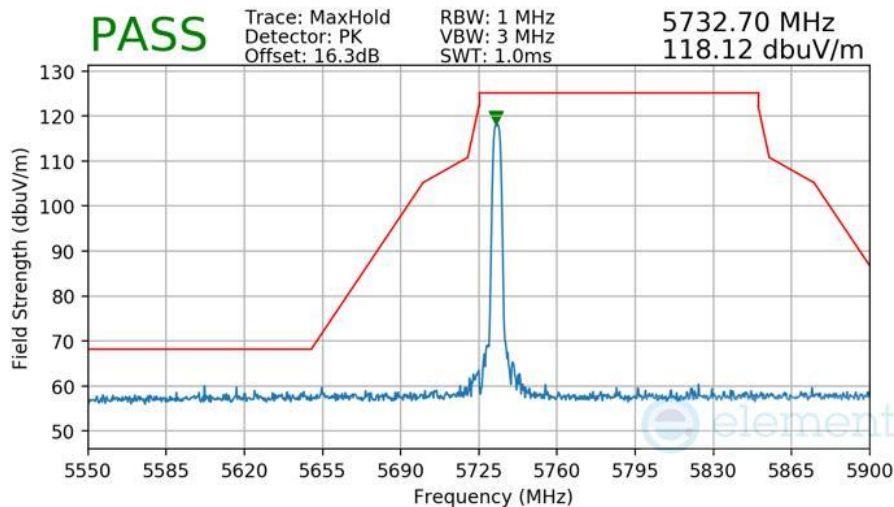

Plot 7-653 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 401 of 441

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

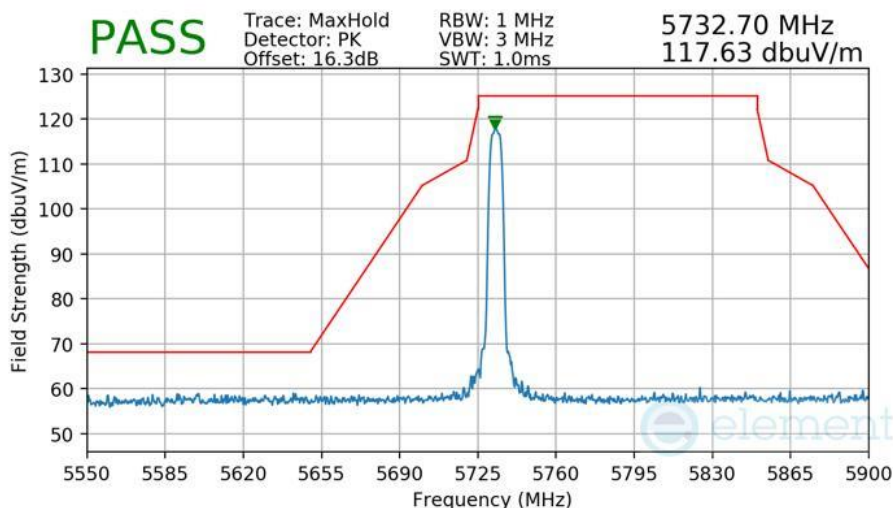

Plot 7-654 Radiated Lower Band Edge Measurement TxBF Primary


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

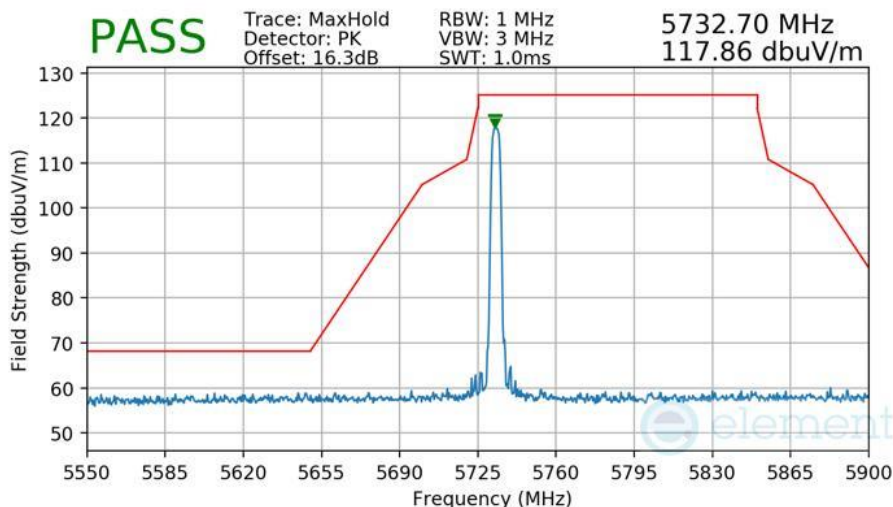

Plot 7-655 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 402 of 441

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

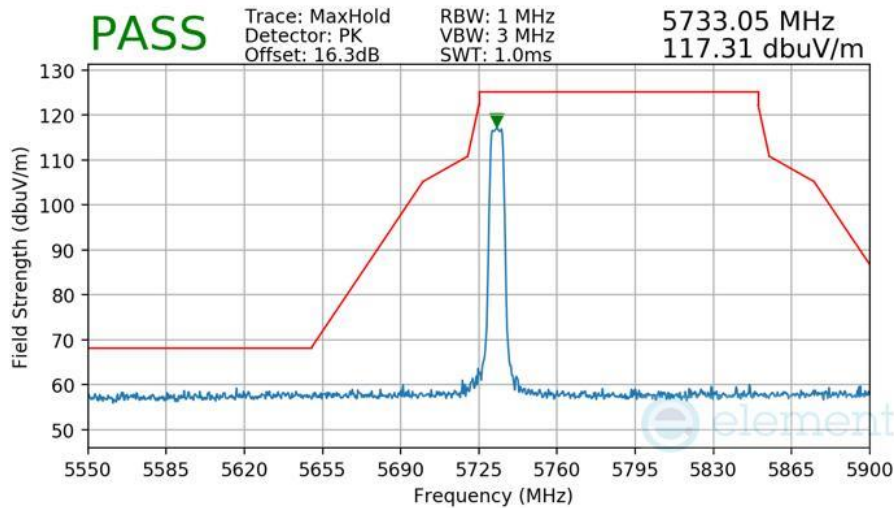

Plot 7-656 Radiated Lower Band Edge Measurement TxBF Primary


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

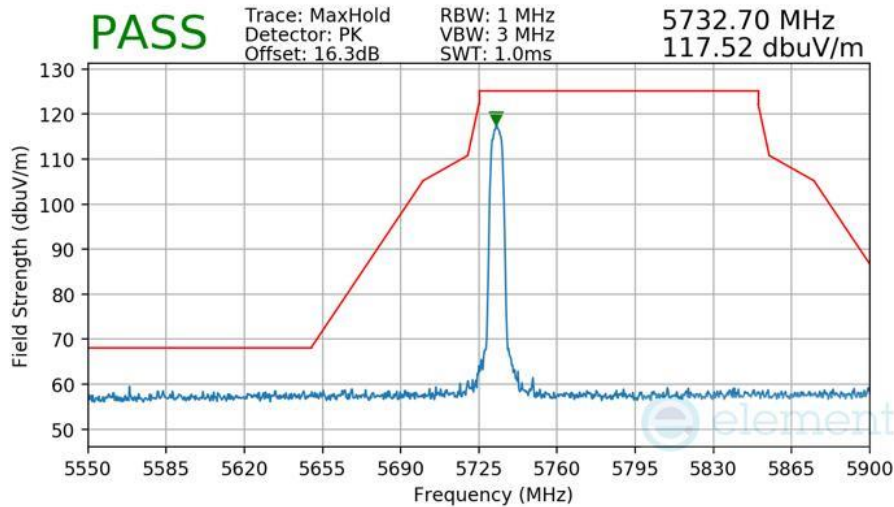

Plot 7-657 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 403 of 441

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

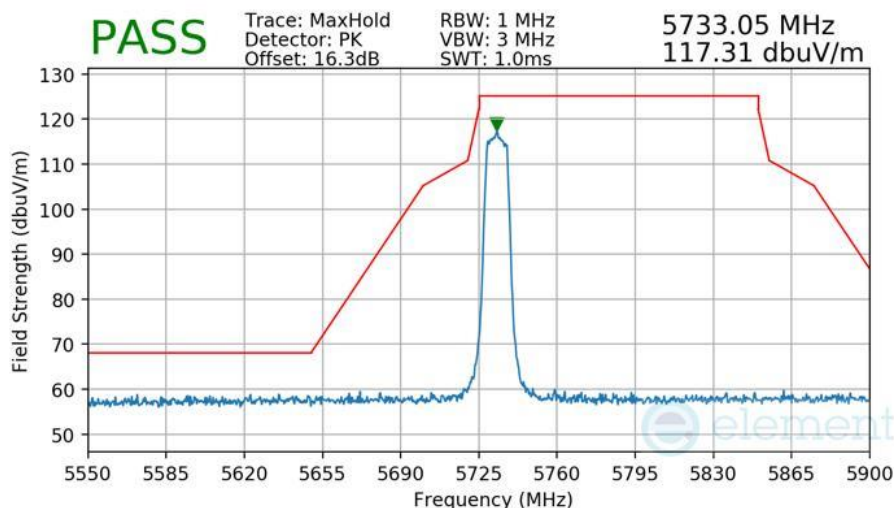

Plot 7-658 Radiated Lower Band Edge Measurement TxBF Primary


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

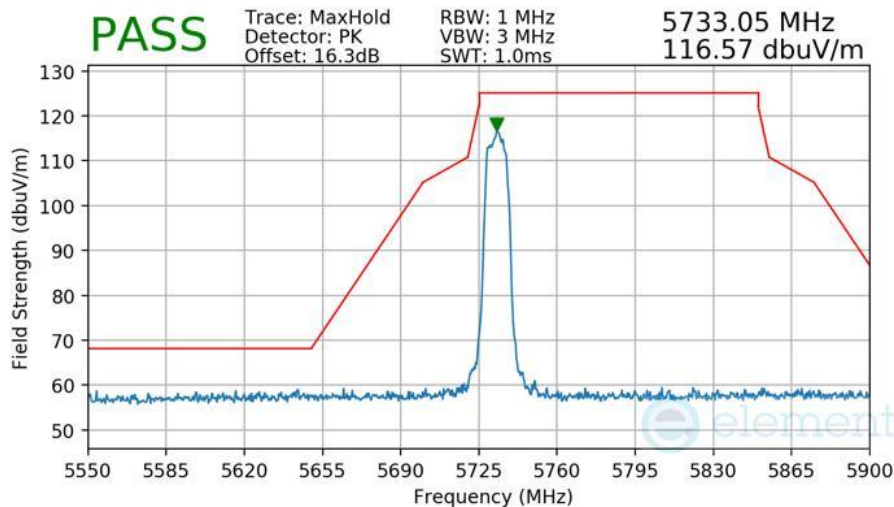

Plot 7-659 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 404 of 441

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

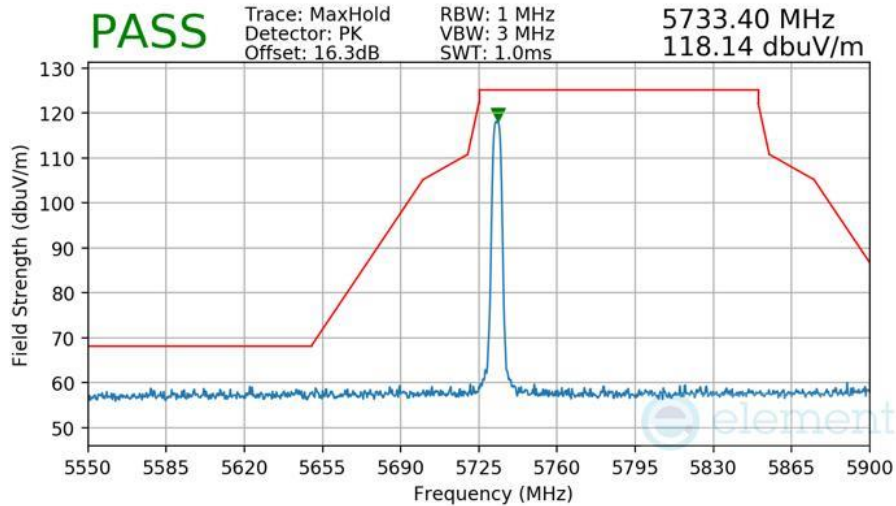

Plot 7-660 Radiated Lower Band Edge Measurement TxBF Primary


Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

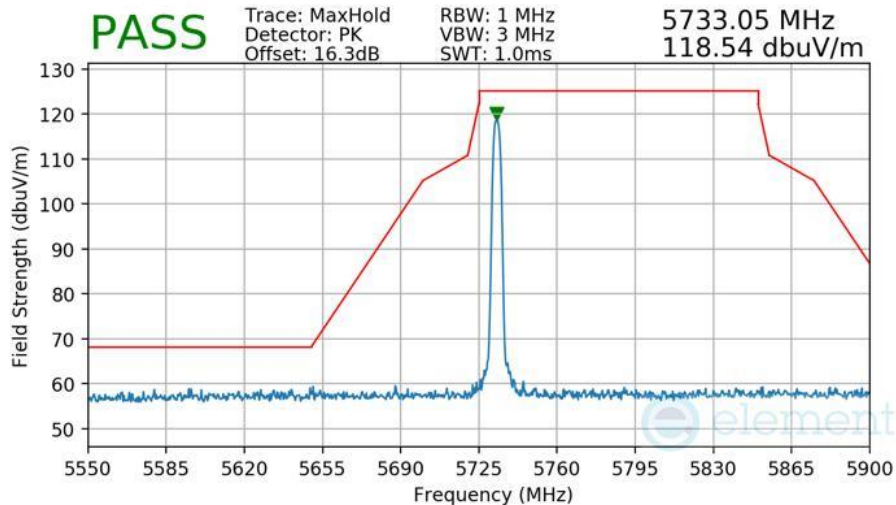

Plot 7-661 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 405 of 441

Mode BDR
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

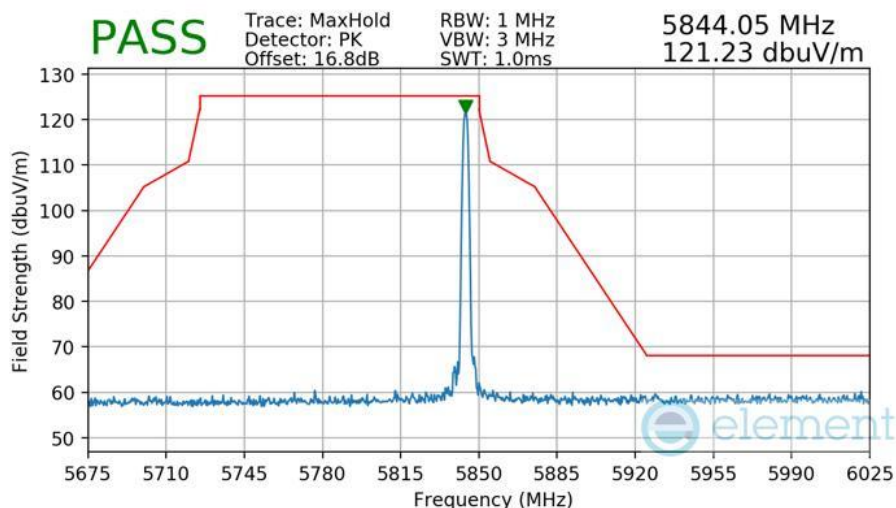

Plot 7-662 Radiated Higher Band Edge Measurement TxBF Primary


Mode LE1M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

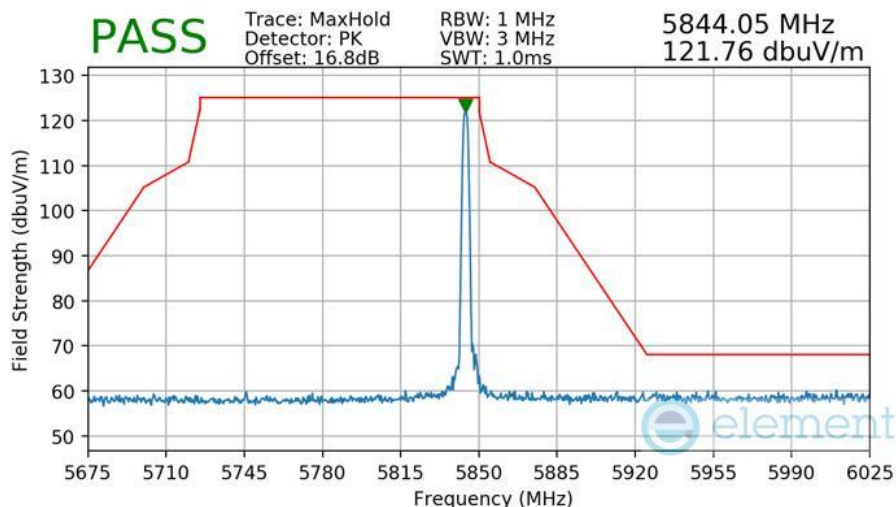

Plot 7-663 Radiated Higher Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 406 of 441

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

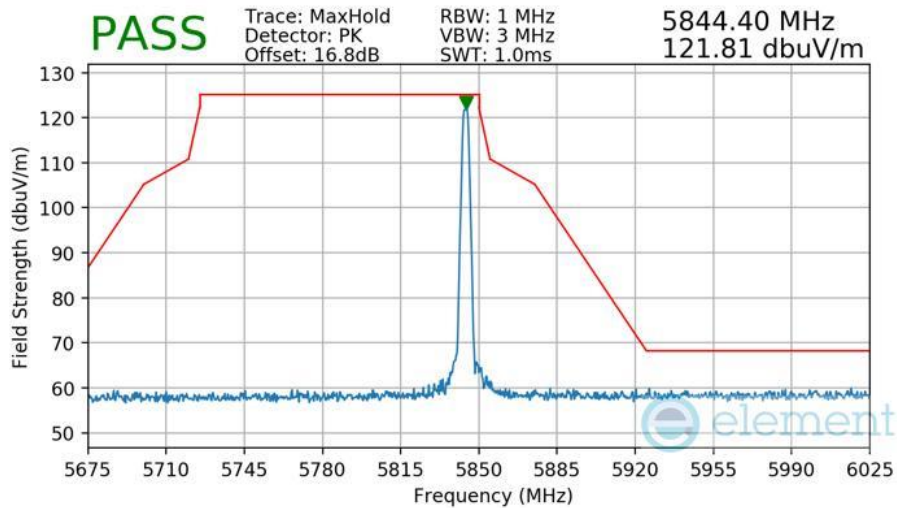

Plot 7-664 Radiated Higher Band Edge Measurement TxBF Primary


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

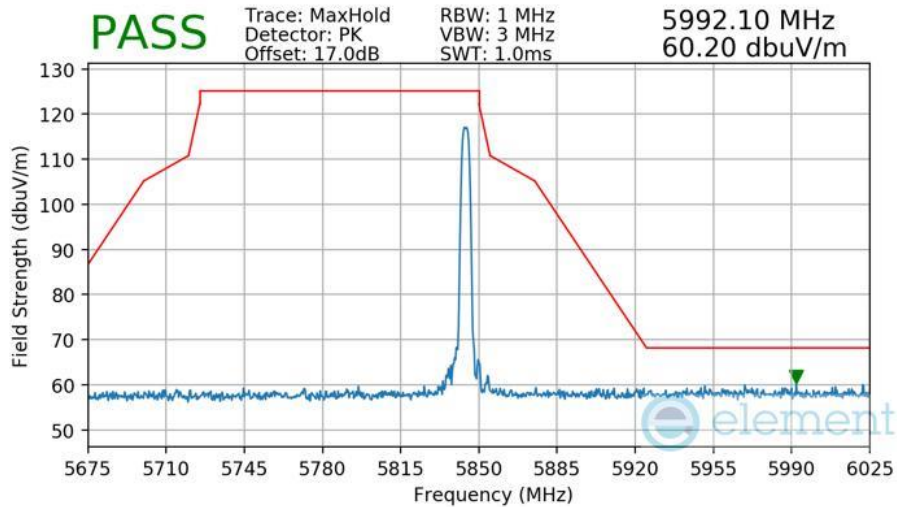

Plot 7-665 Radiated Higher Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 407 of 441

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

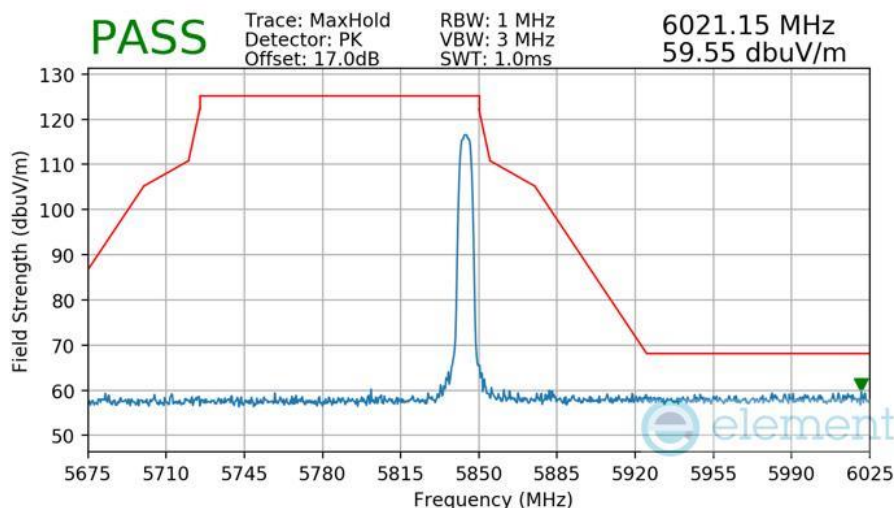

Plot 7-666 Radiated Higher Band Edge Measurement TxBF Primary


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

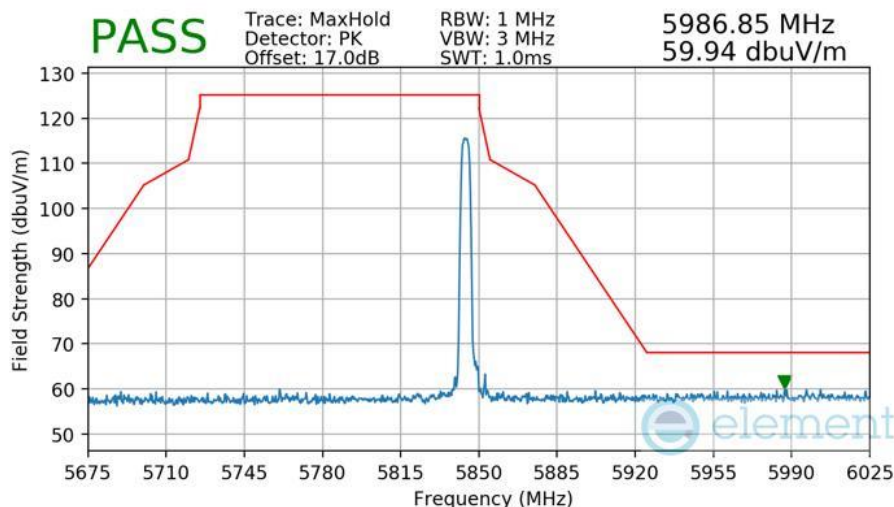

Plot 7-667 Radiated Higher Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 408 of 441

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

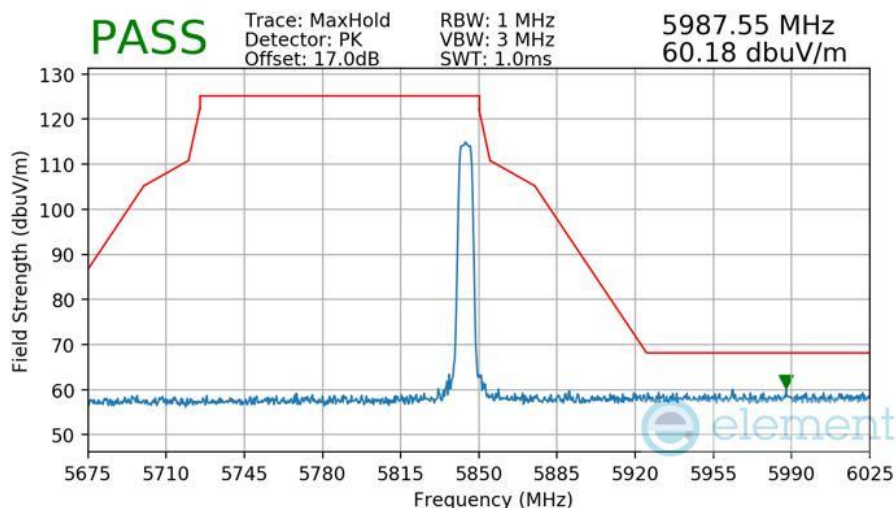

Plot 7-668 Radiated Higher Band Edge Measurement TxBF Primary


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

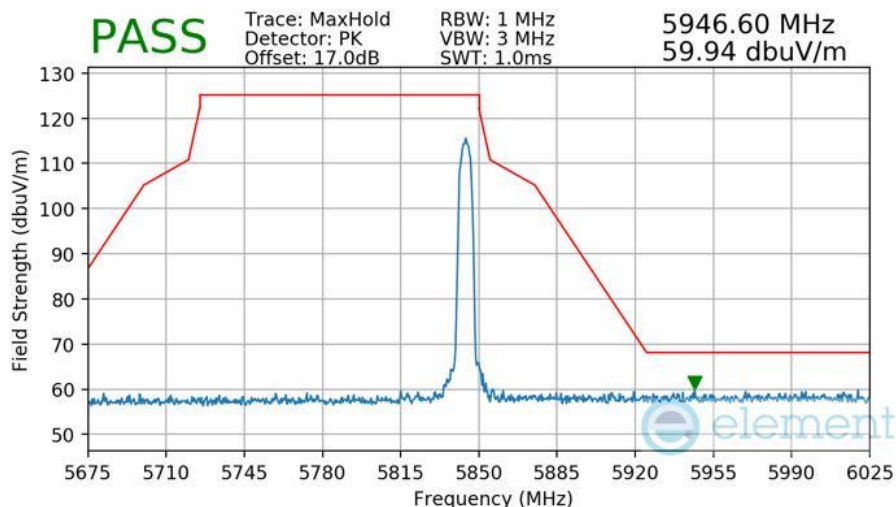

Plot 7-669 Radiated Higher Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 409 of 441

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

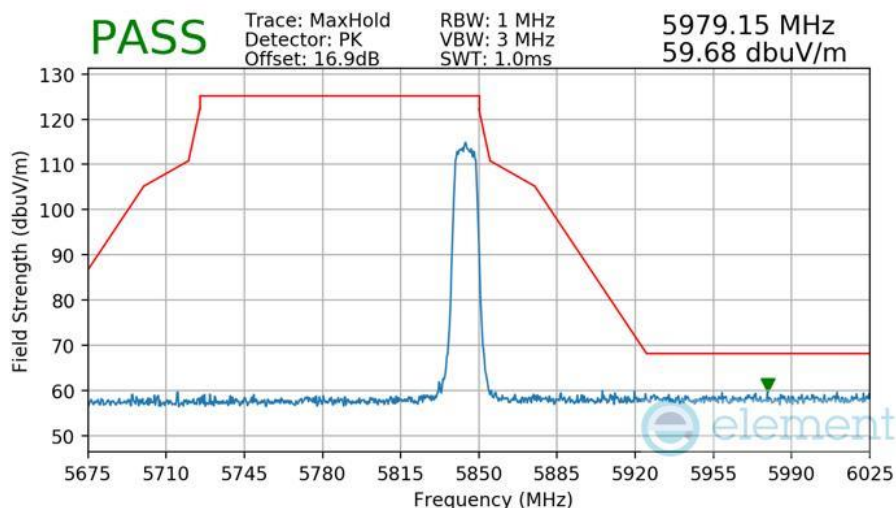

Plot 7-670 Radiated Higher Band Edge Measurement TxBF Primary


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

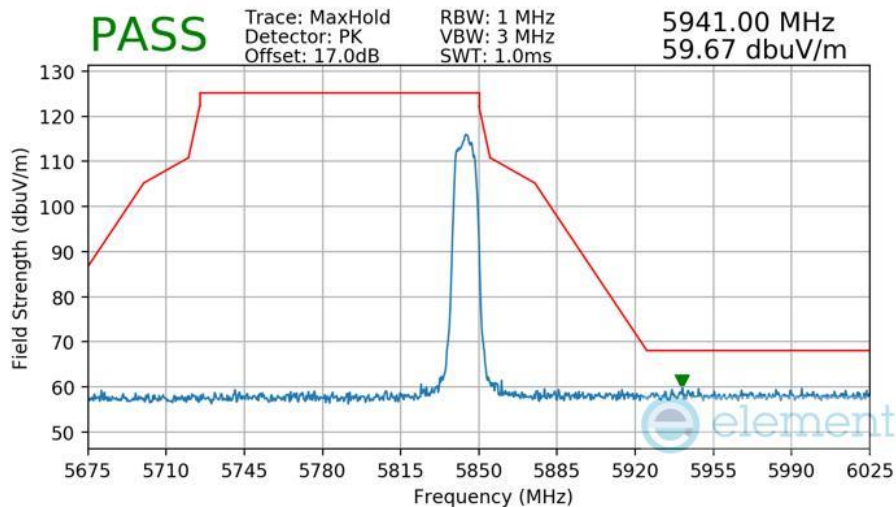

Plot 7-671 Radiated Higher Band Edge Measurement TxBF Primary


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 410 of 441

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

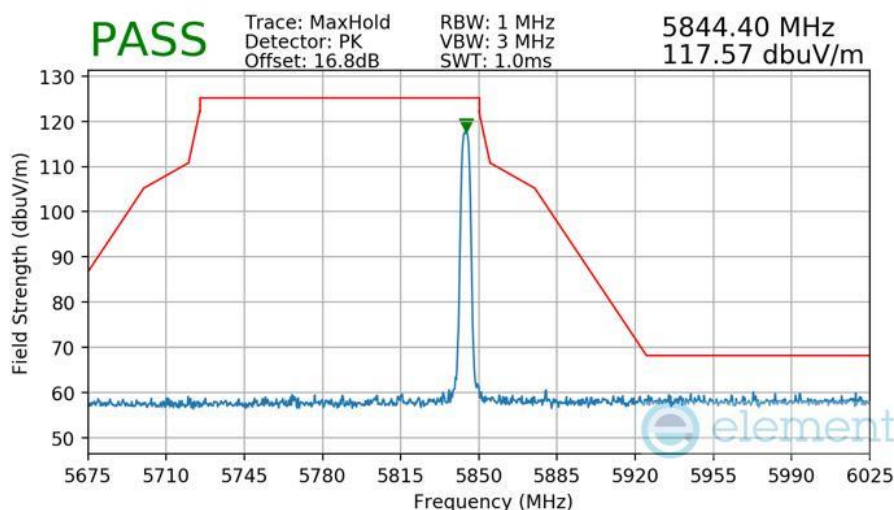

Plot 7-672 Radiated Higher Band Edge Measurement TxBF Primary

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

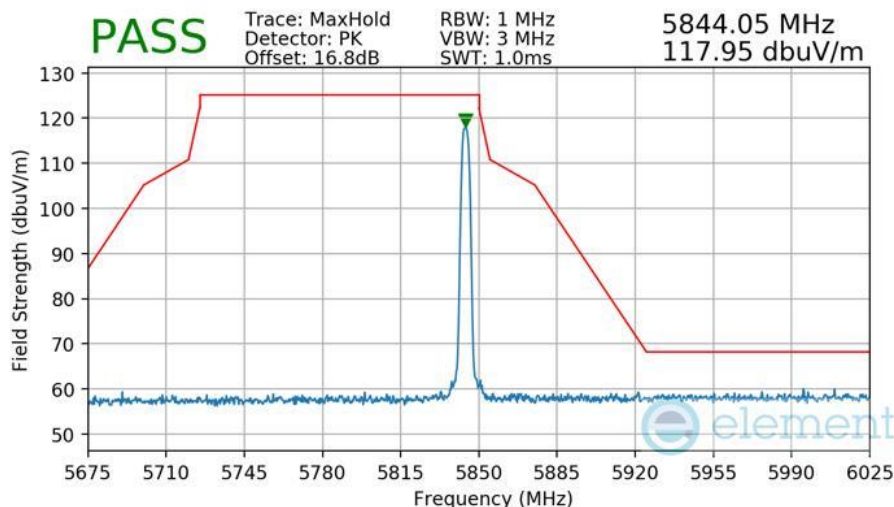


Plot 7-673 Radiated Higher Band Edge Measurement TxBF Primary

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 411 of 441


7.6.11 TxBF Diversity Radiated Band Edge Measurements (U-NII-1)

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5162 MHz

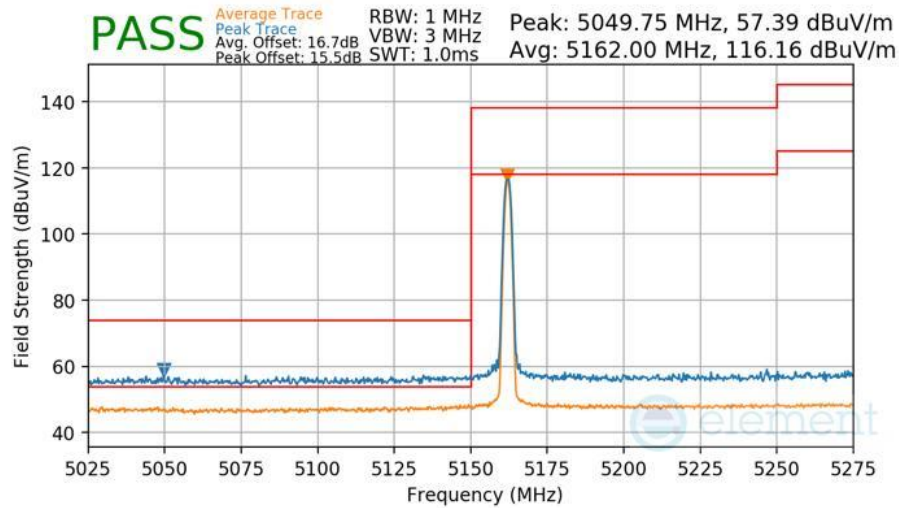

Plot 7-674 Radiated Lower Band Edge Measurement TxBF Diversity


Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5162 MHz

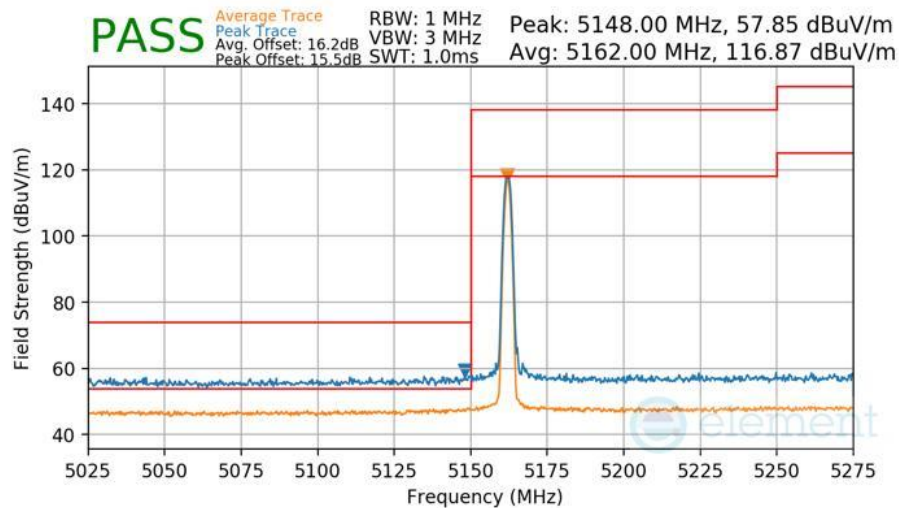

Plot 7-675 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 412 of 441

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162 MHz

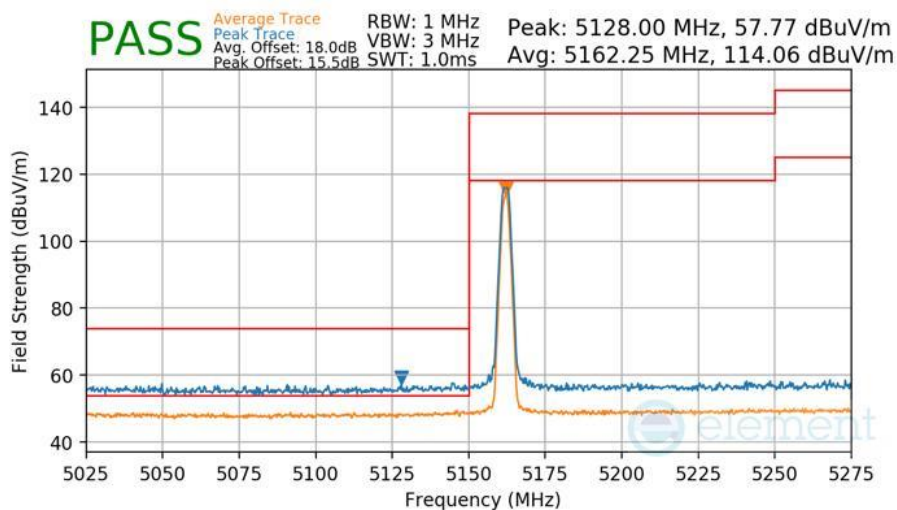

Plot 7-676 Radiated Lower Band Edge Measurement TxBF Diversity


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162 MHz

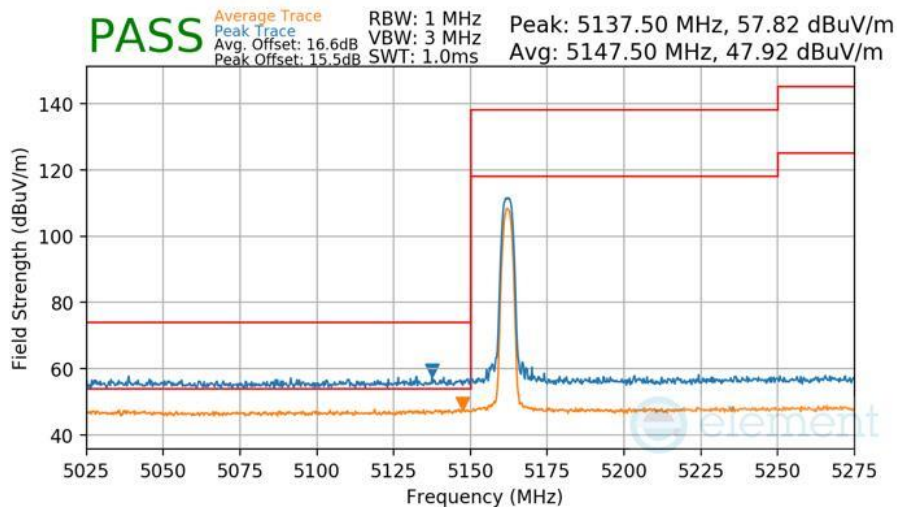

Plot 7-677 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 413 of 441

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162 MHz

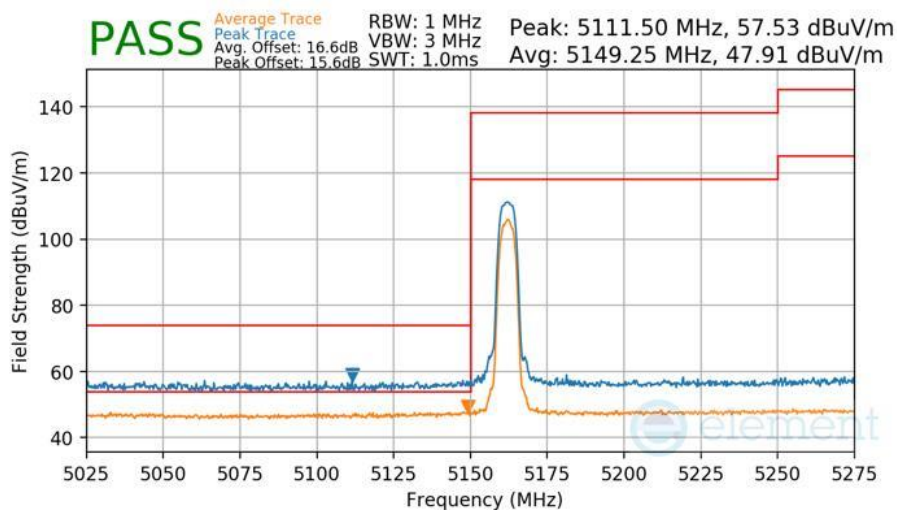

Plot 7-678 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162 MHz

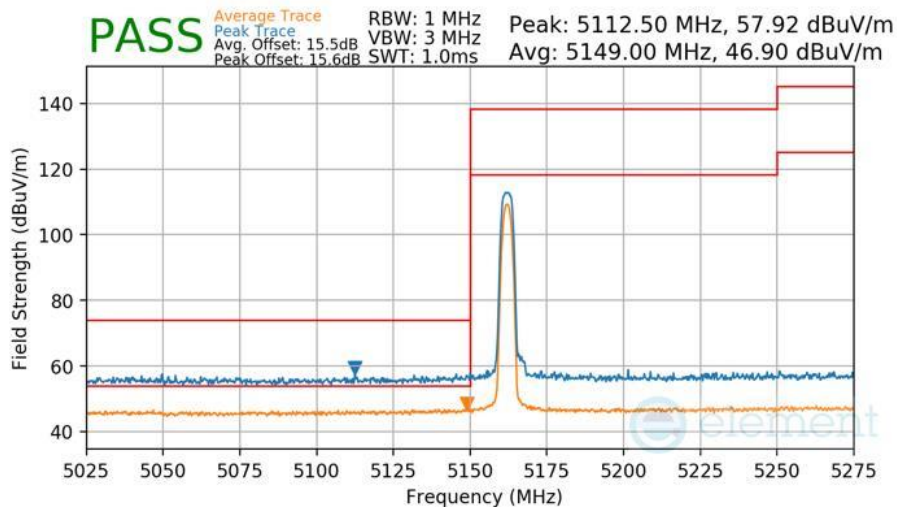

Plot 7-679 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 414 of 441

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162 MHz

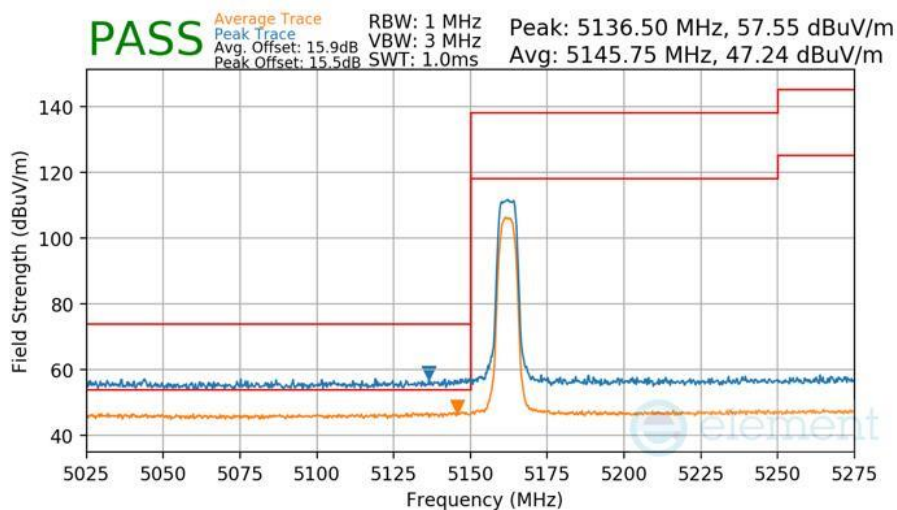

Plot 7-680 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162 MHz

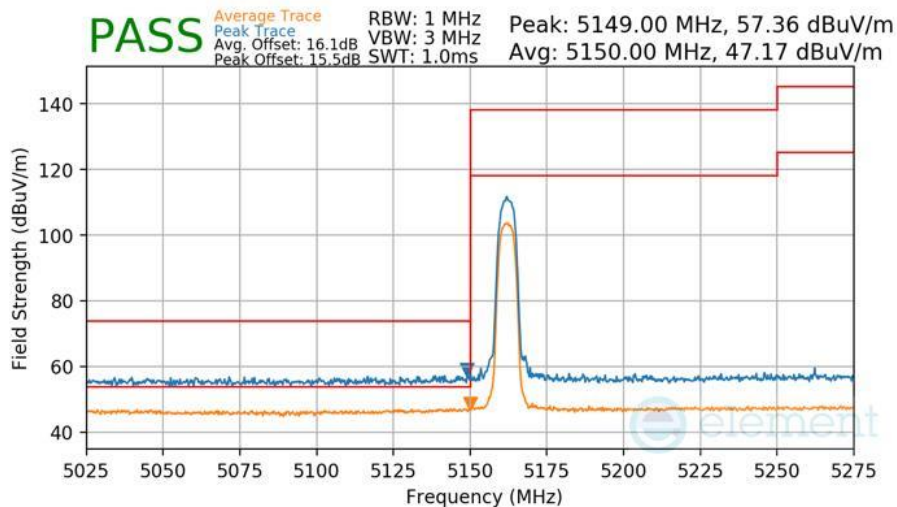

Plot 7-681 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 415 of 441

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5164 MHz

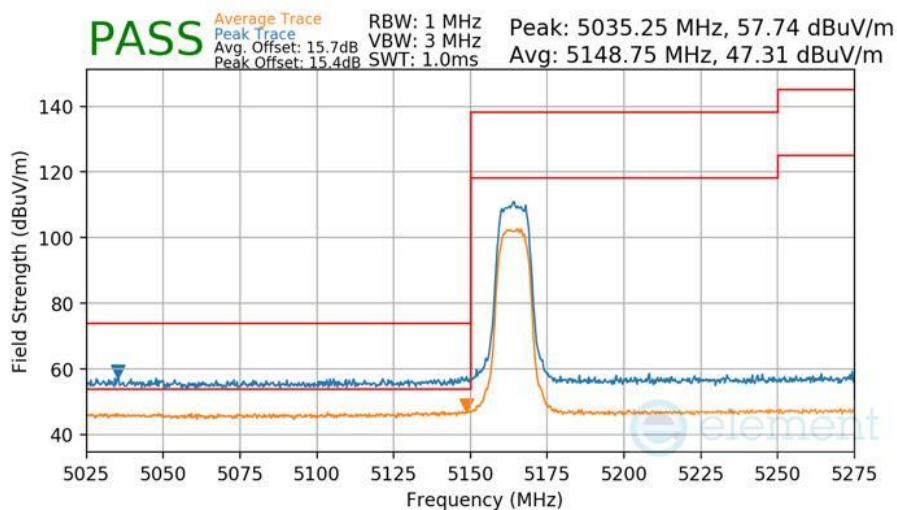

Plot 7-682 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5164 MHz

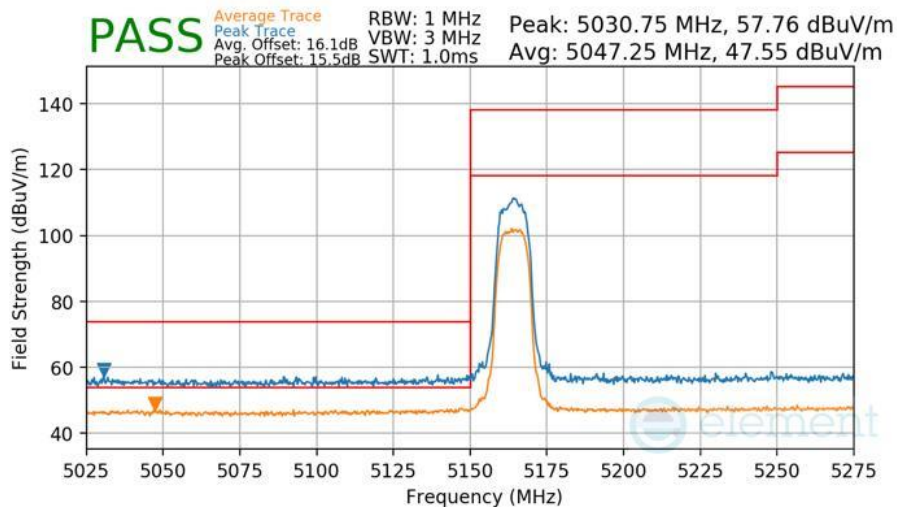

Plot 7-683 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 416 of 441

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162 MHz

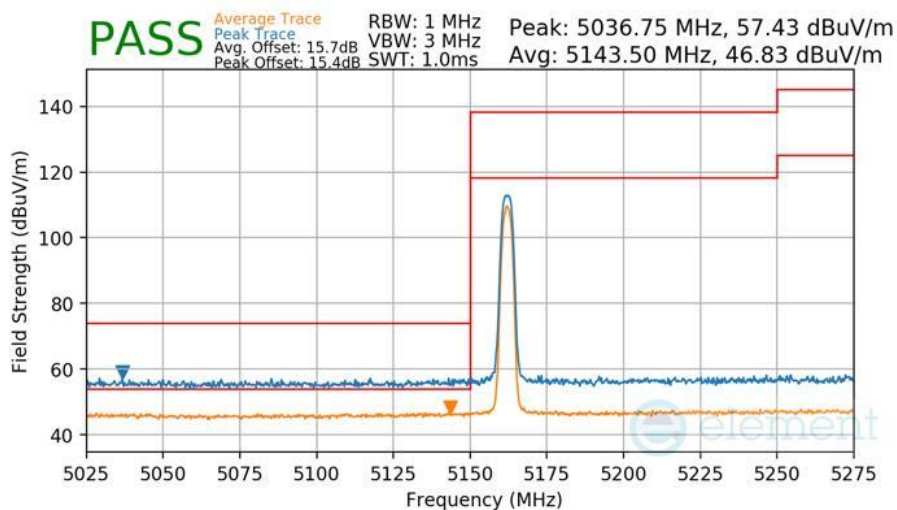

Plot 7-684 Radiated Lower Band Edge Measurement TxBF Diversity

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162 MHz

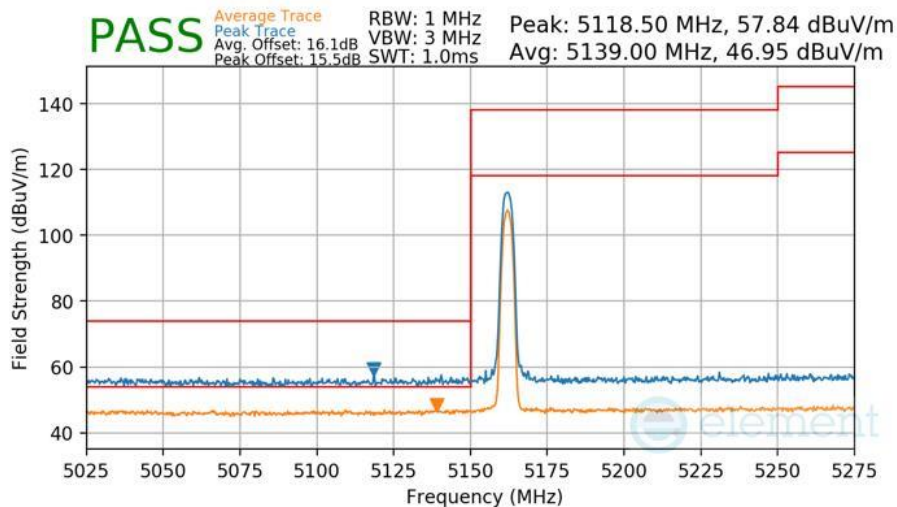


Plot 7-685 Radiated Lower Band Edge Measurement TxBF Diversity

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 417 of 441


7.6.12 TxBF Diversity Radiated Band Edge Measurements (U-NII-3)

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5733 MHz

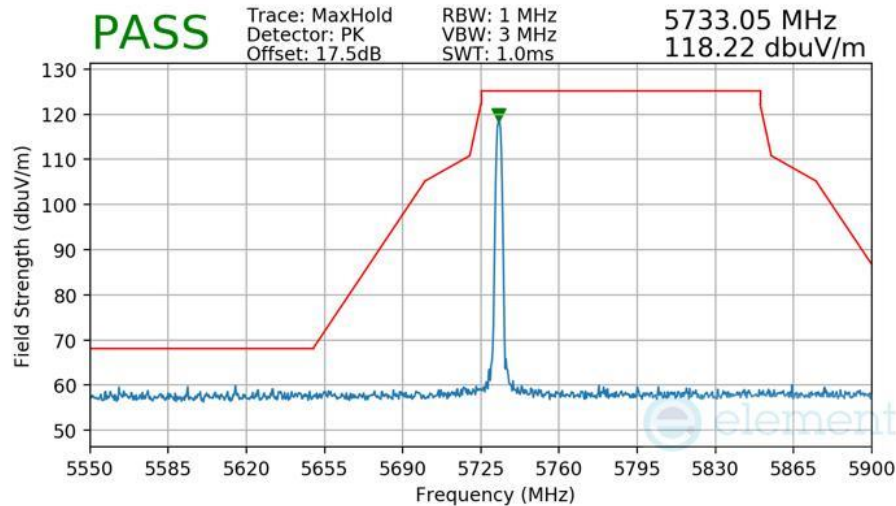

Plot 7-686 Radiated Lower Band Edge Measurement TxBF Diversity


Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5733 MHz

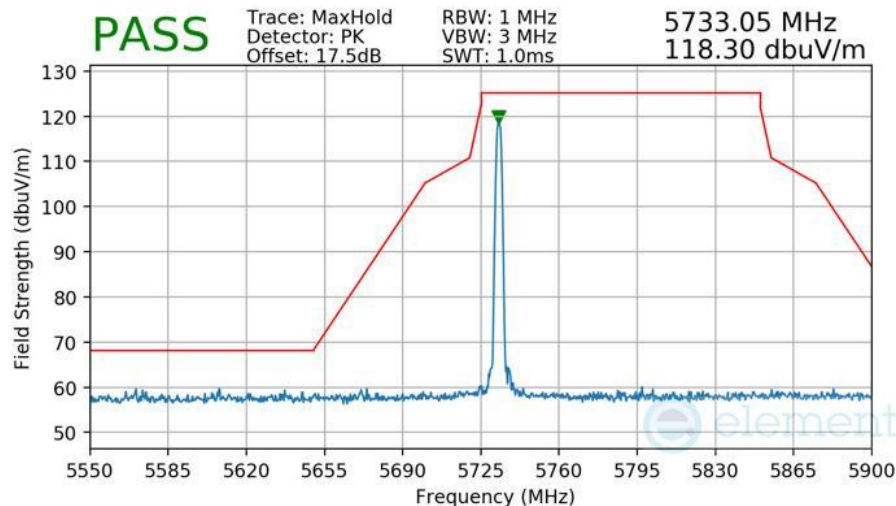

Plot 7-687 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 418 of 441

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

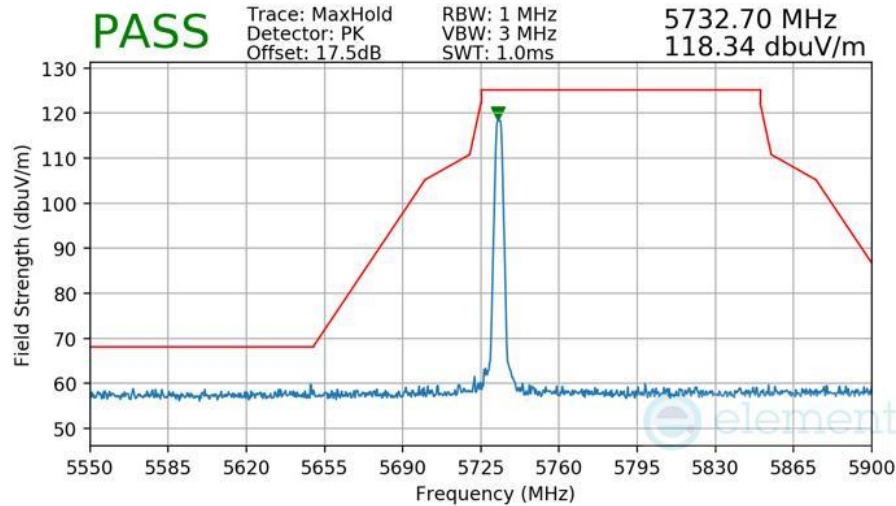

Plot 7-688 Radiated Lower Band Edge Measurement TxBF Diversity


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

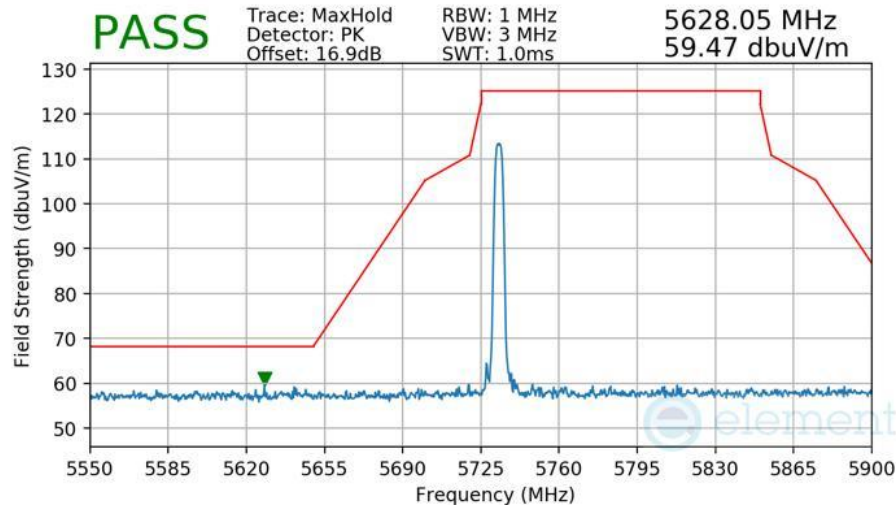

Plot 7-689 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 419 of 441

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

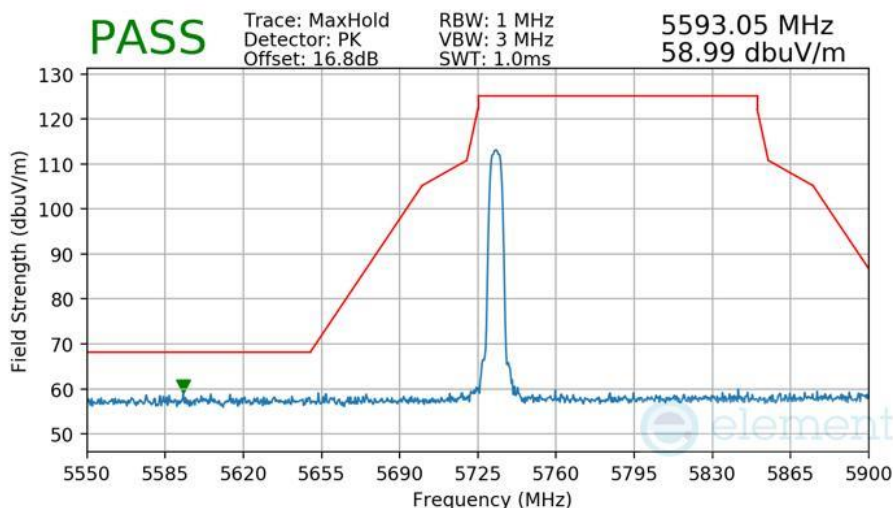

Plot 7-690 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

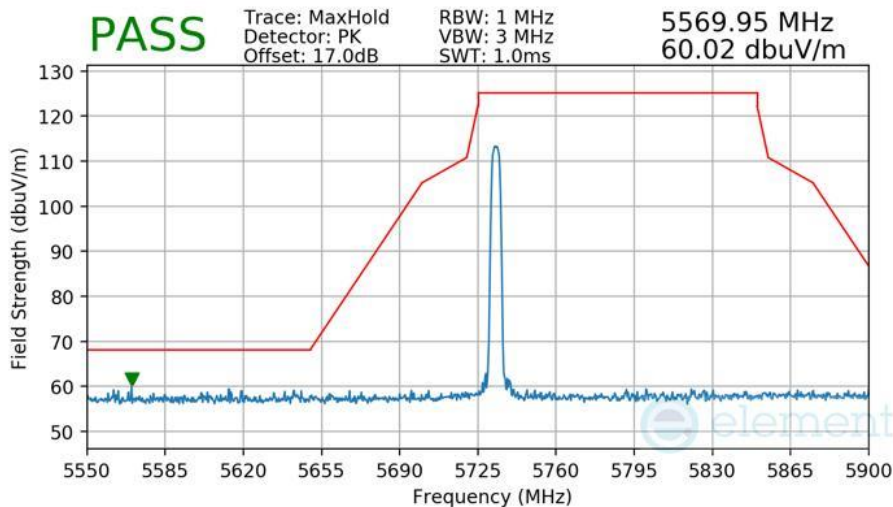

Plot 7-691 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 420 of 441

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

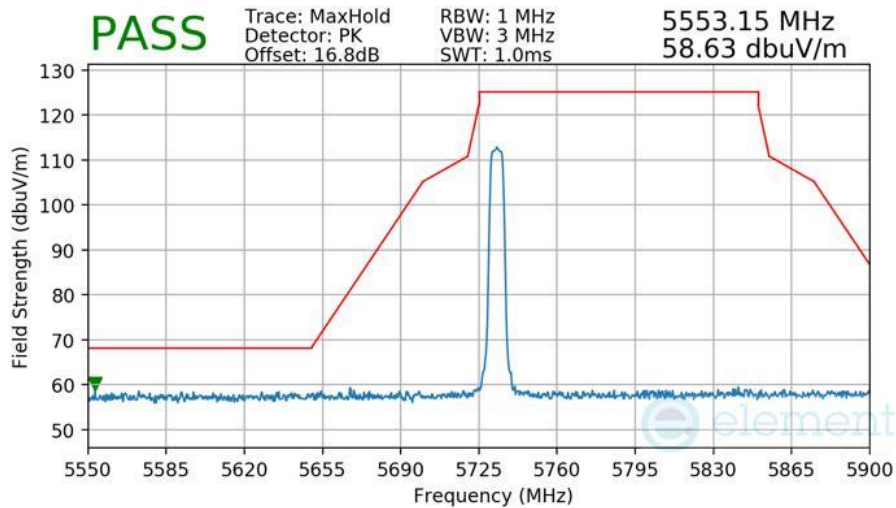

Plot 7-692 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

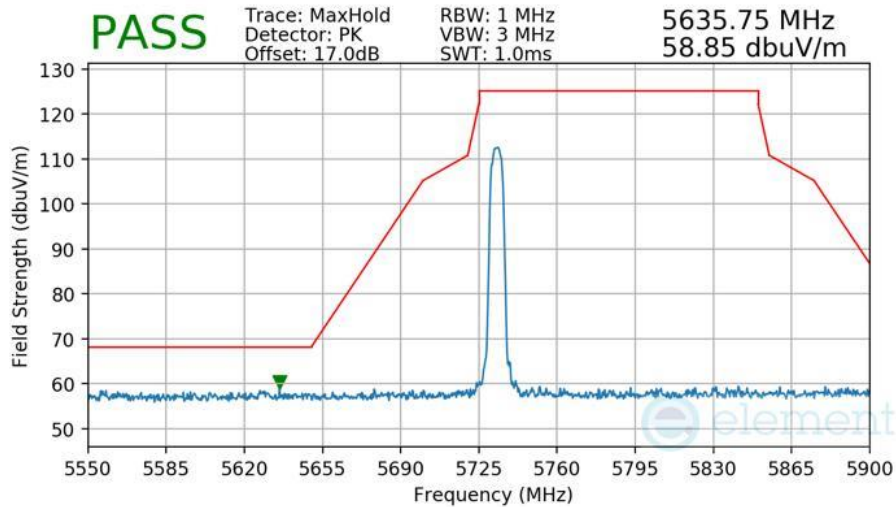

Plot 7-693 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 421 of 441

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

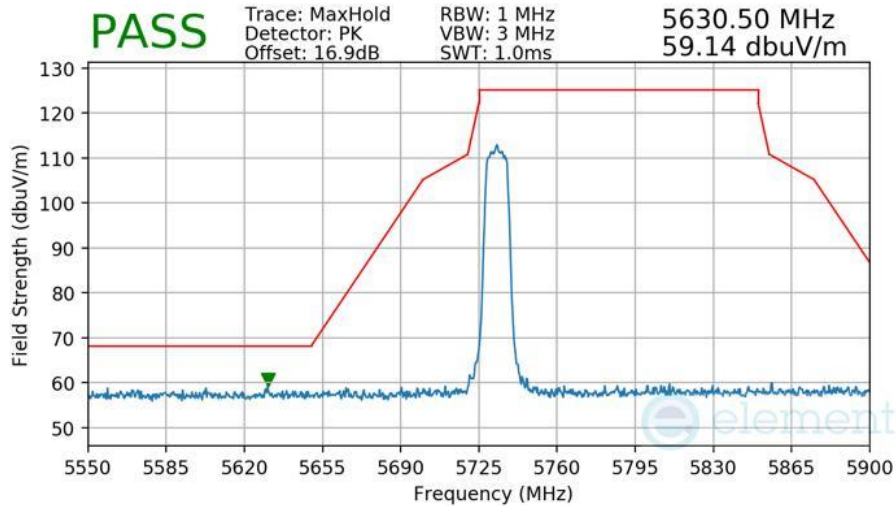

Plot 7-694 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

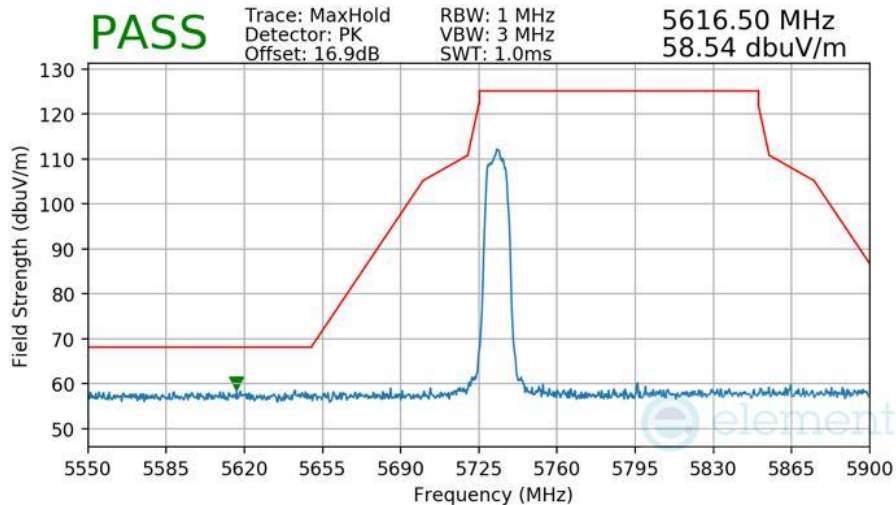

Plot 7-695 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 422 of 441

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

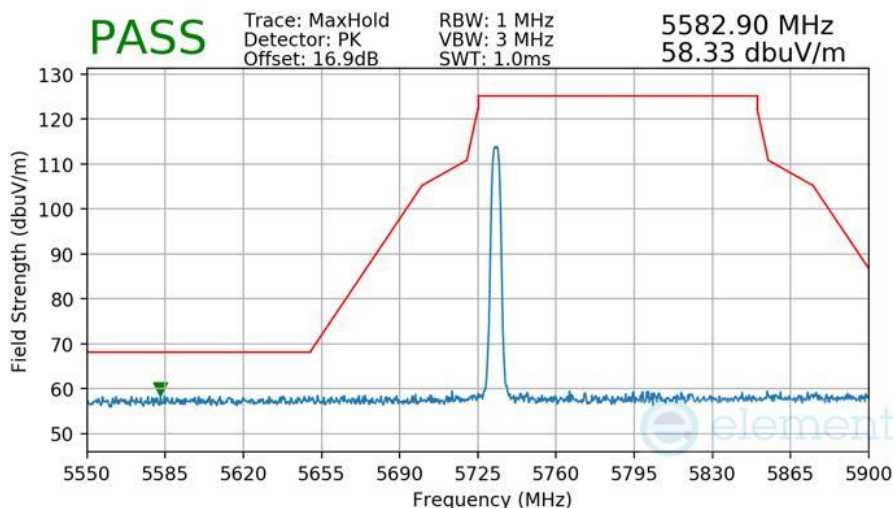

Plot 7-696 Radiated Lower Band Edge Measurement TxBF Diversity


Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733 MHz

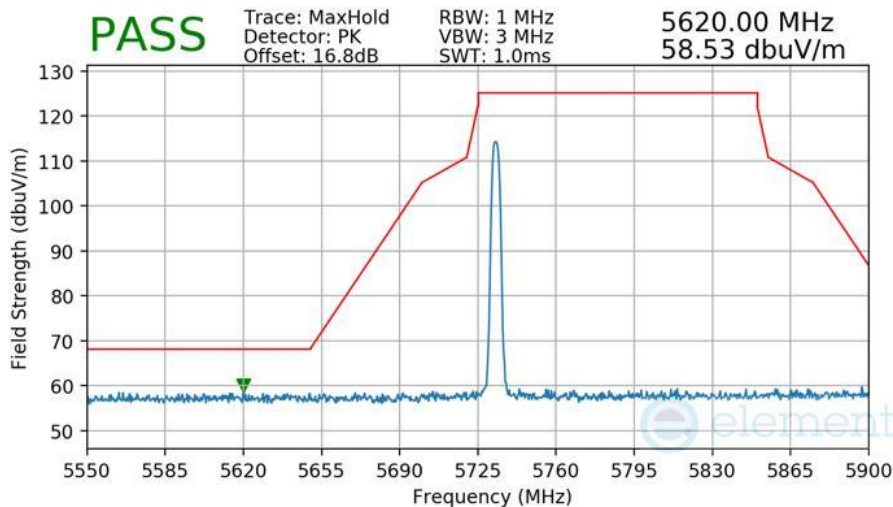

Plot 7-697 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 423 of 441

Mode BDR
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

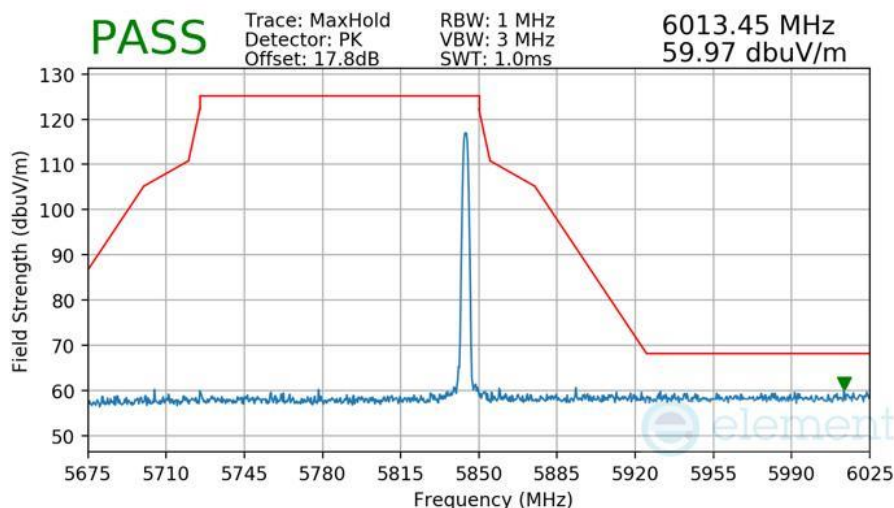

Plot 7-698 Radiated Higher Band Edge Measurement TxBF Diversity


Mode LE1M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

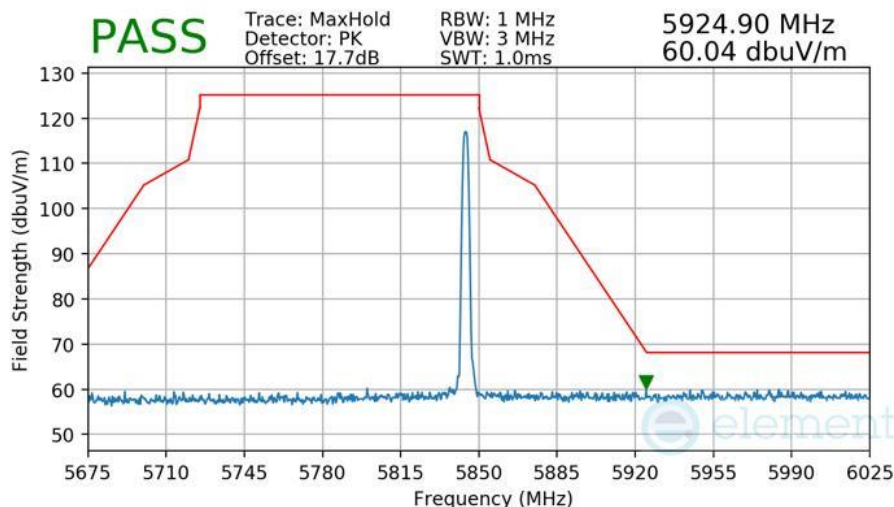

Plot 7-699 Radiated Higher Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 424 of 441

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

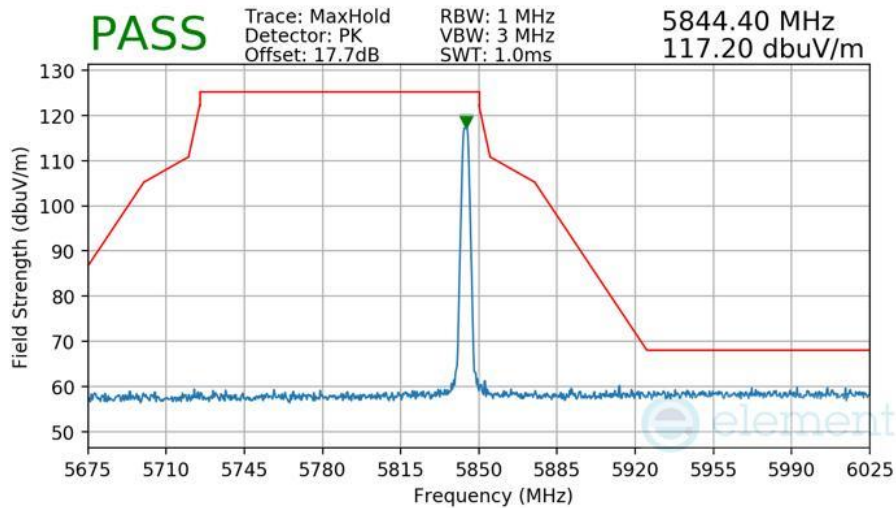

Plot 7-700 Radiated Higher Band Edge Measurement TxBF Diversity


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

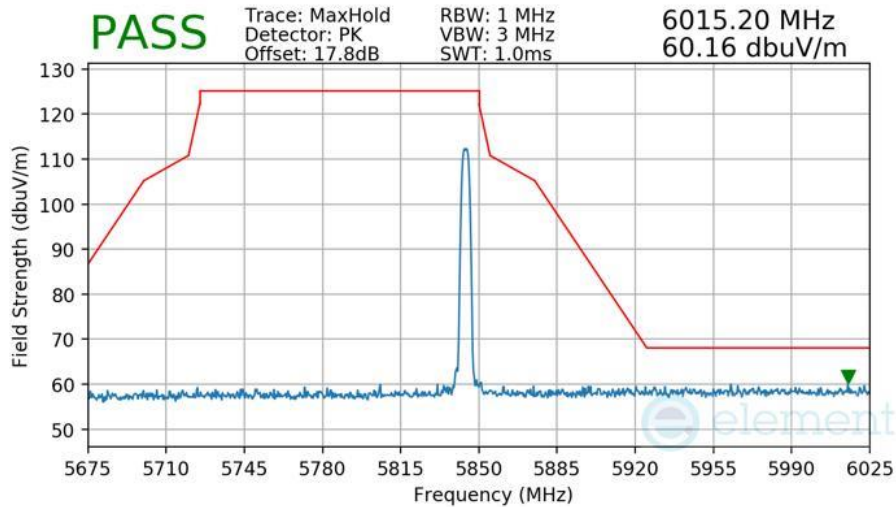

Plot 7-701 Radiated Higher Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 425 of 441

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

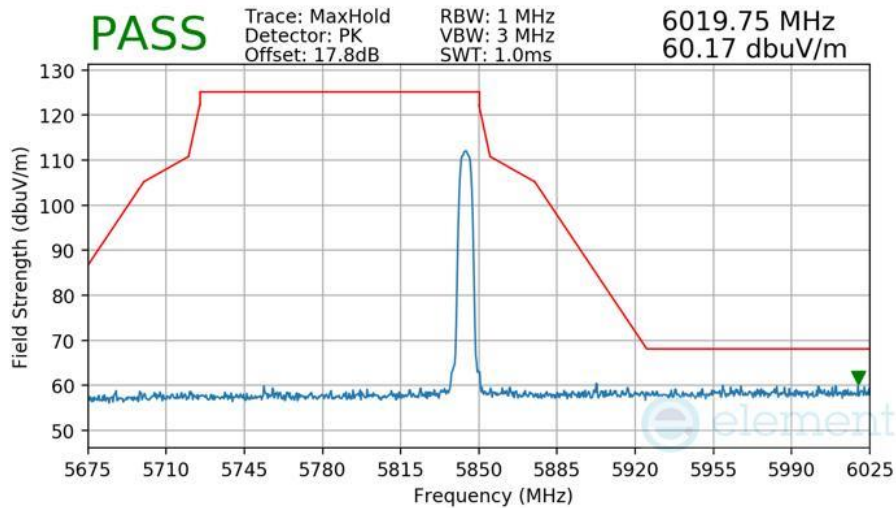

Plot 7-702 Radiated Higher Band Edge Measurement TxBF Diversity


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

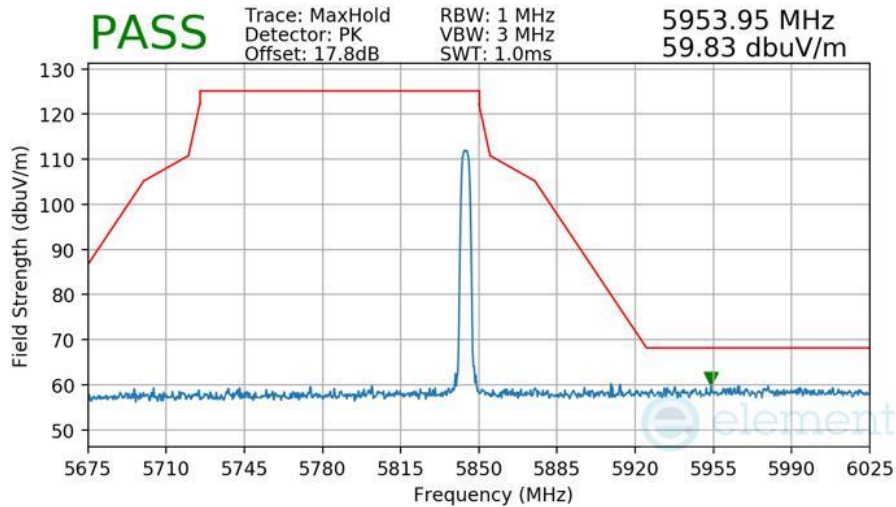

Plot 7-703 Radiated Higher Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 426 of 441

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

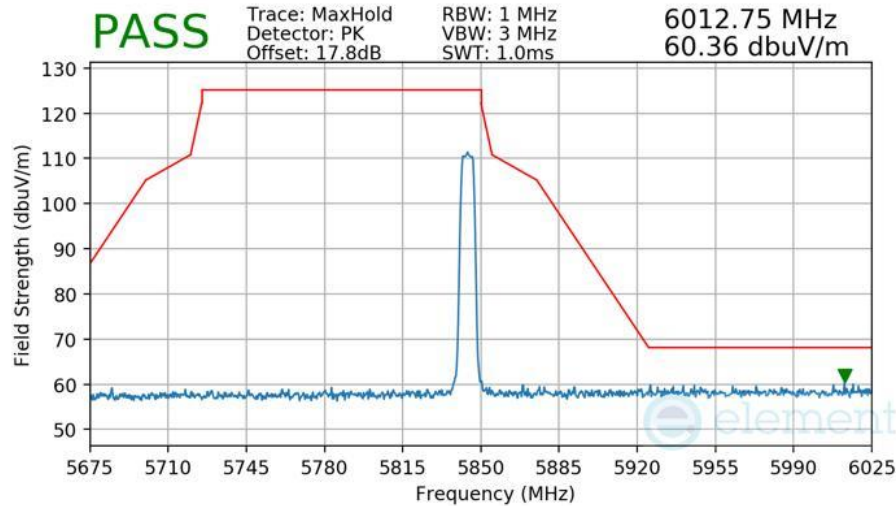

Plot 7-704 Radiated Higher Band Edge Measurement TxBF Diversity


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

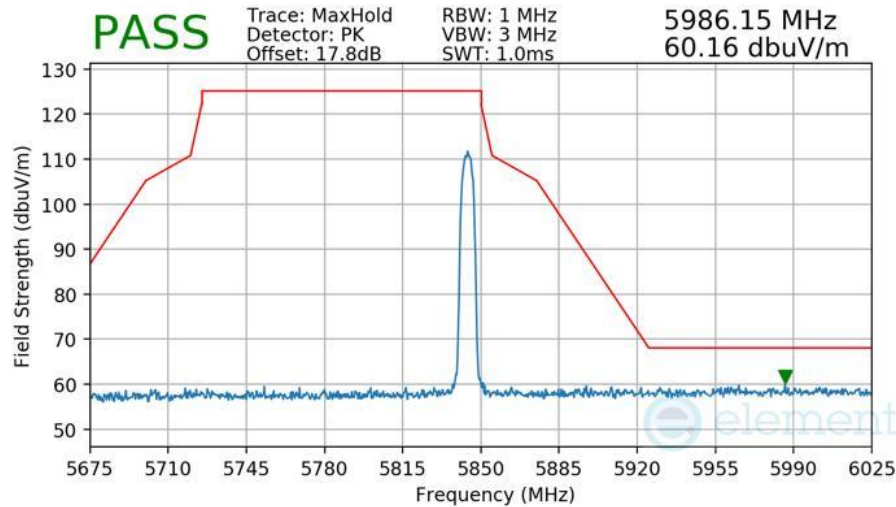

Plot 7-705 Radiated Higher Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 427 of 441

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

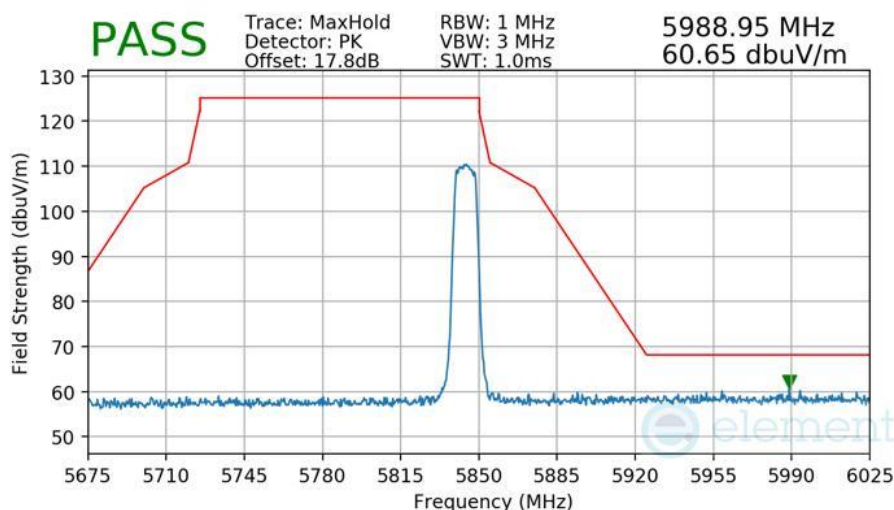

Plot 7-706 Radiated Higher Band Edge Measurement TxBF Diversity


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

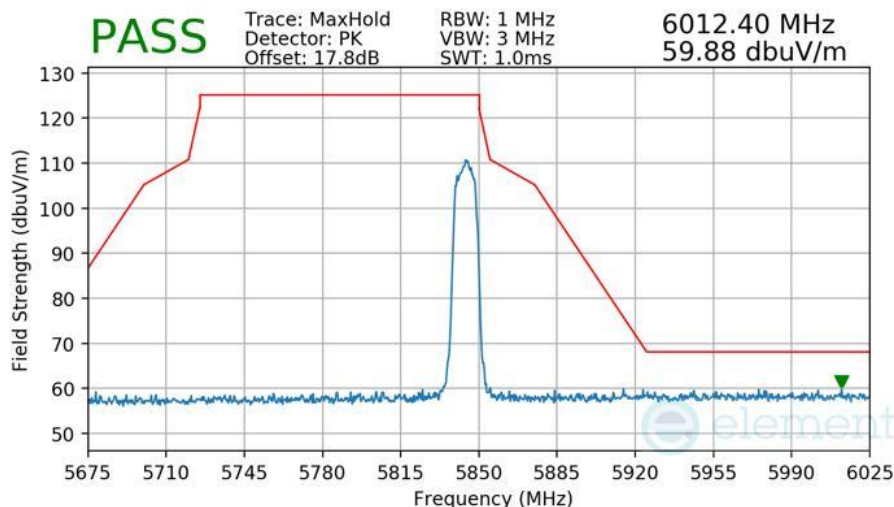

Plot 7-707 Radiated Higher Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 428 of 441

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

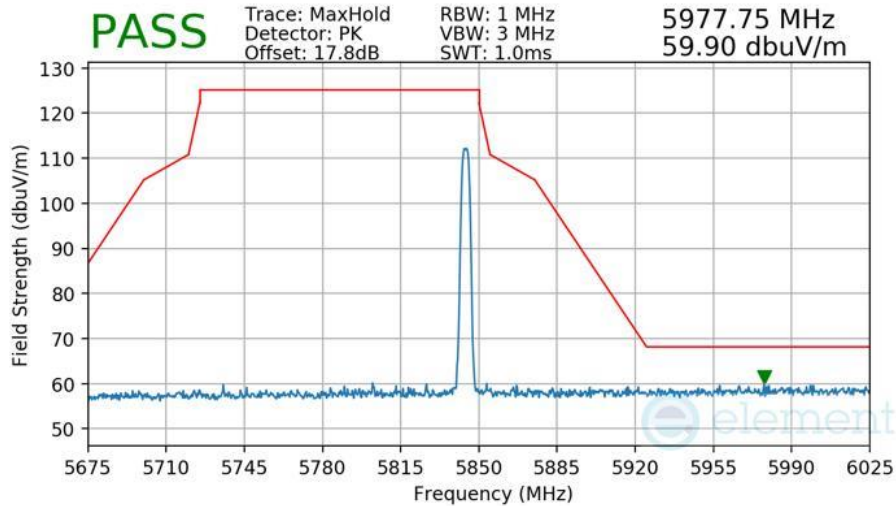

Plot 7-708 Radiated Higher Band Edge Measurement TxBF Diversity

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5844 MHz

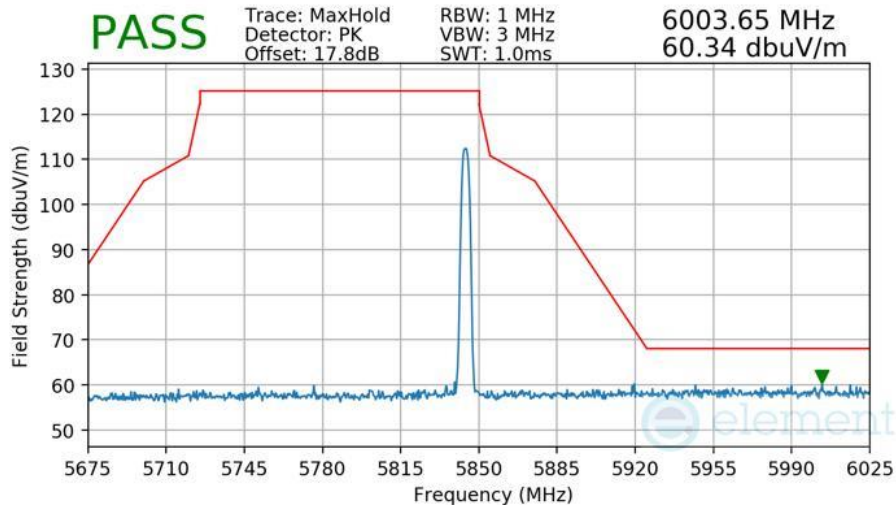

Plot 7-709 Radiated Higher Band Edge Measurement TxBF Diversity

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 429 of 441

7.7 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 must not exceed the limits shown in Table 7-68 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-68. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 430 of 441

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

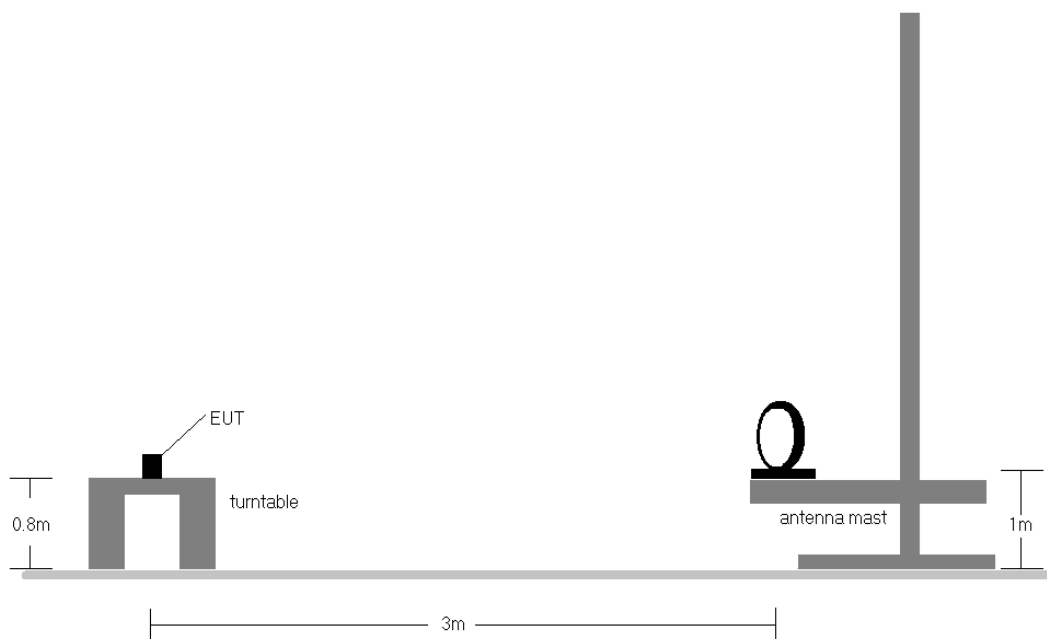


Figure 7-6. Radiated Test Setup < 30 MHz

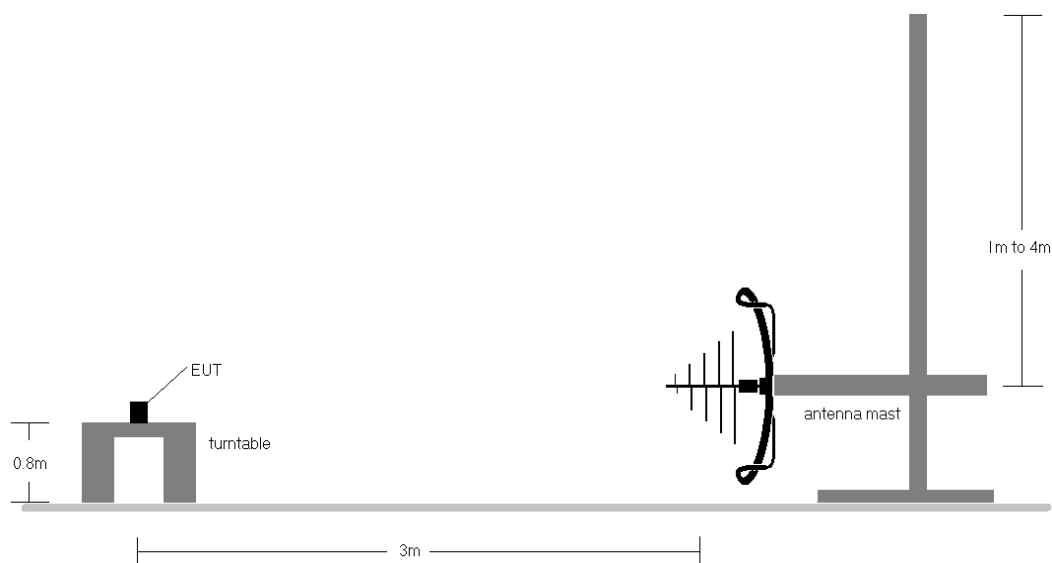


Figure 7-7. Radiated Test Setup < 1 GHz

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 431 of 441

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-68.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor to USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$ – Preamplifier Gain $_{[dB]}$
- Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 432 of 441

Radiated Spurious Emissions (Below 1 GHz)

TxBF Primary

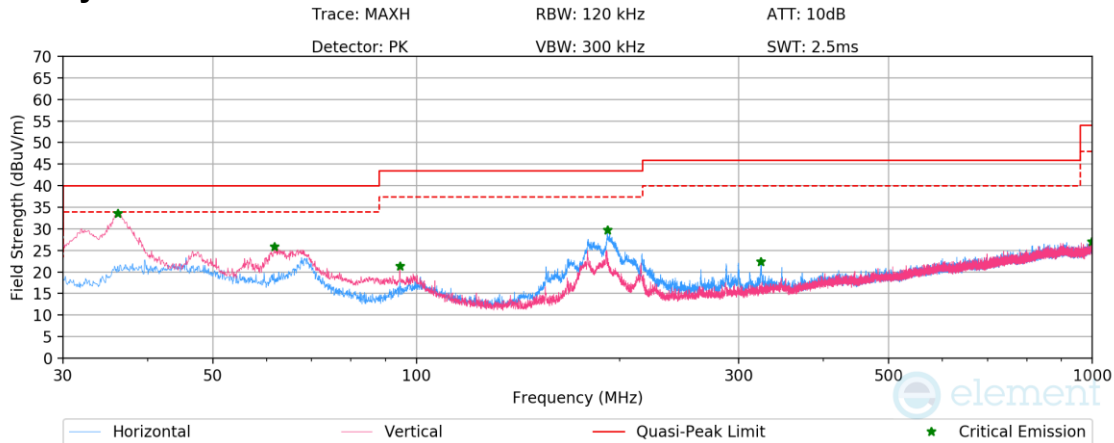


Plot 7-710. Radiated Spurious Emissions Below 1 GHz TxBF Primary (NB UNII BDR ePA – 5788 MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.18	Max-Peak	V	100	0	-53.24	-20.16	33.60	40.00	-6.40
61.62	Max-Peak	V	100	355	-62.16	-18.98	25.86	40.00	-14.14
94.50	Max-Peak	V	100	158	-65.50	-20.21	21.30	43.50	-22.20
191.59	Max-Peak	H	100	198	-58.41	-18.82	29.77	43.50	-13.73
323.41	Max-Peak	H	100	216	-69.60	-14.96	22.44	46.00	-23.56
998.20	Max-Peak	V	300	330	-76.67	-3.26	27.07	54.00	-26.93

Table 7-69. Radiated Spurious Emissions Below 1 GHz TxBF Primary (NB UNII BDR ePA – 5788 MHz), with AC/DC adaptor

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 433 of 441

TxBF Diversity

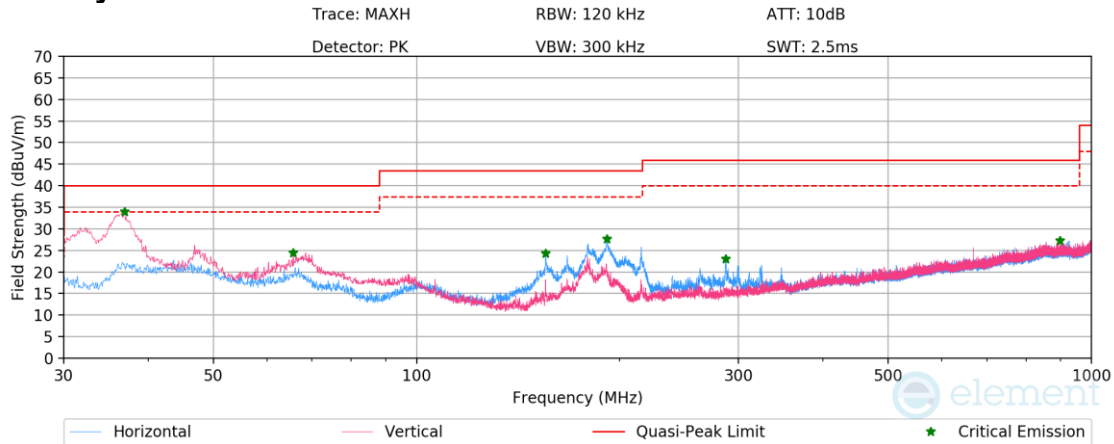

Plot 7-711. Radiated Spurious Emissions Below 1 GHz TxBF Diversity (NB UNII BDR ePA – 5788 MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.90	Max-Peak	V	100	2	-53.10	-19.95	33.95	40.00	-6.05
65.64	Max-Peak	V	100	263	-62.30	-20.26	24.44	40.00	-15.56
155.35	Max-Peak	H	200	173	-61.04	-21.58	24.38	43.50	-19.12
191.41	Max-Peak	H	100	178	-60.50	-18.84	27.66	43.50	-15.84
286.87	Max-Peak	H	100	242	-68.01	-15.94	23.05	46.00	-22.95
898.66	Max-Peak	V	300	43	-75.61	-4.17	27.22	46.00	-18.78

Table 7-70. Radiated Spurious Emissions Below 1 GHz TxBF Diversity (NB UNII BDR ePA – 5788 MHz), with AC/DC adaptor

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 434 of 441

7.8 AC Line Conducted Emissions

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-71. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 435 of 441

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


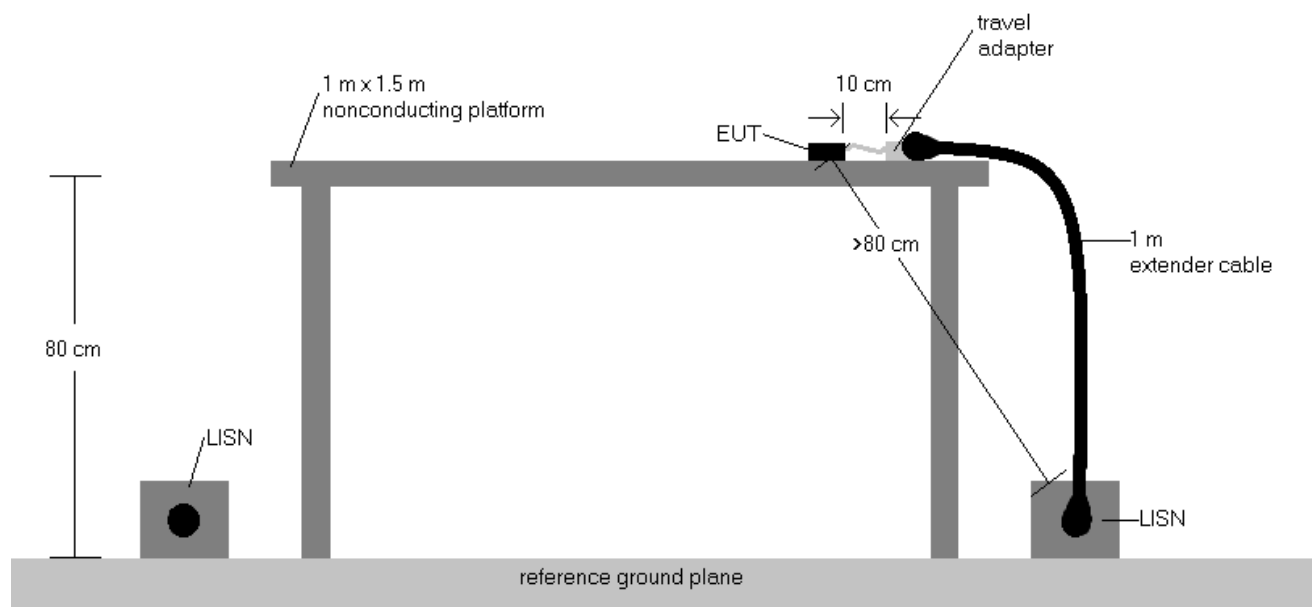


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor to USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150 kHz to 30 MHz are specified in 15.207.
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 436 of 441

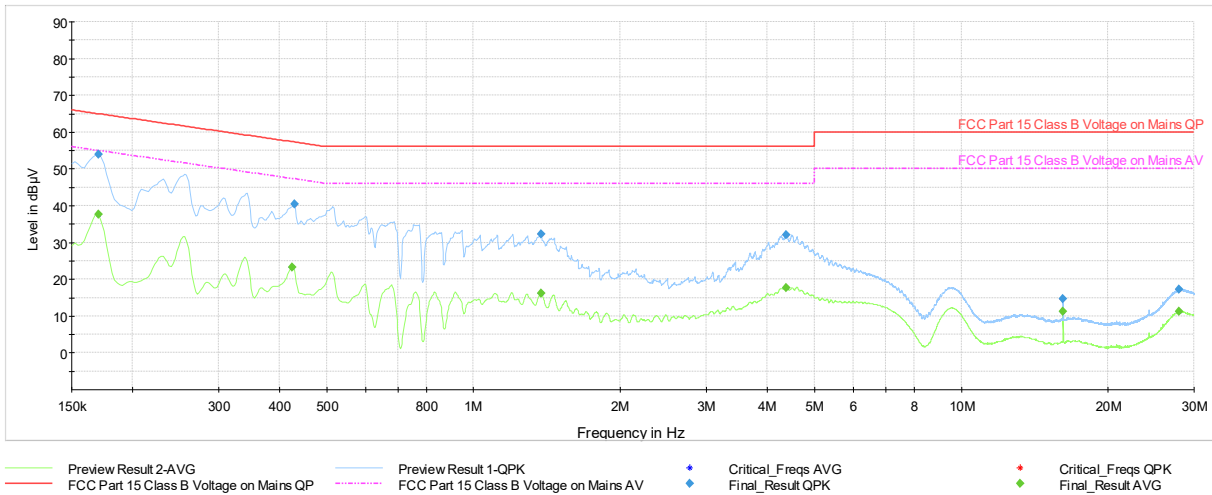


Plot 7-712. AC Line Conducted Plot TxBF (NB UNII BDR ePA – 5788 MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.65	54.95	-17.30	L1	GND
0.17	FINAL	53.95	---	64.95	-11.00	L1	GND
0.42	FINAL	---	23.22	47.36	-24.14	L1	GND
0.43	FINAL	40.35	---	57.27	-16.92	L1	GND
1.38	FINAL	---	16.27	46.00	-29.73	L1	GND
1.38	FINAL	32.23	---	56.00	-23.77	L1	GND
4.37	FINAL	32.06	---	56.00	-23.94	L1	GND
4.37	FINAL	---	17.67	46.00	-28.33	L1	GND
16.17	FINAL	14.76	---	60.00	-45.24	L1	GND
16.17	FINAL	---	11.22	50.00	-38.78	L1	GND
27.90	FINAL	17.22	---	60.00	-42.78	L1	GND
27.95	FINAL	---	11.22	50.00	-38.78	L1	GND

Table 7-72. AC Line Conducted Data TxBF (NB UNII BDR ePA – 5788 MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 437 of 441

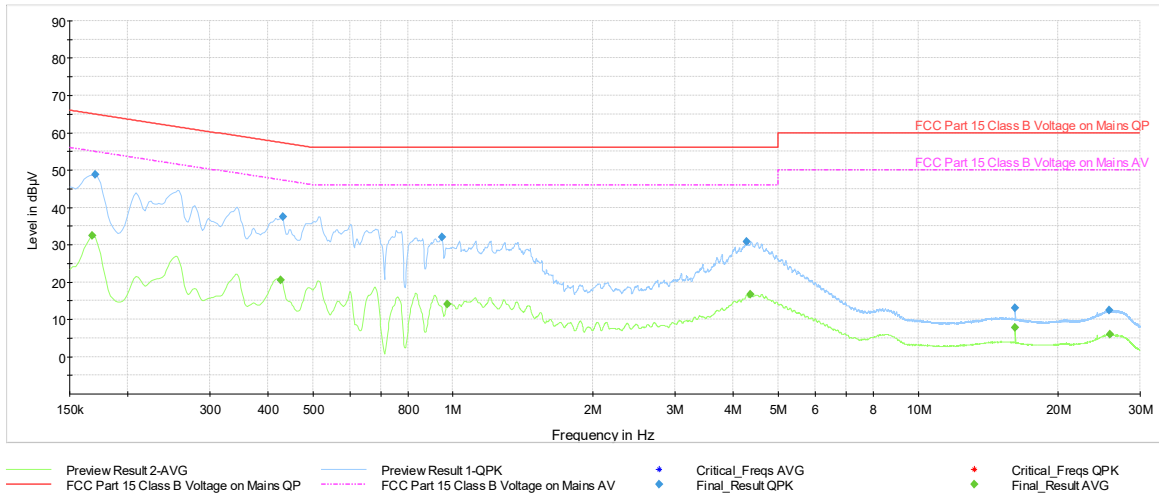


Plot 7-713. AC Line Conducted Plot TxBF (NB UNII BDR ePA – 5788 MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	32.36	55.06	-22.70	N	GND
0.17	FINAL	48.80	---	64.95	-16.15	N	GND
0.43	FINAL	---	20.60	47.32	-26.72	N	GND
0.43	FINAL	37.38	---	57.23	-19.85	N	GND
0.95	FINAL	32.07	---	56.00	-23.93	N	GND
0.97	FINAL	---	13.95	46.00	-32.05	N	GND
4.28	FINAL	30.86	---	56.00	-25.14	N	GND
4.36	FINAL	---	16.65	46.00	-29.35	N	GND
16.17	FINAL	12.98	---	60.00	-47.02	N	GND
16.17	FINAL	---	7.83	50.00	-42.17	N	GND
25.78	FINAL	12.50	---	60.00	-47.50	N	GND
25.86	FINAL	---	5.93	50.00	-44.07	N	GND

Table 7-73. AC Line Conducted TxBF (NB UNII BDR ePA – 5788 MHz) (N) with AC/DC adaptor

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 438 of 441

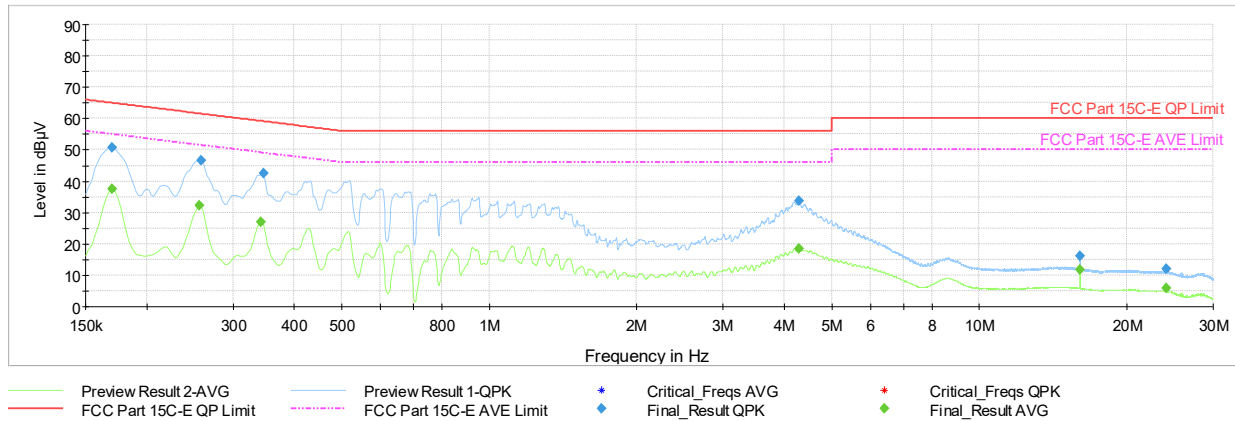


Plot 7-714. AC Line Conducted Plot TxBF (NB UNII BDR ePA – 5788 MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.63	54.95	-17.32	L1	GND
0.17	FINAL	50.66	---	64.95	-14.29	L1	GND
0.26	FINAL	---	32.24	51.57	-19.33	L1	GND
0.26	FINAL	46.76	---	61.50	-14.74	L1	GND
0.34	FINAL	---	26.93	49.17	-22.24	L1	GND
0.35	FINAL	42.41	---	59.06	-16.65	L1	GND
4.29	FINAL	33.63	---	56.00	-22.37	L1	GND
4.29	FINAL	---	18.51	46.00	-27.49	L1	GND
16.07	FINAL	16.16	---	60.00	-43.84	L1	GND
16.07	FINAL	---	11.65	50.00	-38.35	L1	GND
24.10	FINAL	12.03	---	60.00	-47.97	L1	GND
24.10	FINAL	---	5.93	50.00	-44.07	L1	GND

Table 7-74. AC Line Conducted Data TxBF (NB UNII BDR ePA – 5788 MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 439 of 441

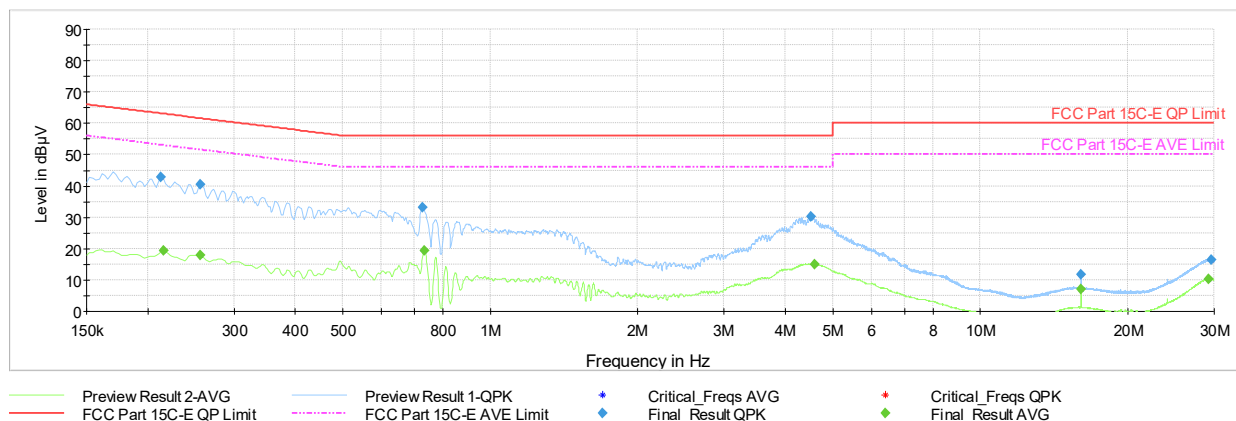

Plot 7-715. AC Line Conducted Plot TxBF (NB UNII BDR ePA – 5788 MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.21	FINAL	42.71	---	63.09	-20.38	N	GND
0.22	FINAL	---	19.32	53.00	-33.68	N	GND
0.26	FINAL	---	18.00	51.57	-33.57	N	GND
0.26	FINAL	40.60	---	61.57	-20.97	N	GND
0.73	FINAL	33.01	---	56.00	-22.99	N	GND
0.73	FINAL	---	19.37	46.00	-26.63	N	GND
4.52	FINAL	30.06	---	56.00	-25.94	N	GND
4.58	FINAL	---	14.96	46.00	-31.04	N	GND
16.08	FINAL	11.79	---	60.00	-48.21	N	GND
16.08	FINAL	---	7.10	50.00	-42.90	N	GND
29.17	FINAL	---	10.38	50.00	-39.62	N	GND
29.60	FINAL	16.56	---	60.00	-43.44	N	GND

Table 7-75. AC Line Conducted TxBF (NB UNII BDR ePA – 5788 MHz) (N) with AC/DC adaptor

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 440 of 441

V 12.0 03/03/2026

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3595** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: BCGA3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-06-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 441 of 441