


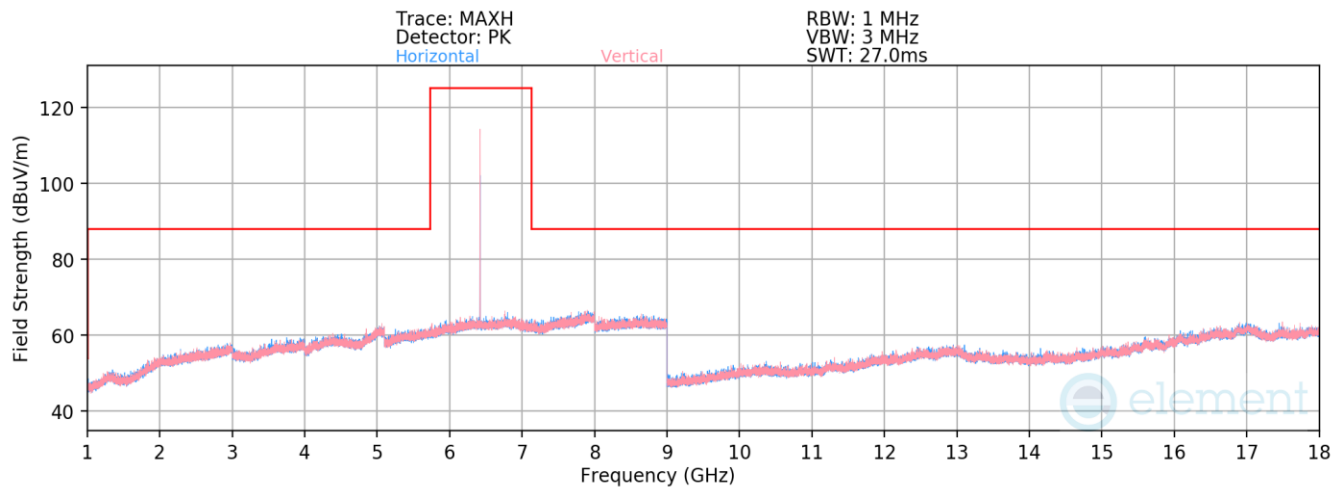

Plot 7-430. Radiated Spurious Emissions 1-18 GHz TxBF Diversity (HDR4 ePA – 6420 MHz)

Mode: HDR4

Data Rate: 4 Mbps

Power Scheme: ePA


Distance of Measurements: 3 Meters

Operating Frequency: 6420 MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12840.00	Average	H	-	-	-84.90	22.22	44.32	68.23	-23.91
12840.00	Peak	H	-	-	-73.19	22.22	56.03	88.23	-32.20

Table 7-40. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 274 of 331

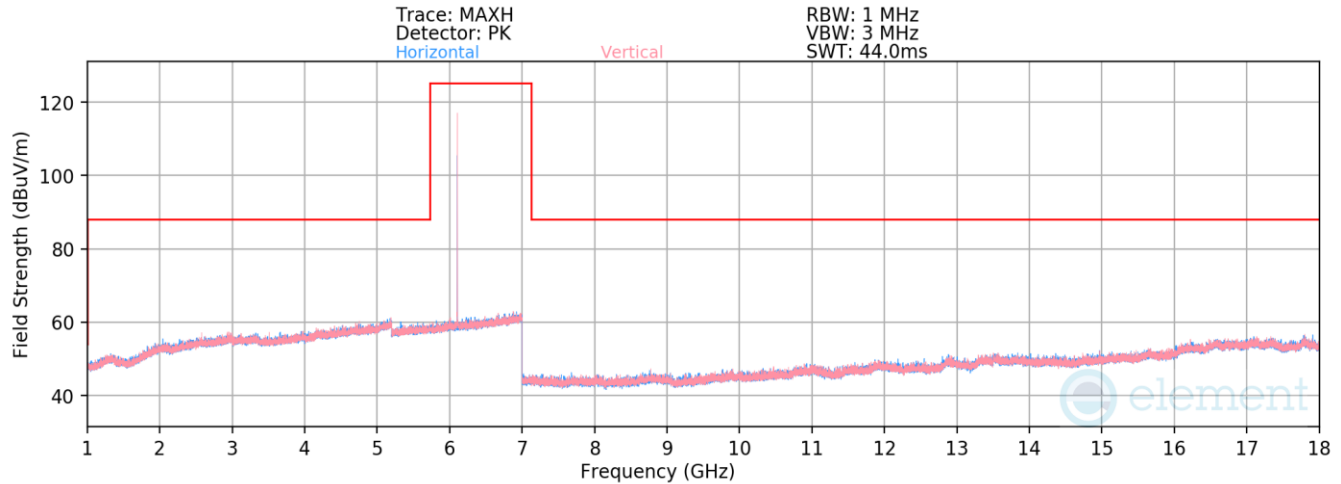

Plot 7-431. Radiated Spurious Emissions 1-18 GHz TxBF Diversity (LE1M ePA – 6106 MHz)

Mode: LE1M

Data Rate: 1 Mbps

Power Scheme: ePA


Distance of Measurements: 3 Meters

Operating Frequency: 6106 MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12212.00	Average	H	-	-	-80.22	11.35	38.12	53.98	-15.86
*	12212.00	Peak	H	-	-	-68.82	11.35	49.53	73.98	-24.45

Table 7-41. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 275 of 331

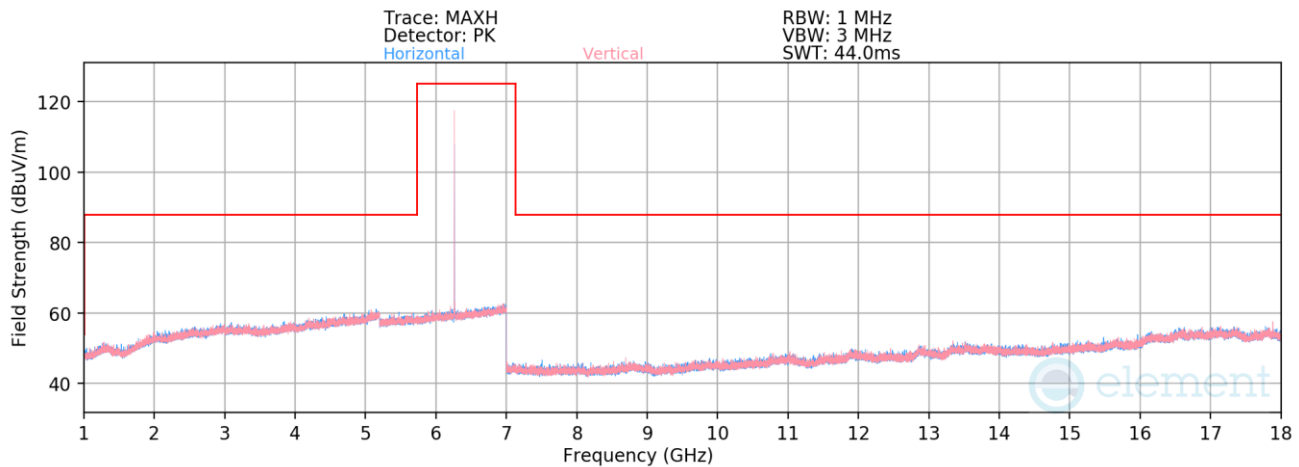

Plot 7-432. Radiated Spurious Emissions 1-18 GHz TxBF Diversity (LE1M ePA – 6263 MHz)

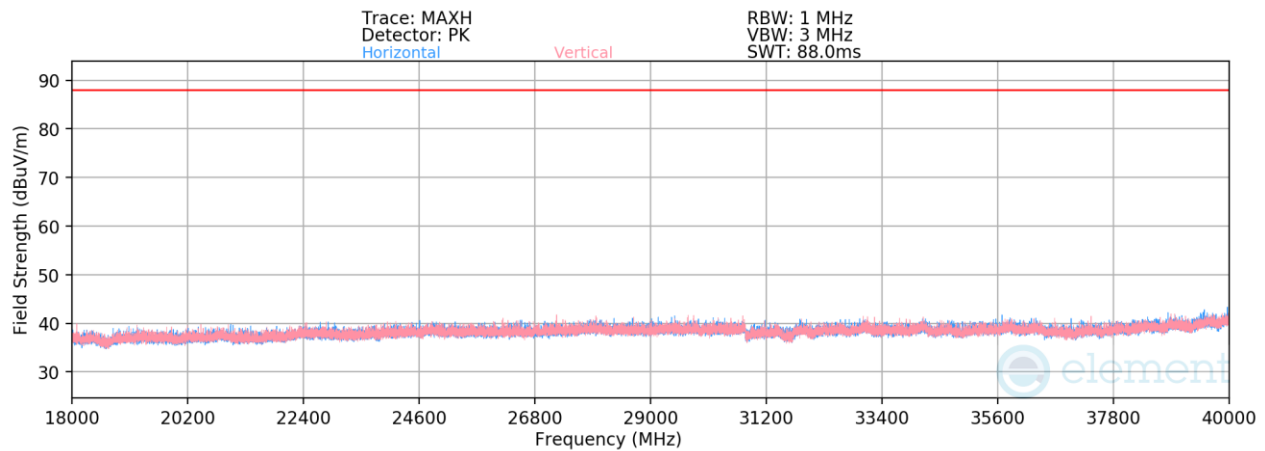


Plot 7-433. Radiated Spurious Emissions Above 18 GHz TxBF Diversity (LE1M ePA – 6263 MHz)

Mode:	LE1M
Data Rate:	1 Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6263 MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12526.00	Average	H	-	-	-81.42	11.74	0.00	37.32	53.98	-16.66
*	12526.00	Peak	H	-	-	-69.74	11.74	0.00	49.00	73.98	-24.98
*	18789.00	Average	H	-	-	-63.88	-5.85	-9.54	27.73	53.98	-26.25
*	18789.00	Peak	H	-	-	-52.24	-5.78	-9.54	39.44	73.98	-34.54
	25052.00	Average	H	-	-	-63.41	-4.40	-9.54	29.65	68.23	-38.58
	25052.00	Peak	H	-	-	-52.28	-4.42	-9.54	40.77	88.23	-47.46
*	31315.00	Average	H	-	-	-64.96	-2.57	-9.54	29.93	53.98	-24.05
*	31315.00	Peak	H	-	-	-53.36	-2.68	-9.54	41.42	73.98	-32.56

Table 7-42. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 276 of 331

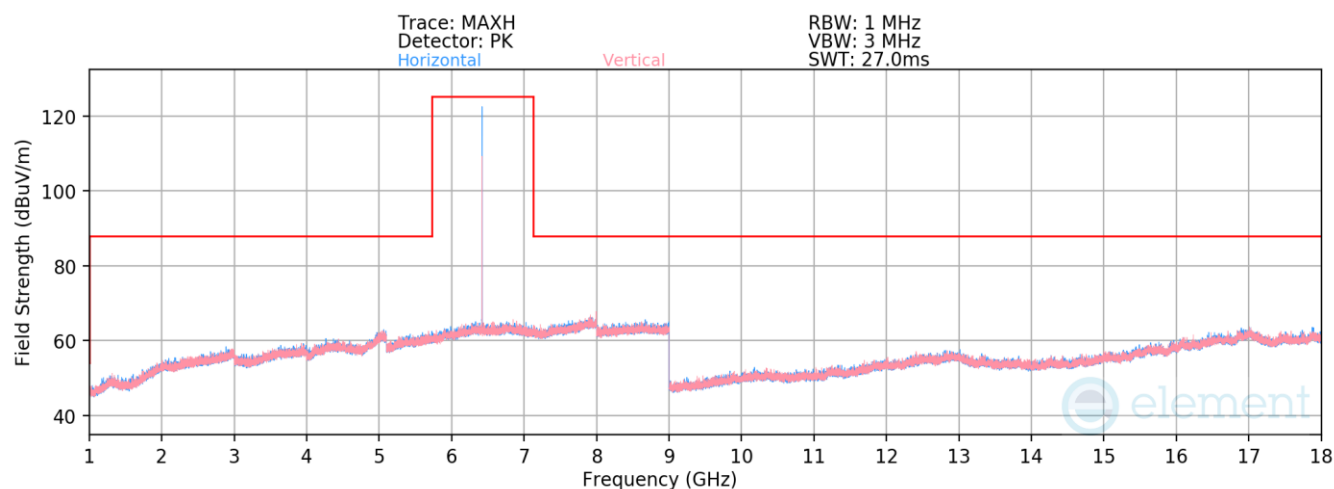

Plot 7-434. Radiated Spurious Emissions 1-18 GHz TxBF Diversity (LE1M ePA - 6420 MHz)

Mode: LE1M

Data Rate: 1 Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 6420 MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12840.00	Average	V	-	-	-85.09	22.45	44.36	68.23	-23.87
12840.00	Peak	V	-	-	-73.31	22.45	56.14	88.23	-32.09


Table 7-43. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 277 of 331

V 12.0 03/03/2026


7.8.3 Antenna WF5T Radiated Band Edge Measurements

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

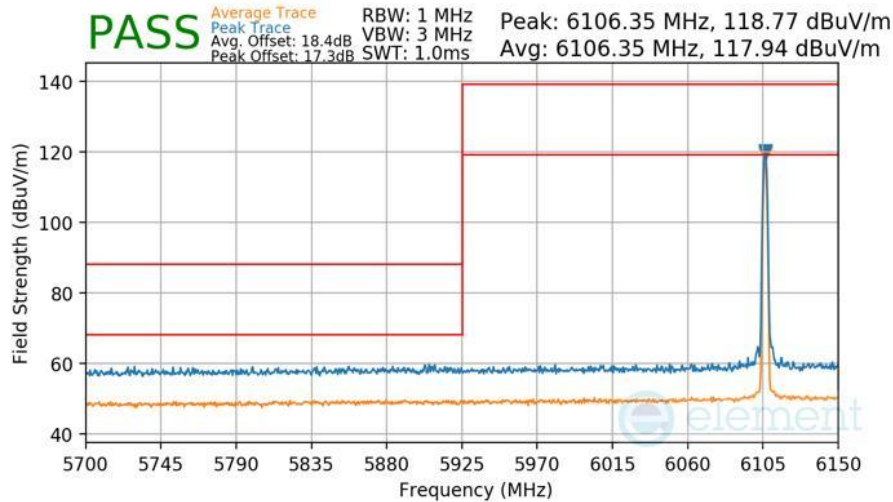

Plot 7-435 Radiated Lower Band Edge Measurement Antenna WF5T


Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

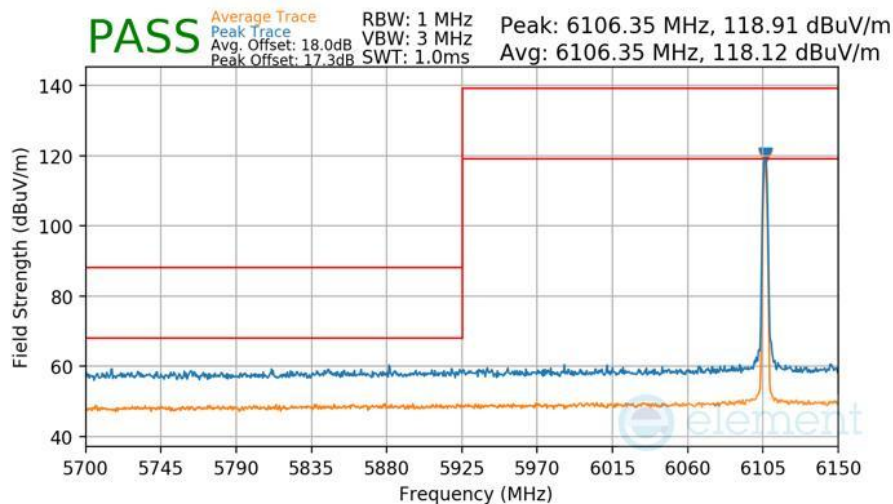

Plot 7-436 Radiated Lower Band Edge Measurement Antenna WF5T


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 278 of 331

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

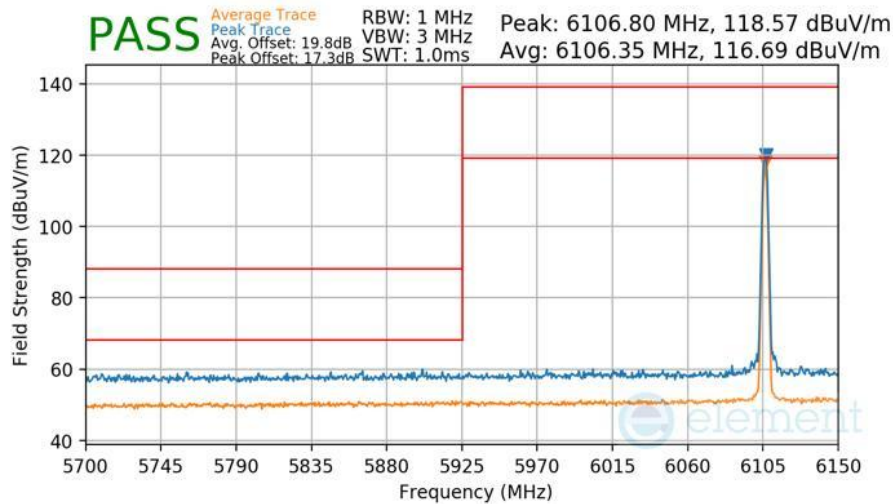

Plot 7-437 Radiated Lower Band Edge Measurement Antenna WF5T


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

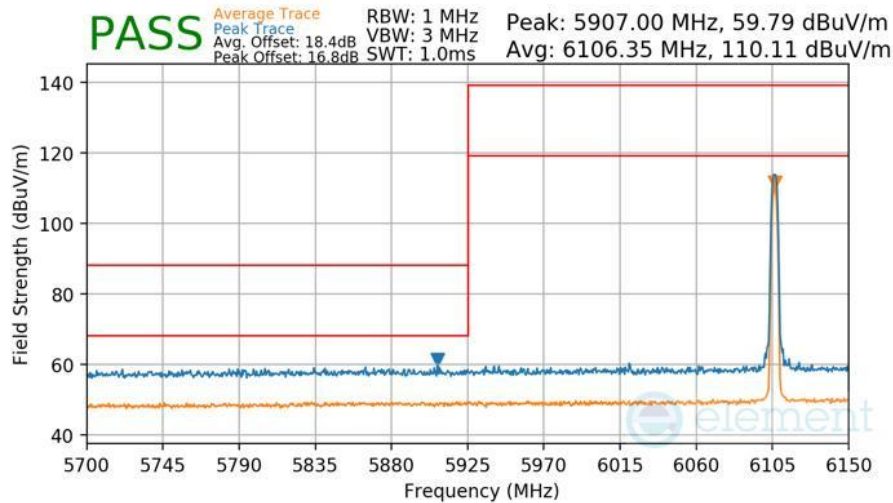

Plot 7-438 Radiated Lower Band Edge Measurement Antenna WF5T


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

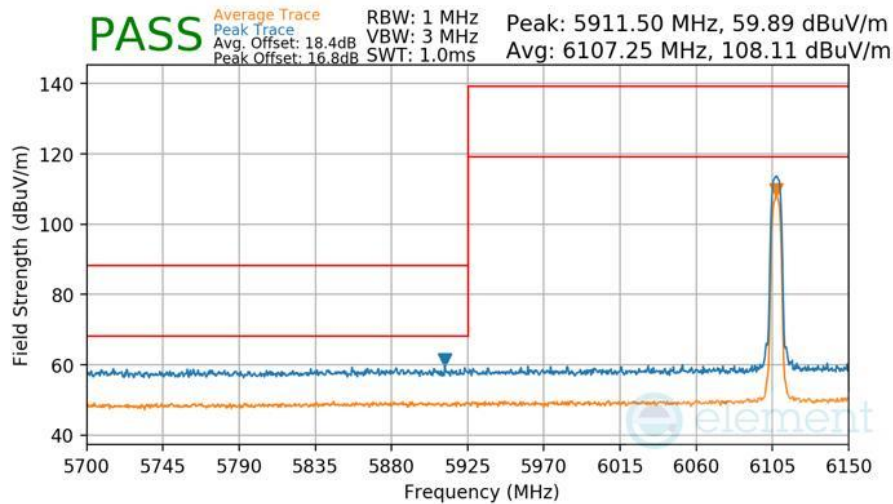

Plot 7-439 Radiated Lower Band Edge Measurement Antenna WF5T


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

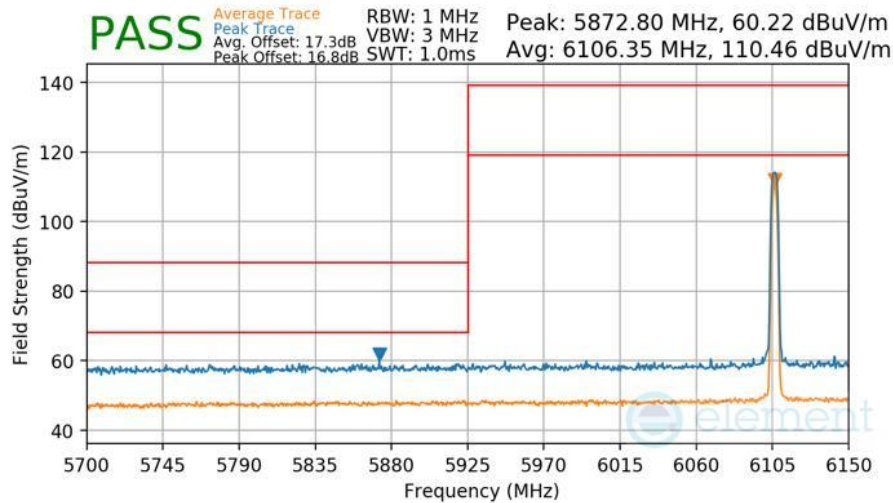

Plot 7-440 Radiated Lower Band Edge Measurement Antenna WF5T


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 280 of 331

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

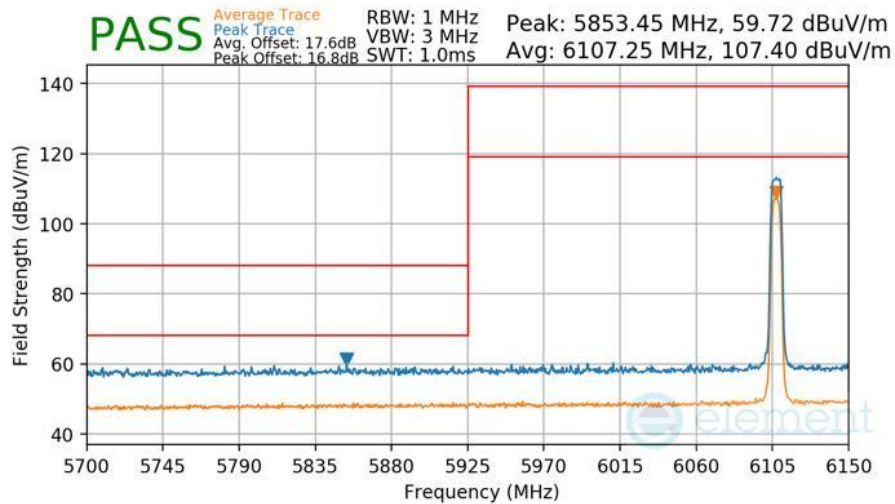

Plot 7-441 Radiated Lower Band Edge Measurement Antenna WF5T


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

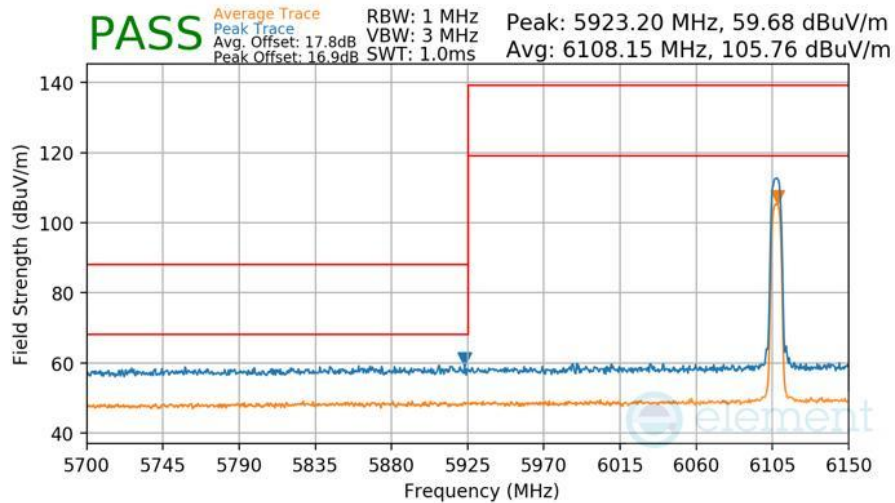

Plot 7-442 Radiated Lower Band Edge Measurement Antenna WF5T


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

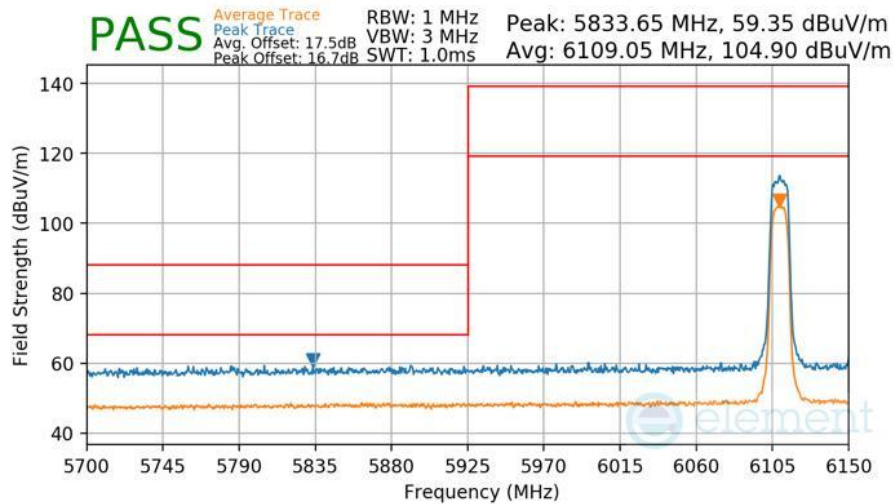

Plot 7-443 Radiated Lower Band Edge Measurement Antenna WF5T


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

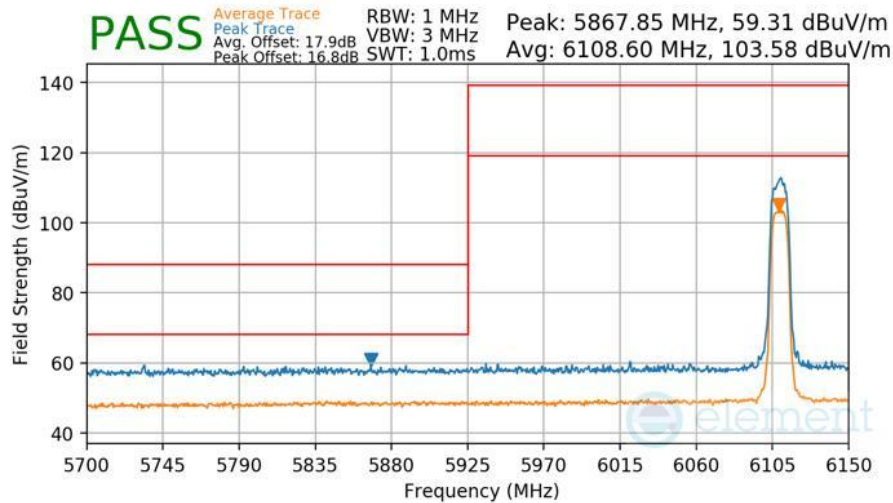

Plot 7-444 Radiated Lower Band Edge Measurement Antenna WF5T


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

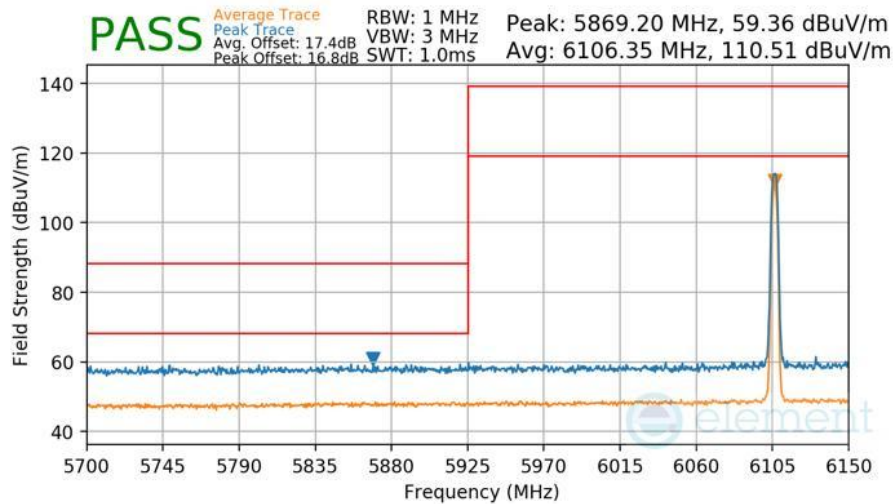

Plot 7-445 Radiated Lower Band Edge Measurement Antenna WF5T

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

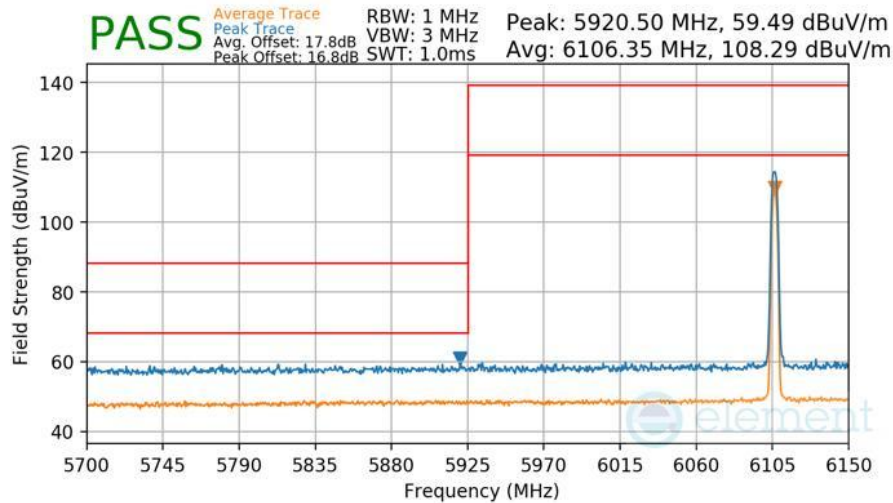


Plot 7-446 Radiated Lower Band Edge Measurement Antenna WF5T

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		


7.8.4 Antenna WF5B Radiated Band Edge Measurements

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

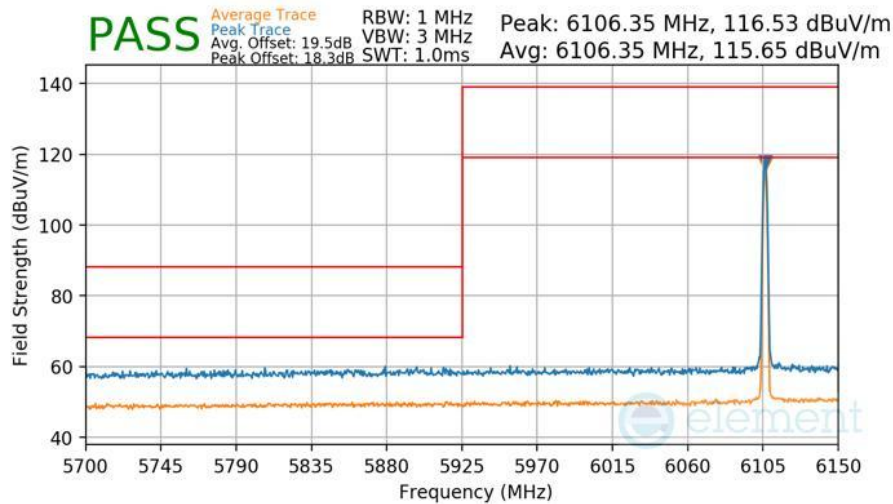

Plot 7-447 Radiated Lower Band Edge Measurement Antenna WF5B


Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

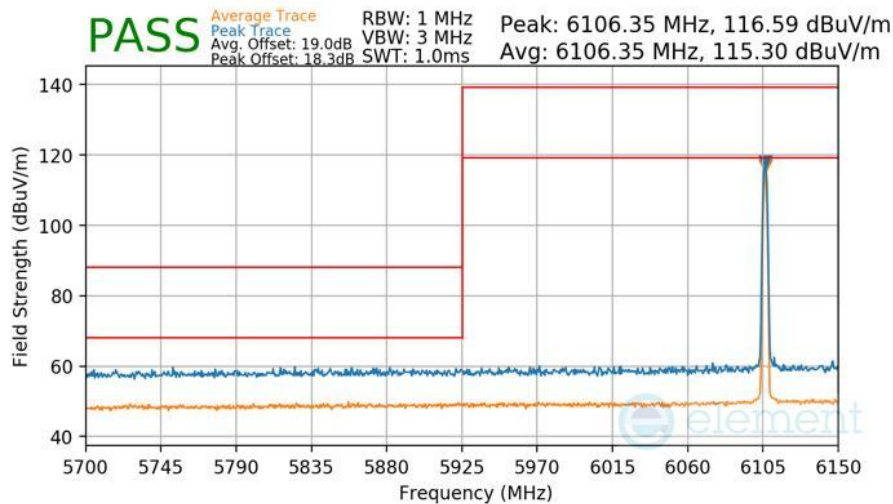

Plot 7-448 Radiated Lower Band Edge Measurement Antenna WF5B


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 284 of 331

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

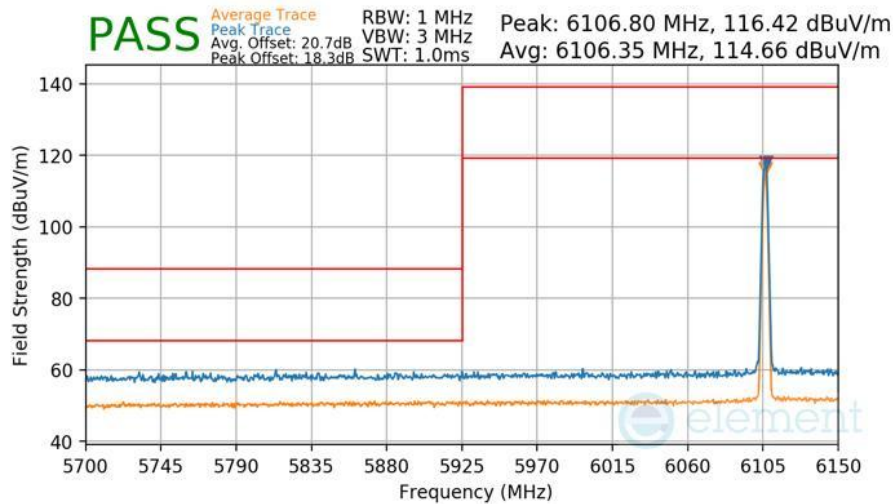

Plot 7-449 Radiated Lower Band Edge Measurement Antenna WF5B


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

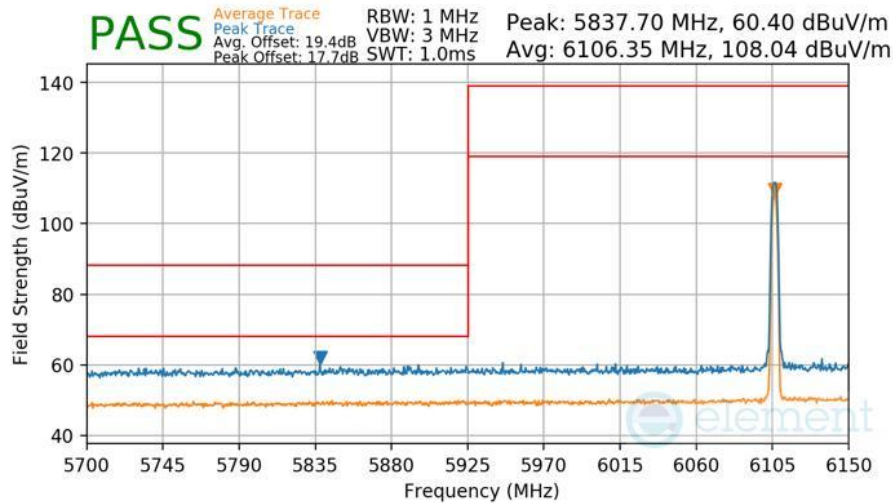

Plot 7-450 Radiated Lower Band Edge Measurement Antenna WF5B


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 285 of 331

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

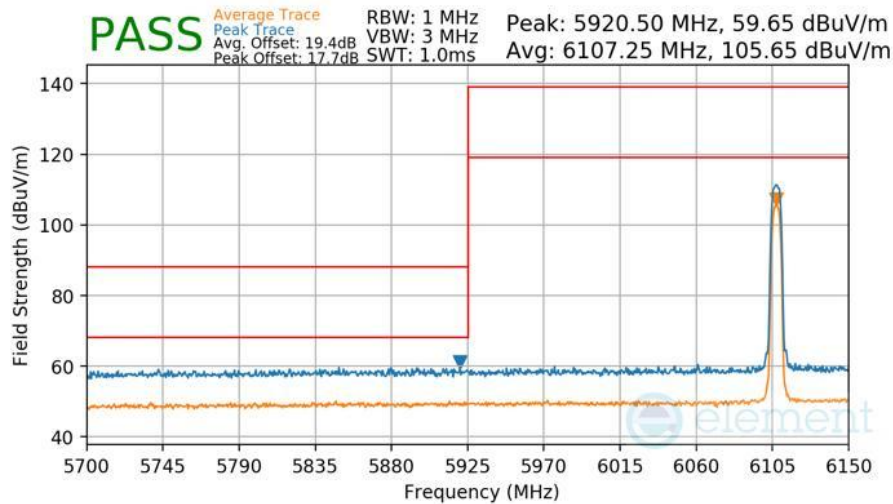

Plot 7-451 Radiated Lower Band Edge Measurement Antenna WF5B


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

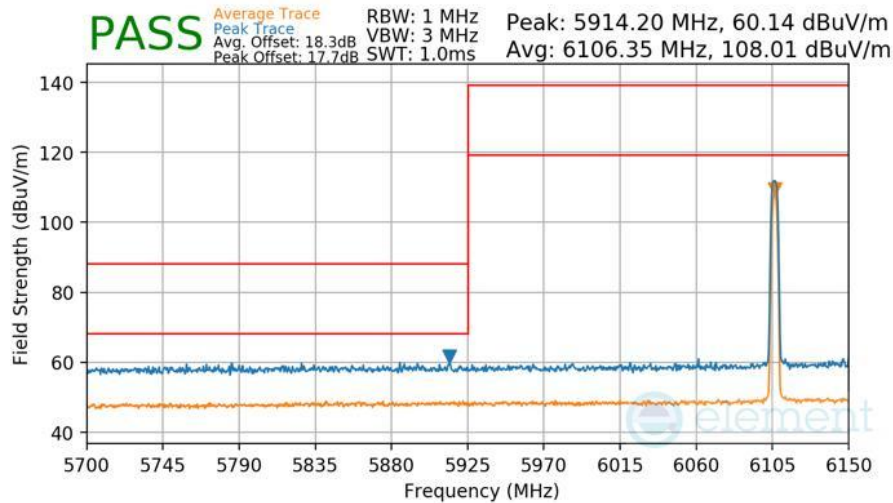

Plot 7-452 Radiated Lower Band Edge Measurement Antenna WF5B


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

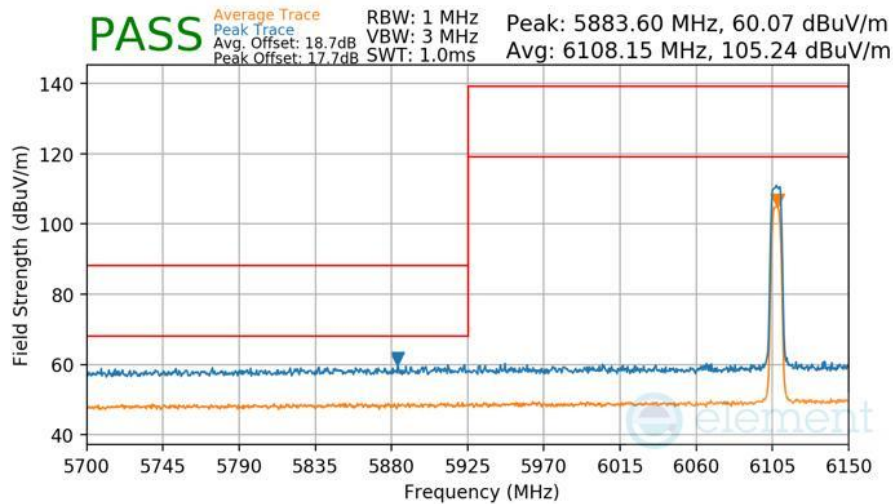

Plot 7-453 Radiated Lower Band Edge Measurement Antenna WF5B


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

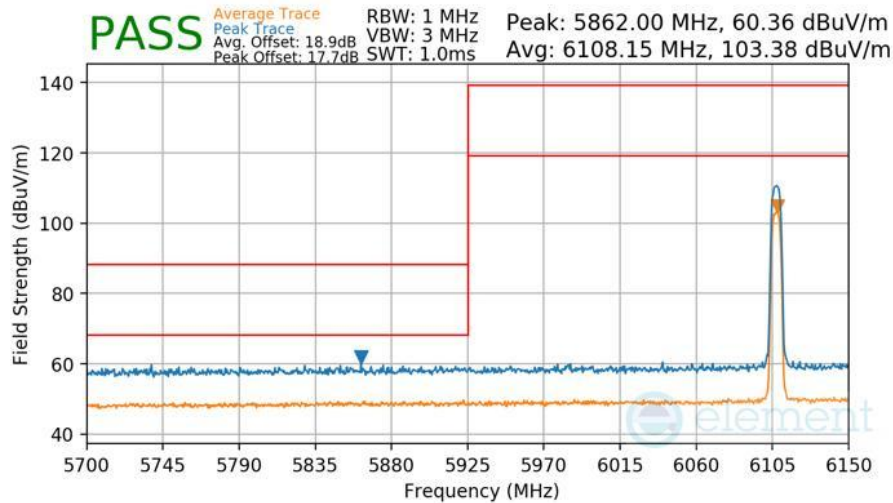

Plot 7-454 Radiated Lower Band Edge Measurement Antenna WF5B


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

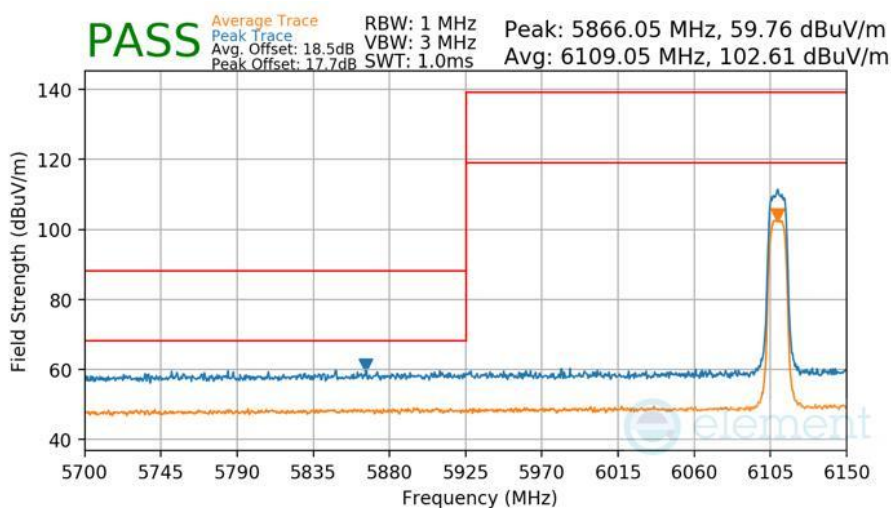

Plot 7-455 Radiated Lower Band Edge Measurement Antenna WF5B


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

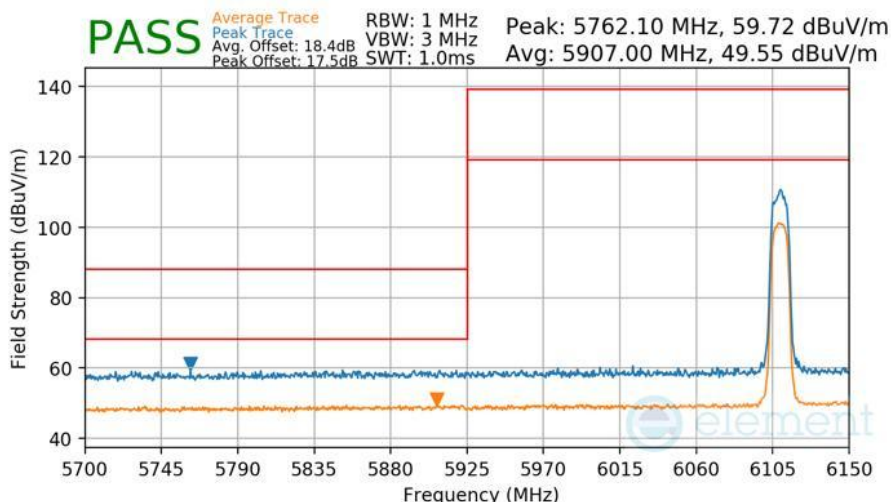

Plot 7-456 Radiated Lower Band Edge Measurement Antenna WF5B


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 288 of 331

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

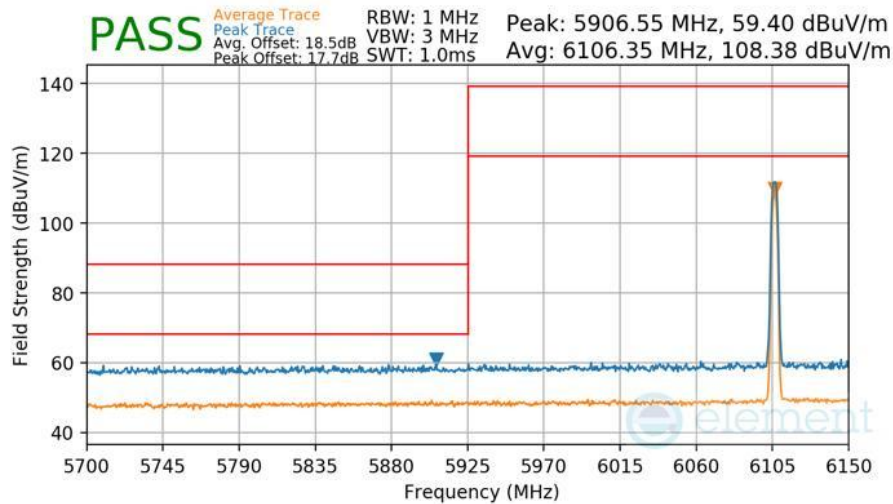

Plot 7-457 Radiated Lower Band Edge Measurement Antenna WF5B

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

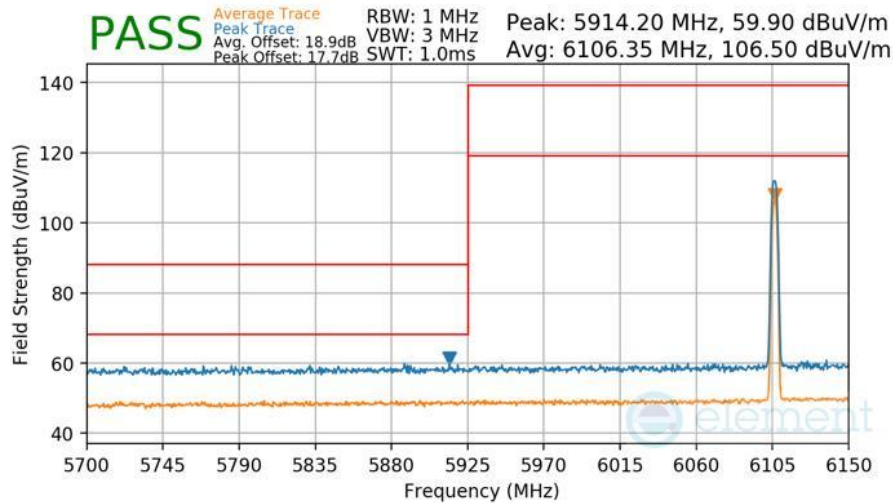


Plot 7-458 Radiated Lower Band Edge Measurement Antenna WF5B

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 289 of 331


7.8.5 Antenna WF8 Radiated Band Edge Measurements

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

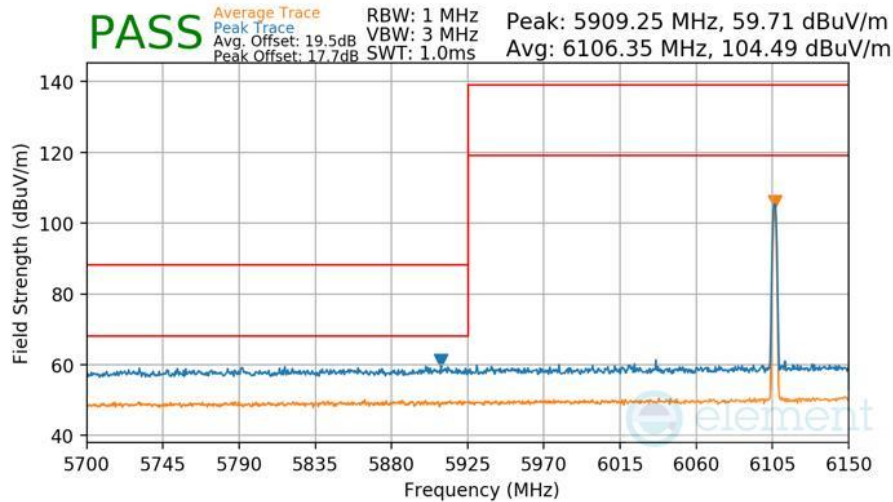

Plot 7-459 Radiated Lower Band Edge Measurement Antenna WF8


Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

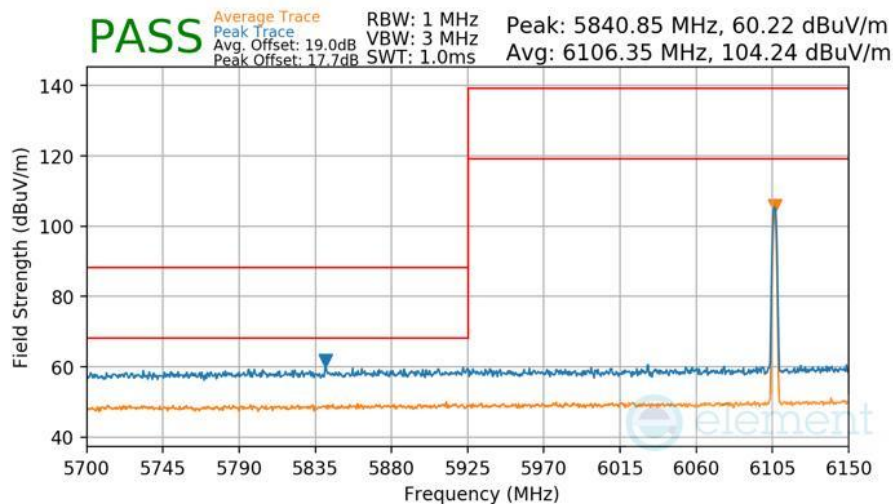

Plot 7-460 Radiated Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 290 of 331

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

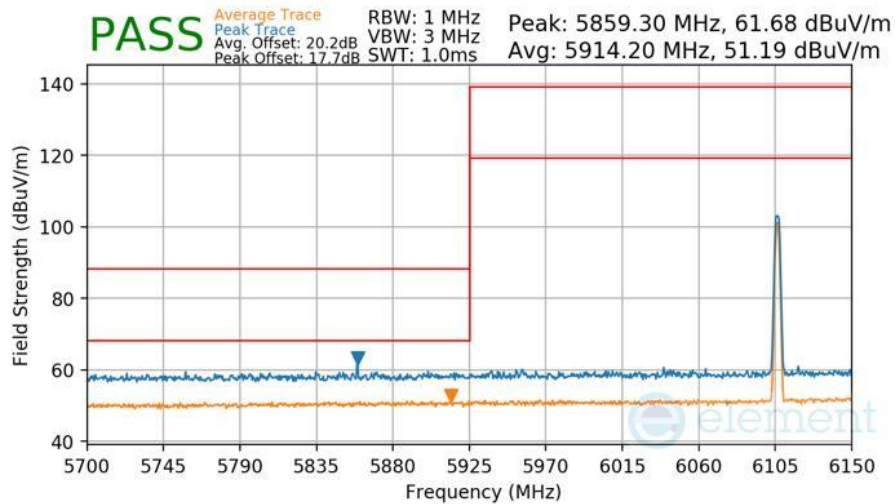

Plot 7-461 Radiated Lower Band Edge Measurement Antenna WF8


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

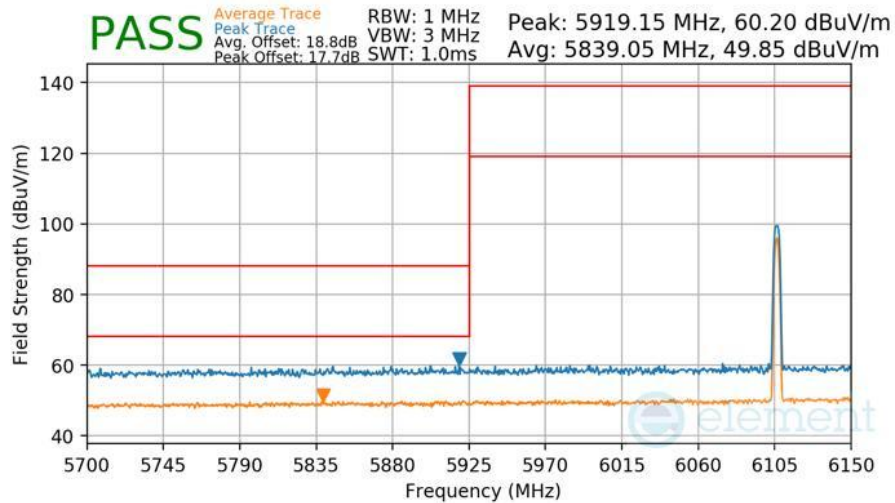

Plot 7-462 Radiated Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

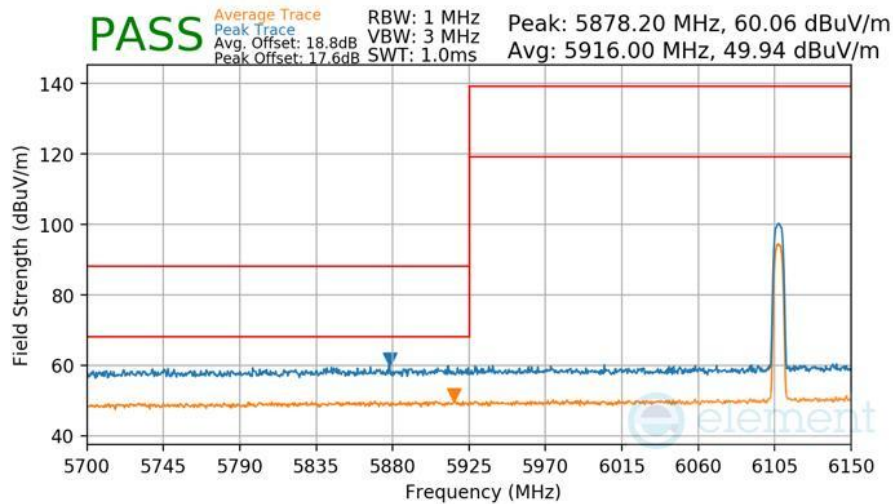

Plot 7-463 Radiated Lower Band Edge Measurement Antenna WF8


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

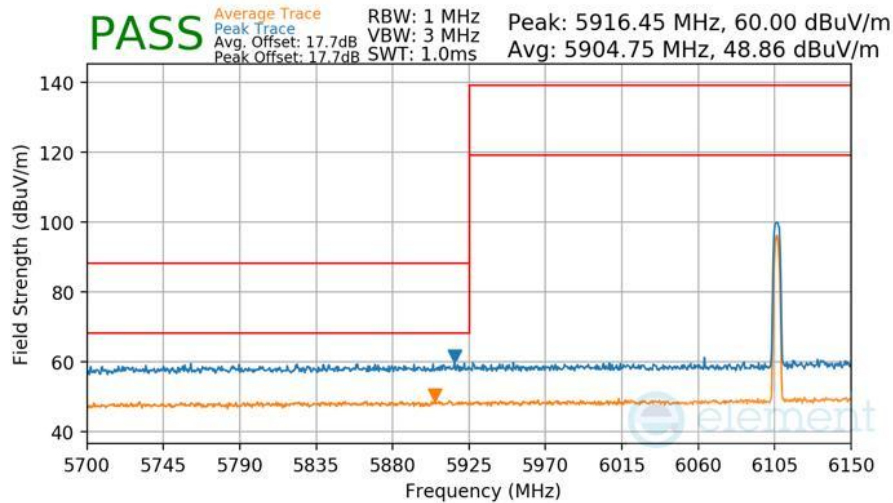

Plot 7-464 Radiated Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 292 of 331

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

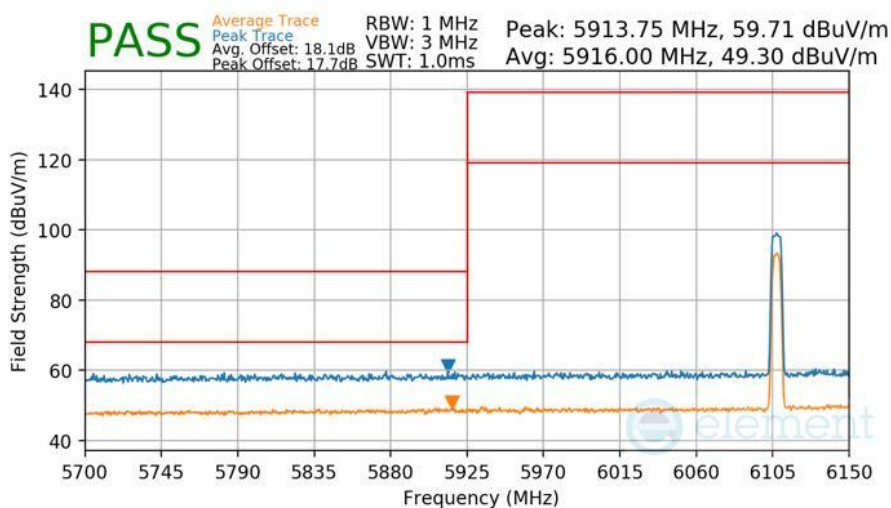

Plot 7-465 Radiated Lower Band Edge Measurement Antenna WF8


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

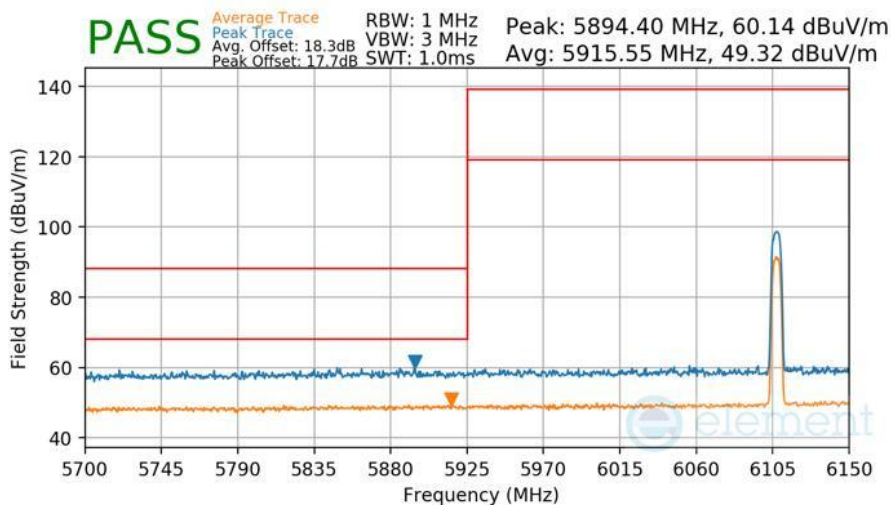

Plot 7-466 Radiated Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

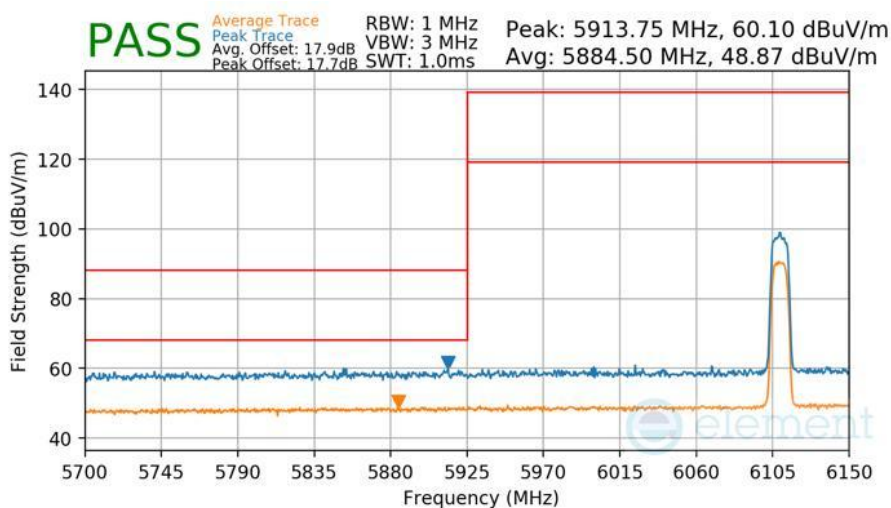

Plot 7-467 Radiated Lower Band Edge Measurement Antenna WF8


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

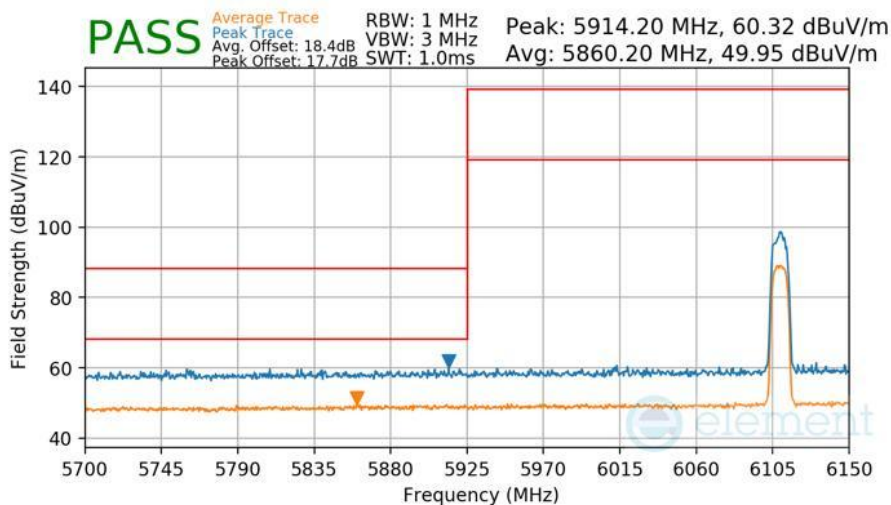

Plot 7-468 Radiated Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 294 of 331

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

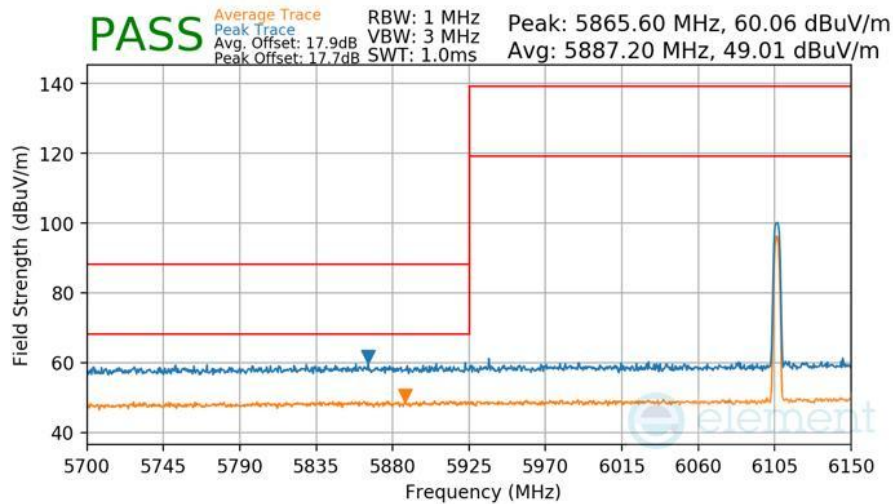

Plot 7-469 Radiated Lower Band Edge Measurement Antenna WF8

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

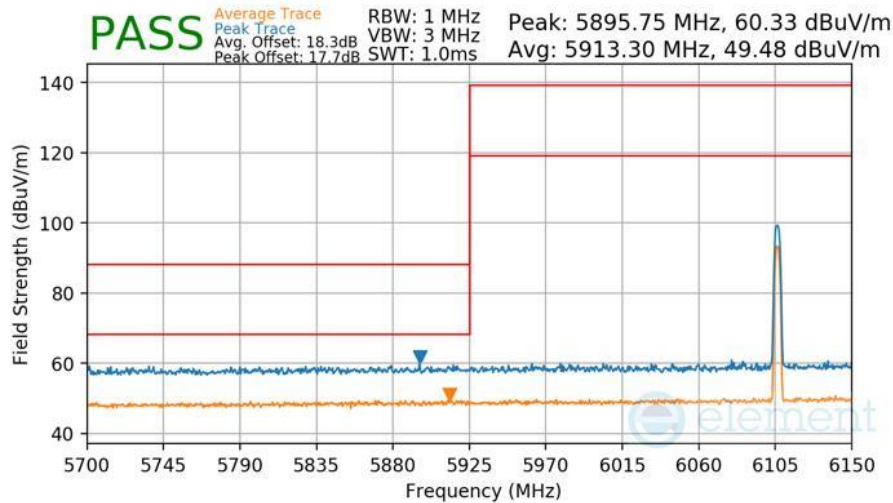


Plot 7-470 Radiated Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		


7.8.6 TxBF Primary Radiated Band Edge Measurements

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

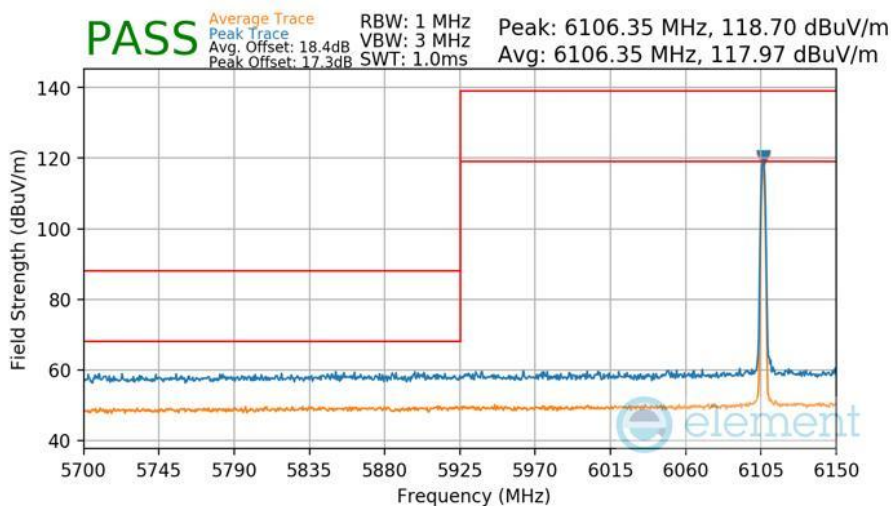

Plot 7-471 Radiated Lower Band Edge Measurement TxBF Primary


Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

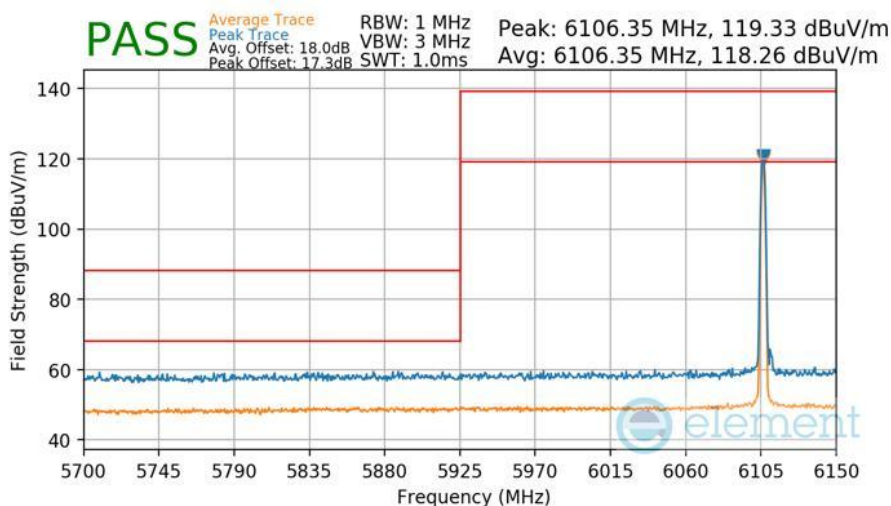

Plot 7-472 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 296 of 331

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

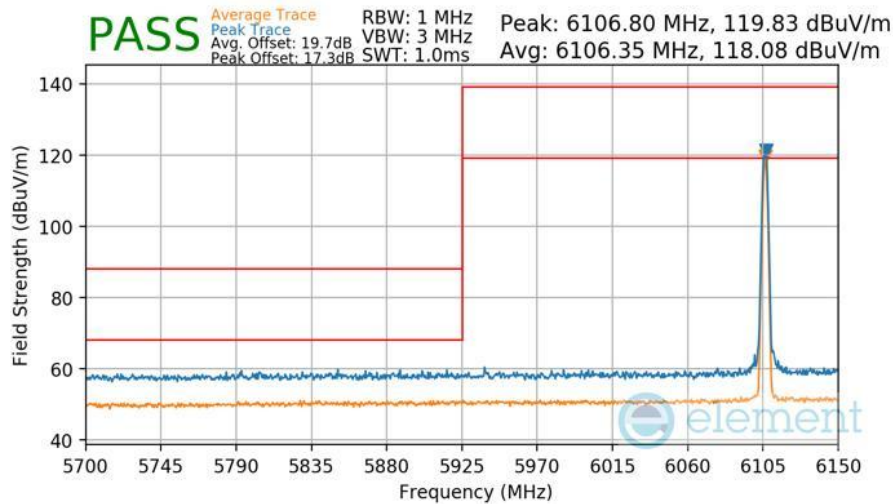

Plot 7-473 Radiated Lower Band Edge Measurement TxBF Primary


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

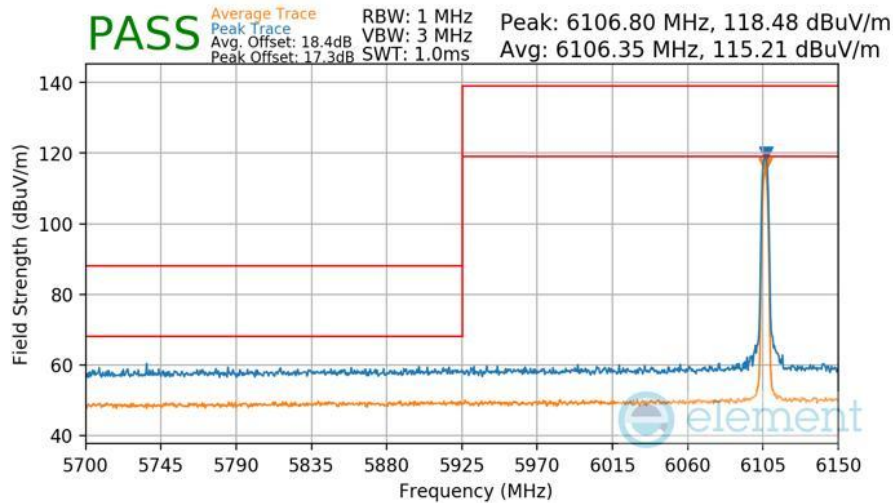

Plot 7-474 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

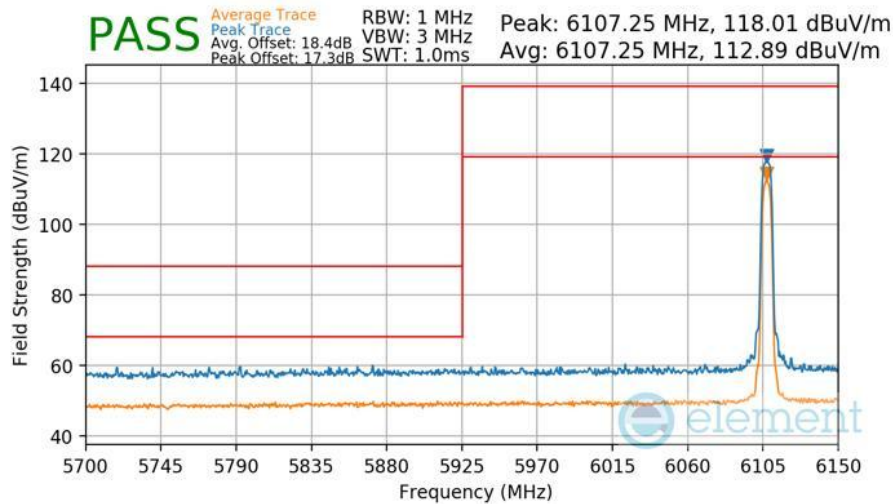

Plot 7-475 Radiated Lower Band Edge Measurement TxBF Primary


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

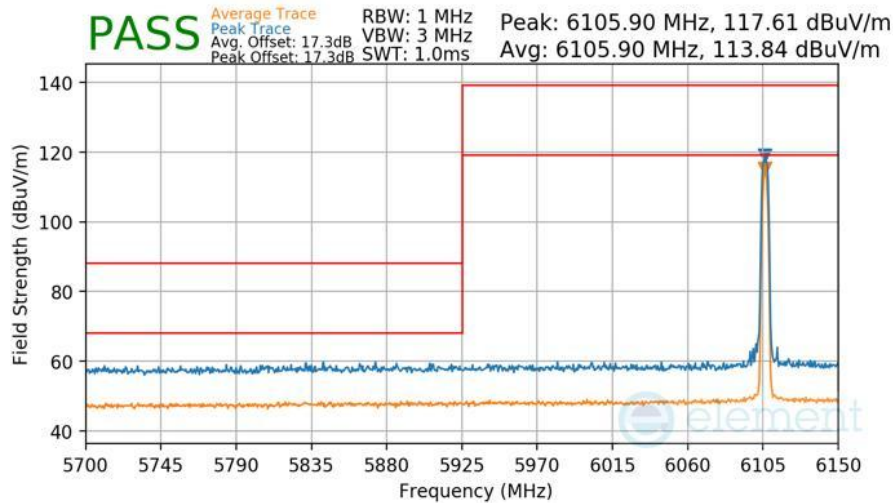

Plot 7-476 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

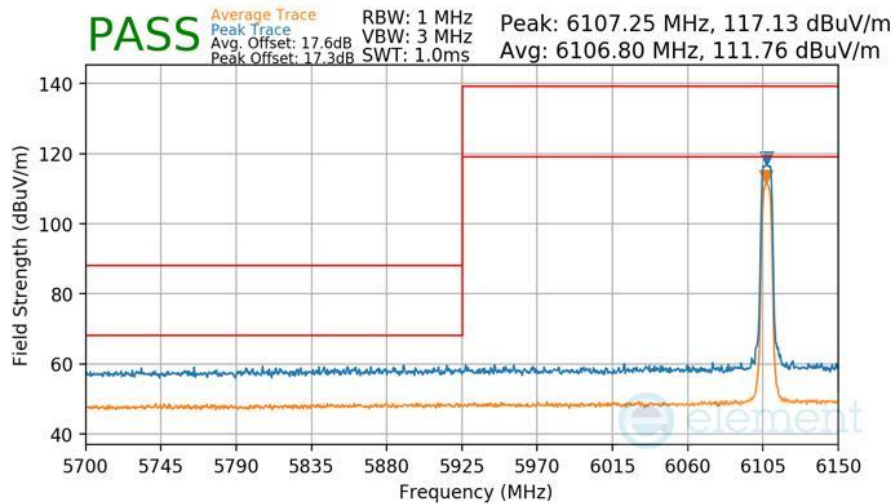

Plot 7-477 Radiated Lower Band Edge Measurement TxBF Primary


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

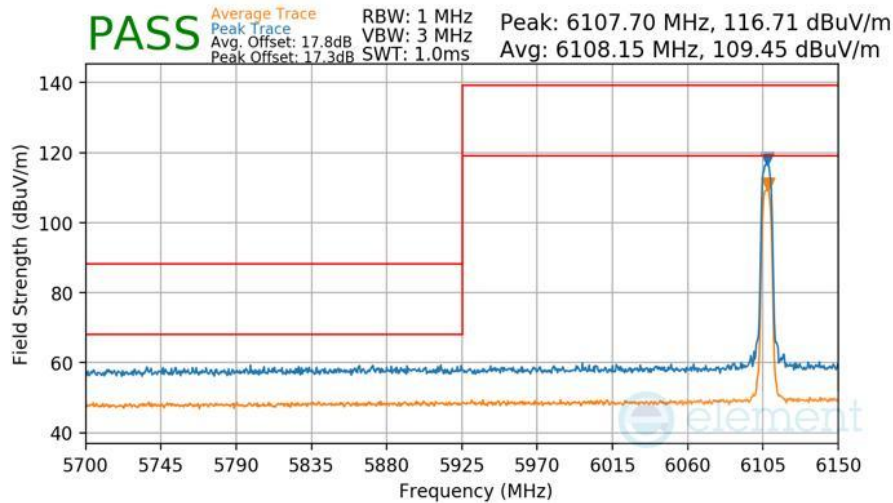

Plot 7-478 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

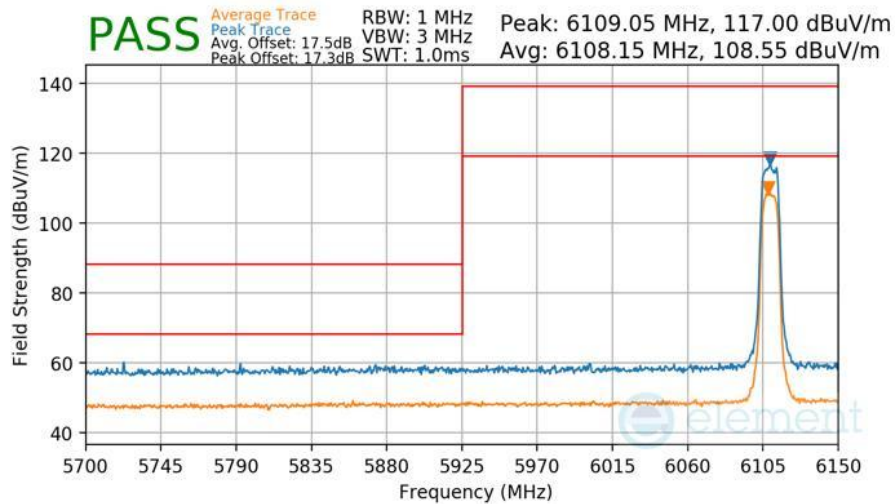

Plot 7-479 Radiated Lower Band Edge Measurement TxBF Primary


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

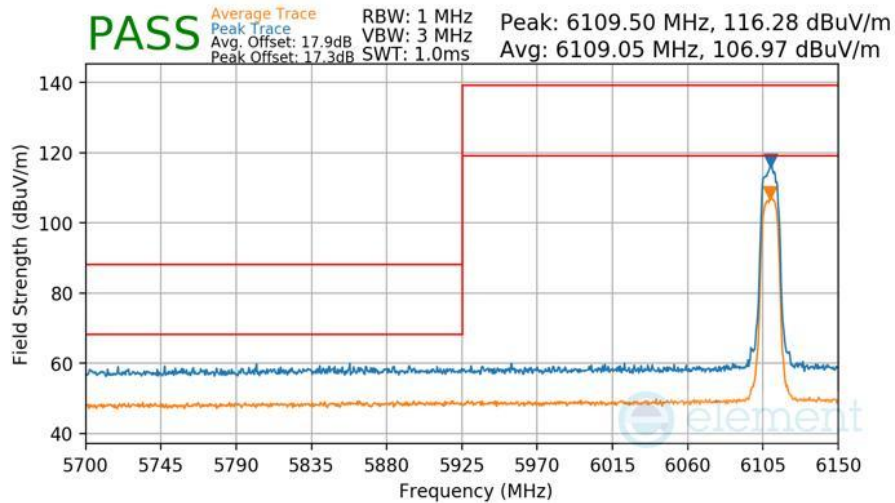

Plot 7-480 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

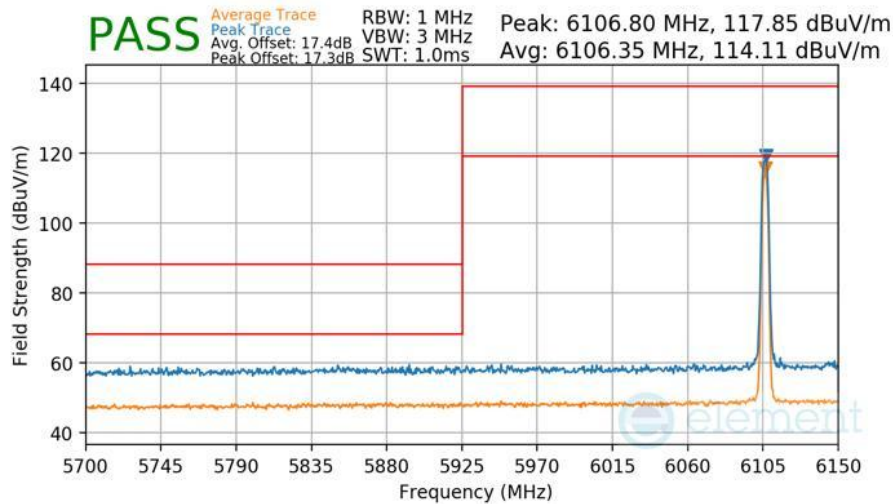

Plot 7-481 Radiated Lower Band Edge Measurement TxBF Primary

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

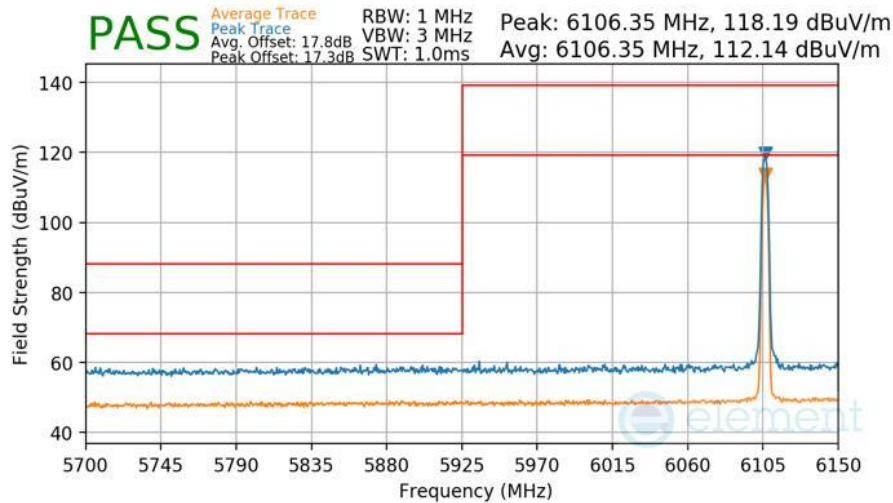


Plot 7-482 Radiated Lower Band Edge Measurement TxBF Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		


7.8.7 TxBF Diversity Radiated Band Edge Measurements

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

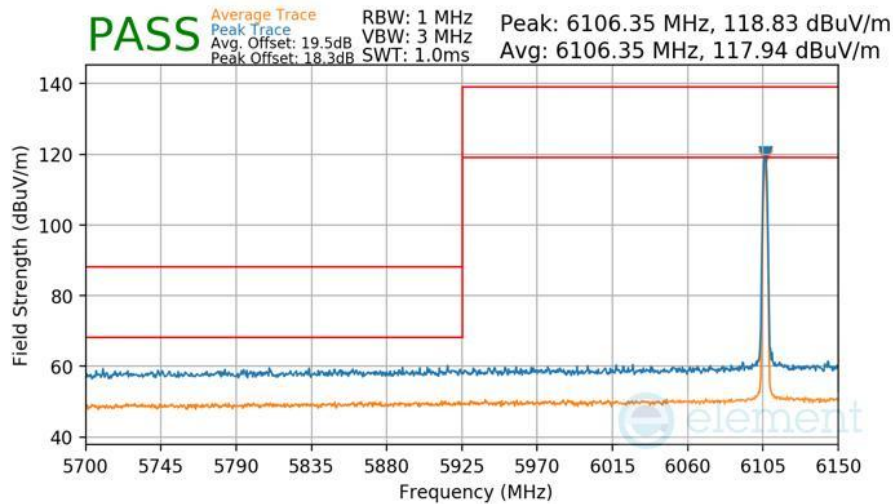

Plot 7-483 Radiated Lower Band Edge Measurement TxBF Diversity


Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106 MHz

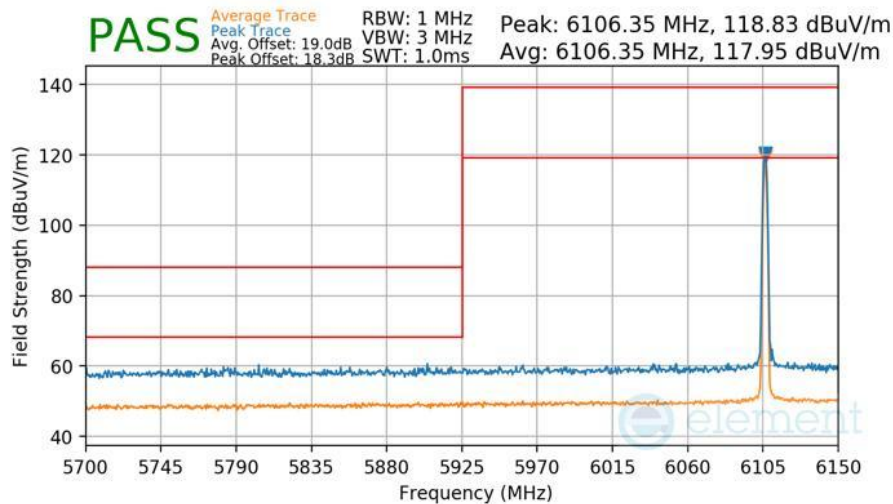

Plot 7-484 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 302 of 331

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

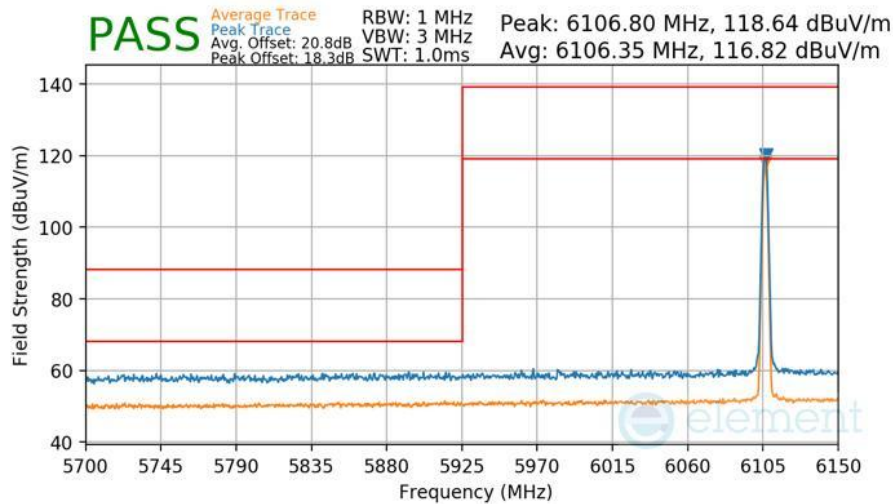

Plot 7-485 Radiated Lower Band Edge Measurement TxBF Diversity


Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

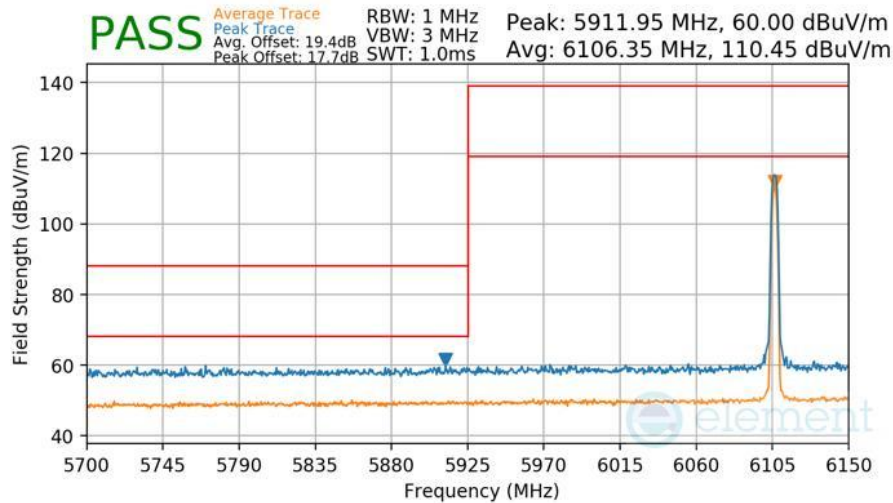

Plot 7-486 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

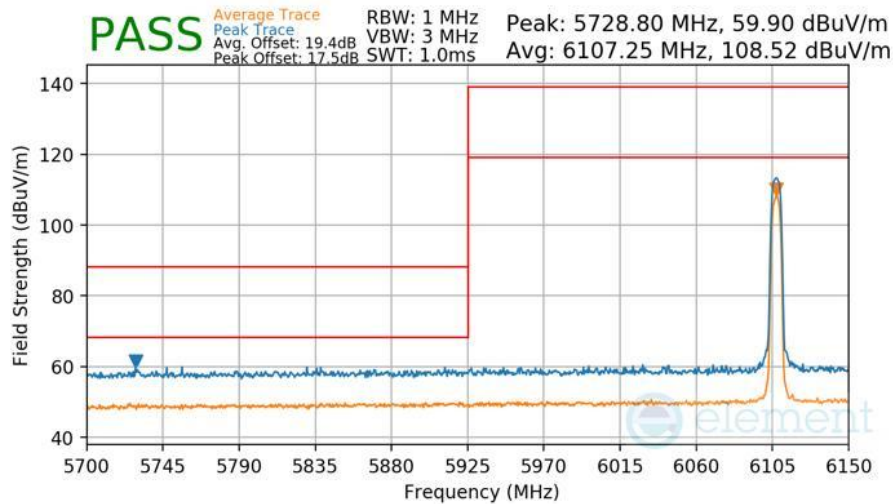

Plot 7-487 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

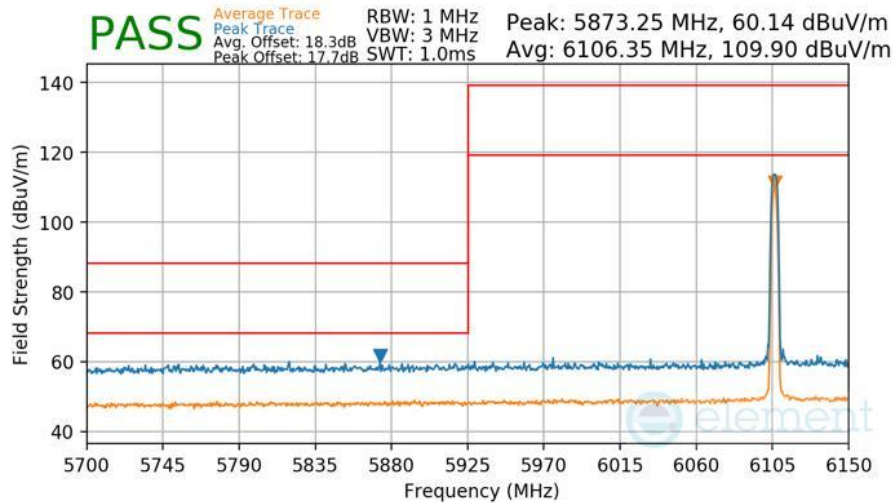

Plot 7-488 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

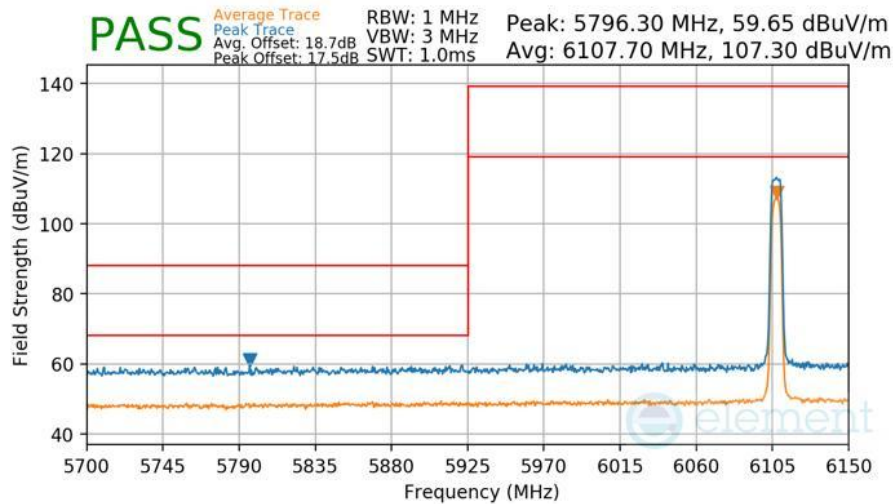

Plot 7-489 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107 MHz

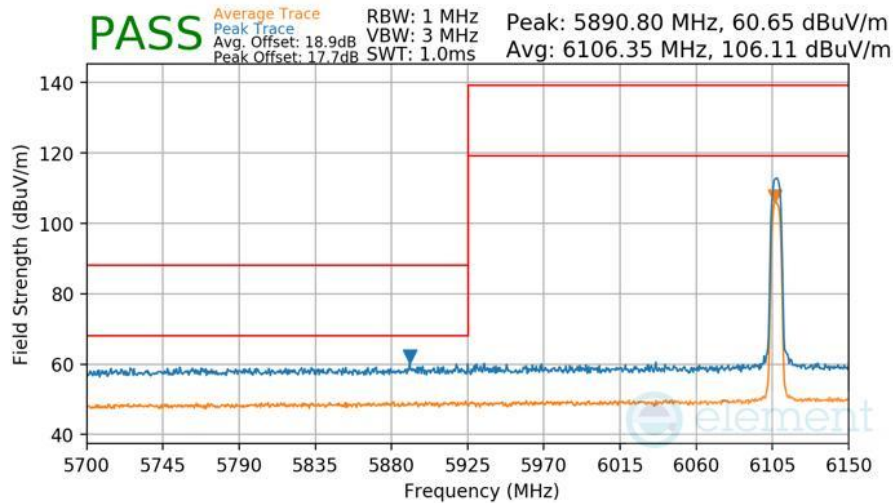

Plot 7-490 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

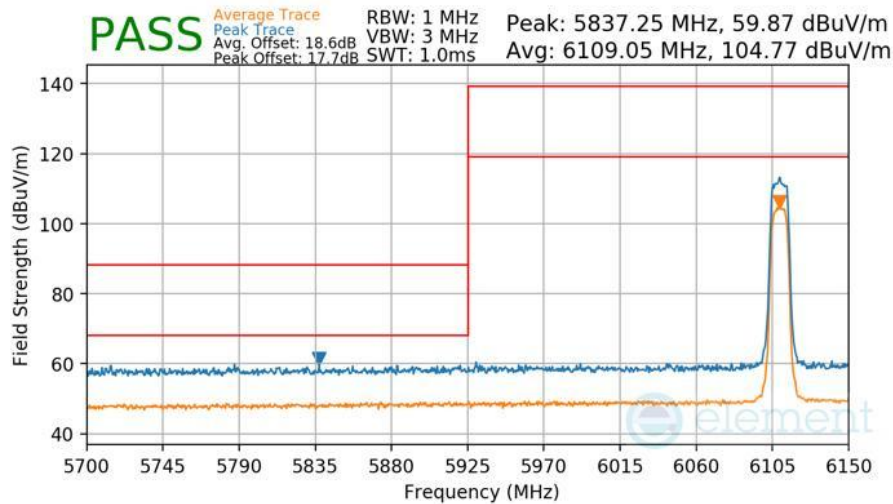

Plot 7-491 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109 MHz

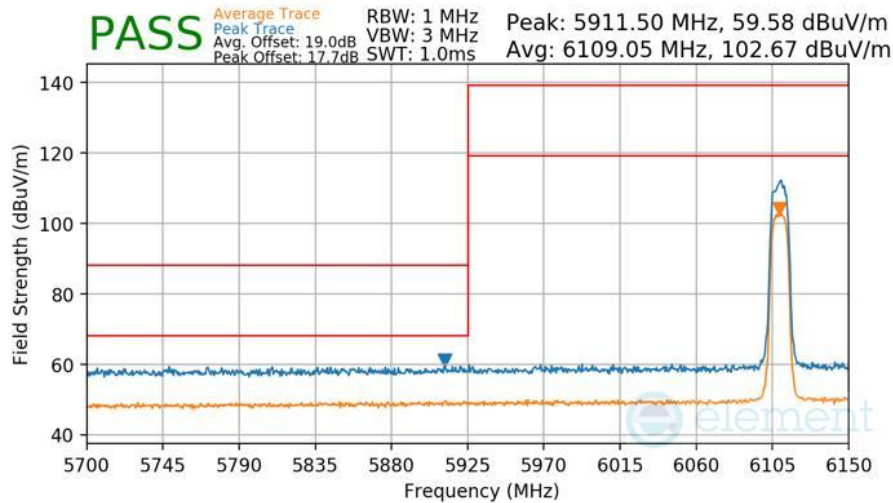

Plot 7-492 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

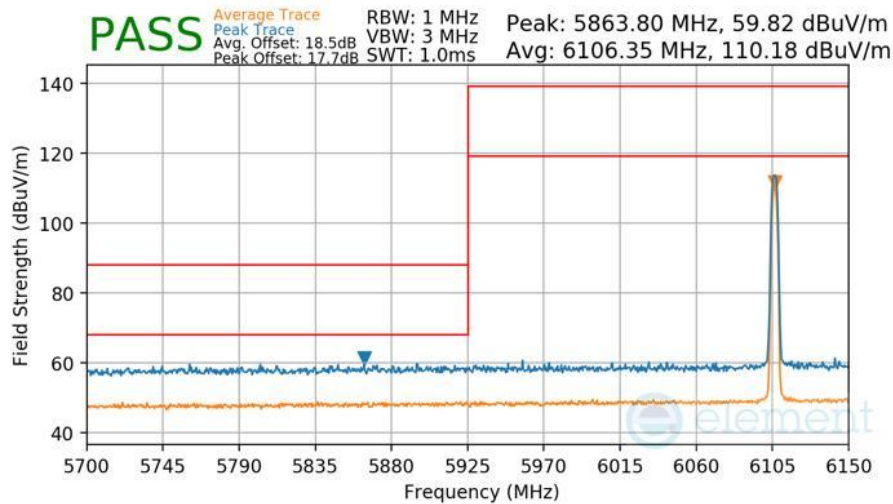

Plot 7-493 Radiated Lower Band Edge Measurement TxBF Diversity

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106 MHz

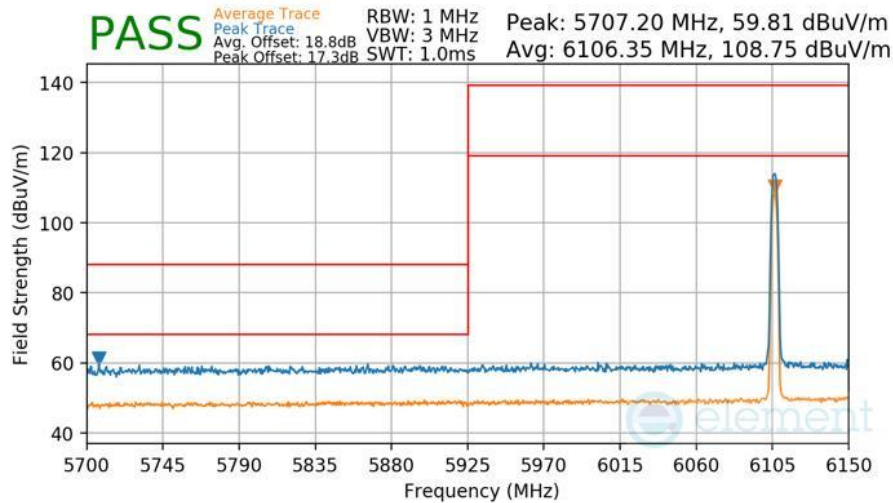

Plot 7-494 Radiated Lower Band Edge Measurement TxBF Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

7.9 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 must not exceed the limits shown in Table 7-44 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-44. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 308 of 331

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

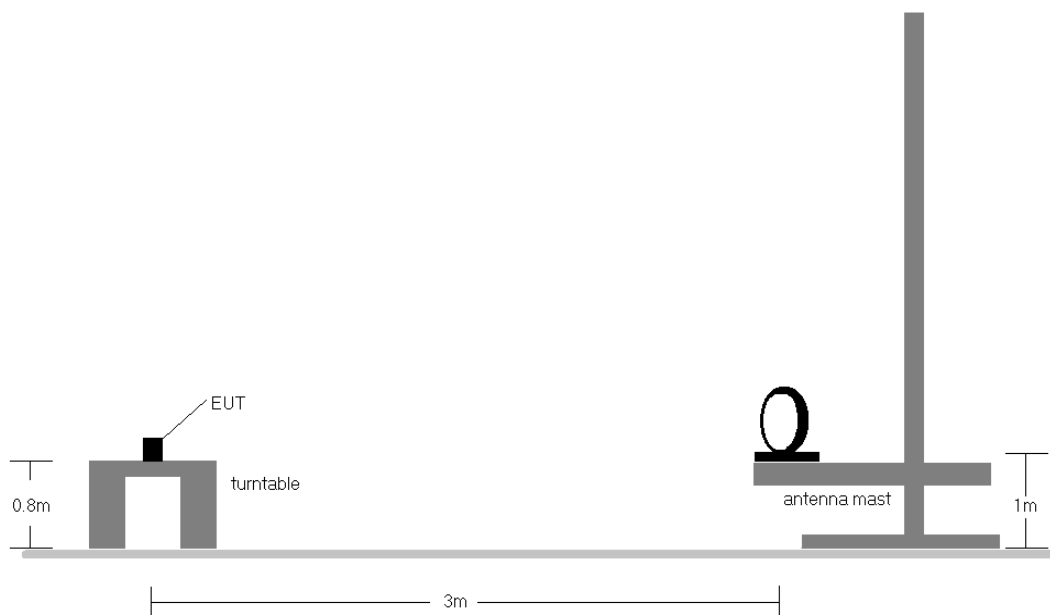


Figure 7-9. Radiated Test Setup < 30 MHz

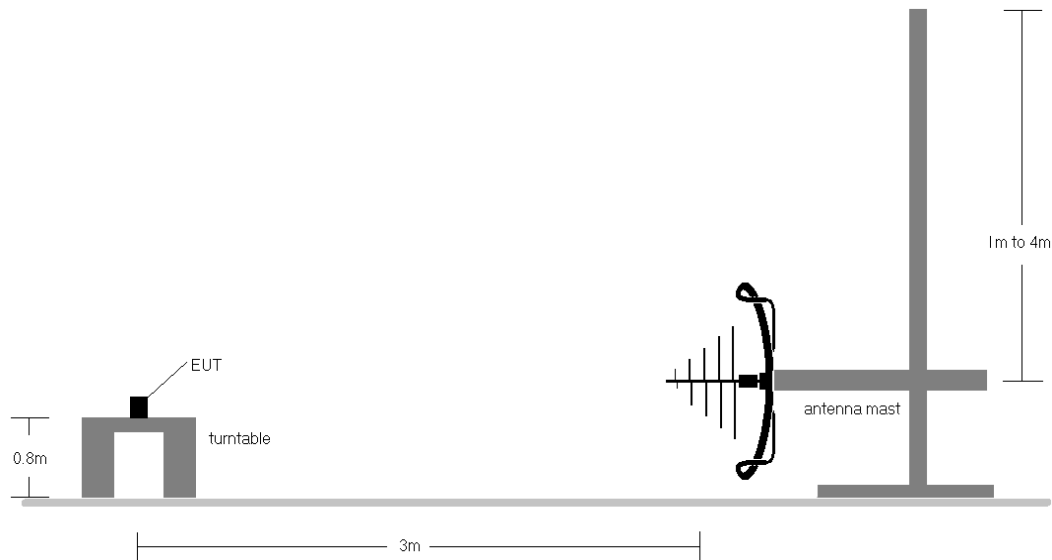


Figure 7-10. Radiated Test Setup < 1 GHz

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 309 of 331

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-44.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor
 - b. EUT powered by host PC via USB-C cable with wire charger
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 310 of 331

7.9.1 Radiated Spurious Emissions (Below 1 GHz)

TxBF Primary

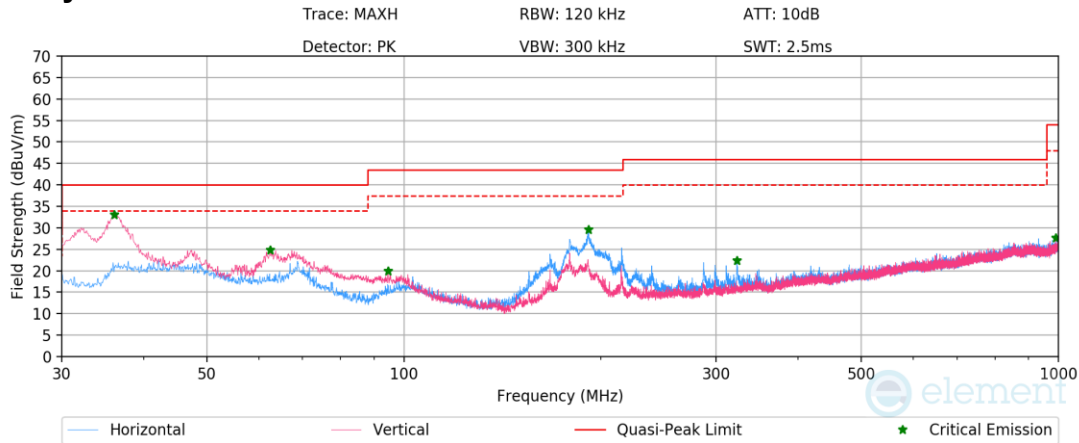


Plot 7-495. Radiated Spurious Emissions Below 1 GHz TxBF (NB UNII BDR ePA – 6263 MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.12	Max-Peak	V	100	7	-53.73	-20.18	33.10	40.00	-6.90
62.46	Max-Peak	V	100	352	-62.90	-19.23	24.87	40.00	-15.13
94.56	Max-Peak	V	100	171	-66.92	-20.19	19.89	43.50	-23.61
191.29	Max-Peak	H	100	188	-58.49	-18.86	29.65	43.50	-13.85
322.69	Max-Peak	H	100	227	-69.56	-15.00	22.44	46.00	-23.56
991.42	Max-Peak	V	300	44	-75.91	-3.44	27.66	54.00	-26.34

Table 7-45. Radiated Spurious Emissions Below 1 GHz TxBF (NB UNII BDR ePA – 6263 MHz), with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 311 of 331

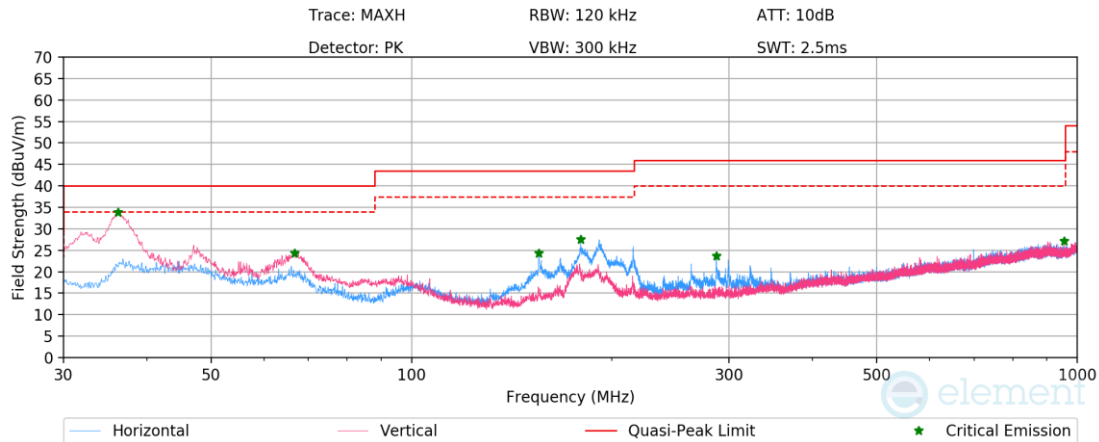


Plot 7-496. Radiated Spurious Emissions Below 1 GHz Tx BF (NB UNII HDR4 ePA - 6263 MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.24	Max-Peak	V	100	8	-53.05	-20.14	33.81	40.00	-6.19
66.72	Max-Peak	V	100	176	-62.08	-20.62	24.30	40.00	-15.70
155.35	Max-Peak	H	200	166	-61.13	-21.58	24.29	43.50	-19.21
179.41	Max-Peak	H	100	173	-59.27	-20.20	27.53	43.50	-15.97
287.11	Max-Peak	H	100	239	-67.43	-15.92	23.65	46.00	-22.35
956.44	Max-Peak	V	300	208	-75.69	-4.21	27.10	46.00	-18.90

Table 7-46. Radiated Spurious Emissions Below 1 GHz Tx BF (NB UNII HDR4 ePA - 6263 MHz), with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 312 of 331

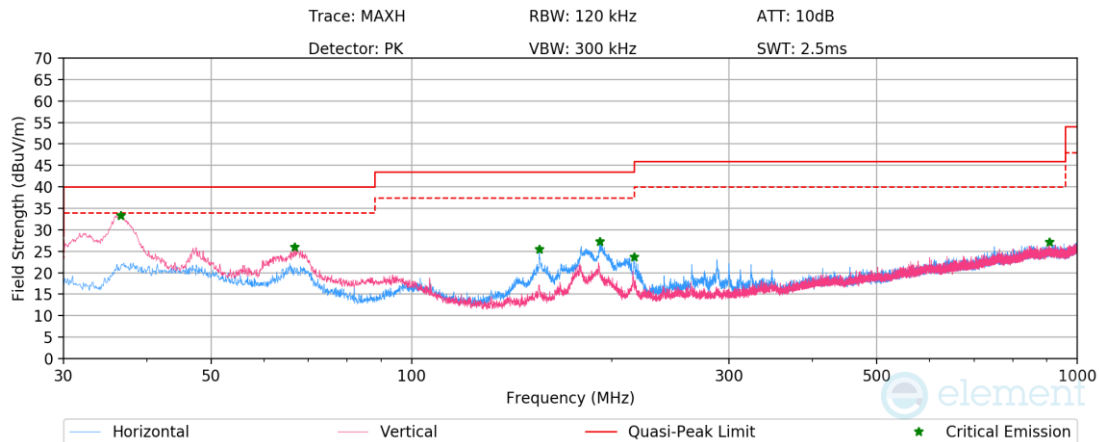


Plot 7-497. Radiated Spurious Emissions Below 1 GHz TxBF (NB UNII LE1M ePA – 6263 MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.54	Max-Peak	V	100	0	-53.59	-20.05	33.35	40.00	-6.65
66.78	Max-Peak	V	100	257	-60.35	-20.64	26.01	40.00	-13.99
155.59	Max-Peak	H	200	142	-59.94	-21.56	25.50	43.50	-18.00
191.77	Max-Peak	H	100	187	-60.97	-18.79	27.24	43.50	-16.26
216.13	Max-Peak	H	100	227	-64.99	-18.38	23.63	46.00	-22.37
908.86	Max-Peak	V	300	56	-75.83	-4.04	27.13	46.00	-18.87

Table 7-47. Radiated Spurious Emissions Below 1 GHz TxBF (NB UNII LE1M ePA – 6263 MHz), with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 313 of 331

TxBF Diversity

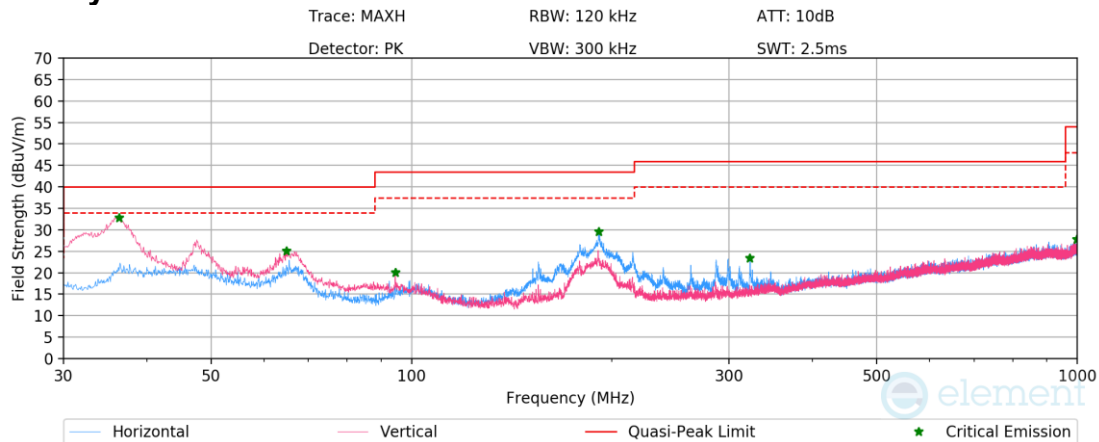


Plot 7-498. Radiated Spurious Emissions Below 1 GHz TxBF (NB UNII BDR ePA – 6263 MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.36	Max-Peak	V	100	2	-54.09	-20.11	32.80	40.00	-7.20
64.92	Max-Peak	V	100	241	-61.88	-20.00	25.13	40.00	-14.87
94.56	Max-Peak	V	100	179	-66.78	-20.19	20.03	43.50	-23.47
191.11	Max-Peak	H	100	198	-58.52	-18.89	29.59	43.50	-13.91
322.33	Max-Peak	H	100	352	-68.56	-15.00	23.44	46.00	-22.56
998.86	Max-Peak	H	100	211	-75.90	-3.26	27.84	54.00	-26.16

Table 7-48. Radiated Spurious Emissions Below 1 GHz TxBF (NB UNII BDR ePA – 6263 MHz), with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 314 of 331

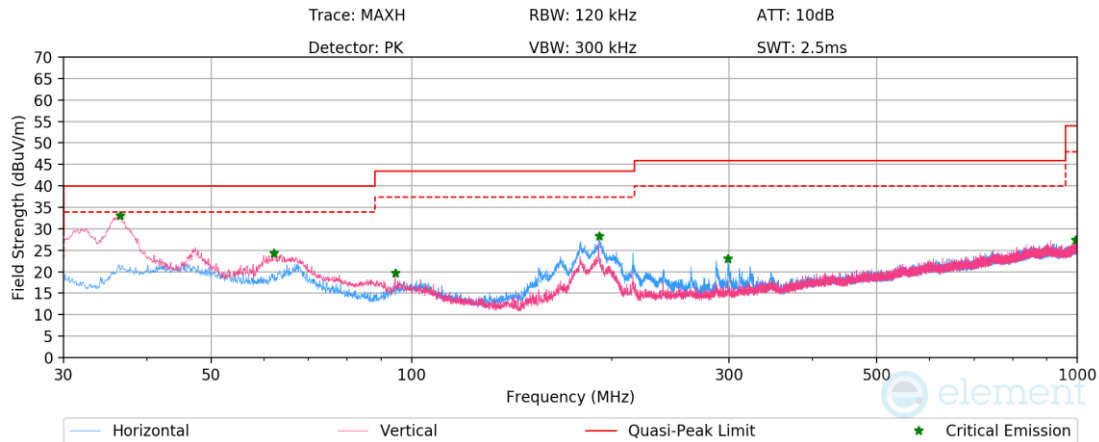


Plot 7-499. Radiated Spurious Emissions Below 1 GHz Tx BF (NB UNII HDR4 ePA – 6263 MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.48	Max-Peak	V	100	0	-53.89	-20.07	33.04	40.00	-6.96
62.10	Max-Peak	V	100	293	-63.54	-19.13	24.34	40.00	-15.66
94.50	Max-Peak	V	100	186	-67.11	-20.21	19.68	43.50	-23.82
191.29	Max-Peak	H	100	194	-59.80	-18.86	28.34	43.50	-15.16
298.93	Max-Peak	H	100	95	-68.22	-15.72	23.06	46.00	-22.94
994.54	Max-Peak	V	300	310	-76.21	-3.36	27.43	54.00	-26.57

Table 7-49. Radiated Spurious Emissions Below 1 GHz Tx BF (NB UNII HDR4 ePA – 6263 MHz), with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 315 of 331

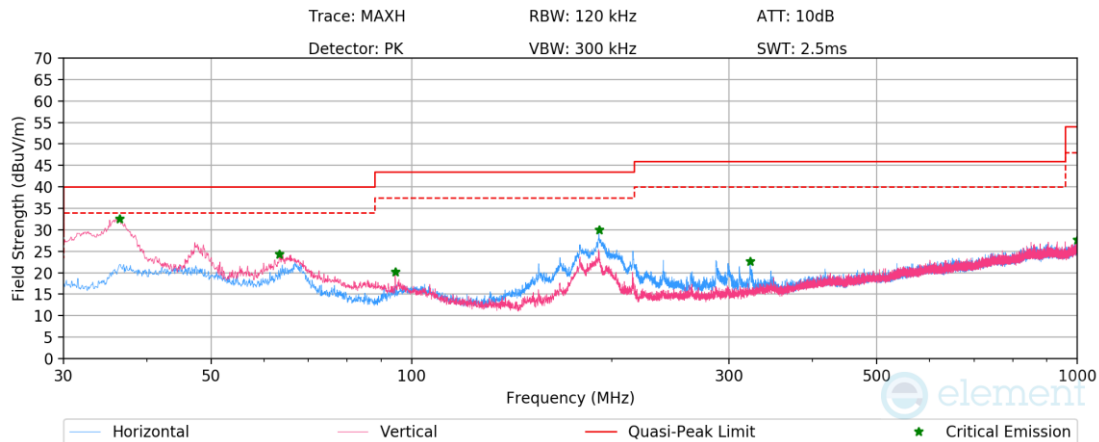

Plot 7-500. Radiated Spurious Emissions Below 1 GHz TxBF (NB UNII LE1M ePA – 6263 MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.42	Max-Peak	V	100	0	-54.31	-20.09	32.60	40.00	-7.40
63.30	Max-Peak	V	100	284	-63.14	-19.50	24.36	40.00	-15.64
94.50	Max-Peak	V	100	131	-66.57	-20.21	20.23	43.50	-23.27
191.23	Max-Peak	H	100	166	-58.10	-18.87	30.03	43.50	-13.47
322.57	Max-Peak	H	100	349	-69.42	-15.00	22.58	46.00	-23.42
999.46	Max-Peak	H	100	300	-76.07	-3.26	27.67	54.00	-26.33

Table 7-50. Radiated Spurious Emissions Below 1 GHz TxBF (NB UNII LE1M ePA – 6263 MHz), with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 316 of 331

7.10 AC Line Conducted Emissions

Test Overview and Limit

All AC line conducted emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted emissions. All data rates and modes were investigated for AC Line conducted emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-51. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 317 of 331

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


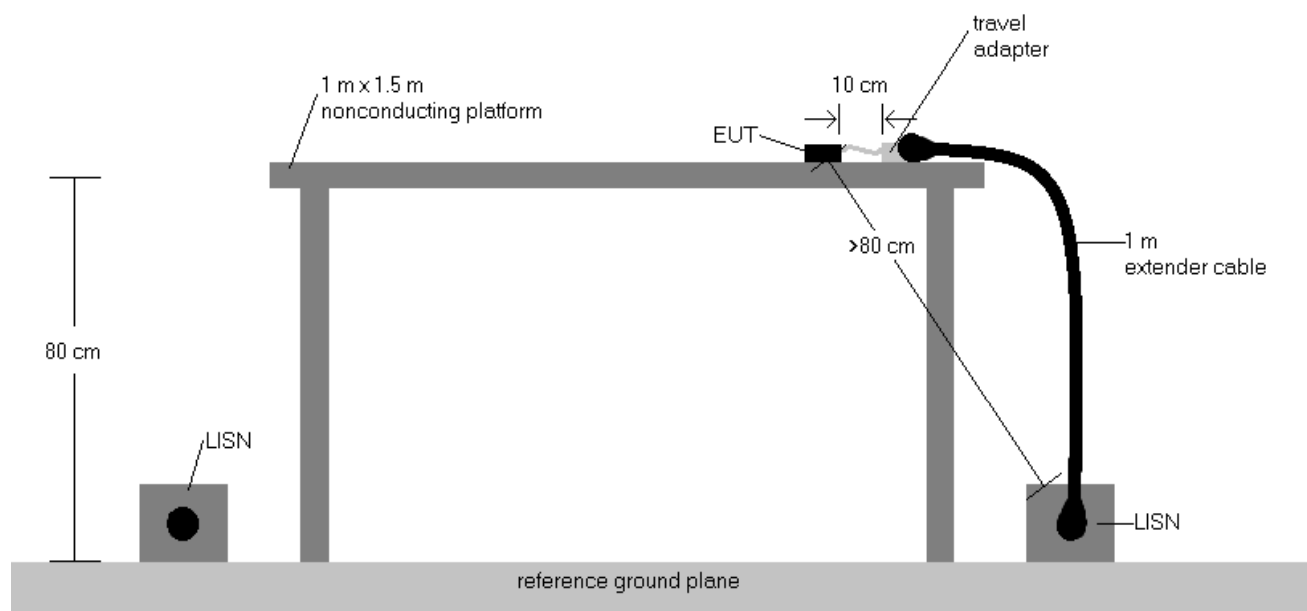


Figure 7-11. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150 kHz to 30 MHz is specified in 15.207 and RSS-Gen (7.4.2).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 318 of 331

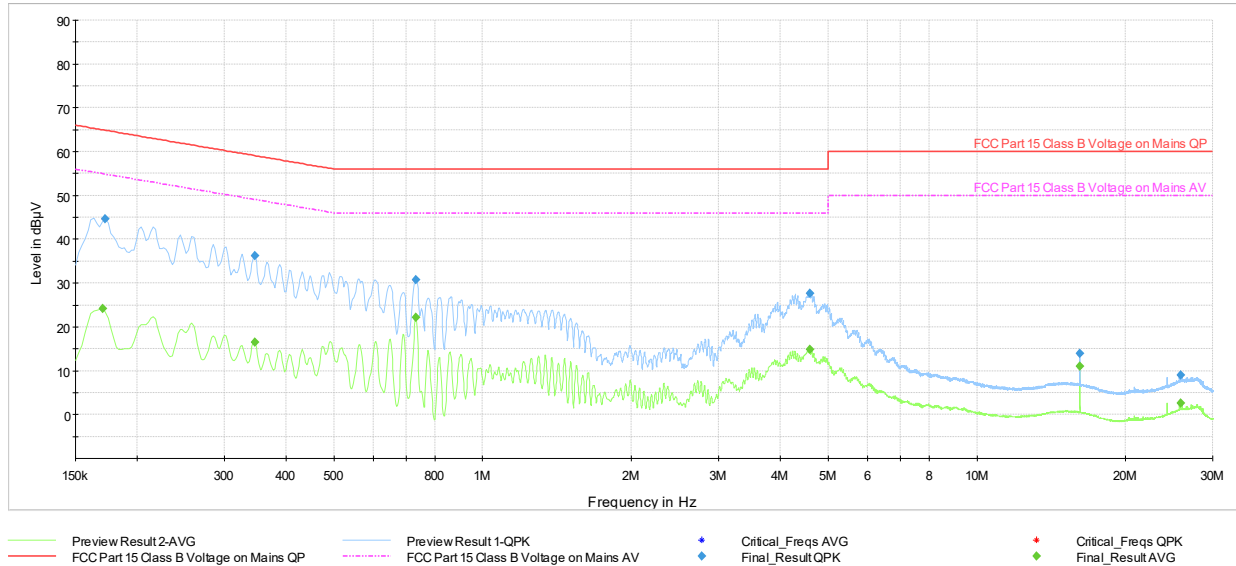


Plot 7-501. AC Line Conducted Plot TxBF Primary (NB UNII BDR ePA – 6263 MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	—	24.11	54.95	-30.84	L1	GND
0.17	FINAL	44.74	—	64.84	-20.10	L1	GND
0.35	FINAL	—	16.47	49.06	-32.59	L1	GND
0.35	FINAL	36.29	—	59.06	-22.77	L1	GND
0.73	FINAL	—	22.10	46.00	-23.90	L1	GND
0.73	FINAL	30.69	—	56.00	-25.31	L1	GND
4.58	FINAL	—	14.80	46.00	-31.20	L1	GND
4.59	FINAL	27.61	—	56.00	-28.39	L1	GND
16.17	FINAL	14.04	—	60.00	-45.96	L1	GND
16.17	FINAL	—	10.93	50.00	-39.07	L1	GND
25.88	FINAL	—	2.62	50.00	-47.38	L1	GND
25.88	FINAL	8.94	—	60.00	-51.06	L1	GND

Table 7-52. AC Line Conducted Data TxBF Primary (NB UNII BDR ePA – 6263 MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 319 of 331

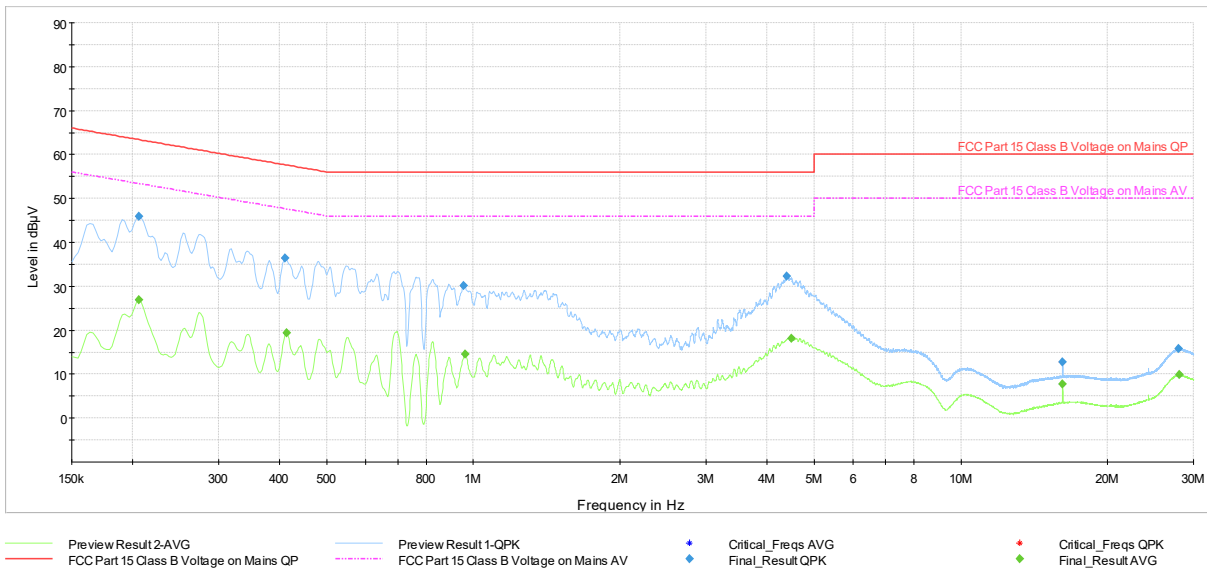


Plot 7-502. AC Line Conducted Plot TxBF Primary (NB UNII BDR ePA – 6263 MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.21	FINAL	—	26.99	53.36	-26.37	N	GND
0.21	FINAL	45.98	—	63.36	-17.38	N	GND
0.41	FINAL	36.36	—	57.63	-21.27	N	GND
0.41	FINAL	—	19.36	47.58	-28.22	N	GND
0.95	FINAL	30.12	—	56.00	-25.88	N	GND
0.96	FINAL	—	14.47	46.00	-31.53	N	GND
4.40	FINAL	32.33	—	56.00	-23.67	N	GND
4.49	FINAL	—	18.18	46.00	-27.82	N	GND
16.17	FINAL	12.68	—	60.00	-47.32	N	GND
16.17	FINAL	—	7.73	50.00	-42.27	N	GND
27.95	FINAL	15.75	—	60.00	-44.25	N	GND
28.06	FINAL	—	9.82	50.00	-40.18	N	GND

Table 7-53. AC Line Conducted TxBF Primary (NB UNII BDR ePA – 6263 MHz) (N) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 320 of 331

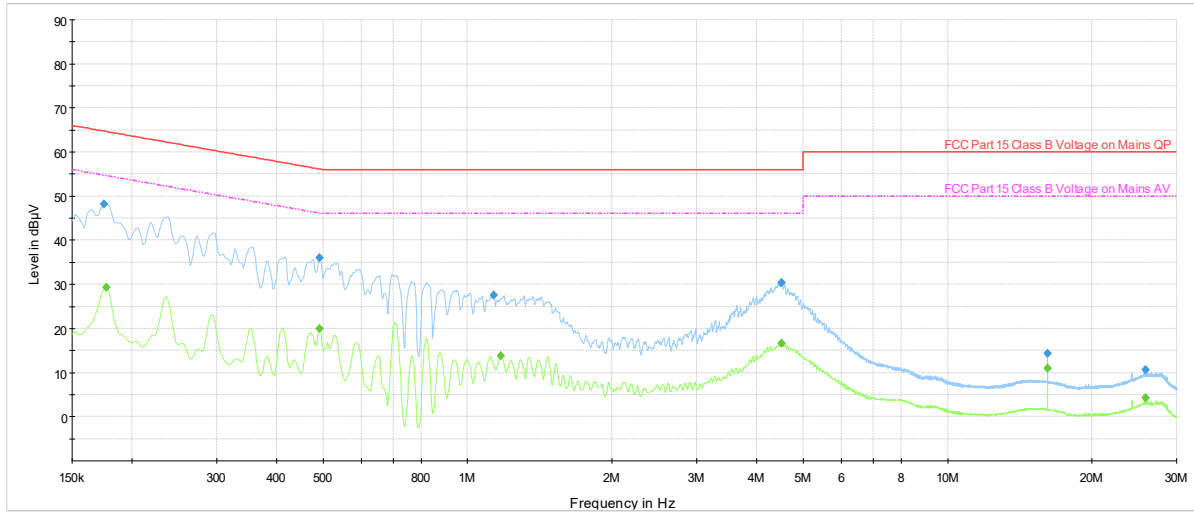


Plot 7-503. AC Line Conducted Plot TxBF Primary (NB UNII HDR4 ePA – 6263 MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	48.15	—	64.73	-16.58	L1	GND
0.18	FINAL	—	29.26	54.63	-25.37	L1	GND
0.49	FINAL	—	20.02	46.13	-26.11	L1	GND
0.49	FINAL	36.03	—	56.13	-20.10	L1	GND
1.13	FINAL	27.64	—	56.00	-28.36	L1	GND
1.17	FINAL	—	13.86	46.00	-32.14	L1	GND
4.51	FINAL	30.35	—	56.00	-25.65	L1	GND
4.51	FINAL	—	16.66	46.00	-29.34	L1	GND
16.14	FINAL	14.27	—	60.00	-45.73	L1	GND
16.14	FINAL	—	10.99	50.00	-39.01	L1	GND
25.88	FINAL	—	4.27	50.00	-45.73	L1	GND
25.88	FINAL	10.57	—	60.00	-49.43	L1	GND

Table 7-54. AC Line Conducted Data TxBF Primary (NB UNII HDR4 ePA – 6263 MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 321 of 331

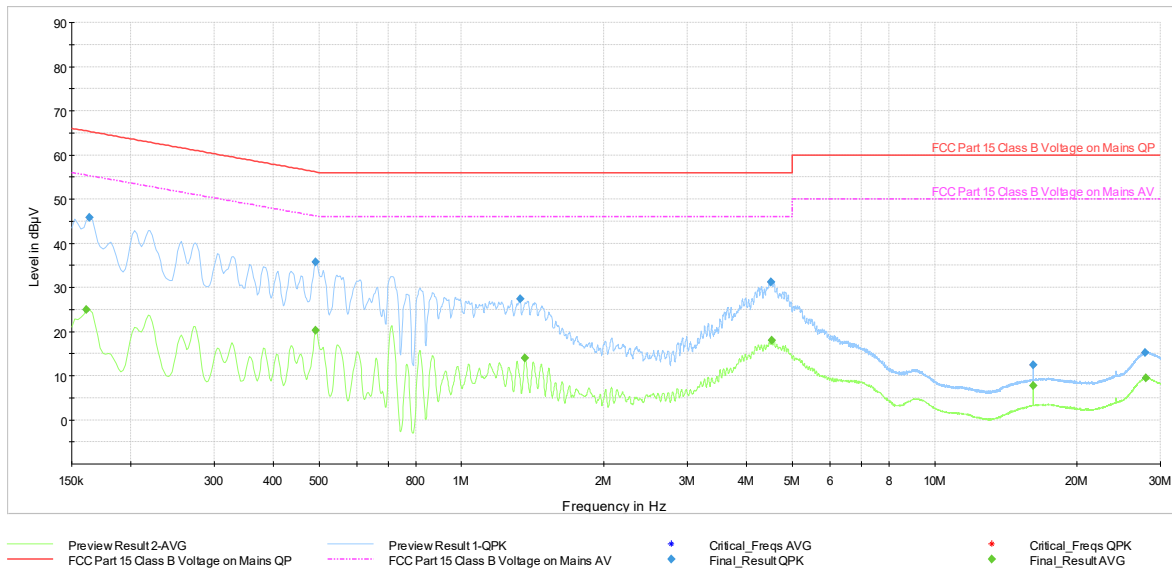


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	—	25.01	55.40	-30.39	N	GND
0.16	FINAL	45.80	—	65.28	-19.48	N	GND
0.49	FINAL	—	20.18	46.13	-25.95	N	GND
0.49	FINAL	35.78	—	56.13	-20.35	N	GND
1.33	FINAL	27.31	—	56.00	-28.69	N	GND
1.36	FINAL	—	14.01	46.00	-31.99	N	GND
4.51	FINAL	31.21	—	56.00	-24.79	N	GND
4.52	FINAL	—	18.00	46.00	-28.00	N	GND
16.13	FINAL	12.51	—	60.00	-47.49	N	GND
16.13	FINAL	—	7.71	50.00	-42.29	N	GND
27.83	FINAL	15.21	—	60.00	-44.79	N	GND
27.97	FINAL	—	9.48	50.00	-40.52	N	GND

Table 7-55. AC Line Conducted TxBF Primary (NB UNII HDR4 ePA – 6263 MHz) (N) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 322 of 331

V 12.0 03/03/2026

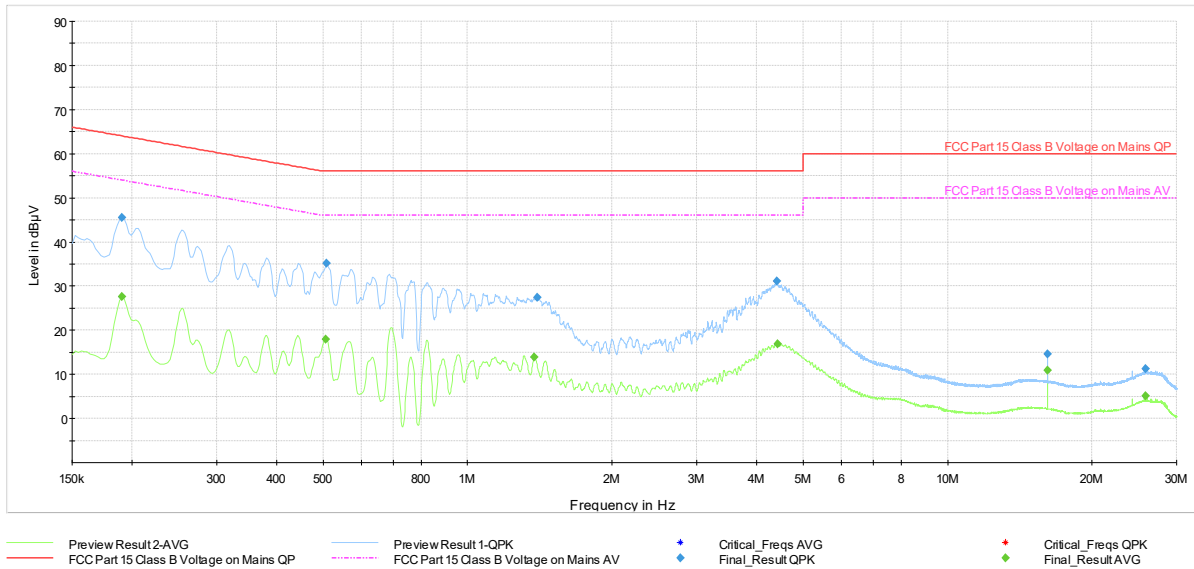


Plot 7-505. AC Line Conducted Plot TxBF Primary (NB UNII LE1M ePA – 6263 MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	—	27.59	54.02	-26.43	L1	GND
0.19	FINAL	45.52	—	64.02	-18.50	L1	GND
0.51	FINAL	—	18.02	46.00	-27.98	L1	GND
0.51	FINAL	35.10	—	56.00	-20.90	L1	GND
1.38	FINAL	—	13.85	46.00	-32.15	L1	GND
1.39	FINAL	27.49	—	56.00	-28.51	L1	GND
4.40	FINAL	31.09	—	56.00	-24.91	L1	GND
4.43	FINAL	—	16.83	46.00	-29.17	L1	GND
16.16	FINAL	14.54	—	60.00	-45.46	L1	GND
16.16	FINAL	—	10.99	50.00	-39.01	L1	GND
25.88	FINAL	—	5.03	50.00	-44.97	L1	GND
25.88	FINAL	11.24	—	60.00	-48.76	L1	GND

Table 7-56. AC Line Conducted Data TxBF Primary (NB UNII LE1M ePA – 6263 MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 323 of 331

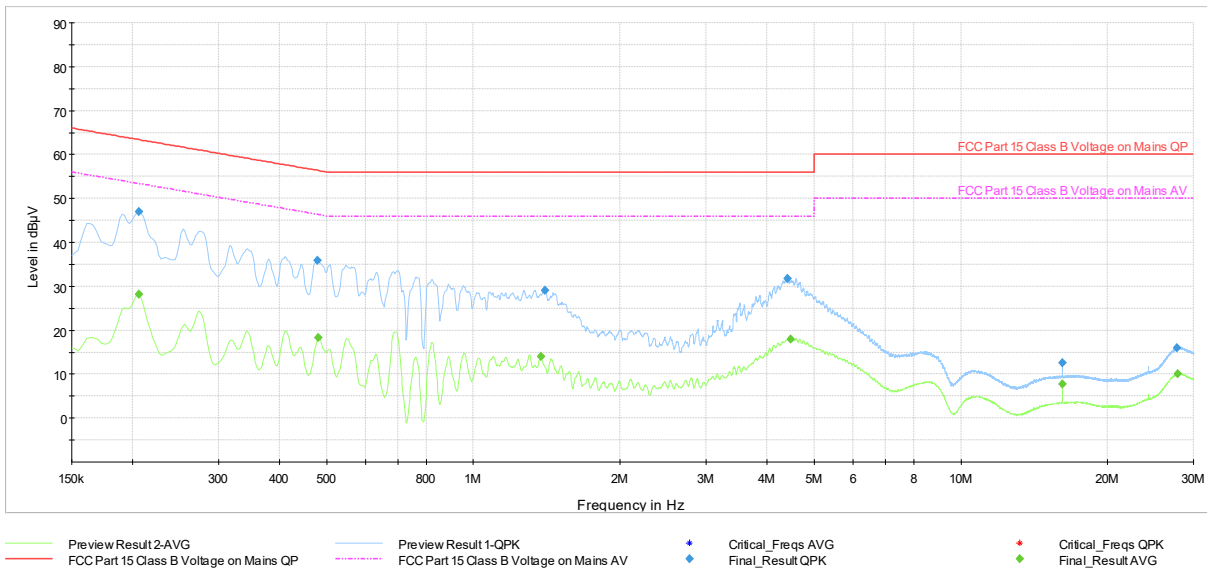


Plot 7-506. AC Line Conducted TxBF Primary (NB UNII LE1M ePA – 6263 MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.21	FINAL	—	28.09	53.36	-25.27	N	GND
0.21	FINAL	46.94	—	63.36	-16.42	N	GND
0.48	FINAL	35.87	—	56.37	-20.50	N	GND
0.48	FINAL	—	18.24	46.33	-28.09	N	GND
1.38	FINAL	—	13.94	46.00	-32.06	N	GND
1.40	FINAL	29.08	—	56.00	-26.92	N	GND
4.41	FINAL	31.76	—	56.00	-24.24	N	GND
4.48	FINAL	—	18.00	46.00	-28.00	N	GND
16.17	FINAL	12.66	—	60.00	-47.34	N	GND
16.17	FINAL	—	7.69	50.00	-42.31	N	GND
27.77	FINAL	15.95	—	60.00	-44.05	N	GND
27.82	FINAL	—	10.03	50.00	-39.97	N	GND

Table 7-57. AC Line Conducted TxBF Primary (NB UNII LE1M ePA – 6263 MHz) (N) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 324 of 331

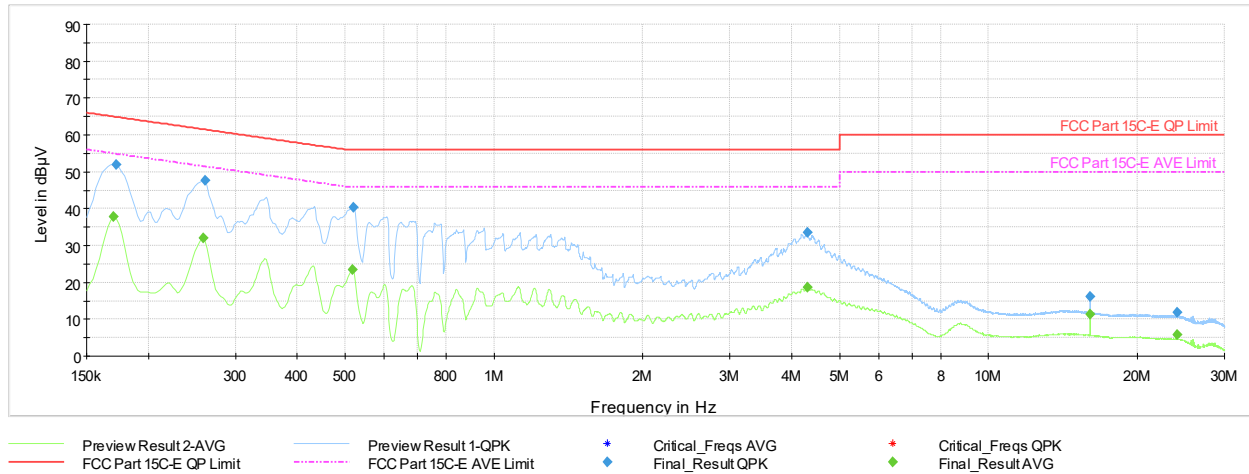


Plot 7-507. AC Line Conducted Plot TxBF Diversity (NB UNII BDR ePA – 6263 MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	—	37.81	54.95	-17.14	L1	GND
0.17	FINAL	51.87	—	64.84	-12.97	L1	GND
0.26	FINAL	—	31.92	51.50	-19.58	L1	GND
0.26	FINAL	47.65	—	61.42	-13.77	L1	GND
0.52	FINAL	—	23.52	46.00	-22.48	L1	GND
0.52	FINAL	40.42	—	56.00	-15.58	L1	GND
4.30	FINAL	—	18.72	46.00	-27.28	L1	GND
4.30	FINAL	33.48	—	56.00	-22.52	L1	GND
16.07	FINAL	16.09	—	60.00	-43.91	L1	GND
16.07	FINAL	—	11.38	50.00	-38.62	L1	GND
24.10	FINAL	11.81	—	60.00	-48.19	L1	GND
24.11	FINAL	—	5.68	50.00	-44.32	L1	GND

Table 7-58. AC Line Conducted Data TxBF Diversity (NB UNII BDR ePA – 6263 MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 325 of 331

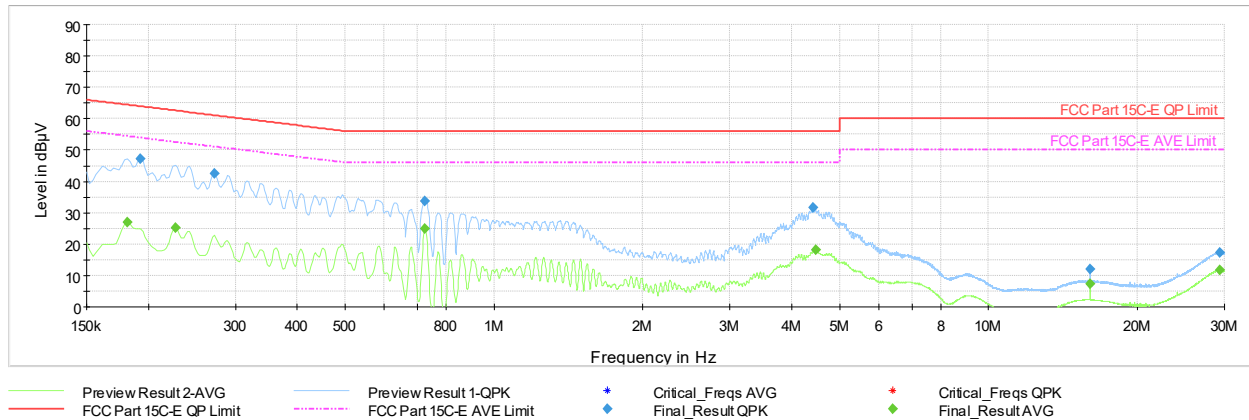


Plot 7-508. AC Line Conducted Plot TxBF Diversity (NB UNII BDR ePA – 6263 MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.18	FINAL	—	26.92	54.42	-27.50	N	GND
0.19	FINAL	47.22	—	63.92	-16.70	N	GND
0.23	FINAL	—	25.12	52.58	-27.46	N	GND
0.27	FINAL	42.64	—	61.07	-18.43	N	GND
0.72	FINAL	33.73	—	56.00	-22.27	N	GND
0.73	FINAL	—	24.99	46.00	-21.01	N	GND
4.42	FINAL	31.61	—	56.00	-24.39	N	GND
4.47	FINAL	—	18.24	46.00	-27.76	N	GND
16.07	FINAL	12.05	—	60.00	-47.95	N	GND
16.07	FINAL	—	7.44	50.00	-42.56	N	GND
29.35	FINAL	—	11.60	50.00	-38.40	N	GND
29.39	FINAL	17.31	—	60.00	-42.69	N	GND

Table 7-59. AC Line Conducted TxBF Diversity (NB UNII BDR ePA – 6263 MHz) (N) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 326 of 331

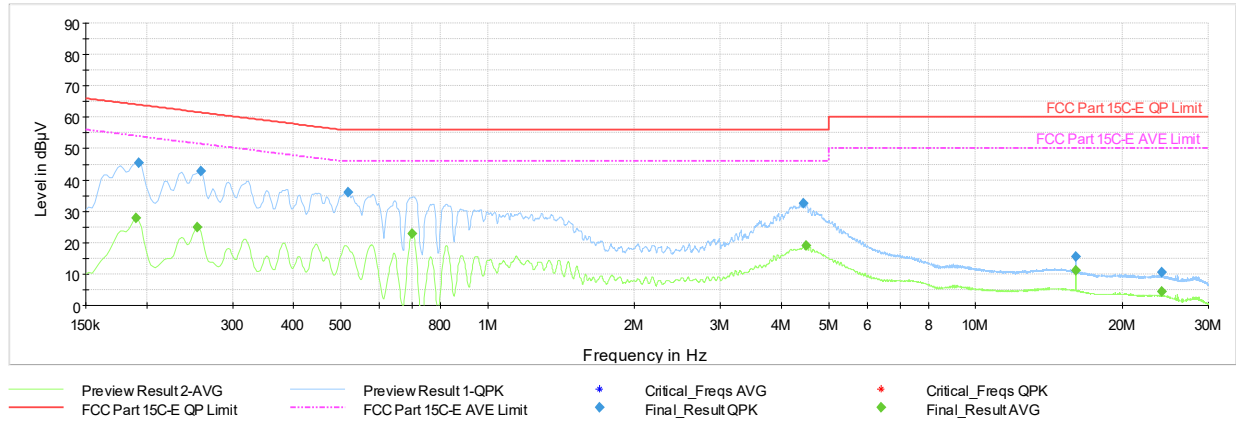


Plot 7-509. AC Line Conducted Plot TxBF Diversity (NB UNII HDR4 ePA – 6263 MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	—	27.91	54.02	-26.11	L1	GND
0.19	FINAL	45.49	—	63.92	-18.43	L1	GND
0.25	FINAL	—	24.98	51.64	-26.66	L1	GND
0.26	FINAL	42.85	—	61.50	-18.65	L1	GND
0.52	FINAL	36.08	—	56.00	-19.92	L1	GND
0.70	FINAL	—	22.73	46.00	-23.27	L1	GND
4.43	FINAL	32.58	—	56.00	-23.42	L1	GND
4.50	FINAL	—	18.93	46.00	-27.07	L1	GND
16.05	FINAL	15.61	—	60.00	-44.39	L1	GND
16.05	FINAL	—	11.27	50.00	-38.73	L1	GND
24.08	FINAL	10.70	—	60.00	-49.30	L1	GND
24.08	FINAL	—	4.53	50.00	-45.47	L1	GND

Table 7-60. AC Line Conducted Data TxBF Diversity (NB UNII HDR4 ePA – 6263 MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 327 of 331

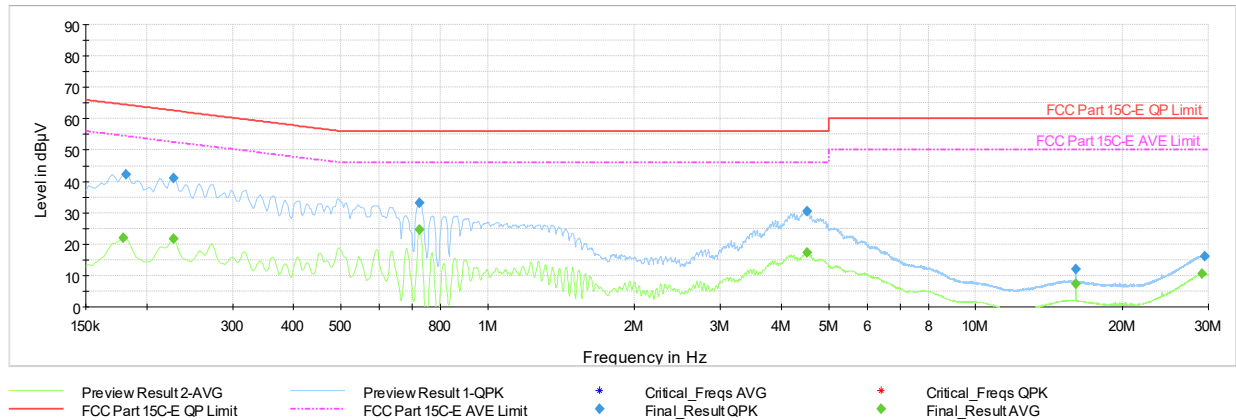


Plot 7-510. AC Line Conducted Plot TxBF Diversity (NB UNII HDR4 ePA – 6263 MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.18	FINAL	—	22.00	54.52	-32.52	N	GND
0.18	FINAL	42.31	—	64.42	-22.11	N	GND
0.23	FINAL	—	21.61	52.58	-30.97	N	GND
0.23	FINAL	40.93	—	62.58	-21.65	N	GND
0.72	FINAL	33.07	—	56.00	-22.93	N	GND
0.73	FINAL	—	24.75	46.00	-21.25	N	GND
4.51	FINAL	30.51	—	56.00	-25.49	N	GND
4.51	FINAL	—	17.36	46.00	-28.64	N	GND
16.06	FINAL	11.93	—	60.00	-48.07	N	GND
16.06	FINAL	—	7.35	50.00	-42.65	N	GND
29.12	FINAL	—	10.53	50.00	-39.47	N	GND
29.43	FINAL	16.26	—	60.00	-43.74	N	GND

Table 7-61. AC Line Conducted TxBF Diversity (NB UNII HDR4 ePA – 6263 MHz) (N) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 328 of 331

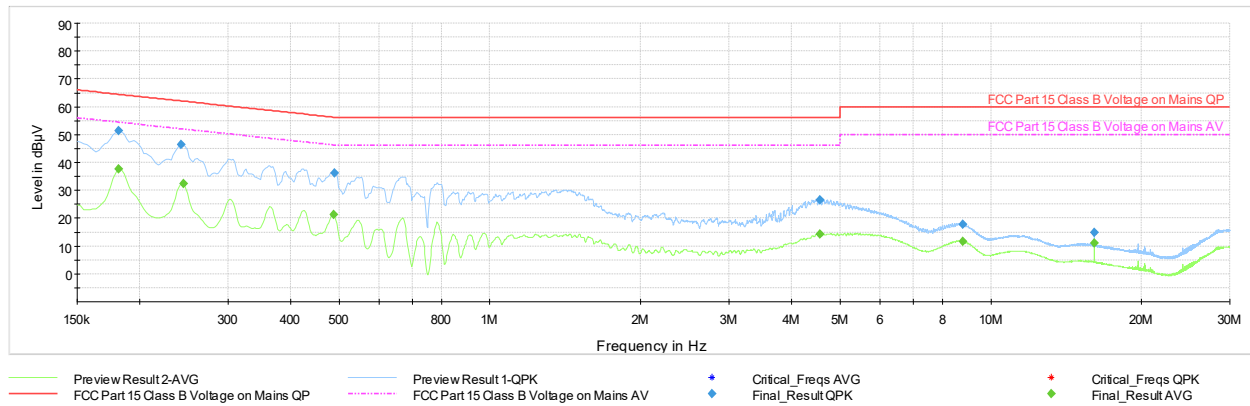


Plot 7-511. AC Line Conducted Plot TxBF Diversity (NB UNII LE1M ePA – 6263 MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.18	FINAL	—	37.74	54.42	-16.68	L1	GND
0.18	FINAL	51.27	—	64.42	-13.15	L1	GND
0.24	FINAL	46.33	—	62.02	-15.69	L1	GND
0.25	FINAL	—	32.37	51.94	-19.57	L1	GND
0.49	FINAL	—	21.22	46.21	-24.99	L1	GND
0.49	FINAL	36.19	—	56.17	-19.98	L1	GND
4.55	FINAL	26.50	—	56.00	-29.50	L1	GND
4.57	FINAL	—	14.17	46.00	-31.83	L1	GND
8.78	FINAL	17.76	—	60.00	-42.24	L1	GND
8.78	FINAL	—	11.74	50.00	-38.26	L1	GND
16.11	FINAL	—	10.93	50.00	-39.07	L1	GND
16.11	FINAL	14.89	—	60.00	-45.11	L1	GND

Table 7-62. AC Line Conducted Data TxBF Diversity (NB UNII LE1M ePA – 6263 MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 329 of 331

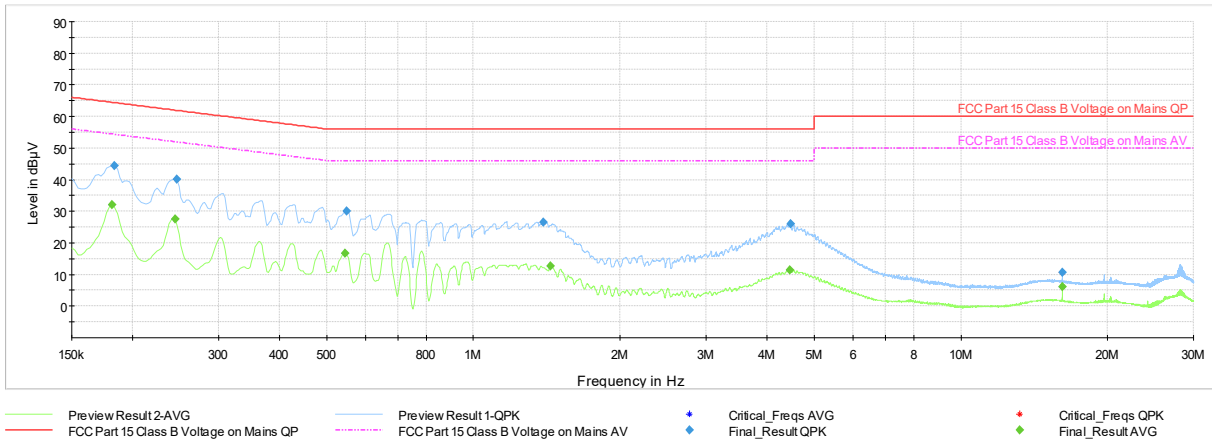

Plot 7-512. AC Line Conducted Plot TxBF Diversity (NB UNII LE1M ePA – 6263 MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.18	FINAL	—	32.14	54.42	-22.28	N	GND
0.18	FINAL	44.40	—	64.31	-19.91	N	GND
0.25	FINAL	—	27.48	51.94	-24.46	N	GND
0.25	FINAL	40.05	—	61.87	-21.82	N	GND
0.55	FINAL	—	16.78	46.00	-29.22	N	GND
0.55	FINAL	30.05	—	56.00	-25.95	N	GND
1.39	FINAL	26.50	—	56.00	-29.50	N	GND
1.44	FINAL	—	12.68	46.00	-33.32	N	GND
4.47	FINAL	—	11.53	46.00	-34.47	N	GND
4.47	FINAL	25.98	—	56.00	-30.02	N	GND
16.12	FINAL	10.59	—	60.00	-49.41	N	GND
16.12	FINAL	—	6.22	50.00	-43.78	N	GND

Table 7-63. AC Line Conducted TxBF Diversity (NB UNII LE1M ePA – 6263 MHz) (N) with AC/DC adaptor

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 330 of 331

V 12.0 03/03/2026

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3595** and **IC: 579C-A3595** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-07-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 331 of 331