



7.7.5 Antenna WF5T Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985 MHz
Channel	7

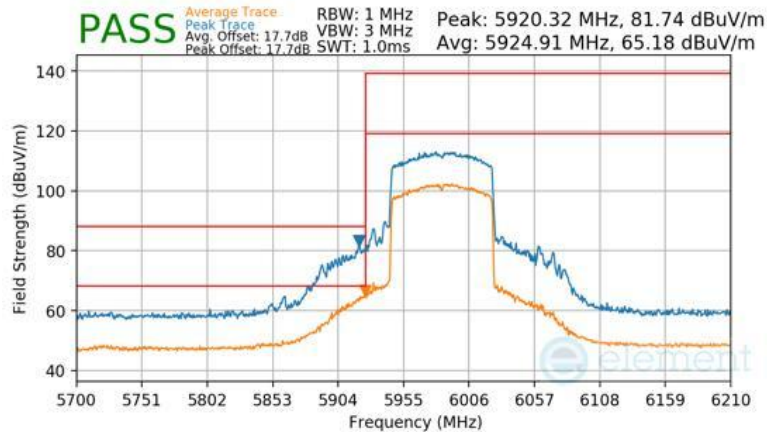

Plot 7-556 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6065 MHz
Channel	23

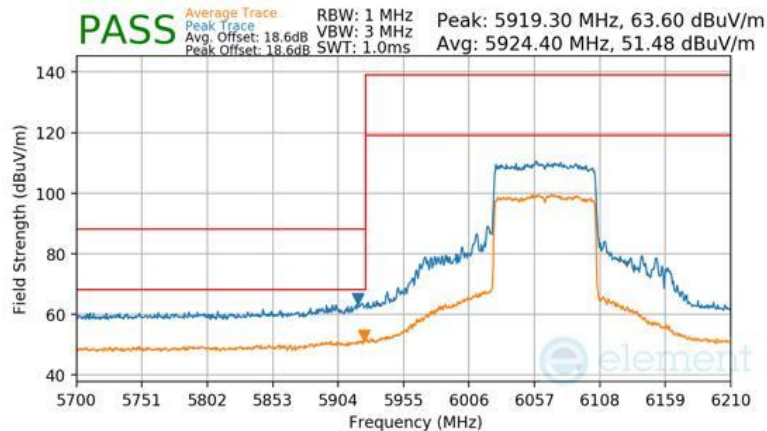

Plot 7-557 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 206 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

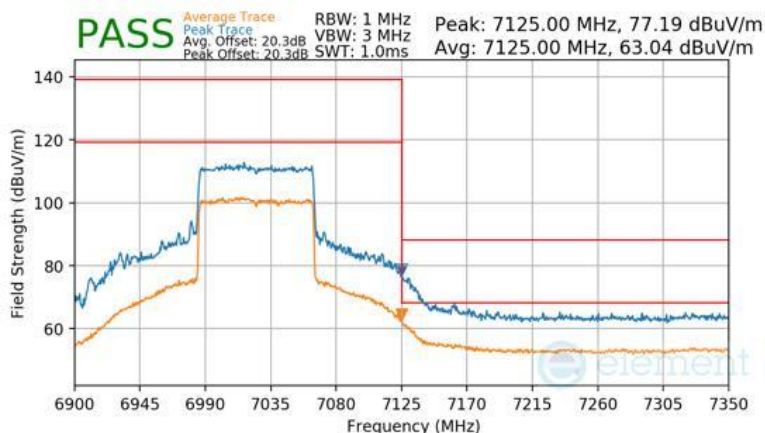


Plot 7-558 Antenna WF5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 207 of 257


7.7.6 Antenna WF5T Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025 MHz
Channel	15

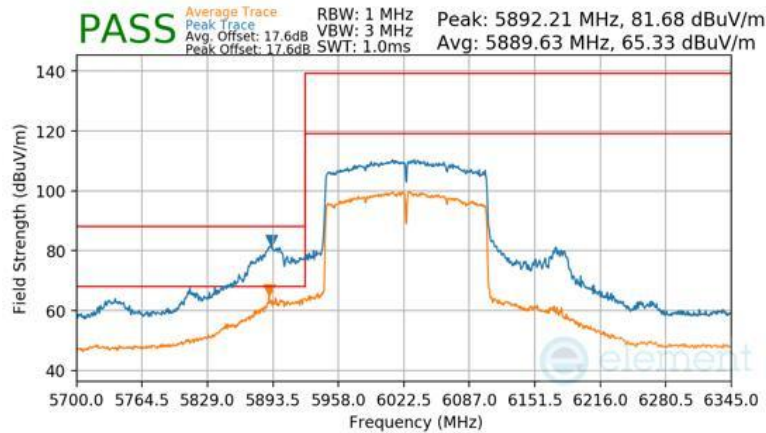

Plot 7-559 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

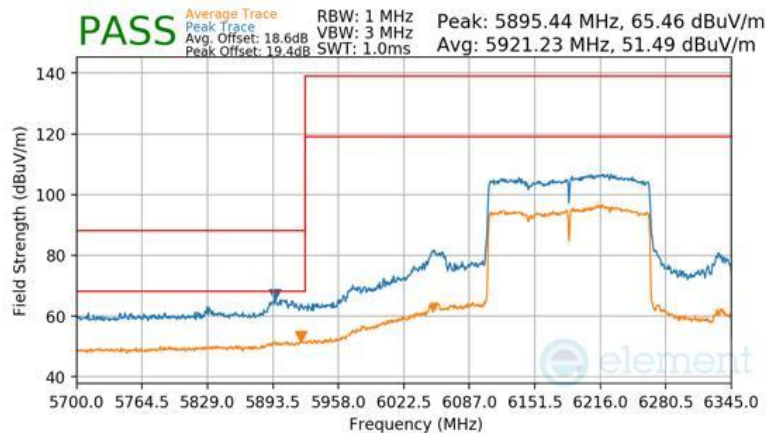


Plot 7-560 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 208 of 257

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS11
 3 Meters
 6825 MHz
 175

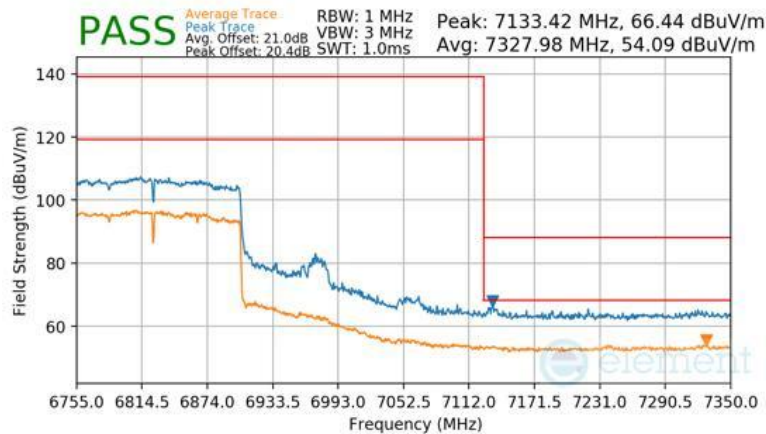

Plot 7-561 Antenna WF5T Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS11
 3 Meters
 6985 MHz
 207

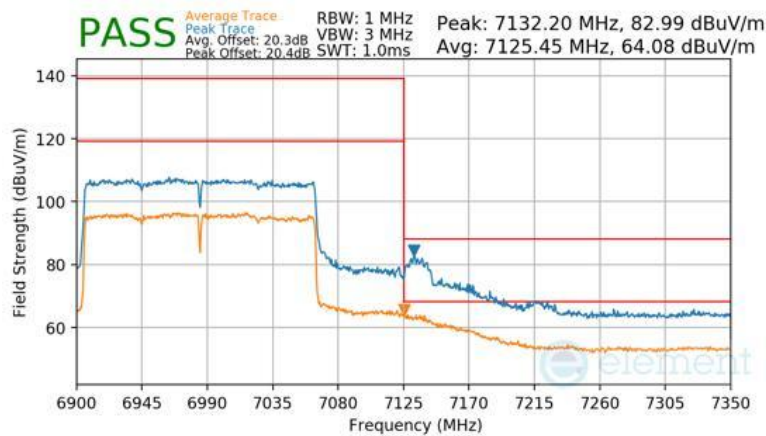


Plot 7-562 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 209 of 257


7.7.7 Antenna WF5B Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

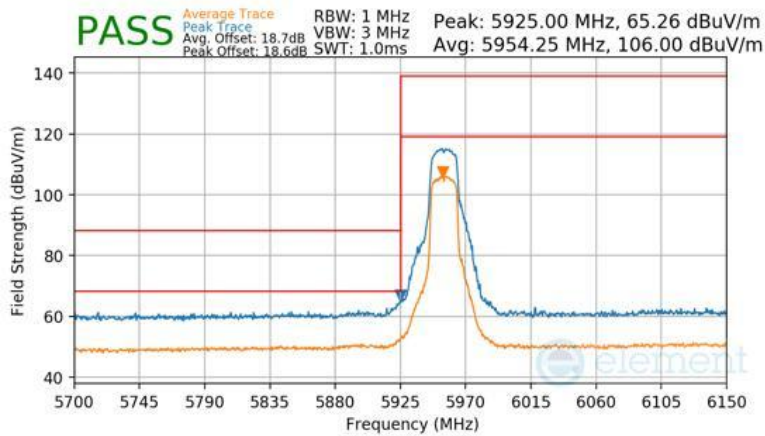

Plot 7-563 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

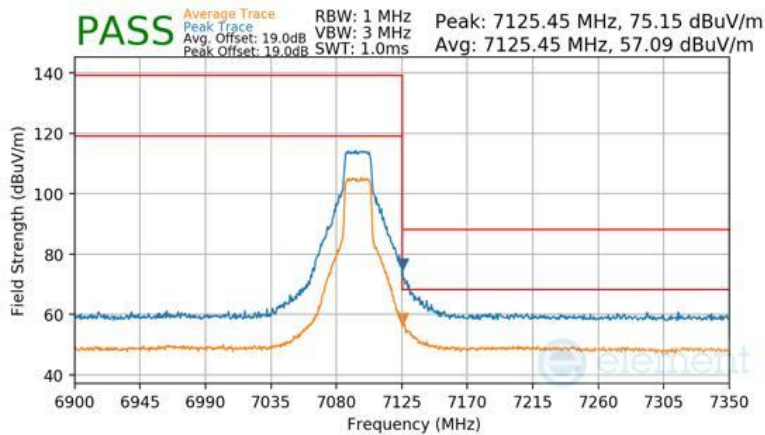


Plot 7-564 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 210 of 257

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

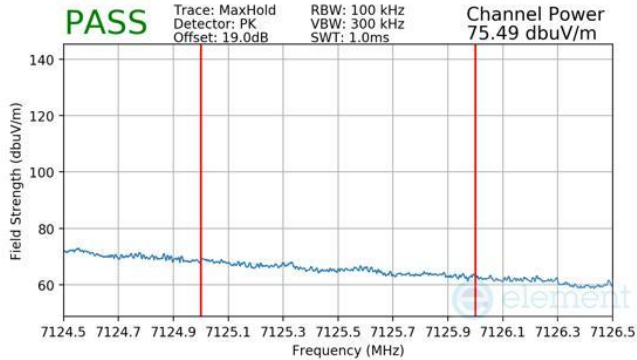


Plot 7-565 Antenna WF5B Radiated Integrated Band Edge (Peak – UNII Band 8)

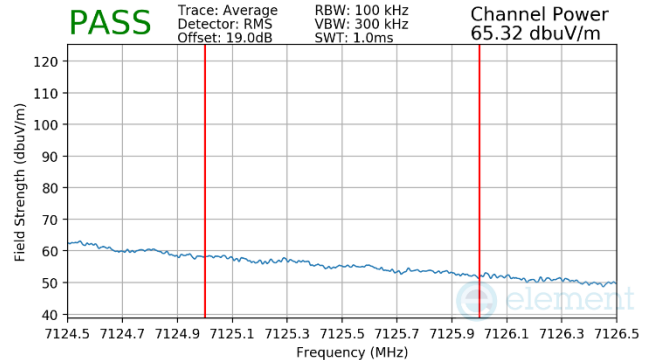

Plot 7-566 Antenna WF5B Radiated Integrated Band Edge (Average – UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

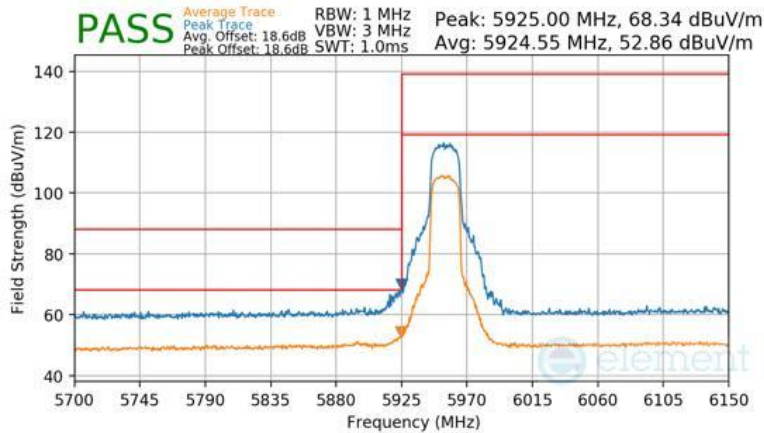

Plot 7-567 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 211 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

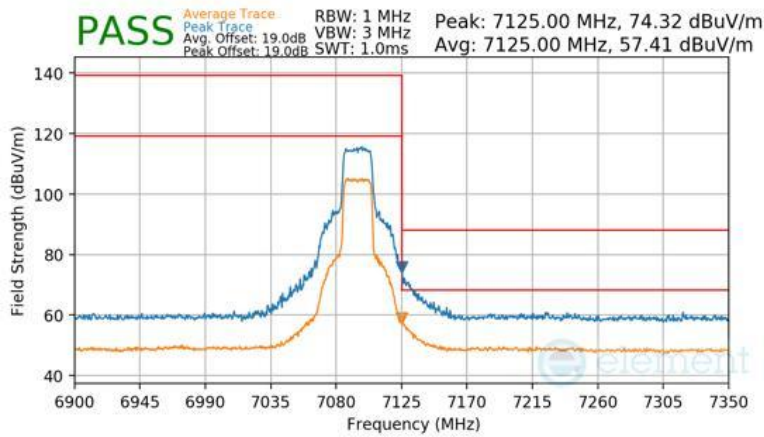


Plot 7-568 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

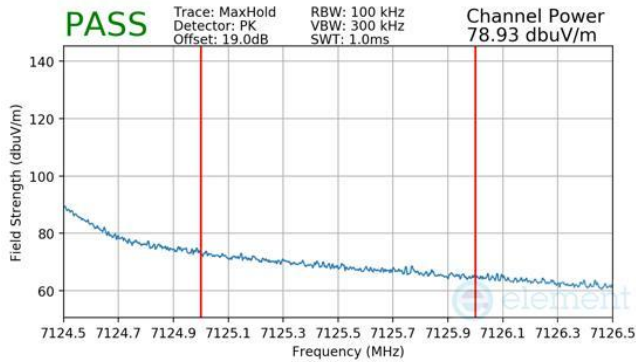


Plot 7-569 Antenna WF5B Radiated Integrated Band Edge (Peak – UNII Band 8)

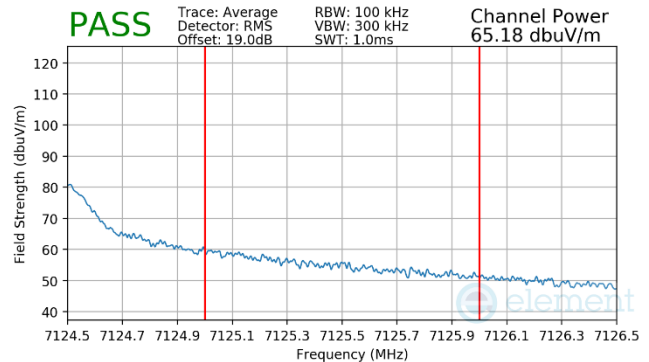

Plot 7-570 Antenna WF5B Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 212 of 257


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085 MHz
Channel	227

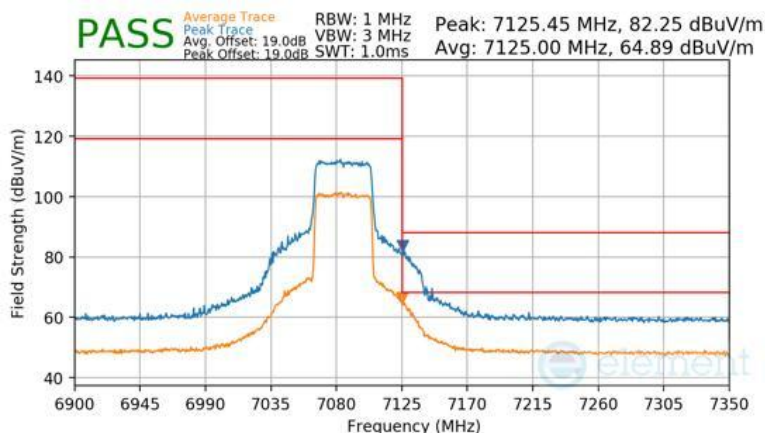

Plot 7-573 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 214 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

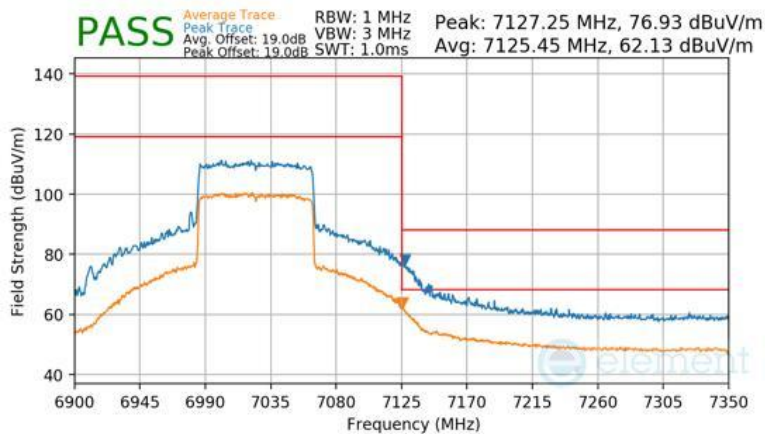


Plot 7-576 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 216 of 257


7.7.10 Antenna WF5B Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025 MHz
Channel	15

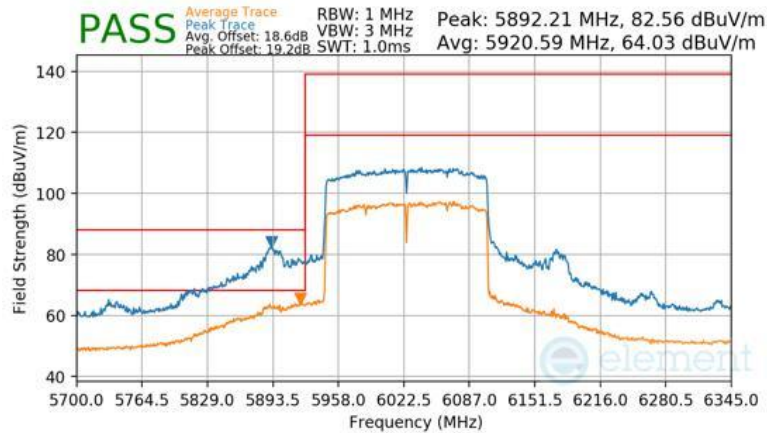

Plot 7-577 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

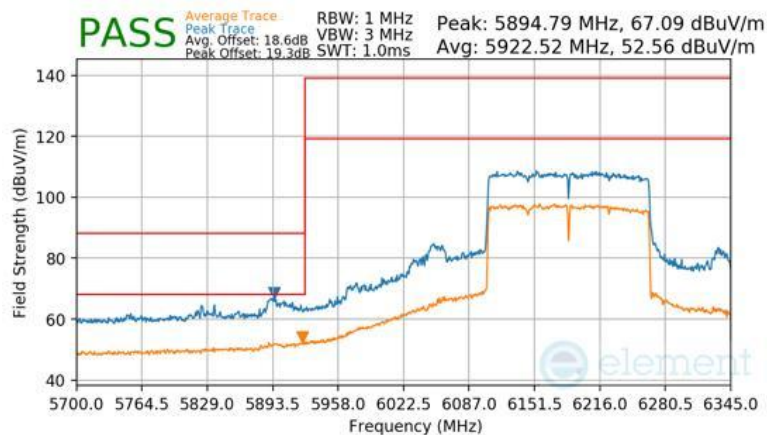


Plot 7-578 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 217 of 257

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS11
 3 Meters
 6825 MHz
 175

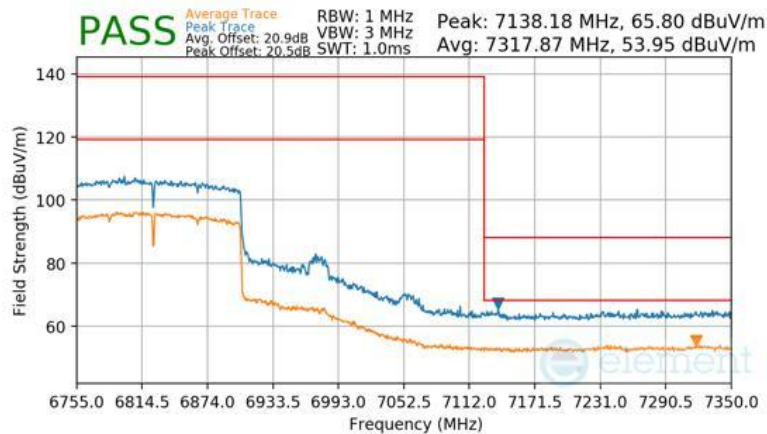

Plot 7-579 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS11
 3 Meters
 6985 MHz
 207

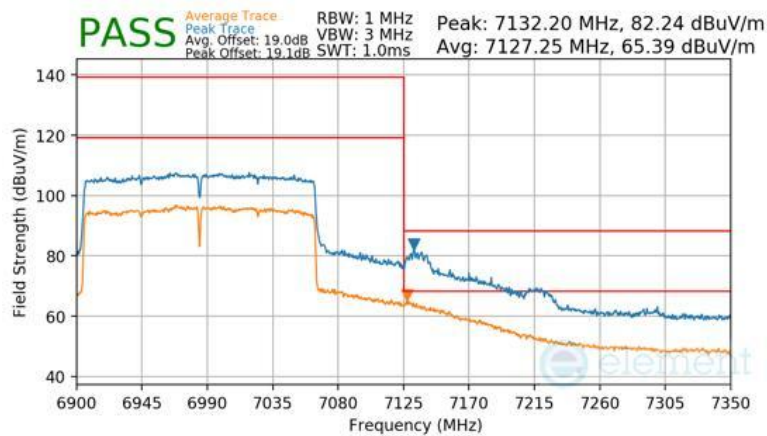


Plot 7-580 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 218 of 257


7.7.11 Antenna WF8 Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

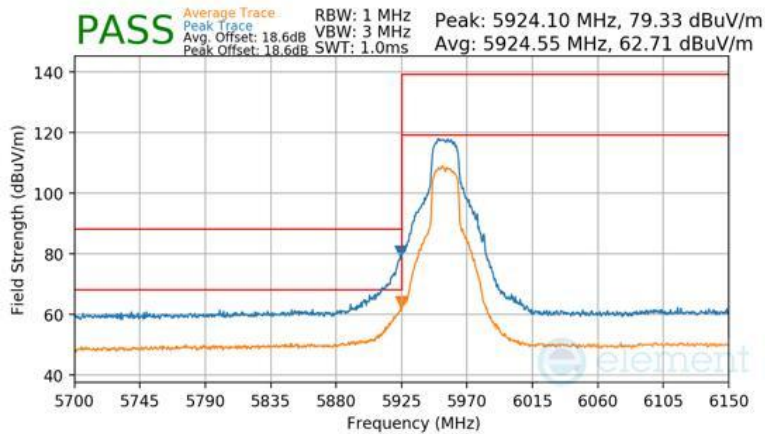

Plot 7-581 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

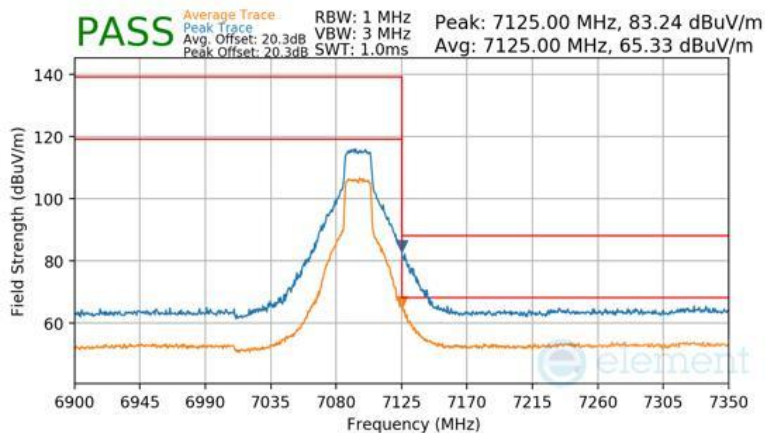


Plot 7-582 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 219 of 257

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

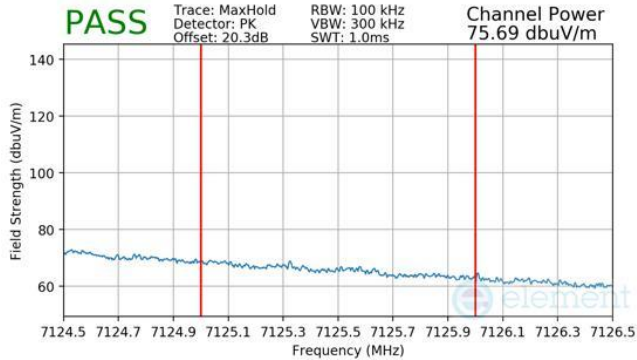


Plot 7-583 Antenna WF8 Radiated Integrated Band Edge (Peak - UNII Band 8)

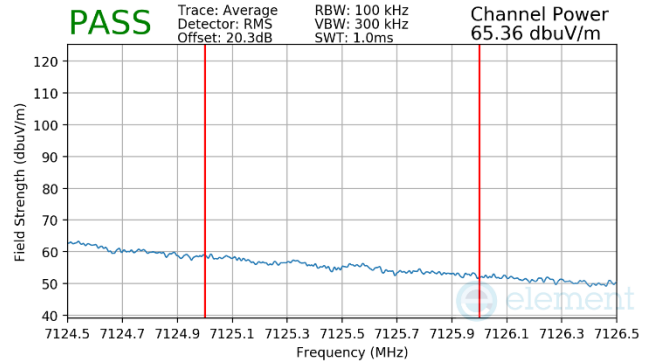

Plot 7-584 Antenna WF8 Radiated Integrated Band Edge (Average - UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

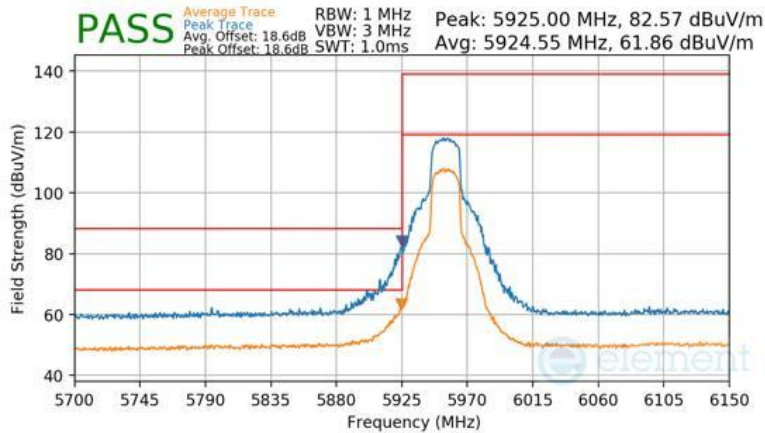

Plot 7-585 Antenna WF8 Radiated Lower Band Edge (Peak & Average - UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 220 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

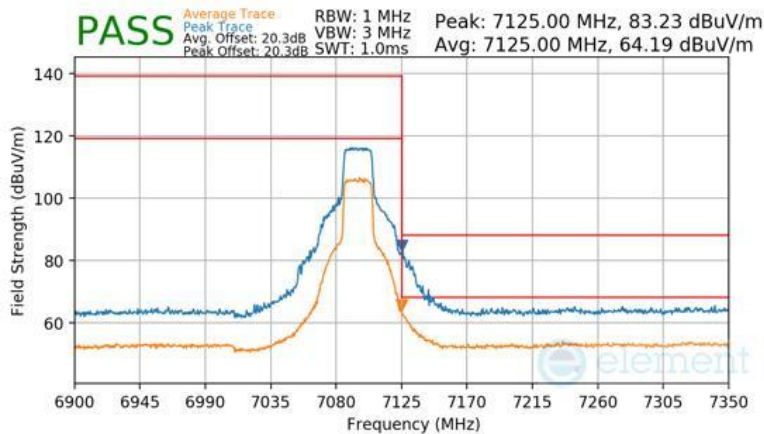


Plot 7-586 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

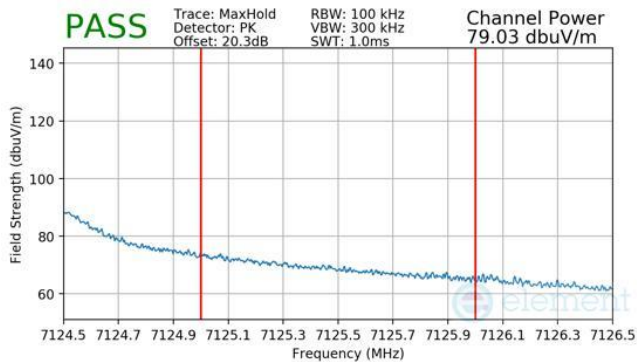

Plot 7-587 Antenna WF8 Radiated Integrated Band Edge (Peak – UNII Band 8)

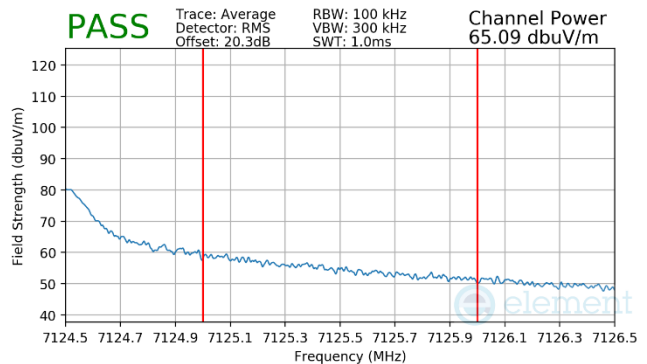


Plot 7-588 Antenna WF8 Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 221 of 257


7.7.12 Antenna WF8 Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965 MHz
Channel	3

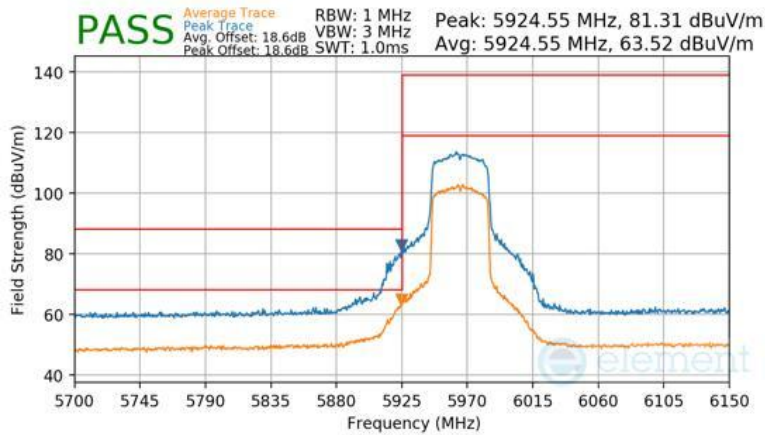

Plot 7-589 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6005 MHz
Channel	11

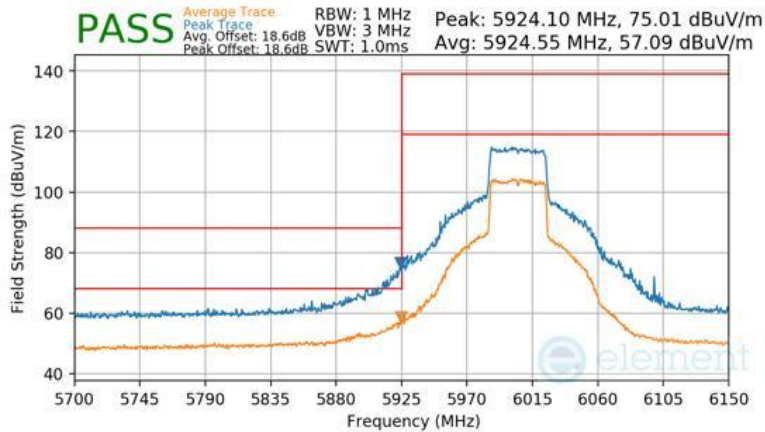

Plot 7-590 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 222 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085 MHz
Channel	227

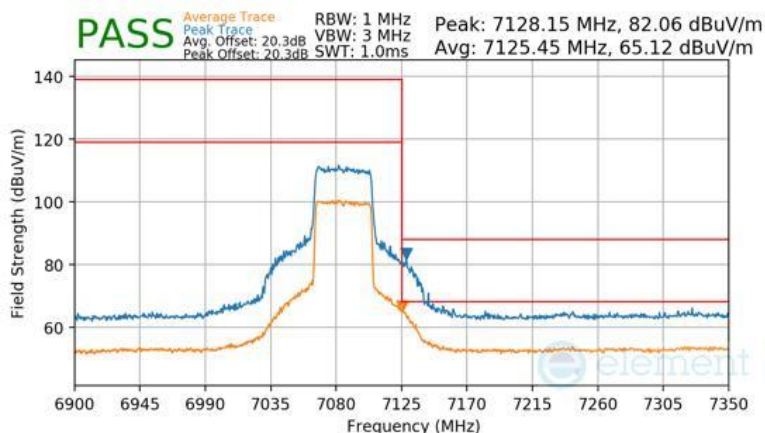


Plot 7-591 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 223 of 257


7.7.13 Antenna WF8 Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985 MHz
Channel	7

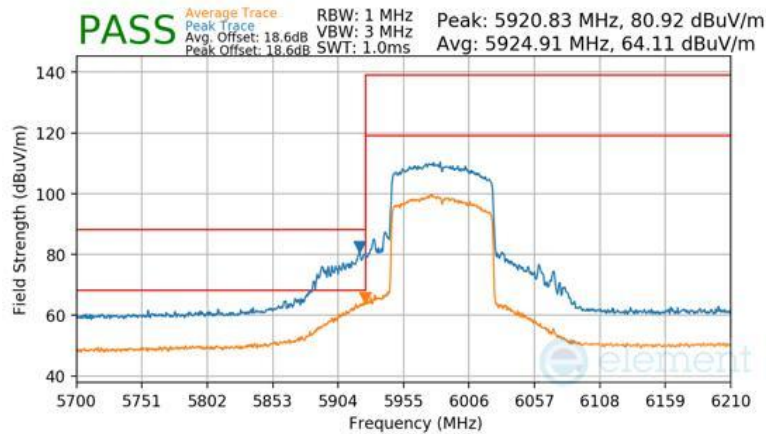

Plot 7-592 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6065 MHz
Channel	23

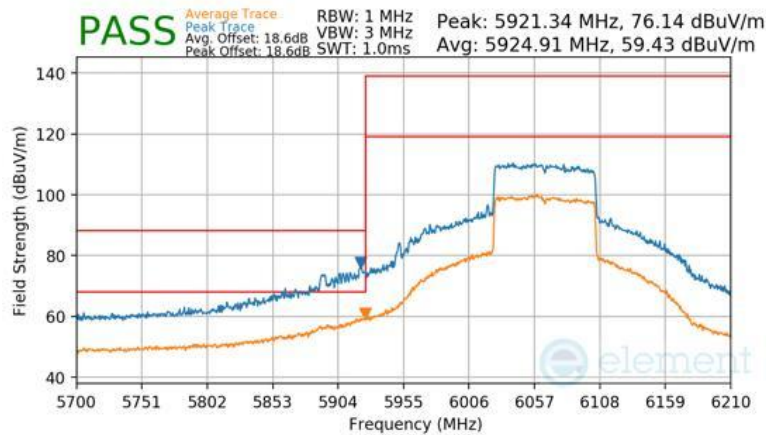

Plot 7-593 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 224 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6945 MHz
Channel	199

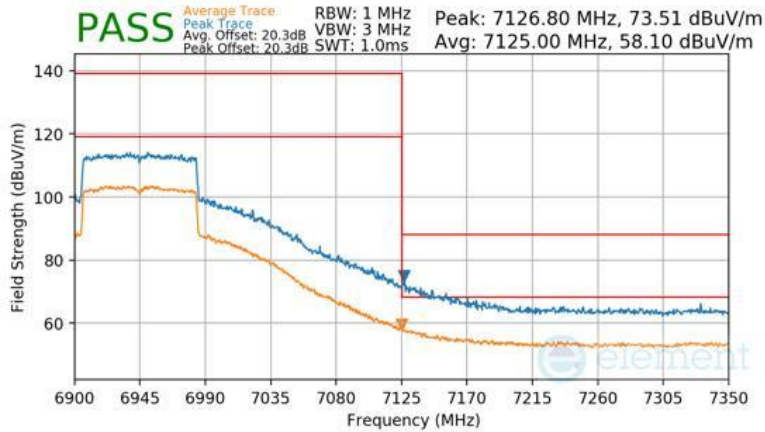

Plot 7-594 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

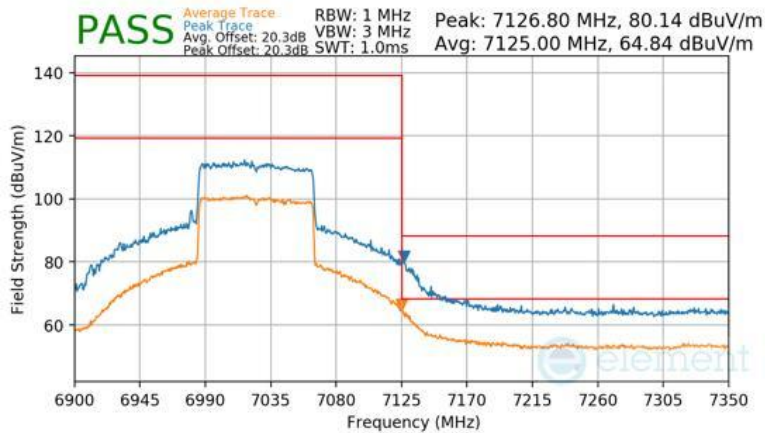


Plot 7-595 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 225 of 257


7.7.14 Antenna WF8 Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025 MHz
Channel	15

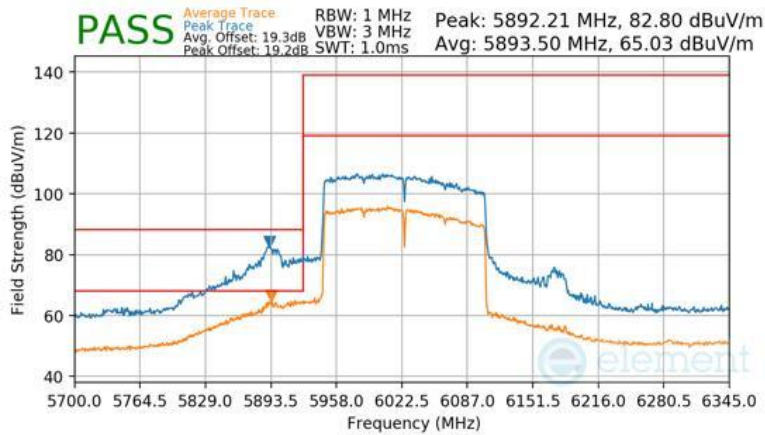

Plot 7-596 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

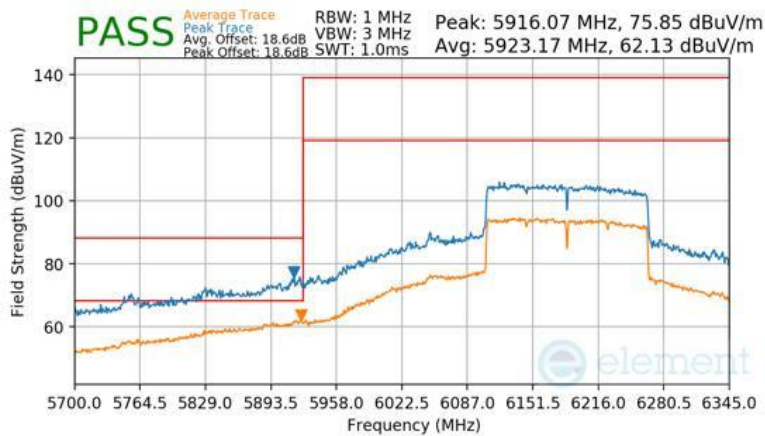

Plot 7-597 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 226 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6825 MHz
Channel	175

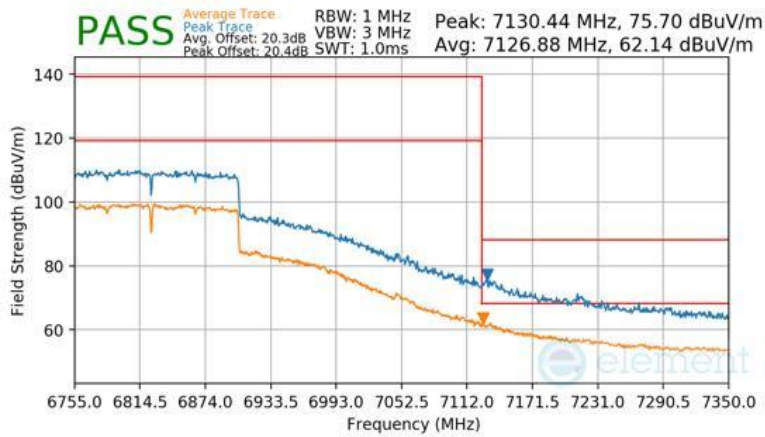

Plot 7-598 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985 MHz
Channel	207

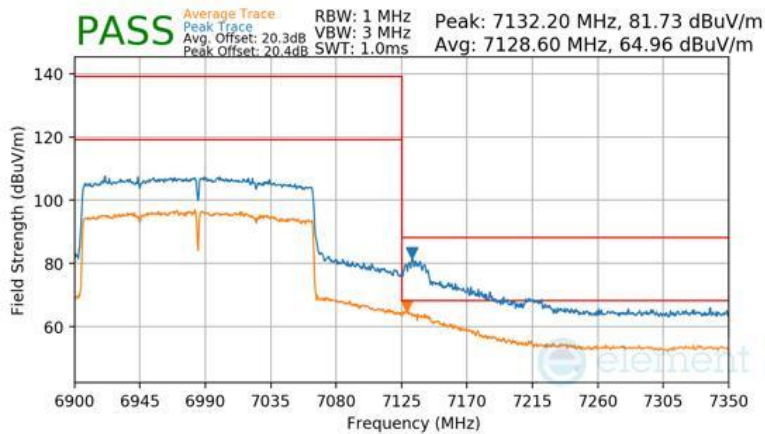


Plot 7-599 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 227 of 257


7.7.15 CDD Primary Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

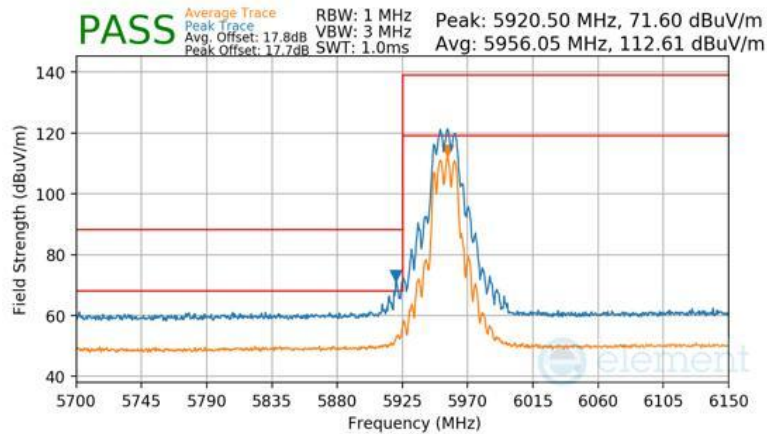

Plot 7-600 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

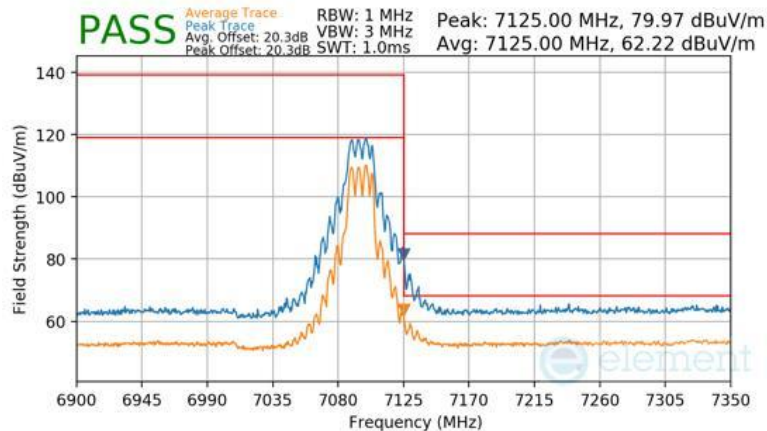


Plot 7-601 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 228 of 257

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

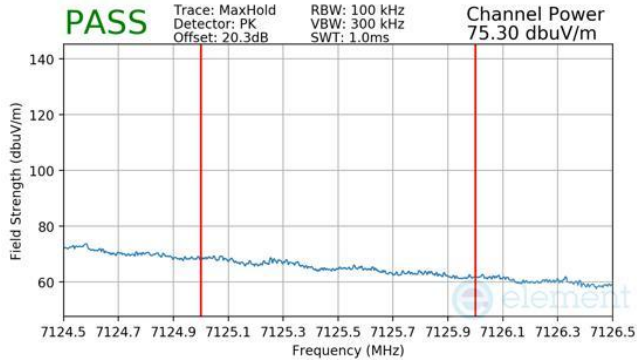


Plot 7-602 CDD Primary Radiated Integrated Band Edge (Peak – UNII Band 8)

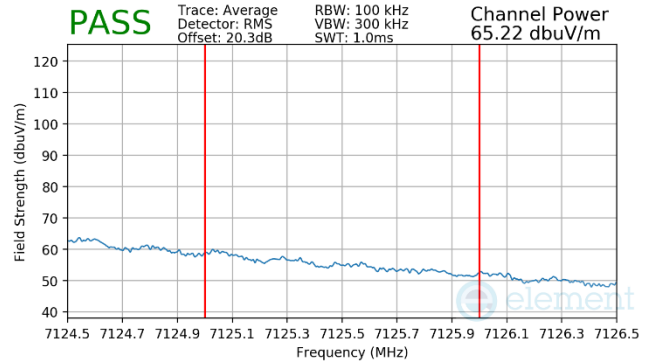

Plot 7-603 CDD Primary Radiated Integrated Band Edge (Average – UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

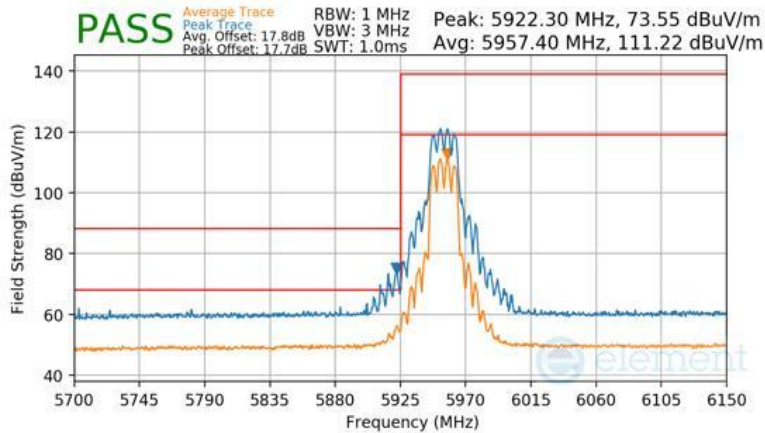

Plot 7-604 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 229 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

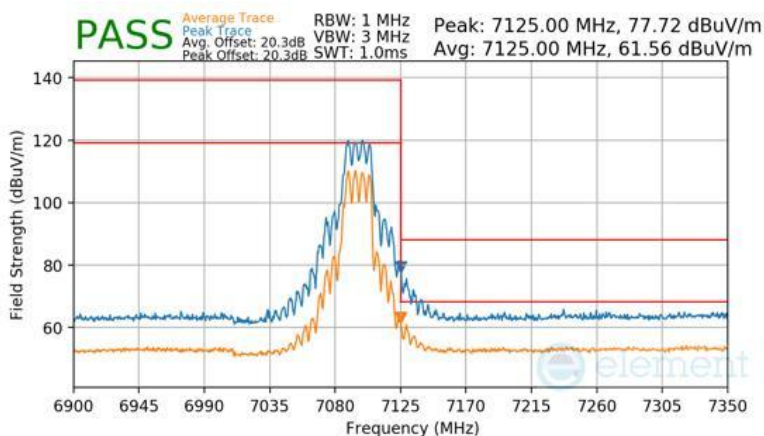


Plot 7-605 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

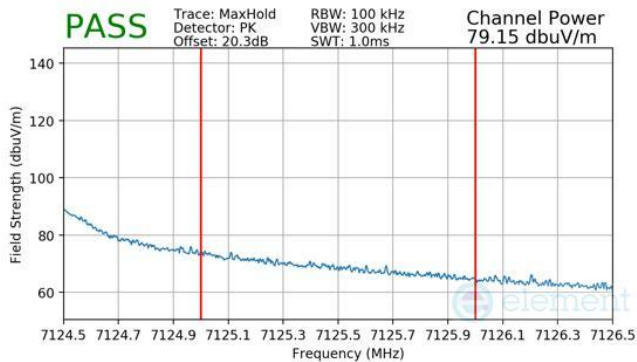

Plot 7-606 CDD Primary Radiated Integrated Band Edge (Peak – UNII Band 8)

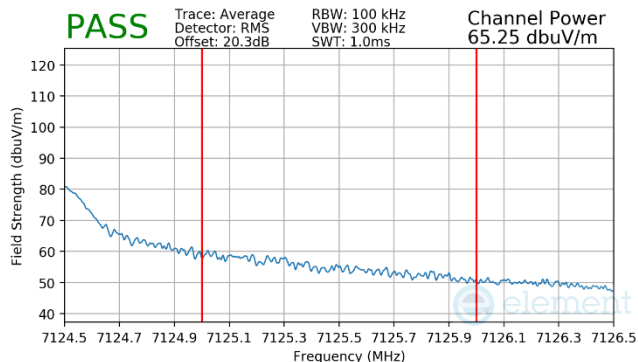


Plot 7-607 CDD Primary Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 230 of 257


7.7.16 CDD Primary Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965 MHz
Channel	3

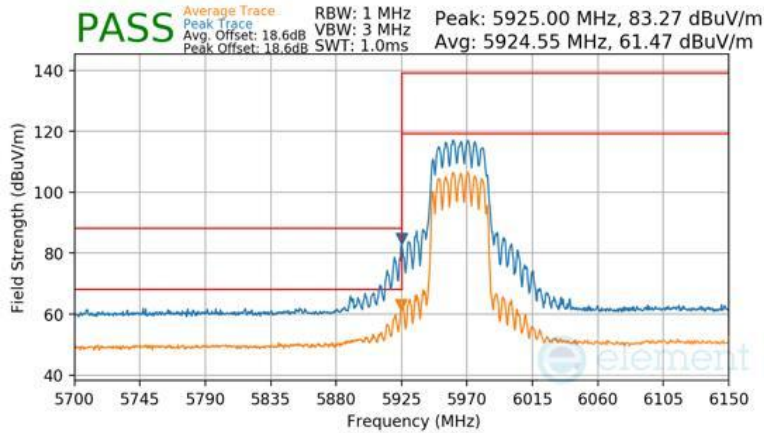

Plot 7-608 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6005 MHz
Channel	11

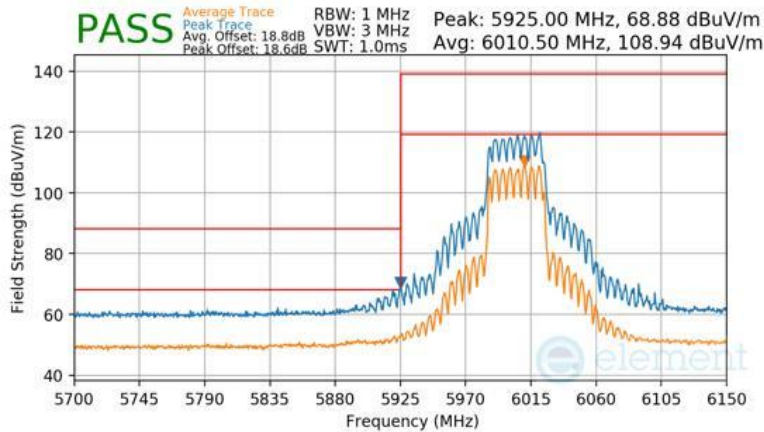

Plot 7-609 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 231 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085 MHz
Channel	227

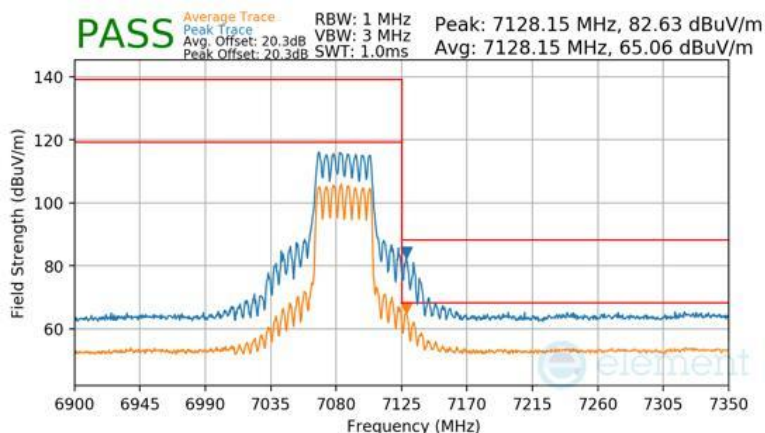


Plot 7-610 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 232 of 257


7.7.17 CDD Primary Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985 MHz
Channel	7

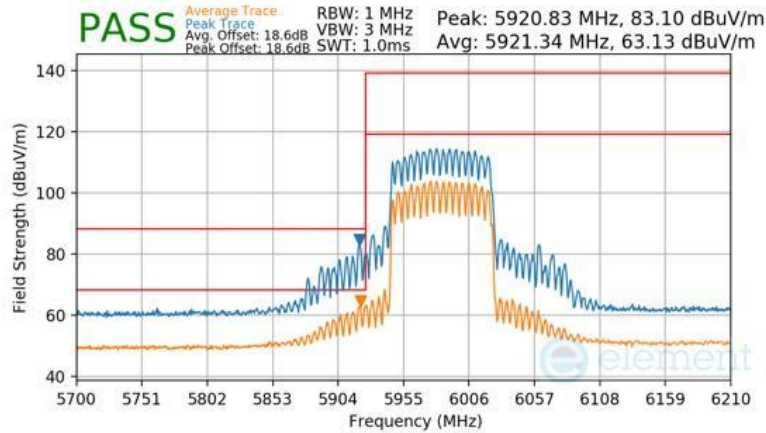

Plot 7-611 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6065 MHz
Channel	23

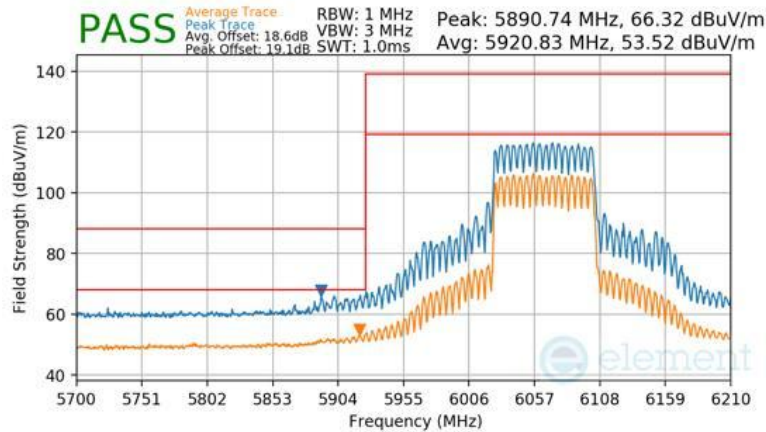

Plot 7-612 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 233 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6945 MHz
Channel	199

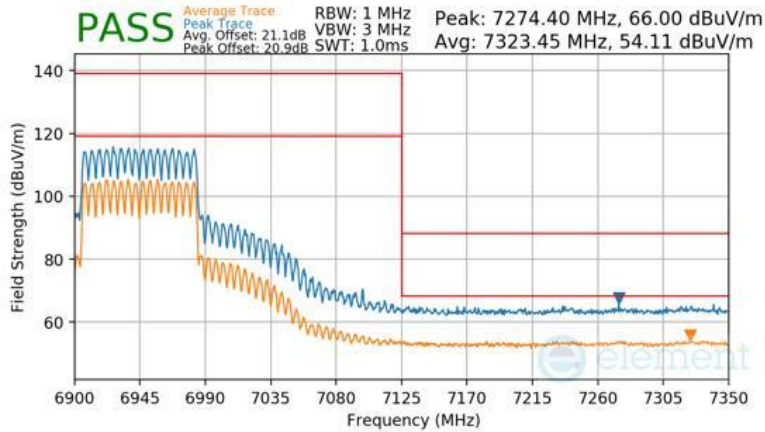

Plot 7-613 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

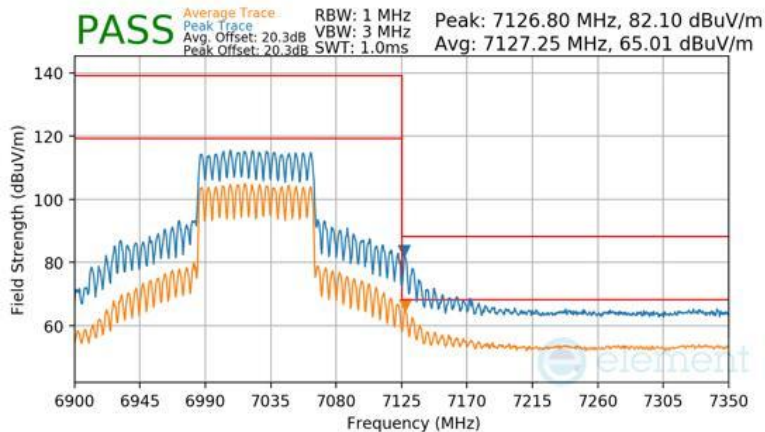


Plot 7-614 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 234 of 257


7.7.18 CDD Primary Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025 MHz
Channel	15

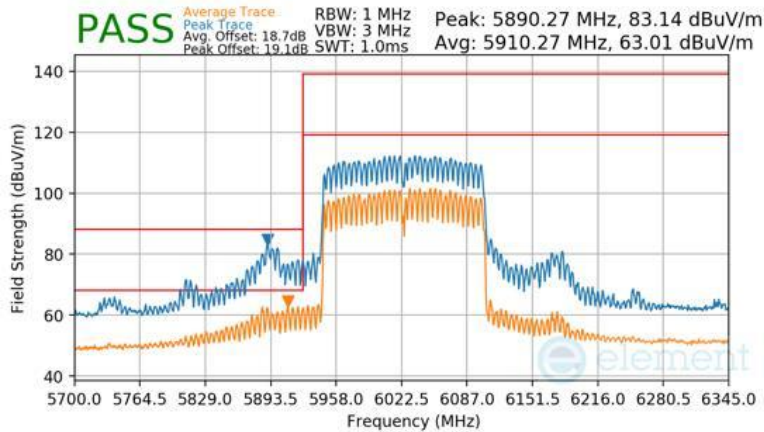

Plot 7-615 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

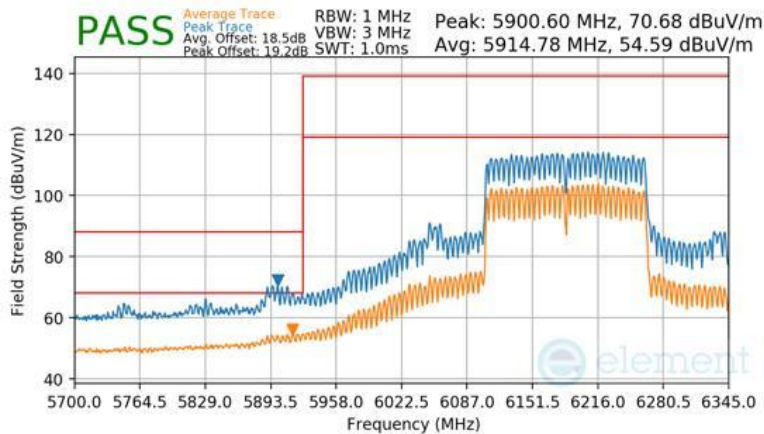


Plot 7-616 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 235 of 257

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS11
 3 Meters
 6825 MHz
 175

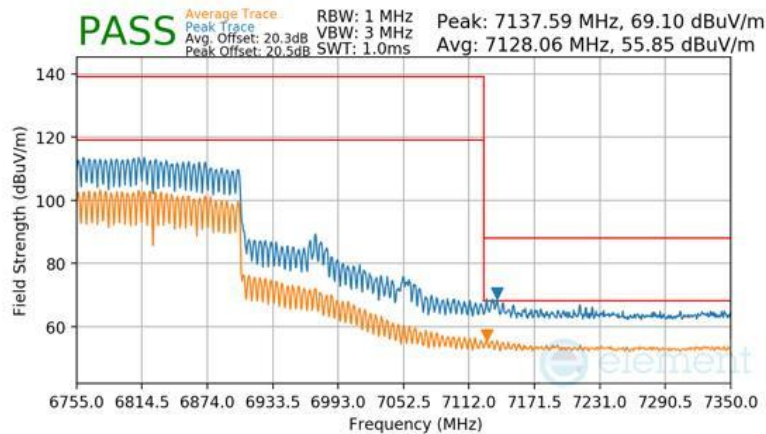

Plot 7-617 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS11
 3 Meters
 6985 MHz
 207

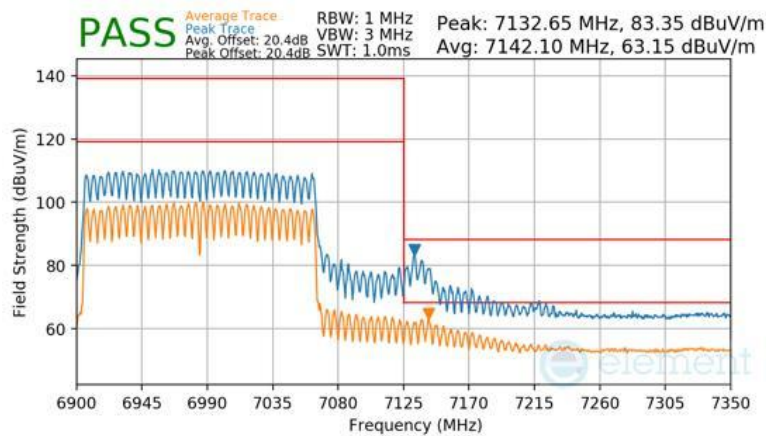


Plot 7-618 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 236 of 257


7.7.19 CDD Diversity Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

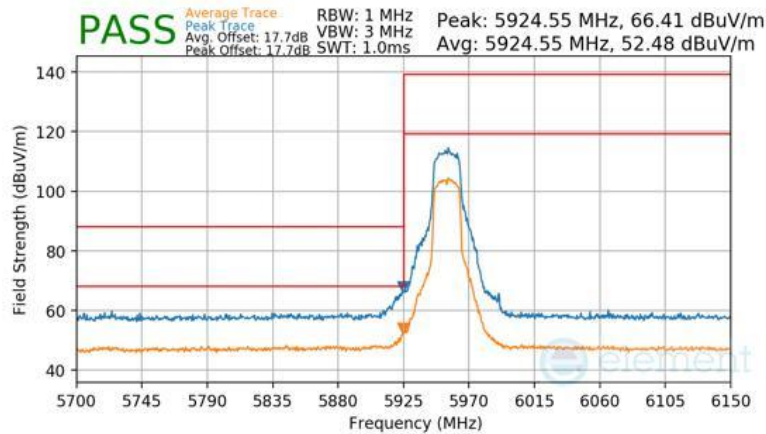

Plot 7-619 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

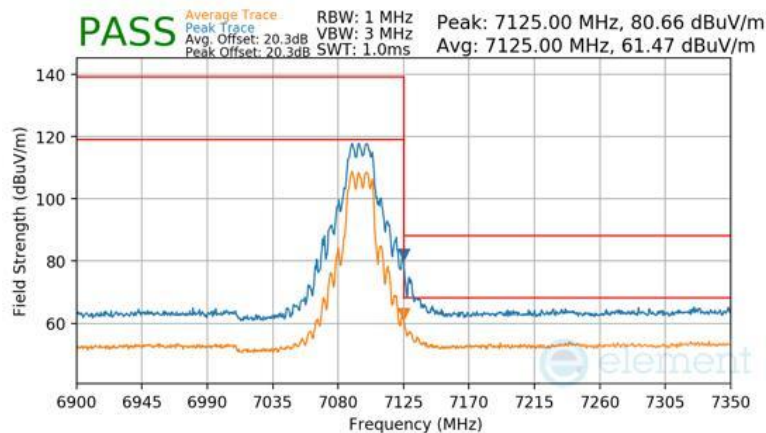


Plot 7-620 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 237 of 257

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

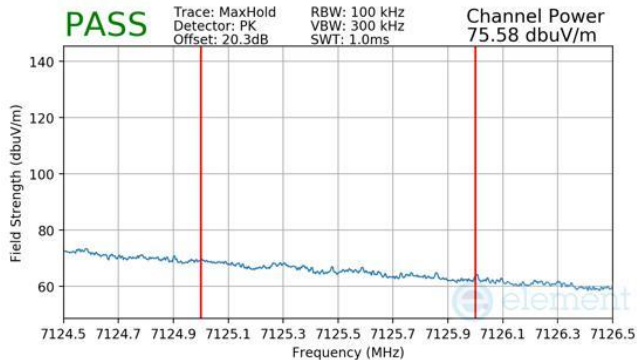


Plot 7-621 CDD Diversity Radiated Integrated Band Edge (Peak - UNII Band 8)

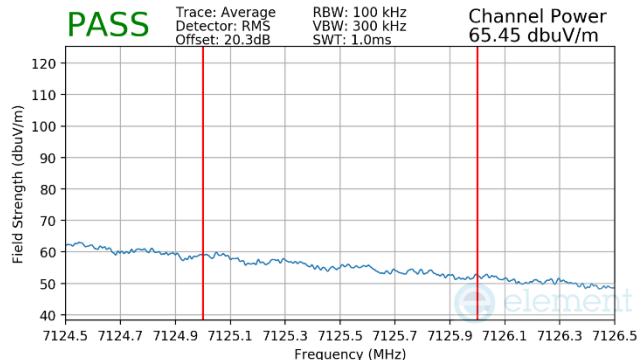

Plot 7-622 CDD Diversity Radiated Integrated Band Edge (Average - UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

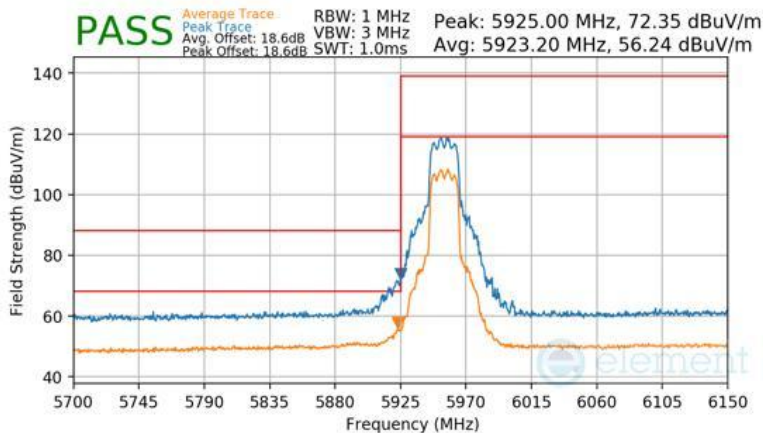

Plot 7-623 CDD Diversity Radiated Lower Band Edge (Peak & Average - UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 238 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

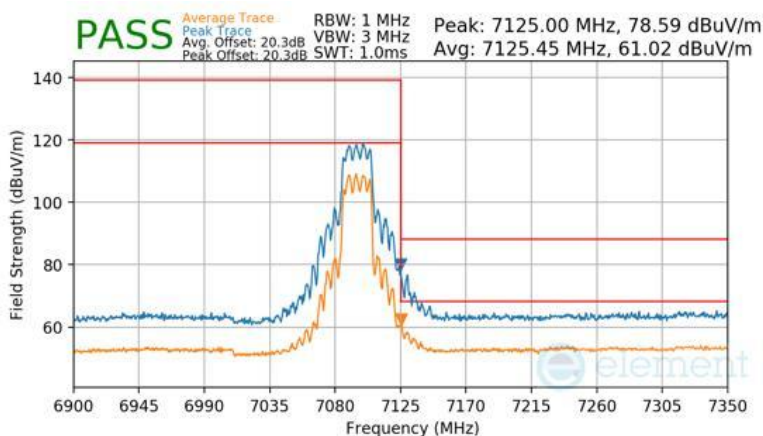


Plot 7-624 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

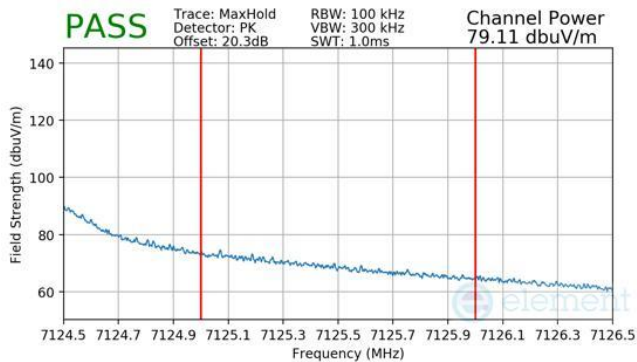

Plot 7-625 CDD Diversity Radiated Integrated Band Edge (Peak – UNII Band 8)

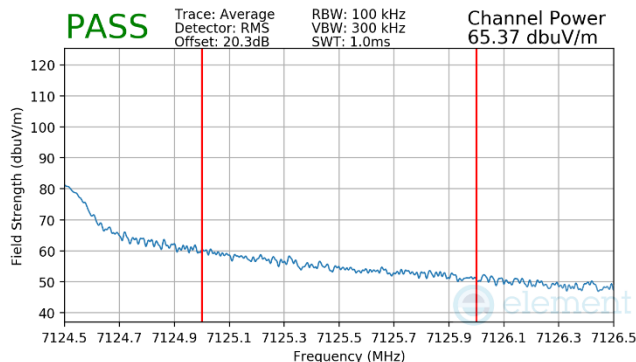


Plot 7-626 CDD Diversity Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 239 of 257


7.7.20 CDD Diversity Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965 MHz
Channel	3

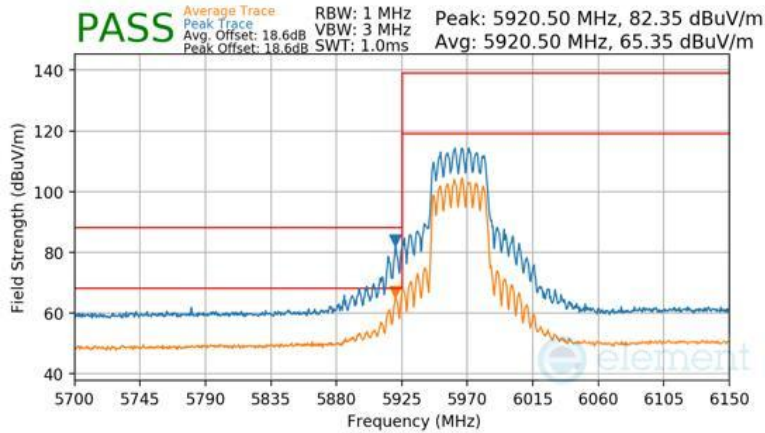

Plot 7-627 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6005 MHz
Channel	11

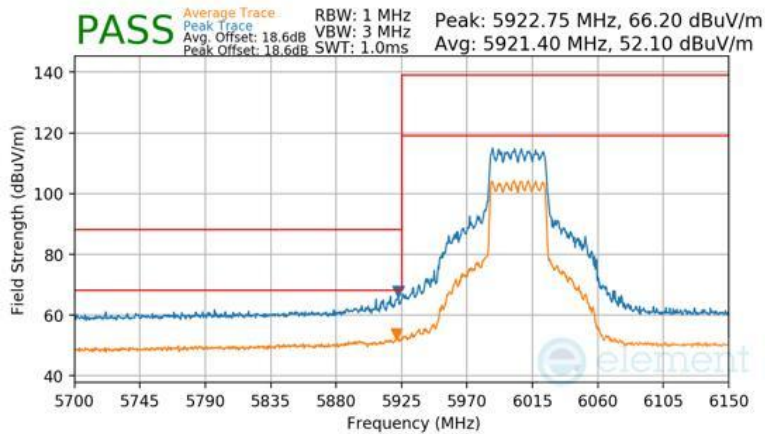

Plot 7-628 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 240 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085 MHz
Channel	227

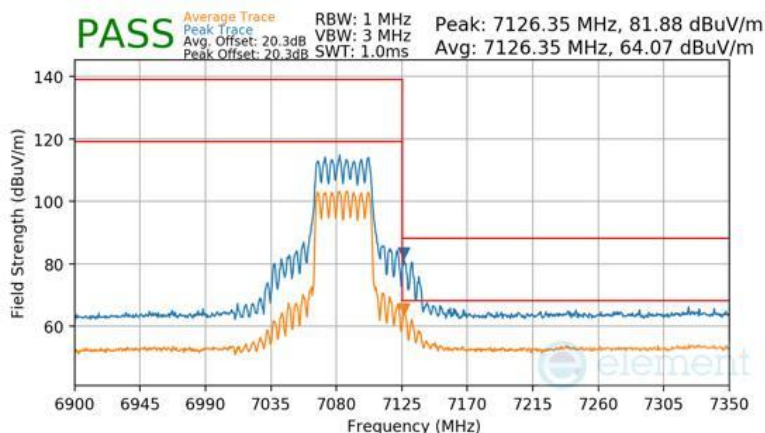


Plot 7-629 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 241 of 257


7.7.21 CDD Diversity Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985 MHz
Channel	7

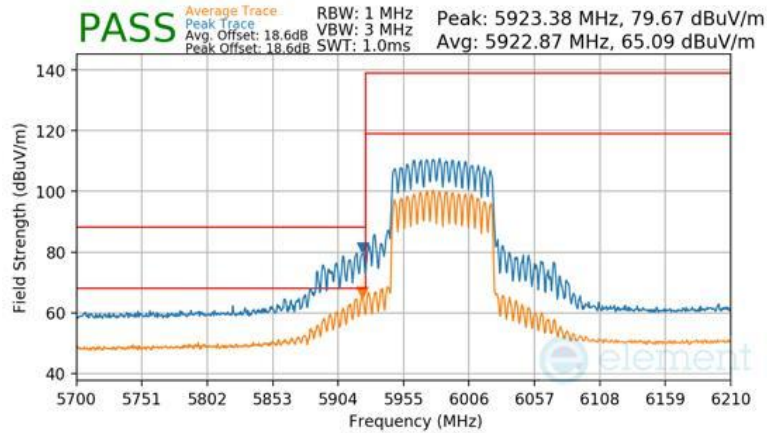

Plot 7-630 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6065 MHz
Channel	23

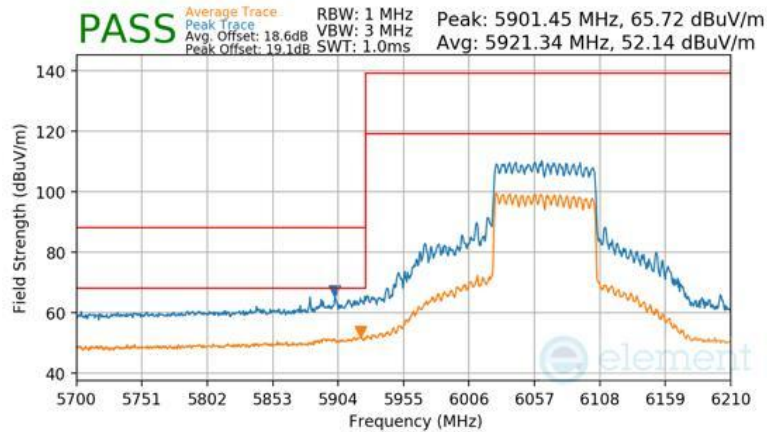

Plot 7-631 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 242 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6945 MHz
Channel	199

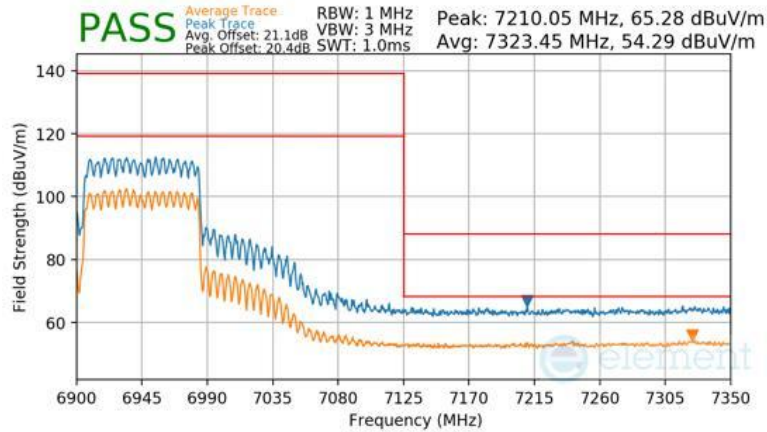

Plot 7-632 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

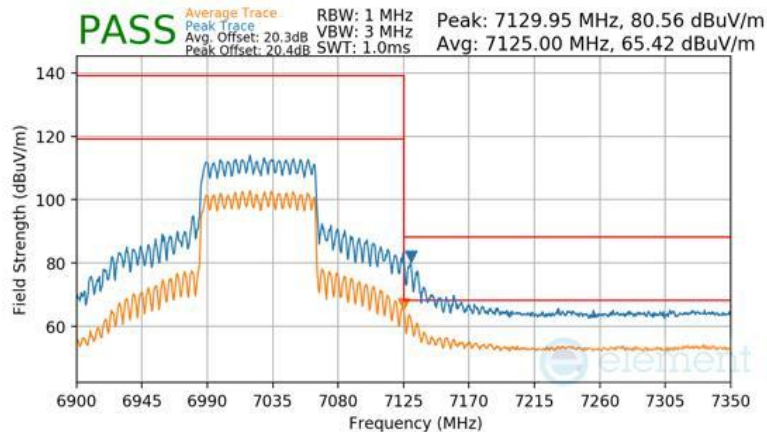


Plot 7-633 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 243 of 257


7.7.22 CDD Diversity Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025 MHz
Channel	15

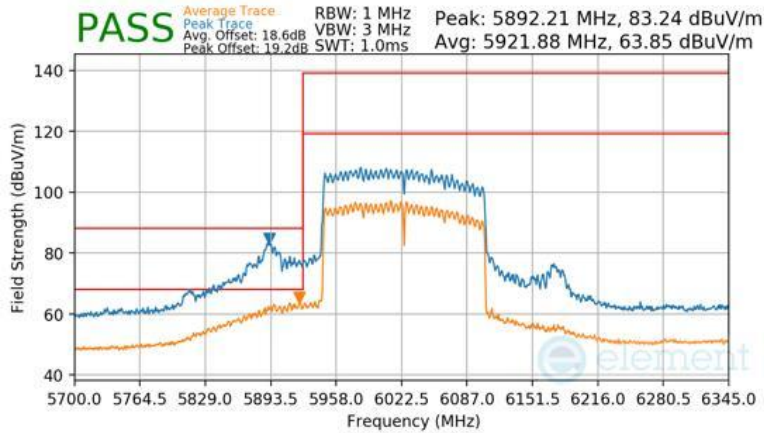

Plot 7-634 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

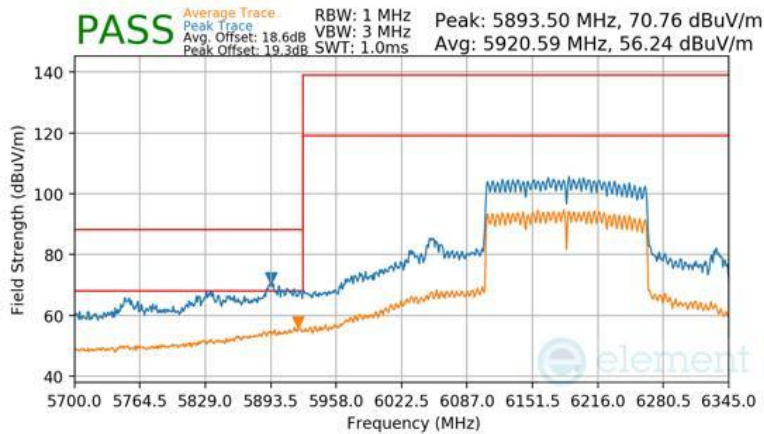

Plot 7-635 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 244 of 257

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6825 MHz
Channel	175

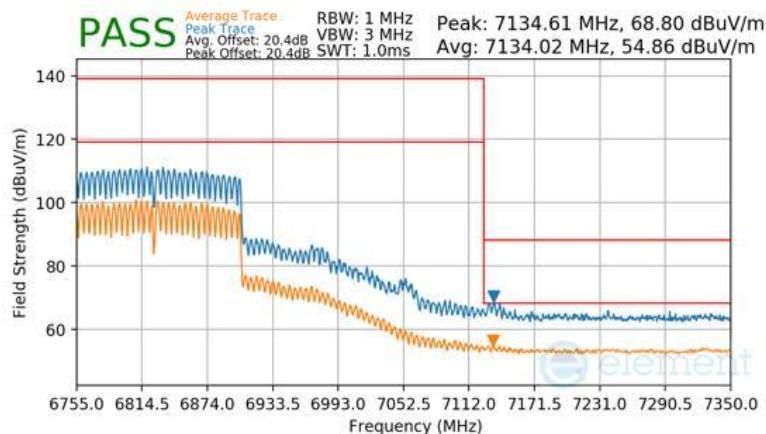

Plot 7-636 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985 MHz
Channel	207

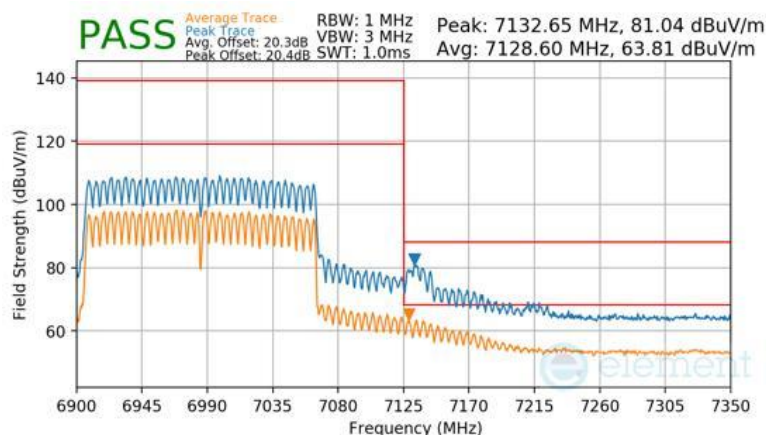

Plot 7-637 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 245 of 257

7.8 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-106 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-106. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 246 of 257

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

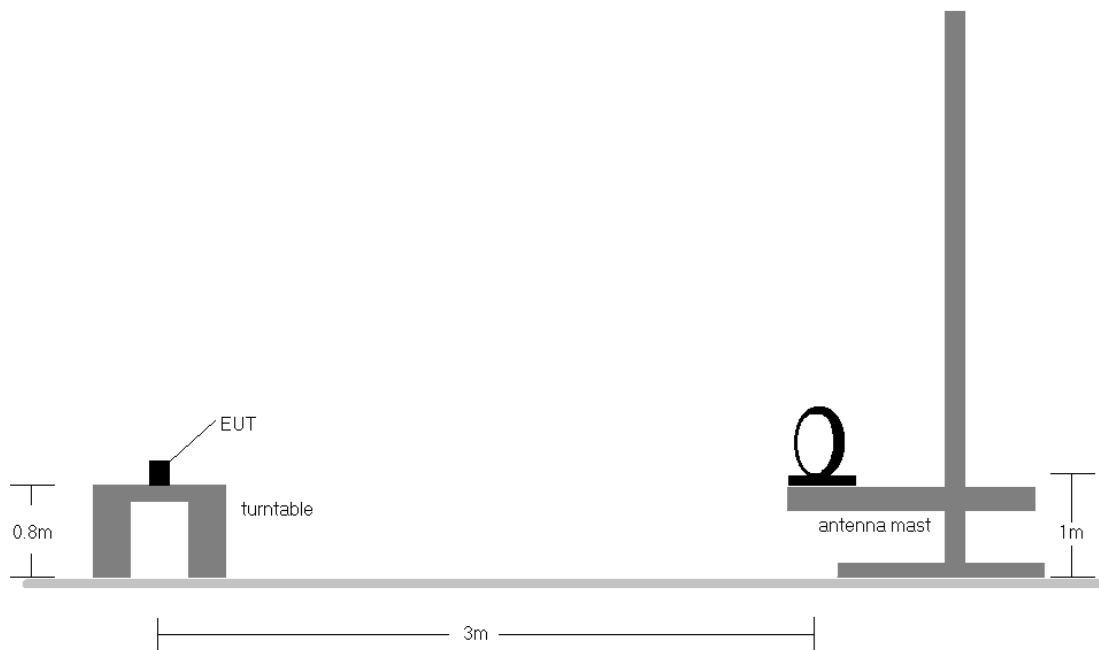


Figure 7-7. Radiated Test Setup < 30 MHz

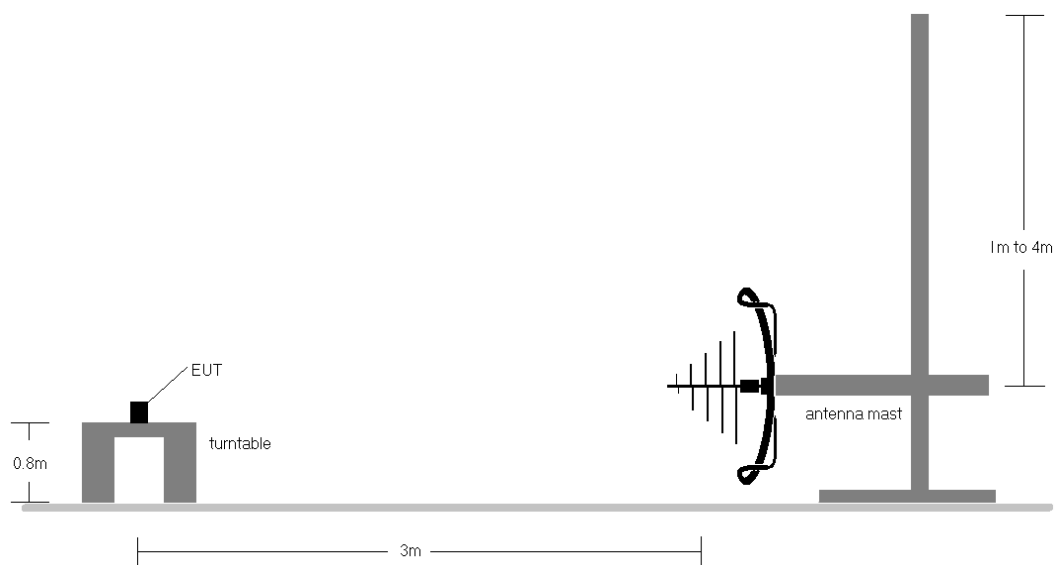


Figure 7-8. Radiated Test Setup < 1 GHz

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 247 of 257

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-106.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 248 of 257

7.8.1 SDM Primary Radiated Spurious Emissions Measurements (Below 1 GHz)

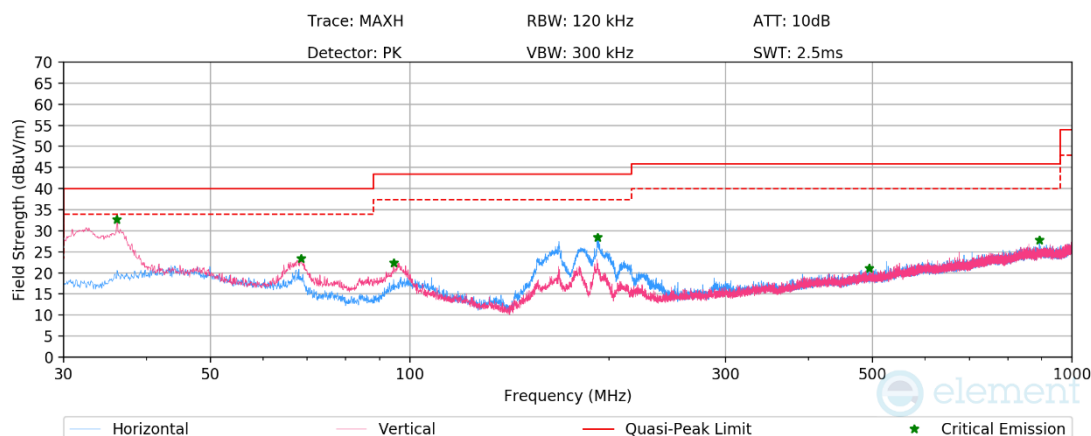


Plot 7-638. Radiated Spurious Emissions below 1 GHz CDD Primary, 802.11be, Ch.45 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.12	Max Peak	V	100	195	-54.10	-20.18	32.72	40.00	-7.28
68.52	Max Peak	V	300	172	-62.26	-21.33	23.41	40.00	-16.59
94.56	Max Peak	V	100	145	-64.44	-20.19	22.37	43.50	-21.13
192.07	Max Peak	H	100	202	-59.78	-18.75	28.47	43.50	-15.03
493.70	Max Peak	H	200	215	-74.53	-11.31	21.16	46.00	-24.84
893.20	Max Peak	H	300	232	-74.87	-4.33	27.80	46.00	-18.20

Table 7-107. Radiated Spurious Emissions Measurement below 1 GHz CDD Primary, 802.11be, Ch.45 with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 249 of 257

7.8.2 SDM Diversity Radiated Spurious Emissions Measurements (Below 1 GHz)

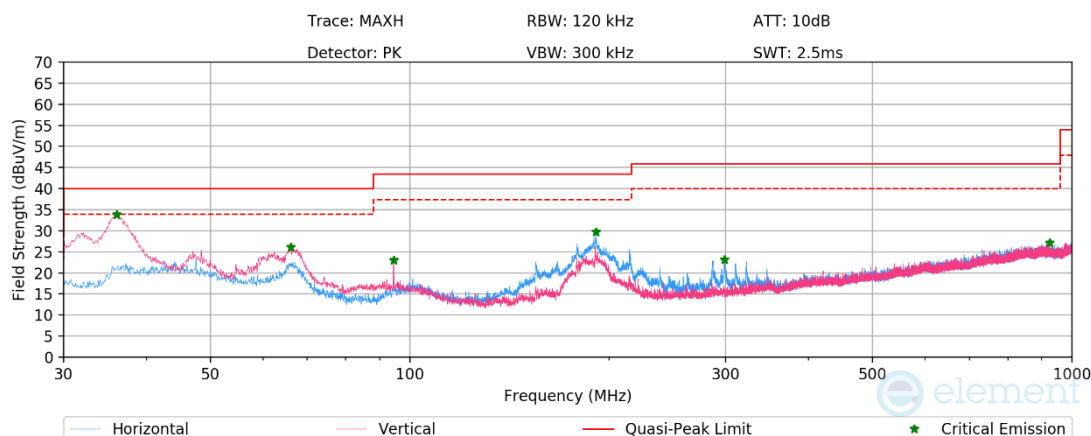

Plot 7-639. Radiated Spurious Emissions below 1 GHz CDD Diversity, 802.11be, Ch.45 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.12	Max Peak	V	100	0	-52.93	-20.18	33.90	40.00	-6.10
66.06	Max Peak	V	100	169	-60.48	-20.42	26.10	40.00	-13.90
94.50	Max Peak	V	100	128	-63.82	-20.21	22.97	43.50	-20.53
190.93	Max Peak	H	100	171	-58.34	-18.92	29.74	43.50	-13.76
298.39	Max Peak	H	100	330	-68.12	-15.71	23.16	46.00	-22.84
925.66	Max Peak	H	100	360	-75.83	-4.02	27.15	46.00	-18.85

Table 7-108. Radiated Spurious Emissions Measurement below 1 GHz CDD Diversity, 802.11be, Ch.45 with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 250 of 257

7.9 AC Line-Conducted Emissions Measurement

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-109. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 251 of 257

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


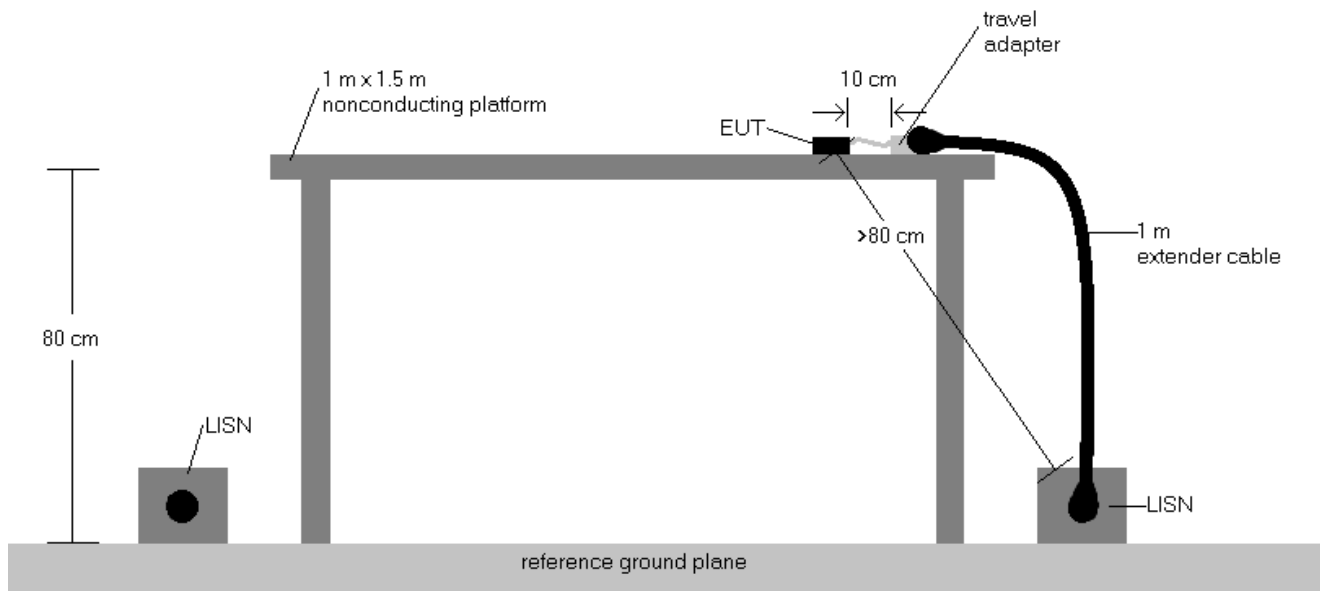


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150 kHz to 30 MHz are specified in 15.207 and RSS-Gen (7.4.2).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 252 of 257

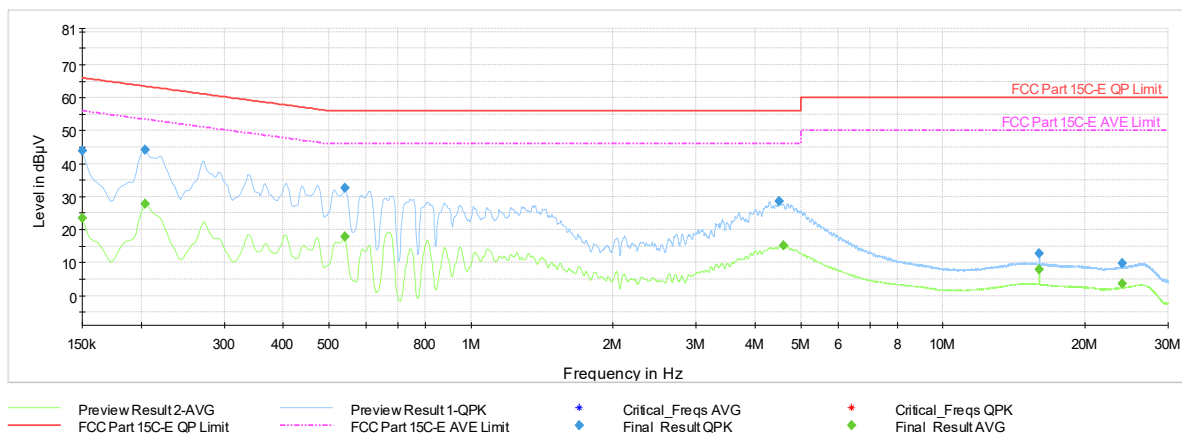


Plot 7-640. AC Line Conducted Plot with 802.11be CDD Primary – Ch.45 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.15	FINAL	---	23.47	56.00	-32.53	L1	GND
0.15	FINAL	43.86	---	66.00	-22.14	L1	GND
0.20	FINAL	---	27.73	53.45	-25.72	L1	GND
0.20	FINAL	44.14	---	63.45	-19.31	L1	GND
0.54	FINAL	---	17.84	46.00	-28.16	L1	GND
0.54	FINAL	32.60	---	56.00	-23.40	L1	GND
4.50	FINAL	28.65	---	56.00	-27.35	L1	GND
4.59	FINAL	---	15.29	46.00	-30.71	L1	GND
16.01	FINAL	12.76	---	60.00	-47.24	L1	GND
16.01	FINAL	---	7.80	50.00	-42.20	L1	GND
24.02	FINAL	---	3.69	50.00	-46.31	L1	GND
24.02	FINAL	9.76	---	60.00	-50.24	L1	GND

Table 7-110. AC Line Conducted Data with 802.11be CDD Primary – Ch. 45 (L1) with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 253 of 257

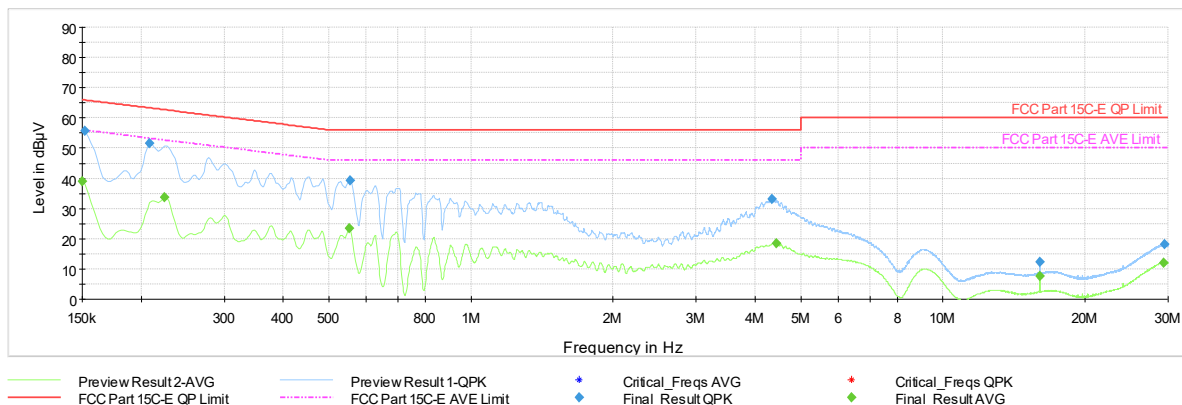


Plot 7-641. AC Line Conducted Plot with 802.11be CDD Primary – Ch. 45 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.15	FINAL	---	38.95	56.00	-17.05	N	GND
0.15	FINAL	55.61	---	65.88	-10.27	N	GND
0.21	FINAL	51.50	---	63.27	-11.77	N	GND
0.22	FINAL	---	33.63	52.66	-19.03	N	GND
0.55	FINAL	---	23.44	46.00	-22.56	N	GND
0.56	FINAL	39.37	---	56.00	-16.63	N	GND
4.34	FINAL	33.03	---	56.00	-22.97	N	GND
4.45	FINAL	---	18.60	46.00	-27.40	N	GND
16.07	FINAL	12.25	---	60.00	-47.75	N	GND
16.07	FINAL	---	7.48	50.00	-42.52	N	GND
29.35	FINAL	---	12.10	50.00	-37.90	N	GND
29.44	FINAL	18.14	---	60.00	-41.86	N	GND

Table 7-111. AC Line Conducted Data with 802.11be CDD Primary – Ch. 45 (N), with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 254 of 257

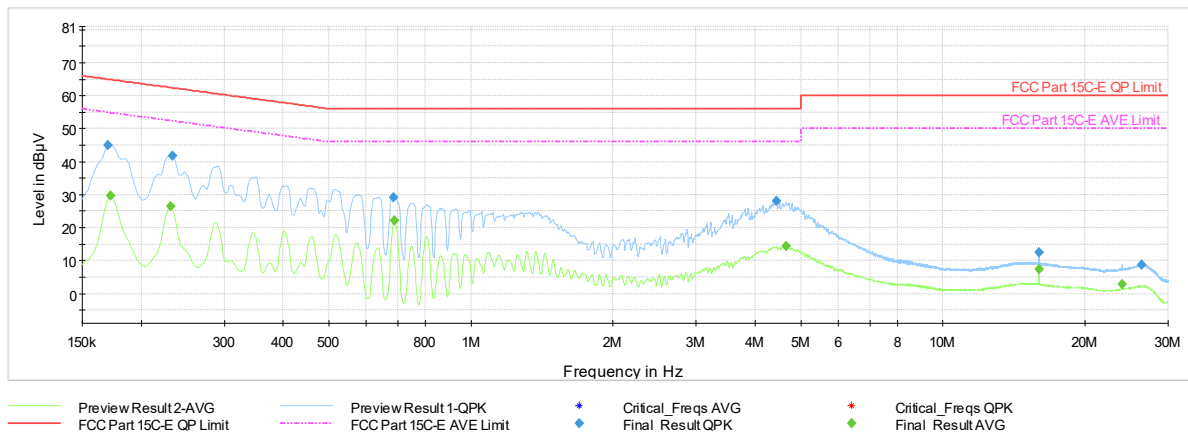


Plot 7-642. AC Line Conducted Plot with 802.11be CDD Diversity – Ch.45 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	45.13	---	64.95	-19.82	L1	GND
0.17	FINAL	---	29.62	54.84	-25.22	L1	GND
0.23	FINAL	---	26.43	52.41	-25.98	L1	GND
0.23	FINAL	41.71	---	62.33	-20.62	L1	GND
0.69	FINAL	29.24	---	56.00	-26.76	L1	GND
0.69	FINAL	---	22.10	46.00	-23.90	L1	GND
4.44	FINAL	28.05	---	56.00	-27.95	L1	GND
4.66	FINAL	---	14.46	46.00	-31.54	L1	GND
16.00	FINAL	12.40	---	60.00	-47.60	L1	GND
16.00	FINAL	---	7.46	50.00	-42.54	L1	GND
24.01	FINAL	---	2.87	50.00	-47.13	L1	GND
26.41	FINAL	8.75	---	60.00	-51.25	L1	GND

Table 7-112. AC Line Conducted Data with 802.11be CDD Diversity – Ch. 45 (L1) with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 255 of 257

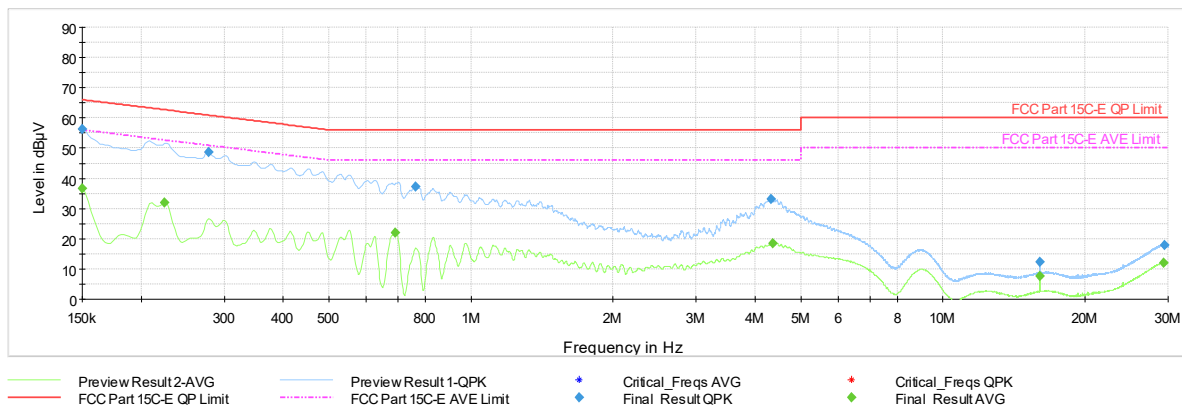

Plot 7-643. AC Line Conducted Plot with 802.11be CDD Diversity – Ch. 45 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.15	FINAL	---	36.78	56.00	-19.22	N	GND
0.15	FINAL	56.25	---	66.00	-9.75	N	GND
0.22	FINAL	---	32.08	52.66	-20.58	N	GND
0.28	FINAL	48.60	---	60.87	-12.27	N	GND
0.69	FINAL	---	22.02	46.00	-23.98	N	GND
0.76	FINAL	37.11	---	56.00	-18.89	N	GND
4.33	FINAL	33.15	---	56.00	-22.85	N	GND
4.36	FINAL	---	18.58	46.00	-27.42	N	GND
16.07	FINAL	12.29	---	60.00	-47.71	N	GND
16.07	FINAL	---	7.54	50.00	-42.46	N	GND
29.30	FINAL	---	11.94	50.00	-38.06	N	GND
29.50	FINAL	17.91	---	60.00	-42.09	N	GND

Table 7-113. AC Line Conducted Data with 802.11be CDD Diversity – Ch. 45 (N), with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 256 of 257

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3595** and **IC: 579C-A3595** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 4/23/26 - 6/23/26	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-11-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 257 of 257