


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 7095 MHz
Channel: 229

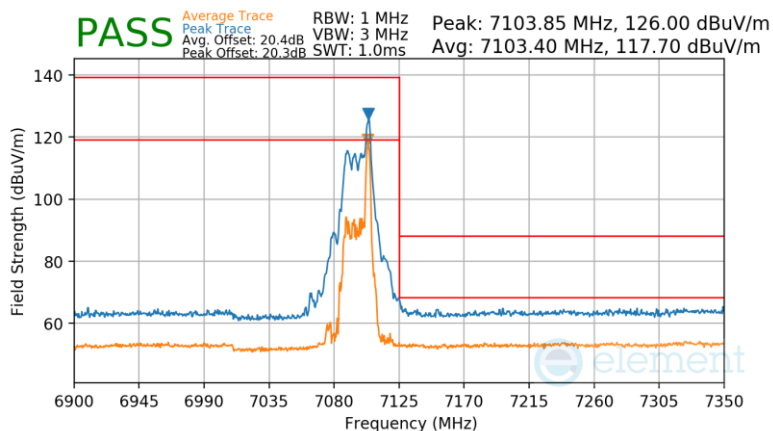


Plot 7-1084 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 422 of 469


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 6115 MHz
Channel: 33

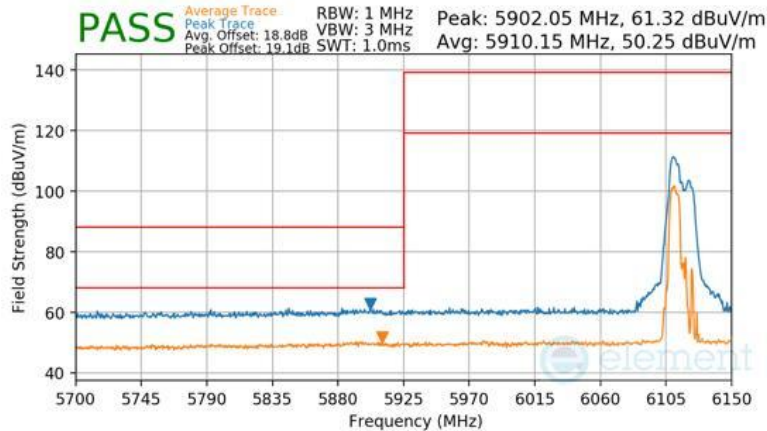

Plot 7-1085 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 6115 MHz
Channel: 33

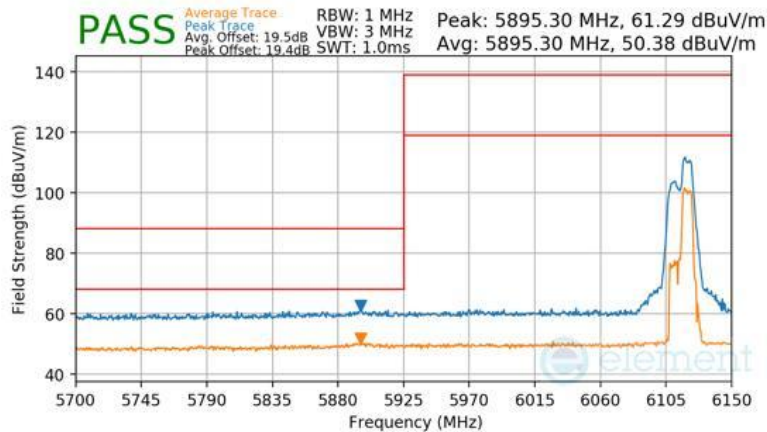

Plot 7-1086 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 423 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 7095 MHz
Channel: 229

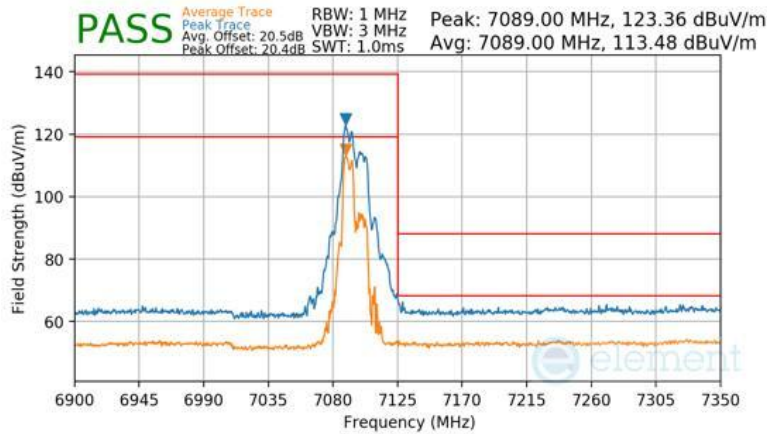

Plot 7-1087 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU52+26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 7095 MHz
Channel: 229

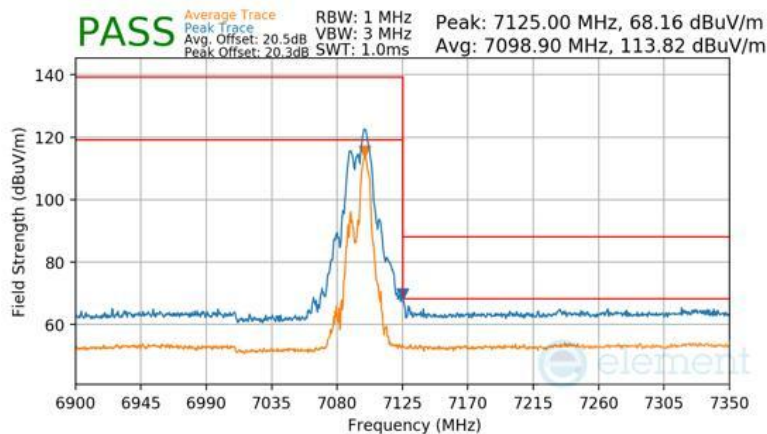


Plot 7-1088 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU52+26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		


RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 6115 MHz
Channel: 33

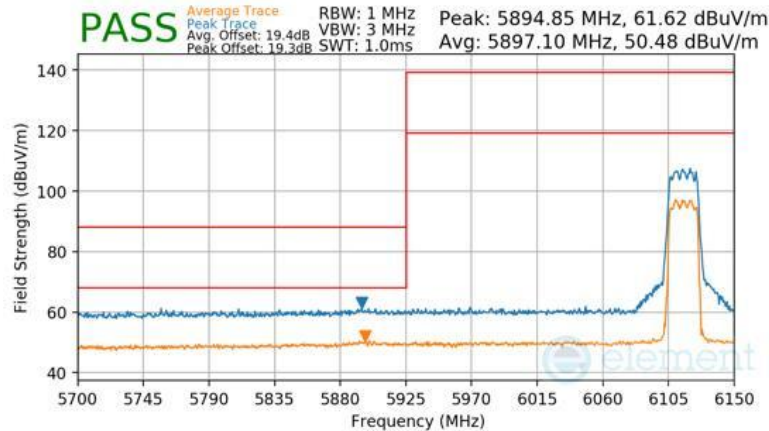

Plot 7-1089 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU242


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 7095 MHz
Channel: 229

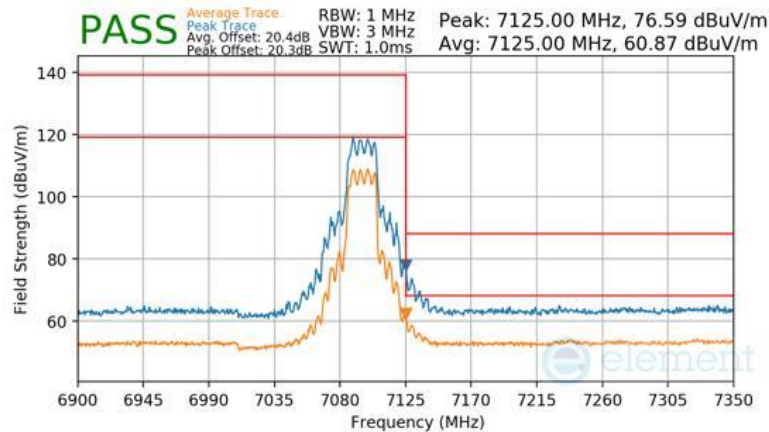


Plot 7-1090 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 7115 MHz
Channel: 233

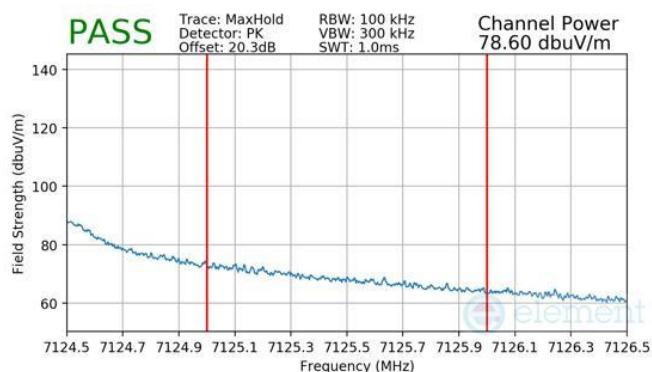

Plot 7-1091 SDM Diversity Radiated Integrated Band Edge (Peak – UNII Band 8) - RU242

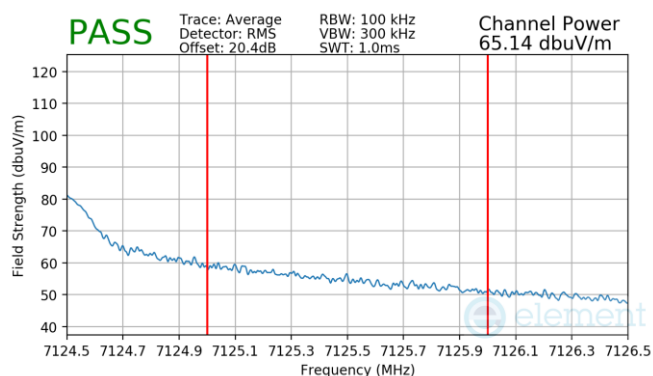


Plot 7-1092 SDM Diversity Radiated Integrated Band Edge (Average – UNII Band 8) - RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 426 of 469

7.7.20 SDM Diversity Radiated Band Edge Measurements (40 MHz BW)


RU52

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 37
Distance of Measurements: 3 Meters
Operating Frequency: 6125 MHz
Channel: 35

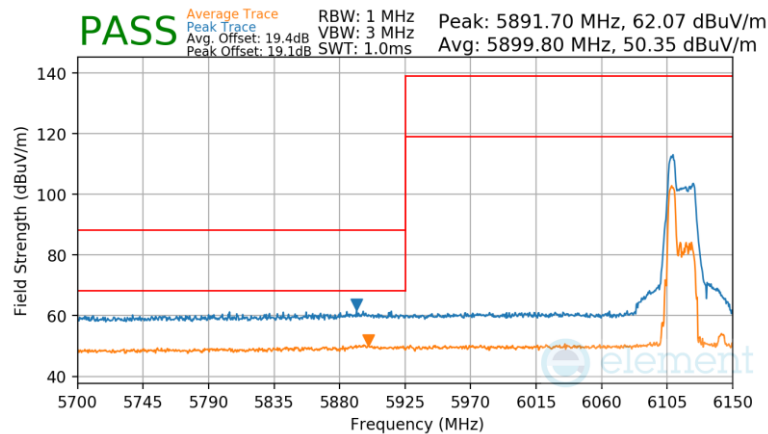

Plot 7-1093 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) – RU52


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 37
Distance of Measurements: 3 Meters
Operating Frequency: 7085 MHz
Channel: 227

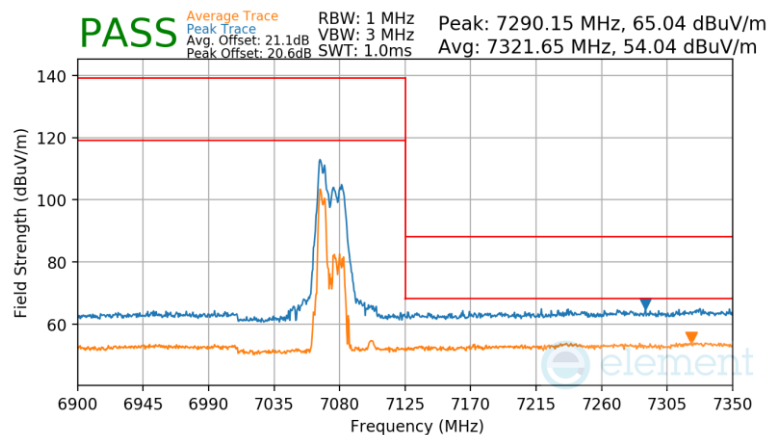

Plot 7-1094 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) – RU52

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 427 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 44
Distance of Measurements: 3 Meters
Operating Frequency: 7085 MHz
Channel: 227

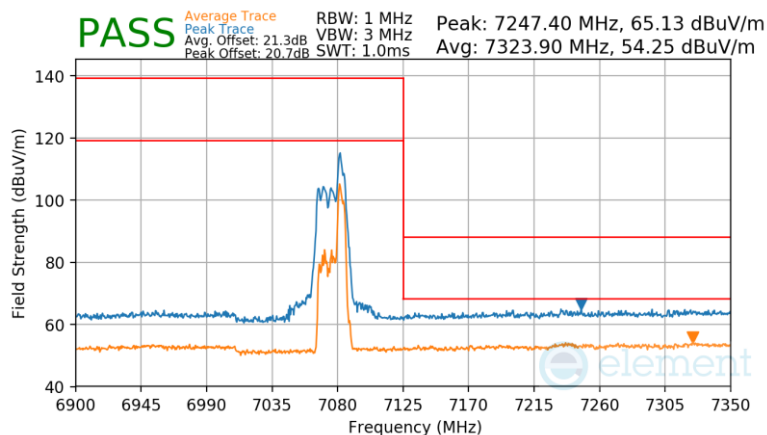


Plot 7-1095 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) – RU52

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 428 of 469


RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 6125 MHz
Channel: 35

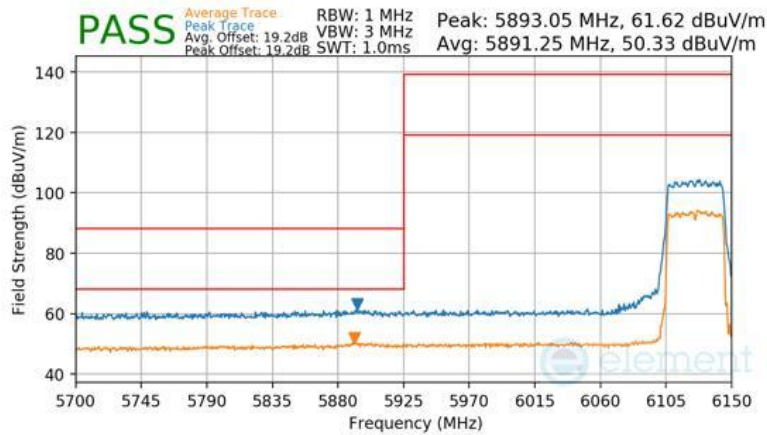

Plot 7-1096 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 7085 MHz
Channel: 227

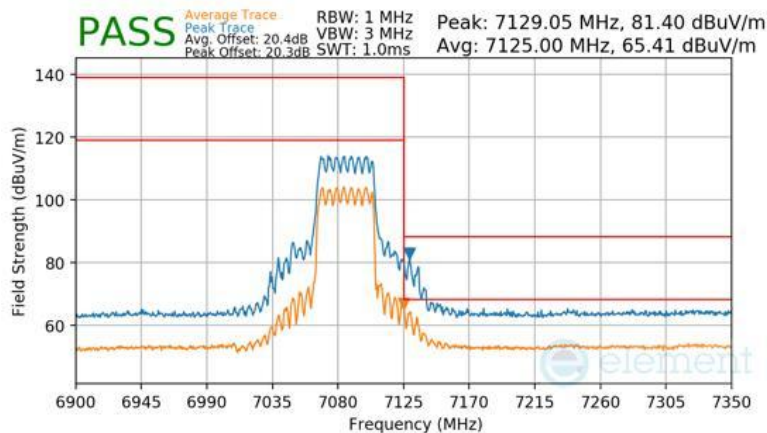


Plot 7-1097 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 429 of 469

7.7.21 SDM Diversity Radiated Band Edge Measurements (80 MHz BW)


RU52

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 37
Distance of Measurements: 3 Meters
Operating Frequency: 6145 MHz
Channel: 39

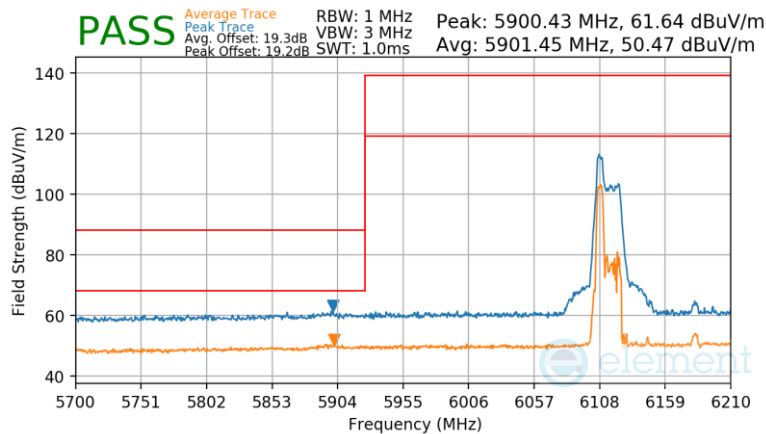

Plot 7-1098 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) – RU52


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 37
Distance of Measurements: 3 Meters
Operating Frequency: 7025 MHz
Channel: 215

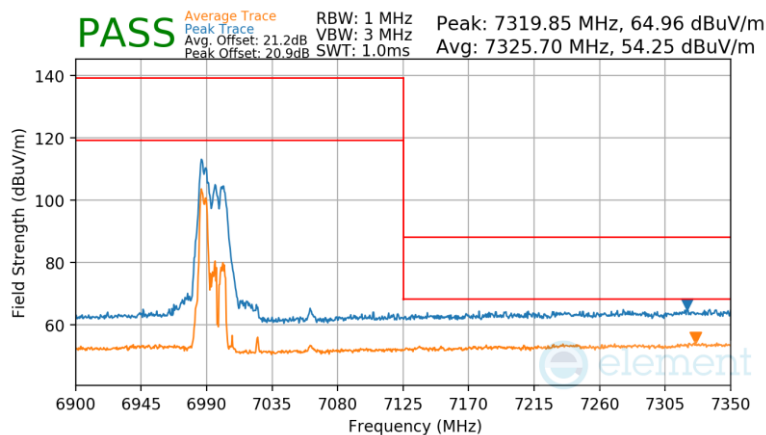

Plot 7-1099 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) – RU52

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 52
Distance of Measurements: 3 Meters
Operating Frequency: 7025 MHz
Channel: 215

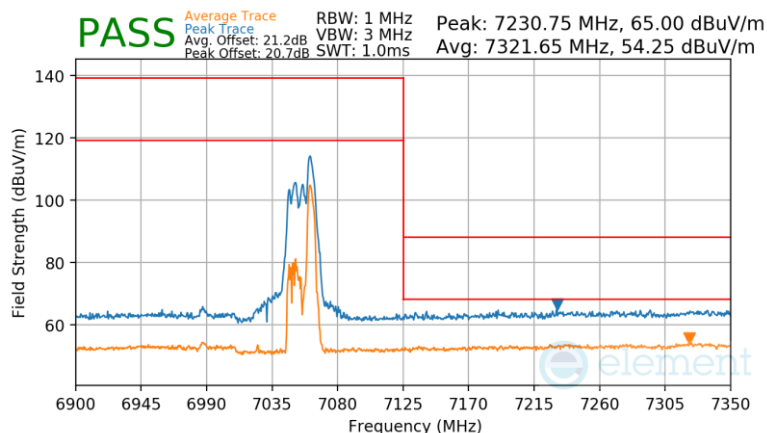


Plot 7-1100 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) – RU52

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 431 of 469


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 6145 MHz
Channel: 39

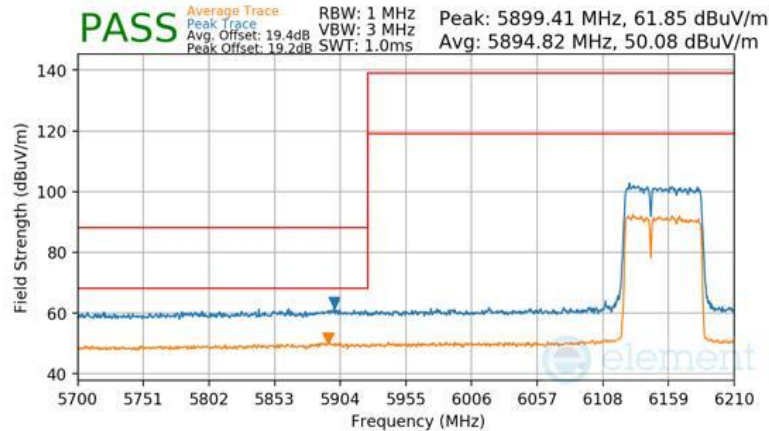

Plot 7-1101 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 6145 MHz
Channel: 39

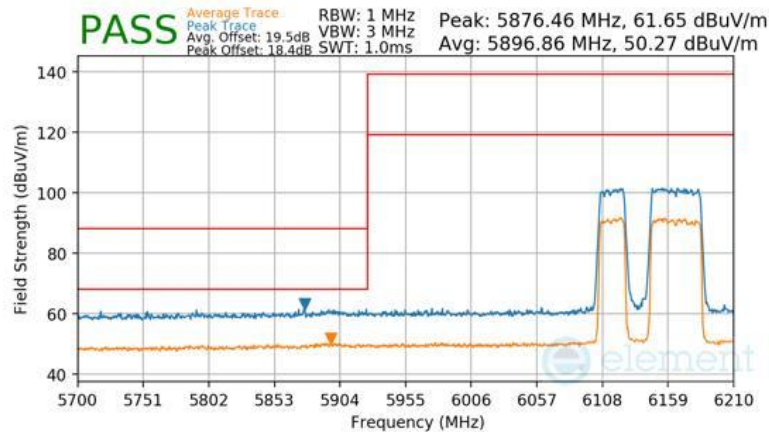

Plot 7-1102 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 432 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 6145 MHz
Channel: 39

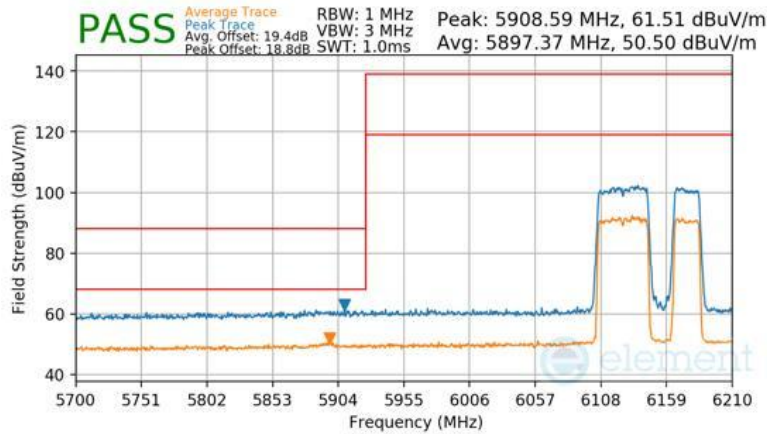

Plot 7-1103 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 6145 MHz
Channel: 39

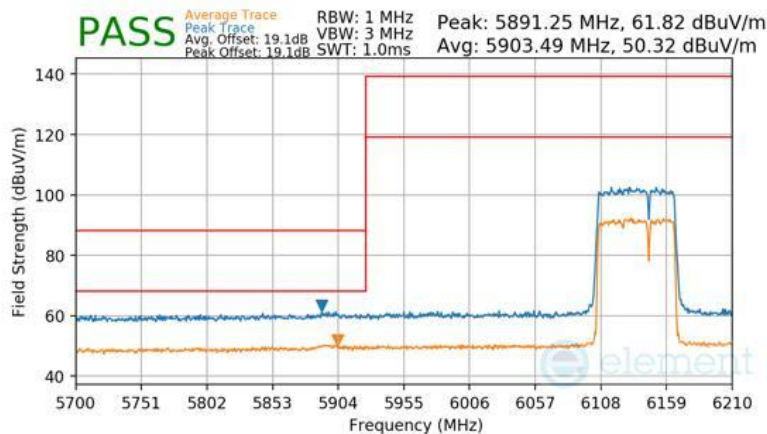

Plot 7-1104 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 433 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 7025 MHz
Channel: 215

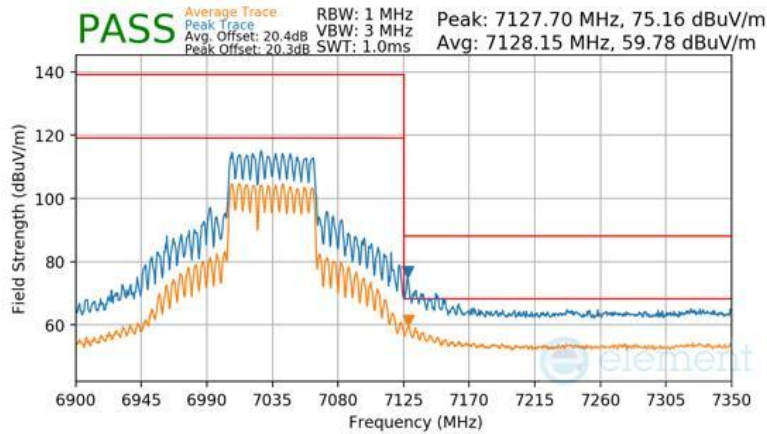

Plot 7-1105 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 7025 MHz
Channel: 215

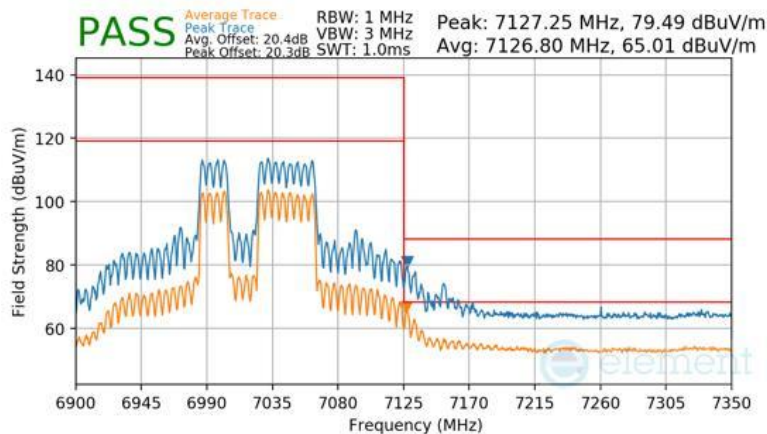

Plot 7-1106 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 434 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 7025 MHz
Channel: 215

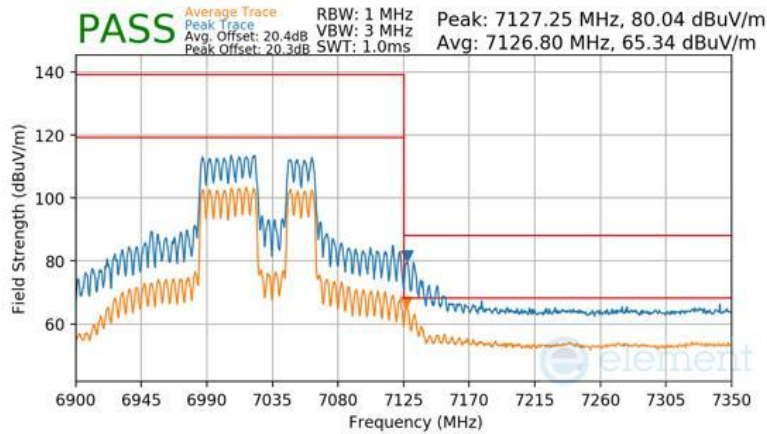

Plot 7-1107 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 7025 MHz
Channel: 215

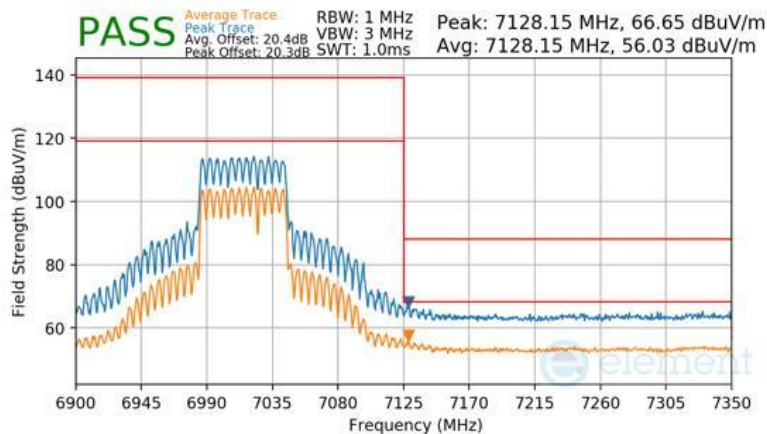


Plot 7-1108 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 435 of 469


RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 6145 MHz
Channel: 39

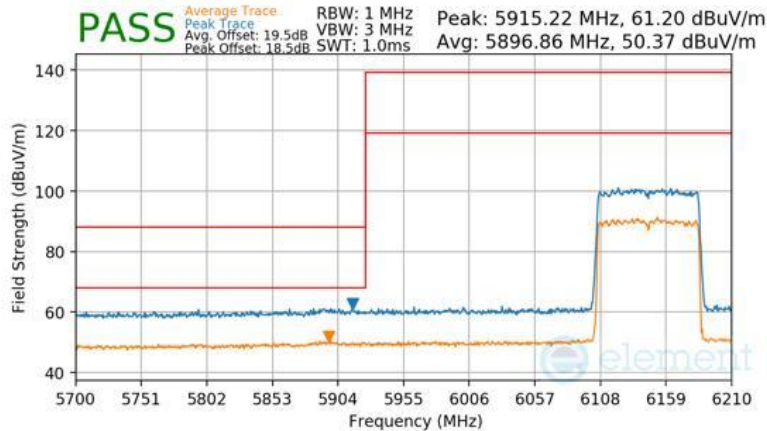

Plot 7-1109 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 7025 MHz
Channel: 215

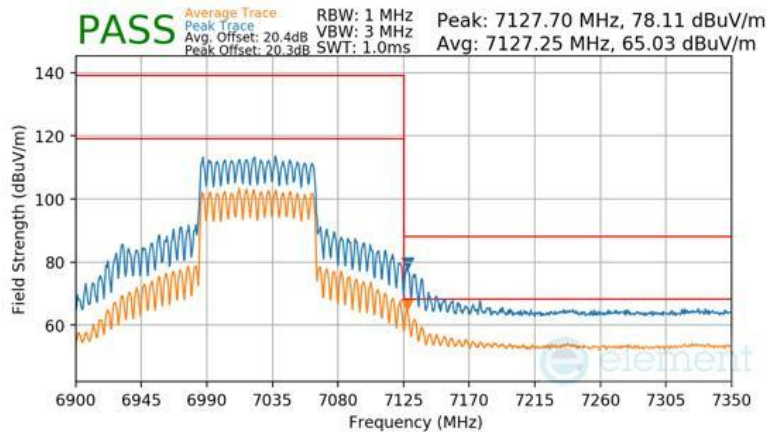


Plot 7-1110 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

7.7.22 SDM Diversity Radiated Band Edge Measurements (160 MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

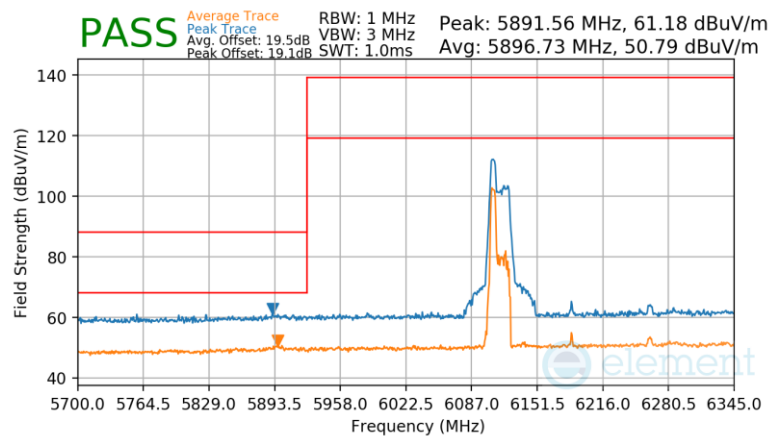

Plot 7-1111 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) – RU52 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 37
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

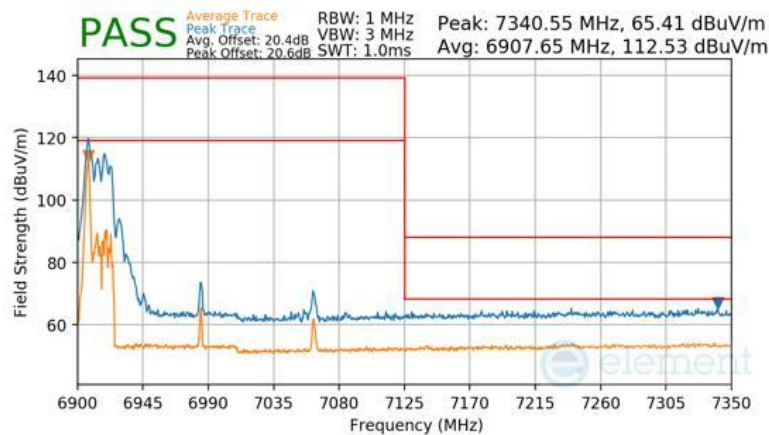

Plot 7-1112 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) – RU52 (L)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 52
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

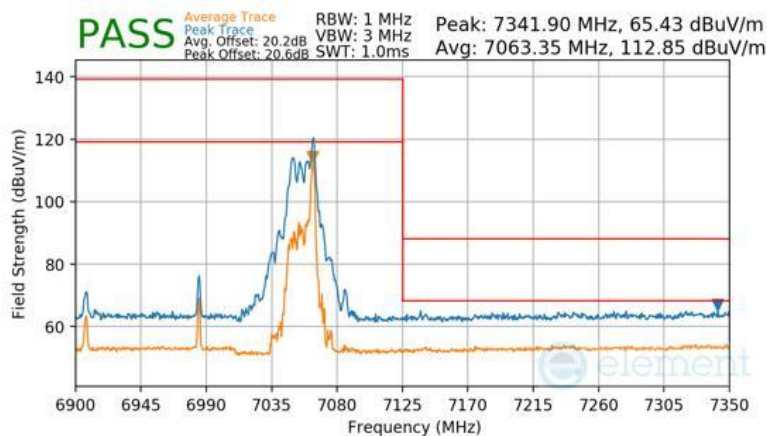


Plot 7-1113 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) – RU52 (H)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 438 of 469


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

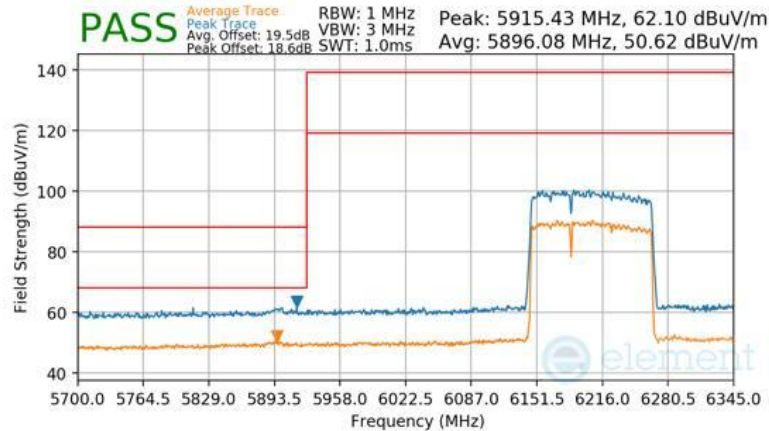

Plot 7-1114 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

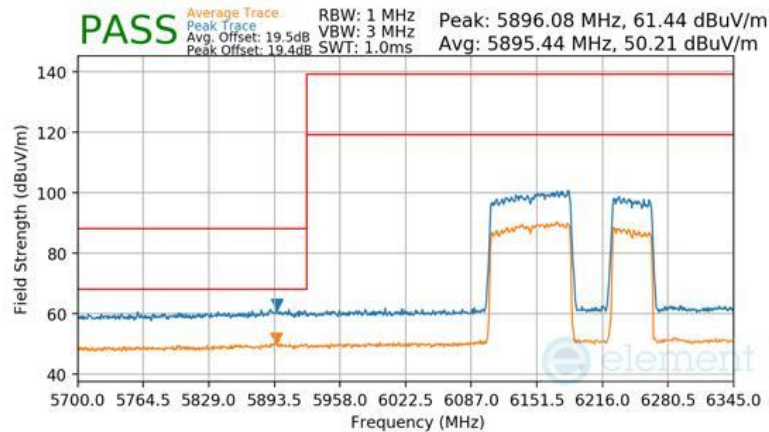

Plot 7-1115 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 439 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

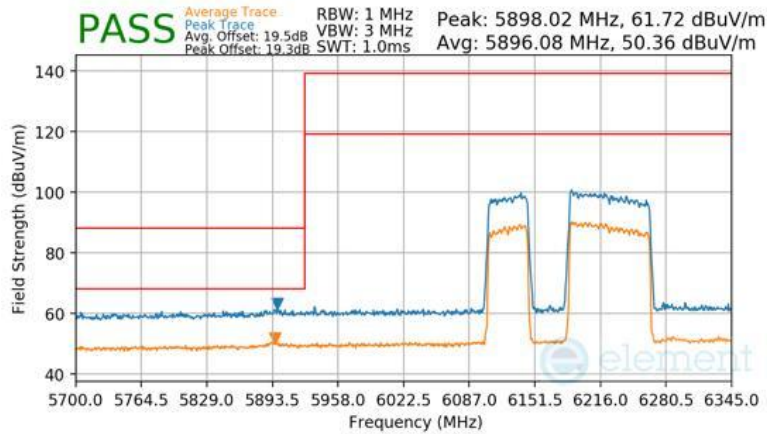

Plot 7-1116 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

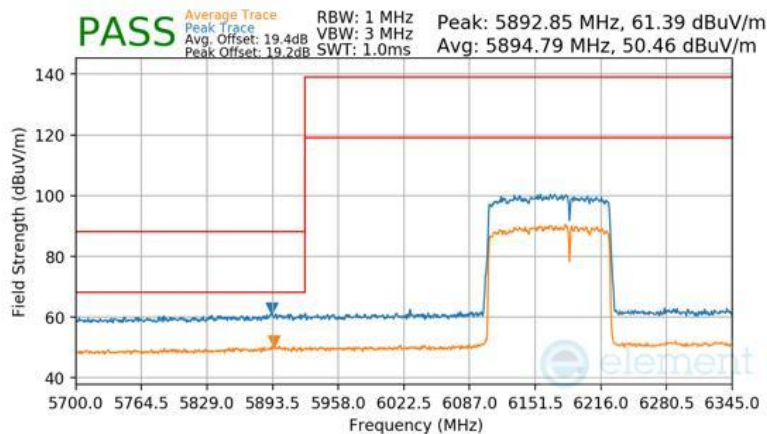

Plot 7-1117 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 440 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

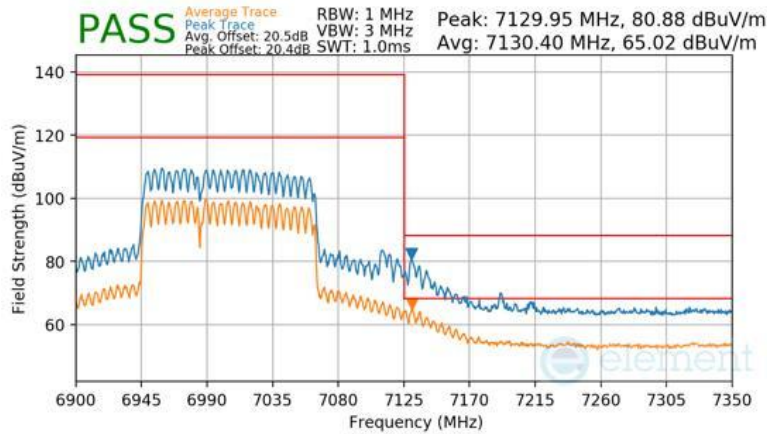

Plot 7-1118 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

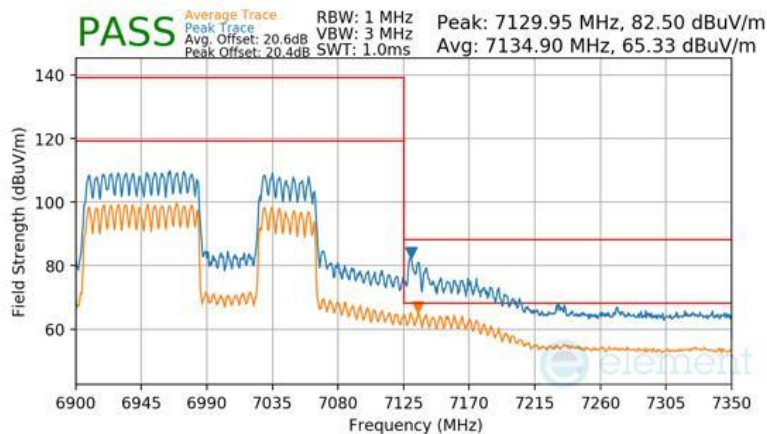

Plot 7-1119 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 441 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

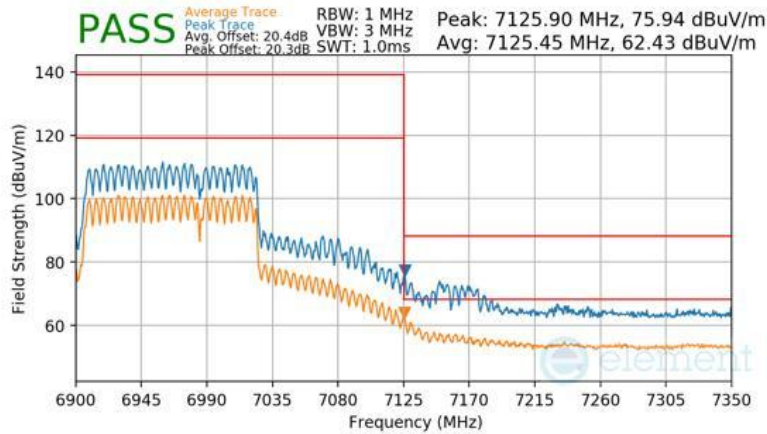

Plot 7-1120 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

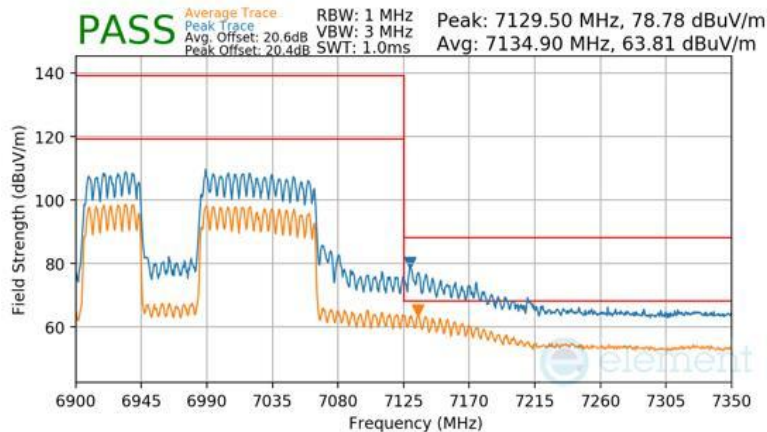

Plot 7-1121 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

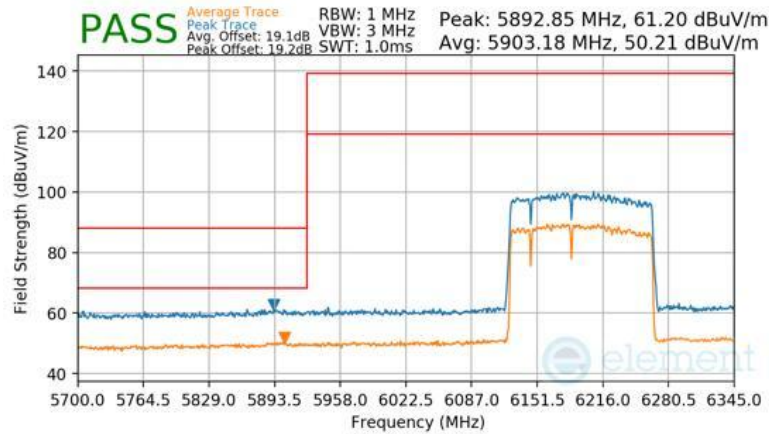

Plot 7-1122 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

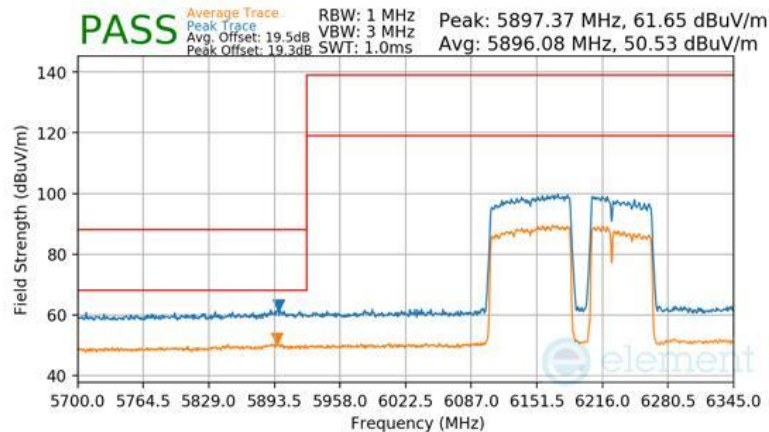

Plot 7-1123 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 443 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

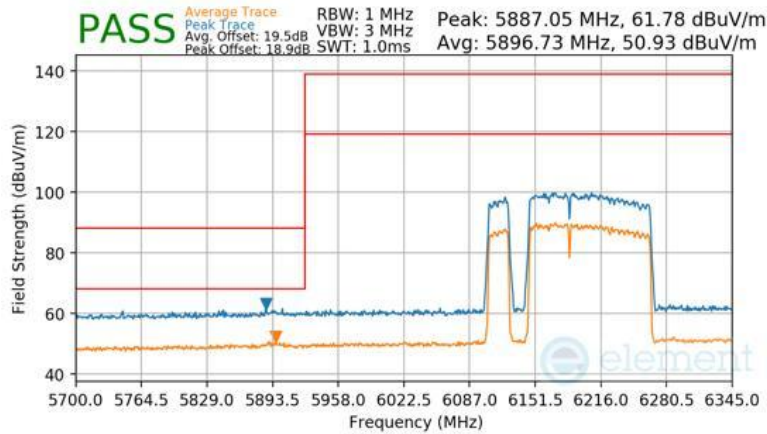

Plot 7-1124 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

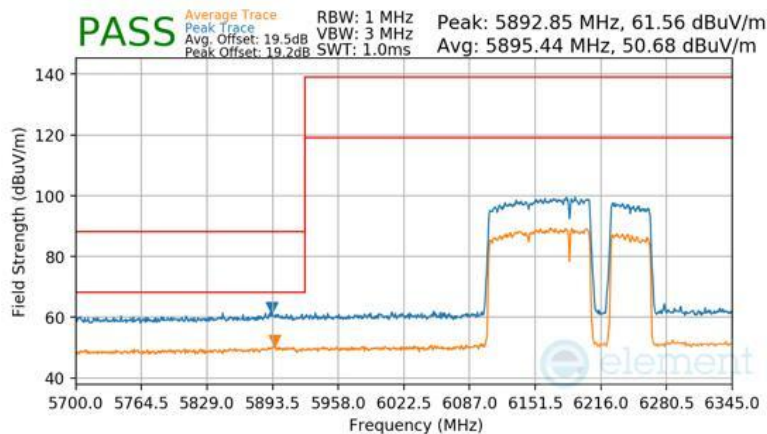

Plot 7-1125 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 444 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

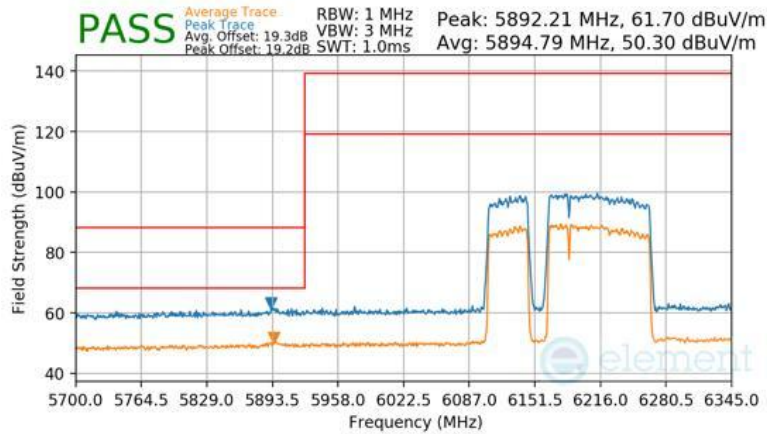

Plot 7-1126 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

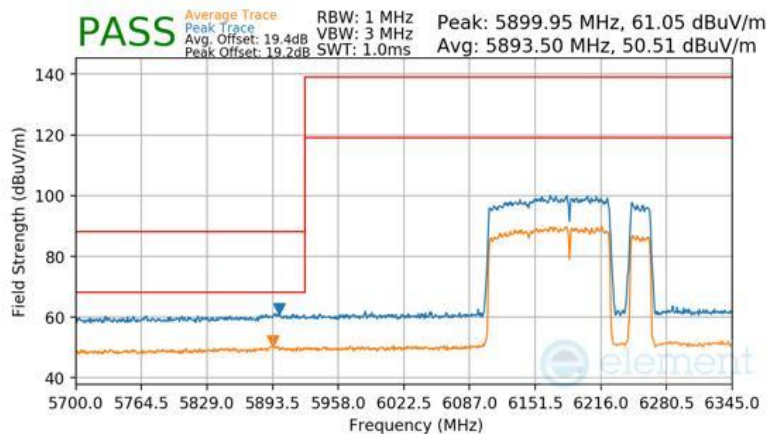

Plot 7-1127 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

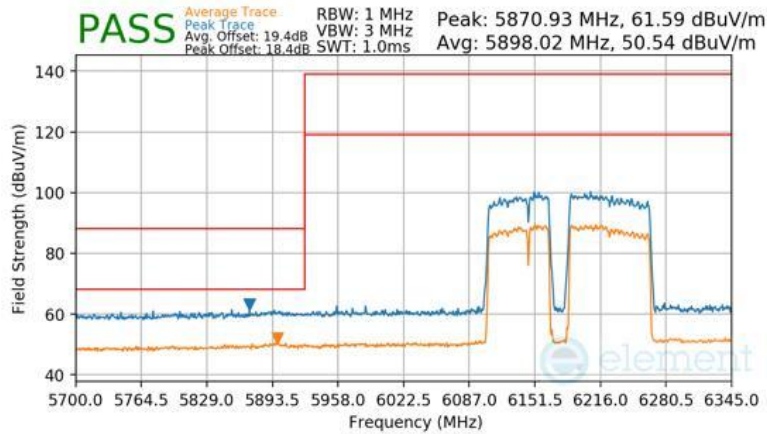

Plot 7-1128 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

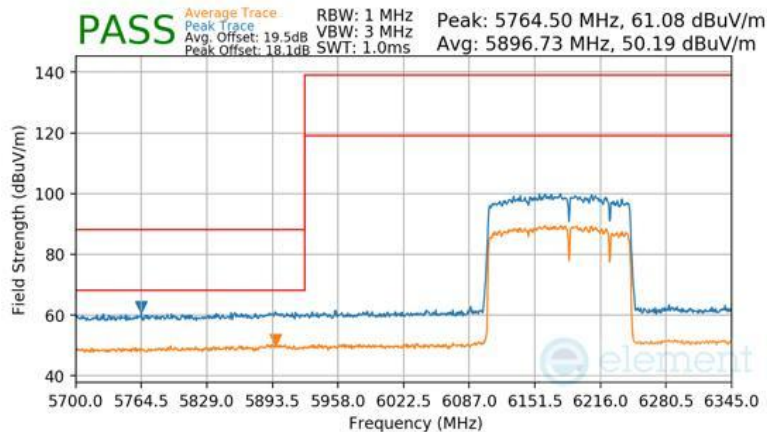

Plot 7-1129 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

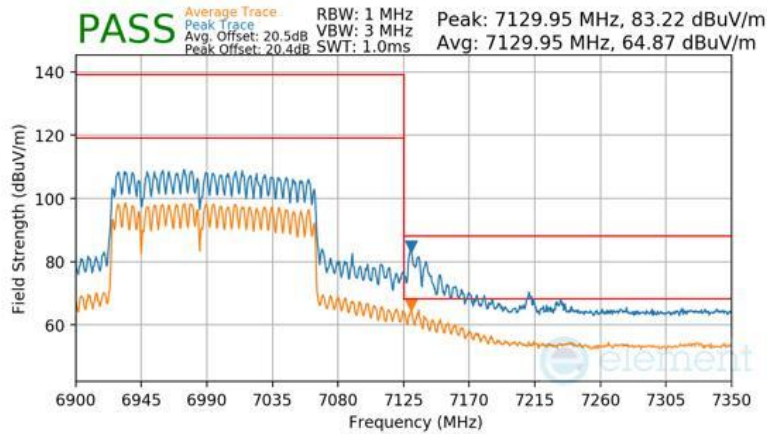

Plot 7-1130 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

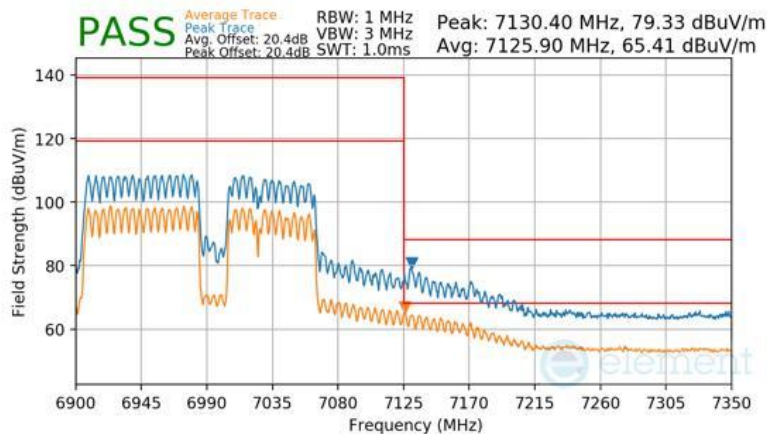

Plot 7-1131 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 447 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

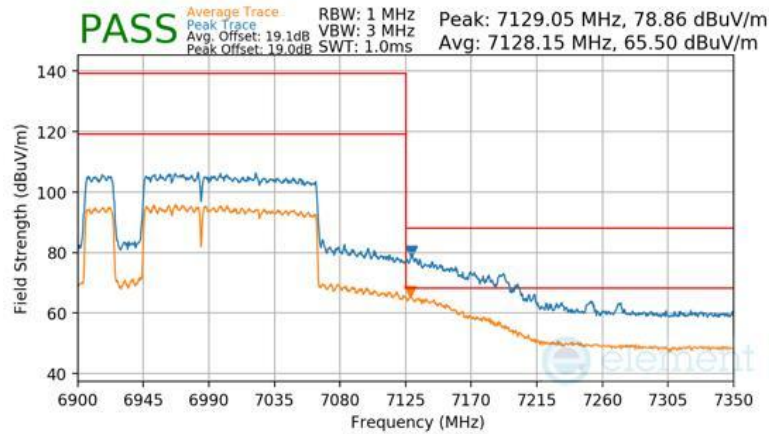

Plot 7-1132 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

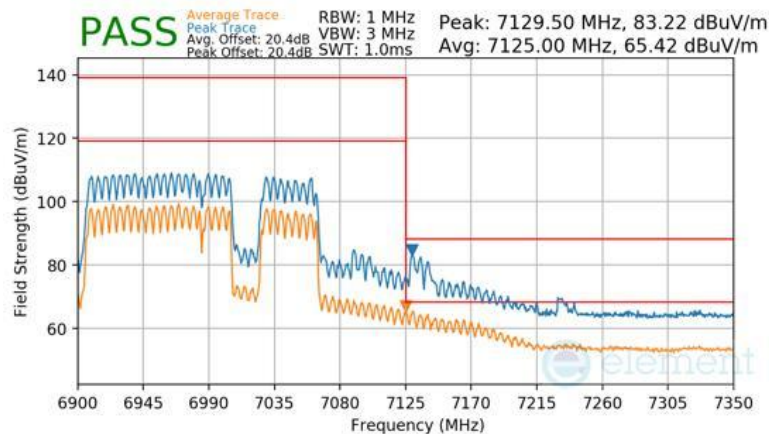

Plot 7-1133 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 448 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

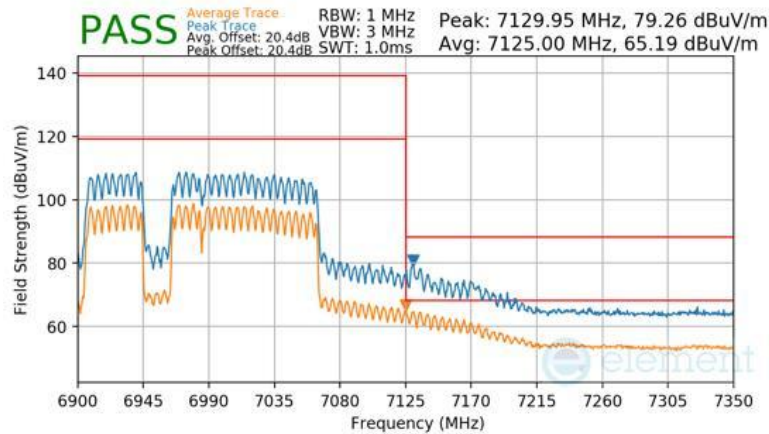

Plot 7-1134 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

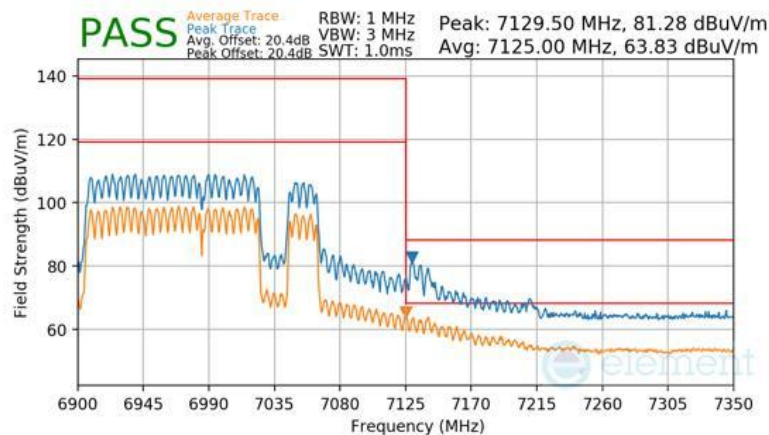

Plot 7-1135 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (LH)


FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 449 of 469

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

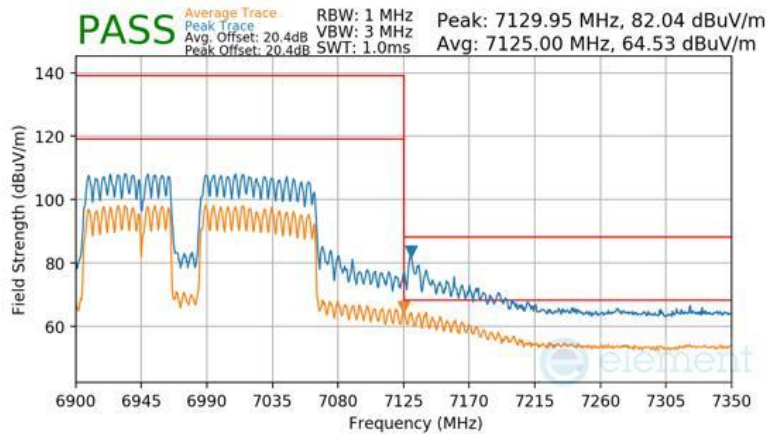

Plot 7-1136 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

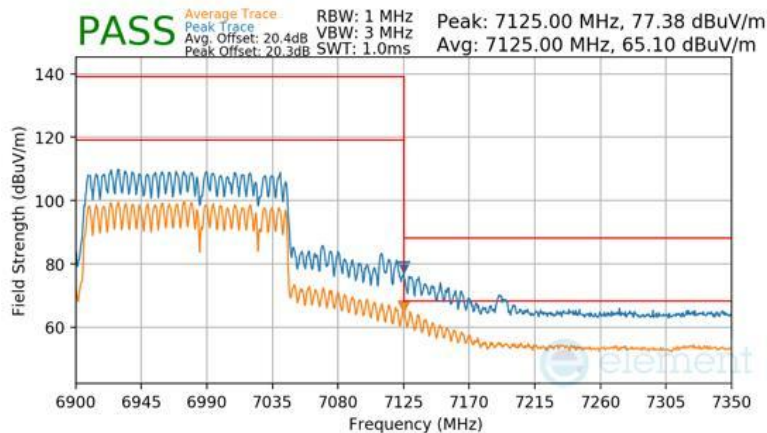


Plot 7-1137 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		


RU996x2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

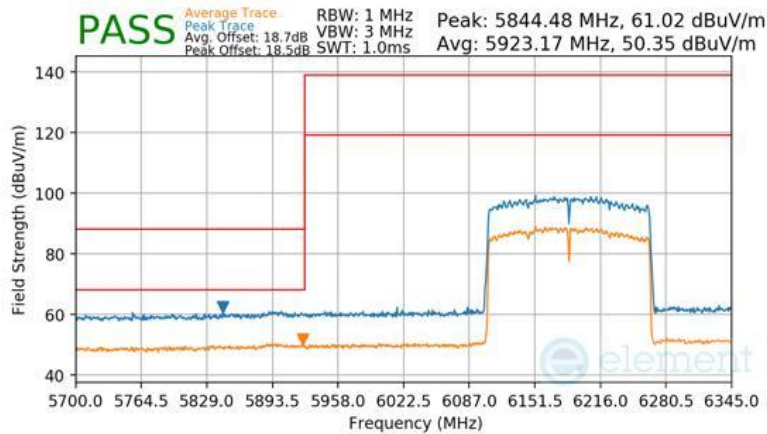

Plot 7-1138 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996X2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

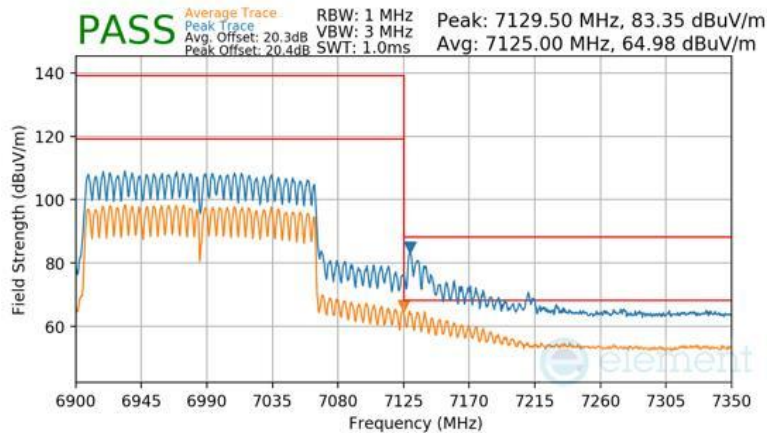

Plot 7-1139 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996X2

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 451 of 469

7.8 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-153 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-153. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 452 of 469

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

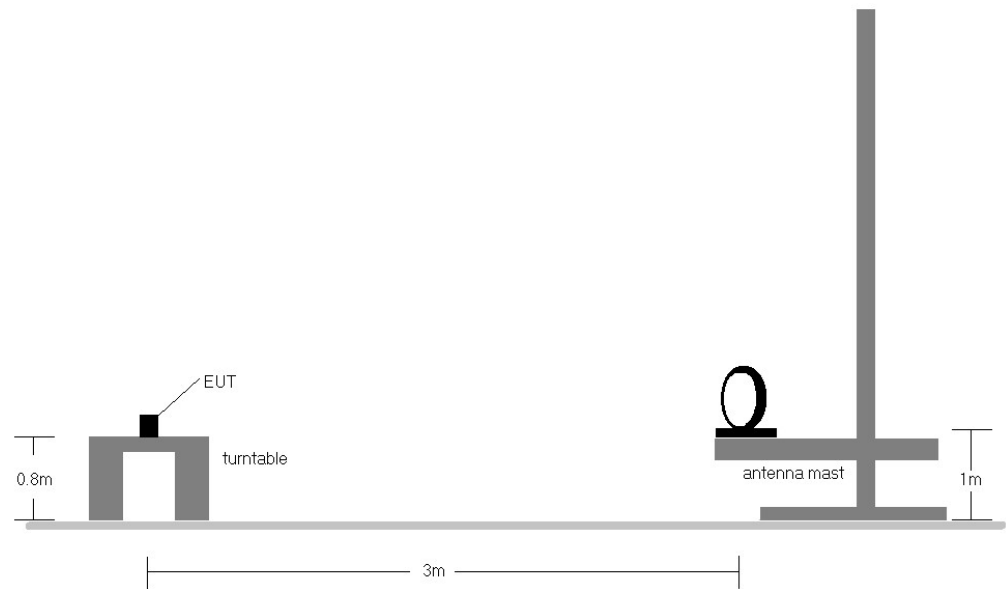


Figure 7-6. Radiated Test Setup < 30 MHz

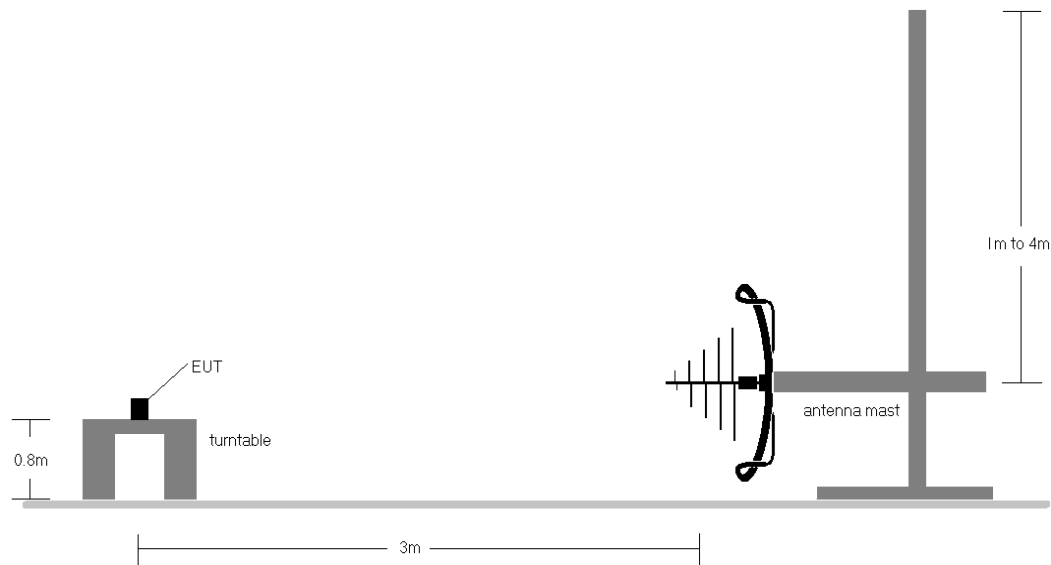


Figure 7-7. Radiated Test Setup < 1 GHz

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 453 of 469

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-153.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamp Gain} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 454 of 469

7.8.1 SDM Primary Radiated Spurious Emissions Measurements (Below 1 GHz)

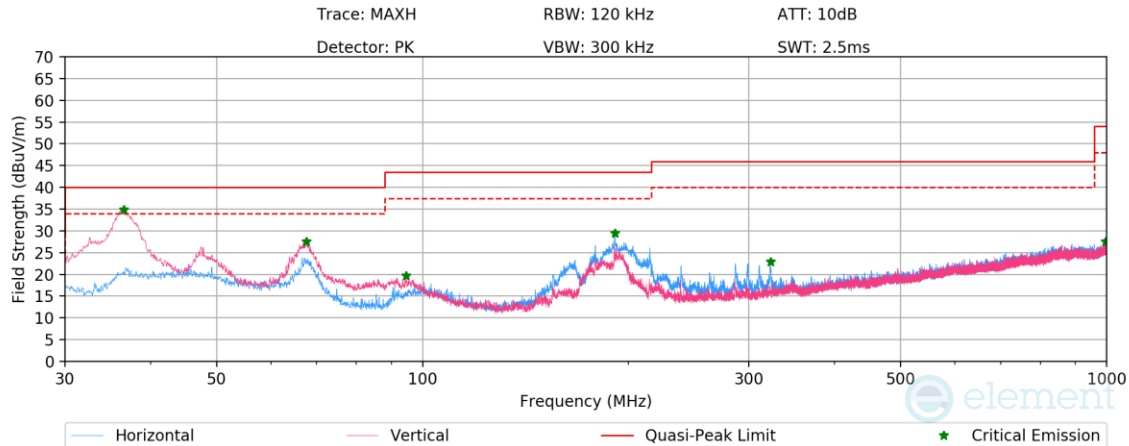


Plot 7-1140. Radiated Spurious Emissions below 1 GHz SDM Primary (802.11be – Ch.61 – RU26) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.36	Quasi-Peak	V	107	361	-53.90	-20.11	33.00	40.00	-7.00
67.56	Max-Peak	V	200	171	-58.46	-20.94	27.60	40.00	-12.40
94.50	Max-Peak	V	100	176	-67.11	-20.21	19.69	43.50	-23.81
190.99	Max-Peak	H	100	29	-58.60	-18.91	29.49	43.50	-14.01
322.51	Max-Peak	H	100	115	-69.03	-15.00	22.96	46.00	-23.04
995.74	Max-Peak	V	200	270	-76.23	-3.28	27.49	54.00	-26.51

Table 7-154. Radiated Spurious Emissions below 1 GHz SDM Primary(802.11be – Ch.61 – RU26) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 455 of 469

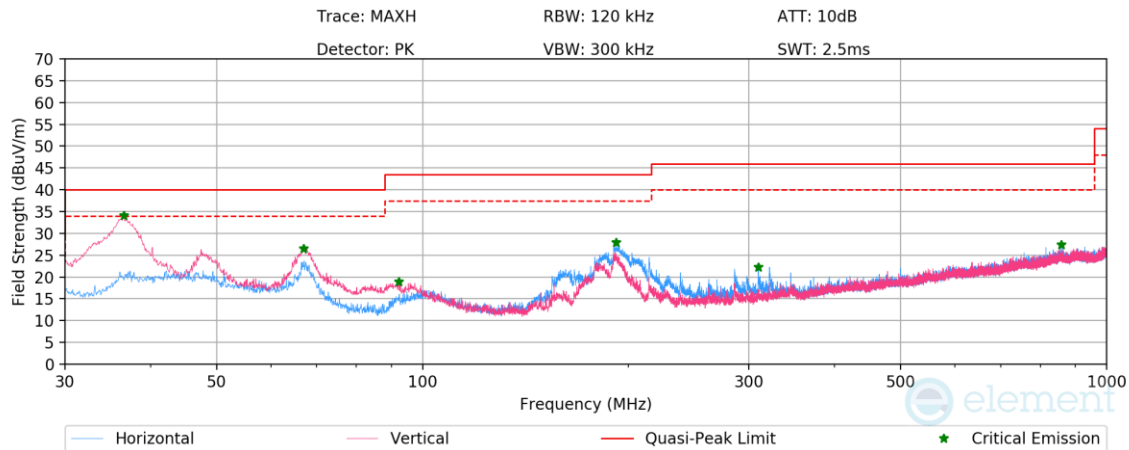


Plot 7-1141. Radiated Spurious Emissions below 1 GHz SDM Primary (802.11be – Ch.61 – RU242) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.22	Quasi-Peak	V	110	32	-54.92	-20.14	31.94	40.00	-8.06
67.02	Max-Peak	V	200	211	-59.77	-20.71	26.51	40.00	-13.49
92.28	Max-Peak	V	100	156	-67.43	-20.70	18.87	43.50	-24.63
191.59	Max-Peak	H	100	26	-60.25	-18.82	27.93	43.50	-15.57
309.55	Max-Peak	H	100	116	-69.30	-15.43	22.27	46.00	-23.73
858.15	Max-Peak	H	100	153	-75.29	-4.32	27.40	46.00	-18.60

Table 7-155. Radiated Spurious Emissions below 1 GHz SDM Primary (802.11be – Ch.61 – RU242) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 456 of 469

7.8.2 SDM Diversity Radiated Spurious Emissions Measurements (Below 1 GHz)

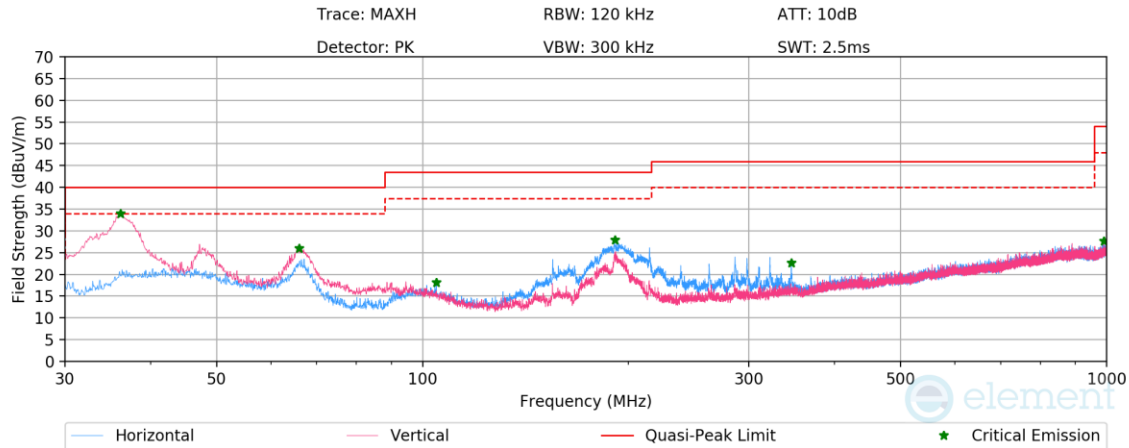


Plot 7-1142. Radiated Spurious Emissions below 1 GHz SDM Diversity (802.11be – Ch.61 – RU26) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.18	Max Peak	V	100	251	-52.86	-20.16	33.98	40.00	-6.02
65.94	Max Peak	V	200	199	-60.58	-20.38	26.05	40.00	-13.95
104.70	Max Peak	H	300	211	-69.79	-19.12	18.10	43.50	-25.40
190.87	Max Peak	H	100	2	-60.18	-18.92	27.90	43.50	-15.60
345.79	Max Peak	H	100	352	-70.24	-14.06	22.71	46.00	-23.29
990.04	Max Peak	V	100	224	-75.87	-3.47	27.66	54.00	-26.34

Table 7-156. Radiated Spurious Emissions below 1 GHz SDM Diversity(802.11be – Ch.61 – RU26) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 457 of 469

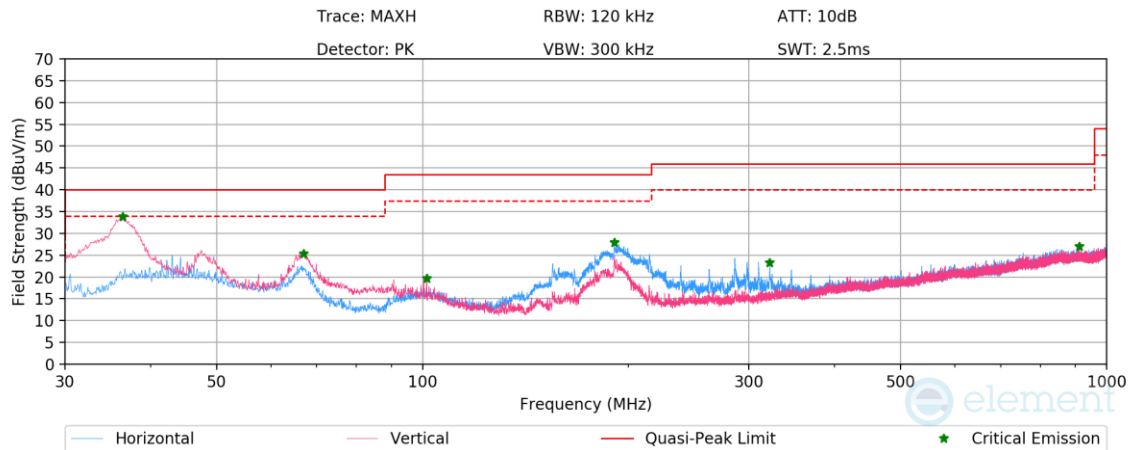

Plot 7-1143. Radiated Spurious Emissions below 1 GHz SDM Diversity (802.11be – Ch.61 – RU242) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.42	Max Peak	V	100	279	-53.07	-20.09	33.84	40.00	-6.16
66.96	Max Peak	V	200	156	-61.02	-20.69	25.29	40.00	-14.71
101.40	Max Peak	V	100	117	-68.13	-19.18	19.69	43.50	-23.81
190.75	Max Peak	H	100	167	-60.15	-18.94	27.91	43.50	-15.59
321.73	Max Peak	H	100	84	-68.67	-15.00	23.33	46.00	-22.67
912.28	Max Peak	V	300	295	-75.97	-4.00	27.02	46.00	-18.98

Table 7-157. Radiated Spurious Emissions below 1 GHz SDM Diversity (802.11be – Ch.61 – RU242) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 458 of 469

7.9 AC Line-Conducted Emissions

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-158. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 459 of 469

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

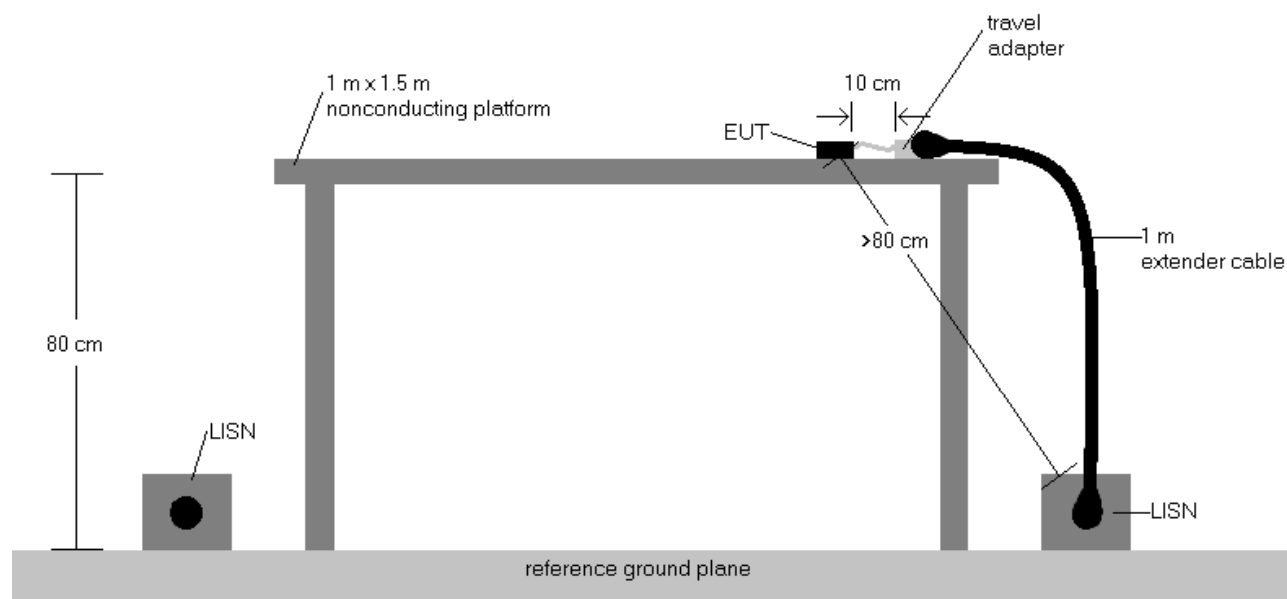



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150 kHz to 30 MHz are specified in 15.207 and RSS-Gen (7.4.2).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 460 of 469

7.9.1 SDM Primary

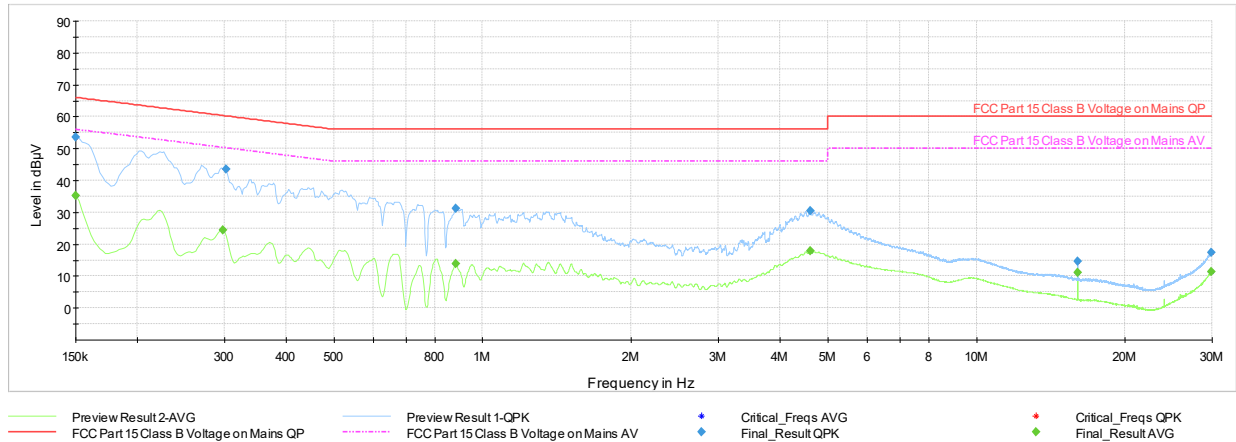


Plot 7-1144. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU26 – Ch.61 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.15	FINAL	---	35.13	56.00	-20.87	L1	GND
0.15	FINAL	53.56	---	66.00	-12.44	L1	GND
0.30	FINAL	---	24.40	50.28	-25.88	L1	GND
0.30	FINAL	43.62	---	60.16	-16.54	L1	GND
0.88	FINAL	---	13.76	46.00	-32.24	L1	GND
0.88	FINAL	31.26	---	56.00	-24.74	L1	GND
4.60	FINAL	30.43	---	56.00	-25.57	L1	GND
4.60	FINAL	---	17.82	46.00	-28.18	L1	GND
16.01	FINAL	14.72	---	60.00	-45.28	L1	GND
16.01	FINAL	---	11.02	50.00	-38.98	L1	GND
29.85	FINAL	17.30	---	60.00	-42.70	L1	GND
29.85	FINAL	---	11.37	50.00	-38.63	L1	GND

Table 7-159. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU26 – Ch.61 (L1) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 461 of 469

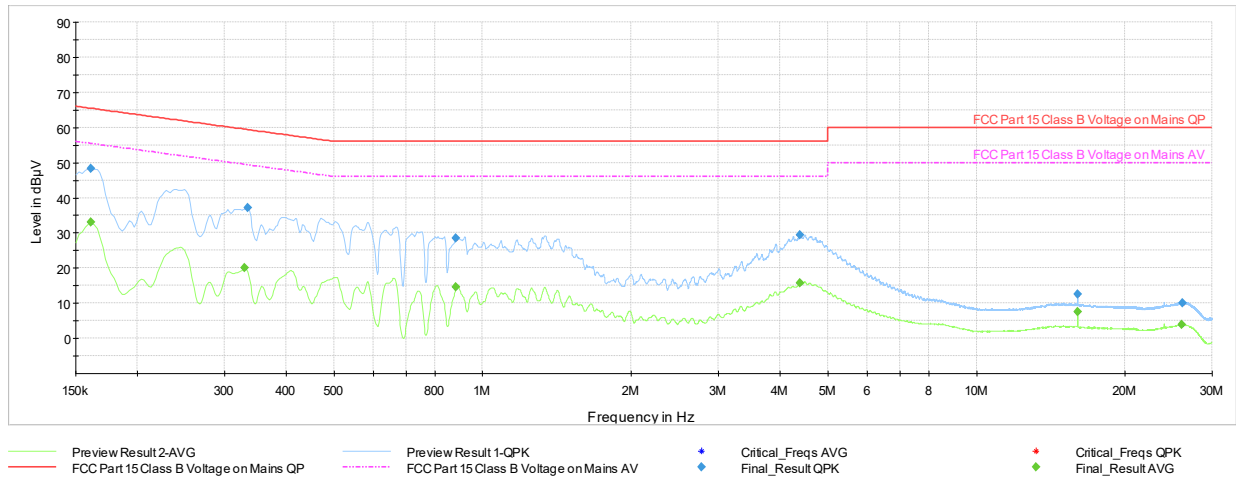


Plot 7-1145. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU26 – Ch.61 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	33.05	55.40	-22.35	N	GND
0.16	FINAL	48.33	---	65.40	-17.07	N	GND
0.33	FINAL	---	20.15	49.45	-29.30	N	GND
0.33	FINAL	37.10	---	59.34	-22.24	N	GND
0.88	FINAL	---	14.50	46.00	-31.50	N	GND
0.88	FINAL	28.47	---	56.00	-27.53	N	GND
4.39	FINAL	29.51	---	56.00	-26.49	N	GND
4.39	FINAL	---	15.77	46.00	-30.23	N	GND
16.01	FINAL	12.60	---	60.00	-47.40	N	GND
16.01	FINAL	---	7.56	50.00	-42.44	N	GND
26.08	FINAL	---	3.82	50.00	-46.18	N	GND
26.11	FINAL	10.09	---	60.00	-49.91	N	GND

Table 7-160. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU26 – Ch.61 (N) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 462 of 469

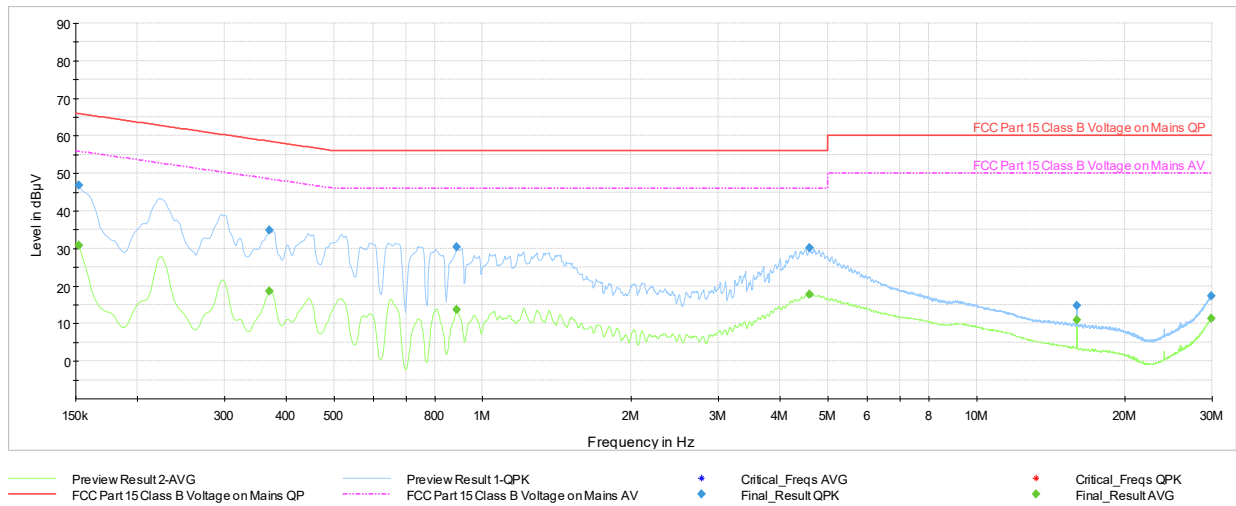


Plot 7-1146. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU242 – Ch.61 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.15	FINAL	---	30.85	55.88	-25.03	L1	GND
0.15	FINAL	46.77	---	65.88	-19.11	L1	GND
0.37	FINAL	---	18.53	48.49	-29.96	L1	GND
0.37	FINAL	34.77	---	58.49	-23.72	L1	GND
0.89	FINAL	---	13.61	46.00	-32.39	L1	GND
0.89	FINAL	30.28	---	56.00	-25.72	L1	GND
4.59	FINAL	30.18	---	56.00	-25.82	L1	GND
4.59	FINAL	---	17.79	46.00	-28.21	L1	GND
15.99	FINAL	14.84	---	60.00	-45.16	L1	GND
15.99	FINAL	---	11.00	50.00	-39.00	L1	GND
29.94	FINAL	---	11.37	50.00	-38.63	L1	GND
29.94	FINAL	17.29	---	60.00	-42.71	L1	GND

Table 7-161. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU242 – Ch.61 (L1) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 463 of 469

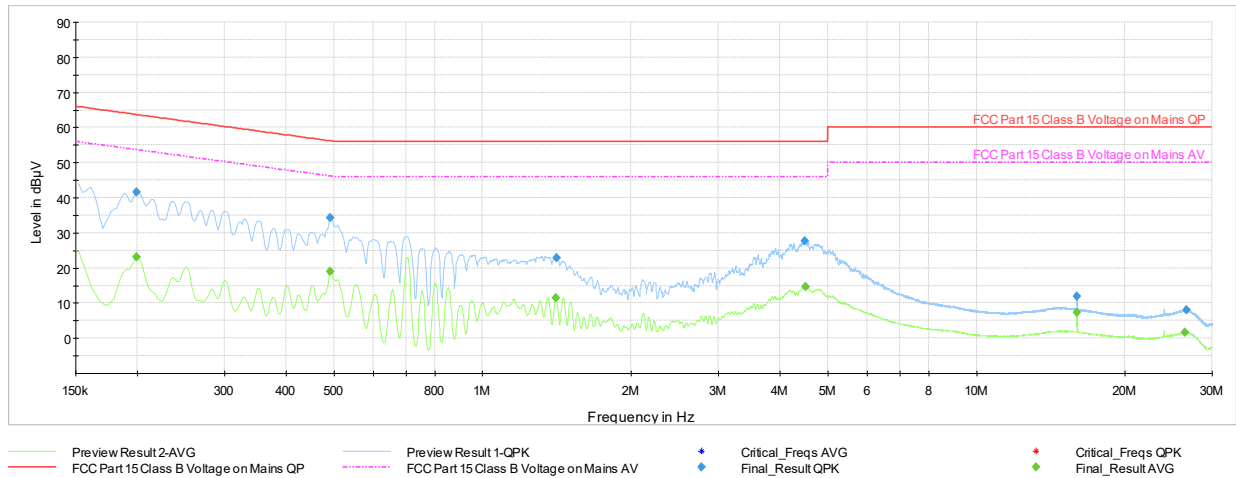


Plot 7-1147. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU242 – Ch.61 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.20	FINAL	---	23.18	53.63	-30.45	N	GND
0.20	FINAL	41.55	---	63.63	-22.08	N	GND
0.49	FINAL	---	19.00	46.13	-27.13	N	GND
0.49	FINAL	34.33	---	56.13	-21.80	N	GND
1.41	FINAL	---	11.39	46.00	-34.61	N	GND
1.41	FINAL	22.88	---	56.00	-33.12	N	GND
4.50	FINAL	27.67	---	56.00	-28.33	N	GND
4.51	FINAL	---	14.74	46.00	-31.26	N	GND
15.99	FINAL	11.95	---	60.00	-48.05	N	GND
15.99	FINAL	---	7.25	50.00	-42.75	N	GND
26.42	FINAL	---	1.65	50.00	-48.35	N	GND
26.66	FINAL	7.95	---	60.00	-52.05	N	GND

Table 7-162. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU242 – Ch.61 (N) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 464 of 469

7.9.2 SDM Diversity

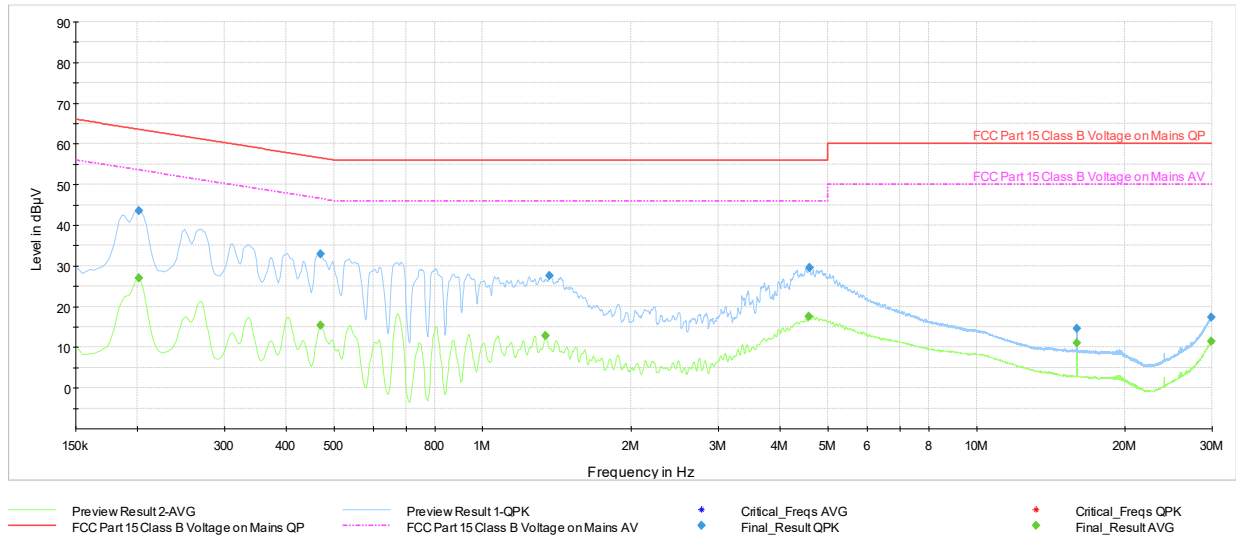


Plot 7-1148. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU26 – Ch.61 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.20	FINAL	---	27.00	53.54	-26.54	L1	GND
0.20	FINAL	43.51	---	63.54	-20.03	L1	GND
0.47	FINAL	---	15.36	46.52	-31.16	L1	GND
0.47	FINAL	32.94	---	56.52	-23.58	L1	GND
1.34	FINAL	---	12.79	46.00	-33.21	L1	GND
1.37	FINAL	27.56	---	56.00	-28.44	L1	GND
4.58	FINAL	---	17.56	46.00	-28.44	L1	GND
4.59	FINAL	29.54	---	56.00	-26.46	L1	GND
15.99	FINAL	14.64	---	60.00	-45.36	L1	GND
15.99	FINAL	---	10.98	50.00	-39.02	L1	GND
29.92	FINAL	---	11.39	50.00	-38.61	L1	GND
29.92	FINAL	17.28	---	60.00	-42.72	L1	GND

Table 7-163. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU26 – Ch.61 (L1) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 465 of 469

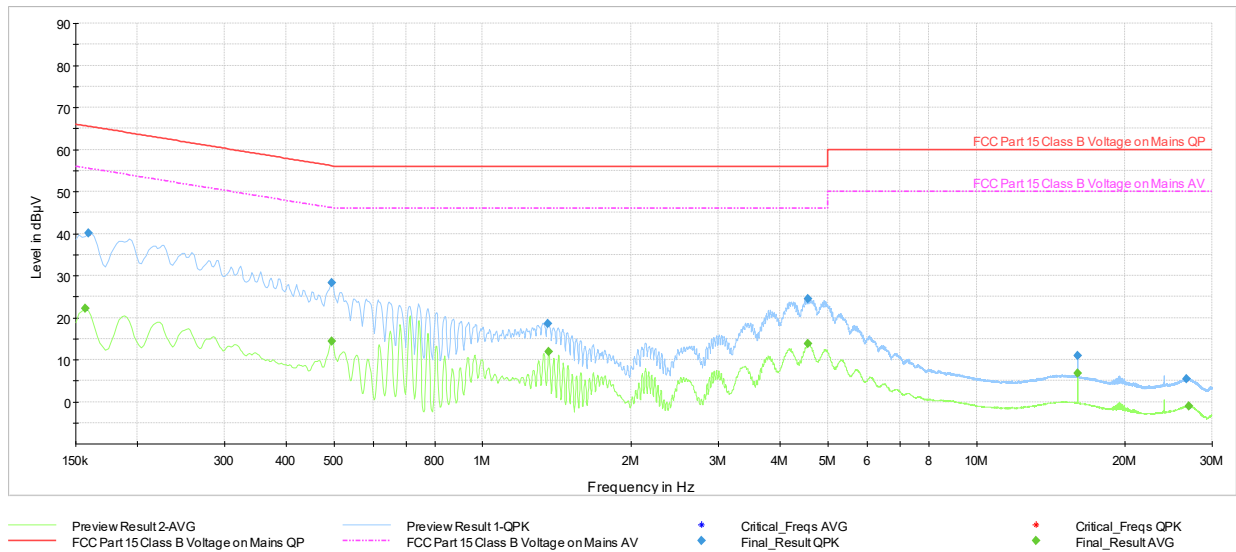


Plot 7-1149. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU26 – Ch.61 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.16	FINAL	---	22.18	55.63	-33.45	N	GND
0.16	FINAL	40.03	---	65.52	-25.49	N	GND
0.49	FINAL	---	14.38	46.10	-31.72	N	GND
0.49	FINAL	28.29	---	56.10	-27.81	N	GND
1.36	FINAL	18.63	---	56.00	-37.37	N	GND
1.36	FINAL	---	11.93	46.00	-34.07	N	GND
4.56	FINAL	24.51	---	56.00	-31.49	N	GND
4.56	FINAL	---	13.76	46.00	-32.24	N	GND
16.01	FINAL	10.87	---	60.00	-49.13	N	GND
16.01	FINAL	---	6.71	50.00	-43.29	N	GND
26.66	FINAL	5.43	---	60.00	-54.57	N	GND
26.88	FINAL	---	-0.97	50.00	-50.97	N	GND

Table 7-164. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU26 – Ch.61 (N) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 466 of 469

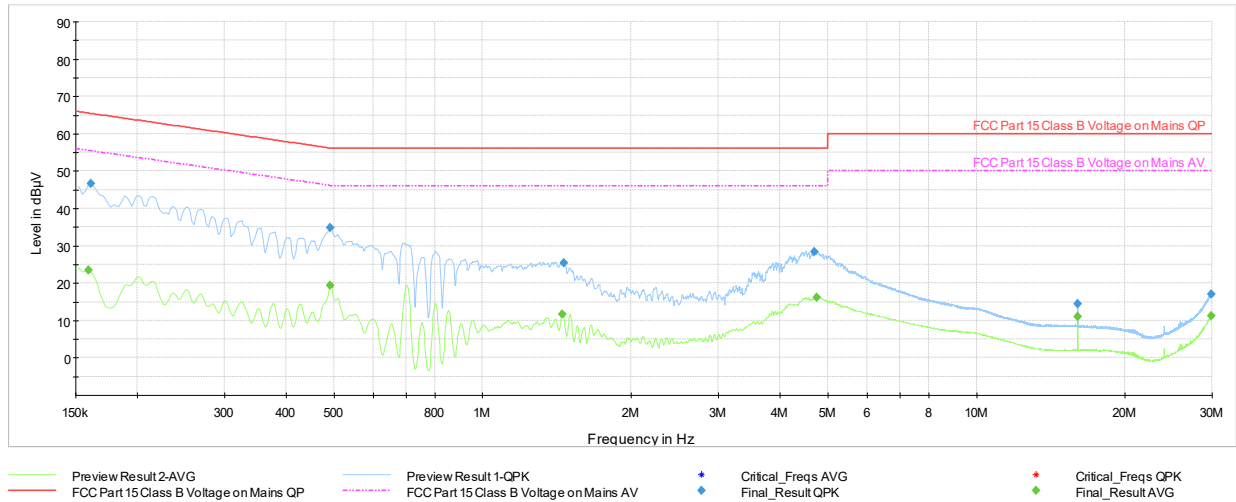


Plot 7-1150. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU242 – Ch.61 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	23.40	55.52	-32.12	L1	GND
0.16	FINAL	46.55	---	65.40	-18.85	L1	GND
0.49	FINAL	---	19.39	46.13	-26.74	L1	GND
0.49	FINAL	34.87	---	56.13	-21.26	L1	GND
1.45	FINAL	---	11.74	46.00	-34.26	L1	GND
1.46	FINAL	25.43	---	56.00	-30.57	L1	GND
4.70	FINAL	28.42	---	56.00	-27.58	L1	GND
4.75	FINAL	---	16.20	46.00	-29.80	L1	GND
16.01	FINAL	14.36	---	60.00	-45.64	L1	GND
16.01	FINAL	---	10.92	50.00	-39.08	L1	GND
29.87	FINAL	16.94	---	60.00	-43.06	L1	GND
29.91	FINAL	---	11.23	50.00	-38.77	L1	GND

Table 7-165. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU242 – Ch.61 (L1) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 467 of 469

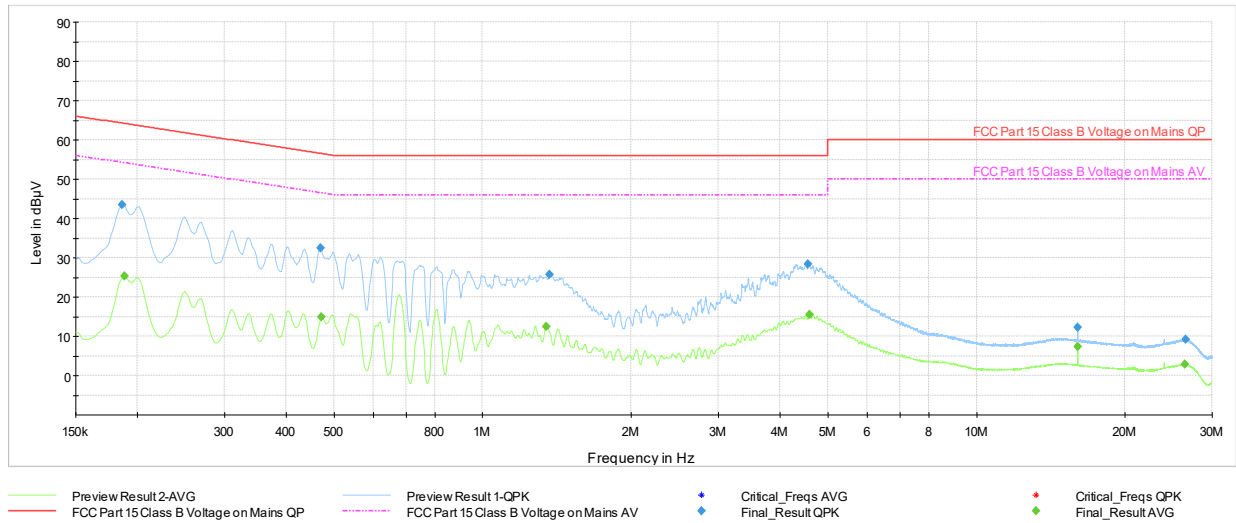

Plot 7-1151. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU242 – Ch.61 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.19	FINAL	43.56	---	64.21	-20.65	N	GND
0.19	FINAL	---	25.36	54.11	-28.75	N	GND
0.47	FINAL	32.43	---	56.52	-24.09	N	GND
0.47	FINAL	---	14.84	46.48	-31.64	N	GND
1.35	FINAL	---	12.53	46.00	-33.47	N	GND
1.37	FINAL	25.79	---	56.00	-30.21	N	GND
4.57	FINAL	28.33	---	56.00	-27.67	N	GND
4.58	FINAL	---	15.54	46.00	-30.46	N	GND
16.01	FINAL	12.29	---	60.00	-47.71	N	GND
16.01	FINAL	---	7.38	50.00	-42.62	N	GND
26.42	FINAL	---	2.84	50.00	-47.16	N	GND
26.49	FINAL	9.19	---	60.00	-50.81	N	GND

Table 7-166. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU242 – Ch.61 (N) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 468 of 469

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3595** and **IC: 579C-A3595** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 5/12/2026 - 7/15/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-14-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 469 of 469