



Duty_Cycle: 97.83% DCCF: 0.095dB

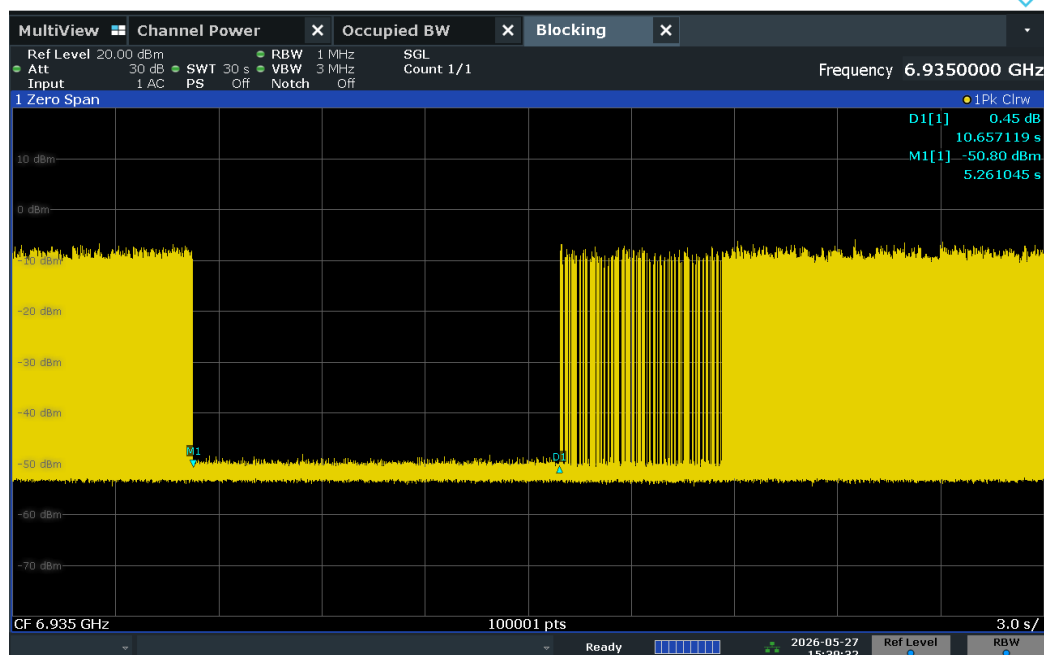

03:39:33 PM 05/27/2026

Plot 7-1335. Contention Based Protocol Timing Plot – UNII 8 – 20 MHz Channel 197

Duty_Cycle: 97.83% DCCF: 0.095dB

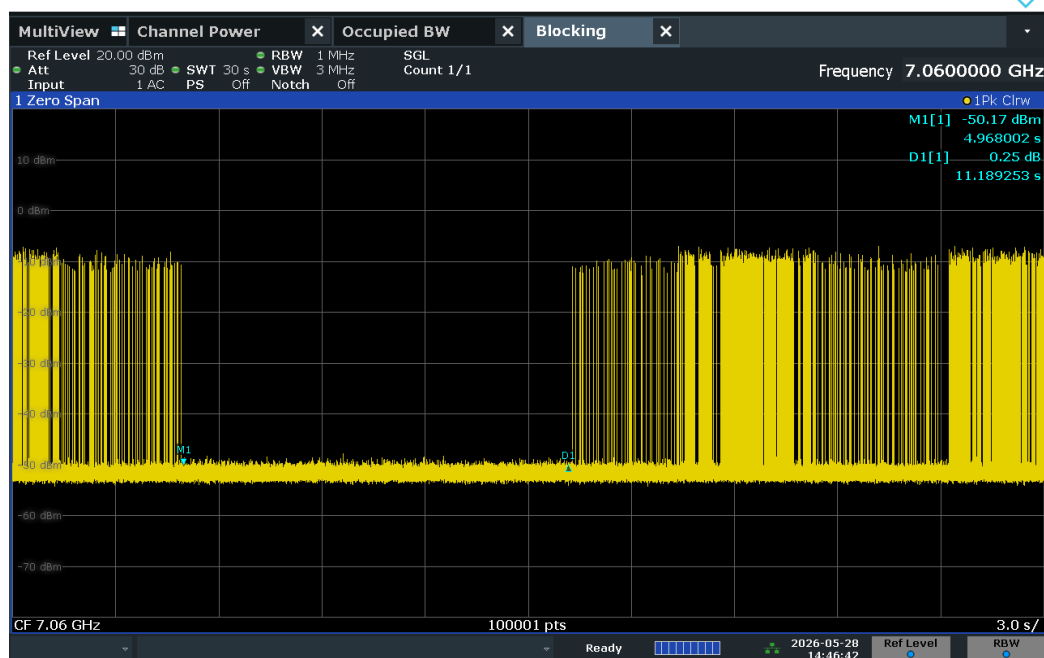


02:46:42 PM 05/28/2026

Plot 7-1336. Contention Based Protocol Timing Plot – UNII 8 – 160 MHz Channel 207 – Low

FCC ID: BCGA3595 IC: 579C-A3595	element	Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 403 of 636

V 12.0 03/03/2026


Duty_Cycle: 97.83% DCCF: 0.095dB

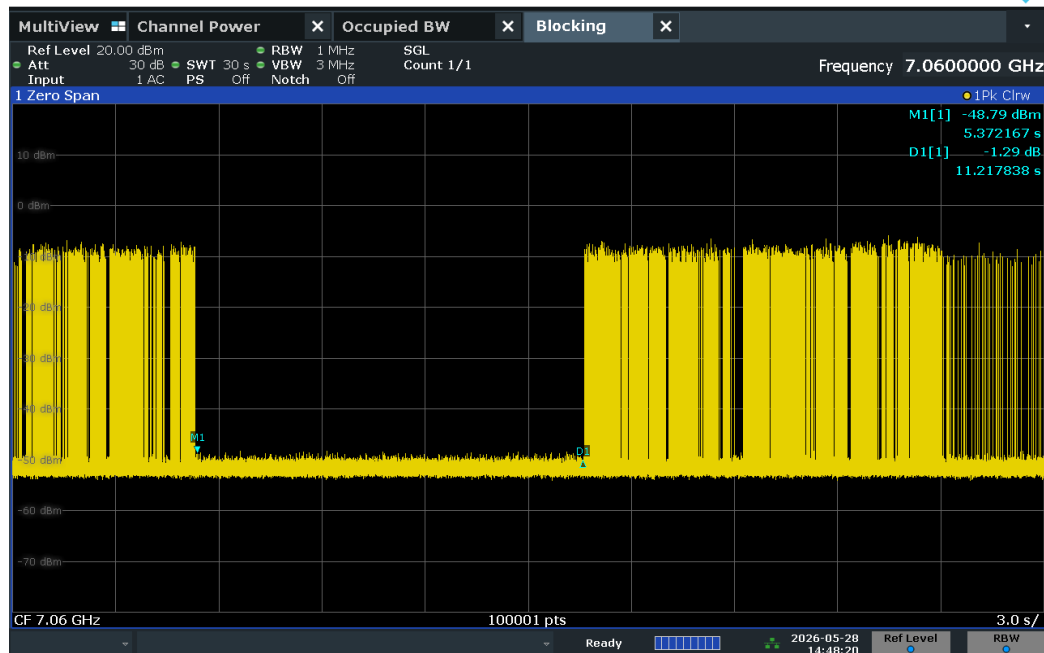

02:48:21 PM 05/28/2026

Plot 7-1337. Contention Based Protocol Timing Plot – UNII 8 – 160 MHz Channel 207 – Mid

Duty_Cycle: 97.83% DCCF: 0.095dB

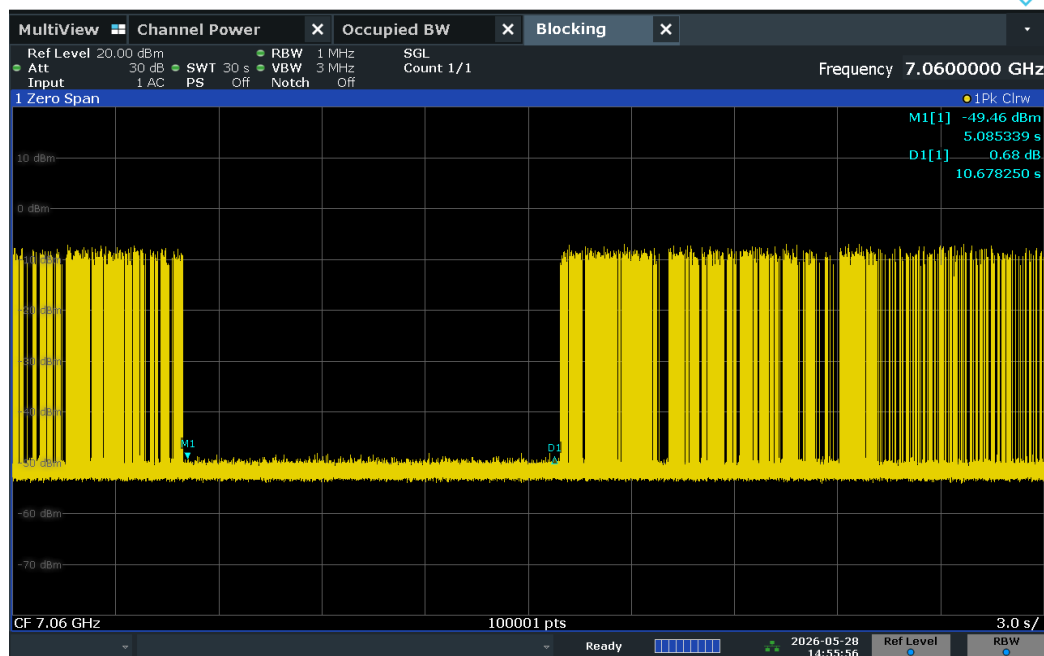

02:55:57 PM 05/28/2026

Plot 7-1338. Contention Based Protocol Timing Plot – UNII 8 – 160 MHz Channel 207 – High

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 404 of 636


V 12.0 03/03/2026

Bandwidth Reduction Plots



12:13:00 PM 06/06/2026

Plot 7-1339. 160 MHz Bandwidth, AWGN Signal Injected – 6110 MHz

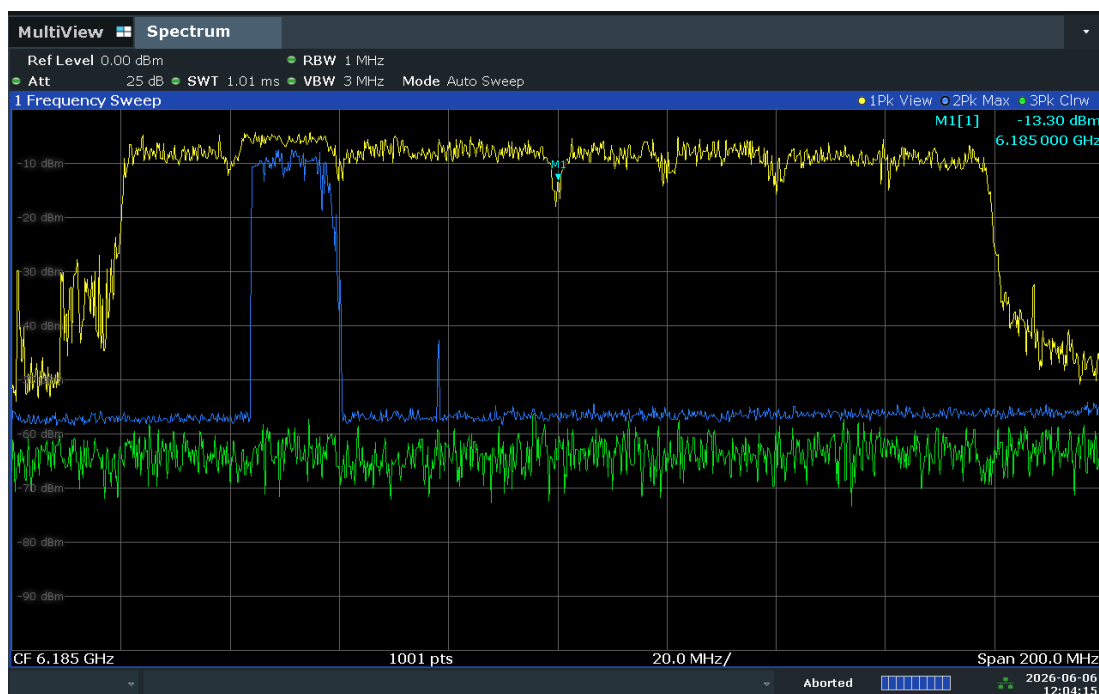


12:04:16 PM 06/06/2026

Plot 7-1340. 160 MHz Bandwidth, AWGN Signal Injected – 6185 MHz

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 405 of 636

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com

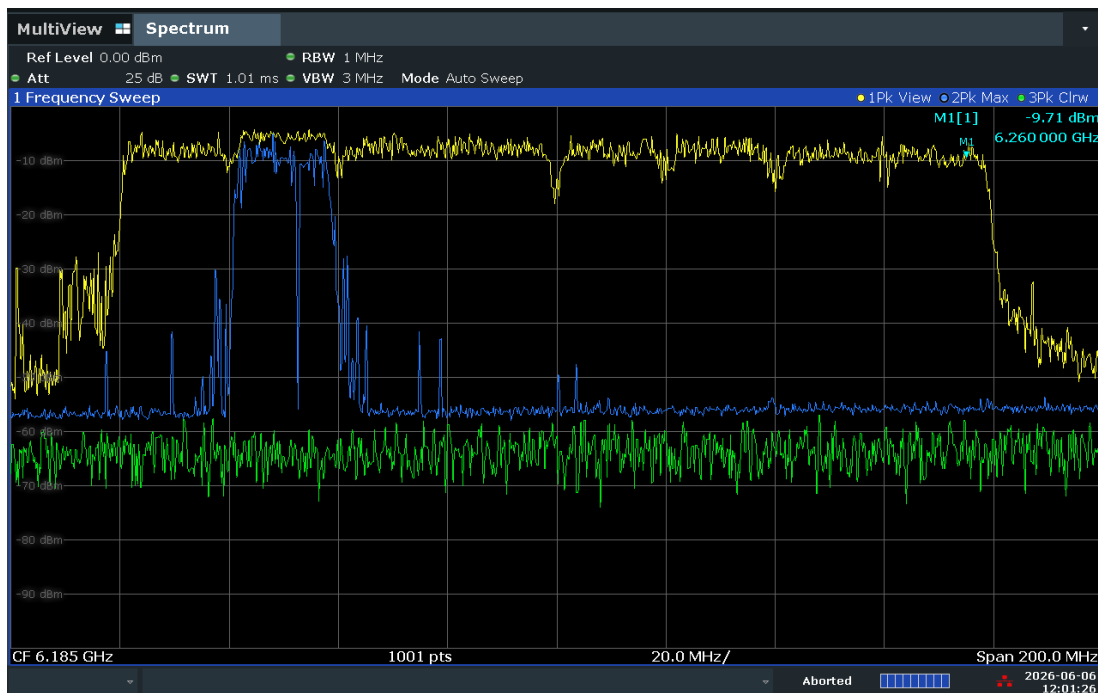

12:01:26 PM 06/06/2026

Plot 7-1341. 160 MHz Bandwidth, AWGN Signal Injected – 6260 MHz

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 406 of 636

V 12.0 03/03/2026

7.7 Radiated Spurious Emissions – Above 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (7.4.3) as shown in the table below.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-203. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 – Sections 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 407 of 636

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

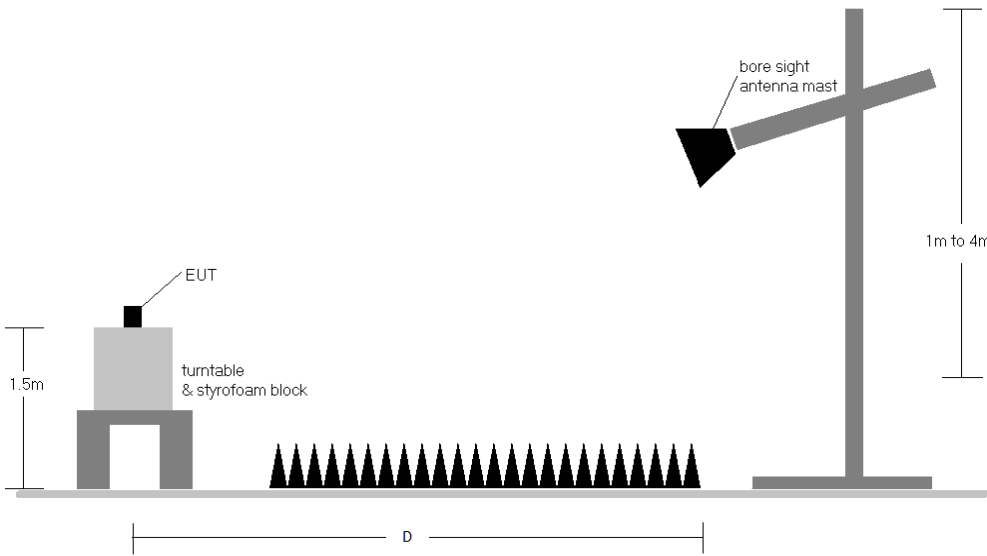


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 408 of 636

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and section 7.5 of RSS-Gen are below the limit shown in Table 7-203.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-203. All spurious emissions that do not lie in a restricted band are subject to a limit of -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
5. D is the measurement test distance and emissions 1-18 GHz were measured at a 3 meters test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20 dB of the limit are fully investigated and the results are shown in this section.
7. All data rates were investigated and only the worse case is reported
8. The unit was tested with all possible modes and only the highest emission is reported.
9. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
10. All radiated measurements were tested at the highest supported power setting per band.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.3 to 7.7.21 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 409 of 636

7.7.1 CDD/SDM Primary Radiated Spurious Emission

RU26

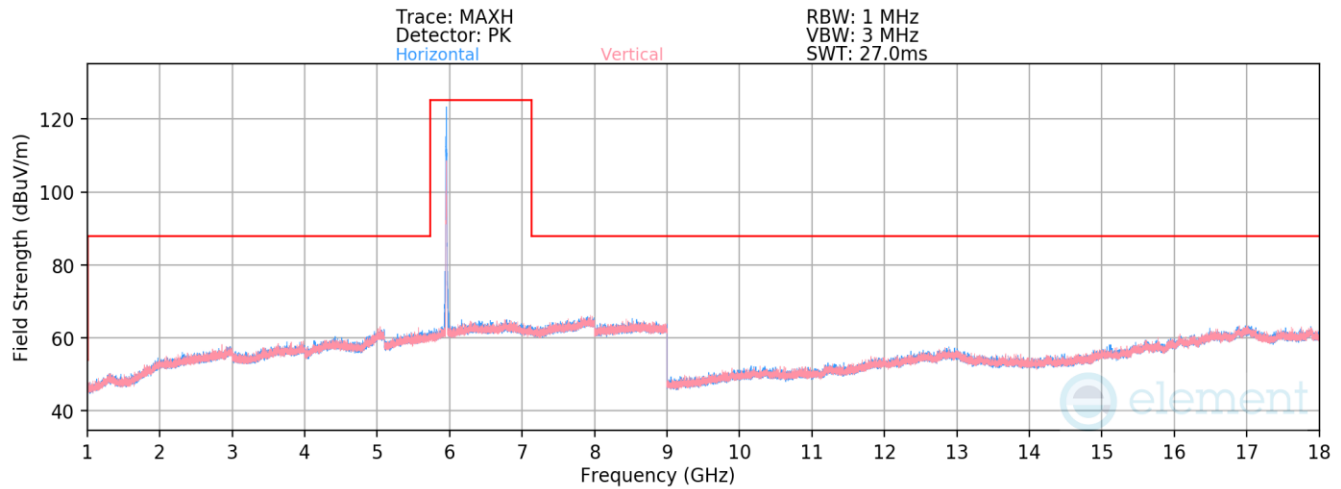


Plot 7-1342. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 1 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955 MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	V	-	-	-84.94	20.74	42.80	53.98	-11.18
* 11910.00	Peak	V	-	-	-73.76	20.74	53.98	73.98	-20.00
* 17865.00	Average	H	-	-	-85.45	25.14	46.68	53.98	-7.30
* 17865.00	Peak	H	-	-	-73.93	25.14	58.20	73.98	-15.78

Table 7-204. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 410 of 636

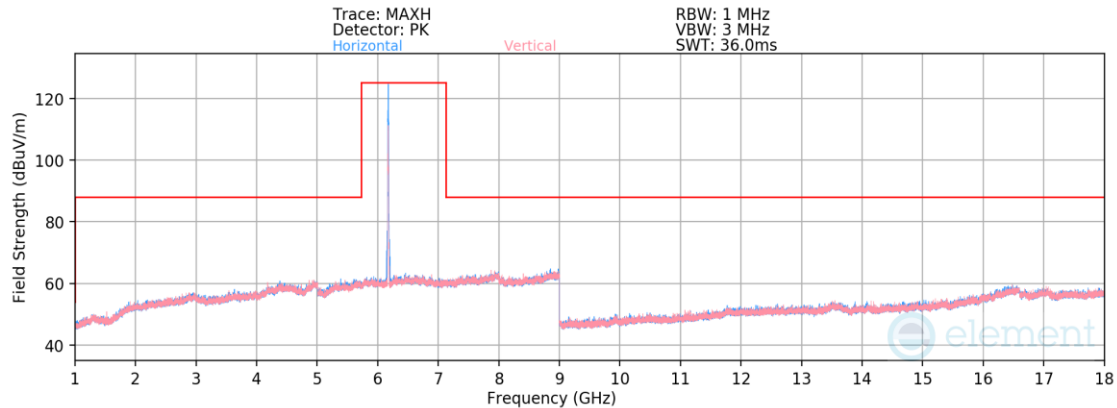

Plot 7-1343. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 45 – RU26)

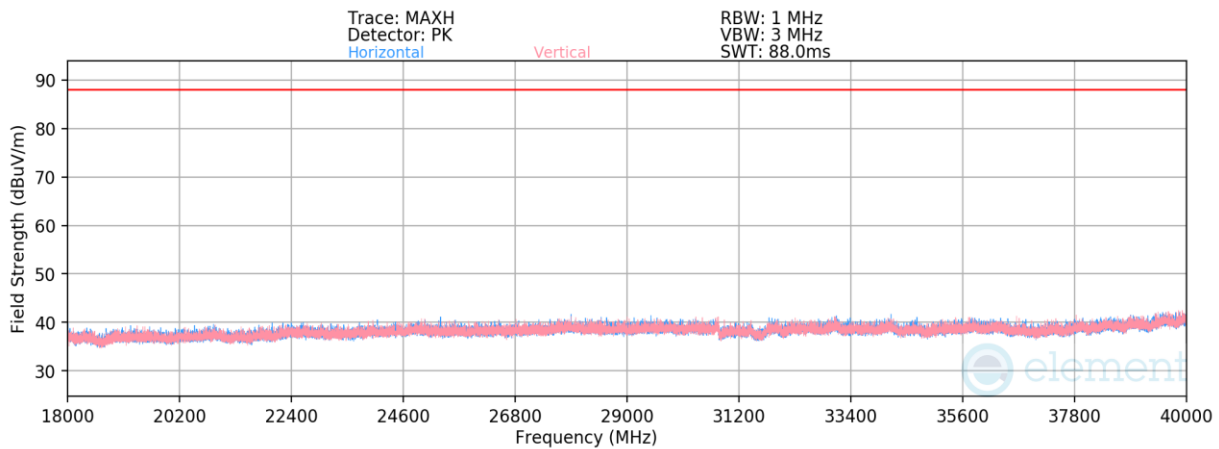


Plot 7-1344. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 45 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175 MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-83.97	18.18	0.00	41.21	53.98	-12.77
* 12350.00	Peak	V	-	-	-72.77	18.18	0.00	52.41	73.98	-21.57
* 18525.00	Average	V	-	-	-64.21	-5.54	-9.54	27.71	53.98	-26.27
* 18525.00	Peak	V	-	-	-53.32	-5.54	-9.54	38.59	73.98	-35.39
24700.00	Average	V	-	-	-63.44	-4.31	-9.54	29.71	68.23	-38.52
24700.00	Peak	V	-	-	-52.20	-4.31	-9.54	40.95	88.23	-47.28
30875.00	Average	V	-	-	-65.28	-2.76	-9.54	29.42	68.23	-38.81
30875.00	Peak	V	-	-	-53.96	-2.76	-9.54	40.74	88.23	-47.49
37050.00	Average	V	-	-	-68.45	-4.95	-9.54	24.06	68.23	-44.17
37050.00	Peak	V	-	-	-57.87	-4.95	-9.54	34.64	88.23	-53.59

Table 7-205. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 411 of 636

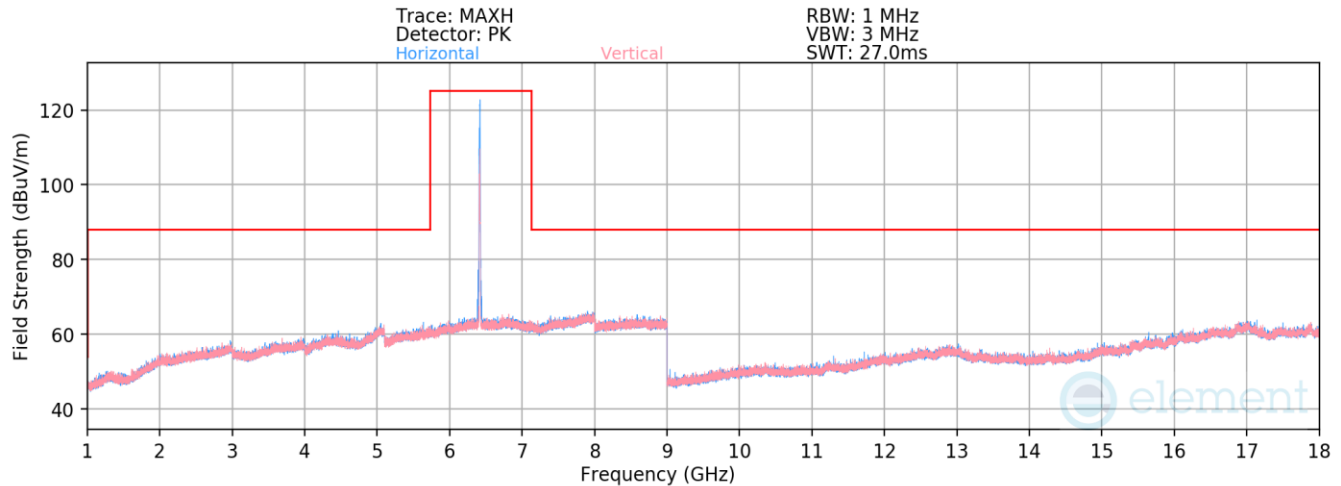

Plot 7-1345. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be – Ch. 93 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	V	-	-	-84.63	22.22	44.59	68.23	-23.64
12830.00	Peak	V	-	-	-73.45	22.22	55.77	88.23	-32.46

Table 7-206. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 412 of 636

V 12.0 03/03/2026

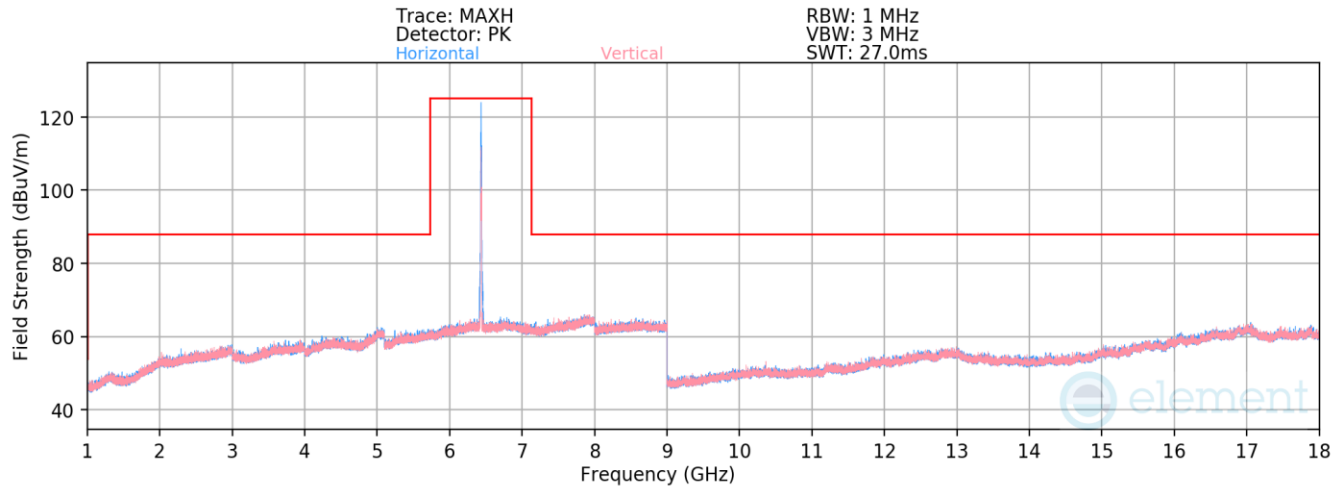


Plot 7-1346. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 97 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435 MHz
Channel: 97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.99	22.49	44.50	68.23	-23.73
12870.00	Peak	H	-	-	-72.99	22.49	56.50	88.23	-31.73

Table 7-207. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 413 of 636

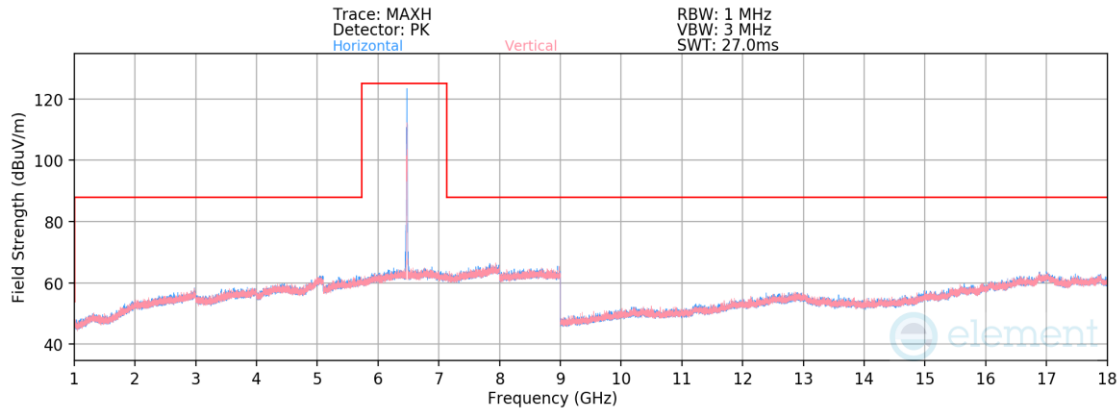

Plot 7-1347. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 105 – RU26)

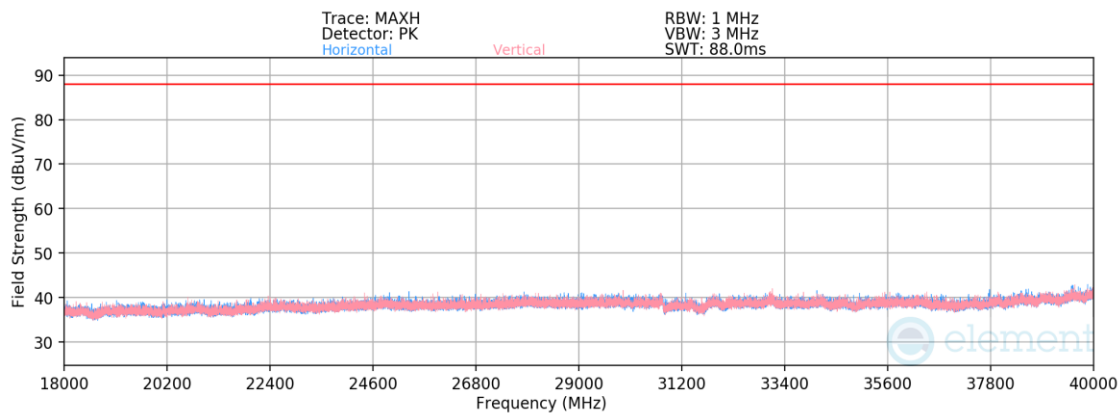


Plot 7-1348. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 105 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475 MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-85.08	22.56	0.00	44.48	68.23	-23.75
12950.00	Peak	V	-	-	-72.91	22.56	0.00	56.66	88.23	-31.57
* 19425.00	Average	V	-	-	-63.17	-5.91	-9.54	28.38	53.98	-25.60
* 19425.00	Peak	V	-	-	-51.73	-5.91	-9.54	39.82	73.98	-34.16
25900.00	Average	V	-	-	-63.90	-4.42	-9.54	29.14	68.23	-39.09
25900.00	Peak	V	-	-	-53.02	-4.42	-9.54	40.02	88.23	-48.21
32375.00	Average	V	-	-	-64.56	-3.19	-9.54	29.71	68.23	-38.52
32375.00	Peak	V	-	-	-53.16	-3.19	-9.54	41.12	88.23	-47.11
* 38850.00	Average	V	-	-	-67.57	-2.32	-9.54	27.57	53.98	-26.41
* 38850.00	Peak	V	-	-	-56.37	-2.32	-9.54	38.77	73.98	-35.21

Table 7-208. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 414 of 636

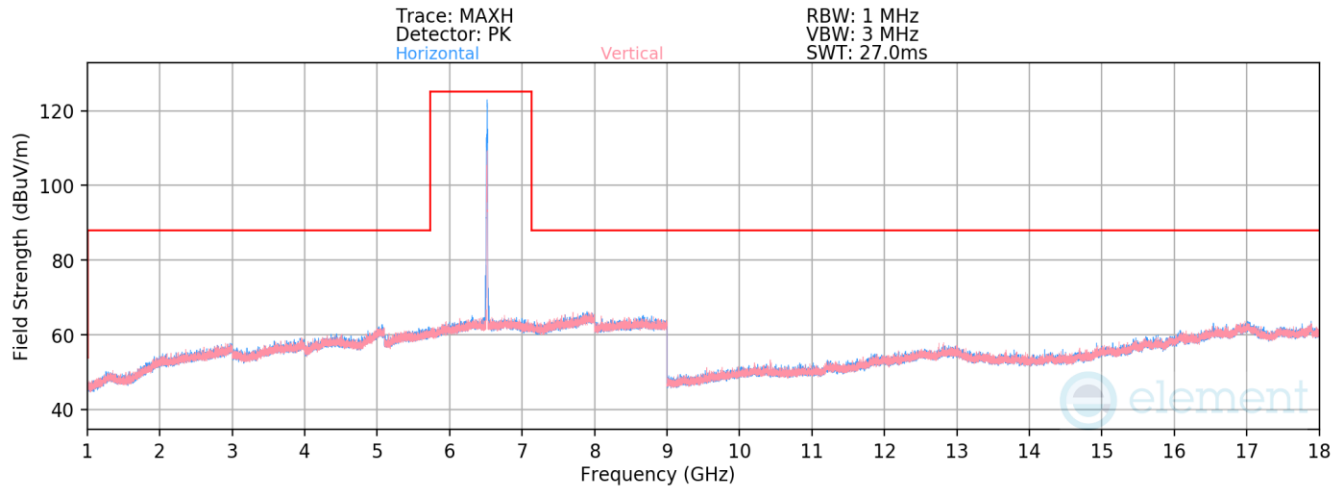


Plot 7-1349. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 113 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515 MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	V	-	-	-85.33	22.88	44.55	68.23	-23.68
13030.00	Peak	V	-	-	-73.97	22.88	55.91	88.23	-32.32

Table 7-209. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 415 of 636

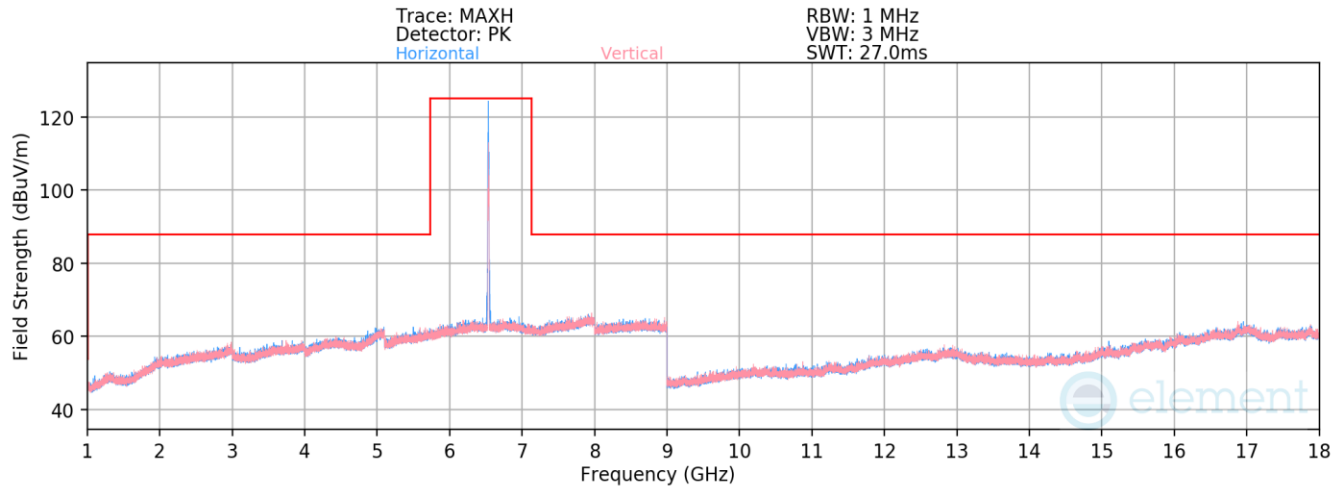


Plot 7-1350. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 117 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535 MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.72	22.85	44.13	68.23	-24.10
13070.00	Peak	H	-	-	-73.89	22.85	55.96	88.23	-32.27

Table 7-210. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 416 of 636

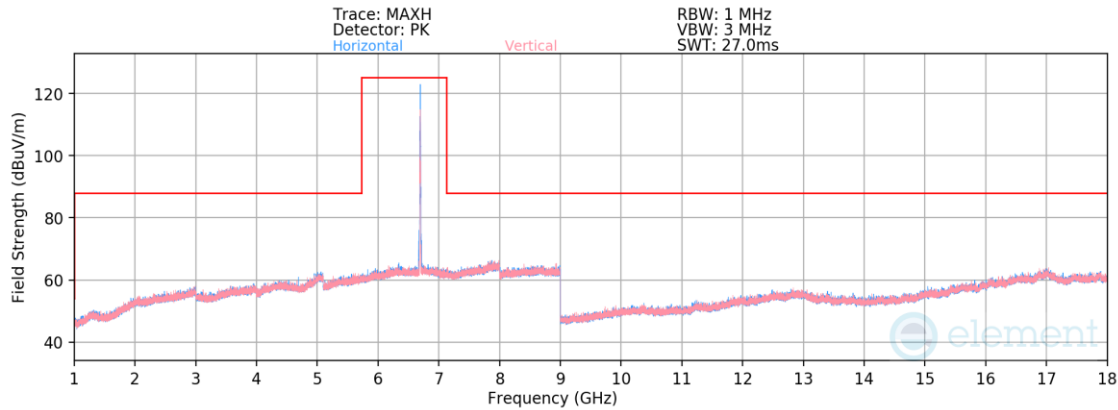

Plot 7-1351. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 149 – RU26)

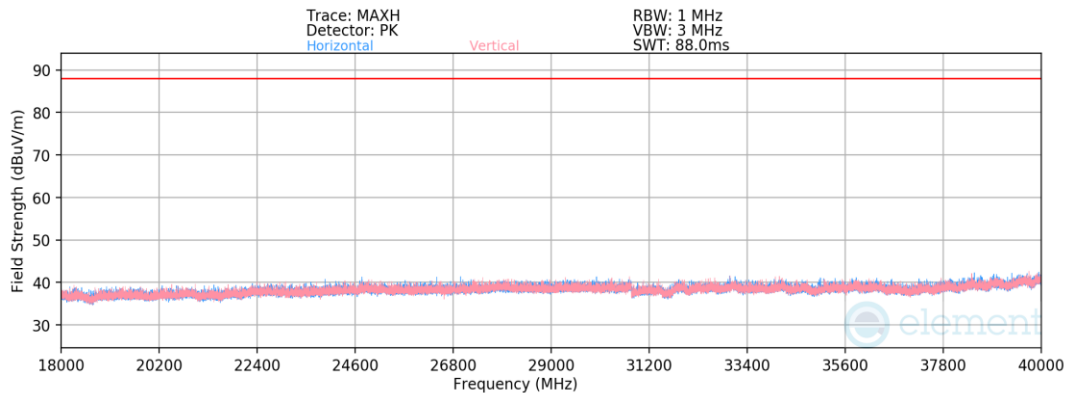


Plot 7-1352. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 149 – RU26)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695 MHz
Channel:	149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	13390.00	Average	H	-	-	-85.23	22.68	0.00	44.46	53.98	-9.52
*	13390.00	Peak	H	-	-	-74.10	22.68	0.00	55.58	73.98	-18.40
*	20085.00	Average	H	-	-	-63.39	-6.21	-9.54	27.85	53.98	-26.13
*	20085.00	Peak	H	-	-	-52.06	-6.22	-9.54	39.18	73.98	-34.80
	26780.00	Average	H	-	-	-64.61	-3.89	-9.54	28.97	68.23	-39.26
	26780.00	Peak	H	-	-	-52.95	-3.89	-9.54	40.62	88.23	-47.61
	33475.00	Average	H	-	-	-64.01	-3.58	-9.54	29.87	68.23	-38.36
	33475.00	Peak	H	-	-	-52.53	-3.59	-9.54	41.34	88.23	-46.89

Table 7-211. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 417 of 636

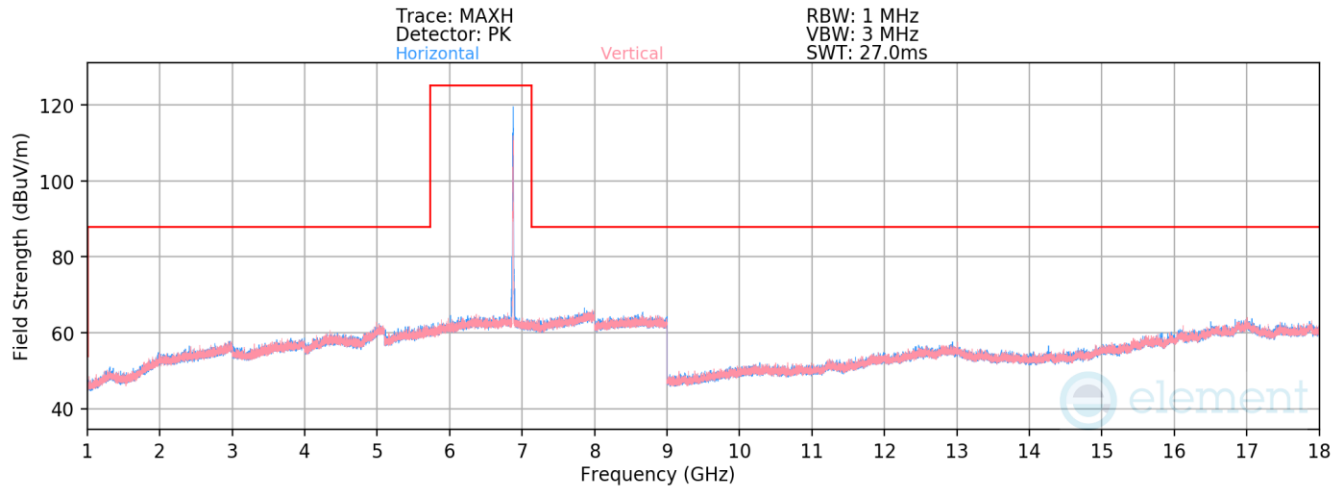


Plot 7-1353. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 185 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875 MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	V	-	-	-85.72	22.63	43.91	68.23	-24.32
13750.00	Peak	V	-	-	-74.39	22.63	55.24	88.23	-32.99

Table 7-212. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 418 of 636

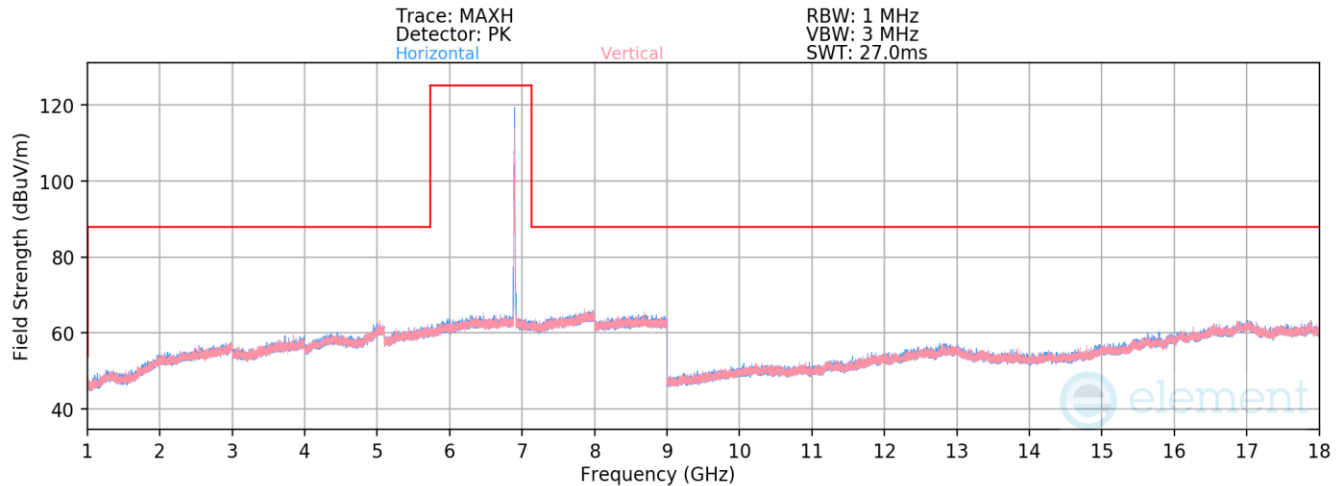

Plot 7-1354. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 189 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895 MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-85.72	23.03	44.31	68.23	-23.92
13790.00	Peak	V	-	-	-74.65	23.03	55.38	88.23	-32.85


Table 7-213. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 419 of 636

V 12.0 03/03/2026

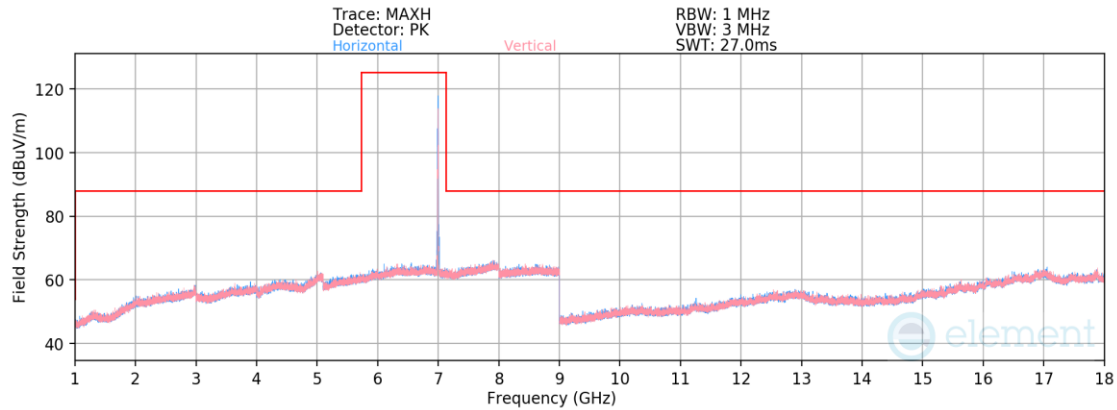

Plot 7-1355. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 209 – RU26)

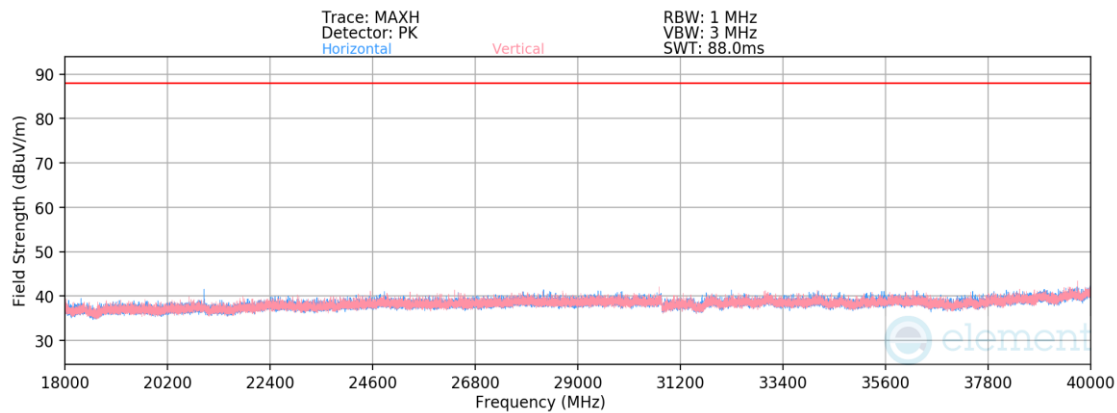


Plot 7-1356. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 209 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995 MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	H	-	-	-85.89	22.86	0.00	43.97	68.23	-24.26
13990.00	Peak	H	-	-	-74.60	22.86	0.00	55.26	88.23	-32.97
* 20985.00	Average	H	-	-	-63.30	-5.84	-9.54	28.32	53.98	-25.66
* 20985.00	Peak	H	-	-	-51.54	-5.85	-9.54	40.07	73.98	-33.91
27980.00	Average	H	-	-	-65.03	-2.86	-9.54	29.56	68.23	-38.67
27980.00	Peak	H	-	-	-53.89	-2.86	-9.54	40.71	88.23	-47.52
34975.00	Average	H	-	-	-62.95	-4.85	-9.54	29.66	68.23	-38.57
34975.00	Peak	H	-	-	-51.91	-4.85	-9.54	40.70	88.23	-47.53

Table 7-214. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 420 of 636

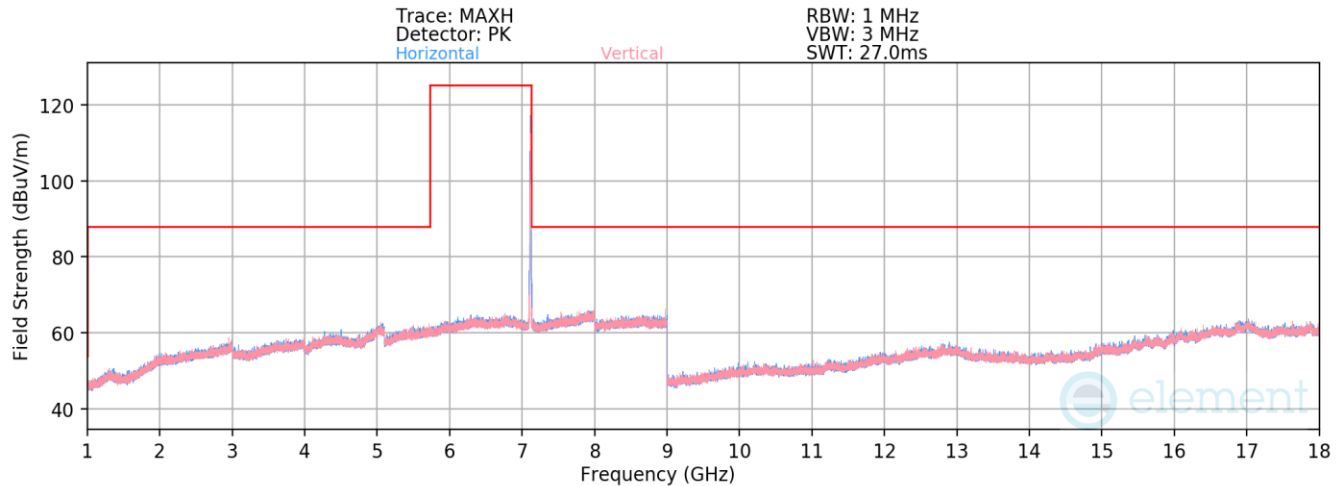

Plot 7-1357. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 229 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095 MHz
Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14190.00	Average	V	-	-	-85.95	23.76	44.81	68.23	-23.42
14190.00	Peak	V	-	-	-75.15	23.76	55.61	88.23	-32.62

Table 7-215. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 421 of 636

RU242

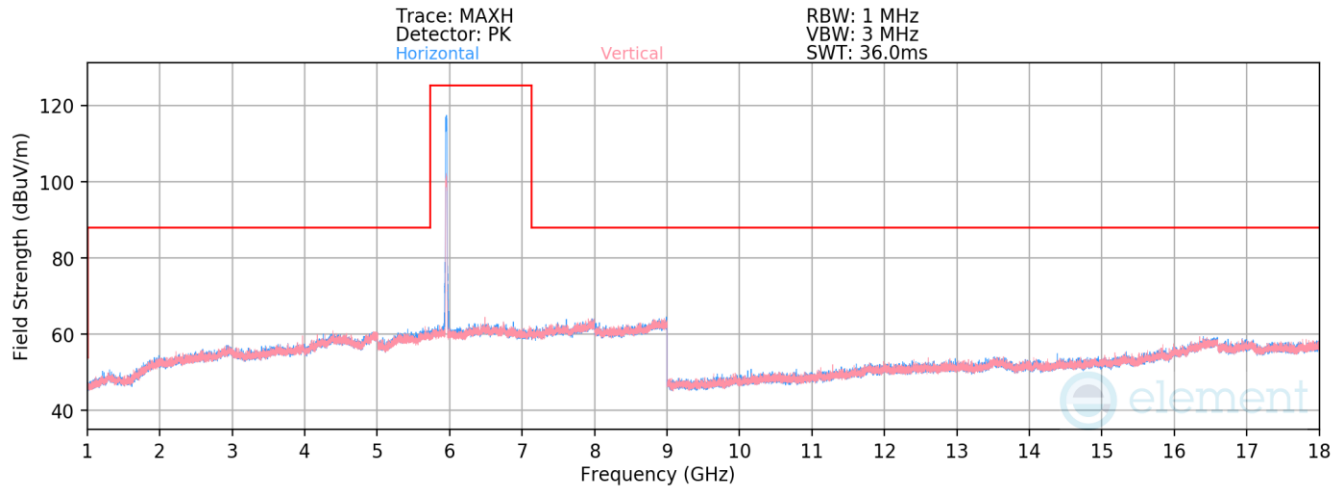


Plot 7-1358. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 1 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5955 MHz
Channel:	1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	V	-	-	-83.82	17.49	40.67	53.98	-13.31
* 11910.00	Peak	V	-	-	-72.51	17.49	51.97	73.98	-22.01
* 17865.00	Average	V	-	-	-85.75	25.57	46.82	53.98	-7.16
* 17865.00	Peak	V	-	-	-74.29	25.57	58.28	73.98	-15.70

Table 7-216. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 422 of 636

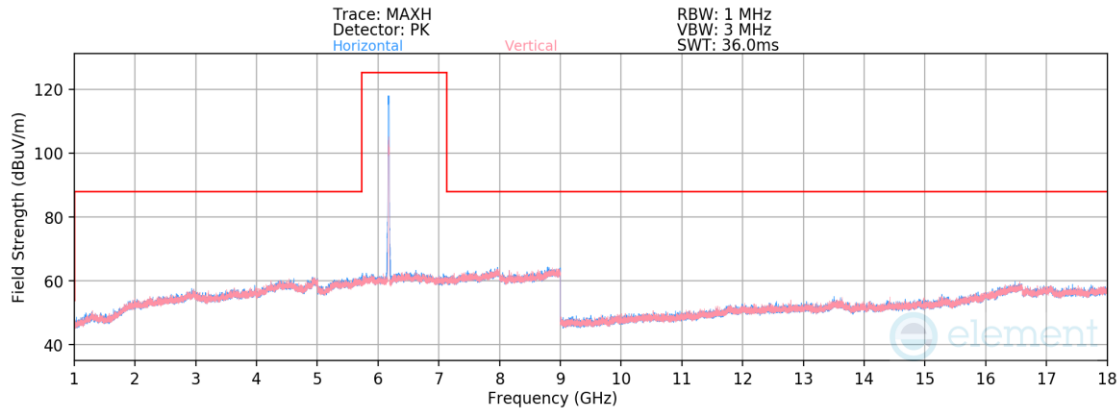

Plot 7-1359. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 45 – RU242)

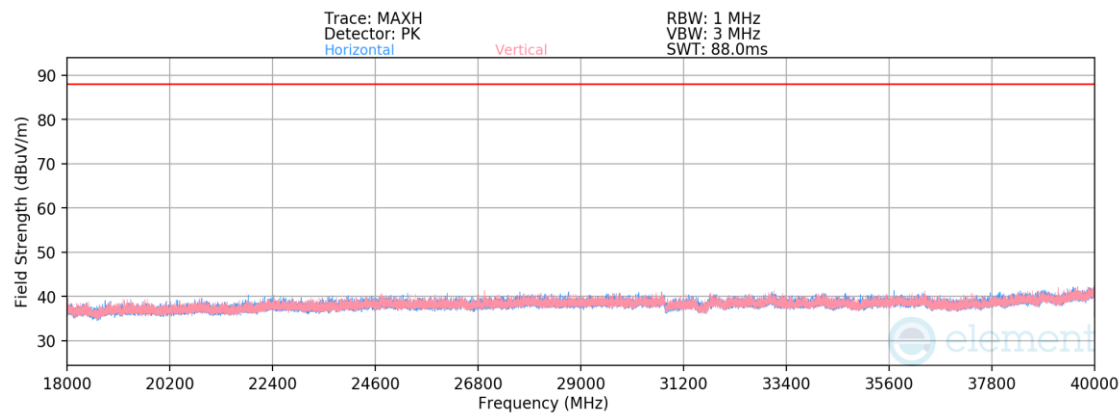


Plot 7-1360. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 45 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175 MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-84.15	18.18	0.00	41.03	53.98	-12.95
* 12350.00	Peak	H	-	-	-72.19	18.18	0.00	52.99	73.98	-20.99
* 18525.00	Average	H	-	-	-64.09	-5.50	-9.54	27.87	53.98	-26.11
* 18525.00	Peak	H	-	-	-53.37	-5.50	-9.54	38.58	73.98	-35.40
24700.00	Average	H	-	-	-63.33	-4.35	-9.54	29.78	68.23	-38.45
24700.00	Peak	H	-	-	-52.10	-4.35	-9.54	41.01	88.23	-47.22
30875.00	Average	H	-	-	-65.03	-2.72	-9.54	29.71	68.23	-38.52
30875.00	Peak	H	-	-	-53.55	-2.72	-9.54	41.19	88.23	-47.04
37050.00	Average	H	-	-	-67.74	-4.95	-9.54	24.77	68.23	-43.46
37050.00	Peak	H	-	-	-56.43	-4.95	-9.54	36.08	88.23	-52.15

Table 7-217. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

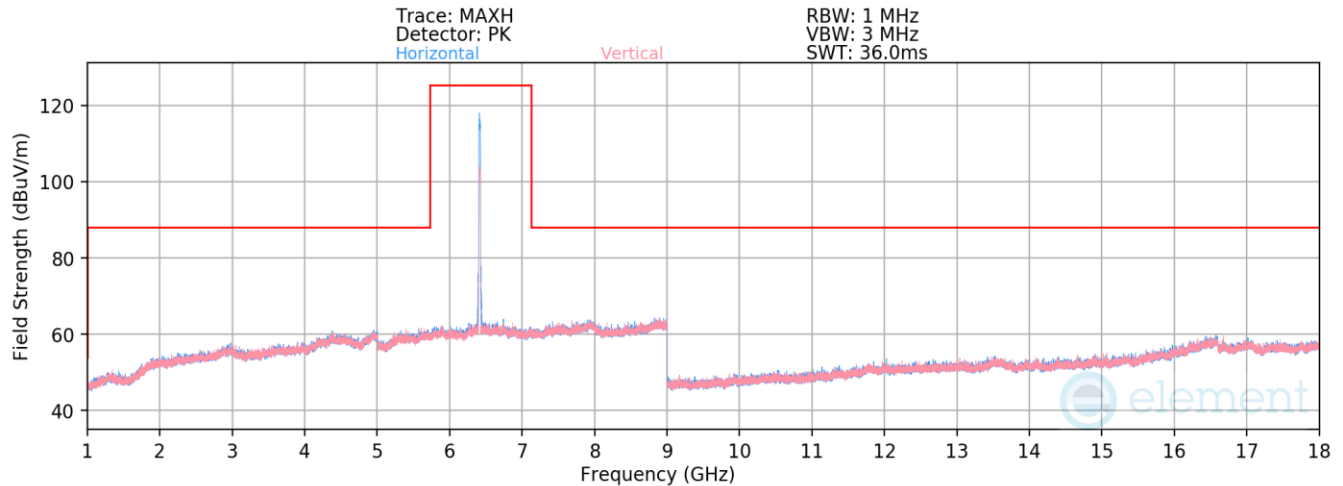


Plot 7-1361. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be – Ch. 93 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.24	19.01	41.77	68.23	-26.46
12830.00	Peak	H	-	-	-72.99	19.01	53.02	88.23	-35.21

Table 7-218. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 424 of 636

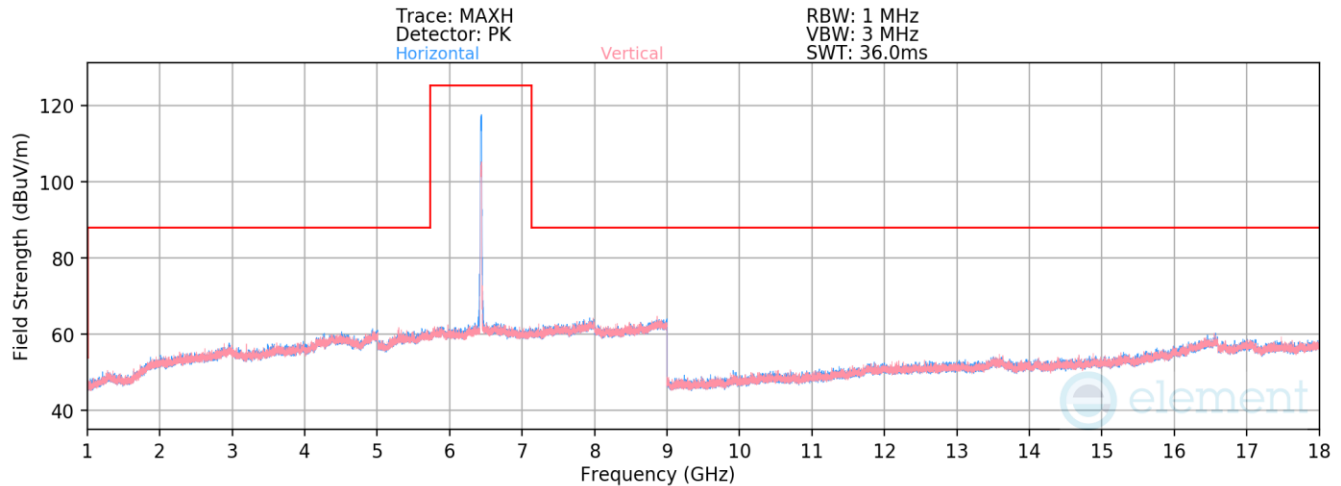


Plot 7-1362. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be – Ch. 97 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435 MHz
Channel: 97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.17	18.96	41.79	68.23	-26.44
12870.00	Peak	H	-	-	-72.78	18.96	53.18	88.23	-35.05

Table 7-219. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 425 of 636

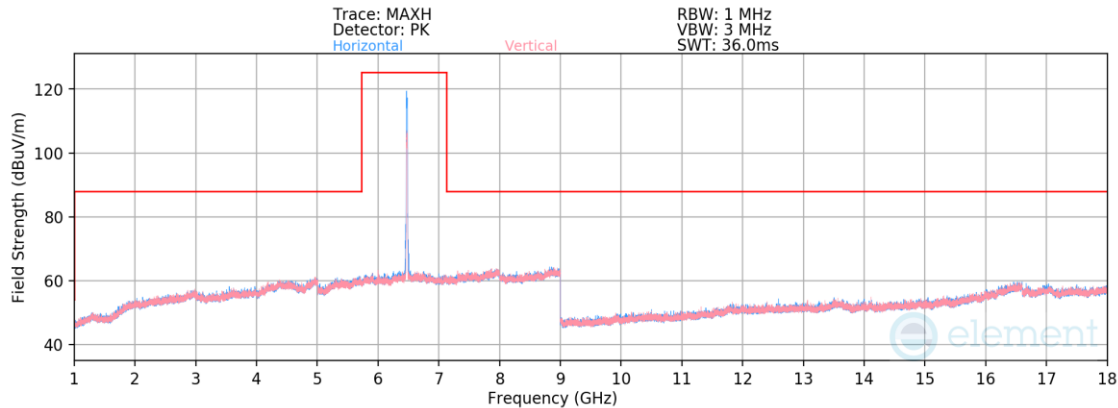

Plot 7-1363. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be – Ch. 105 – RU242)

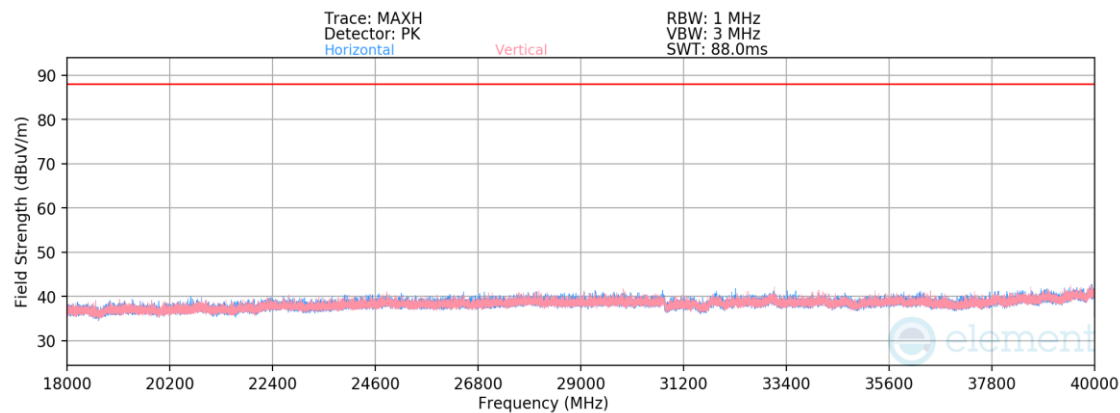


Plot 7-1364. Radiated Spurious Emissions 18-40 GHz CDD Primary (802.11be – Ch. 105 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475 MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-84.55	19.33	0.00	41.78	68.23	-26.45
12950.00	Peak	V	-	-	-73.28	19.33	0.00	53.05	88.23	-35.18
* 19425.00	Average	V	-	-	-63.13	-5.95	-9.54	28.38	53.98	-25.60
* 19425.00	Peak	V	-	-	-51.97	-5.95	-9.54	39.53	73.98	-34.45
25900.00	Average	V	-	-	-63.90	-4.45	-9.54	29.11	68.23	-39.12
25900.00	Peak	V	-	-	-53.11	-4.45	-9.54	39.90	88.23	-48.33
32375.00	Average	V	-	-	-64.40	-3.19	-9.54	29.88	68.23	-38.35
32375.00	Peak	V	-	-	-53.35	-3.19	-9.54	40.93	88.23	-47.30
* 38850.00	Average	V	-	-	-65.65	-2.32	-9.54	29.49	53.98	-24.49
* 38850.00	Peak	V	-	-	-54.60	-2.32	-9.54	40.54	73.98	-33.44

Table 7-220. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 426 of 636

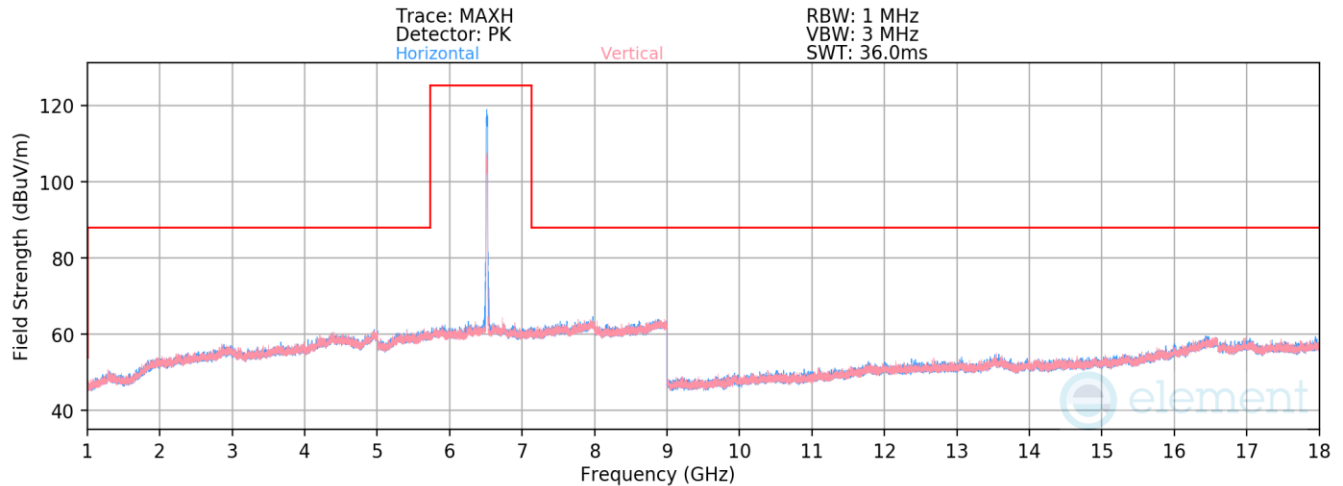


Plot 7-1365. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be – Ch. 113 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515 MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	V	-	-	-84.38	19.29	41.91	68.23	-26.32
13030.00	Peak	V	-	-	-73.12	19.29	53.17	88.23	-35.06

Table 7-221. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 427 of 636

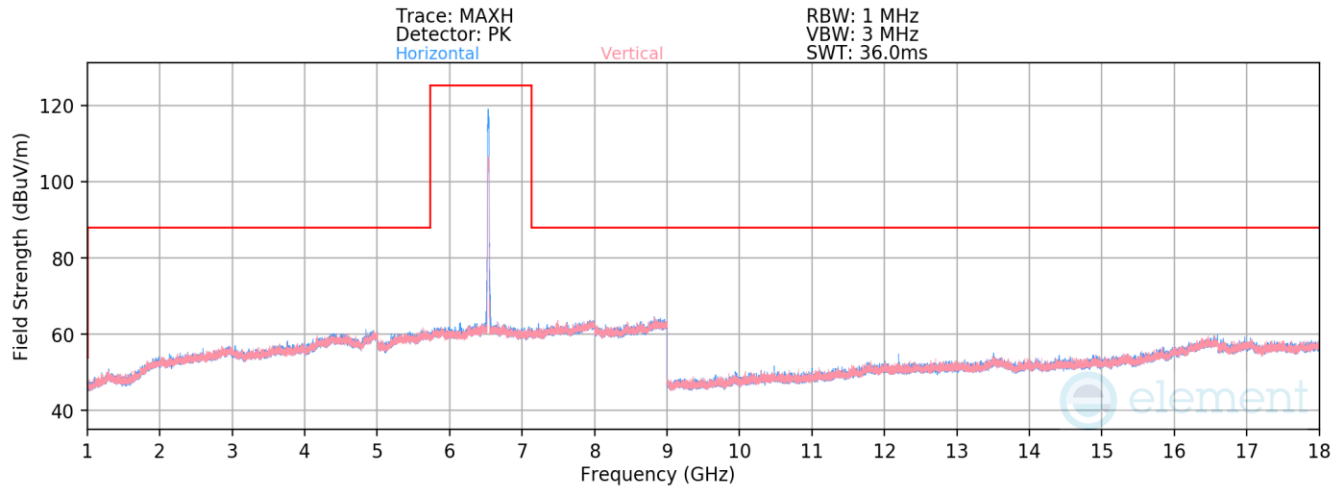


Plot 7-1366. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be – Ch. 117 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535 MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	V	-	-	-84.52	19.42	41.90	68.23	-26.33
13070.00	Peak	V	-	-	-72.96	19.42	53.45	88.23	-34.78

Table 7-222. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 428 of 636

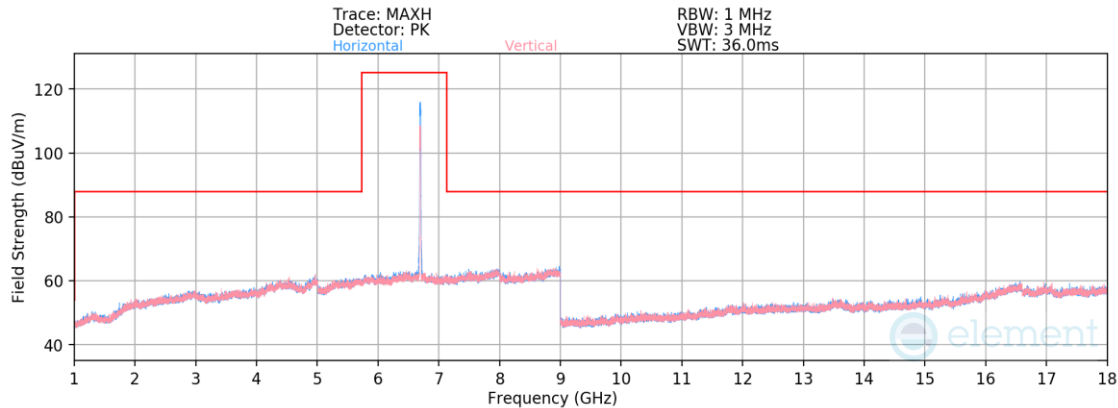

Plot 7-1367. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be – Ch. 149 – RU242)

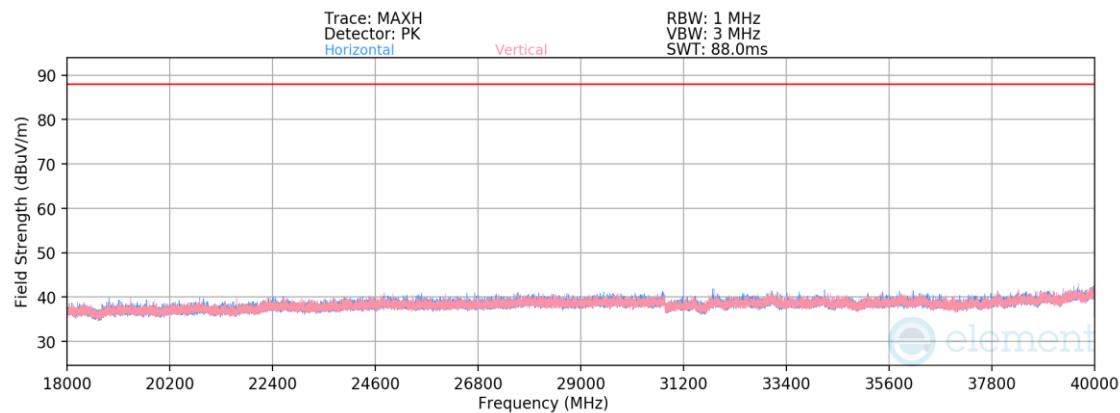


Plot 7-1368. Radiated Spurious Emissions 18-40 GHz CDD Primary (802.11be – Ch. 149 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695 MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-84.28	19.39	0.00	42.11	53.98	-11.87
* 13390.00	Peak	V	-	-	-72.19	19.39	0.00	54.20	73.98	-19.78
* 20085.00	Average	V	-	-	-63.03	-6.22	-9.54	28.21	53.98	-25.77
* 20085.00	Peak	V	-	-	-52.18	-6.22	-9.54	39.06	73.98	-34.92
26780.00	Average	V	-	-	-64.35	-3.81	-9.54	29.30	68.23	-38.93
26780.00	Peak	V	-	-	-53.06	-3.81	-9.54	40.59	88.23	-47.64
33475.00	Average	V	-	-	-63.52	-3.59	-9.54	30.35	68.23	-37.88
33475.00	Peak	V	-	-	-52.56	-3.59	-9.54	41.31	88.23	-46.92

Table 7-223. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 429 of 636

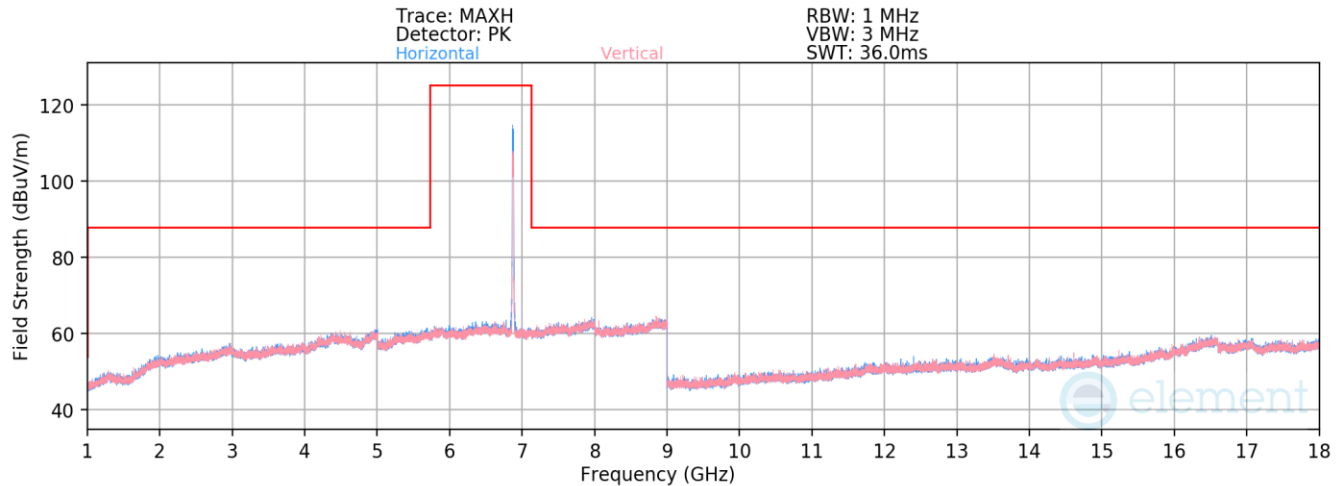


Plot 7-1369. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 185 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875 MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-84.04	19.22	42.18	68.23	-26.05
13750.00	Peak	H	-	-	-72.74	19.22	53.48	88.23	-34.75

Table 7-224. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 430 of 636

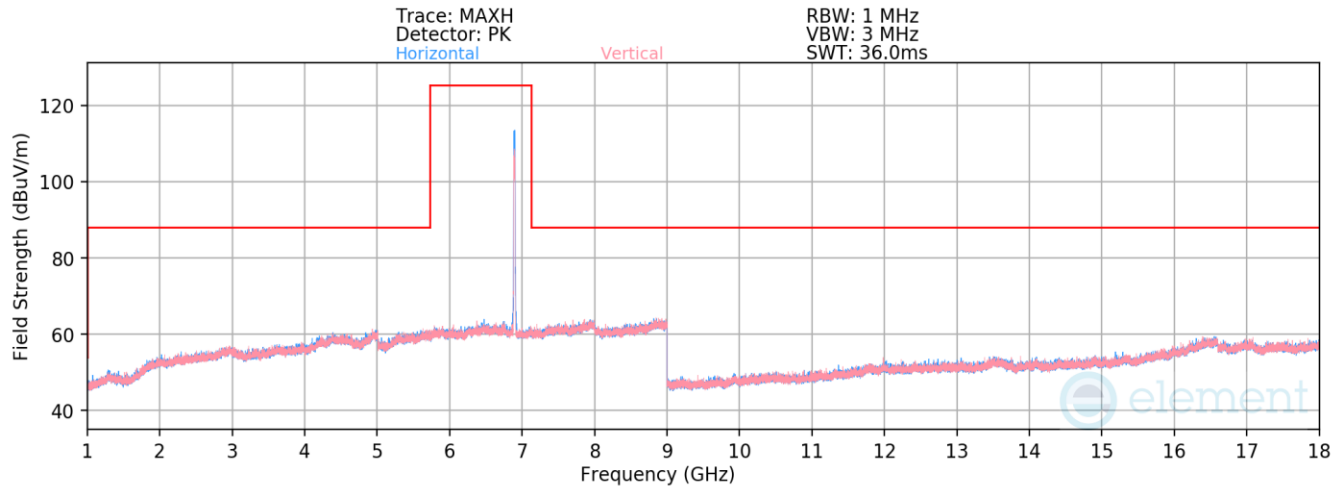


Plot 7-1370. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 189 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895 MHz
Channel: 189


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-84.46	19.02	41.55	68.23	-26.68
13790.00	Peak	V	-	-	-72.58	19.02	53.44	88.23	-34.79

Table 7-225. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 431 of 636

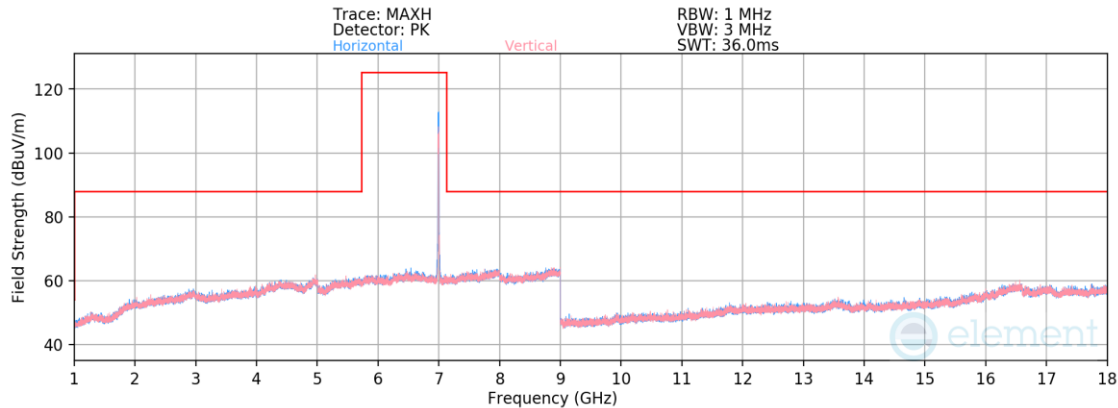

Plot 7-1371. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 209 – RU242)

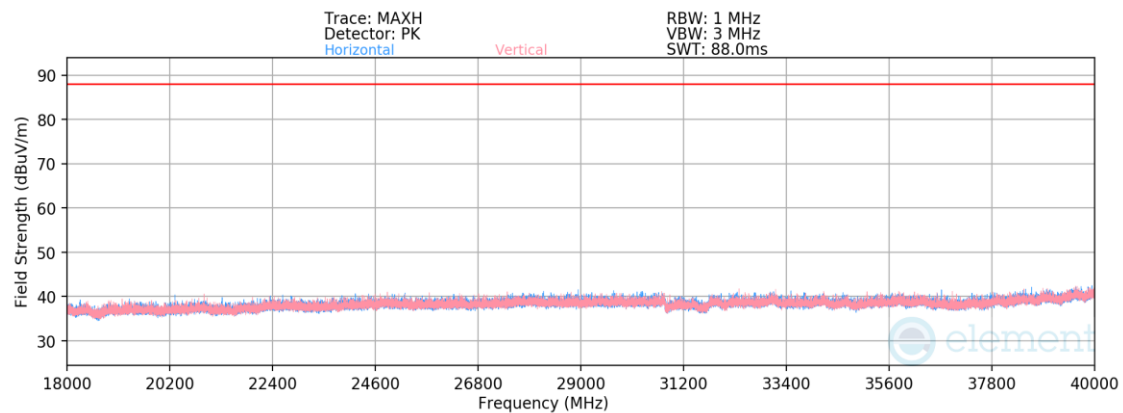


Plot 7-1372. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 209 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995 MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	H	-	-	-84.64	19.53	0.00	41.89	68.23	-26.34
13990.00	Peak	H	-	-	-72.09	19.53	0.00	54.45	88.23	-33.78
* 20985.00	Average	H	-	-	-62.95	-5.87	-9.54	28.64	53.98	-25.34
* 20985.00	Peak	H	-	-	-50.69	-5.87	-9.54	40.90	73.98	-33.08
27980.00	Average	H	-	-	-64.82	-2.86	-9.54	29.78	68.23	-38.45
27980.00	Peak	H	-	-	-53.55	-2.86	-9.54	41.04	88.23	-47.19
34975.00	Average	H	-	-	-62.99	-4.82	-9.54	29.65	68.23	-38.58
34975.00	Peak	H	-	-	-51.53	-4.82	-9.54	41.10	88.23	-47.13

Table 7-226. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 432 of 636

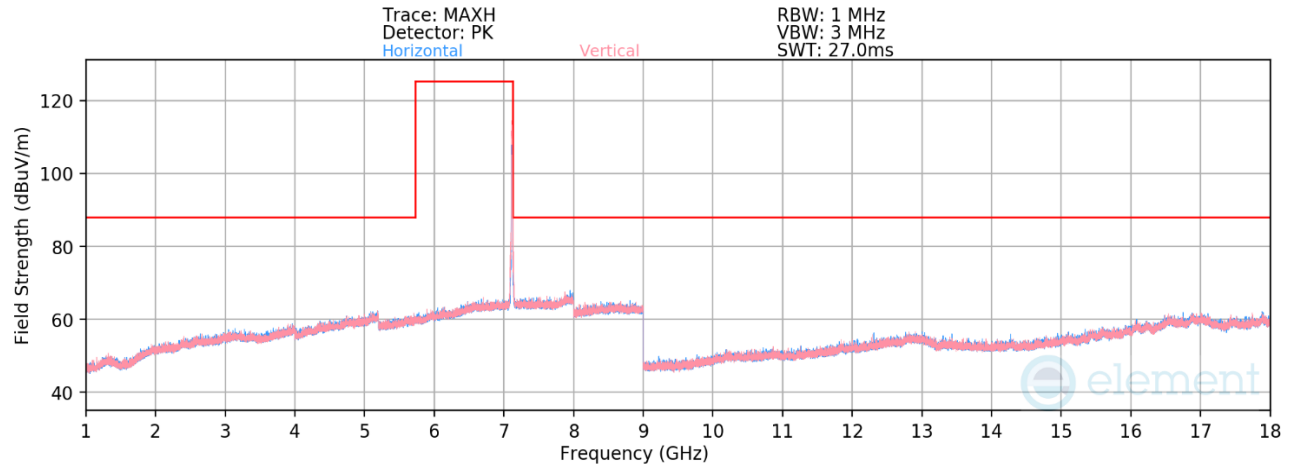

Plot 7-1373. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 233 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115 MHz
Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	V	-	-	-84.37	19.58	42.21	68.23	-26.02
14230.00	Peak	V	-	-	-73.01	19.58	53.57	88.23	-34.66


Table 7-227. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 433 of 636

V 12.0 03/03/2026

7.7.2 CDD/SDM Diversity Radiated Spurious Emission

RU26

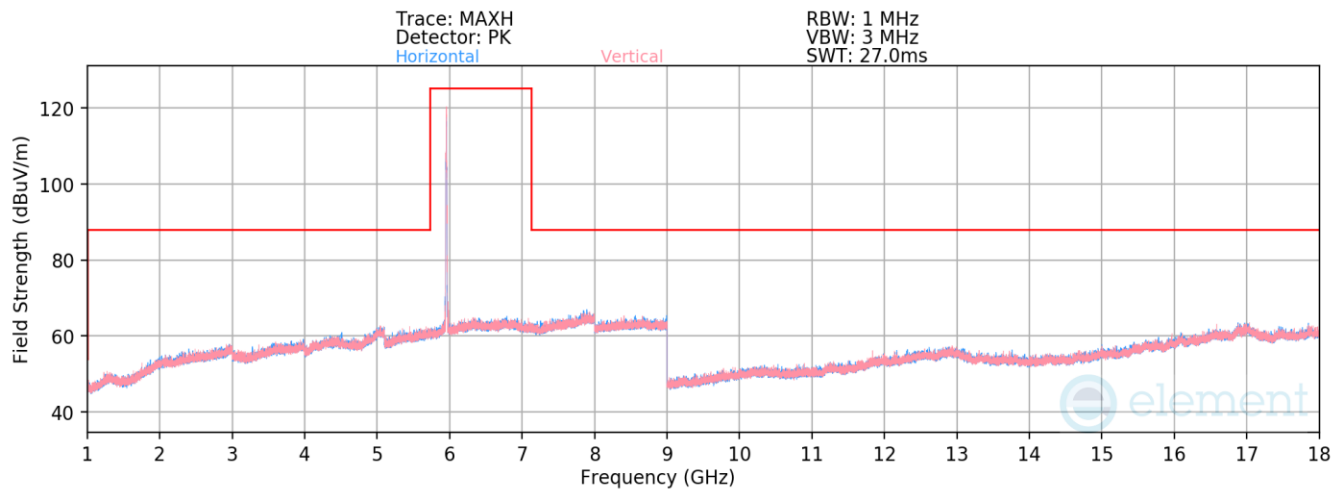


Plot 7-1374. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 1 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955 MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	H	-	-	-85.02	20.94	42.93	53.98	-11.05
* 11910.00	Peak	H	-	-	-73.97	20.94	53.97	73.98	-20.01
* 17865.00	Average	V	-	-	-85.37	25.15	46.78	53.98	-7.20
* 17865.00	Peak	V	-	-	-73.78	25.15	58.37	73.98	-15.61

Table 7-228. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 434 of 636

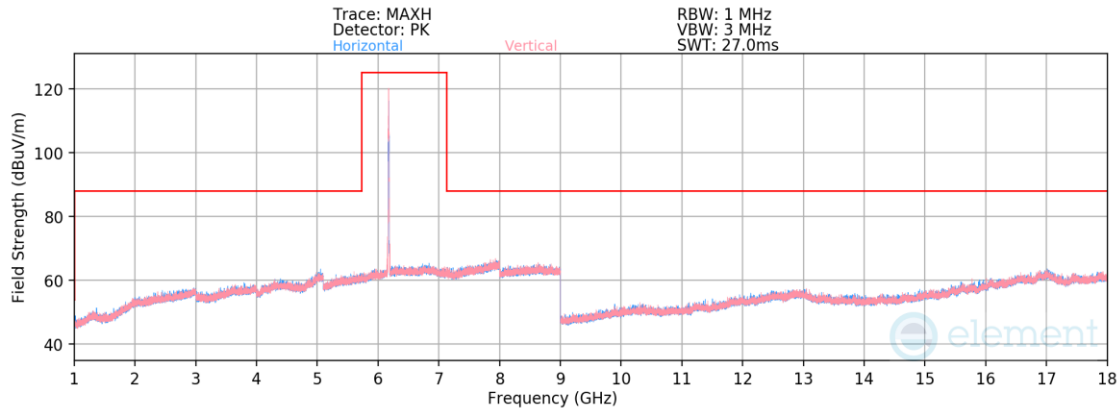

Plot 7-1375. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 45 – RU26)

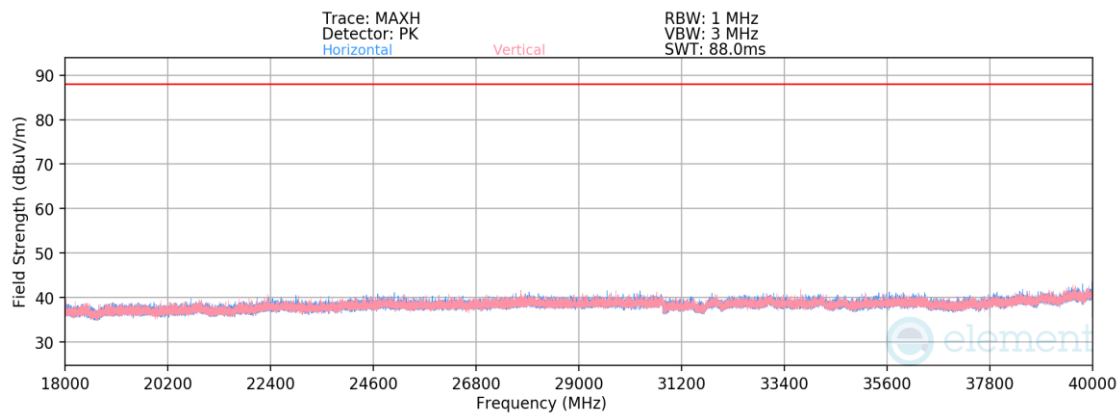

Plot 7-1376. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 45 – RU26)

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 6175 MHz

Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-85.18	21.79	0.00	43.61	53.98	-10.37
* 12350.00	Peak	V	-	-	-73.70	21.79	0.00	55.09	73.98	-18.89
* 18525.00	Average	V	-	-	-64.45	-5.50	-9.54	27.51	53.98	-26.47
* 18525.00	Peak	V	-	-	-53.00	-5.50	-9.54	38.96	73.98	-35.02
24700.00	Average	V	-	-	-63.53	-4.31	-9.54	29.62	68.23	-38.61
24700.00	Peak	V	-	-	-51.39	-4.31	-9.54	41.76	88.23	-46.47
30875.00	Average	V	-	-	-65.08	-2.66	-9.54	29.72	68.23	-38.51
30875.00	Peak	V	-	-	-53.77	-2.66	-9.54	41.03	88.23	-47.20
37050.00	Average	V	-	-	-68.27	-4.95	-9.54	24.24	68.23	-43.99
37050.00	Peak	V	-	-	-56.48	-4.95	-9.54	36.03	88.23	-52.20

Table 7-229. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

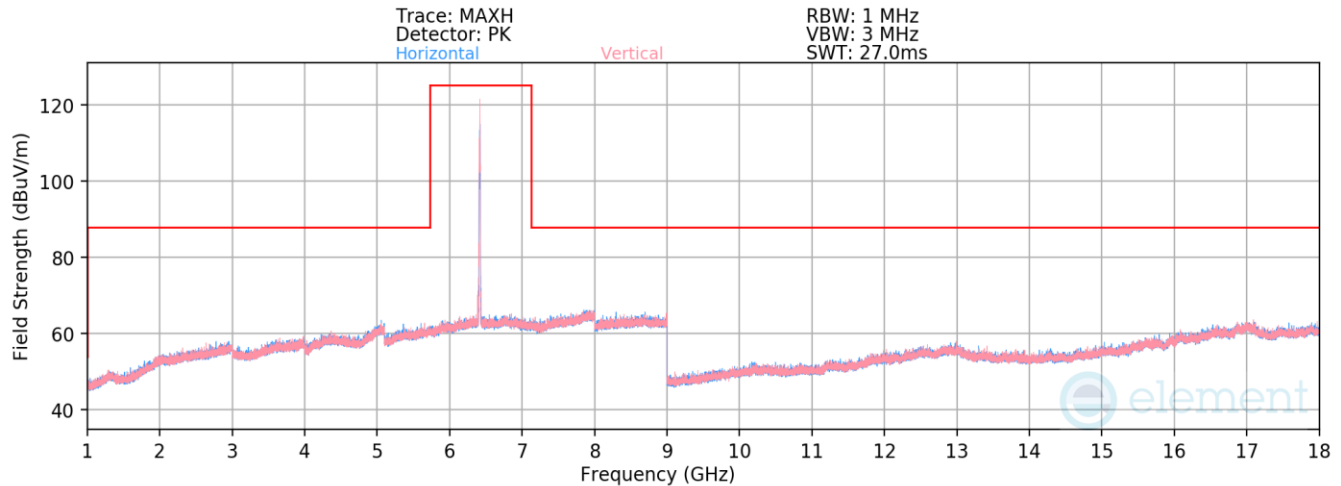


Plot 7-1377. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be – Ch. 93 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.83	22.48	44.64	68.23	-23.59
12830.00	Peak	H	-	-	-73.26	22.48	56.22	88.23	-32.01

Table 7-230. Radiated Spurious Emission Measurements CDD Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 436 of 636

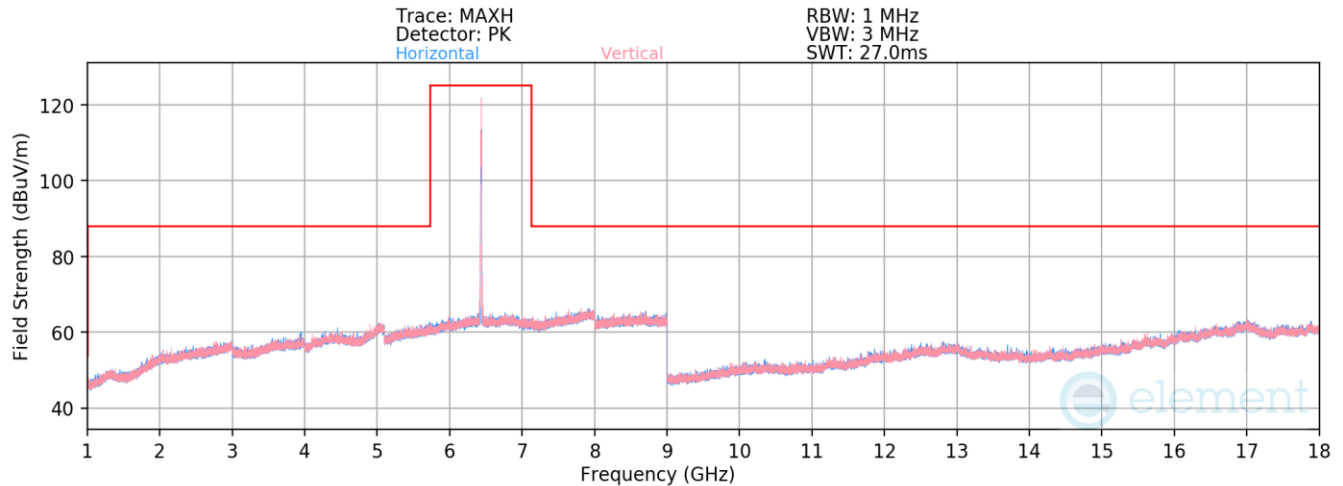


Plot 7-1378. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 97 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435 MHz
Channel: 97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.70	22.61	44.91	68.23	-23.32
12870.00	Peak	H	-	-	-73.88	22.61	55.72	88.23	-32.51

Table 7-231. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 437 of 636

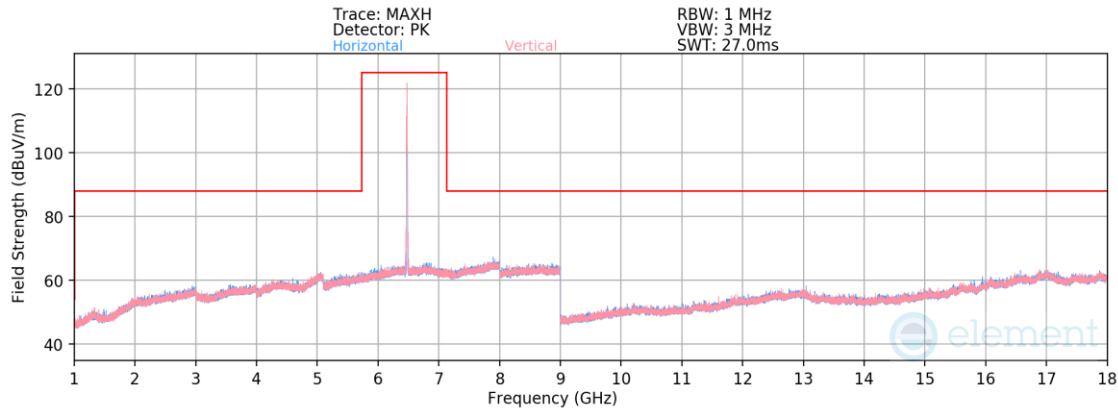

Plot 7-1379. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 105 – RU26)

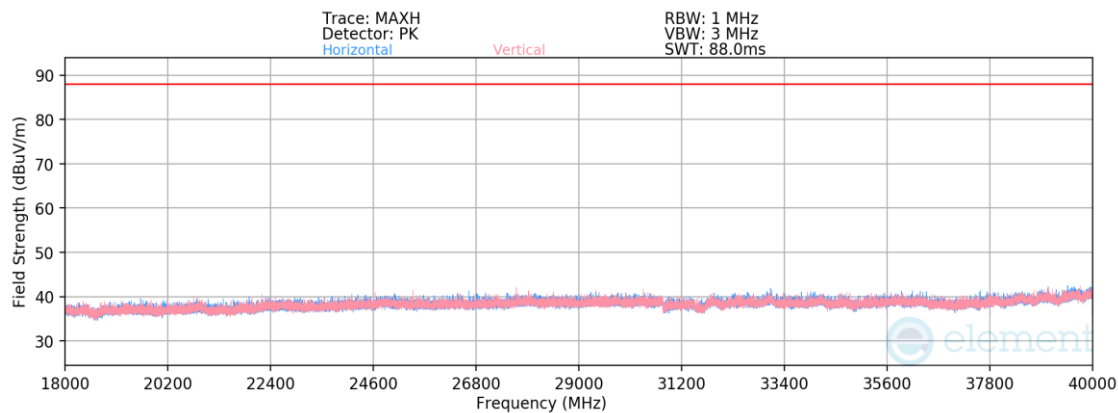


Plot 7-1380. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 105 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475 MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-84.65	22.58	0.00	44.93	68.23	-23.30
12950.00	Peak	H	-	-	-73.49	22.58	0.00	56.09	88.23	-32.14
* 19425.00	Average	H	-	-	-63.15	-5.91	-9.54	28.40	53.98	-25.58
* 19425.00	Peak	H	-	-	-51.98	-5.95	-9.54	39.53	73.98	-34.45
25900.00	Average	H	-	-	-64.19	-4.39	-9.54	28.88	68.23	-39.35
25900.00	Peak	H	-	-	-52.69	-4.45	-9.54	40.31	88.23	-47.92
32375.00	Average	H	-	-	-64.65	-3.25	-9.54	29.56	68.23	-38.67
32375.00	Peak	H	-	-	-53.09	-3.19	-9.54	41.18	88.23	-47.05
* 38850.00	Average	H	-	-	-67.25	-2.32	-9.54	27.89	53.98	-26.09
* 38850.00	Peak	H	-	-	-56.49	-2.32	-9.54	38.65	73.98	-35.33

Table 7-232. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 438 of 636

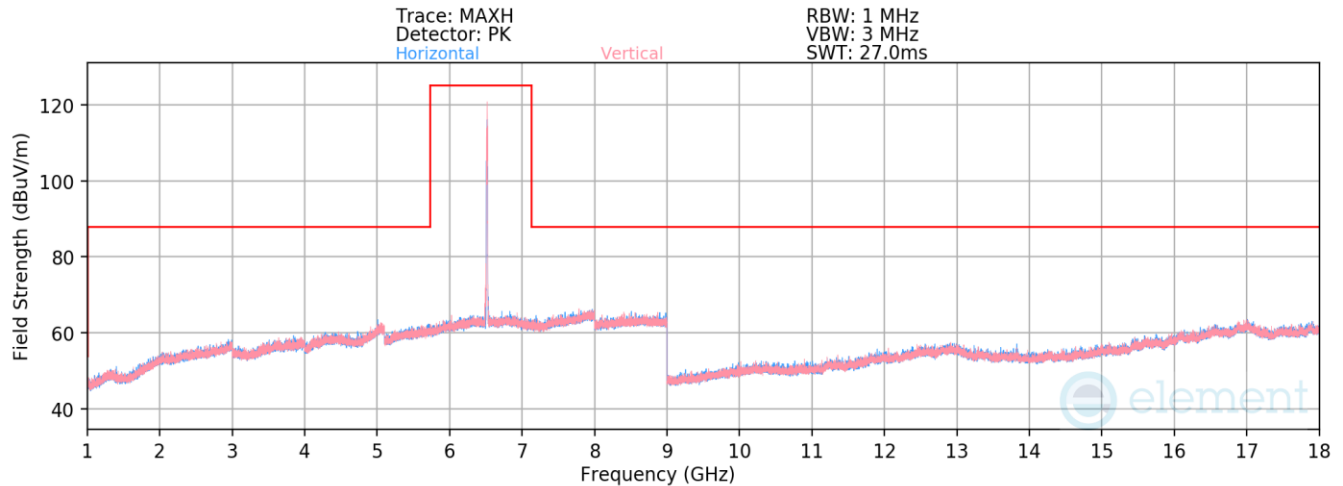


Plot 7-1381. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 113 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515 MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	H	-	-	-84.92	22.88	44.95	68.23	-23.28
13030.00	Peak	H	-	-	-73.40	22.88	56.48	88.23	-31.75

Table 7-233. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 439 of 636

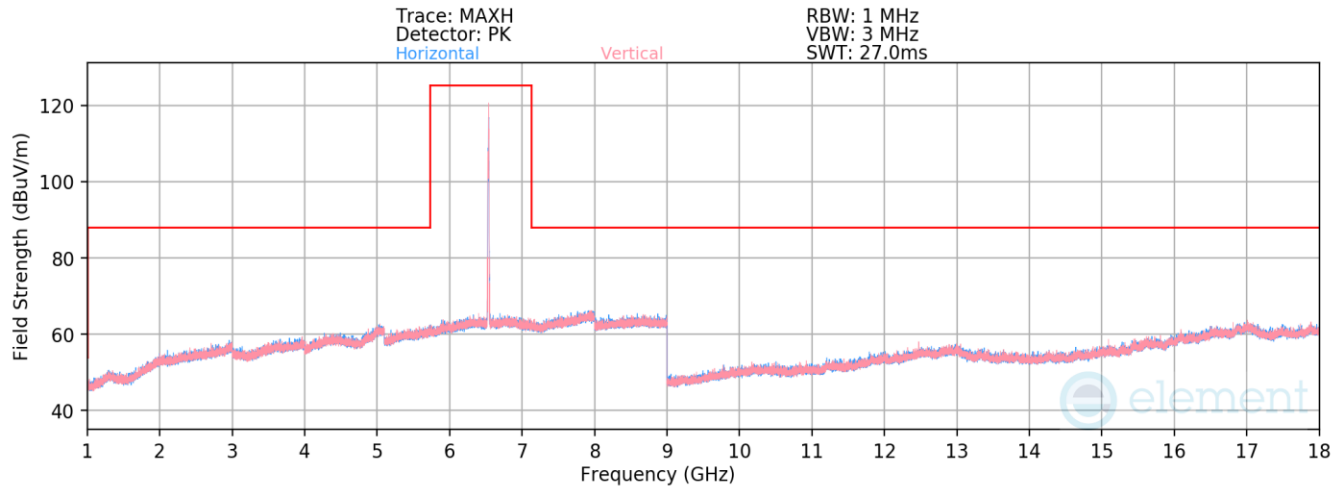


Plot 7-1382. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 117 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535 MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	V	-	-	-84.84	22.85	45.01	68.23	-23.22
13070.00	Peak	V	-	-	-73.74	22.85	56.11	88.23	-32.12

Table 7-234. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 440 of 636

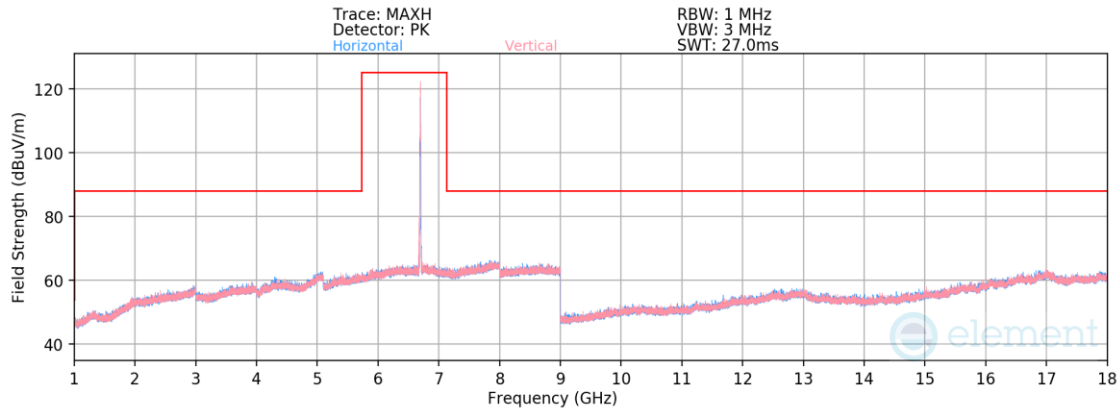

Plot 7-1383. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 149 – RU26)

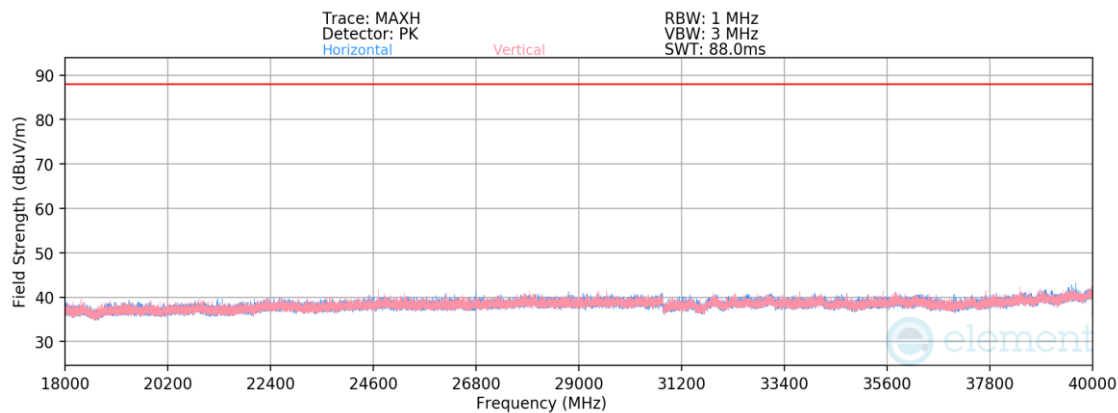


Plot 7-1384. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 149 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695 MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-84.94	22.71	0.00	44.78	53.98	-9.20
* 13390.00	Peak	H	-	-	-73.10	22.71	0.00	56.61	73.98	-17.37
* 20085.00	Average	H	-	-	-63.38	-6.23	-9.54	27.84	53.98	-26.14
* 20085.00	Peak	H	-	-	-52.07	-6.23	-9.54	39.15	73.98	-34.83
26780.00	Average	H	-	-	-64.46	-3.89	-9.54	29.11	68.23	-39.12
26780.00	Peak	H	-	-	-53.53	-3.89	-9.54	40.05	88.23	-48.18
33475.00	Average	H	-	-	-63.91	-3.63	-9.54	29.92	68.23	-38.31
33475.00	Peak	H	-	-	-53.04	-3.63	-9.54	40.79	88.23	-47.44

Table 7-235. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 441 of 636

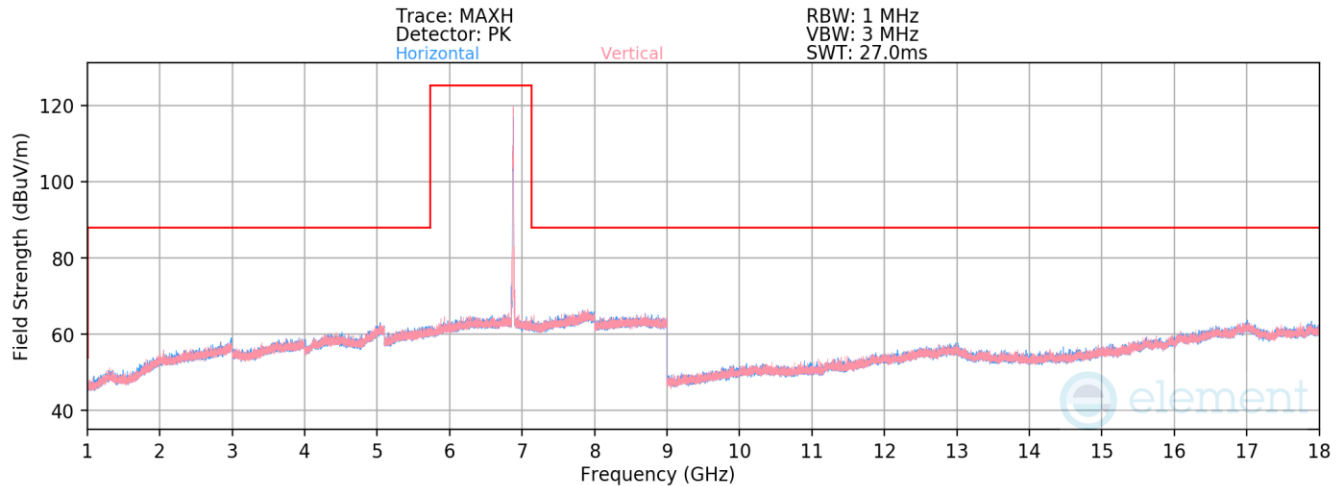


Plot 7-1385. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 185 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875 MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-85.34	22.63	44.29	68.23	-23.94
13750.00	Peak	H	-	-	-74.45	22.63	55.18	88.23	-33.05

Table 7-236. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 442 of 636

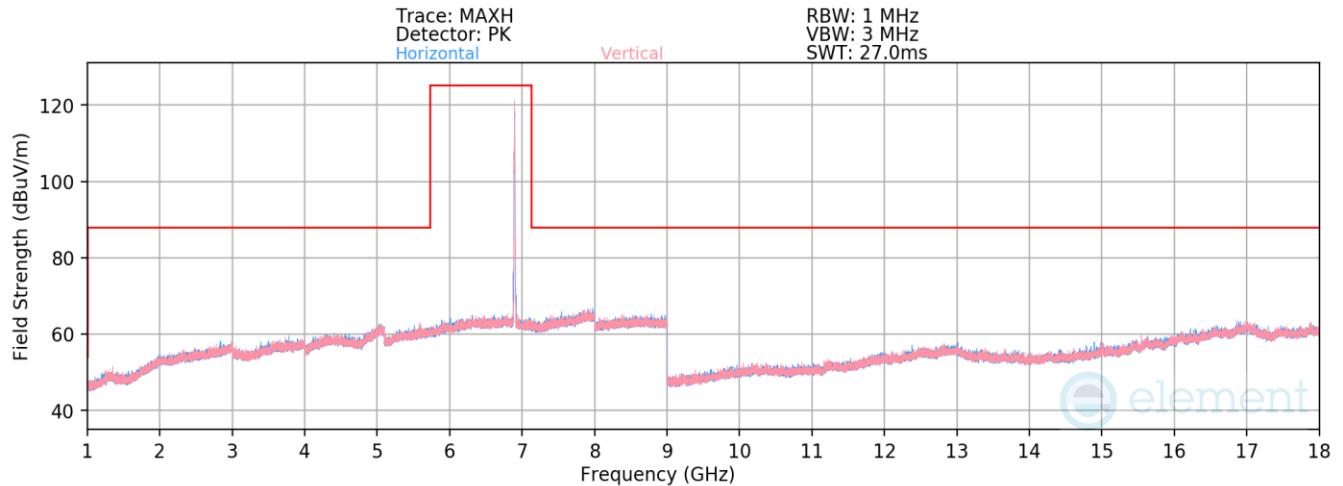


Plot 7-1386. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 189 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895 MHz
Channel: 189


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-85.58	23.05	44.47	68.23	-23.76
13790.00	Peak	V	-	-	-73.99	23.05	56.06	88.23	-32.17

Table 7-237. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 443 of 636

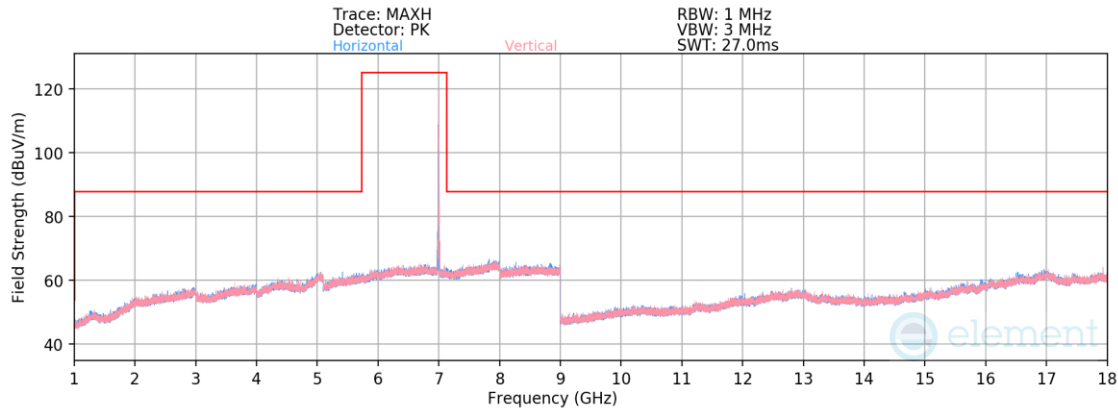

Plot 7-1387. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 209 – RU26)

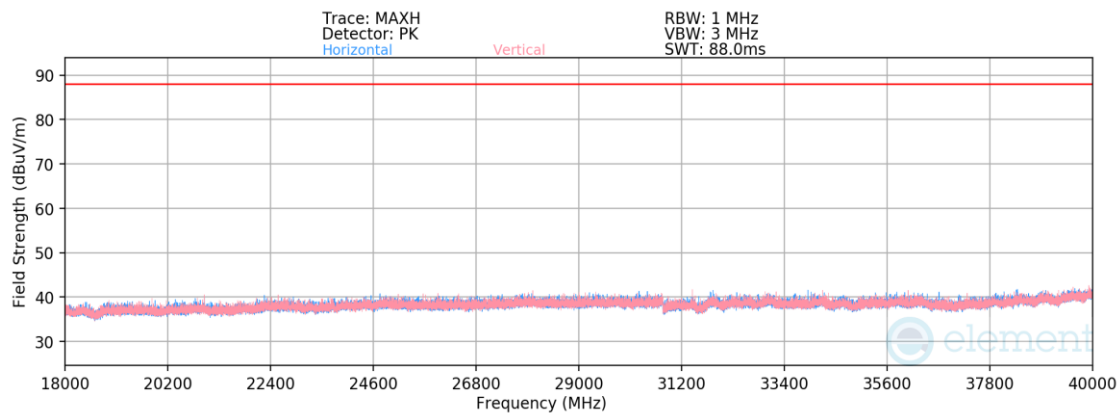


Plot 7-1388. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 209 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995 MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	H	-	-	-86.06	22.91	0.00	43.84	68.23	-24.39
13990.00	Peak	H	-	-	-74.93	22.91	0.00	54.98	88.23	-33.25
* 20985.00	Average	H	-	-	-63.00	-5.84	-9.54	28.62	53.98	-25.36
* 20985.00	Peak	H	-	-	-51.84	-5.84	-9.54	39.77	73.98	-34.21
27980.00	Average	H	-	-	-65.21	-2.86	-9.54	29.39	68.23	-38.84
27980.00	Peak	H	-	-	-53.87	-2.86	-9.54	40.72	88.23	-47.51
34975.00	Average	H	-	-	-63.18	-4.85	-9.54	29.43	68.23	-38.80
34975.00	Peak	H	-	-	-51.81	-4.85	-9.54	40.80	88.23	-47.43

Table 7-238. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 444 of 636

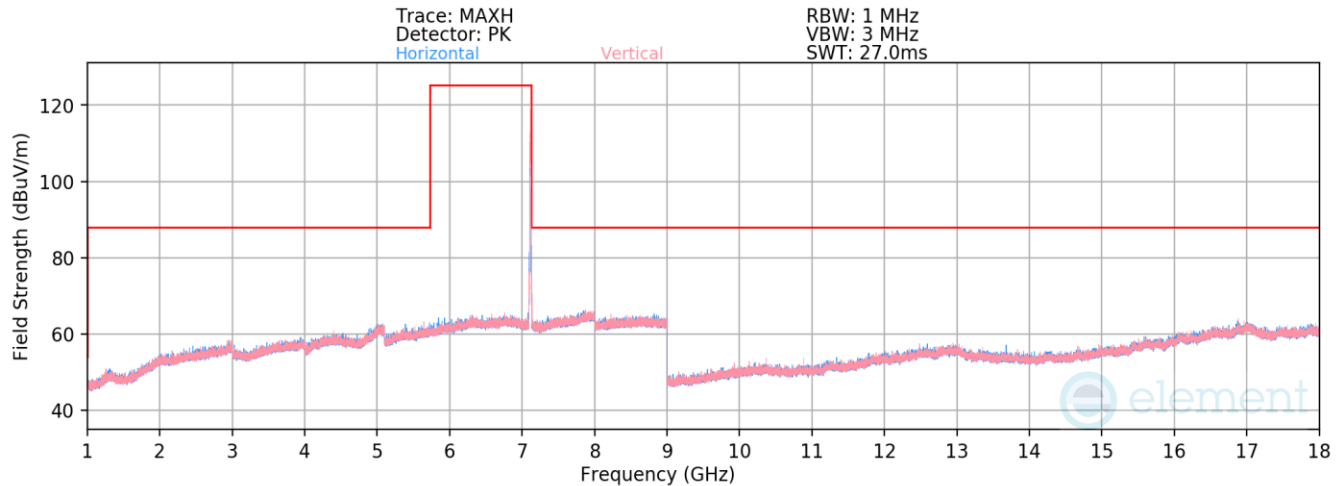

Plot 7-1389. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 229 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095 MHz
Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14190.00	Average	H	-	-	-85.74	23.76	45.02	68.23	-23.21
14190.00	Peak	H	-	-	-74.68	23.76	56.08	88.23	-32.15

Table 7-239. Radiated Spurious Emission Measurements SDM Diversity – RU26

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 445 of 636

RU242

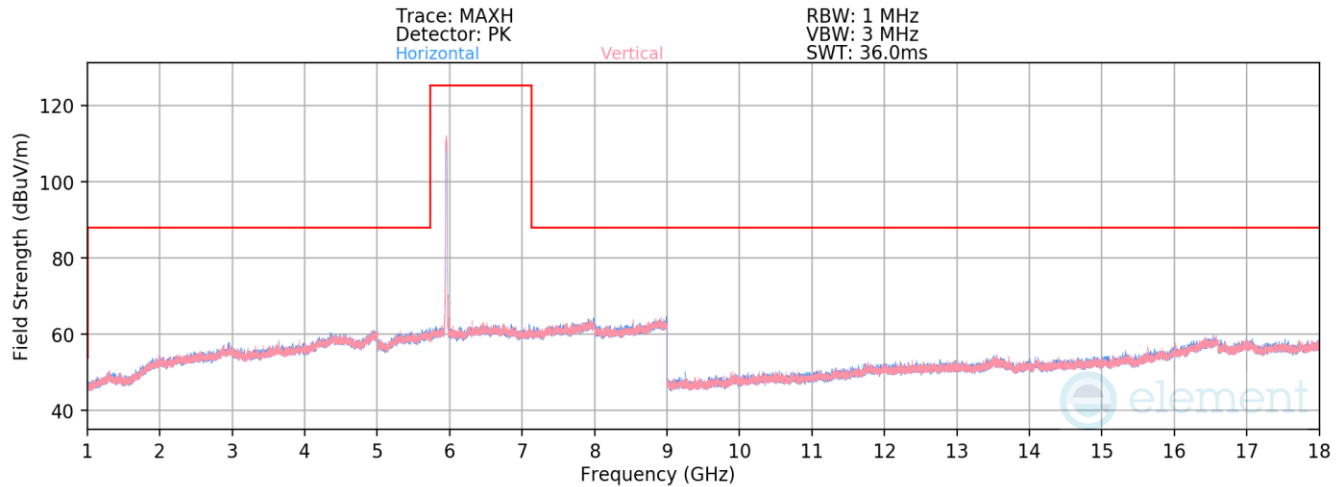


Plot 7-1390. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 1 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955 MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	H	-	-	-83.92	17.44	40.52	53.98	-13.46
* 11910.00	Peak	H	-	-	-73.04	17.44	51.40	73.98	-22.58
* 17865.00	Average	H	-	-	-85.62	25.55	46.92	53.98	-7.06
* 17865.00	Peak	H	-	-	-74.77	25.55	57.78	73.98	-16.20

Table 7-240. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 446 of 636

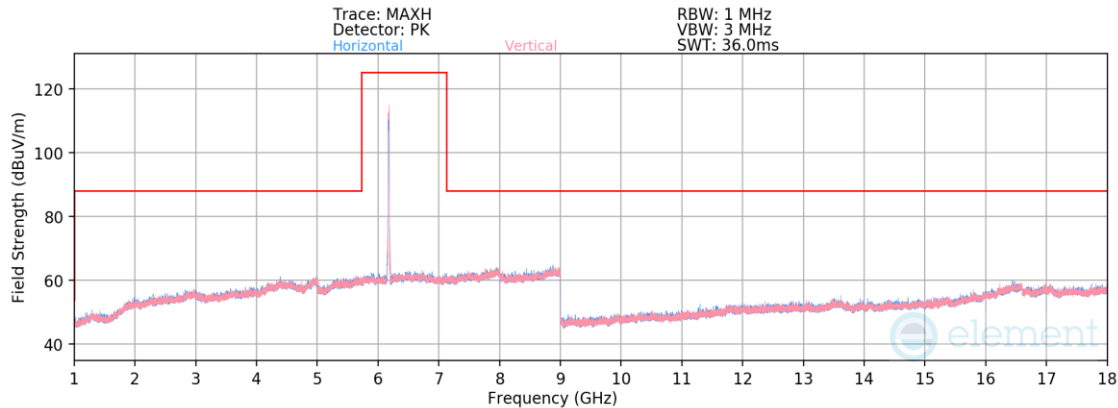

Plot 7-1391. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 45 – RU242)

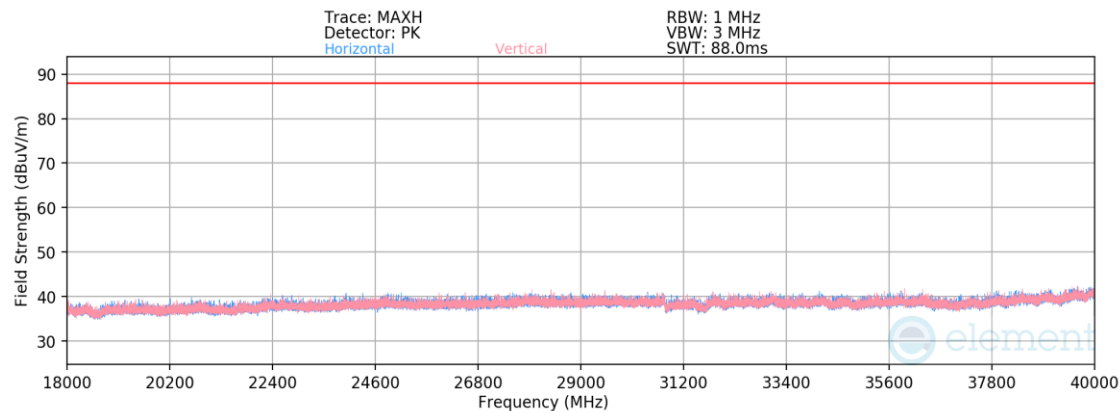


Plot 7-1392. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 45 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175 MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-84.07	18.18	0.00	41.11	53.98	-12.87
* 12350.00	Peak	V	-	-	-72.51	18.18	0.00	52.67	73.98	-21.31
* 18525.00	Average	V			-64.42	-5.54	-9.54	27.50	53.98	-26.48
* 18525.00	Peak	V			-52.45	-5.54	-9.54	39.46	73.98	-34.52
24700.00	Average	V			-63.50	-4.31	-9.54	29.65	68.23	-38.58
24700.00	Peak	V			-52.04	-4.31	-9.54	41.11	88.23	-47.12
30875.00	Average	V			-64.97	-2.76	-9.54	29.74	68.23	-38.49
30875.00	Peak	V			-53.42	-2.76	-9.54	41.29	88.23	-46.94
37050.00	Average	V			-69.17	-4.95	-9.54	23.34	68.23	-44.89
37050.00	Peak	V			-58.37	-4.95	-9.54	34.14	88.23	-54.09

Table 7-241. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 447 of 636

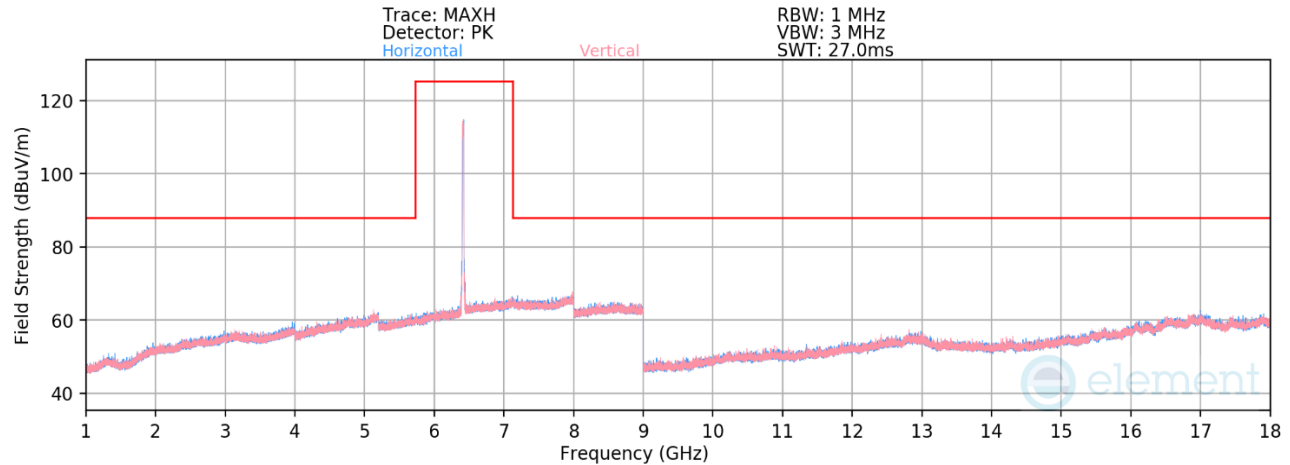


Plot 7-1393. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be – Ch. 93 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.34	18.98	41.64	68.23	-26.59
12830.00	Peak	H	-	-	-73.09	18.98	52.89	88.23	-35.34

Table 7-242. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 448 of 636

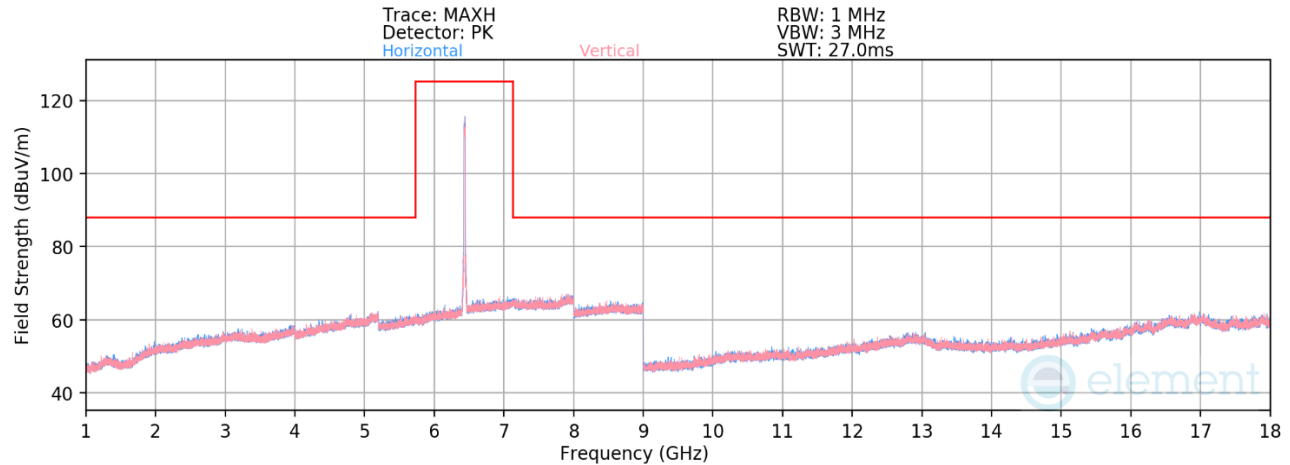

Plot 7-1394. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be – Ch. 97 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435 MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	V	-	-	-84.34	19.02	41.69	68.23	-26.54
12870.00	Peak	V	-	-	-72.94	19.02	53.08	88.23	-35.15


Table 7-243. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 449 of 636

V 12.0 03/03/2026

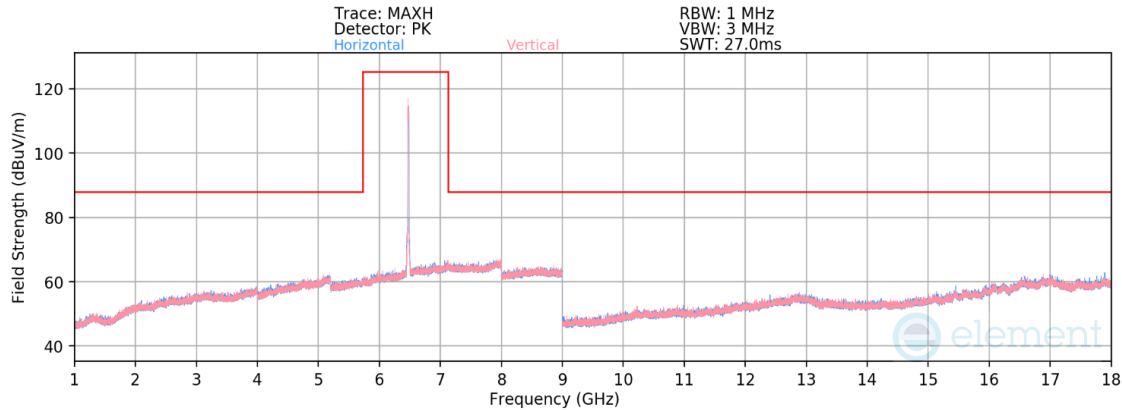

Plot 7-1395. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be – Ch. 105 – RU242)

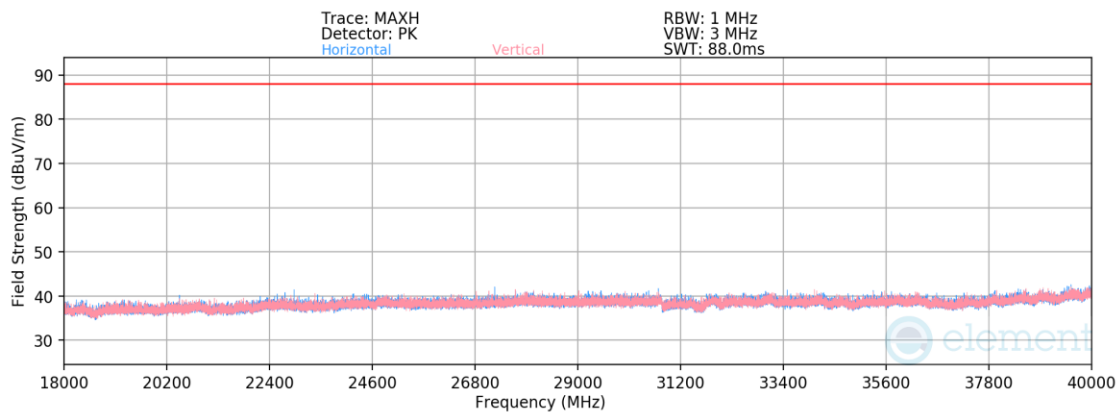


Plot 7-1396. Radiated Spurious Emissions 18-40 GHz CDD Diversity (802.11be – Ch. 105 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475 MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-84.49	19.33	0.00	41.84	68.23	-26.39
12950.00	Peak	V	-	-	-72.74	19.33	0.00	53.59	88.23	-34.64
* 19425.00	Average	V	-	-	-63.02	-5.95	-9.54	28.49	53.98	-25.49
* 19425.00	Peak	V	-	-	-51.75	-5.95	-9.54	39.75	73.98	-34.23
25900.00	Average	V	-	-	-64.18	-4.40	-9.54	28.88	68.23	-39.35
25900.00	Peak	V	-	-	-52.91	-4.45	-9.54	40.10	88.23	-48.13
32375.00	Average	V	-	-	-64.61	-3.36	-9.54	29.48	68.23	-38.75
32375.00	Peak	V	-	-	-53.25	-3.36	-9.54	40.85	88.23	-47.38
* 38850.00	Average	V	-	-	-67.64	-2.32	-9.54	27.51	53.98	-26.47
* 38850.00	Peak	V	-	-	-56.59	-2.32	-9.54	38.55	73.98	-35.43

Table 7-244. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

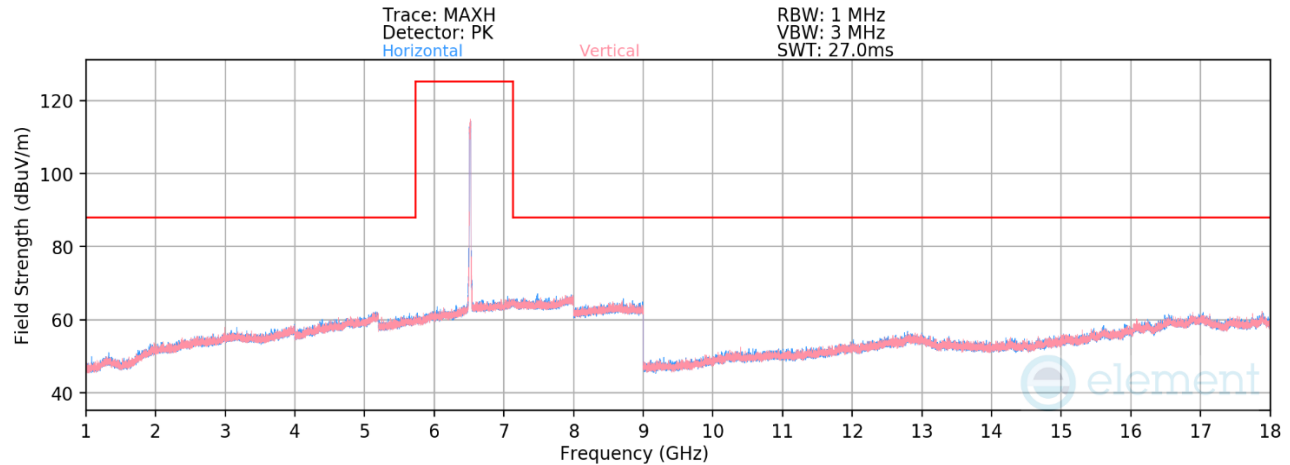

Plot 7-1397. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be – Ch. 113 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515 MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	V	-	-	-84.64	19.29	41.65	68.23	-26.58
13030.00	Peak	V	-	-	-73.19	19.29	53.11	88.23	-35.12

Table 7-245. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 451 of 636

V 12.0 03/03/2026

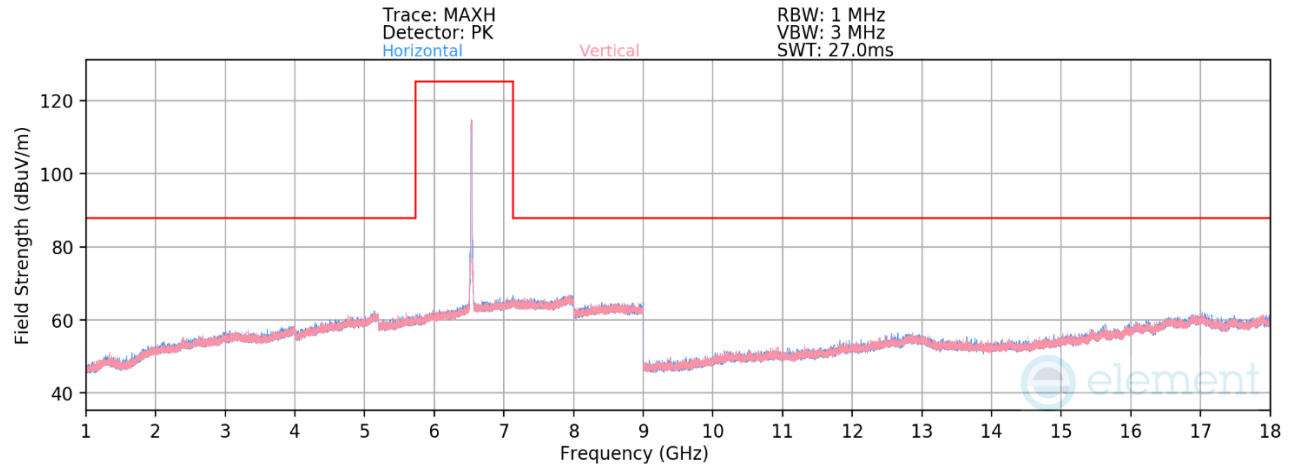


Plot 7-1398. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be – Ch. 117 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535 MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-84.62	19.38	41.75	68.23	-26.48
13070.00	Peak	H	-	-	-72.89	19.38	53.49	88.23	-34.74

Table 7-246. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 452 of 636

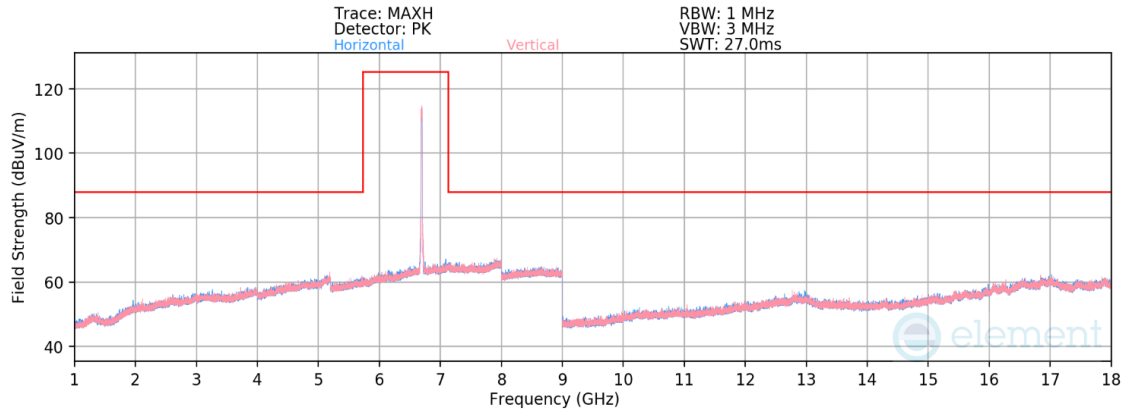

Plot 7-1399. Radiated Spurious Emissions above 1 GHz CDD Diversity (802.11be – Ch. 149 – RU242)

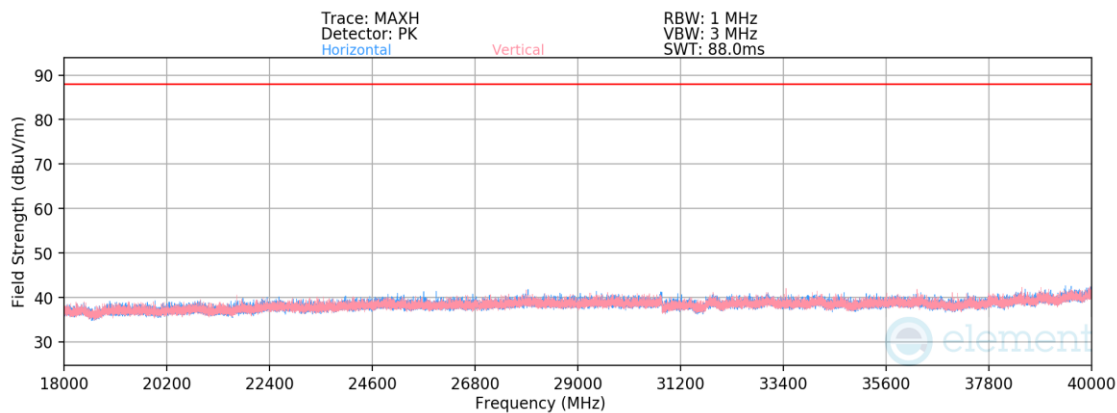


Plot 7-1400. Radiated Spurious Emissions 18-40 GHz CDD Diversity (802.11be – Ch. 149 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695 MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-84.33	19.47	0.00	42.14	53.98	-11.84
* 13390.00	Peak	V	-	-	-72.87	19.47	0.00	53.60	73.98	-20.38
* 20085.00	Average	H	-	-	-63.15	-6.23	-9.54	28.07	53.98	-25.91
* 20085.00	Peak	H	-	-	-52.21	-6.23	-9.54	39.02	73.98	-34.96
26780.00	Average	H	-	-	-64.15	-3.81	-9.54	29.50	68.23	-38.73
26780.00	Peak	H	-	-	-52.62	-3.81	-9.54	41.04	88.23	-47.19
33475.00	Average	H	-	-	-63.90	-3.63	-9.54	29.93	68.23	-38.30
33475.00	Peak	H	-	-	-52.50	-3.63	-9.54	41.33	88.23	-46.90

Table 7-247. Radiated Spurious Emission Measurements CDD Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 453 of 636

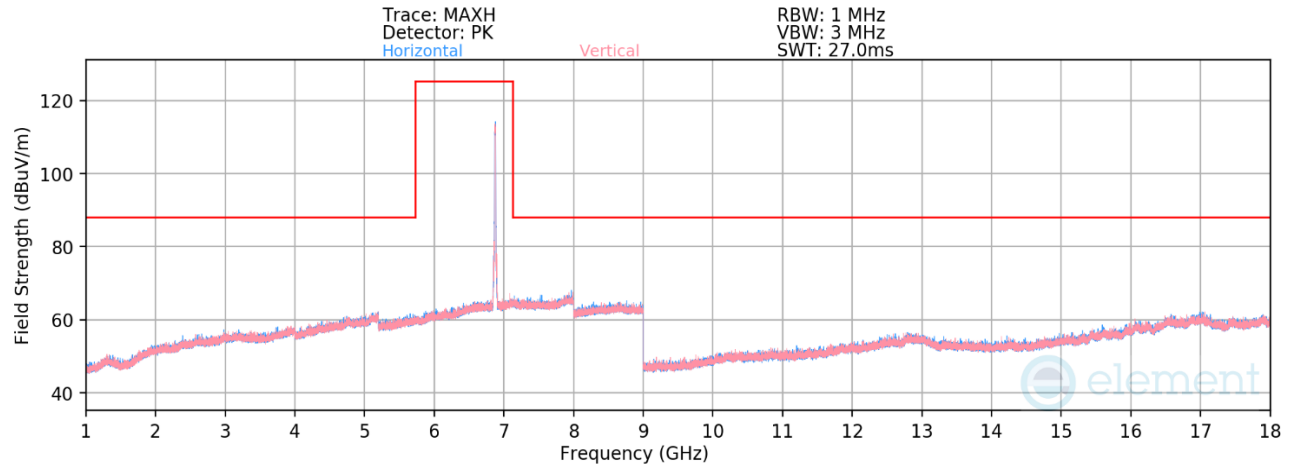

Plot 7-1401. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 185 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875 MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-84.14	19.15	42.01	68.23	-26.22
13750.00	Peak	H	-	-	-72.48	19.15	53.67	88.23	-34.56

Table 7-248. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3595 IC: 579C-A3595		Test Dates: 05/12/2026 - 07/04/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-12-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 454 of 636

V 12.0 03/03/2026