




Plot 7-63 PSD CDD Primary Antenna WF5T (20 MHz BW 802.11a - Ch.149)

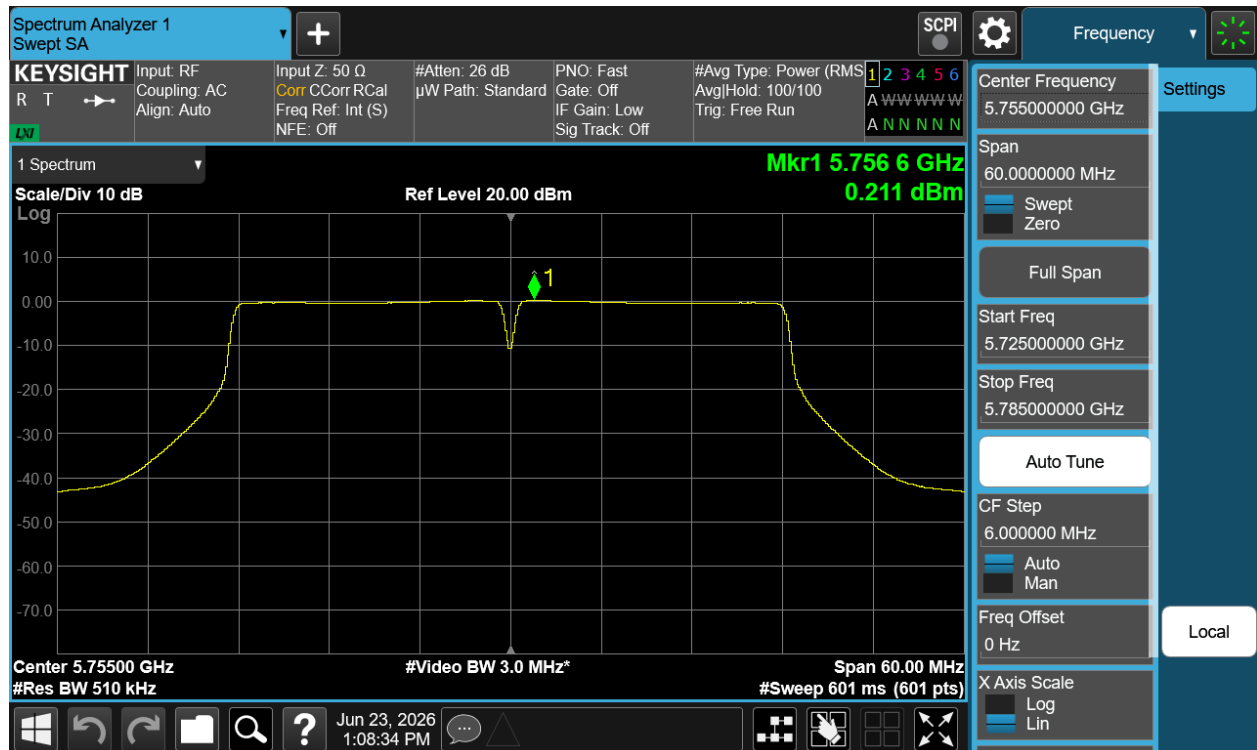


Plot 7-64 PSD CDD Primary Antenna WF5T (40 MHz BW 802.11n - Ch.151)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 102 of 267




Plot 7-65 PSD CDD Primary Antenna WF5T (80 MHz BW 802.11ac - Ch.155)

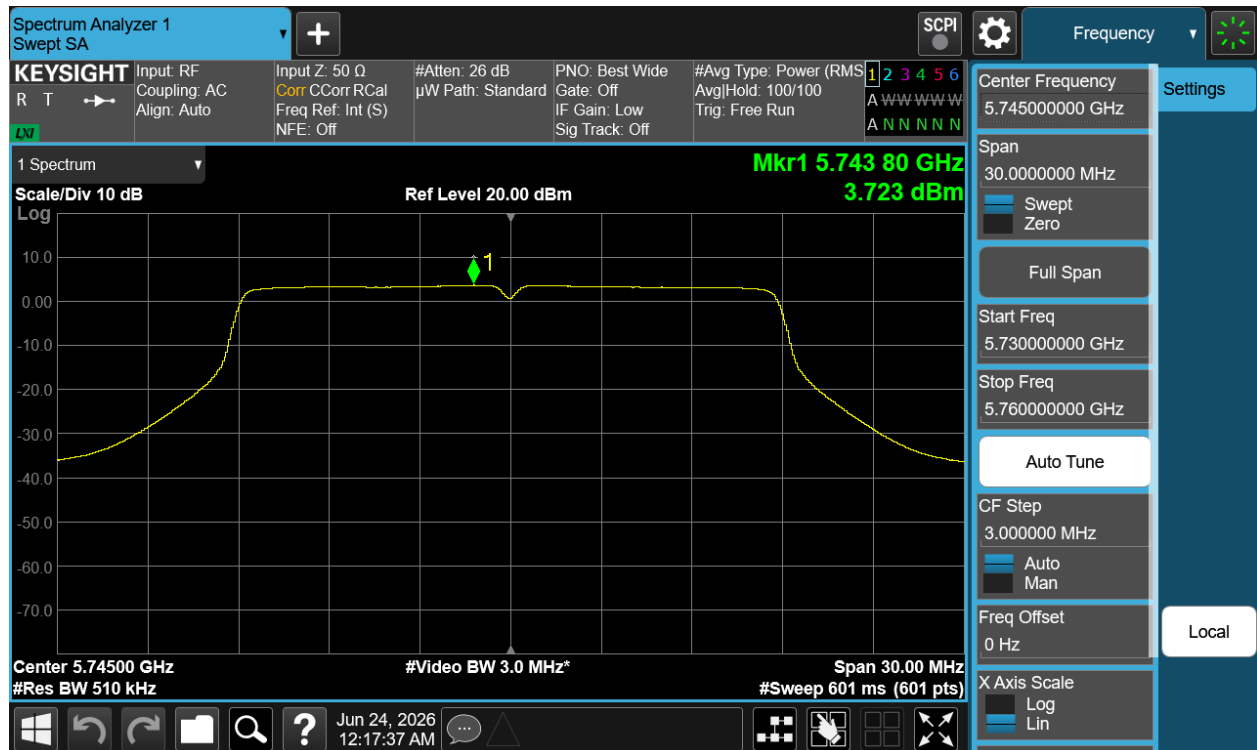


Plot 7-66 PSD CDD Primary Antenna WF5B (20 MHz BW 802.11a - Ch.149)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 103 of 267

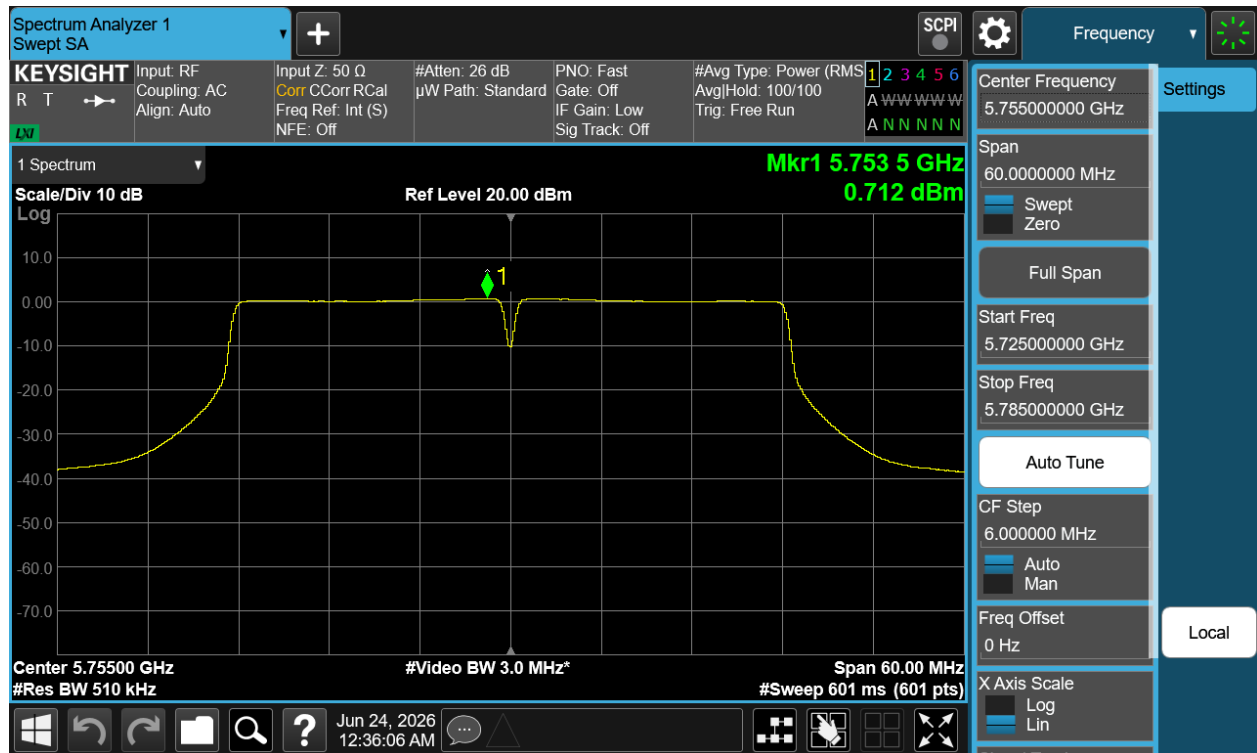

Plot 7-67 PSD CDD Primary Antenna WF5B (40 MHz BW 802.11n - Ch.151)

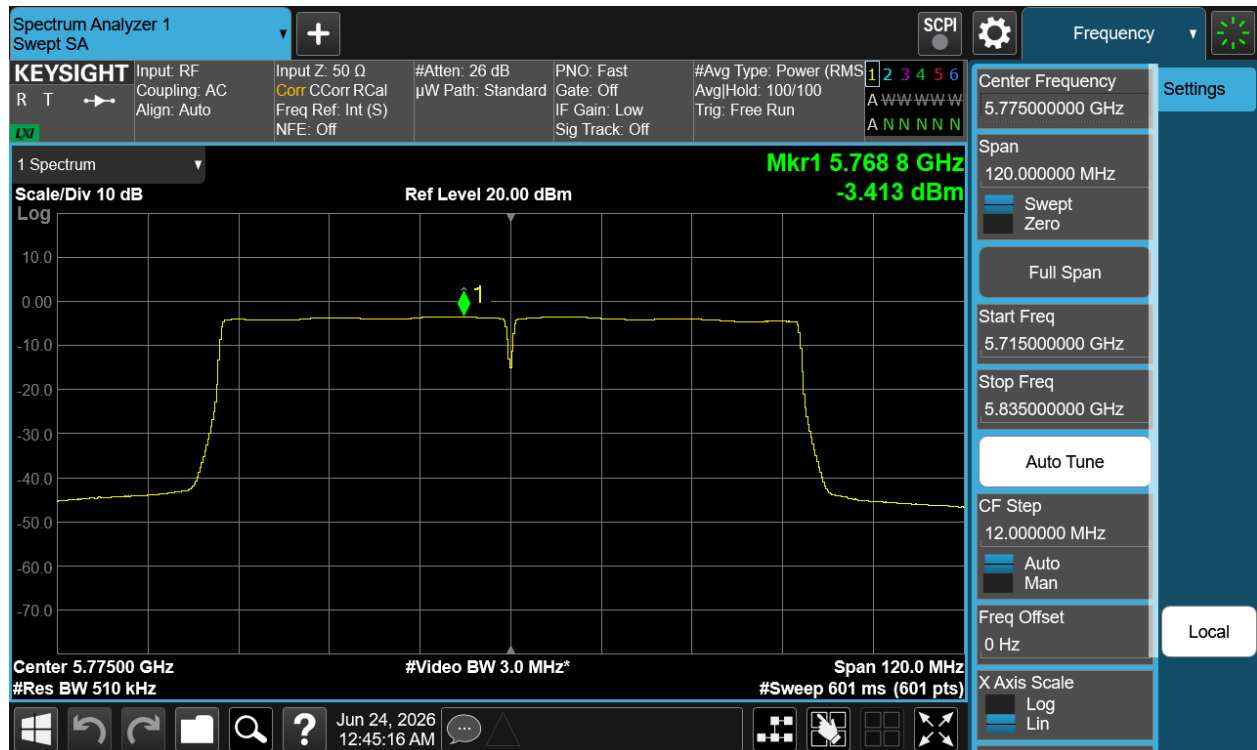


Plot 7-68 PSD CDD Primary Antenna WF5B (80 MHz BW 802.11ac - Ch.155)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 104 of 267


	Frequency [MHz]	Channel No.	802.11 MODE	Mode	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF5B Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directoinal Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	CDD	6Mbps	-3.27	-3.54	-0.39	6.51	6.12	10.0	-3.88
	5200	40	a	CDD	6Mbps	-2.99	-2.42	0.31	6.51	6.82	10.0	-3.18
	5240	48	a	CDD	36Mbps	-3.08	-2.76	0.09	6.51	6.60	10.0	-3.40
	5180	36	n (20 MHz)	SDM	MCS5	-0.44	-0.48	2.55	3.50	6.05	10.0	-3.95
	5200	40	n (20 MHz)	SDM	MCS3	0.57	0.40	3.50	3.50	7.00	10.0	-3.00
	5240	48	n (20 MHz)	SDM	MCS3	0.48	0.78	3.64	3.50	7.14	10.0	-2.86
	5180	36	be (SU) (20 MHz)	SDM	MCS0	-0.54	-0.34	2.57	3.50	6.07	10.0	-3.93
	5200	40	be (SU) (20 MHz)	SDM	MCS3	0.58	0.57	3.58	3.50	7.09	10.0	-2.91
	5240	48	be (SU) (20 MHz)	SDM	MCS0	0.17	0.50	3.35	3.50	6.85	10.0	-3.15
	5190	38	n (40 MHz)	SDM	MCS0	-1.29	-1.68	1.53	3.50	5.03	10.0	-4.97
	5230	46	n (40 MHz)	SDM	MCS0	-0.81	-0.68	2.27	3.50	5.77	10.0	-4.23
	5190	38	be (SU) (40 MHz)	SDM	MCS0	-2.01	-2.35	0.83	3.50	4.34	10.0	-5.66
	5230	46	be (SU) (40 MHz)	SDM	MCS3	-1.03	-0.88	2.06	3.50	5.56	10.0	-4.44
	5210	42	ac (80 MHz)	CDD	MCS0	-6.01	-5.66	-2.82	6.51	3.69	10.0	-6.31
Band 1/2	5210	42	be (SU) (80 MHz)	CDD	MCS0	-6.02	-5.74	-2.87	6.51	3.64	10.0	-6.36
	5250	50	ac (160 MHz)	CDD	MCS0	-8.66	-8.47	-5.55	7.82	2.26	10.0	-7.74
	5250	50	be (SU) (160 MHz)	CDD	MCS0	-8.71	-8.49	-5.59	7.82	2.22	10.0	-7.78

Table 7-109. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD/SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 105 of 267

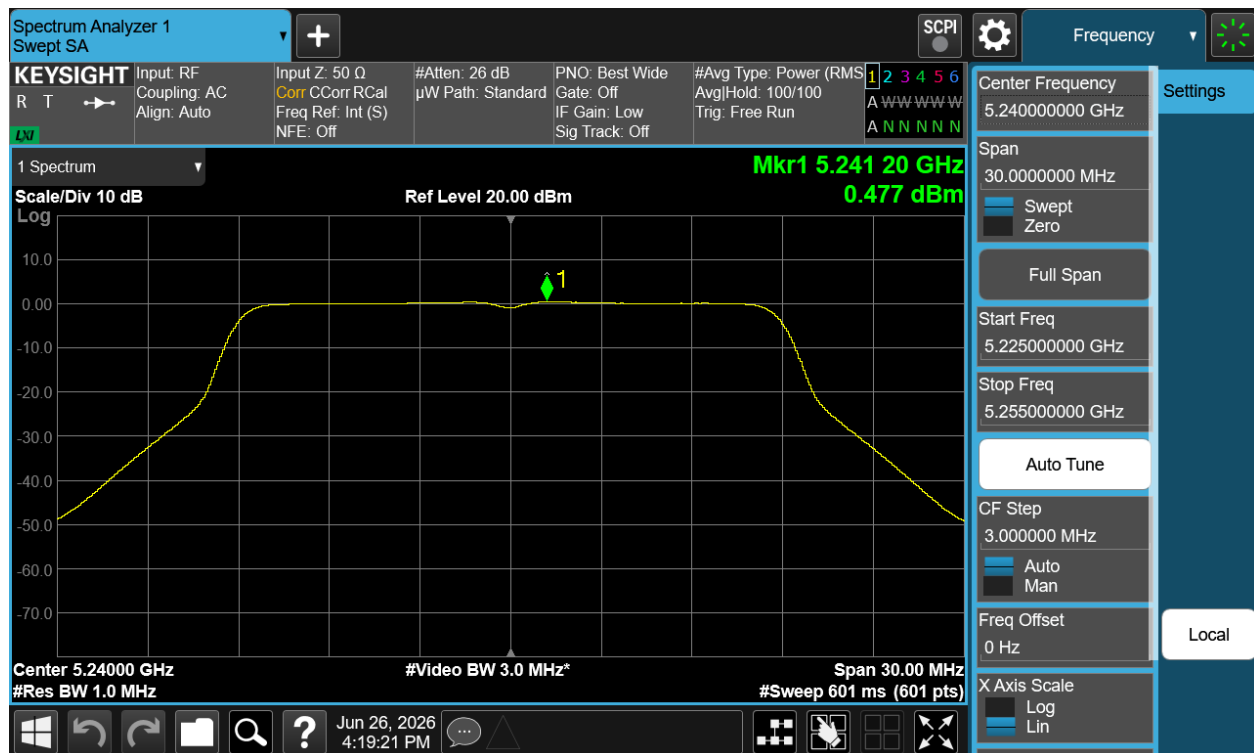


Plot 7-69 PSD SDM Primary Antenna WF5T (20 MHz BW 802.11n - Ch.48)

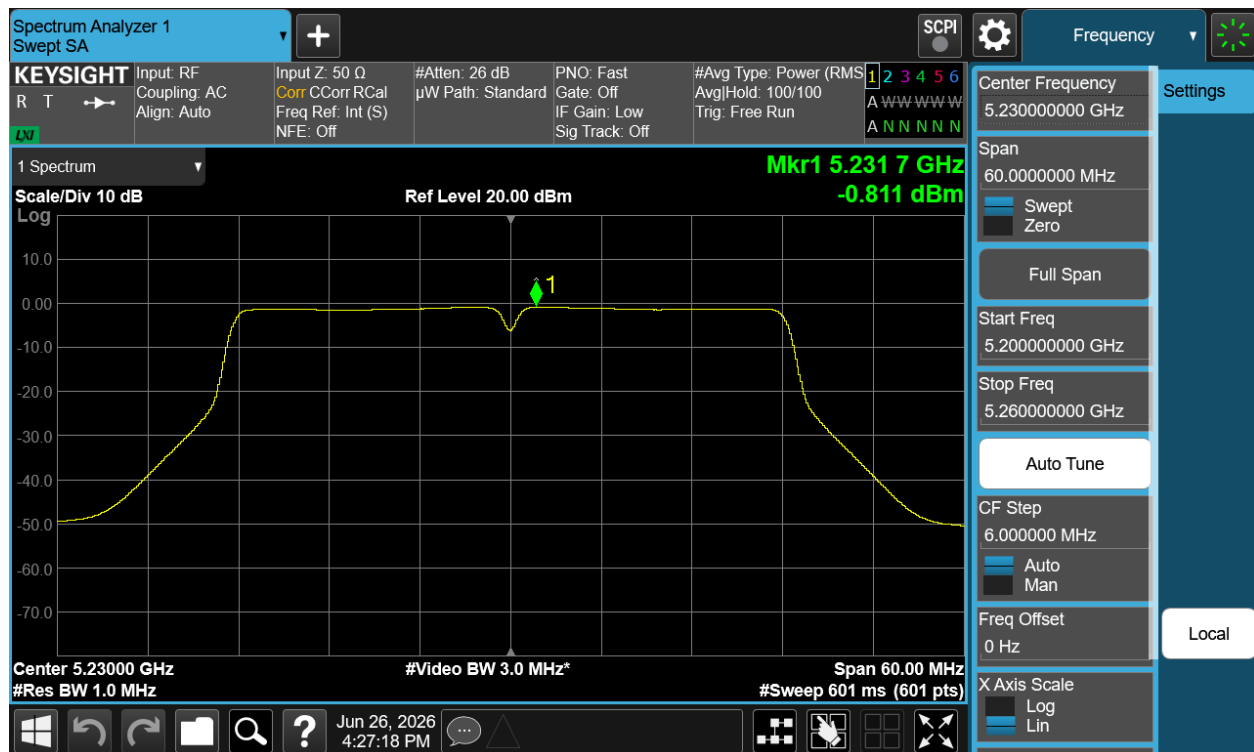


Plot 7-70 PSD SDM Primary Antenna WF5T (40 MHz BW 802.11n - Ch.46)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 106 of 267

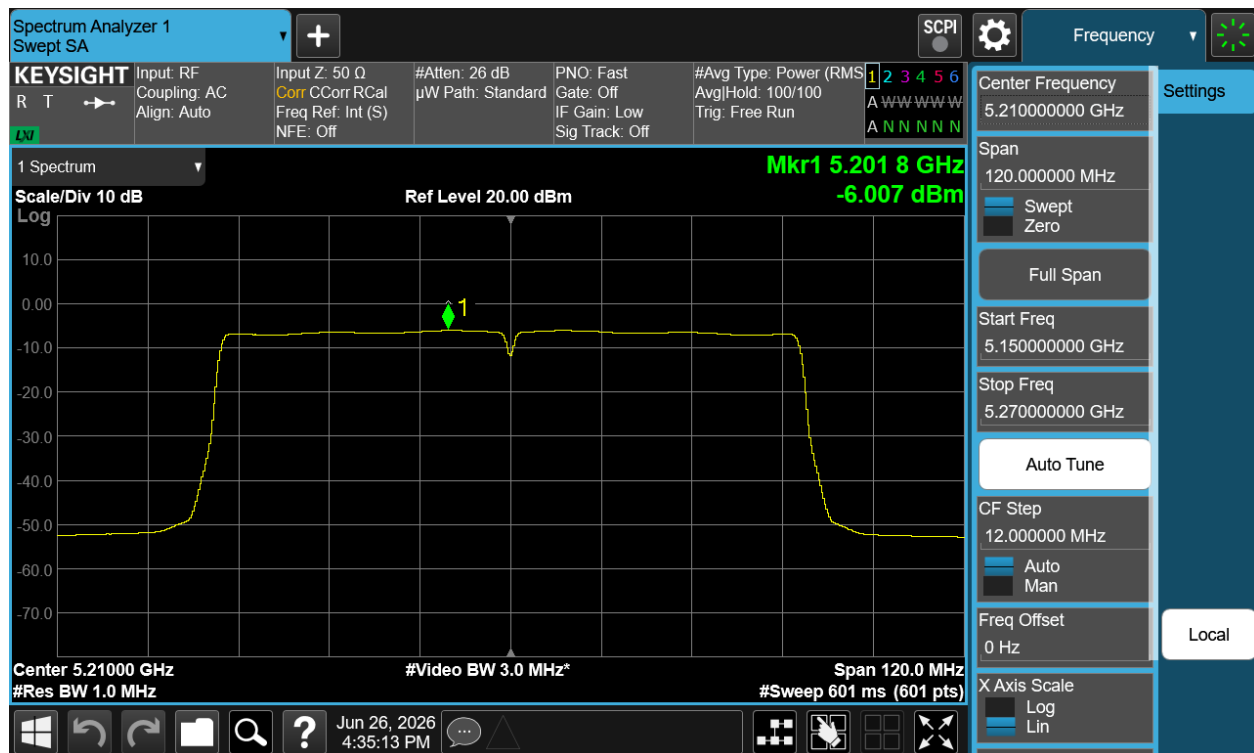


Plot 7-71 PSD CDD Primary Antenna WF5T (80 MHz BW 802.11ac - Ch.42)

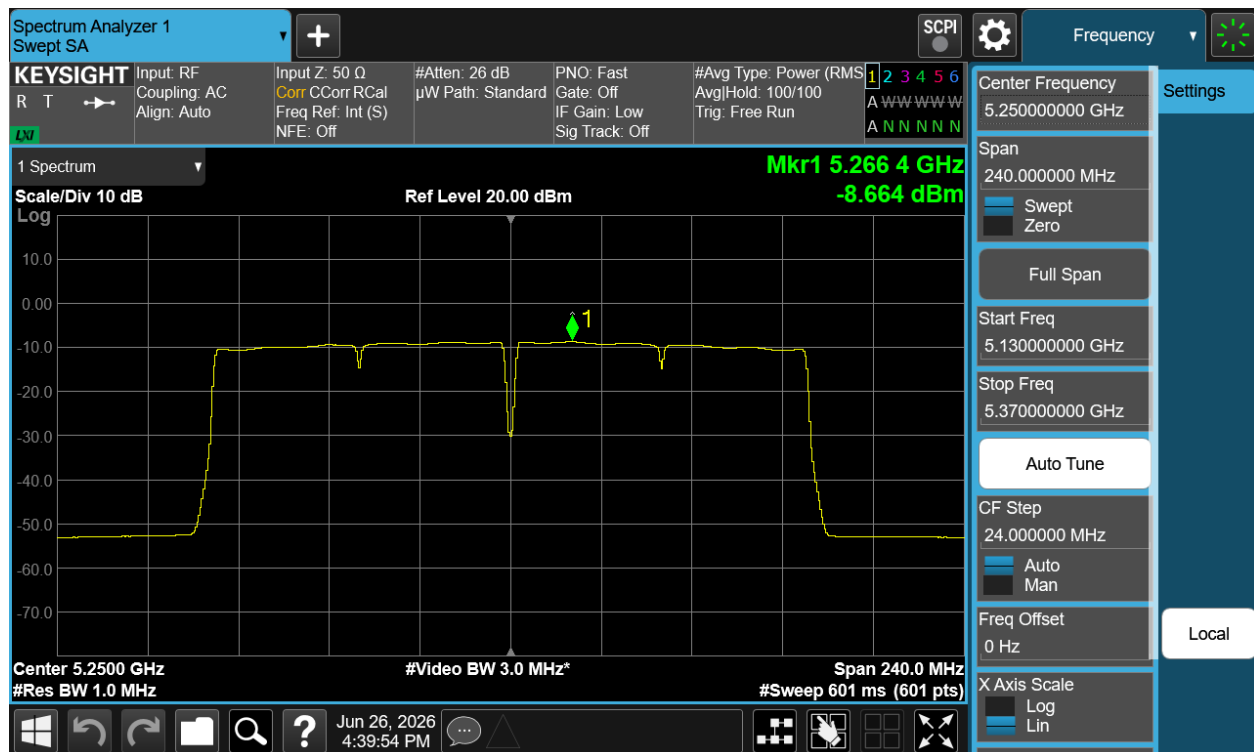


Plot 7-72 PSD CDD Primary Antenna WF5T (160 MHz BW 802.11ac - Ch.50)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 107 of 267

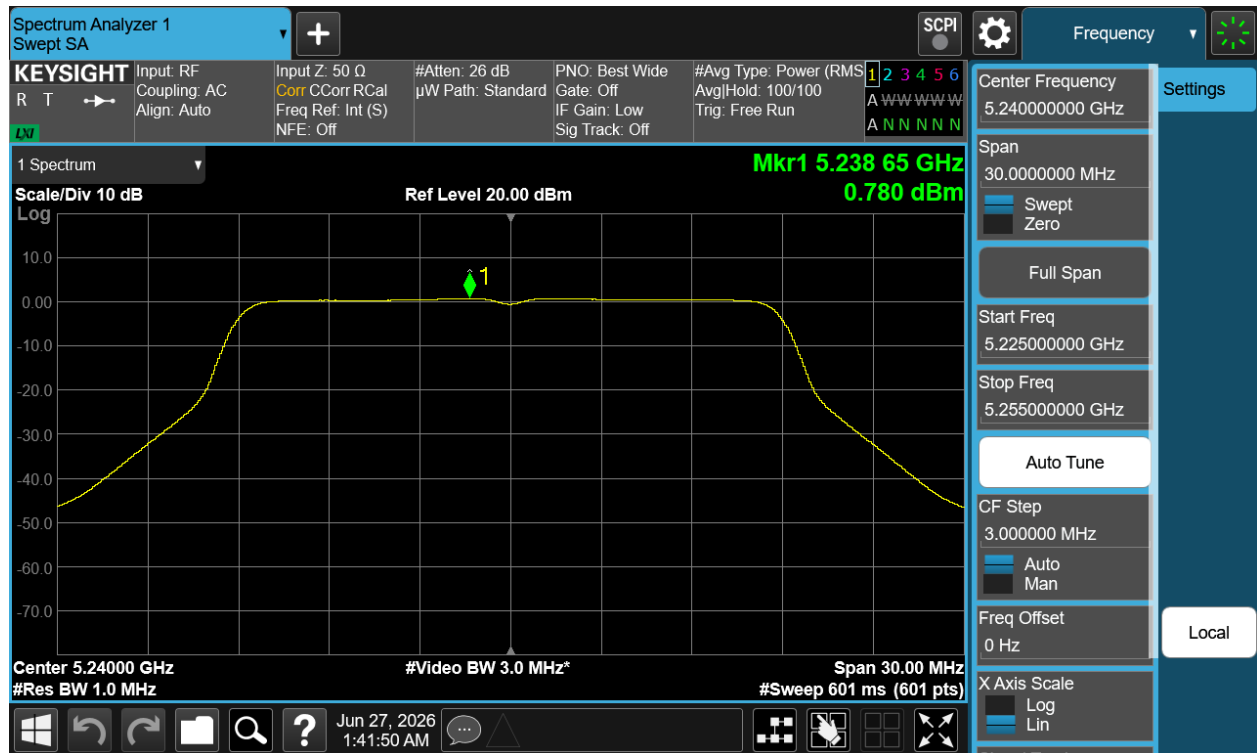


Plot 7-73 PSD SDM Primary Antenna WF5B (20 MHz BW 802.11n - Ch.48)

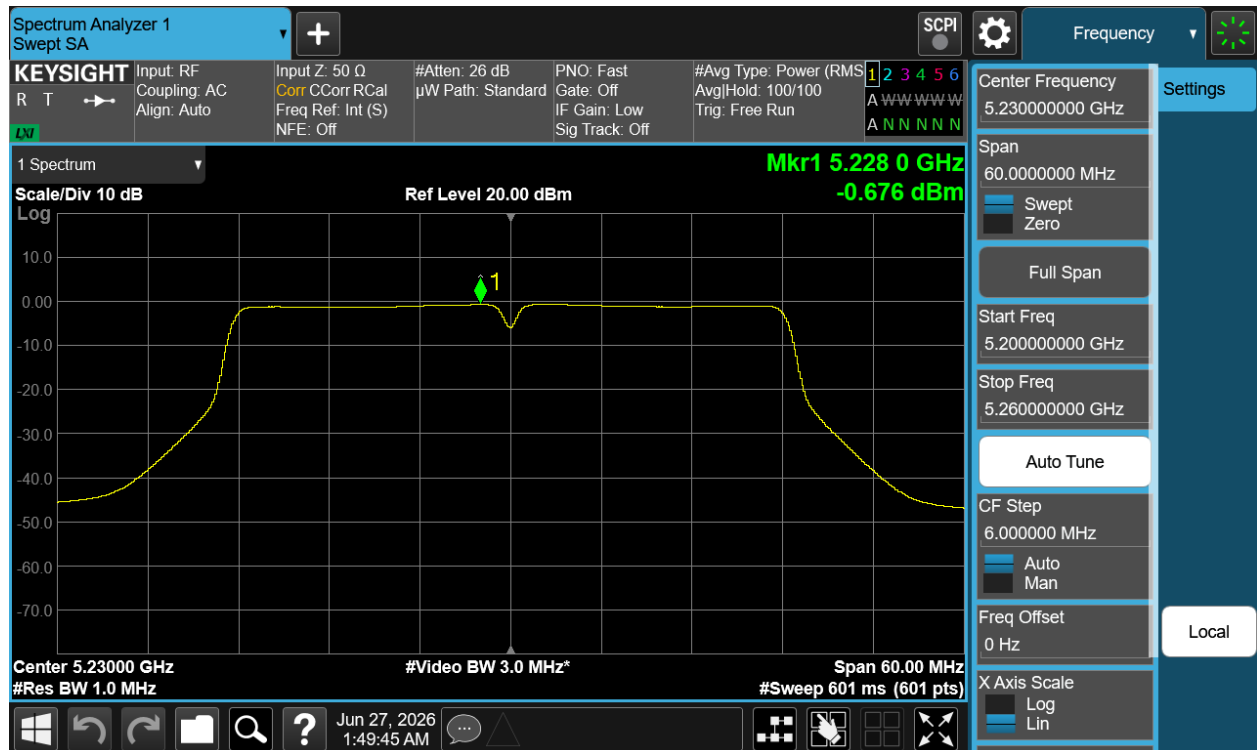


Plot 7-74 PSD SDM Primary Antenna WF5B (40 MHz BW 802.11n - Ch.46)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 108 of 267

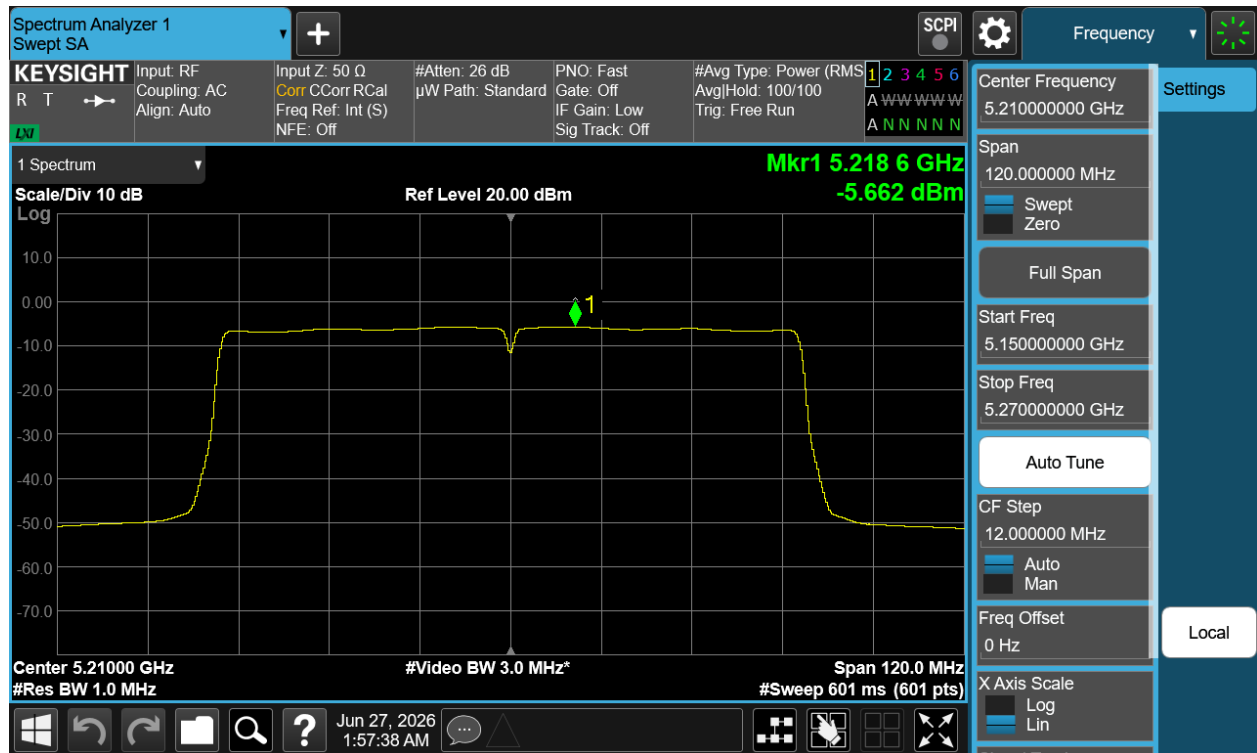

Plot 7-75 PSD CDD Primary Antenna WF5B (80 MHz BW 802.11ac - Ch.42)

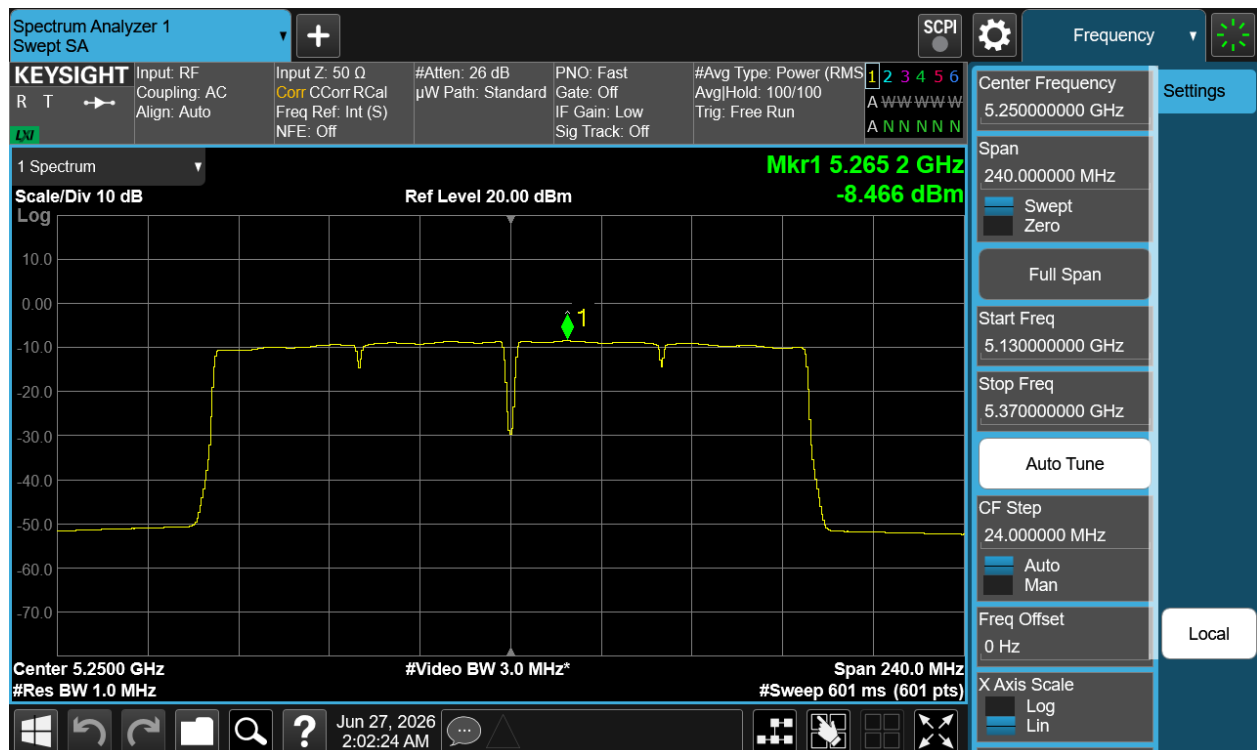

Plot 7-76 PSD CDD Primary Antenna WF5B (160 MHz BW 802.11ac - Ch.50)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 109 of 267

7.5.5 Summed CDD/SDM Diversity Power Spectral Density Measurements


	Frequency [MHz]	Channel No.	802.11 MODE	Mode	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF8 Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	CDD	36Mbps	3.31	3.44	6.38	11.00	-4.62
	5200	40	a	CDD	36Mbps	4.40	4.27	7.34	11.00	-3.66
	5240	48	a	CDD	18Mbps	4.78	4.97	7.89	11.00	-3.11
	5180	36	n (20 MHz)	CDD	MCS5	3.31	3.75	6.55	11.00	-4.45
	5200	40	n (20 MHz)	SDM	MCS5	4.38	4.58	7.49	11.00	-3.51
	5240	48	n (20 MHz)	SDM	MCS3	4.77	5.25	8.03	11.00	-2.97
	5180	36	be (SU) (20 MHz)	CDD	MCS0	2.99	3.30	6.16	11.00	-4.84
	5200	40	be (SU) (20 MHz)	CDD	MCS0	4.11	3.99	7.06	11.00	-3.94
	5240	48	be (SU) (20 MHz)	SDM	MCS3	4.71	4.76	7.74	11.00	-3.26
	5190	38	n (40 MHz)	CDD	MCS0	-1.60	-1.49	1.47	11.00	-9.53
	5230	46	n (40 MHz)	CDD	MCS3	2.72	2.95	5.85	11.00	-5.15
	5190	38	be (SU) (40 MHz)	CDD	MCS0	-2.34	-2.23	0.72	11.00	-10.28
Band 1/2	5230	46	be (SU) (40 MHz)	CDD	MCS0	2.53	2.78	5.66	11.00	-5.34
	5210	42	ac (80 MHz)	CDD	MCS0	-5.98	-5.87	-2.91	11.00	-13.91
Band 2A	5210	42	be (SU) (80 MHz)	CDD	MCS0	-6.08	-5.89	-2.97	11.00	-13.97
	5250	50	ac (160 MHz)	CDD	MCS0	-8.69	-8.66	-5.66	11.00	-16.66
	5250	50	be (SU) (160 MHz)	CDD	MCS0	-8.74	-8.70	-5.71	11.00	-16.71
	5260	52	a	CDD	6Mbps	4.28	4.27	7.28	11.00	-3.72
	5300	60	a	CDD	36Mbps	4.11	3.95	7.04	11.00	-3.96
	5320	64	a	CDD	18Mbps	3.68	3.28	6.49	11.00	-4.51
	5260	52	n (20 MHz)	SDM	MCS5	4.68	4.85	7.77	11.00	-3.23
	5300	60	n (20 MHz)	SDM	MCS0	3.85	3.80	6.83	11.00	-4.17
	5320	64	n (20 MHz)	SDM	MCS3	3.42	3.91	6.68	11.00	-4.32
	5260	52	be (SU) (20 MHz)	SDM	MCS3	4.64	5.12	7.89	11.00	-3.11
	5300	60	be (SU) (20 MHz)	SDM	MCS3	3.06	3.60	6.35	11.00	-4.65
	5320	64	be (SU) (20 MHz)	SDM	MCS0	3.17	3.64	6.42	11.00	-4.58
	5270	54	n (40 MHz)	SDM	MCS0	3.02	3.09	6.07	11.00	-4.93
	5310	62	n (40 MHz)	CDD	MCS0	-1.10	-1.24	1.84	11.00	-9.16
	5270	54	be (SU) (40 MHz)	SDM	MCS0	2.80	2.91	5.87	11.00	-5.13
	5310	62	be (SU) (40 MHz)	CDD	MCS3	-2.37	-2.64	0.51	11.00	-10.49
	5290	58	ac (80 MHz)	CDD	MCS0	-5.15	-5.04	-2.08	11.00	-13.08
	5290	58	be (SU) (80 MHz)	CDD	MCS0	-5.19	-4.99	-2.08	11.00	-13.08
Band 2C	5500	100	a	CDD	18Mbps	4.02	3.70	6.87	11.00	-4.13
	5580	116	a	CDD	36Mbps	4.95	4.63	7.80	11.00	-3.20
	5720	144	a	CDD	36Mbps	4.78	4.46	7.63	11.00	-3.37
	5500	100	n (20 MHz)	SDM	MCS0	3.47	4.12	6.82	11.00	-4.18
	5580	116	n (20 MHz)	SDM	MCS5	4.85	5.23	8.05	11.00	-2.95
	5720	144	n (20 MHz)	SDM	MCS5	4.69	5.17	7.95	11.00	-3.05
	5500	100	be (SU) (20 MHz)	SDM	MCS0	3.17	3.83	6.52	11.00	-4.48
	5580	116	be (SU) (20 MHz)	SDM	MCS0	4.80	5.46	8.16	11.00	-2.84
	5720	144	be (SU) (20 MHz)	SDM	MCS3	4.66	5.50	8.11	11.00	-2.89
	5510	102	n (40 MHz)	CDD	MCS0	-1.30	-0.71	2.01	11.00	-8.99
	5550	110	n (40 MHz)	SDM	MCS0	2.74	2.94	5.85	11.00	-5.15
	5590	118	n (40 MHz)	SDM	MCS5	3.18	3.88	6.55	11.00	-4.45
	5670	134	n (40 MHz)	CDD	MCS0	2.56	2.66	5.62	11.00	-5.38
	5710	142	n (40 MHz)	CDD	MCS5	3.47	3.63	6.56	11.00	-4.44
	5510	102	be (SU) (40 MHz)	CDD	MCS0	-2.01	-1.05	1.51	11.00	-9.49
	5550	110	be (SU) (40 MHz)	SDM	MCS0	2.57	2.80	5.70	11.00	-5.30
	5590	118	be (SU) (40 MHz)	SDM	MCS3	3.22	3.64	6.44	11.00	-4.56
	5670	134	be (SU) (40 MHz)	CDD	MCS0	2.39	2.48	5.44	11.00	-5.56
	5710	142	be (SU) (40 MHz)	CDD	MCS0	3.06	3.44	6.27	11.00	-4.73
	5530	106	ac (80 MHz)	CDD	MCS0	-5.83	-5.61	-2.70	11.00	-13.70
	5610	122	ac (80 MHz)	CDD	MCS0	0.05	0.27	3.17	11.00	-7.83
	5690	138	ac (80 MHz)	CDD	MCS5	-0.11	0.33	3.13	11.00	-7.87
	5530	106	be (SU) (80 MHz)	CDD	MCS0	-5.62	-5.70	-2.65	11.00	-13.65
	5610	122	be (SU) (80 MHz)	CDD	MCS0	-0.44	-0.24	2.67	11.00	-8.33
	5690	138	be (SU) (80 MHz)	CDD	MCS3	0.11	0.15	3.14	11.00	-7.86
	5570	114	ac (160 MHz)	CDD	MCS0	-9.25	-9.02	-6.12	11.00	-17.12
	5570	114	be (SU) (160 MHz)	CDD	MCS0	-9.54	-9.37	-6.44	11.00	-17.44

Table 7-110. Bands 1, 2A, 2C CDD/SDM Diversity Power Spectral Density Measurements

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 110 of 267

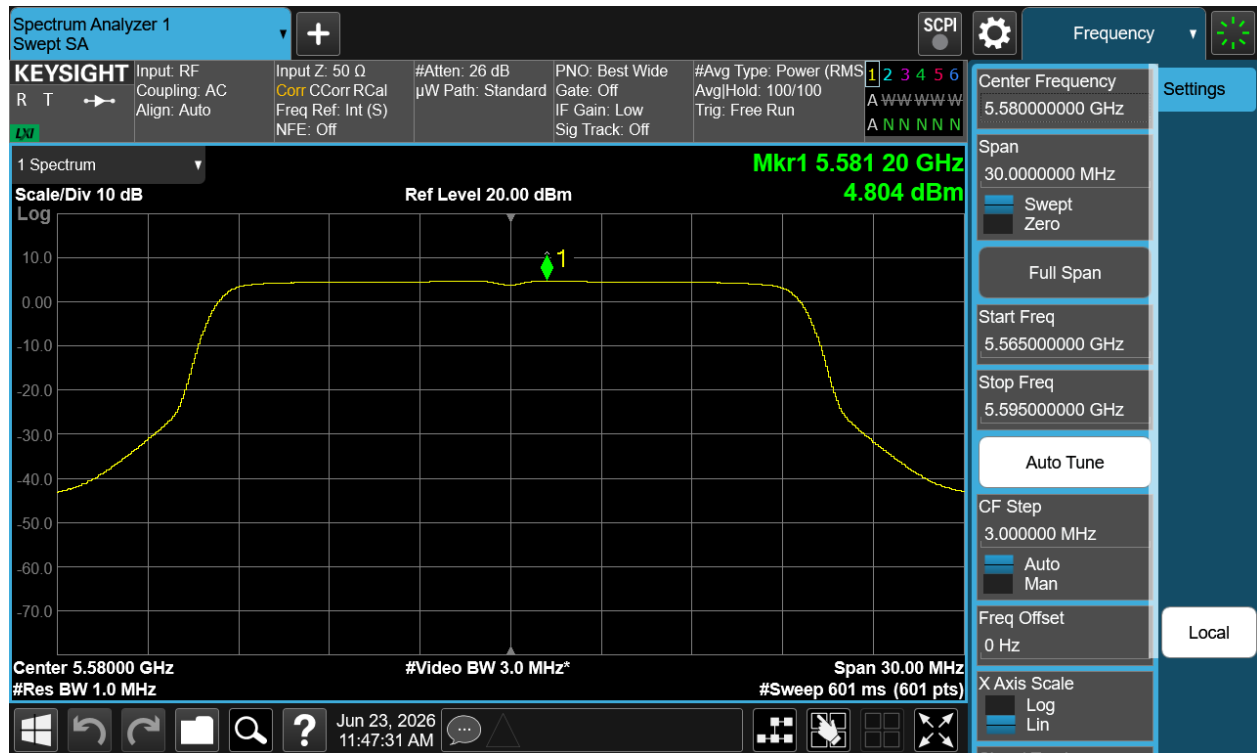


Plot 7-77 PSD SDM Diversity Antenna WF5T (20 MHz BW 802.11be(SU) - Ch.116)

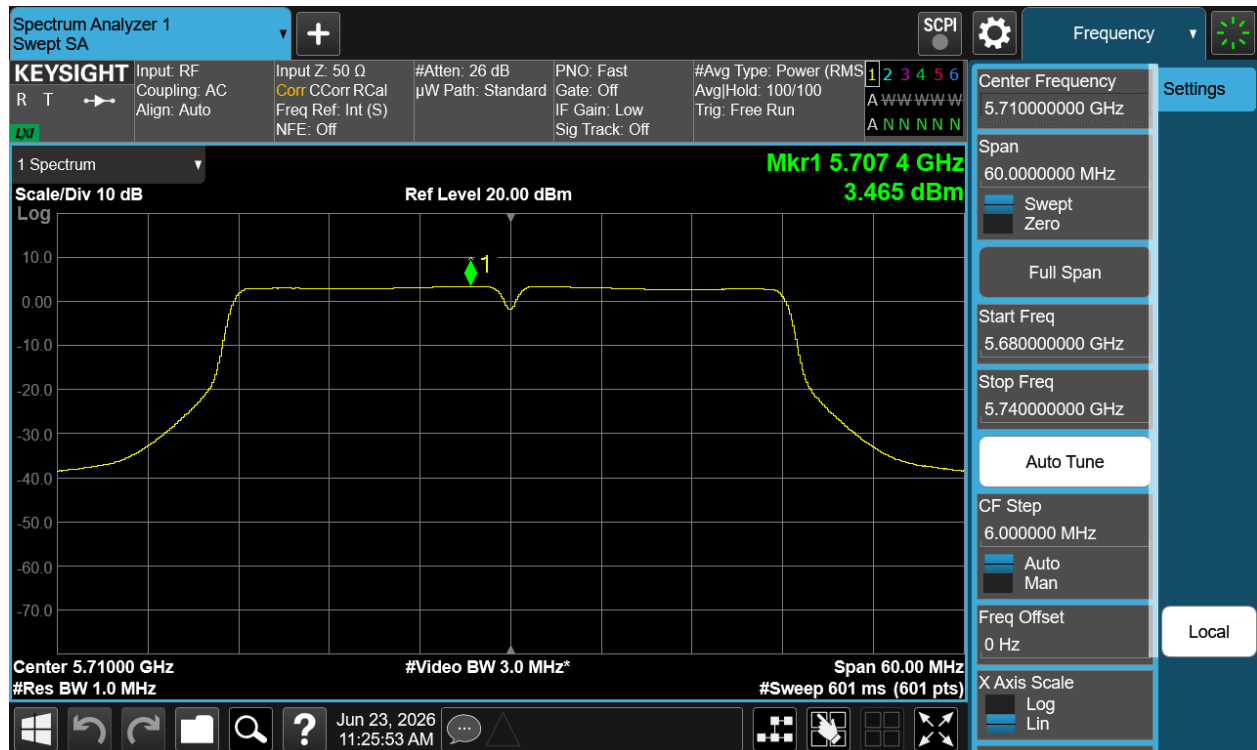


Plot 7-78 PSD CDD Diversity Antenna WF5T (40 MHz BW 802.11n - Ch.142)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 111 of 267

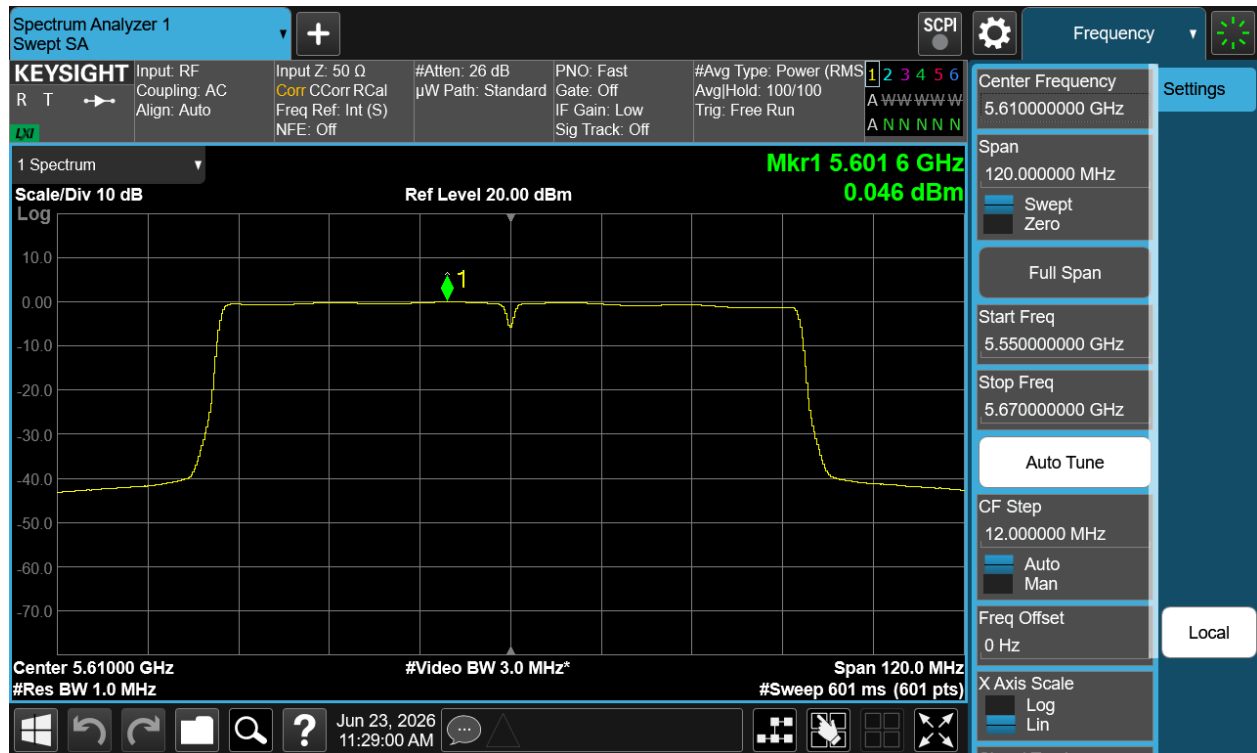


Plot 7-79 PSD CDD Diversity Antenna WF5T (80 MHz BW 802.11ac - Ch.122)

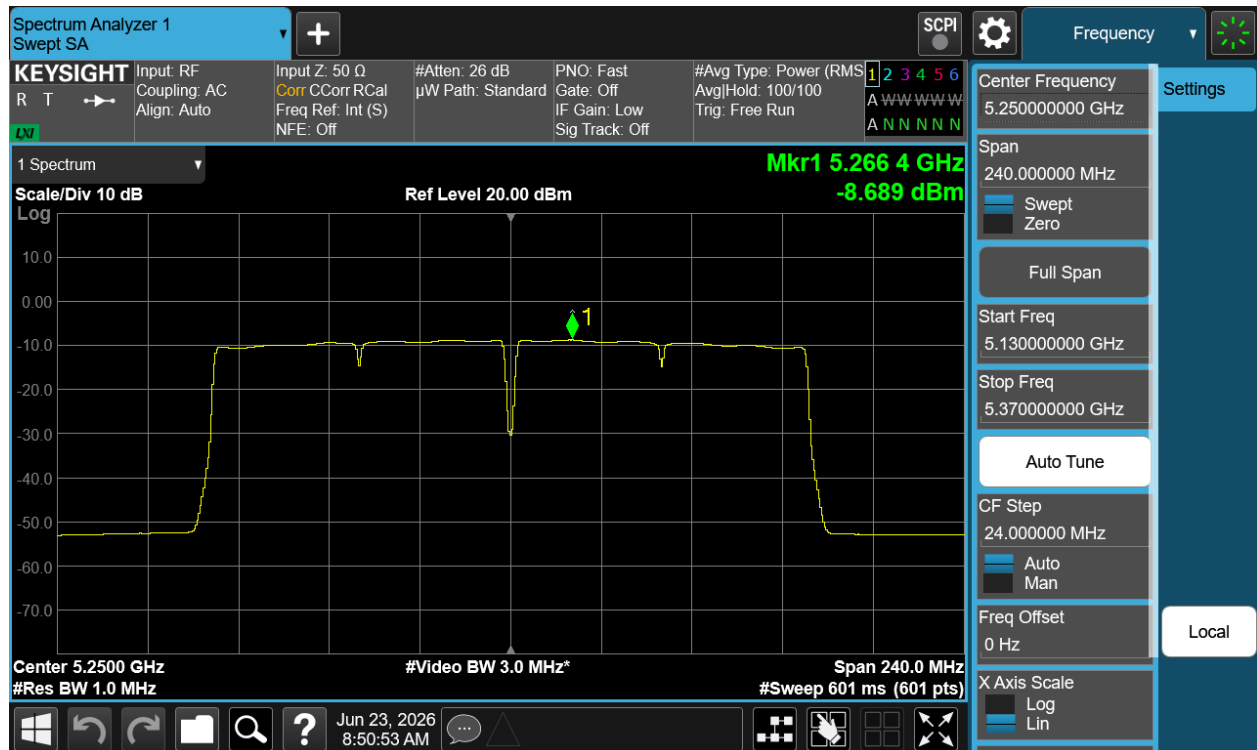


Plot 7-80 PSD CDD Diversity Antenna WF5T (160 MHz BW 802.11ac - Ch.50)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 112 of 267

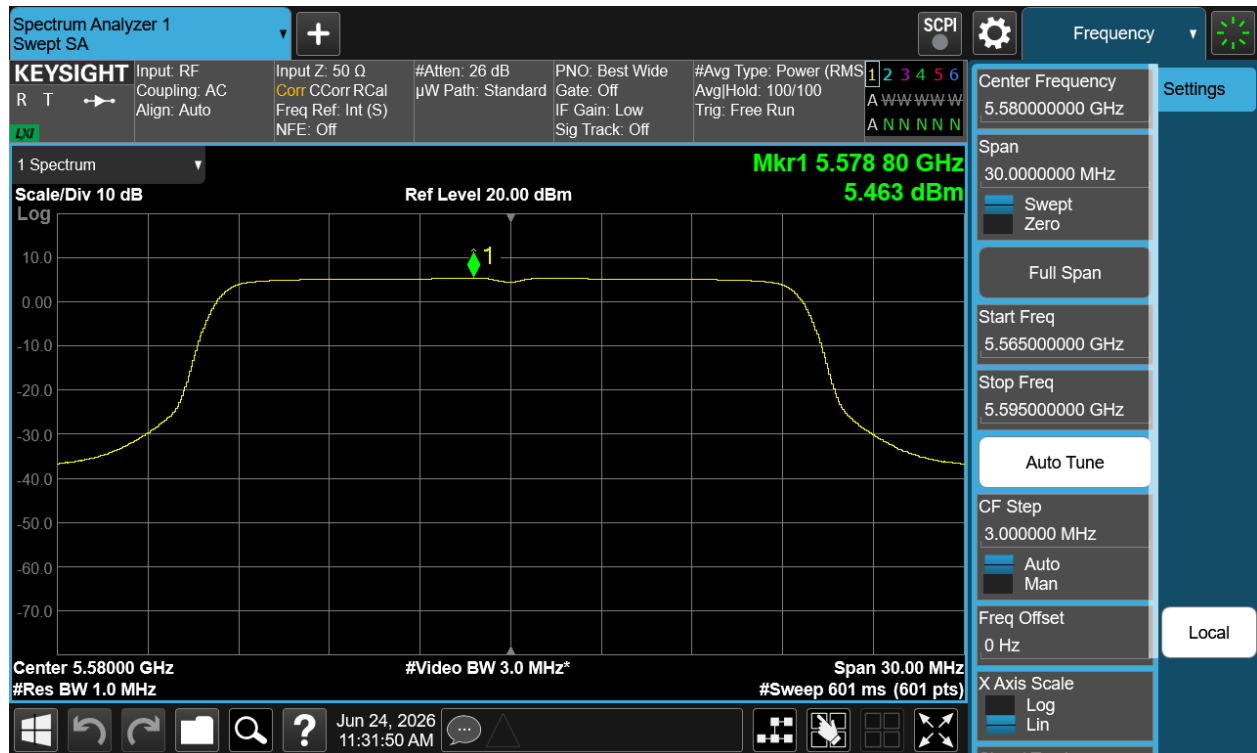


Plot 7-81 PSD SDM Diversity Antenna WF8 (20 MHz BW 802.11be(SU) - Ch.116)

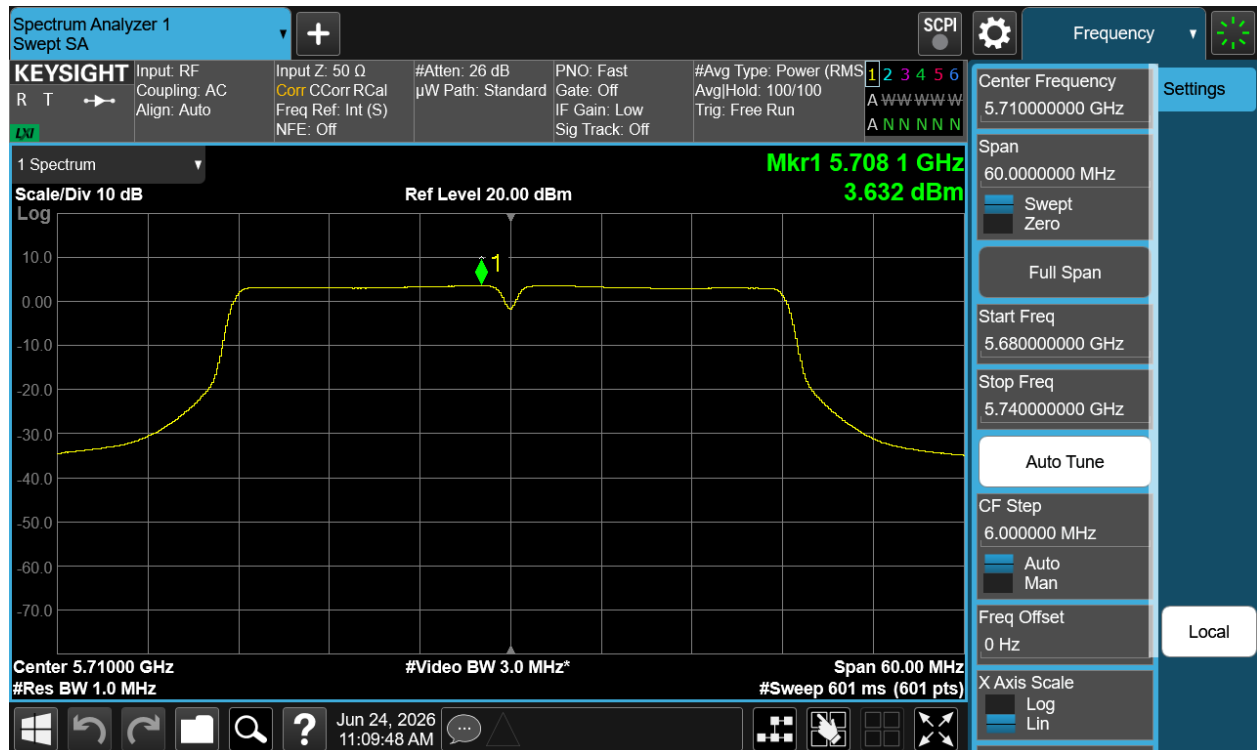


Plot 7-82 PSD CDD Diversity Antenna WF8 (40 MHz BW 802.11n - Ch.142)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 113 of 267

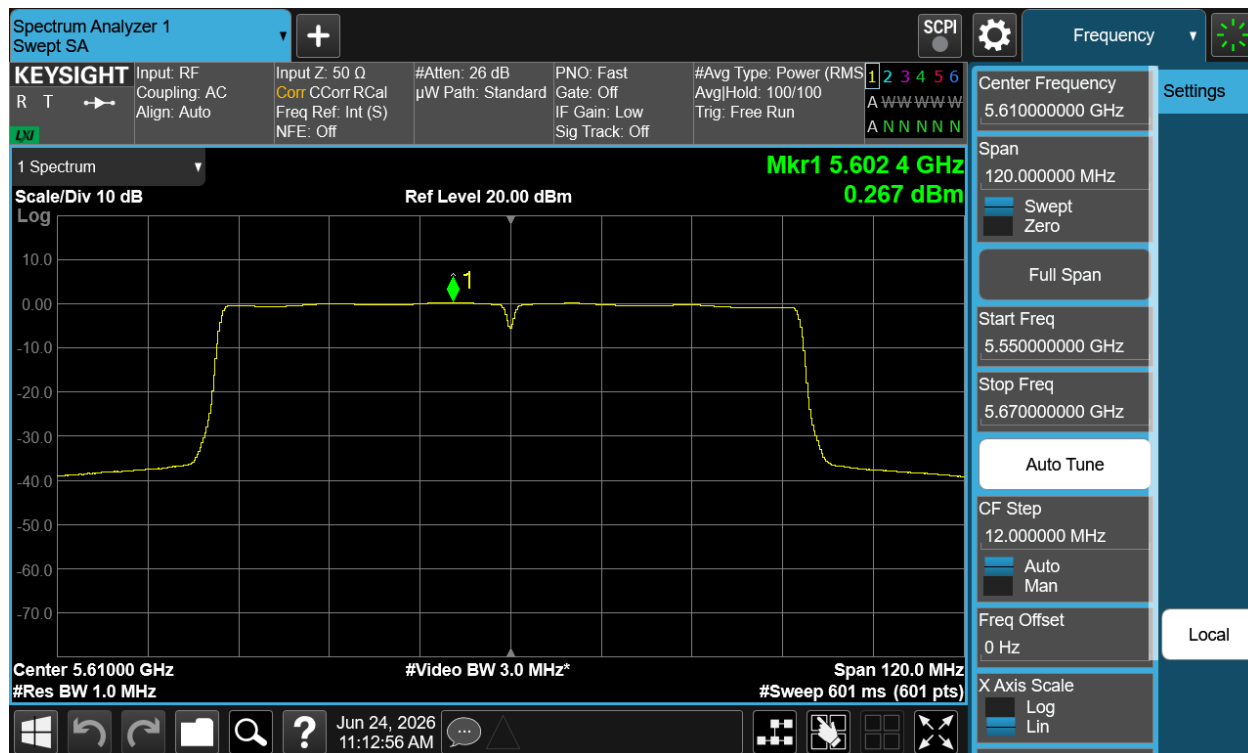

Plot 7-83 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11ac - Ch.122)

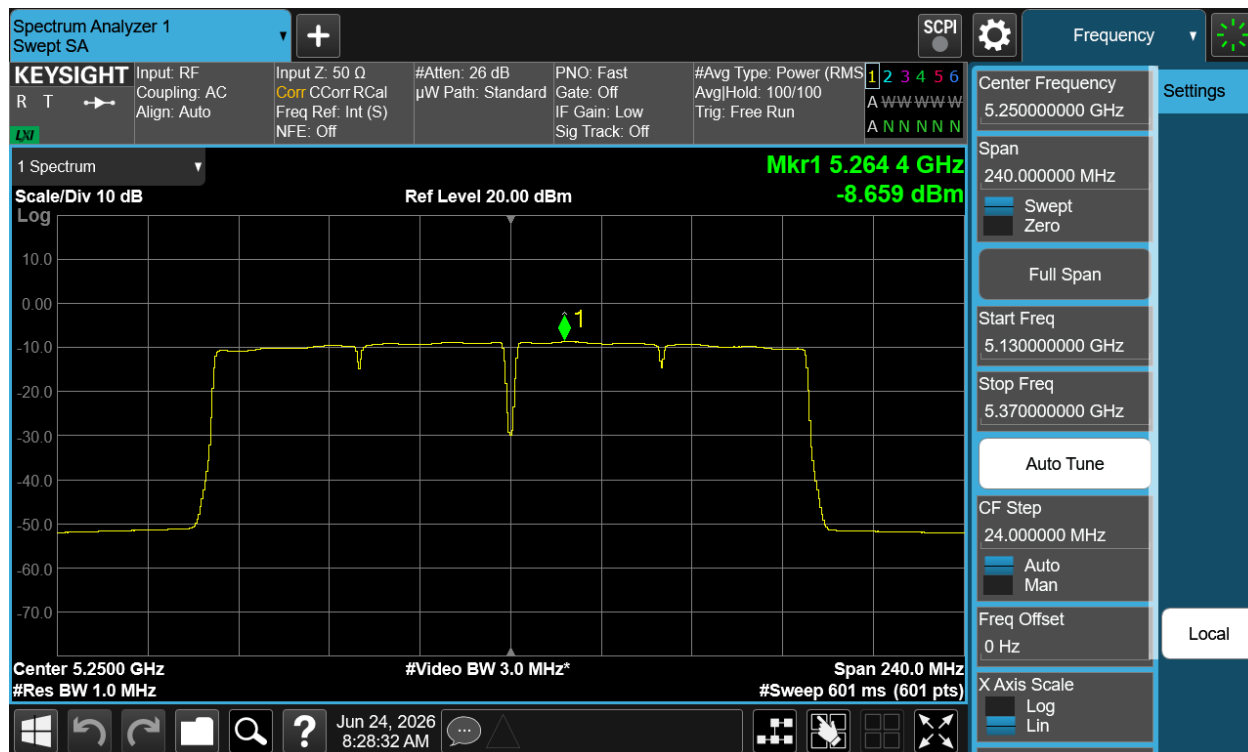


Plot 7-84 PSD CDD Diversity Antenna WF8 (160 MHz BW 802.11ac - Ch.50)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 114 of 267


	Frequency [MHz]	Channel	802.11 MODE	Mode	Data Rate	Antenna WF5T Power Density [dBm/500 kHz]	Antenna WF8 Power Density [dBm/500 kHz]	Summed Power Density [dBm/500 kHz]	Max Permissible Power Density [dBm/500 kHz]	Margin [dB]
Band 3	5745	149	a	CDD	6Mbps	3.32	3.76	6.56	30.0	-23.44
	5785	157	a	CDD	36Mbps	3.17	3.65	6.43	30.0	-23.57
	5825	165	a	CDD	36Mbps	3.14	3.65	6.41	30.0	-23.59
	5745	149	n (20 MHz)	CDD	MCS3	3.32	3.30	6.32	30.0	-23.68
	5785	157	n (20 MHz)	CDD	MCS3	3.16	3.63	6.42	30.0	-23.58
	5825	165	n (20 MHz)	CDD	MCS5	3.13	3.65	6.41	30.0	-23.59
	5745	149	be (SU) (20 MHz)	CDD	MCS5	3.29	3.33	6.32	30.0	-23.68
	5785	157	be (SU) (20 MHz)	CDD	MCS5	3.18	3.14	6.17	30.0	-23.83
	5825	165	be (SU) (20 MHz)	CDD	MCS5	3.14	3.18	6.17	30.0	-23.83
	5755	151	n (40 MHz)	CDD	MCS0	0.21	0.45	3.34	30.0	-26.66
	5795	159	n (40 MHz)	CDD	MCS3	0.19	0.34	3.27	30.0	-26.73
	5755	151	be (SU) (40 MHz)	CDD	MCS0	0.34	0.30	3.33	30.0	-26.67
	5795	159	be (SU) (40 MHz)	CDD	MCS3	0.27	0.13	3.21	30.0	-26.79
	5775	155	ac (80 MHz)	CDD	MCS0	-3.07	-2.96	0.00	30.0	-30.00
	5775	155	be (SU) (80 MHz)	CDD	MCS0	-4.50	-4.49	-1.48	30.0	-31.48

Table 7-111. Band 3 Power Spectral Density Measurements CDD Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 115 of 267

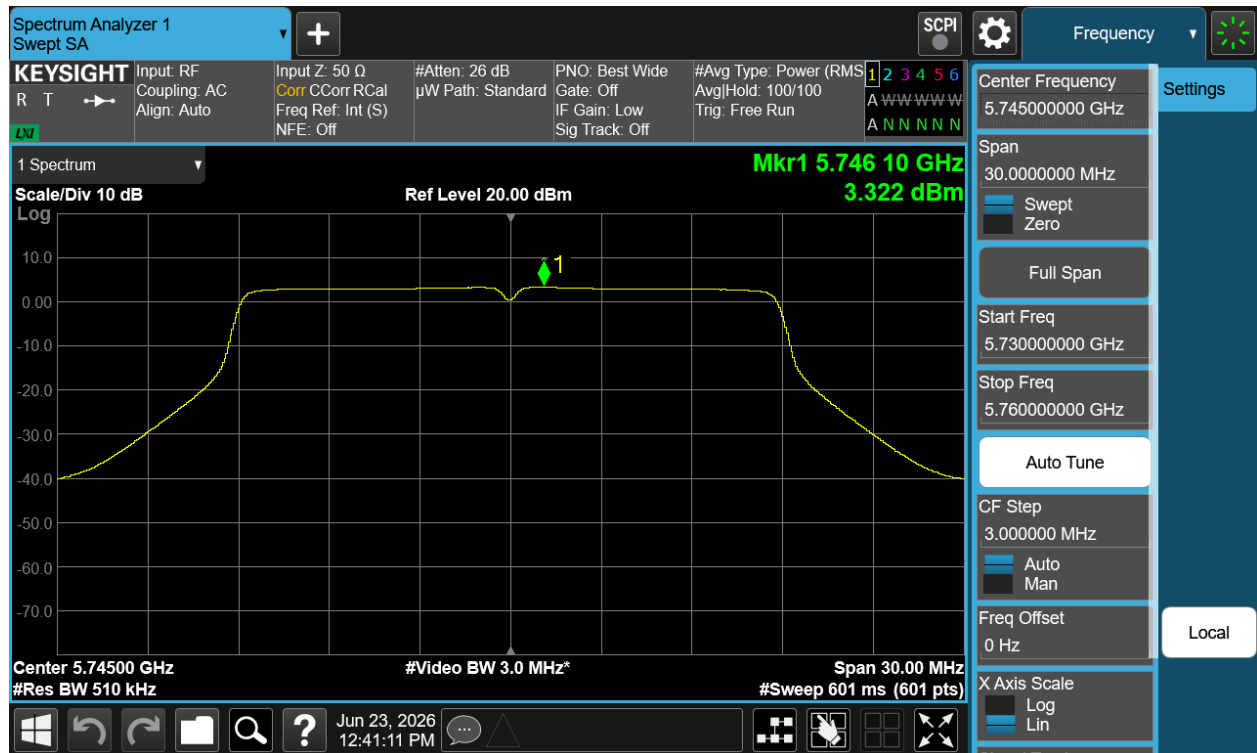


Plot 7-85 PSD CDD Diversity Antenna WF5T (20 MHz BW 802.11a - Ch.149)

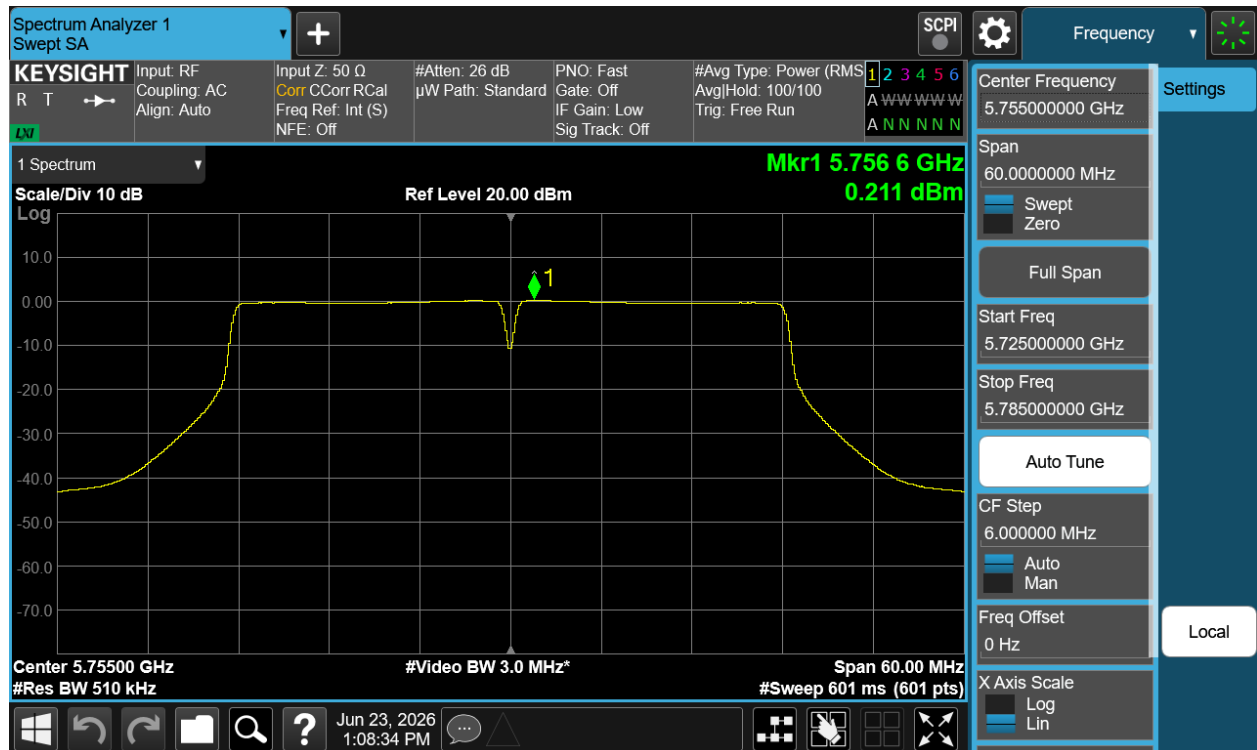


Plot 7-86 PSD CDD Diversity Antenna WF5T (40 MHz BW 802.11n - Ch.151)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 116 of 267

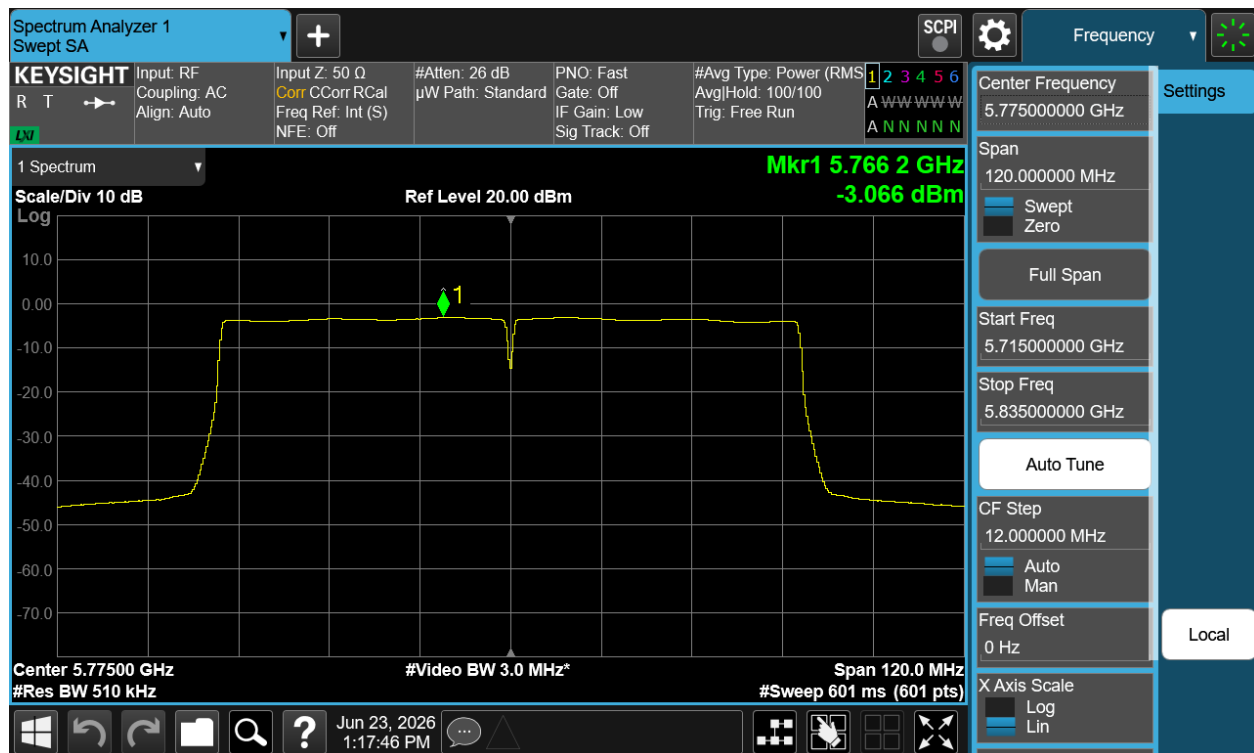


Plot 7-87 PSD CDD Diversity Antenna WF5T (80 MHz BW 802.11ac - Ch.155)

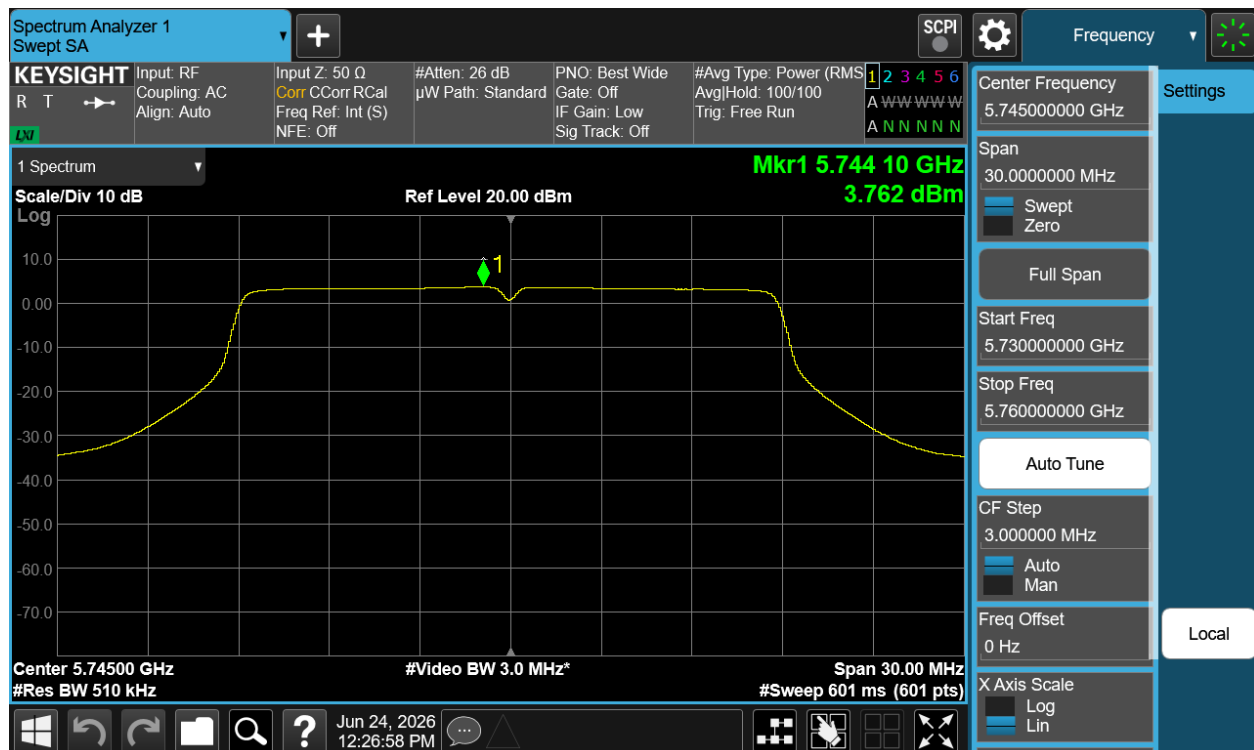


Plot 7-88 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11a - Ch.149)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 117 of 267

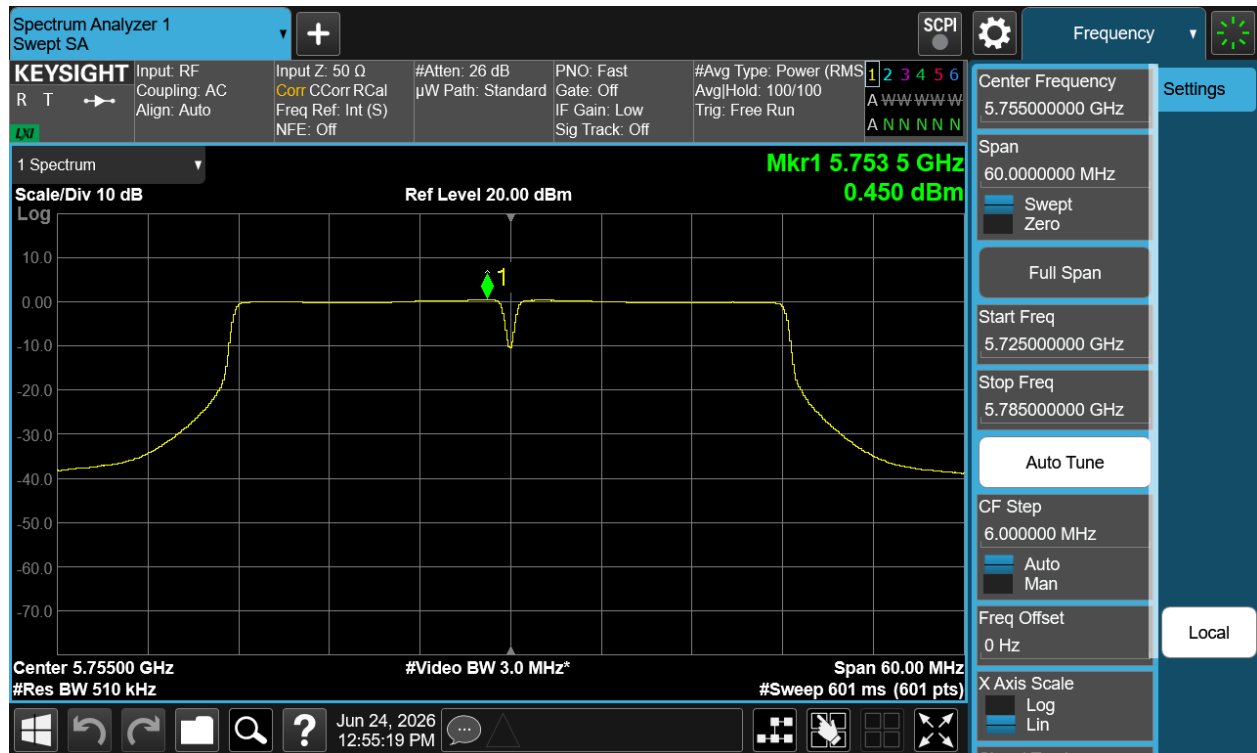

Plot 7-89 PSD CDD Diversity Antenna WF8 (40 MHz BW 802.11n - Ch.151)

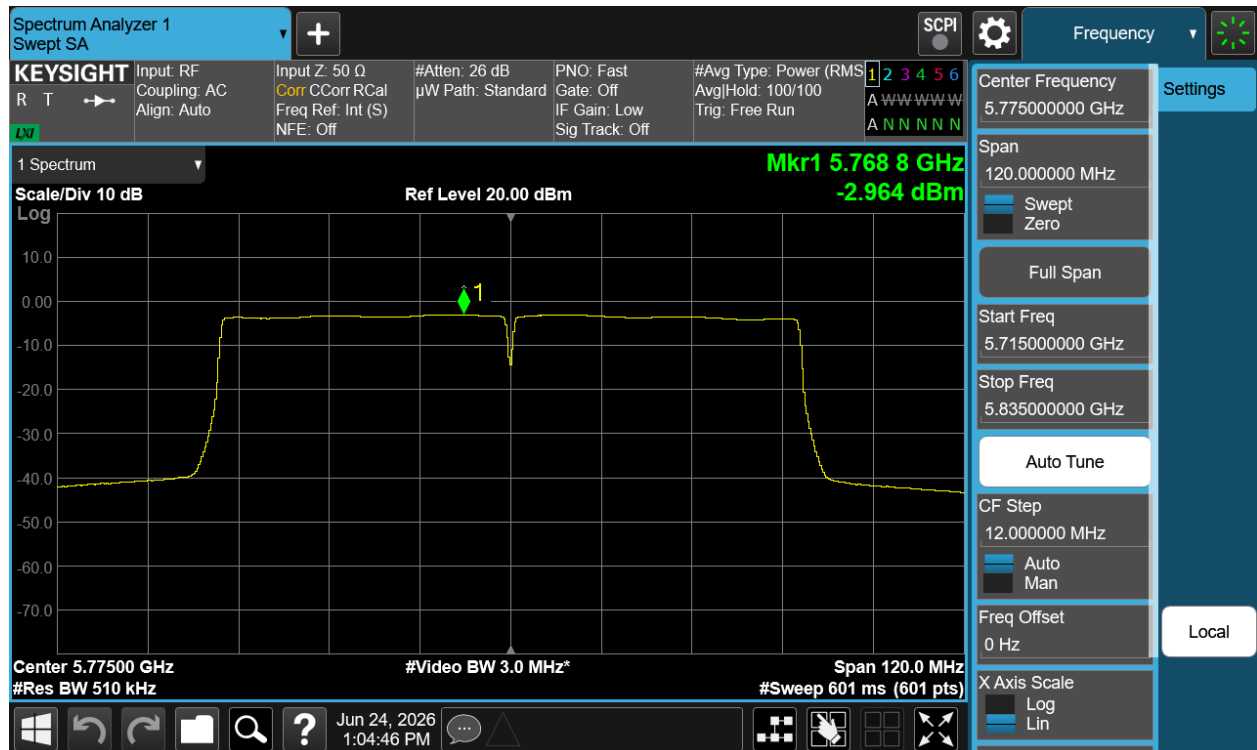


Plot 7-90 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11ac - Ch.155)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 118 of 267


	Frequency [MHz]	Channel No.	802.11 MODE	Mode	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF8 Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directoinal Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	CDD	6Mbps	-3.27	-3.32	-0.29	3.15	2.86	10.0	-7.14
	5200	40	a	CDD	36Mbps	-2.97	-2.56	0.25	3.15	3.40	10.0	-6.60
	5240	48	a	CDD	36Mbps	-3.08	-2.59	0.18	3.15	3.33	10.0	-6.67
	5180	36	n (20 MHz)	SDM	MCS3	-0.44	0.13	2.86	1.07	3.93	10.0	-6.07
	5200	40	n (20 MHz)	SDM	MCS5	0.60	0.69	3.66	1.07	4.73	10.0	-5.27
	5240	48	n (20 MHz)	SDM	MCS5	0.49	0.92	3.72	1.07	4.79	10.0	-5.21
	5180	36	be (SU) (20 MHz)	SDM	MCS3	-0.46	-0.15	2.71	1.07	3.78	10.0	-6.22
	5200	40	be (SU) (20 MHz)	SDM	MCS5	0.57	0.92	3.76	1.07	4.83	10.0	-5.17
	5240	48	be (SU) (20 MHz)	SDM	MCS5	0.17	0.58	3.39	1.07	4.46	10.0	-5.54
	5190	38	n (40 MHz)	SDM	MCS0	-1.29	-1.05	1.84	1.07	2.91	10.0	-7.09
	5230	46	n (40 MHz)	SDM	MCS0	-0.81	-0.98	2.12	1.07	3.19	10.0	-6.81
	5190	38	be (SU) (40 MHz)	SDM	MCS0	-2.01	-2.02	1.00	1.07	2.07	10.0	-7.93
	5230	46	be (SU) (40 MHz)	SDM	MCS0	-1.00	-1.14	1.94	1.07	3.01	10.0	-6.99
	5210	42	ac (80 MHz)	CDD	MCS0	-6.01	-5.69	-2.83	3.15	0.32	10.0	-9.68
Band 1/2	5210	42	be (SU) (80 MHz)	CDD	MCS0	-6.02	-5.76	-2.88	3.15	0.27	10.0	-9.73
	5250	50	ac (160 MHz)	CDD	MCS0	-8.66	-8.61	-5.62	4.50	-1.12	10.0	-11.12
	5250	50	be (SU) (160 MHz)	CDD	MCS0	-8.71	-8.68	-5.69	4.50	-1.19	10.0	-11.19

Table 7-112. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD/SDM Diversity

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 119 of 267

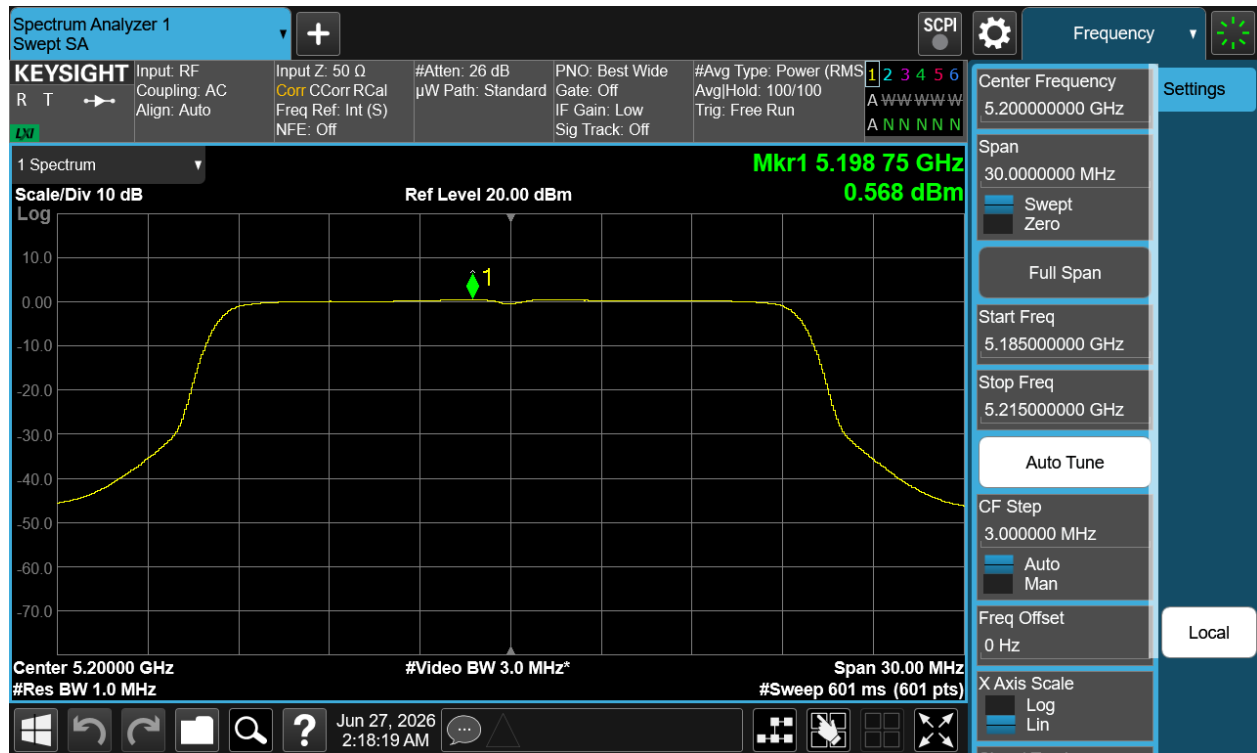


Plot 7-91 PSD SDM Diversity Antenna WF5T (20 MHz BW 802.11be(SU) - Ch.40)

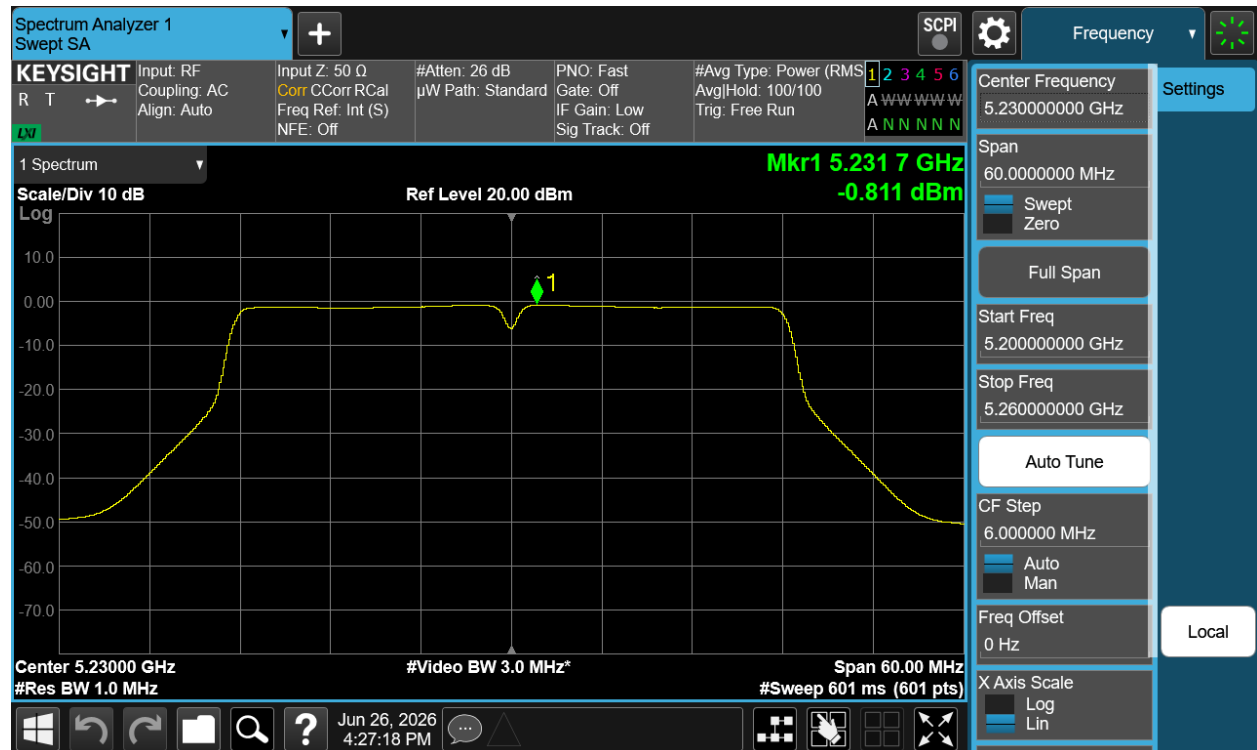


Plot 7-92 PSD SDM Diversity Antenna WF5T (40 MHz BW 802.11n - Ch.46)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 120 of 267

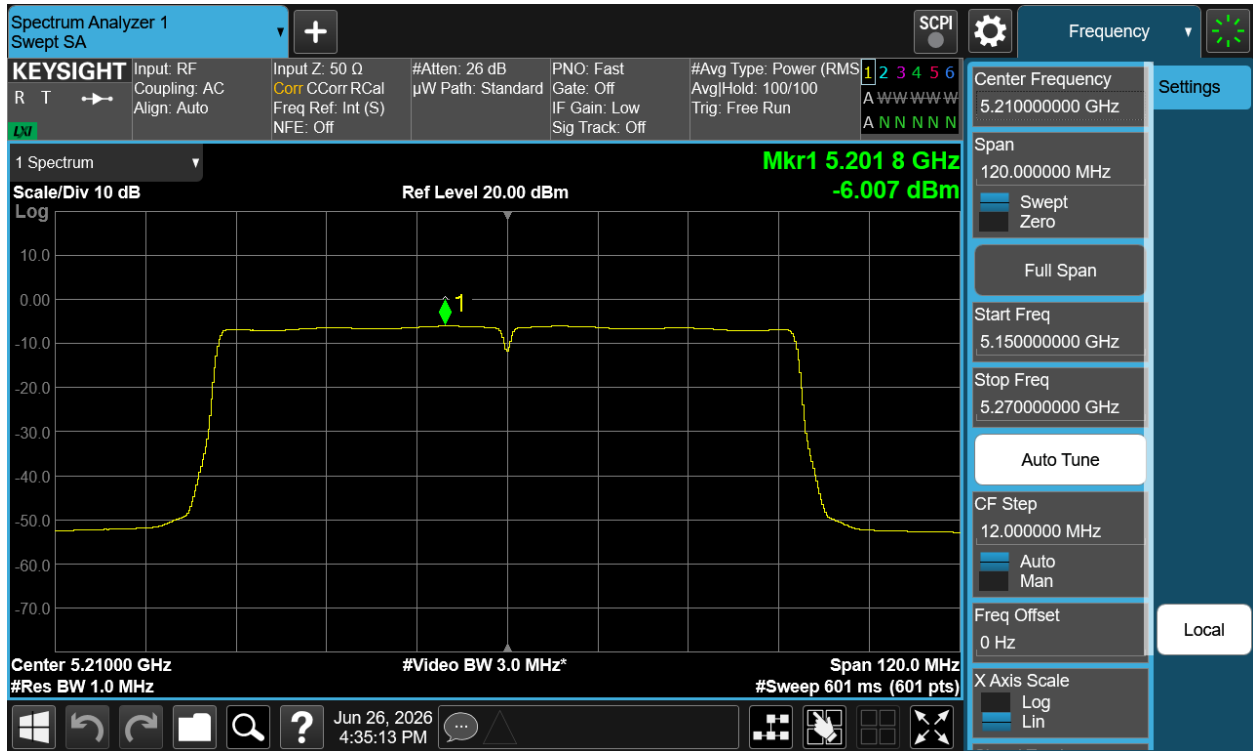


Plot 7-93 PSD CDD Diversity Antenna WF5T (80 MHz BW 802.11ac - Ch.42)

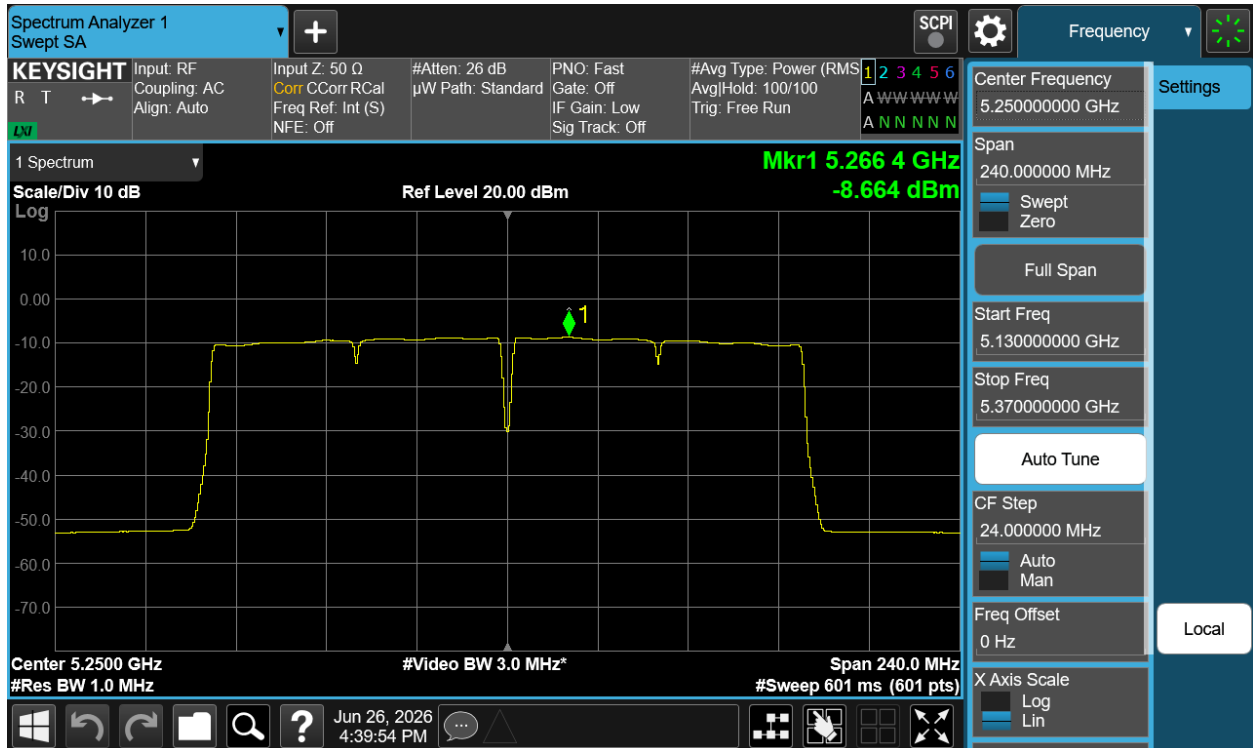


Plot 7-94 PSD CDD Diversity Antenna WF5T (160 MHz BW 802.11ac - Ch.50)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 121 of 267

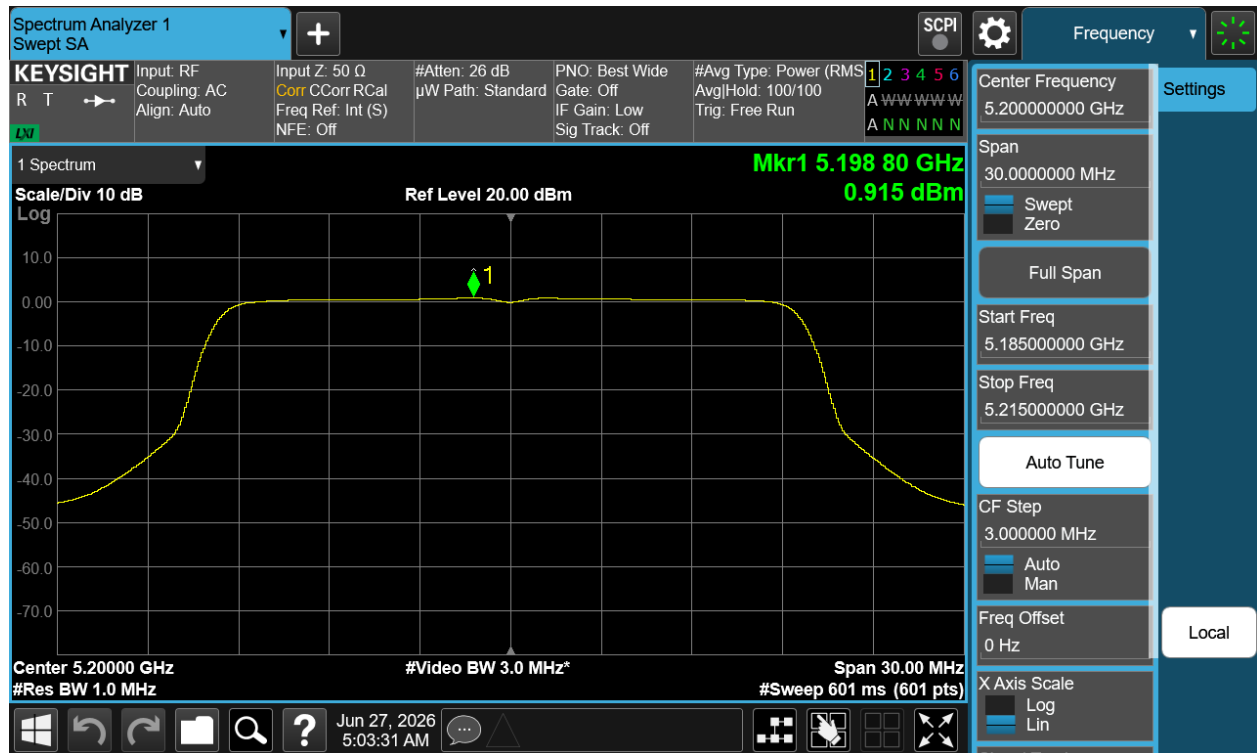


Plot 7-95 PSD SDM Diversity Antenna WF8 (20 MHz BW 802.11be(SU) - Ch.40)

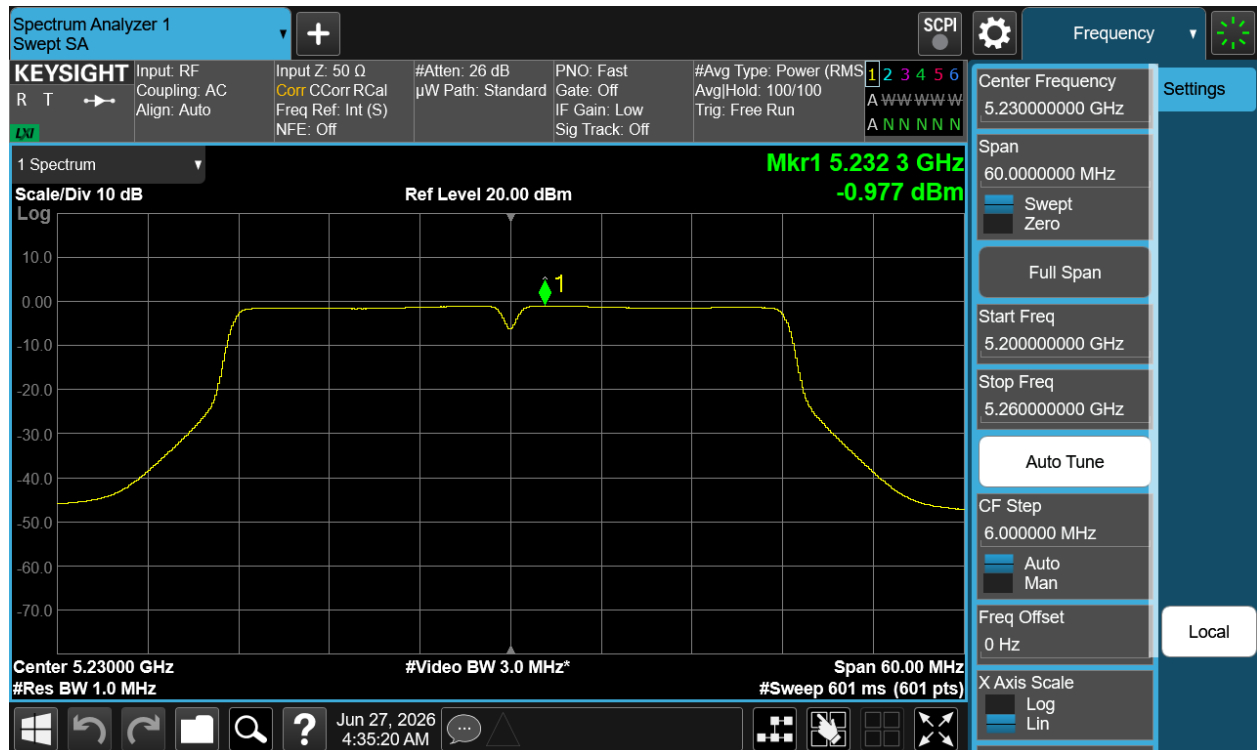


Plot 7-96 PSD SDM Diversity Antenna WF8 (40 MHz BW 802.11n - Ch.46)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 122 of 267

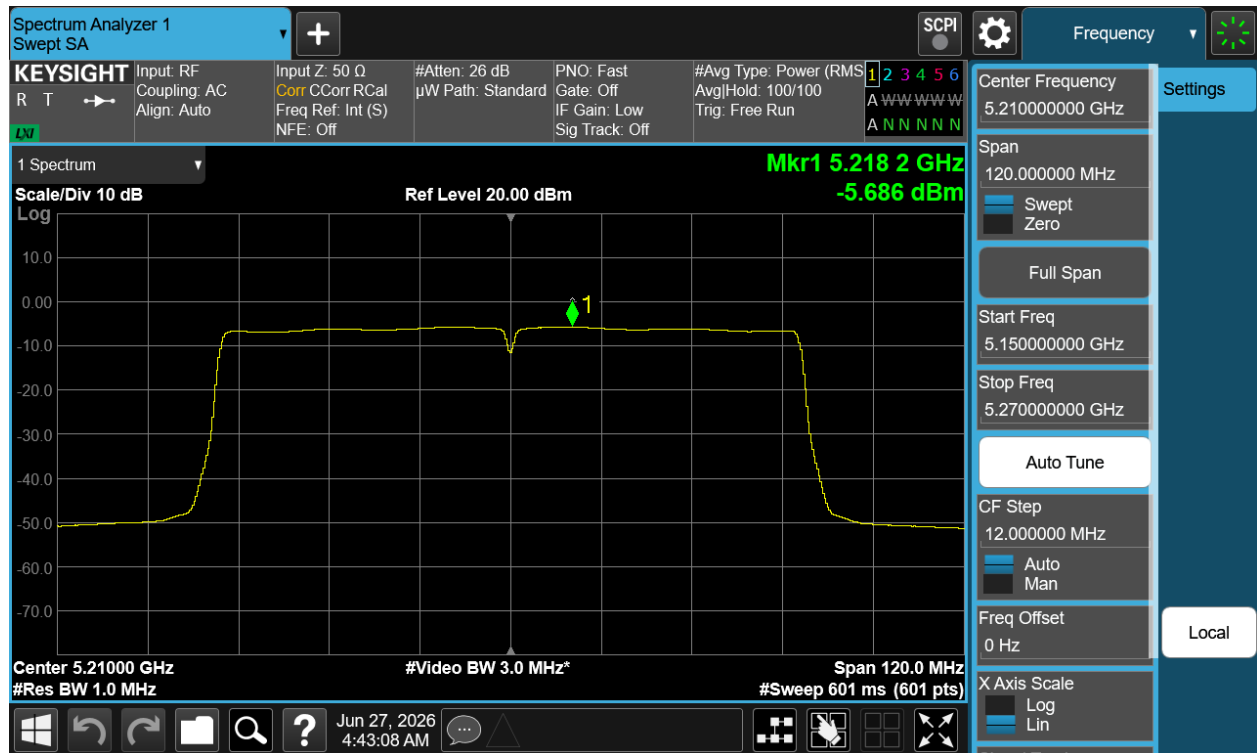

Plot 7-97 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11ac - Ch.42)

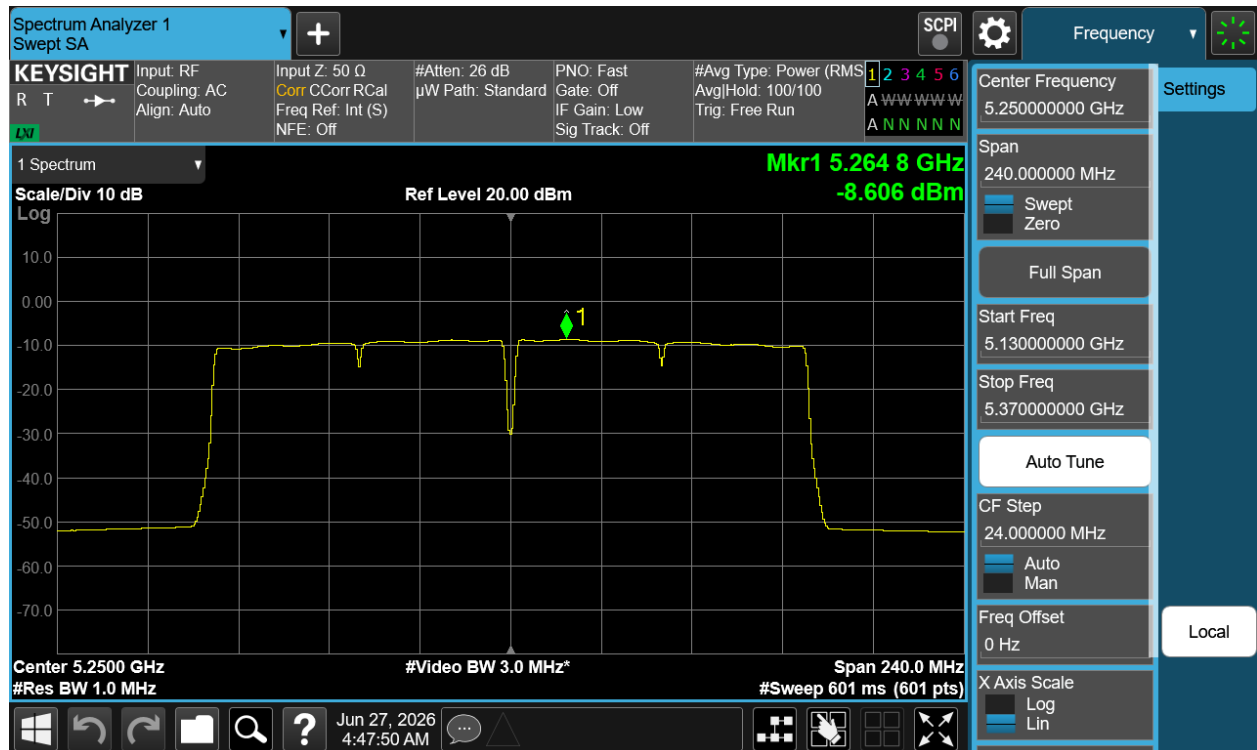

Plot 7-98 PSD CDD Diversity Antenna WF8 (160 MHz BW 802.11ac - Ch.50)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 123 of 267

7.5.6 Sum and Directional Gain Calculation

Per ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and KDB 662911 v02r01 Section E)1), the conducted powers at WF5T and WF5B were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 14.6.3, the correlated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Primary Calculation:

At 5180 MHz in 802.11n (20 MHz BW) mode, the average power spectral density was measured to be -0.44 dBm for WF5T and -0.48 dBm for WF5B.

$$\text{WF5T} + \text{WF5B} = \text{CDD/SDM Primary}$$

$$(-0.44 \text{ dBm} + (-0.48) \text{ dBm}) = (0.903 \text{ mW} + 0.895 \text{ mW}) = 1.798 \text{ mW} = 2.55 \text{ dBm}$$

Sample e.i.r.p Power Spectral Density Calculation:

At 5180 MHz in 802.11n (20 MHz BW) mode, the average CDD/SDM power spectral density was calculated to be 2.55 dBm with directional gain of 3.50 dBi.

$$\text{e.i.r.p. Power Spectral Density (dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$2.55 \text{ dBm} + 3.50 \text{ dBi} = 6.05 \text{ dBm}$$

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 124 of 267

7.6 Radiated Spurious Emissions – Above 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-113 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-113. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 – Sections 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 125 of 267

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

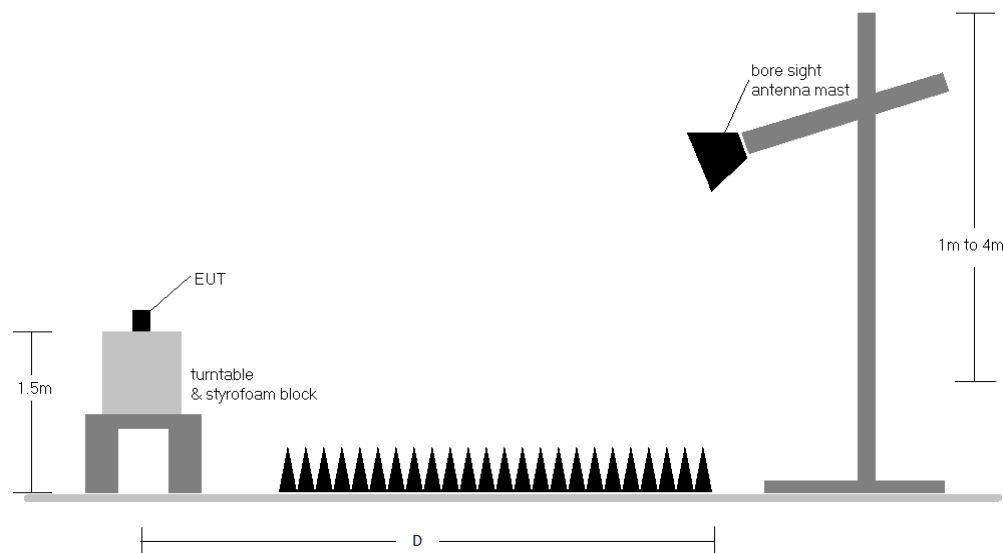


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 126 of 267

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-113.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-113. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18 GHz were measured at a 3 meters test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20 dB of the limit are fully investigated and the results are shown in this section.
8. All modes, data rates and antenna configurations were investigated and only the worst case is reported.
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The unit was tested at its highest output power.
11. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.4 to 7.6.23 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 127 of 267

7.6.1 CDD/SDM Primary Radiated Spurious Emission

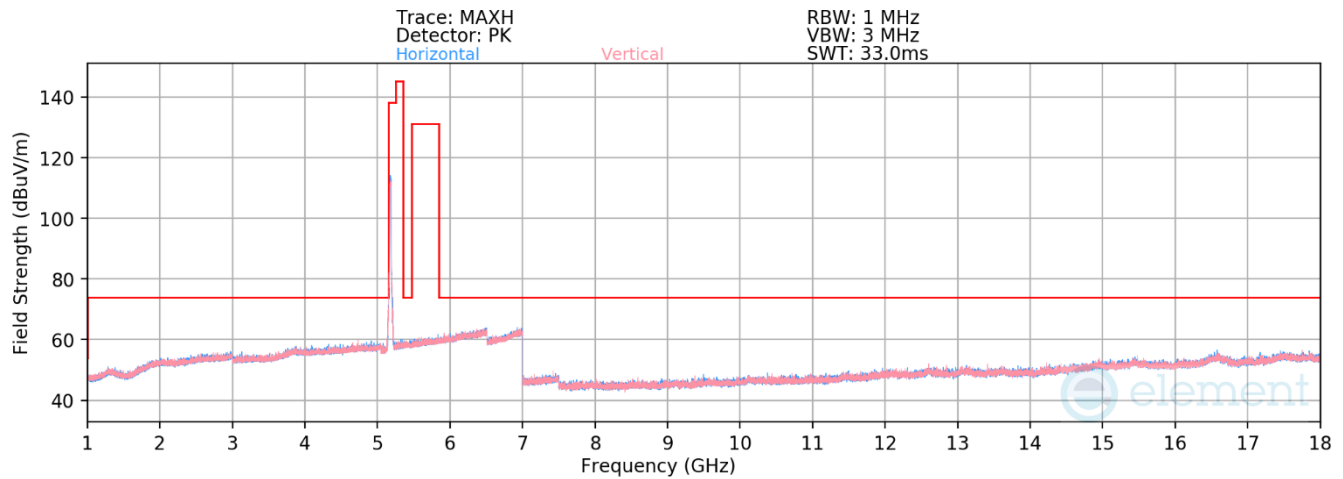


Plot 7-99. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11n – Ch. 36)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5180 MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	-	-	-69.24	11.68	49.44	68.23	-18.79
* 15540.00	Average	H	-	-	-81.37	18.37	44.00	53.98	-9.98
* 15540.00	Peak	H	-	-	-69.85	18.37	55.52	73.98	-18.46

Table 7-114. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 128 of 267

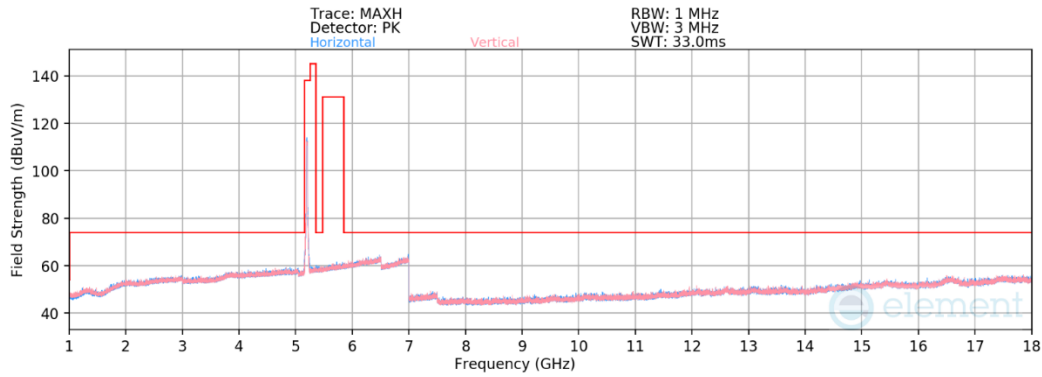

Plot 7-100. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11n – Ch. 40)

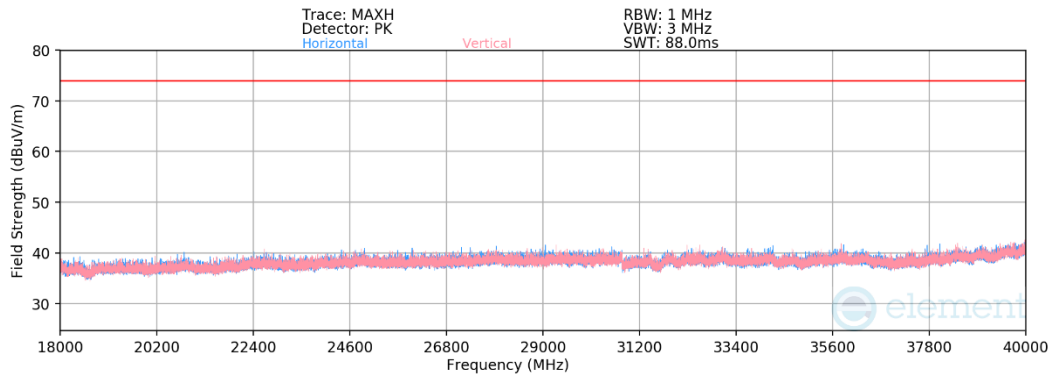


Plot 7-101. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (802.11n – Ch.40)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200 MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-69.02	11.91	0.00	49.89	68.23	-18.34
* 15600.00	Average	H	-	-	-81.46	18.87	0.00	44.42	53.98	-9.56
* 15600.00	Peak	H	-	-	-71.04	18.87	0.00	54.83	73.98	-19.15
* 20800.00	Average	V	-	-	-62.74	-5.90	-9.54	28.82	53.98	-25.16
* 20800.00	Peak	V	-	-	-51.86	-5.90	-9.54	39.70	73.98	-34.28
26000.00	Peak	H	-	-	-52.62	-4.40	-9.54	40.44	68.23	-27.79
* 31200.00	Average	H	-	-	-64.97	-2.74	-9.54	29.76	53.98	-24.22
* 31200.00	Peak	H	-	-	-52.85	-2.74	-9.54	41.87	73.98	-32.11
36400.00	Peak	V	-	-	-54.49	-4.89	-9.54	38.08	68.23	-30.15

Table 7-115. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 129 of 267

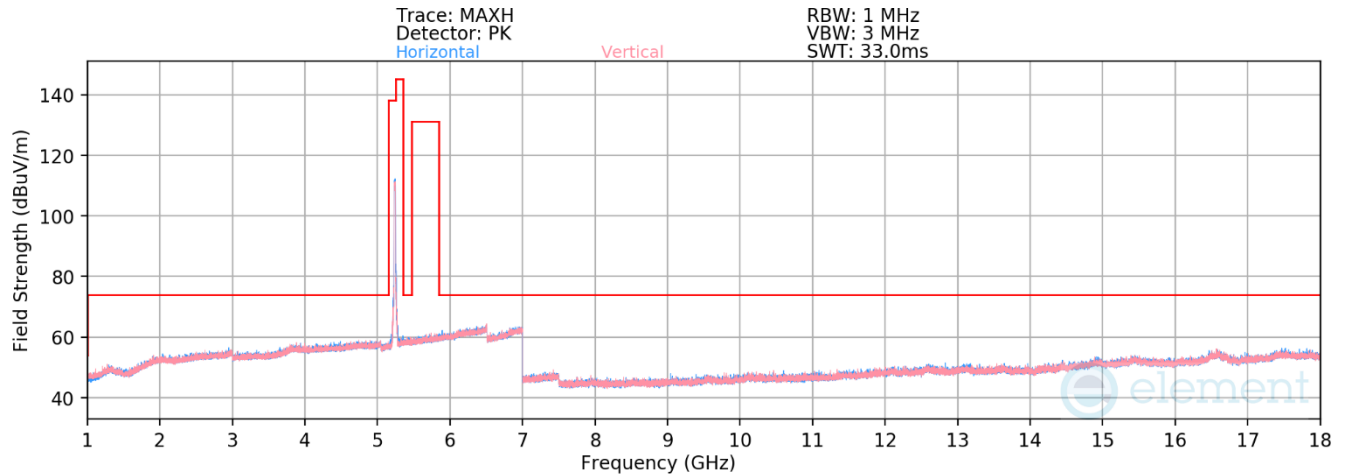


Plot 7-102. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11n – Ch. 48)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-68.57	12.43	50.86	68.23	-17.37
* 15720.00	Average	V	-	-	-81.25	18.53	44.27	53.98	-9.71
* 15720.00	Peak	V	-	-	-70.30	18.53	55.23	73.98	-18.75

Table 7-116. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 130 of 267

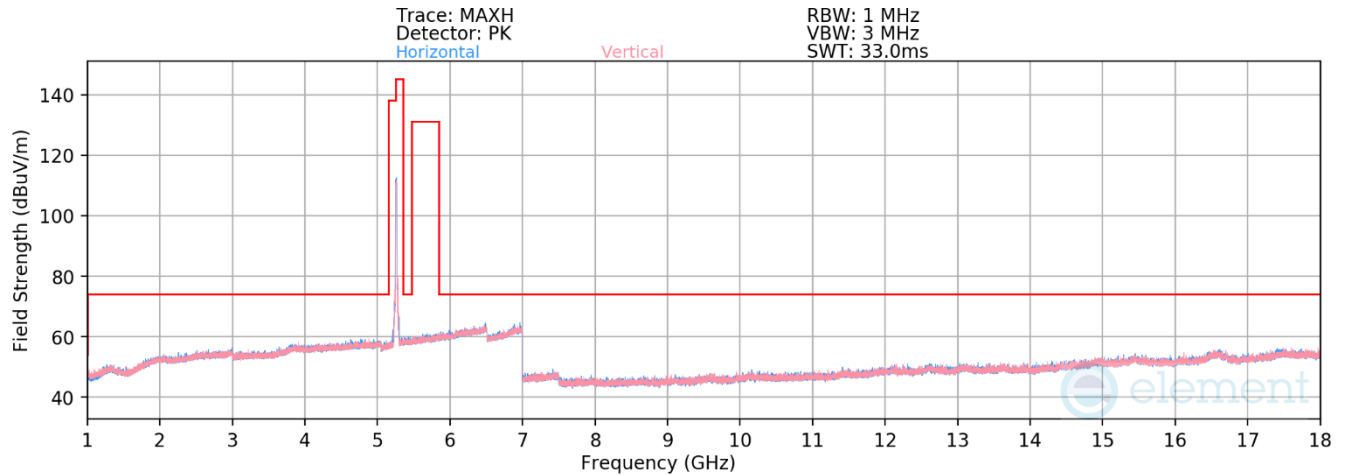


Plot 7-103. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11n – Ch. 52)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-68.95	12.48	50.53	68.23	-17.70
* 15780.00	Average	V	-	-	-81.19	18.10	43.91	53.98	-10.07
* 15780.00	Peak	V	-	-	-69.13	18.10	55.97	73.98	-18.01

Table 7-117. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 131 of 267

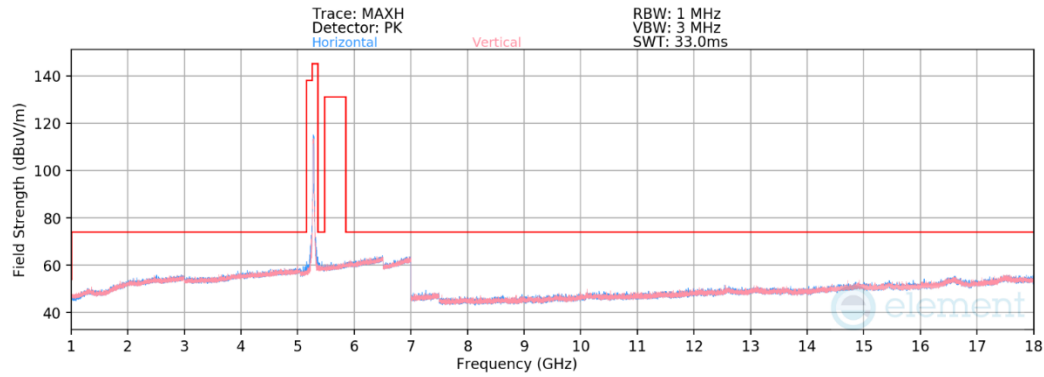

Plot 7-104. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11n – Ch. 56)

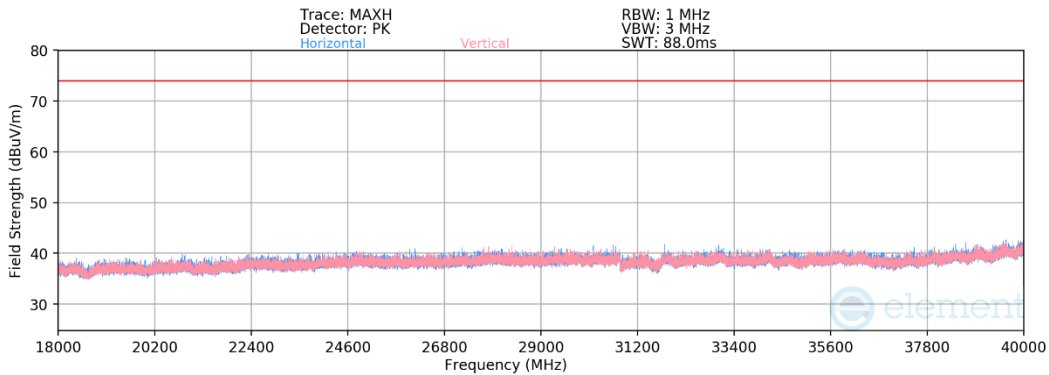


Plot 7-105. Radiated Spurious Emissions 18 GHz - 40 GHz SDM Primary (802.11n – Ch. 56)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280 MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-73.09	18.49	0.00	52.40	68.23	-15.83
* 15840.00	Average	H	-	-	-85.83	26.55	0.00	47.72	53.98	-6.26
* 15840.00	Peak	H	-	-	-74.52	26.55	0.00	59.03	73.98	-14.95
* 21120.00	Average	V	-	-	-62.90	-6.08	-9.54	28.48	53.98	-25.50
* 21120.00	Peak	V	-	-	-51.21	-6.08	-9.54	40.17	73.98	-33.81
26400.00	Peak	H	-	-	-53.31	-4.04	-9.54	40.11	68.23	-28.12
* 31680.00	Average	H	-	-	-65.17	-2.66	-9.54	29.63	53.98	-24.35
* 31680.00	Peak	H	-	-	-56.25	-2.76	-9.54	38.45	73.98	-35.53
36960.00	Peak	V	-	-	-53.31	-4.80	-9.54	39.35	68.23	-28.88

Table 7-118. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 132 of 267

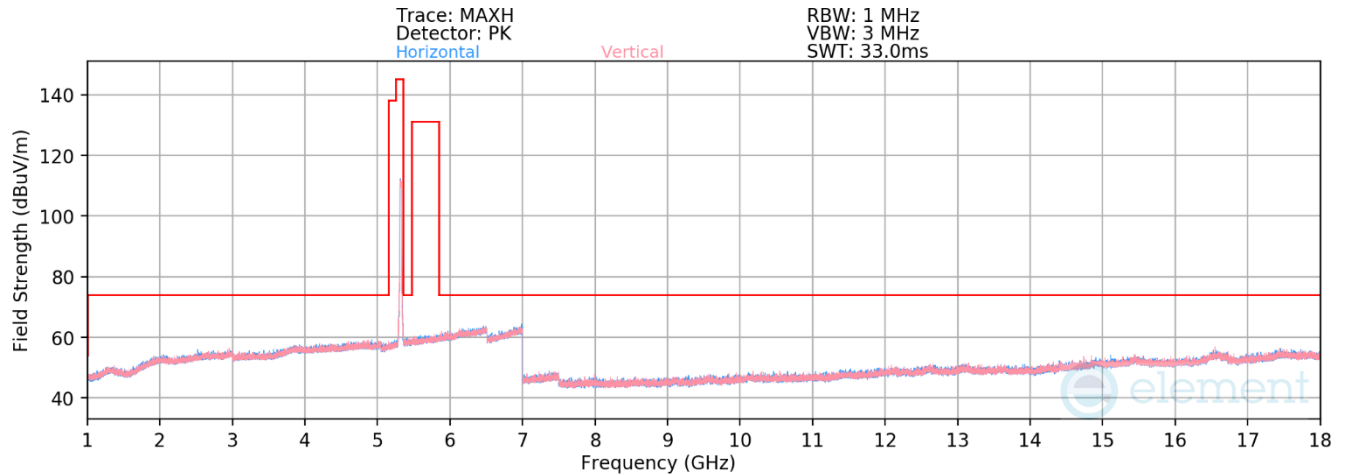


Plot 7-106. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11n – Ch. 64)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	10640.00	Average	V	-	-	-80.52	13.09	39.58	53.98	-14.40
*	10640.00	Peak	V	-	-	-69.57	13.09	50.53	73.98	-23.45
*	15960.00	Average	H	-	-	-81.74	18.25	43.51	53.98	-10.47
*	15960.00	Peak	H	-	-	-70.65	18.25	54.60	73.98	-19.38

Table 7-119. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 133 of 267

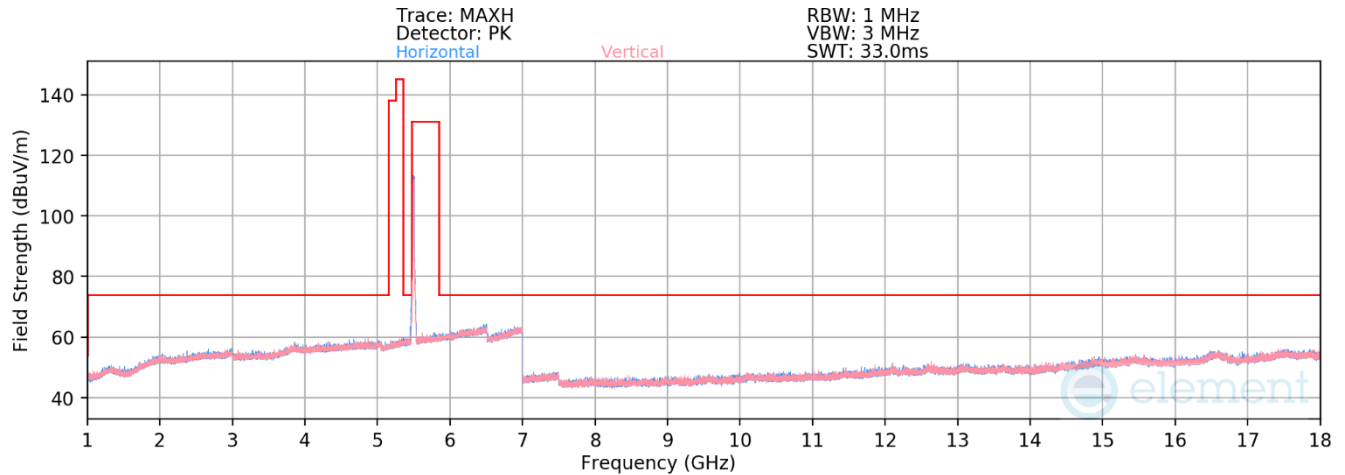


Plot 7-107. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11n – Ch. 100)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-80.53	13.21	39.68	53.98	-14.30
* 11000.00	Peak	V	-	-	-69.38	13.21	50.82	73.98	-23.16
16500.00	Peak	V	-	-	-69.53	19.41	56.88	68.23	-11.35

Table 7-120. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 134 of 267

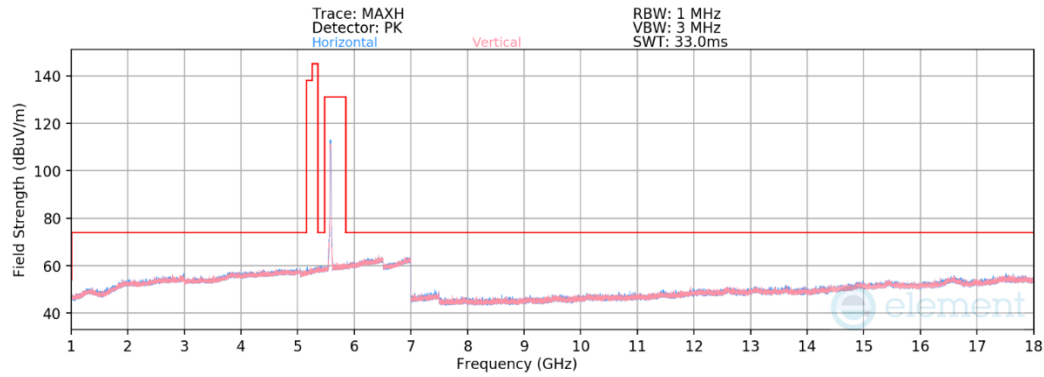

Plot 7-108. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11n – Ch. 116)

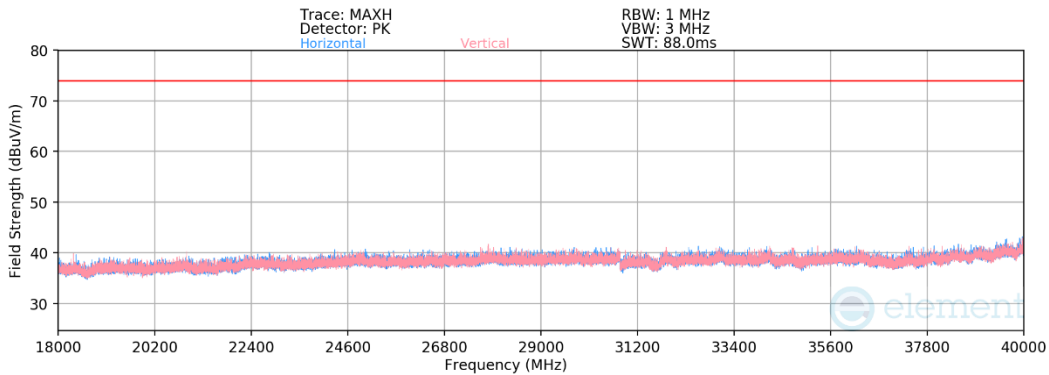


Plot 7-109. Radiated Spurious Emissions 18 GHz - 40 GHz SDM Primary (802.11n – Ch. 116)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580 MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	V	-	-	-80.33	12.96	0.00	39.63	53.98	-14.35
* 11160.00	Peak	V	-	-	-69.06	12.96	0.00	50.90	73.98	-23.08
16740.00	Peak	V	-	-	-71.07	20.39	0.00	56.32	68.23	-11.91
* 22320.00	Average	H	-	-	-62.86	-5.46	-9.54	29.13	53.98	-24.85
* 22320.00	Peak	H	-	-	-51.45	-5.46	-9.54	40.55	73.98	-33.43
27900.00	Peak	H	-	-	-53.57	-3.02	-9.54	40.87	68.23	-27.36
33480.00	Peak	V	-	-	-54.91	-3.59	-9.54	38.96	68.23	-29.27
* 39060.00	Average	H	-	-	-74.50	-2.47	-9.54	20.48	53.98	-33.50
* 39060.00	Peak	H	-	-	-54.50	-2.47	-9.54	40.48	73.98	-33.50

Table 7-121. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 135 of 267

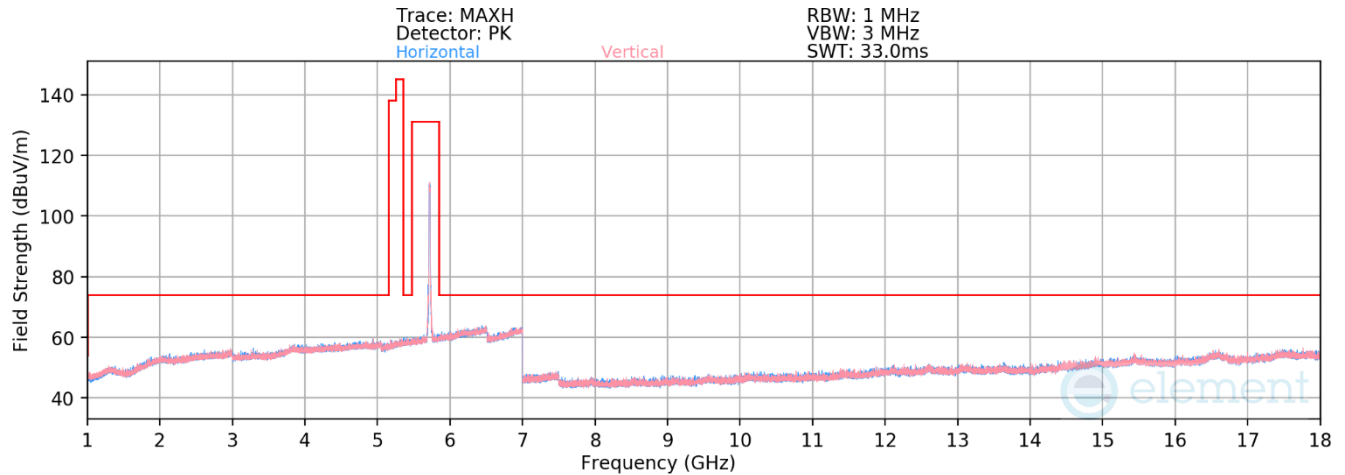


Plot 7-110. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11n – Ch. 144)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5720 MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-80.82	13.84	40.02	53.98	-13.96
* 11440.00	Peak	V	-	-	-69.32	13.84	51.52	73.98	-22.46
17160.00	Peak	H	-	-	-71.42	19.81	55.39	68.23	-12.84

Table 7-122. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 136 of 267

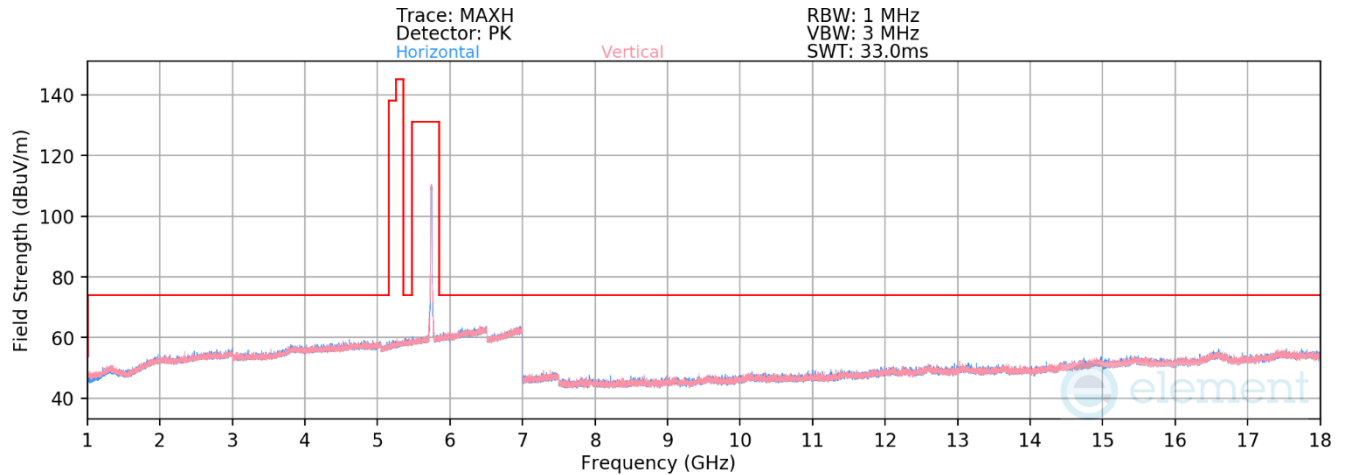


Plot 7-111. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11n – Ch. 149)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-80.87	13.64	39.77	53.98	-14.21
* 11490.00	Peak	V	-	-	-70.00	13.64	50.65	73.98	-23.33
17235.00	Peak	H	-	-	-71.40	19.69	55.29	68.23	-12.94

Table 7-123. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 137 of 267

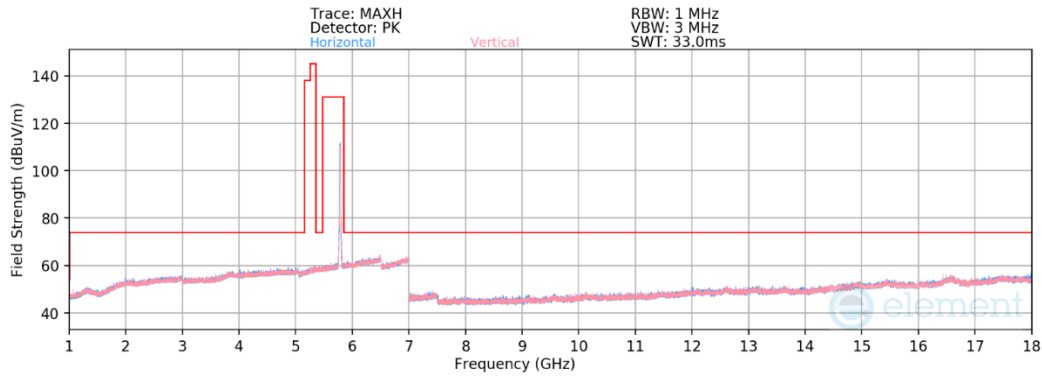

Plot 7-112. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11n – Ch. 157)

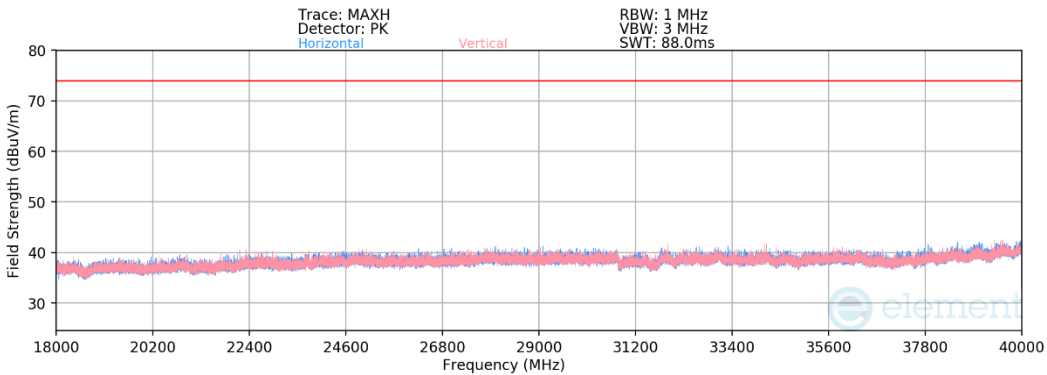


Plot 7-113. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (802.11n – Ch.157)

Mode: 802.11n
 Data Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5785 MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-80.64	13.90	0.00	40.26	53.98	-13.72
* 11570.00	Peak	V	-	-	-69.58	13.90	0.00	51.33	73.98	-22.65
17355.00	Peak	H	-	-	-70.83	19.80	0.00	55.97	68.23	-12.26
23140.00	Peak	V	-	-	-51.94	-5.68	-9.54	39.84	68.23	-28.39
28925.00	Peak	V	-	-	-53.70	-2.88	-9.54	40.88	68.23	-27.35
34710.00	Peak	H	-	-	-50.72	-4.60	-9.54	42.14	68.23	-26.09

Table 7-124. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 138 of 267

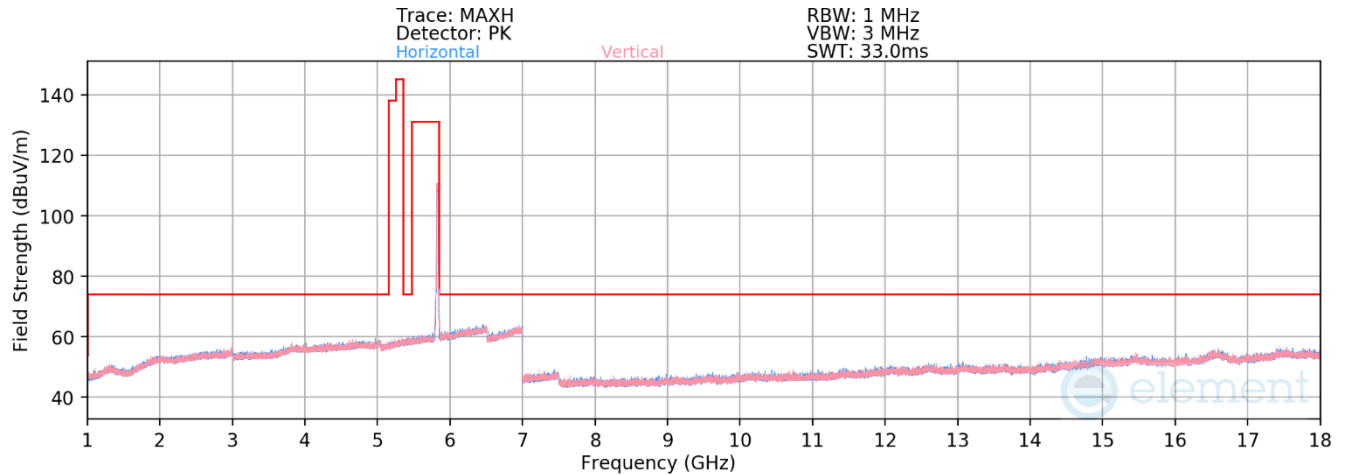


Plot 7-114. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11n – Ch. 165)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5825 MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-80.52	13.63	40.11	53.98	-13.87
* 11650.00	Peak	H	-	-	-69.61	13.63	51.02	73.98	-22.96
17475.00	Peak	V	-	-	-71.29	20.09	55.80	68.23	-12.43

Table 7-125. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 139 of 267

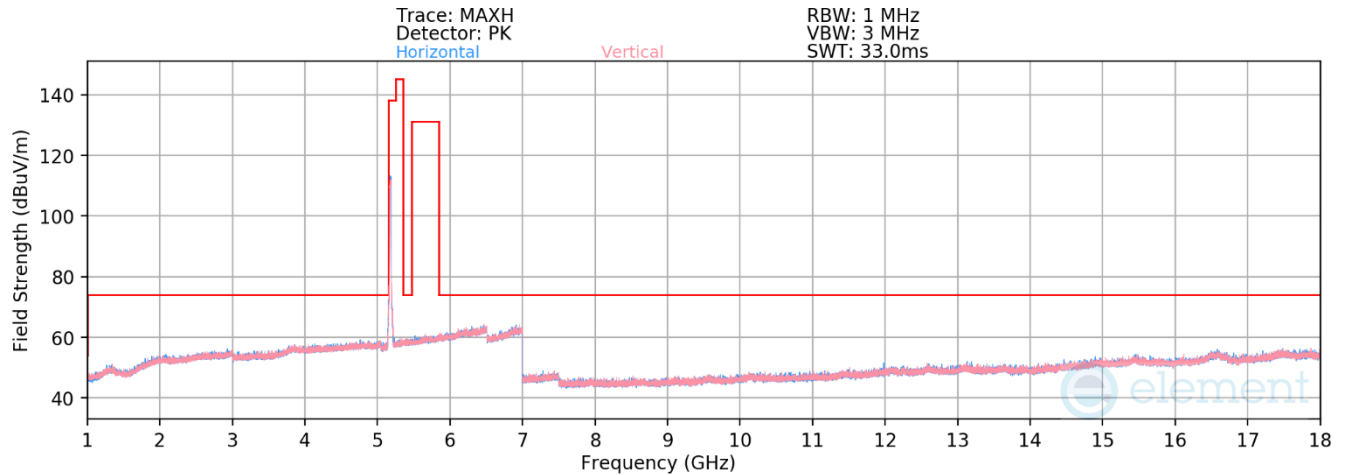


Plot 7-115. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be(SU) – Ch. 36)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180 MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-68.47	11.68	50.21	68.23	-18.02
* 15540.00	Average	H	-	-	-81.32	18.37	44.05	53.98	-9.93
* 15540.00	Peak	H	-	-	-70.08	18.37	55.29	73.98	-18.69

Table 7-126. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 140 of 267

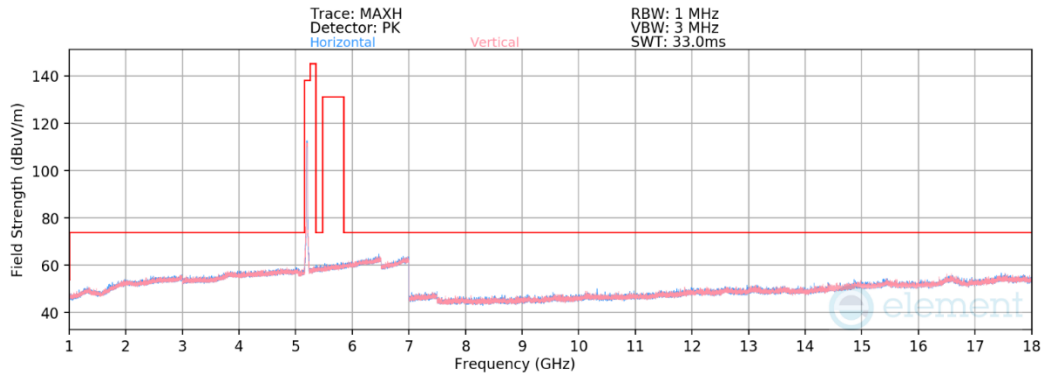

Plot 7-116. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be(SU) – Ch. 40)

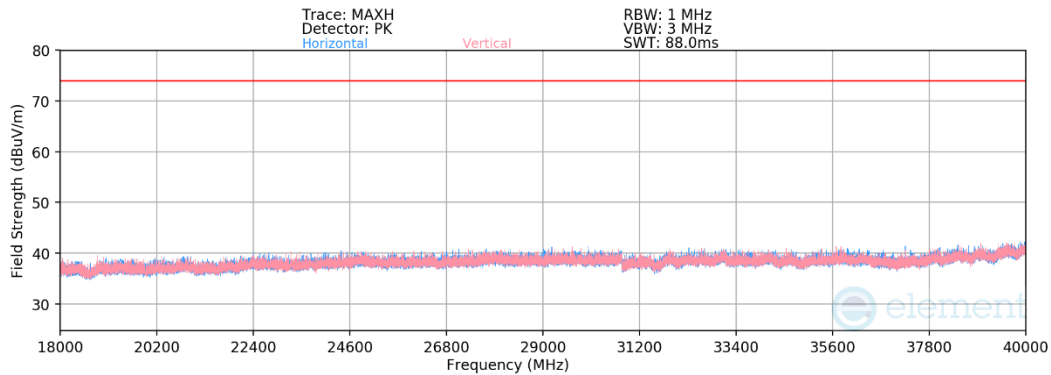


Plot 7-117. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (802.11be(SU) – Ch.40)

Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200 MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-69.41	11.91	0.00	49.50	68.23	-18.73
* 15600.00	Average	H	-	-	-81.73	18.87	0.00	44.15	53.98	-9.83
* 15600.00	Peak	H	-	-	-71.30	18.87	0.00	54.57	73.98	-19.41
* 20800.00	Average	H	-	-	-62.96	-5.91	-9.54	28.59	53.98	-25.39
* 20800.00	Peak	H	-	-	-51.66	-5.91	-9.54	39.89	73.98	-34.09
26000.00	Peak	V	-	-	-52.59	-4.40	-9.54	40.47	68.23	-27.76
* 31200.00	Average	V	-	-	-65.94	-2.74	-9.54	28.79	53.98	-25.19
* 31200.00	Peak	V	-	-	-55.94	-2.74	-9.54	38.79	73.98	-35.19
36400.00	Peak	V	-	-	-53.37	-4.89	-9.54	39.20	68.23	-29.03

Table 7-127. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 141 of 267

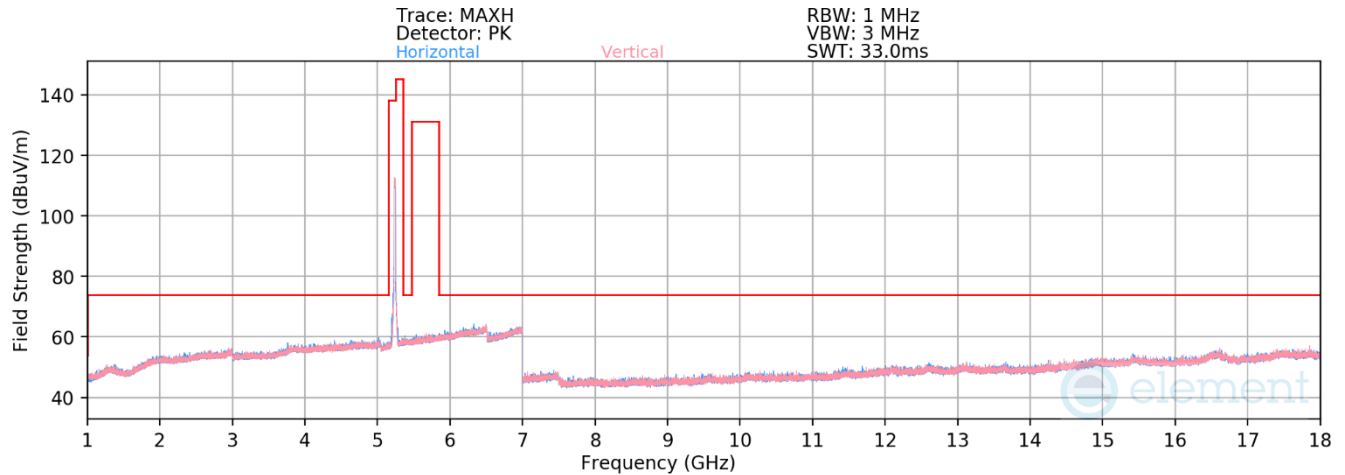


Plot 7-118. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be(SU) – Ch. 48)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-67.95	12.29	51.34	68.23	-16.89
* 15720.00	Average	H	-	-	-81.56	18.47	43.91	53.98	-10.07
* 15720.00	Peak	H	-	-	-70.89	18.47	54.58	73.98	-19.40

Table 7-128. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 142 of 267

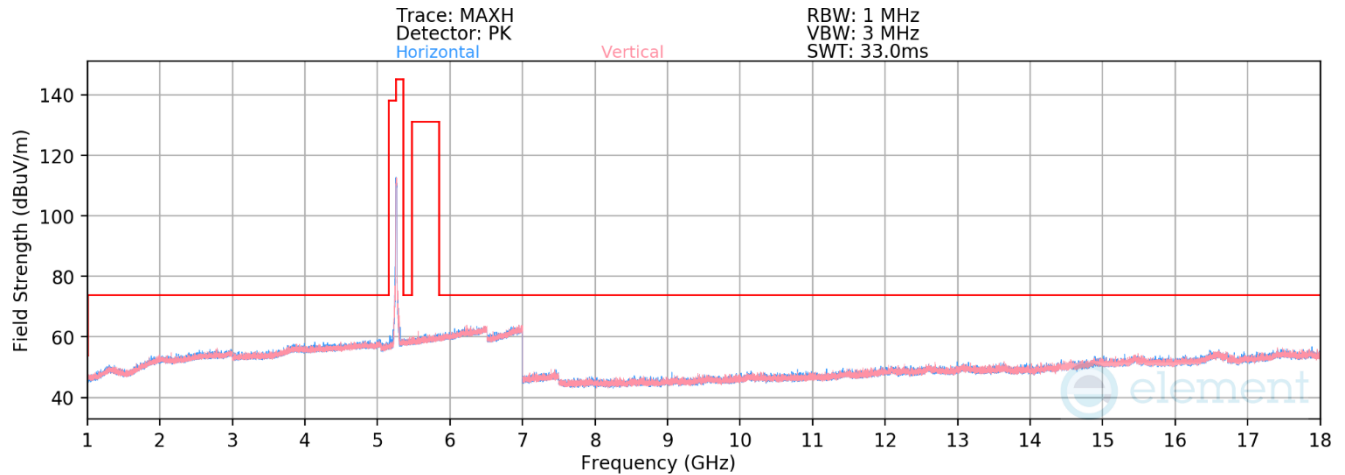

Plot 7-119. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be(SU) – Ch. 52)

Mode: 802.11be(SU)

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 5260 MHz

Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	-	-	-69.34	12.48	50.14	68.23	-18.09
* 15780.00	Average	H	-	-	-81.16	18.10	43.93	53.98	-10.05
* 15780.00	Peak	H	-	-	-70.48	18.10	54.62	73.98	-19.36

Table 7-129. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 143 of 267

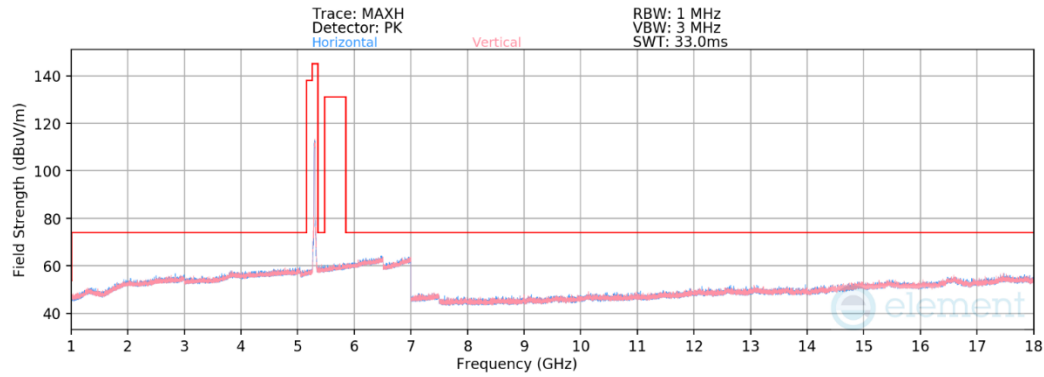

Plot 7-120. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be(SU) – Ch. 56)

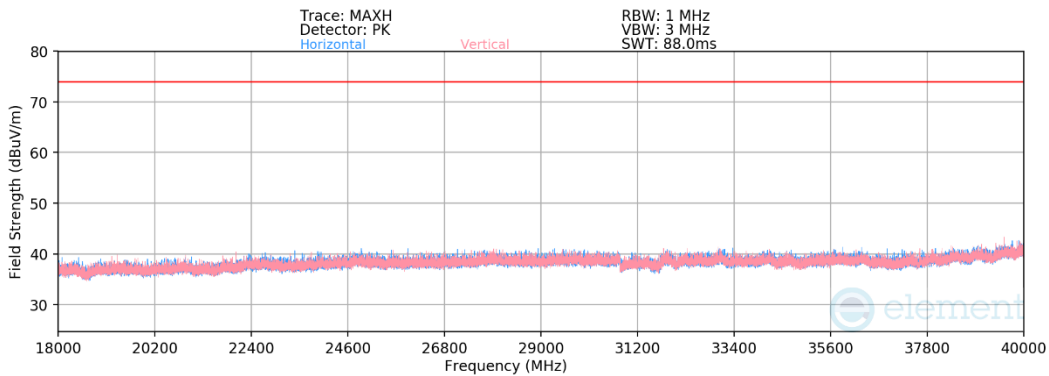


Plot 7-121. Radiated Spurious Emissions 18 GHz - 40 GHz SDM Primary (802.11be(SU) – Ch.56)

Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280 MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	V	-	-	-73.30	18.49	0.00	52.19	68.23	-16.04
* 15840.00	Average	H	-	-	-85.51	26.41	0.00	47.90	53.98	-6.08
* 15840.00	Peak	H	-	-	-74.50	26.41	0.00	58.91	73.98	-15.07
* 21120.00	Average	V	-	-	-62.97	-6.08	-9.54	28.41	53.98	-25.57
* 21120.00	Peak	V	-	-	-51.80	-6.08	-9.54	39.58	73.98	-34.40
26400.00	Peak	V	-	-	-52.83	-4.04	-9.54	40.60	68.23	-27.63
* 31680.00	Average	H	-	-	-65.25	-2.66	-9.54	29.56	53.98	-24.42
* 31680.00	Peak	H	-	-	-53.90	-2.76	-9.54	40.80	73.98	-33.18
36960.00	Peak	H	-	-	-53.23	-4.80	-9.54	39.44	68.23	-28.79

Table 7-130. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 144 of 267

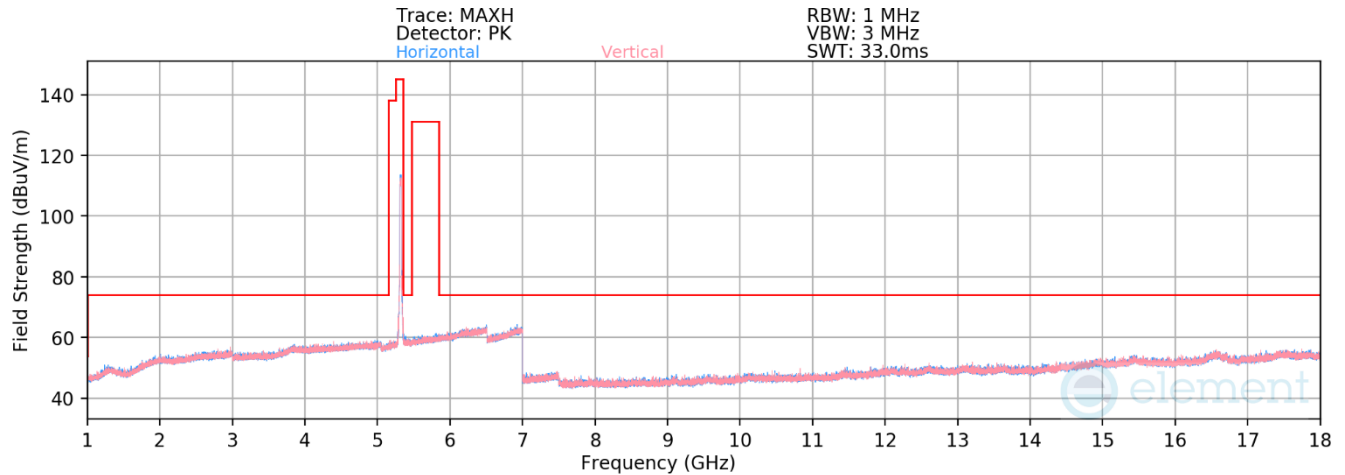


Plot 7-122. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be(SU) – Ch. 64)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-80.09	13.09	40.01	53.98	-13.97
* 10640.00	Peak	H	-	-	-69.49	13.09	50.61	73.98	-23.37
* 15960.00	Average	V	-	-	-81.74	18.35	43.61	53.98	-10.37
* 15960.00	Peak	V	-	-	-71.30	18.35	54.05	73.98	-19.93

Table 7-131. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 145 of 267

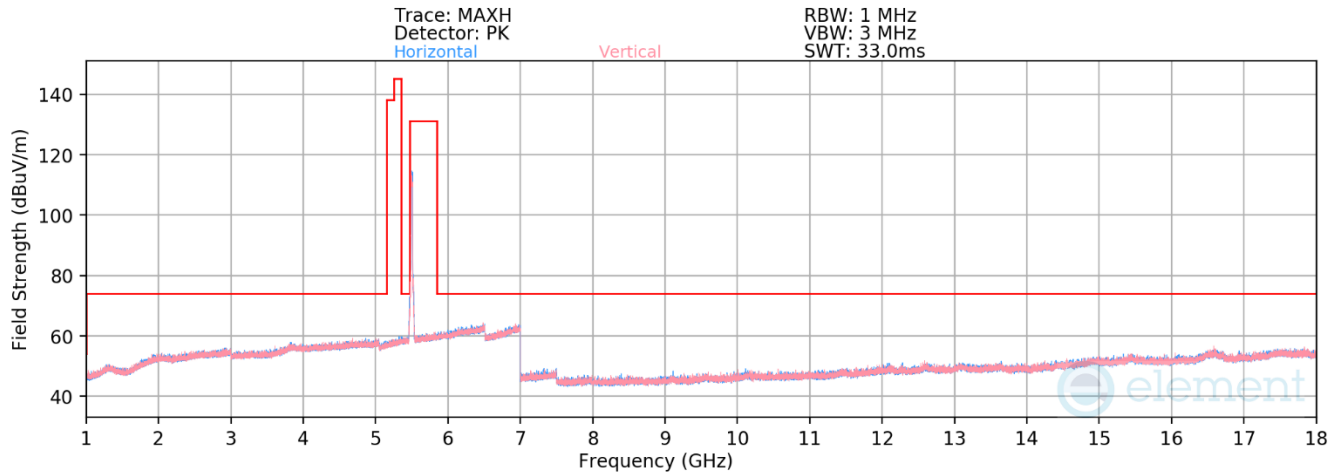


Plot 7-123. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be(SU) – Ch. 100)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-80.28	13.21	39.92	53.98	-14.06
* 11000.00	Peak	H	-	-	-69.44	13.21	50.76	73.98	-23.22
16500.00	Peak	V	-	-	-71.11	19.58	55.46	68.23	-12.77

Table 7-132. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 146 of 267

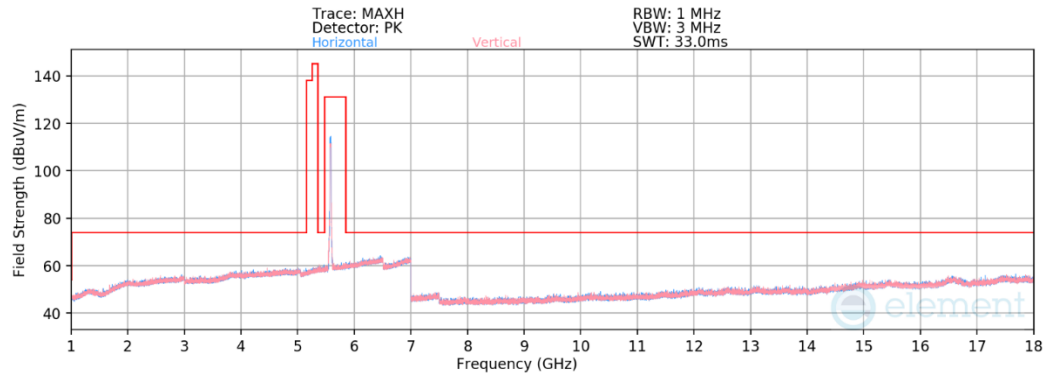

Plot 7-124. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be(SU) – Ch. 116)

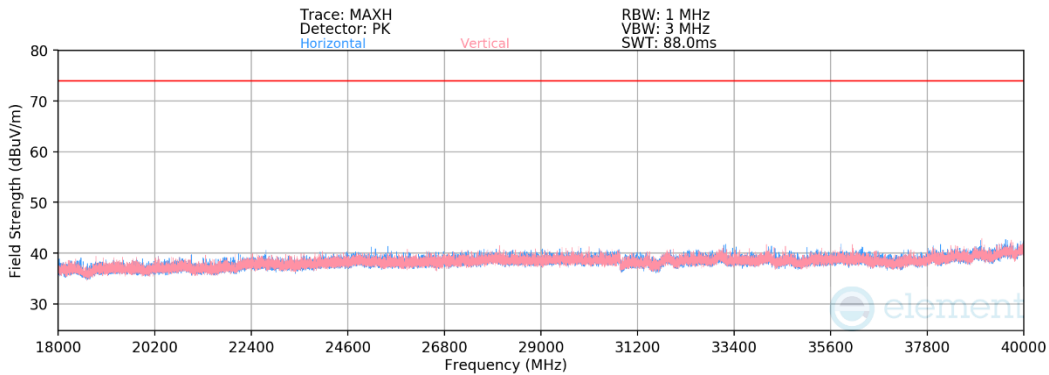


Plot 7-125. Radiated Spurious Emissions 18 GHz - 40 GHz SDM Primary (802.11be(SU) – Ch.116)

Mode: 802.11be(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580 MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-80.25	12.91	0.00	39.67	53.98	-14.31
* 11160.00	Peak	H	-	-	-68.82	12.91	0.00	51.10	73.98	-22.88
16740.00	Peak	H	-	-	-71.25	19.99	0.00	55.73	68.23	-12.50
* 22320.00	Average	V	-	-	-51.67	-5.49	-9.54	40.30	53.98	-13.68
* 22320.00	Peak	V	-	-	-62.80	-5.49	-9.54	29.16	73.98	-44.82
27900.00	Peak	H	-	-	-53.39	-3.02	-9.54	41.06	68.23	-27.17
33480.00	Peak	V	-	-	-52.76	-3.59	-9.54	41.11	68.23	-27.12

Table 7-133. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 147 of 267

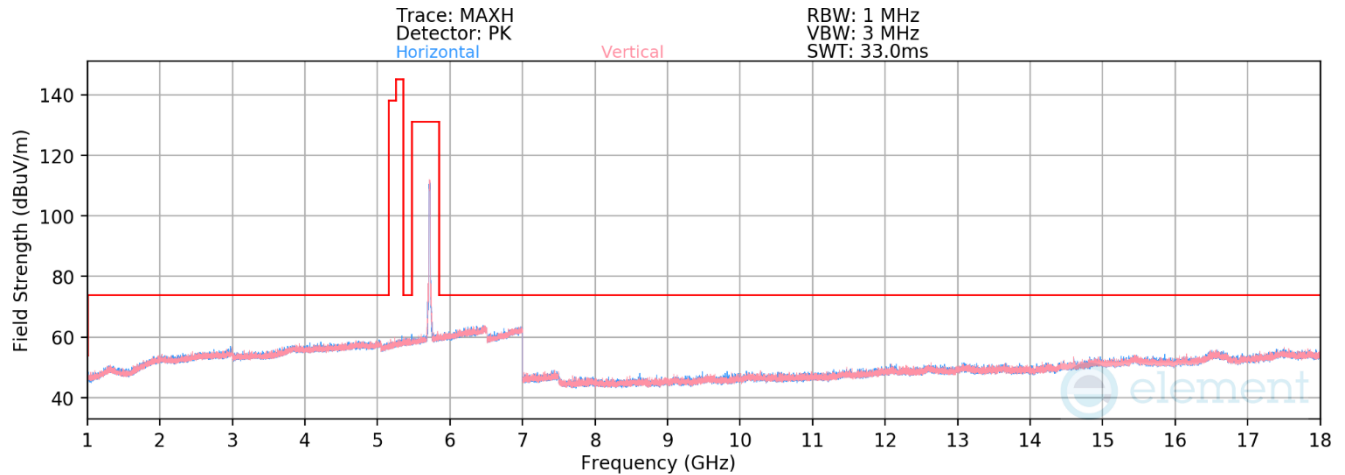


Plot 7-126. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be(SU) – Ch. 144)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5720 MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-80.94	13.84	39.90	53.98	-14.08
* 11440.00	Peak	V	-	-	-69.49	13.84	51.35	73.98	-22.63
17160.00	Peak	V	-	-	-71.29	19.81	55.52	68.23	-12.71

Table 7-134. Radiated Measurements SDM Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 148 of 267

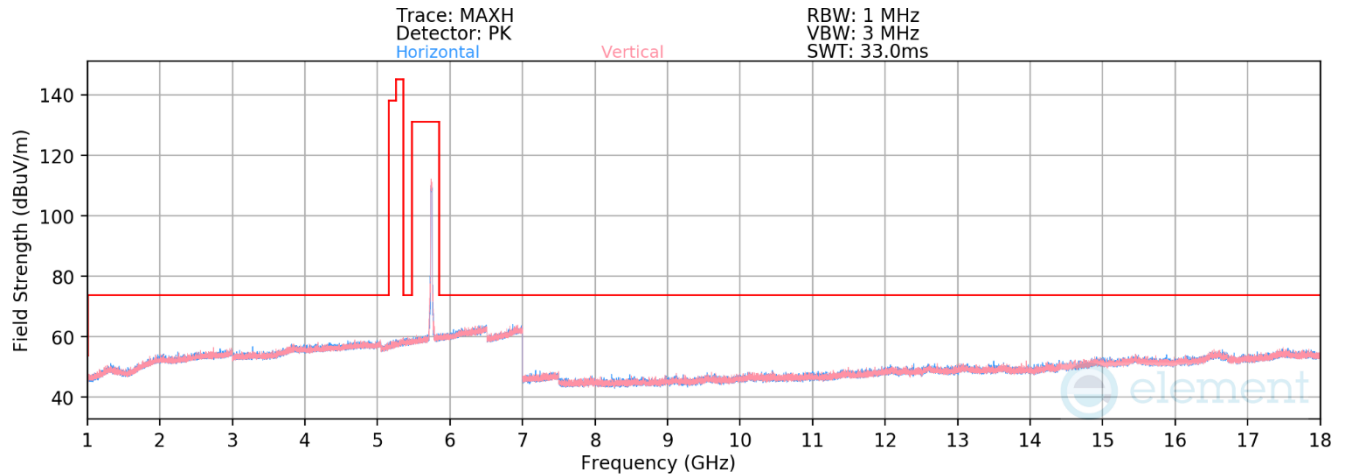

Plot 7-127. Radiated Spurious Emissions above 1 GHz CDD Primary (802.11be(SU) – Ch. 149)

Mode: 802.11be(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-80.84	13.63	39.79	53.98	-14.19
* 11490.00	Peak	H	-	-	-70.26	13.63	50.36	73.98	-23.62
17235.00	Peak	V	-	-	-70.78	19.69	55.91	68.23	-12.32

Table 7-135. Radiated Measurements CDD Primary

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 149 of 267