




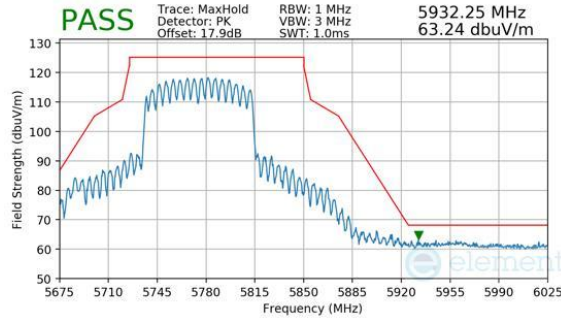


Plot 7-423. CDD Primary (Peak, Ch.155, 802.11ac, MCS9)

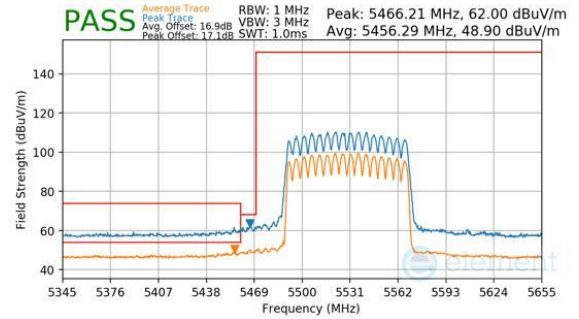


Plot 7-426. CDD Primary (Peak & Average, Ch.106, 802.11be(SU), MCS11)

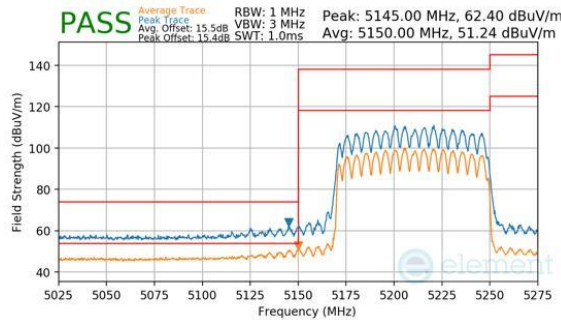


Plot 7-424. CDD Primary (Peak & Average, Ch.42, 802.11be(SU), MCS11)

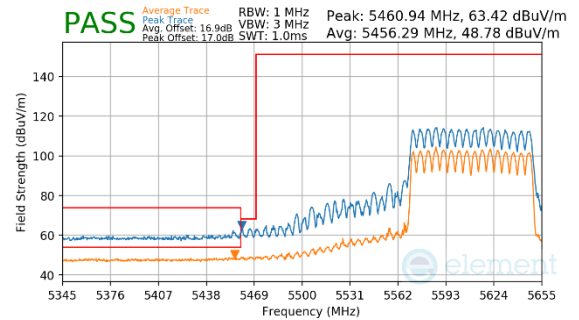

Plot 7-427. CDD Primary (Peak & Average, Ch.122, 802.11be(SU), MCS11)

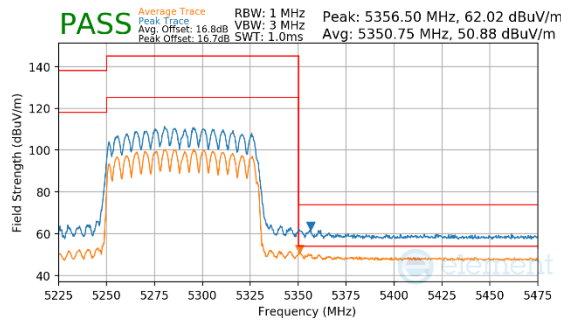


Plot 7-425. CDD Primary (Peak & Average, Ch.58, 802.11be(SU), MCS11)

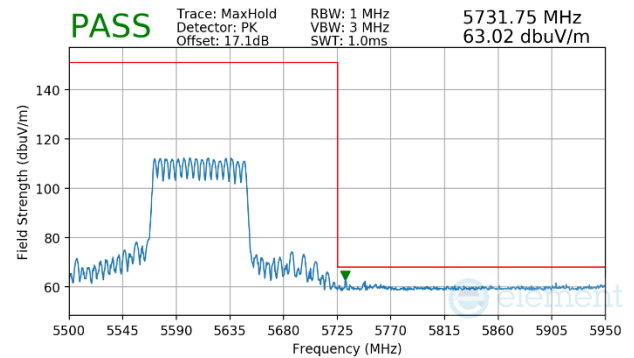


Plot 7-428. CDD Primary (Peak, Ch.122, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 228 of 267

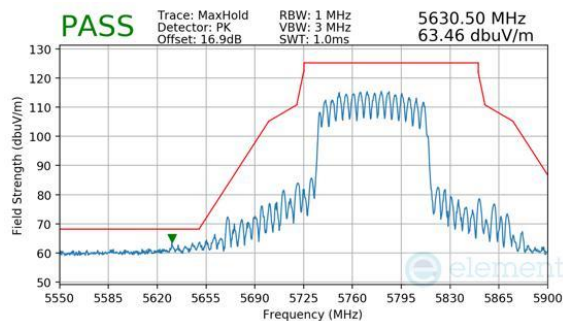


Plot 7-429. CDD Primary (Peak, Ch.155, 802.11be(SU), MCS11)

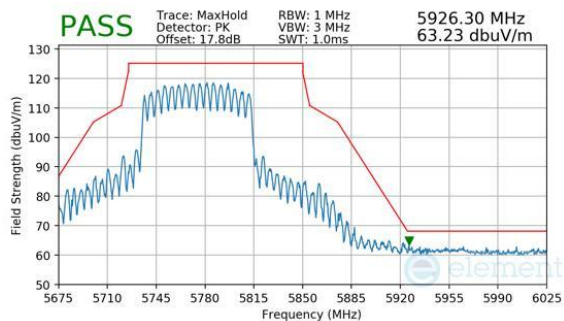


Plot 7-430. CDD Primary (Peak, Ch.155, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 229 of 267


7.6.19 CDD Primary Radiated Band Edge Measurements (160 MHz BW)

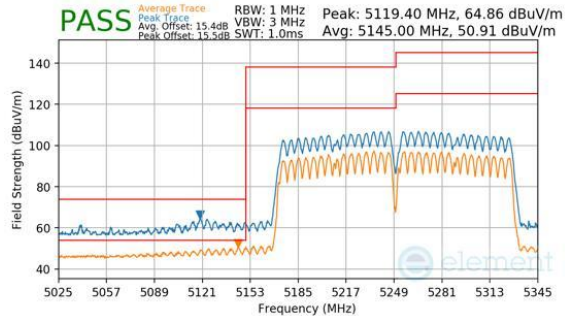


Plot 7-431. CDD Primary (Peak & Average, Ch.50, 802.11ac, MCS9)

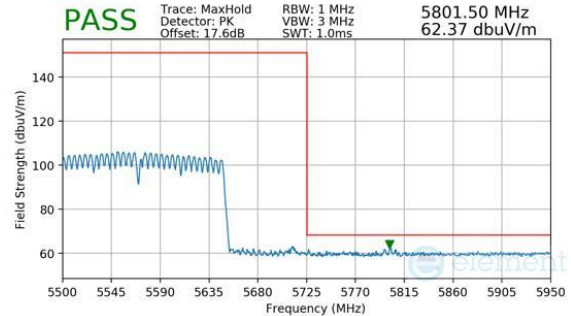


Plot 7-434. CDD Primary (Peak, Ch.114, 802.11ac, MCS9)

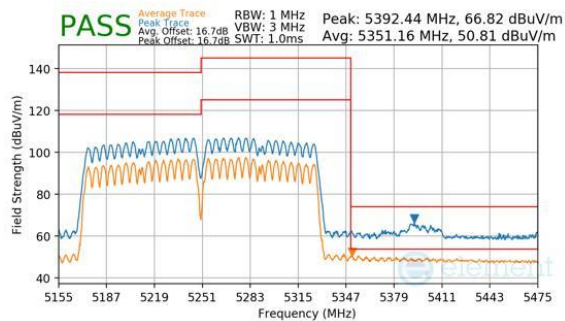


Plot 7-432. CDD Primary (Peak & Average, Ch.50, 802.11ac, MCS9)

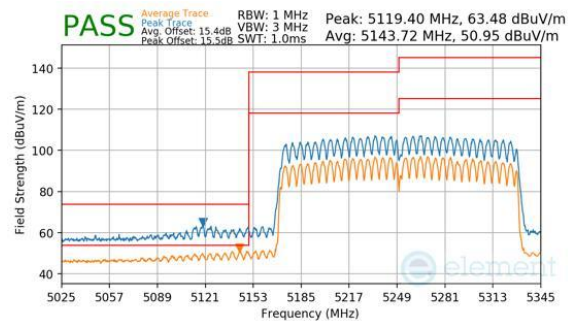

Plot 7-435. CDD Primary (Peak & Average, Ch.50, 802.11be(SU), MCS11)

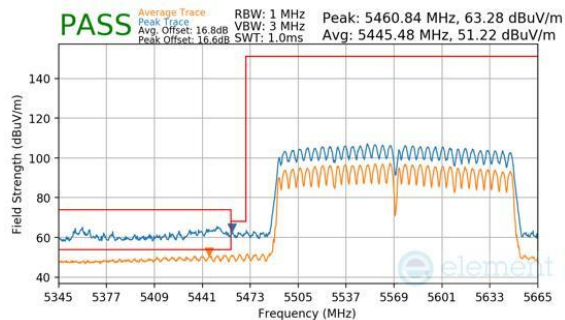


Plot 7-433. CDD Primary (Peak & Average, Ch.114, 802.11ac, MCS9)

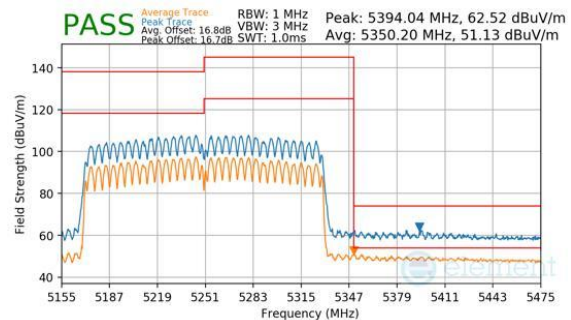


Plot 7-436. CDD Primary (Peak & Average, Ch.50, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 230 of 267

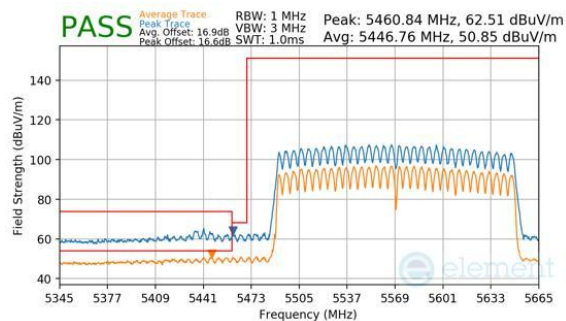


Plot 7-437. CDD Primary (Peak & Average, Ch.114, 802.11be(SU), MCS11)

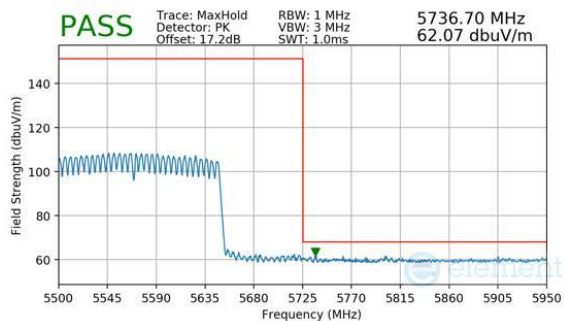


Plot 7-438. CDD Primary (Peak, Ch.114, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 231 of 267

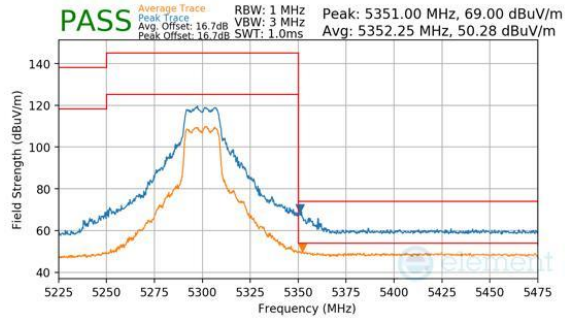


Plot 7-445. SDM Diversity (Peak & Average, Ch.60, 802.11n, MCS7)

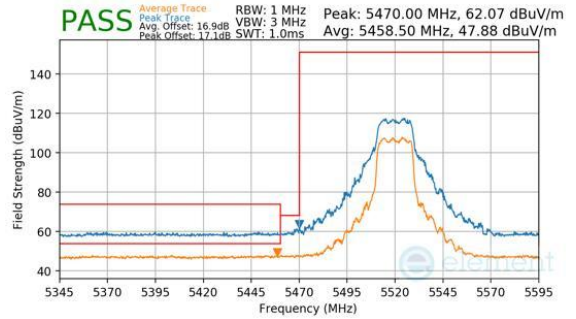


Plot 7-448. SDM Diversity (Peak & Average, Ch.104, 802.11n, MCS7)

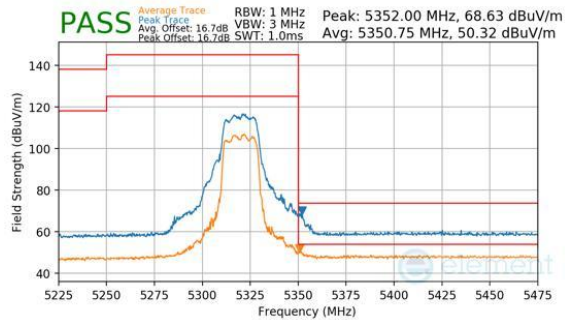


Plot 7-446. SDM Diversity (Peak & Average, Ch.64, 802.11n, MCS7)

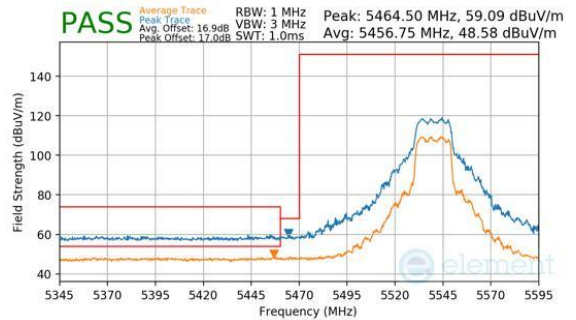

Plot 7-449. SDM Diversity (Peak & Average, Ch.108, 802.11n, MCS7)

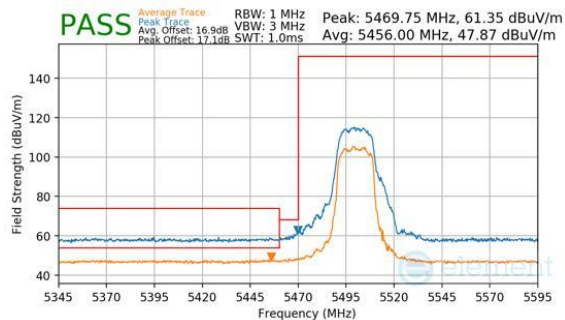


Plot 7-447. CDD Diversity (Peak & Average, Ch.100, 802.11n, MCS7)

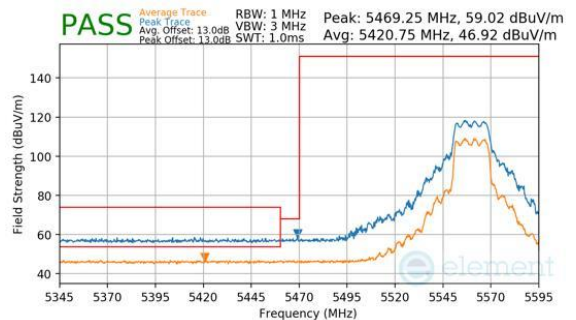


Plot 7-450. SDM Diversity (Peak & Average, Ch.112, 802.11n, MCS7)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 233 of 267

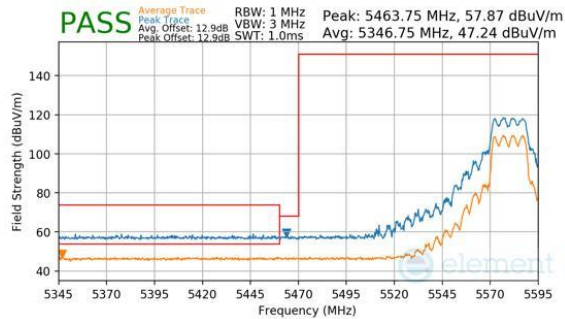


Plot 7-451. SDM Diversity (Peak & Average, Ch.116, 802.11n, MCS7)

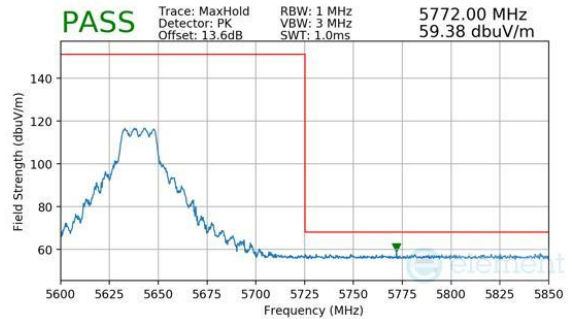


Plot 7-454. SDM Diversity (Peak, Ch.128, 802.11n, MCS7)

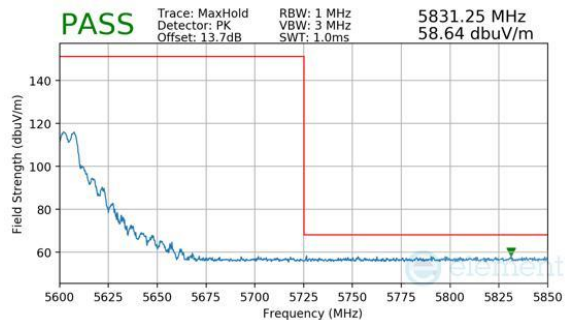


Plot 7-452. SDM Diversity (Peak, Ch.120, 802.11n, MCS7)

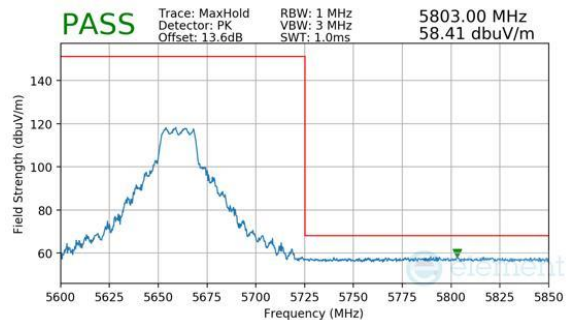

Plot 7-455. SDM Diversity (Peak, Ch.132, 802.11n, MCS7)

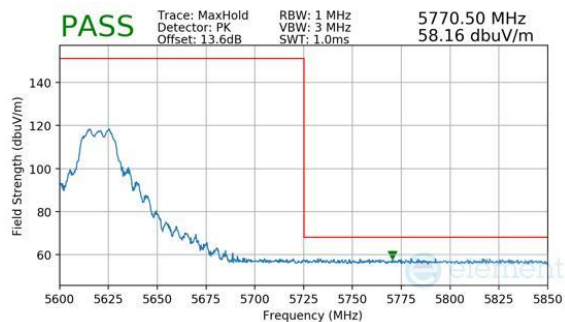


Plot 7-453. SDM Diversity (Peak, Ch.124, 802.11n, MCS7)

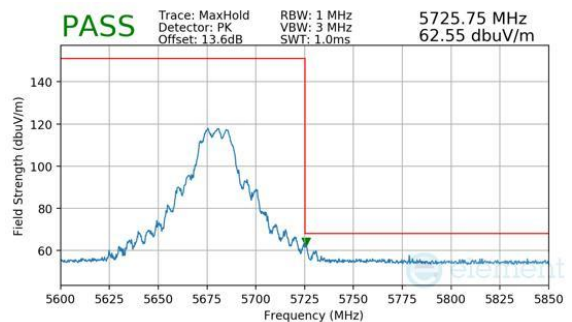


Plot 7-456. SDM Diversity (Peak, Ch.136, 802.11n, MCS7)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 234 of 267

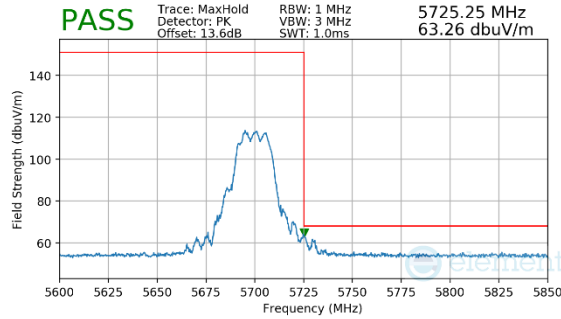


Plot 7-457. CDD Diversity (Peak, Ch.140, 802.11n, MCS7)

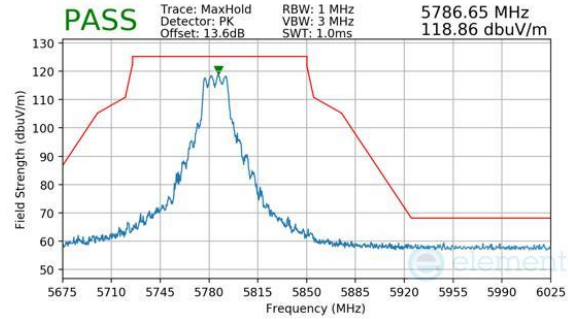


Plot 7-460. CDD Diversity (Peak, Ch.157, 802.11n, MCS7)

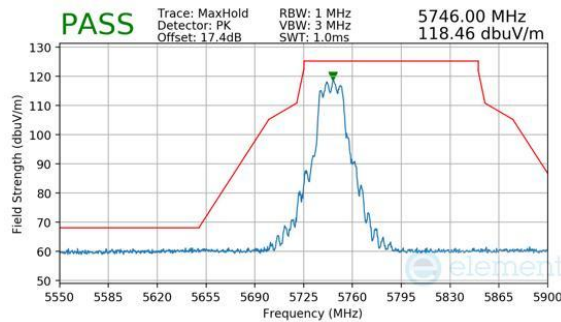


Plot 7-458. CDD Diversity (Peak, Ch.149, 802.11n, MCS7)

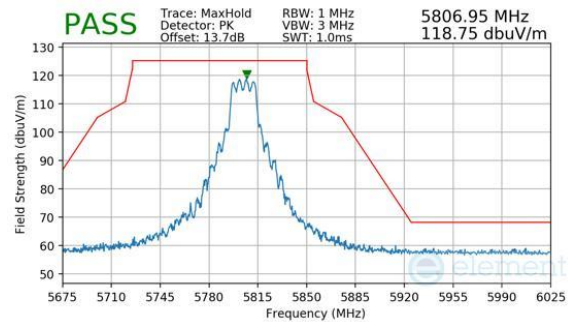

Plot 7-461. CDD Diversity (Peak, Ch.161, 802.11n, MCS7)

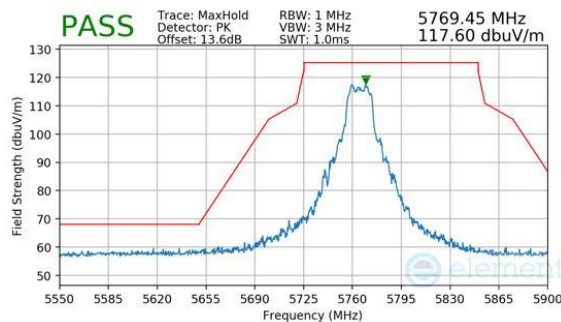


Plot 7-459. CDD Diversity (Peak, Ch.153, 802.11n, MCS7)

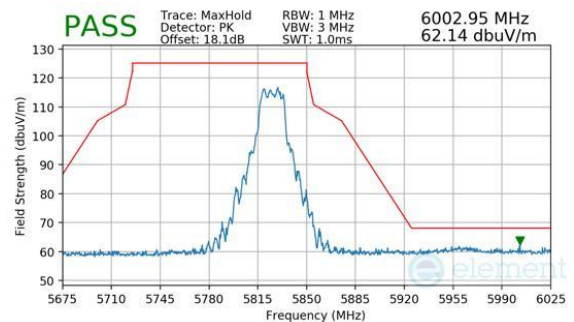


Plot 7-462. CDD Diversity (Peak, Ch.165, 802.11n, MCS7)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 235 of 267

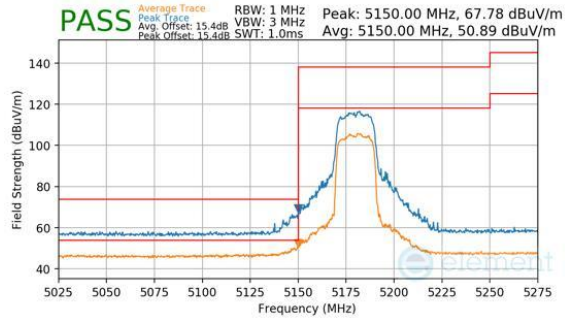


Plot 7-463. CDD Diversity (Peak & Average, Ch.36, 802.11be(SU), MCS11)

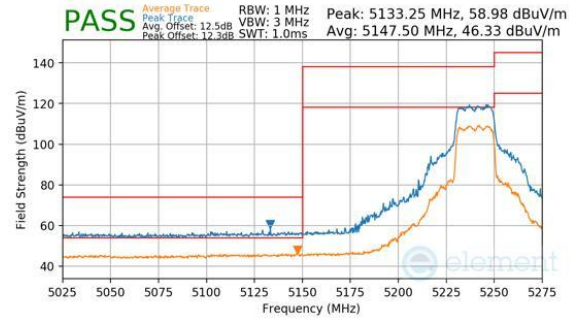


Plot 7-466. SDM Diversity (Peak & Average, Ch.48, 802.11be(SU), MCS11)

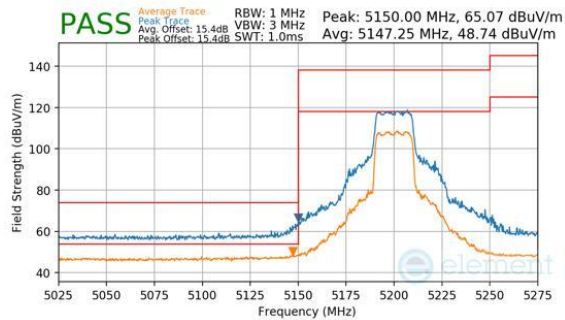


Plot 7-464. CDD Diversity (Peak & Average, Ch.40, 802.11be(SU), MCS11)

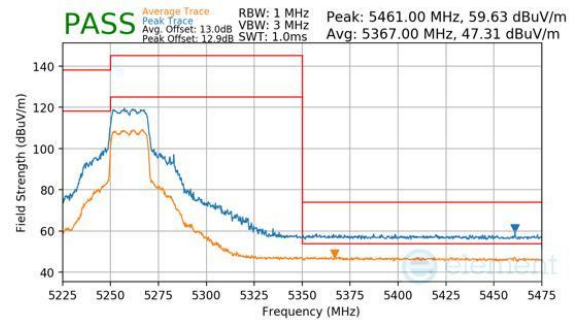

Plot 7-467. SDM Diversity (Peak & Average, Ch.52, 802.11be(SU), MCS11)

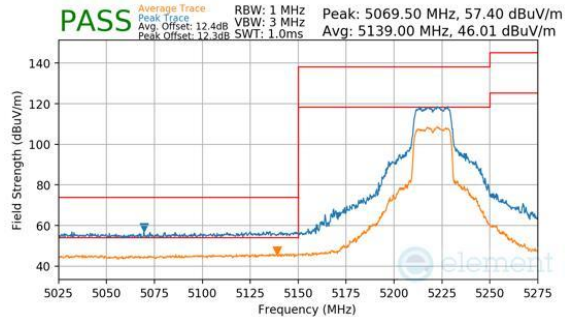


Plot 7-465. CDD Diversity (Peak & Average, Ch.44, 802.11be(SU), MCS11)

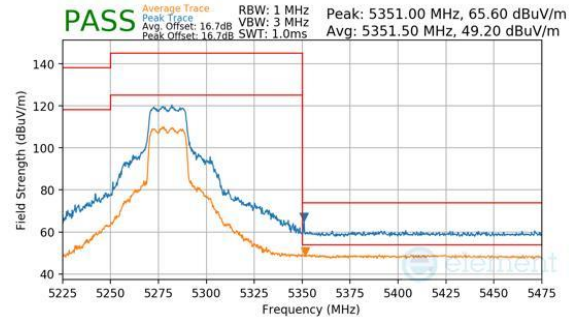


Plot 7-468. SDM Diversity (Peak & Average, Ch.56, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 236 of 267

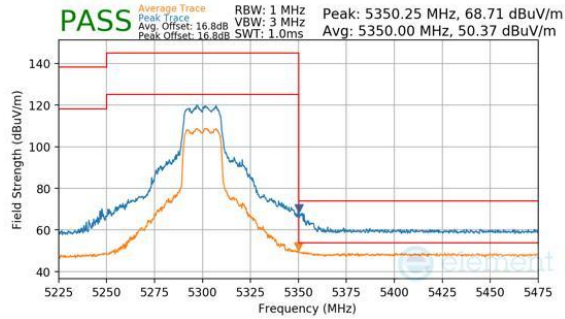


Plot 7-469. SDM Diversity (Peak & Average, Ch.60, 802.11be(SU), MCS11)

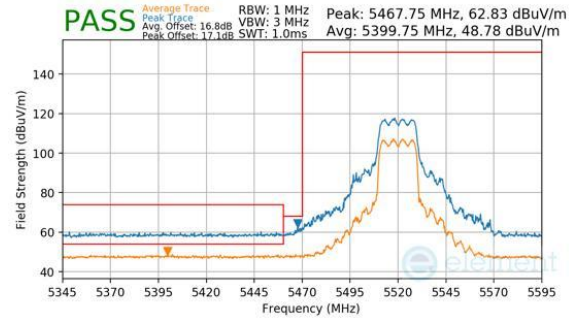


Plot 7-472. SDM Diversity (Peak & Average, Ch.104, 802.11be(SU), MCS11)

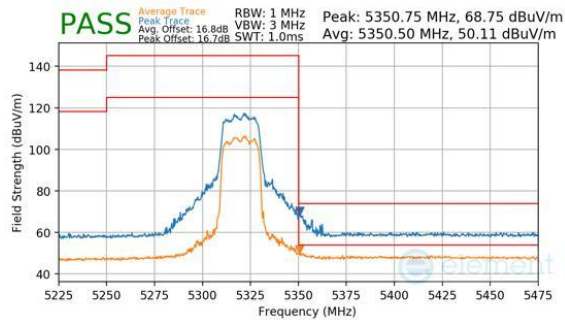


Plot 7-470. CDD Diversity (Peak & Average, Ch.64, 802.11be(SU), MCS11)

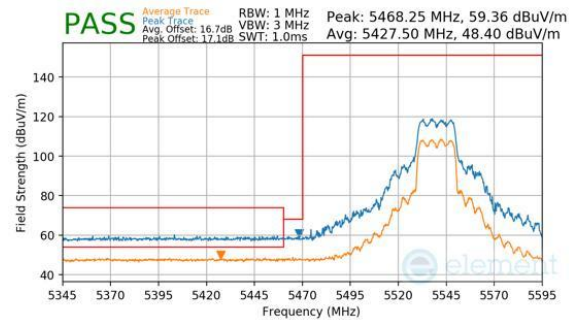

Plot 7-473. SDM Diversity (Peak & Average, Ch.108, 802.11be(SU), MCS11)

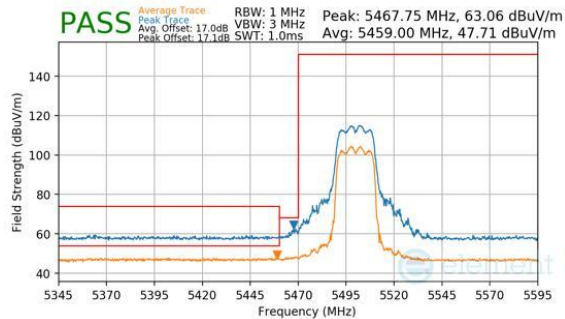


Plot 7-471. CDD Diversity (Peak & Average, Ch.100, 802.11be(SU), MCS11)

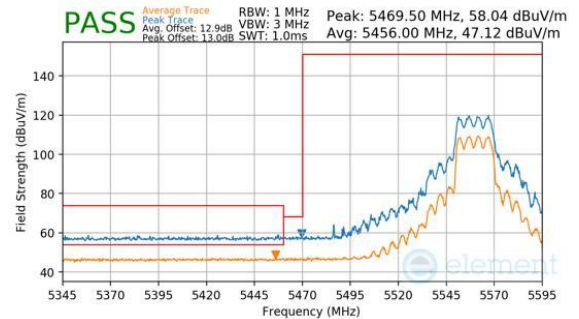


Plot 7-474. SDM Diversity (Peak & Average, Ch.112, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 237 of 267

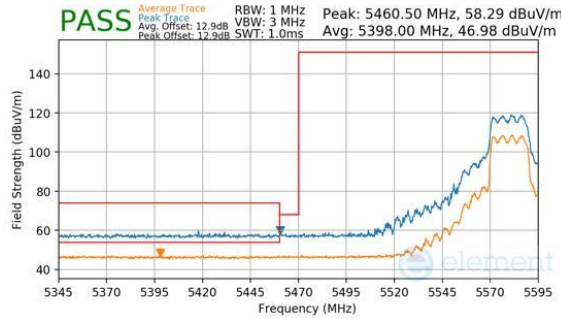


Plot 7-475. SDM Diversity (Peak & Average, Ch.116, 802.11be(SU), MCS11)

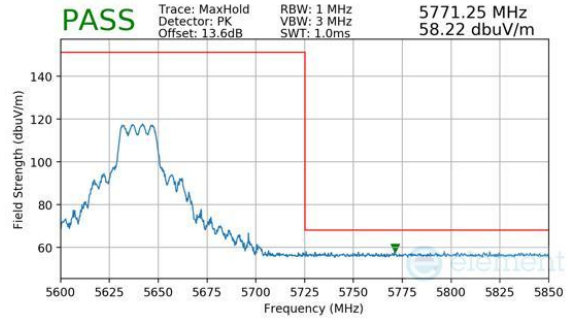


Plot 7-478. SDM Diversity (Peak, Ch.128, 802.11be(SU), MCS11)

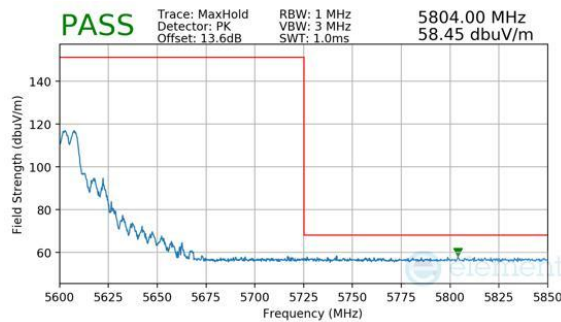


Plot 7-476. SDM Diversity (Peak, Ch.120, 802.11be(SU), MCS11)

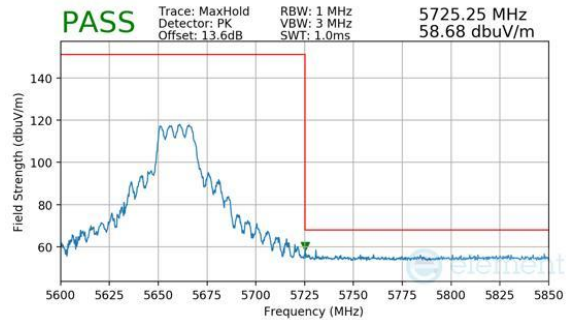

Plot 7-479. SDM Diversity (Peak, Ch.132, 802.11be(SU), MCS11)

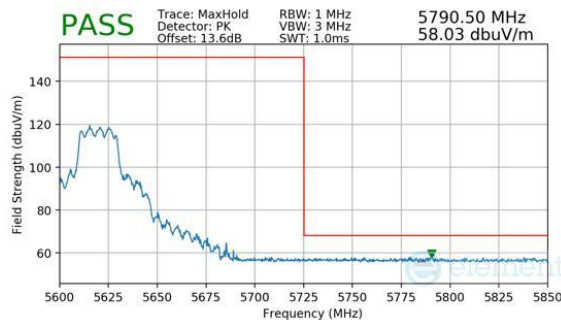


Plot 7-477. SDM Diversity (Peak, Ch.124, 802.11be(SU), MCS11)

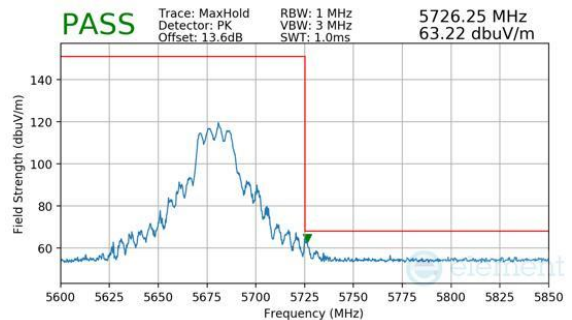


Plot 7-480. SDM Diversity (Peak, Ch.136, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 238 of 267

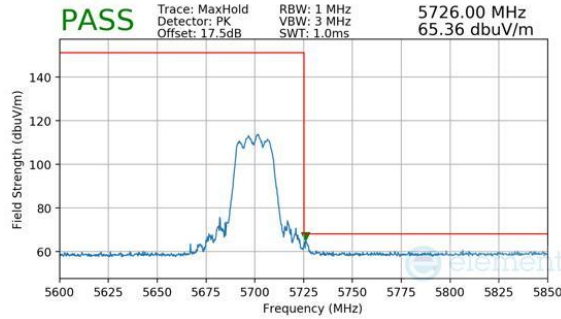


Plot 7-481. CDD Diversity (Peak, Ch.140, 802.11be(SU), MCS11)

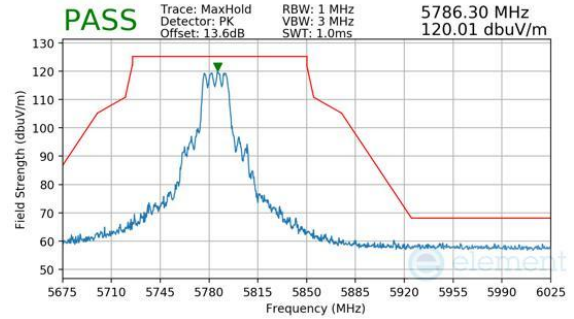


Plot 7-484. CDD Diversity (Peak, Ch.157, 802.11be(SU), MCS11)

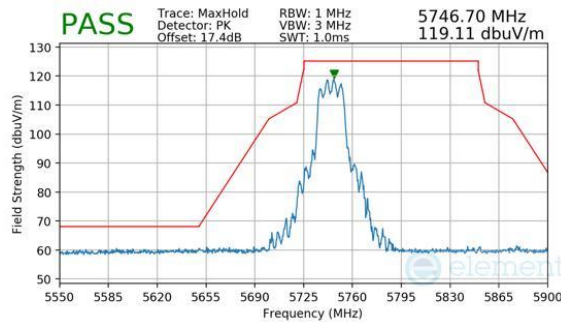


Plot 7-482. CDD Diversity (Peak, Ch.149, 802.11be(SU), MCS11)

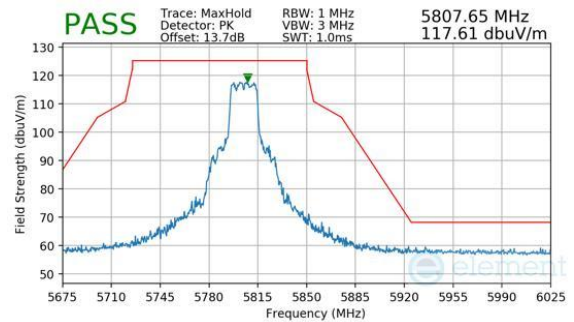

Plot 7-485. CDD Diversity (Peak, Ch.161, 802.11be(SU), MCS11)

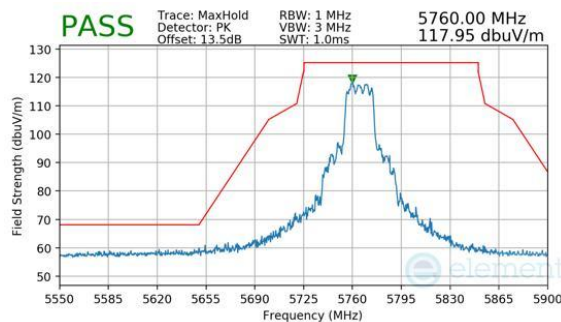


Plot 7-483. CDD Diversity (Peak, Ch.153, 802.11be(SU), MCS11)

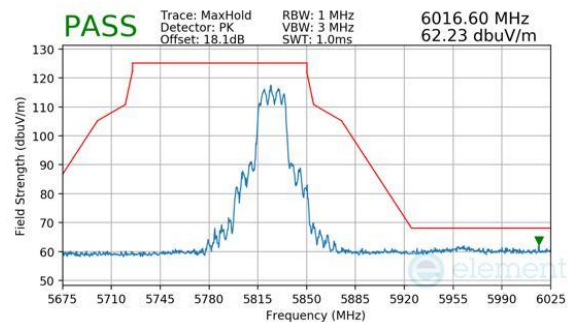


Plot 7-486. CDD Diversity (Peak, Ch.165, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 239 of 267

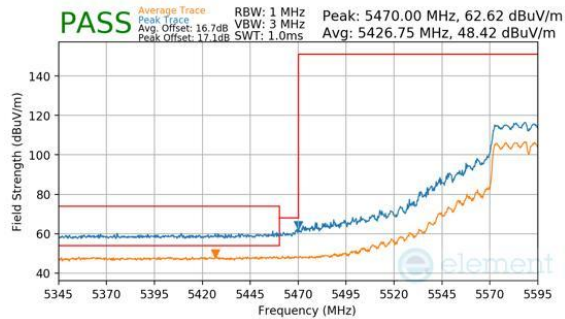


Plot 7-493. SDM Diversity (Peak & Average, Ch.118, 802.11n, MCS7)

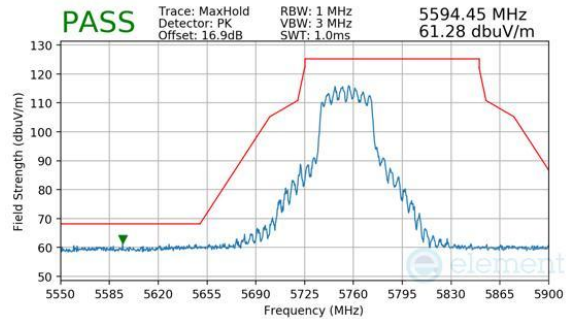


Plot 7-496. CDD Diversity (Peak, Ch.151, 802.11n, MCS7)

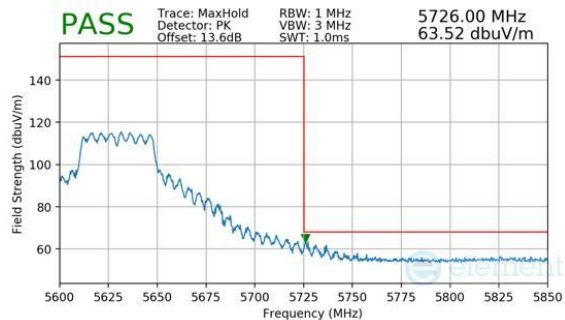


Plot 7-494. SDM Diversity (Peak, Ch.126, 802.11n, MCS7)

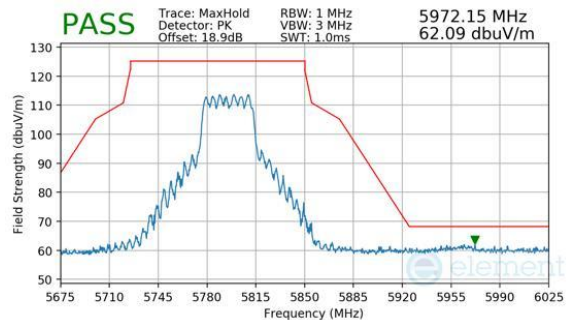

Plot 7-497. CDD Diversity (Peak, Ch.159, 802.11n, MCS7)

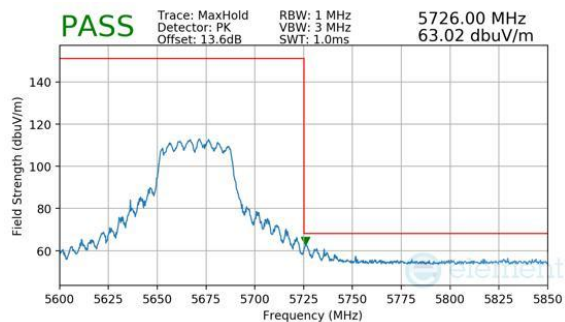


Plot 7-495. CDD Diversity (Peak, Ch.134, 802.11n, MCS7)

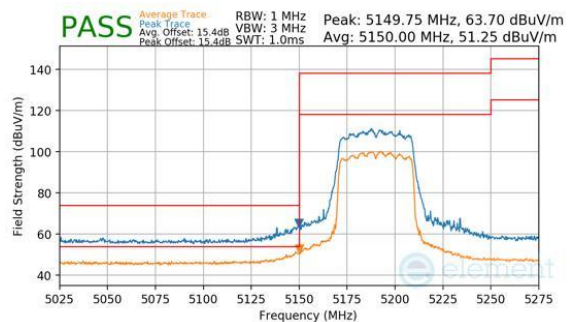


Plot 7-498. CDD Diversity (Peak & Average, Ch.38, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 241 of 267

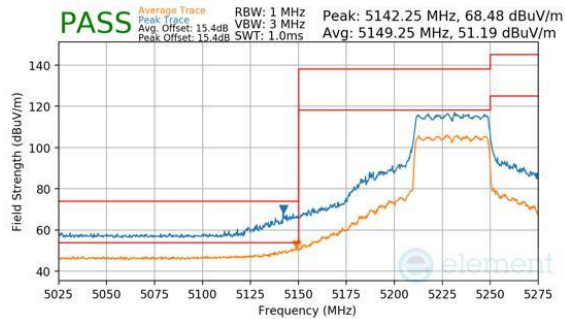


Plot 7-499. CDD Diversity (Peak & Average, Ch.46, 802.11be(SU), MCS11)

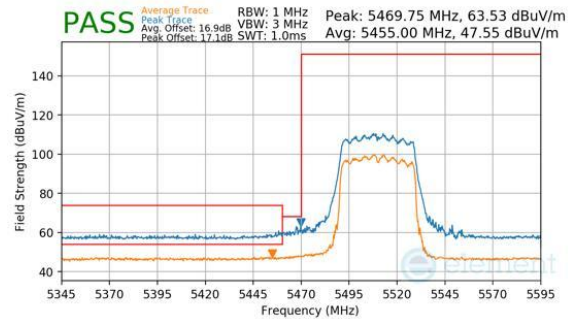


Plot 7-502. CDD Diversity (Peak & Average, Ch.102, 802.11be(SU), MCS11)

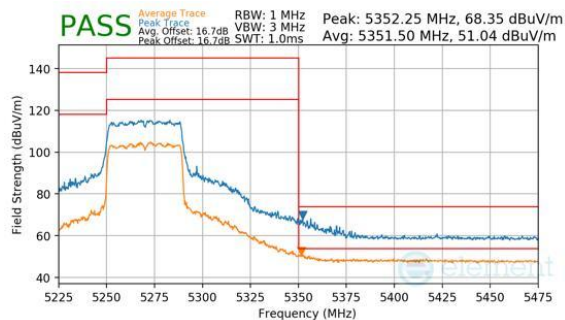


Plot 7-500. CDD Diversity (Peak & Average, Ch.54, 802.11be(SU), MCS11)

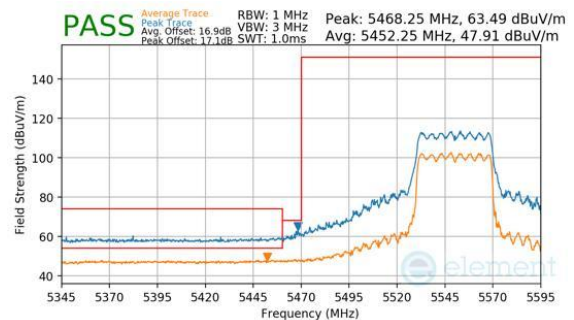

Plot 7-503. CDD Diversity (Peak & Average, Ch.110, 802.11be(SU), MCS11)

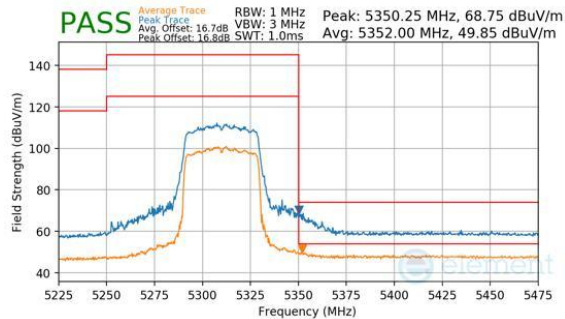


Plot 7-501. CDD Diversity (Peak & Average, Ch.62, 802.11be(SU), MCS11)

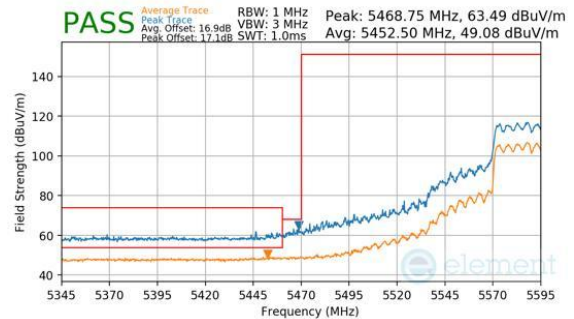


Plot 7-504. CDD Diversity (Peak & Average, Ch.118, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 242 of 267

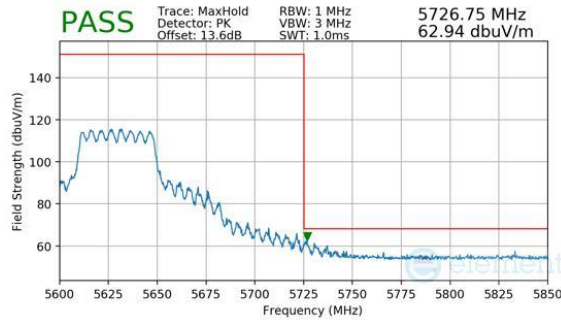


Plot 7-505. CDD Diversity (Peak, Ch.126, 802.11be(SU), MCS11)

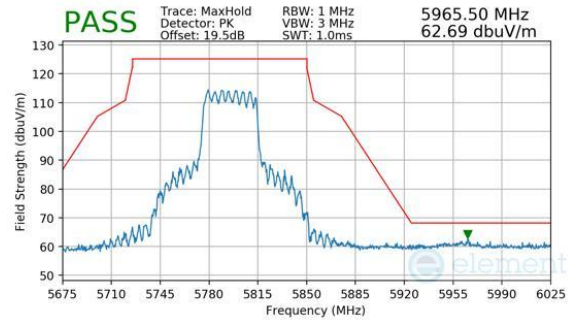

Plot 7-508. CDD Diversity (Peak, Ch.159, 802.11be(SU), MCS11)

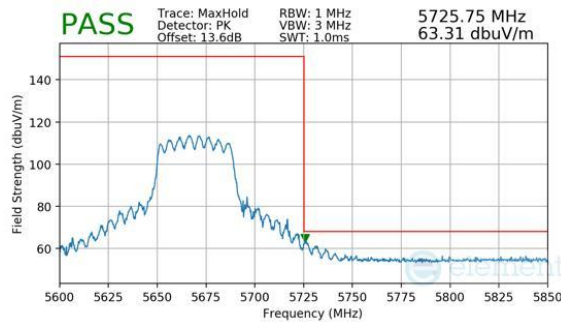


Plot 7-506. CDD Diversity (Peak, Ch.134, 802.11be(SU), MCS11)

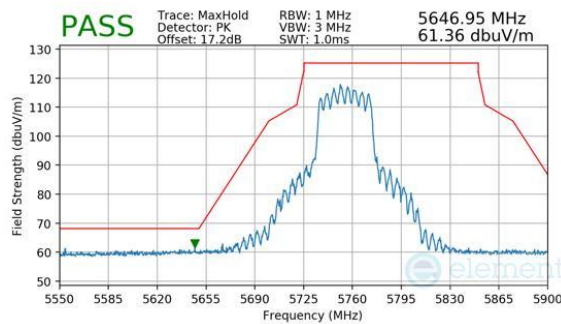


Plot 7-507. CDD Diversity (Peak, Ch.151, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 243 of 267


7.6.22 CDD Diversity Radiated Band Edge Measurements (80 MHz BW)

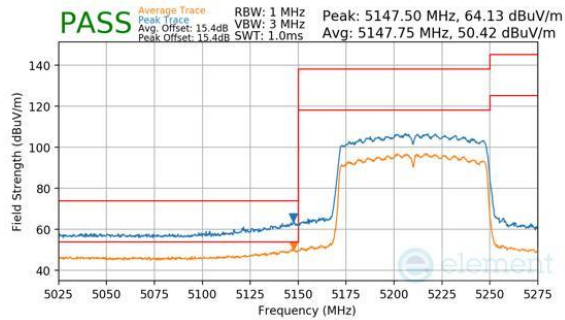


Plot 7-509. CDD Diversity (Peak & Average, Ch.42, 802.11ac, MCS9)

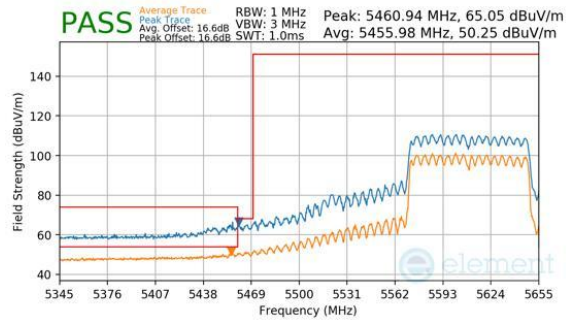


Plot 7-512. CDD Diversity (Peak & Average, Ch.122, 802.11ac, MCS9)

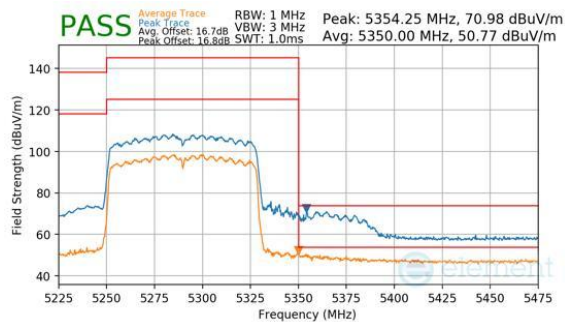


Plot 7-510. CDD Diversity (Peak & Average, Ch.58, 802.11ac, MCS9)

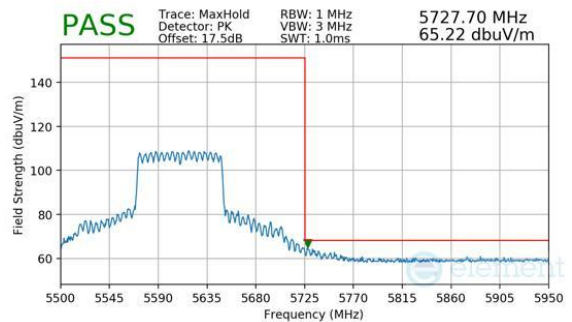

Plot 7-513. CDD Diversity (Peak, Ch.122, 802.11ac, MCS9)

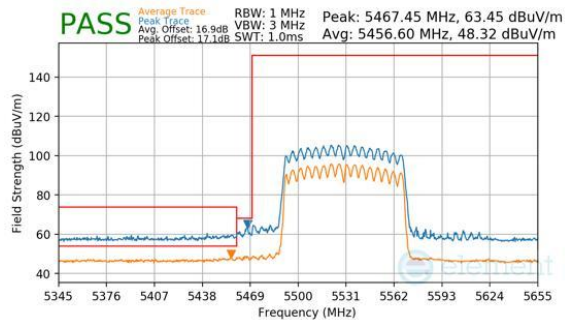


Plot 7-511. CDD Diversity (Peak & Average, Ch.106, 802.11ac, MCS9)

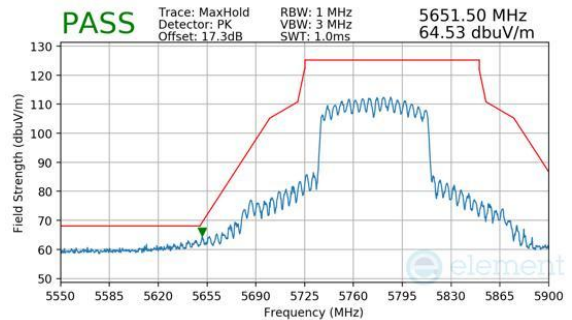


Plot 7-514. CDD Diversity (Peak, Ch.155, 802.11ac, MCS9)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 244 of 267

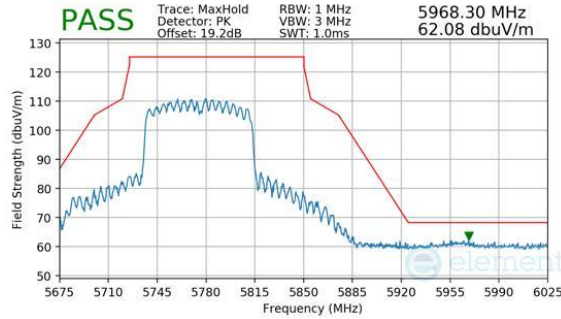


Plot 7-515. CDD Diversity (Peak, Ch.155, 802.11ac, MCS9)

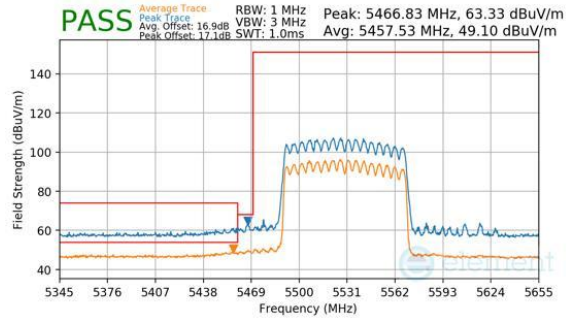


Plot 7-518. CDD Diversity (Peak & Average, Ch.106, 802.11be(SU), MCS11)

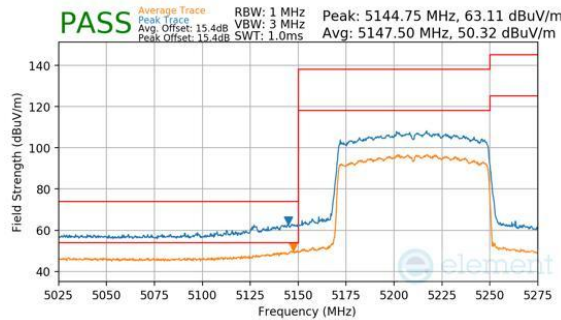


Plot 7-516. CDD Diversity (Peak & Average, Ch.42, 802.11be(SU), MCS11)

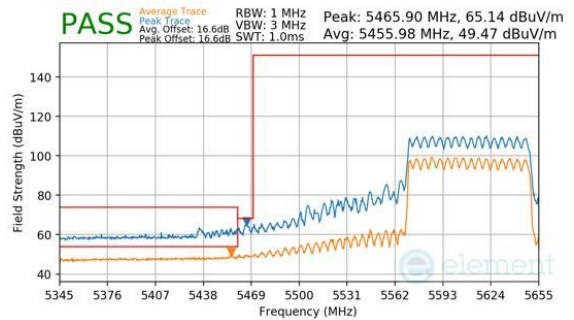

Plot 7-519. CDD Diversity (Peak & Average, Ch.122, 802.11be(SU), MCS11)

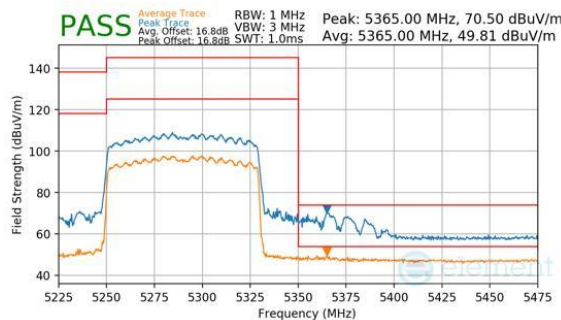


Plot 7-517. CDD Diversity (Peak & Average, Ch.58, 802.11be(SU), MCS11)

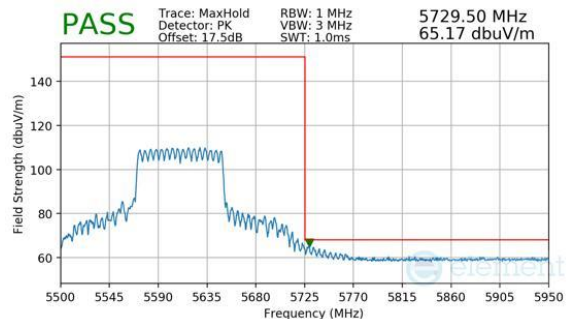


Plot 7-520. CDD Diversity (Peak, Ch.122, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 245 of 267

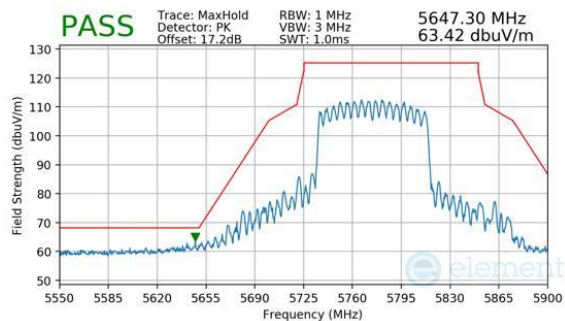

Plot 7-521. CDD Diversity (Peak, Ch.155, 802.11be(SU), MCS11)

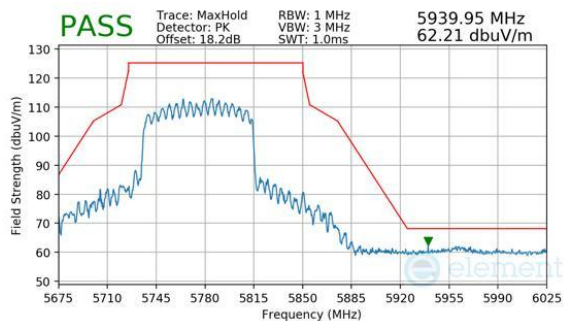


Plot 7-522. CDD Diversity (Peak, Ch.155, 802.11be(SU), MCS11)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 246 of 267

V 12.0 03/03/2026


7.6.23 CDD Diversity Radiated Band Edge Measurements (160 MHz BW)

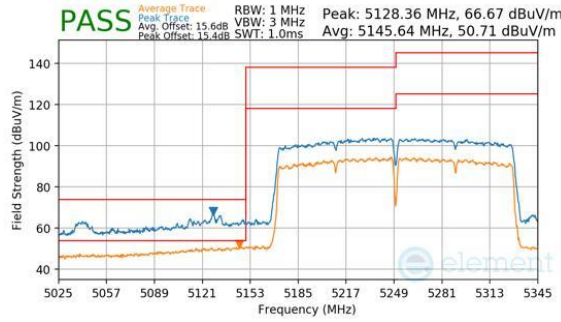


Plot 7-523. CDD Diversity (Peak & Average, Ch.50, 802.11ac, MCS9)

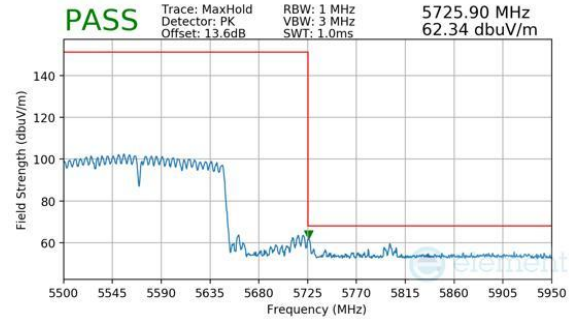


Plot 7-526. CDD Diversity (Peak, Ch.114, 802.11ac, MCS9)

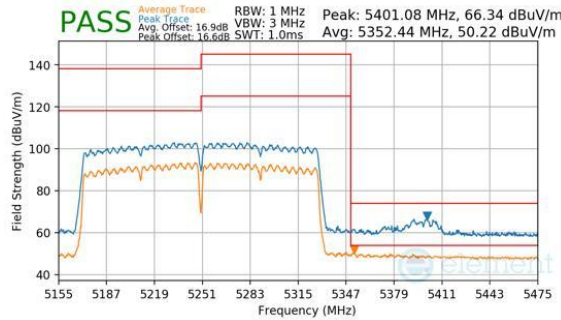


Plot 7-524. CDD Diversity (Peak & Average, Ch.50, 802.11ac, MCS9)

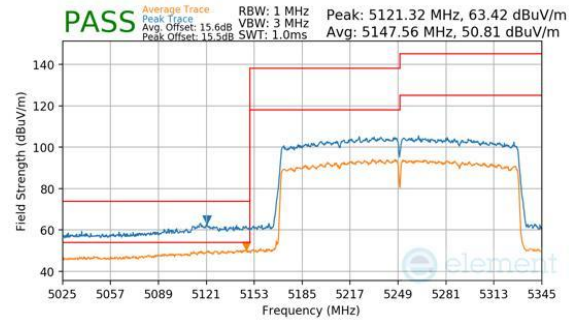

Plot 7-527. CDD Diversity (Peak & Average, Ch.50, 802.11be(SU), MCS11)

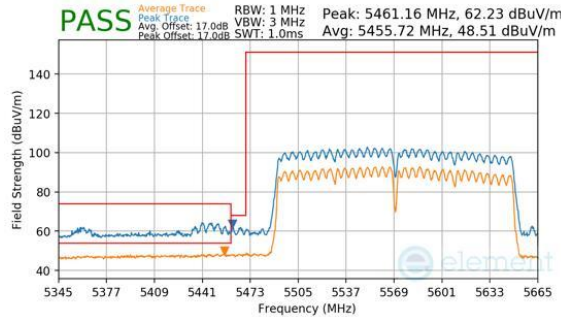


Plot 7-525. CDD Diversity (Peak & Average, Ch.114, 802.11ac, MCS9)

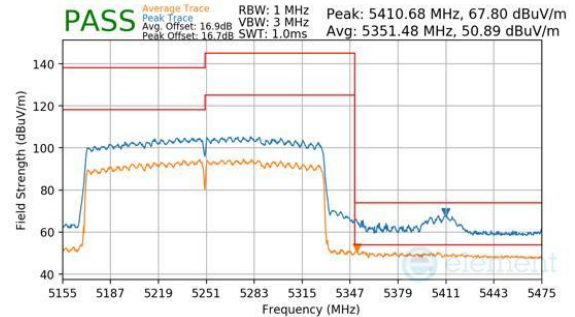


Plot 7-528. CDD Diversity (Peak & Average, Ch.50, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 247 of 267

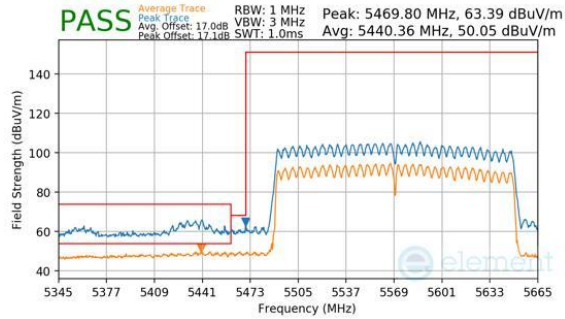

Plot 7-529. CDD Diversity (Peak & Average, Ch.114, 802.11be(SU), MCS11)

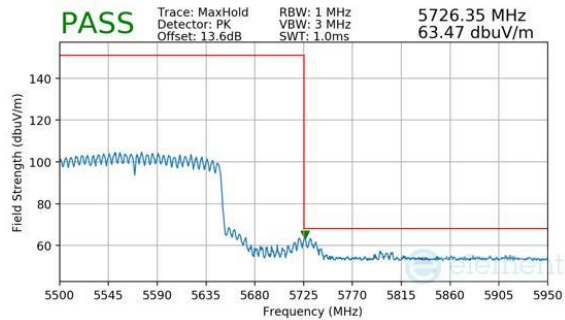

Plot 7-530. CDD Diversity (Peak, Ch.114, 802.11be(SU), MCS11)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 248 of 267

7.7 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-165 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-165. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 249 of 267

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

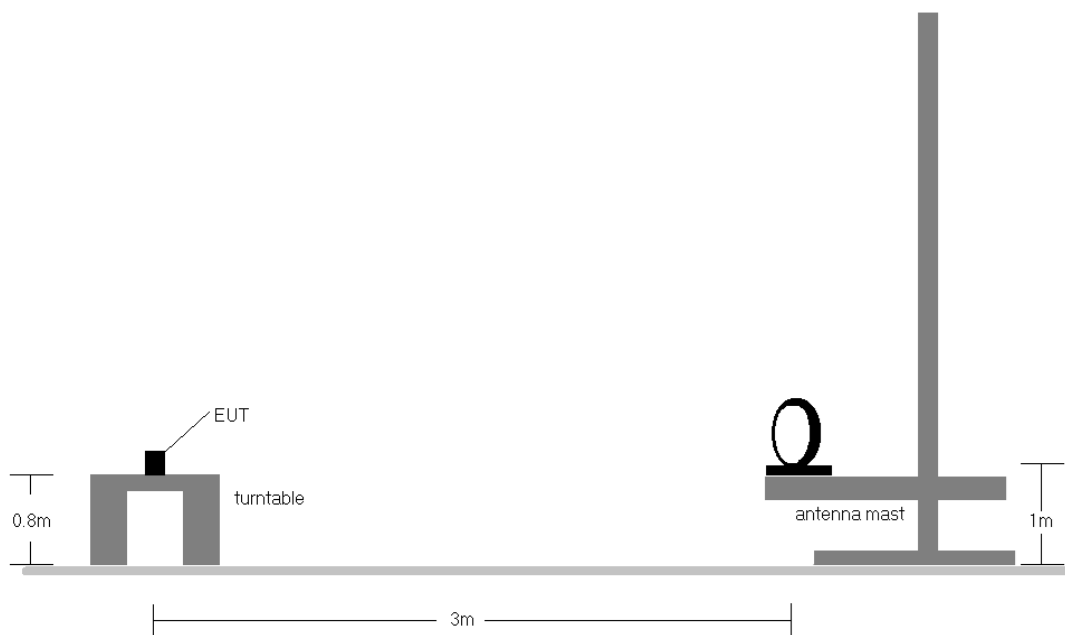


Figure 7-6. Radiated Test Setup < 30 MHz

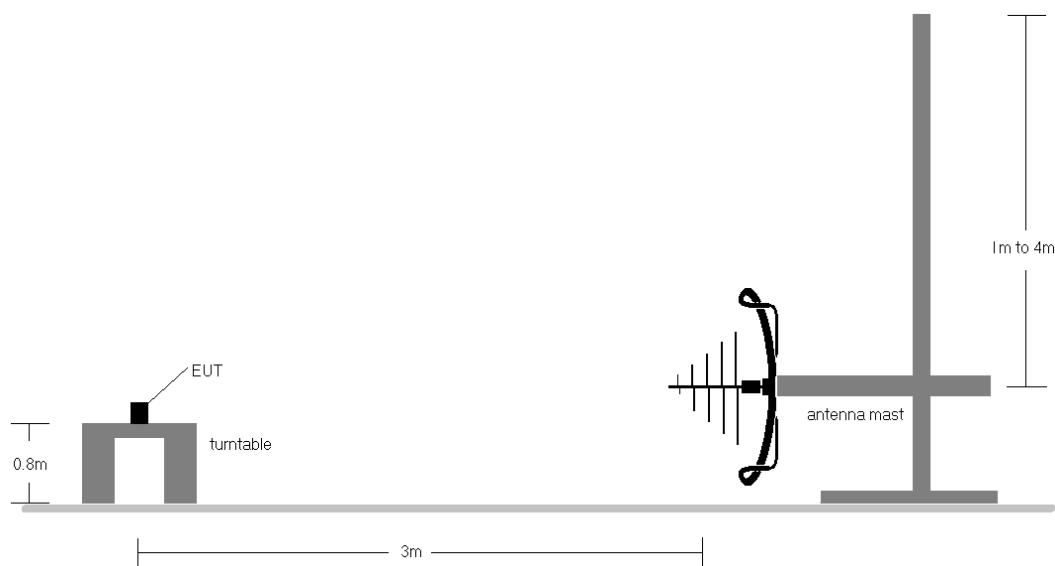


Figure 7-7. Radiated Test Setup < 1 GHz

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 250 of 267

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-165.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamp Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 251 of 267

7.7.1 CDD Primary Radiated Spurious Emissions Measurements (Below 1 GHz)

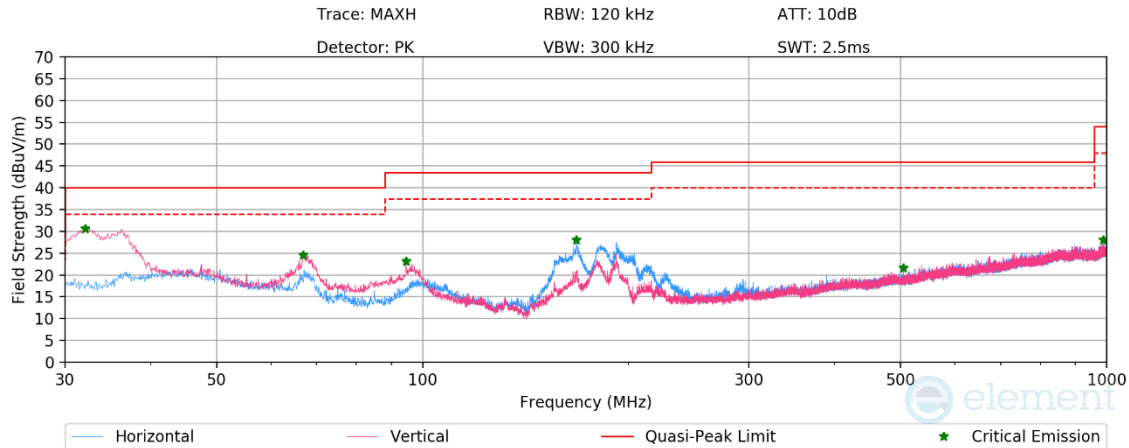


Plot 7-531. Radiated Spurious Emissions below 1 GHz CDD Primary, 802.11n, Ch.40 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
32.10	Max-Peak	V	100	244	-54.75	-21.65	30.60	40.00	-9.40
66.90	Max-Peak	V	100	257	-61.75	-20.67	24.58	40.00	-15.42
94.50	Max-Peak	V	100	216	-63.65	-20.21	23.14	43.50	-20.36
167.89	Max-Peak	H	200	360	-58.05	-20.88	28.07	43.50	-15.43
504.26	Max-Peak	V	200	74	-74.24	-11.20	21.56	46.00	-24.44
988.06	Max-Peak	H	100	224	-75.36	-3.59	28.05	54.00	-25.95

Table 7-166. Radiated Spurious Emissions below 1 GHz CDD Primary, 802.11n, Ch.40 with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 252 of 267

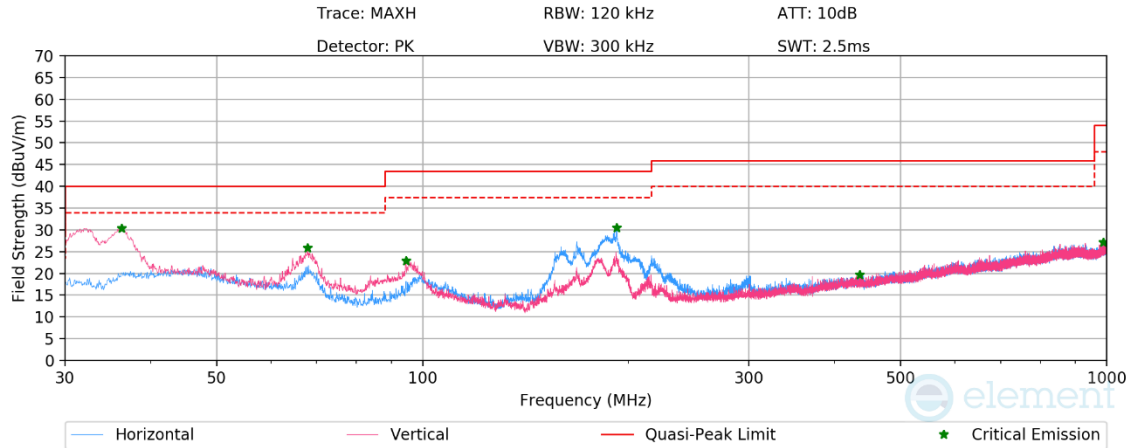


Plot 7-532. Radiated Spurious Emissions below 1 GHz CDD Primary, 802.11be (SU), Ch.40 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.30	Max-Peak	V	100	4	-56.54	-20.13	30.34	40.00	-9.66
67.80	Max-Peak	V	300	169	-60.05	-21.04	25.91	40.00	-14.09
94.50	Max-Peak	V	100	144	-63.92	-20.21	22.87	43.50	-20.63
192.19	Max-Peak	H	100	220	-57.80	-18.73	30.47	43.50	-13.03
435.38	Max-Peak	V	300	159	-74.84	-12.45	19.71	46.00	-26.29
988.12	Max-Peak	H	200	107	-76.24	-3.59	27.17	54.00	-26.83

Table 7-167. Radiated Spurious Emissions below 1 GHz CDD Primary, 802.11be (SU), Ch.40 with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 253 of 267

7.7.2 CDD Diversity Radiated Spurious Emissions Measurements (Below 1 GHz)

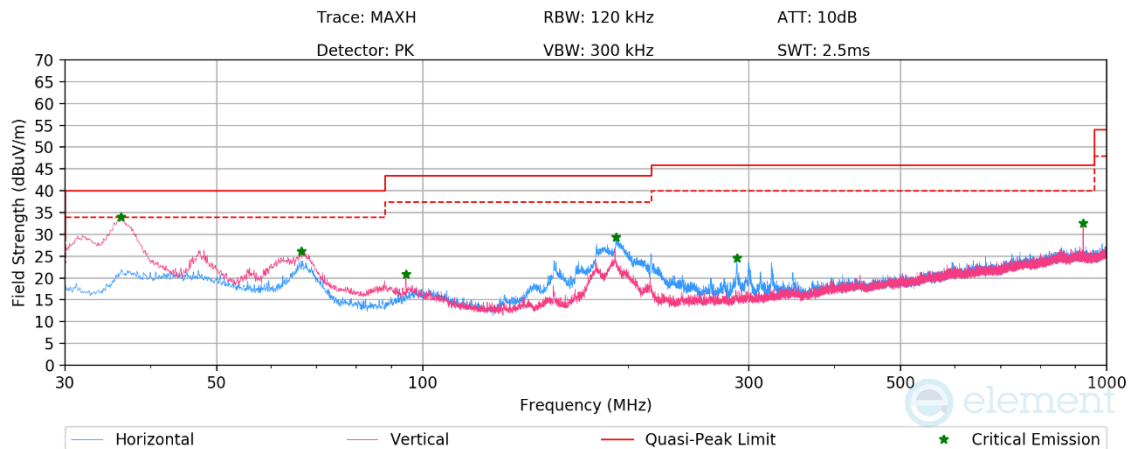


Plot 7-533. Radiated Spurious Emissions below 1 GHz CDD Diversity, 802.11n, Ch.40 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.24	Max-Peak	V	100	0	-52.91	-20.14	33.94	40.00	-6.06
66.48	Max-Peak	V	100	237	-60.31	-20.55	26.14	40.00	-13.86
94.50	Max-Peak	V	100	129	-65.93	-20.21	20.86	43.50	-22.64
191.95	Max-Peak	H	100	193	-58.85	-18.76	29.39	43.50	-14.11
287.89	Max-Peak	H	100	100	-66.47	-15.91	24.62	46.00	-21.38
924.04	Max-Peak	V	100	105	-70.44	-4.06	32.50	46.00	-13.50

Table 7-168. Radiated Spurious Emissions below 1 GHz CDD Diversity, 802.11n, Ch.40 with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 254 of 267

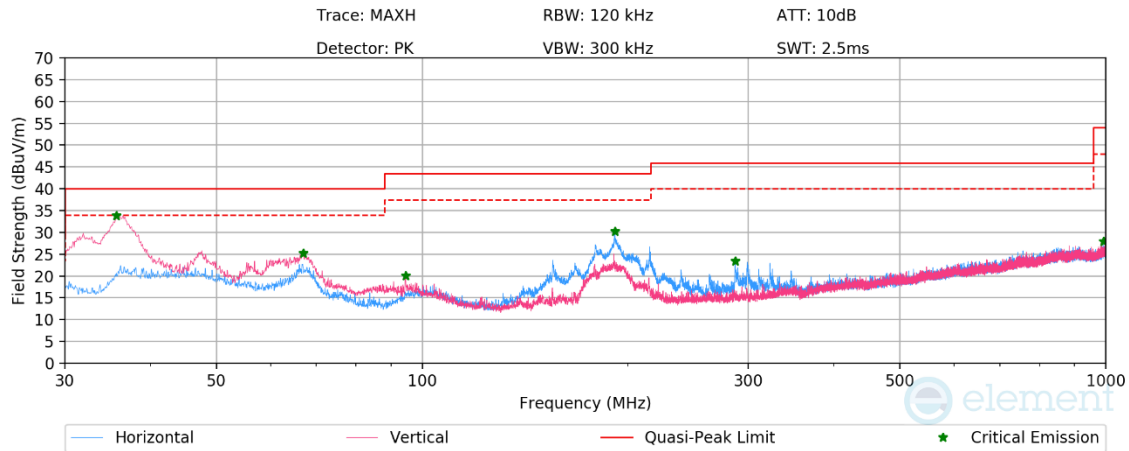

Plot 7-534. Radiated Spurious Emissions below 1 GHz CDD Diversity, 802.11be (SU), Ch.40 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
35.70	Max-Peak	V	100	10	-52.84	-20.34	33.82	40.00	-6.18
66.96	Max-Peak	V	100	21	-61.04	-20.69	25.27	40.00	-14.73
94.50	Max-Peak	V	100	116	-66.78	-20.21	20.02	43.50	-23.48
191.29	Max-Peak	H	100	180	-57.88	-18.86	30.26	43.50	-13.24
287.17	Max-Peak	H	100	84	-67.63	-15.92	23.45	46.00	-22.55
991.60	Max-Peak	H	100	296	-75.63	-3.43	27.94	54.00	-26.06


Table 7-169. Radiated Spurious Emissions below 1 GHz CDD Diversity, 802.11be (SU), Ch.40 with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 255 of 267

7.7.3 Simultaneous TX Radiated Spurious Emissions Measurements (Below 1 GHz)

Description	Bluetooth	UNII
Antenna	Antenna WF8	Antenna WF8
Channel	78	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK ePA	802.11be(SU)

Table 7-170. Worst Case Simultaneous Transmission Configuration

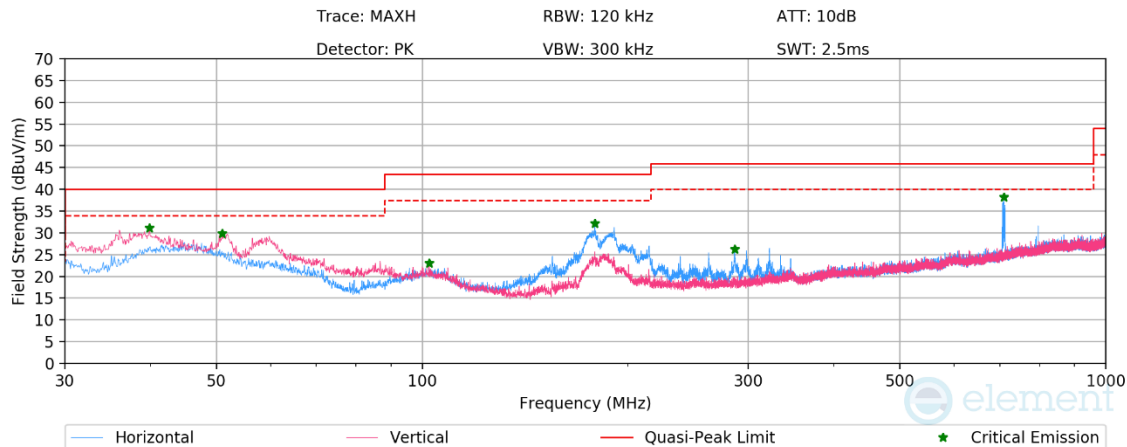

Plot 7-535. Radiated Spurious Emissions – Simultaneous Transmission 30 MHz – 1 GHz, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
39.87	Max-Peak	V	100	0	-59.61	-16.29	31.10	40.00	-8.90
50.97	Max-Peak	V	100	327	-62.10	-15.10	29.79	40.00	-10.21
102.33	Max-Peak	V	100	114	-66.12	-17.80	23.08	43.50	-20.42
178.89	Max-Peak	H	100	256	-55.19	-19.63	32.18	43.50	-11.32
286.46	Max-Peak	H	100	299	-65.15	-15.64	26.21	46.00	-19.79
709.10	Max-Peak	H	200	100	-61.57	-7.26	38.17	46.00	-7.83

Table 7-171. Radiated Spurious Emissions – Simultaneous Transmission 30 MHz – 1 GHz, with AC/DC Adapter)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 256 of 267

7.8 AC Line-Conducted Emissions

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-172. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 257 of 267

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

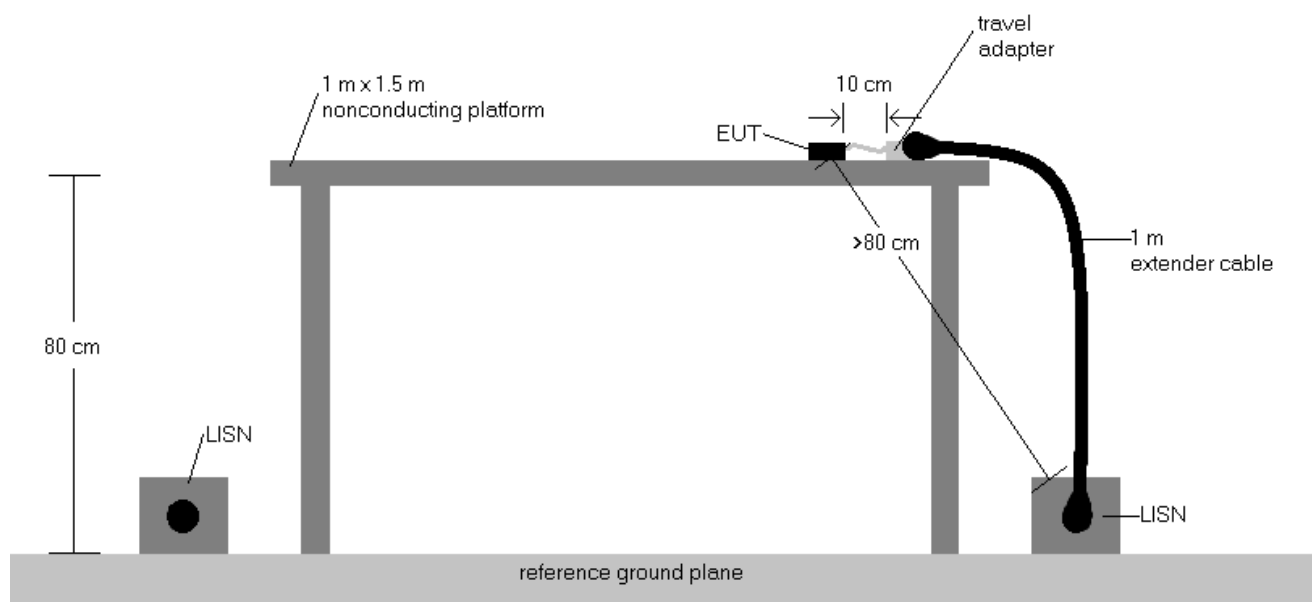



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150 kHz to 30 MHz are specified in 15.207 and RSS-Gen (7.4.2).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 258 of 267

7.8.1 CDD Primary AC Line-Conducted Emissions Measurement

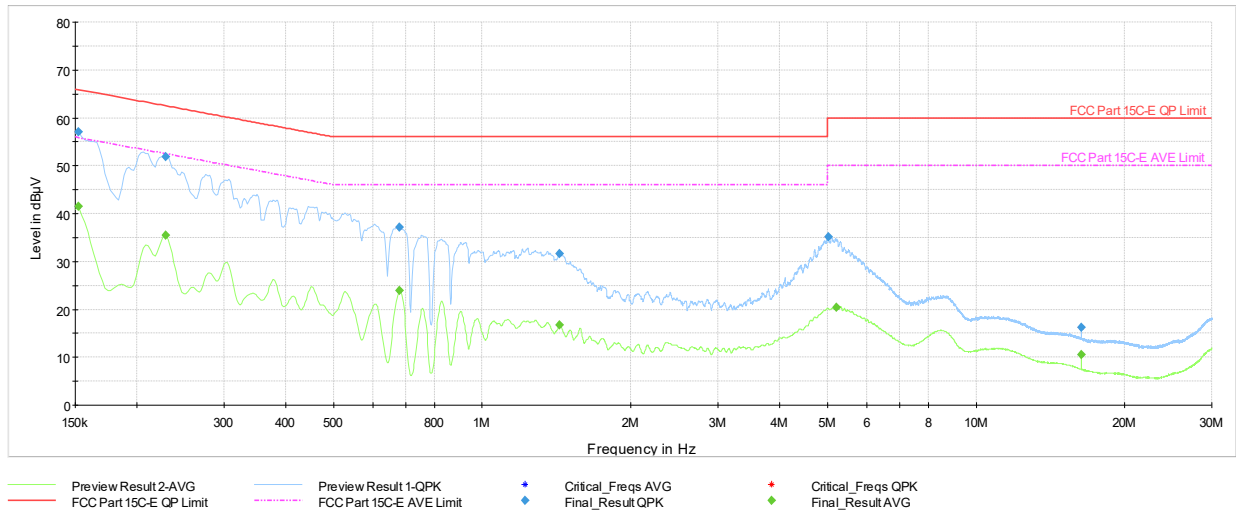


Plot 7-536. AC Line Conducted Plot with 802.11n CDD Primary – Ch.40 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.15	FINAL	---	41.43	55.88	-14.45	L1	GND
0.15	FINAL	57.06	---	65.88	-8.82	L1	GND
0.23	FINAL	---	35.41	52.50	-17.09	L1	GND
0.23	FINAL	51.80	---	62.50	-10.70	L1	GND
0.68	FINAL	37.23	---	56.00	-18.77	L1	GND
0.68	FINAL	---	23.86	46.00	-22.14	L1	GND
1.43	FINAL	31.58	---	56.00	-24.42	L1	GND
1.43	FINAL	---	16.76	46.00	-29.24	L1	GND
5.01	FINAL	35.17	---	60.00	-24.83	L1	GND
5.21	FINAL	---	20.48	50.00	-29.52	L1	GND
16.34	FINAL	---	10.52	50.00	-39.48	L1	GND
16.34	FINAL	16.23	---	60.00	-43.77	L1	GND

Table 7-173. AC Line Conducted Data with 802.11n CDD Primary – Ch.40 (L1) with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 259 of 267

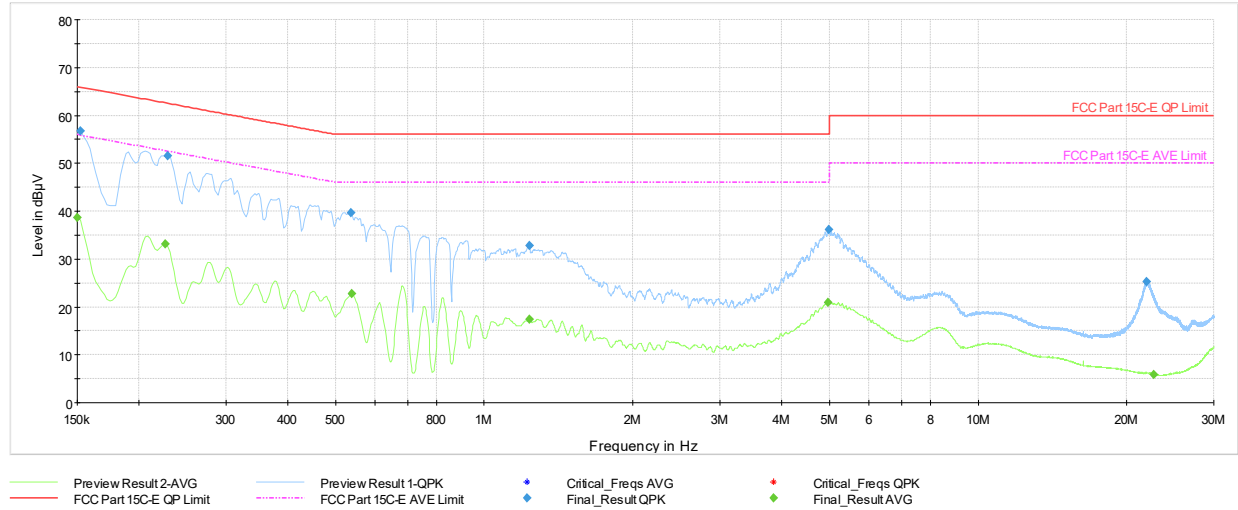


Plot 7-537. AC Line Conducted Plot with 802.11n CDD Primary – Ch.40 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.15	FINAL	---	38.58	56.00	-17.42	N	GND
0.15	FINAL	56.68	---	65.88	-9.20	N	GND
0.23	FINAL	---	33.20	52.58	-19.38	N	GND
0.23	FINAL	51.57	---	62.50	-10.93	N	GND
0.54	FINAL	39.71	---	56.00	-16.29	N	GND
0.54	FINAL	---	22.69	46.00	-23.31	N	GND
1.23	FINAL	32.80	---	56.00	-23.20	N	GND
1.23	FINAL	---	17.46	46.00	-28.54	N	GND
4.97	FINAL	---	20.84	46.00	-25.16	N	GND
4.99	FINAL	36.17	---	56.00	-19.83	N	GND
21.97	FINAL	25.31	---	60.00	-34.69	N	GND
22.71	FINAL	---	5.91	50.00	-44.09	N	GND

Table 7-174. AC Line Conducted Data with 802.11n CDD Primary – Ch.40 (N), with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 260 of 267

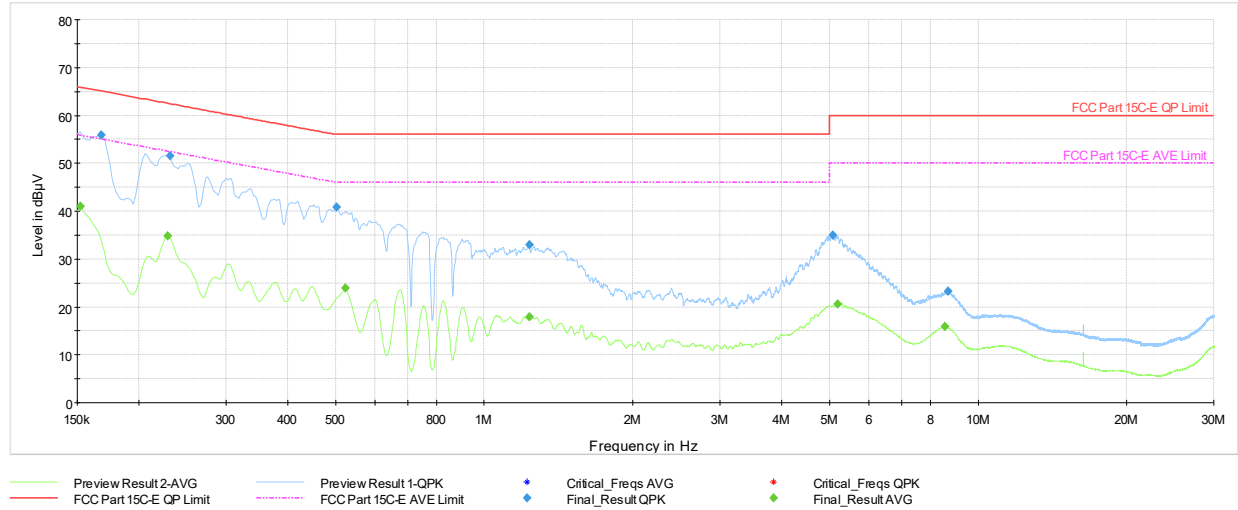


Plot 7-538. AC Line Conducted Plot with 802.11be(SU) CDD Primary – Ch.40 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.15	FINAL	---	41.03	55.88	-14.85	L1	GND
0.17	FINAL	55.91	---	65.06	-9.15	L1	GND
0.23	FINAL	---	34.89	52.50	-17.61	L1	GND
0.23	FINAL	51.49	---	62.41	-10.92	L1	GND
0.50	FINAL	40.83	---	56.00	-15.17	L1	GND
0.52	FINAL	---	23.94	46.00	-22.06	L1	GND
1.23	FINAL	32.93	---	56.00	-23.07	L1	GND
1.24	FINAL	---	17.88	46.00	-28.12	L1	GND
5.08	FINAL	34.93	---	60.00	-25.07	L1	GND
5.19	FINAL	---	20.59	50.00	-29.41	L1	GND
8.55	FINAL	---	15.84	50.00	-34.16	L1	GND
8.69	FINAL	23.26	---	60.00	-36.74	L1	GND

Table 7-175. AC Line Conducted Data with 802.11be(SU) CDD Primary – Ch.40 (L1) with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 261 of 267

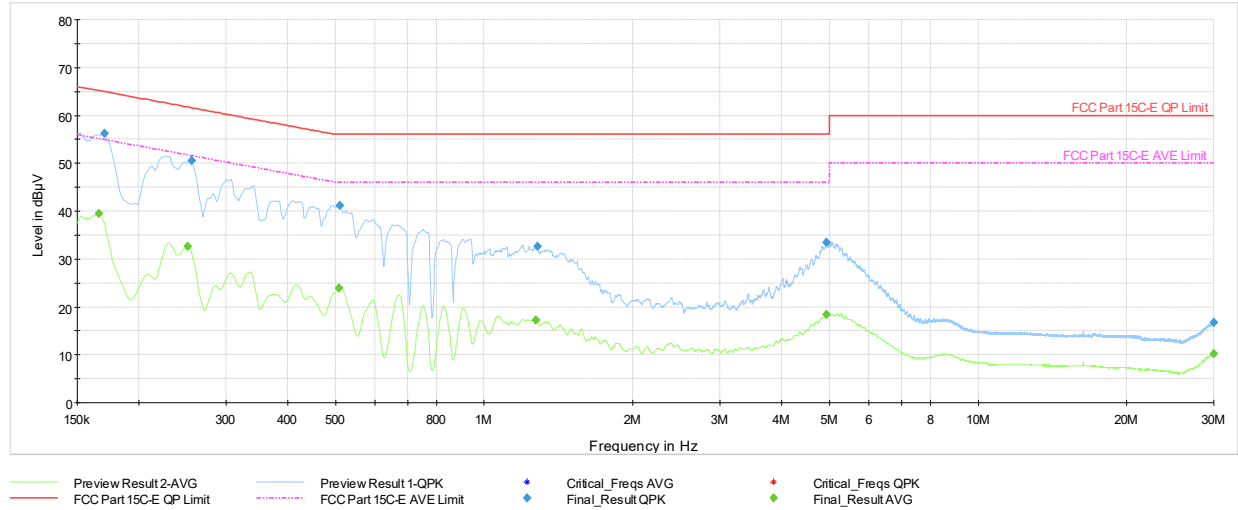


Plot 7-539. AC Line Conducted Plot with 802.11be(SU) CDD Primary – Ch.40 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	39.44	55.17	-15.73	N	GND
0.17	FINAL	56.16	---	64.95	-8.79	N	GND
0.25	FINAL	---	32.62	51.72	-19.10	N	GND
0.26	FINAL	50.53	---	61.57	-11.04	N	GND
0.51	FINAL	---	23.90	46.00	-22.10	N	GND
0.51	FINAL	41.14	---	56.00	-14.86	N	GND
1.27	FINAL	---	17.21	46.00	-28.79	N	GND
1.28	FINAL	32.57	---	56.00	-23.43	N	GND
4.93	FINAL	---	18.43	46.00	-27.57	N	GND
4.93	FINAL	33.46	---	56.00	-22.54	N	GND
30.00	FINAL	---	10.29	50.00	-39.71	N	GND
30.00	FINAL	16.77	---	60.00	-43.23	N	GND

Table 7-176. AC Line Conducted Data with 802.11be(SU) CDD Primary – Ch.40 (N), with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 262 of 267

7.8.2 CDD Diversity AC Line-Conducted Emissions Measurement

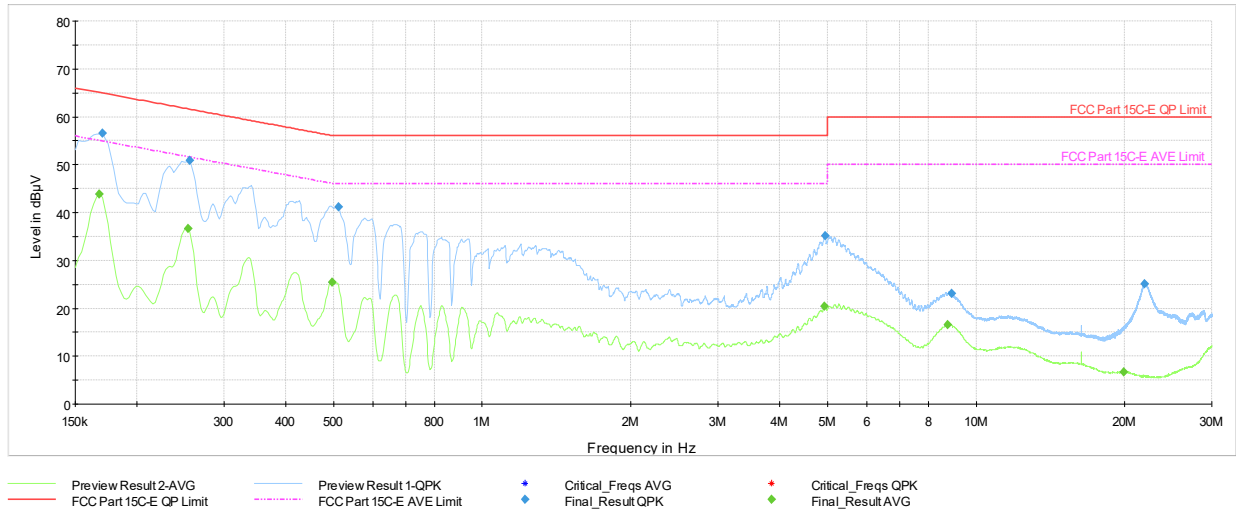


Plot 7-540. AC Line Conducted Plot with 802.11n CDD Diversity – Ch.40 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	43.86	55.06	-11.20	L1	GND
0.17	FINAL	56.54	---	64.95	-8.41	L1	GND
0.25	FINAL	---	36.69	51.64	-14.95	L1	GND
0.26	FINAL	50.87	---	61.57	-10.70	L1	GND
0.50	FINAL	---	25.49	46.06	-20.57	L1	GND
0.51	FINAL	41.21	---	56.00	-14.79	L1	GND
4.93	FINAL	---	20.48	46.00	-25.52	L1	GND
4.94	FINAL	35.23	---	56.00	-20.77	L1	GND
8.77	FINAL	---	16.58	50.00	-33.42	L1	GND
8.91	FINAL	23.14	---	60.00	-36.86	L1	GND
19.88	FINAL	---	6.77	50.00	-43.23	L1	GND
21.94	FINAL	25.03	---	60.00	-34.97	L1	GND

Table 7-177. AC Line Conducted Data with 802.11n CDD Diversity – Ch.40 (L1) with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 263 of 267

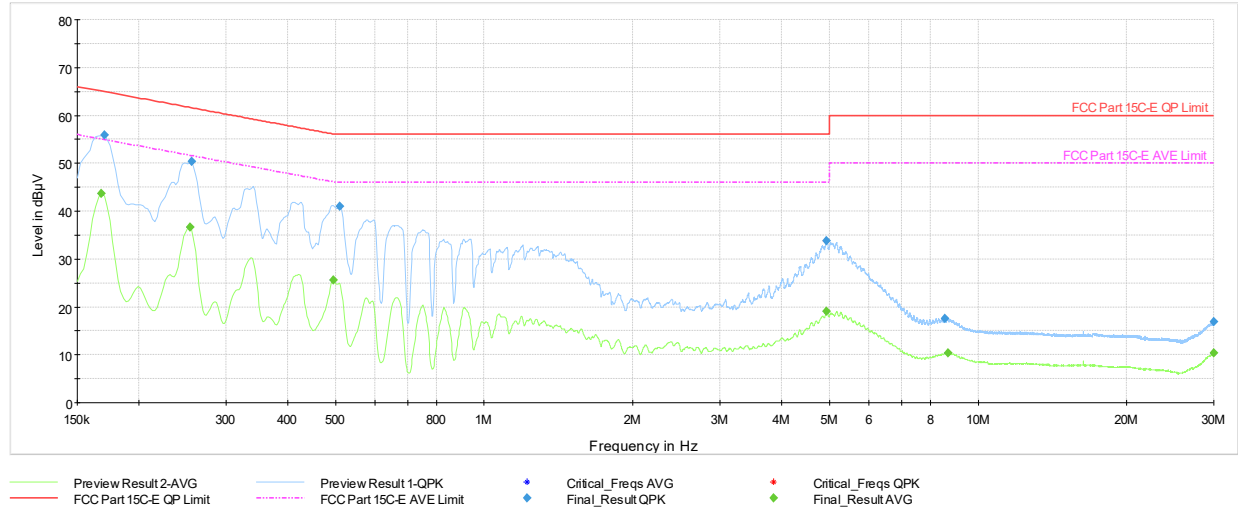


Plot 7-541. AC Line Conducted Plot with 802.11n CDD Diversity – Ch.40 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	43.68	55.06	-11.38	N	GND
0.17	FINAL	55.90	---	64.95	-9.05	N	GND
0.25	FINAL	---	36.58	51.64	-15.06	N	GND
0.26	FINAL	50.33	---	61.57	-11.24	N	GND
0.49	FINAL	---	25.53	46.10	-20.57	N	GND
0.51	FINAL	41.02	---	56.00	-14.98	N	GND
4.93	FINAL	---	19.00	46.00	-27.00	N	GND
4.94	FINAL	33.83	---	56.00	-22.17	N	GND
8.57	FINAL	17.50	---	60.00	-42.50	N	GND
8.68	FINAL	---	10.41	50.00	-39.59	N	GND
30.00	FINAL	---	10.43	50.00	-39.57	N	GND
30.00	FINAL	16.89	---	60.00	-43.11	N	GND

Table 7-178. AC Line Conducted Data with 802.11n CDD Diversity – Ch.40 (N), with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 264 of 267

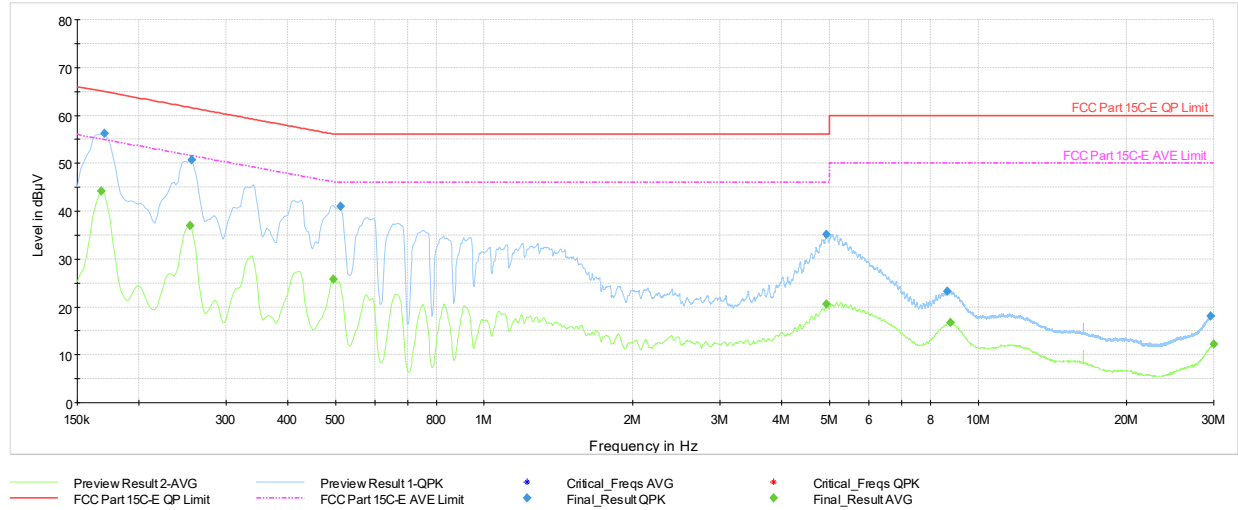


Plot 7-542. AC Line Conducted Plot with 802.11be(SU) CDD Diversity – Ch.40 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	44.10	55.06	-10.96	L1	GND
0.17	FINAL	56.23	---	64.95	-8.72	L1	GND
0.25	FINAL	---	36.97	51.64	-14.67	L1	GND
0.26	FINAL	50.66	---	61.57	-10.91	L1	GND
0.49	FINAL	---	25.78	46.10	-20.32	L1	GND
0.51	FINAL	41.07	---	56.00	-14.93	L1	GND
4.93	FINAL	---	20.67	46.00	-25.33	L1	GND
4.93	FINAL	35.18	---	56.00	-20.82	L1	GND
8.67	FINAL	23.26	---	60.00	-36.74	L1	GND
8.79	FINAL	---	16.68	50.00	-33.32	L1	GND
29.57	FINAL	18.10	---	60.00	-41.90	L1	GND
30.00	FINAL	---	12.29	50.00	-37.71	L1	GND

Table 7-179. AC Line Conducted Data with 802.11be(SU) CDD Diversity – Ch.40 (L1) with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 265 of 267

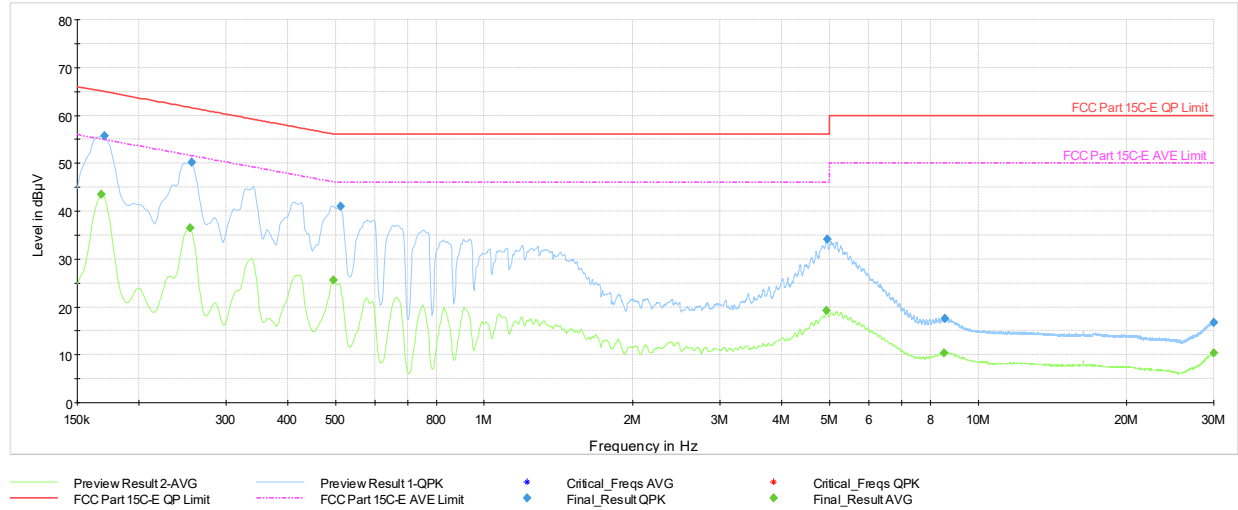

Plot 7-543. AC Line Conducted Plot with 802.11be(SU) CDD Diversity – Ch.40 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	43.52	55.06	-11.54	N	GND
0.17	FINAL	55.75	---	64.95	-9.20	N	GND
0.25	FINAL	---	36.45	51.64	-15.19	N	GND
0.26	FINAL	50.27	---	61.57	-11.30	N	GND
0.49	FINAL	---	25.53	46.10	-20.57	N	GND
0.51	FINAL	41.03	---	56.00	-14.97	N	GND
4.93	FINAL	---	19.20	46.00	-26.80	N	GND
4.94	FINAL	34.18	---	56.00	-21.82	N	GND
8.53	FINAL	---	10.29	50.00	-39.71	N	GND
8.55	FINAL	17.52	---	60.00	-42.48	N	GND
30.00	FINAL	---	10.40	50.00	-39.60	N	GND
30.00	FINAL	16.77	---	60.00	-43.23	N	GND

Table 7-180. AC Line Conducted Data with 802.11be(SU) CDD Diversity – Ch.40 (N), with AC/DC adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 266 of 267

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3595** and **IC: 579C-A3595** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 04/23/2026 - 07/02/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-09-R5.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 267 of 267

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.