

7.7 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-243 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-243. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 366 of 383

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

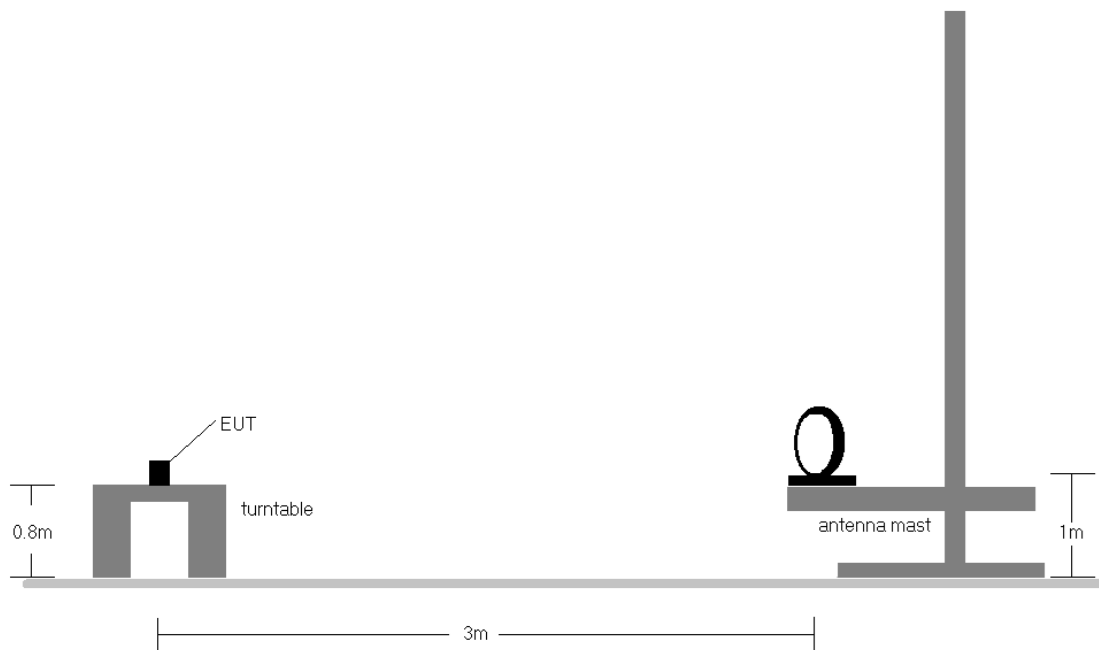


Figure 7-6. Radiated Test Setup < 30 MHz

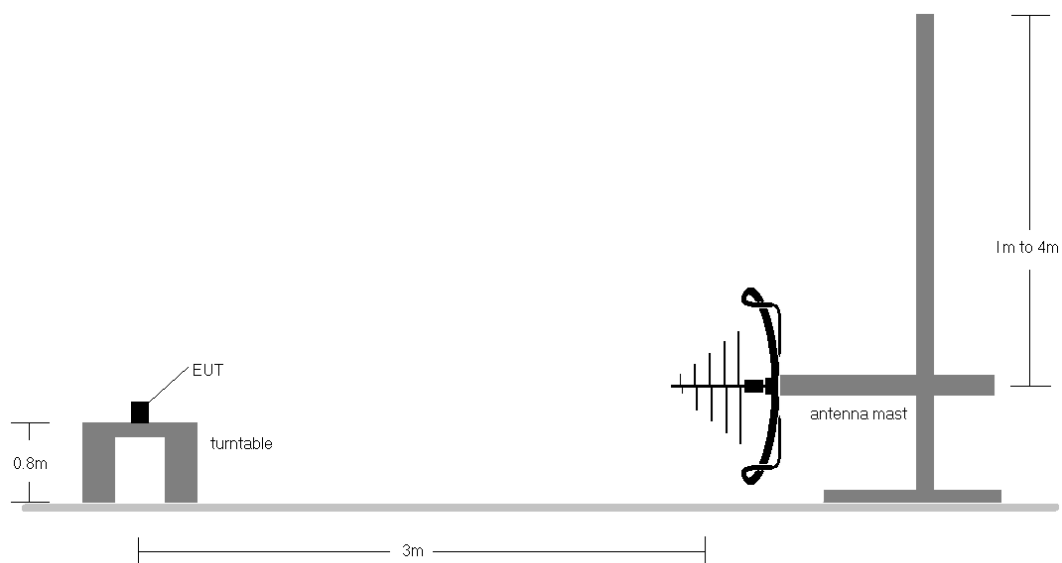


Figure 7-7. Radiated Test Setup < 1 GHz

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 367 of 383

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-243.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All antenna configurations and data rates were investigated and only the worst case are reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 368 of 383

7.7.1 CDD Primary Radiated Spurious Emissions (Below 1 GHz)

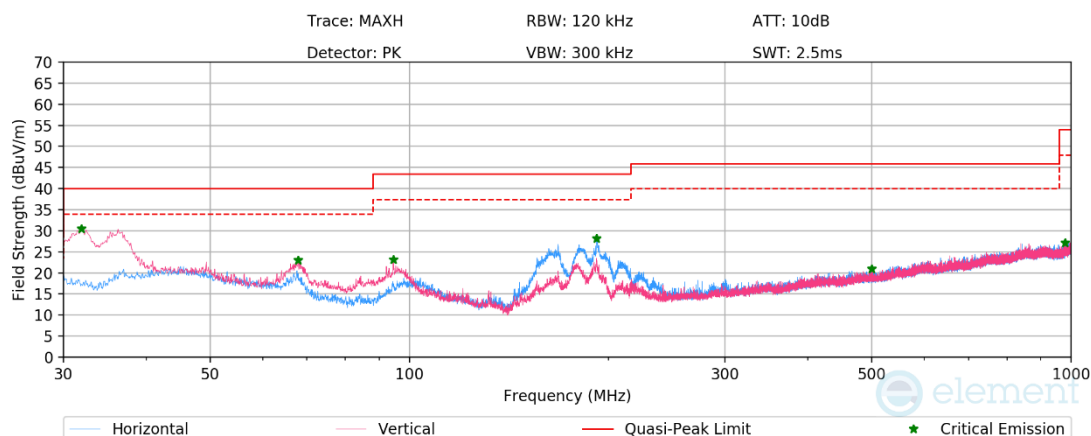


Plot 7-1226. RSE below 1 GHz CDD Primary (RU26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
31.92	Max-Peak	V	100	251	-54.86	-21.66	30.47	40.00	-9.53
67.86	Max-Peak	V	100	257	-62.95	-21.06	22.99	40.00	-17.01
94.56	Max-Peak	V	100	222	-63.61	-20.19	23.20	43.50	-20.30
191.95	Max-Peak	H	100	198	-60.07	-18.76	28.16	43.50	-15.34
499.94	Max-Peak	V	100	6	-74.80	-11.18	21.03	46.00	-24.97
979.60	Max-Peak	V	300	166	-76.08	-3.77	27.15	54.00	-26.85

Table 7-244. RSE below 1 GHz CDD Primary (RU26 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 369 of 383

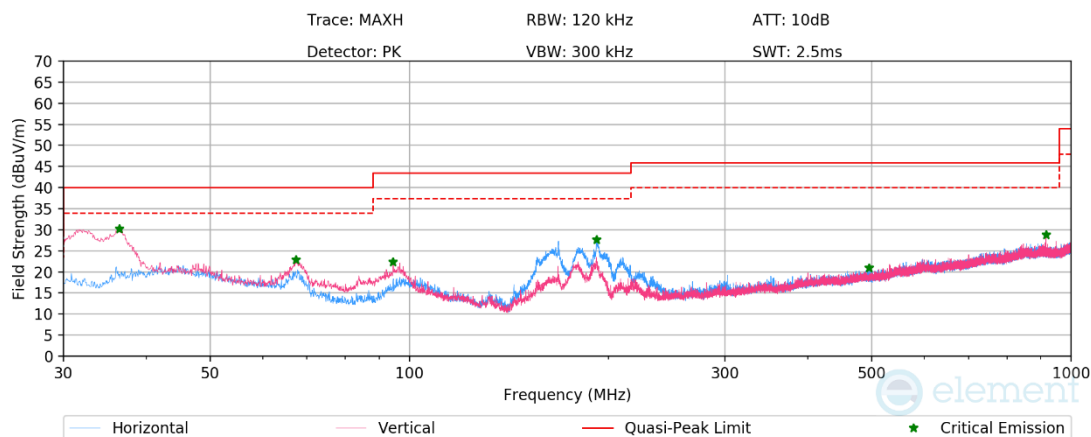


Plot 7-1227. RSE below 1 GHz CDD Primary (RU242 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.42	Max-Peak	V	100	0	-56.63	-20.09	30.28	40.00	-9.72
67.32	Max-Peak	V	100	254	-63.29	-20.84	22.88	40.00	-17.12
94.44	Max-Peak	V	100	91	-64.42	-20.22	22.35	43.50	-21.15
191.77	Max-Peak	H	100	211	-60.48	-18.79	27.73	43.50	-15.77
494.90	Max-Peak	H	100	116	-74.76	-11.30	20.93	46.00	-25.07
916.24	Max-Peak	V	100	187	-74.11	-4.07	28.82	46.00	-17.18

Table 7-245. RSE below 1 GHz CDD Primary (RU242– Ch.40), with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 370 of 383

7.7.2 CDD Diversity Radiated Spurious Emissions (Below 1 GHz)

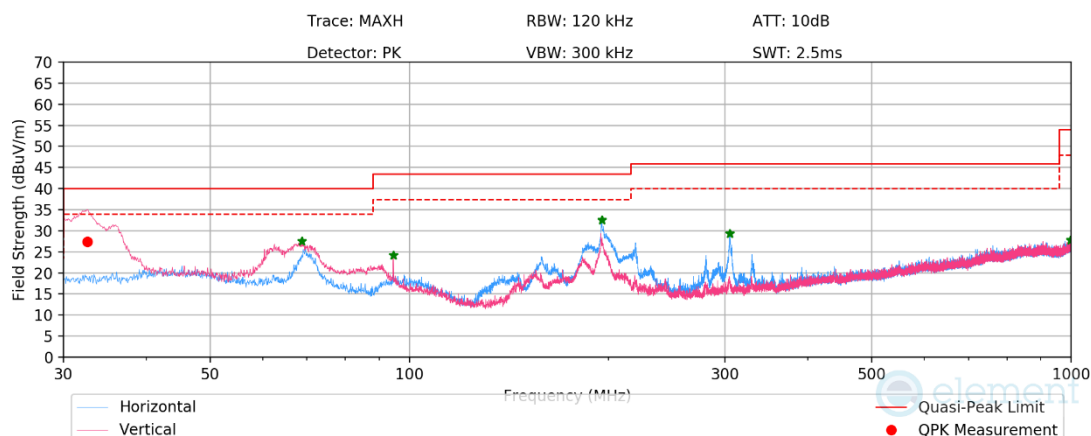


Plot 7-1228. RSE below 1 GHz CDD Diversity (RU26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
32.58	Quasi-Peak	V	100	191	-58.97	-20.57	27.46	40.00	-12.54
68.70	Max-Peak	V	100	298	-58.95	-20.51	27.54	40.00	-12.46
94.50	Max-Peak	V	100	172	-63.52	-19.34	24.14	43.50	-19.36
195.25	Max-Peak	H	100	155	-56.86	-17.57	32.57	43.50	-10.93
305.17	Max-Peak	H	100	173	-62.77	-14.90	29.32	46.00	-16.68
997.48	Max-Peak	H	300	148	-76.42	-2.77	27.80	54.00	-26.20

Table 7-246. RSE below 1 GHz CDD Diversity (RU26 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 371 of 383

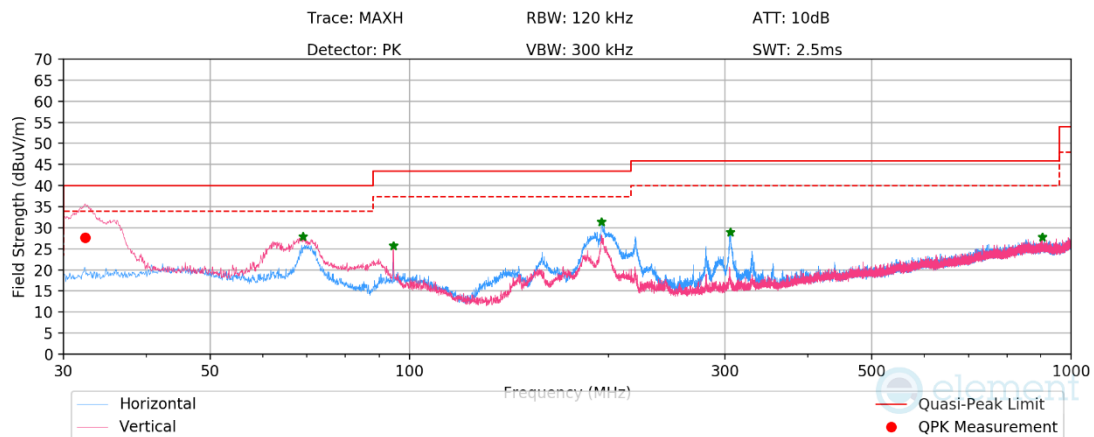

Plot 7-1229. RSE below 1 GHz CDD Diversity (RU242 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
32.34	Quasi-Peak	V	100	203	-58.68	-20.64	27.68	40.00	-12.32
69.06	Max-Peak	V	100	292	-58.44	-20.63	27.93	40.00	-12.07
94.50	Max-Peak	V	100	214	-61.89	-19.34	25.77	43.50	-17.73
195.13	Max-Peak	H	100	190	-58.00	-17.59	31.41	43.50	-12.09
305.41	Max-Peak	H	100	173	-63.19	-14.88	28.93	46.00	-17.07
904.78	Max-Peak	V	300	125	-75.80	-3.41	27.79	46.00	-18.21

Table 7-247. RSE below 1 GHz CDD Diversity (RU242– Ch.40), with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 372 of 383

7.8 AC Line Conducted Emissions Measurement

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-248. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 373 of 383

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

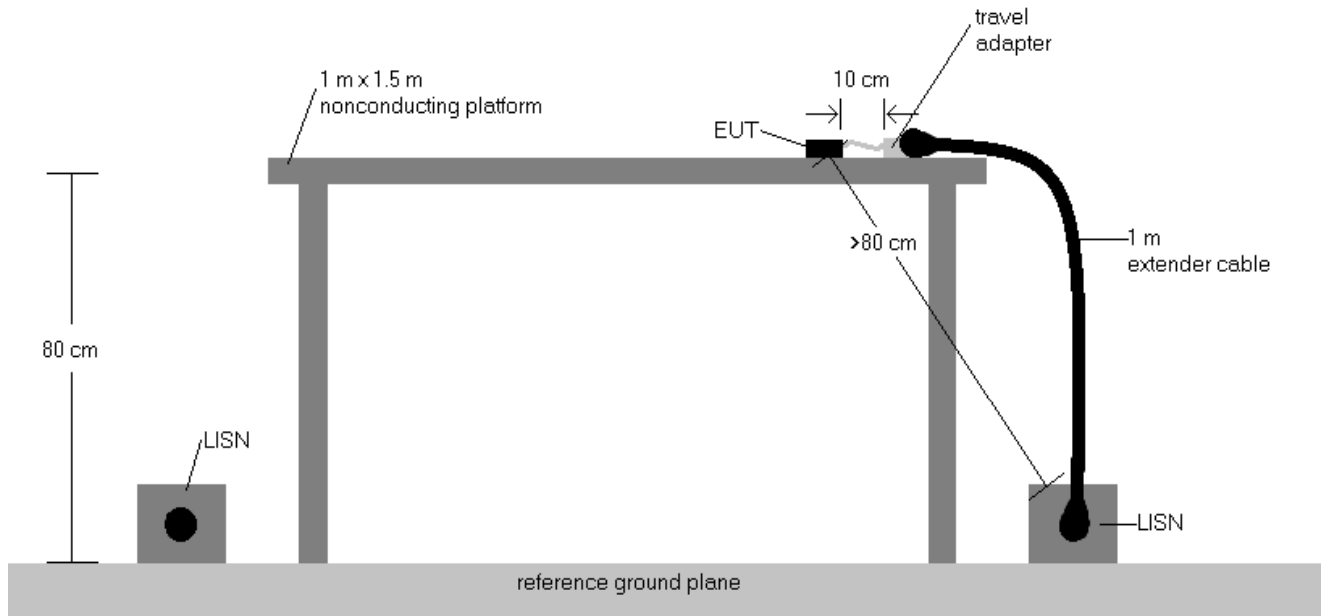



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150 kHz to 30 MHz are specified in 15.207 and RSS-Gen (7.4.2).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 374 of 383

7.8.1 CDD Primary AC Line Conducted Emissions Measurement

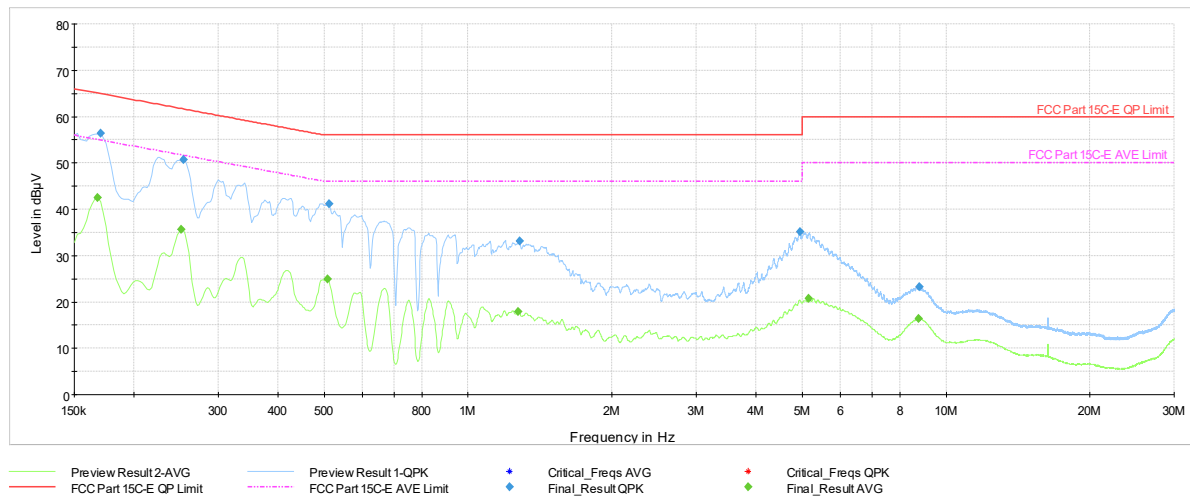


Plot 7-1230. AC Line Conducted Plot with 11be CDD Primary – RU26 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	—	42.59	55.06	-12.47	L1	GND
0.170	FINAL	56.4	—	64.95	-8.53	L1	GND
0.251	FINAL	—	35.68	51.72	-16.04	L1	GND
0.254	FINAL	50.6	—	61.64	-11.01	L1	GND
0.508	FINAL	—	24.96	46.00	-21.04	L1	GND
0.512	FINAL	41.2	—	56.00	-14.85	L1	GND
1.273	FINAL	—	17.88	46.00	-28.12	L1	GND
1.284	FINAL	33.1	—	56.00	-22.86	L1	GND
4.947	FINAL	35.1	—	56.00	-20.90	L1	GND
5.163	FINAL	—	20.67	50.00	-29.33	L1	GND
8.772	FINAL	—	16.40	50.00	-33.60	L1	GND
8.792	FINAL	23.3	—	60.00	-36.67	L1	GND

Table 7-249. AC Line Conducted with 11be CDD Primary – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 375 of 383

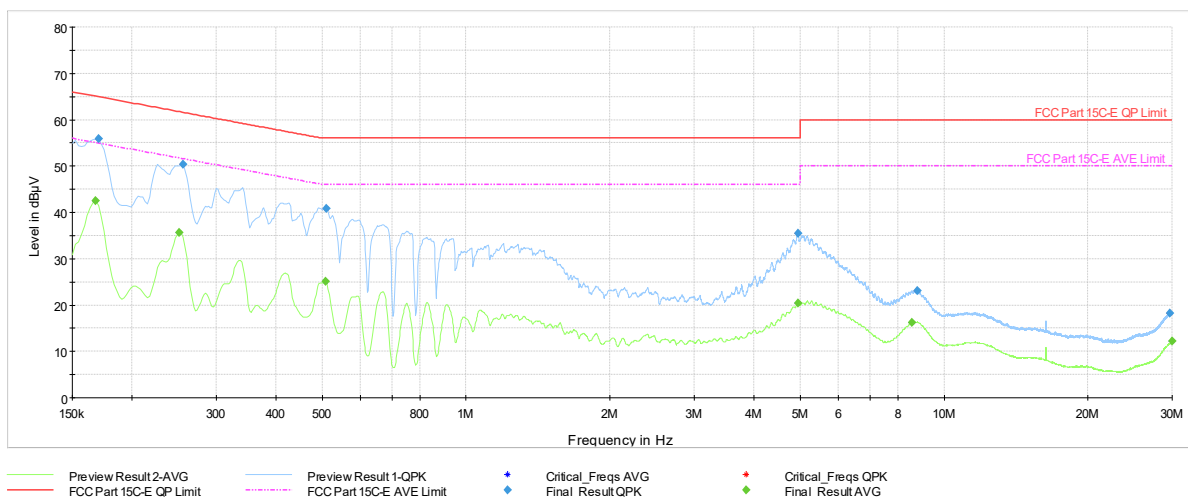


Plot 7-1231. AC Line Conducted Plot with 11be CDD Primary – RU26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	42.46	55.06	-12.60	N	GND
0.170	FINAL	55.9	—	64.95	-9.07	N	GND
0.251	FINAL	—	35.66	51.72	-16.05	N	GND
0.256	FINAL	50.3	—	61.57	-11.24	N	GND
0.508	FINAL	—	25.03	46.00	-20.97	N	GND
0.510	FINAL	40.9	—	56.00	-15.15	N	GND
4.940	FINAL	35.4	—	56.00	-20.59	N	GND
4.954	FINAL	—	20.47	46.00	-25.53	N	GND
8.567	FINAL	—	16.23	50.00	-33.77	N	GND
8.792	FINAL	23.1	—	60.00	-36.88	N	GND
29.618	FINAL	18.3	—	60.00	-41.75	N	GND
30.000	FINAL	—	12.25	50.00	-37.75	N	GND

Table 7-250. AC Line Conducted with 11be CDD Primary – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 376 of 383

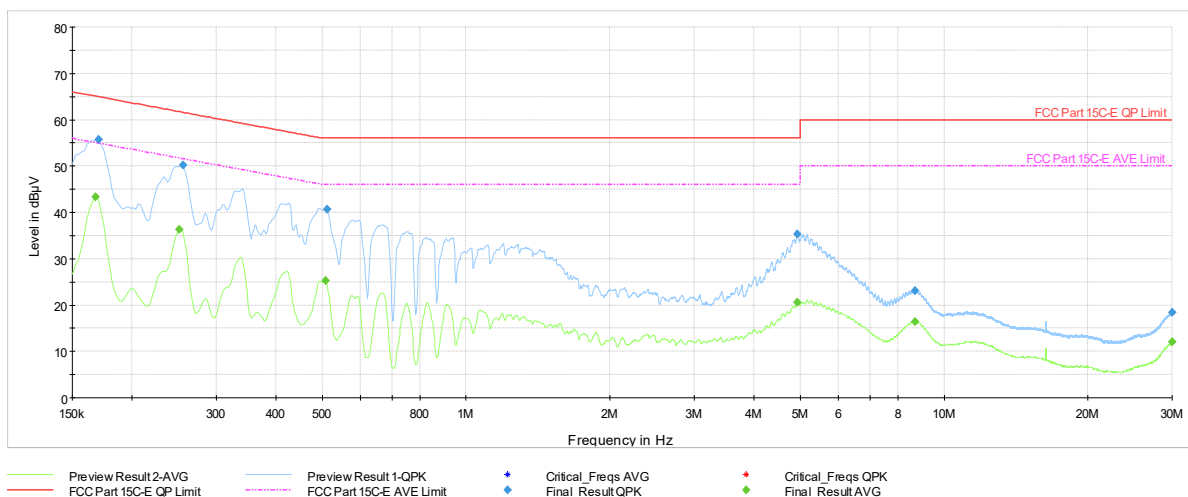


Plot 7-1232. AC Line Conducted Plot with 11be CDD Primary – RU242 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	43.31	55.06	-11.74	L1	GND
0.170	FINAL	55.7	—	64.95	-9.29	L1	GND
0.251	FINAL	—	36.33	51.72	-15.39	L1	GND
0.256	FINAL	50.2	—	61.57	-11.42	L1	GND
0.508	FINAL	—	25.19	46.00	-20.81	L1	GND
0.512	FINAL	40.8	—	56.00	-15.25	L1	GND
4.927	FINAL	—	20.66	46.00	-25.34	L1	GND
4.938	FINAL	35.3	—	56.00	-20.69	L1	GND
8.680	FINAL	—	16.43	50.00	-33.57	L1	GND
8.698	FINAL	23.1	—	60.00	-36.94	L1	GND
30.000	FINAL	—	12.04	50.00	-37.96	L1	GND
30.000	FINAL	18.4	—	60.00	-41.59	L1	GND

Table 7-251. AC Line Conducted with 11be CDD Primary – RU242 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 377 of 383

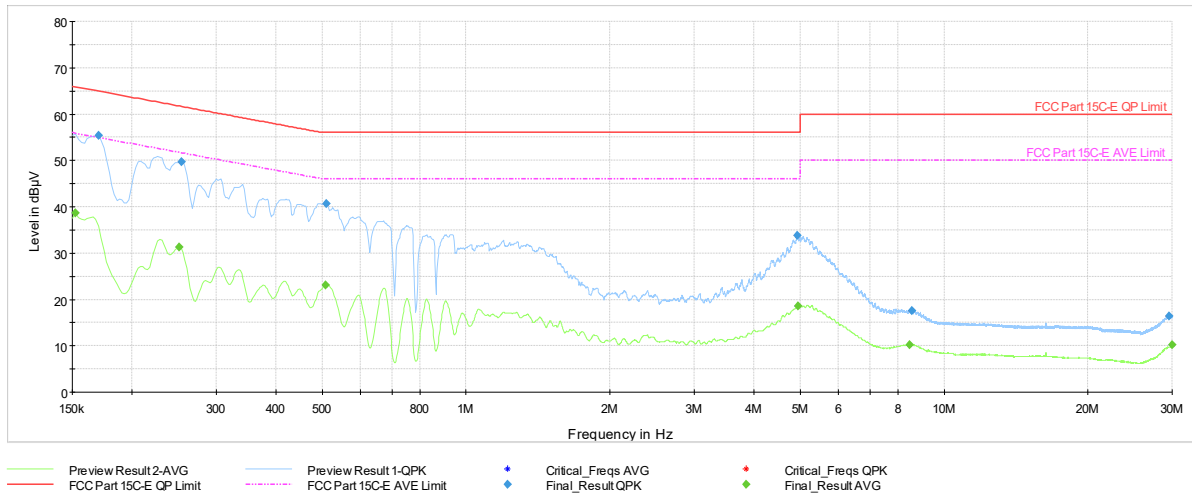


Plot 7-1233. AC Line Conducted Plot with 11be CDD Primary – RU242 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	—	38.59	55.88	-17.28	N	GND
0.170	FINAL	55.4	—	64.95	-9.54	N	GND
0.251	FINAL	—	31.26	51.72	-20.46	N	GND
0.254	FINAL	49.8	—	61.64	-11.85	N	GND
0.508	FINAL	—	23.15	46.00	-22.85	N	GND
0.510	FINAL	40.8	—	56.00	-15.25	N	GND
4.934	FINAL	33.8	—	56.00	-22.18	N	GND
4.947	FINAL	—	18.62	46.00	-27.38	N	GND
8.464	FINAL	—	10.29	50.00	-39.71	N	GND
8.570	FINAL	17.5	—	60.00	-42.49	N	GND
29.553	FINAL	16.4	—	60.00	-43.60	N	GND
30.000	FINAL	—	10.21	50.00	-39.79	N	GND

Table 7-252. AC Line Conducted with 11be CDD Primary – RU242 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 378 of 383

7.8.2 CDD Diversity AC Line Conducted Emissions Measurement

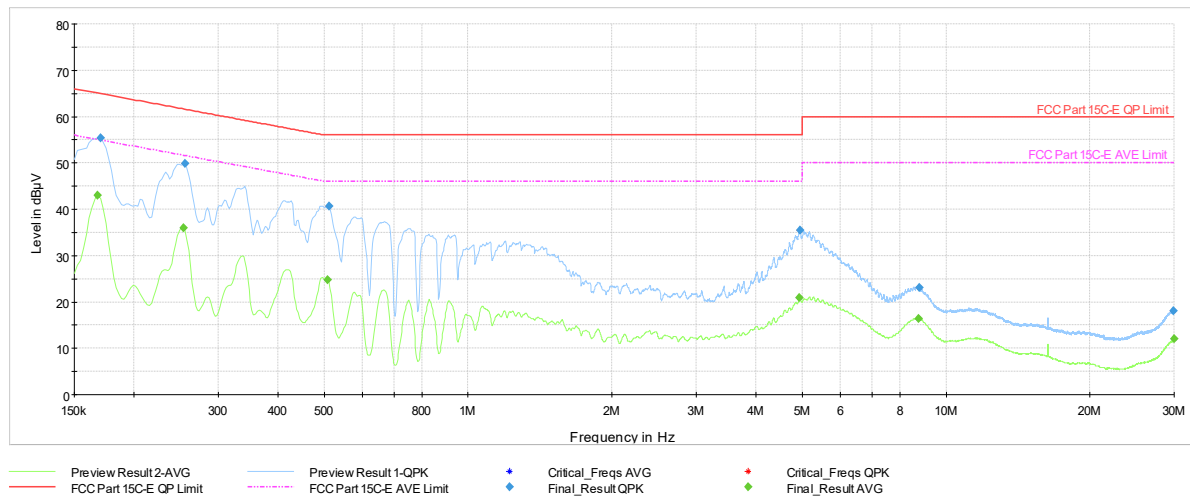


Plot 7-1234. AC Line Conducted Plot with 11be CDD Diversity – RU26 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	—	42.96	55.06	-12.10	L1	GND
0.170	FINAL	55.4	—	64.95	-9.59	L1	GND
0.254	FINAL	—	36.02	51.64	-15.62	L1	GND
0.256	FINAL	49.9	—	61.57	-11.65	L1	GND
0.508	FINAL	—	24.80	46.00	-21.20	L1	GND
0.512	FINAL	40.7	—	56.00	-15.31	L1	GND
4.931	FINAL	—	20.86	46.00	-25.14	L1	GND
4.945	FINAL	35.5	—	56.00	-20.53	L1	GND
8.763	FINAL	—	16.39	50.00	-33.61	L1	GND
8.792	FINAL	23.1	—	60.00	-36.88	L1	GND
29.873	FINAL	18.1	—	60.00	-41.94	L1	GND
30.000	FINAL	—	12.04	50.00	-37.96	L1	GND

Table 7-253. AC Line Conducted with 11be CDD Diversity – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 379 of 383

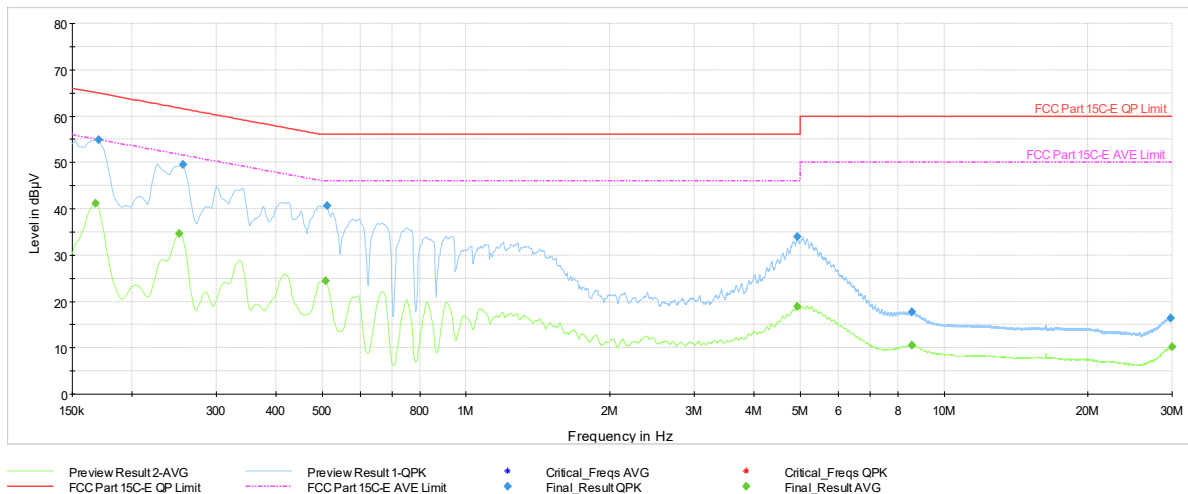


Plot 7-1235. AC Line Conducted Plot with 11be CDD Diversity – RU26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	—	41.22	55.06	-13.84	N	GND
0.170	FINAL	54.9	—	64.95	-10.09	N	GND
0.251	FINAL	—	34.65	51.72	-17.07	N	GND
0.256	FINAL	49.5	—	61.57	-12.07	N	GND
0.508	FINAL	—	24.48	46.00	-21.52	N	GND
0.512	FINAL	40.7	—	56.00	-15.35	N	GND
4.927	FINAL	—	18.99	46.00	-27.01	N	GND
4.938	FINAL	34.0	—	56.00	-21.97	N	GND
8.567	FINAL	—	10.48	50.00	-39.52	N	GND
8.570	FINAL	17.8	—	60.00	-42.23	N	GND
29.747	FINAL	16.4	—	60.00	-43.59	N	GND
30.000	FINAL	—	10.20	50.00	-39.80	N	GND

Table 7-254. AC Line Conducted with 11be CDD Diversity – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 380 of 383

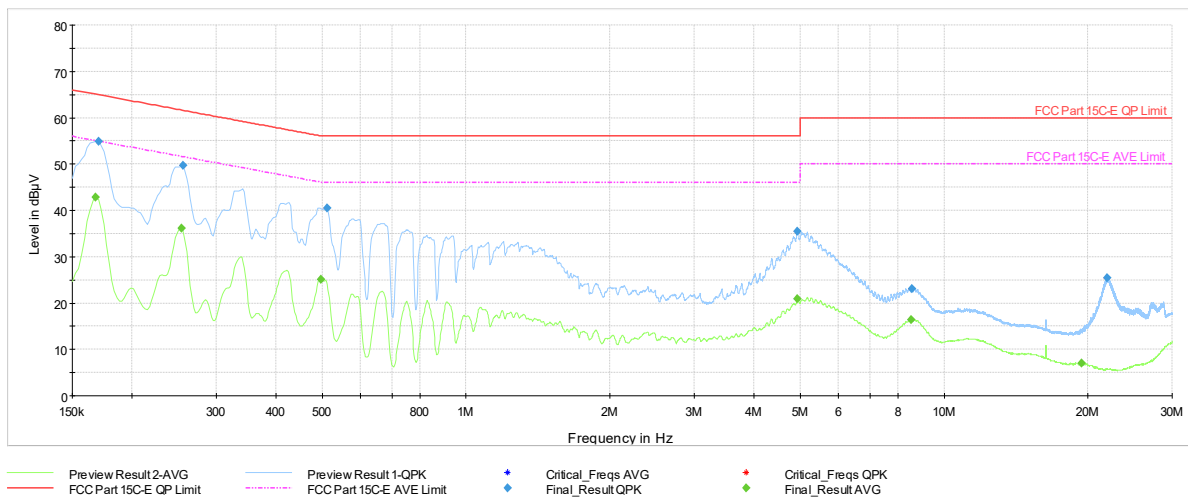


Plot 7-1236. AC Line Conducted Plot with 11be CDD Diversity – RU242 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	42.87	55.06	-12.18	L1	GND
0.170	FINAL	55.0	—	64.95	-9.98	L1	GND
0.254	FINAL	—	36.08	51.64	-15.56	L1	GND
0.256	FINAL	49.6	—	61.57	-11.93	L1	GND
0.497	FINAL	—	25.09	46.06	-20.97	L1	GND
0.512	FINAL	40.5	—	56.00	-15.50	L1	GND
4.927	FINAL	—	20.84	46.00	-25.16	L1	GND
4.936	FINAL	35.5	—	56.00	-20.52	L1	GND
8.540	FINAL	—	16.40	50.00	-33.60	L1	GND
8.567	FINAL	23.2	—	60.00	-36.84	L1	GND
19.363	FINAL	—	6.97	50.00	-43.03	L1	GND
21.939	FINAL	25.5	—	60.00	-34.53	L1	GND

Table 7-255. AC Line Conducted with 11be CDD Diversity – RU242 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 381 of 383

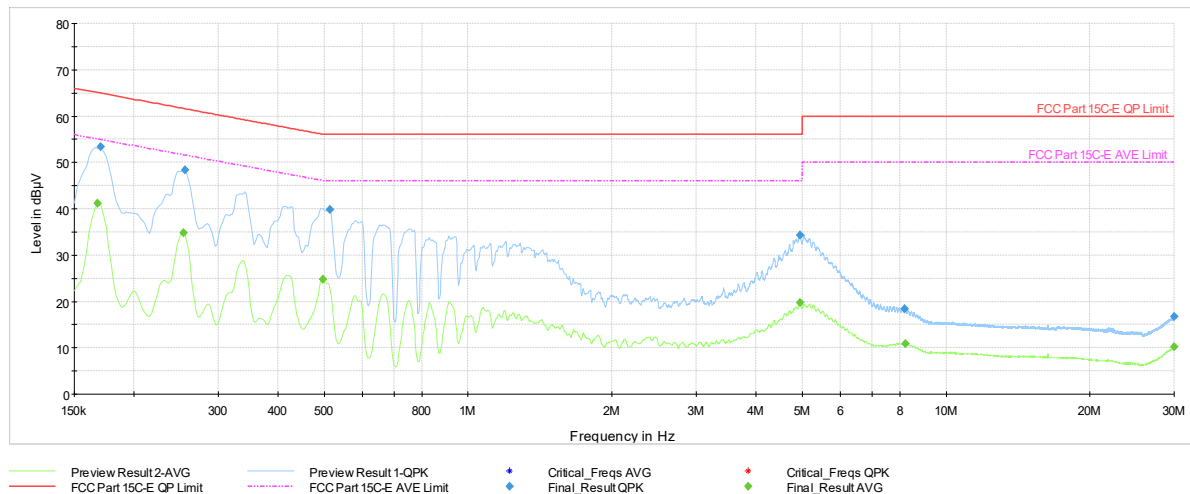

Plot 7-1237. AC Line Conducted Plot with 11be CDD Diversity – RU242 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	—	41.24	55.06	-13.82	N	GND
0.170	FINAL	53.3	—	64.95	-11.63	N	GND
0.254	FINAL	—	34.80	51.64	-16.84	N	GND
0.256	FINAL	48.4	—	61.57	-13.22	N	GND
0.497	FINAL	—	24.79	46.06	-21.27	N	GND
0.515	FINAL	39.9	—	56.00	-16.09	N	GND
4.945	FINAL	34.4	—	56.00	-21.65	N	GND
4.947	FINAL	—	19.72	46.00	-26.28	N	GND
8.201	FINAL	18.4	—	60.00	-41.57	N	GND
8.205	FINAL	—	10.94	50.00	-39.06	N	GND
30.000	FINAL	—	10.26	50.00	-39.74	N	GND
30.000	FINAL	16.8	—	60.00	-43.22	N	GND

Table 7-256. AC Line Conducted with 11be CDD Diversity – RU242 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 382 of 383

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3595** and **IC: 579C-A3595** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 383 of 383