




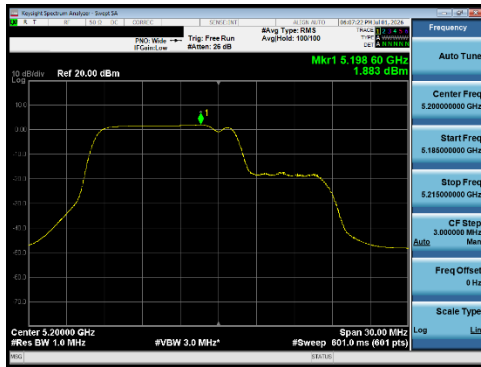


Plot 7-194 PSD CDD Primary Antenna WF5B (20 MHz BW 802.11be(RU) RU106+26 Index82 - Ch.40)

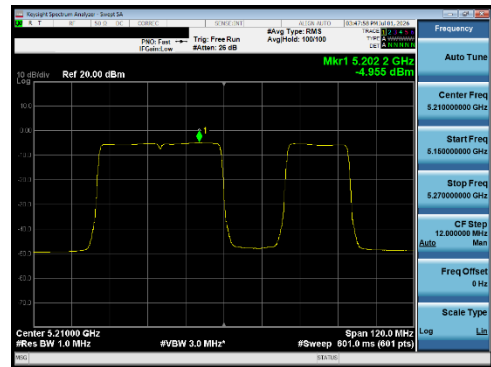


Plot 7-198 PSD CDD Primary Antenna WF5T (80 MHz BW 802.11be(RU) RU484+242 Index92 - Ch.42)

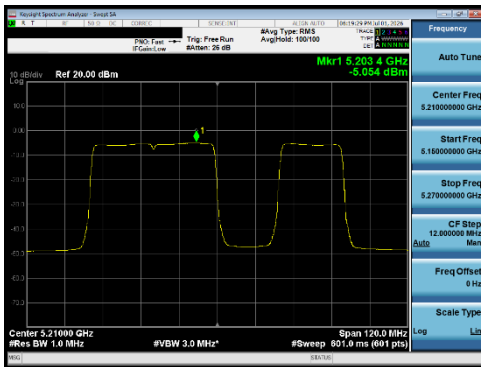


Plot 7-195 PSD CDD Primary Antenna WF5B (80 MHz BW 802.11be(RU) RU484+242 Index92 - Ch.42)

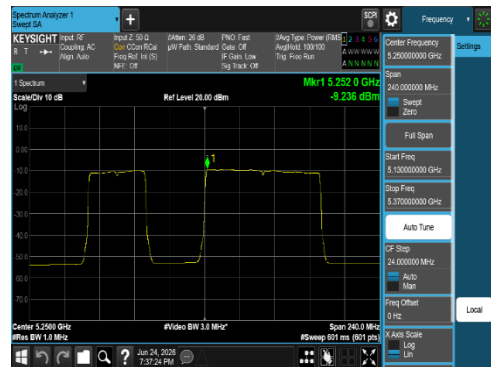

Plot 7-199 PSD CDD Primary Antenna WF5T (160 MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)

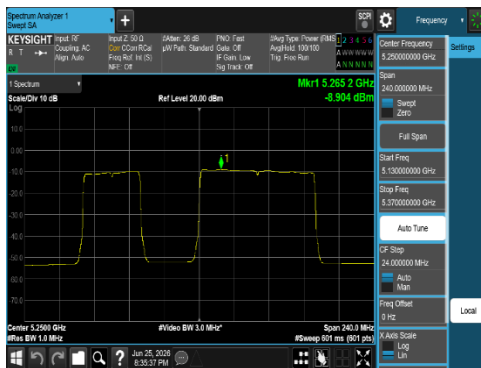


Plot 7-196 PSD CDD Primary Antenna WF5B (160 MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)

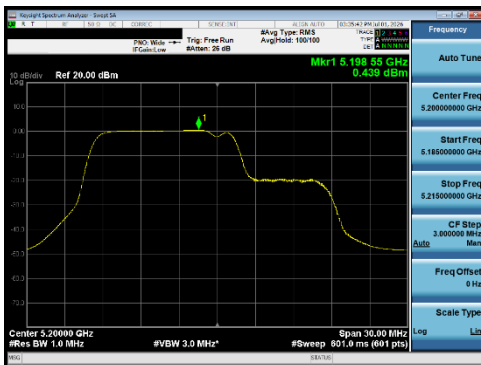


Plot 7-197 PSD CDD Primary Antenna WF5T (20 MHz BW 802.11be(RU) RU106+26 Index82 - Ch.40)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 126 of 383

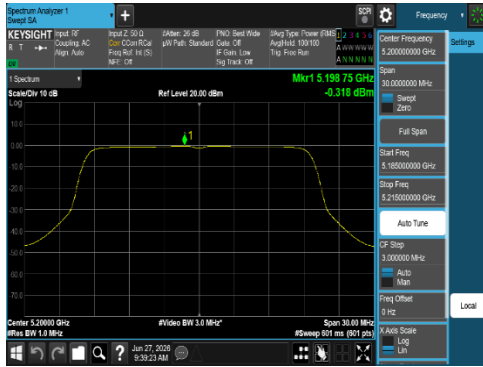


Plot 7-200 PSD CDD Primary Antenna WF5B (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.40)

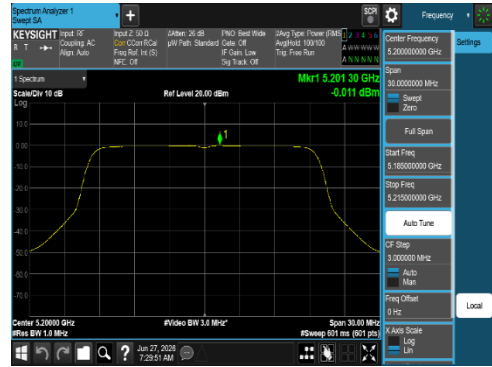


Plot 7-204 PSD CDD Primary Antenna WF5T (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.40)

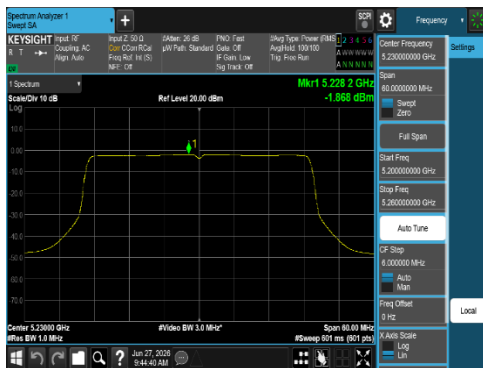


Plot 7-201 PSD CDD Primary Antenna WF5B (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

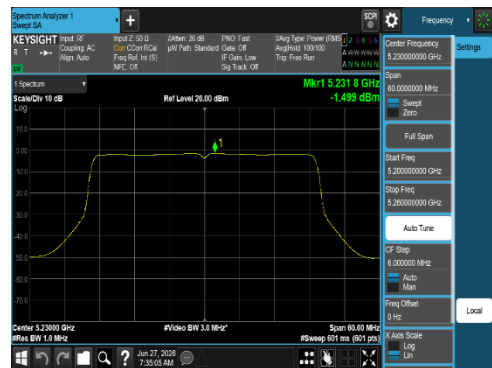


Plot 7-205 PSD CDD Primary Antenna WF5T (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

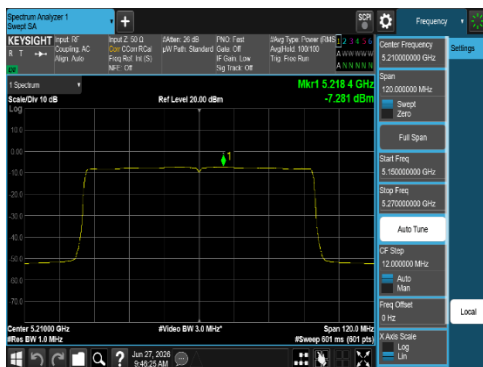


Plot 7-202 PSD CDD Primary Antenna WF5B (80 MHz BW 802.11be(RU) RU996 Index67 - Ch.42)

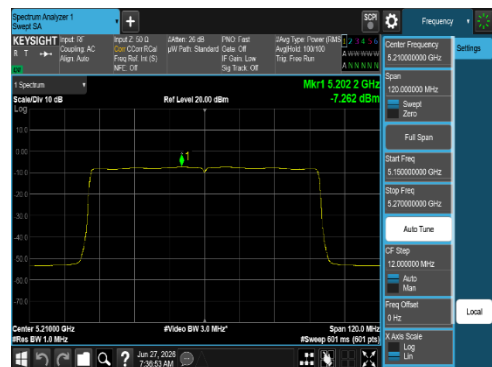

Plot 7-206 PSD CDD Primary Antenna WF5T (80 MHz BW 802.11be(RU) RU996 Index67 - Ch.42)

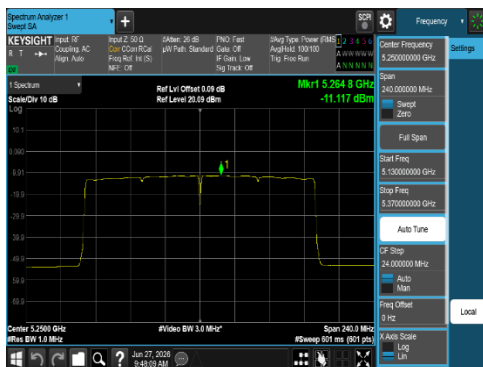

Plot 7-203 PSD CDD Primary Antenna WF5B (160 MHz BW 802.11be(RU) RU996X2 Index68 - Ch.50)

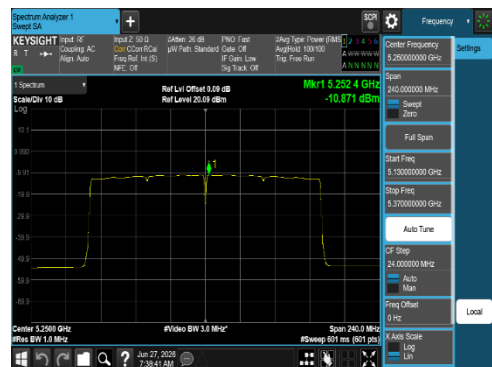

Plot 7-207 PSD CDD Primary Antenna WF5T (160 MHz BW 802.11be(RU) RU996X2 Index68 - Ch.50)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 127 of 383

7.5.5 Summed CDD/SDM Diversity Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Mode	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF8 Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	be (20 MHz)	26	8	SDM	MCS5	5.49	4.55	8.06	11.0	-2.94
	5200	40	be (20 MHz)	26	8	SDM	MCS5	5.53	4.38	8.00	11.0	-3.00
	5240	48	be (20 MHz)	26	8	SDM	MCS5	4.88	4.42	7.67	11.0	-3.33
	5190	38	be (40 MHz)	26	0	SDM	MCS5	5.50	4.34	7.97	11.0	-3.03
	5230	46	be (40 MHz)	26	17	SDM	MCS5	5.03	4.30	7.69	11.0	-3.31
	5210	42	be (80 MHz)	26	0	SDM	MCS5	5.23	4.25	7.77	11.0	-3.23
Band 1/2A	5250	50	be (160 MHz)	52	52	SDM	MCS5	4.90	5.09	8.00	11.0	-3.00
Band 2A	5260	52	be (20 MHz)	52	37	SDM	MCS5	5.13	5.34	8.24	11.0	-2.76
	5280	60	be (20 MHz)	52	39	SDM	MCS5	5.45	5.55	8.51	11.0	-2.49
	5320	64	be (20 MHz)	52	39	SDM	MCS5	5.10	5.14	8.13	11.0	-2.87
	5270	54	be (40 MHz)	52	40	SDM	MCS5	4.92	5.64	8.30	11.0	-2.70
	5310	62	be (40 MHz)	52	40	SDM	MCS5	4.83	5.09	7.97	11.0	-3.03
	5290	58	be (80 MHz)	52	44	SDM	MCS5	5.15	5.31	8.24	11.0	-2.76
Band 2C	5500	100	be (20 MHz)	52	39	SDM	MCS5	4.87	4.89	7.89	11.0	-3.11
	5580	116	be (20 MHz)	52	40	SDM	MCS5	5.19	5.78	8.50	11.0	-2.50
	5720	144	be (20 MHz)	52	37	SDM	MCS5	5.10	5.61	8.37	11.0	-2.63
	5510	102	be (40 MHz)	52	44	SDM	MCS5	5.02	5.31	8.18	11.0	-2.82
	5550	110	be (40 MHz)	52	44	SDM	MCS5	5.29	5.58	8.45	11.0	-2.55
	5590	118	be (40 MHz)	52	44	SDM	MCS5	5.48	5.74	8.62	11.0	-2.38
	5670	134	be (40 MHz)	52	40	SDM	MCS5	5.28	5.39	8.35	11.0	-2.65
	5710	142	be (40 MHz)	52	44	CDD	MCS5	5.37	5.41	8.40	11.0	-2.60
	5530	106	be (80 MHz)	52	44	SDM	MCS5	4.88	5.49	8.21	11.0	-2.79
	5610	122	be (80 MHz)	52	52	SDM	MCS5	5.04	5.16	8.11	11.0	-2.89
	5690	138	be (80 MHz)	52	37	SDM	MCS5	5.39	5.49	8.45	11.0	-2.55
	5570	114	be (160 MHz)	52	52	SDM	MCS5	3.95	4.15	7.06	11.0	-3.94

Table 7-185. Bands 1, 2A, 2C Power Spectral Density Measurements CDD Diversity (RU26/52)

	Frequency [MHz]	Channel No.	802.11 MODE	Mode	RU Size	RU Index	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF8 Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	be (20 MHz)	SDM	52+26	71	MCS5	3.60	4.09	6.86	11.0	-4.14
	5200	40	be (20 MHz)	SDM	52+26	72	MCS5	4.28	4.44	7.37	11.0	-3.63
	5240	48	be (20 MHz)	SDM	52+26	72	MCS5	4.30	4.42	7.37	11.0	-3.63
	5180	36	be (20 MHz)	SDM	106+26	82	MCS5	3.54	4.01	6.79	11.0	-4.21
	5200	40	be (20 MHz)	SDM	106+26	83	MCS5	4.18	4.26	7.23	11.0	-3.77
	5240	48	be (20 MHz)	SDM	106+26	82	MCS5	4.12	4.29	7.22	11.0	-3.78
Band 1/2A	5210	42	be (80 MHz)	CDD	484+242	92	MCS5	-5.78	-5.71	-2.73	11.0	-13.73
	5250	50 (L)	be (160 MHz)	CDD	996+484	95	MCS5	-9.24	-9.33	-6.27	11.0	-17.27
	5250	50 (L)	be (160 MHz)	CDD	996+484+242	99	MCS5	-10.38	-9.87	-7.11	11.0	-18.11
	5250	50 (U)	be (160 MHz)	CDD	996+484	94	MCS5	-9.56	-9.59	-6.56	11.0	-17.56
	5250	50 (U)	be (160 MHz)	CDD	996+484+242	98	MCS5	-10.13	-10.09	-7.10	11.0	-18.10
	5260	52	be (20 MHz)	SDM	52+26	71	MCS5	4.28	4.39	7.35	11.0	-3.65
Band 2A	5280	60	be (20 MHz)	SDM	52+26	71	MCS5	4.24	4.39	7.33	11.0	-3.67
	5320	64	be (20 MHz)	SDM	52+26	71	MCS5	3.79	4.23	7.02	11.0	-3.98
	5260	52	be (20 MHz)	SDM	106+26	83	MCS5	4.10	4.32	7.22	11.0	-3.78
	5280	60	be (20 MHz)	SDM	106+26	82	MCS5	4.16	4.30	7.24	11.0	-3.76
	5320	64	be (20 MHz)	SDM	106+26	82	MCS5	3.54	3.90	6.73	11.0	-4.27
	5290	58	be (80 MHz)	CDD	484+242	92	MCS5	-4.29	-4.50	-1.39	11.0	-12.39
Band 2C	5500	100	be (20 MHz)	SDM	52+26	71	MCS5	3.59	3.94	6.78	11.0	-4.22
	5580	116	be (20 MHz)	SDM	52+26	71	MCS5	4.36	4.49	7.43	11.0	-3.57
	5720	144	be (20 MHz)	CDD	52+26	72	MCS5	4.75	4.02	7.41	11.0	-3.59
	5500	100	be (20 MHz)	SDM	106+26	82	MCS5	3.31	3.66	6.50	11.0	-4.50
	5580	116	be (20 MHz)	SDM	106+26	83	MCS5	4.81	4.43	7.63	11.0	-3.37
	5720	144	be (20 MHz)	CDD	106+26	83	MCS5	4.66	4.14	7.41	11.0	-3.59
	5530	106	be (80 MHz)	CDD	484+242	92	MCS5	-5.94	-6.01	-2.97	11.0	-13.97
	5610	122	be (80 MHz)	CDD	484+242	93	MCS5	-1.26	-1.39	1.69	11.0	-9.31
	5690	138	be (80 MHz)	CDD	484+242	91	MCS5	1.16	0.55	3.88	11.0	-7.12
	5570	114 (L)	be (160 MHz)	CDD	996+484	95	MCS5	-10.34	-10.82	-7.56	11.0	-18.56
	5570	114 (H)	be (160 MHz)	CDD	996+484+242	99	MCS5	-11.39	-11.46	-8.42	11.0	-19.42
	5570	114 (L)	be (160 MHz)	CDD	996+484	95	MCS5	-10.34	-10.82	-7.56	11.0	-18.56
	5570	114 (H)	be (160 MHz)	CDD	996+484+242	99	MCS5	-11.39	-11.46	-8.42	11.0	-19.42


Table 7-186. Bands 1, 2A, 2C Power Spectral Density Measurements CDD Diversity (MRU)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 128 of 383


	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Mode	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF8 Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	be (20 MHz)	242	61	CDD	MCS5	2.57	1.80	5.21	11.0	-5.79
	5200	40	be (20 MHz)	242	61	CDD	MCS5	4.48	3.50	7.03	11.0	-3.97
	5240	48	be (20 MHz)	242	61	SDM	MCS5	5.37	4.44	7.94	11.0	-3.06
	5190	38	be (40 MHz)	484	65	CDD	MCS5	-1.87	-2.86	0.68	11.0	-10.32
	5230	46	be (40 MHz)	484	65	CDD	MCS5	3.36	2.57	5.99	11.0	-5.01
	5210	42	be (80 MHz)	996	67	CDD	MCS5	-5.88	-6.82	-3.31	11.0	-14.31
Band 1/2A	5250	50	be (160 MHz)	996x2	68	CDD	MCS5	-9.58	-10.51	-7.01	11.0	-18.01
Band 2A	5260	52	be (20 MHz)	242	61	SDM	MCS5	4.49	3.50	7.03	11.0	-3.97
	5280	60	be (20 MHz)	242	61	SDM	MCS5	4.22	3.07	6.69	11.0	-4.31
	5320	64	be (20 MHz)	242	61	CDD	MCS5	2.62	1.43	5.08	11.0	-5.92
	5270	54	be (40 MHz)	484	65	CDD	MCS5	2.89	1.77	5.37	11.0	-5.63
	5310	62	be (40 MHz)	484	65	CDD	MCS5	-2.32	-3.57	0.11	11.0	-10.89
	5290	58	be (80 MHz)	996	67	CDD	MCS5	-4.71	-5.70	-2.17	11.0	-13.17
Band 2C	5500	100	be (20 MHz)	242	61	CDD	MCS5	1.65	0.97	4.33	11.0	-6.67
	5580	116	be (20 MHz)	242	61	SDM	MCS5	5.28	4.38	7.86	11.0	-3.14
	5720	144	be (20 MHz)	242	61	SDM	MCS5	5.42	4.19	7.86	11.0	-3.14
	5510	102	be (40 MHz)	484	65	CDD	MCS5	-1.96	-2.90	0.61	11.0	-10.39
	5550	110	be (40 MHz)	484	65	CDD	MCS5	1.94	0.84	4.43	11.0	-6.57
	5590	118	be (40 MHz)	484	65	CDD	MCS5	2.93	2.01	5.50	11.0	-5.50
	5670	134	be (40 MHz)	484	65	CDD	MCS5	0.32	-1.24	2.62	11.0	-8.38
	5710	142	be (40 MHz)	484	65	CDD	MCS5	3.61	2.01	5.89	11.0	-5.11
	5530	106	be (80 MHz)	996	67	CDD	MCS5	-6.53	-7.45	-3.96	11.0	-14.96
	5610	122	be (80 MHz)	996	67	CDD	MCS5	-1.63	-2.83	0.83	11.0	-10.17
	5690	138	be (80 MHz)	996	67	CDD	MCS5	0.57	-0.65	3.01	11.0	-7.99
	5570	114	be (160 MHz)	996x2	68	CDD	MCS5	-11.13	-11.97	-8.52	11.0	-19.52

Table 7-187. Bands 1, 2A, 2C Power Spectral Density Measurements CDD Diversity (Fully-loaded RU)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 129 of 383

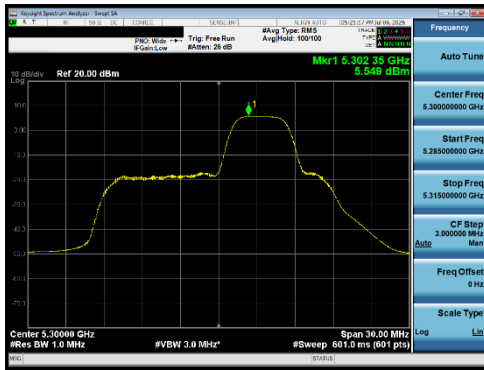


Plot 7-208 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU52 Index39 - Ch.60)

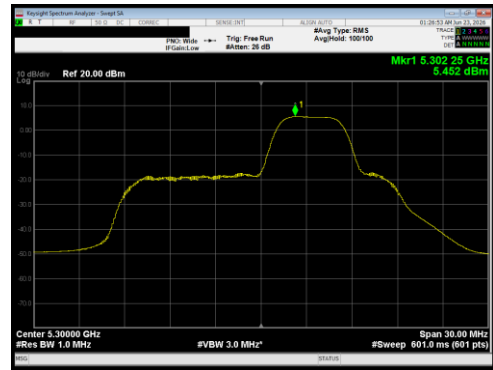


Plot 7-212 PSD CDD Diversity Antenna WF5T (20 MHz BW 802.11be(RU) RU52 Index39 - Ch.60)

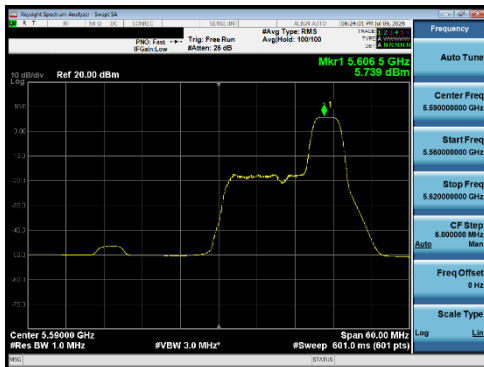


Plot 7-209 PSD CDD Diversity Antenna WF8 (40 MHz BW 802.11be(RU) RU52 Index44 - Ch.118)

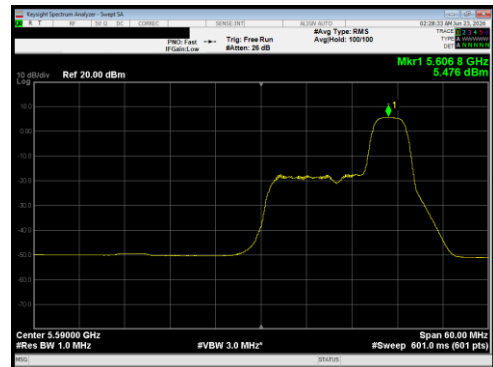


Plot 7-213 PSD CDD Diversity Antenna WF5T (20 MHz BW 802.11be(RU) RU52 Index44 - Ch.118)

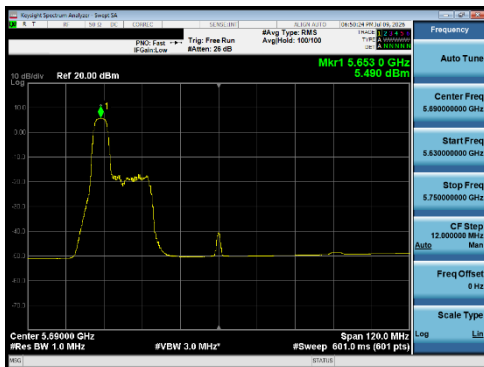


Plot 7-210 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11be(RU) RU52 Index44 - Ch.106)

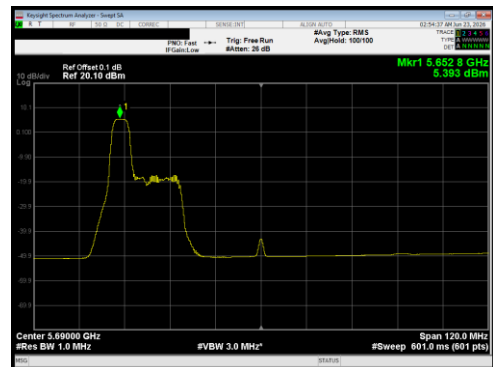

Plot 7-214 PSD CDD Diversity Antenna WF5T (80 MHz BW 802.11be(RU) RU52 Index44 - Ch.106)

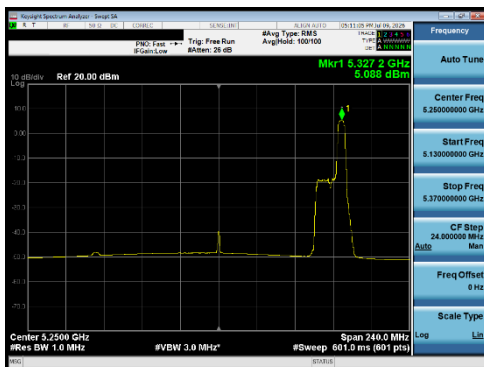

Plot 7-211 PSD CDD Diversity Antenna WF8 (160 MHz BW 802.11be(RU) RU52 Index52 - Ch.50)

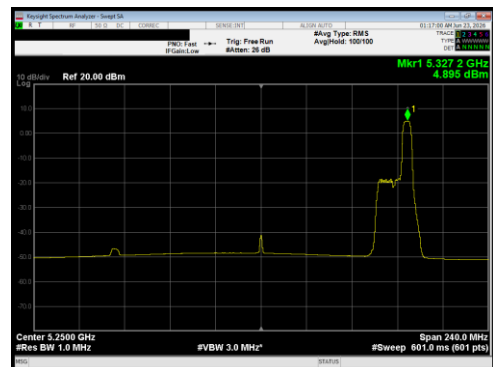


Plot 7-215 PSD CDD Diversity Antenna WF5T (160 MHz BW 802.11be(RU) RU52 Index52 - Ch.50)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 130 of 383




Plot 7-216 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU106+26 Index83 - Ch.116)

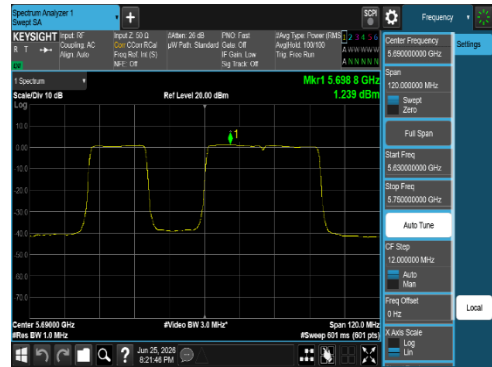


Plot 7-220 PSD CDD Diversity Antenna WF5B (80 MHz BW 802.11be(RU) RU484+242 Index91 - Ch.138)

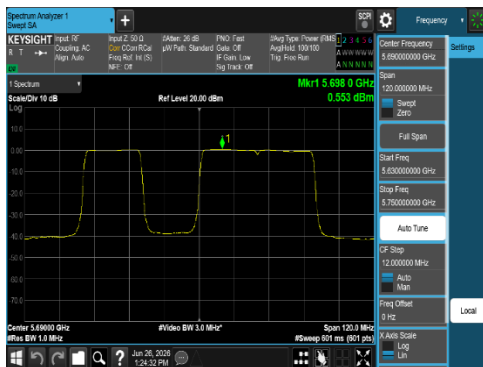

Plot 7-217 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11be(RU) RU484+242 Index91 - Ch.138)

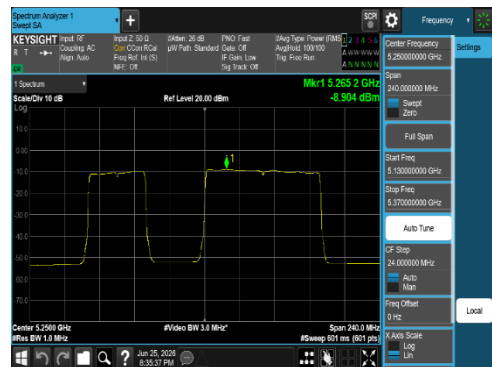

Plot 7-221 PSD CDD Diversity Antenna WF5B (160 MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)

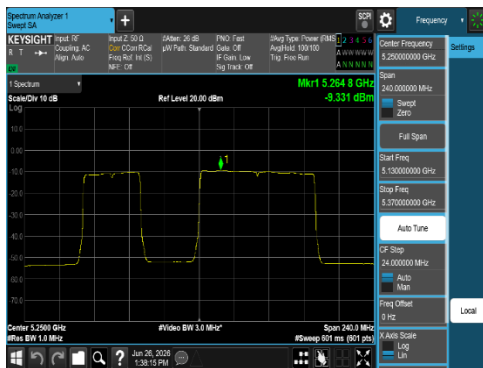


Plot 7-218 PSD CDD Diversity Antenna WF8 (160 MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)




Plot 7-219 PSD CDD Diversity Antenna WF5B (20 MHz BW 802.11be(RU) RU106+26 Index83 - Ch.116)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 131 of 383

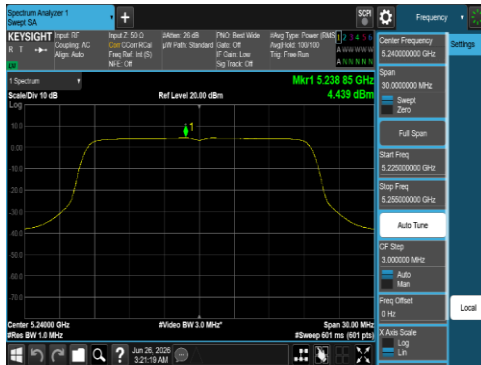


Plot 7-222 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.48)

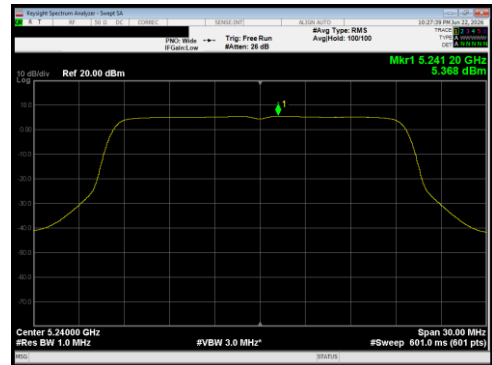


Plot 7-226 PSD CDD Diversity Antenna WF5T (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.48)

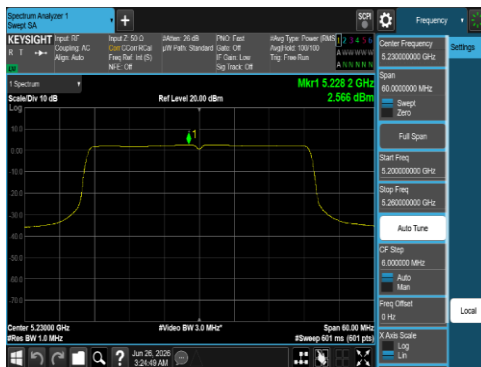


Plot 7-223 PSD CDD Diversity Antenna WF8 (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

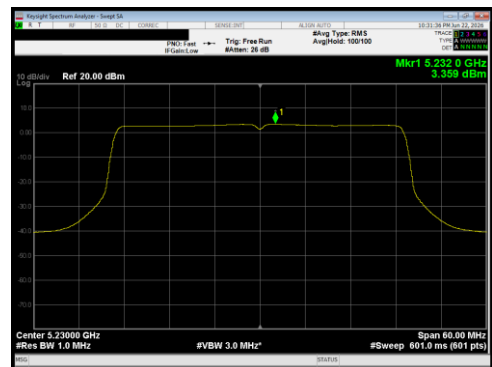


Plot 7-227 PSD CDD Diversity Antenna WF5T (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

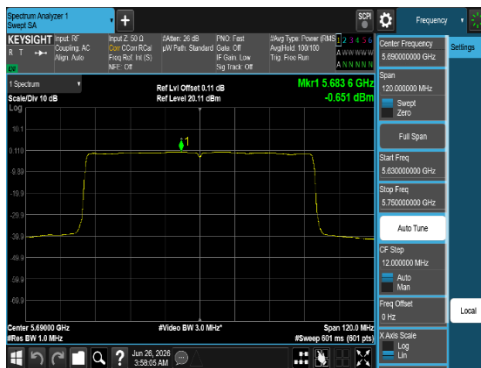


Plot 7-224 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11be(RU) RU996 Index67 - Ch.138)

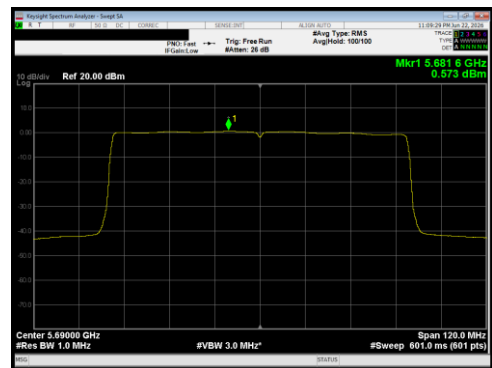

Plot 7-228 PSD CDD Diversity Antenna WF5T (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.48)

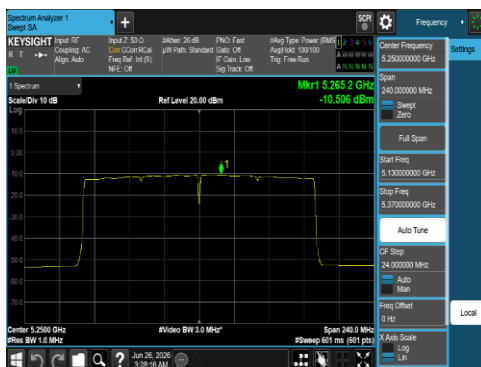

Plot 7-225 PSD CDD Diversity Antenna WF8 (160 MHz BW 802.11be(RU) RU996x2 Index68 - Ch.50)

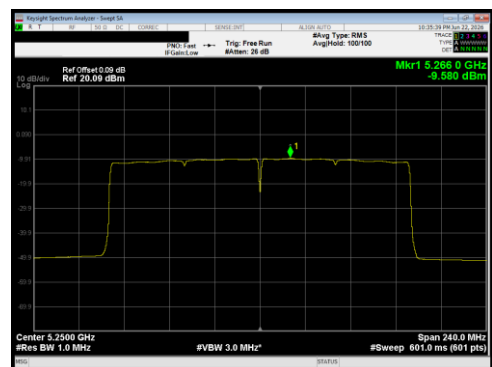

Plot 7-229 PSD CDD Diversity Antenna WF5T (160 MHz BW 802.11be(RU) RU996X2 Index68 - Ch.50)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 132 of 383

	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Mode	Data Rate	Antenna WF5T Power Density [dBm/500 kHz]	Antenna WF8 Power Density [dBm/500 kHz]	Summed Power Density [dBm/500 kHz]	Max Power Density [dBm/500 kHz]	Margin [dB]
Band 3	5180	149	be (20 MHz)	26	8	CDD	MCS5	4.01	2.86	6.48	30.0	-23.52
	5200	157	be (20 MHz)	26	8	CDD	MCS5	4.07	2.83	6.50	30.0	-23.50
	5240	165	be (20 MHz)	26	8	CDD	MCS5	4.47	3.02	6.82	30.0	-23.18
	5190	151	be (40 MHz)	26	0	CDD	MCS5	3.68	2.80	6.27	30.0	-23.73
	5230	159	be (40 MHz)	26	17	CDD	MCS5	4.04	2.82	6.48	30.0	-23.52
	5210	155	be (80 MHz)	26	17	CDD	MCS5	4.00	2.82	6.46	30.0	-23.54

Table 7-188. Band 3 Power Spectral Density Measurements CDD Diversity (RU26)


	Frequency [MHz]	Channel No.	802.11 MODE	Mode	RU Size	RU Index	Data Rate	Antenna WF5T Power Density [dBm/500 kHz]	Antenna WF8 Power Density [dBm/500 kHz]	Summed Power Density [dBm/500 kHz]	Max Permissible Power Density [dBm/500 kHz]	Margin [dB]
Band 3	5745	149	be (20 MHz)	CDD	52+26	71	MCS5	2.77	2.51	5.65	30.0	-24.35
	5785	157	be (20 MHz)	CDD	52+26	71	MCS5	2.89	2.38	5.65	30.0	-24.35
	5825	165	be (20 MHz)	CDD	52+26	71	MCS5	2.99	2.71	5.78	30.0	-24.22
	5745	149	be (20 MHz)	CDD	106+26	82	MCS5	2.70	2.41	5.57	30.0	-24.43
	5785	157	be (20 MHz)	CDD	106+26	82	MCS5	2.53	2.71	5.63	30.0	-24.37
	5825	165	be (20 MHz)	CDD	106+26	82	MCS5	2.50	2.75	5.64	30.0	-24.36
	5775	155	be (80 MHz)	CDD	484+242	91	MCS5	-5.36	-5.02	-1.95	30.0	-31.95

Table 7-189. Band 3 Power Spectral Density Measurements CDD Diversity (MRU)


	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Mode	Data Rate	Antenna WF5T Power Density [dBm/500 kHz]	Antenna WF8 Power Density [dBm/500 kHz]	Summed Power Density [dBm/500 kHz]	Max Permissible Power Density [dBm/500 kHz]	Margin [dB]
Band 3	5745	149	be (20 MHz)	242	61	CDD	MCS5	3.56	2.35	6.00	30.0	-24.00
	5785	157	be (20 MHz)	242	61	CDD	MCS5	3.63	2.18	5.97	30.0	-24.03
	5825	165	be (20 MHz)	242	61	CDD	MCS5	4.06	2.65	6.42	30.0	-23.58
	5755	151	be (40 MHz)	484	65	CDD	MCS5	0.31	-0.56	2.91	30.0	-27.09
	5795	159	be (40 MHz)	484	65	CDD	MCS5	0.32	-0.74	2.83	30.0	-27.17
	5775	155	be (80 MHz)	996	67	CDD	MCS5	-5.17	-6.85	-2.92	30.0	-32.92

Table 7-190. Band 3 Power Spectral Density Measurements CDD Diversity (Fully-loaded RU)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 133 of 383

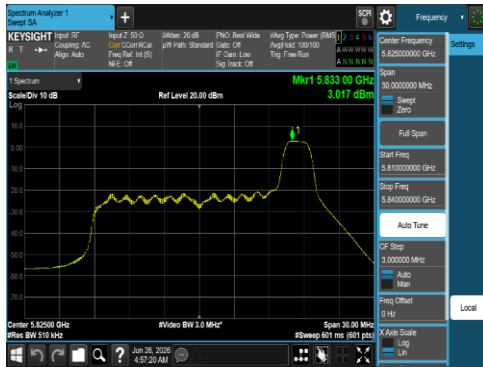


Plot 7-230 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU26 Index0 - Ch.165)

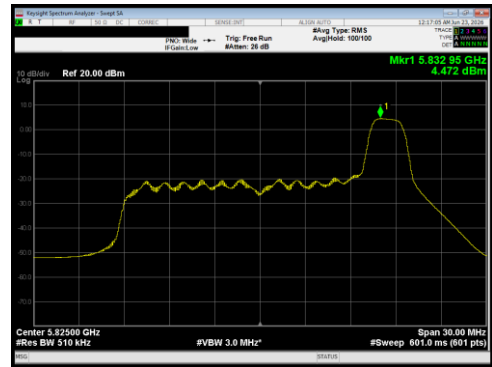


Plot 7-233 PSD CDD Diversity Antenna WF5T (20 MHz BW 802.11be(RU) RU26 Index0 - Ch.165)

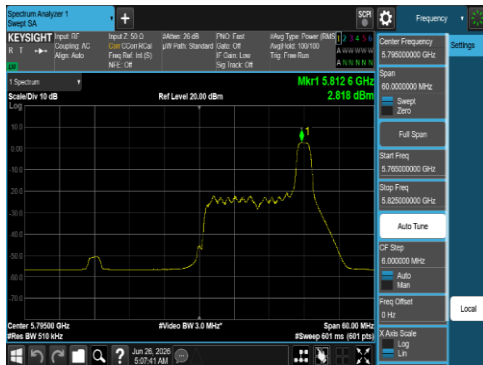


Plot 7-231 PSD CDD Diversity Antenna WF8 (40 MHz BW 802.11be(RU) RU26 Index17 - Ch.159)

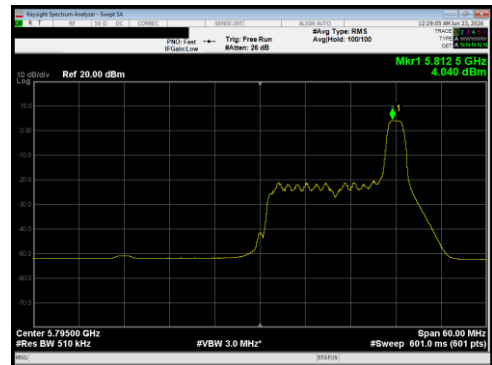

Plot 7-234 PSD CDD Diversity Antenna WF5T (40 MHz BW 802.11be(RU) RU26 Index17 - Ch.159)

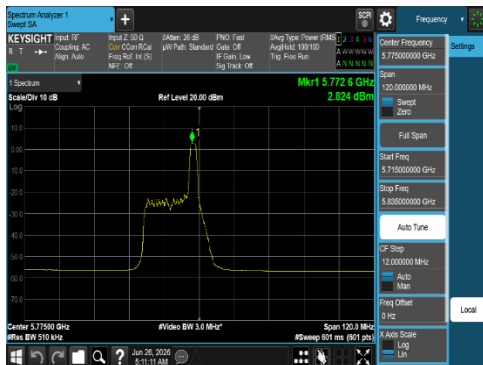

Plot 7-232 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11be(RU) RU26 Index36 - Ch.155)

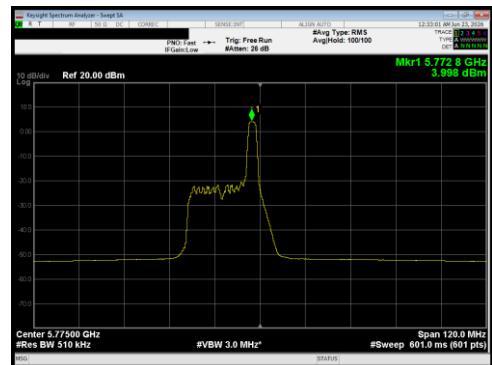


Plot 7-235 PSD CDD Diversity Antenna WF5T (80 MHz BW 802.11be(RU) RU26 Index36 - Ch.155)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 134 of 383




Plot 7-236 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU52+26 Index71 - Ch.165)

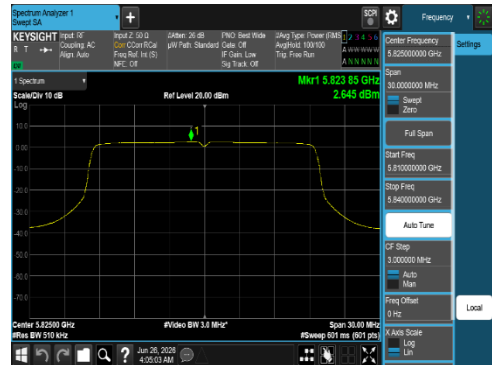


Plot 7-240 PSD CDD Primary Antenna WF8 (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.165)

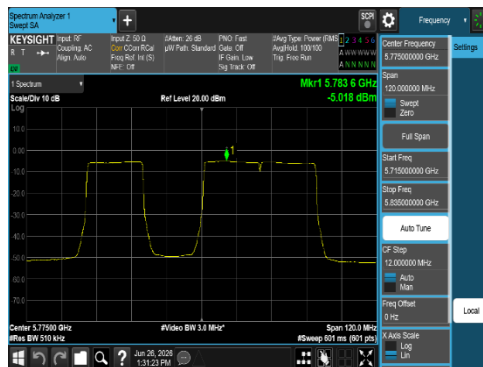


Plot 7-237 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11be(RU) RU484+242 Index91 - Ch.155)

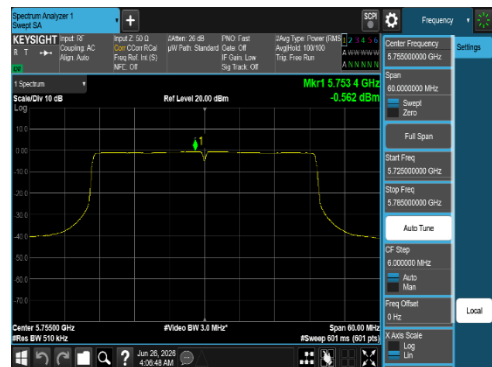


Plot 7-241 PSD CDD Primary Antenna WF8 (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.151)

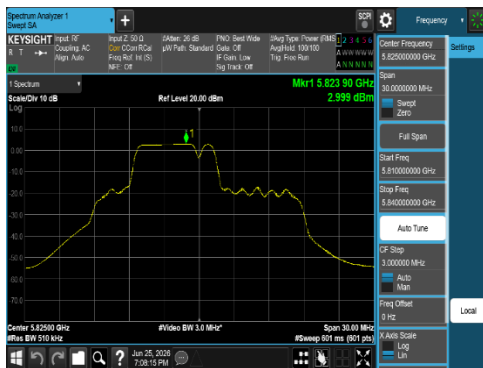


Plot 7-238 PSD CDD Diversity Antenna WF5B (20 MHz BW 802.11be(RU) RU52+26 Index71 - Ch.165)

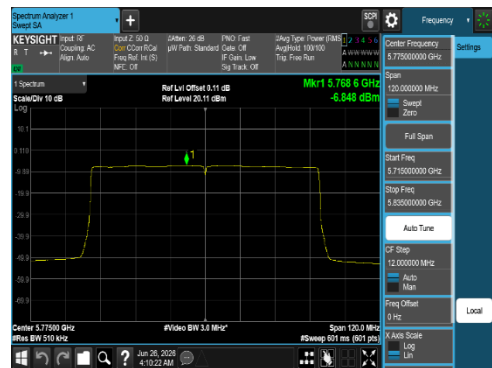

Plot 7-242 PSD CDD Primary Antenna WF8 (80 MHz BW 802.11be(RU) RU996 Index67 - Ch.155)

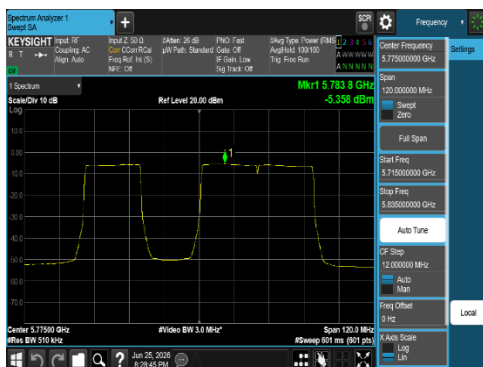


Plot 7-239 PSD CDD Diversity Antenna WF5B (80 MHz BW 802.11be(RU) RU484+242 Index91 - Ch.155)

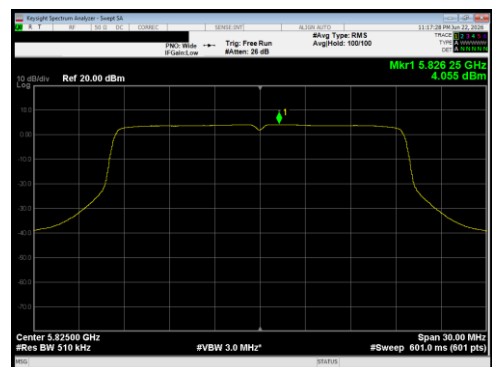


Plot 7-243 PSD CDD Primary Antenna WF5T (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.165)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 135 of 383

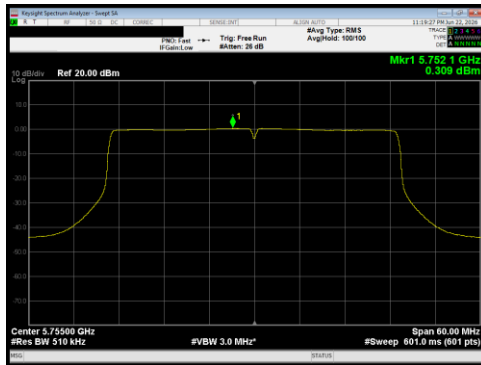

Plot 7-244 PSD CDD Primary Antenna WF5T (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.157)

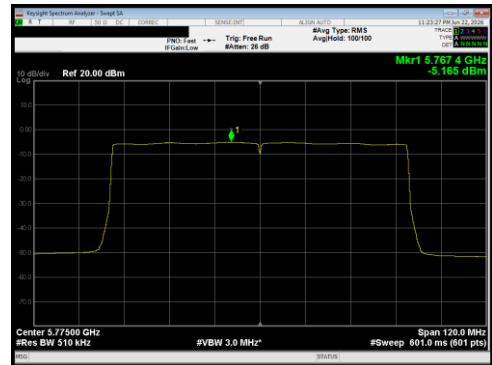

Plot 7-245 PSD CDD Primary Antenna WF5T (80 MHz BW 802.11be(RU) RU996 Index67 - Ch.155)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 136 of 383

	Frequency [MHz]	Channel	802.11 MODE	Mode	RU Size	RU Index	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF8 Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directional Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	be (20 MHz)	SDM	26	0	MCSS	-0.15	-0.26	2.80	1.07	3.87	10.0	-6.13
	5200	40	be (20 MHz)	SDM	26	0	MCSS	-0.12	-0.24	2.83	1.07	3.90	10.0	-6.10
	5240	48	be (20 MHz)	SDM	26	8	MCSS	-0.14	-0.44	2.72	1.07	3.79	10.0	-6.21
	5190	38	be (40 MHz)	SDM	26	17	MCSS	-0.26	-0.36	2.70	1.07	3.77	10.0	-6.23
	5230	46	be (40 MHz)	SDM	26	0	MCSS	-0.61	-0.48	2.47	1.07	3.54	10.0	-6.46
	5210	42	be (80 MHz)	SDM	26	0	MCSS	-0.46	-0.44	2.56	1.07	3.63	10.0	-6.37
Band 1/2A	5250	50	be (160 MHz)	SDM	52	52	MCSS	-1.72	-1.77	1.27	2.51	3.78	10.0	-6.22

Table 7-191. ISED Band 1 e.i.r.p. Power Spectral Density Measurements SDM Diversity (RU26/52)


	Frequency [MHz]	Channel No.	802.11 MODE	Mode	RU Size	RU Index	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF8 Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directional Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	be (20 MHz)	SDM	52+26	72	MCSS	-0.10	0.47	3.20	1.07	4.27	10.0	-5.73
	5200	40	be (20 MHz)	SDM	52+26	71	MCSS	0.49	1.06	3.80	1.07	4.87	10.0	-5.13
	5240	48	be (20 MHz)	SDM	52+26	71	MCSS	0.33	1.09	3.74	1.07	4.81	10.0	-5.19
	5180	36	be (20 MHz)	SDM	106+26	82	MCSS	-0.23	0.58	3.20	1.07	4.27	10.0	-5.73
	5200	40	be (20 MHz)	SDM	106+26	82	MCSS	0.44	1.35	3.93	1.07	5.00	10.0	-5.00
	5240	48	be (20 MHz)	SDM	106+26	83	MCSS	0.40	0.81	3.62	1.07	4.69	10.0	-5.31
	5210	42	be (80 MHz)	CDD	484+242	92	MCSS	-4.96	-4.56	-1.74	3.15	1.41	10.0	-8.59
	5250	50 (L)	be (160 MHz)	CDD	996+484	95	MCSS	-9.24	-9.33	-6.27	4.50	-1.77	10.0	-11.77
Band 1/2A	5250	50 (L)	be (160 MHz)	CDD	996+484+242	97	MCSS	-10.21	-10.13	-7.16	4.50	-2.66	10.0	-12.66
	5250	50 (U)	be (160 MHz)	CDD	996+484	94	MCSS	-9.56	-9.59	-6.56	4.50	-2.06	10.0	-12.06
	5250	50 (U)	be (160 MHz)	CDD	996+484+242	98	MCSS	-10.13	-10.09	-7.10	4.50	-2.60	10.0	-12.60

Table 7-192. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD/SDM Diversity (MRU)

	Frequency [MHz]	Channel	802.11 MODE	Mode	RU Size	RU Index	Data Rate	Antenna WF5T Measured Power Density [dBm/MHz]	Antenna WF8 Measured Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directional Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	be (20 MHz)	SDM	242	61	MCSS	-1.35	-1.20	1.74	1.07	2.81	10.0	-7.19
	5200	40	be (20 MHz)	SDM	242	61	MCSS	-0.01	0.04	3.03	1.07	4.10	10.0	-5.90
	5240	48	be (20 MHz)	SDM	242	61	MCSS	-0.17	-0.67	2.60	1.07	3.67	10.0	-6.33
	5190	38	be (40 MHz)	SDM	484	65	MCSS	-2.75	-2.93	0.18	1.07	1.25	10.0	-8.75
	5230	46	be (40 MHz)	SDM	484	65	MCSS	-1.50	-1.94	1.30	1.07	2.37	10.0	-7.63
	5210	42	be (80 MHz)	CDD	996	67	MCSS	-7.26	-7.14	-4.19	3.15	-1.04	10.0	-11.04
Band 1/2A	5250	50	be (160 MHz)	CDD	996	68	MCSS	-10.87	-11.03	-7.94	4.50	-3.44	10.0	-13.44

Table 7-193. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD/SDM Diversity (Fully-loaded RU)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 137 of 383

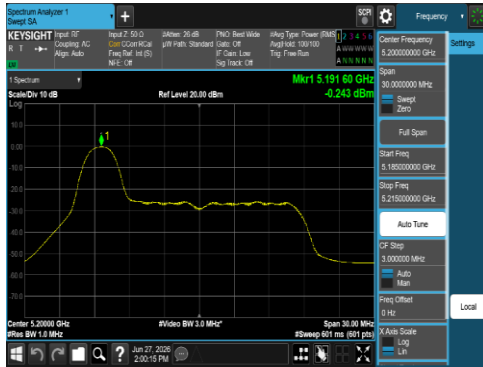

Plot 7-246 PSD SDM Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU26 Index0 - Ch.40)




Plot 7-250 PSD SDM Diversity Antenna WF5T (20 MHz BW 802.11be(RU) RU26 Index0 - Ch.40)




Plot 7-247 PSD SDM Diversity Antenna WF8 (40 MHz BW 802.11be(RU) RU26 Index17 - Ch.38)




Plot 7-251 PSD SDM Diversity Antenna WF5T (40 MHz BW 802.11be(RU) RU26 Index17 - Ch.38)

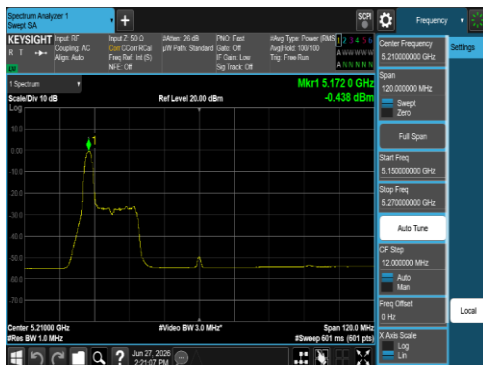

Plot 7-248 PSD SDM Diversity Antenna WF8 (80 MHz BW 802.11be(RU) RU26 Index17 - Ch.42)

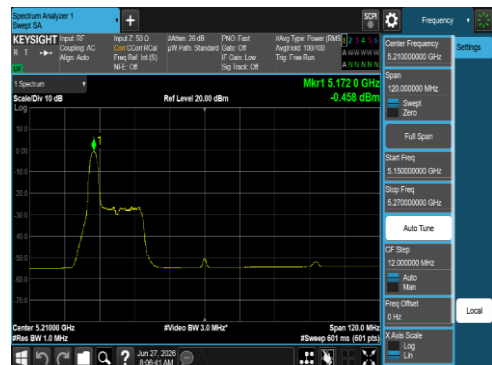

Plot 7-252 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU26 Index0 - Ch.40)

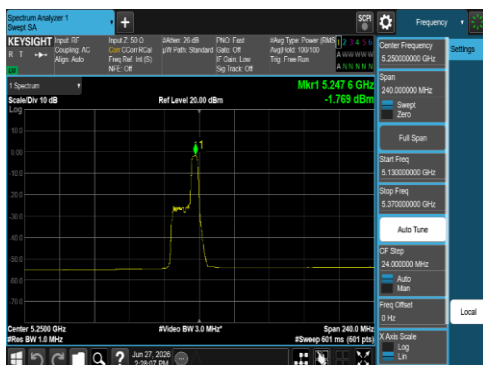


Plot 7-249 PSD SDM Diversity Antenna WF8 (160 MHz BW 802.11be(RU) RU52 Index52 - Ch.50)




Plot 7-253 PSD SDM Diversity Antenna WF5T (160 MHz BW 802.11be(RU) RU52 Index52 - Ch.50)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 138 of 383

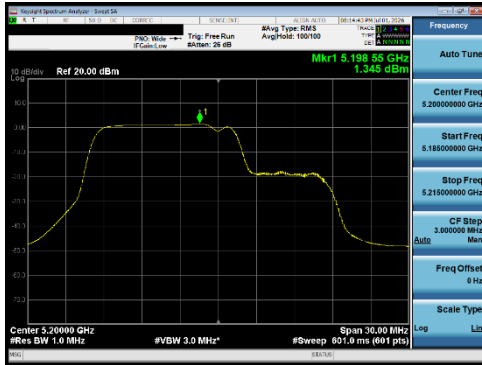


Plot 7-254 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU106+26 Index82 - Ch.40)

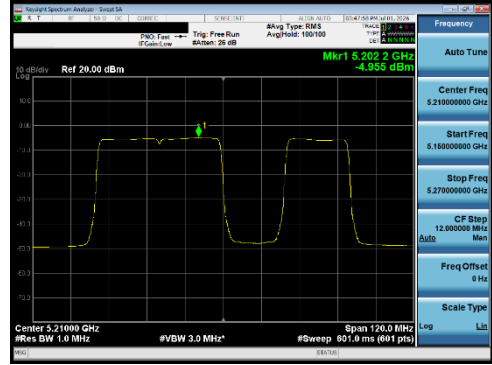


Plot 7-258 PSD CDD Diversity Antenna WF5T (80 MHz BW 802.11be(RU) RU484+242 Index92 - Ch.42)

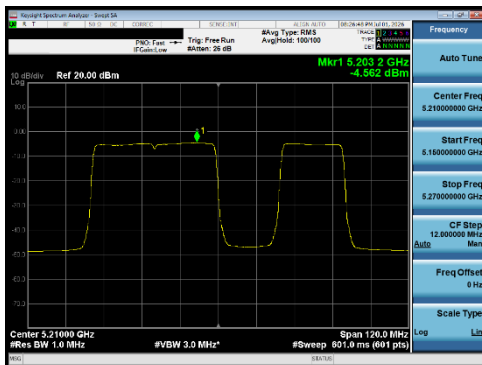


Plot 7-255 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11be(RU) RU484+242 Index92 - Ch.42)

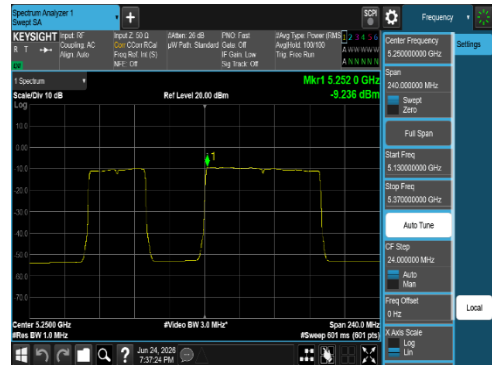

Plot 7-259 PSD CDD Diversity Antenna WF5T (160 MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)

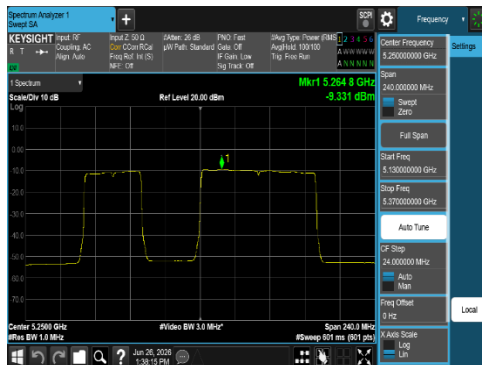


Plot 7-256 PSD CDD Diversity Antenna WF8 (160 MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)

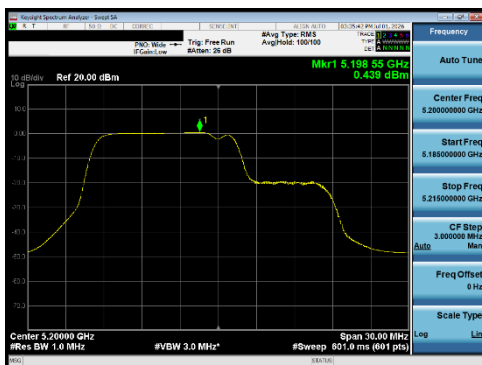


Plot 7-257 PSD CDD Diversity Antenna WF5T (20 MHz BW 802.11be(RU) RU106+26 Index82 - Ch.40)


FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 139 of 383

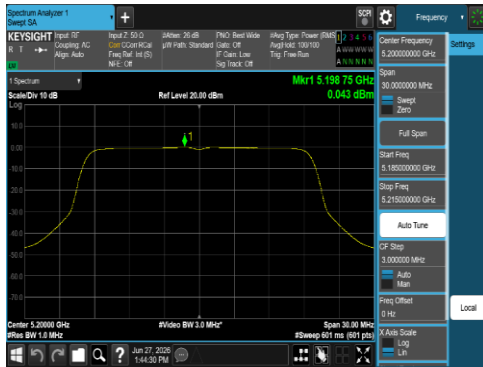


Plot 7-260 PSD SDM Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.40)

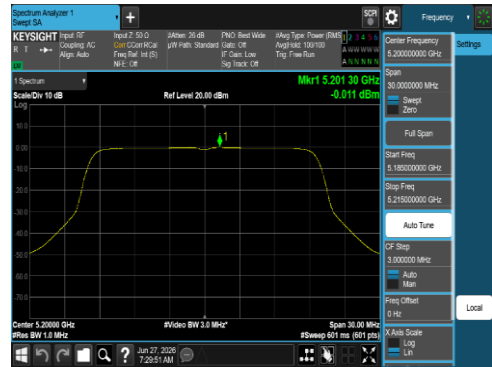


Plot 7-264 PSD SDM Diversity Antenna WF5T (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.40)

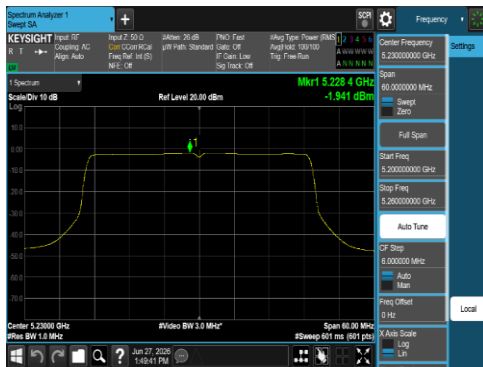


Plot 7-261 PSD SDM Diversity Antenna WF8 (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

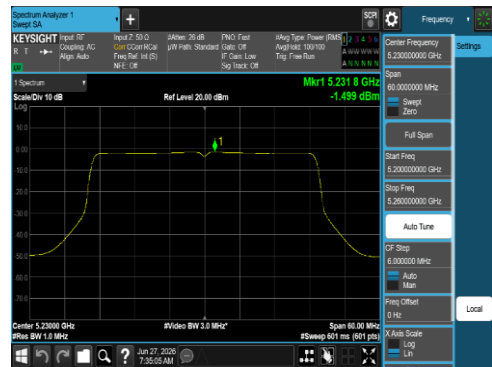


Plot 7-265 PSD SDM Diversity Antenna WF5T (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

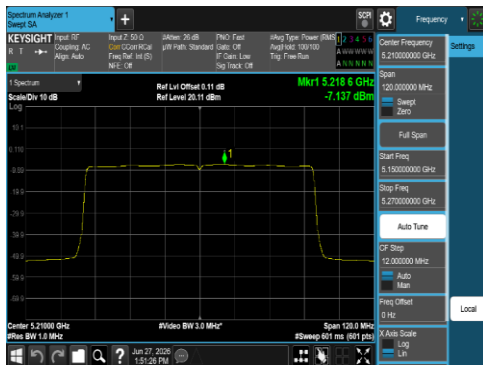


Plot 7-262 PSD CDD Diversity Antenna WF8 (80 MHz BW 802.11be(RU) RU996 Index67 - Ch.42)

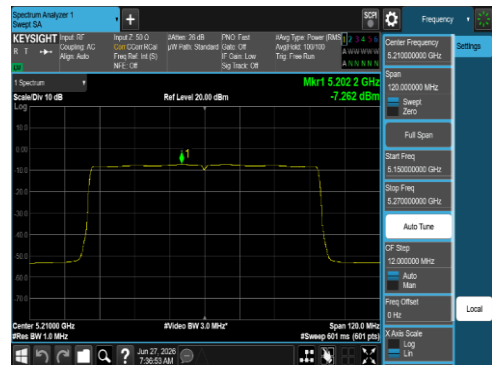

Plot 7-266 PSD CDD Diversity Antenna WF8 (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.40)

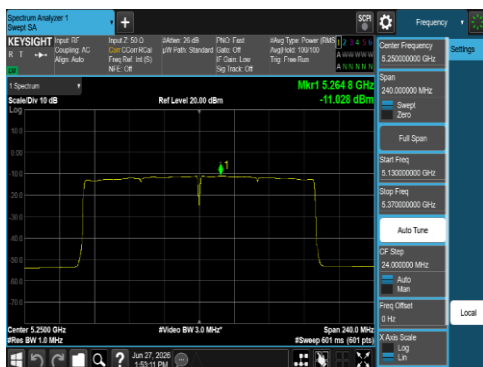

Plot 7-263 PSD CDD Diversity Antenna WF8 (160 MHz BW 802.11be(RU) RU996X2 Index68 - Ch.50)

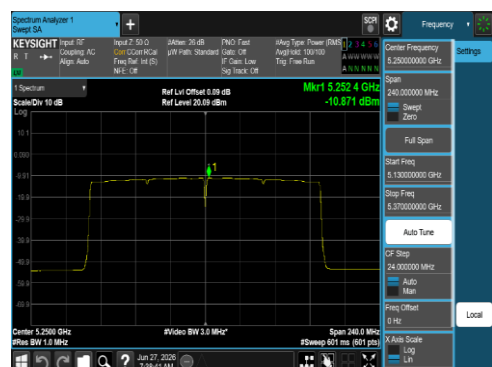

Plot 7-267 PSD CDD Diversity Antenna WF5T (160 MHz BW 802.11be(RU) RU996X2 Index68 - Ch.50)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 140 of 383

Note:

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna WF5T and Antenna WF5B were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.6.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5180 MHz in 802.11be(RU) (20 MHz BW) mode, the power spectral density was measured to be 4.16 dBm for Antenna WF5T and 3.26 dBm for Antenna WF5B.

$$\text{Antenna WF5T} + \text{Antenna WF5B} = \text{CDD/SDM}$$

$$(-0.15 \text{ dBm} + (-0.38) \text{ dBm}) = (0.966 \text{ mW} + 0.916 \text{ mW}) = 1.884 \text{ mW} = 2.75 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5180 MHz in 802.11be(RU) (20 MHz BW) mode, the average MIMO power spectral density was calculated to be 2.75 dBm with directional gain of 3.50 dBi.

$$\begin{aligned} \text{e.i.r.p. Power Spectral Density (dBm)} &= \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)} \\ 2.75 \text{ dBm} + 3.50 \text{ dBi} &= 6.25 \text{ dBm} \end{aligned}$$

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 141 of 383

7.6 Radiated Spurious Emission – Above 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. RU26, 52 Tones, RU106, RU242, RU484, RU996 and RU996x2), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/ MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/ MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/ MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/ MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/ MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/ MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-194 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-194. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclauses 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 142 of 383

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

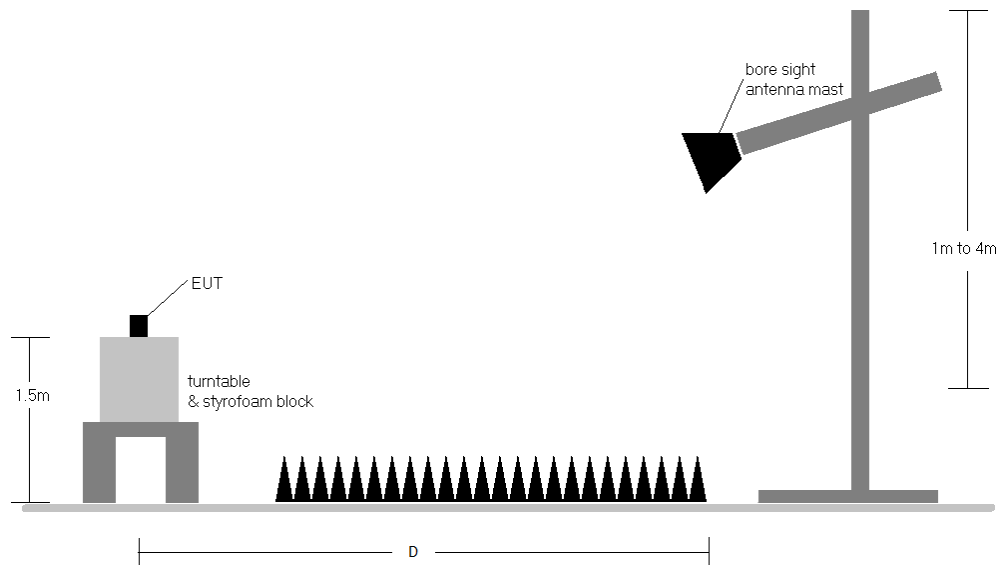


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 143 of 383

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-194.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-194. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18 GHz were measured at a 3 meters test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20 dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 144 of 383

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{\text{[dB}\mu\text{V/m]}} = \text{Analyzer Level}_{\text{[dBm]}} + 107 + \text{AFCL}_{\text{[dB/m]}}$
- $\text{AFCL}_{\text{[dB/m]}} = \text{Antenna Factor}_{\text{[dB/m]}} + \text{Cable Loss}_{\text{[dB]}} - \text{Preamplifier Gain}_{\text{[dB]}}$
- $\text{Margin}_{\text{[dB]}} = \text{Field Strength Level}_{\text{[dB}\mu\text{V/m]}} - \text{Limit}_{\text{[dB}\mu\text{V/m]}}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.3 to 7.6.22 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 145 of 383

7.6.1 CDD Primary Radiated Spurious Emissions

RU26 / RU52

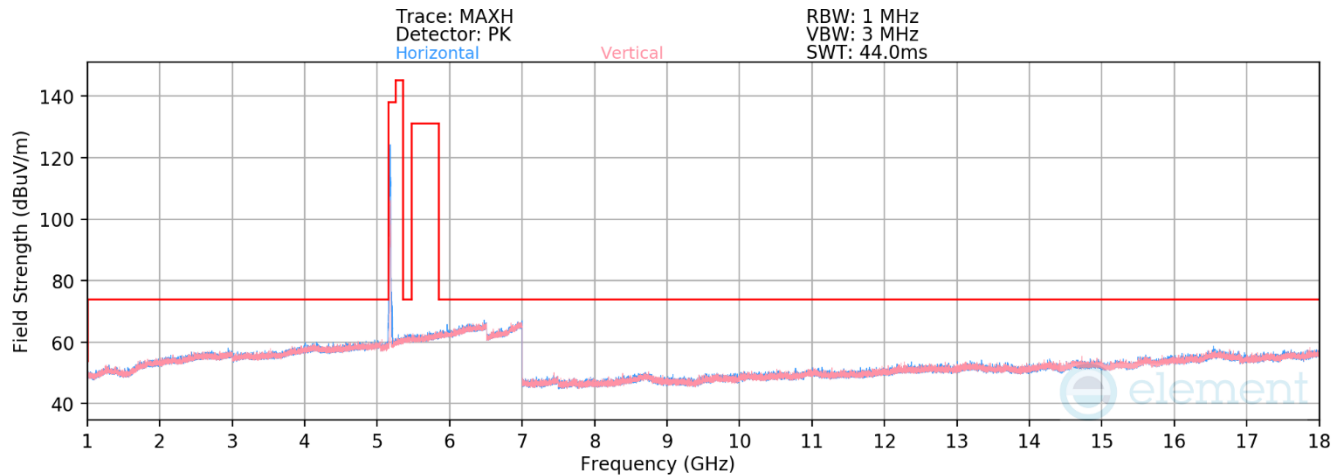


Plot 7-268. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.36 – RU26)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5180 MHz
Channel:	36


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10360.00	Peak	H	-	-	-69.05	11.67	49.61	68.23	-18.62
*	15540.00	Average	H	-	-	-81.18	18.19	44.02	53.98	-9.96
*	15540.00	Peak	H	-	-	-70.34	18.19	54.85	73.98	-19.13

Table 7-195. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 146 of 383

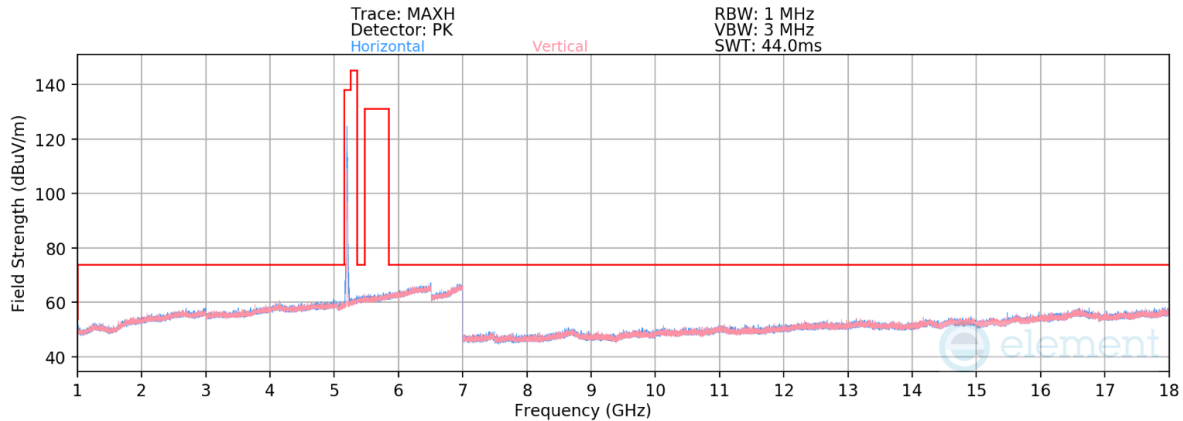

Plot 7-269. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.40 – RU26)

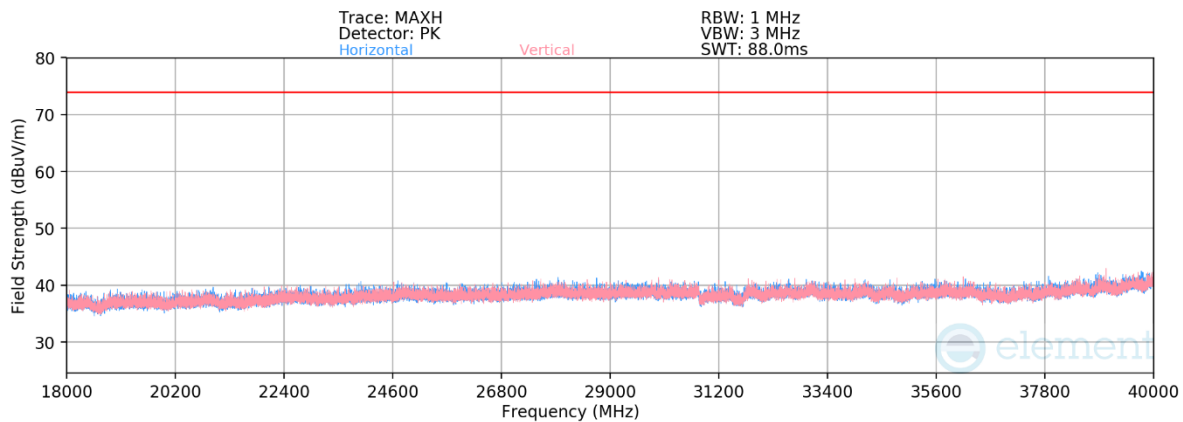


Plot 7-270. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (11be Ch.40 — RU26)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5200 MHz
Channel:	40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-68.67	11.90	0.00	50.23	68.23	-18.00
* 15600.00	Average	V	-	-	-81.64	18.87	0.00	44.23	53.98	-9.75
* 15600.00	Peak	V	-	-	-71.32	18.87	0.00	54.55	73.98	-19.43
* 20800.00	Average	V	-	-	-63.03	-5.90	-9.54	28.53	53.98	-25.45
* 20800.00	Peak	V	-	-	-50.67	-5.90	-9.54	40.89	73.98	-33.09
26000.00	Peak	V	-	-	-51.97	-4.40	-9.54	41.09	68.23	-27.14
* 31200.00	Average	V	-	-	-64.98	-2.70	-9.54	29.78	53.98	-24.20
* 31200.00	Peak	V	-	-	-53.42	-2.65	-9.54	41.39	73.98	-32.59

Table 7-196. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 147 of 383

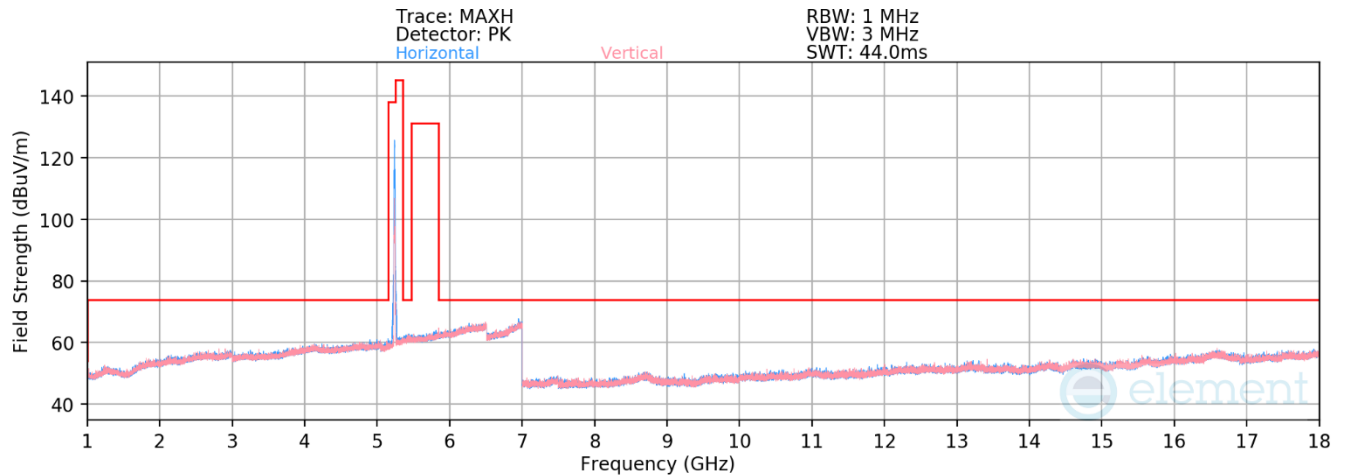


Plot 7-271. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.48 – RU26)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	-	-	-68.44	12.29	50.85	68.23	-17.38
* 15720.00	Average	V	-	-	-81.40	18.53	44.13	53.98	-9.85
* 15720.00	Peak	V	-	-	-70.46	18.53	55.06	73.98	-18.92

Table 7-197. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 148 of 383

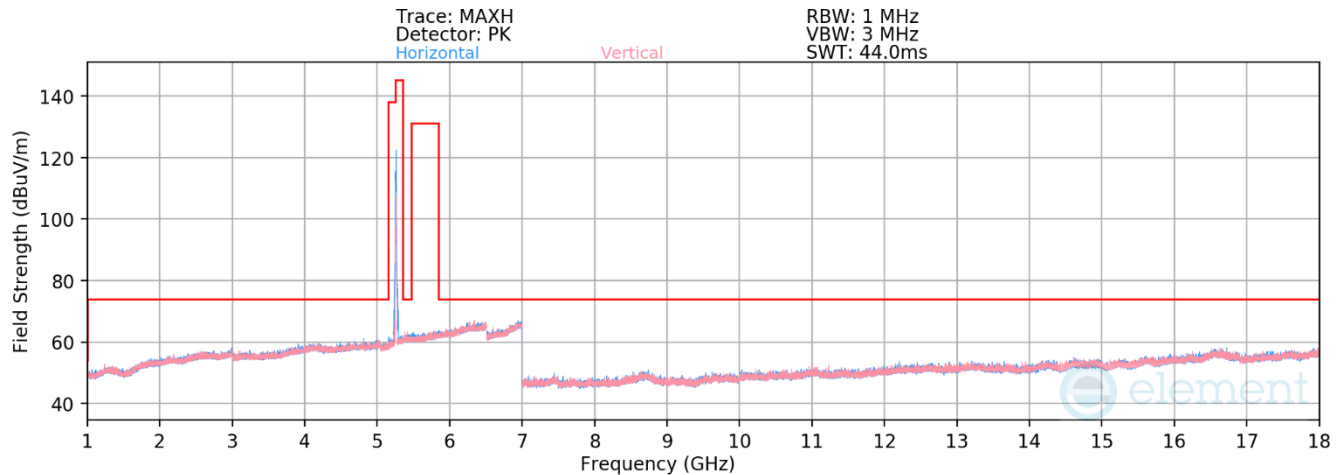


Plot 7-272. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.52 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.28	12.54	50.26	68.23	-17.97
* 15780.00	Average	H	-	-	-81.20	18.34	44.13	53.98	-9.85
* 15780.00	Peak	H	-	-	-70.81	18.34	54.53	73.98	-19.45

Table 7-198. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 149 of 383

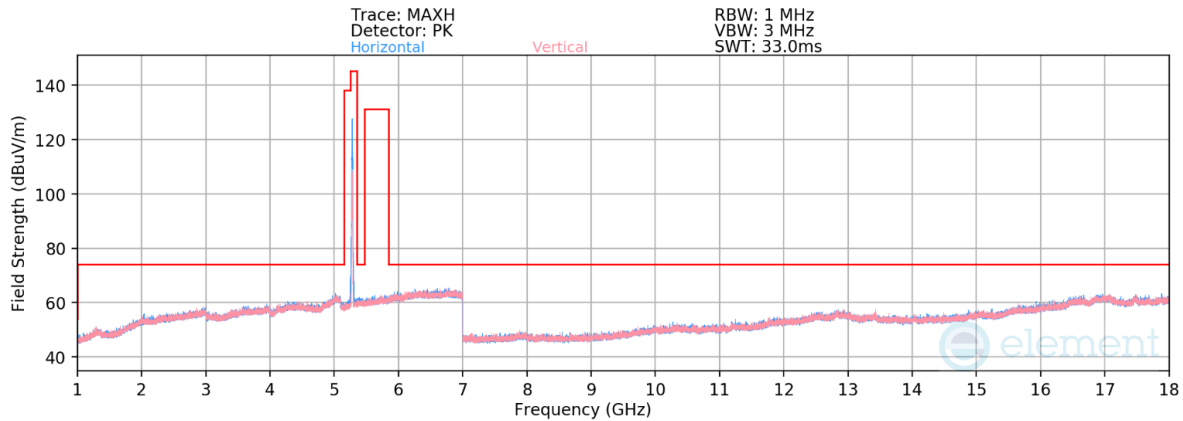

Plot 7-273. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.56 – RU26)

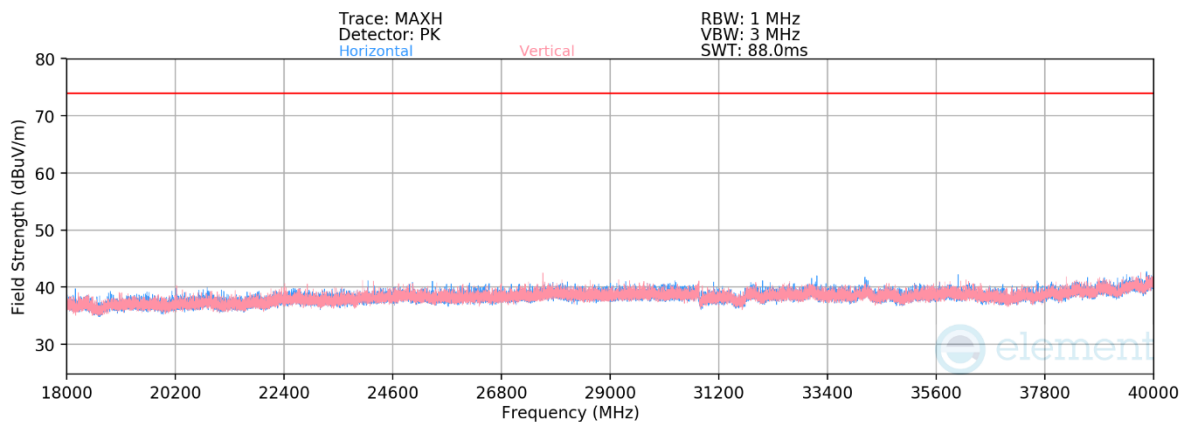


Plot 7-274. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (11be Ch.56 — RU26)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5280 MHz
Channel:	56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	V	-	-	-73.33	18.49	0.00	52.17	68.23	-16.06
* 15840.00	Average	H	-	-	-85.87	26.55	0.00	47.68	53.98	-6.30
* 15840.00	Peak	H	-	-	-74.56	26.55	0.00	58.99	73.98	-14.99
* 21120.00	Average	V	-	-	-63.07	-6.08	-9.54	28.31	53.98	-25.67
* 21120.00	Peak	V	-	-	-51.16	-6.08	-9.54	40.22	73.98	-33.76
26400.00	Peak	H	-	-	-52.57	-4.04	-9.54	40.85	68.23	-27.38
* 31680.00	Average	V	-	-	-65.35	-2.66	-9.54	29.45	53.98	-24.53
* 31680.00	Peak	V	-	-	-53.87	-2.66	-9.54	40.93	73.98	-33.05

Table 7-199. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 150 of 383

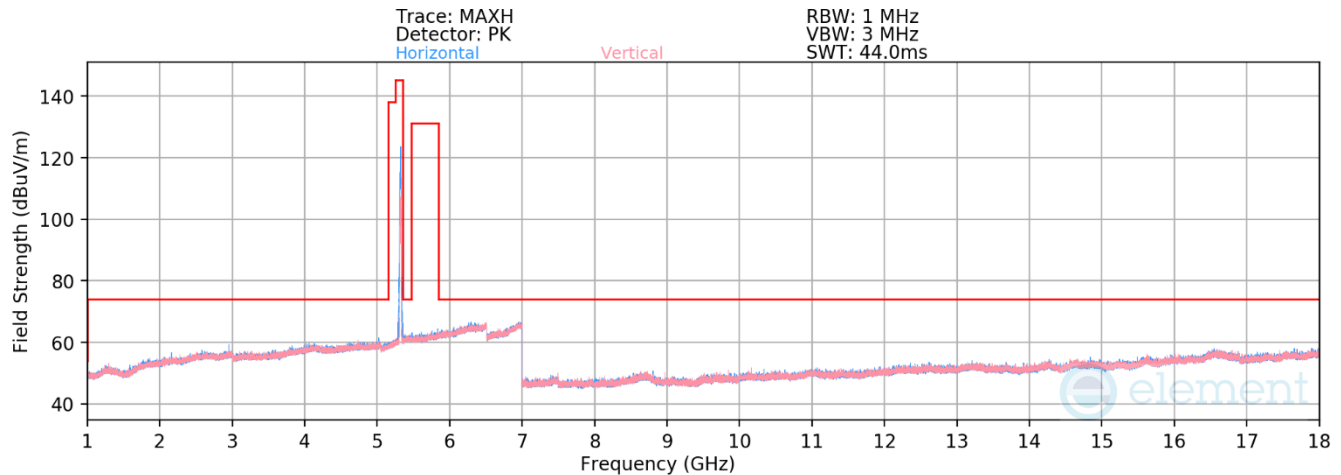


Plot 7-275. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.64 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-80.69	13.09	39.41	53.98	-14.57
* 10640.00	Peak	V	-	-	-69.24	13.09	50.85	73.98	-23.13
* 15960.00	Average	H	-	-	-81.52	18.35	43.82	53.98	-10.16
* 15960.00	Peak	H	-	-	-69.88	18.35	55.46	73.98	-18.52

Table 7-200. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 151 of 383

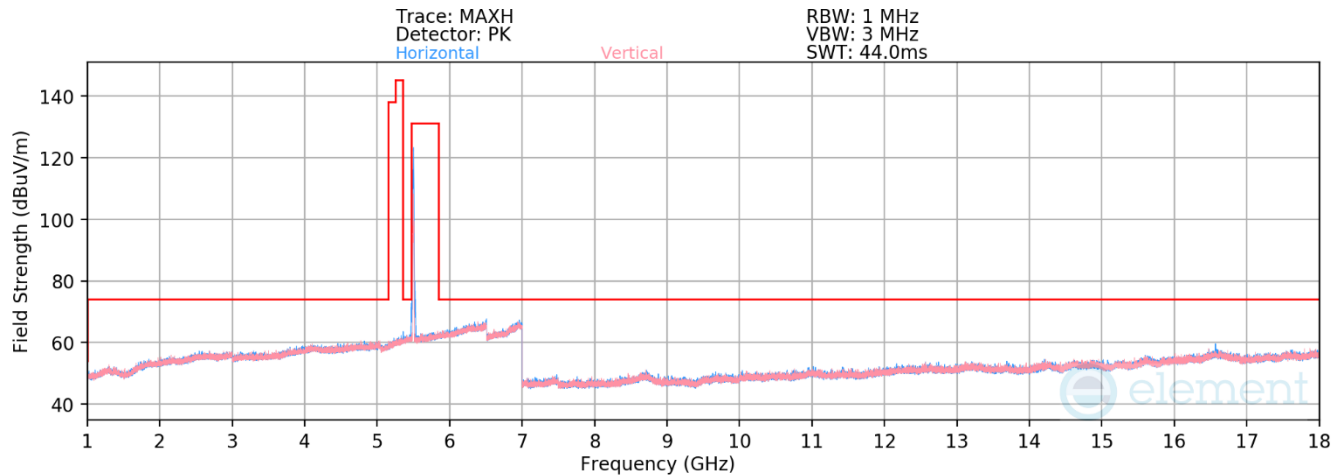


Plot 7-276. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.100 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-80.65	13.18	39.54	53.98	-14.44
* 11000.00	Peak	H	-	-	-69.51	13.18	50.68	73.98	-23.30
16500.00	Peak	H	-	-	-70.30	19.58	56.28	68.23	-11.95

Table 7-201. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 152 of 383

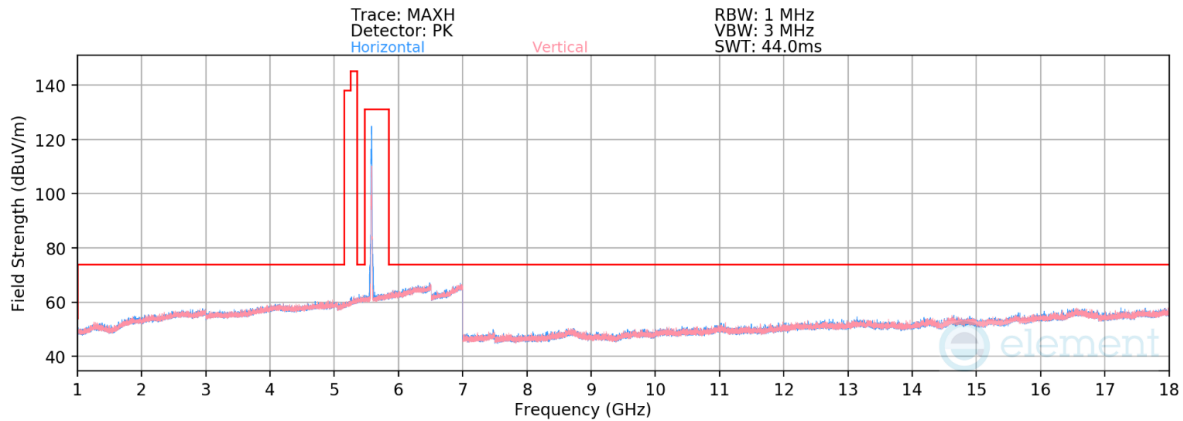

Plot 7-277. Radiated Spurious Emissions above 1 GHz CDD Primary (11be - Ch.116 - RU52)

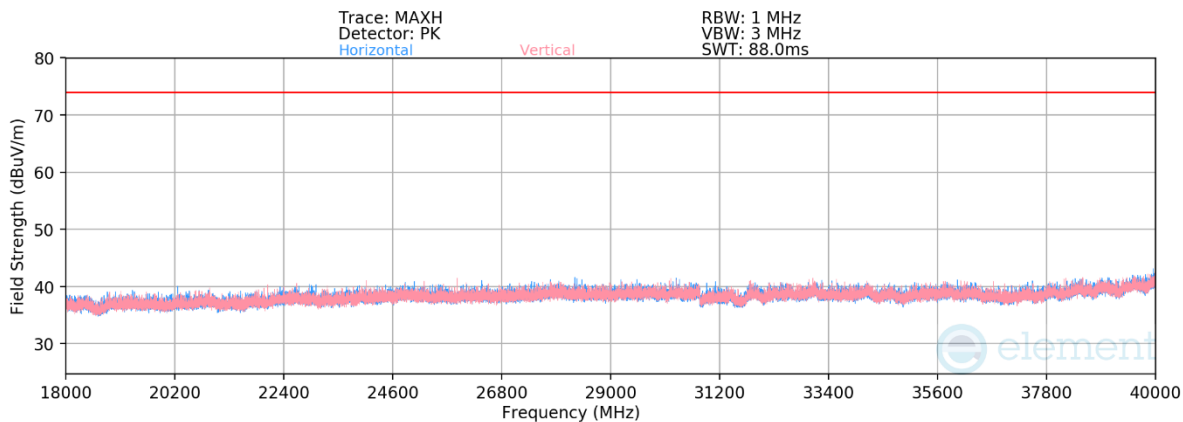


Plot 7-278. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (11be Ch.116 - RU52)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5580 MHz
Channel:	116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-80.34	12.96	0.00	39.62	53.98	-14.36
* 11160.00	Peak	H	-	-	-69.15	12.96	0.00	50.81	73.98	-23.17
16740.00	Peak	H	-	-	-70.29	20.06	0.00	56.77	68.23	-11.46
* 22320.00	Average	V	-	-	-62.70	-5.46	-9.54	29.30	53.98	-24.68
* 22320.00	Peak	V	-	-	-51.43	-5.49	-9.54	40.54	73.98	-33.44
27900.00	Peak	H	-	-	-53.97	-2.91	-9.54	40.58	68.23	-27.65
33480.00	Peak	V	-	-	-52.30	-3.59	-9.54	41.57	68.23	-26.66

Table 7-202. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 153 of 383

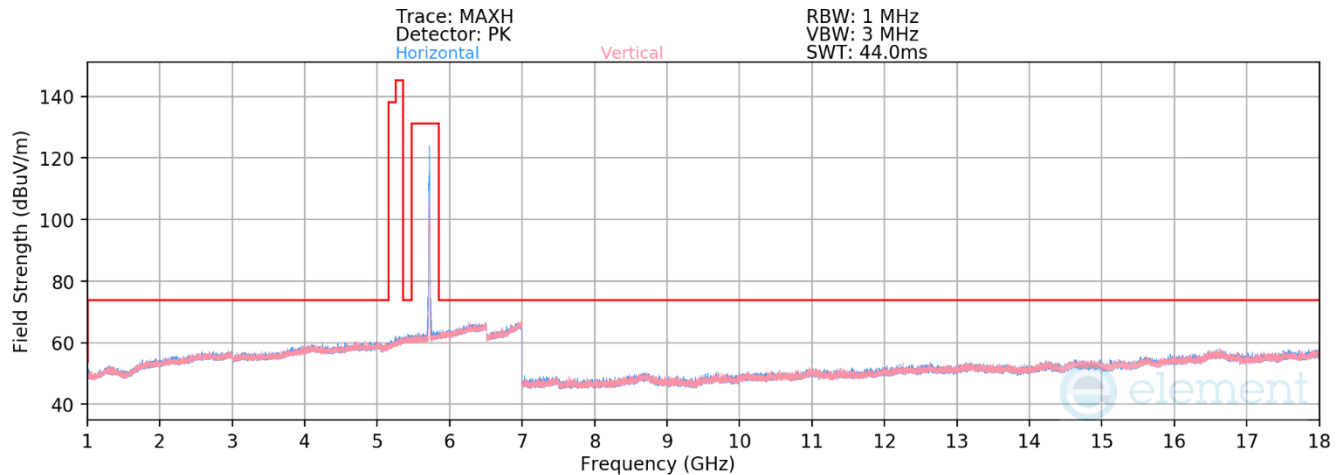

Plot 7-279. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.144 – RU52)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5720 MHz

Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-80.38	13.84	40.46	53.98	-13.52
* 11440.00	Peak	V	-	-	-69.98	13.84	50.86	73.98	-23.12
17160.00	Peak	V	-	-	-71.05	19.91	55.86	68.23	-12.37

Table 7-203. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 154 of 383

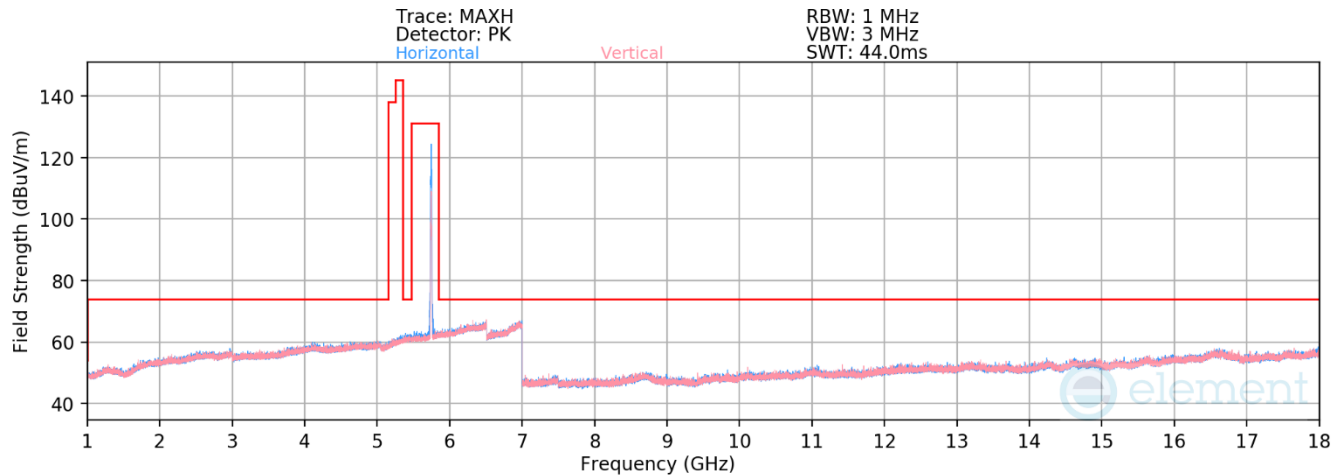


Plot 7-280. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.149 – RU26)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-80.78	13.57	39.79	53.98	-14.19
* 11490.00	Peak	V	-	-	-70.21	13.57	50.36	73.98	-23.62
17235.00	Peak	H	-	-	-71.22	19.74	55.51	68.23	-12.72

Table 7-204. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 155 of 383

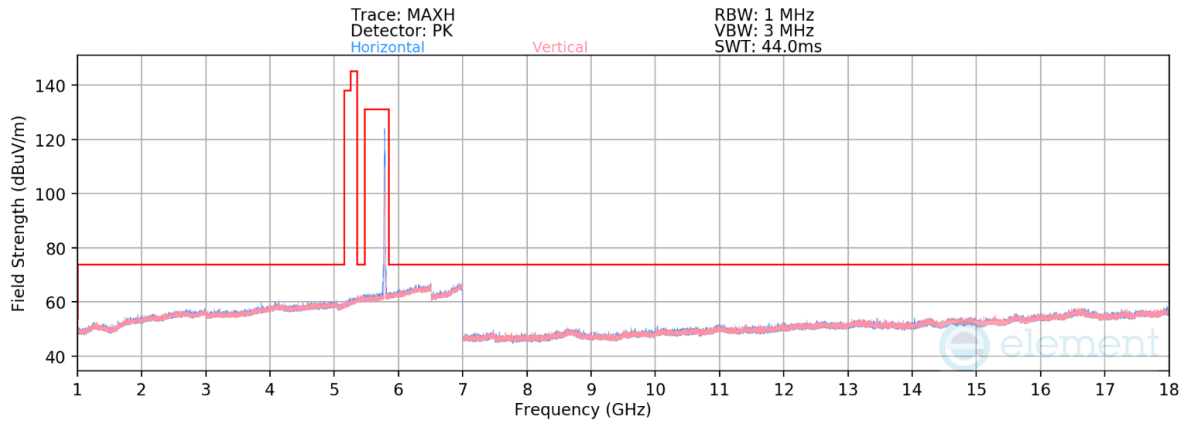

Plot 7-281. Radiated Spurious Emissions above 1 GHz CDD Primary (11be - Ch.157 - RU26)

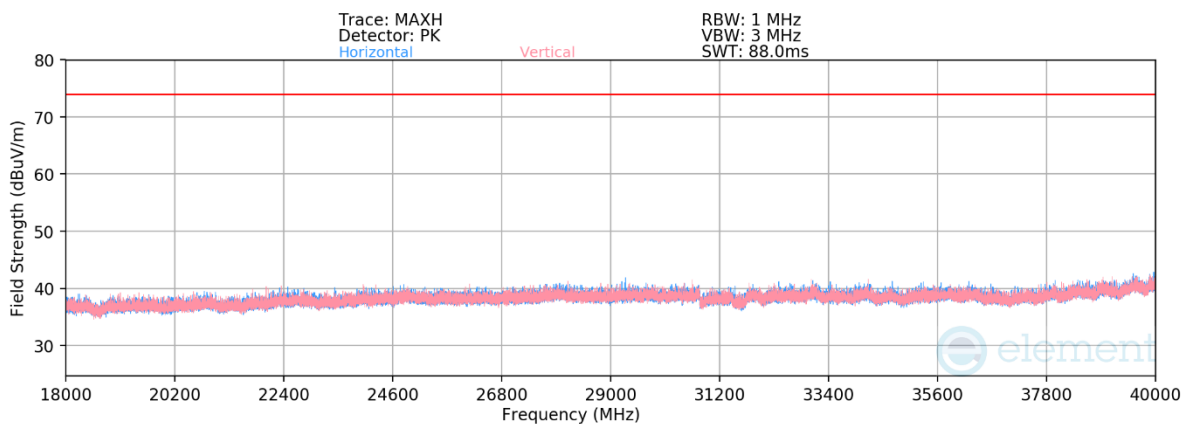


Plot 7-282. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (11be Ch.157 - RU26)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5785 MHz
Channel:	157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-80.58	13.90	0.00	40.32	53.98	-13.66
* 11570.00	Peak	H	-	-	-69.99	13.90	0.00	50.91	73.98	-23.07
17355.00	Peak	V	-	-	-71.19	19.71	0.00	55.52	68.23	-12.71
23140.00	Average	V	-	-	-52.37	-5.68	-9.54	39.41	68.23	-28.82
28925.00	Peak	H	-	-	-53.57	-2.88	-9.54	41.01	68.23	-27.22
34710.00	Peak	H	-	-	-51.21	-4.60	-9.54	41.65	68.23	-26.58

Table 7-205. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 156 of 383

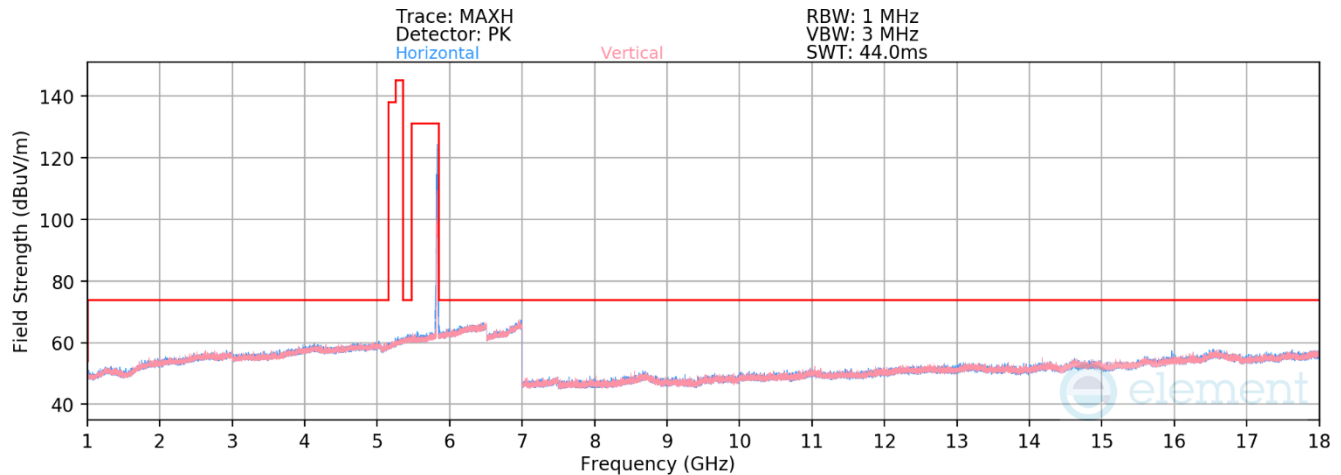

Plot 7-283. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.165 – RU26)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5825 MHz


Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-80.54	13.69	40.15	53.98	-13.83
* 11650.00	Peak	H	-	-	-70.19	13.69	50.50	73.98	-23.48
17475.00	Peak	V	-	-	-71.51	20.79	56.28	68.23	-11.95

Table 7-206. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 157 of 383

RU242

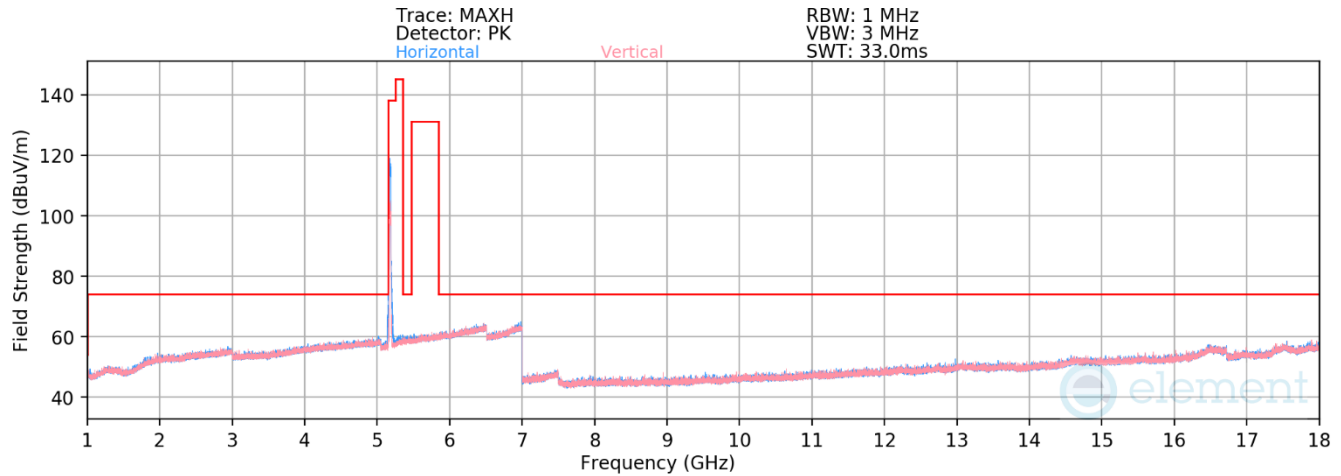


Plot 7-284. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.36 – RU242)

Mode:	11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5180 MHz
Channel:	36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-67.76	9.29	48.54	68.23	-19.69
* 15540.00	Average	H	-	-	-80.09	14.76	41.67	53.98	-12.31
* 15540.00	Peak	H	-	-	-68.71	14.76	53.04	73.98	-20.94

Table 7-207. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 158 of 383

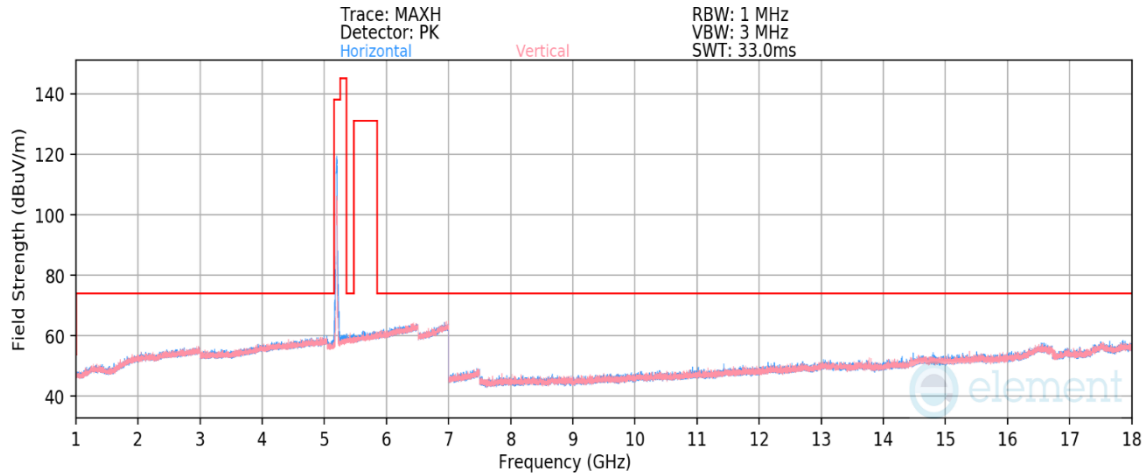

Plot 7-285. Radiated Spurious Emissions above 1 GHz CDD Primary (11be – Ch.40 – RU242)

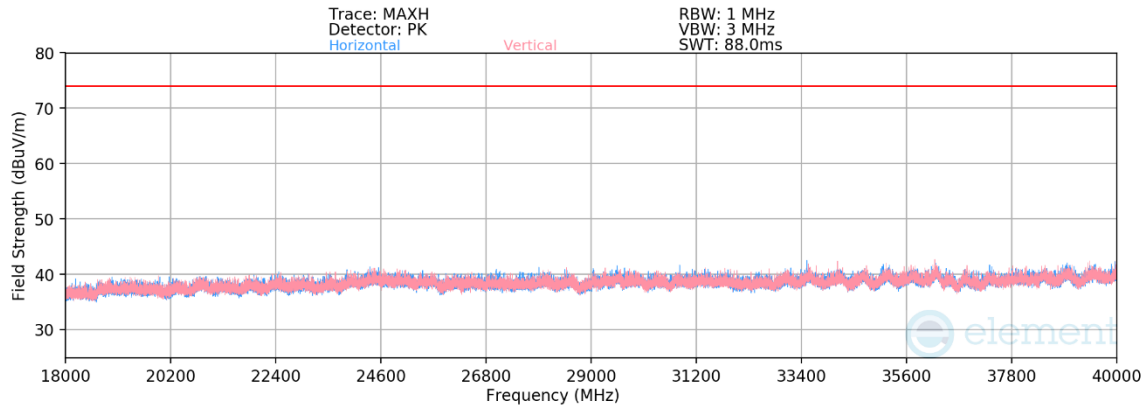

Plot 7-286. Radiated Spurious Emissions 18 GHz - 40 GHz CDD Primary (11be Ch.40 — RU242)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5200 MHz

Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-67.40	9.49	0.00	49.08	68.23	-19.15
* 15600.00	Average	V	-	-	-79.61	14.79	0.00	42.18	53.98	-11.80
* 15600.00	Peak	V	-	-	-69.52	14.79	0.00	52.27	73.98	-21.71
* 20800.00	Average	V	-	-	-62.68	-5.90	-9.54	28.88	53.98	-25.10
* 20800.00	Peak	V	-	-	-51.28	-5.87	-9.54	40.31	73.98	-33.67
26000.00	Peak	H	-	-	-53.10	-4.40	-9.54	39.96	68.23	-28.27
* 31200.00	Average	V	-	-	-64.92	-2.74	-9.54	29.80	53.98	-24.18
* 31200.00	Peak	V	-	-	-53.47	-2.74	-9.54	41.25	73.98	-32.73

Table 7-208. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3595 IC: 579C-A3595	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 8/31/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030025-10-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 159 of 383