



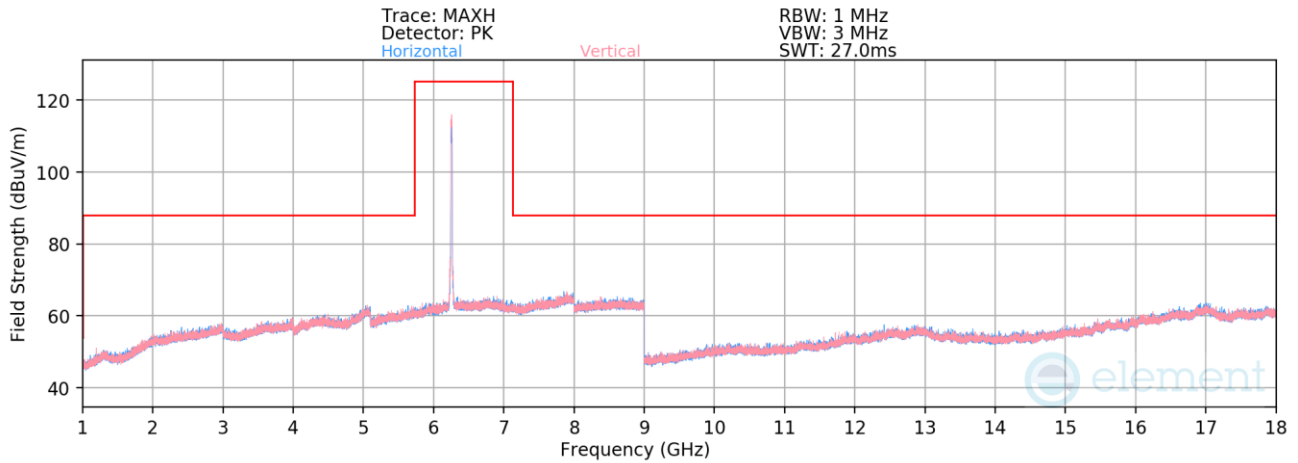

Plot 7-328. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 61)

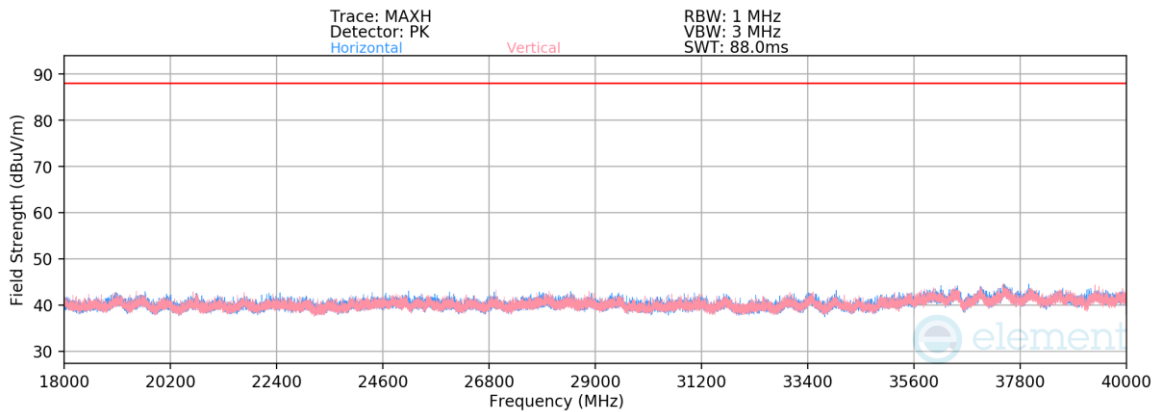


Plot 7-329. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 61)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6255 MHz
Channel:	61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12510.00	Average	H	-	-	-84.64	22.17	0.00	44.54	53.98	-9.44
* 12510.00	Peak	H	-	-	-72.95	22.17	0.00	56.22	73.98	-17.76
* 18765.00	Average	H	-	-	-60.70	-5.84	-9.54	30.92	53.98	-23.06
* 18765.00	Peak	H	-	-	-49.43	-5.83	-9.54	42.20	73.98	-31.78
25020.00	Average	V	-	-	-61.85	-4.40	-9.54	31.21	68.23	-37.02
25020.00	Peak	V	-	-	-50.35	-4.40	-9.54	42.71	88.23	-45.52
* 31275.00	Average	V	-	-	-63.61	-2.72	-9.54	31.13	53.98	-22.85
* 31275.00	Peak	V	-	-	-52.47	-2.61	-9.54	42.38	73.98	-31.60

Table 7-59. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 133 of 192

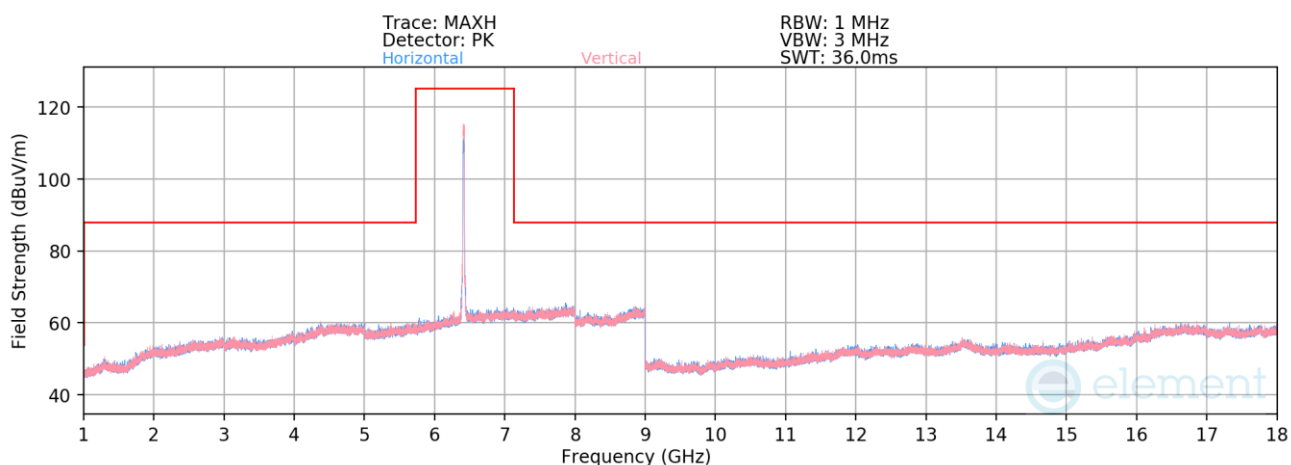

Plot 7-330. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 93)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	V	-	-	-83.13	19.11	42.97	68.23	-25.26
12830.00	Peak	V	-	-	-72.50	19.11	53.61	88.23	-34.62

Table 7-60. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 134 of 192

V 11.0 05/2025

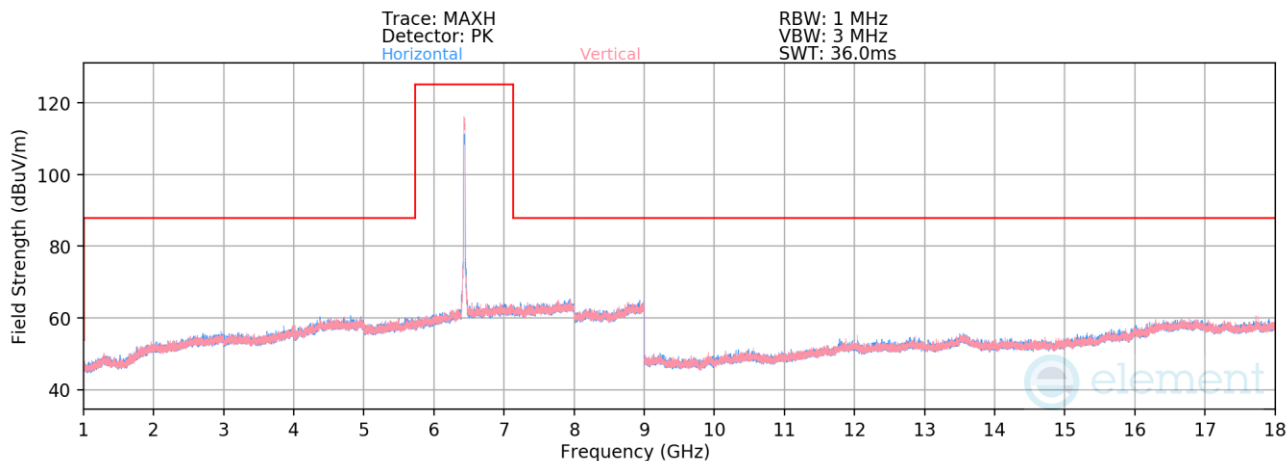

Plot 7-331. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 97)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6435 MHz
Channel:	97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-83.37	18.94	42.57	68.23	-25.66
12870.00	Peak	H	-	-	-71.86	18.94	54.08	88.23	-34.15


Table 7-61. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 135 of 192

V 11.0 05/2025

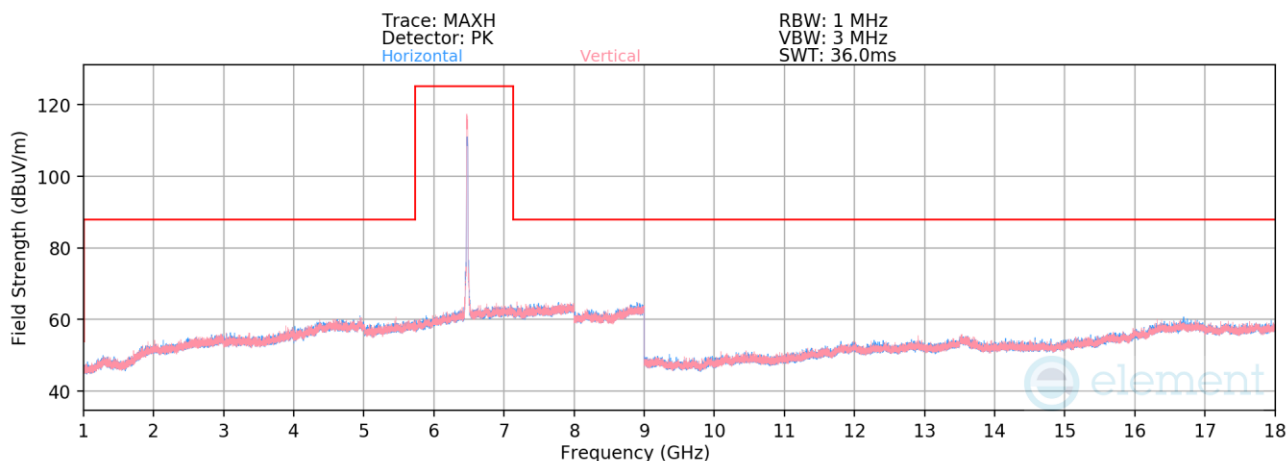

Plot 7-332. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 105)

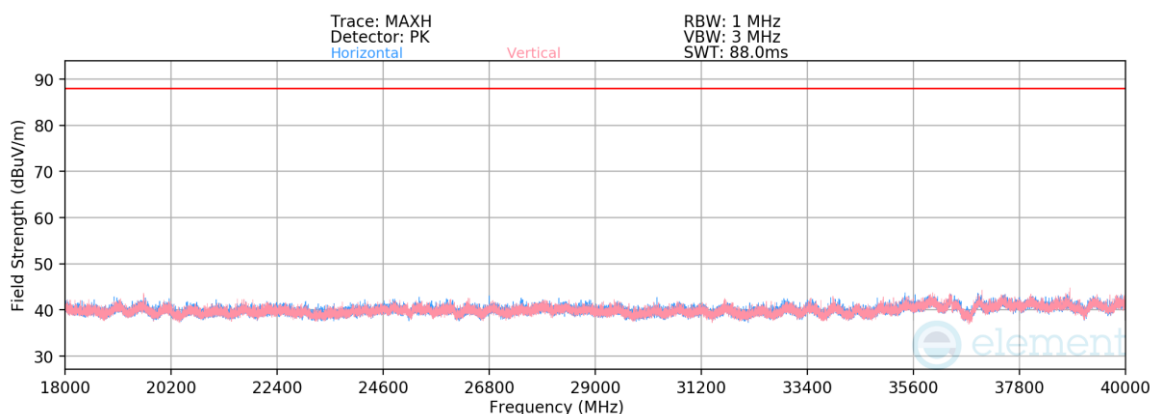


Plot 7-333. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 105)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475 MHz
Channel:	105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-83.56	19.33	0.00	42.78	68.23	-25.45
12950.00	Peak	V	-	-	-72.06	19.33	0.00	54.27	88.23	-33.96
* 19425.00	Average	H	-	-	-60.78	-5.95	-9.54	30.73	53.98	-23.25
* 19425.00	Peak	H	-	-	-49.26	-5.95	-9.54	42.25	73.98	-31.73
25900.00	Average	V	-	-	-61.88	-4.39	-9.54	31.19	68.23	-37.04
25900.00	Peak	V	-	-	-50.19	-4.39	-9.54	42.88	88.23	-45.35
32375.00	Average	V	-	-	-63.30	-3.25	-9.54	30.91	68.23	-37.32
32375.00	Peak	V	-	-	-51.74	-3.25	-9.54	42.47	88.23	-45.76

Table 7-62. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 136 of 192

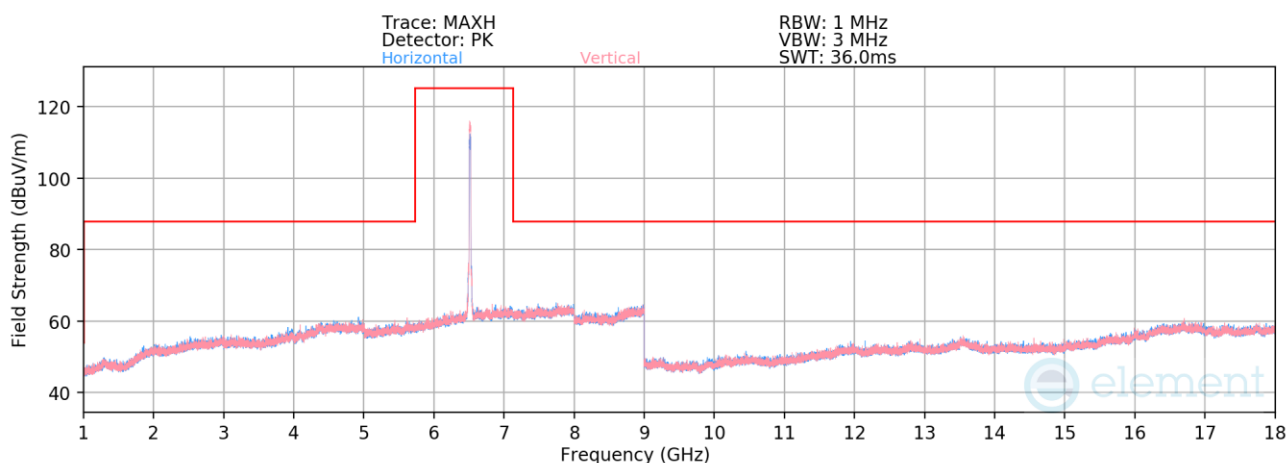


Plot 7-334. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 113)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515 MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-83.92	19.29	42.38	68.23	-25.85
13030.00	Peak	H	-	-	-72.33	19.29	53.96	88.23	-34.27

Table 7-63. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 137 of 192

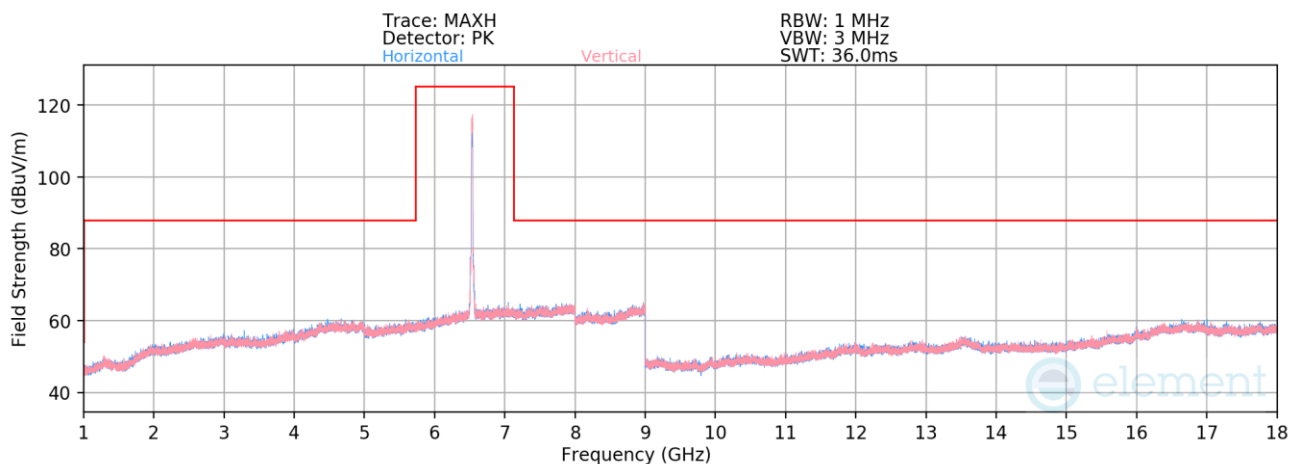

Plot 7-335. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 117)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6535 MHz
Channel:	117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.80	19.38	42.57	68.23	-25.66
13070.00	Peak	H	-	-	-72.49	19.38	53.89	88.23	-34.34


Table 7-64. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 138 of 192

V 11.0 05/2025

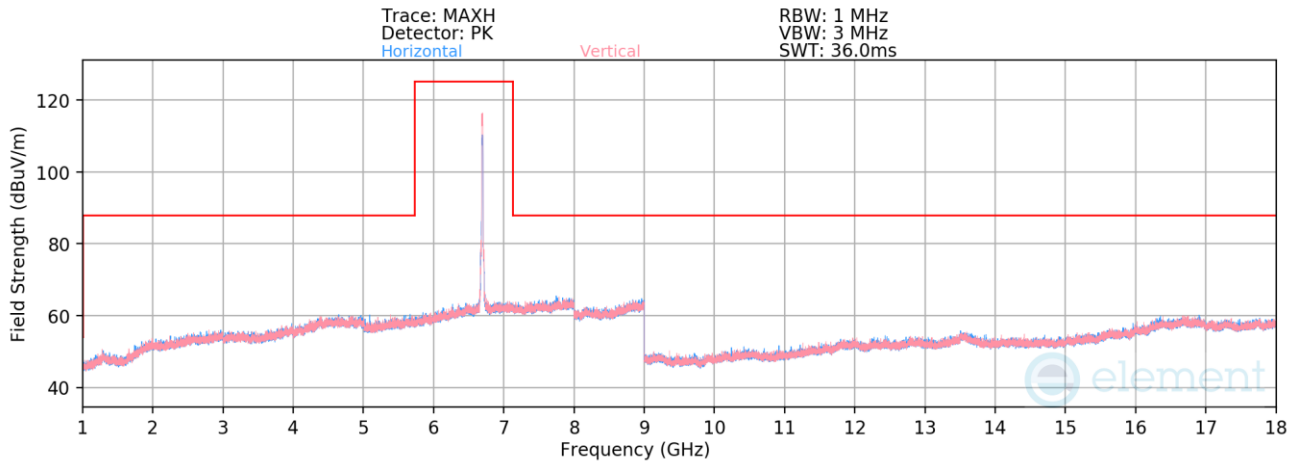

Plot 7-336. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 149)

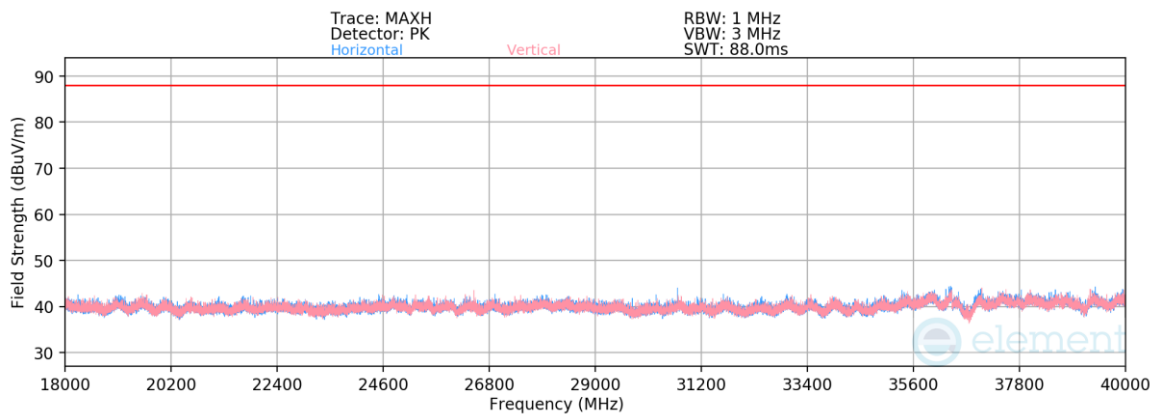


Plot 7-337. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 149)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695 MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13390.00	Average	V	-	-	-83.65	19.42	0.00	42.76	68.23	-25.47
13390.00	Peak	V	-	-	-72.80	19.42	0.00	53.61	88.23	-34.62
* 20085.00	Average	H	-	-	-59.90	-6.21	-9.54	31.35	53.98	-22.63
* 20085.00	Peak	H	-	-	-48.38	-6.21	-9.54	42.87	73.98	-31.11
26780.00	Average	H	-	-	-62.73	-3.80	-9.54	30.93	68.23	-37.30
26780.00	Peak	H	-	-	-51.34	-3.80	-9.54	42.32	88.23	-45.91
33475.00	Average	H	-	-	-61.41	-3.58	-9.54	32.47	68.23	-35.76
33475.00	Peak	H	-	-	-50.30	-3.58	-9.54	43.58	88.23	-44.65

Table 7-65. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 139 of 192

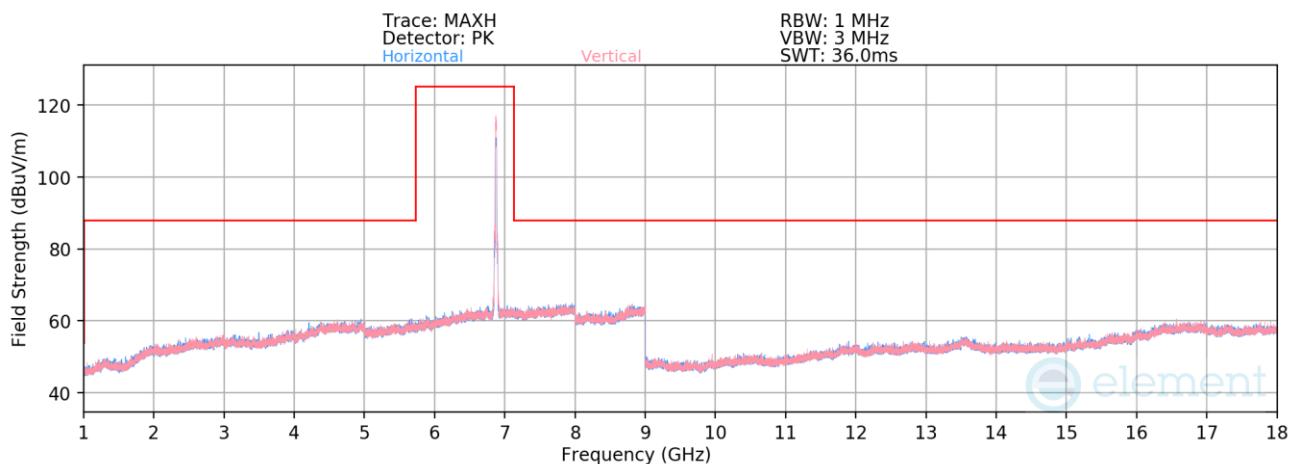


Plot 7-338. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 185)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6875 MHz
Channel:	185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-83.41	19.22	42.81	68.23	-25.42
13790.00	Peak	H	-	-	-71.28	19.22	54.94	88.23	-33.29

Table 7-66. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 140 of 192

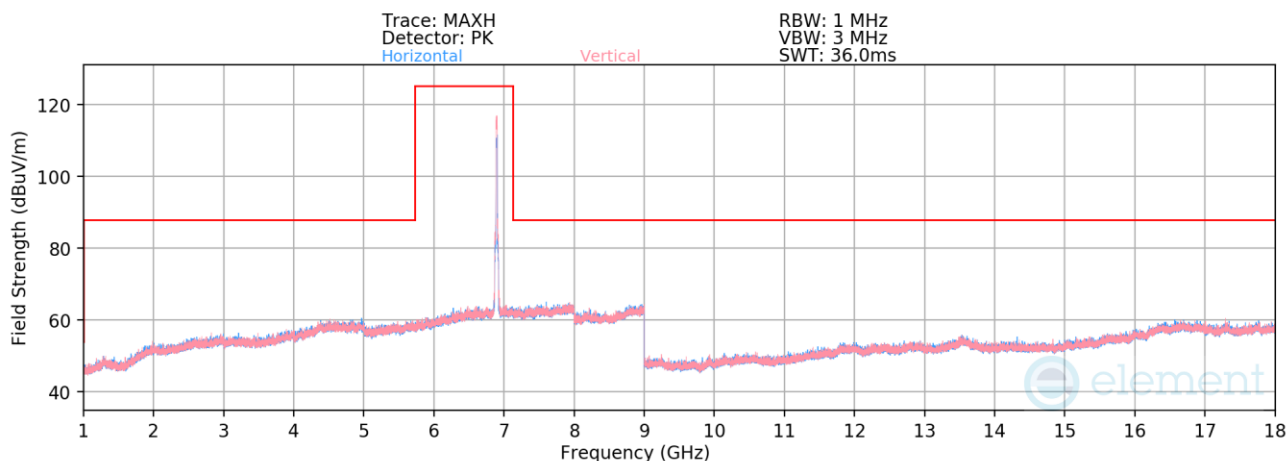

Plot 7-339. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 189)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895 MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-83.41	19.22	42.81	68.23	-25.42
13790.00	Peak	H	-	-	-71.28	19.22	54.94	88.23	-33.29


Table 7-67. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 141 of 192

V 11.0 05/2025

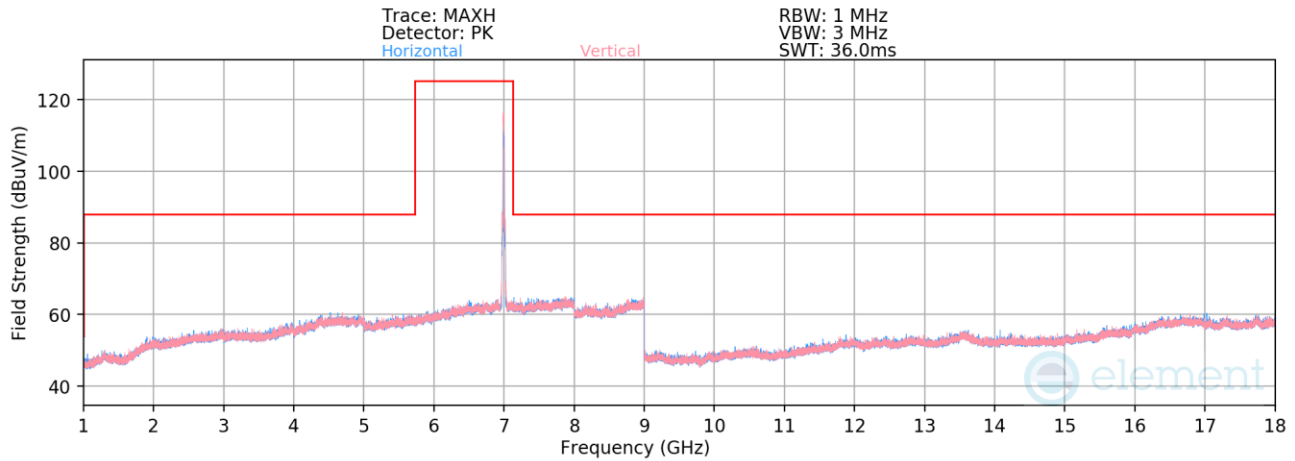

Plot 7-340. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 209)

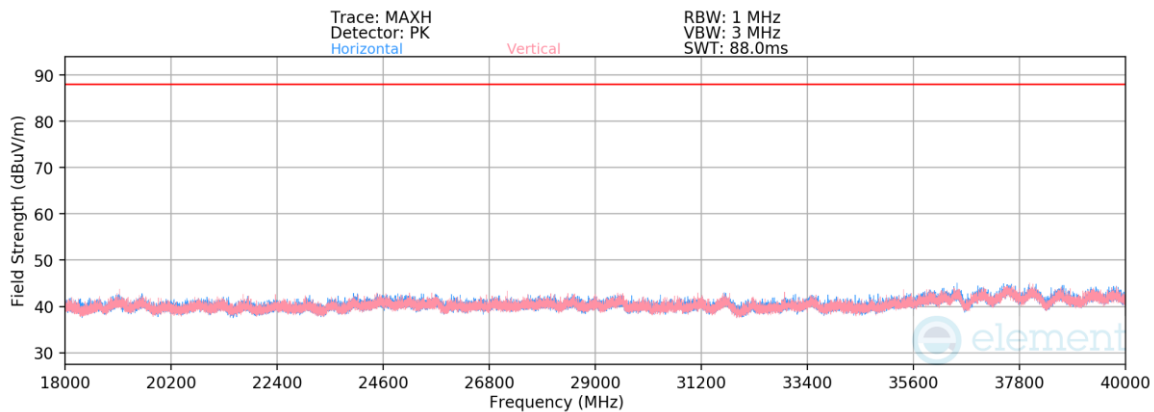


Plot 7-341. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 209)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995 MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13990.00	Average	V	-	-	-83.82	19.54	0.00	42.72	68.23	-25.51
13990.00	Peak	V	-	-	-72.15	19.54	0.00	54.39	88.23	-33.84
* 20985.00	Average	V	-	-	-61.01	-5.87	-9.54	30.58	53.98	-23.40
* 20985.00	Peak	V	-	-	-49.74	-5.87	-9.54	41.85	73.98	-32.13
27980.00	Average	V	-	-	-62.60	-2.82	-9.54	32.04	68.23	-36.19
27980.00	Peak	V	-	-	-50.79	-2.82	-9.54	43.85	88.23	-44.38
34975.00	Average	V	-	-	-61.75	-4.82	-9.54	30.89	68.23	-37.34
34975.00	Peak	V	-	-	-50.58	-4.82	-9.54	42.06	88.23	-46.17

Table 7-68. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 142 of 192

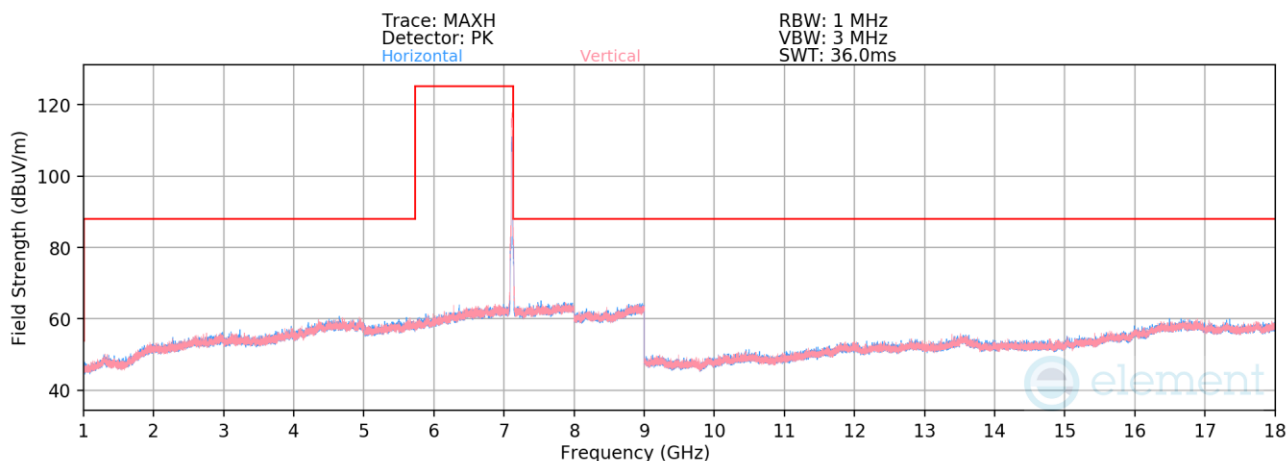

Plot 7-342. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 233)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7115 MHz
Channel:	233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.71	19.63	42.92	68.23	-25.31
14230.00	Peak	H	-	-	-72.30	19.63	54.33	88.23	-33.90


Table 7-69. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 143 of 192

Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

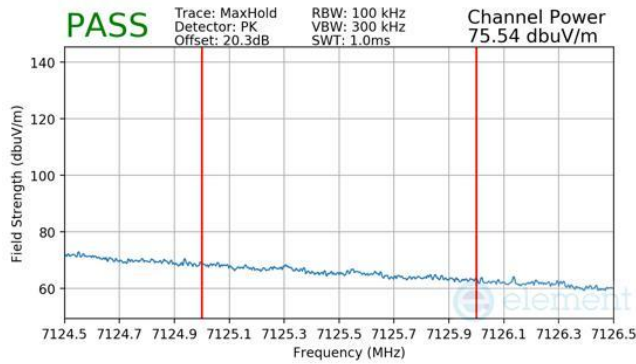


Plot 7-345 Antenna 5T Radiated Integrated Band Edge (Peak – UNII Band 8)

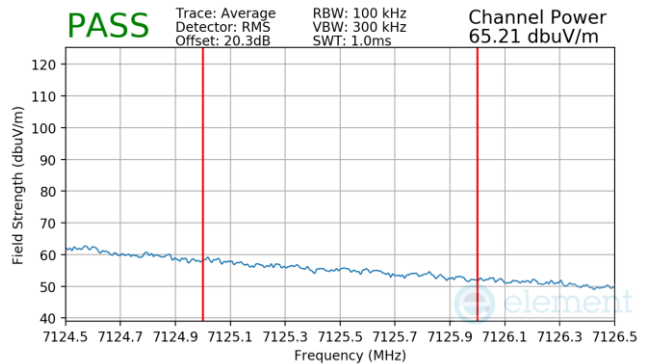

Plot 7-346 Antenna 5T Radiated Integrated Band Edge (Average – UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6115 MHz
Channel	33

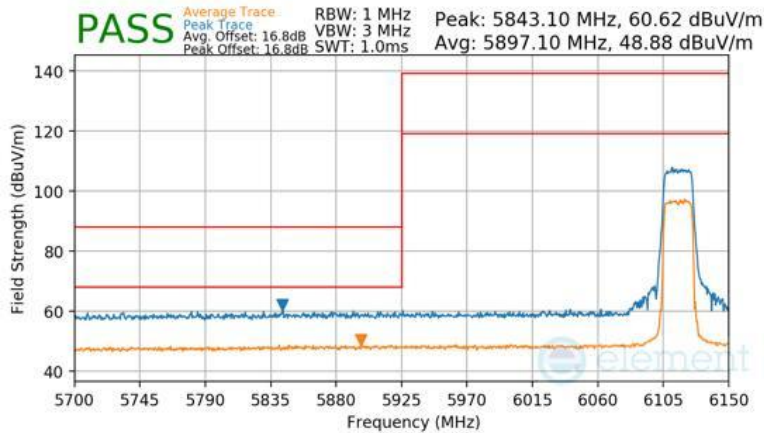

Plot 7-347 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 145 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

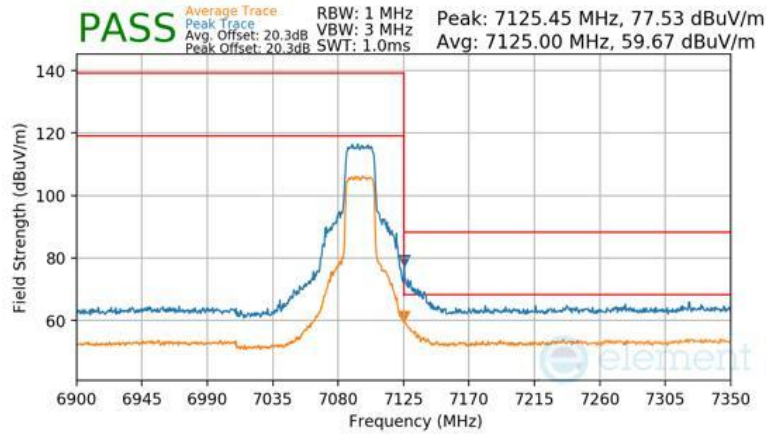


Plot 7-348 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

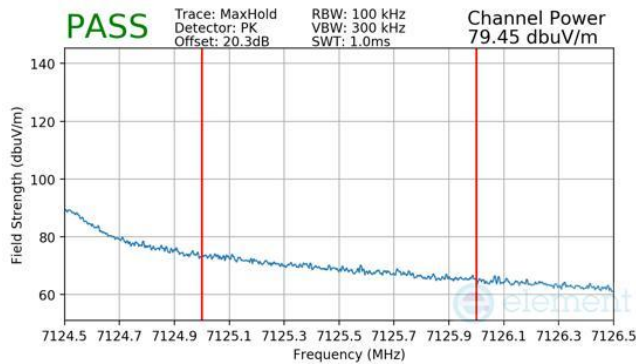

Plot 7-349 Antenna 5T Radiated Integrated Band Edge (Peak – UNII Band 8)

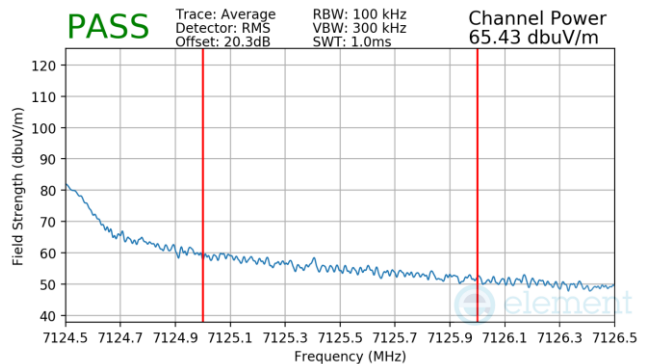


Plot 7-350 Antenna 5T Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 146 of 192


7.8.4 Antenna 5T Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6125 MHz
Channel	35

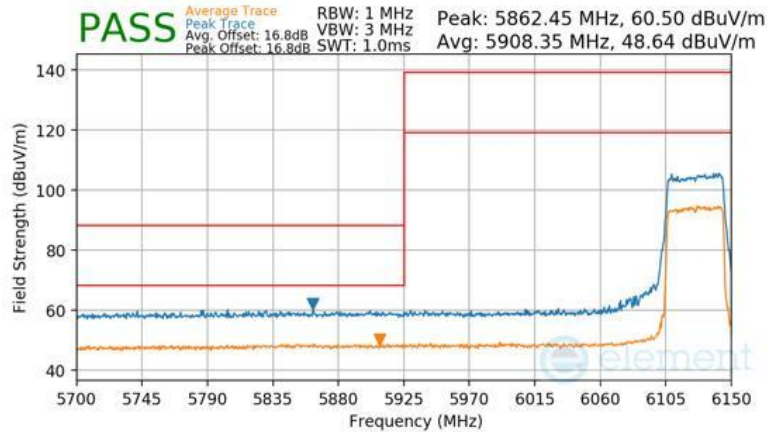

Plot 7-351 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085 MHz
Channel	227

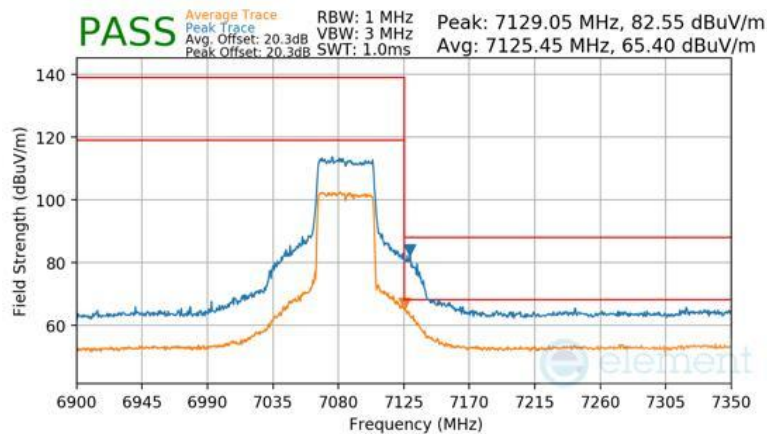


Plot 7-352 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 147 of 192


7.8.5 Antenna 5T Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6145 MHz
Channel	39

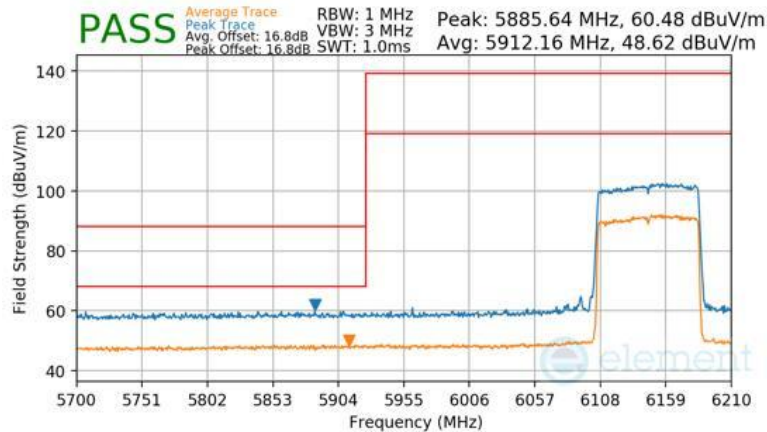

Plot 7-353 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

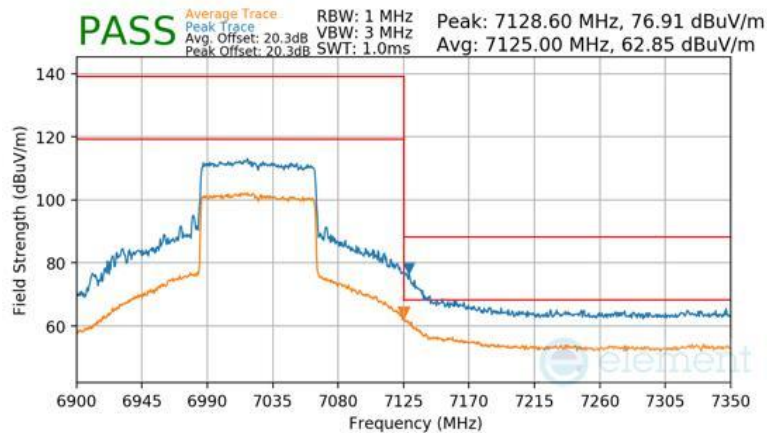


Plot 7-354 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 148 of 192


7.8.6 Antenna 5T Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

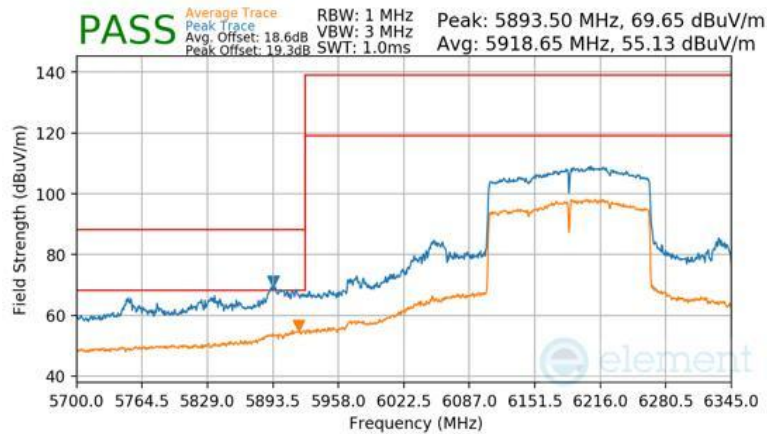

Plot 7-355 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6825 MHz
Channel	175

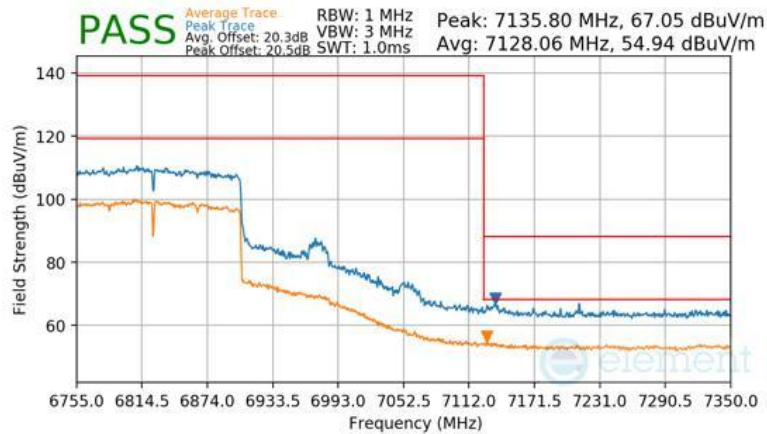

Plot 7-356 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 7)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 149 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985 MHz
Channel	207

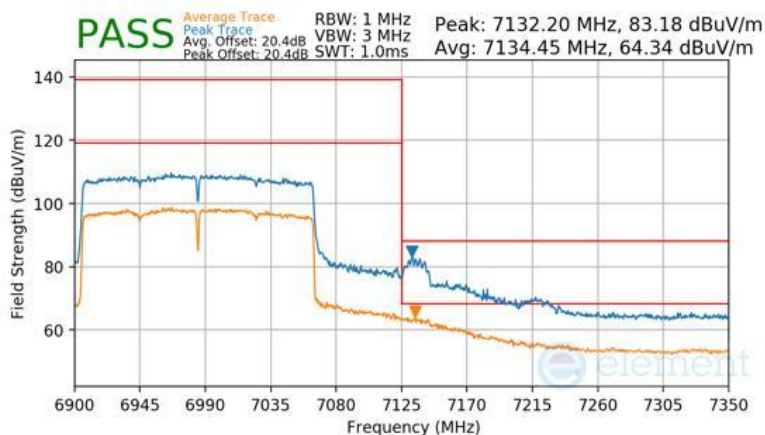


Plot 7-357 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 150 of 192

V 11.0 05/2025

Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

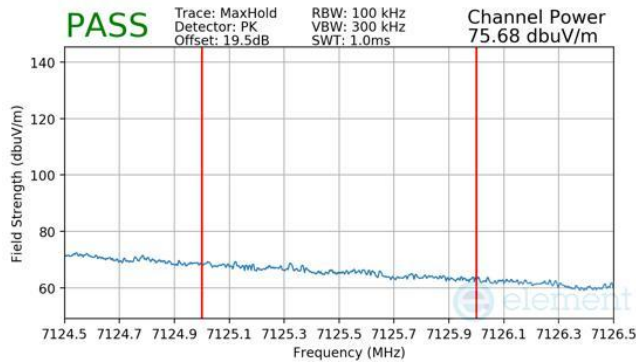


Plot 7-360 Antenna 5B Radiated Integrated Band Edge (Peak – UNII Band 8)

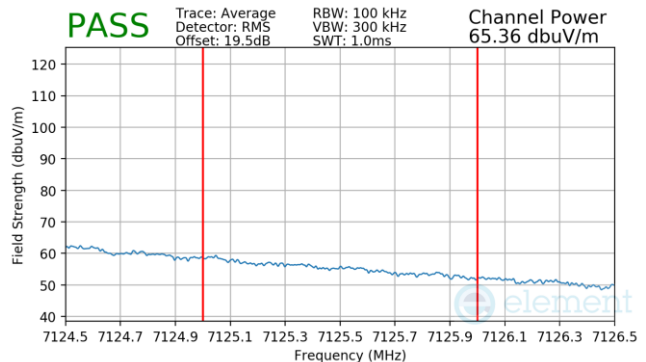

Plot 7-361 Antenna 5B Radiated Integrated Band Edge (Average – UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6115 MHz
Channel	33

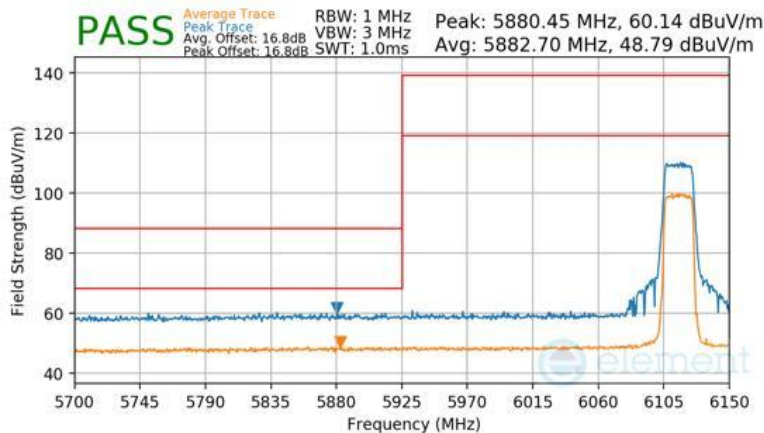

Plot 7-362 Antenna 5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 152 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

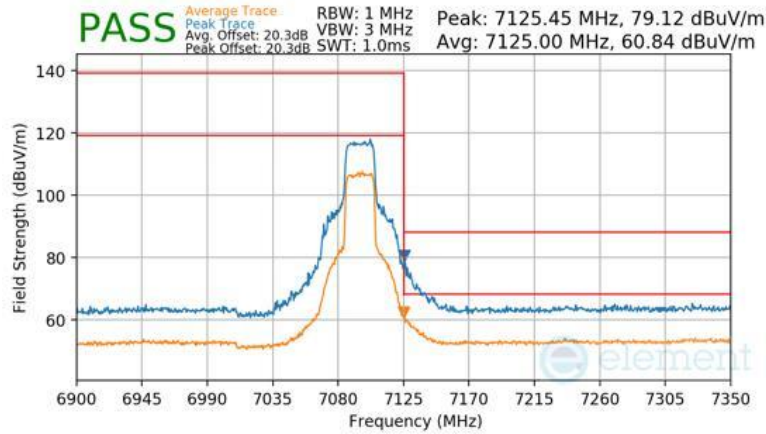


Plot 7-363 Antenna 5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

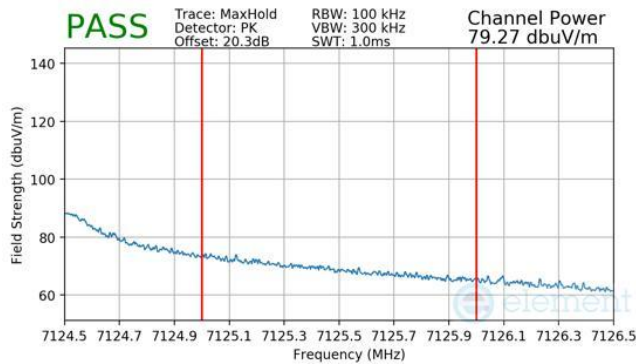

Plot 7-364 Antenna 5B Radiated Integrated Band Edge (Peak – UNII Band 8)

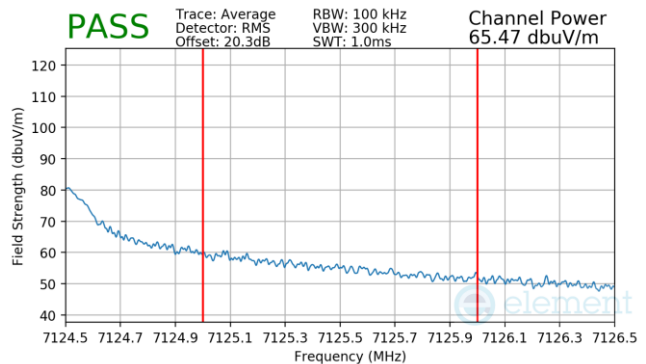


Plot 7-365 Antenna 5B Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 153 of 192


7.8.8 Antenna 5B Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6125 MHz
Channel	35

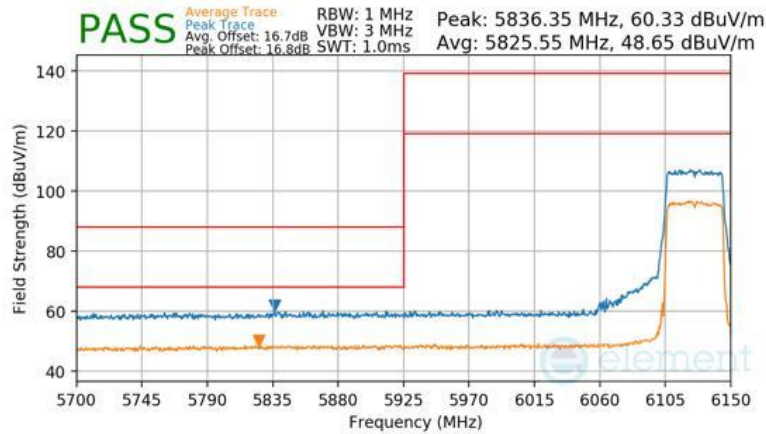

Plot 7-366 Antenna 5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085 MHz
Channel	227

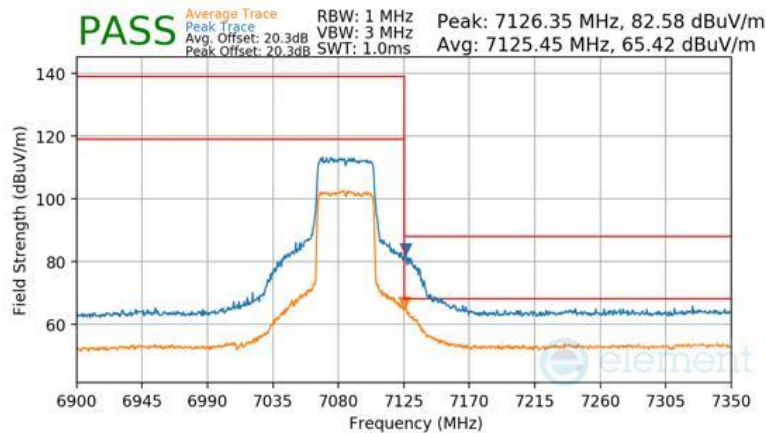


Plot 7-367 Antenna 5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 154 of 192


7.8.9 Antenna 5B Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6145 MHz
Channel	39

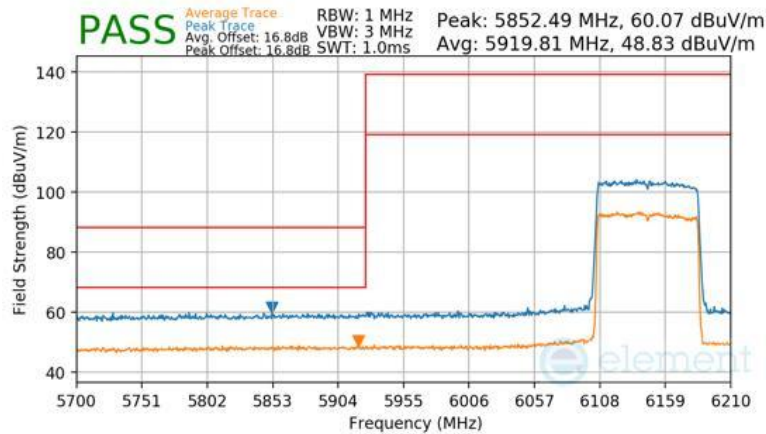

Plot 7-368 Antenna 5B Radiated Lower Band Edge (Peak & Average - UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

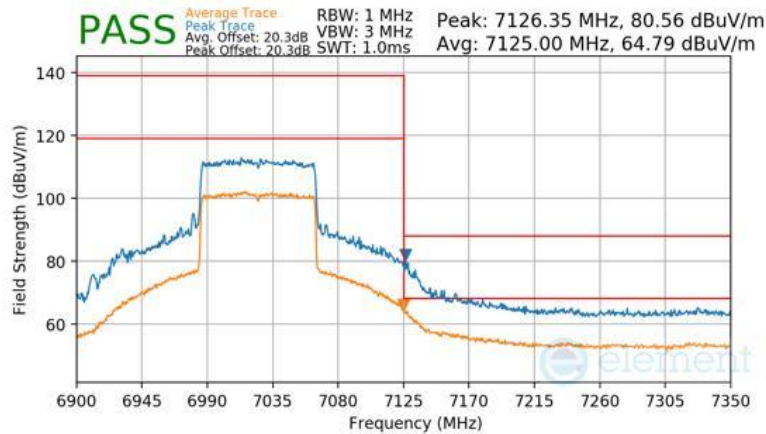


Plot 7-369 Antenna 5B Radiated Upper Band Edge (Peak & Average - UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		


7.8.10 Antenna 5B Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

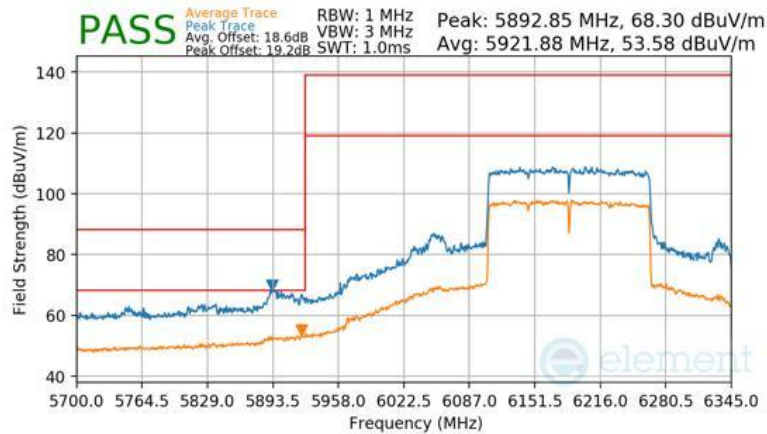

Plot 7-370 Antenna 5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6825 MHz
Channel	175

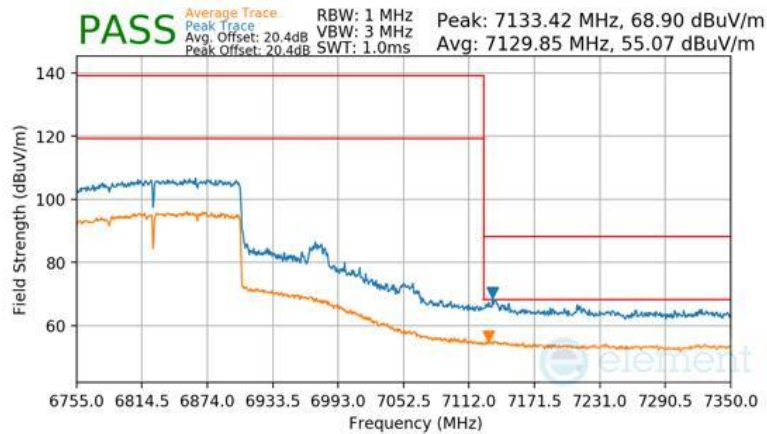

Plot 7-371 Antenna 5B Radiated Upper Band Edge (Peak & Average – UNII Band 7)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985 MHz
Channel	207

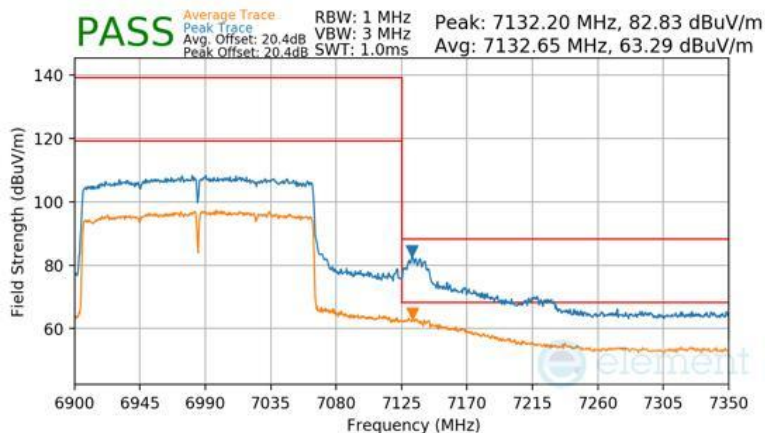


Plot 7-372 Antenna 5B Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 157 of 192

V 11.0 05/2025


7.8.11 Antenna 1B Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	6115 MHz
Channel	33

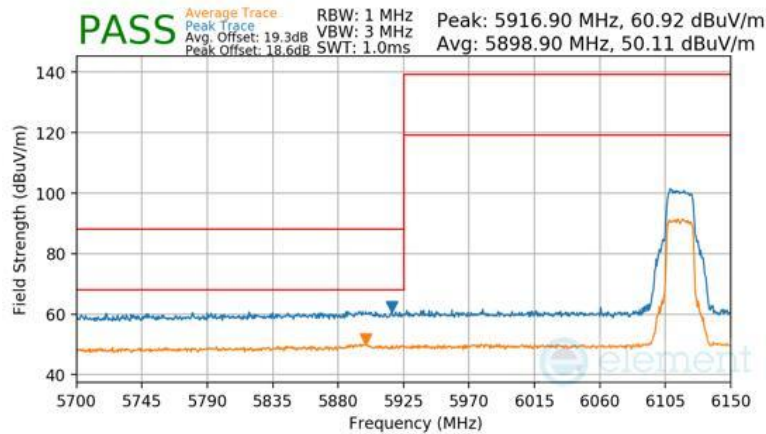

Plot 7-373 Antenna 1B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

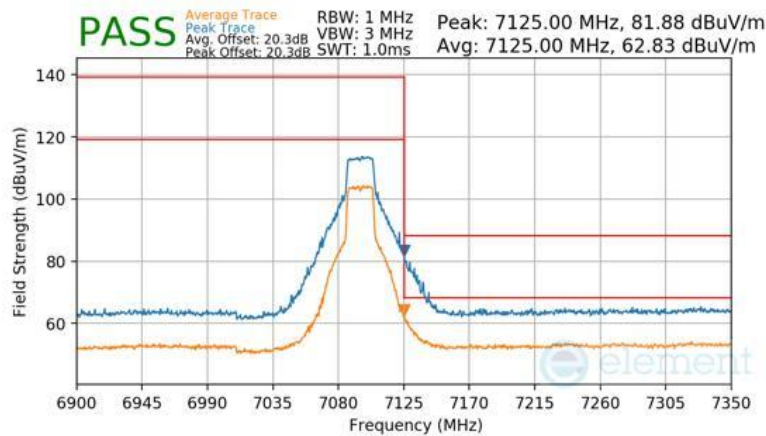


Plot 7-374 Antenna 1B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 158 of 192

Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

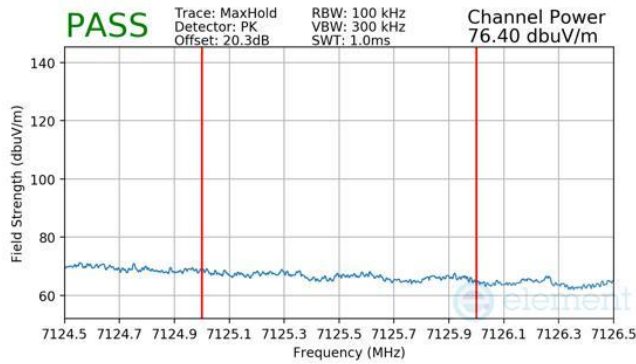


Plot 7-375 Antenna 1B Radiated Integrated Band Edge (Peak – UNII Band 8)

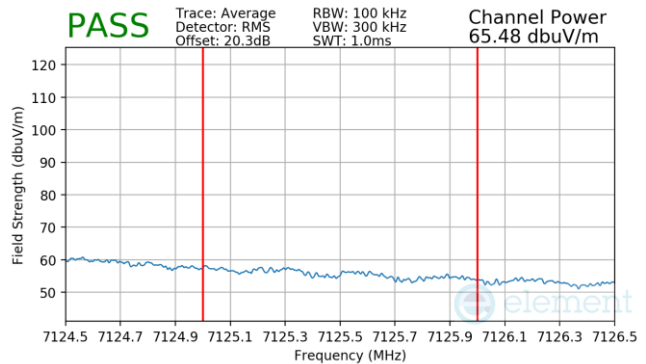

Plot 7-376 Antenna 1B Radiated Integrated Band Edge (Average – UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6115 MHz
Channel	33

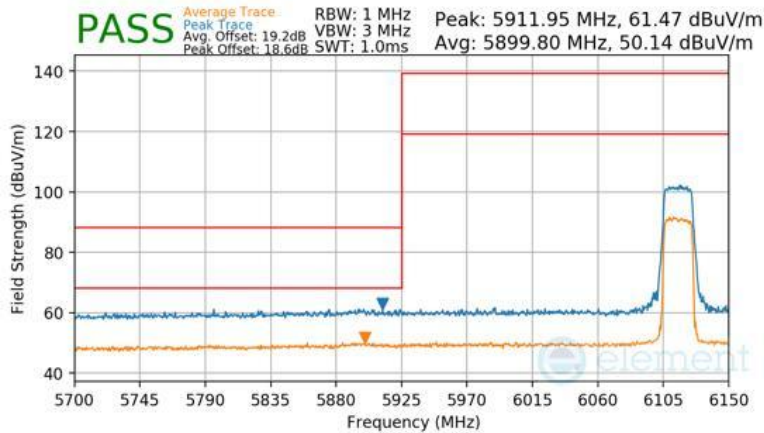

Plot 7-377 Antenna 1B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 159 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

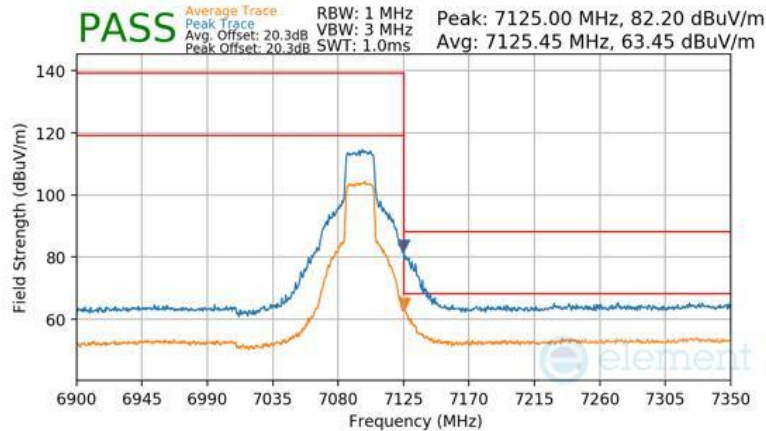


Plot 7-378 Antenna 1B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

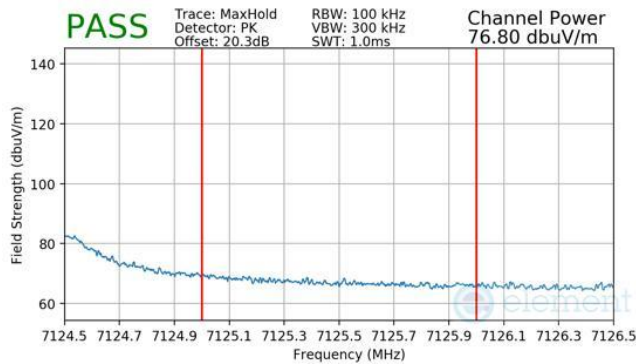

Plot 7-379 Antenna 1B Radiated Integrated Band Edge (Peak – UNII Band 8)

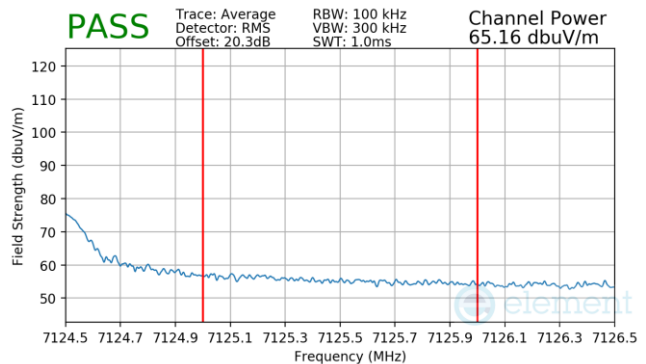


Plot 7-380 Antenna 1B Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		


7.8.13 Antenna 1B Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6145 MHz
Channel	39

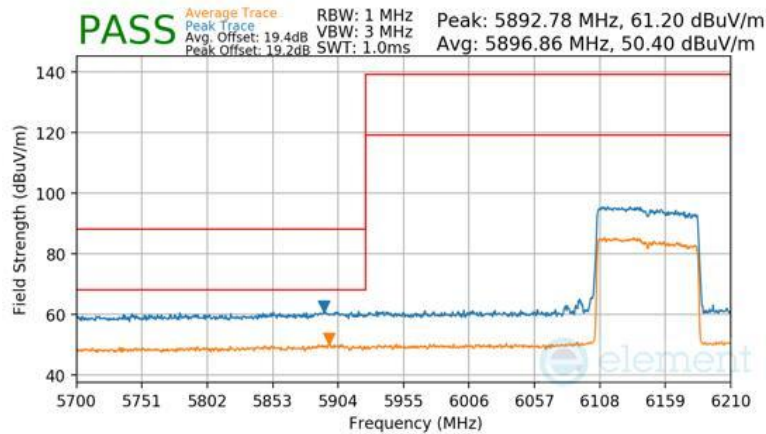

Plot 7-383 Antenna 1B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6945 MHz
Channel	199

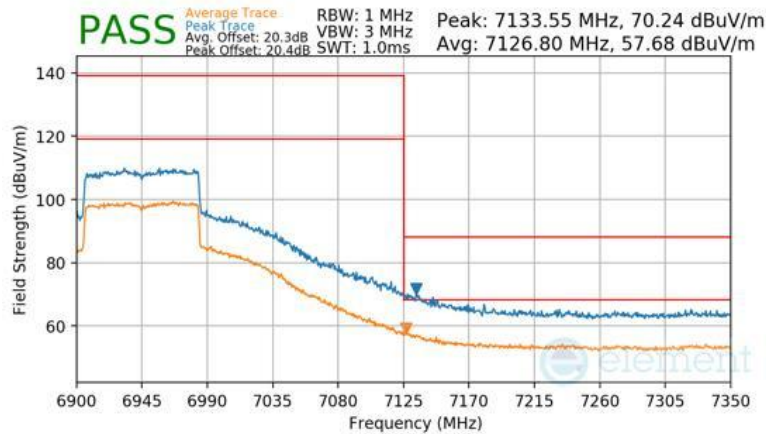

Plot 7-384 Antenna 1B Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

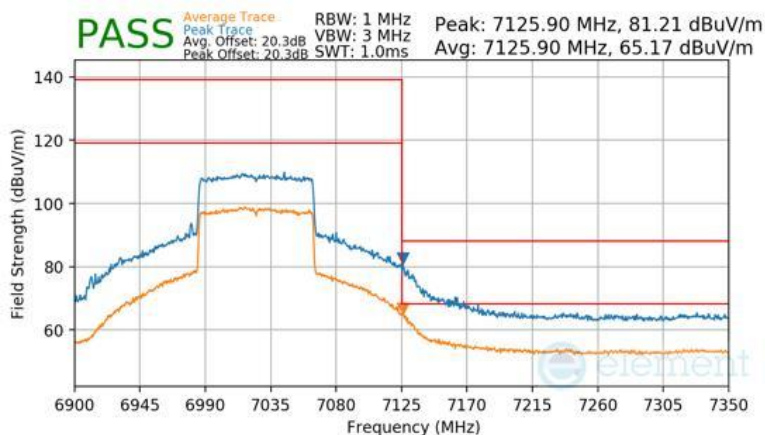


Plot 7-385 Antenna 1B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 163 of 192


7.8.14 Antenna 1B Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

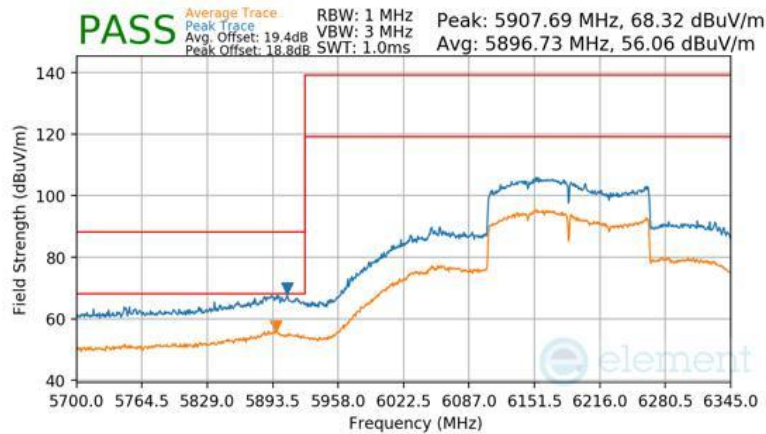

Plot 7-386 Antenna 1B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6825 MHz
Channel	175

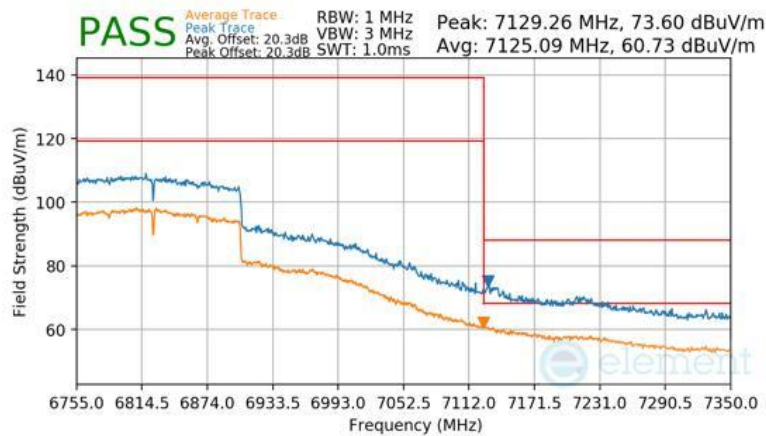

Plot 7-387 Antenna 1B Radiated Upper Band Edge (Peak & Average – UNII Band 7)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 164 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985 MHz
Channel	207

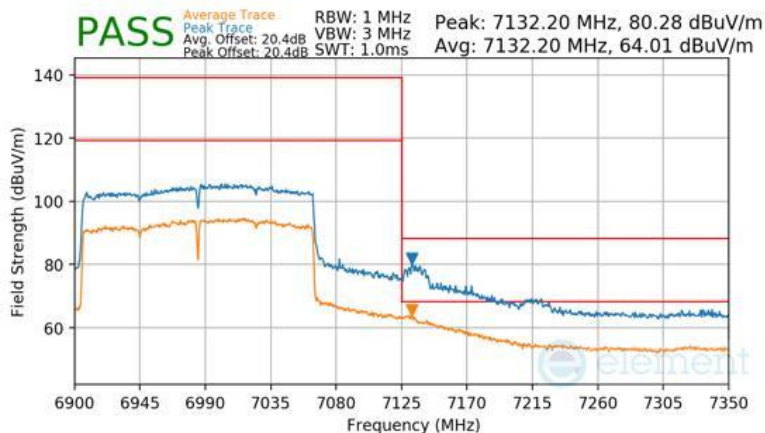


Plot 7-388 Antenna 1B Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 165 of 192


7.8.15 CDD Primary Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	6115 MHz
Channel	33

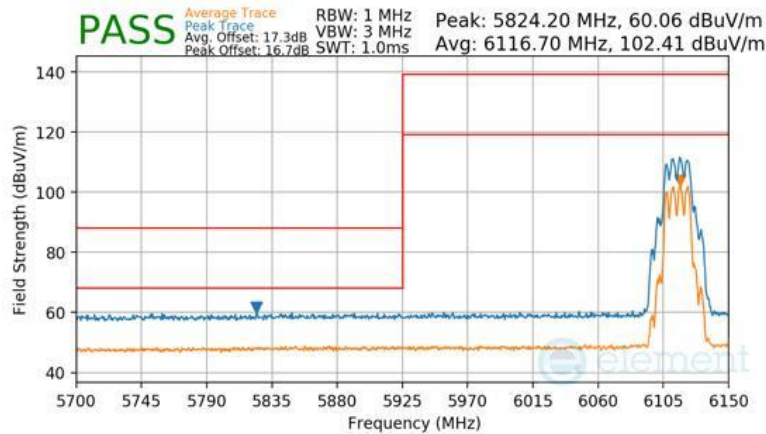

Plot 7-389 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

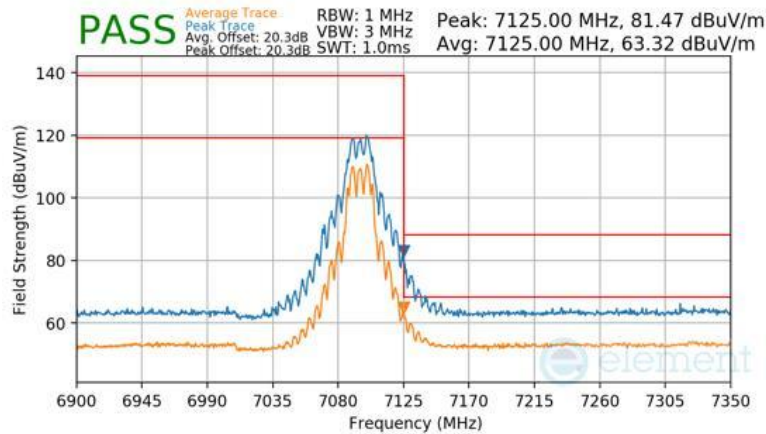


Plot 7-390 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 166 of 192

Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

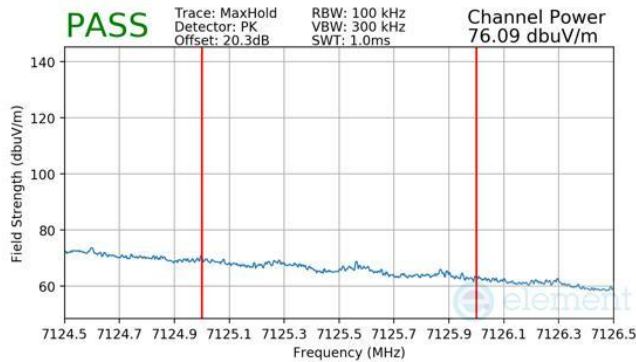


Plot 7-391 CDD Primary Radiated Integrated Band Edge (Peak – UNII Band 8)

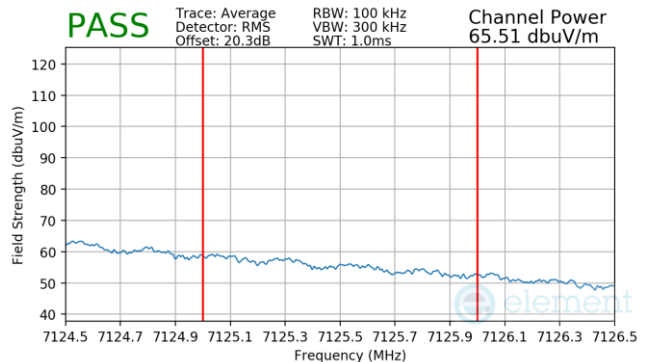

Plot 7-392 CDD Primary Radiated Integrated Band Edge (Average – UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6115 MHz
Channel	33

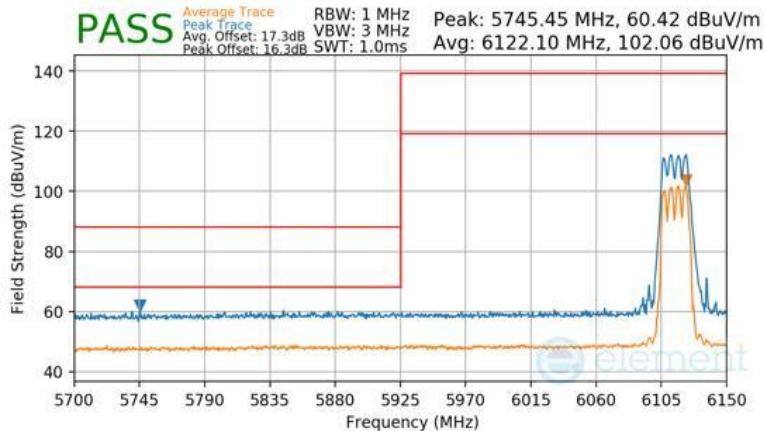

Plot 7-393 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 167 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

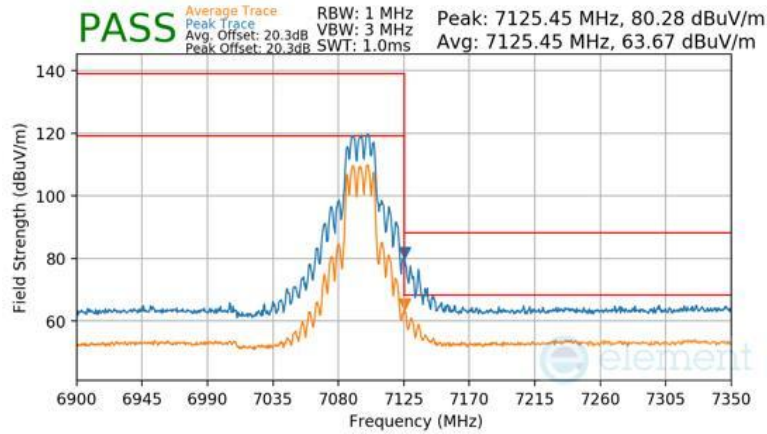


Plot 7-394 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

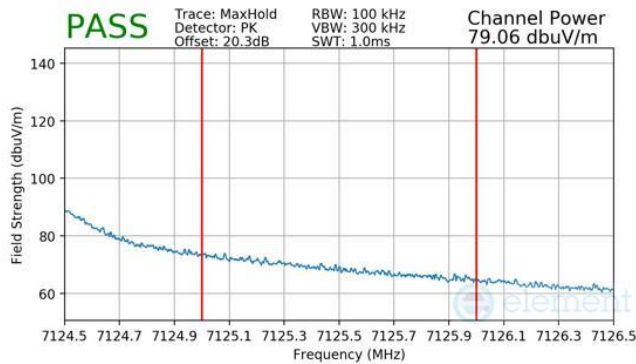

Plot 7-395 CDD Primary Radiated Integrated Band Edge (Peak – UNII Band 8)

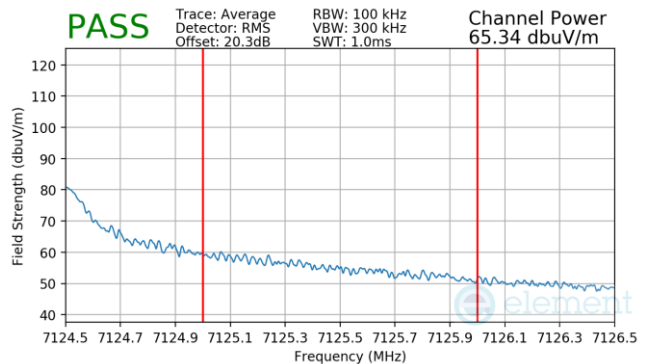


Plot 7-396 CDD Primary Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 168 of 192


7.8.16 CDD Primary Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6125 MHz
Channel	35

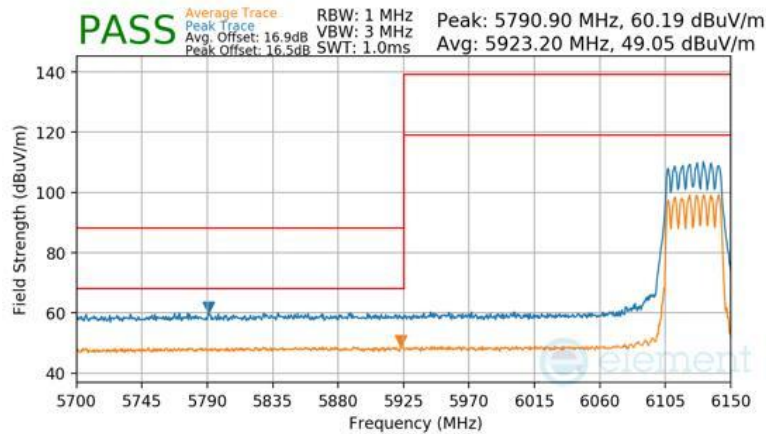

Plot 7-397 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085 MHz
Channel	227

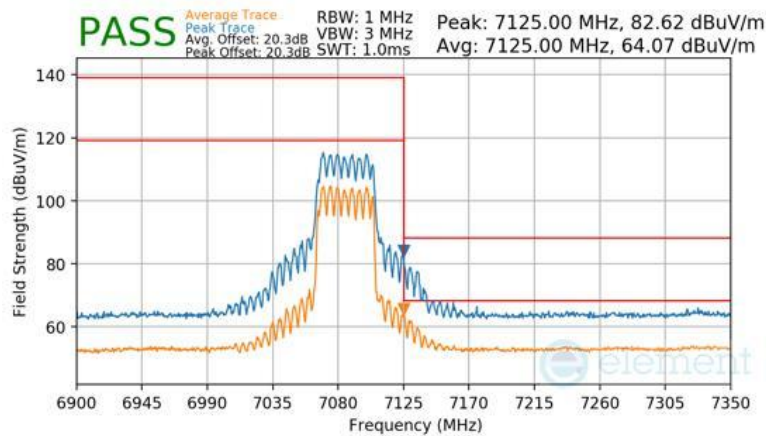


Plot 7-398 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 169 of 192


7.8.17 CDD Primary Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6145 MHz
Channel	39

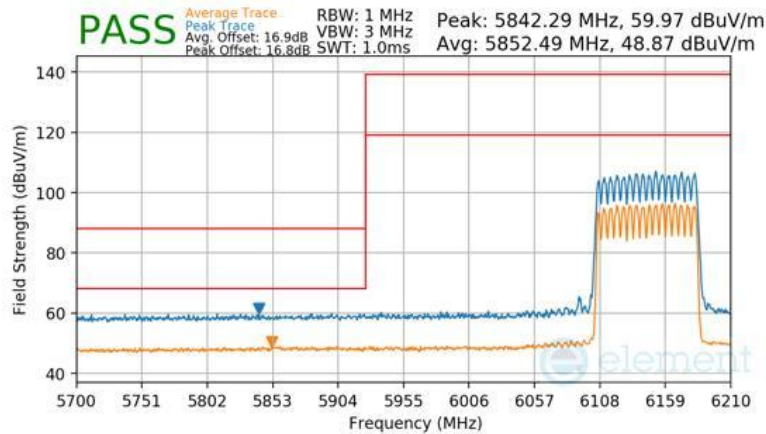

Plot 7-399 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6945 MHz
Channel	199

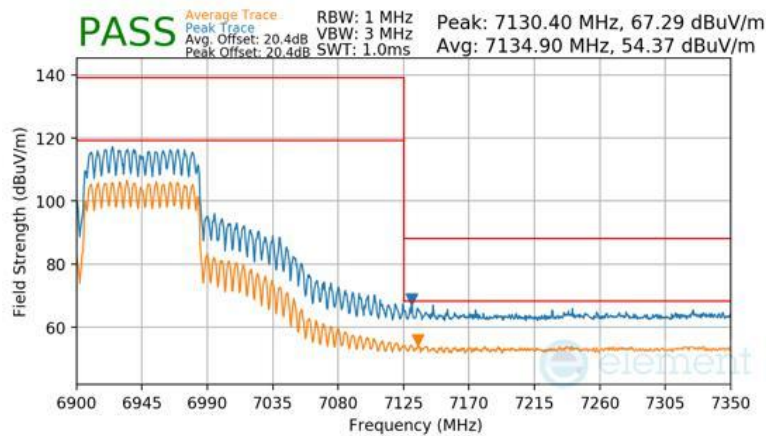

Plot 7-400 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 170 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

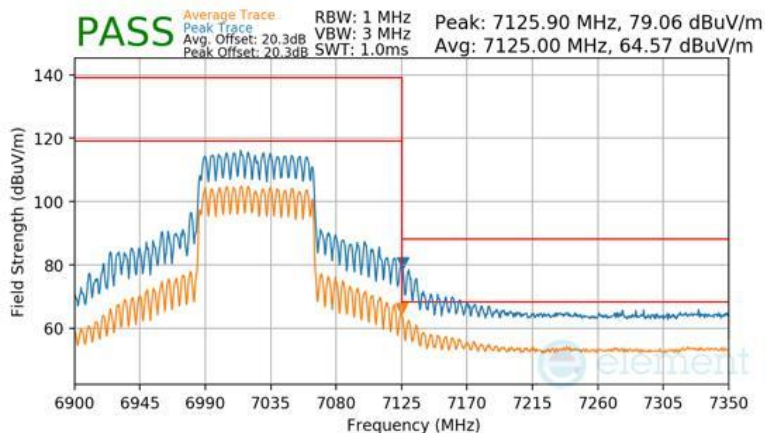


Plot 7-401 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 171 of 192


7.8.18 CDD Primary Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

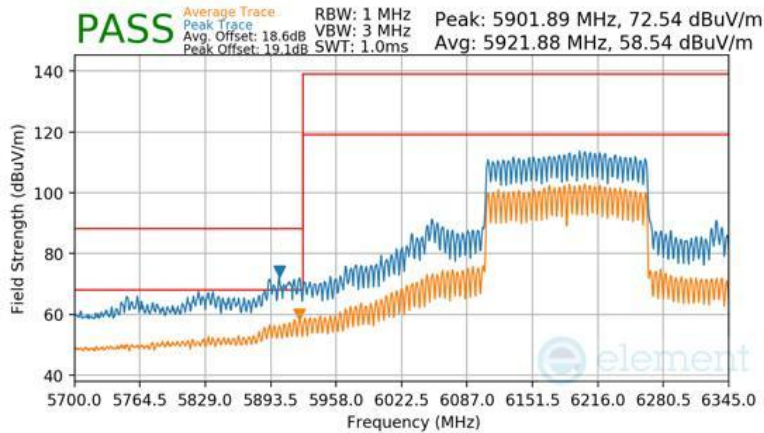

Plot 7-402 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6825 MHz
Channel	175

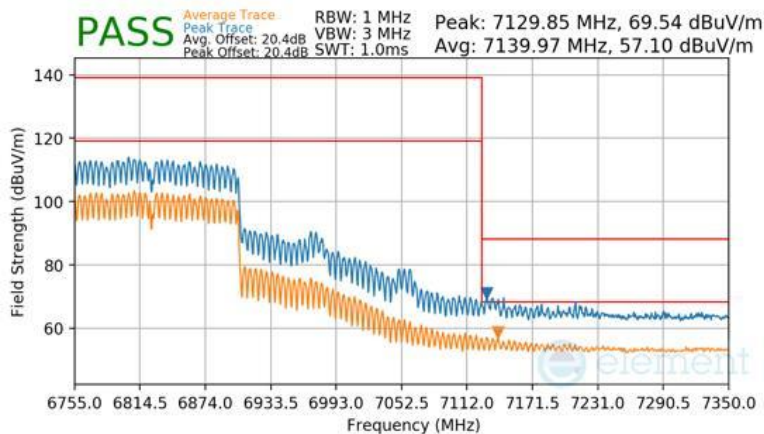

Plot 7-403 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 7)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 172 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985 MHz
Channel	207

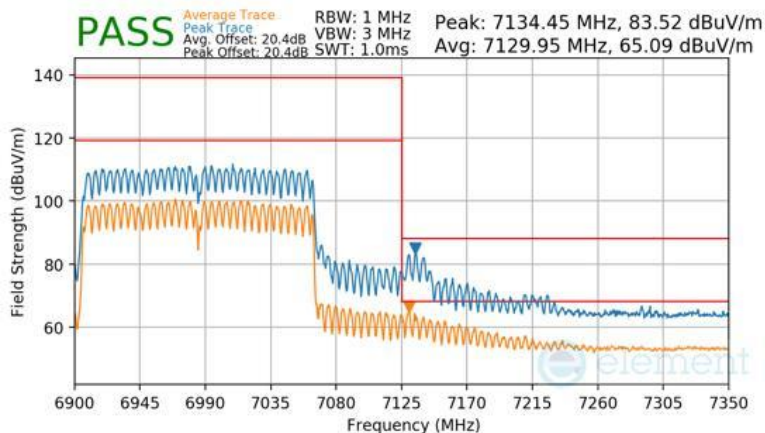


Plot 7-404 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 173 of 192


7.8.19 CDD Diversity Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	6115 MHz
Channel	33

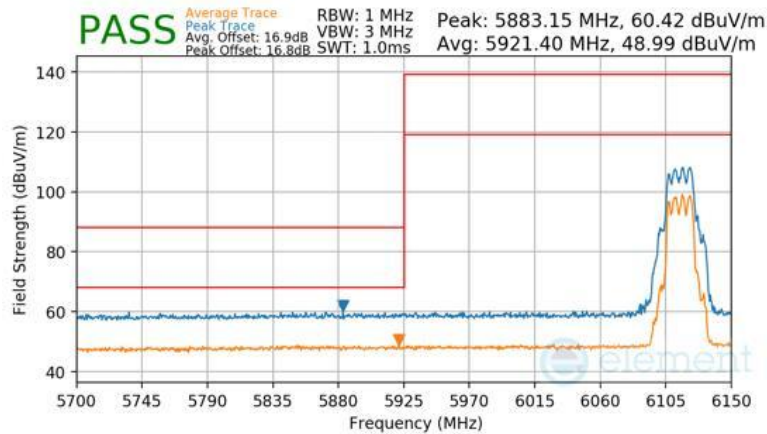

Plot 7-405 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

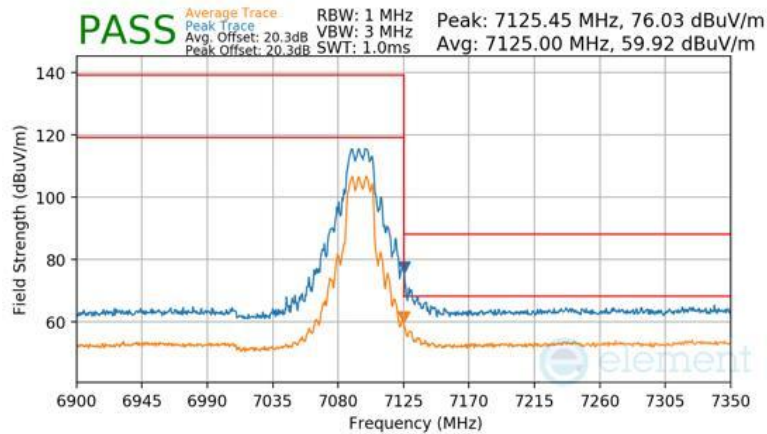


Plot 7-406 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 174 of 192

Mode	802.11a
Data Rate	54 Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

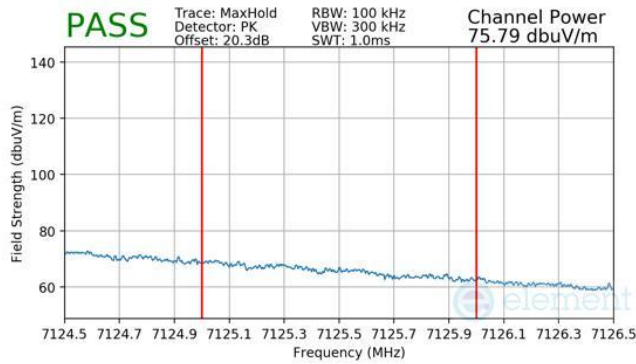


Plot 7-407 CDD Diversity Radiated Integrated Band Edge (Peak - UNII Band 8)

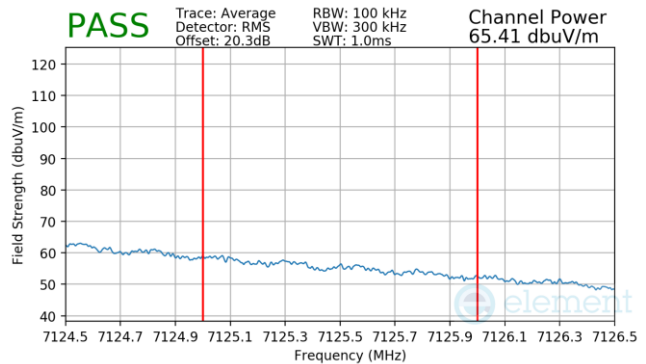

Plot 7-408 CDD Diversity Radiated Integrated Band Edge (Average - UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6115 MHz
Channel	33

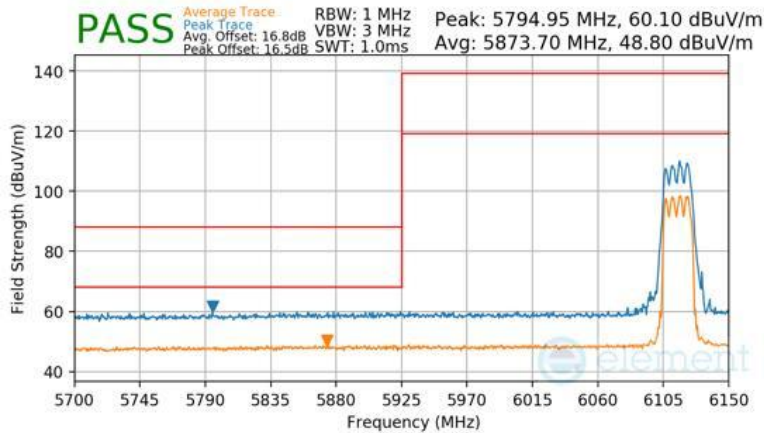

Plot 7-409 CDD Diversity Radiated Lower Band Edge (Peak & Average - UNII Band 5)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 175 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

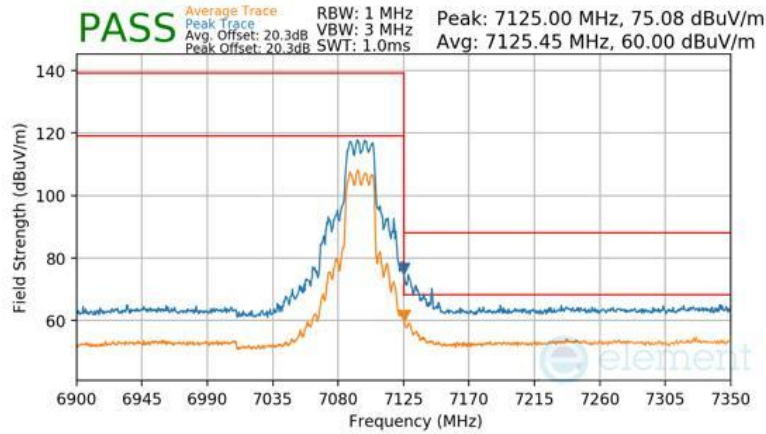


Plot 7-410 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

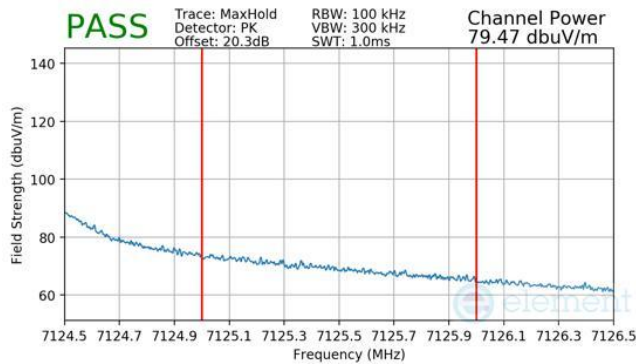

Plot 7-411 CDD Diversity Radiated Integrated Band Edge (Peak – UNII Band 8)

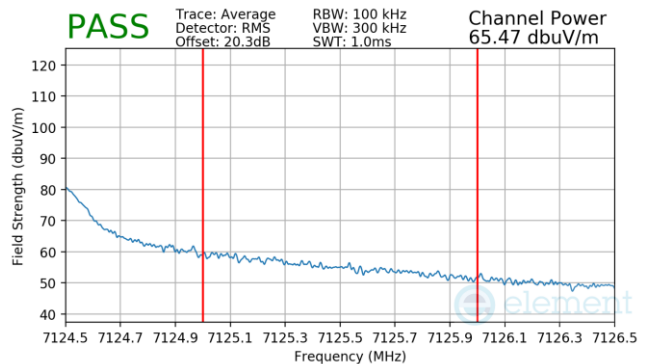


Plot 7-412 CDD Diversity Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 176 of 192


7.8.20 CDD Diversity Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6125 MHz
Channel	35

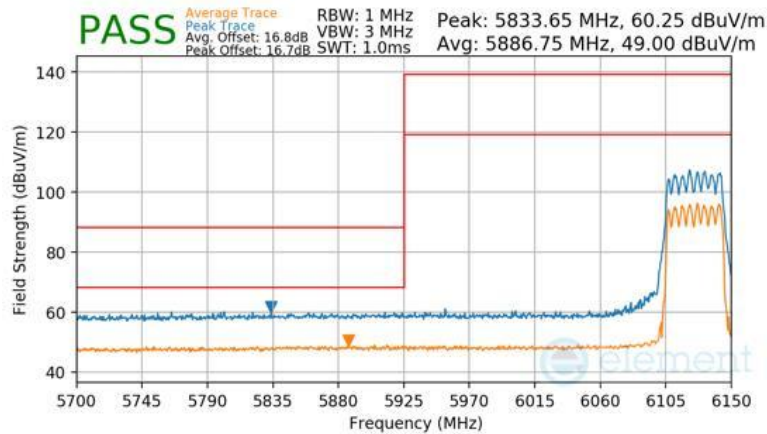

Plot 7-413 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085 MHz
Channel	227

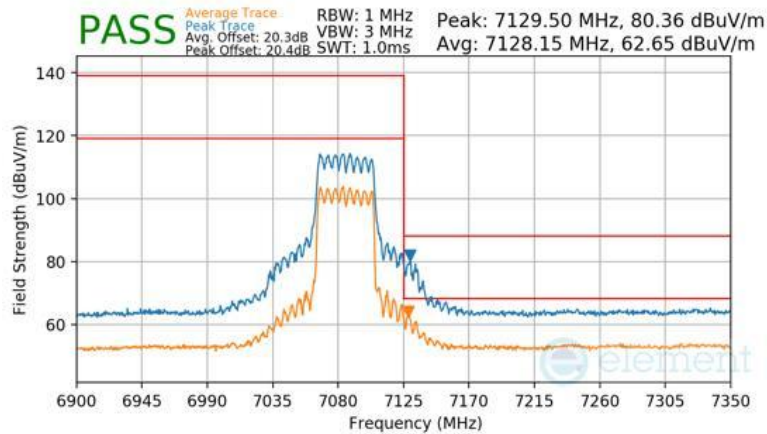


Plot 7-414 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 177 of 192


7.8.21 CDD Diversity Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6145 MHz
Channel	39

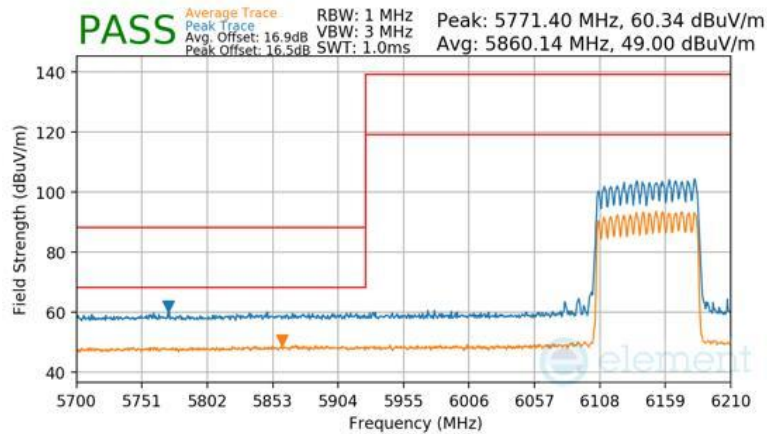

Plot 7-415 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025 MHz
Channel	215

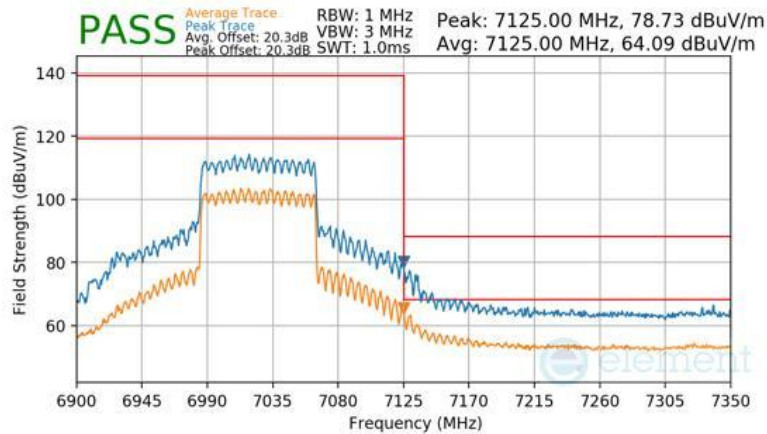


Plot 7-416 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 178 of 192


7.8.22 CDD Diversity Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

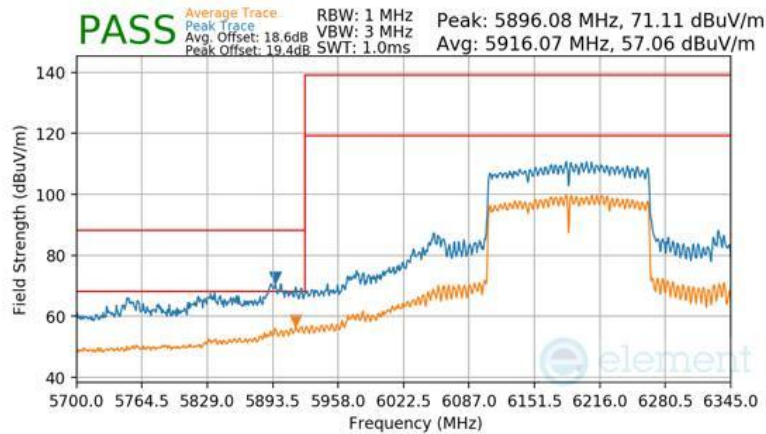

Plot 7-417 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6825 MHz
Channel	175

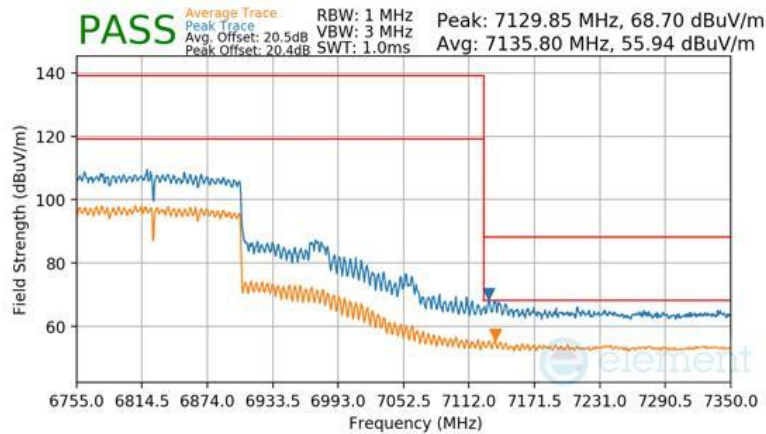

Plot 7-418 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 7)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 179 of 192

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985 MHz
Channel	207

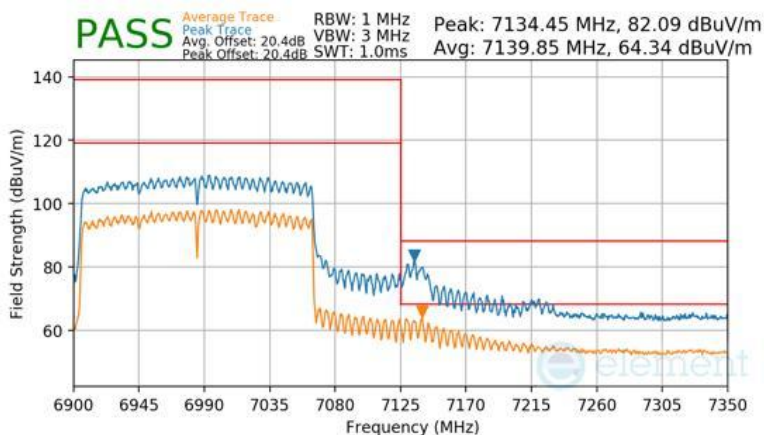

Plot 7-419 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 180 of 192

V 11.0 05/2025

7.9 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-70 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-70. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 181 of 192

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

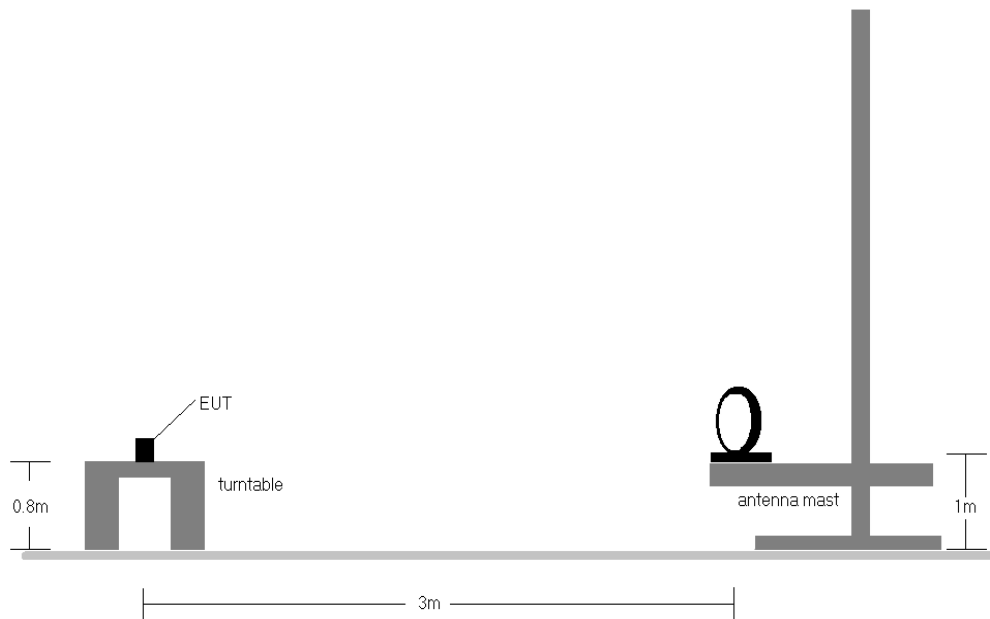


Figure 7-8. Radiated Test Setup < 30 MHz

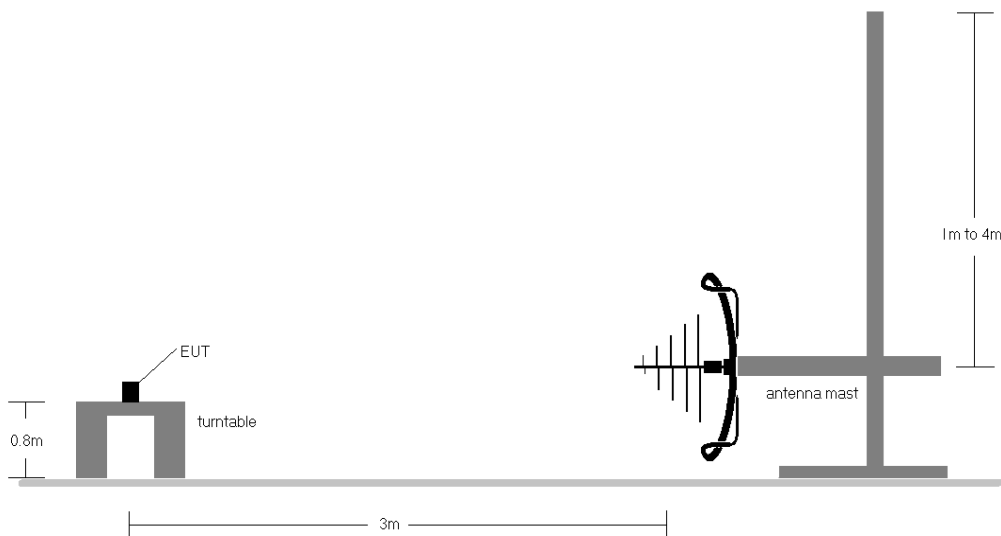


Figure 7-9. Radiated Test Setup < 1 GHz

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 182 of 192

V 11.0 05/2025

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-70.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] - Preamp Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 183 of 192

V 11.0 05/2025

7.9.1 SDM Primary Radiated Spurious Emissions Measurements (Below 1 GHz)

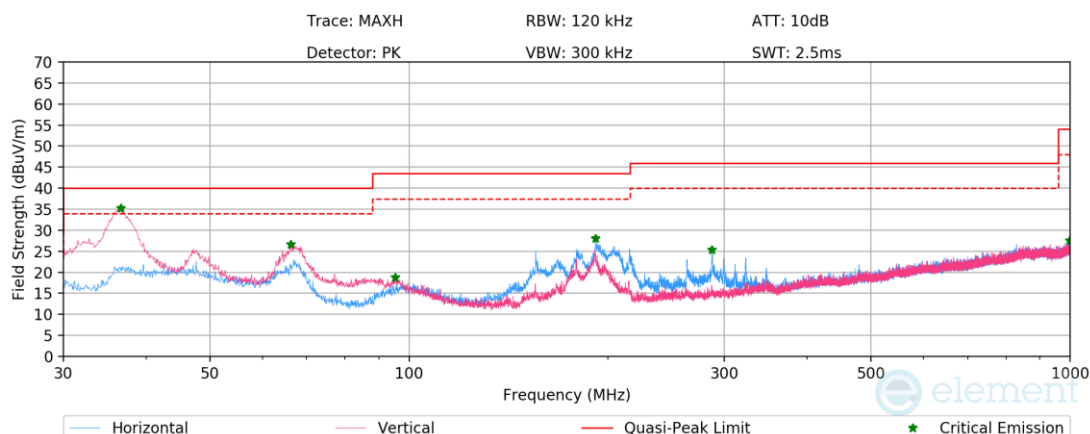


Plot 7-420. Radiated Spurious Emissions below 1 GHz SDM Primary, 802.11be, Ch.61 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.64	Quasi-Peak	V	108	343	-55.67	-20.02	31.31	40.00	-8.69
66.18	Max-Peak	V	200	140	-59.91	-20.46	26.63	40.00	-13.37
95.22	Max-Peak	V	100	203	-68.16	-20.02	18.82	43.50	-24.68
191.53	Max-Peak	H	100	156	-60.10	-18.83	28.08	43.50	-15.42
287.29	Max-Peak	H	100	257	-65.76	-15.92	25.33	46.00	-20.67
997.90	Max-Peak	V	300	131	-76.23	-3.27	27.50	54.00	-26.50

Table 7-71. Radiated Spurious Emissions Measurement below 1 GHz SDM Primary, 802.11be, Ch.61 with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 184 of 192

7.9.2 SDM Diversity Radiated Spurious Emissions Measurements (Below 1 GHz)

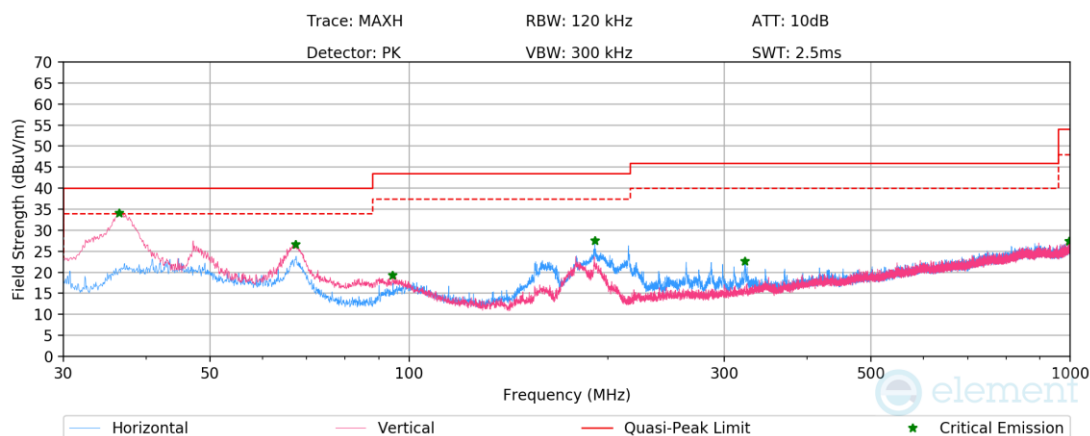

Plot 7-421. Radiated Spurious Emissions below 1 GHz SDM Diversity, 802.11be, Ch.61 with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
34.52	Quasi-Peak	V	165	322	-61.68	-20.90	24.42	40.00	-15.58
67.32	Max-Peak	V	200	135	-59.56	-20.84	26.60	40.00	-13.40
94.44	Max-Peak	V	100	143	-67.48	-20.22	19.29	43.50	-24.21
190.93	Max-Peak	H	100	191	-60.55	-18.92	27.54	43.50	-15.96
322.33	Max-Peak	H	100	45	-69.30	-15.00	22.70	46.00	-23.30
996.88	Max-Peak	H	100	0	-76.19	-3.35	27.46	54.00	-26.54

Table 7-72. Radiated Spurious Emissions Measurement below 1 GHz SDM Diversity, 802.11be, Ch.61 with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 185 of 192

7.10 AC Line-Conducted Emissions Measurement

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-73. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 186 of 192

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

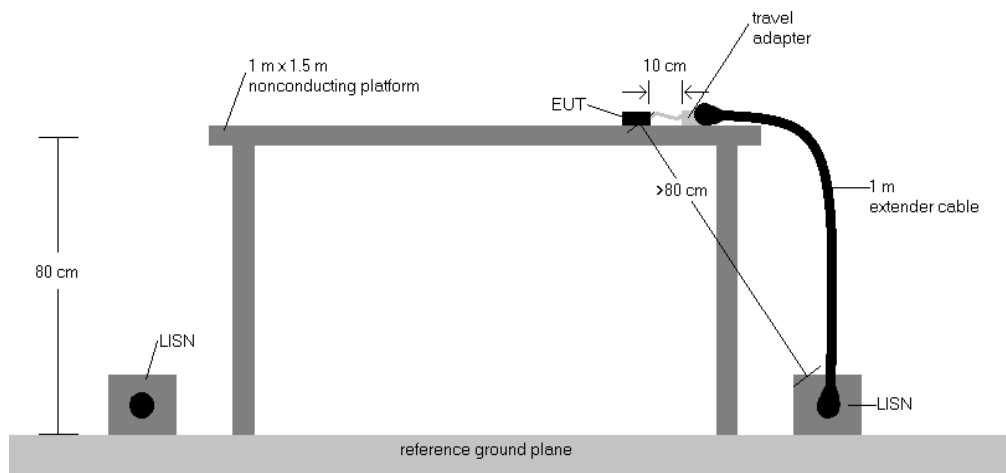



Figure 7-10. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated, and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150 kHz to 30 MHz are specified in 15.207 and RSS-Gen (7.4.2).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 187 of 192

V 11.0 05/2025

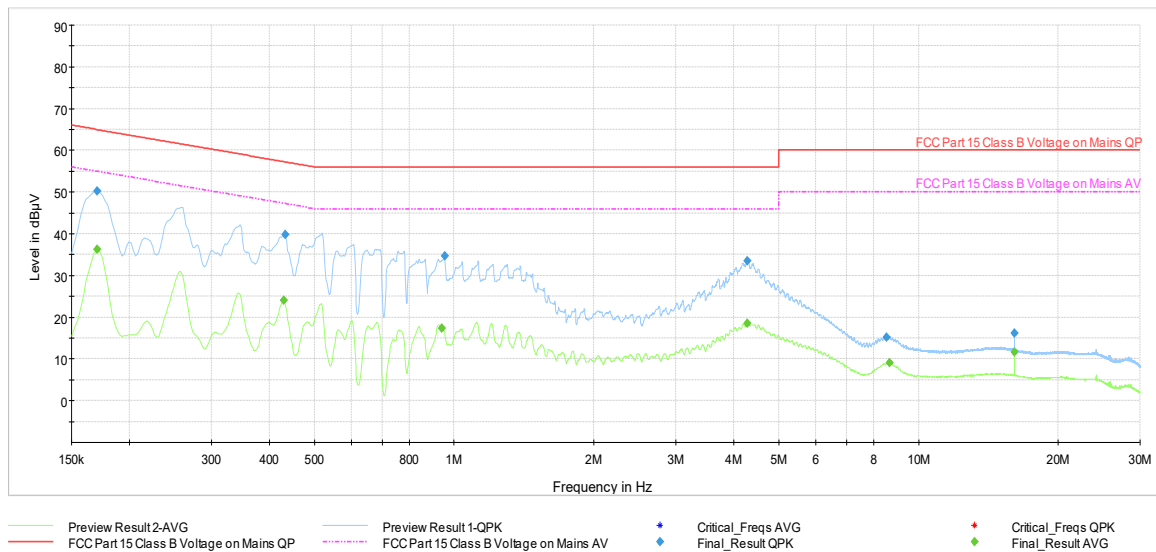


Plot 7-422. AC Line Conducted Plot with 802.11be SDM Primary – Ch.61 (L1), with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	36.32	54.95	-18.63	L1	GND
0.17	FINAL	50.25	---	64.95	-14.70	L1	GND
0.43	FINAL	---	24.00	47.27	-23.27	L1	GND
0.43	FINAL	39.83	---	57.19	-17.36	L1	GND
0.94	FINAL	---	17.27	46.00	-28.73	L1	GND
0.95	FINAL	34.69	---	56.00	-21.31	L1	GND
4.28	FINAL	---	18.63	46.00	-27.37	L1	GND
4.28	FINAL	33.42	---	56.00	-22.58	L1	GND
8.52	FINAL	15.28	---	60.00	-44.72	L1	GND
8.65	FINAL	---	9.12	50.00	-40.88	L1	GND
16.08	FINAL	---	11.65	50.00	-38.35	L1	GND
16.08	FINAL	16.25	---	60.00	-43.75	L1	GND

Table 7-74. AC Line Conducted Data with 802.11be SDM Primary – Ch. 61 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 188 of 192

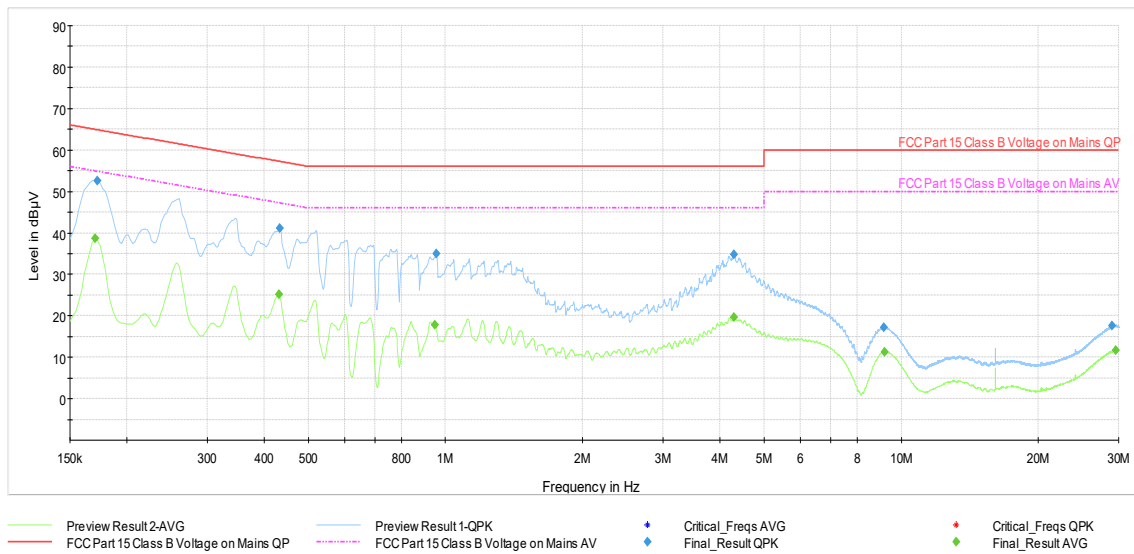


Plot 7-423. AC Line Conducted Plot with 802.11be SDM Primary – Ch. 61 (N), with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	38.65	54.95	-16.30	N	GND
0.17	FINAL	52.61	---	64.84	-12.23	N	GND
0.43	FINAL	---	25.23	47.23	-22.00	N	GND
0.43	FINAL	41.14	---	57.19	-16.05	N	GND
0.95	FINAL	---	17.72	46.00	-28.28	N	GND
0.96	FINAL	34.94	---	56.00	-21.06	N	GND
4.30	FINAL	---	19.65	46.00	-26.35	N	GND
4.30	FINAL	34.72	---	56.00	-21.28	N	GND
9.15	FINAL	17.26	---	60.00	-42.74	N	GND
9.18	FINAL	---	11.26	50.00	-38.74	N	GND
29.06	FINAL	17.51	---	60.00	-42.49	N	GND
29.54	FINAL	---	11.59	50.00	-38.41	N	GND

Table 7-75. AC Line Conducted Data with 802.11be SDM Primary – Ch. 61 (N), with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 189 of 192

V 11.0 05/2025

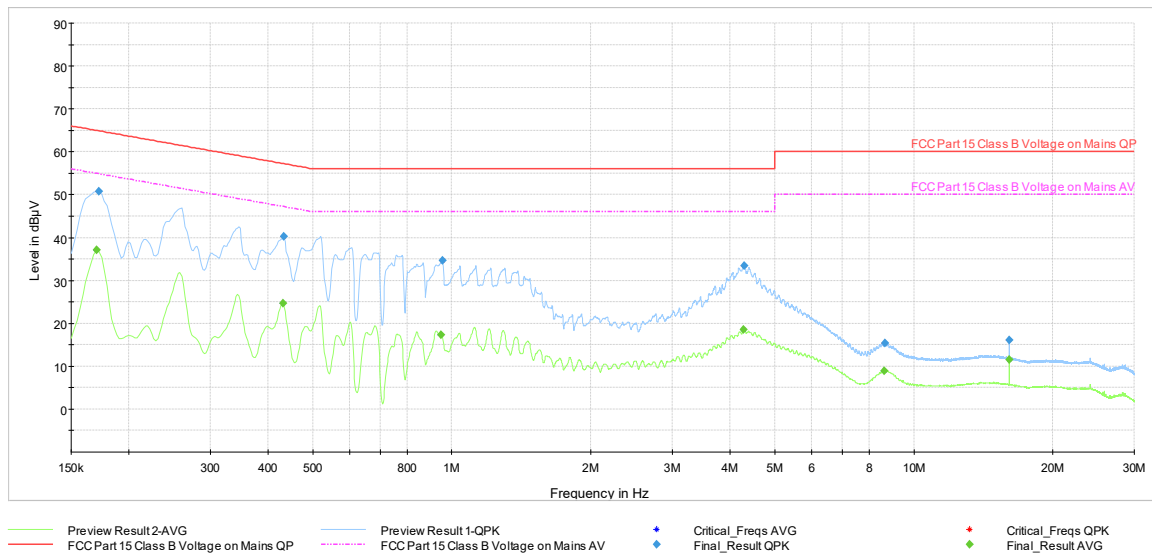


Plot 7-424. AC Line Conducted Plot with 802.11be SDM Diversity – Ch.61 (L1), with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.18	54.95	-17.77	L1	GND
0.17	FINAL	50.73	---	64.84	-14.11	L1	GND
0.43	FINAL	---	24.73	47.23	-22.50	L1	GND
0.43	FINAL	40.22	---	57.19	-16.97	L1	GND
0.95	FINAL	---	17.35	46.00	-28.65	L1	GND
0.95	FINAL	34.70	---	56.00	-21.30	L1	GND
4.28	FINAL	---	18.50	46.00	-27.50	L1	GND
4.30	FINAL	33.42	---	56.00	-22.58	L1	GND
8.64	FINAL	---	8.90	50.00	-41.10	L1	GND
8.66	FINAL	15.36	---	60.00	-44.64	L1	GND
16.07	FINAL	16.03	---	60.00	-43.97	L1	GND
16.07	FINAL	---	11.52	50.00	-38.48	L1	GND

Table 7-76. AC Line Conducted Data with 802.11be SDM Diversity – Ch. 61 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 190 of 192

V 11.0 05/2025

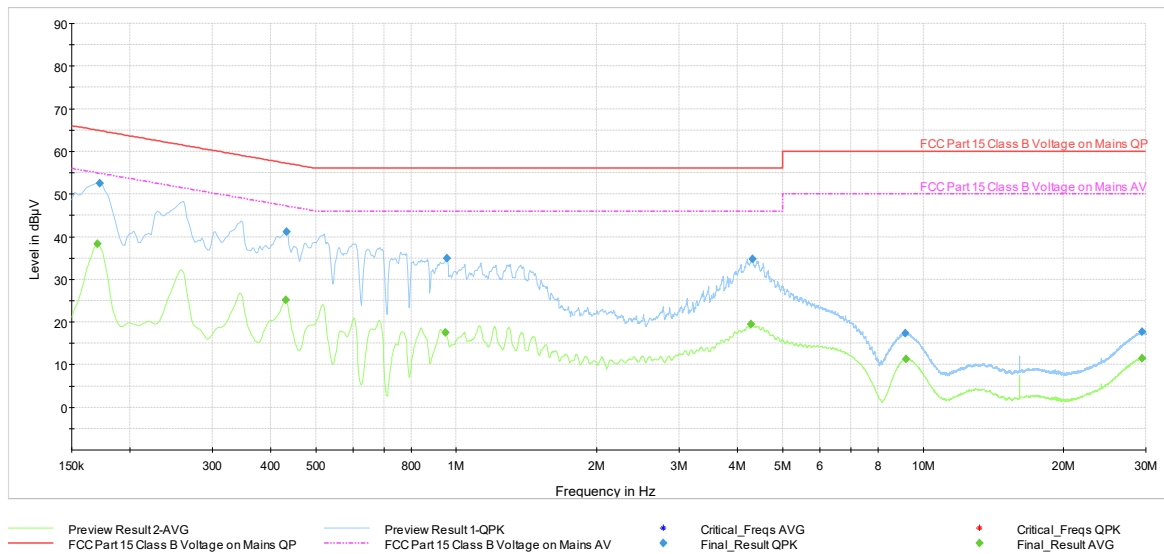

Plot 7-425. AC Line Conducted Plot with 802.11be SDM Diversity – Ch. 61 (N), with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	38.27	54.95	-16.68	N	GND
0.17	FINAL	52.56	---	64.84	-12.28	N	GND
0.43	FINAL	---	25.15	47.23	-22.08	N	GND
0.43	FINAL	41.17	---	57.19	-16.02	N	GND
0.95	FINAL	---	17.59	46.00	-28.41	N	GND
0.96	FINAL	34.99	---	56.00	-21.01	N	GND
4.29	FINAL	---	19.40	46.00	-26.60	N	GND
4.31	FINAL	34.84	---	56.00	-21.16	N	GND
9.17	FINAL	17.37	---	60.00	-42.63	N	GND
9.19	FINAL	---	11.26	50.00	-38.74	N	GND
29.43	FINAL	---	11.45	50.00	-38.55	N	GND
29.46	FINAL	17.68	---	60.00	-42.32	N	GND

Table 7-77. AC Line Conducted Data with 802.11be SDM Diversity – Ch. 61 (N), with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 191 of 192

V 11.0 05/2025

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3596** and **IC: 579C-A3596** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/29/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-20.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		