



Duty_Cycle: 97.83% DCCF: 0.095dB

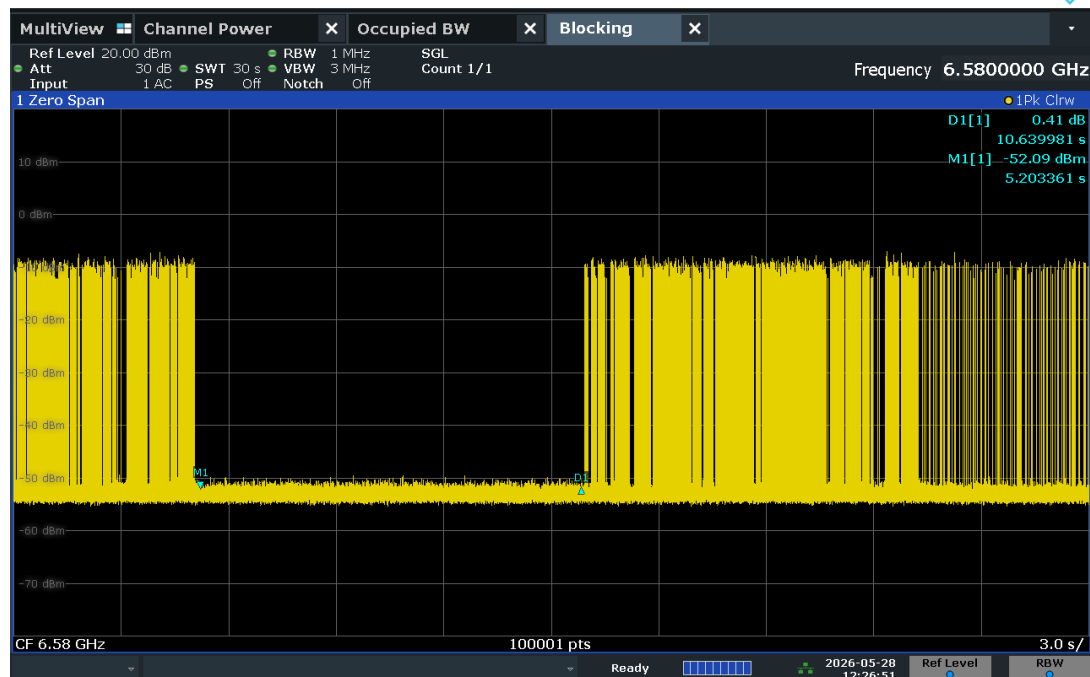

12:26:52 PM 05/28/2026

Plot 7-500. Contention Based Protocol Timing Plot – UNII 6 – 160 MHz Channel 111 – Mid

Duty_Cycle: 97.83% DCCF: 0.095dB

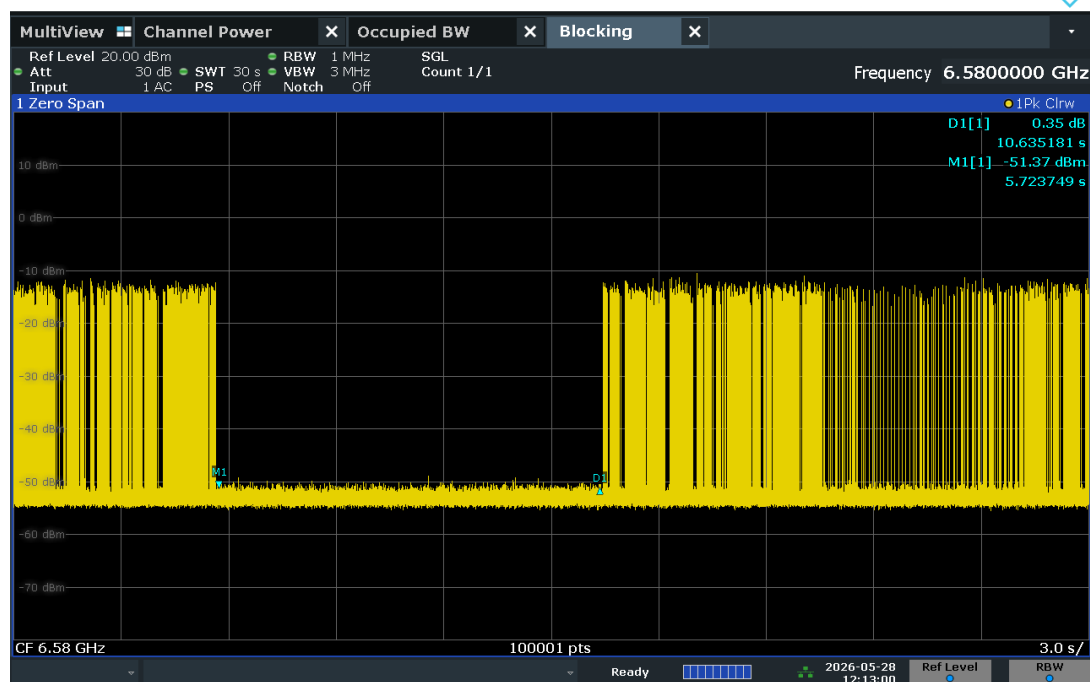


12:13:01 PM 05/28/2026

Plot 7-501. Contention Based Protocol Timing Plot – UNII 6 – 160 MHz Channel 111 – High

FCC ID: BCGA3596 IC: 579C-A3596	element	Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 168 of 258


Duty_Cycle: 97.83% DCCF: 0.095dB

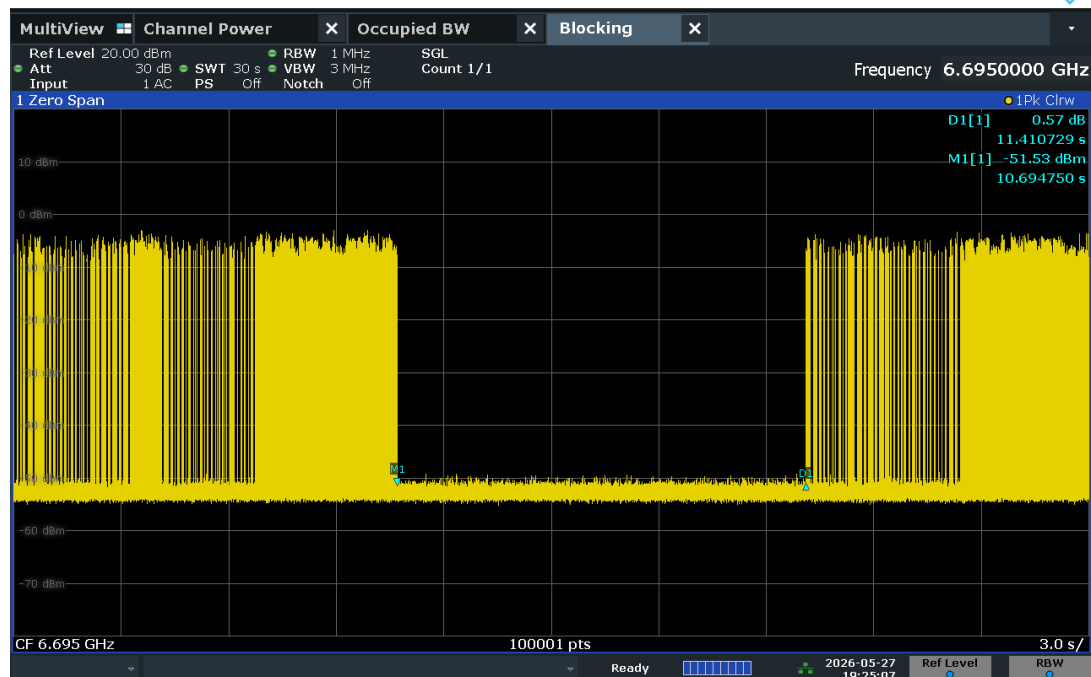

07:25:08 PM 05/27/2026

Plot 7-502. Contention Based Protocol Timing Plot – UNII 7 – 20 MHz Channel 149

Duty_Cycle: 97.83% DCCF: 0.095dB

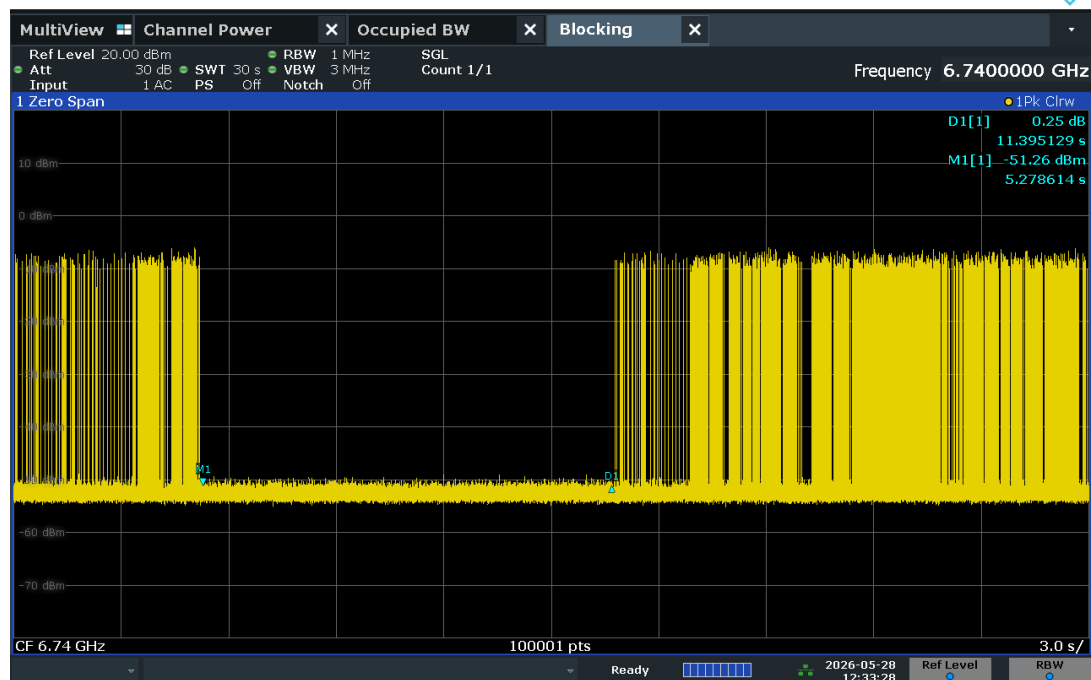


12:33:28 PM 05/28/2026

Plot 7-503. Contention Based Protocol Timing Plot – UNII 7 – 160 MHz Channel 143 – Low

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 169 of 258


Duty_Cycle: 97.83% DCCF: 0.095dB

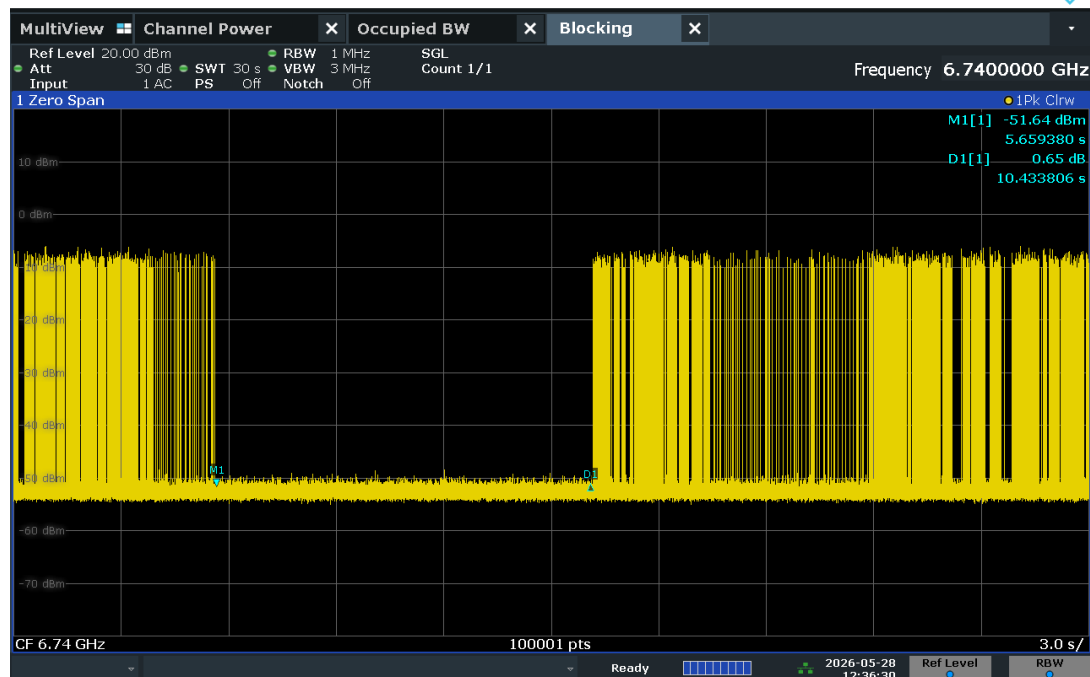

12:36:31 PM 05/28/2026

Plot 7-504. Contention Based Protocol Timing Plot – UNII 7 – 160 MHz Channel 143 – Mid

Duty_Cycle: 97.83% DCCF: 0.095dB

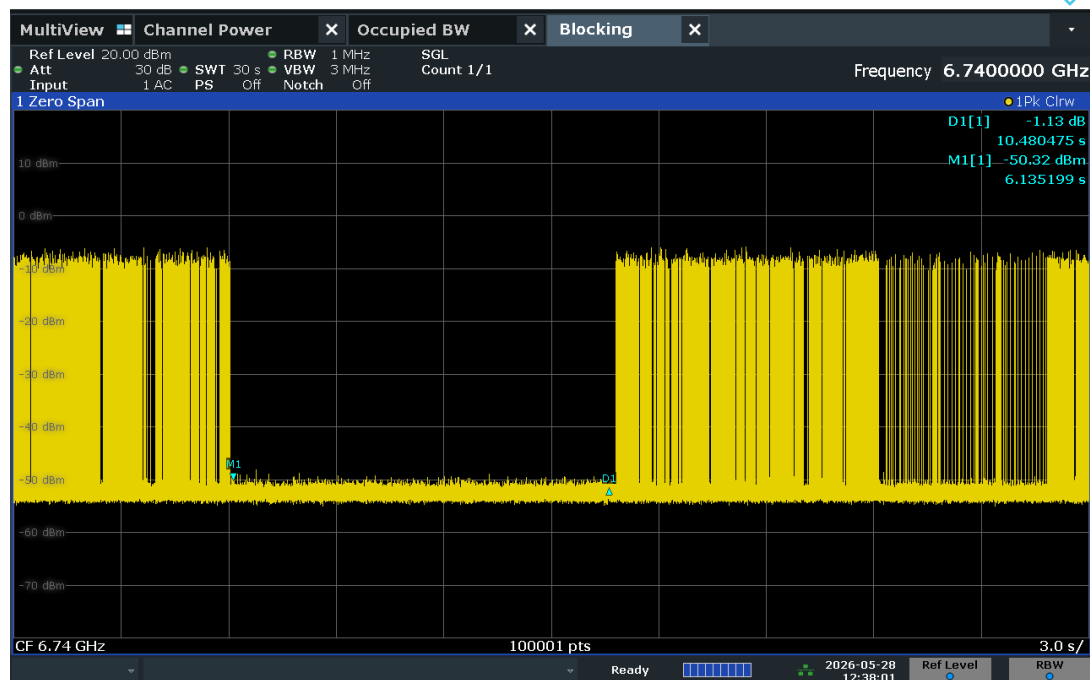


12:38:02 PM 05/28/2026

Plot 7-505. Contention Based Protocol Timing Plot – UNII 7 – 160 MHz Channel 143 – High

FCC ID: BCGA3596 IC: 579C-A3596	element	Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 170 of 258


Duty_Cycle: 97.83% DCCF: 0.095dB

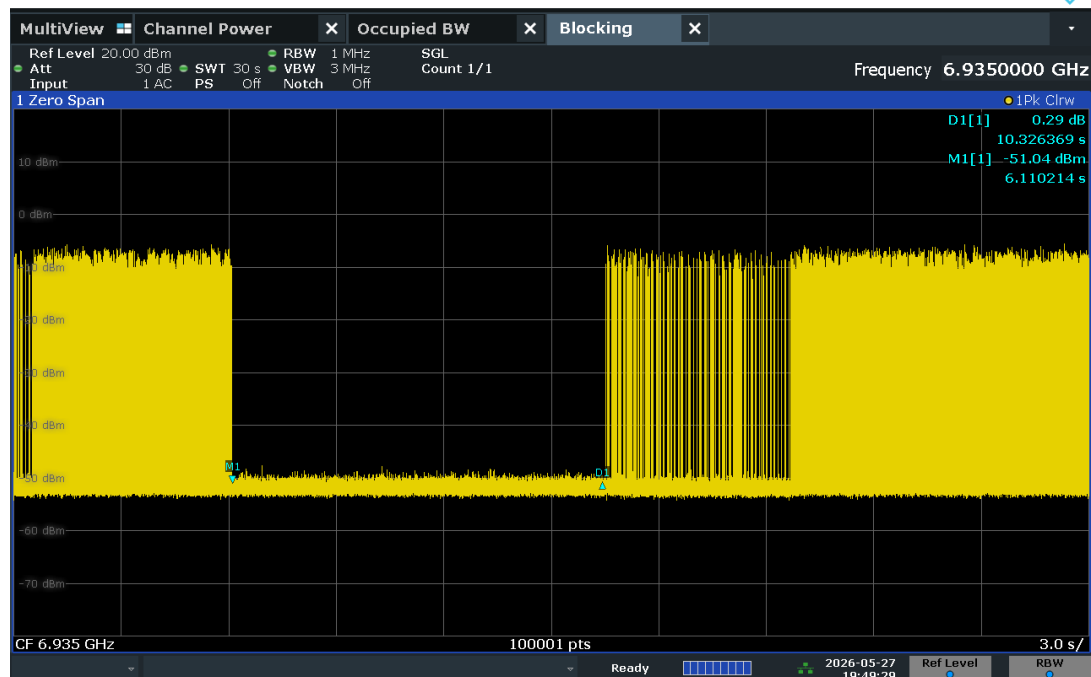

07:49:29 PM 05/27/2026

Plot 7-506. Contention Based Protocol Timing Plot – UNII 8 – 20 MHz Channel 197

Duty_Cycle: 97.83% DCCF: 0.095dB

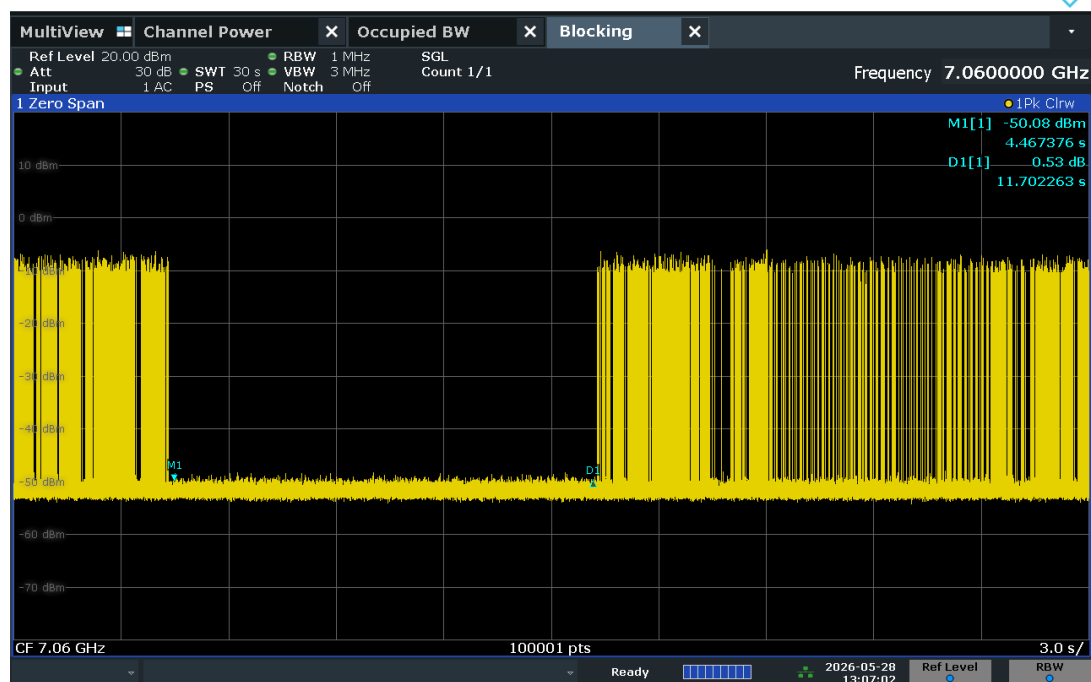


01:07:02 PM 05/28/2026

Plot 7-507. Contention Based Protocol Timing Plot – UNII 8 – 160 MHz Channel 207 – Low

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 171 of 258


Duty_Cycle: 97.83% DCCF: 0.095dB

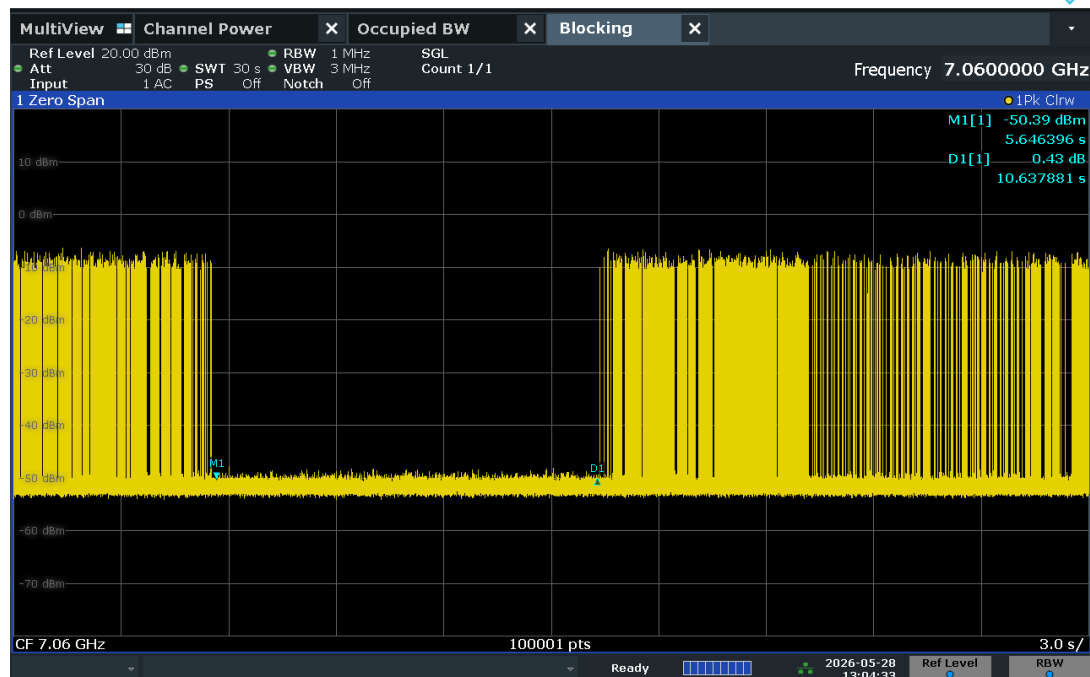

01:04:34 PM 05/28/2026

Plot 7-508. Contention Based Protocol Timing Plot – UNII 8 – 160 MHz Channel 207 – Mid

Duty_Cycle: 97.83% DCCF: 0.095dB

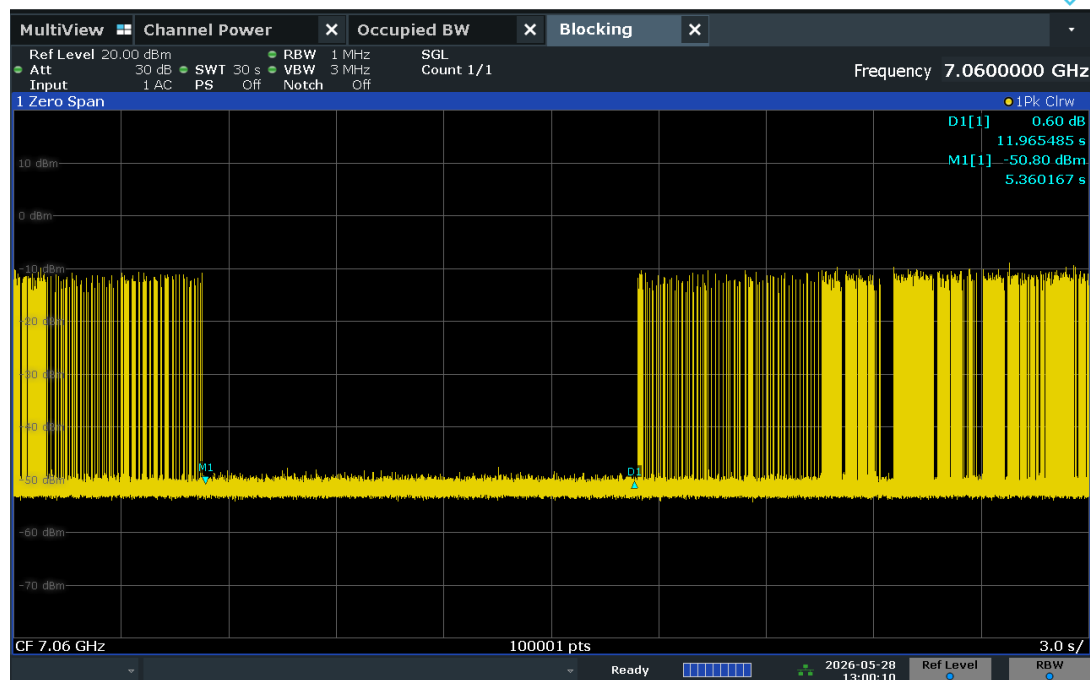


01:00:11 PM 05/28/2026

Plot 7-509. Contention Based Protocol Timing Plot – UNII 8 – 160 MHz Channel 207 – High


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 172 of 258

Bandwidth Reduction Plots

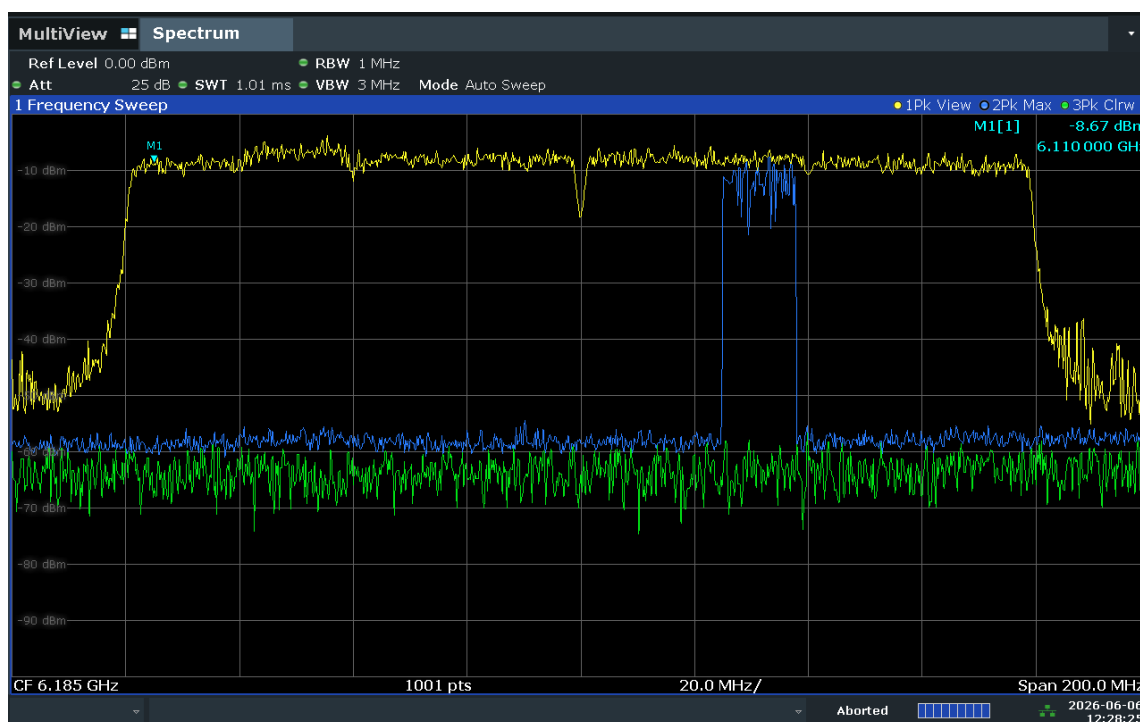

12:28:25 PM 06/06/2026


Plot 7-510. 160 MHz Bandwidth, AWGN Signal Injected – 6110Mhz

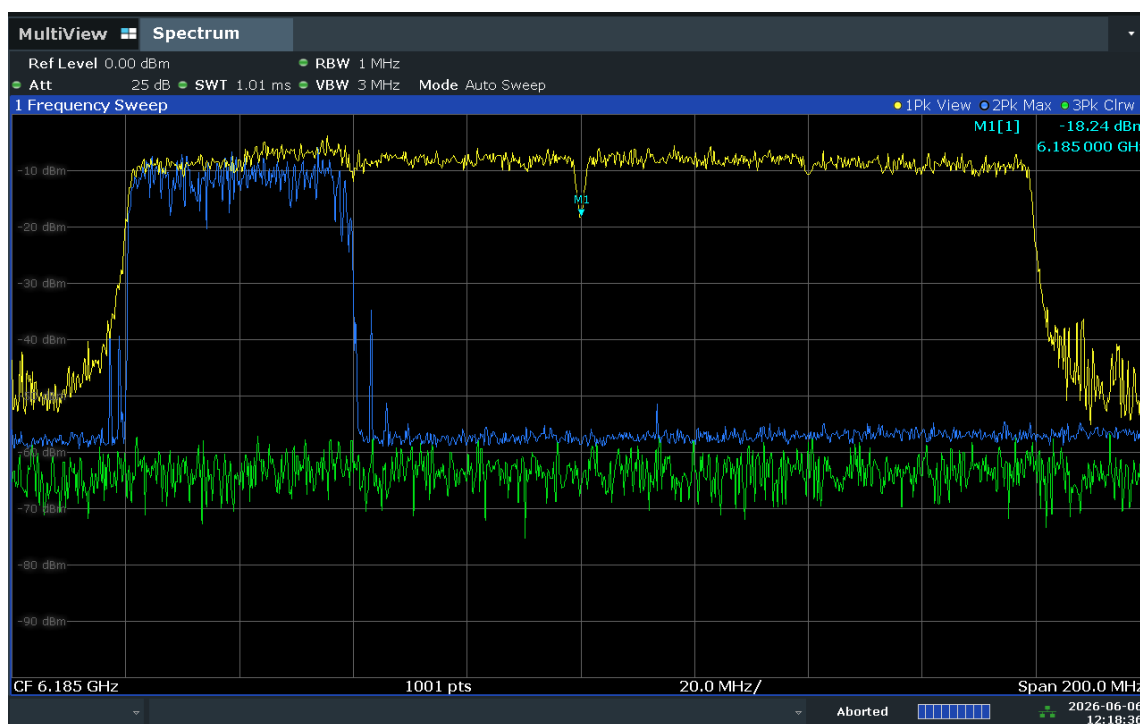

12:18:37 PM 06/06/2026

Plot 7-511. 160 MHz Bandwidth, AWGN Signal Injected – 6185 MHz

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 173 of 258

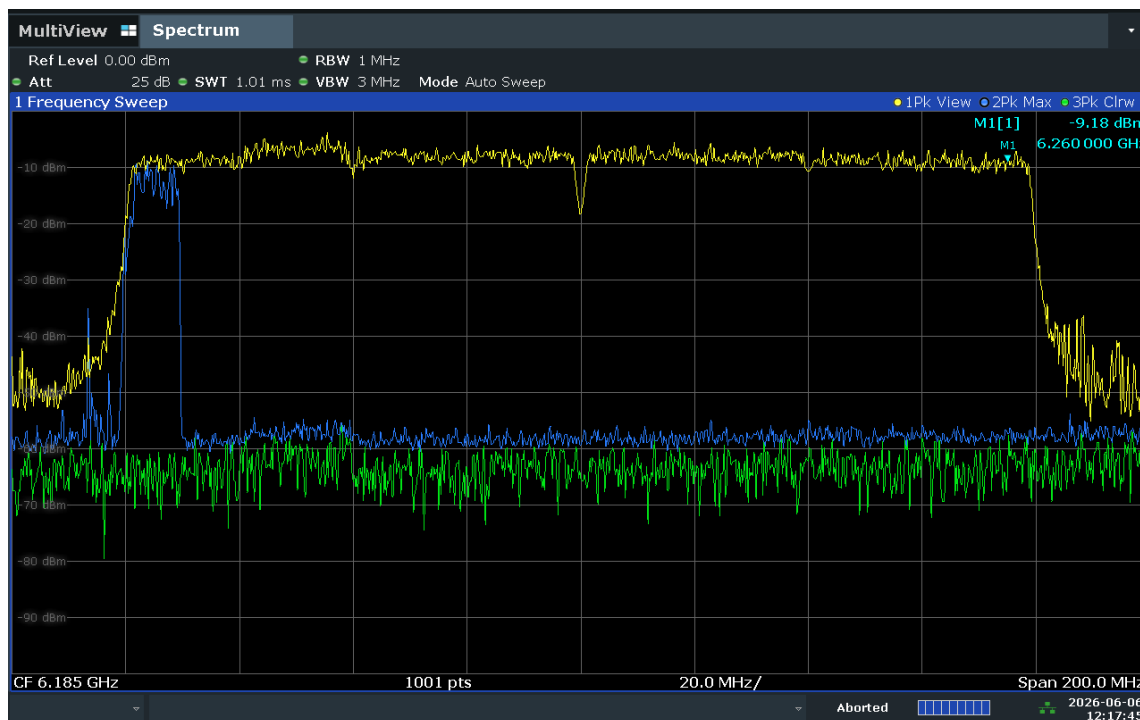

12:17:46 PM 06/06/2026

Plot 7-512. 160 MHz Bandwidth, AWGN Signal Injected – 6260 MHz

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 174 of 258

7.7 Radiated Spurious Emissions – Above 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (7.4.3) as shown in the table below.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-81. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 – Sections 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 175 of 258

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

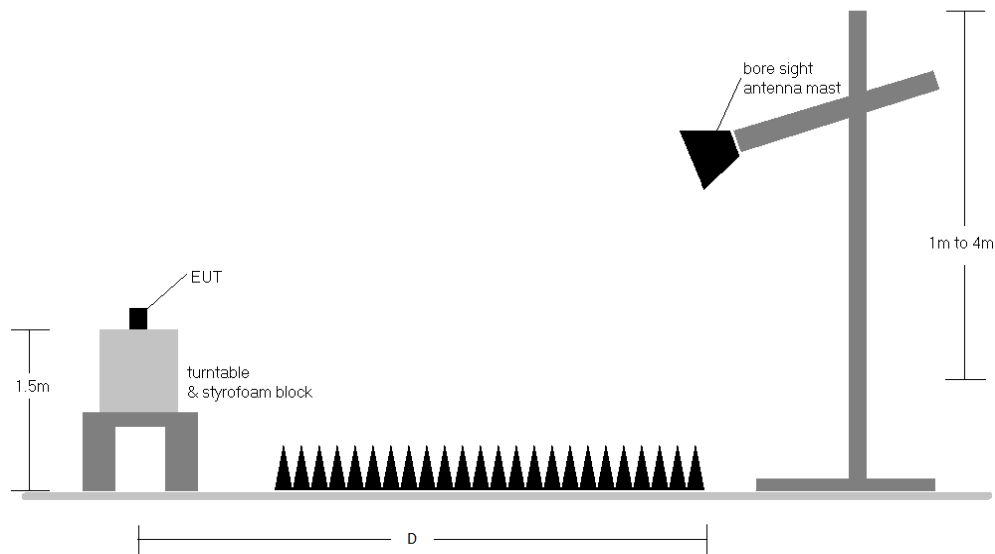


Figure 7-6. Test Instrument & Measurement Setup

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 176 of 258

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-81.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-81. All spurious emissions that do not lie in a restricted band are subject to a limit of -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18 GHz were measured at a 3 meters test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20 dB of the limit are fully investigated and the results are shown in this section.
8. All data rates were investigated and only the worse case is reported
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
11. All radiated measurements were tested at the highest supported power setting per band.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.3 to 7.7.22 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 177 of 258

7.7.1 CDD/SDM Primary Radiated Spurious Emission

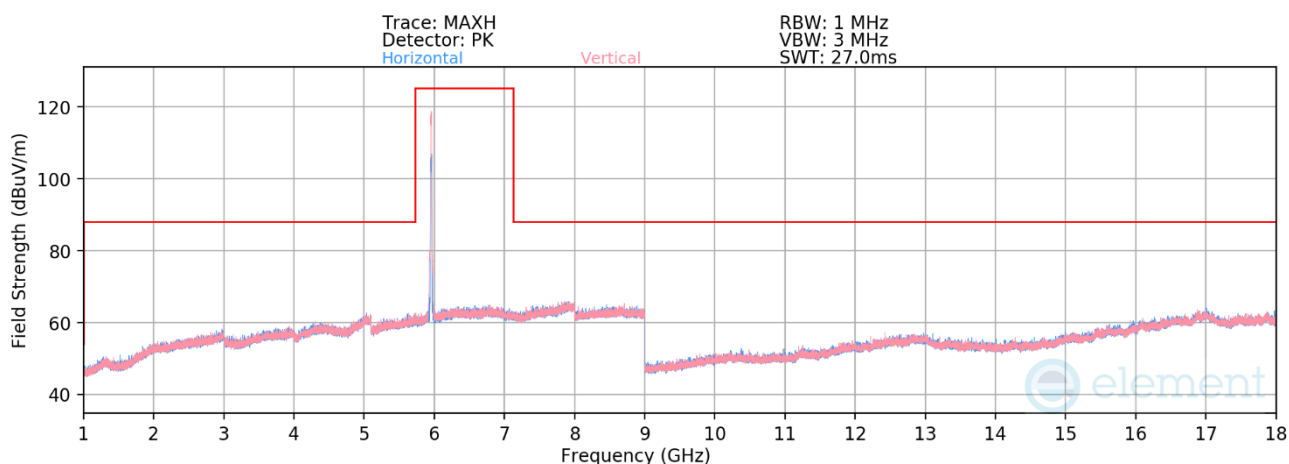


Plot 7-513. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 1)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5955 MHz
Channel:	1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	V	-	-	-84.87	20.94	43.07	53.98	-10.91
* 11910.00	Peak	V	-	-	-73.92	20.94	54.03	73.98	-19.95

Table 7-82. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 178 of 258

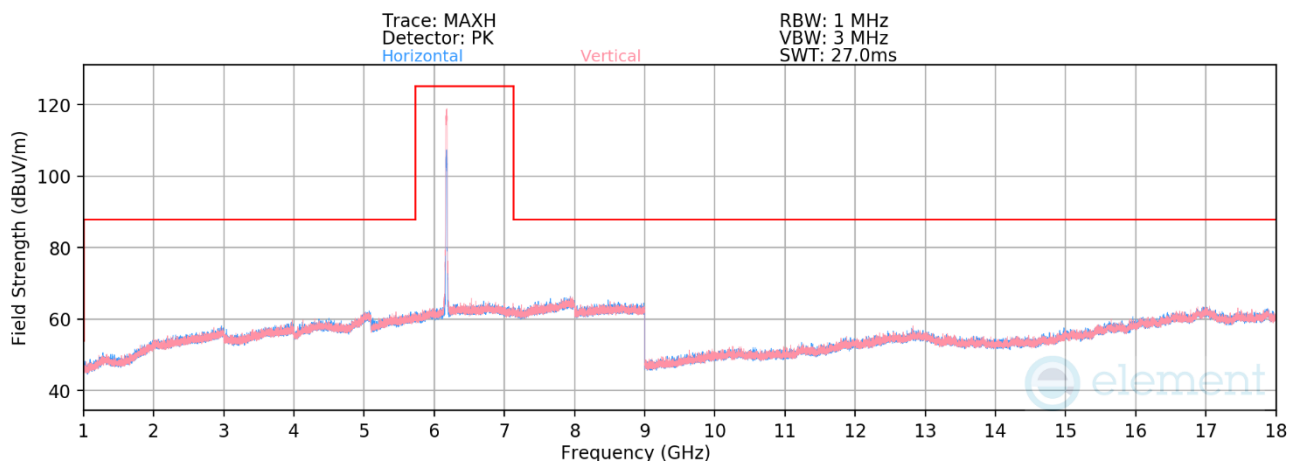

Plot 7-514. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 45)

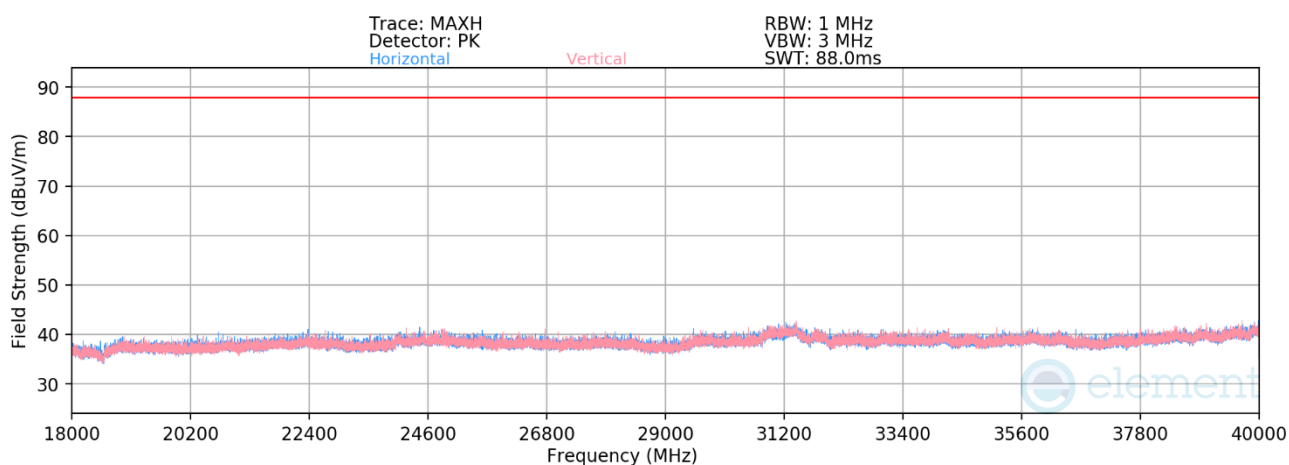

Plot 7-515. Radiated Spurious Emissions 18-40 GHz CDD Primary (802.11be – Ch. 45)

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 6175 MHz

Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-85.05	21.45	0.00	43.40	53.98	-10.58
* 12350.00	Peak	H	-	-	-72.98	21.45	0.00	55.47	73.98	-18.51
* 18525.00	Average	V	-	-	-65.56	-5.50	-9.54	26.40	53.98	-27.58
* 18525.00	Peak	V	-	-	-53.82	-5.50	-9.54	38.14	73.98	-35.84
24700.00	Average	H	-	-	-63.27	-4.34	-9.54	29.85	68.23	-38.38
24700.00	Peak	H	-	-	-52.05	-4.34	-9.54	41.07	88.23	-47.16
30875.00	Average	V	-	-	-62.94	-2.66	-9.54	31.86	68.23	-36.37
30875.00	Peak	V	-	-	-51.91	-2.66	-9.54	42.89	88.23	-45.34

Table 7-83. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 179 of 258

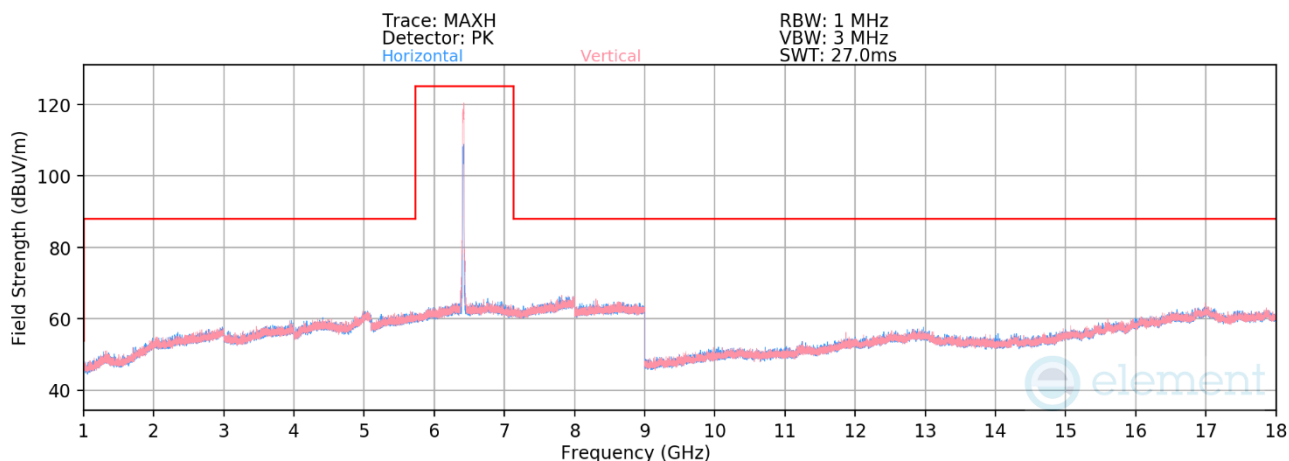


Plot 7-516. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 93)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	V	-	-	-84.89	22.54	44.65	68.23	-23.58
12830.00	Peak	V	-	-	-73.95	22.54	55.60	88.23	-32.63

Table 7-84. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 180 of 258

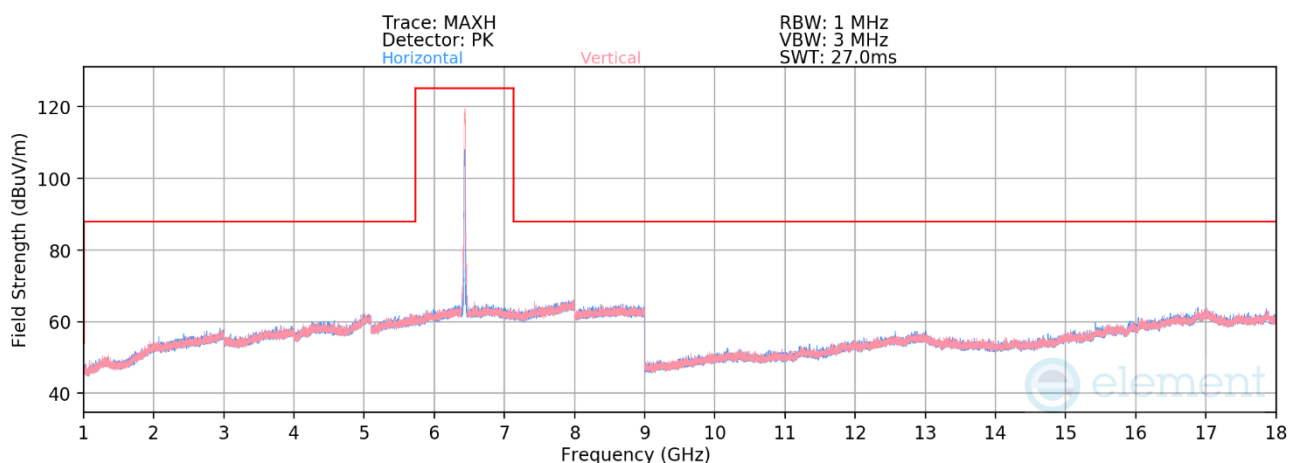


Plot 7-517. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 97)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6435 MHz
Channel:	97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	V	-	-	-84.84	22.49	44.65	68.23	-23.58
12870.00	Peak	V	-	-	-73.87	22.49	55.62	88.23	-32.61

Table 7-85. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 181 of 258

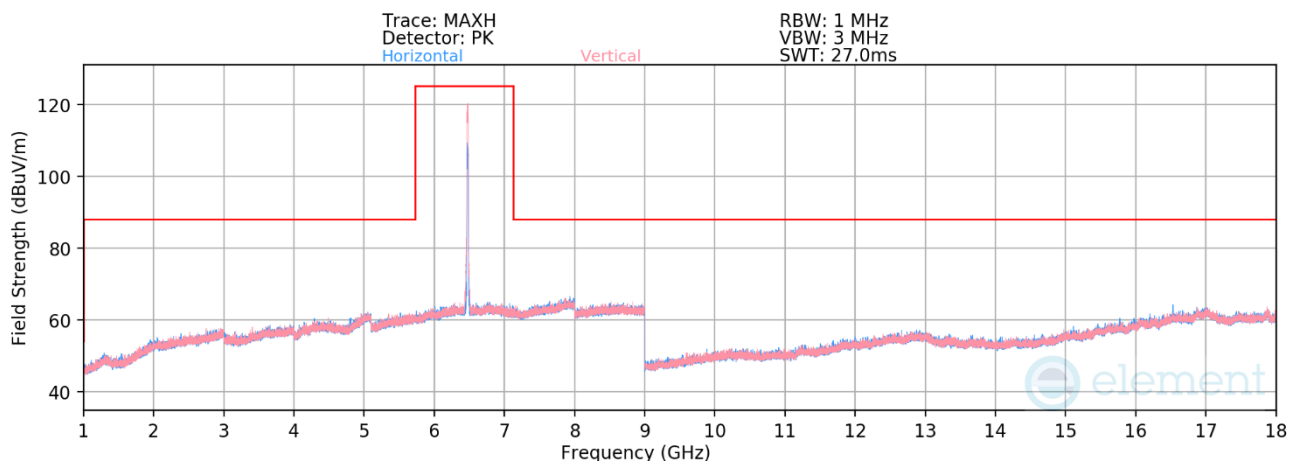

Plot 7-518. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 105)

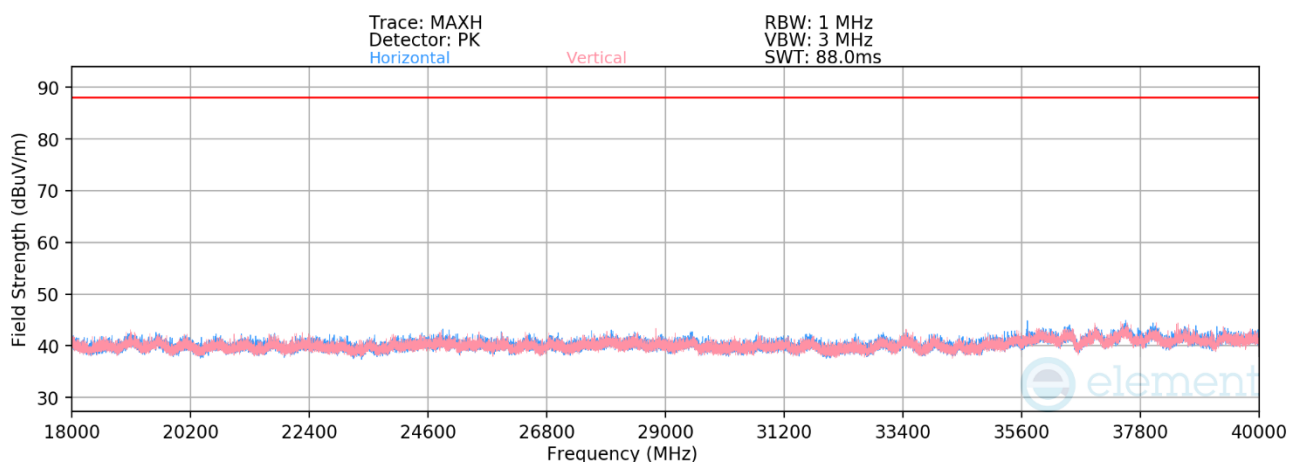


Plot 7-519. Radiated Spurious Emissions 18-40 GHz CDD Primary (802.11be – Ch. 105)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475 MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-84.84	22.56	0.00	44.72	68.23	-23.51
12950.00	Peak	H	-	-	-73.95	22.56	0.00	55.61	88.23	-32.62
* 19425.00	Average	V	-	-	-60.38	-5.91	-9.54	31.17	53.98	-22.81
* 19425.00	Peak	V	-	-	-49.04	-5.91	-9.54	42.51	73.98	-31.47
25900.00	Average	H	-	-	-61.70	-4.45	-9.54	31.31	68.23	-36.92
25900.00	Peak	H	-	-	-50.30	-4.45	-9.54	42.71	88.23	-45.52
32375.00	Average	V	-	-	-63.68	-3.25	-9.54	30.53	68.23	-37.70
32375.00	Peak	V	-	-	-52.00	-3.25	-9.54	42.21	88.23	-46.02

Table 7-86. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 182 of 258

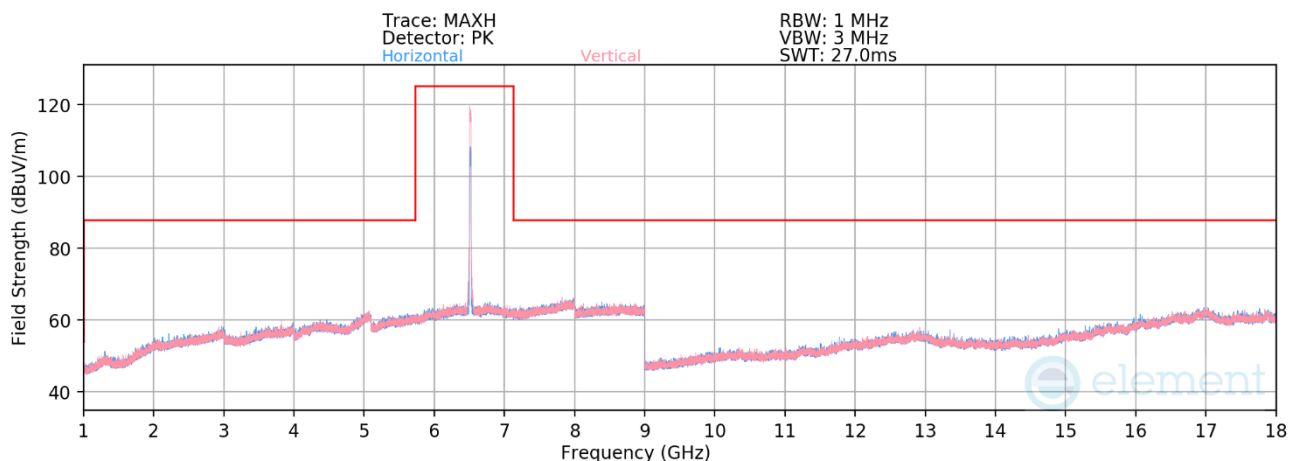


Plot 7-520. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 113)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515 MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	V	-	-	-84.99	22.84	44.85	68.23	-23.38
13030.00	Peak	V	-	-	-73.85	22.84	56.00	88.23	-32.23

Table 7-87. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 183 of 258

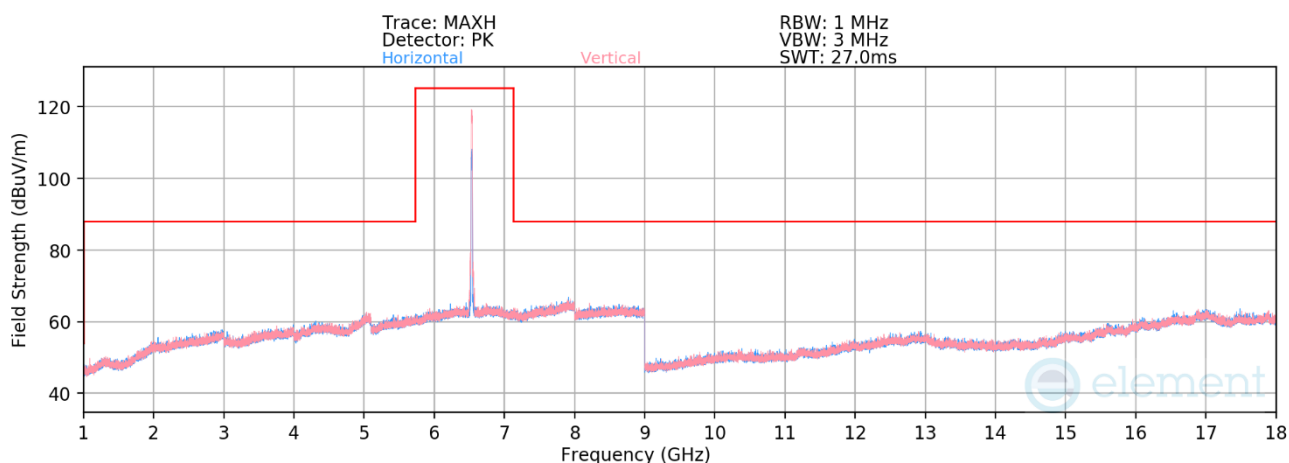


Plot 7-521. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 117)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535 MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-85.43	22.85	44.42	68.23	-23.81
13070.00	Peak	H	-	-	-73.76	22.85	56.10	88.23	-32.13

Table 7-88. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 184 of 258

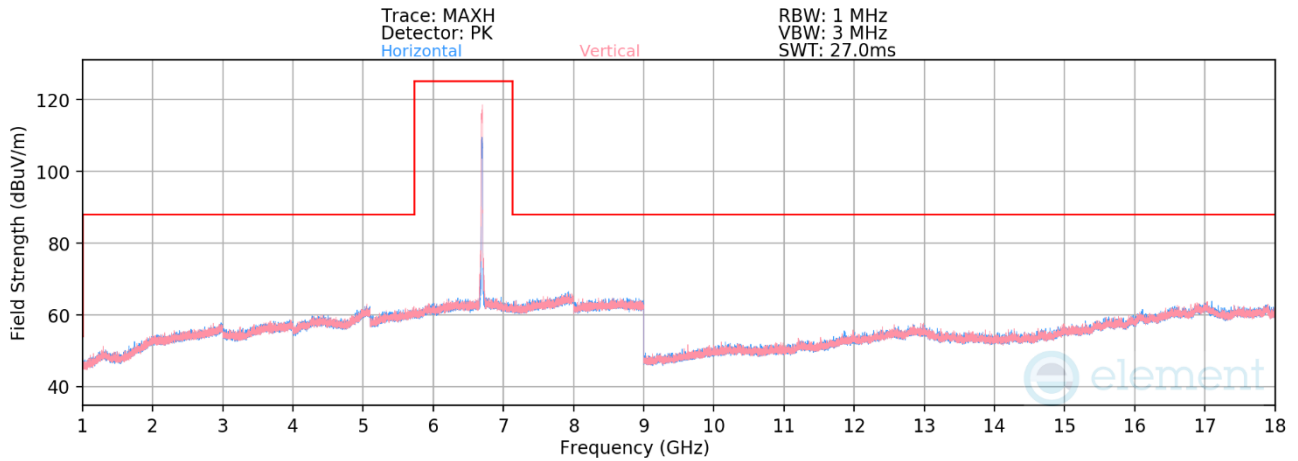

Plot 7-522. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 149)

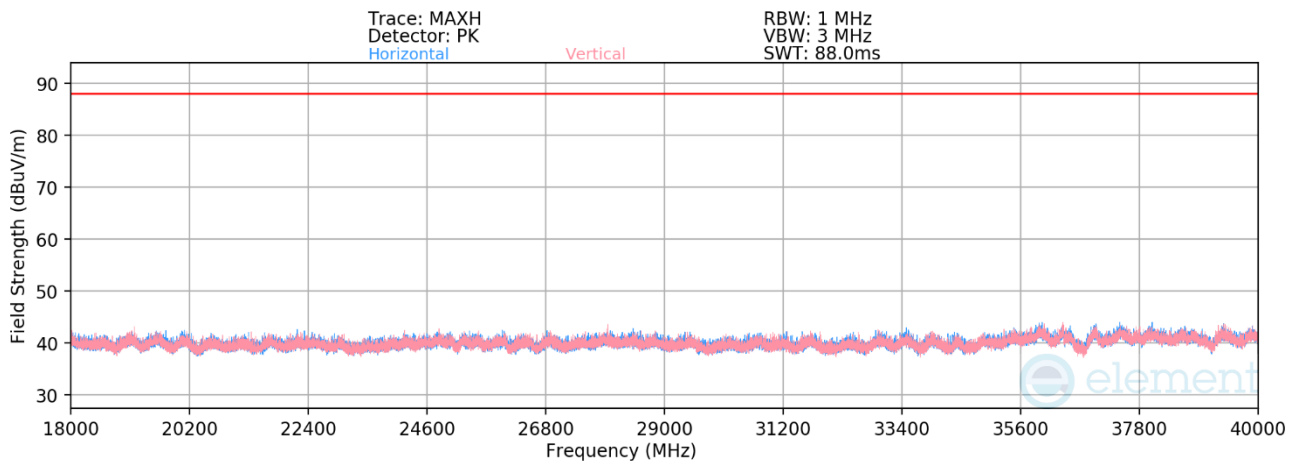


Plot 7-523. Radiated Spurious Emissions 18-40 GHz CDD Primary (802.11be – Ch. 149)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695 MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-85.61	23.00	0.00	44.38	53.98	-9.60
* 13390.00	Peak	H	-	-	-74.19	23.00	0.00	55.80	73.98	-18.18
* 20085.00	Average	H	-	-	-59.86	-6.23	-9.54	31.37	53.98	-22.61
* 20085.00	Peak	H	-	-	-48.67	-6.23	-9.54	42.56	73.98	-31.42
26780.00	Average	V	-	-	-62.66	-3.80	-9.54	31.00	68.23	-37.23
26780.00	Peak	V	-	-	-51.17	-3.80	-9.54	42.49	88.23	-45.74
33475.00	Average	H	-	-	-61.60	-3.63	-9.54	32.23	68.23	-36.00
33475.00	Peak	H	-	-	-50.26	-3.63	-9.54	43.57	88.23	-44.66

Table 7-89. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 185 of 258

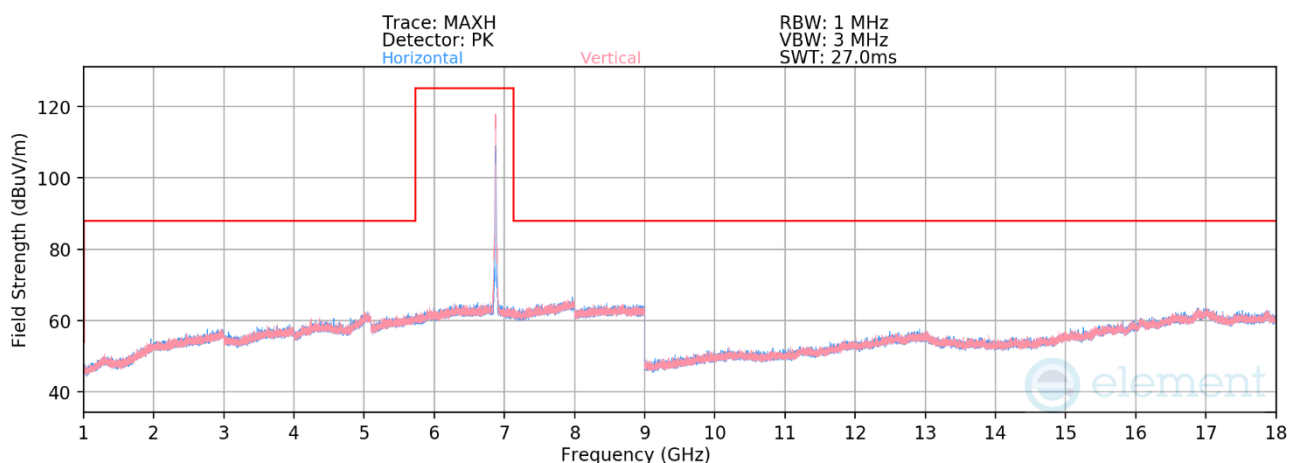


Plot 7-524. Radiated Spurious Emissions 1-18 GHz CDD Primary (802.11be – Ch. 185)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875 MHz
Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	V	-	-	-85.76	22.65	43.90	68.23	-24.33
13750.00	Peak	V	-	-	-74.26	22.65	55.39	88.23	-32.84

Table 7-90. Radiated Spurious Emission Measurements CDD Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 186 of 258

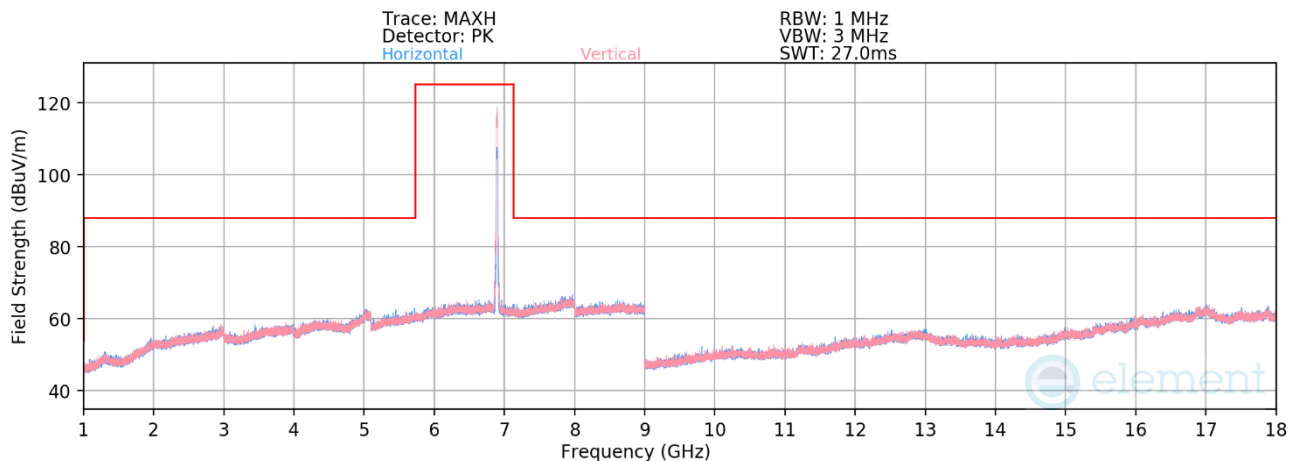


Plot 7-525. Radiated Spurious Emissions 1-18 GHz SDM Primary (802.11be – Ch. 189)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6895 MHz
Channel:	189


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-85.67	23.03	44.37	68.23	-23.86
13790.00	Peak	H	-	-	-73.68	23.03	56.35	88.23	-31.88

Table 7-91. Radiated Spurious Emission Measurements SDM Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 187 of 258

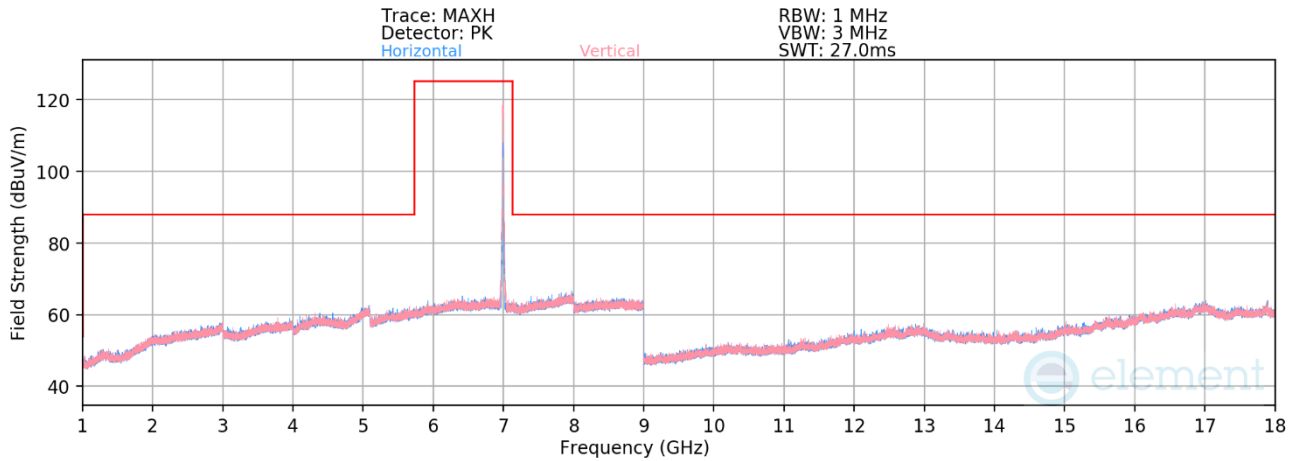

Plot 7-526. Radiated Spurious Emissions 1-18 GHz SDM Primary (802.11be – Ch. 209)

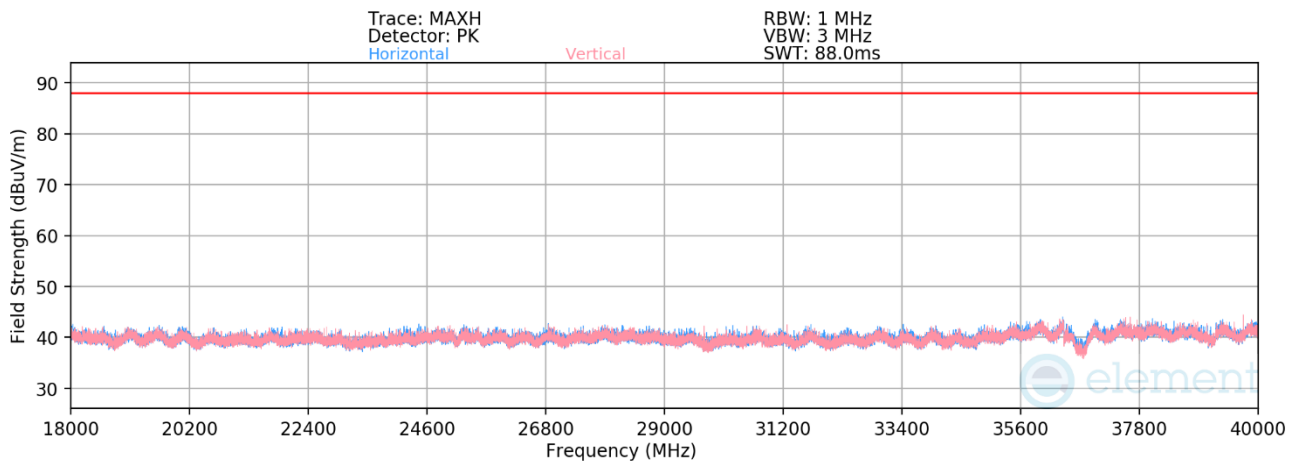

Plot 7-527. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 209)

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 6995 MHz

Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13990.00	Average	V	-	-	-86.14	22.86	0.00	43.72	53.98	-10.26
* 13990.00	Peak	V	-	-	-74.30	22.86	0.00	55.56	73.98	-18.42
* 20985.00	Average	V	-	-	-61.08	-5.84	-9.54	30.54	53.98	-23.44
* 20985.00	Peak	V	-	-	-50.11	-5.84	-9.54	41.51	73.98	-32.47
27980.00	Average	V	-	-	-62.89	-2.82	-9.54	31.75	68.23	-36.48
27980.00	Peak	V	-	-	-51.64	-2.82	-9.54	43.00	88.23	-45.23
34975.00	Average	V	-	-	-61.54	-4.84	-9.54	31.08	68.23	-37.15
34975.00	Peak	V	-	-	-49.93	-4.84	-9.54	42.69	88.23	-45.54

Table 7-92. Radiated Spurious Emission Measurements SDM Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 188 of 258

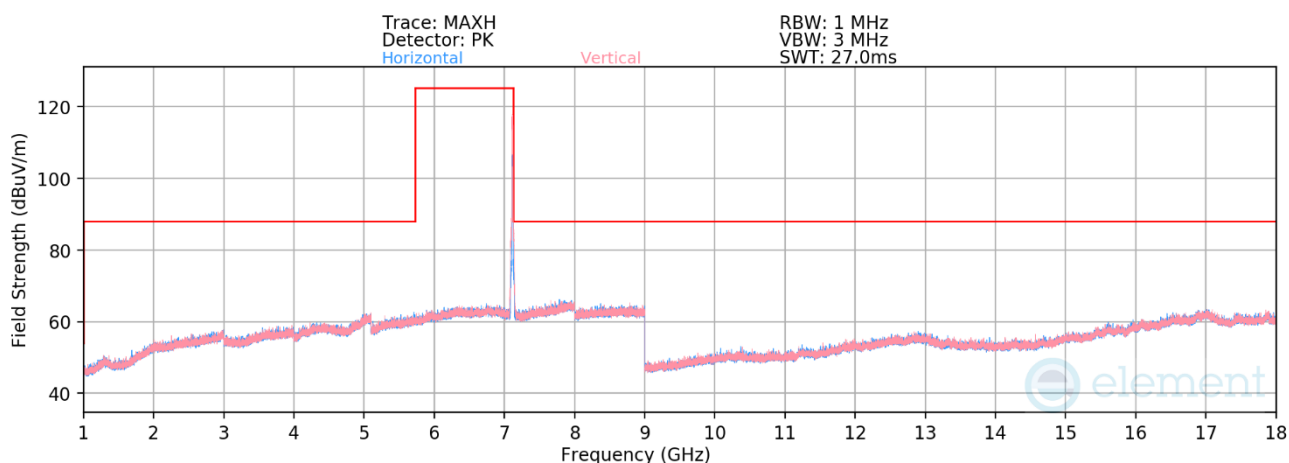

Plot 7-528. Radiated Spurious Emissions 1-18 GHz SDM Primary (802.11be – Ch. 233)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7115 MHz
Channel:	233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	V	-	-	-86.10	23.76	44.66	68.23	-23.57
14230.00	Peak	V	-	-	-75.15	23.76	55.61	88.23	-32.62

Table 7-93. Radiated Spurious Emission Measurements SDM Primary

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 189 of 258

7.7.2 CDD/SDM Diversity Radiated Spurious Emission

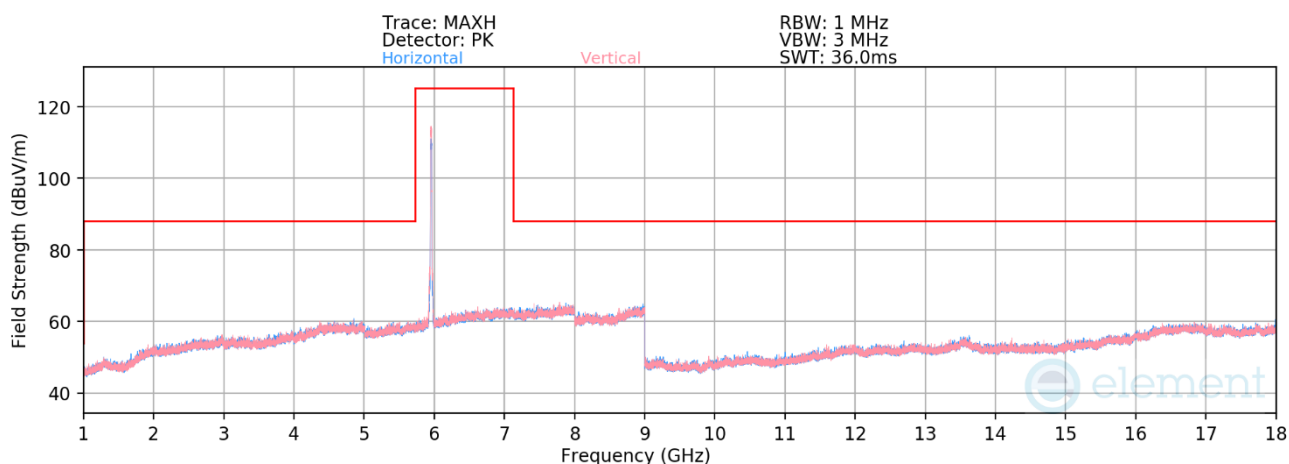


Plot 7-529. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 1)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955 MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	H	-	-	-82.87	17.49	41.61	53.98	-12.37
* 11910.00	Peak	H	-	-	-71.70	17.49	52.79	73.98	-21.19

Table 7-94. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 190 of 258

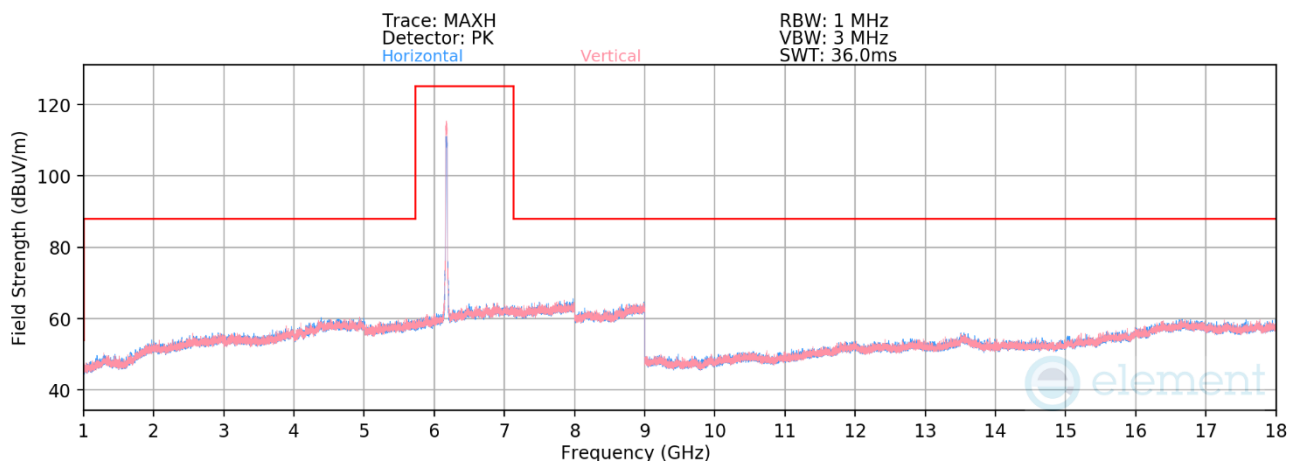

Plot 7-530. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 45)

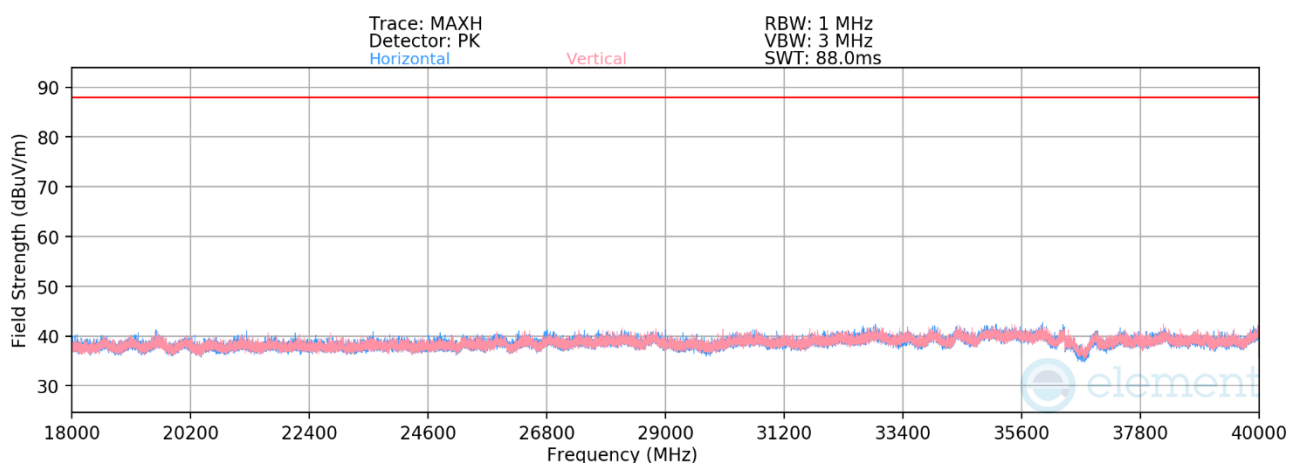


Plot 7-531. Radiated Spurious Emissions 18-40 GHz CDD Diversity (802.11be – Ch. 45)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6175 MHz
Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-83.54	18.18	0.00	41.64	53.98	-12.34
* 12350.00	Peak	H	-	-	-72.32	18.18	0.00	52.86	73.98	-21.12
* 18525.00	Average	V	-	-	-61.14	-7.31	-9.54	29.01	53.98	-24.97
* 18525.00	Peak	V	-	-	-49.89	-7.31	-9.54	40.26	73.98	-33.72
24700.00	Average	V	-	-	-61.52	-6.57	-9.54	29.37	68.23	-38.86
24700.00	Peak	V	-	-	-49.97	-6.57	-9.54	40.92	88.23	-47.31
30875.00	Average	H	-	-	-63.87	-3.73	-9.54	29.86	68.23	-38.37
30875.00	Peak	H	-	-	-52.37	-3.73	-9.54	41.36	88.23	-46.87

Table 7-95. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 191 of 258

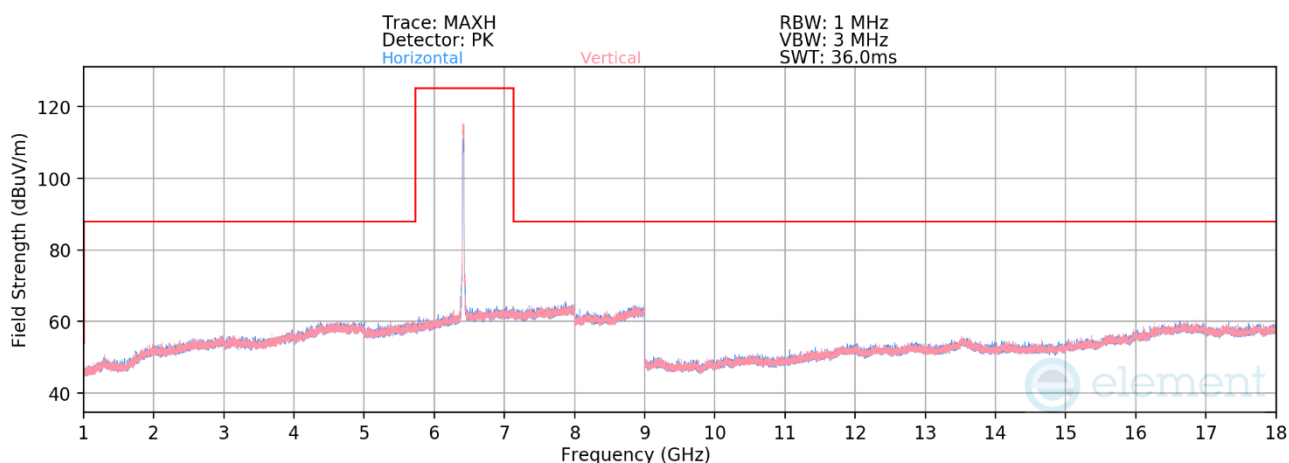


Plot 7-532. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 93)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	V	-	-	-83.13	19.11	42.97	68.23	-25.26
12830.00	Peak	V	-	-	-72.50	19.11	53.61	88.23	-34.62

Table 7-96. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 192 of 258

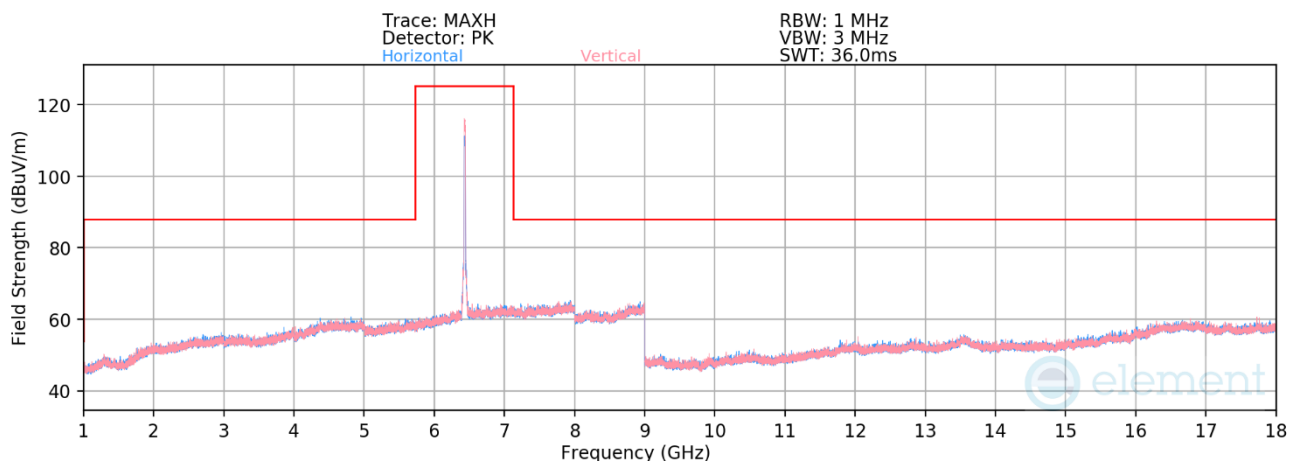


Plot 7-533. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 97)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435 MHz
Channel: 97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	H	-	-	-83.37	18.94	42.57	68.23	-25.66
12870.00	Peak	H	-	-	-71.86	18.94	54.08	88.23	-34.15

Table 7-97. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 193 of 258

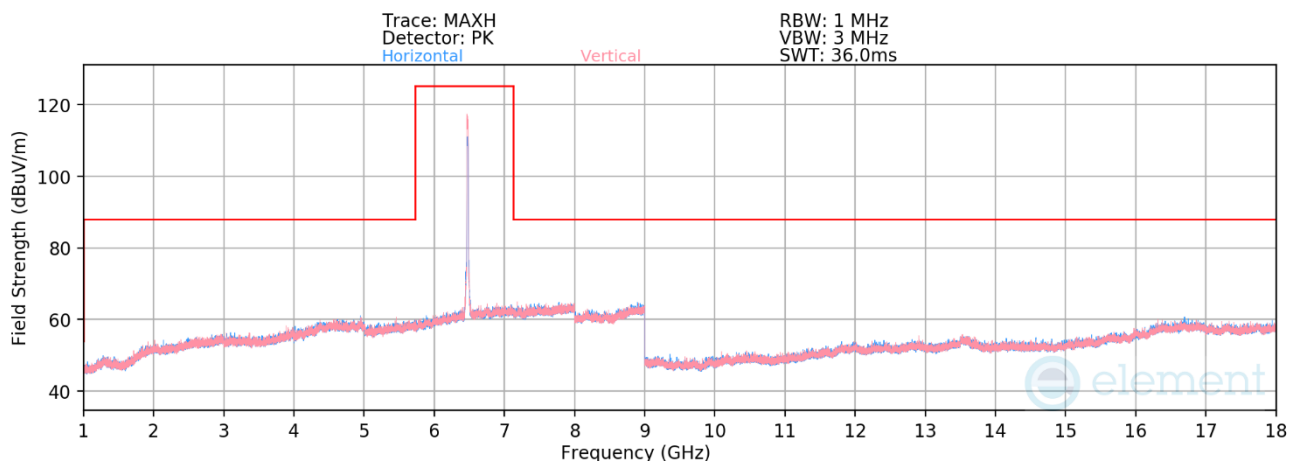

Plot 7-534. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 105)

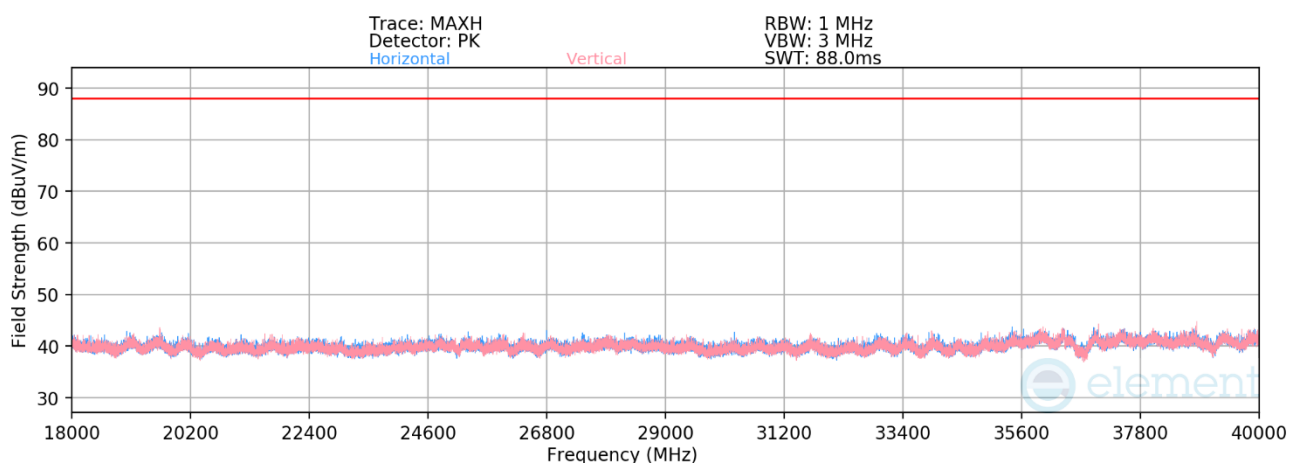


Plot 7-535. Radiated Spurious Emissions 18-40 GHz CDD Diversity (802.11be – Ch. 105)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475 MHz
Channel:	105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-83.56	19.33	0.00	42.78	68.23	-25.45
12950.00	Peak	V	-	-	-72.06	19.33	0.00	54.27	88.23	-33.96
* 19425.00	Average	H	-	-	-60.78	-5.95	-9.54	30.73	53.98	-23.25
* 19425.00	Peak	H	-	-	-49.26	-5.95	-9.54	42.25	73.98	-31.73
25900.00	Average	V	-	-	-61.88	-4.39	-9.54	31.19	68.23	-37.04
25900.00	Peak	V	-	-	-50.19	-4.39	-9.54	42.88	88.23	-45.35
32375.00	Average	V	-	-	-63.30	-3.25	-9.54	30.91	68.23	-37.32
32375.00	Peak	V	-	-	-51.74	-3.25	-9.54	42.47	88.23	-45.76

Table 7-98. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 194 of 258

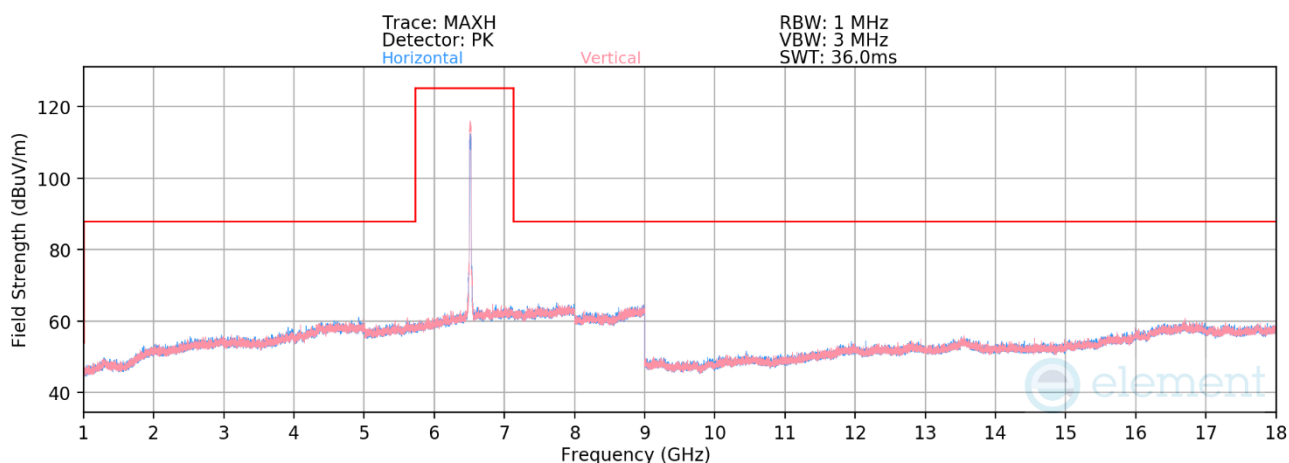

Plot 7-536. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 113)

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 6515 MHz

Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	H	-	-	-83.92	19.29	42.38	68.23	-25.85
13030.00	Peak	H	-	-	-72.33	19.29	53.96	88.23	-34.27

Table 7-99. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 195 of 258

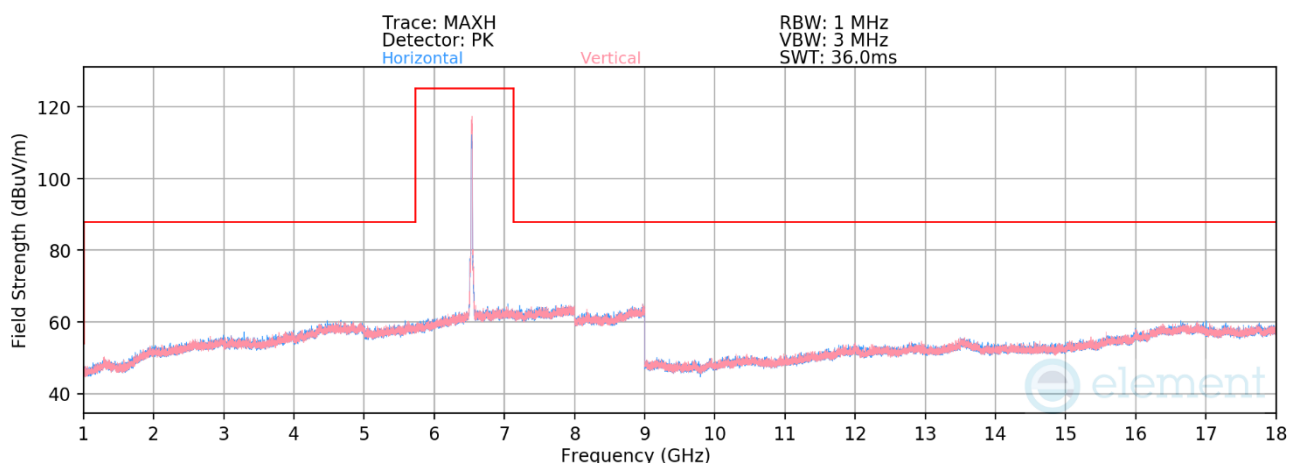


Plot 7-537. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 117)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535 MHz
Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.80	19.38	42.57	68.23	-25.66
13070.00	Peak	H	-	-	-72.49	19.38	53.89	88.23	-34.34

Table 7-100. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 196 of 258

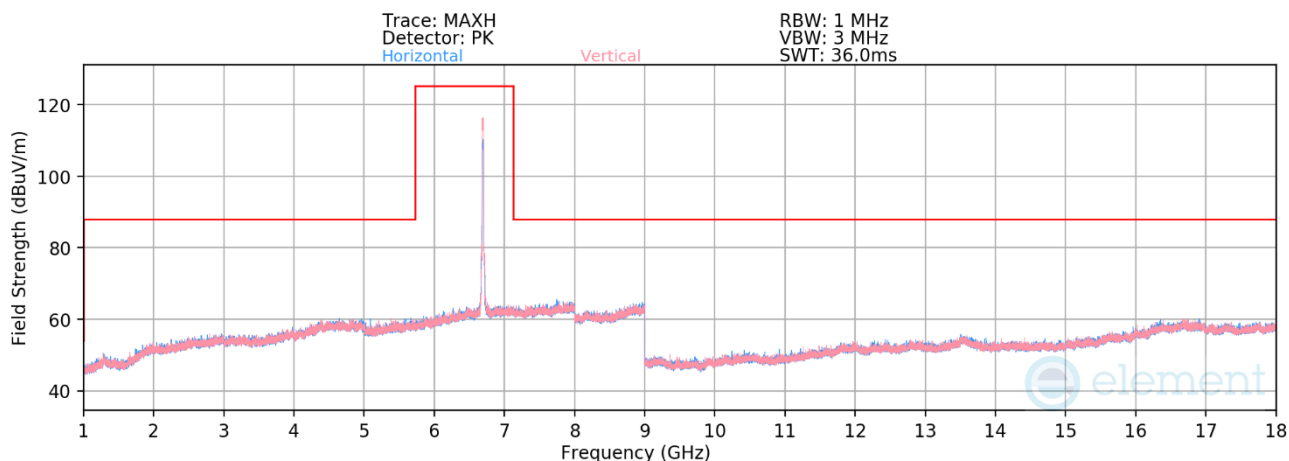

Plot 7-538. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 149)

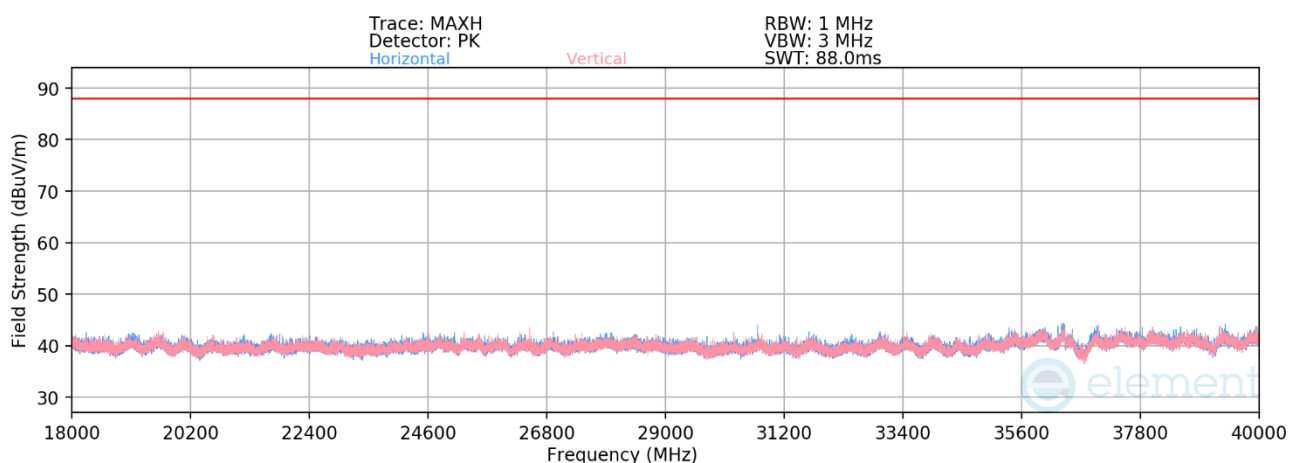


Plot 7-539. Radiated Spurious Emissions 18-40 GHz CDD Diversity (802.11be – Ch. 149)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695 MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-83.65	19.42	0.00	42.76	53.98	-11.22
* 13390.00	Peak	V	-	-	-72.80	19.42	0.00	53.61	73.98	-20.37
* 20085.00	Average	H	-	-	-59.90	-6.21	-9.54	31.35	53.98	-22.63
* 20085.00	Peak	H	-	-	-48.38	-6.21	-9.54	42.87	73.98	-31.11
26780.00	Average	H	-	-	-62.73	-3.80	-9.54	30.93	68.23	-37.30
26780.00	Peak	H	-	-	-51.34	-3.80	-9.54	42.32	88.23	-45.91
33475.00	Average	H	-	-	-61.41	-3.58	-9.54	32.47	68.23	-35.76
33475.00	Peak	H	-	-	-50.30	-3.58	-9.54	43.58	88.23	-44.65

Table 7-101. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 197 of 258

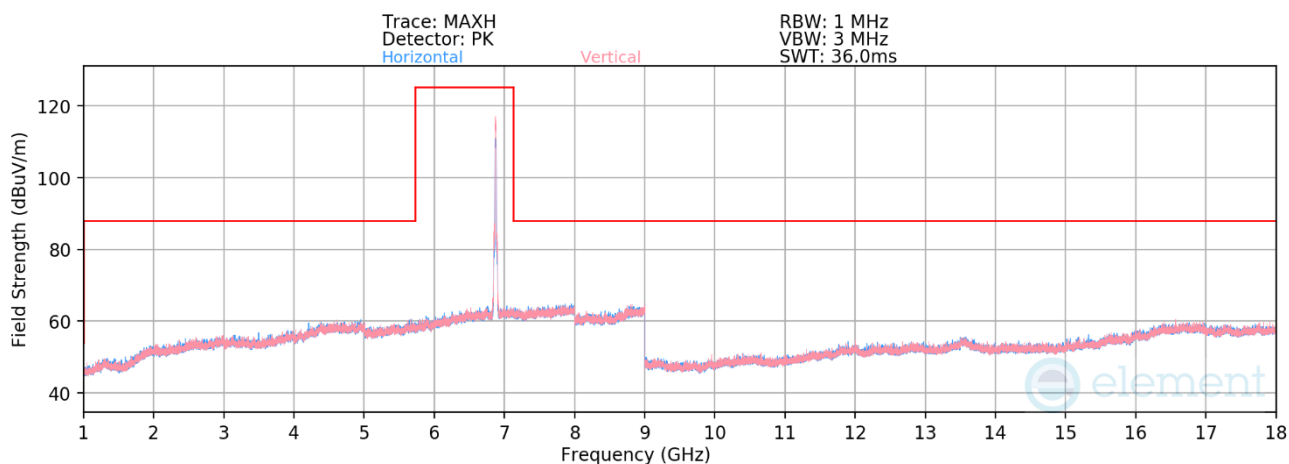

Plot 7-540. Radiated Spurious Emissions 1-18 GHz CDD Diversity (802.11be – Ch. 185)

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 6875 MHz

Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.27	19.15	42.88	68.23	-25.35
13750.00	Peak	H	-	-	-71.53	19.15	54.61	88.23	-33.62

Table 7-102. Radiated Spurious Emission Measurements CDD Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 198 of 258

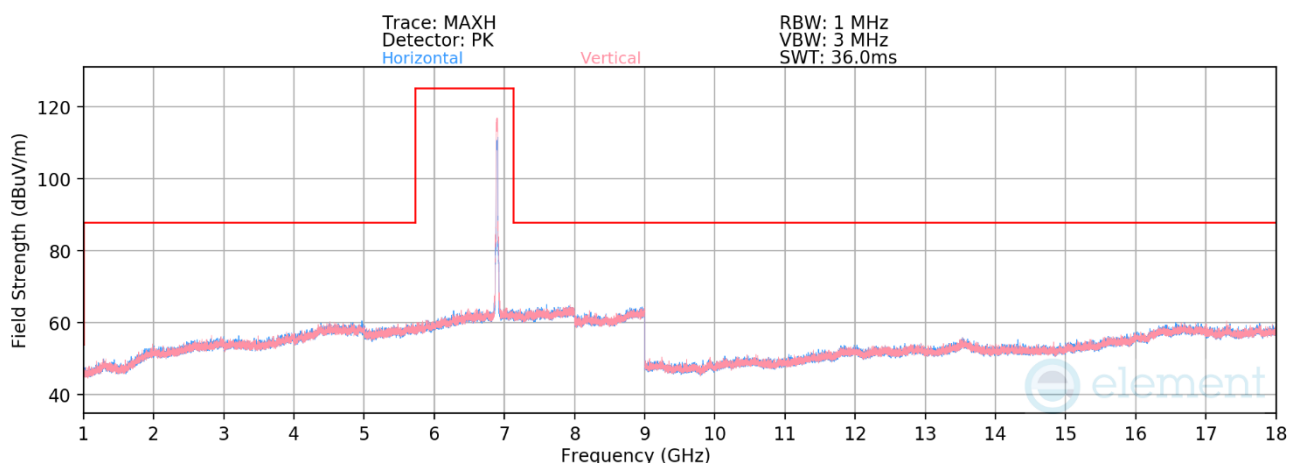


Plot 7-541. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 189)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895 MHz
Channel: 189


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	H	-	-	-83.41	19.22	42.81	68.23	-25.42
13790.00	Peak	H	-	-	-71.28	19.22	54.94	88.23	-33.29

Table 7-103. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 199 of 258

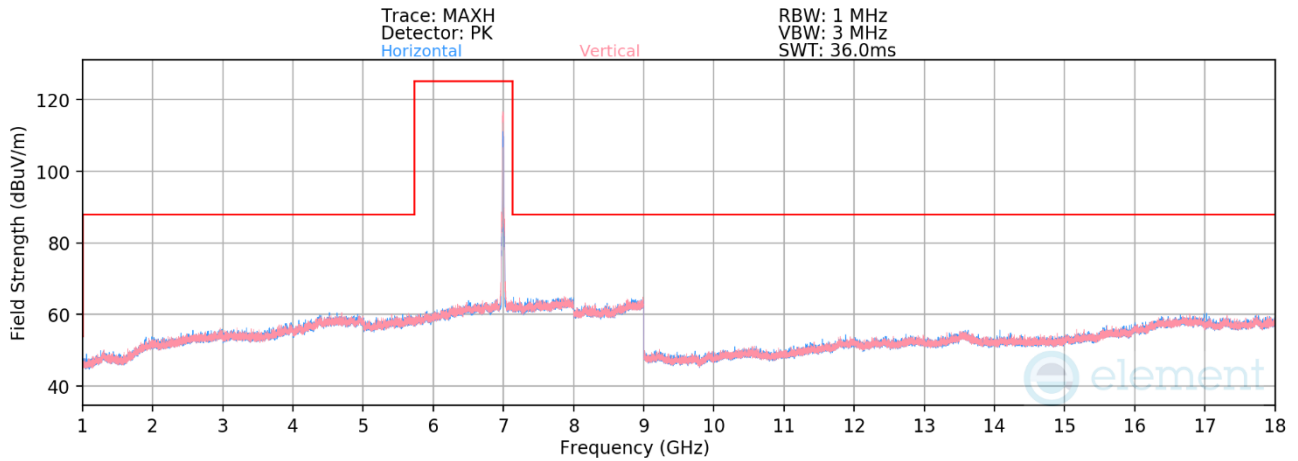

Plot 7-542. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 209)

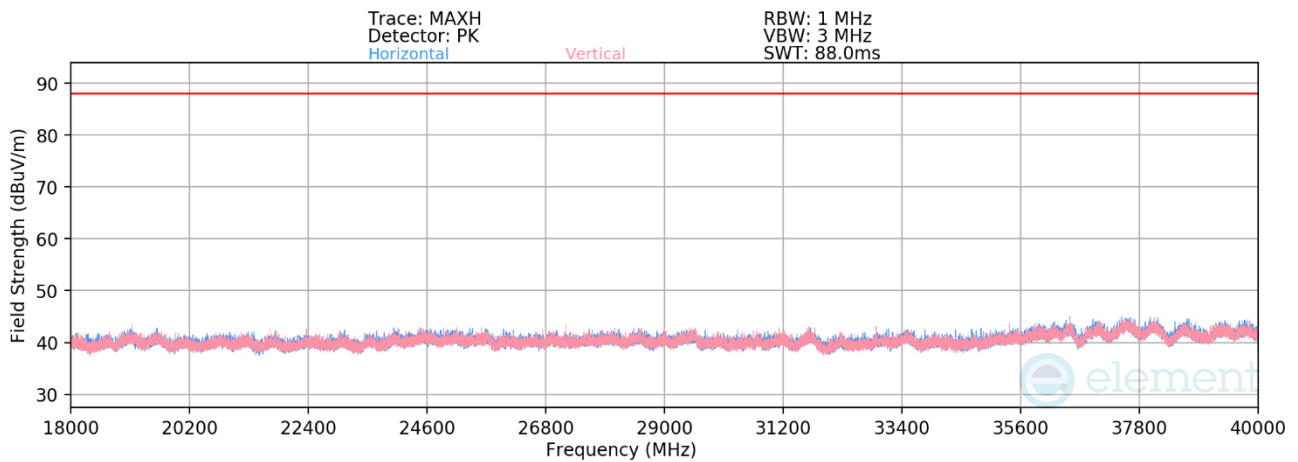


Plot 7-543. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 209)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6995 MHz
Channel:	209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13990.00	Average	V	-	-	-83.82	19.54	0.00	42.72	53.98	-11.26
* 13990.00	Peak	V	-	-	-72.15	19.54	0.00	54.39	73.98	-19.59
* 20985.00	Average	V	-	-	-61.01	-5.87	-9.54	30.58	53.98	-23.40
* 20985.00	Peak	V	-	-	-49.74	-5.87	-9.54	41.85	73.98	-32.13
27980.00	Average	V	-	-	-62.60	-2.82	-9.54	32.04	68.23	-36.19
27980.00	Peak	V	-	-	-50.79	-2.82	-9.54	43.85	88.23	-44.38
34975.00	Average	V	-	-	-61.75	-4.82	-9.54	30.89	68.23	-37.34
34975.00	Peak	V	-	-	-50.58	-4.82	-9.54	42.06	88.23	-46.17

Table 7-104. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 200 of 258

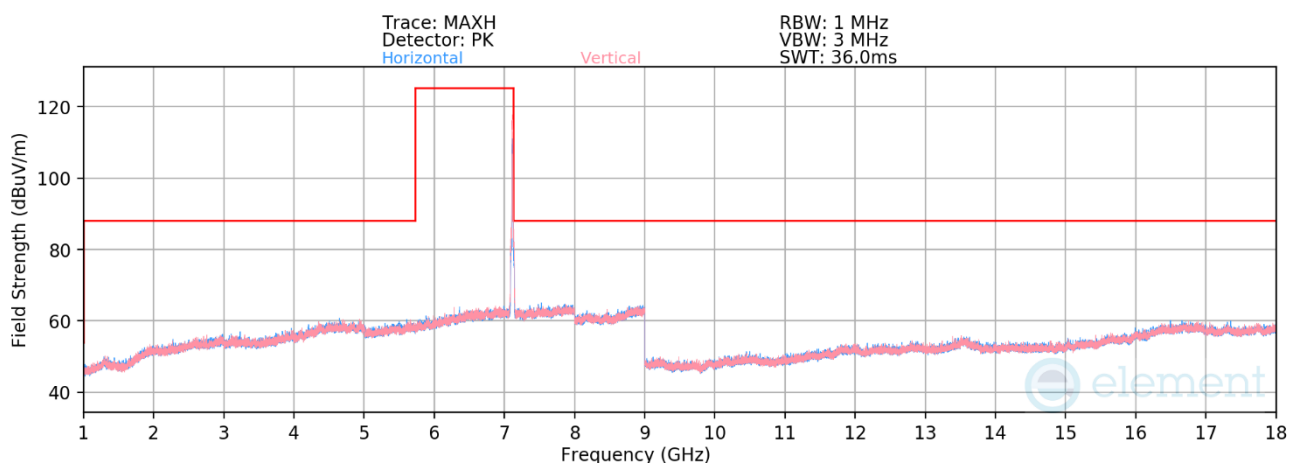

Plot 7-544. Radiated Spurious Emissions 1-18 GHz SDM Diversity (802.11be – Ch. 233)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7115 MHz
Channel: 233


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	H	-	-	-83.71	19.63	42.92	68.23	-25.31
14230.00	Peak	H	-	-	-72.30	19.63	54.33	88.23	-33.90

Table 7-105. Radiated Spurious Emission Measurements SDM Diversity

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 201 of 258


7.7.3 Antenna WF5T Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

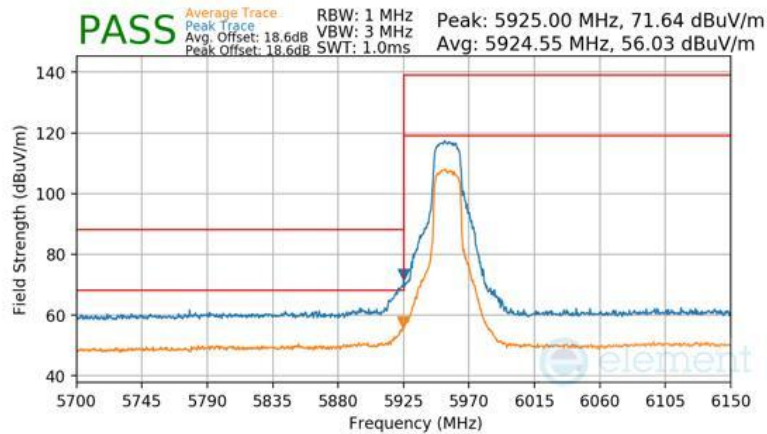

Plot 7-545 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

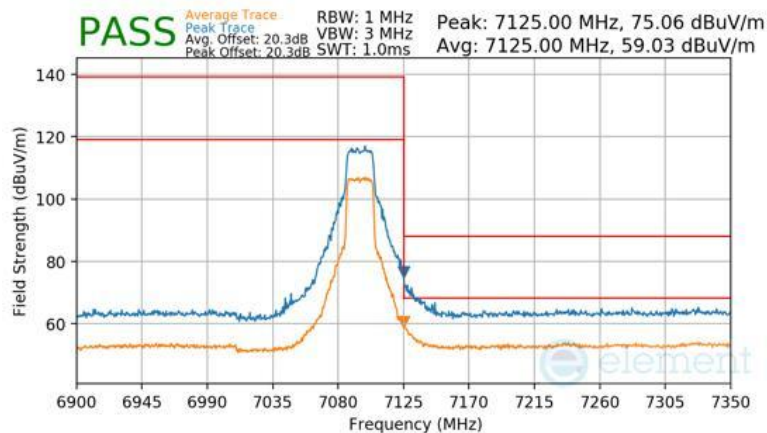


Plot 7-546 Antenna WF5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 202 of 258

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

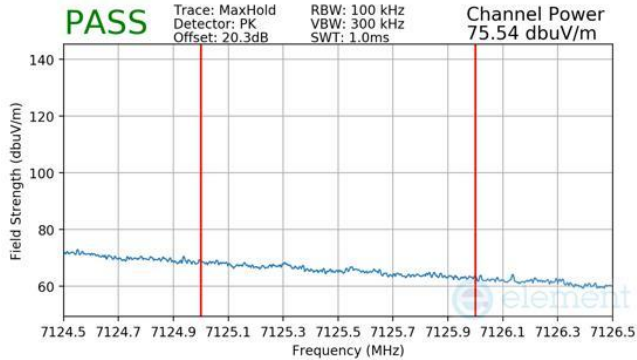


Plot 7-547 Antenna WF5T Radiated Integrated Band Edge (Peak – UNII Band 8)

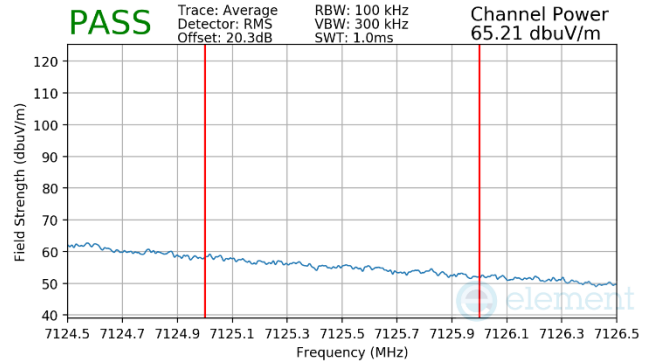

Plot 7-548 Antenna WF5T Radiated Integrated Band Edge (Average – UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

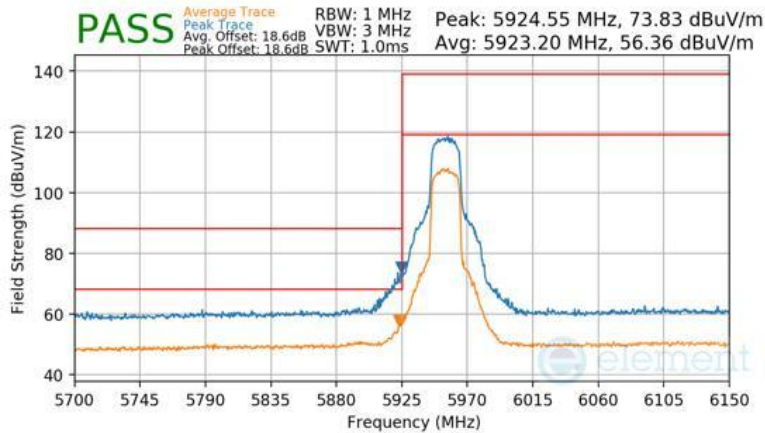

Plot 7-549 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 203 of 258

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

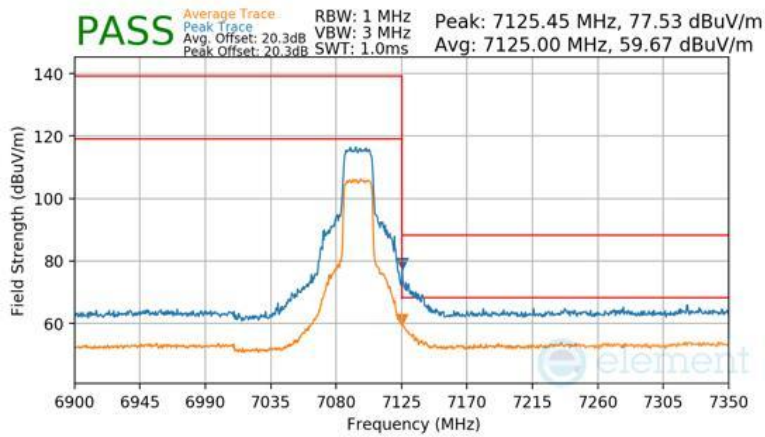


Plot 7-550 Antenna WF5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

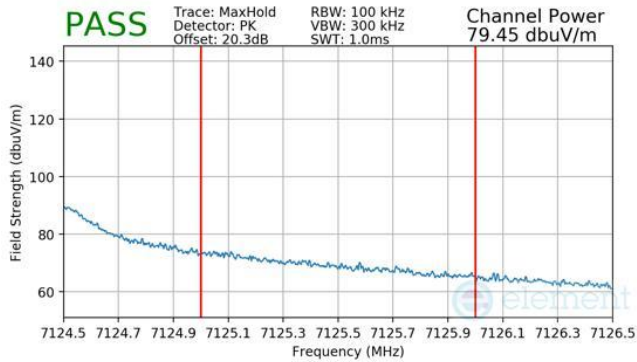

Plot 7-551 Antenna WF5T Radiated Integrated Band Edge (Peak – UNII Band 8)

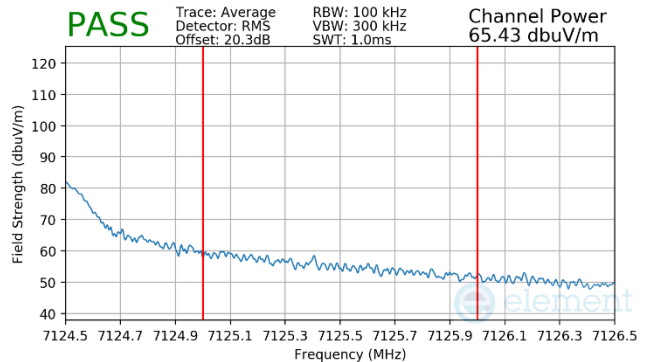


Plot 7-552 Antenna WF5T Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 204 of 258


7.7.4 Antenna WF5T Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965 MHz
Channel	3

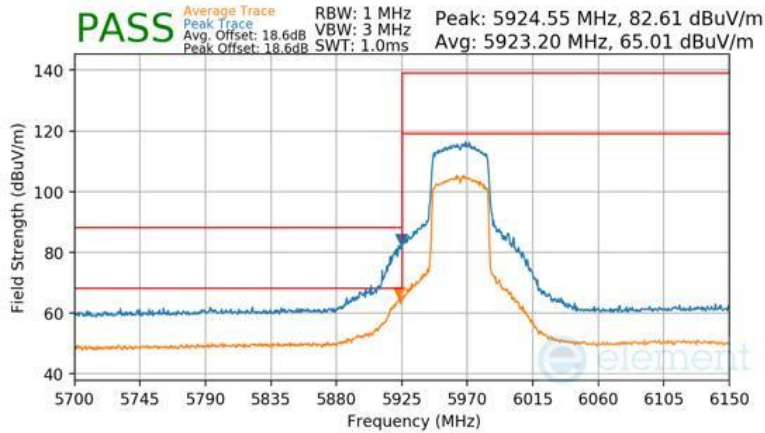

Plot 7-553 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6005 MHz
Channel	11

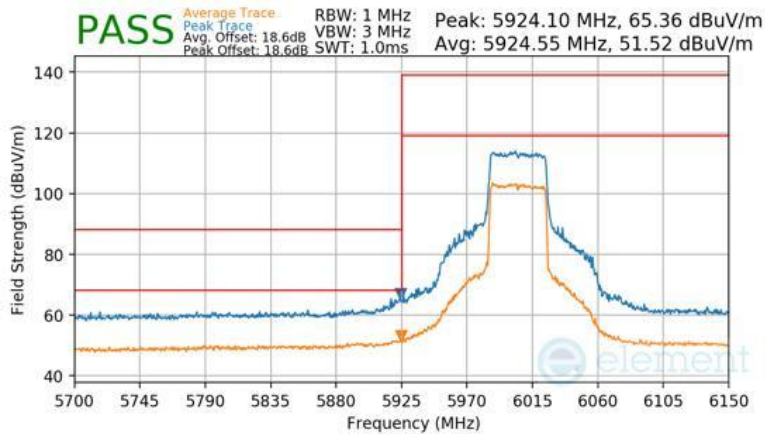


Plot 7-554 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 205 of 258

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS11
 3 Meters
 7085 MHz
 227

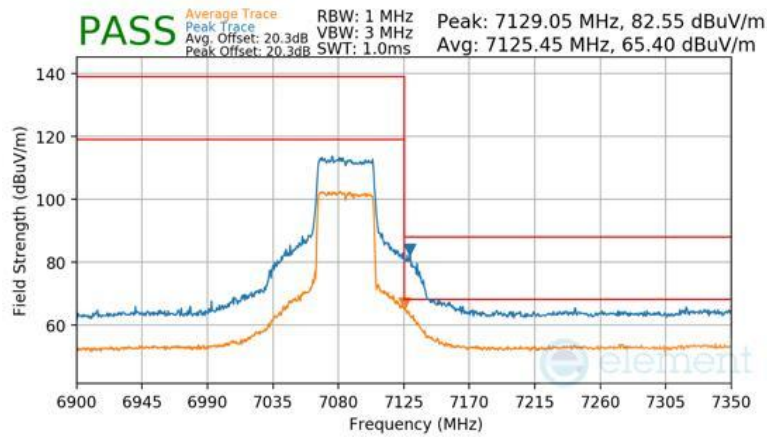


Plot 7-555 Antenna WF5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 206 of 258


7.7.5 Antenna WF5T Radiated Band Edge Measurements (80 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985 MHz
Channel	7

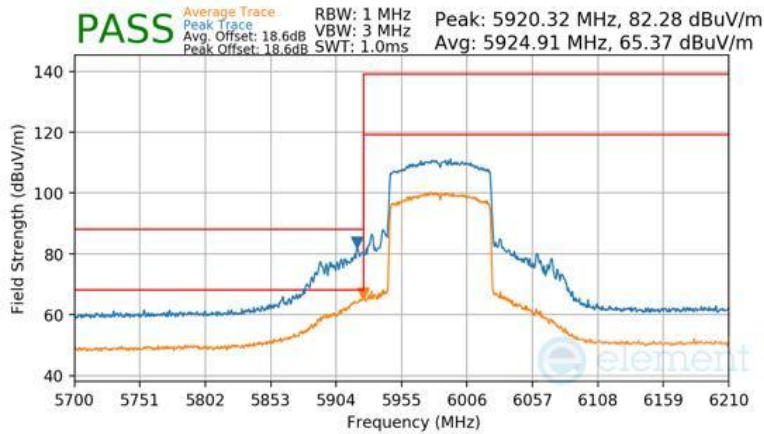

Plot 7-556 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6065 MHz
Channel	23

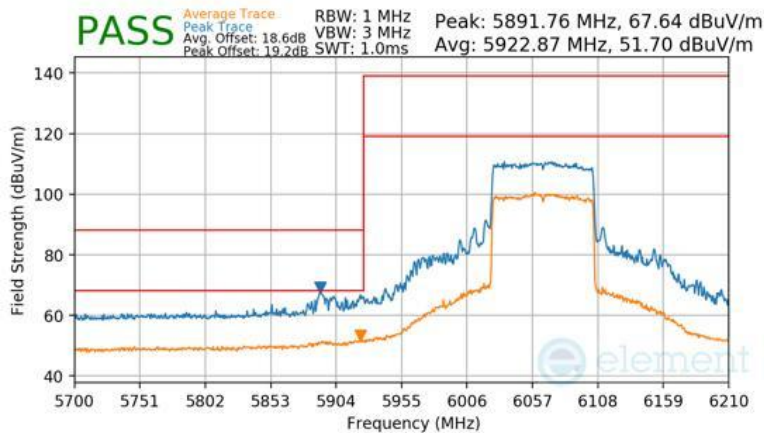

Plot 7-557 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU

MCS11

3 Meters

7025 MHz

215

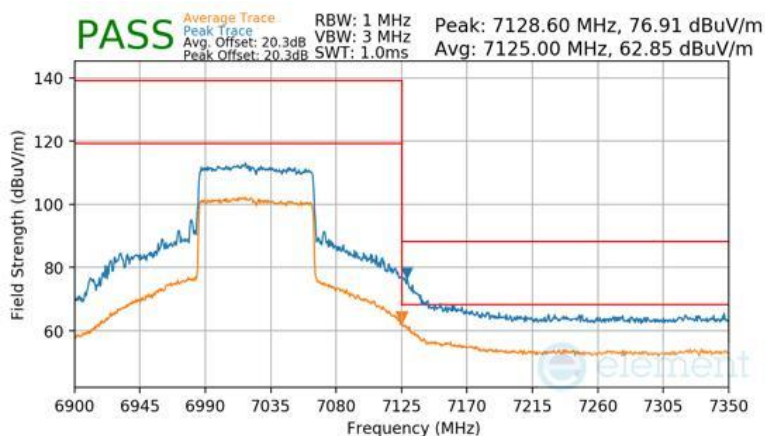


Plot 7-558 Antenna WF5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 208 of 258


7.7.6 Antenna WF5T Radiated Band Edge Measurements (160 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025 MHz
Channel	15

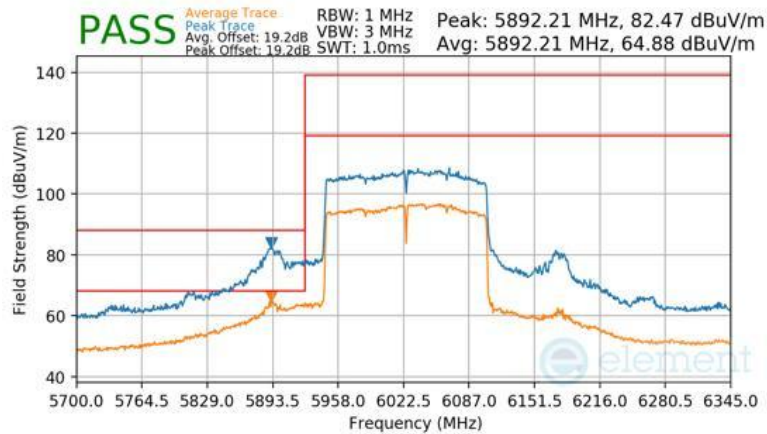

Plot 7-559 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6185 MHz
Channel	47

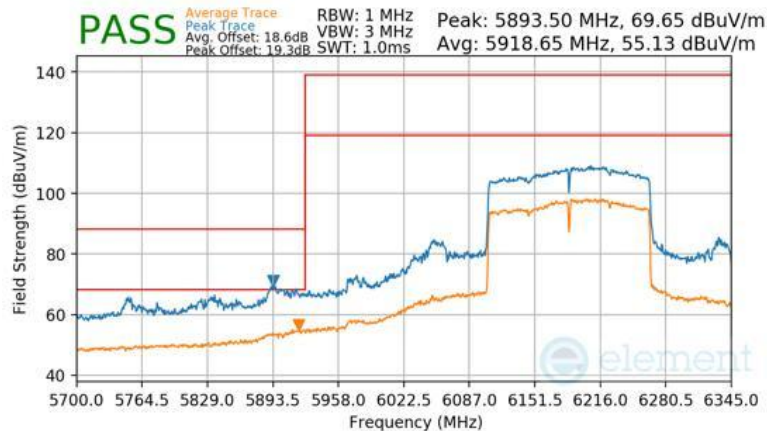


Plot 7-560 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 209 of 258

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS11
 3 Meters
 6825 MHz
 175

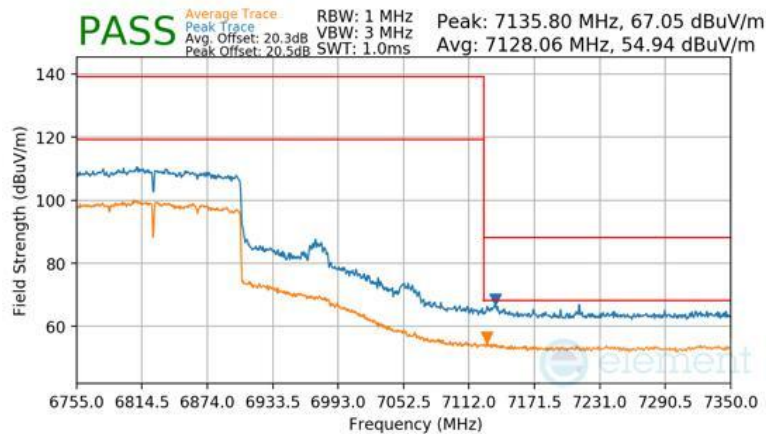

Plot 7-561 Antenna WF5T Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS11
 3 Meters
 6985 MHz
 207

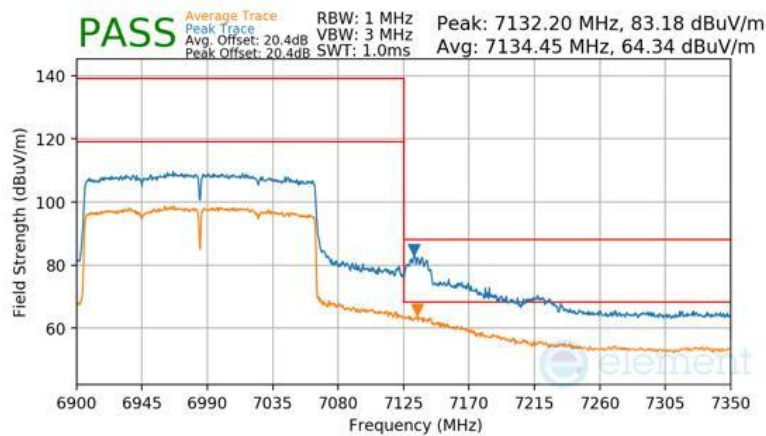


Plot 7-562 Antenna WF5T Radiated Lower Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 210 of 258


7.7.7 Antenna WF5B Radiated Band Edge Measurements (20 MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

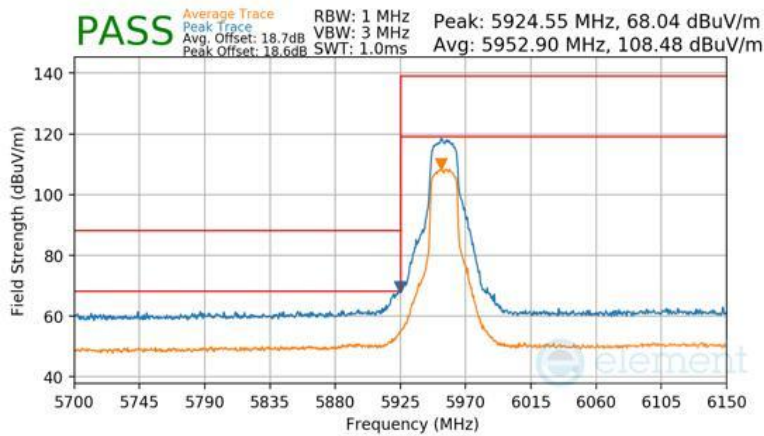

Plot 7-563 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

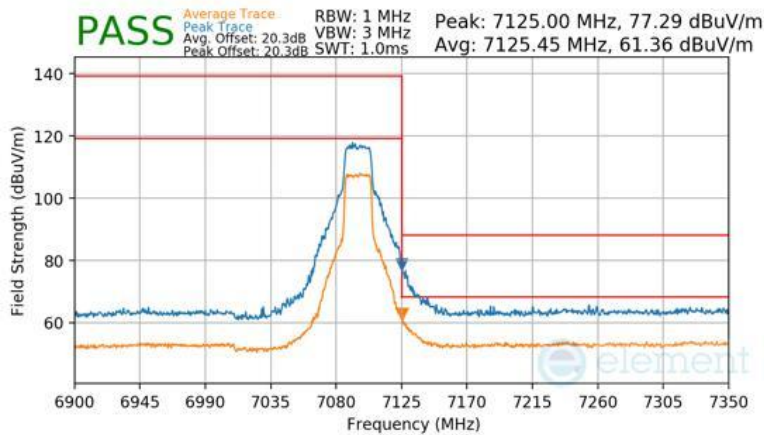


Plot 7-564 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 211 of 258

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

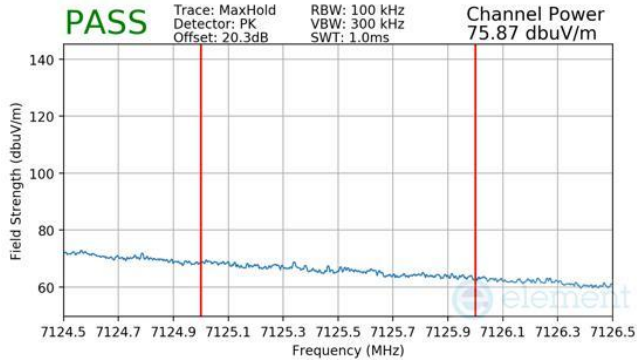


Plot 7-565 Antenna WF5B Radiated Integrated Band Edge (Peak – UNII Band 8)

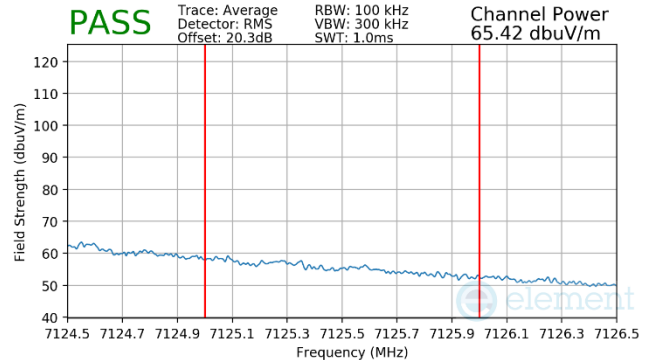

Plot 7-566 Antenna WF5B Radiated Integrated Band Edge (Average – UNII Band 8)


Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955 MHz
Channel	1

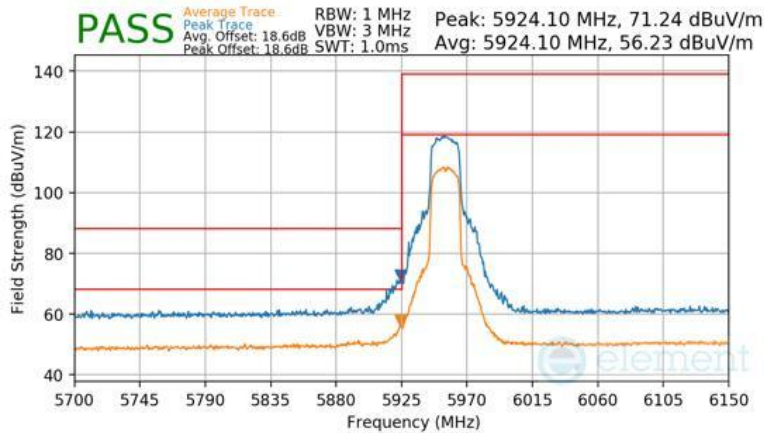

Plot 7-567 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 212 of 258

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095 MHz
Channel	229

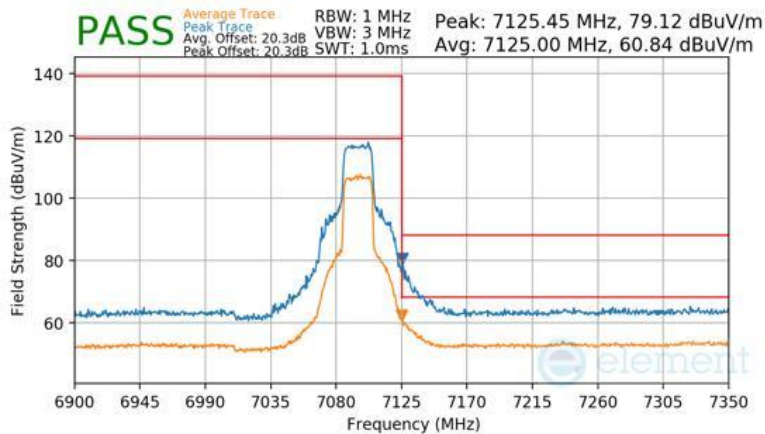


Plot 7-568 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115 MHz
Channel	233

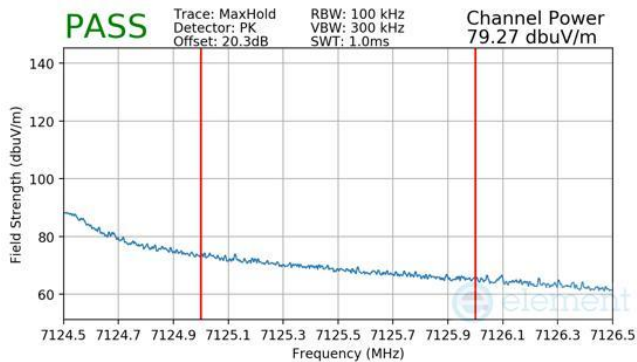

Plot 7-569 Antenna WF5B Radiated Integrated Band Edge (Peak – UNII Band 8)

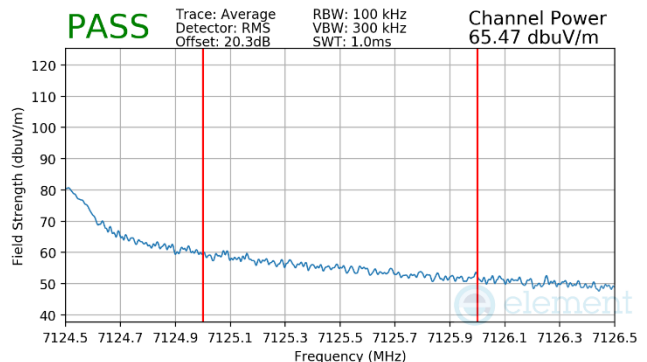


Plot 7-570 Antenna WF5B Radiated Integrated Band Edge (Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 213 of 258


7.7.8 Antenna WF5B Radiated Band Edge Measurements (40 MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965 MHz
Channel	3

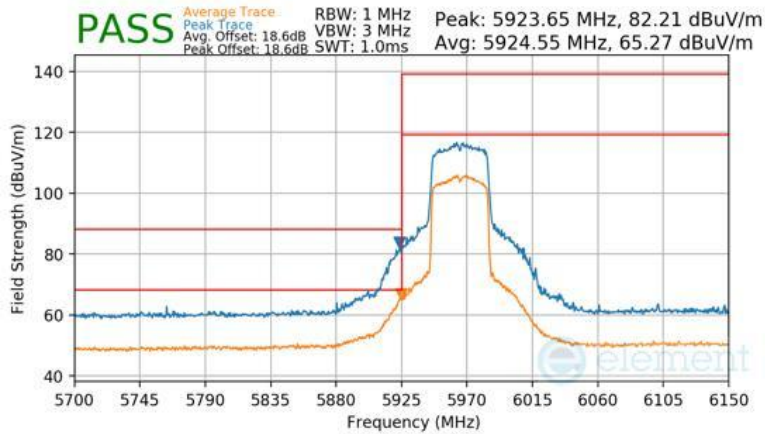

Plot 7-571 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6005 MHz
Channel	11

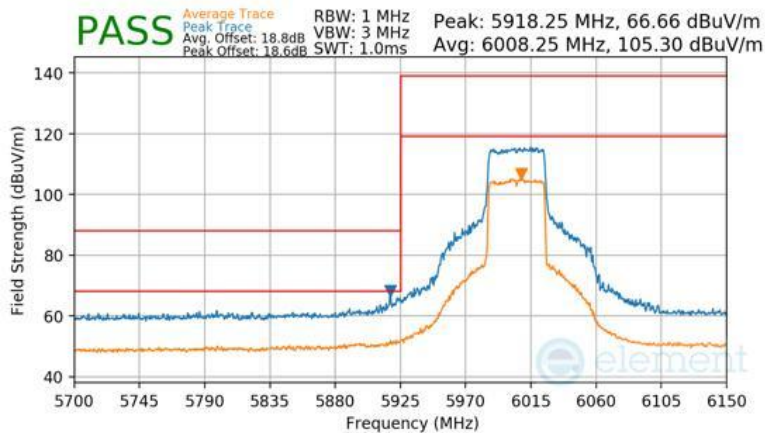


Plot 7-572 Antenna WF5B Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 214 of 258

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS11
 3 Meters
 7085 MHz
 227

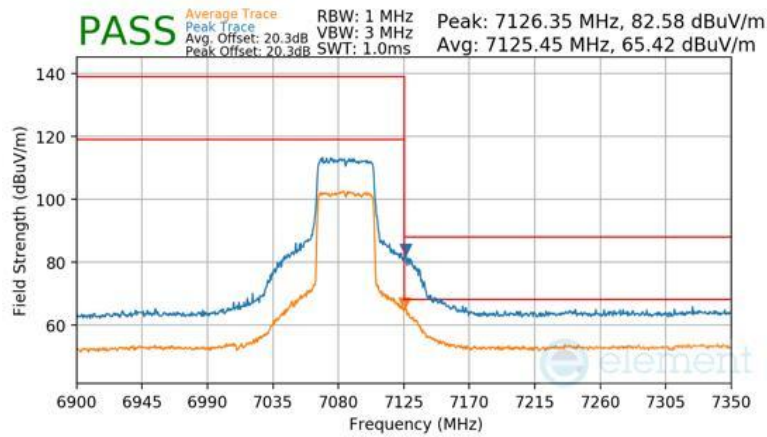

Plot 7-573 Antenna WF5B Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 4/23/2026 - 6/25/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-18-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 215 of 258