



Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

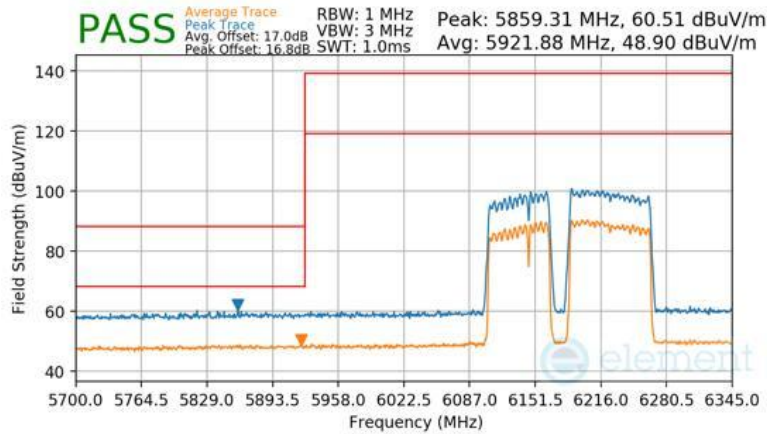

Plot 7-1131 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

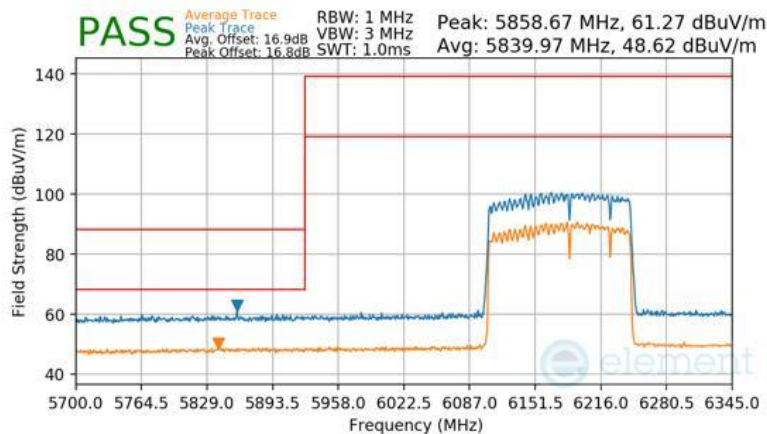

Plot 7-1132 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 445 of 468

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

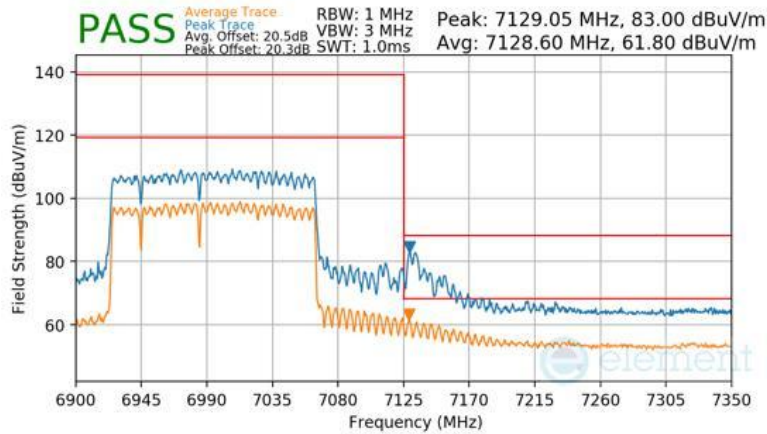

Plot 7-1133 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

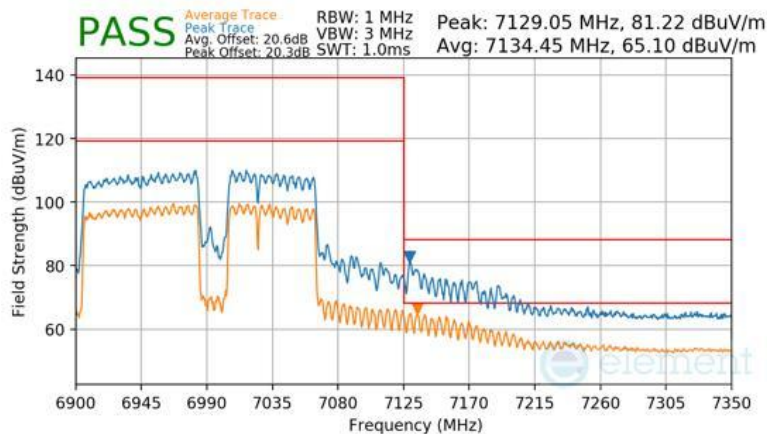

Plot 7-1134 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

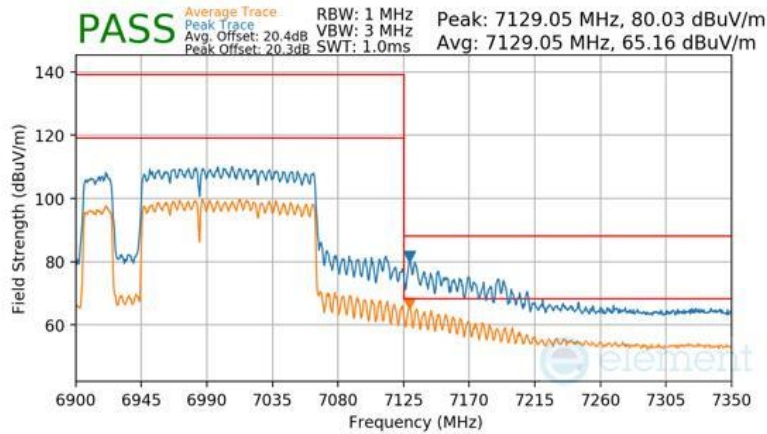

Plot 7-1135 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

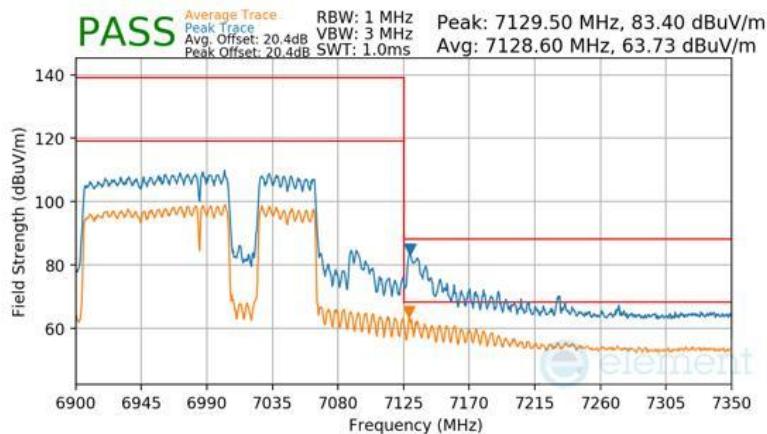

Plot 7-1136 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

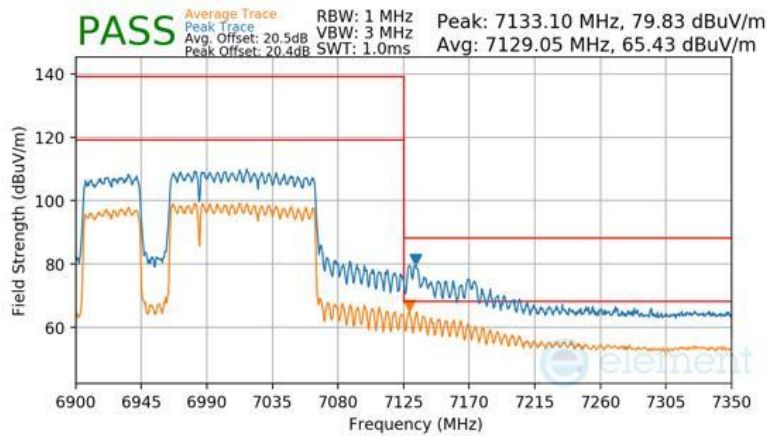

Plot 7-1137 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

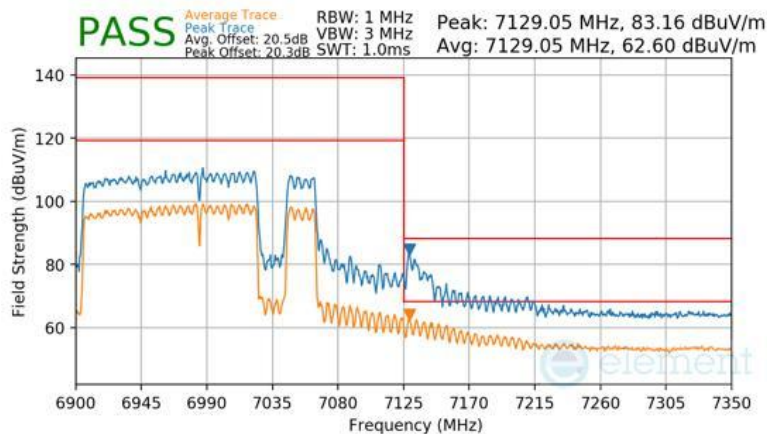

Plot 7-1138 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

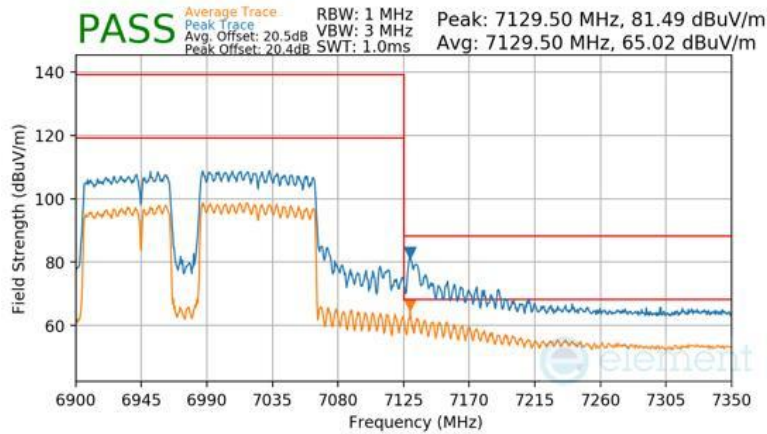

Plot 7-1139 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

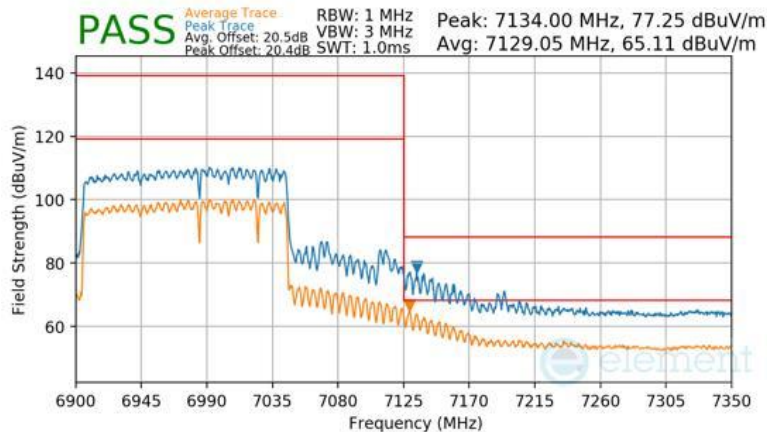


Plot 7-1140 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 449 of 468


RU996x2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6185 MHz
Channel: 47

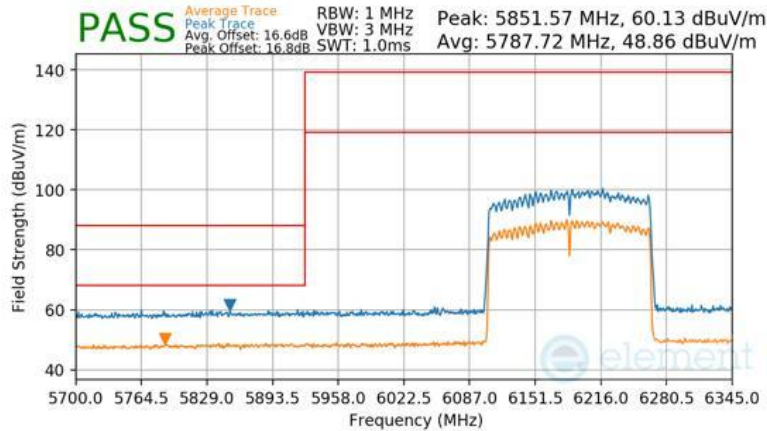

Plot 7-1141 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996X2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6985 MHz
Channel: 207

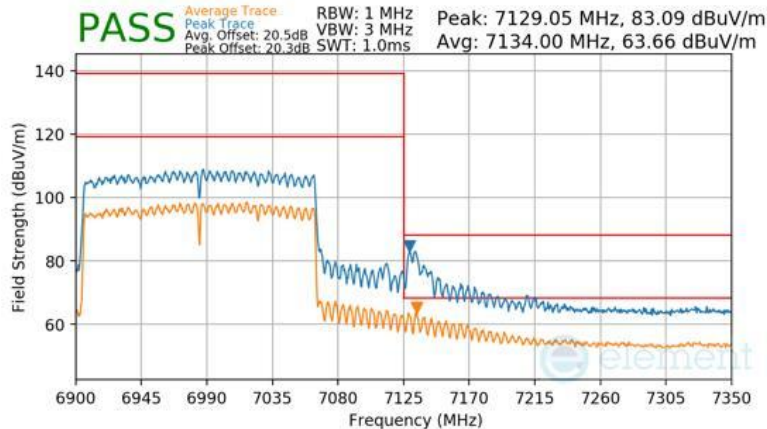

Plot 7-1142 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996X2

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

7.8 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-151 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-151. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 451 of 468

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

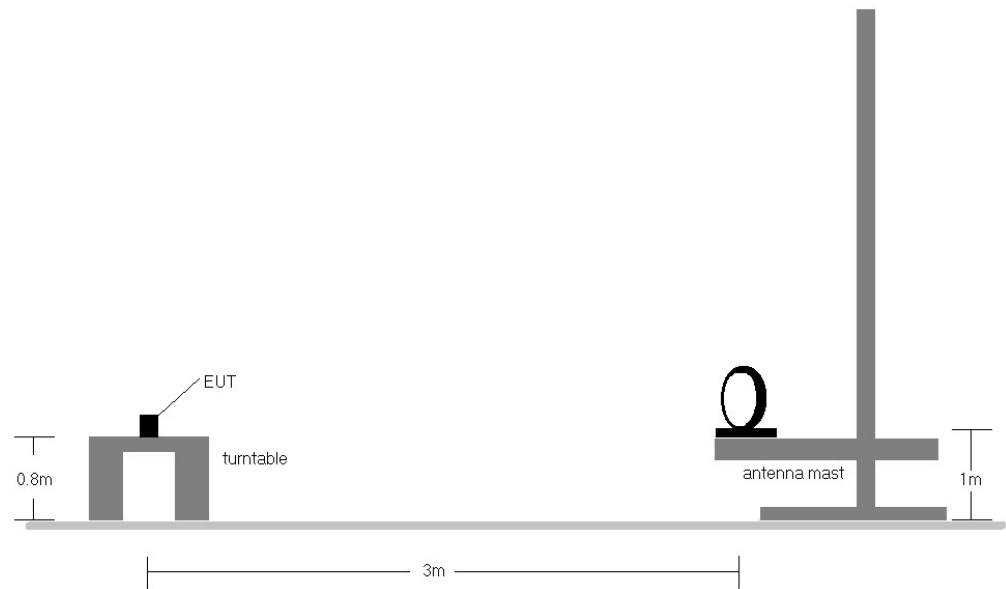


Figure 7-6. Radiated Test Setup < 30 MHz

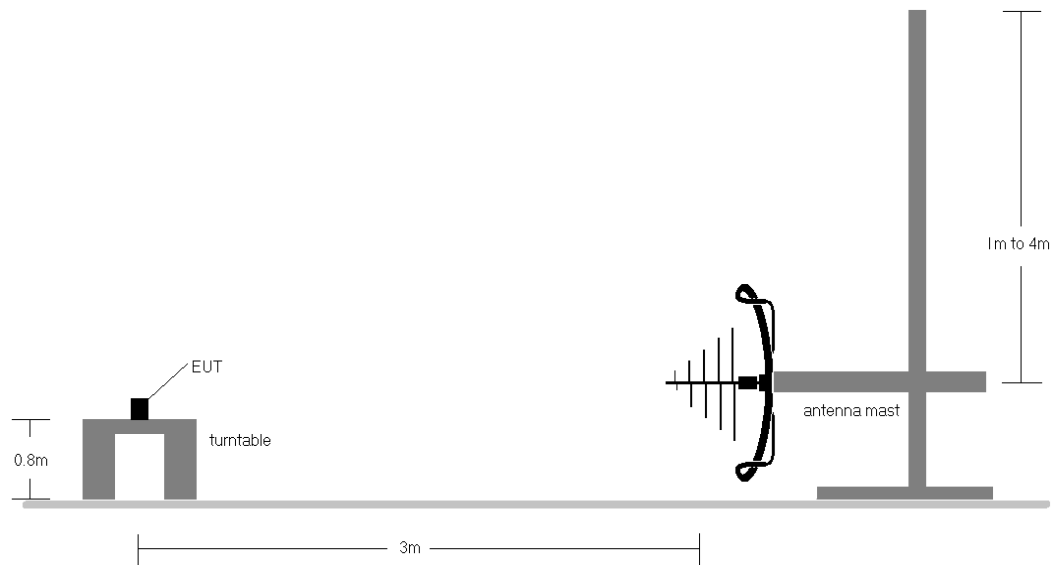


Figure 7-7. Radiated Test Setup < 1 GHz

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 452 of 468

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-151.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 453 of 468

7.8.1 SDM Primary Radiated Spurious Emissions Measurements (Below 1 GHz)

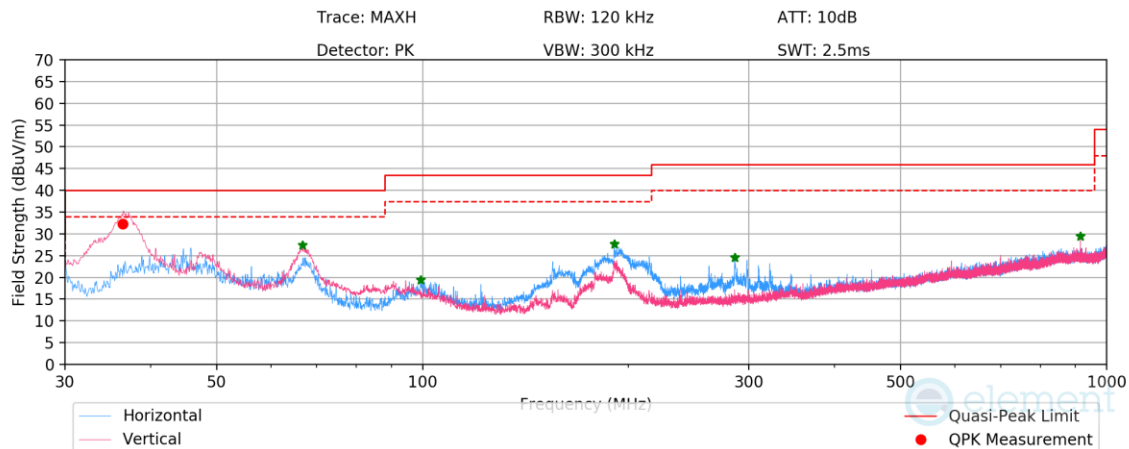


Plot 7-1143. Radiated Spurious Emissions below 1 GHz SDM Primary (802.11be – Ch.61 – RU52) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.44	Quasi-Peak	V	100	123	-54.66	-20.09	32.25	40.00	-7.75
66.66	Max-Peak	V	200	147	-58.99	-20.60	27.41	40.00	-12.59
99.30	Max-Peak	H	300	67	-68.13	-19.42	19.45	43.50	-24.05
190.69	Max-Peak	H	100	155	-60.36	-18.95	27.69	43.50	-15.81
285.79	Max-Peak	H	100	257	-66.34	-16.06	24.60	46.00	-21.40
915.82	Max-Peak	V	200	28	-73.48	-4.08	29.45	46.00	-16.55

Table 7-152. Radiated Spurious Emissions below 1 GHz SDM Primary (802.11be – Ch.61 – RU52) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 454 of 468

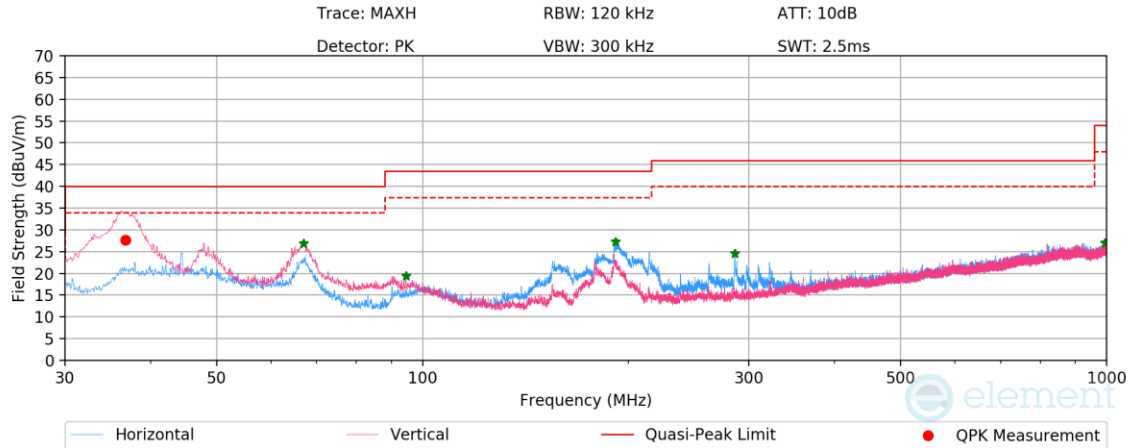


Plot 7-1144. Radiated Spurious Emissions below 1 GHz SDM Primary (802.11be – Ch.61 – RU242) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
34.97	Quasi-Peak	V	126	52	-58.69	-20.65	27.66	40.00	-12.34
66.96	Max-Peak	V	100	189	-59.45	-20.69	26.86	40.00	-13.14
94.50	Max-Peak	V	100	234	-67.40	-20.21	19.39	43.50	-24.11
191.23	Max-Peak	H	100	189	-60.88	-18.87	27.25	43.50	-16.25
286.09	Max-Peak	H	100	248	-66.35	-16.04	24.61	46.00	-21.39
994.36	Max-Peak	V	300	321	-76.64	-3.36	26.99	54.00	-27.01

Table 7-153. Radiated Spurious Emissions below 1 GHz SDM Primary (802.11be – Ch.61 – RU242) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 455 of 468

7.8.2 SDM Diversity Radiated Spurious Emissions Measurements (Below 1 GHz)

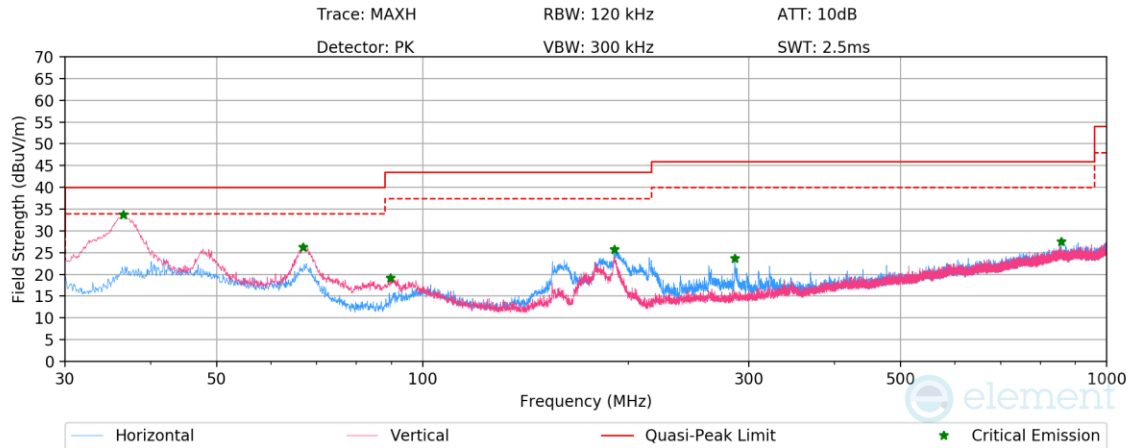


Plot 7-1145. Radiated Spurious Emissions below 1 GHz SDM Diversity (802.11be – Ch.61 – RU52) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.48	Max Peak	V	100	358	-53.17	-20.07	33.75	40.00	-6.25
66.84	Max Peak	V	100	159	-60.14	-20.66	26.20	40.00	-13.80
89.70	Max Peak	V	100	189	-66.46	-21.37	19.17	43.50	-24.33
190.57	Max Peak	H	100	46	-62.26	-18.97	25.77	43.50	-17.73
285.97	Max Peak	H	100	253	-67.25	-16.05	23.70	46.00	-22.30
858.57	Max Peak	H	100	211	-75.21	-4.32	27.47	46.00	-18.53

Table 7-154. Radiated Spurious Emissions below 1 GHz SDM Diversity (802.11be – Ch.61 – RU52) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 456 of 468

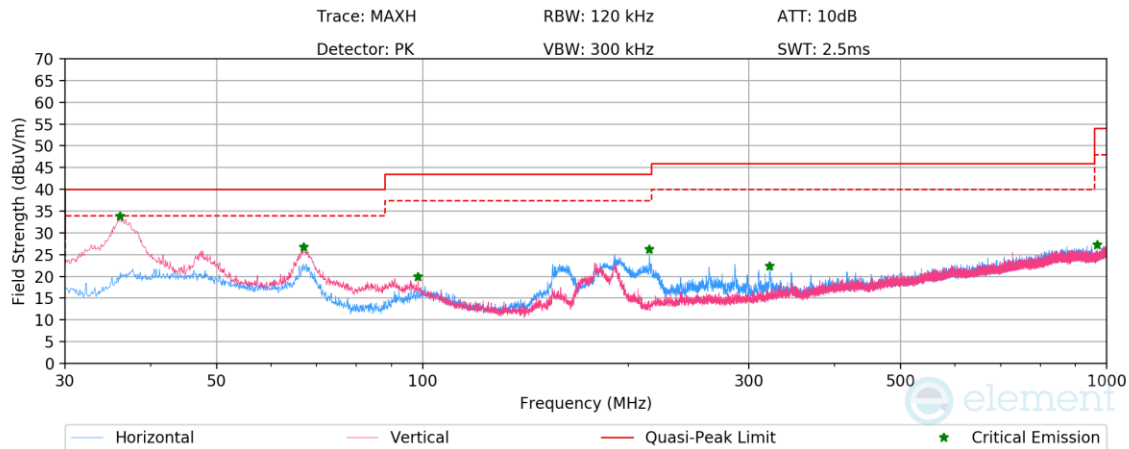

Plot 7-1146. Radiated Spurious Emissions below 1 GHz SDM Diversity (802.11be – Ch.61 – RU242) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.12	Max-Peak	V	100	1	-52.93	-20.18	33.90	40.00	-6.10
67.02	Max-Peak	V	200	157	-59.56	-20.71	26.72	40.00	-13.28
98.46	Max-Peak	V	100	40	-67.63	-19.47	19.91	43.50	-23.59
214.51	Max-Peak	H	100	231	-62.25	-18.51	26.25	43.50	-17.25
321.67	Max-Peak	H	100	53	-69.65	-15.00	22.35	46.00	-23.65
969.22	Max-Peak	H	100	259	-75.59	-4.16	27.25	54.00	-26.75

Table 7-155. Radiated Spurious Emissions below 1 GHz SDM Diversity (802.11be – Ch.61 – RU242) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 457 of 468

7.9 AC Line-Conducted Emissions

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-156. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 458 of 468

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

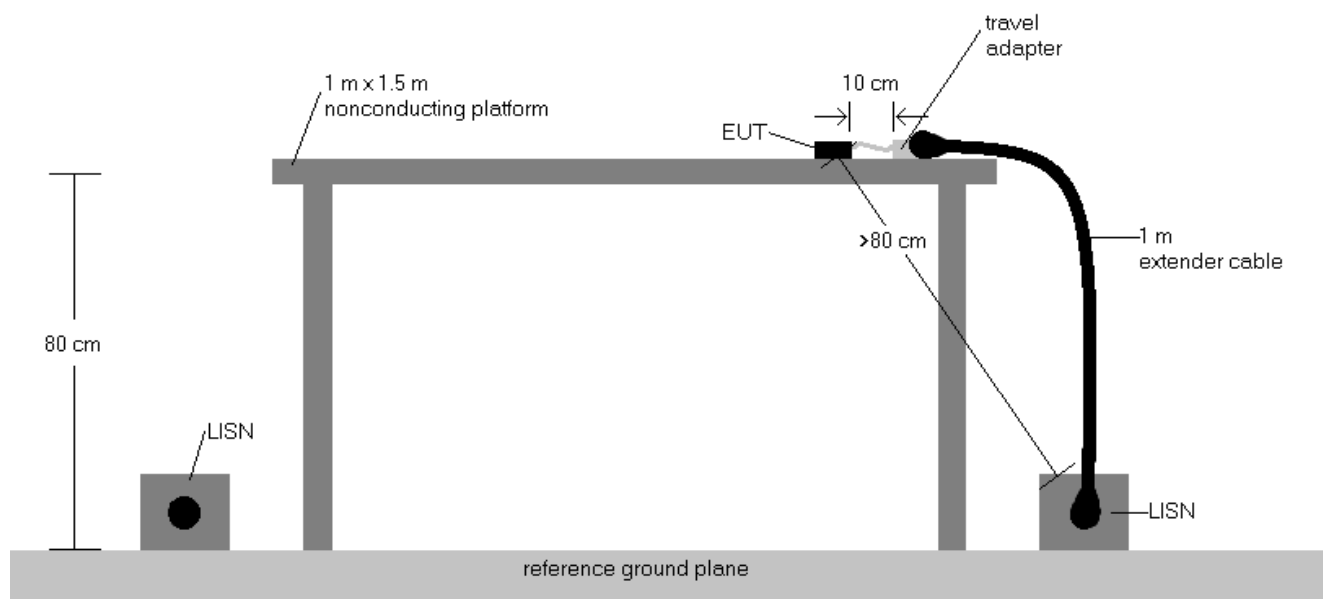



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150 kHz to 30 MHz are specified in 15.207 and RSS-Gen (7.4.2).
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Correction Factor (dB)
- Margin (dB) = QP/AV Level (dBμV) - QP/AV Limit (dBμV)
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 459 of 468

7.9.1 SDM Primary

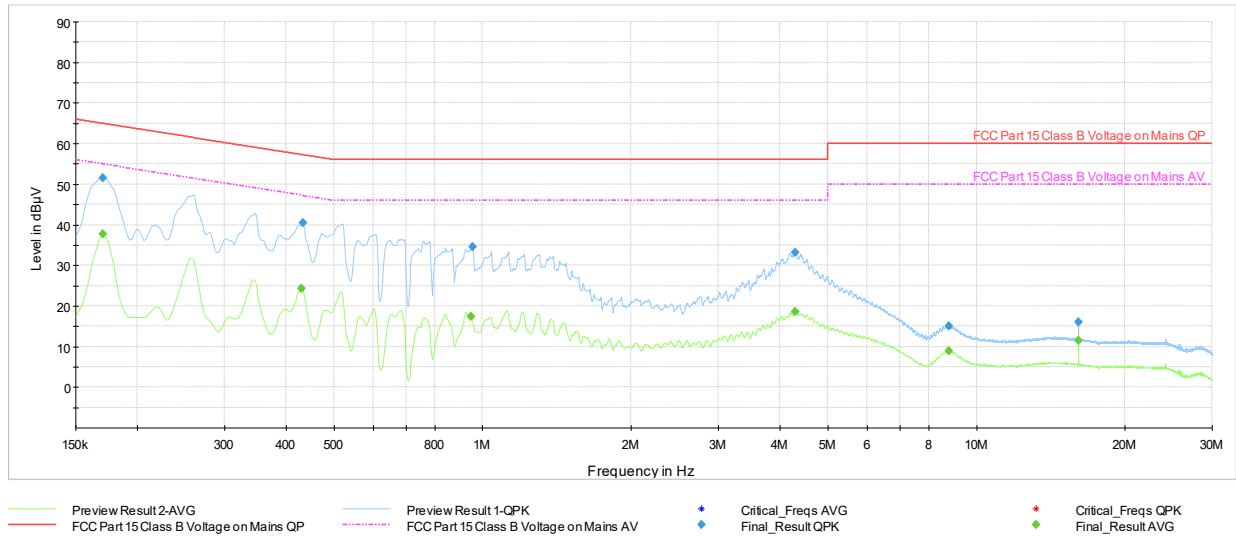


Plot 7-1147. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU52 – Ch.61 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.64	54.95	-17.31	L1	GND
0.17	FINAL	51.60	---	64.95	-13.35	L1	GND
0.43	FINAL	---	24.38	47.27	-22.89	L1	GND
0.43	FINAL	40.43	---	57.19	-16.76	L1	GND
0.95	FINAL	---	17.33	46.00	-28.67	L1	GND
0.95	FINAL	34.61	---	56.00	-21.39	L1	GND
4.29	FINAL	33.23	---	56.00	-22.77	L1	GND
4.30	FINAL	---	18.62	46.00	-27.38	L1	GND
8.78	FINAL	15.10	---	60.00	-44.90	L1	GND
8.79	FINAL	---	8.86	50.00	-41.14	L1	GND
16.09	FINAL	16.08	---	60.00	-43.92	L1	GND
16.09	FINAL	---	11.54	50.00	-38.46	L1	GND

Table 7-157. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU52 – Ch.61 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 460 of 468

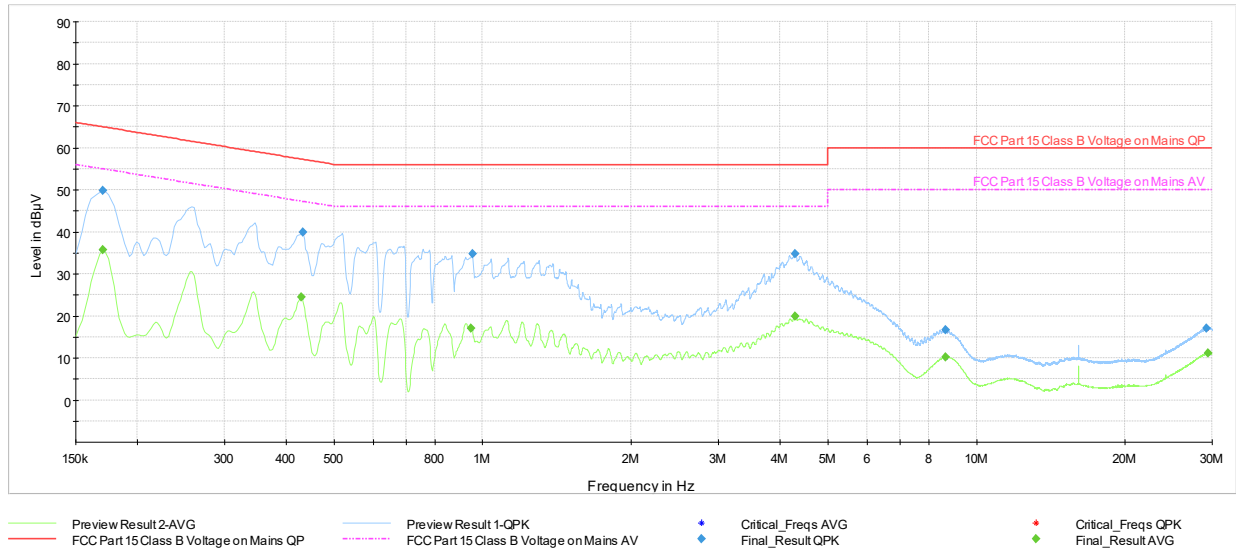


Plot 7-1148. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU52 – Ch.61 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	35.68	54.95	-19.27	N	GND
0.17	FINAL	49.72	---	64.95	-15.23	N	GND
0.43	FINAL	---	24.47	47.27	-22.80	N	GND
0.43	FINAL	39.89	---	57.19	-17.30	N	GND
0.95	FINAL	---	17.05	46.00	-28.95	N	GND
0.95	FINAL	34.85	---	56.00	-21.15	N	GND
4.29	FINAL	---	19.89	46.00	-26.11	N	GND
4.30	FINAL	34.86	---	56.00	-21.14	N	GND
8.65	FINAL	---	10.26	50.00	-39.74	N	GND
8.66	FINAL	16.66	---	60.00	-43.34	N	GND
29.19	FINAL	17.03	---	60.00	-42.97	N	GND
29.49	FINAL	---	11.12	50.00	-38.88	N	GND

Table 7-158. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU52 – Ch.61 (N) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 461 of 468

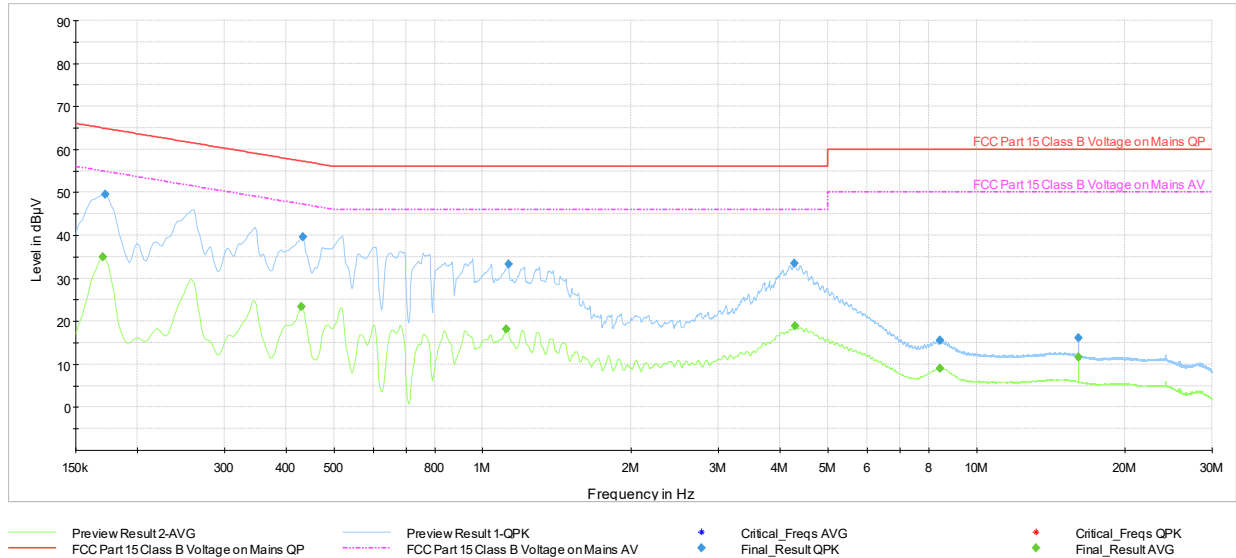


Plot 7-1149. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU242 – Ch.61 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	35.03	54.95	-19.92	L1	GND
0.17	FINAL	49.43	---	64.84	-15.41	L1	GND
0.43	FINAL	---	23.36	47.27	-23.91	L1	GND
0.43	FINAL	39.61	---	57.19	-17.58	L1	GND
1.12	FINAL	---	18.26	46.00	-27.74	L1	GND
1.13	FINAL	33.24	---	56.00	-22.76	L1	GND
4.28	FINAL	33.39	---	56.00	-22.61	L1	GND
4.30	FINAL	---	18.96	46.00	-27.04	L1	GND
8.42	FINAL	---	9.05	50.00	-40.95	L1	GND
8.43	FINAL	15.63	---	60.00	-44.37	L1	GND
16.08	FINAL	---	11.65	50.00	-38.35	L1	GND
16.08	FINAL	16.12	---	60.00	-43.88	L1	GND

Table 7-159. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU242 – Ch.61 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 462 of 468

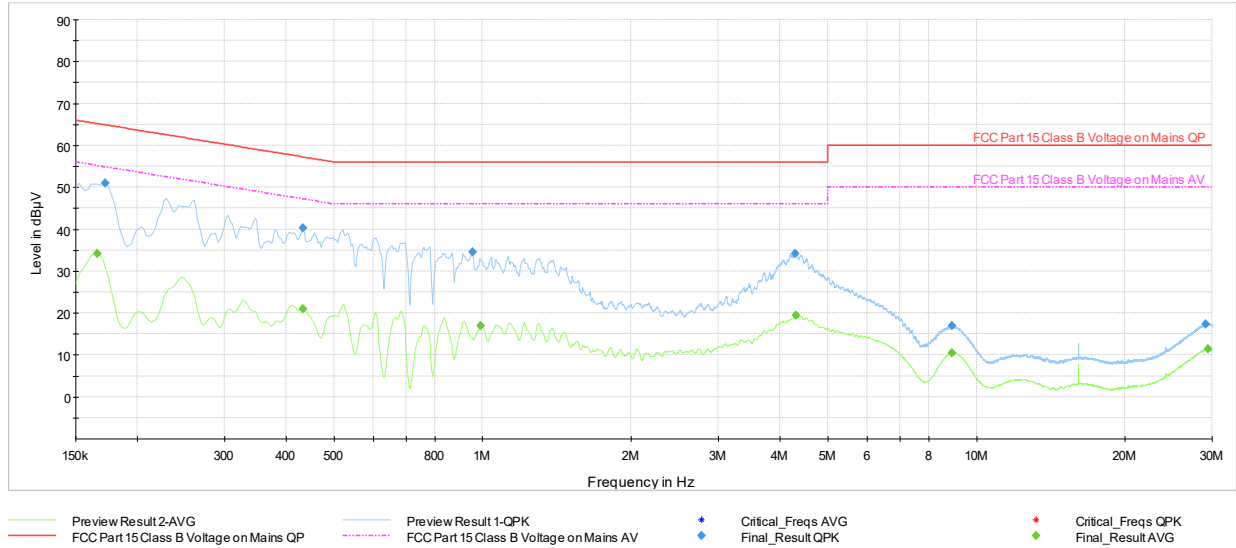


Plot 7-1150. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU242 – Ch.61 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	34.23	55.17	-20.94	N	GND
0.17	FINAL	50.94	---	64.84	-13.90	N	GND
0.43	FINAL	---	21.01	47.19	-26.18	N	GND
0.43	FINAL	40.36	---	57.19	-16.83	N	GND
0.95	FINAL	34.54	---	56.00	-21.46	N	GND
0.99	FINAL	---	16.94	46.00	-29.06	N	GND
4.30	FINAL	34.20	---	56.00	-21.80	N	GND
4.31	FINAL	---	19.38	46.00	-26.62	N	GND
8.93	FINAL	16.88	---	60.00	-43.12	N	GND
8.93	FINAL	---	10.51	50.00	-39.49	N	GND
29.09	FINAL	17.31	---	60.00	-42.69	N	GND
29.41	FINAL	---	11.39	50.00	-38.61	N	GND

Table 7-160. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU242 – Ch.61 (N) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 463 of 468

7.9.2 SDM Diversity

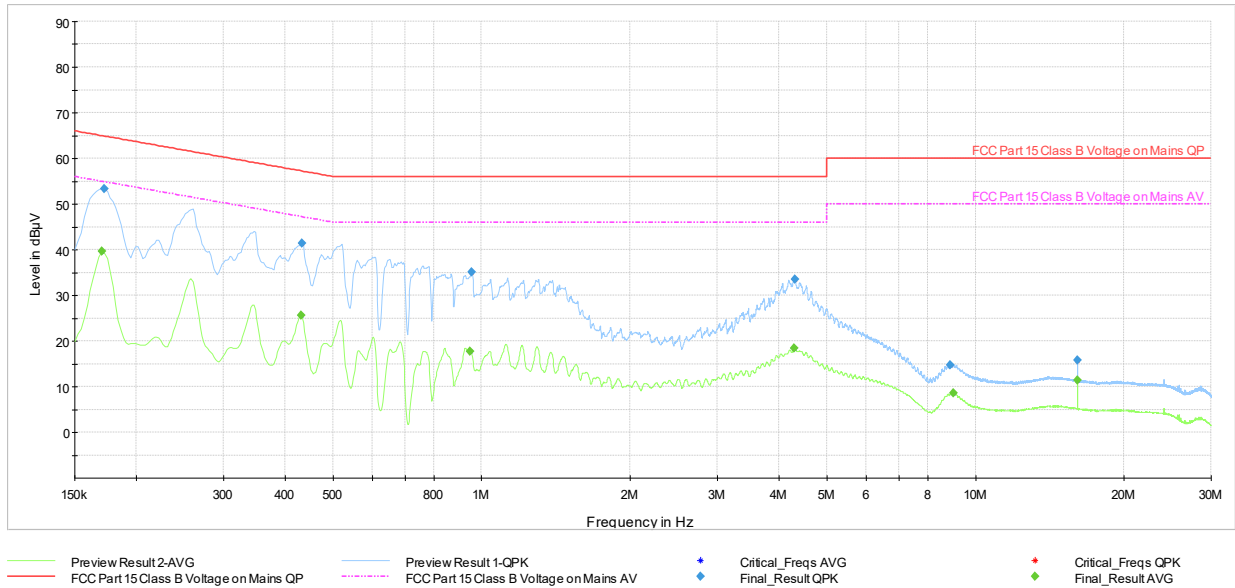


Plot 7-1151. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU52 – Ch.61 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	39.58	54.95	-15.37	L1	GND
0.17	FINAL	53.42	---	64.84	-11.42	L1	GND
0.43	FINAL	---	25.61	47.23	-21.62	L1	GND
0.43	FINAL	41.44	---	57.19	-15.75	L1	GND
0.95	FINAL	---	17.78	46.00	-28.22	L1	GND
0.96	FINAL	35.15	---	56.00	-20.85	L1	GND
4.30	FINAL	---	18.38	46.00	-27.62	L1	GND
4.31	FINAL	33.46	---	56.00	-22.54	L1	GND
8.90	FINAL	14.76	---	60.00	-45.24	L1	GND
9.01	FINAL	---	8.55	50.00	-41.45	L1	GND
16.07	FINAL	---	11.37	50.00	-38.63	L1	GND
16.07	FINAL	15.80	---	60.00	-44.20	L1	GND

Table 7-161. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU52 – Ch.61 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 464 of 468

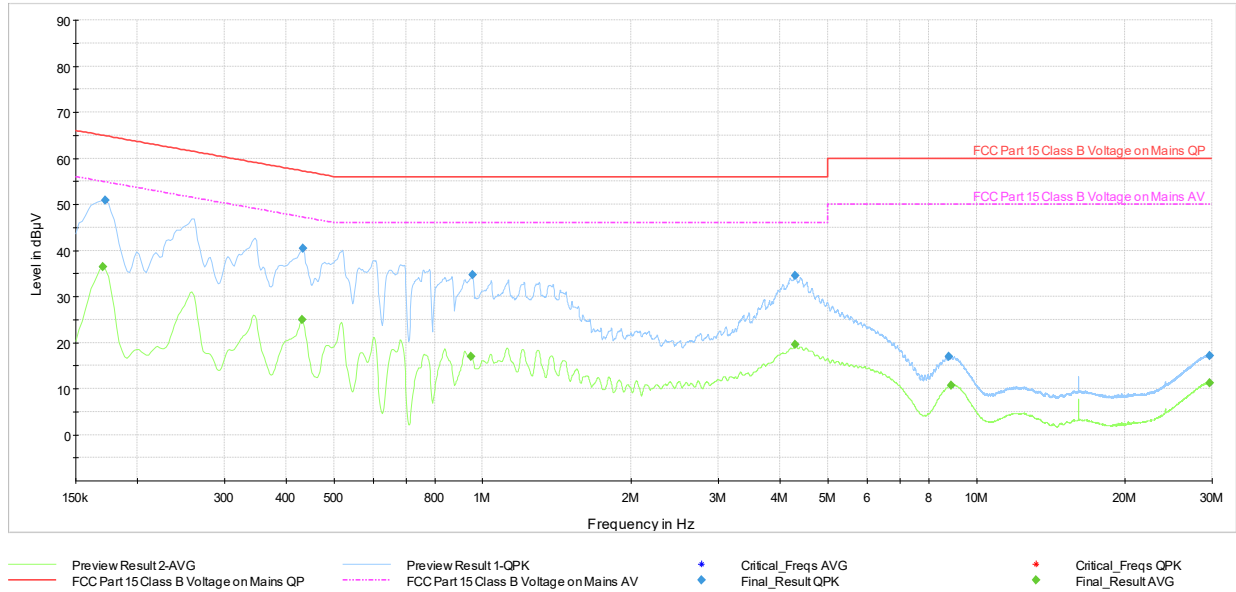


Plot 7-1152. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU52 – Ch.61 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	36.49	54.95	-18.46	N	GND
0.17	FINAL	50.95	---	64.84	-13.89	N	GND
0.43	FINAL	---	24.94	47.23	-22.29	N	GND
0.43	FINAL	40.39	---	57.19	-16.80	N	GND
0.95	FINAL	---	16.98	46.00	-29.02	N	GND
0.95	FINAL	34.70	---	56.00	-21.30	N	GND
4.29	FINAL	34.59	---	56.00	-21.41	N	GND
4.30	FINAL	---	19.55	46.00	-26.45	N	GND
8.78	FINAL	17.01	---	60.00	-42.99	N	GND
8.88	FINAL	---	10.67	50.00	-39.33	N	GND
29.69	FINAL	17.18	---	60.00	-42.82	N	GND
29.69	FINAL	---	11.25	50.00	-38.75	N	GND

Table 7-162. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU52 – Ch.61 (N) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 465 of 468

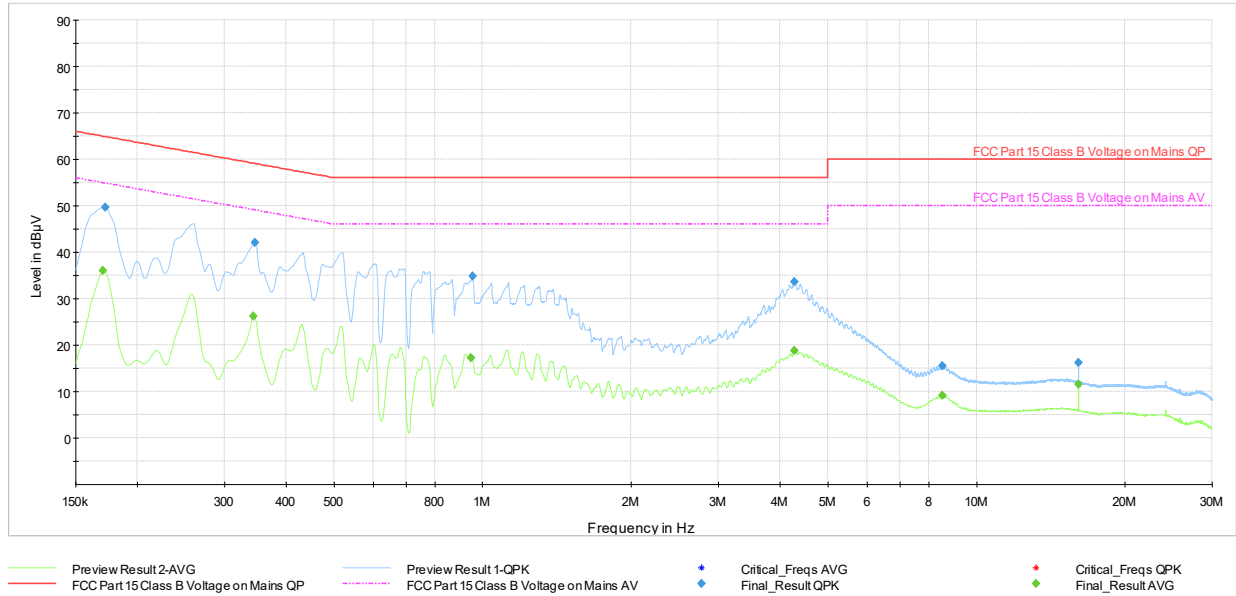


Plot 7-1153. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU242 – Ch.61 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	36.00	54.95	-18.95	L1	GND
0.17	FINAL	49.63	---	64.84	-15.21	L1	GND
0.34	FINAL	---	26.16	49.12	-22.96	L1	GND
0.35	FINAL	42.14	---	59.06	-16.92	L1	GND
0.95	FINAL	---	17.28	46.00	-28.72	L1	GND
0.95	FINAL	34.75	---	56.00	-21.25	L1	GND
4.29	FINAL	33.57	---	56.00	-22.43	L1	GND
4.29	FINAL	---	18.79	46.00	-27.21	L1	GND
8.53	FINAL	---	9.10	50.00	-40.90	L1	GND
8.54	FINAL	15.47	---	60.00	-44.53	L1	GND
16.08	FINAL	---	11.62	50.00	-38.38	L1	GND
16.08	FINAL	16.14	---	60.00	-43.86	L1	GND

Table 7-163. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU242 – Ch.61 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 466 of 468

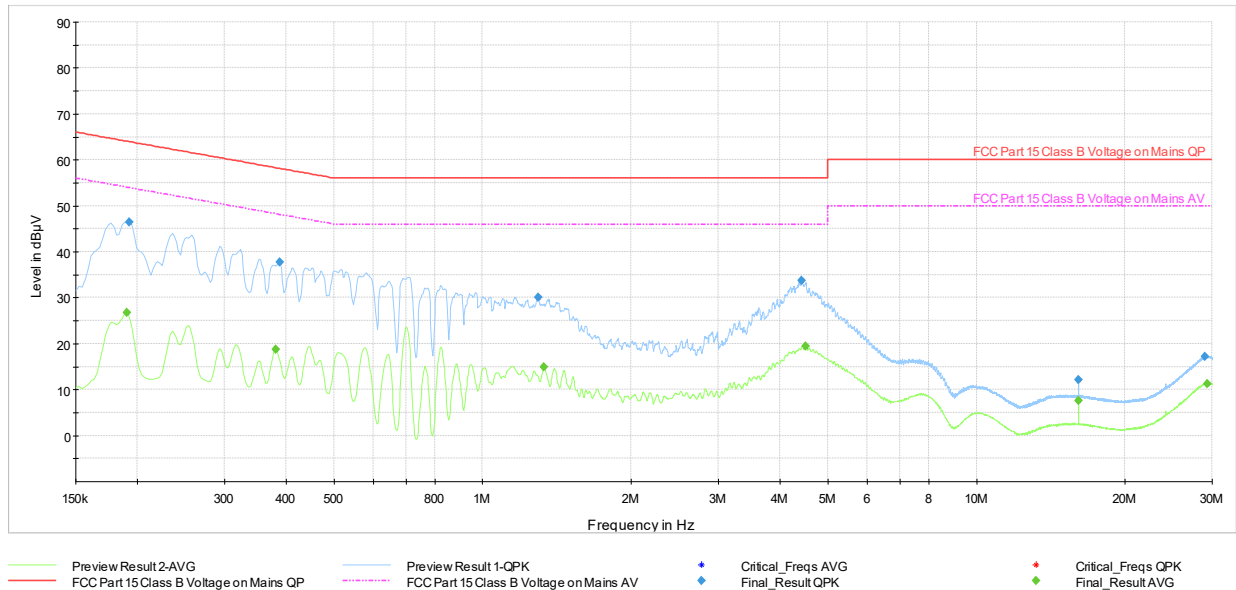

Plot 7-1154. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU242 – Ch.61 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	---	26.80	54.02	-27.22	N	GND
0.19	FINAL	46.41	---	63.92	-17.51	N	GND
0.38	FINAL	---	18.75	48.24	-29.49	N	GND
0.39	FINAL	37.73	---	58.10	-20.37	N	GND
1.30	FINAL	30.09	---	56.00	-25.91	N	GND
1.33	FINAL	---	14.96	46.00	-31.04	N	GND
4.43	FINAL	33.78	---	56.00	-22.22	N	GND
4.50	FINAL	---	19.50	46.00	-26.50	N	GND
16.08	FINAL	12.18	---	60.00	-47.82	N	GND
16.08	FINAL	---	7.53	50.00	-42.47	N	GND
29.00	FINAL	17.10	---	60.00	-42.90	N	GND
29.30	FINAL	---	11.33	50.00	-38.67	N	GND

Table 7-164. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU242 – Ch.61 (N) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 467 of 468

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3596** and **IC: 579C-A3596** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 468 of 468