


7.7.1 SDM Primary Radiated Spurious Emission

RU52

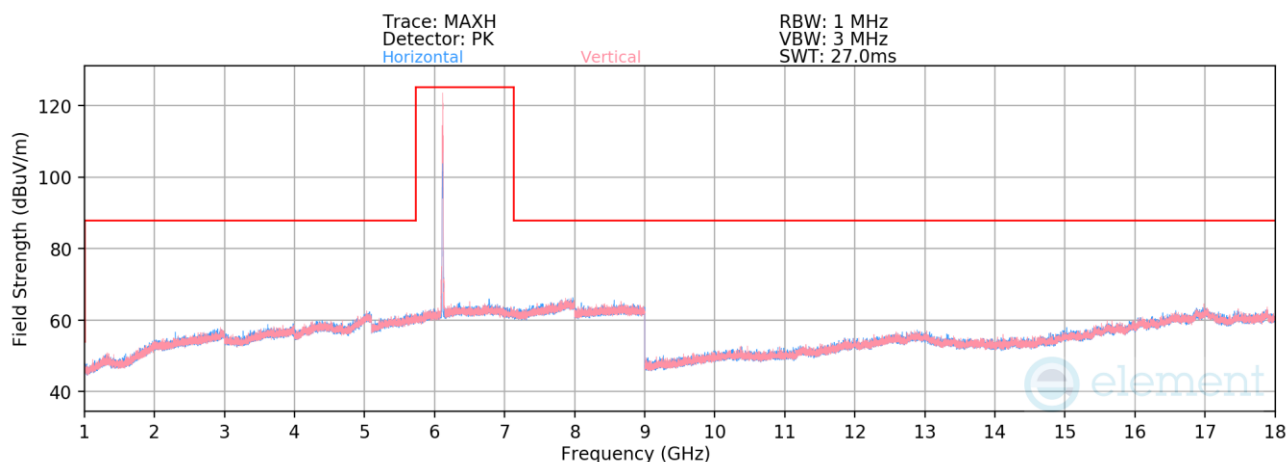

Plot 7-781. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 33 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6115 MHz
Channel:	33

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12230.00	Average	V	-	-	-84.76	21.38	43.61	53.98	-10.37
* 12230.00	Peak	V	-	-	-73.88	21.38	54.50	73.98	-19.48


Table 7-103. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 248 of 468

V 12.0 03/03/2026

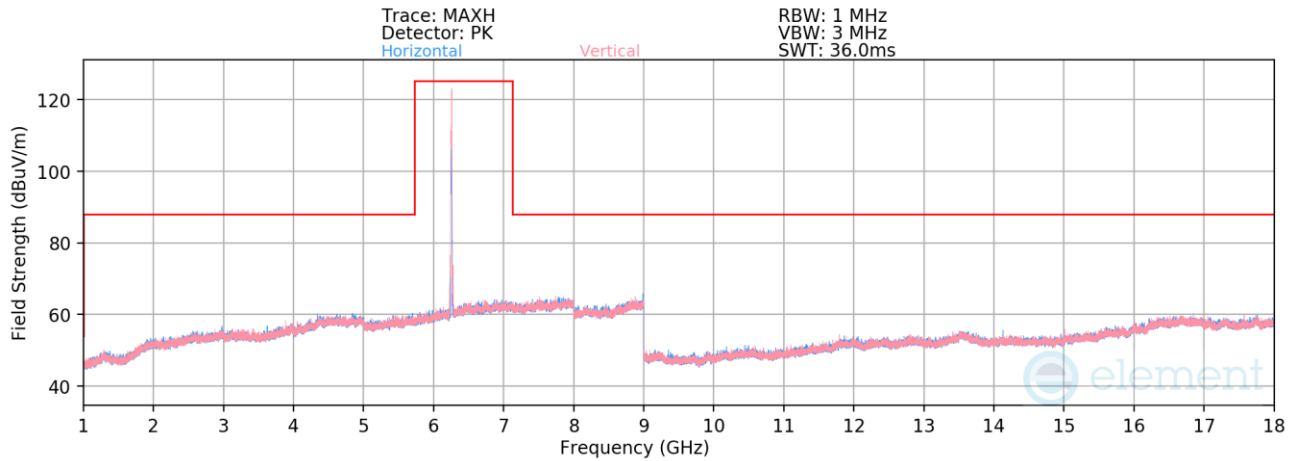

Plot 7-782. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 61 – RU52)

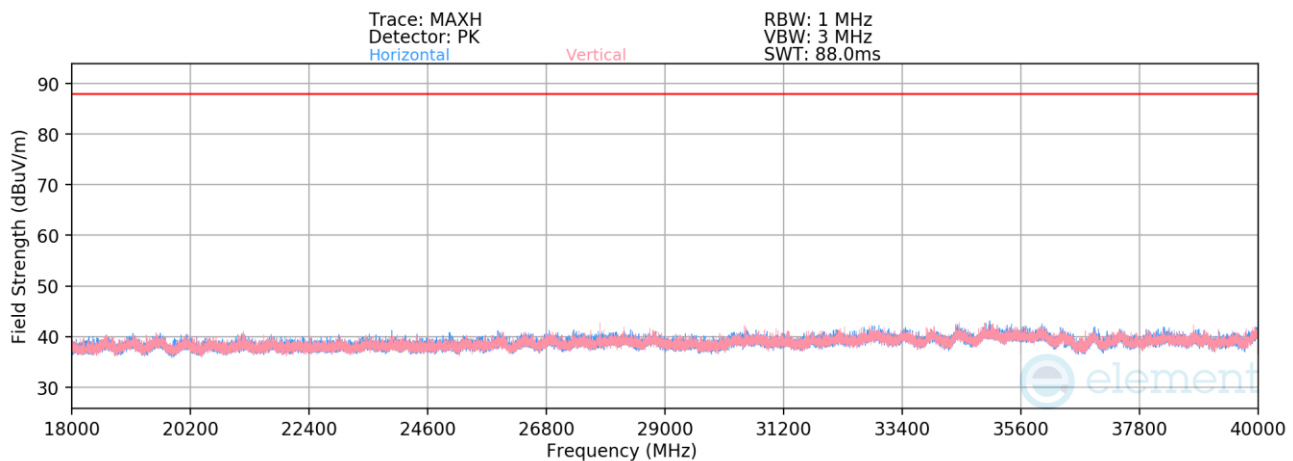


Plot 7-783. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 61 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6255 MHz
Channel:	61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12510.00	Average	H	-	-	-83.71	18.57	0.00	41.86	53.98	-12.12
* 12510.00	Peak	H	-	-	-71.37	18.57	0.00	54.20	73.98	-19.78
* 18765.00	Average	V	-	-	-63.67	-5.84	-9.54	27.94	53.98	-26.04
* 18765.00	Peak	V	-	-	-51.82	-5.84	-9.54	39.79	73.98	-34.19
25020.00	Average	H	-	-	-63.47	-4.34	-9.54	29.66	68.23	-38.57
25020.00	Peak	H	-	-	-52.38	-4.34	-9.54	40.74	88.23	-47.49
* 31275.00	Average	V	-	-	-62.07	-2.61	-9.54	32.78	53.98	-21.20
* 31275.00	Peak	V	-	-	-49.96	-2.61	-9.54	44.88	73.98	-29.10
37530.00	Average	V	-	-	-64.17	-4.28	-9.54	29.01	68.23	-39.22
37530.00	Peak	V	-	-	-53.74	-4.28	-9.54	39.44	88.23	-48.79

Table 7-104. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 249 of 468

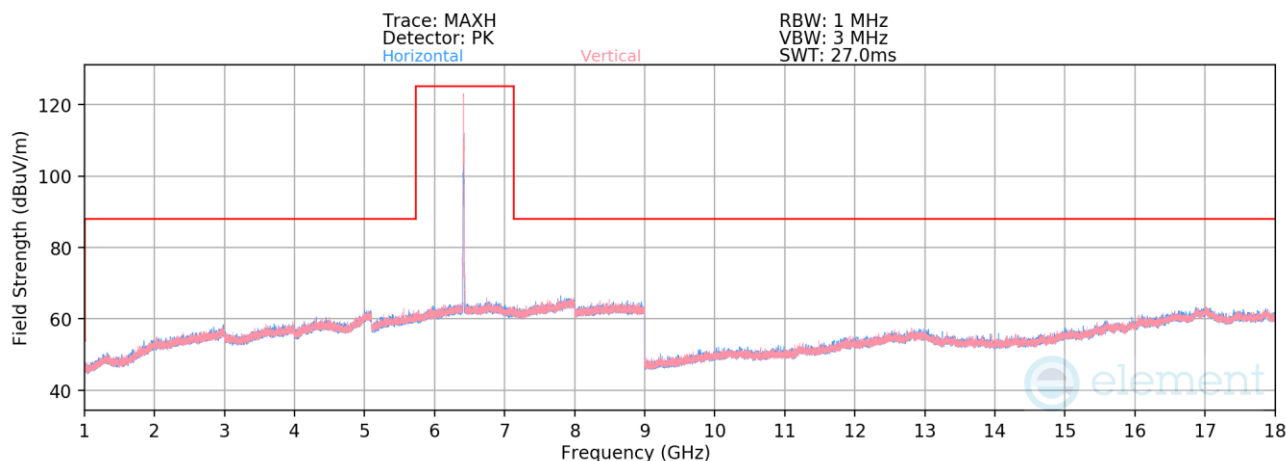

Plot 7-784. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 93 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6415 MHz
Channel:	93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12830.00	Average	V	-	-	-84.95	22.61	44.66	68.23	-23.57
12830.00	Peak	V	-	-	-74.05	22.61	55.56	88.23	-32.67

Table 7-105. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 250 of 468

V 12.0 03/03/2026

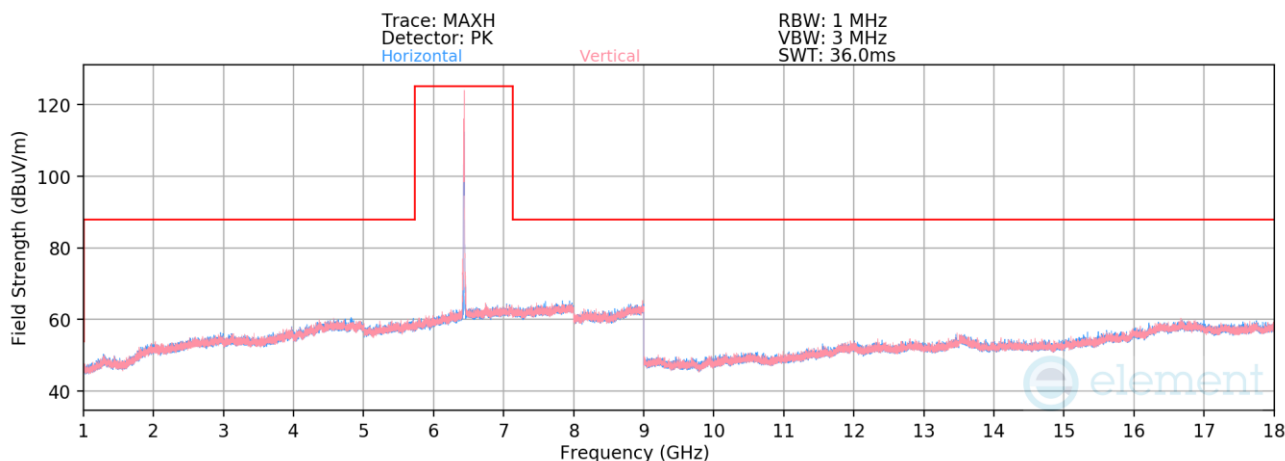

Plot 7-785. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 97 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435 MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-83.13	18.94	42.81	68.23	-25.42
12870.00	Peak	H	-	-	-71.77	18.94	54.17	88.23	-34.06


Table 7-106. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 251 of 468

V 12.0 03/03/2026

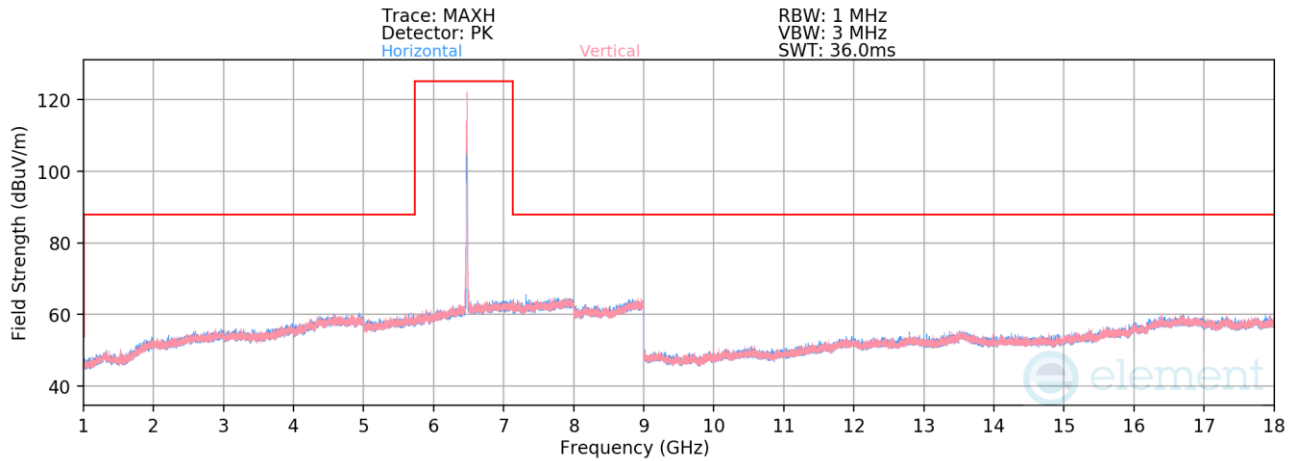

Plot 7-786. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 105 – RU52)

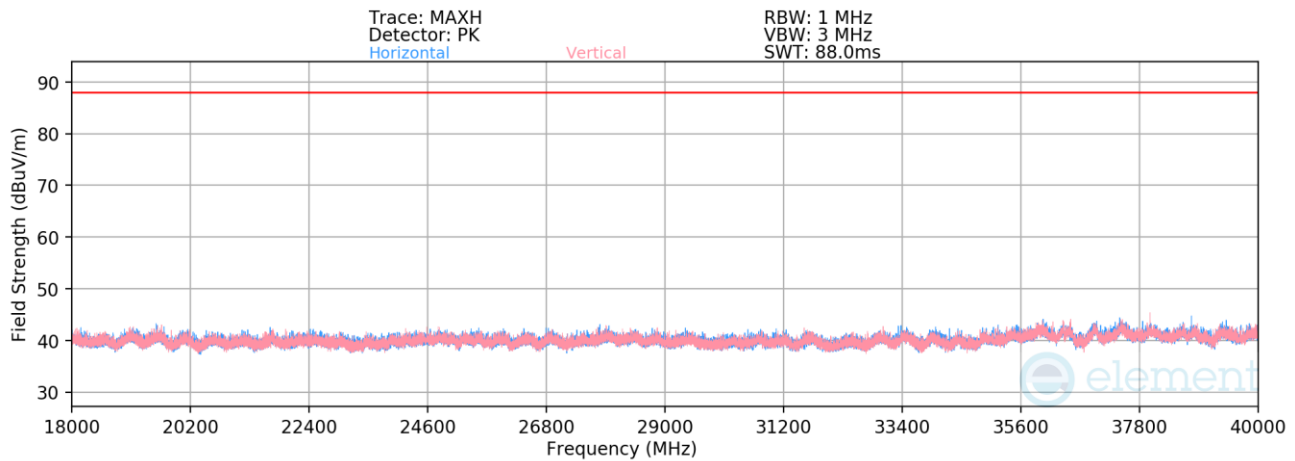


Plot 7-787. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 105 – RU52)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6475 MHz
Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-83.18	19.32	0.00	43.13	68.23	-25.10
12950.00	Peak	V	-	-	-72.28	19.32	0.00	54.03	88.23	-34.20
* 19425.00	Average	H	-	-	-60.44	-5.95	-9.54	31.07	53.98	-22.91
* 19425.00	Peak	H	-	-	-48.90	-5.95	-9.54	42.60	73.98	-31.38
25900.00	Average	V	-	-	-61.31	-4.39	-9.54	31.77	68.23	-36.46
25900.00	Peak	V	-	-	-50.38	-4.39	-9.54	42.69	88.23	-45.54
32375.00	Average	V	-	-	-63.18	-3.25	-9.54	31.03	68.23	-37.20
32375.00	Peak	V	-	-	-51.96	-3.25	-9.54	42.25	88.23	-45.98
* 38850.00	Average	V	-	-	-63.96	-2.32	-9.54	31.18	53.98	-22.80
* 38850.00	Peak	V	-	-	-52.80	-2.32	-9.54	42.34	73.98	-31.64

Table 7-107. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 252 of 468

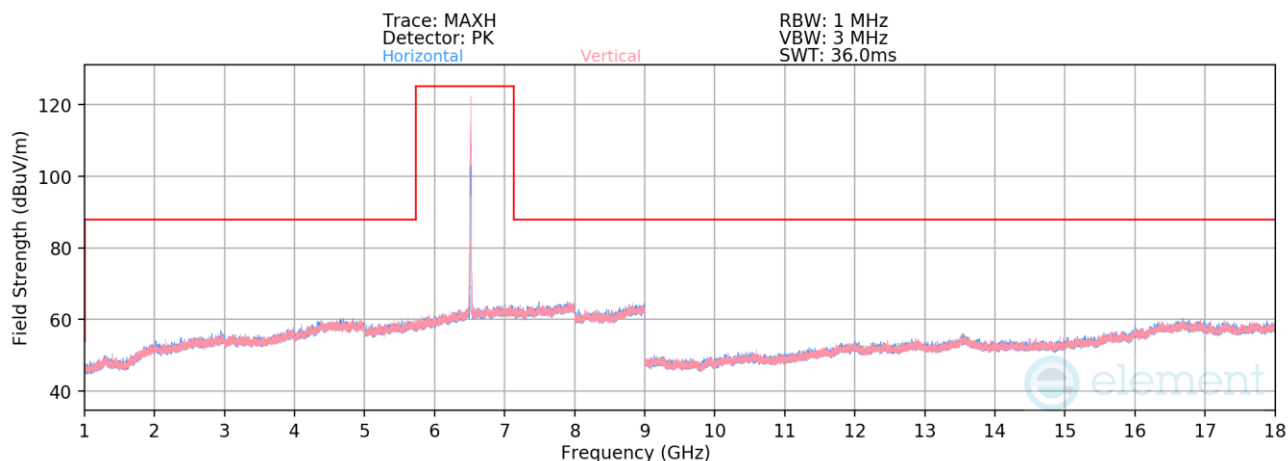

Plot 7-788. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 113 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6515 MHz
Channel:	113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	V	-	-	-83.60	19.29	42.69	68.23	-25.54
13030.00	Peak	V	-	-	-72.57	19.29	53.72	88.23	-34.51

Table 7-108. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 253 of 468

V 12.0 03/03/2026

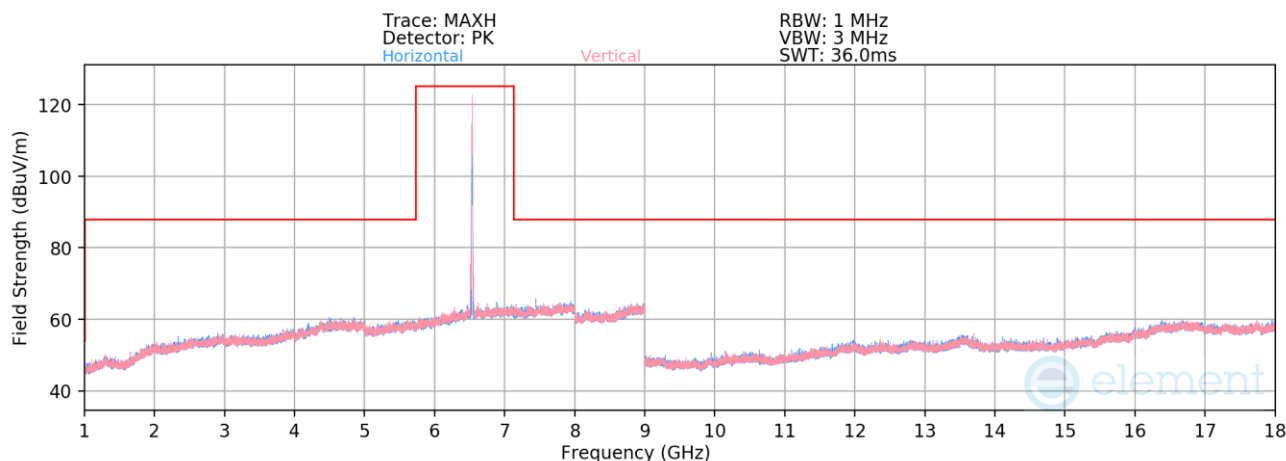

Plot 7-789. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 117 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6535 MHz
Channel:	117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.77	19.42	42.65	68.23	-25.58
13070.00	Peak	H	-	-	-72.56	19.42	53.86	88.23	-34.37


Table 7-109. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 254 of 468

V 12.0 03/03/2026

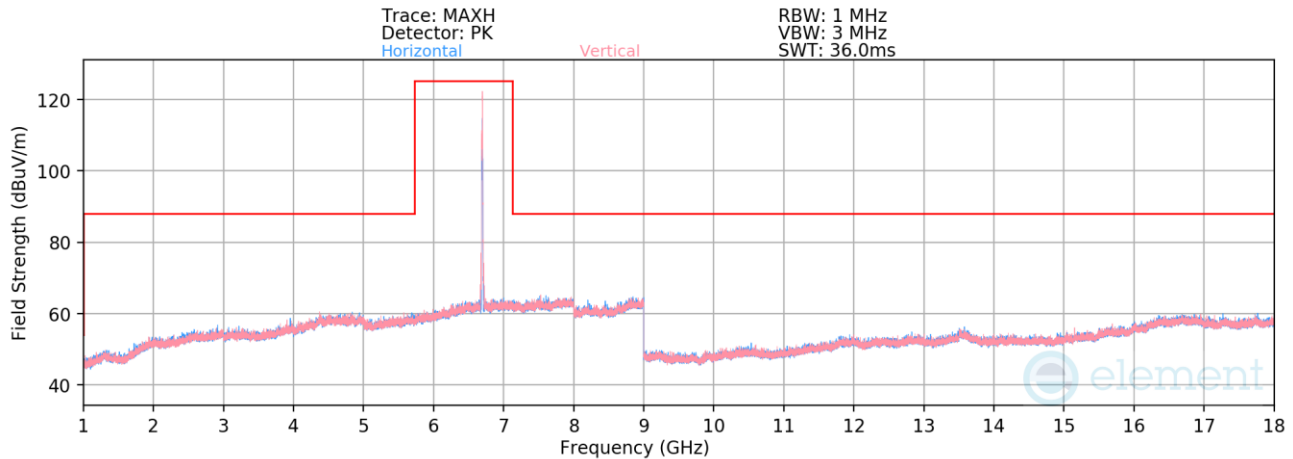

Plot 7-790. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 149 – RU52)

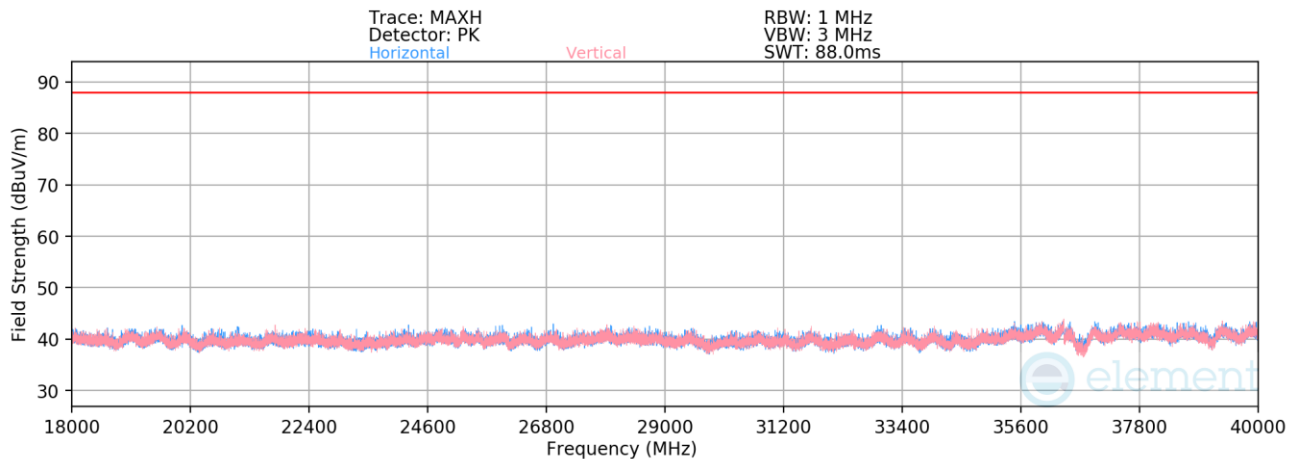


Plot 7-791. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 149 – RU52)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695 MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	H	-	-	-83.56	19.47	0.00	42.91	53.98	-11.07
* 13390.00	Peak	H	-	-	-72.23	19.47	0.00	54.24	73.98	-19.74
* 20085.00	Average	V	-	-	-59.82	-6.22	-9.54	31.42	53.98	-22.56
* 20085.00	Peak	V	-	-	-48.30	-6.22	-9.54	42.94	73.98	-31.04
26780.00	Average	H	-	-	-62.66	-3.89	-9.54	30.91	68.23	-37.32
26780.00	Peak	H	-	-	-51.36	-3.89	-9.54	42.21	88.23	-46.02
33475.00	Average	H	-	-	-61.52	-3.63	-9.54	32.31	68.23	-35.92
33475.00	Peak	H	-	-	-50.27	-3.63	-9.54	43.57	88.23	-44.66

Table 7-110. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 255 of 468

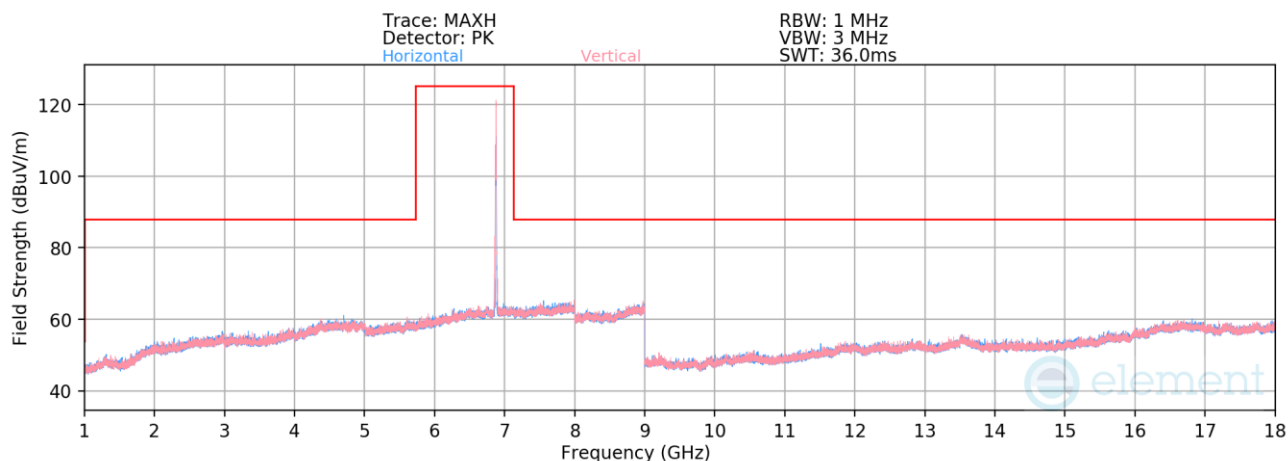


Plot 7-792. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 185 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6875 MHz
Channel:	185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.26	19.15	42.88	68.23	-25.35
13750.00	Peak	H	-	-	-71.77	19.15	54.38	88.23	-33.85

Table 7-111. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 256 of 468

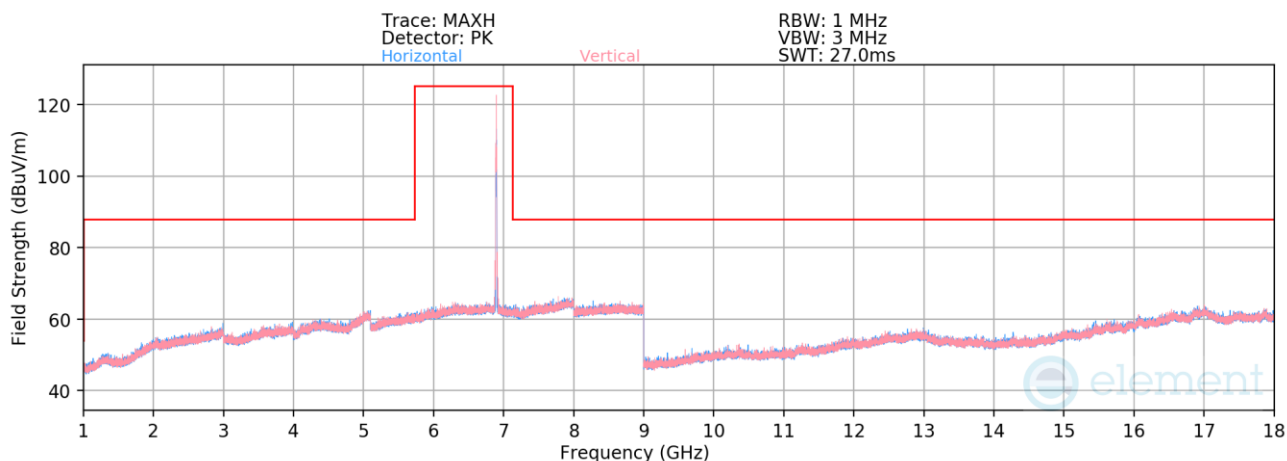

Plot 7-793. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 189 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6895 MHz
Channel:	189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-85.15	22.76	44.61	68.23	-23.62
13790.00	Peak	V	-	-	-73.74	22.76	56.02	88.23	-32.21


Table 7-112. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 257 of 468

V 12.0 03/03/2026

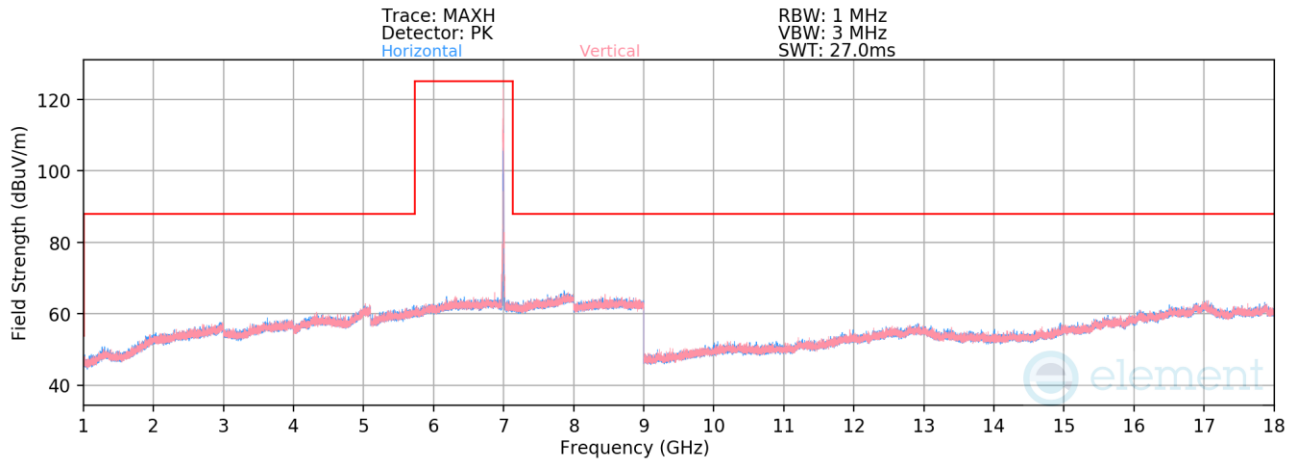

Plot 7-794. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 209 – RU52)

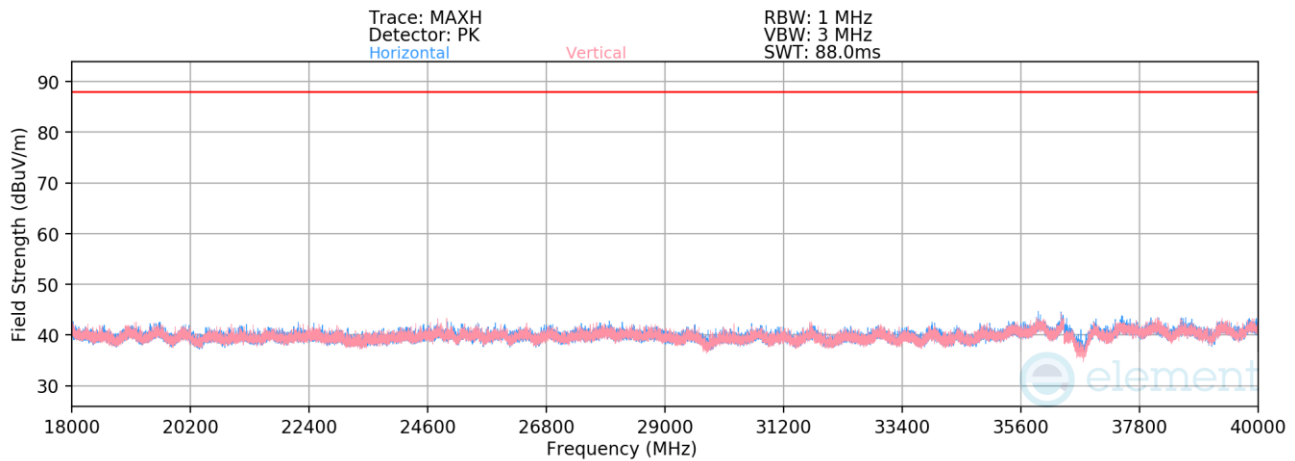


Plot 7-795. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 209 – RU52)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995 MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	V	-	-	-85.84	22.91	0.00	44.07	68.23	-24.16
13990.00	Peak	V	-	-	-74.28	22.91	0.00	55.62	88.23	-32.61
* 20985.00	Average	H	-	-	-61.00	-5.96	-9.54	30.50	53.98	-23.48
* 20985.00	Peak	H	-	-	-48.60	-5.96	-9.54	42.90	73.98	-31.08
27980.00	Average	H	-	-	-62.89	-2.86	-9.54	31.70	68.23	-36.53
27980.00	Peak	H	-	-	-51.85	-2.86	-9.54	42.75	88.23	-45.48
34975.00	Average	H	-	-	-61.49	-4.85	-9.54	31.12	68.23	-37.11
34975.00	Peak	H	-	-	-49.86	-4.85	-9.54	42.75	88.23	-45.48

Table 7-113. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 258 of 468

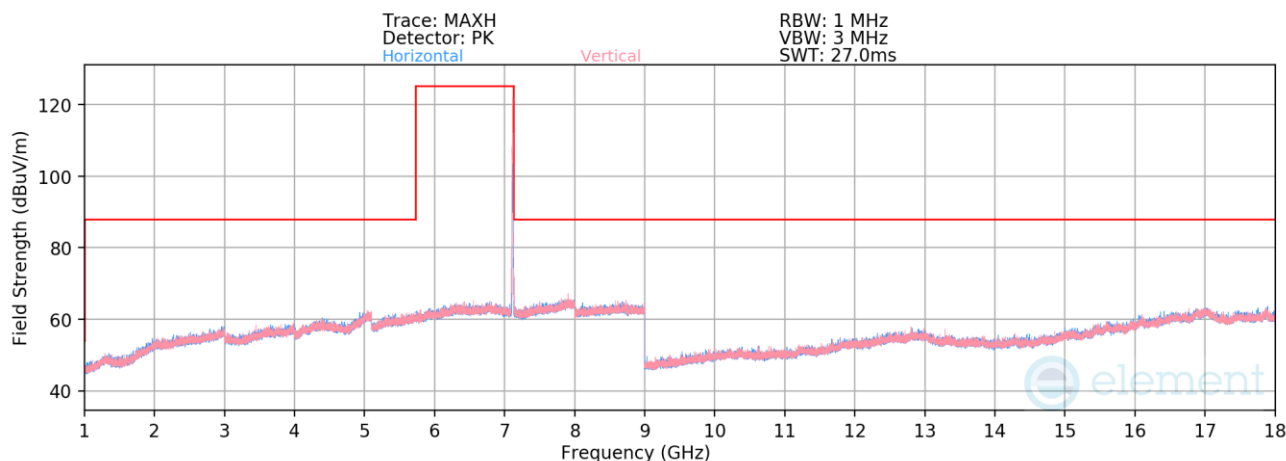

Plot 7-796. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 229 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095 MHz
Channel: 229

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14190.00	Average	H	-	-	-85.87	23.47	44.60	68.23	-23.63
14190.00	Peak	H	-	-	-73.79	23.47	56.68	88.23	-31.55

Table 7-114. Radiated Spurious Emission Measurements SDM Primary – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 259 of 468

V 12.0 03/03/2026

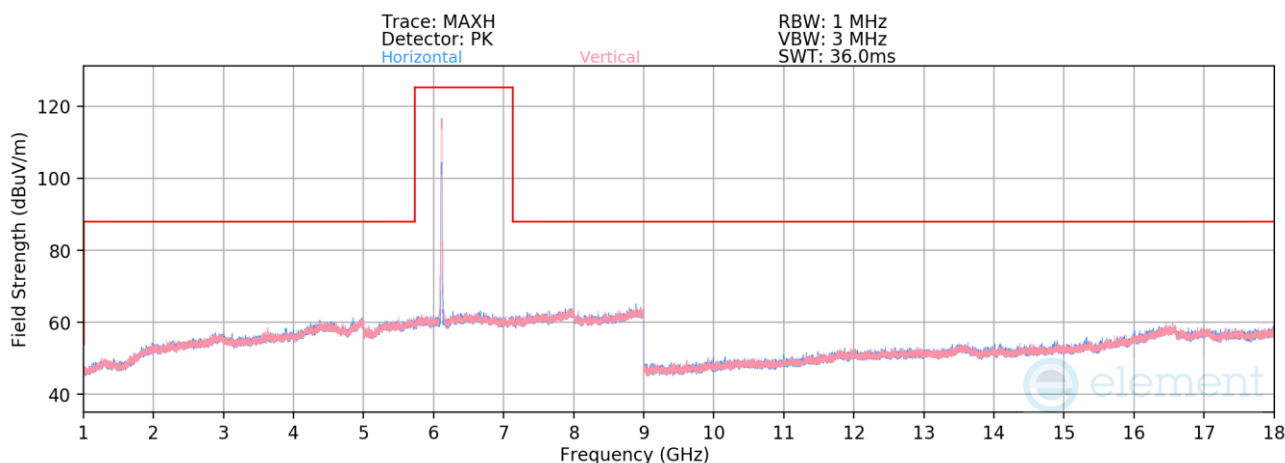

Plot 7-797. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 33 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6115 MHz
Channel:	33


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12230.00	Average	H	-	-	-83.71	18.09	41.39	53.98	-12.59
* 12230.00	Peak	H	-	-	-72.29	18.09	52.80	73.98	-21.18

Table 7-115. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 260 of 468

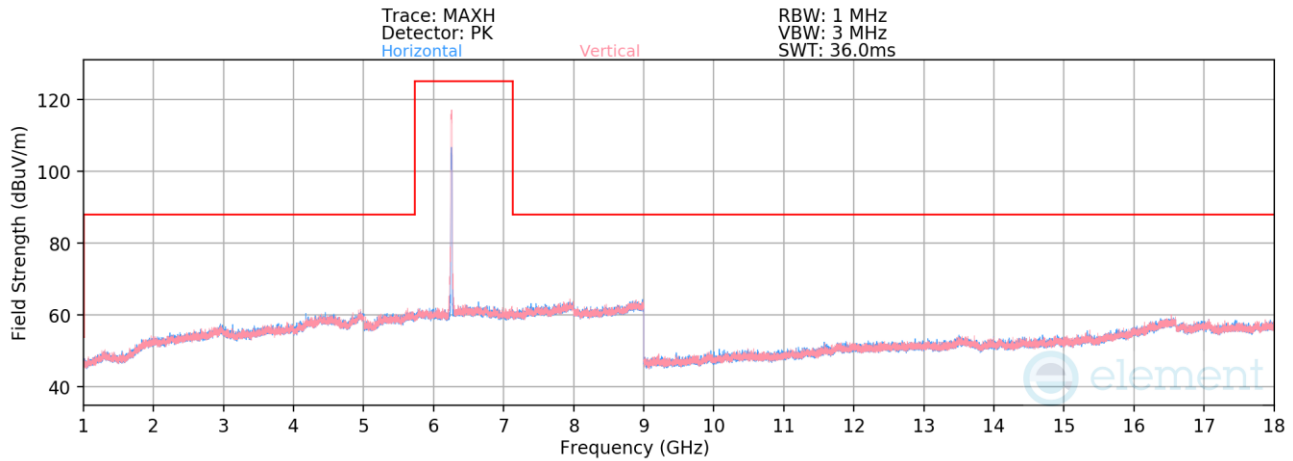

Plot 7-798. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 61 – RU242)

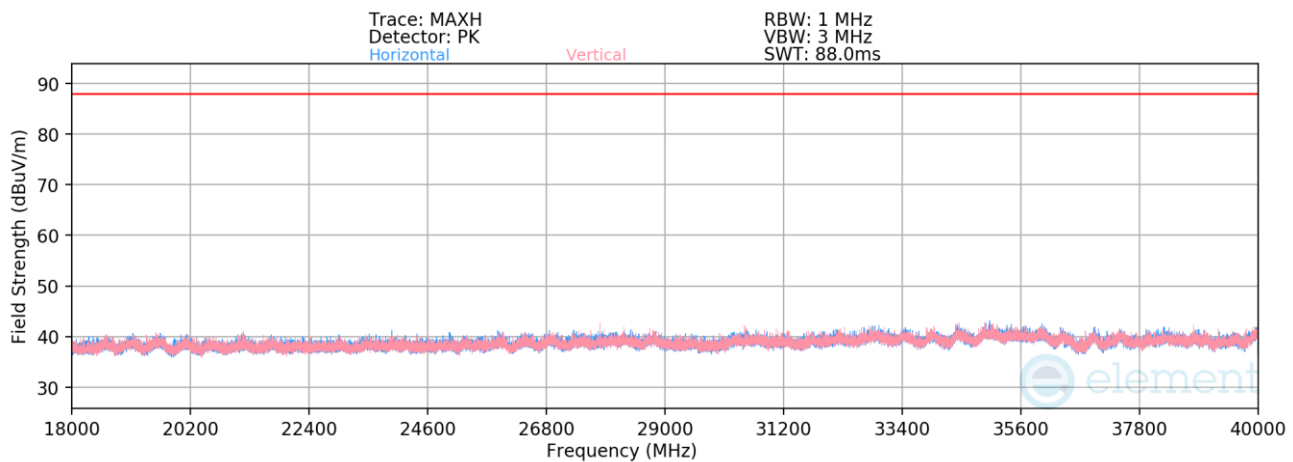


Plot 7-799. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 61 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6255 MHz
Channel: 61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12510.00	Average	H	-	-	-84.50	18.60	0.00	41.10	53.98	-12.88
* 12510.00	Peak	H	-	-	-72.37	18.60	0.00	53.23	73.98	-20.75
* 18765.00	Average	H	-	-	-63.71	-5.84	-9.54	27.91	53.98	-26.07
* 18765.00	Peak	H	-	-	-52.19	-5.84	-9.54	39.43	73.98	-34.55
25020.00	Average	H	-	-	-63.48	-4.40	-9.54	29.58	68.23	-38.65
25020.00	Peak	H	-	-	-51.51	-4.40	-9.54	41.56	88.23	-46.67
* 31275.00	Average	H	-	-	-62.24	-2.61	-9.54	32.60	53.98	-21.38
* 31275.00	Peak	H	-	-	-50.91	-2.61	-9.54	43.94	73.98	-30.04
37530.00	Average	H	-	-	-63.96	-4.28	-9.54	29.22	68.23	-39.01
37530.00	Peak	H	-	-	-52.44	-4.28	-9.54	40.74	88.23	-47.49

Table 7-116. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 261 of 468

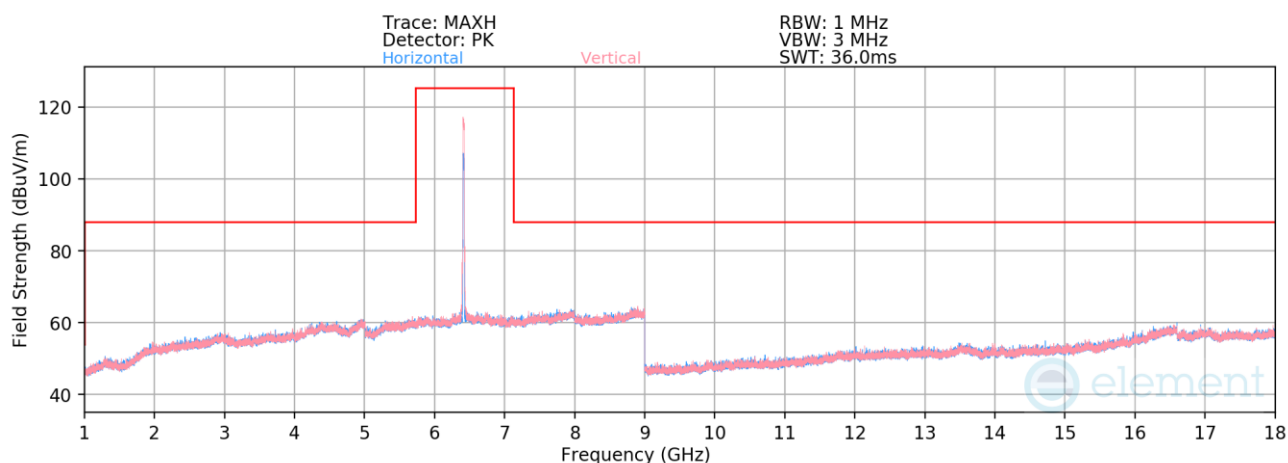

Plot 7-800. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 93 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6415 MHz
Channel:	93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.07	18.98	41.91	68.23	-26.32
12830.00	Peak	H	-	-	-72.48	18.98	53.51	88.23	-34.72

Table 7-117. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 262 of 468

V 12.0 03/03/2026

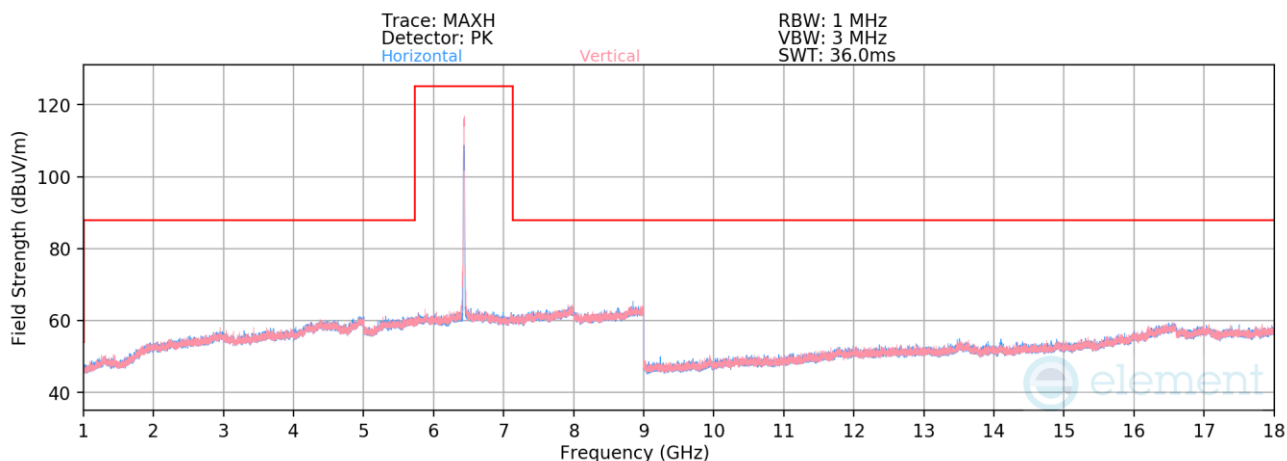

Plot 7-801. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 97 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6435 MHz
Channel:	97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	V	-	-	-84.22	19.02	41.80	68.23	-26.43
12870.00	Peak	V	-	-	-72.18	19.02	53.85	88.23	-34.38


Table 7-118. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 263 of 468

V 12.0 03/03/2026

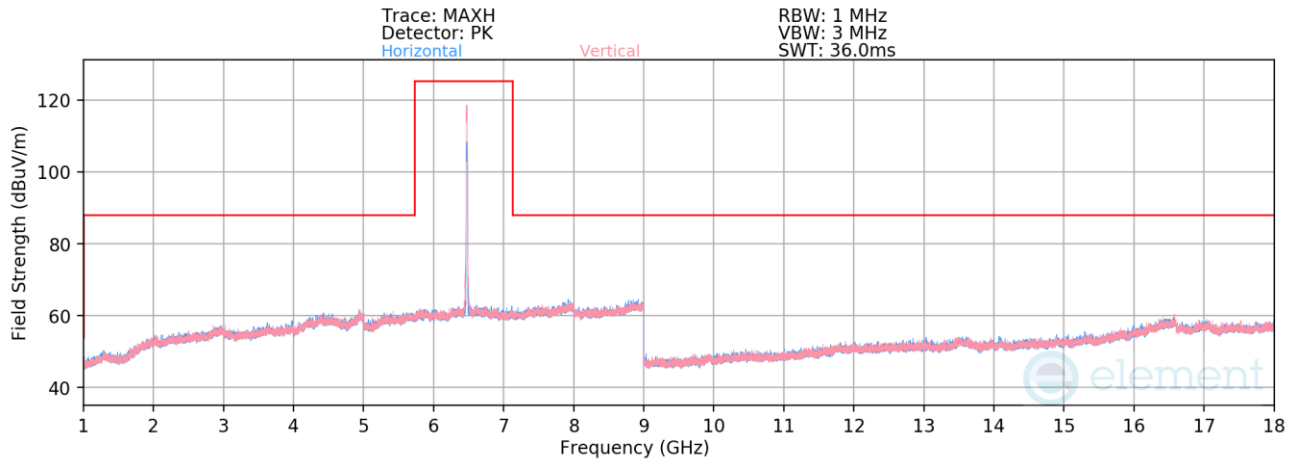

Plot 7-802. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 105 – RU242)

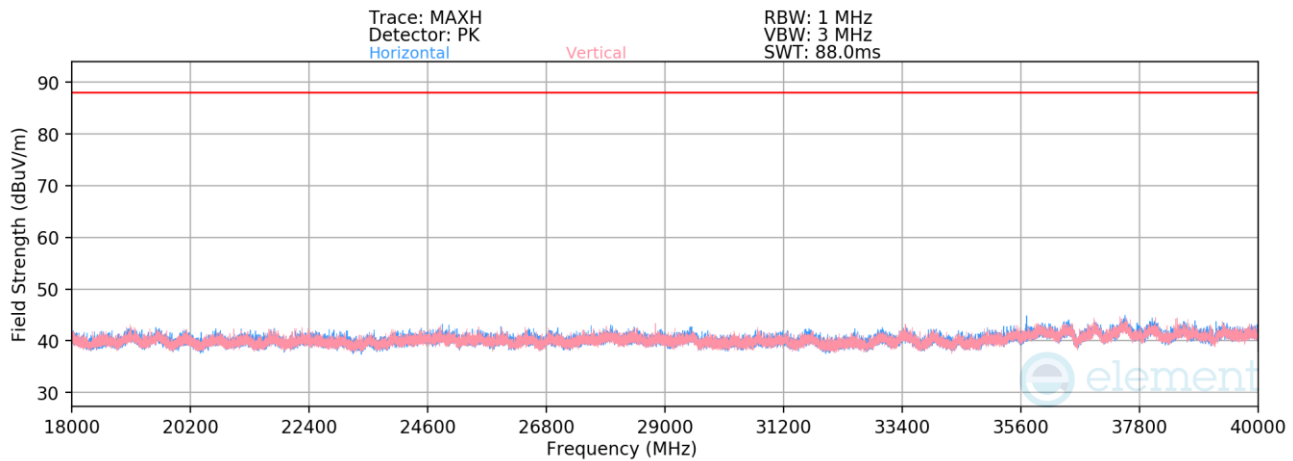


Plot 7-803. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 105 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475 MHz
Channel:	105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-84.31	19.33	0.00	42.02	68.23	-26.21
12950.00	Peak	V	-	-	-73.75	19.33	0.00	52.58	88.23	-35.65
* 19425.00	Average	H	-	-	-59.87	-5.91	-9.54	31.68	53.98	-22.30
* 19425.00	Peak	H	-	-	-48.68	-5.91	-9.54	42.87	73.98	-31.11
25900.00	Average	V	-	-	-61.19	-4.45	-9.54	31.82	68.23	-36.41
25900.00	Peak	V	-	-	-49.94	-4.45	-9.54	43.06	88.23	-45.17
32375.00	Average	V	-	-	-63.39	-3.36	-9.54	30.71	68.23	-37.52
32375.00	Peak	V	-	-	-51.62	-3.36	-9.54	42.48	88.23	-45.75
* 38850.00	Average	H	-	-	-65.30	-2.32	-9.54	29.85	53.98	-24.13
* 38850.00	Peak	H	-	-	-54.57	-2.32	-9.54	40.57	73.98	-33.41

Table 7-119. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 264 of 468

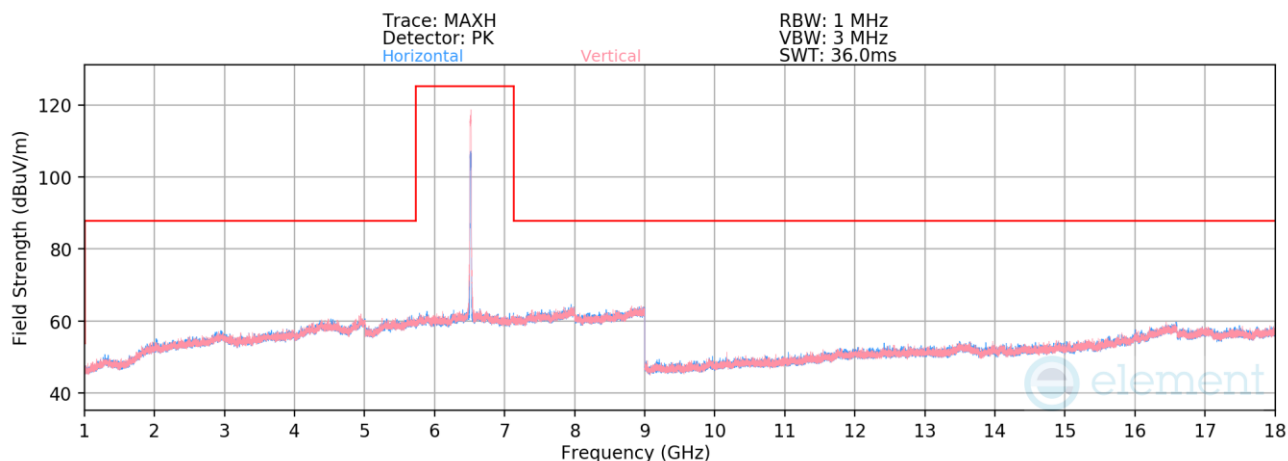

Plot 7-804. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 113 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6515 MHz
Channel:	113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Average	H	-	-	-84.60	19.44	41.84	68.23	-26.39
13030.00	Peak	H	-	-	-73.38	19.44	53.07	88.23	-35.16

Table 7-120. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 265 of 468

V 12.0 03/03/2026

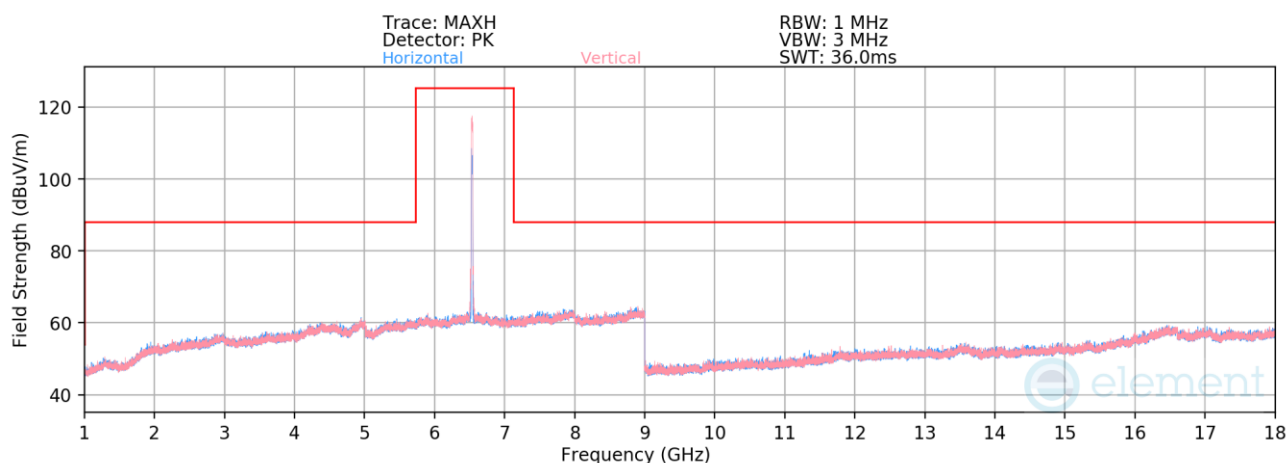

Plot 7-805. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 117 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6535 MHz
Channel:	117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	H	-	-	-84.32	19.42	42.10	68.23	-26.13
13070.00	Peak	H	-	-	-72.66	19.42	53.76	88.23	-34.47


Table 7-121. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 266 of 468

V 12.0 03/03/2026

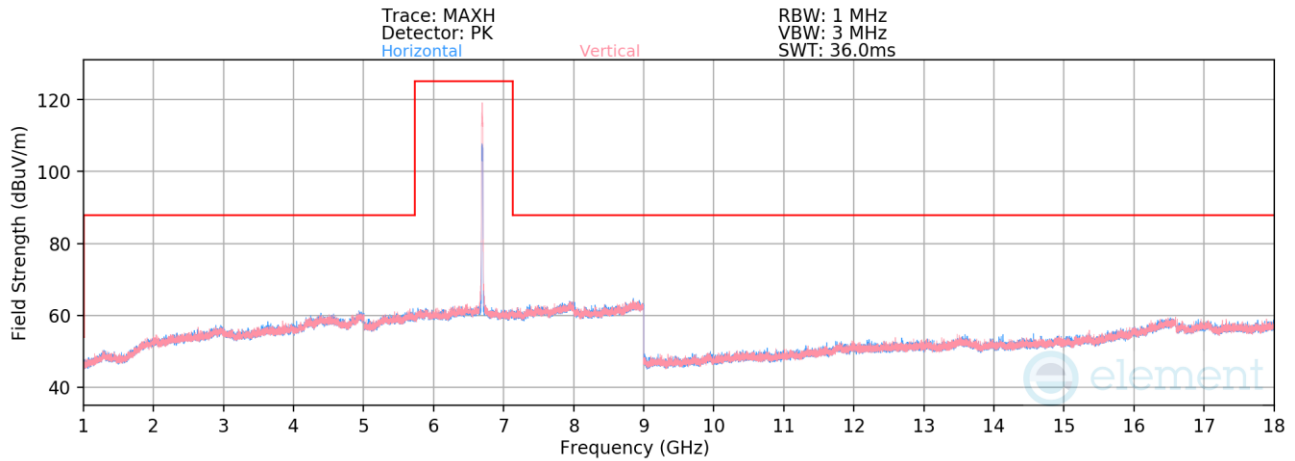

Plot 7-806. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 149 – RU242)

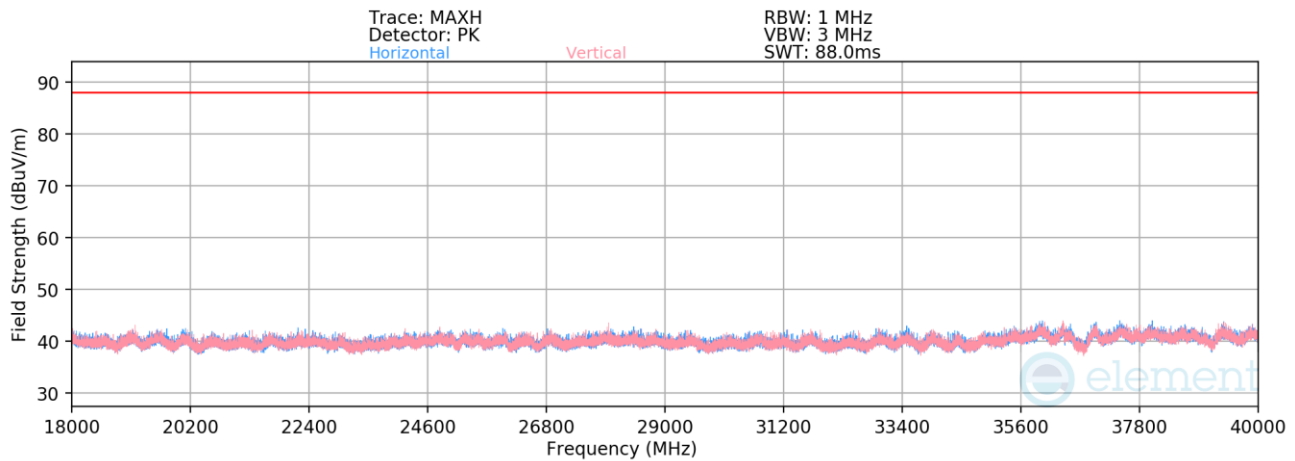


Plot 7-807. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 149 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695 MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-84.20	19.47	0.00	42.27	53.98	-11.71
* 13390.00	Peak	V	-	-	-72.08	19.47	0.00	54.39	73.98	-19.59
* 20085.00	Average	H	-	-	-59.65	-6.23	-9.54	31.58	53.98	-22.40
* 20085.00	Peak	H	-	-	-48.39	-6.23	-9.54	42.84	73.98	-31.14
26780.00	Average	V	-	-	-62.52	-3.81	-9.54	31.13	68.23	-37.10
26780.00	Peak	V	-	-	-51.13	-3.81	-9.54	42.52	88.23	-45.71
33475.00	Average	V	-	-	-61.09	-3.63	-9.54	32.74	68.23	-35.49
33475.00	Peak	V	-	-	-49.76	-3.63	-9.54	44.07	88.23	-44.16

Table 7-122. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 267 of 468

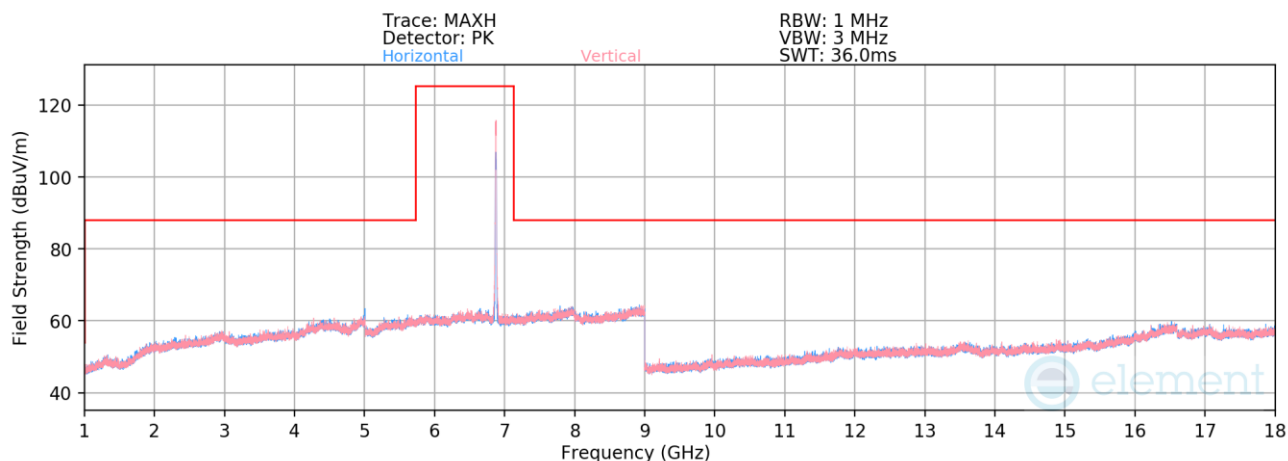

Plot 7-808. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 185 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6875 MHz
Channel:	185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.97	19.15	42.18	68.23	-26.05
13750.00	Peak	H	-	-	-71.89	19.15	54.26	88.23	-33.97

Table 7-123. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 268 of 468

V 12.0 03/03/2026

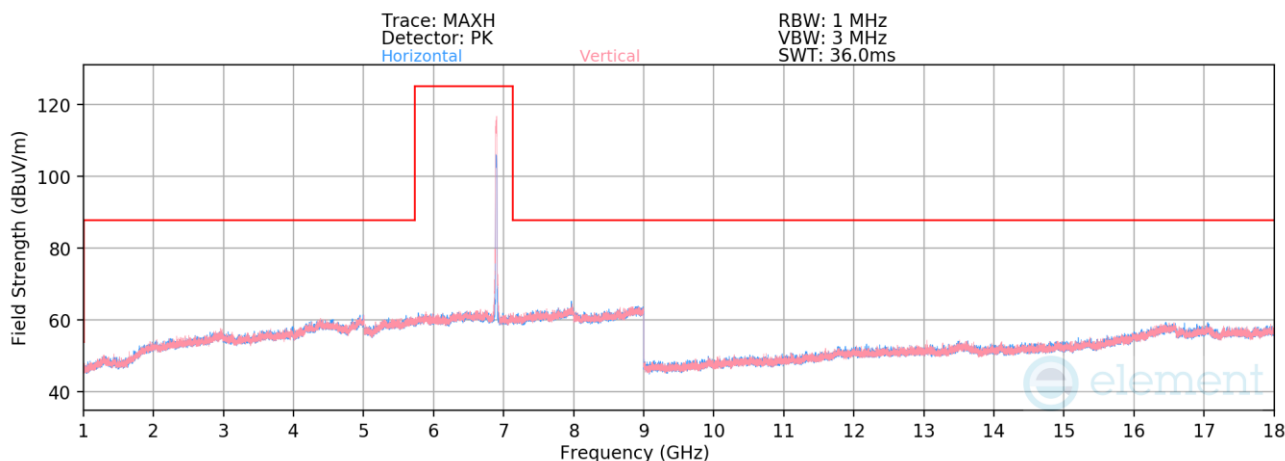

Plot 7-809. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 189 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6895 MHz
Channel:	189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	V	-	-	-84.08	19.22	42.14	68.23	-26.09
13790.00	Peak	V	-	-	-72.49	19.22	53.72	88.23	-34.51


Table 7-124. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 269 of 468

V 12.0 03/03/2026

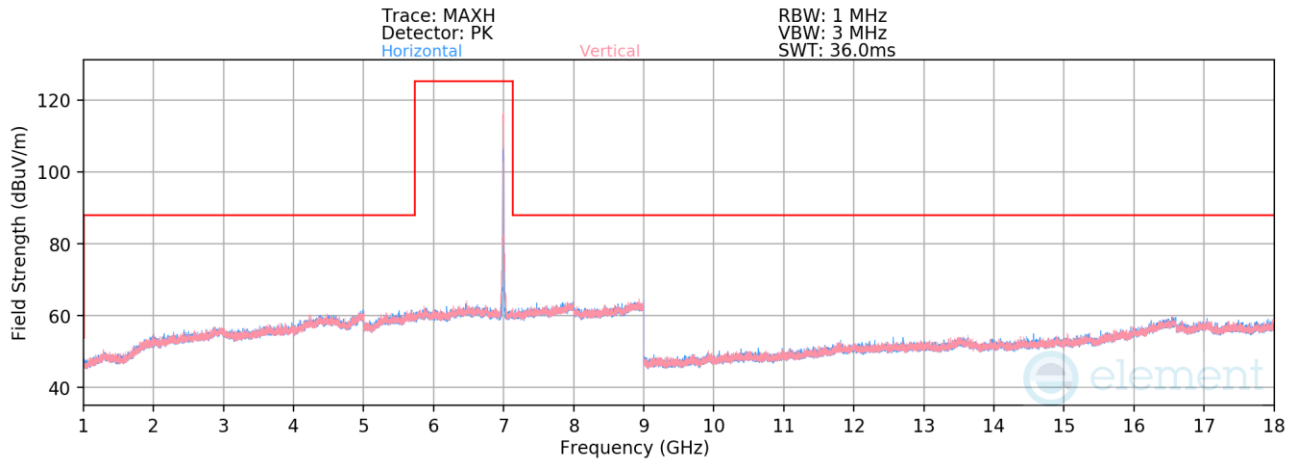

Plot 7-810. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 209 – RU242)

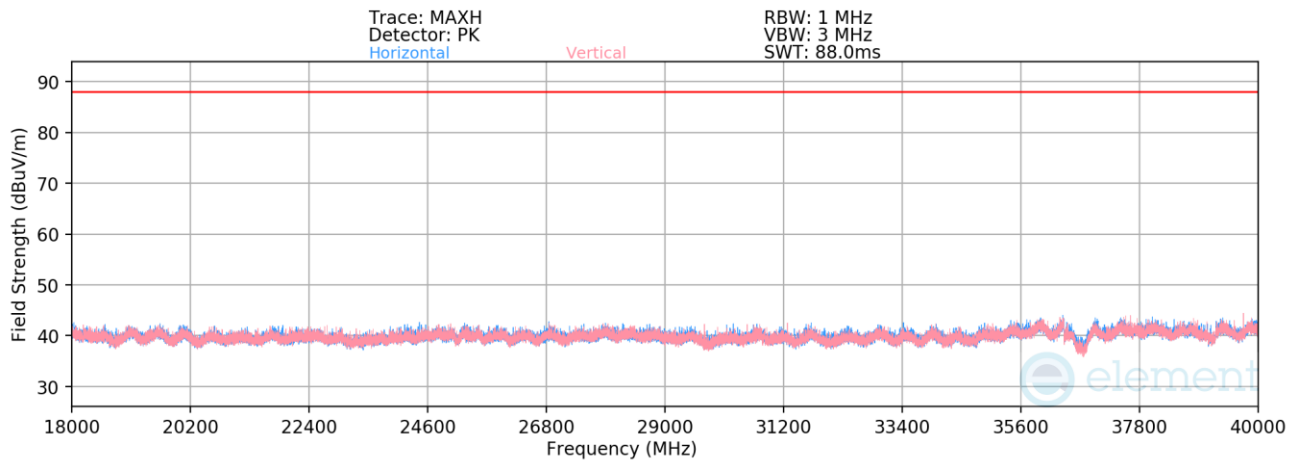


Plot 7-811. Radiated Spurious Emissions 18-40 GHz SDM Primary (802.11be – Ch. 209 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6995 MHz
Channel:	209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-84.35	19.53	0.00	42.19	68.23	-26.04
13990.00	Peak	H	-	-	-72.72	19.53	0.00	53.81	88.23	-34.42
* 20985.00	Average	V	-	-	-60.61	-5.84	-9.54	31.01	53.98	-22.97
* 20985.00	Peak	V	-	-	-49.94	-5.84	-9.54	41.68	73.98	-32.30
27980.00	Average	V	-	-	-62.44	-2.82	-9.54	32.20	68.23	-36.03
27980.00	Peak	V	-	-	-51.41	-2.82	-9.54	43.23	88.23	-45.00
34975.00	Average	H	-	-	-61.34	-4.84	-9.54	31.28	68.23	-36.95
34975.00	Peak	H	-	-	-49.52	-4.84	-9.54	43.10	88.23	-45.13

Table 7-125. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 270 of 468

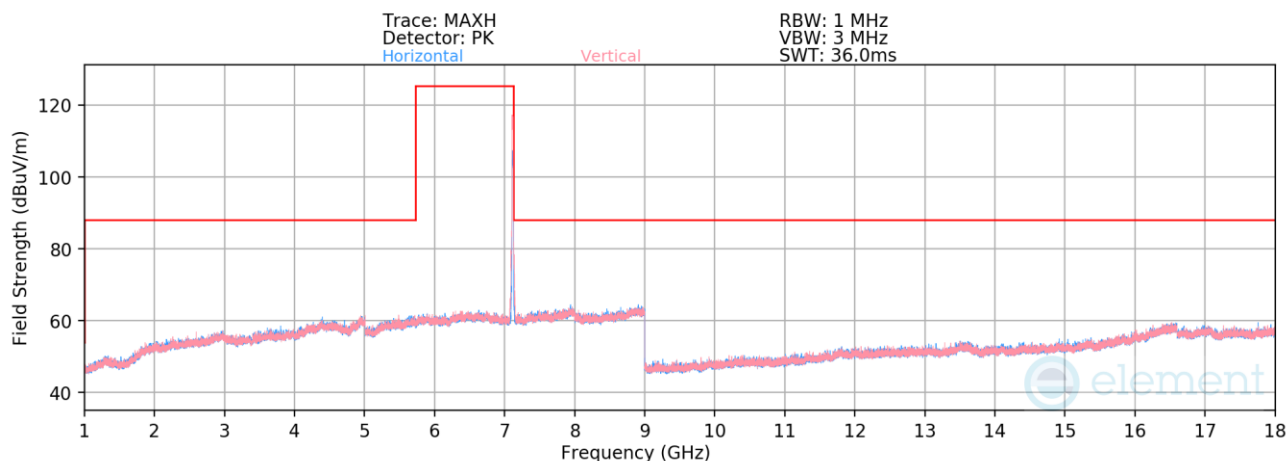

Plot 7-812. Radiated Spurious Emissions above 1 GHz SDM Primary (802.11be – Ch. 233 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7115 MHz
Channel:	233


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	H	-	-	-84.20	19.63	42.43	68.23	-25.80
14230.00	Peak	H	-	-	-72.92	19.63	53.71	88.23	-34.52

Table 7-126. Radiated Spurious Emission Measurements SDM Primary – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 271 of 468

7.7.2 SDM Diversity Radiated Spurious Emission

RU52

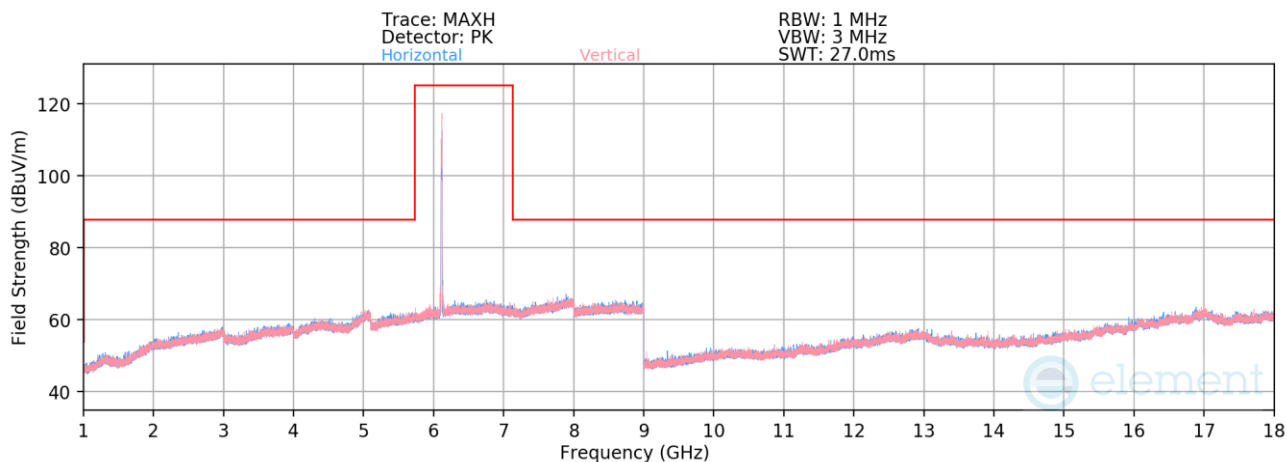

Plot 7-813. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 33 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6115 MHz
Channel:	33

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12230.00	Average	V	-	-	-84.83	21.16	43.33	53.98	-10.65
* 12230.00	Peak	V	-	-	-73.95	21.16	54.21	73.98	-19.77


Table 7-127. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 272 of 468

V 12.0 03/03/2026

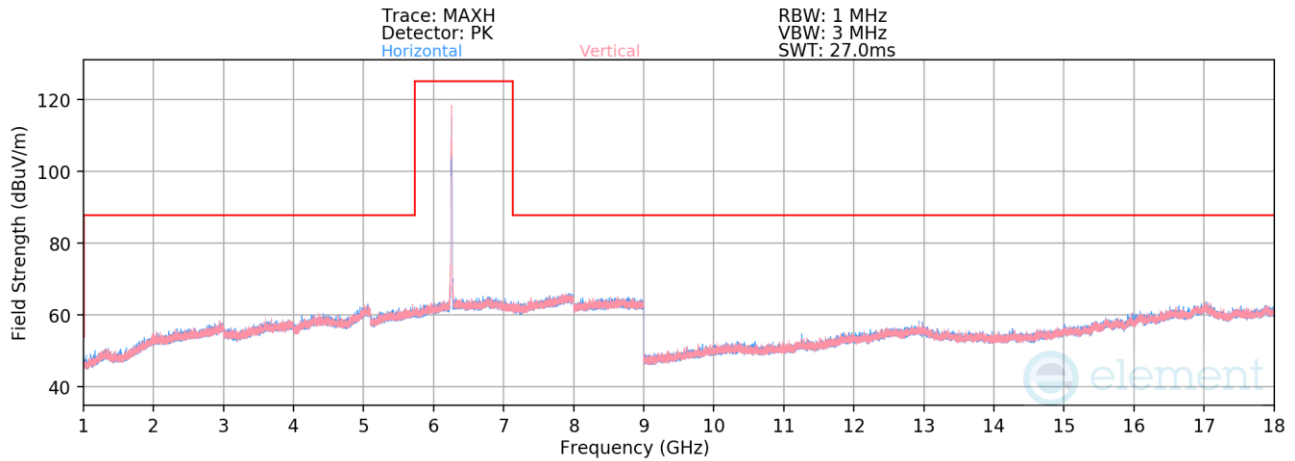

Plot 7-814. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 61 – RU52)

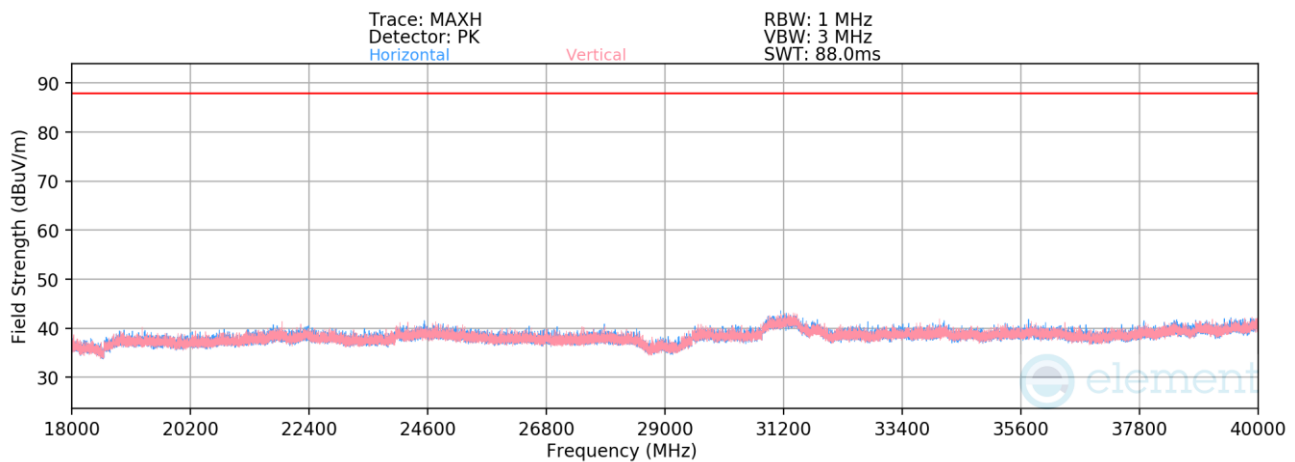


Plot 7-815. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 61 – RU52)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6255 MHz
Channel: 61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12510.00	Average	V	-	-	-84.64	22.17	0.00	44.53	53.98	-9.45
* 12510.00	Peak	V	-	-	-73.38	22.17	0.00	55.79	73.98	-18.19
* 18765.00	Average	V	-	-	-63.60	-5.83	-9.54	28.02	53.98	-25.96
* 18765.00	Peak	V	-	-	-52.20	-5.83	-9.54	39.43	73.98	-34.55
25020.00	Average	V	-	-	-63.28	-4.40	-9.54	29.78	68.23	-38.45
25020.00	Peak	V	-	-	-51.73	-4.40	-9.54	41.33	88.23	-46.90
* 31275.00	Average	V	-	-	-62.15	-2.75	-9.54	32.56	53.98	-21.42
* 31275.00	Peak	V	-	-	-50.57	-2.61	-9.54	44.27	73.98	-29.71
37530.00	Average	V	-	-	-64.48	-4.28	-9.54	28.70	68.23	-39.53
37530.00	Peak	V	-	-	-52.97	-4.28	-9.54	40.21	88.23	-48.02

Table 7-128. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 273 of 468

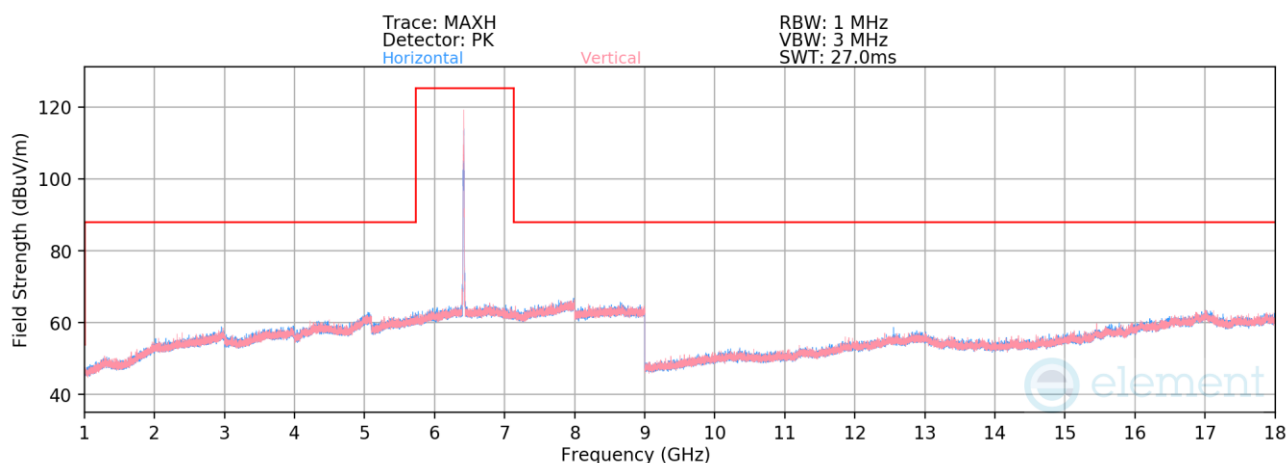

Plot 7-816. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 93 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.79	22.54	44.76	68.23	-23.47
12830.00	Peak	H	-	-	-73.36	22.54	56.18	88.23	-32.05

Table 7-129. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 274 of 468

V 12.0 03/03/2026

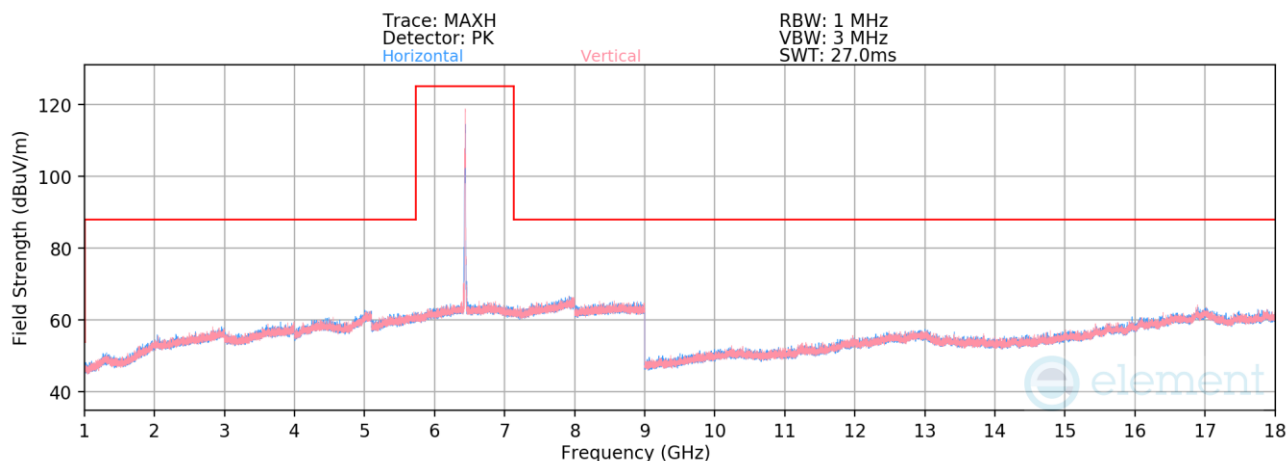

Plot 7-817. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 97 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6435 MHz
Channel:	97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	V	-	-	-84.75	22.49	44.74	68.23	-23.49
12870.00	Peak	V	-	-	-73.37	22.49	56.12	88.23	-32.11


Table 7-130. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 275 of 468

V 12.0 03/03/2026

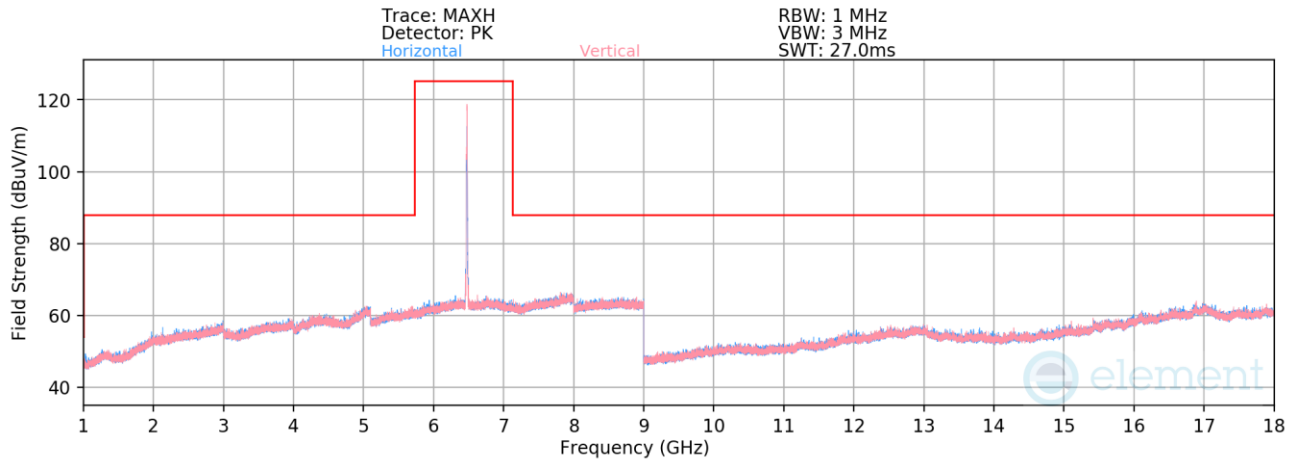

Plot 7-818. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 105 – RU52)

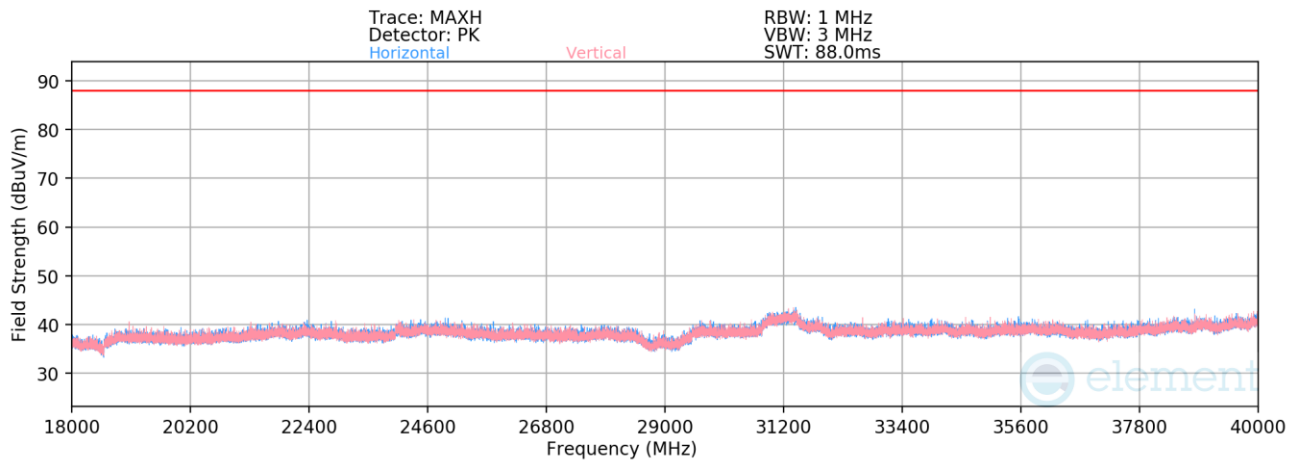


Plot 7-819. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 105 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475 MHz
Channel:	105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	H	-	-	-84.41	22.56	0.00	45.15	68.23	-23.08
12950.00	Peak	H	-	-	-73.59	22.56	0.00	55.97	88.23	-32.26
* 19425.00	Average	V	-	-	-63.22	-5.85	-9.54	28.39	53.98	-25.59
* 19425.00	Peak	V	-	-	-51.72	-5.85	-9.54	39.89	73.98	-34.09
25900.00	Average	H	-	-	-64.92	-4.45	-9.54	28.09	68.23	-40.14
25900.00	Peak	H	-	-	-52.86	-4.45	-9.54	40.15	88.23	-48.08
32375.00	Average	H	-	-	-64.25	-3.19	-9.54	30.03	68.23	-38.20
32375.00	Peak	H	-	-	-53.65	-3.19	-9.54	40.63	88.23	-47.60
* 38850.00	Average	V	-	-	-65.41	-2.32	-9.54	29.73	53.98	-24.25
* 38850.00	Peak	V	-	-	-54.57	-2.32	-9.54	40.57	73.98	-33.41

Table 7-131. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 276 of 468

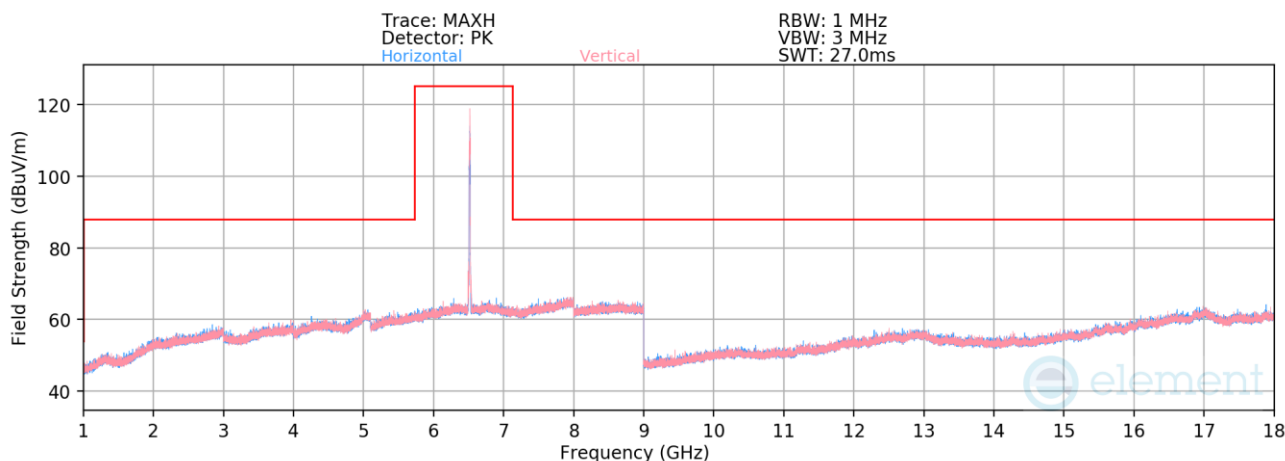

Plot 7-820. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 113 – RU52)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515 MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	V	-	-	-84.60	22.85	45.25	68.23	-22.98
13030.00	Peak	V	-	-	-73.27	22.85	56.59	88.23	-31.64

Table 7-132. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 277 of 468

V 12.0 03/03/2026

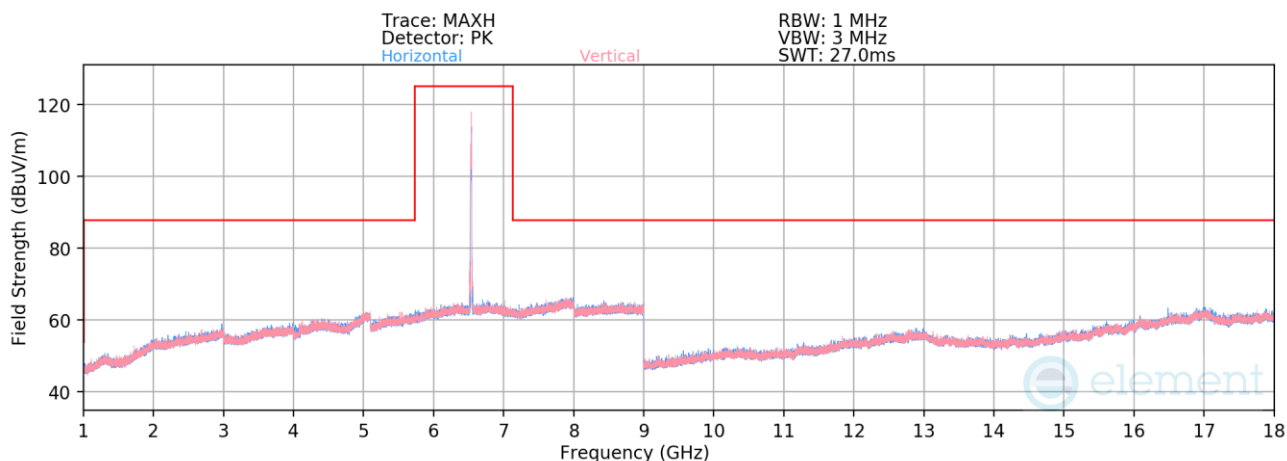

Plot 7-821. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 117 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6535 MHz
Channel:	117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	V	-	-	-84.61	22.48	44.87	68.23	-23.36
13070.00	Peak	V	-	-	-73.74	22.48	55.73	88.23	-32.50


Table 7-133. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 278 of 468

V 12.0 03/03/2026

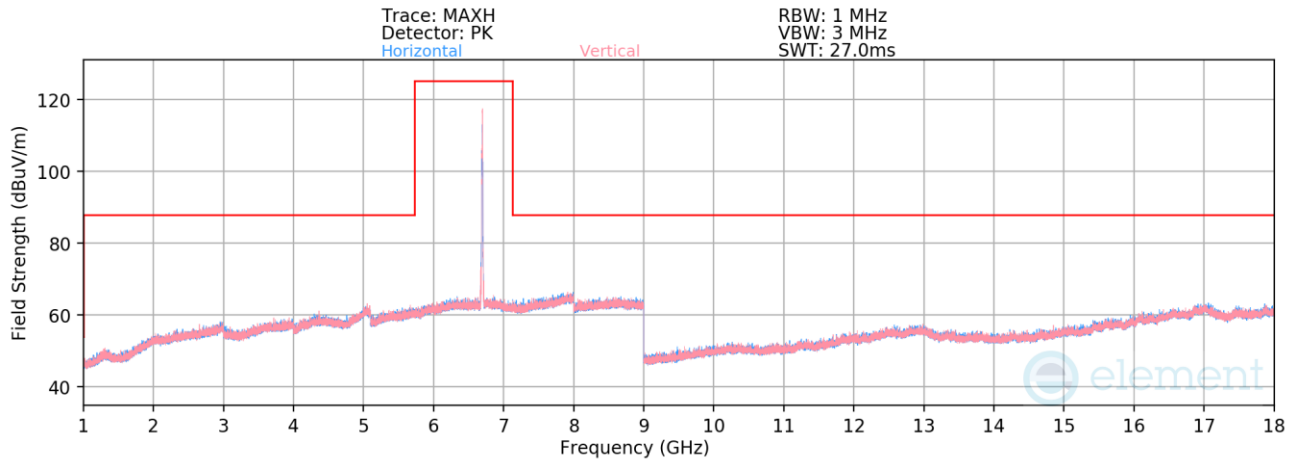

Plot 7-822. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 149 – RU52)

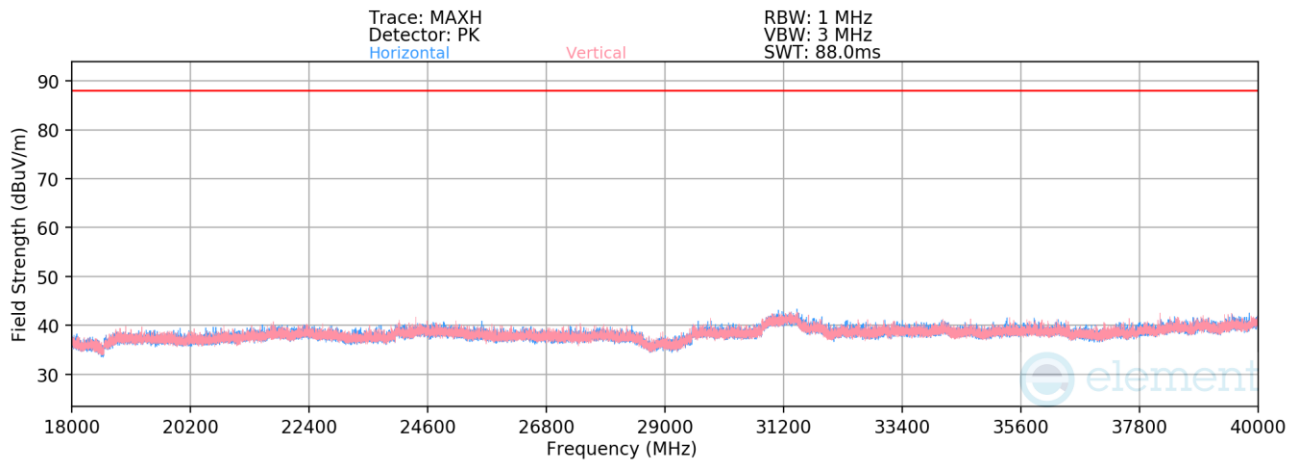


Plot 7-823. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 149 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695 MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-85.27	22.97	0.00	44.70	53.98	-9.28
* 13390.00	Peak	V	-	-	-73.77	22.97	0.00	56.20	73.98	-17.78
* 20085.00	Average	V	-	-	-63.32	-6.21	-9.54	27.92	53.98	-26.06
* 20085.00	Peak	V	-	-	-51.53	-6.22	-9.54	39.71	73.98	-34.27
26780.00	Average	V	-	-	-65.19	-3.81	-9.54	28.47	68.23	-39.76
26780.00	Peak	V	-	-	-53.93	-3.81	-9.54	39.73	88.23	-48.50
33475.00	Average	H	-	-	-63.48	-3.59	-9.54	30.39	68.23	-37.84
33475.00	Peak	H	-	-	-51.58	-3.59	-9.54	42.29	88.23	-45.94

Table 7-134. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 279 of 468

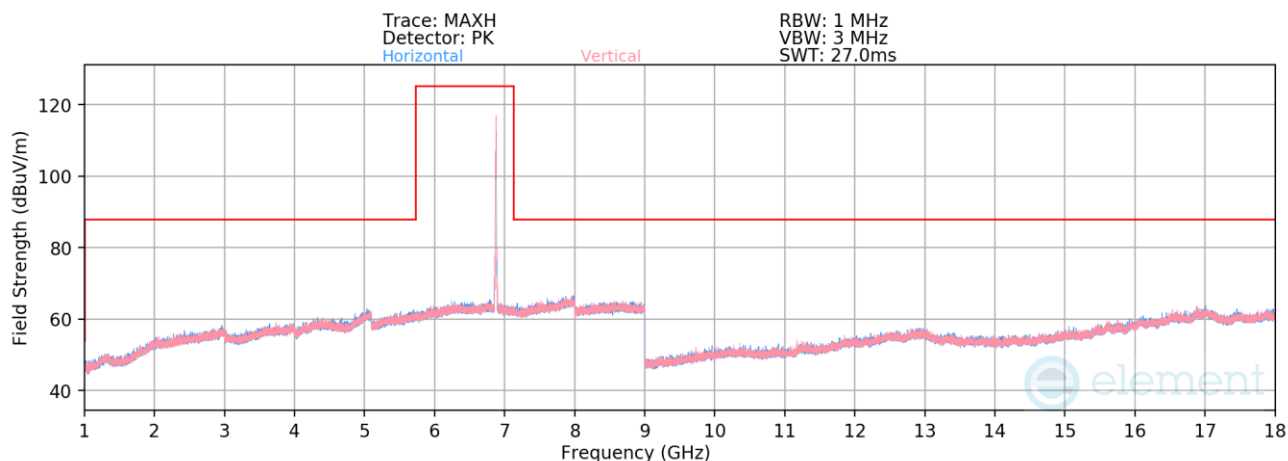


Plot 7-824. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 185 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6875 MHz
Channel:	185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-85.25	22.65	44.41	68.23	-23.82
13750.00	Peak	H	-	-	-73.55	22.65	56.10	88.23	-32.13

Table 7-135. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 280 of 468

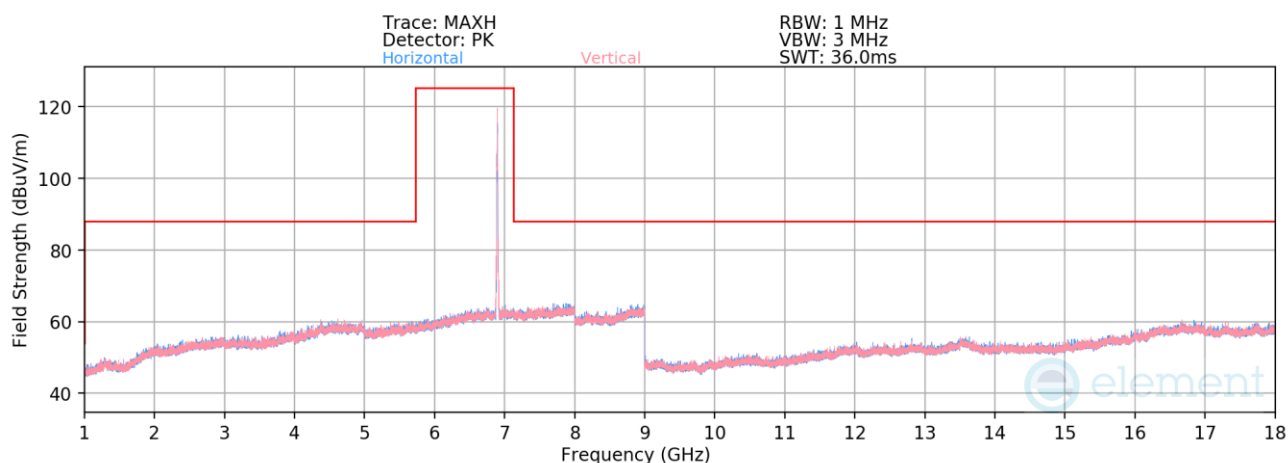

Plot 7-825. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 189 – RU52)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6895 MHz
Channel:	189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	H	-	-	-83.65	19.22	42.57	68.23	-25.66
13790.00	Peak	H	-	-	-71.92	19.22	54.30	88.23	-33.93


Table 7-136. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 281 of 468

V 12.0 03/03/2026

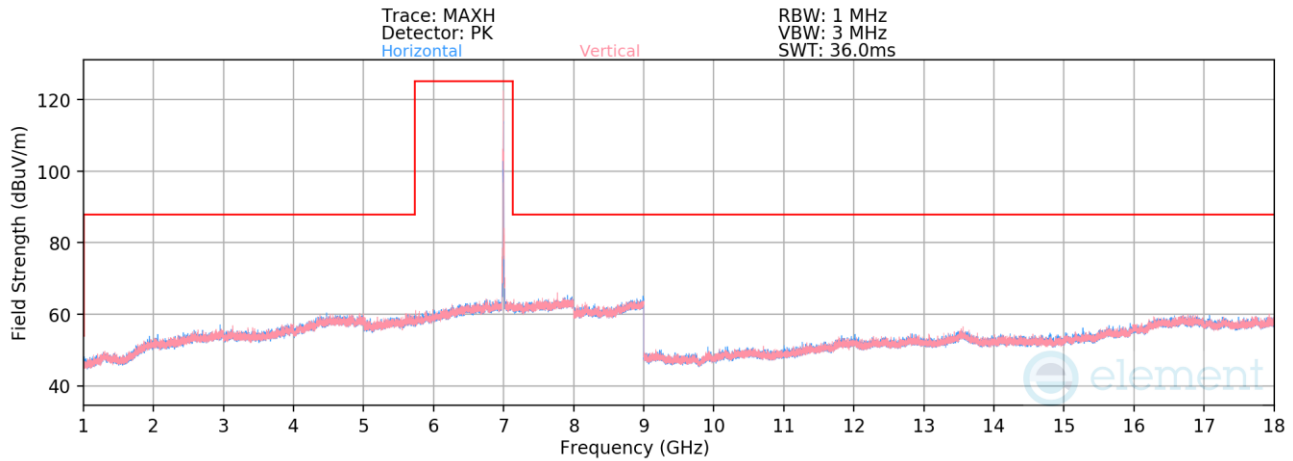

Plot 7-826. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 209 – RU52)

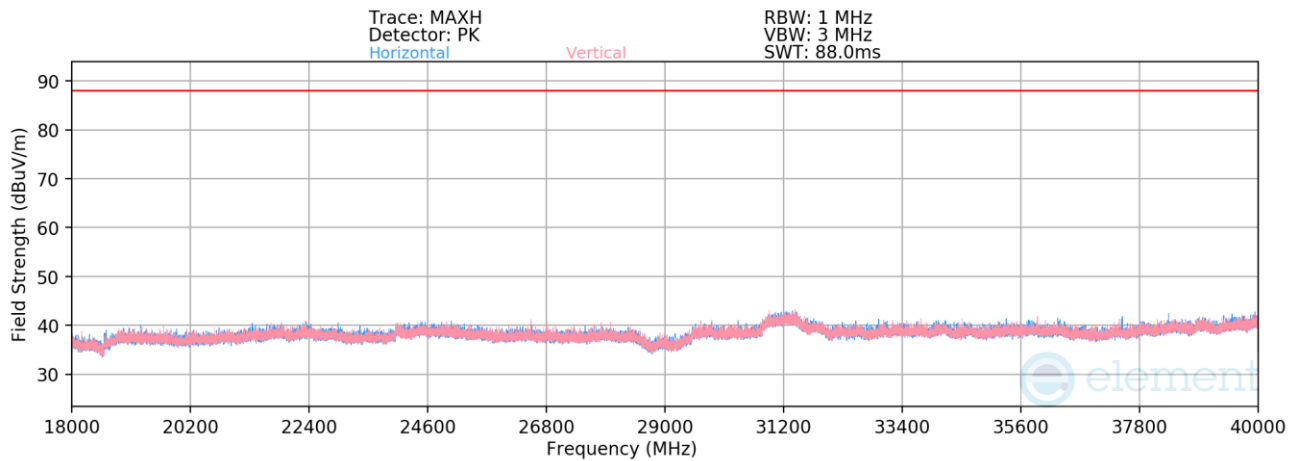


Plot 7-827. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 209 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6995 MHz
Channel:	209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-83.82	19.54	0.00	42.72	68.23	-25.51
13990.00	Peak	H	-	-	-72.48	19.54	0.00	54.06	88.23	-34.17
* 20985.00	Average	H	-	-	-63.20	-5.84	-9.54	28.41	53.98	-25.57
* 20985.00	Peak	H	-	-	-51.55	-5.84	-9.54	40.07	73.98	-33.91
27980.00	Average	H	-	-	-66.40	-2.86	-9.54	28.19	68.23	-40.04
27980.00	Peak	H	-	-	-55.20	-2.86	-9.54	39.40	88.23	-48.83
34975.00	Average	H	-	-	-62.83	-4.82	-9.54	29.81	68.23	-38.42
34975.00	Peak	H	-	-	-51.27	-4.82	-9.54	41.37	88.23	-46.86

Table 7-137. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 282 of 468

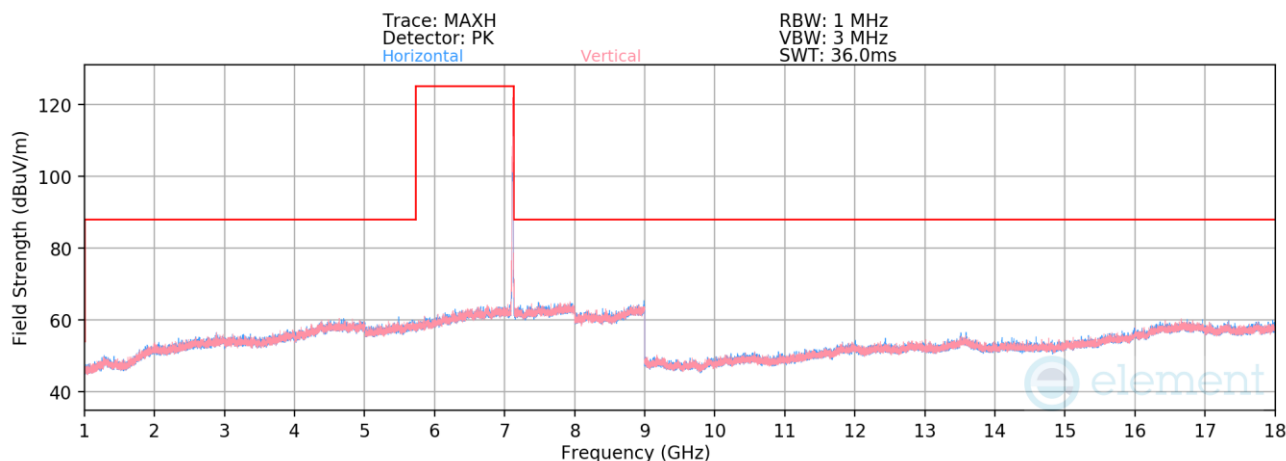

Plot 7-828. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 229 – RU52)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7095 MHz
Channel:	229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14190.00	Average	V	-	-	-83.35	19.63	43.29	68.23	-24.94
14190.00	Peak	V	-	-	-71.31	19.63	55.32	88.23	-32.91

Table 7-138. Radiated Spurious Emission Measurements SDM Diversity – RU52

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 283 of 468

V 12.0 03/03/2026

RU242

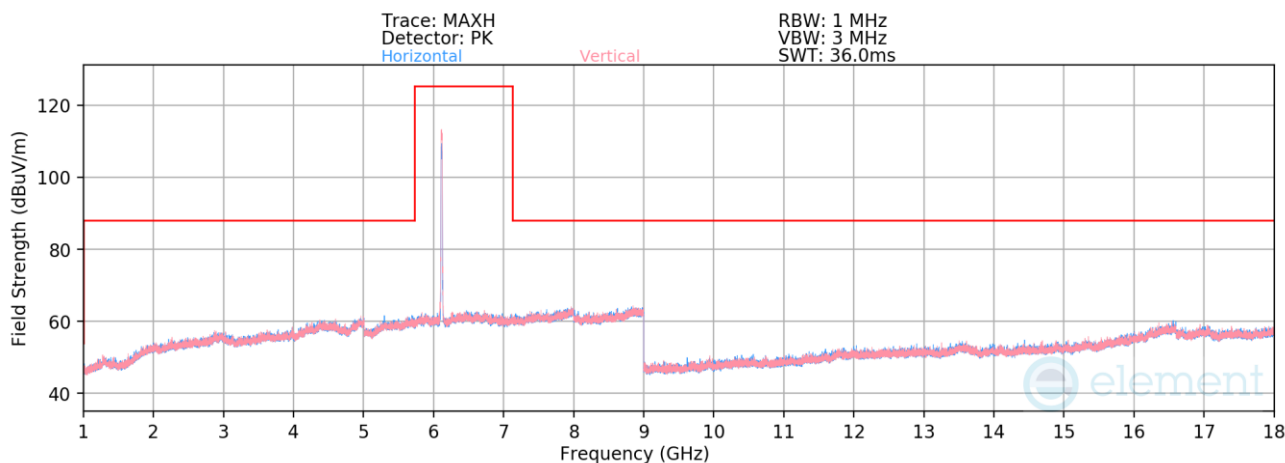

Plot 7-829. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 33 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6115 MHz
Channel:	33

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12230.00	Average	V	-	-	-83.63	18.09	41.46	53.98	-12.52
* 12230.00	Peak	V	-	-	-72.65	18.09	52.44	73.98	-21.54


Table 7-139. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 284 of 468

V 12.0 03/03/2026

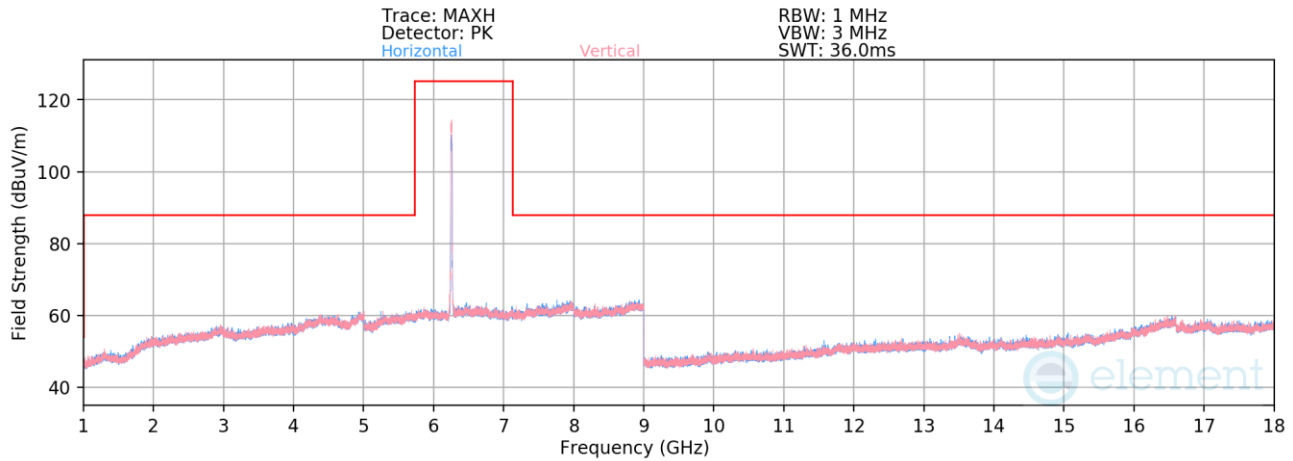

Plot 7-830. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 45 – RU242)

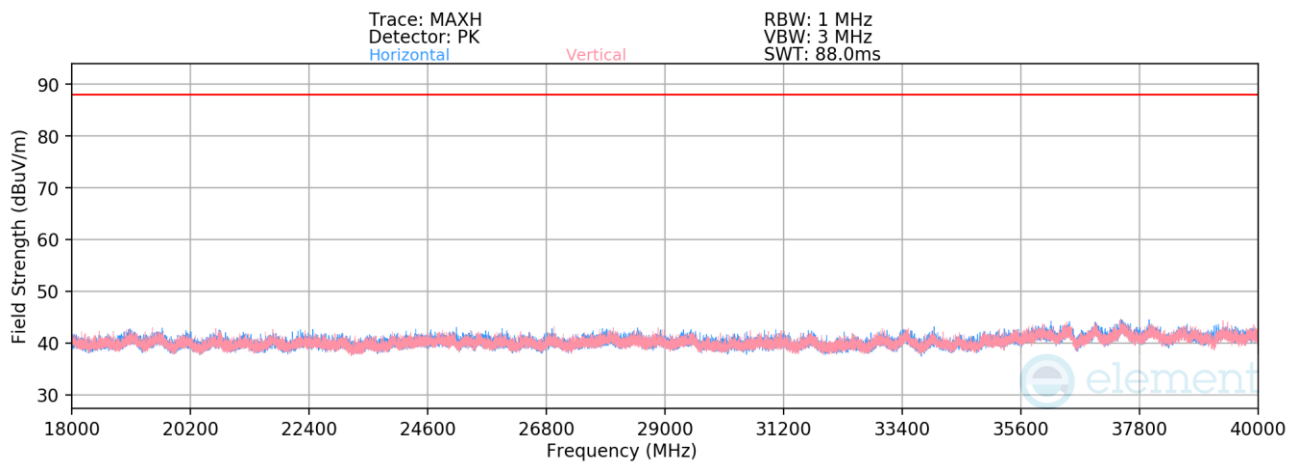


Plot 7-831. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 61 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6255 MHz
Channel: 61

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12510.00	Average	H	-	-	-84.40	18.57	0.00	41.17	53.98	-12.81
* 12510.00	Peak	H	-	-	-72.86	18.57	0.00	52.71	73.98	-21.27
* 18765.00	Average	V	-	-	-63.72	-5.83	-9.54	27.91	53.98	-26.07
* 18765.00	Peak	V	-	-	-52.43	-5.83	-9.54	39.20	73.98	-34.78
25020.00	Average	V	-	-	-63.45	-4.38	-9.54	29.63	68.23	-38.60
25020.00	Peak	V	-	-	-52.41	-4.38	-9.54	40.67	88.23	-47.56
* 31275.00	Average	V	-	-	-62.01	-2.75	-9.54	32.69	53.98	-21.29
* 31275.00	Peak	V	-	-	-50.65	-2.75	-9.54	44.06	73.98	-29.92
37530.00	Average	V	-	-	-64.78	-4.28	-9.54	28.40	68.23	-39.83
37530.00	Peak	V	-	-	-53.47	-4.28	-9.54	39.71	88.23	-48.52

Table 7-140. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 285 of 468

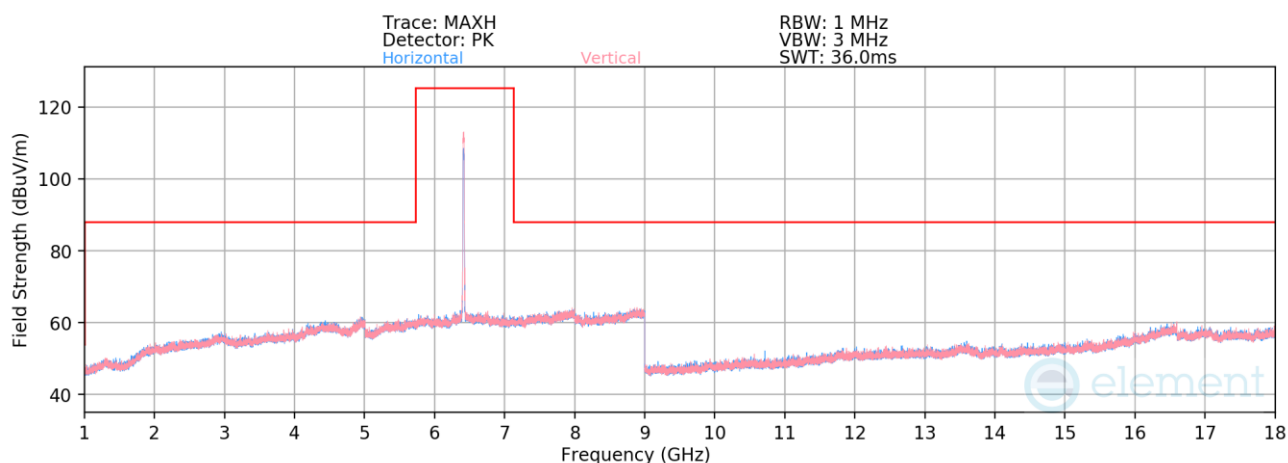

Plot 7-832. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 93 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415 MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-84.15	19.01	41.86	68.23	-26.37
12830.00	Peak	H	-	-	-72.69	19.01	53.32	88.23	-34.91

Table 7-141. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 286 of 468

V 12.0 03/03/2026

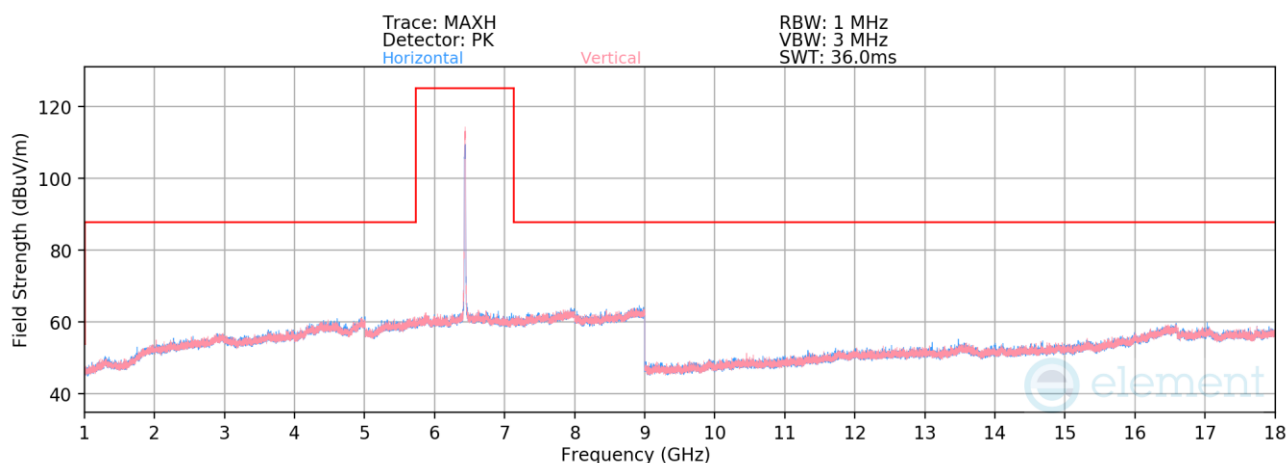

Plot 7-833. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 97 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435 MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12870.00	Average	H	-	-	-84.16	19.02	41.86	68.23	-26.37
12870.00	Peak	H	-	-	-73.09	19.02	52.94	88.23	-35.29


Table 7-142. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 287 of 468

V 12.0 03/03/2026

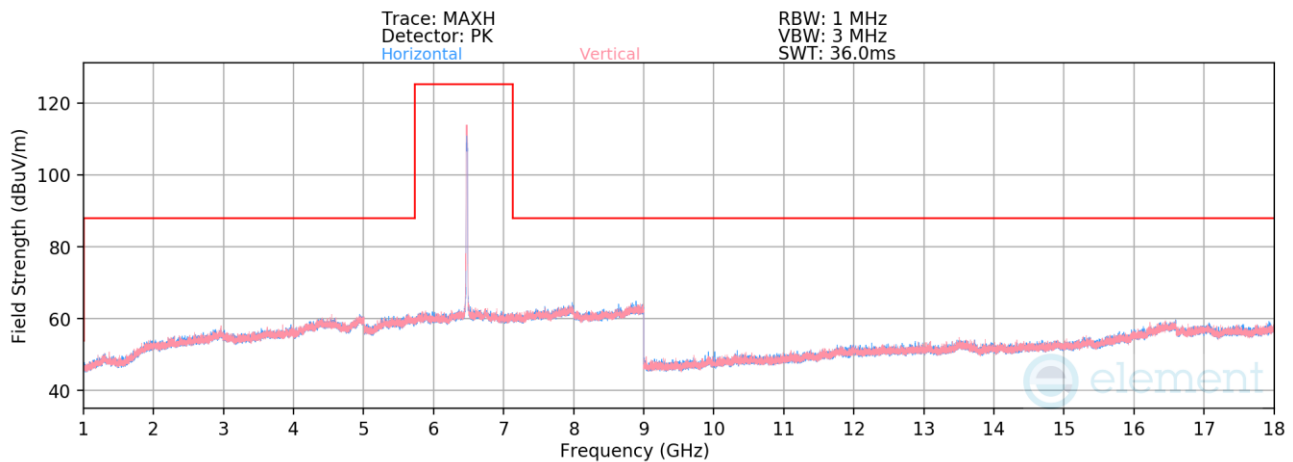

Plot 7-834. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 105 – RU242)

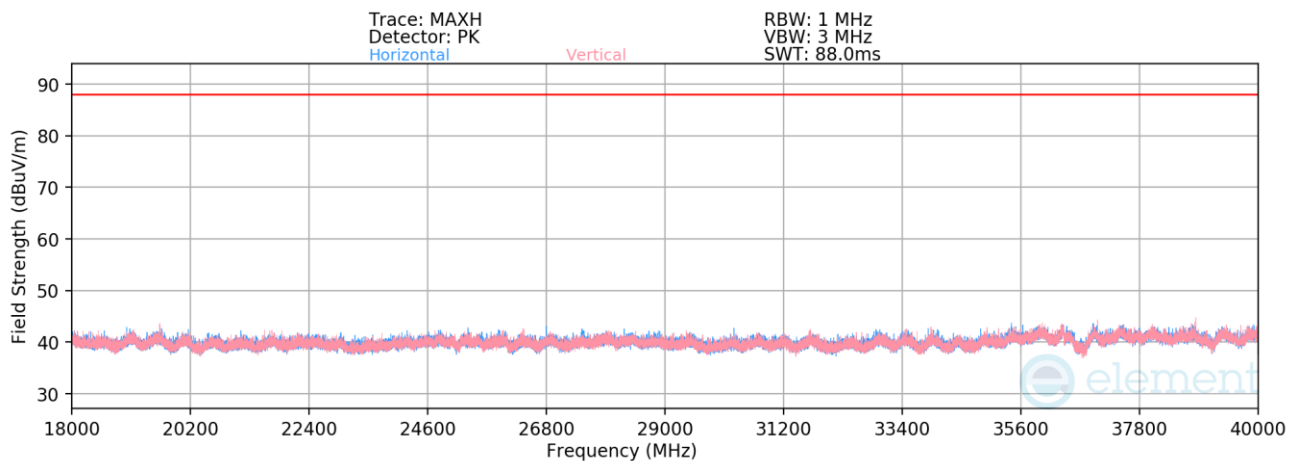


Plot 7-835. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 105 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475 MHz
Channel:	105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12950.00	Average	V	-	-	-84.42	19.33	0.00	41.91	68.23	-26.32
12950.00	Peak	V	-	-	-72.73	19.33	0.00	53.60	88.23	-34.63
* 19425.00	Average	H	-	-	-60.21	-5.95	-9.54	31.29	53.98	-22.69
* 19425.00	Peak	H	-	-	-48.90	-5.95	-9.54	42.61	73.98	-31.37
25900.00	Average	V	-	-	-61.37	-4.39	-9.54	31.70	68.23	-36.53
25900.00	Peak	V	-	-	-50.10	-4.39	-9.54	42.98	88.23	-45.25
32375.00	Average	H	-	-	-62.61	-3.25	-9.54	31.60	68.23	-36.63
32375.00	Peak	H	-	-	-51.59	-3.25	-9.54	42.62	88.23	-45.61
* 38850.00	Average	H	-	-	-64.71	-2.32	-9.54	30.43	53.98	-23.55
* 38850.00	Peak	H	-	-	-53.39	-2.32	-9.54	41.75	73.98	-32.23

Table 7-143. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 288 of 468

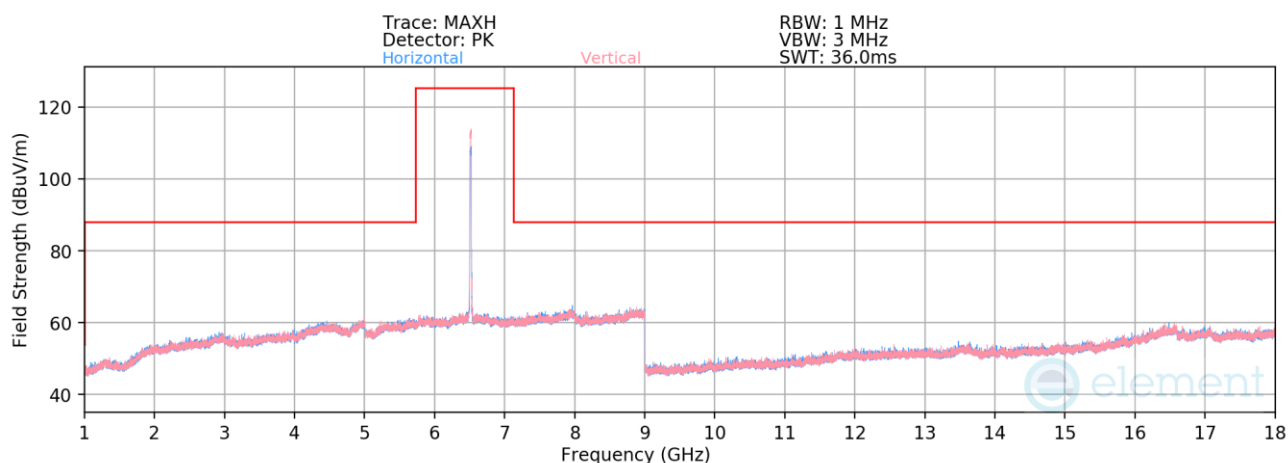

Plot 7-836. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 113 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6515 MHz
Channel:	113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	H	-	-	-84.18	19.29	42.12	68.23	-26.11
13030.00	Peak	H	-	-	-73.16	19.29	53.14	88.23	-35.09

Table 7-144. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 289 of 468

V 12.0 03/03/2026

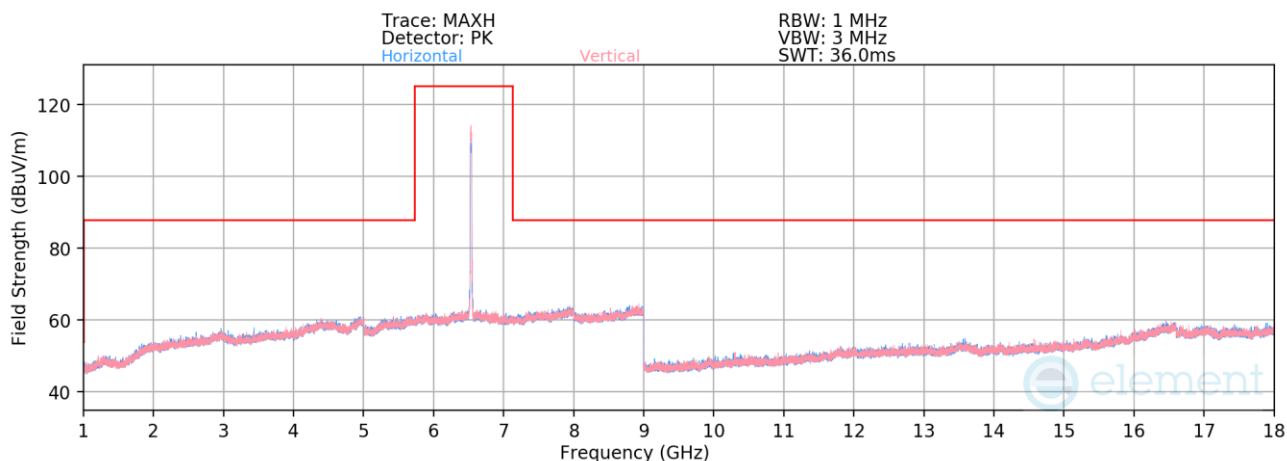


Plot 7-837. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 117 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6535 MHz
Channel:	117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	V	-	-	-84.17	19.38	42.21	68.23	-26.02
13070.00	Peak	V	-	-	-72.87	19.38	53.51	88.23	-34.72

Table 7-145. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 290 of 468

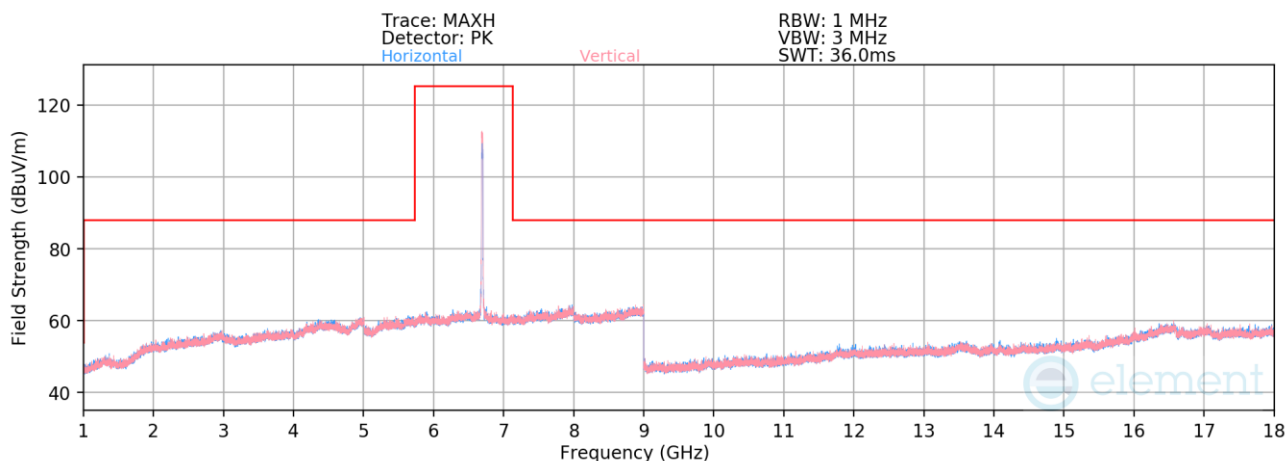

Plot 7-838. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 149 – RU242)

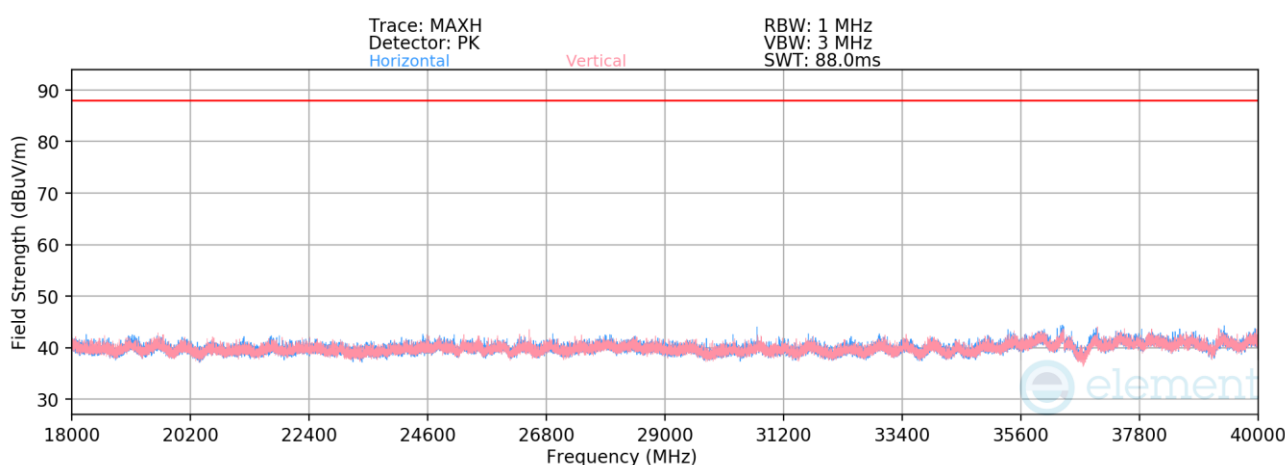


Plot 7-839. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 149 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695 MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-83.74	19.47	0.00	42.73	53.98	-11.25
* 13390.00	Peak	V	-	-	-73.20	19.47	0.00	53.27	73.98	-20.71
* 20085.00	Average	H	-	-	-59.71	-6.22	-9.54	31.53	53.98	-22.45
* 20085.00	Peak	H	-	-	-47.98	-6.21	-9.54	43.27	73.98	-30.71
26780.00	Average	H	-	-	-62.60	-3.89	-9.54	30.98	68.23	-37.25
26780.00	Peak	H	-	-	-51.01	-3.89	-9.54	42.57	88.23	-45.66
33475.00	Average	H	-	-	-61.13	-3.58	-9.54	32.75	68.23	-35.48
33475.00	Peak	H	-	-	-49.86	-3.58	-9.54	44.02	88.23	-44.21

Table 7-146. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 291 of 468

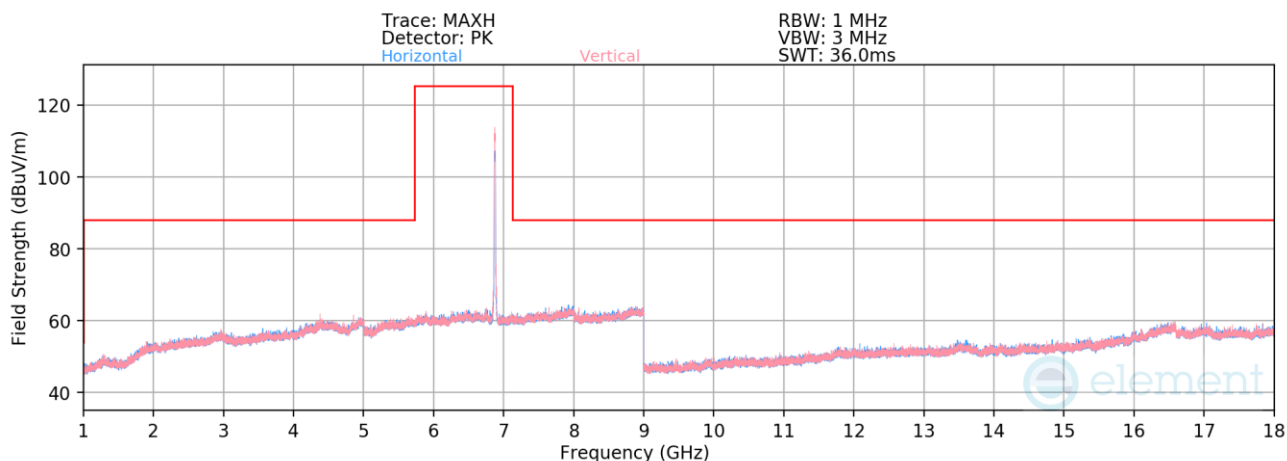

Plot 7-840. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 185 – RU242)


Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6875 MHz
Channel:	185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.95	19.22	42.26	68.23	-25.97
13750.00	Peak	H	-	-	-72.05	19.22	54.16	88.23	-34.07

Table 7-147. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 292 of 468

V 12.0 03/03/2026

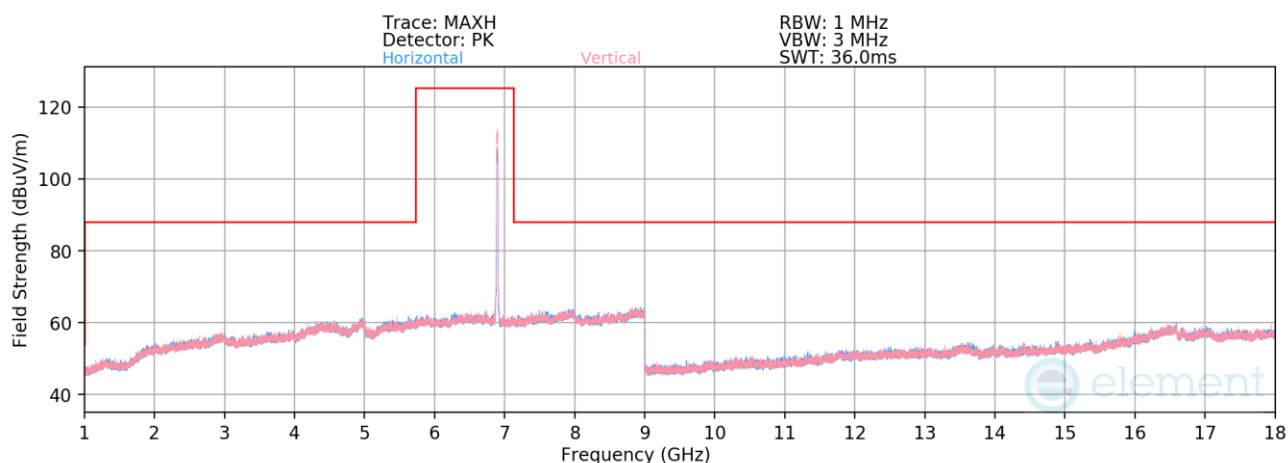

Plot 7-841. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 189 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895 MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Average	H	-	-	-84.20	19.02	41.82	68.23	-26.41
13790.00	Peak	H	-	-	-73.09	19.02	52.93	88.23	-35.30


Table 7-148. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 293 of 468

V 12.0 03/03/2026

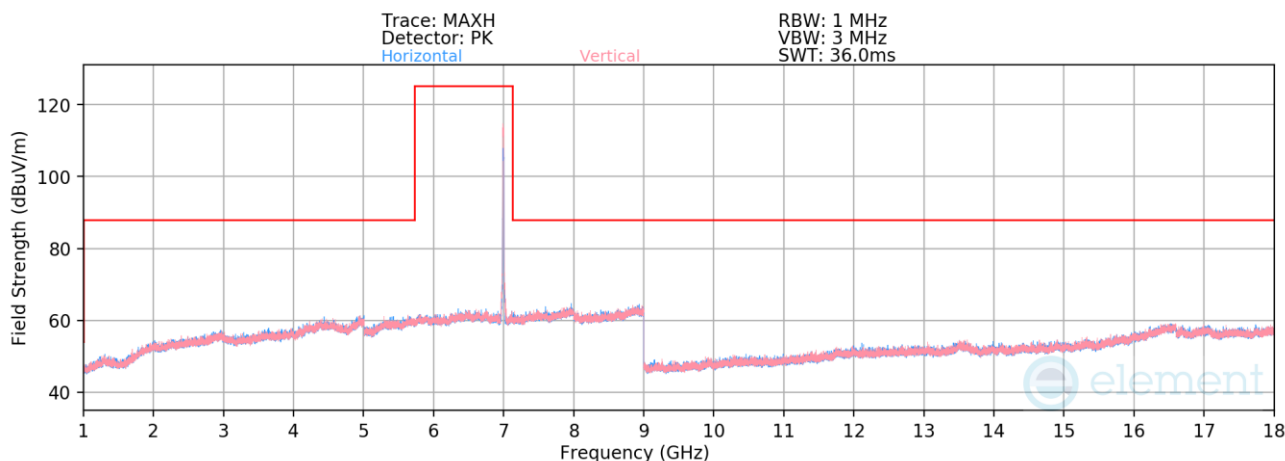

Plot 7-842. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 209 – RU242)

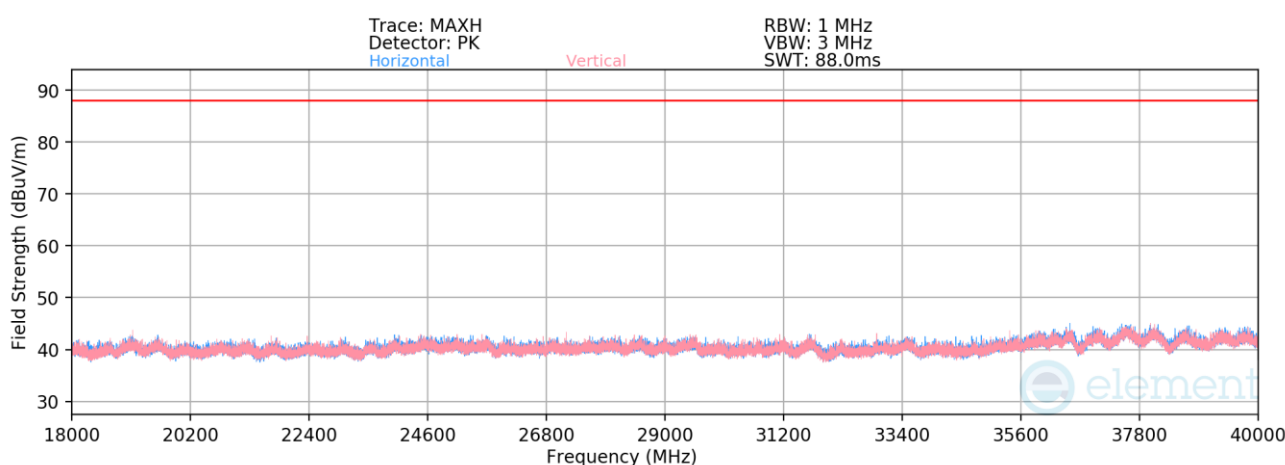


Plot 7-843. Radiated Spurious Emissions 18-40 GHz SDM Diversity (802.11be – Ch. 209 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6995 MHz
Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-84.78	19.54	0.00	41.76	68.23	-26.47
13990.00	Peak	H	-	-	-72.62	19.54	0.00	53.92	88.23	-34.31
* 20985.00	Average	H	-	-	-60.51	-5.87	-9.54	31.09	53.98	-22.89
* 20985.00	Peak	H	-	-	-49.55	-5.87	-9.54	42.05	73.98	-31.93
27980.00	Average	V	-	-	-62.15	-2.82	-9.54	32.49	68.23	-35.74
27980.00	Peak	V	-	-	-50.69	-2.82	-9.54	43.94	88.23	-44.29
34975.00	Average	V	-	-	-61.51	-4.82	-9.54	31.13	68.23	-37.10
34975.00	Peak	V	-	-	-50.05	-4.82	-9.54	42.58	88.23	-45.65

Table 7-149. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 294 of 468

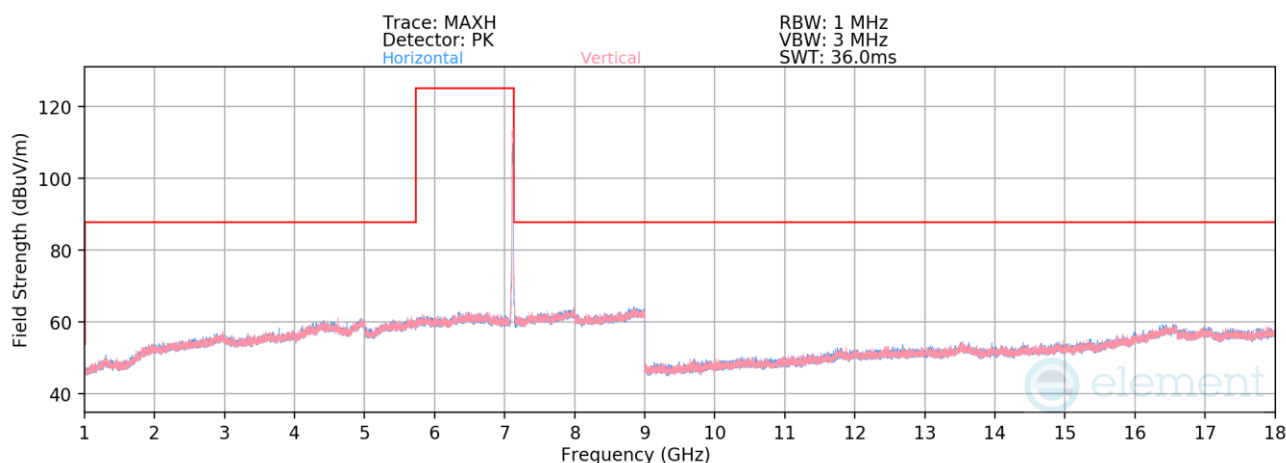

Plot 7-844. Radiated Spurious Emissions above 1 GHz SDM Diversity (802.11be – Ch. 233 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7115 MHz
Channel:	233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14230.00	Average	V	-	-	-83.72	19.58	42.85	68.23	-25.38
14230.00	Peak	V	-	-	-72.69	19.58	53.89	88.23	-34.34

Table 7-150. Radiated Spurious Emission Measurements SDM Diversity – RU242

FCC ID: BCGA3596 IC: 579C-A3596		Test Dates: 05/12/2026 - 09/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-21-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 295 of 468