




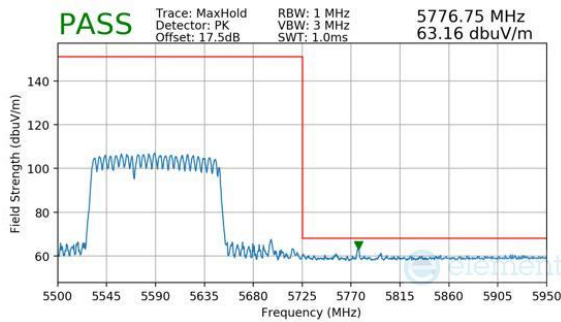


Plot 7-1183. CDD Diversity (Peak, RU996+484, Index 94 (L), Ch.114, MCS11)

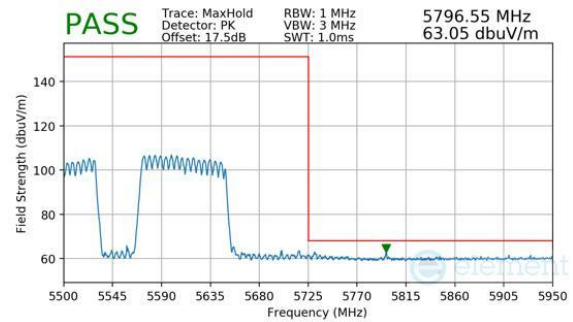


Plot 7-1186. CDD Diversity (Peak, RU996+484, Index 95 (L), Ch.114, MCS11)

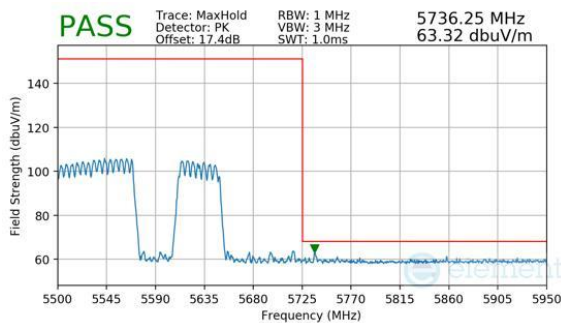


Plot 7-1184. CDD Diversity (Peak, RU996+484, Index 94 (H), Ch.114, MCS11)

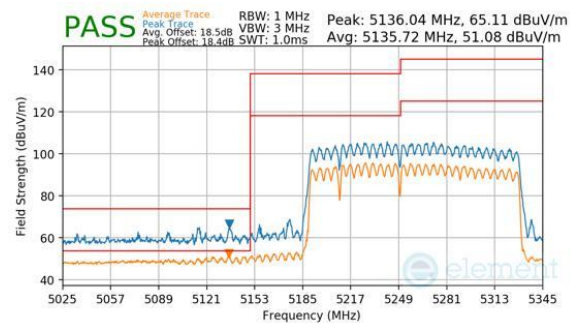

Plot 7-1187. CDD Diversity (Peak & Average, RU996+484+242, Index 96 (L), Ch.50, MCS11)

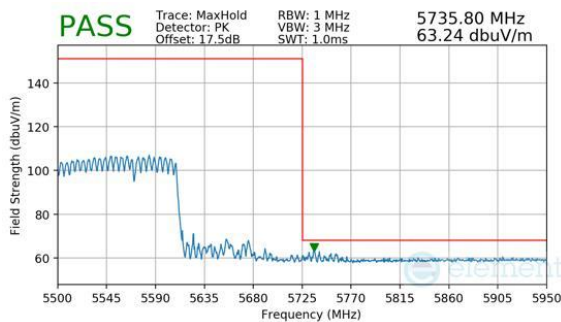


Plot 7-1185. CDD Diversity (Peak, RU996+484, Index 95 (H), Ch.114, MCS11)

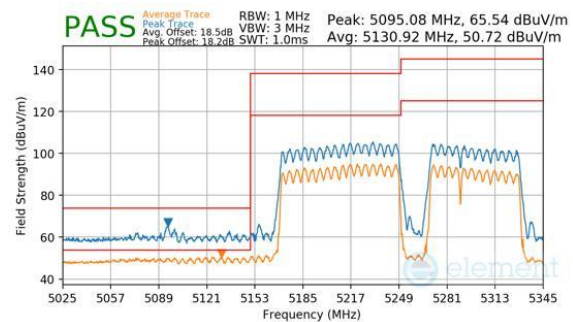


Plot 7-1188. CDD Diversity (Peak & Average, RU996+484+242, Index 96 (H), Ch.50, MCS11)


FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 356 of 380

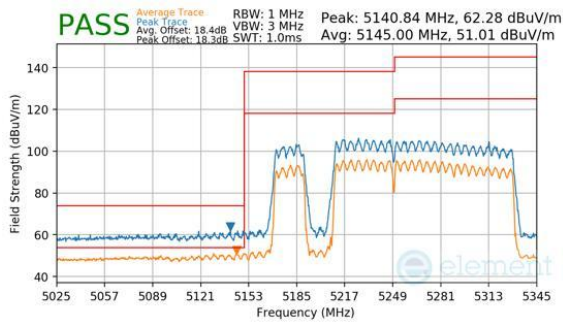


Plot 7-1189. CDD Diversity (Peak & Average, RU996+484+242, Index 97 (L), Ch.50, MCS11)

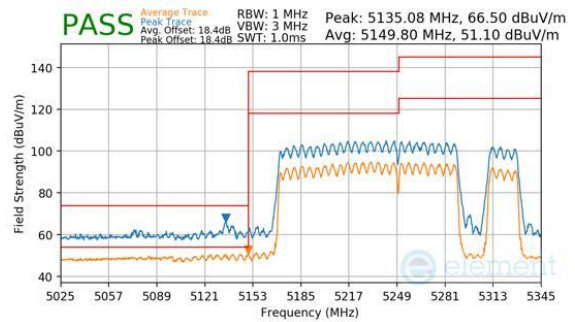


Plot 7-1192. CDD Diversity (Peak & Average, RU996+484+242, Index 98 (H), Ch.50, MCS11)

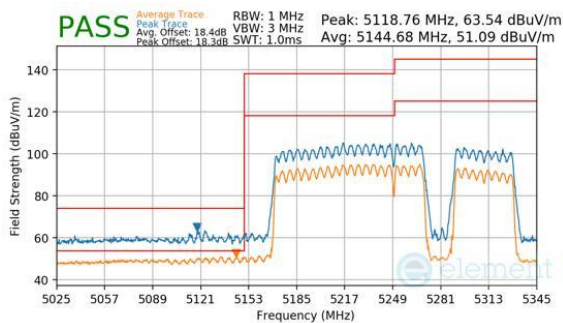


Plot 7-1190. CDD Diversity (Peak & Average, RU996+484+242, Index 97 (H), Ch.50, MCS11)

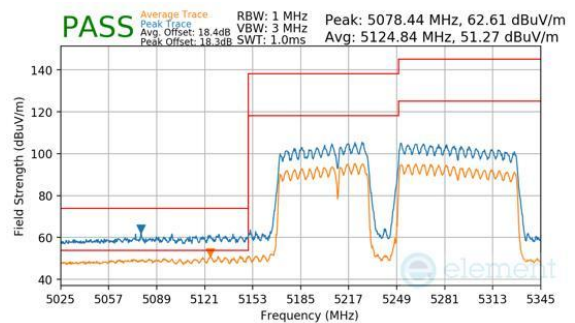

Plot 7-1193. CDD Diversity (Peak & Average, RU996+484+242, Index 99 (L), Ch.50, MCS11)

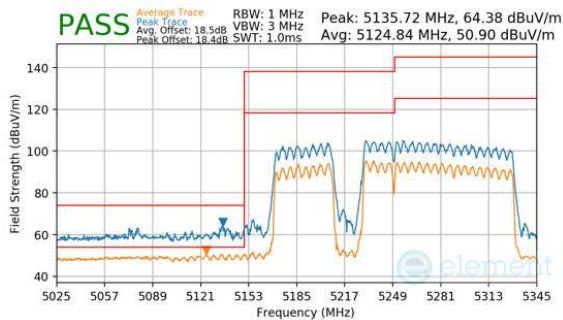


Plot 7-1191. CDD Diversity (Peak & Average, RU996+484+242, Index 98 (L), Ch.50, MCS11)

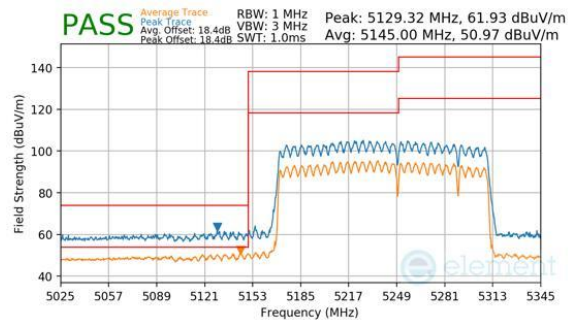


Plot 7-1194. CDD Diversity (Peak & Average, RU996+484+242, Index 99 (H), Ch.50, MCS11)


FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 357 of 380

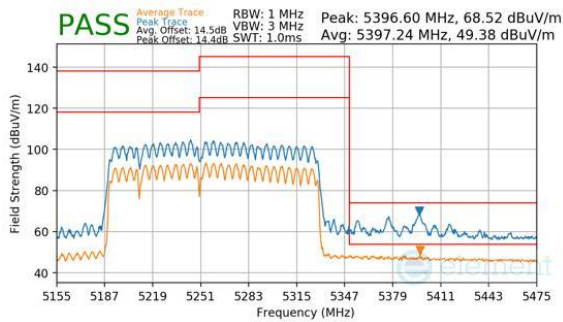


Plot 7-1195. CDD Diversity (Peak & Average, RU996+484+242, Index 96 (L), Ch.50, MCS11)

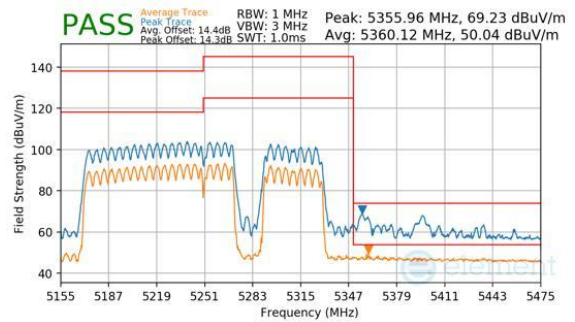


Plot 7-1198. CDD Diversity (Peak & Average, RU996+484+242, Index 97 (H), Ch.50, MCS11)

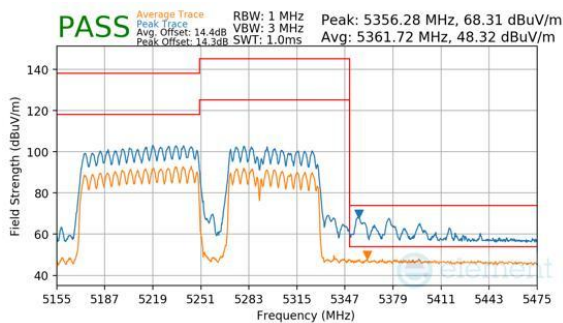


Plot 7-1196. CDD Diversity (Peak & Average, RU996+484+242, Index 96 (H), Ch.50, MCS11)

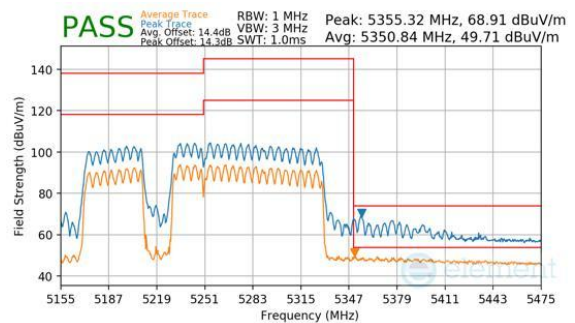

Plot 7-1199. CDD Diversity (Peak & Average, RU996+484+242, Index 98 (L), Ch.50, MCS11)

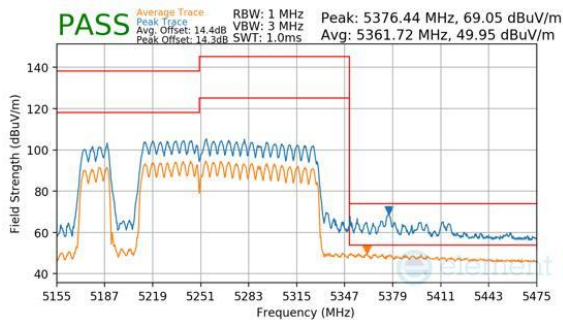


Plot 7-1197. CDD Diversity (Peak & Average, RU996+484+242, Index 97 (L), Ch.50, MCS11)

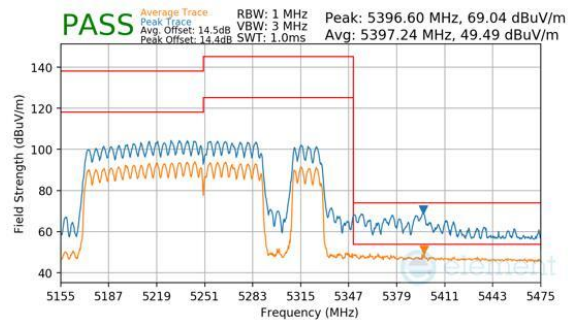


Plot 7-1200. CDD Diversity (Peak & Average, RU996+484+242, Index 98 (H), Ch.50, MCS11)


FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 358 of 380

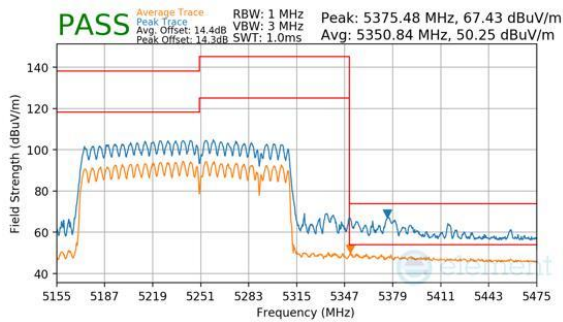


Plot 7-1201. CDD Diversity (Peak & Average, RU996+484+242, Index 99 (H), Ch.50, MCS11)

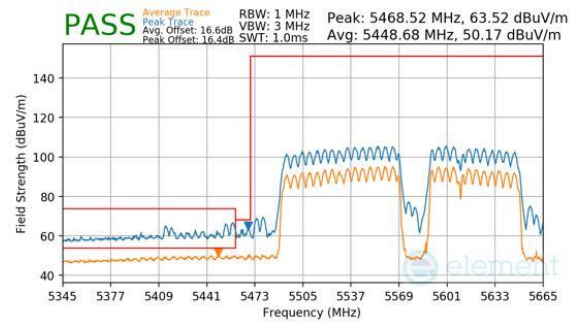


Plot 7-1204. CDD Diversity (Peak & Average, RU996+484+242, Index 96 (H), Ch.114, MCS11)

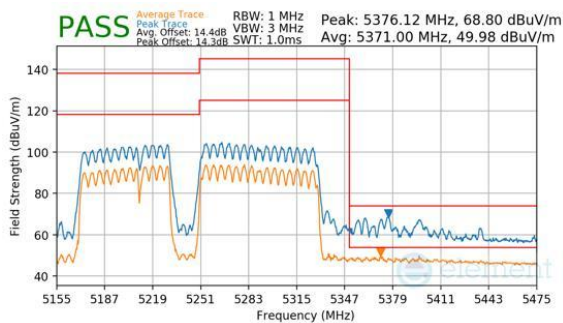


Plot 7-1202. CDD Diversity (Peak & Average, RU996+484+242, Index 99 (L), Ch.50, MCS11)

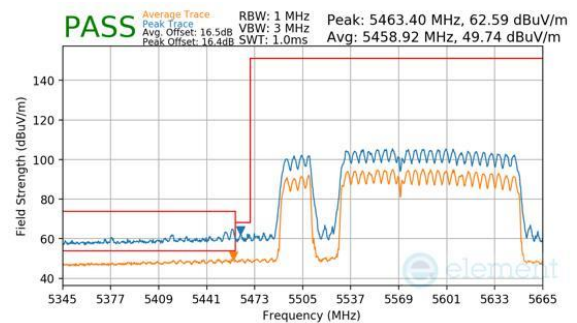

Plot 7-1205. CDD Diversity (Peak & Average, RU996+484+242, Index 97 (L), Ch.114, MCS11)

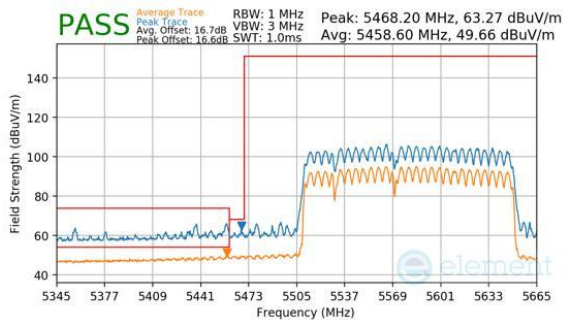


Plot 7-1203. CDD Diversity (Peak & Average, RU996+484+242, Index 96 (L), Ch.114, MCS11)

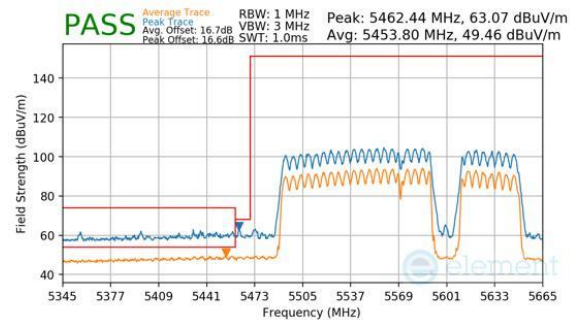


Plot 7-1206. CDD Diversity (Peak & Average, RU996+484+242, Index 97 (H), Ch.114, MCS11)


FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 359 of 380

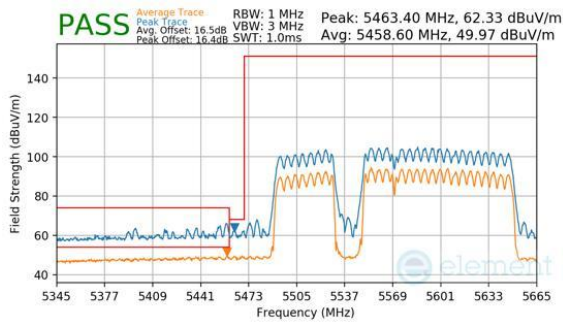


Plot 7-1207. CDD Diversity (Peak & Average, RU996+484+242, Index 98 (L), Ch.114, MCS11)

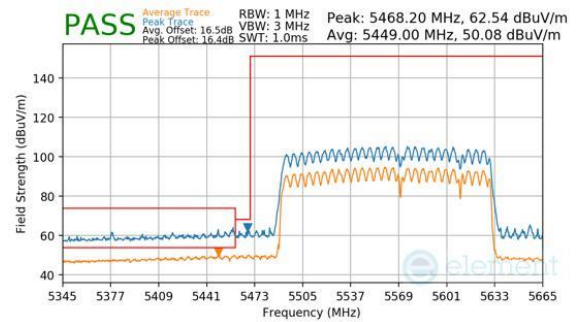


Plot 7-1210. CDD Diversity (Peak & Average, RU996+484+242, Index 99 (H), Ch.114, MCS11)

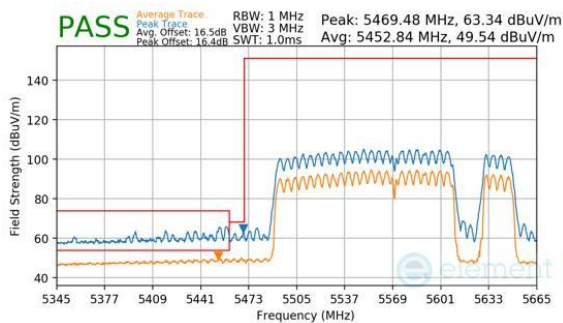


Plot 7-1208. CDD Diversity (Peak & Average, RU996+484+242, Index 98 (H), Ch.114, MCS11)

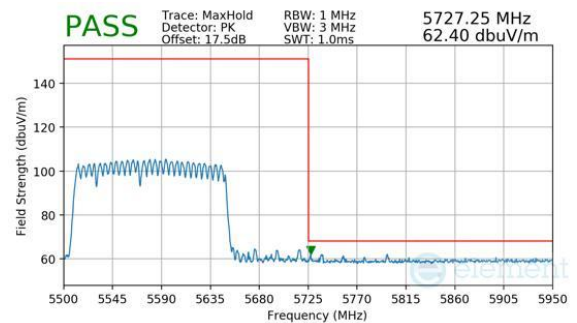

Plot 7-1211. CDD Diversity (Peak, RU996+484+242, Index 96 (L), Ch.114, MCS11)

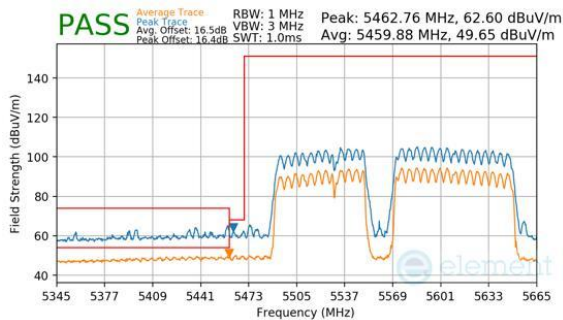


Plot 7-1209. CDD Diversity (Peak & Average, RU996+484+242, Index 99 (L), Ch.114, MCS11)

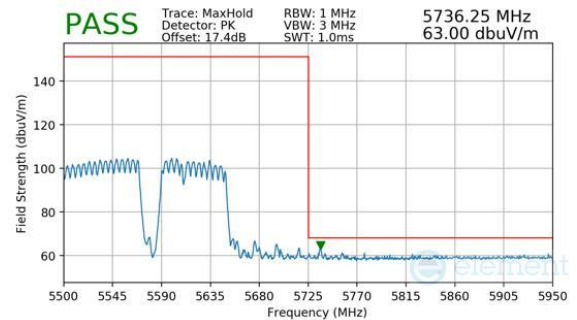


Plot 7-1212. CDD Diversity (Peak, RU996+484+242, Index 96 (H), Ch.114, MCS11)


FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 360 of 380

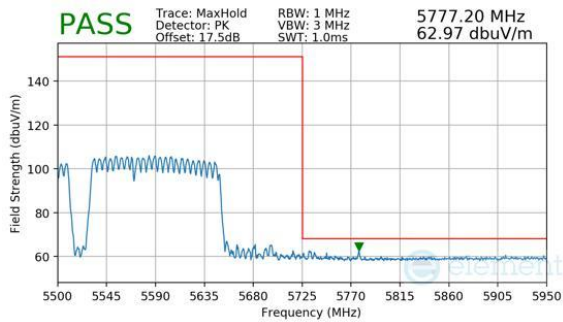


Plot 7-1213. CDD Diversity (Peak, RU996+484+242, Index 97 (L), Ch.114, MCS11)

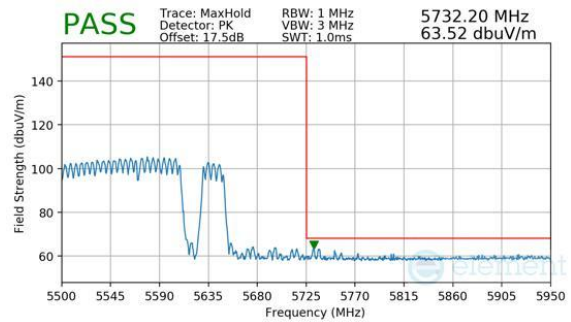


Plot 7-1216. CDD Diversity (Peak, RU996+484+242, Index 98 (H), Ch.114, MCS11)

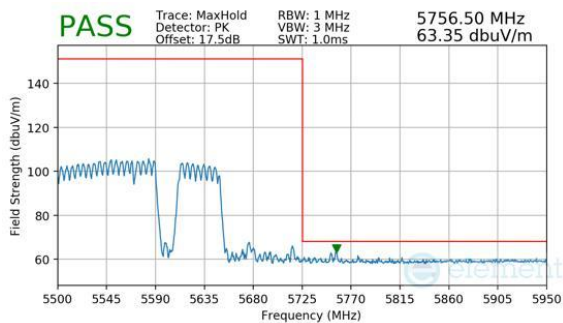


Plot 7-1214. CDD Diversity (Peak, RU996+484+242, Index 97 (H), Ch.114, MCS11)

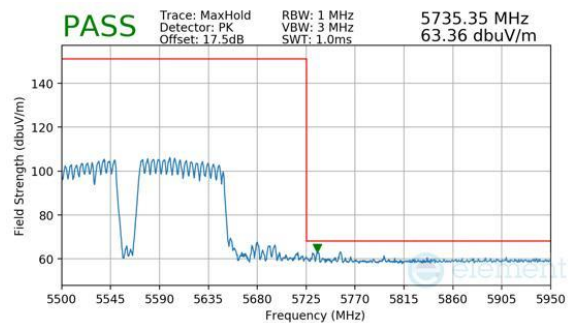

Plot 7-1217. CDD Diversity (Peak, RU996+484+242, Index 99 (L), Ch.114, MCS11)

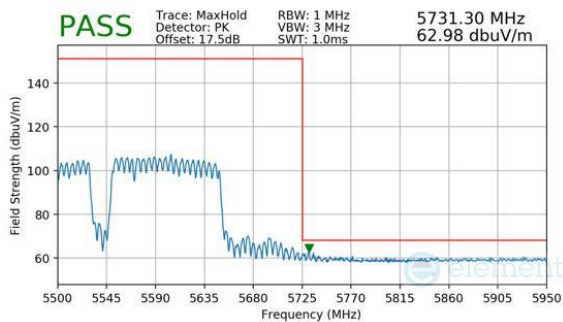


Plot 7-1215. CDD Diversity (Peak, RU996+484+242, Index 98 (L), Ch.114, MCS11)

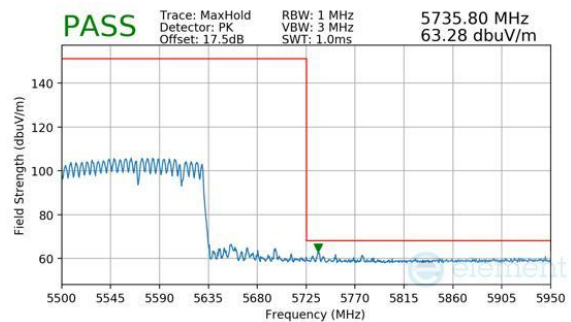


Plot 7-1218. CDD Diversity (Peak, RU996+484+242, Index 99 (H), Ch.114, MCS11)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 361 of 380


RU996X2

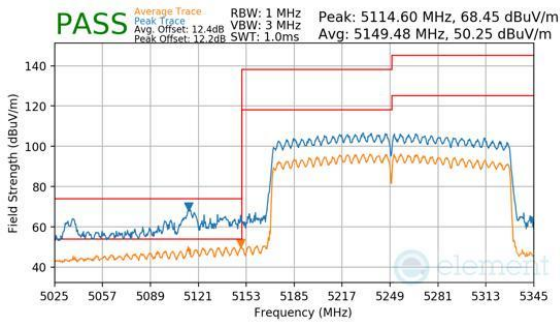


Plot 7-1219. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.50, MCS11)

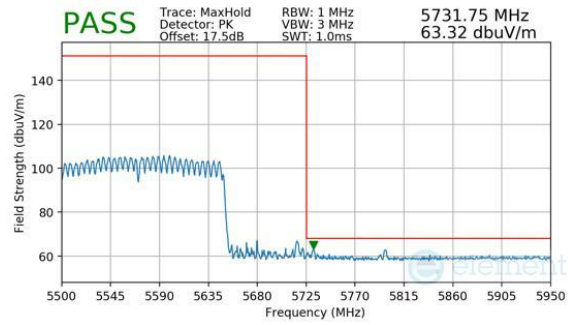

Plot 7-1222. CDD Diversity (Peak, RU996X2, Index 68, Ch.114, MCS11)

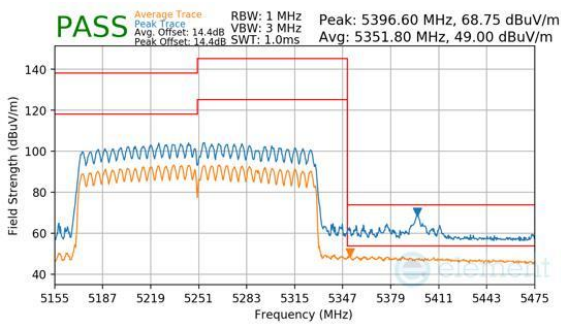

Plot 7-1220. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.50, MCS11)

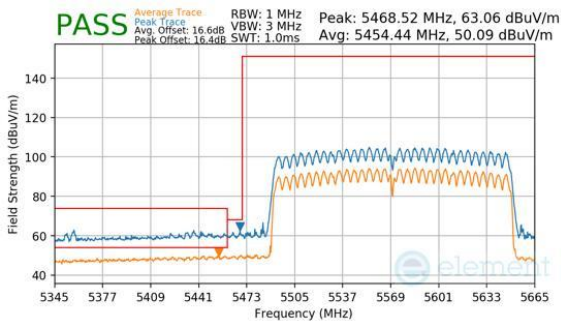

Plot 7-1221. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.114, MCS11)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 362 of 380

7.7 Radiated Spurious Emissions – Below 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive Antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-243 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-243. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 363 of 380

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

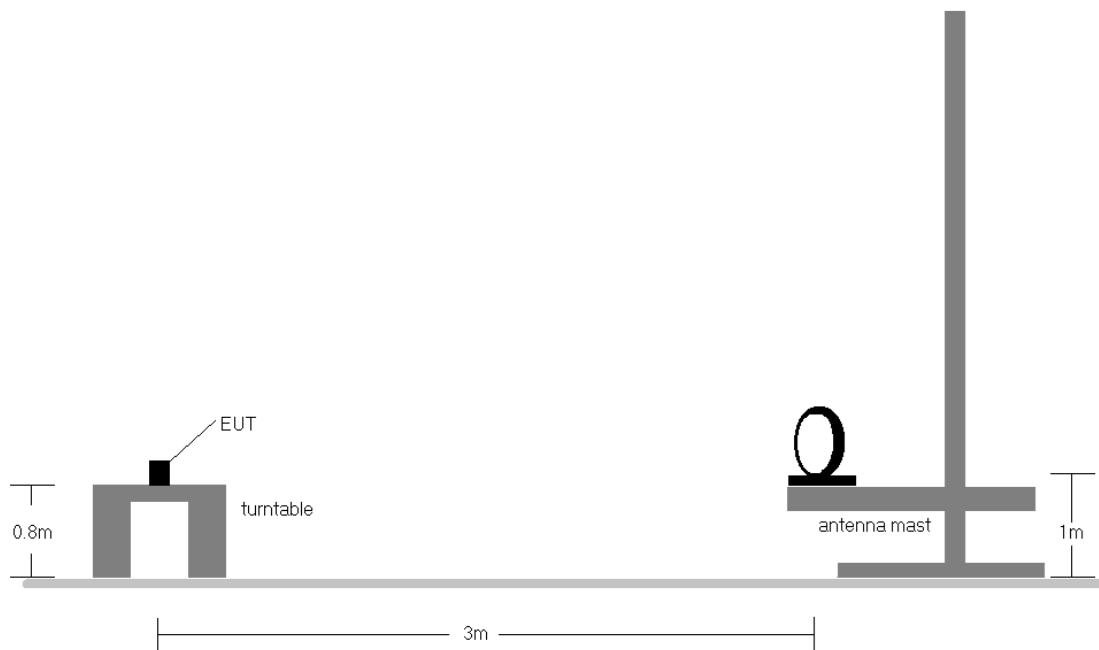


Figure 7-6. Radiated Test Setup < 30 MHz

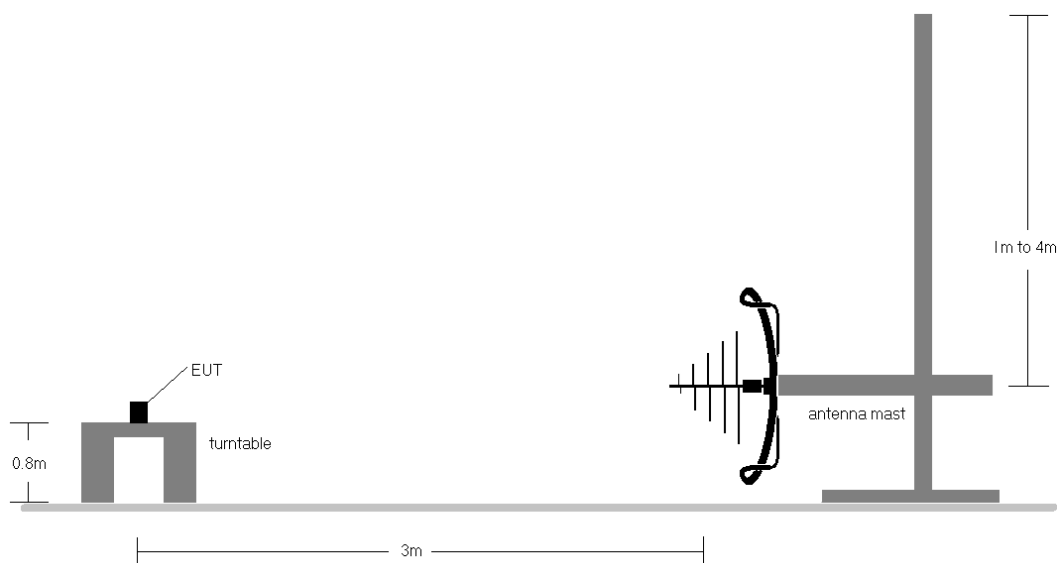


Figure 7-7. Radiated Test Setup < 1 GHz

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 364 of 380

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-243.
2. The broadBand receive Antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop Antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6 dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20 dB of the limit below 30 MHz.
8. The results recorded using the broadBand Antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement Antenna was found to be less than 2:1.
9. All Antenna configurations and data rates were investigated and only the worst case are reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 365 of 380

7.7.1 CDD Primary Radiated Spurious Emissions (Below 1 GHz)

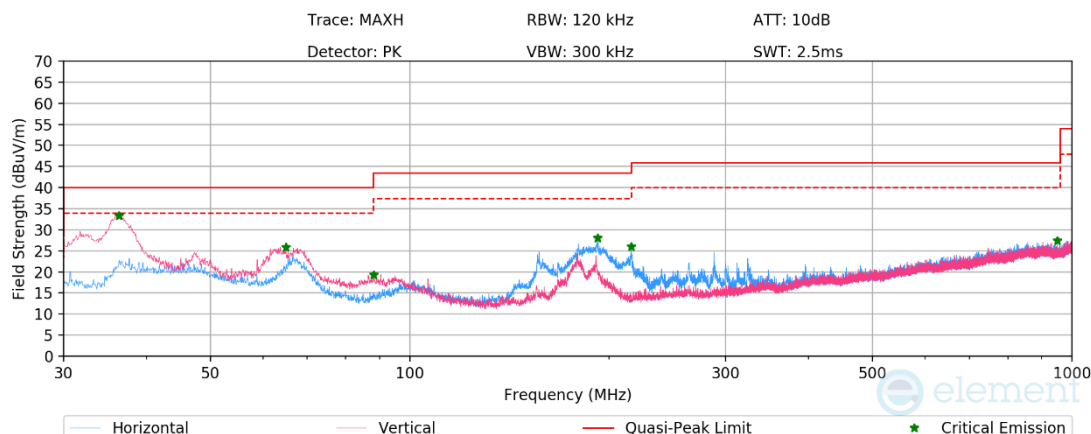


Plot 7-1223. RSE below 1 GHz CDD Primary (RU26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.36	Max-Peak	V	100	8	-53.55	-20.11	33.34	40.00	-6.66
64.98	Max-Peak	V	100	276	-61.07	-20.02	25.92	40.00	-14.08
88.14	Max-Peak	V	100	338	-65.63	-22.02	19.35	43.50	-24.15
192.07	Max-Peak	H	100	198	-60.24	-18.75	28.01	43.50	-15.49
216.01	Max-Peak	H	100	221	-62.66	-18.38	25.96	46.00	-20.04
950.98	Max-Peak	H	300	95	-75.47	-4.07	27.46	46.00	-18.54

Table 7-244. RSE below 1 GHz CDD Primary (RU26 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 366 of 380

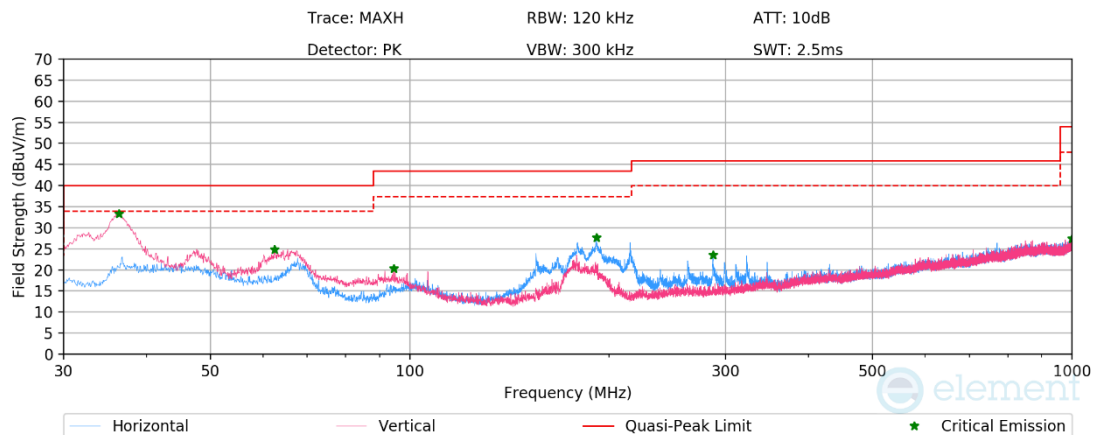


Plot 7-1224. RSE below 1 GHz CDD Primary (RU242 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.36	Max-Peak	V	100	1	-53.55	-20.11	33.35	40.00	-6.65
62.46	Max-Peak	V	100	357	-62.87	-19.23	24.90	40.00	-15.10
94.50	Max-Peak	V	100	232	-66.47	-20.21	20.33	43.50	-23.17
191.29	Max-Peak	H	100	185	-60.45	-18.86	27.69	43.50	-15.81
286.81	Max-Peak	H	100	222	-67.46	-15.95	23.59	46.00	-22.41
999.28	Max-Peak	V	200	2	-76.36	-3.26	27.38	54.00	-26.62

Table 7-245. RSE below 1 GHz CDD Primary (RU242– Ch.40), with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 367 of 380

7.7.2 CDD Diversity Radiated Spurious Emissions (Below 1 GHz)

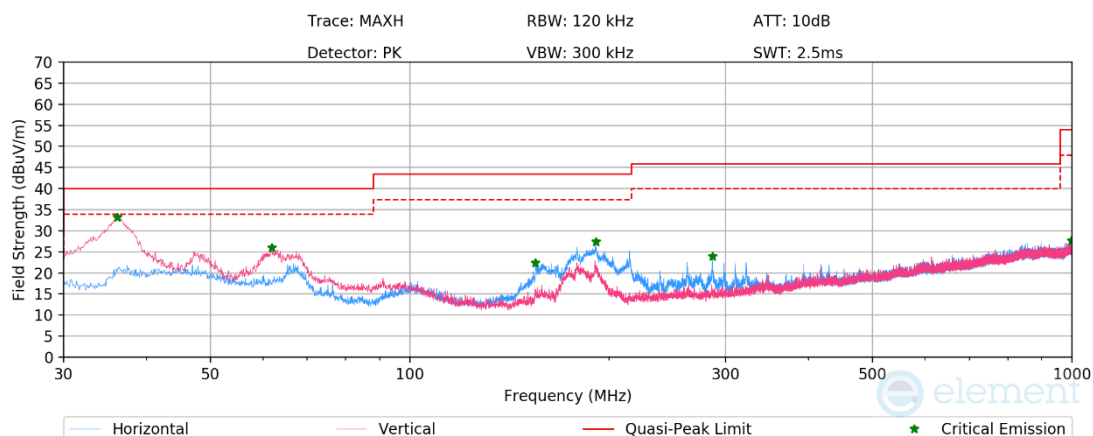


Plot 7-1225. RSE below 1 GHz CDD Diversity (RU26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.18	Max-Peak	V	100	61	-53.70	-20.16	33.14	40.00	-6.86
61.86	Max-Peak	V	100	352	-61.97	-19.05	25.98	40.00	-14.02
154.81	Max-Peak	H	200	176	-62.98	-21.62	22.40	43.50	-21.10
190.93	Max-Peak	H	100	202	-60.69	-18.92	27.39	43.50	-16.11
286.45	Max-Peak	H	100	239	-67.05	-15.99	23.96	46.00	-22.04
998.92	Max-Peak	V	100	357	-76.09	-3.26	27.65	54.00	-26.35

Table 7-246. RSE below 1 GHz CDD Diversity (RU26 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 368 of 380

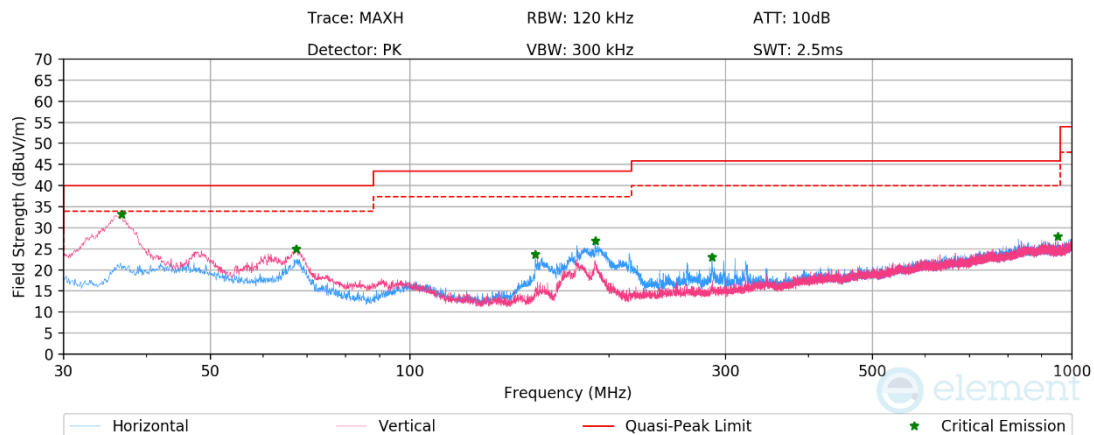

Plot 7-1226. RSE below 1 GHz CDD Diversity (RU242 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.72	Max-Peak	V	100	0	-53.84	-20.00	33.15	40.00	-6.85
67.38	Max-Peak	V	200	216	-61.12	-20.86	25.01	40.00	-14.99
154.81	Max-Peak	H	200	167	-61.65	-21.62	23.73	43.50	-19.77
190.69	Max-Peak	H	100	185	-61.20	-18.95	26.85	43.50	-16.65
286.09	Max-Peak	H	100	257	-67.91	-16.04	23.05	46.00	-22.95
951.34	Max-Peak	V	100	229	-74.97	-4.11	27.92	46.00	-18.08

Table 7-247. RSE below 1 GHz CDD Diversity (RU242– Ch.40), with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 369 of 380

7.8 AC Line Conducted Emissions Measurement

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-248. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 370 of 380

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

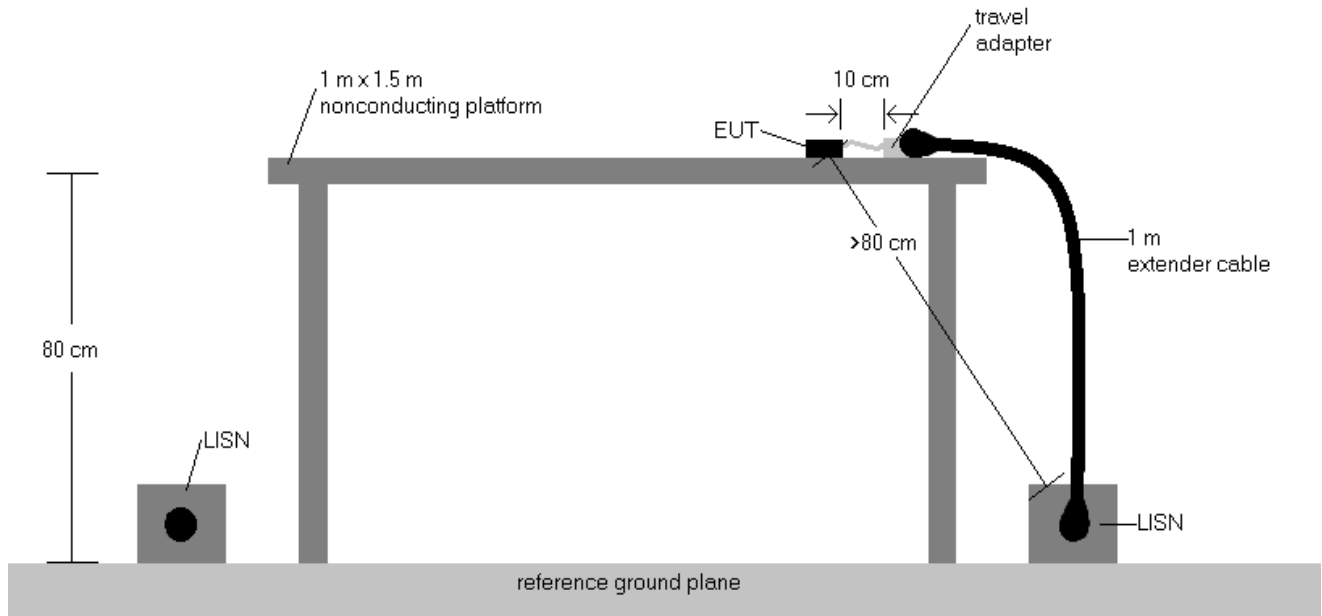



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30 MHz are specified in 15.207 and RSS-Gen (7.4.2).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 371 of 380

7.8.1 CDD Primary AC Line Conducted Emissions Measurement

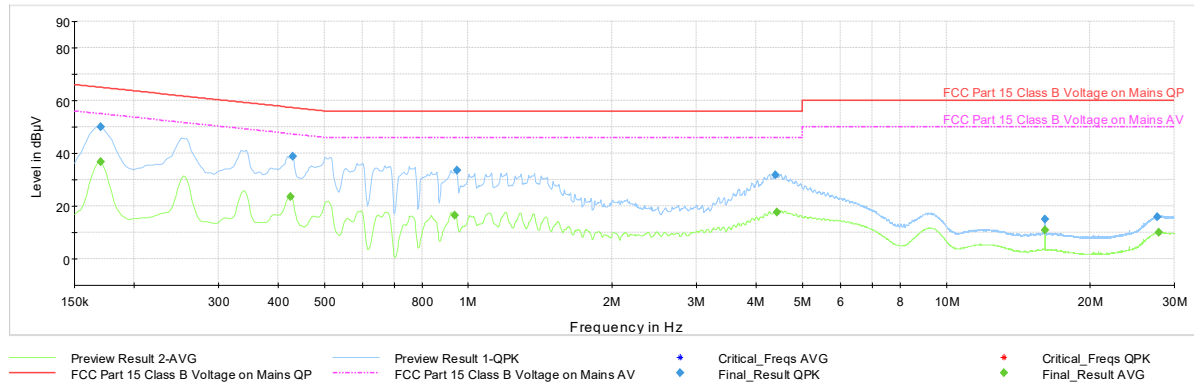


Plot 7-1227. AC Line Conducted Plot with 11be CDD Primary – RU26 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.170	FINAL	—	36.72	54.95	-18.23	L1	GND
0.170	FINAL	50.1	—	64.95	-14.84	L1	GND
0.425	FINAL	—	23.48	47.36	-23.88	L1	GND
0.429	FINAL	38.9	—	57.27	-18.40	L1	GND
0.938	FINAL	—	16.33	46.00	-29.67	L1	GND
0.947	FINAL	33.6	—	56.00	-22.43	L1	GND
4.389	FINAL	31.7	—	56.00	-24.26	L1	GND
4.427	FINAL	—	17.70	46.00	-28.30	L1	GND
16.085	FINAL	14.9	—	60.00	-45.06	L1	GND
16.085	FINAL	—	10.87	50.00	-39.13	L1	GND
27.665	FINAL	16.0	—	60.00	-44.04	L1	GND
27.890	FINAL	—	10.06	50.00	-39.94	L1	GND

Table 7-249. AC Line Conducted with 11be CDD Primary – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 372 of 380

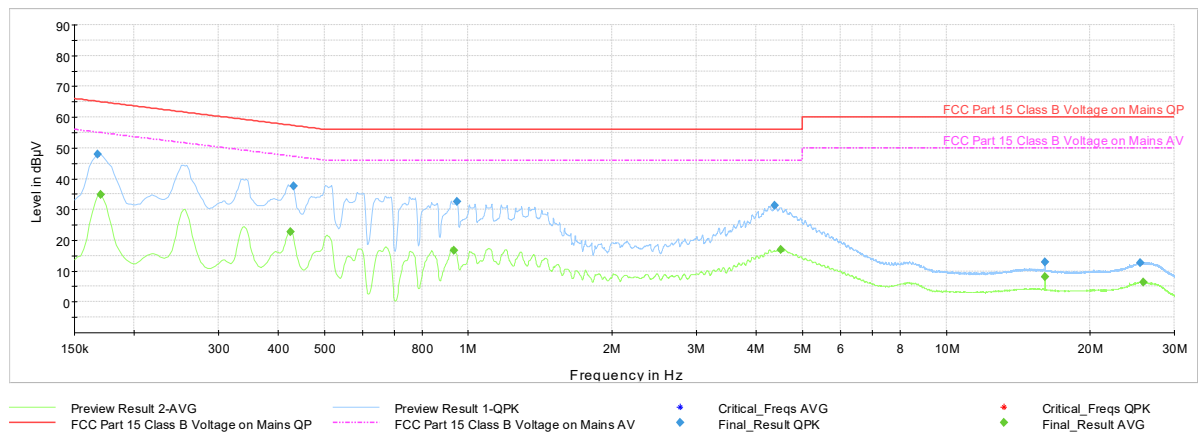


Plot 7-1228. AC Line Conducted Plot with 11be CDD Primary – RU26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	48.0	—	65.06	-17.09	N	GND
0.170	FINAL	—	34.94	54.95	-20.01	N	GND
0.425	FINAL	—	22.75	47.36	-24.61	N	GND
0.431	FINAL	37.7	—	57.23	-19.54	N	GND
0.933	FINAL	—	16.82	46.00	-29.18	N	GND
0.949	FINAL	32.6	—	56.00	-23.36	N	GND
4.378	FINAL	31.2	—	56.00	-24.82	N	GND
4.506	FINAL	—	17.00	46.00	-29.00	N	GND
16.096	FINAL	12.9	—	60.00	-47.06	N	GND
16.098	FINAL	—	8.09	50.00	-41.91	N	GND
25.411	FINAL	12.8	—	60.00	-47.24	N	GND
25.852	FINAL	—	6.39	50.00	-43.61	N	GND

Table 7-250. AC Line Conducted with 11be CDD Primary – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 373 of 380

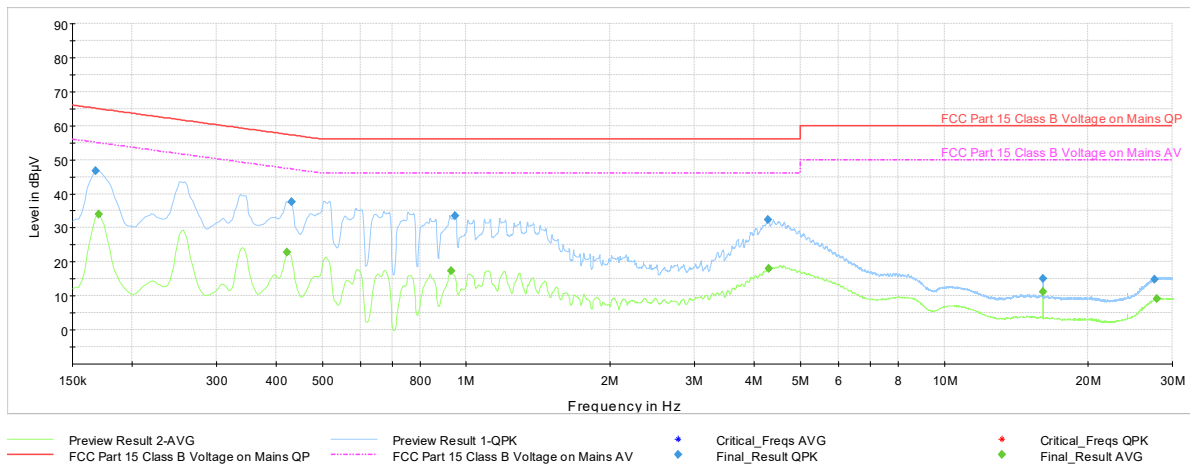


Plot 7-1229. AC Line Conducted Plot with 11be CDD Primary – RU242 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	46.8	—	65.06	-18.26	L1	GND
0.170	FINAL	—	33.94	54.95	-21.01	L1	GND
0.422	FINAL	—	22.70	47.40	-24.71	L1	GND
0.431	FINAL	37.7	—	57.23	-19.52	L1	GND
0.929	FINAL	—	17.42	46.00	-28.58	L1	GND
0.949	FINAL	33.6	—	56.00	-22.41	L1	GND
4.281	FINAL	32.3	—	56.00	-23.73	L1	GND
4.297	FINAL	—	18.07	46.00	-27.93	L1	GND
16.085	FINAL	15.1	—	60.00	-44.89	L1	GND
16.085	FINAL	—	11.19	50.00	-38.81	L1	GND
27.553	FINAL	14.9	—	60.00	-45.13	L1	GND
27.841	FINAL	—	9.03	50.00	-40.97	L1	GND

Table 7-251. AC Line Conducted with 11be CDD Primary – RU242 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 374 of 380

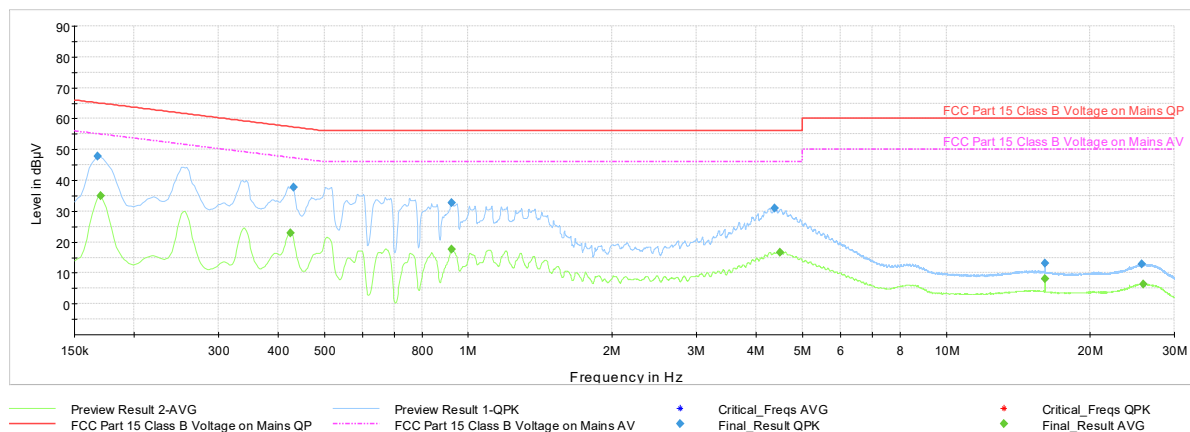


Plot 7-1230. AC Line Conducted Plot with 11be CDD Primary – RU242 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	47.7	—	65.06	-17.32	N	GND
0.170	FINAL	—	34.88	54.95	-20.07	N	GND
0.425	FINAL	—	22.80	47.36	-24.56	N	GND
0.431	FINAL	37.7	—	57.23	-19.56	N	GND
0.922	FINAL	—	17.76	46.00	-28.24	N	GND
0.922	FINAL	32.8	—	56.00	-23.19	N	GND
4.371	FINAL	31.0	—	56.00	-25.00	N	GND
4.493	FINAL	—	16.72	46.00	-29.28	N	GND
16.094	FINAL	13.2	—	60.00	-46.78	N	GND
16.094	FINAL	—	8.09	50.00	-41.91	N	GND
25.674	FINAL	12.9	—	60.00	-47.10	N	GND
25.852	FINAL	—	6.43	50.00	-43.57	N	GND

Table 7-252. AC Line Conducted with 11be CDD Primary – RU242 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 375 of 380

7.8.2 CDD Diversity AC Line Conducted Emissions Measurement

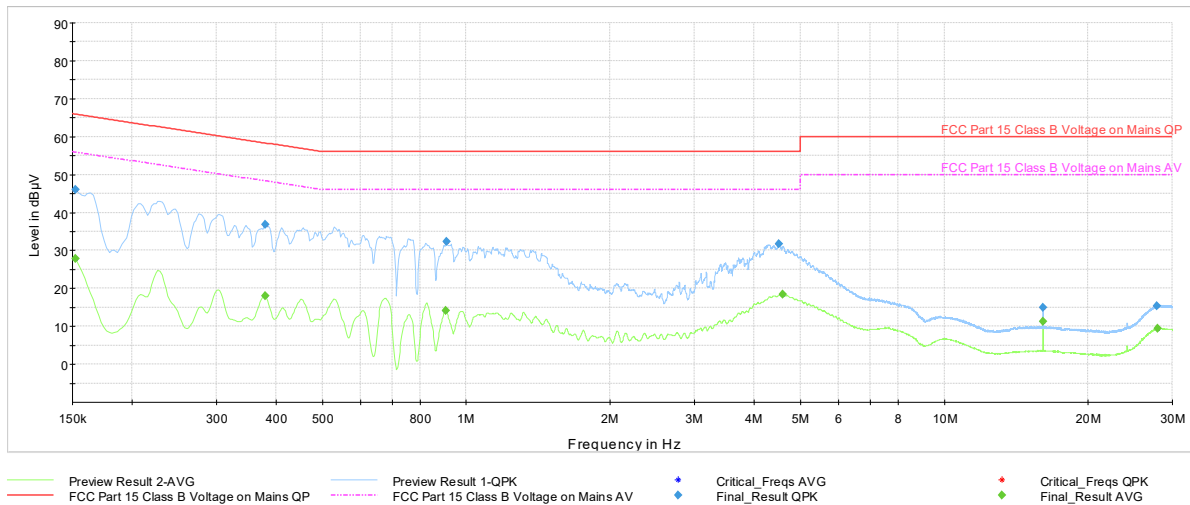


Plot 7-1231. AC Line Conducted Plot with 11be CDD Diversity – RU26 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	—	27.81	55.88	-28.06	L1	GND
0.152	FINAL	46.1	—	65.88	-19.79	L1	GND
0.380	FINAL	—	17.97	48.29	-30.32	L1	GND
0.380	FINAL	36.8	—	58.29	-21.52	L1	GND
0.906	FINAL	—	14.17	46.00	-31.83	L1	GND
0.908	FINAL	32.3	—	56.00	-23.68	L1	GND
4.511	FINAL	31.6	—	56.00	-24.36	L1	GND
4.596	FINAL	—	18.43	46.00	-27.57	L1	GND
16.078	FINAL	15.0	—	60.00	-45.04	L1	GND
16.078	FINAL	—	11.18	50.00	-38.82	L1	GND
27.827	FINAL	15.4	—	60.00	-44.56	L1	GND
27.949	FINAL	—	9.49	50.00	-40.51	L1	GND

Table 7-253. AC Line Conducted with 11be CDD Diversity – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 376 of 380

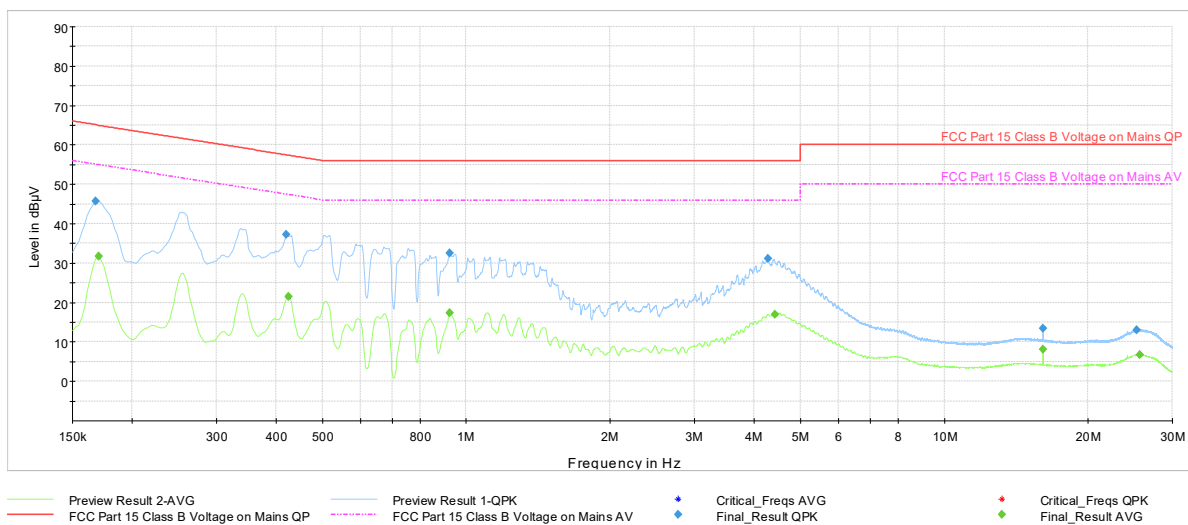


Plot 7-1232. AC Line Conducted Plot with 11be CDD Diversity – RU26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	45.8	—	65.06	-19.31	N	GND
0.170	FINAL	—	31.74	54.95	-23.21	N	GND
0.420	FINAL	37.2	—	57.45	-20.25	N	GND
0.425	FINAL	—	21.47	47.36	-25.89	N	GND
0.924	FINAL	—	17.28	46.00	-28.72	N	GND
0.924	FINAL	32.5	—	56.00	-23.48	N	GND
4.286	FINAL	31.1	—	56.00	-24.92	N	GND
4.427	FINAL	—	17.06	46.00	-28.94	N	GND
16.094	FINAL	13.4	—	60.00	-46.59	N	GND
16.094	FINAL	—	8.10	50.00	-41.90	N	GND
25.307	FINAL	13.0	—	60.00	-46.96	N	GND
25.629	FINAL	—	6.78	50.00	-43.22	N	GND

Table 7-254. AC Line Conducted with 11be CDD Diversity – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 377 of 380

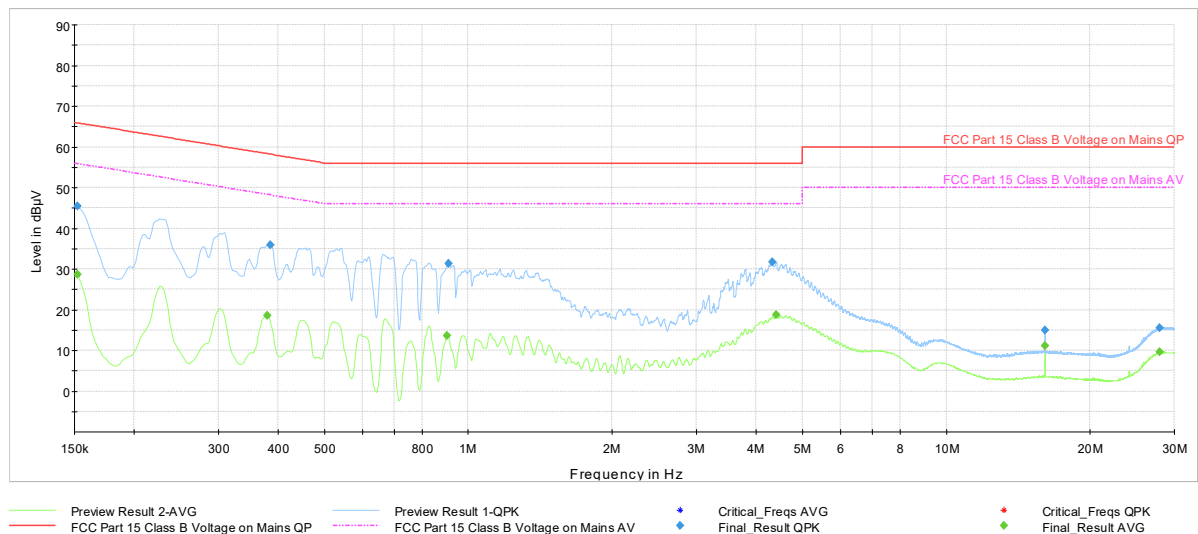


Plot 7-1233. AC Line Conducted Plot with 11be CDD Diversity – RU242 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	—	28.58	55.88	-27.30	L1	GND
0.152	FINAL	45.4	—	65.88	-20.46	L1	GND
0.380	FINAL	—	18.49	48.29	-29.80	L1	GND
0.386	FINAL	36.0	—	58.14	-22.19	L1	GND
0.904	FINAL	—	13.66	46.00	-32.34	L1	GND
0.908	FINAL	31.4	—	56.00	-24.58	L1	GND
4.319	FINAL	31.7	—	56.00	-24.26	L1	GND
4.405	FINAL	—	18.82	46.00	-27.18	L1	GND
16.080	FINAL	15.0	—	60.00	-44.97	L1	GND
16.080	FINAL	—	11.19	50.00	-38.81	L1	GND
27.951	FINAL	—	9.66	50.00	-40.34	L1	GND
27.951	FINAL	15.5	—	60.00	-44.49	L1	GND

Table 7-255. AC Line Conducted with 11be CDD Diversity – RU242 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 378 of 380

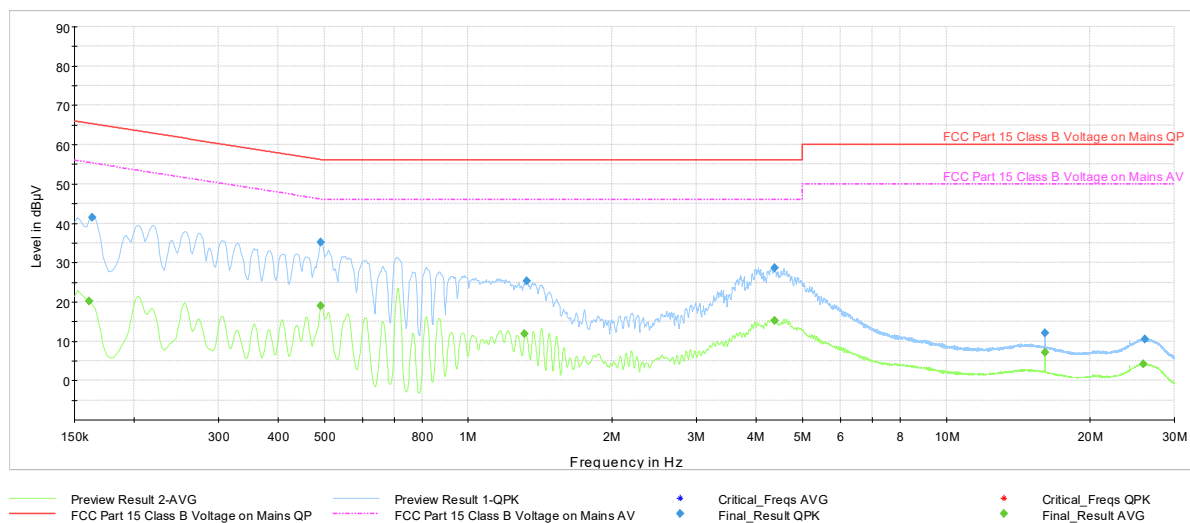

Plot 7-1234. AC Line Conducted Plot with 11be CDD Diversity – RU242 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	20.20	55.40	-35.20	N	GND
0.164	FINAL	41.6	—	65.28	-23.74	N	GND
0.492	FINAL	—	18.94	46.13	-27.19	N	GND
0.492	FINAL	35.2	—	56.13	-20.95	N	GND
1.313	FINAL	—	11.98	46.00	-34.02	N	GND
1.327	FINAL	25.3	—	56.00	-30.69	N	GND
4.371	FINAL	28.7	—	56.00	-27.27	N	GND
4.371	FINAL	—	15.33	46.00	-30.67	N	GND
16.089	FINAL	12.1	—	60.00	-47.95	N	GND
16.089	FINAL	—	7.21	50.00	-42.79	N	GND
25.872	FINAL	—	4.18	50.00	-45.82	N	GND
25.936	FINAL	10.5	—	60.00	-49.48	N	GND

Table 7-256. AC Line Conducted with 11be CDD Diversity – RU242 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 379 of 380

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3596** and **IC: 579C-A3596** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 380 of 380