




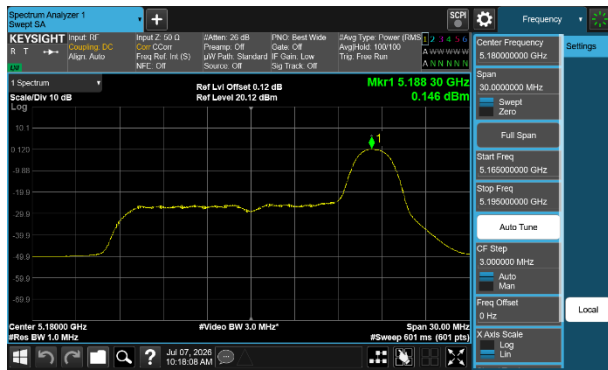


Plot 7-246 PSD CDD Diversity Antenna 5T (20 MHz BW 802.11be(RU) RU26 Index8 - Ch.36)

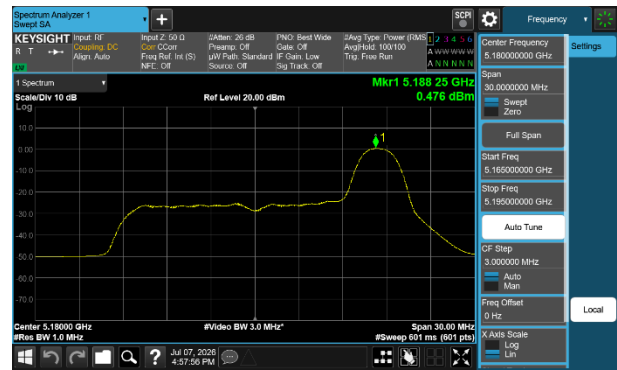


Plot 7-250 PSD CDD Diversity Antenna 1B (20 MHz BW 802.11be(RU) RU26 Index8 - Ch.36)

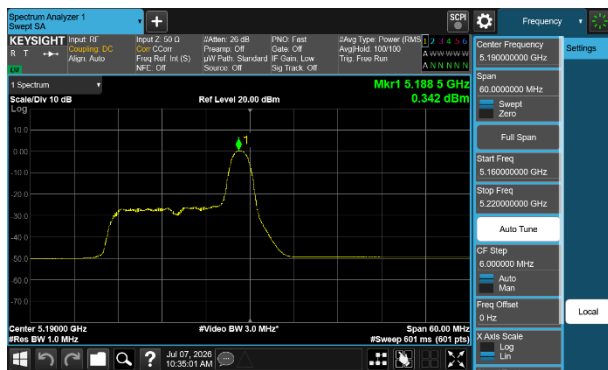


Plot 7-247 PSD CDD Diversity Antenna 5T (40 MHz BW 802.11be(RU) RU26 Index8 - Ch.38)

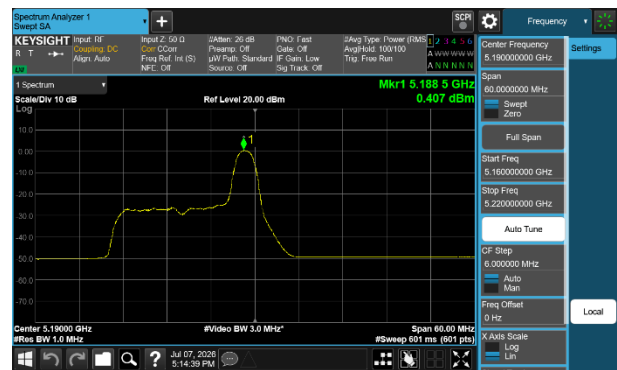


Plot 7-251 PSD CDD Diversity Antenna 1B (40 MHz BW 802.11be(RU) RU26 Index8 - Ch.38)

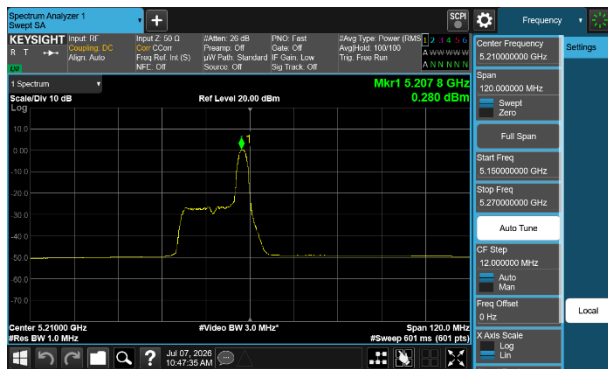


Plot 7-248 PSD CDD Diversity Antenna 5T (80 MHz BW 802.11be(RU) RU26 Index17 - Ch.42)

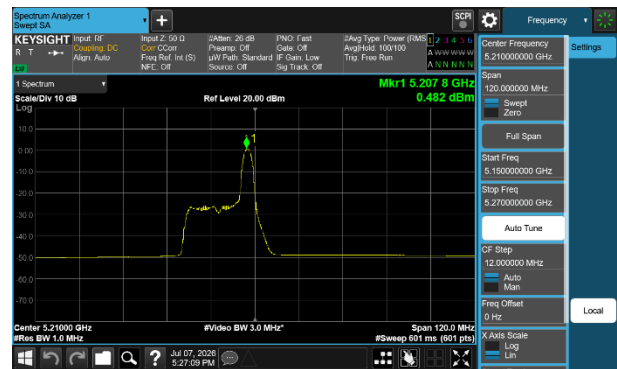

Plot 7-252 PSD CDD Diversity Antenna 1B (80 MHz BW 802.11be(RU) RU26 Index17 - Ch.42)

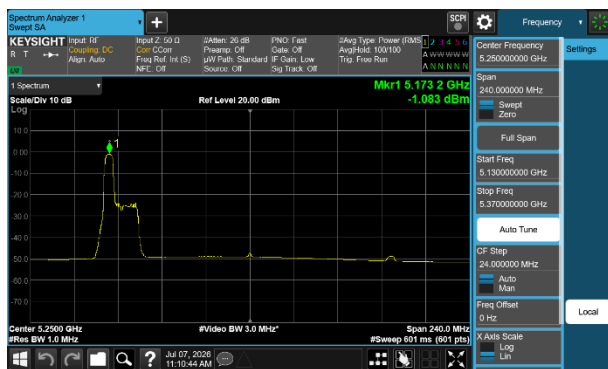


Plot 7-249 PSD CDD Diversity Antenna 5T (160 MHz BW 802.11be(RU) RU52 Index37 - Ch.50)

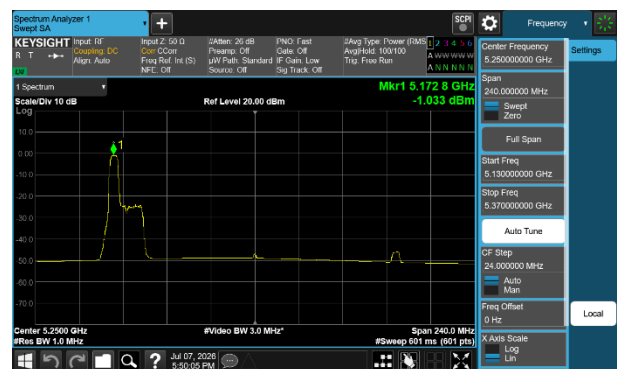


Plot 7-253 PSD CDD Diversity Antenna 1B (160 MHz BW 802.11be(RU) RU52 Index37 - Ch.50)


FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 139 of 380

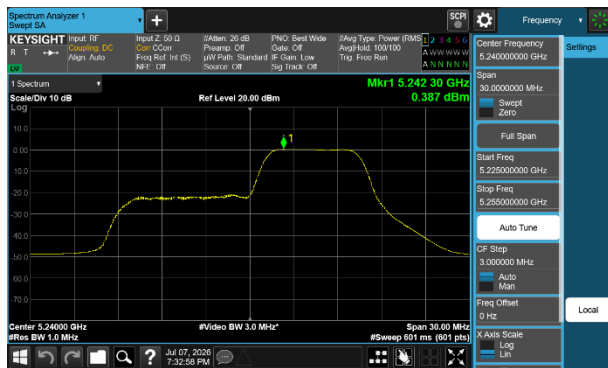


Plot 7-254 PSD CDD Diversity Antenna 5T (20 MHz BW 802.11be(RU) RU52+26 Index72 - Ch.48)

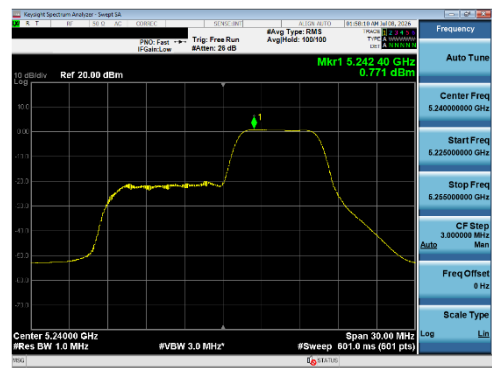


Plot 7-257 PSD CDD Diversity Antenna 1B (20 MHz BW 802.11be(RU) RU52+26 Index72 - Ch.48)

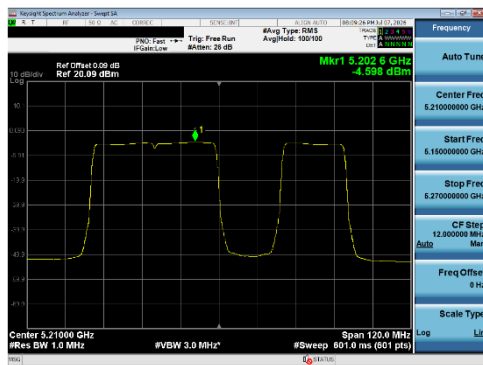


Plot 7-255 PSD CDD Diversity Antenna 5T (80 MHz BW 802.11be(RU) RU484+242 Index92 - Ch.42)

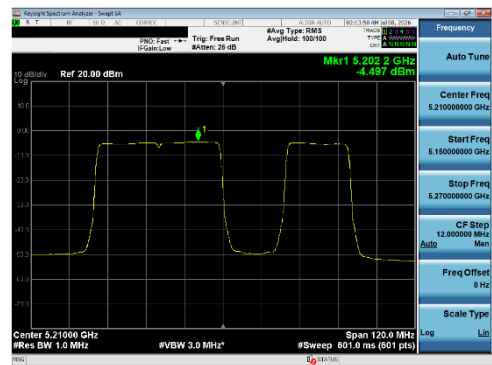

Plot 7-258 PSD CDD Diversity Antenna 1B (80 MHz BW 802.11be(RU) RU484+242 Index92 - Ch.42)

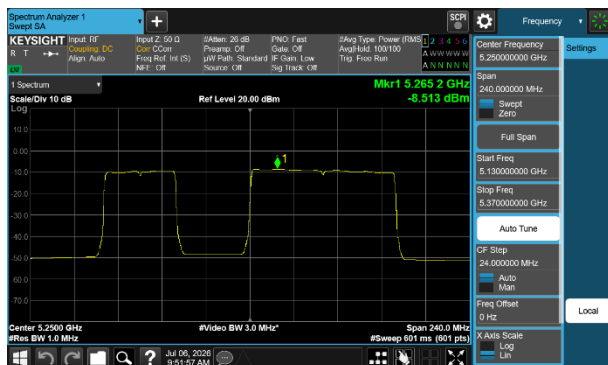


Plot 7-256 PSD CDD Diversity Antenna 5T (160 MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)

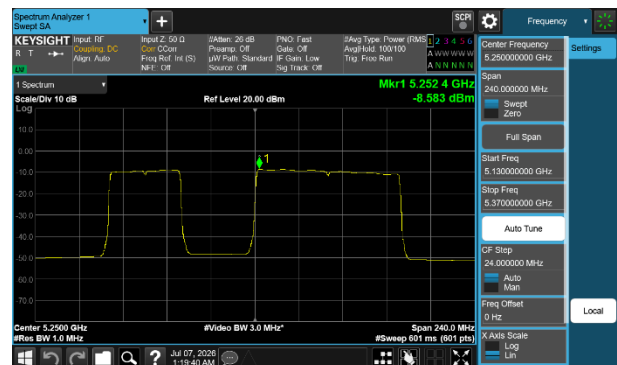


Plot 7-259 PSD CDD Diversity Antenna 1B (160 MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)


FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 140 of 380

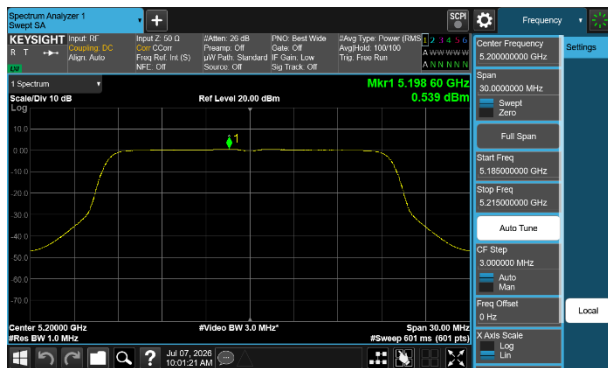


Plot 7-260 PSD CDD Diversity Antenna 5T (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.40)

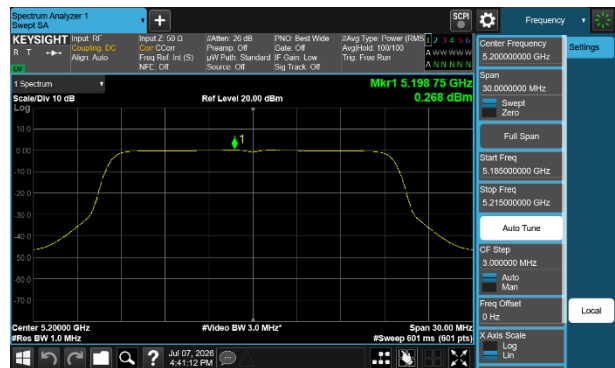


Plot 7-264 PSD CDD Diversity Antenna 1B (20 MHz BW 802.11be(RU) RU242 Index61 - Ch.40)

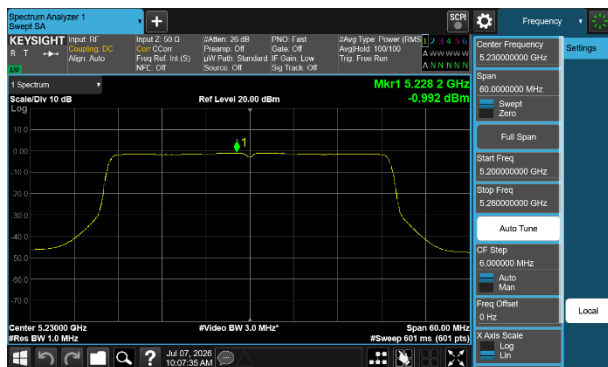


Plot 7-261 PSD CDD Diversity Antenna 5T (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

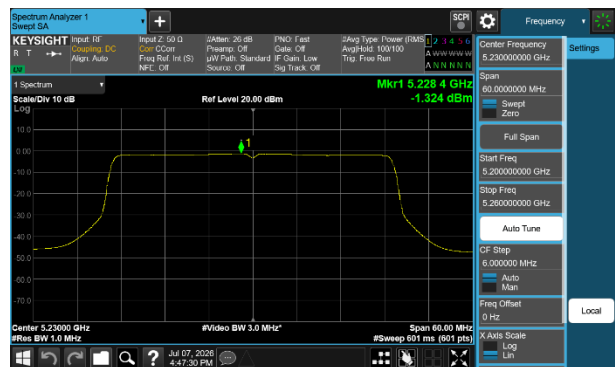


Plot 7-265 PSD CDD Diversity Antenna 1B (40 MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

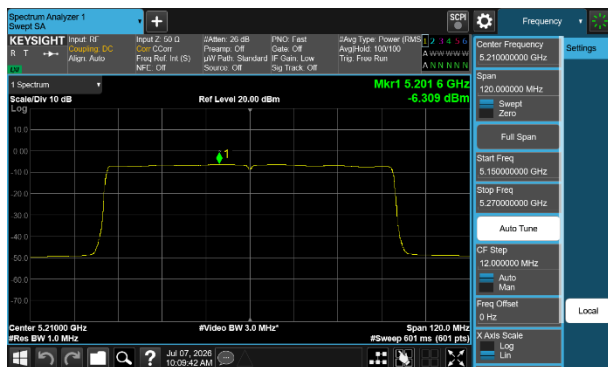


Plot 7-262 PSD CDD Diversity Antenna 5T (80 MHz BW 802.11be(RU) RU996 Index67 - Ch.42)

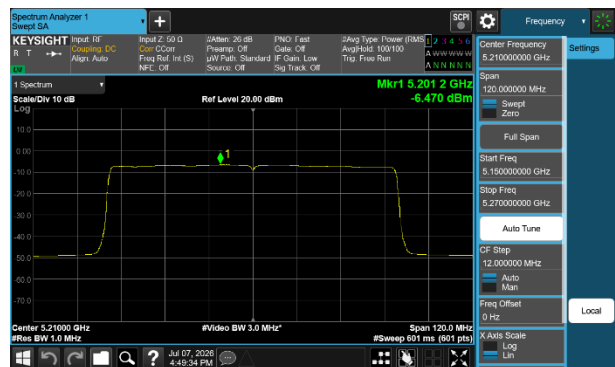

Plot 7-266 PSD CDD Diversity Antenna 1B (80 MHz BW 802.11be(RU) RU996 Index67 - Ch.42)

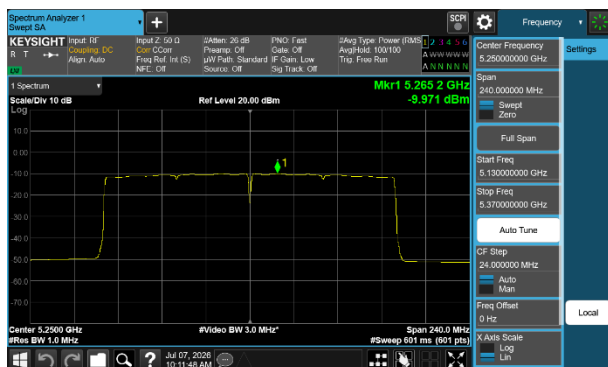

Plot 7-263 PSD CDD Diversity Antenna 5T (160 MHz BW 802.11be(RU) RU996 Index68 - Ch.50)

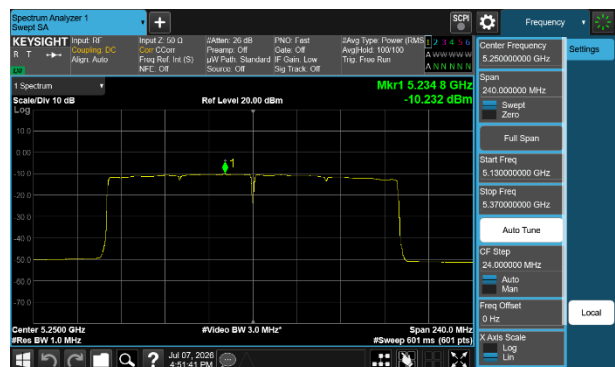

Plot 7-267 PSD CDD Diversity Antenna 1B (160 MHz BW 802.11be(RU) RU996 Index68 - Ch.50)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 141 of 380

Note:

Per ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and K DB 662911 v02r01 Section E)1), the conducted powers at Antenna 5T and Antenna 5B were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 14.6.3, the correlated directional gain is calculated using the following formula, where G_N is the gain of the nth Antenna and N_{ANT} , the total number of Antenna s used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth Antenna and N_{ANT} , the total number of Antenna s used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5180 MHz in 802.11ax (20 MHz BW) mode, the average conducted output power was measured to be -0.50 dBm for Antenna 5T and -0.92 dBm for Antenna 5B.

$$\text{Antenna 5T} + \text{Antenna 5B} = \text{CDD/SDM}$$

$$((-0.50) \text{ dBm} + (-0.92) \text{ dBm}) = (0.891 \text{ mW} + 0.809 \text{ mW}) = 1.702 \text{ mW} = 2.31 \text{ dBm}$$

Sample e.i.r.p Power Spectral Denisty Calculation:

At 5180 MHz in 802.11ax (20 MHz BW) mode, the average CDD/SDM power spectral denisty was calculated to be 2.31 dBm with directional gain of 3.87 dBi.

$$\text{e.i.r.p. Power Spectral Density (dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$2.31 \text{ dBm} + 3.87 \text{ dBi} = 6.18 \text{ dBm}$$

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 142 of 380

7.6 Radiated Spurious Emission – Above 1 GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive Antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and K DB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. RU26, 52 Tones, RU106, RU242, RU484, RU996 and RU996x2), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/ MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/ MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/ MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/ MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/ MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/ MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-194 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-194. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 – Subclauses 12.7.7, 12.7.6
K DB 789033 D02 v02r01 – Section G

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 143 of 380

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

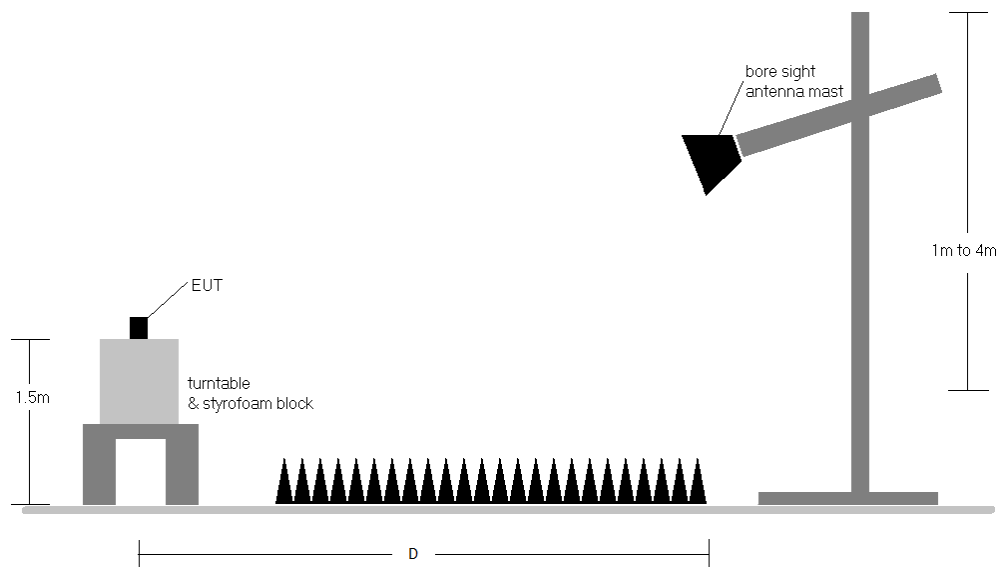


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 144 of 380

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-194.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-194. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27 dBm/ MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/ MHz to obtain the limit for out of band spurious emissions of 68.2 dB μ V/m.
3. The Antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn Antenna s.
6. D is the measurement test distance and emissions 1-18 GHz were measured at a 3 meters test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20 dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 145 of 380

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.3 to 7.6.22 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 146 of 380

V 12.0 03/03/2026

7.6.1 CDD Primary Radiated Spurious Emissions

RU26/52

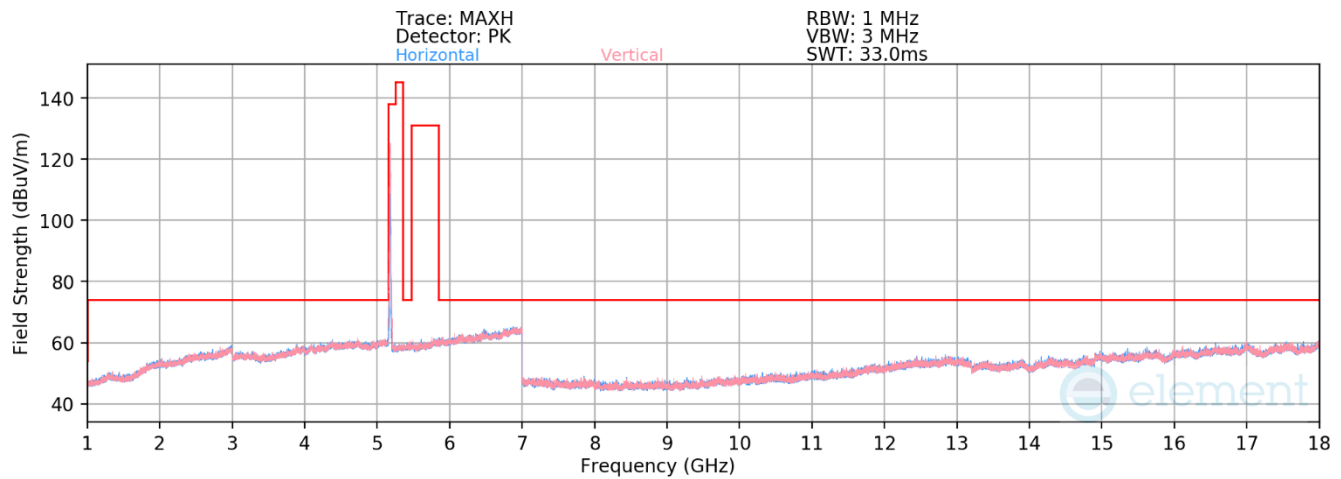


Plot 7-268. RSE above 1 GHz CDD Primary (11be – Ch.36 – RU26)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5180 MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	-	-	-71.40	14.80	50.39	68.23	-17.84
* 15540.00	Average	H	-	-	-83.66	21.99	45.34	53.98	-8.64
* 15540.00	Peak	H	-	-	-72.46	21.99	56.54	73.98	-17.44

Table 7-195. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 147 of 380

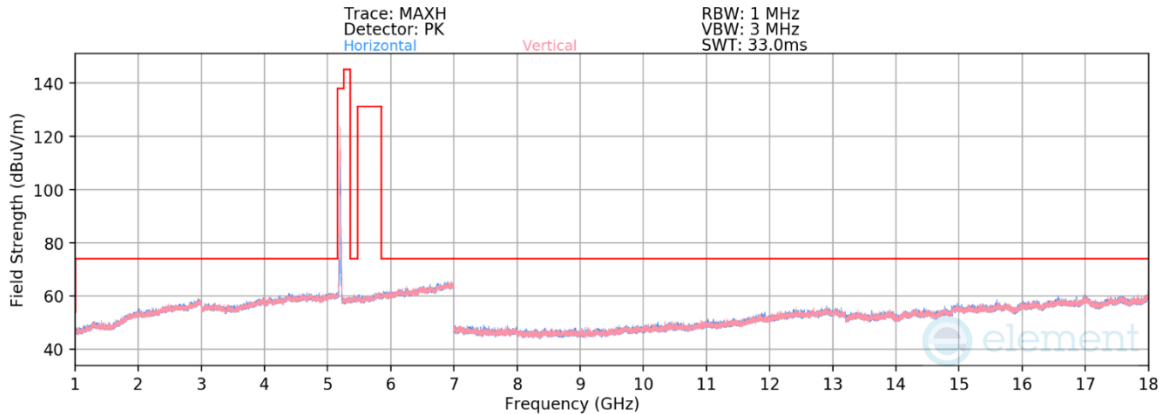

Plot 7-269. RSE above 1 GHz CDD Primary (11be - Ch.40 - RU26)

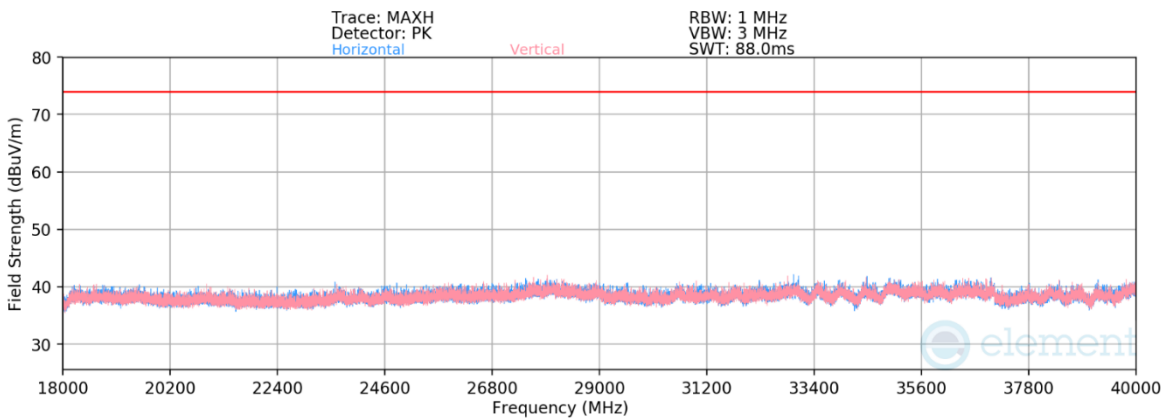

Plot 7-270. RSE 18 GHz - 40 GHz CDD Primary (11be Ch.40 - RU26)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5200 MHz

Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-70.96	14.83	0.00	50.87	68.23	-17.36
* 15600.00	Average	V	-	-	-83.16	22.81	0.00	46.64	53.98	-7.34
* 15600.00	Peak	V	-	-	-71.63	22.81	0.00	58.18	73.98	-15.80
* 20800.00	Average	H	-	-	-62.70	-5.90	-9.54	28.86	53.98	-25.12
* 20800.00	Peak	H	-	-	-51.22	-5.87	-9.54	40.37	73.98	-33.61
26000.00	Peak	H	-	-	-52.67	-4.35	-9.54	40.44	68.23	-27.79
* 31200.00	Average	V	-	-	-62.54	-2.74	-9.54	32.18	53.98	-21.80
* 31200.00	Peak	V	-	-	-50.94	-2.70	-9.54	43.82	73.98	-30.16

Table 7-196. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 148 of 380

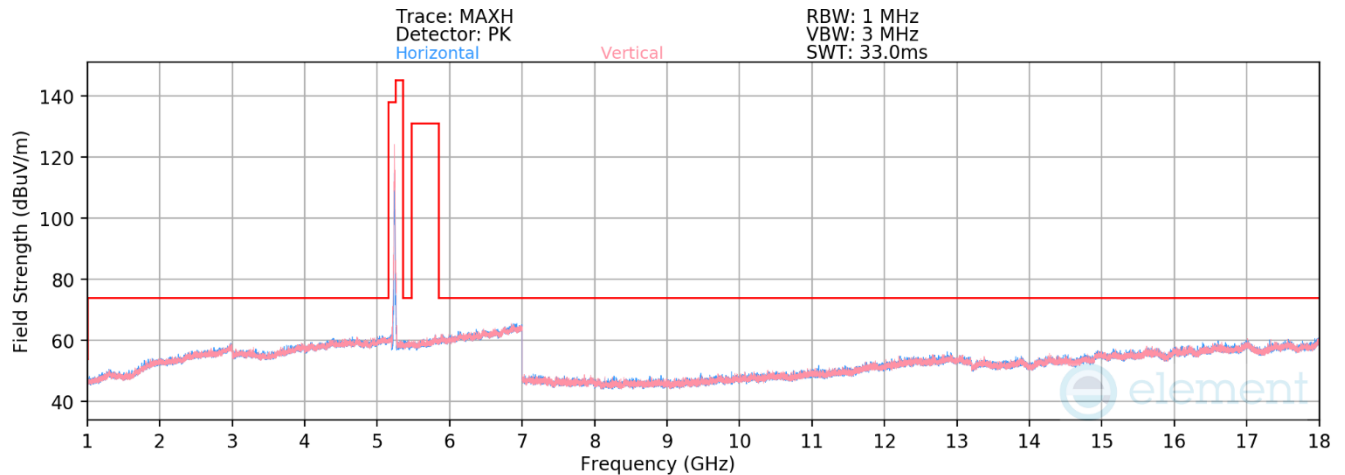


Plot 7-271. RSE above 1 GHz CDD Primary (11be – Ch.48 – RU26)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	-	-	-72.08	15.71	50.63	68.23	-17.60
* 15720.00	Average	V	-	-	-84.03	23.36	46.33	53.98	-7.65
* 15720.00	Peak	V	-	-	-72.68	23.36	57.68	73.98	-16.30

Table 7-197. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 149 of 380

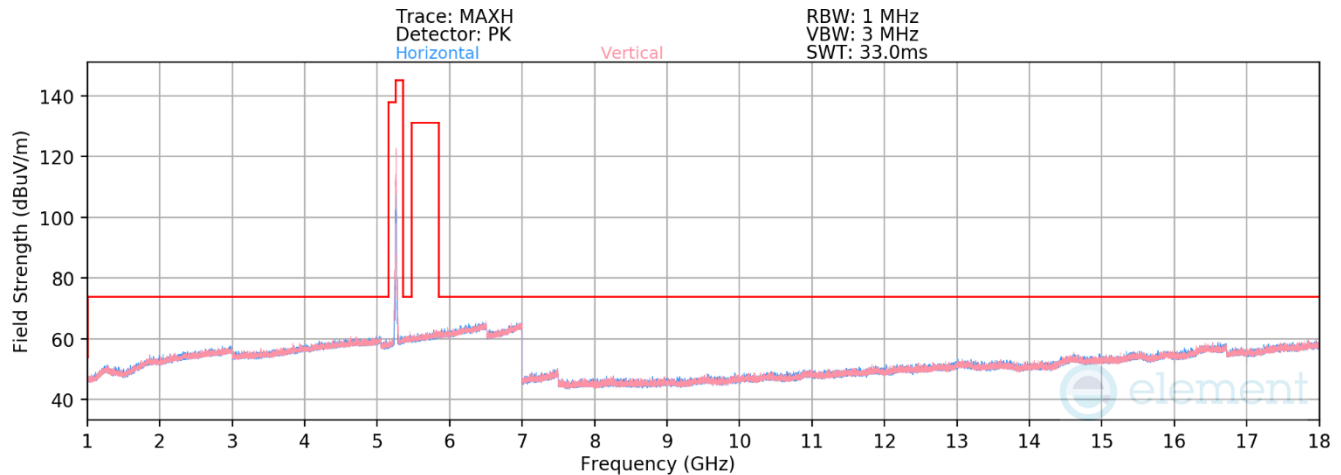


Plot 7-272. RSE above 1 GHz CDD Primary (11be – Ch.52 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 39
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.29	11.15	48.86	68.23	-19.37
* 15780.00	Average	V	-	-	-81.36	17.58	43.22	53.98	-10.76
* 15780.00	Peak	V	-	-	-71.05	17.58	53.53	73.98	-20.45

Table 7-198. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 150 of 380

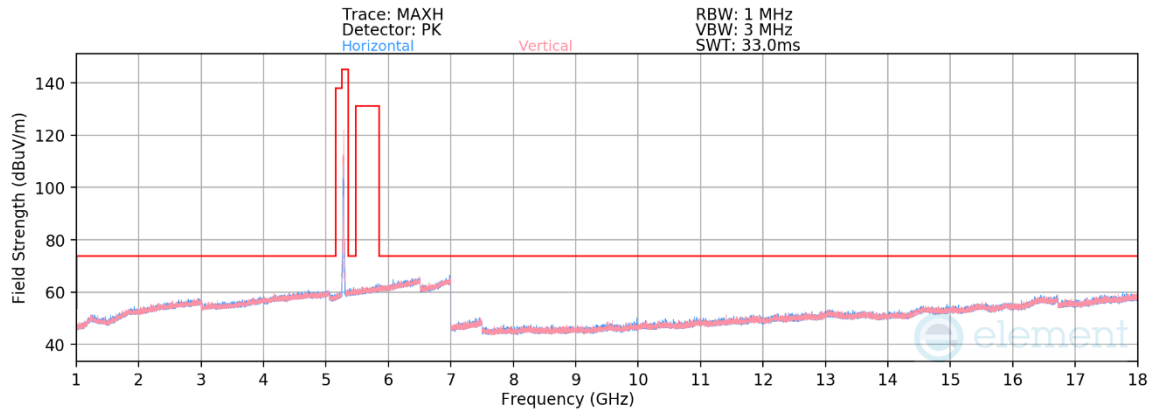

Plot 7-273. RSE above 1 GHz CDD Primary (11be – Ch.56 – RU52)

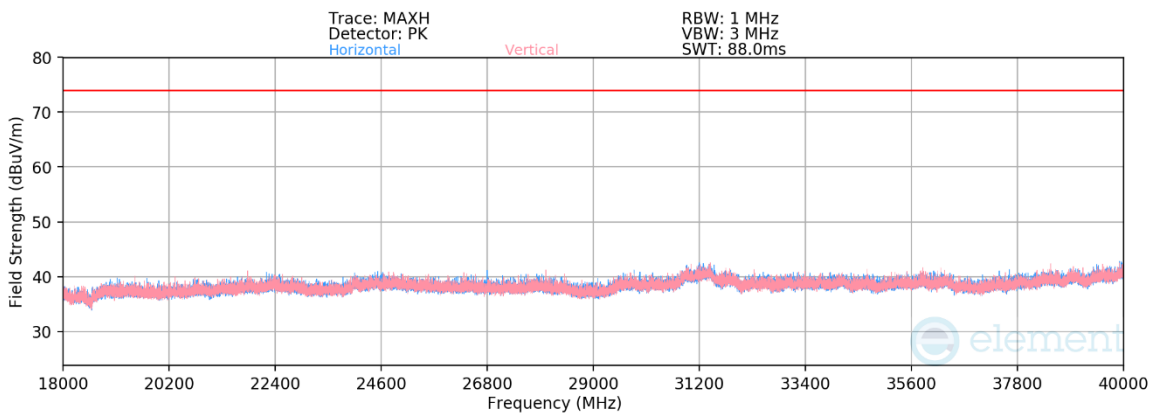


Plot 7-274. RSE 18 GHz – 40 GHz CDD Primary (11be Ch.56 — RU52)

Mode: 802.11be (20 MHz BW)
 Data Rate: MCS0
 RU Index: 39
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280 MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	V	-	-	-74.02	18.49	0.00	51.47	68.23	-16.76
* 15840.00	Average	V	-	-	-85.84	26.41	0.00	47.58	53.98	-6.40
* 15840.00	Peak	V	-	-	-74.28	26.41	0.00	59.13	73.98	-14.85
* 21120.00	Average	V	-	-	-62.70	-6.08	-9.54	28.68	53.98	-25.30
* 21120.00	Peak	V	-	-	-50.31	-6.08	-9.54	41.07	73.98	-32.91
26400.00	Peak	V	-	-	-53.15	-4.09	-9.54	40.22	68.23	-28.01
* 31680.00	Average	H	-	-	-64.40	-2.66	-9.54	30.40	53.98	-23.58
* 31680.00	Peak	H	-	-	-52.88	-2.66	-9.54	41.92	73.98	-32.06

Table 7-199. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 151 of 380

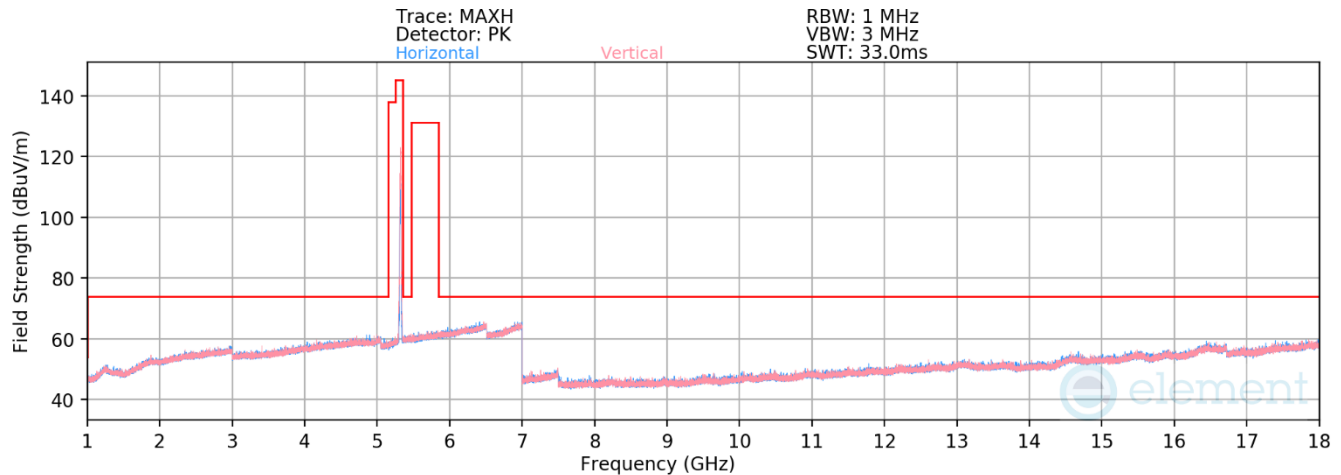


Plot 7-275. RSE above 1 GHz CDD Primary (11be – Ch.64 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 39
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-80.00	10.91	37.91	53.98	-16.07
* 10640.00	Peak	V	-	-	-68.84	10.91	49.07	73.98	-24.91
* 15960.00	Average	V	-	-	-81.20	17.69	43.48	53.98	-10.50
* 15960.00	Peak	V	-	-	-69.97	17.69	54.71	73.98	-19.27

Table 7-200. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 152 of 380

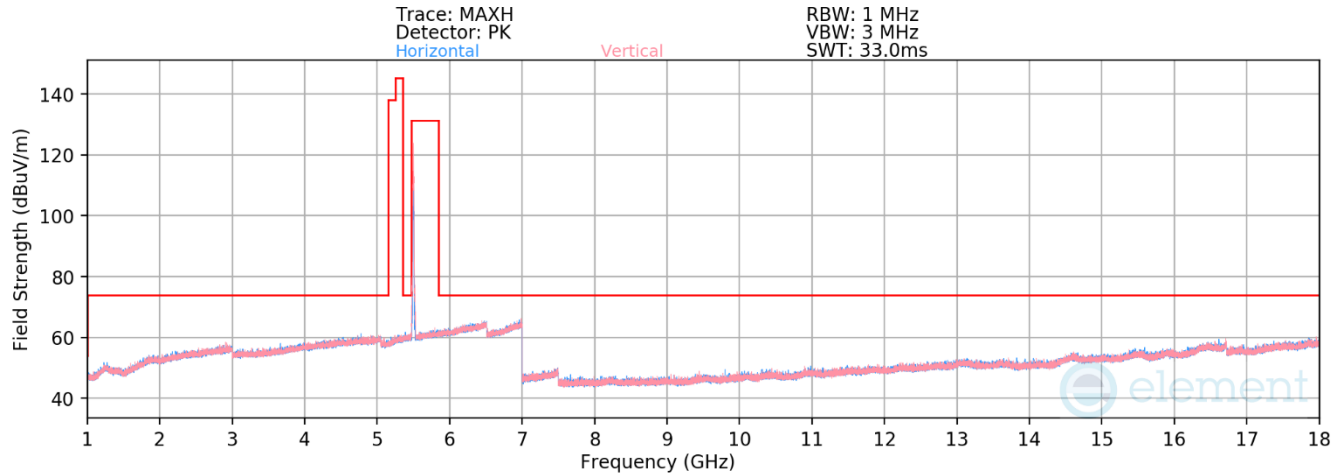


Plot 7-276. RSE above 1 GHz CDD Primary (11be – Ch.100 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 39
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-80.79	12.50	38.71	53.98	-15.27
* 11000.00	Peak	V	-	-	-69.46	12.50	50.04	73.98	-23.94
16500.00	Peak	V	-	-	-70.48	19.12	55.64	68.23	-12.59

Table 7-201. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 153 of 380

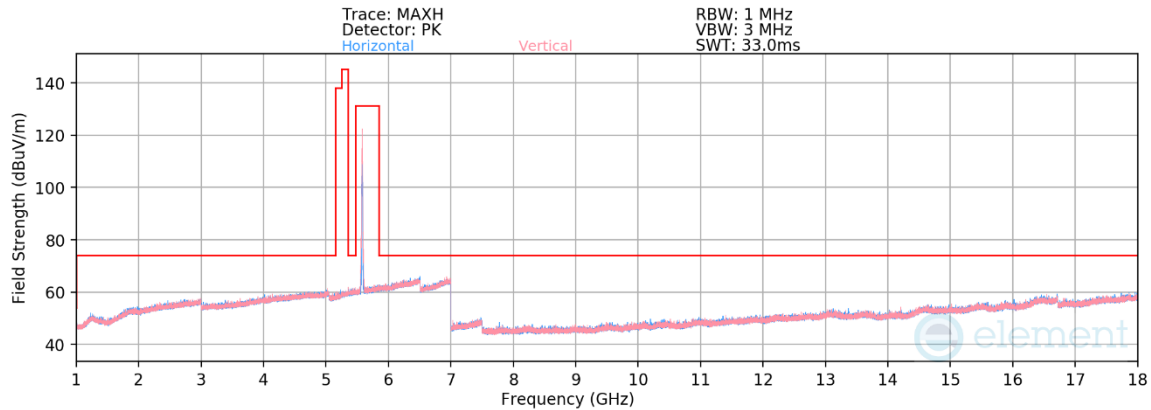

Plot 7-277. RSE above 1 GHz CDD Primary (11be – Ch.116 – RU52)

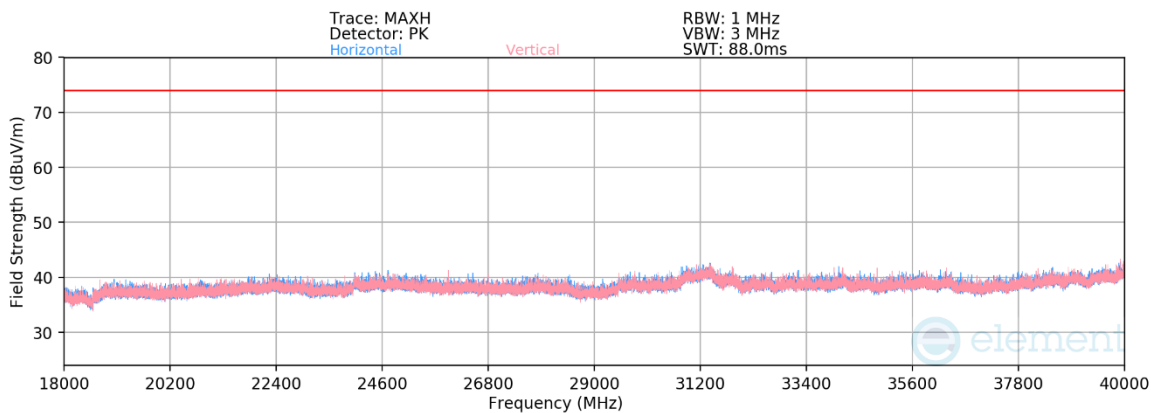


Plot 7-278. RSE 18 GHz – 40 GHz CDD Primary (11be Ch.116 — RU52)

Mode: 802.11be (20 MHz BW)
 Data Rate: MCS0
 RU Index: 39
 Distance of Measurements: 3 Meters
 Operating Frequency: 5580 MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-80.43	11.68	0.00	38.25	53.98	-15.73
* 11160.00	Peak	H	-	-	-69.51	11.68	0.00	49.17	73.98	-24.81
* 16740.00	Peak	V	-	-	-69.56	19.47	0.00	56.91	68.23	-11.32
* 22320.00	Average	H	-	-	-62.21	-5.46	-9.54	29.79	53.98	-24.19
* 22320.00	Peak	H	-	-	-51.17	-5.49	-9.54	40.80	73.98	-33.18
27900.00	Peak	V	-	-	-54.30	-2.89	-9.54	40.27	68.23	-27.96
33480.00	Peak	H	-	-	-52.57	-3.63	-9.54	41.26	68.23	-26.97

Table 7-202. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 154 of 380

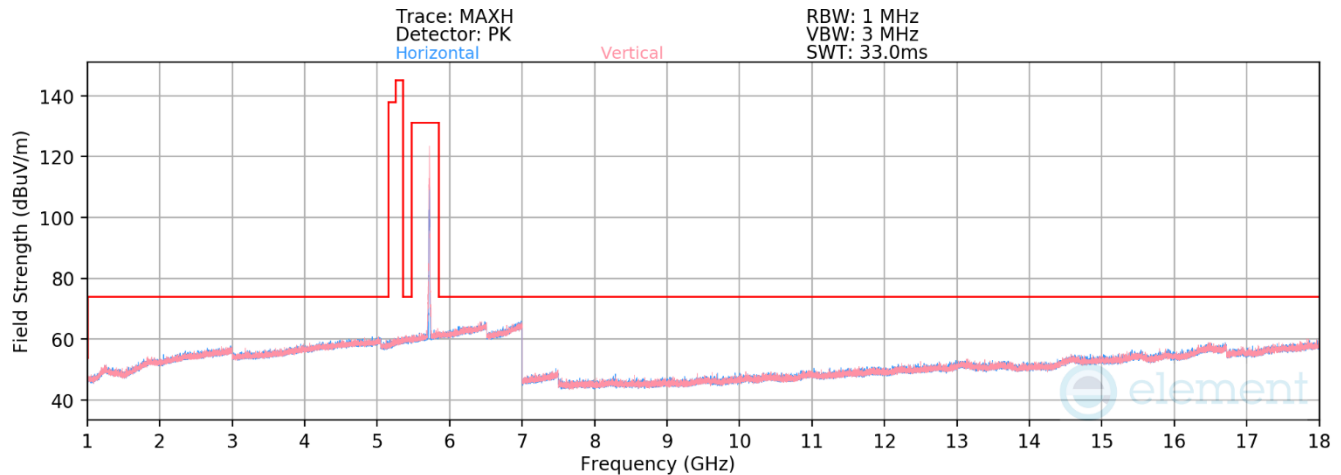

Plot 7-279. RSE above 1 GHz CDD Primary (11be – Ch.144 – RU52)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 39

Distance of Measurements: 3 Meters


Operating Frequency: 5720 MHz

Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-80.29	12.43	39.14	53.98	-14.84
*	11440.00	Peak	H	-	-	-68.77	12.43	50.66	73.98	-23.32
	17160.00	Peak	H	-	-	-69.68	20.31	57.64	68.23	-10.59

Table 7-203. Radiated Measurements CDD Primary (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 155 of 380

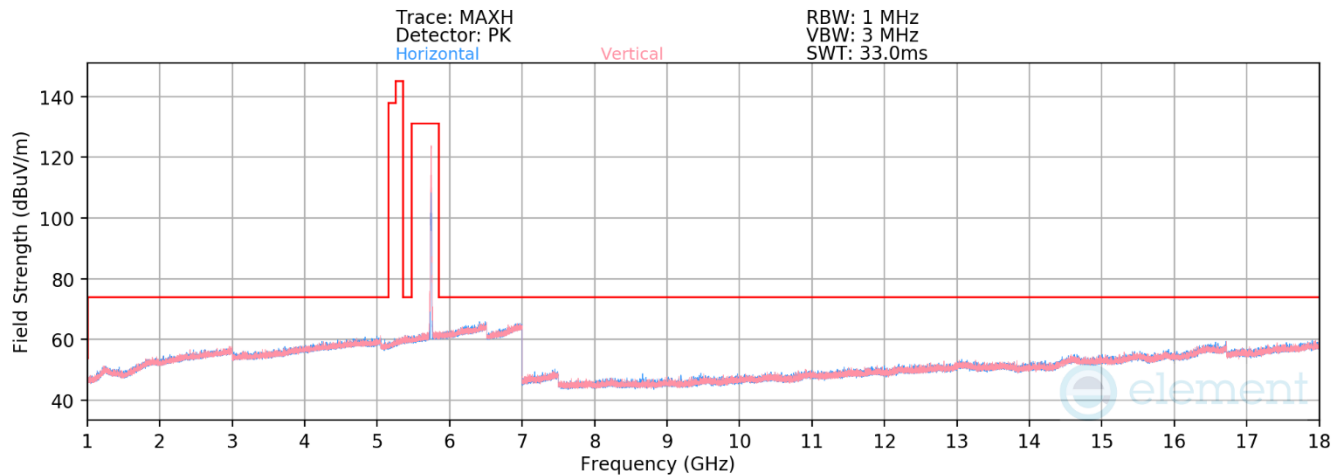


Plot 7-280. RSE above 1 GHz CDD Primary (11be – Ch.149 – RU26)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-80.23	12.46	39.23	53.98	-14.75
*	11490.00	Peak	H	-	-	-68.84	12.46	50.62	73.98	-23.36
	17235.00	Peak	V	-	-	-69.76	20.42	57.66	68.23	-10.57

Table 7-204. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 156 of 380

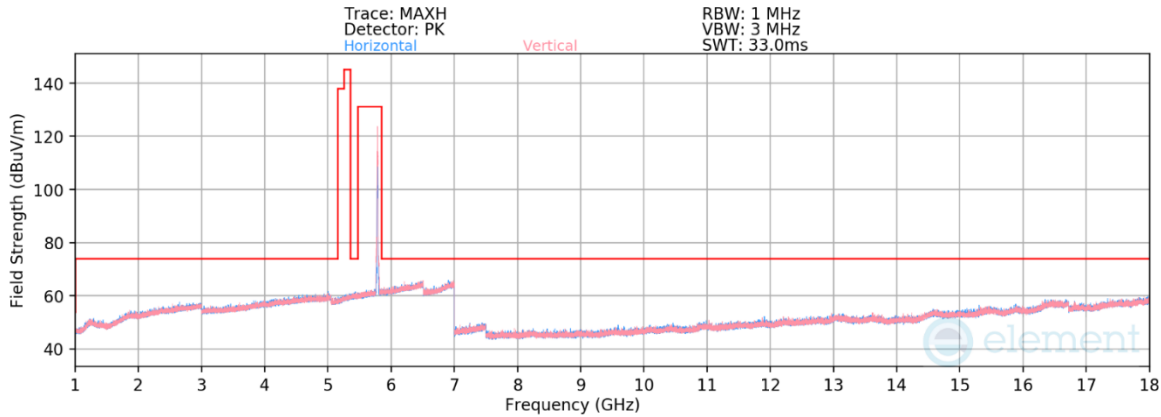

Plot 7-281. RSE above 1 GHz CDD Primary (11be – Ch.157 – RU26)

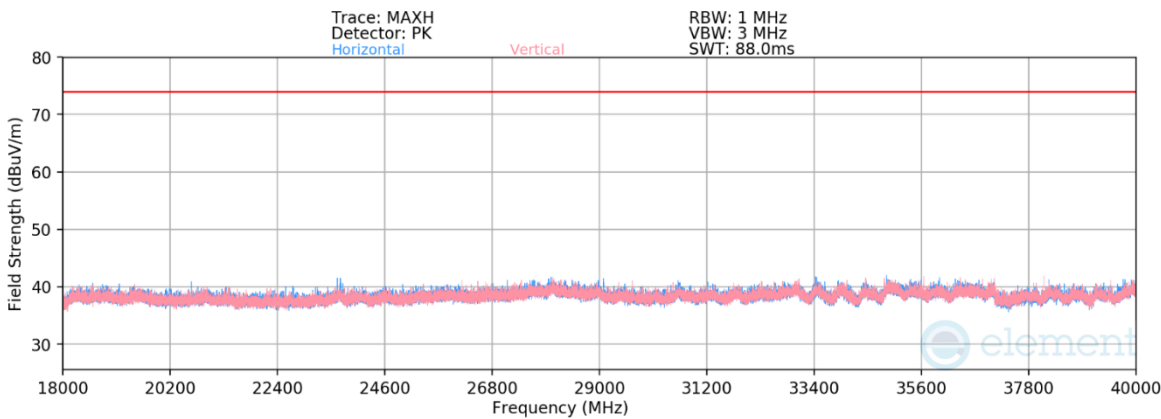

Plot 7-282. RSE 18 GHz – 40 GHz CDD Primary (11be Ch.157 — RU26)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5785 MHz

Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-80.59	12.40	0.00	38.81	53.98	-15.17
* 11570.00	Peak	H	-	-	-70.24	12.40	0.00	49.16	73.98	-24.82
17355.00	Peak	V	-	-	-70.24	20.86	0.00	57.62	68.23	-10.61
23140.00	Peak	V	-	-	-51.62	-5.67	-9.54	40.17	68.23	-28.06
28925.00	Peak	H	-	-	-56.79	-2.80	-9.54	37.87	68.23	-30.36
34710.00	Peak	V	-	-	-51.45	-4.60	-9.54	41.41	68.23	-26.82

Table 7-205. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 157 of 380

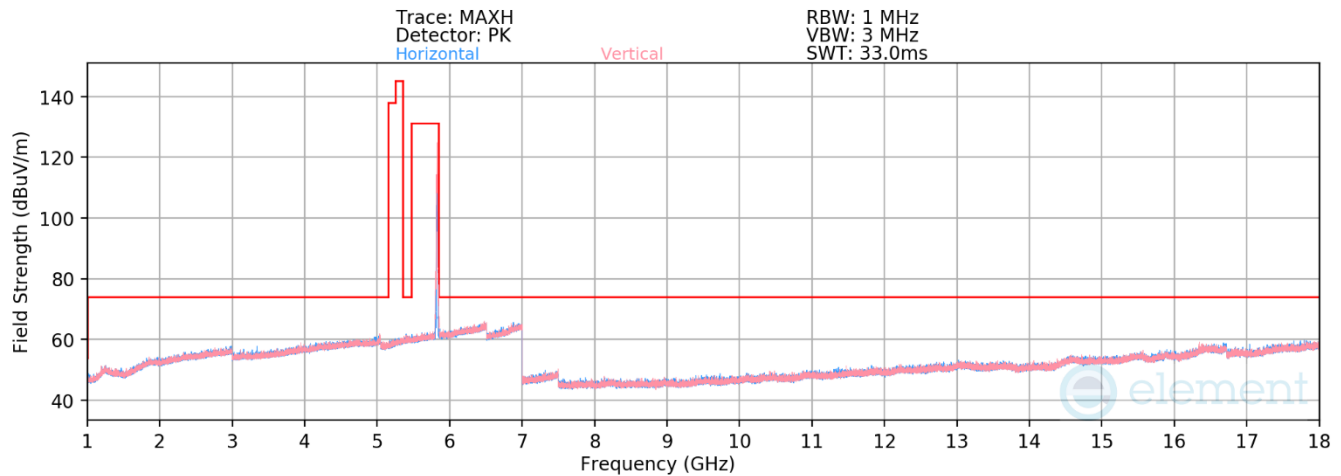

Plot 7-283. RSE above 1 GHz CDD Primary (11be – Ch.165 – RU26)


Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5825 MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-80.16	12.36	39.20	53.98	-14.78
* 11650.00	Peak	V	-	-	-69.25	12.36	50.11	73.98	-23.87
17475.00	Peak	H	-	-	-69.75	21.23	58.48	68.23	-9.75

Table 7-206. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 158 of 380

RU242

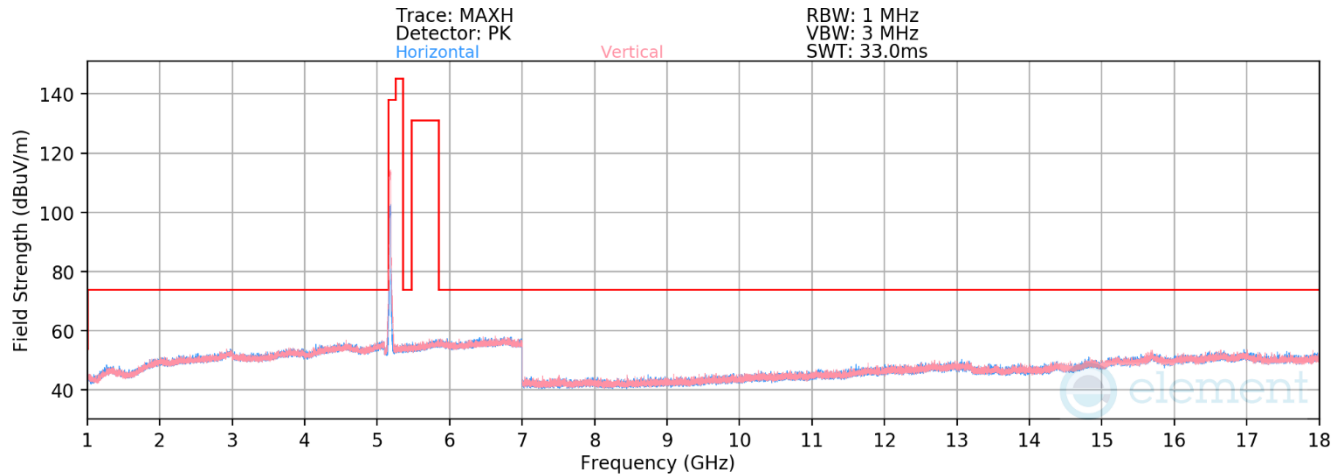


Plot 7-284. RSE above 1 GHz CDD Primary (11be – Ch.36 – RU242)

Mode: 11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5180 MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-69.41	8.48	46.07	68.23	-22.16
* 15540.00	Average	H	-	-	-83.74	17.52	40.79	53.98	-13.19
* 15540.00	Peak	H	-	-	-71.97	17.52	52.56	73.98	-21.42

Table 7-207. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 159 of 380

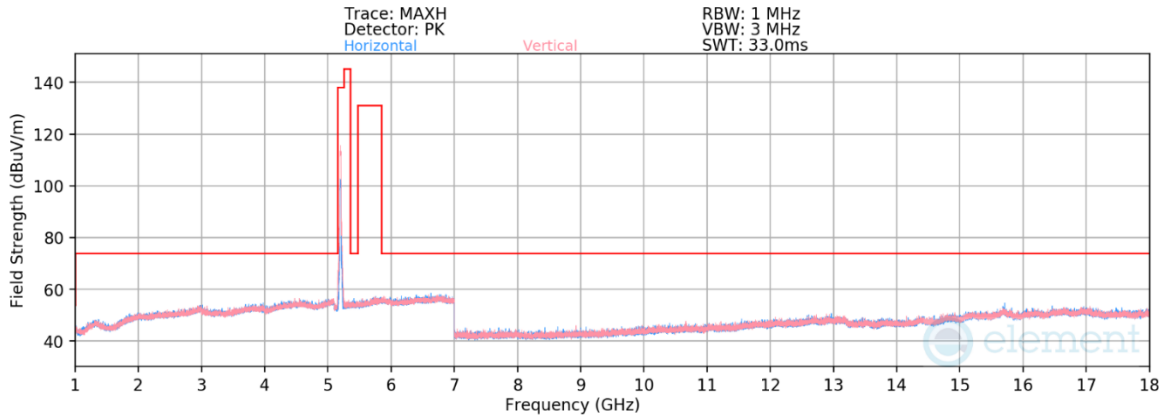

Plot 7-285. RSE above 1 GHz CDD Primary (11be - Ch.40 - RU242)

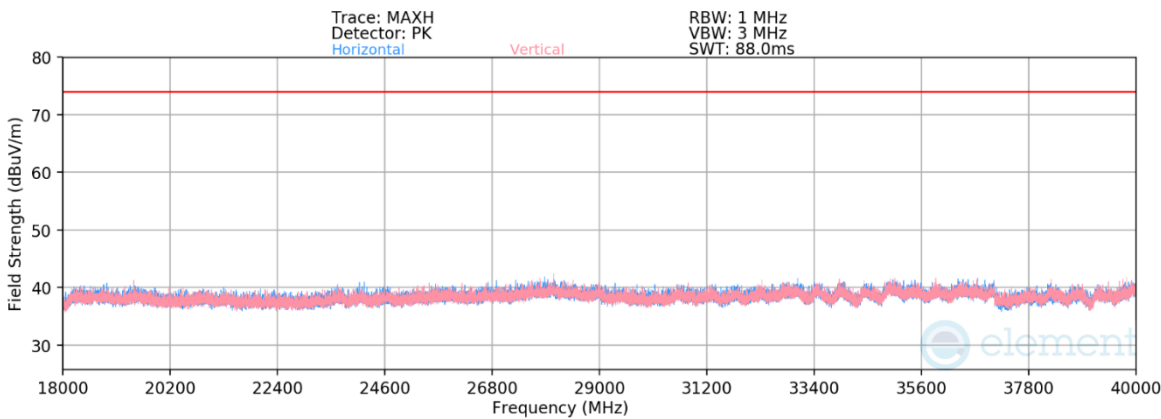


Plot 7-286. RSE 18 GHz - 40 GHz CDD Primary (11be Ch.40 - RU242)

Mode: 802.11be (20 MHz BW)
 Data Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200 MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	H	-	-	-68.97	8.45	0.00	46.48	68.23	-21.75
* 15600.00	Average	V	-	-	-83.57	17.62	0.00	41.05	53.98	-12.93
* 15600.00	Peak	V	-	-	-72.28	17.62	0.00	52.33	73.98	-21.65
* 20800.00	Average	H	-	-	-62.90	-5.91	-9.54	28.65	53.98	-25.33
* 20800.00	Peak	H	-	-	-50.94	-5.87	-9.54	40.65	73.98	-33.33
26000.00	Peak	H	-	-	-52.64	-4.40	-9.54	40.42	68.23	-27.81
* 31200.00	Average	H	-	-	-64.72	-2.74	-9.54	30.00	53.98	-23.98
* 31200.00	Peak	H	-	-	-53.21	-2.74	-9.54	41.51	73.98	-32.47

Table 7-208. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 160 of 380

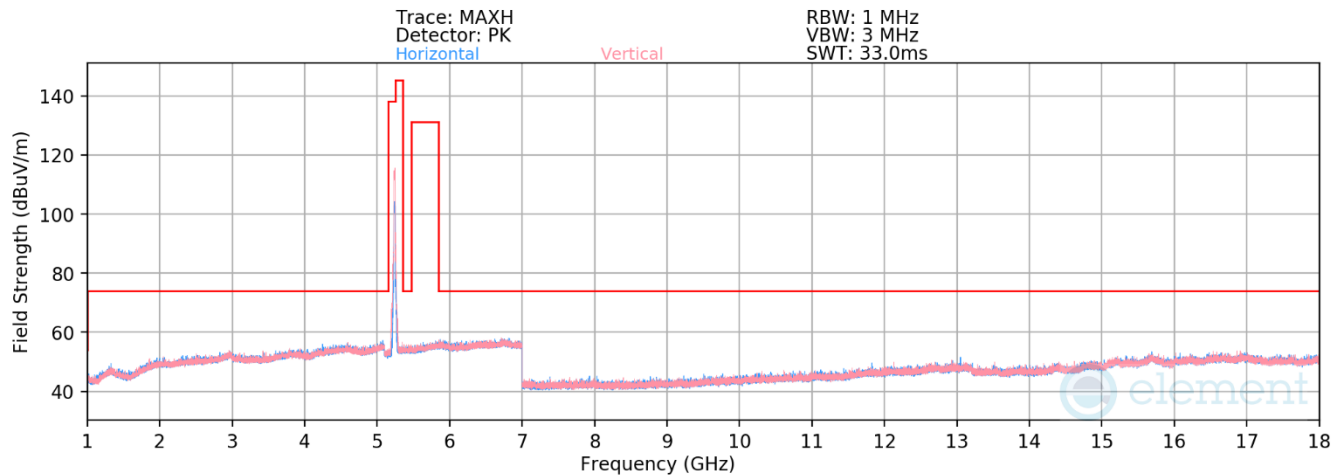

Plot 7-287. RSE above 1 GHz CDD Primary (11be – Ch.48 – RU242)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5240 MHz

Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-68.57	8.66	47.09	68.23	-21.14
* 15720.00	Average	H	-	-	-82.79	17.76	41.97	53.98	-12.01
* 15720.00	Peak	H	-	-	-71.74	17.76	53.02	73.98	-20.96

Table 7-209. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 161 of 380

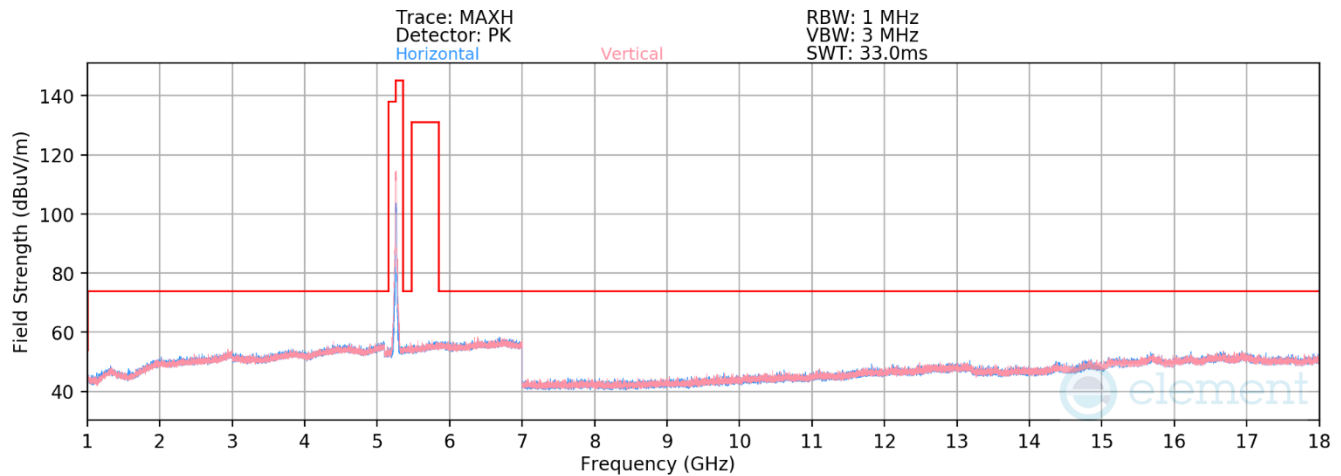


Plot 7-288. RSE above 1 GHz CDD Primary (11be – Ch.52 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.63	9.00	46.37	68.23	-21.86
* 15780.00	Average	V	-	-	-83.10	17.40	41.30	53.98	-12.68
* 15780.00	Peak	V	-	-	-71.75	17.40	52.65	73.98	-21.33

Table 7-210. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 162 of 380

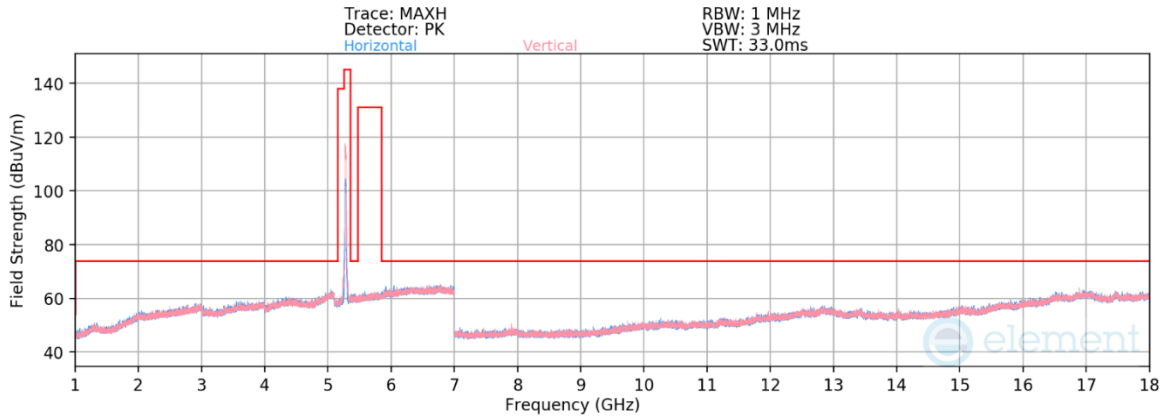

Plot 7-289. RSE above 1 GHz CDD Primary (11be – Ch.56 – RU242)

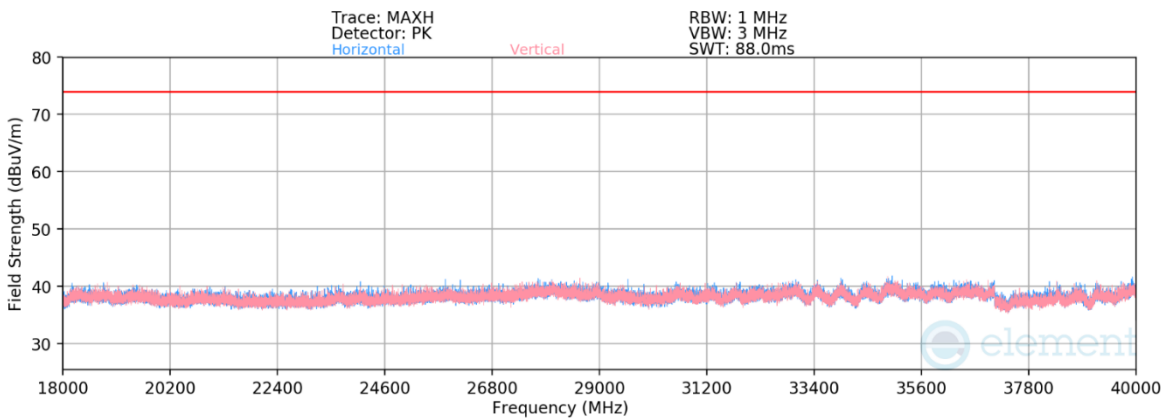


Plot 7-290. RSE 18 GHz – 40 GHz CDD Primary (11be Ch.56 — RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5280 MHz
Channel:	56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-73.44	18.18	0.00	51.74	68.23	-16.49
* 15840.00	Average	V	-	-	-85.88	26.55	0.00	47.67	53.98	-6.31
* 15840.00	Peak	V	-	-	-74.71	26.55	0.00	58.84	73.98	-15.14
* 21120.00	Average	H	-	-	-62.49	-6.08	-9.54	28.89	53.98	-25.09
* 21120.00	Peak	H	-	-	-51.65	-6.08	-9.54	39.73	73.98	-34.25
26400.00	Peak	V	-	-	-52.99	-4.04	-9.54	40.43	68.23	-27.80
* 31680.00	Average	H	-	-	-64.38	-2.78	-9.54	30.30	53.98	-23.68
* 31680.00	Peak	H	-	-	-53.29	-2.70	-9.54	41.47	73.98	-32.51

Table 7-211. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 163 of 380

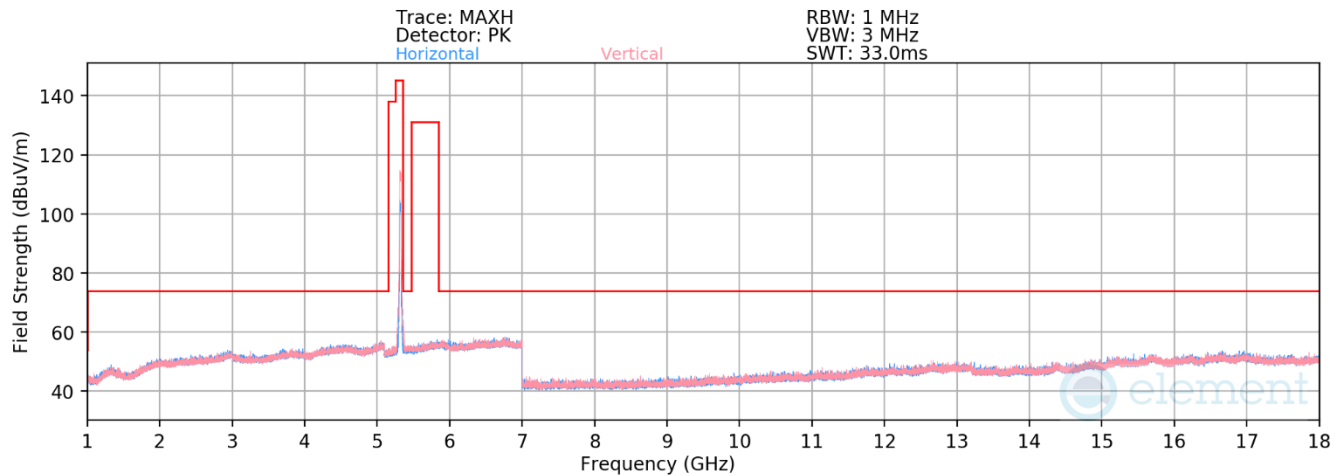


Plot 7-291. RSE above 1 GHz CDD Primary (11be – Ch.64 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-80.44	9.10	35.66	53.98	-18.32
*	10640.00	Peak	H	-	-	-69.34	9.10	46.76	73.98	-27.22
*	15960.00	Average	H	-	-	-84.04	18.25	41.21	53.98	-12.77
*	15960.00	Peak	H	-	-	-72.62	18.25	52.63	73.98	-21.35

Table 7-212. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 164 of 380

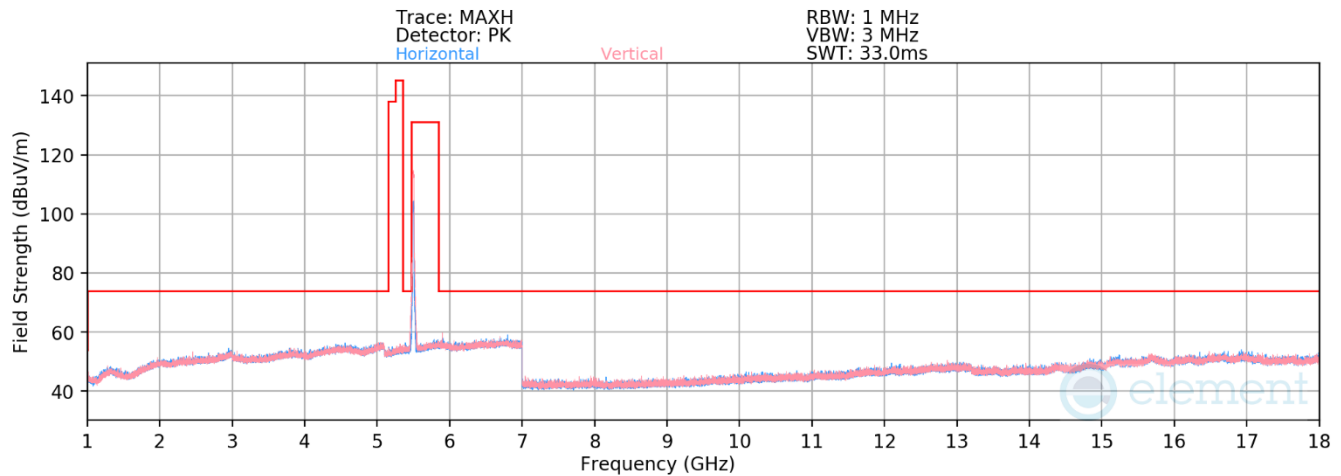


Plot 7-292. RSE above 1 GHz CDD Primary (11be – Ch.100 – RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5500 MHz
Channel:	100


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	V	-	-	-81.08	9.60	35.52	53.98	-18.46
*	11000.00	Peak	V	-	-	-69.86	9.60	46.74	73.98	-27.24
	16500.00	Peak	V	-	-	-72.47	18.81	53.35	68.23	-14.88

Table 7-213. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 165 of 380

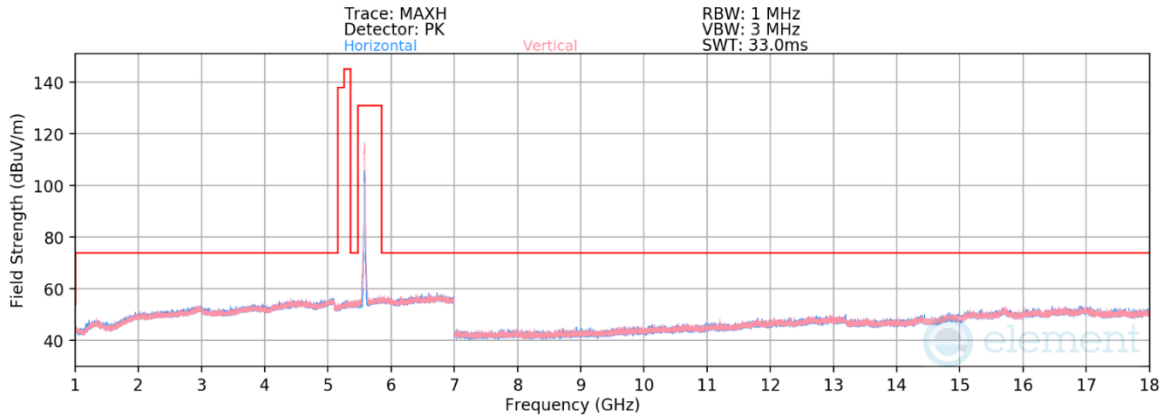

Plot 7-293. RSE above 1 GHz CDD Primary (11be – Ch.116 – RU242)

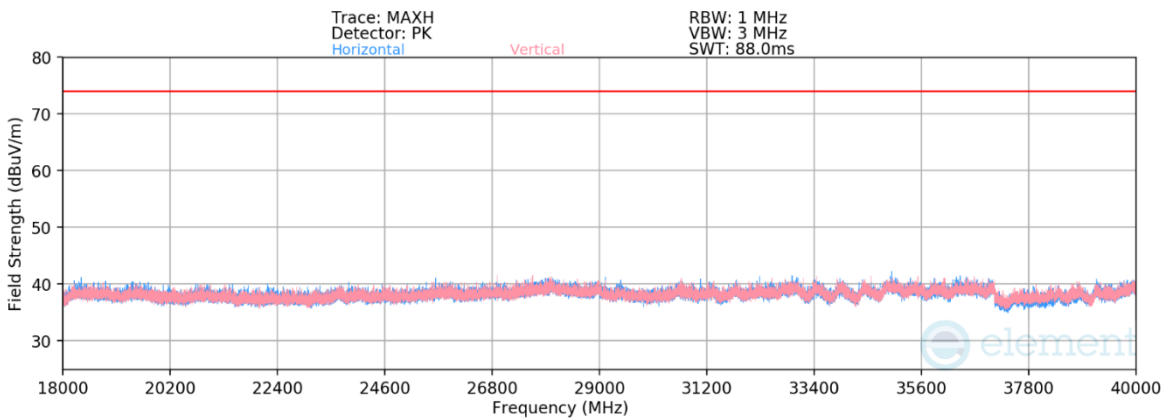


Plot 7-294. RSE 18 GHz – 40 GHz CDD Primary (11be Ch.116 — RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5580 MHz
Channel:	116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	V	-	-	-80.89	9.45	0.00	35.57	53.98	-18.41
* 11160.00	Peak	V	-	-	-69.37	9.45	0.00	47.09	73.98	-26.89
16740.00	Peak	V	-	-	-72.38	18.95	0.00	53.57	68.23	-14.66
* 22320.00	Average	V	-	-	-62.39	-5.49	-9.54	29.58	53.98	-24.40
* 22320.00	Peak	V	-	-	-50.69	-5.49	-9.54	41.28	73.98	-32.70
27900.00	Peak	H	-	-	-54.28	-2.91	-9.54	40.27	68.23	-27.96
33480.00	Peak	V	-	-	-52.45	-3.59	-9.54	41.42	68.23	-26.81

Table 7-214. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 166 of 380

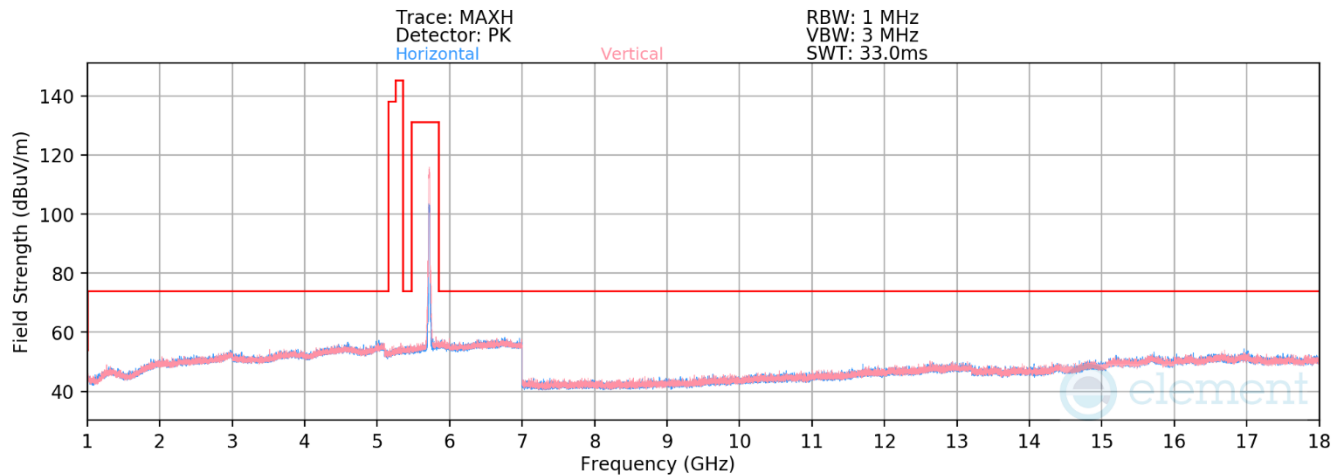


Plot 7-295. RSE above 1 GHz CDD Primary (11be – Ch.144 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5720 MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11440.00	Average	V	-	-	-81.52	9.97	35.45	53.98	-18.53
*	11440.00	Peak	V	-	-	-70.13	9.97	46.84	73.98	-27.14
	17160.00	Peak	V	-	-	-72.64	18.80	53.16	68.23	-15.07

Table 7-215. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 167 of 380

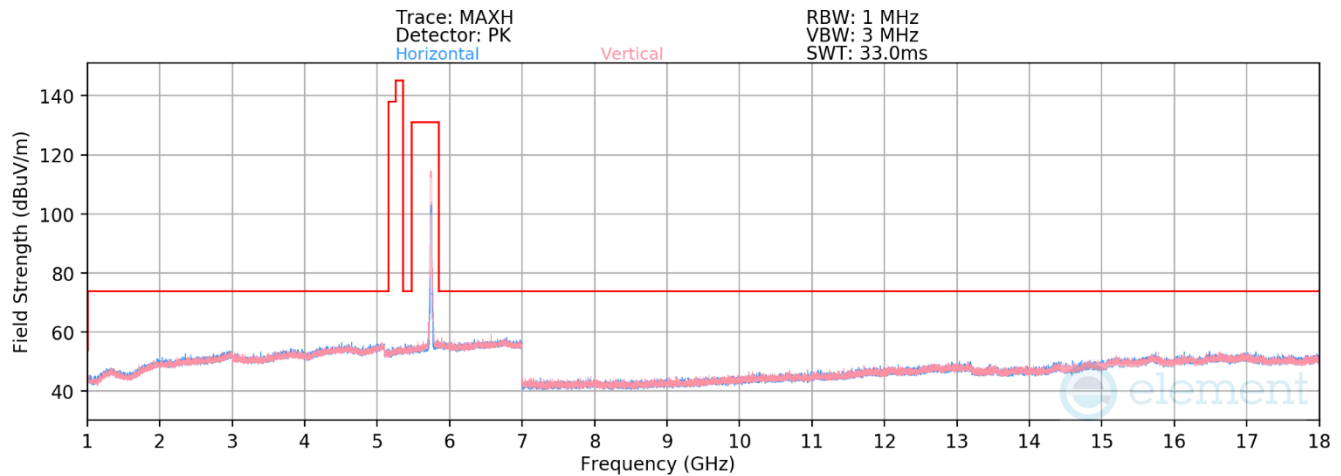


Plot 7-296. RSE above 1 GHz CDD Primary (11be – Ch.149 – RU242)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5745 MHz
Channel: 149


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	V	-	-	-81.23	10.03	35.79	53.98	-18.19
*	11490.00	Peak	V	-	-	-69.89	10.03	47.14	73.98	-26.84
	17235.00	Peak	V	-	-	-73.61	18.74	52.14	68.23	-16.09

Table 7-216. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 168 of 380

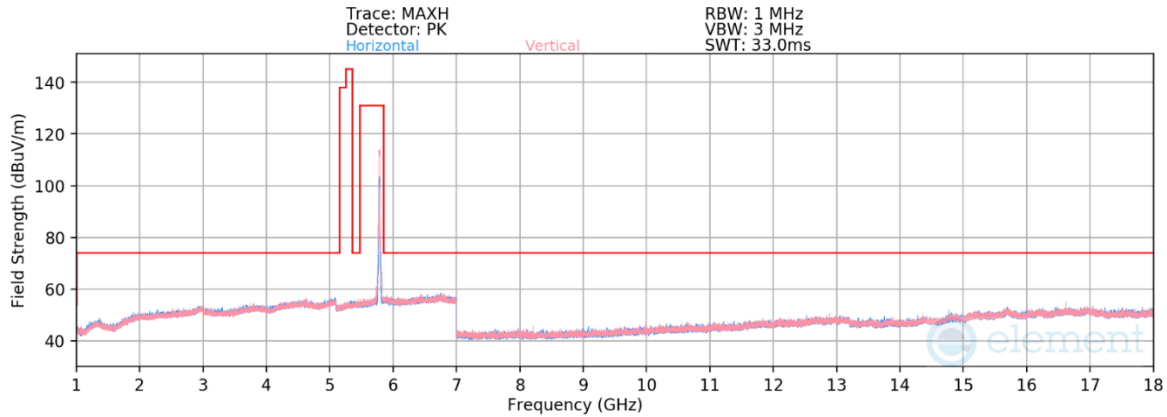

Plot 7-297. RSE above 1 GHz CDD Primary (11be – Ch.157 – RU242)

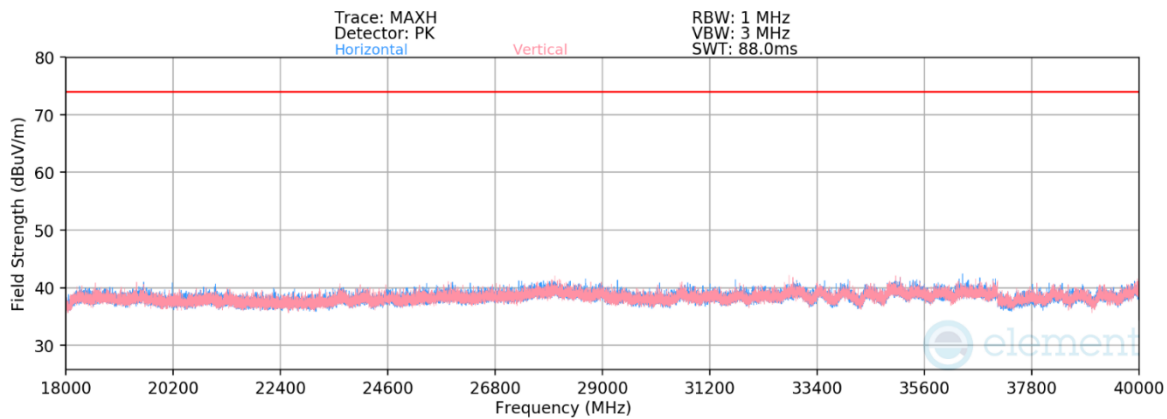


Plot 7-298. RSE 18 GHz – 40 GHz CDD Primary (11be Ch.157 — RU242)

Mode:	802.11be (20 MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5785 MHz
Channel:	157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-80.55	10.13	0.00	36.58	53.98	-17.40
* 11570.00	Peak	V	-	-	-69.39	10.13	0.00	47.74	73.98	-26.24
17355.00	Peak	H	-	-	-73.01	19.08	0.00	53.07	68.23	-15.16
23140.00	Peak	V	-	-	-52.32	-5.68	-9.54	39.46	68.23	-28.77
28925.00	Peak	H	-	-	-55.81	-2.80	-9.54	38.85	68.23	-29.38
34710.00	Peak	V	-	-	-50.87	-4.60	-9.54	41.99	68.23	-26.24

Table 7-217. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 169 of 380

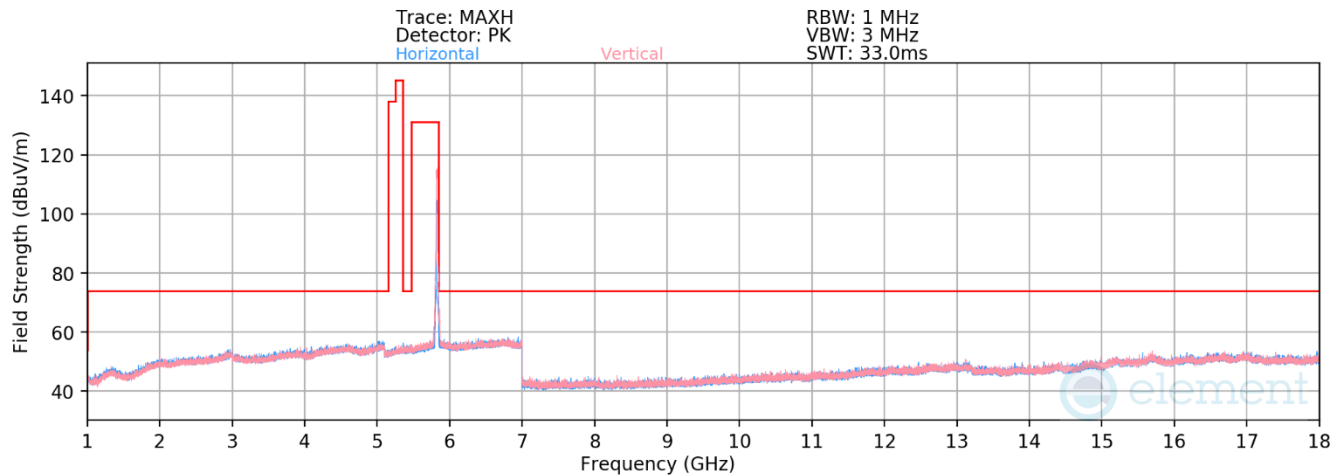

Plot 7-299. RSE above 1 GHz CDD Primary (11be – Ch.165 – RU242)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5825 MHz

Channel: 165


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-80.87	10.59	36.72	53.98	-17.26
* 11650.00	Peak	V	-	-	-70.08	10.59	47.51	73.98	-26.47
17475.00	Peak	H	-	-	-72.56	18.17	52.61	68.23	-15.62

Table 7-218. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 170 of 380

7.6.2 CDD Diversity Radiated Spurious Emissions

RU26/52

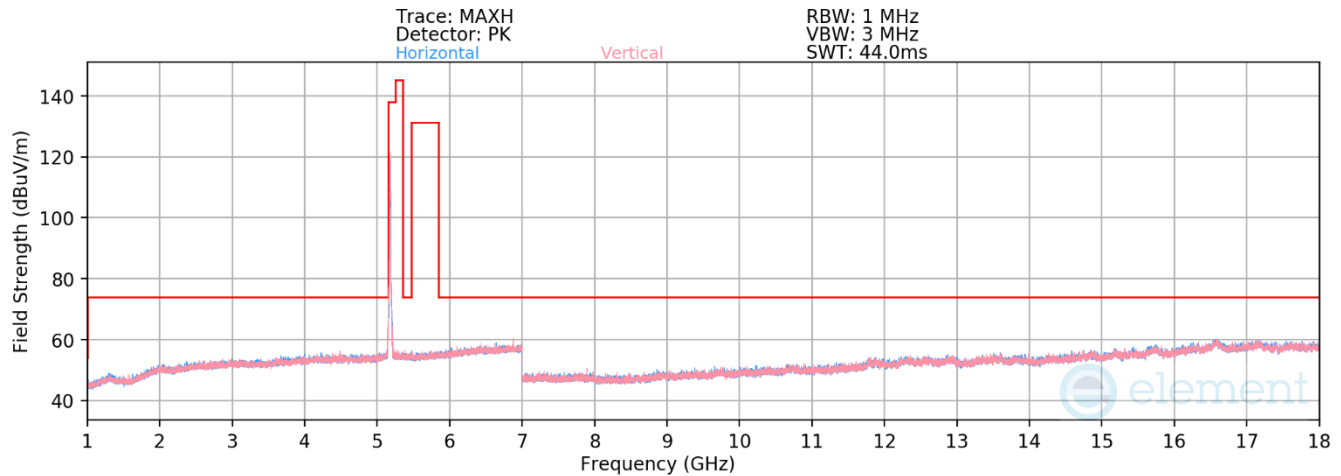

Plot 7-300. RSE above 1 GHz CDD Diversity (11be – Ch.36 – RU26)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5180 MHz

Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	-	-	-69.59	11.12	48.53	68.23	-19.70
* 15540.00	Average	H	-	-	-81.21	17.36	43.15	53.98	-10.83
* 15540.00	Peak	H	-	-	-70.61	17.36	53.74	73.98	-20.24

Table 7-219. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 171 of 380

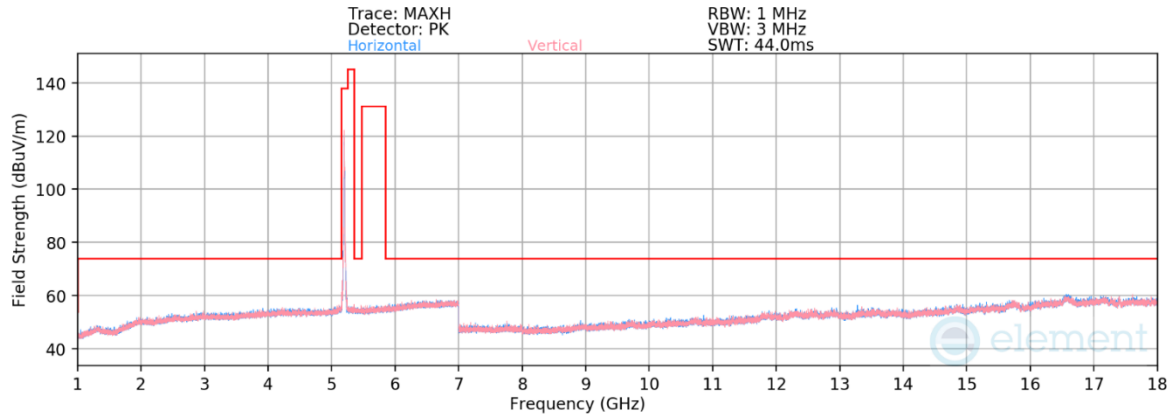

Plot 7-301. RSE above 1 GHz CDD Diversity (11be – Ch.40 – RU26)

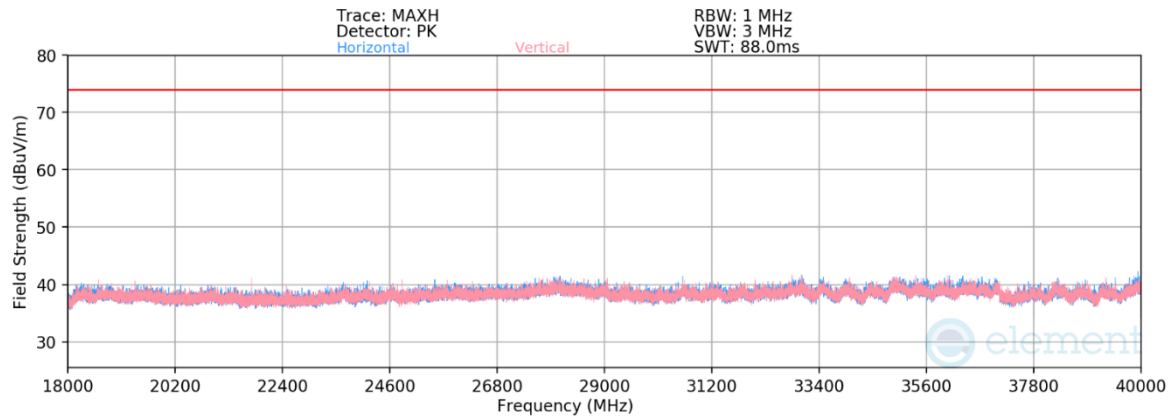

Plot 7-302. RSE 18 GHz – 40 GHz CDD Diversity (11be Ch.40 — RU26)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5200 MHz

Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	H	-	-	-68.89	11.37	0.00	49.48	68.23	-18.75
* 15600.00	Average	V	-	-	-81.24	17.04	0.00	42.80	53.98	-11.18
* 15600.00	Peak	V	-	-	-70.88	17.04	0.00	53.16	73.98	-20.82
* 20800.00	Average	H	-	-	-62.98	-5.90	-9.54	28.58	53.98	-25.40
* 20800.00	Peak	H	-	-	-51.97	-5.87	-9.54	39.62	73.98	-34.36
26000.00	Peak	H	-	-	-53.37	-4.35	-9.54	39.74	68.23	-28.49
* 31200.00	Average	V	-	-	-62.40	-2.74	-9.54	32.32	53.98	-21.66
* 31200.00	Peak	V	-	-	-50.45	-2.70	-9.54	44.31	73.98	-29.67

Table 7-220. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 172 of 380

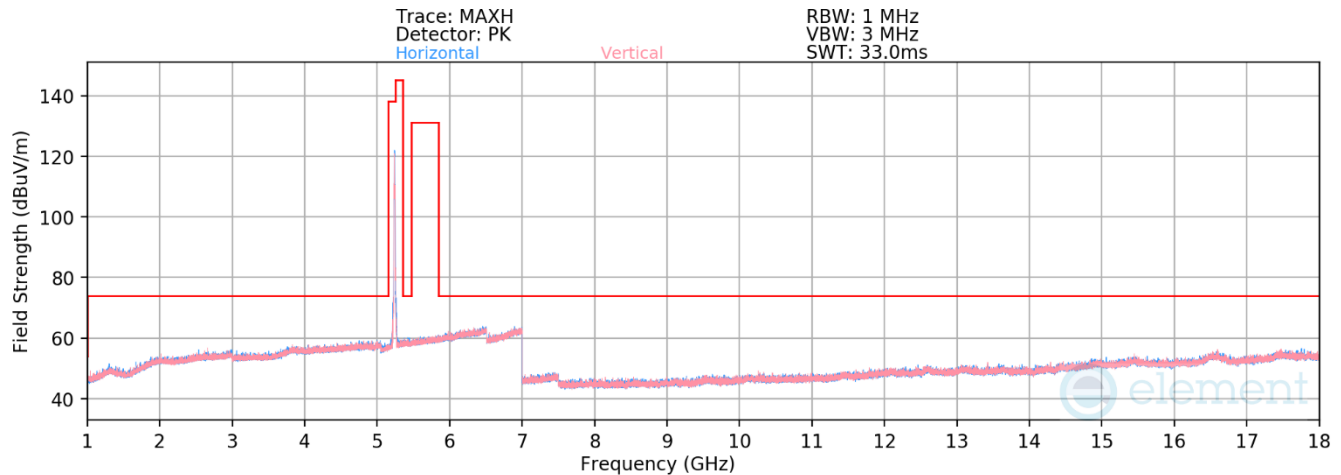


Plot 7-303. RSE above 1 GHz CDD Diversity (11be - Ch.48 - RU26)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5240 MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.38	11.51	49.13	68.23	-19.10
* 15720.00	Average	V	-	-	-80.91	16.57	42.66	53.98	-11.32
* 15720.00	Peak	V	-	-	-69.90	16.57	53.67	73.98	-20.31

Table 7-221. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 173 of 380

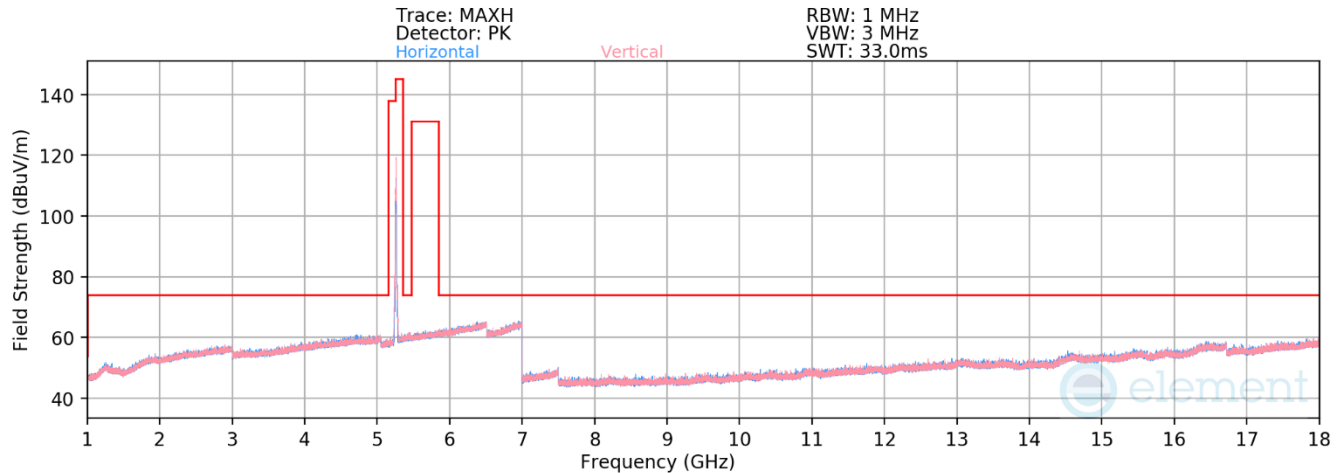


Plot 7-304. RSE above 1 GHz CDD Diversity (11be – Ch.52 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 39
Distance of Measurements: 3 Meters
Operating Frequency: 5260 MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	V	-	-	-68.94	11.21	49.27	68.23	-18.96
* 15780.00	Average	H	-	-	-80.75	17.58	43.82	53.98	-10.16
* 15780.00	Peak	H	-	-	-70.45	17.58	54.12	73.98	-19.86

Table 7-222. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 174 of 380

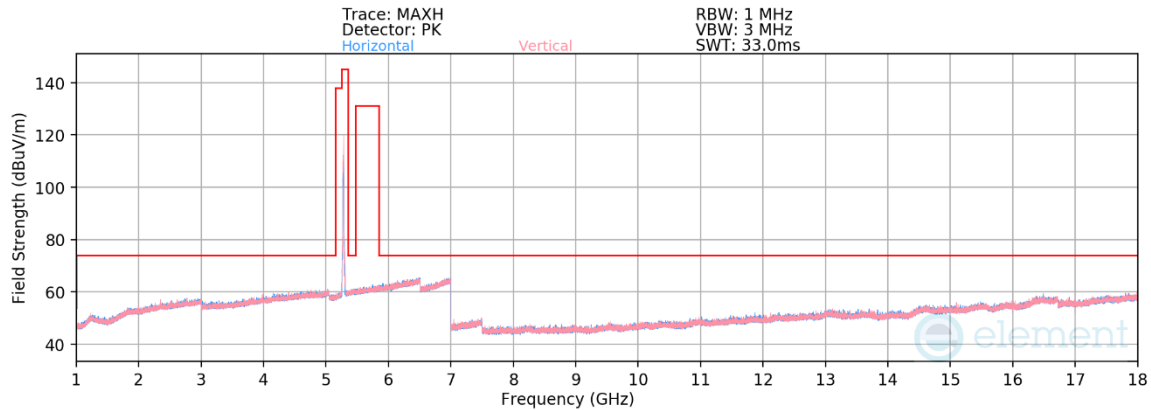

Plot 7-305. RSE above 1 GHz CDD Diversity (11be - Ch.56 - RU52)

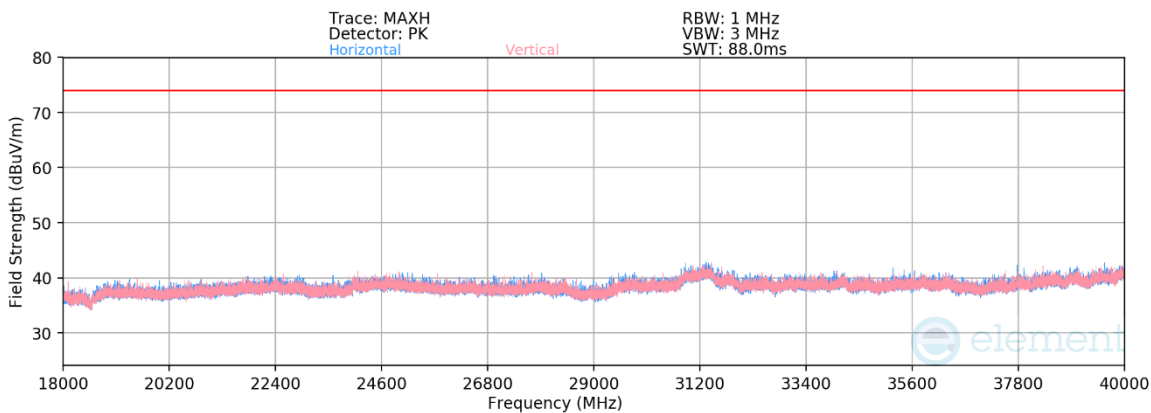


Plot 7-306. RSE 18 GHz - 40 GHz CDD Diversity (11be Ch.56 - RU52)

Mode: 802.11be (20 MHz BW)
 Data Rate: MCS0
 RU Index: 39
 Distance of Measurements: 3 Meters
 Operating Frequency: 5280 MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	V	-	-	-69.17	11.15	0.00	48.99	68.23	-19.24
* 15840.00	Average	V	-	-	-81.18	17.84	0.00	43.66	53.98	-10.32
* 15840.00	Peak	V	-	-	-71.05	17.84	0.00	53.79	73.98	-20.19
* 21120.00	Average	V	-	-	-62.64	-6.08	-9.54	28.74	53.98	-25.24
* 21120.00	Peak	V	-	-	-50.90	-6.08	-9.54	40.48	73.98	-33.50
26400.00	Peak	V	-	-	-52.57	-4.09	-9.54	40.80	68.23	-27.43
* 31680.00	Average	H	-	-	-64.69	-2.66	-9.54	30.11	53.98	-23.87
* 31680.00	Peak	H	-	-	-53.64	-2.66	-9.54	41.16	73.98	-32.82

Table 7-223. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 175 of 380

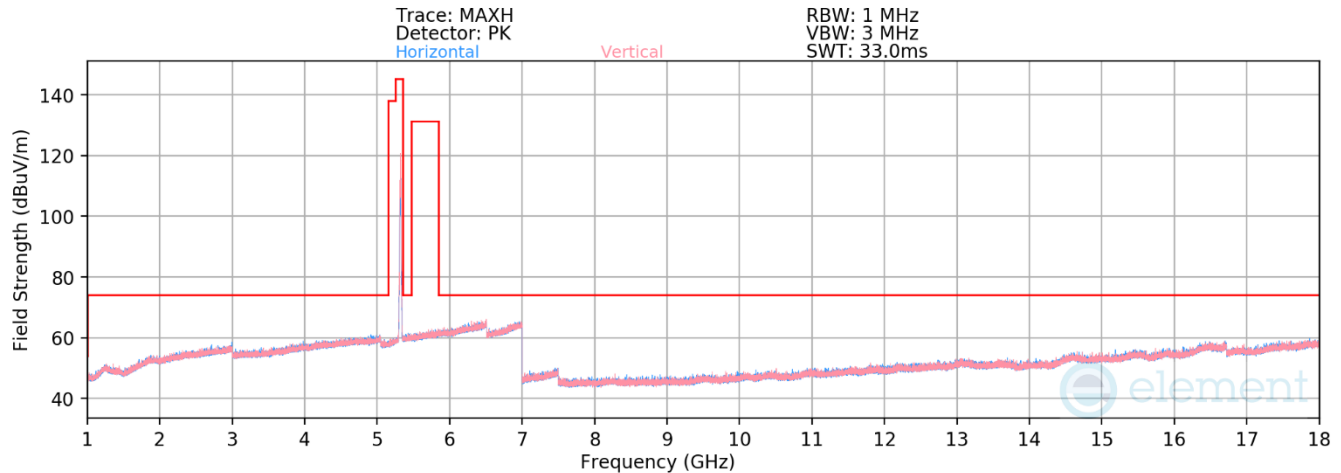


Plot 7-307. RSE above 1 GHz CDD Diversity (11be – Ch.64 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 39
Distance of Measurements: 3 Meters
Operating Frequency: 5320 MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-80.02	10.90	37.88	53.98	-16.10
* 10640.00	Peak	H	-	-	-68.90	10.90	49.00	73.98	-24.98
* 15960.00	Average	H	-	-	-81.18	17.69	43.51	53.98	-10.47
* 15960.00	Peak	H	-	-	-70.34	17.69	54.34	73.98	-19.64

Table 7-224. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 176 of 380

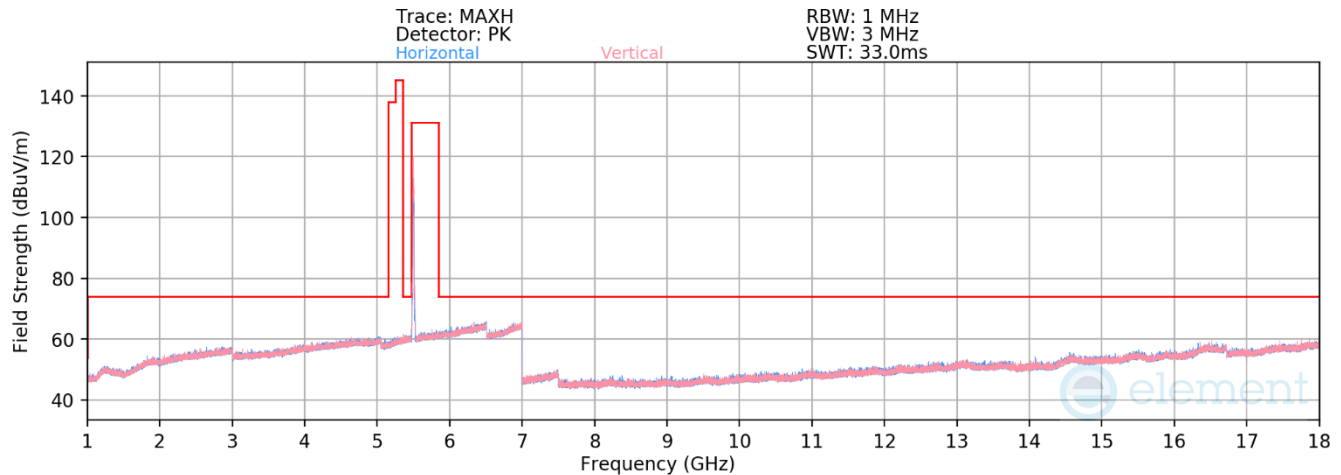


Plot 7-308. RSE above 1 GHz CDD Diversity (11be – Ch.100 – RU52)

Mode: 802.11be (20 MHz BW)
Data Rate: MCS0
RU Index: 39
Distance of Measurements: 3 Meters
Operating Frequency: 5500 MHz
Channel: 100


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-80.46	12.50	39.04	53.98	-14.94
* 11000.00	Peak	H	-	-	-69.81	12.50	49.69	73.98	-24.29
16500.00	Peak	H	-	-	-69.91	19.09	56.18	68.23	-12.05

Table 7-225. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 177 of 380

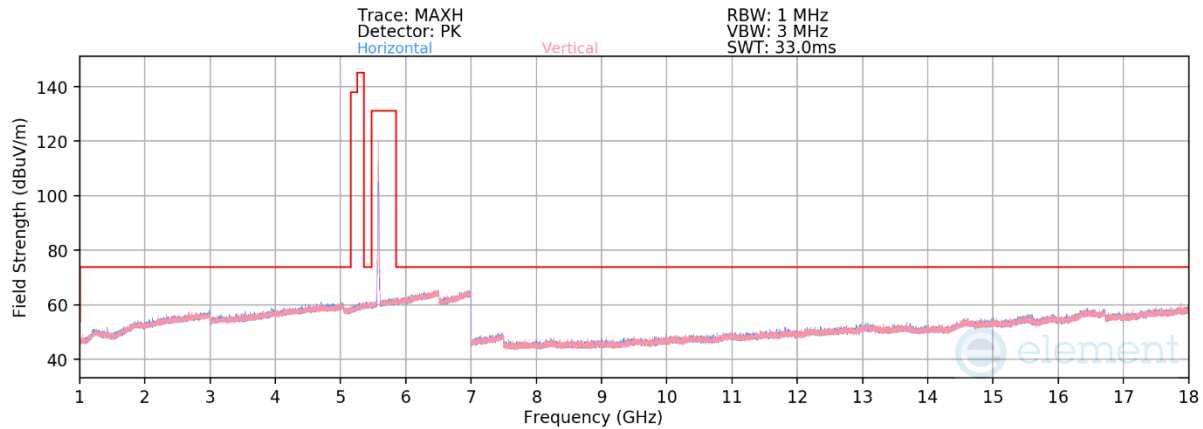

Plot 7-309. RSE above 1 GHz CDD Diversity (11be – Ch.116 – RU52)

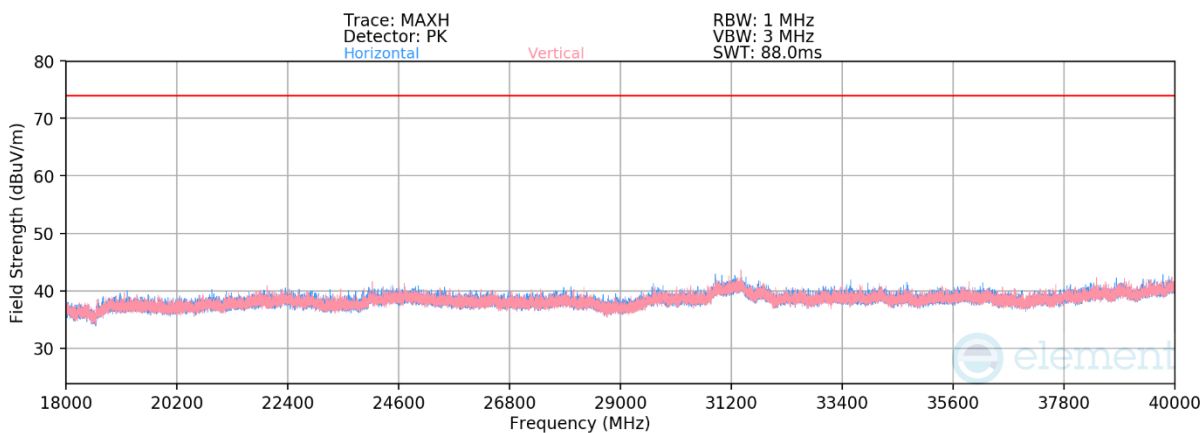

Plot 7-310. RSE 18 GHz – 40 GHz CDD Diversity (11be Ch.116 — RU52)

Mode: 802.11be (20 MHz BW)

Data Rate: MCS0

RU Index: 39

Distance of Measurements: 3 Meters

Operating Frequency: 5580 MHz

Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-80.43	11.63	0.00	38.20	53.98	-15.78
* 11160.00	Peak	H	-	-	-69.43	11.63	0.00	49.20	73.98	-24.78
16740.00	Peak	V	-	-	-69.40	19.56	0.00	57.16	68.23	-11.07
* 22320.00	Average	H	-	-	-62.17	-5.46	-9.54	29.83	53.98	-24.15
* 22320.00	Peak	H	-	-	-50.89	-5.49	-9.54	41.08	73.98	-32.90
27900.00	Peak	V	-	-	-54.55	-2.89	-9.54	40.02	68.23	-28.21
33480.00	Peak	H	-	-	-51.80	-3.63	-9.54	42.03	68.23	-26.20

Table 7-226. Radiated Measurements CDD Diversity (RU52)

FCC ID: BCGA3596 IC: 579C-A3596	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 5/12/2026 - 7/08/2026	EUT Type: Tablet Device	Approved by: Technical Manager
Test Report S/N: 1C2604030026-17-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 178 of 380