

EMLE ENGINEERING INC. 4615 ENTERPRISE COMMON, FREMONT, CA 94538

NARROWBAND CONDUCTED EMI


CLASS B (450KHZ-30MHZ)

PERFORMED FOR: HARRIS MCD

115 VAC SUPPLY LINE

MODEL # C1

SERIAL # 001

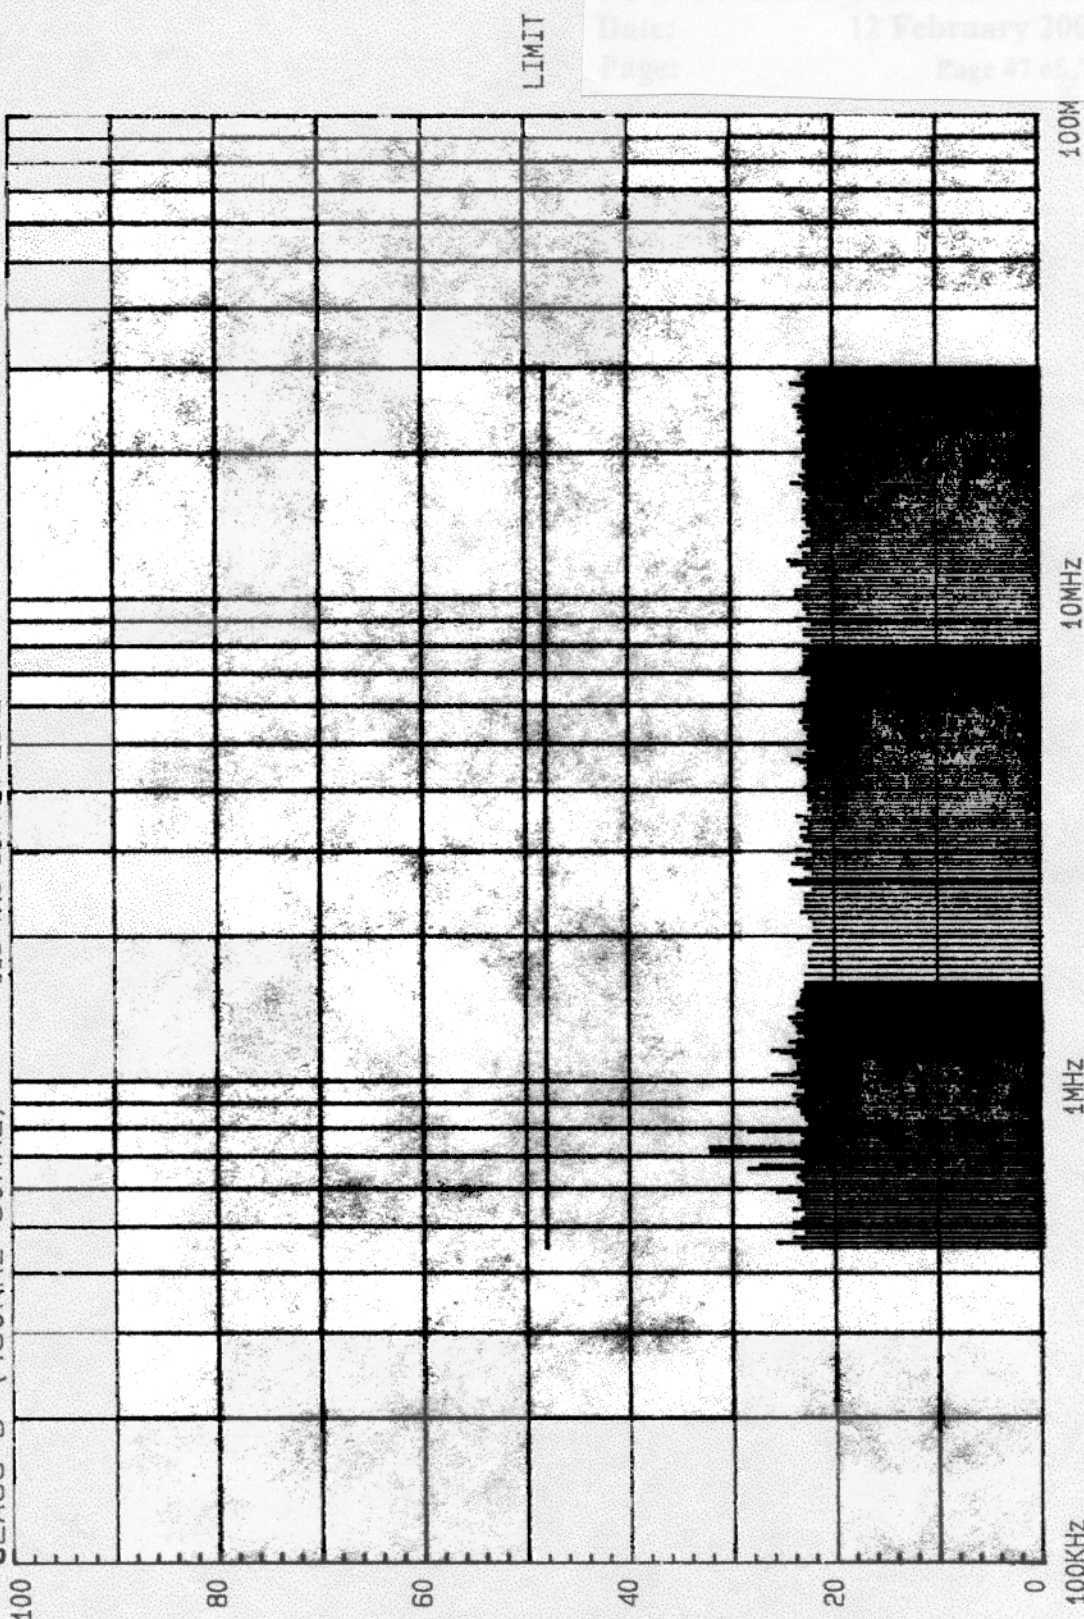

Conducted Emissions, Graphical Data, Supply Lead, C1 Radio

Date:

12 February 2000

Page:

Page 48 of 71

EMCE ENGINEERING INC.
4615 ENTERPRISE COMMON
FREMONT, CA 94538

PERFORMED FOR: HARRIS MCD
TEST SPECIMEN: 5.8 GHZ SPREAD SPECTRUM RADIO

MODEL NO: C1
SERIAL NO: 001

115 VAC RETURN LINE

CONDUCTED NARROWBAND RESULTS: (FCC-B)

450KHz to 1.6 MHz

The Two Largest Signals are:	0.67 MHz	27.7 dBuV
	0.45 MHz	24.0 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED

1.6 MHz to 8 MHz

The Two Largest Signals are:	4.42 MHz	24.1 dBuV
	1.60 MHz	22.2 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED

8 MHz to 30 MHz

The Two Largest Signals are:	9.34 MHz	23.8 dBuV
	8.00 MHz	21.6 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED

COMMENTS:

VERIFIED BY 

DATE: 2/13/00

JSE COMMON, FHEMONI, CA 94538

INL

EMLE ENBLINCE


MODEL # C1

SERIAL 01

PERFORMED FOR: HARRIS MCD

115 VAC RETURN LINE

NARROWBAND CONDUCTED EMI
CLASS B (450KHZ 30MHz)

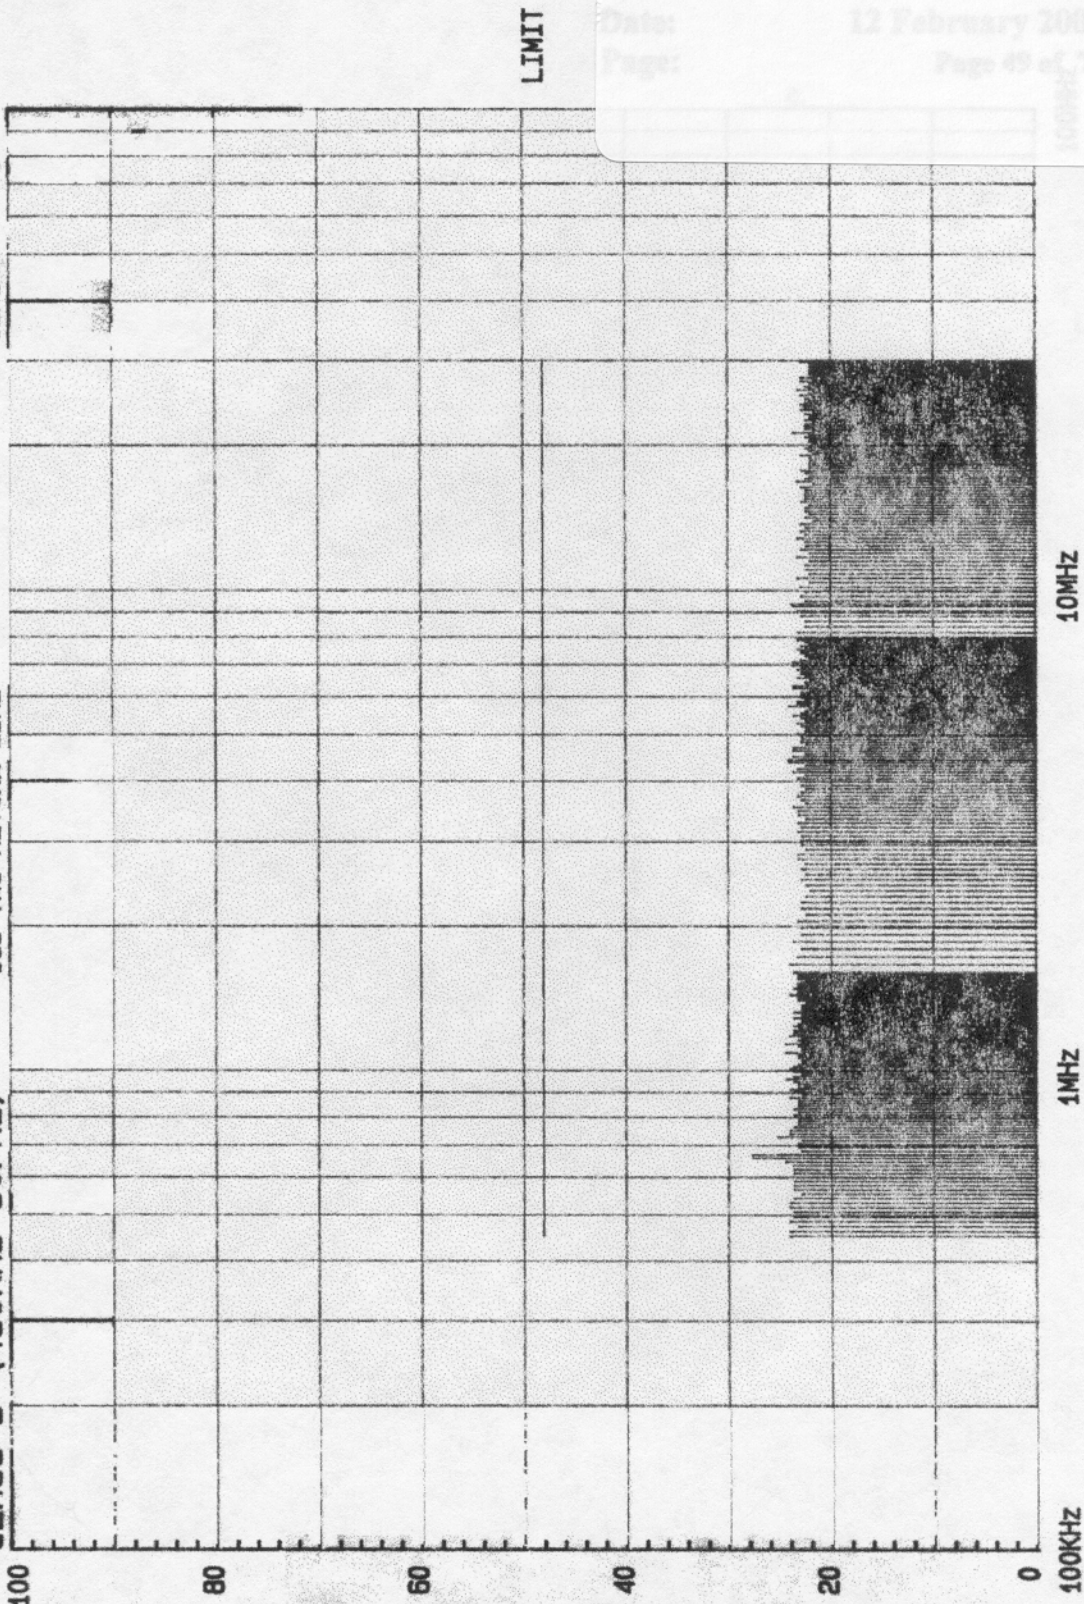

Conducted Emissions, Graphical Data, Return Lead, C1 Radio

Date:

12 February 2000

Page:

Page 50 of 71

EMCE ENGINEERING INC.
4615 ENTERPRISE COMMON
FREMONT, CA 94538

PERFORMED FOR: HARRIS MCD
TEST SPECIMEN: 5.8 GHZ SPREAD SPECTRUM RADIO

MODEL NO: C2
SERIAL NO: 001

VAC SUPPLY LINE

CONDUCTED NARROWBAND RESULTS: (FCC-B)

450KHz to 1.6 MHz

The Two Largest Signals are:	0.60 MHz	29.9 dBuV
	0.45 MHz	22.5 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED

1.6 MHz to 8 MHz

The Two Largest Signals are:	4.21 MHz	28.4 dBuV
	1.60 MHz	24.0 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED

MHz to 30 MHz***

The Two Largest Signals are:	10.57 MHz	24.3 dBuV
	8.00 MHz	20.6 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED


COMMENTS:

VERIFIED BY

Don Ballard

CMLC ENGINEERING INC. 4615 ENTERPRISE COMMON, FREMONT, CA 94538 DATE: 2/13/00

NARROWBAND CONDUCTED EMI CLASS B (450KHZ-30MHZ) MODEL # C2 PERFORMED FOR: HARRIS MCD SERIAL # 001 115 VAC SUPPLY LINE

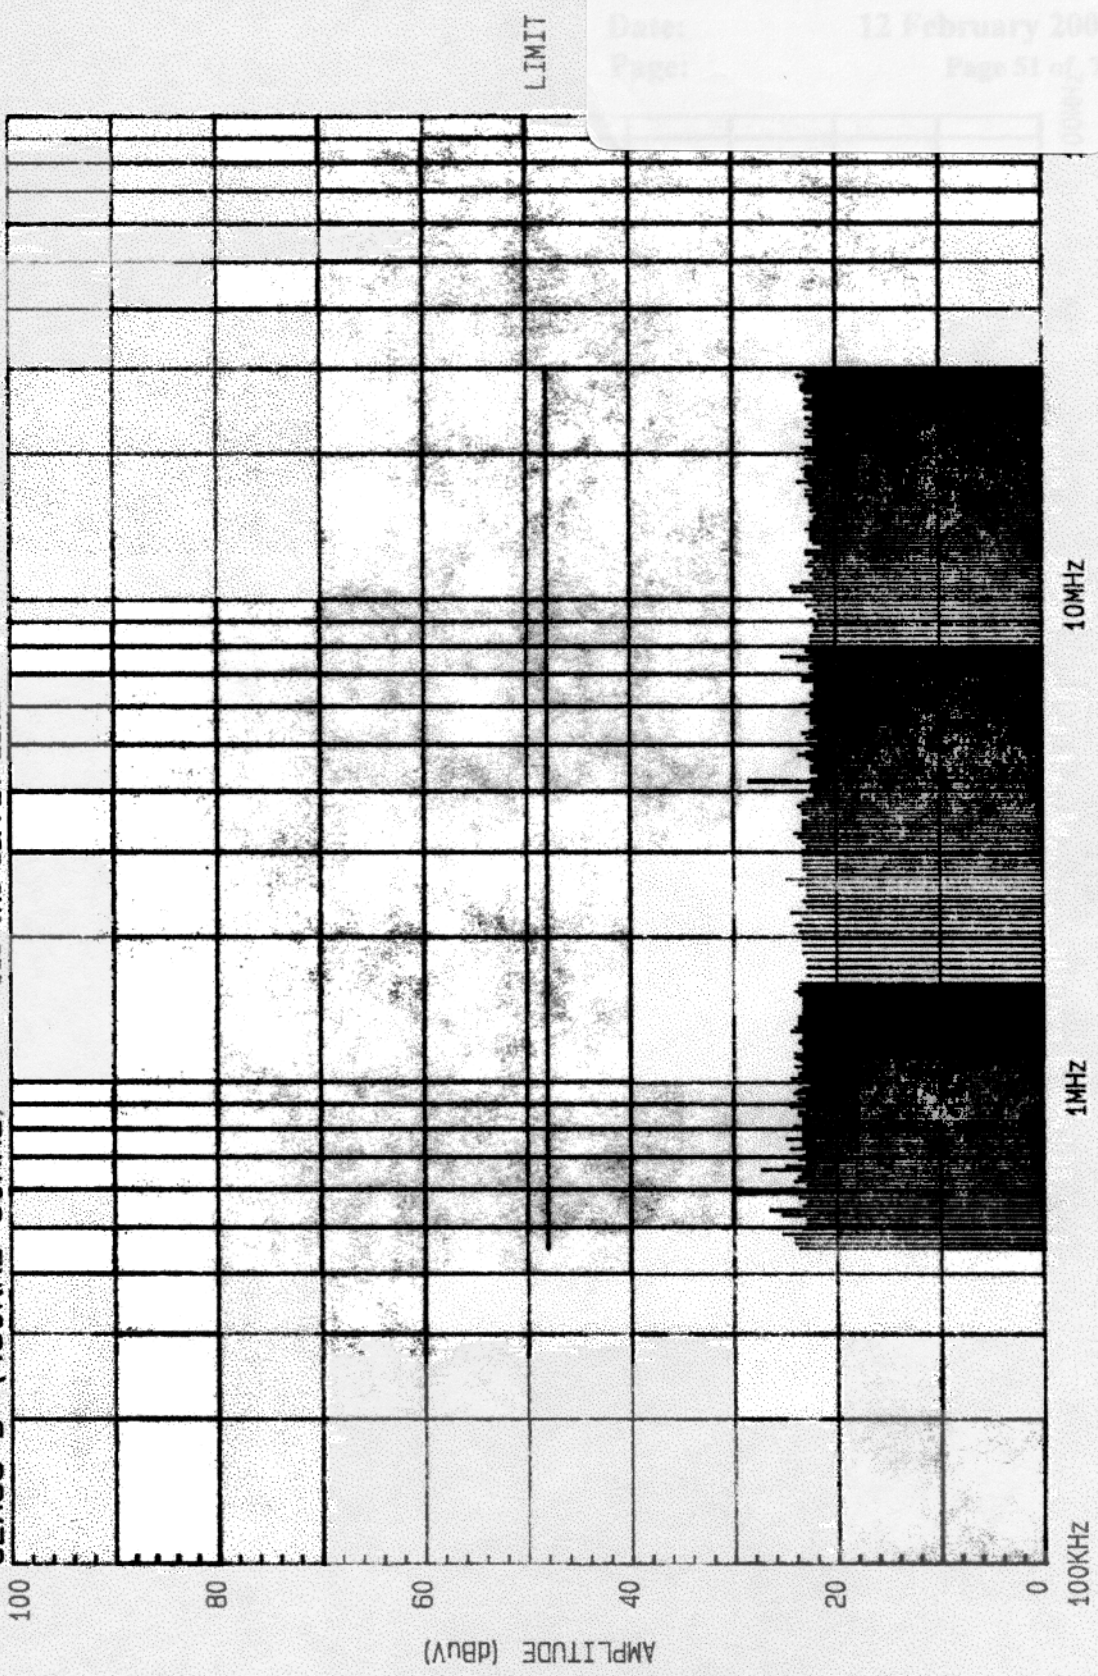

Conducted Emissions, Graphical Data, Supply Lead, C2 Radio

EMCE ENGINEERING INC.
4615 ENTERPRISE COMMON
FREMONT, CA 94538

PERFORMED FOR: HARRIS MCD
TEST SPECIMEN: 5.8 GHZ SPREAD SPECTRUM RADIO

MODEL NO: C2
SERIAL NO: 001

115 VAC RETURN LINE

CONDUCTED NARROWBAND RESULTS: (FCC-B)

450KHz to 1.6 MHz

The Two Largest Signals are:	0.58 MHz	27.9 dBuV
	0.45 MHz	24.0 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED

1.6 MHz to 8 MHz

The Two Largest Signals are:	4.20 MHz	26.2 dBuV
	1.60 MHz	22.7 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED

8 MHz to 30 MHz

The Two Largest Signals are:	12.69 MHz	24.7 dBuV
	8.00 MHz	22.2 dBuV
Spec at This Frequency is:		48.0 dBuV
		PASSED

COMMENTS:

VERIFIED BY




PERFORMED FOR: HARRIS MCD

NARROWBAND CONDUCTED EMI

CLASS B (450KHZ-30MHZ) 115 VAC RETURN LINE

MODEL # C2

SERIAL # 001

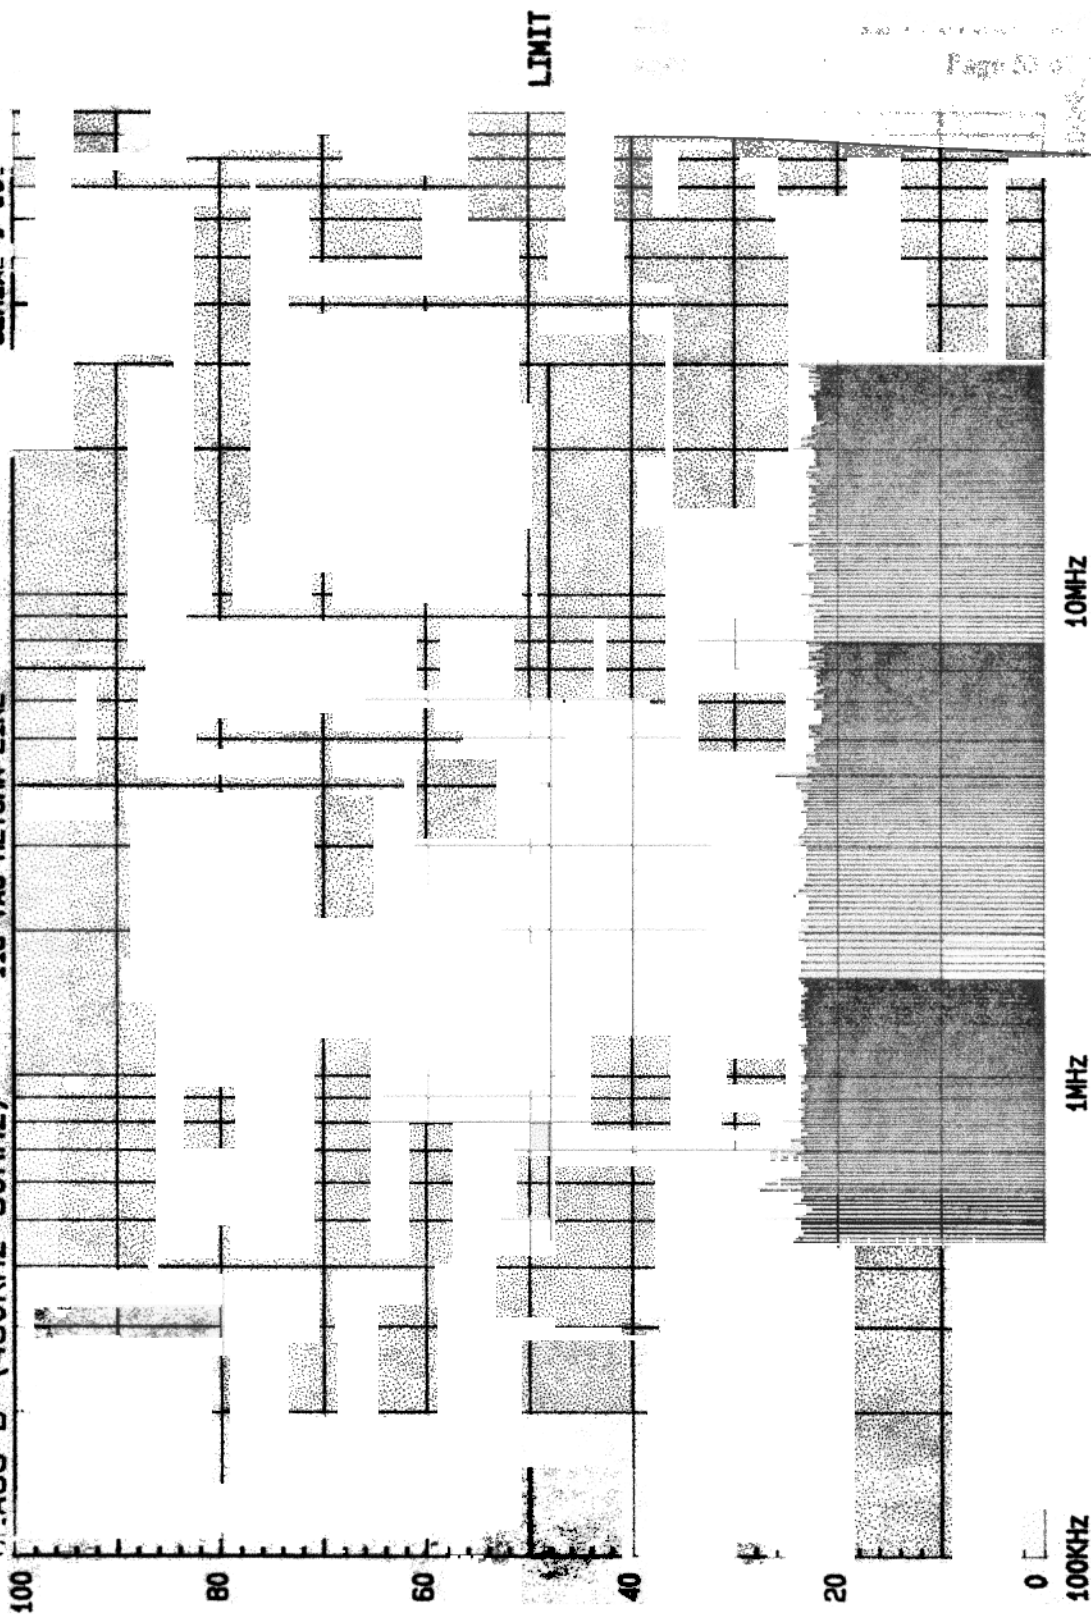

Conducted Emissions, Graphical Data, Return Lead, C2 Radio