

KTL Test Report:	8R01058
Applicant:	Allen Telecom Group 140 Vista Centre Drive Forest, Virginia 24551
Equipment Under Test: (E.U.T.)	Brite Cell Dual Band
FCC ID:	BCR-BCEL-DUALBAND
In Accordance With:	FCC Part 22, Subpart H Cellular Band Repeaters
Tested By:	KTL Ottawa Inc. 3325 River Road, R.R. 5 Ottawa, Ontario K1V 1H2
Authorized By:	T. Tidwell, Wireless Group Manager
Date:	
Total Number of Pages:	63

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Table of Contents

Section 1. Summary of Test Results

- General
- Summary of Test Data

Section 2. General Equipment Specification

- Specifications
- Description of Modifications for Class II Permissive Change
- Modifications Made During Testing
- Theory of Operation
- System Diagram

Section 3. RF Power Output

- Test Results
- Measurement Data
- Power Over Bandwidth Graphs

Section 4. Occupied Bandwidth

- Occupied Bandwidth (Voice + SAT)
 - Test Results
 - Test Data
 - Voice + SAT Input and Output Graphs
- Occupied Bandwidth (WB Data)
 - Test Results
 - Test Data
 - Wideband Data Input and Output Graphs
- Occupied Bandwidth (ST)
 - Test Results
 - Test Data
 - ST Input and Output Graphs
- Occupied Bandwidth (Digital Mod.)
 - Test Results
 - Test Data
 - Digital Mod. Input and Output Graphs

Section 5. Spurious Emissions at Antenna Terminals

- Test Results
- Test Data
- Graphs

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Table of Contents, continued

Section 6. Field Strength of Spurious

- Test Results
- Test Data
- Test Data - Radiated Emissions - Uplink
- Test Data - Radiated Emissions - Downlink
- Photographs of Test Setup
- Pre-Scan Data

Section 7. Frequency Stability

- Test Results
- Measurement Data
- Graphs

Section 8. Test Equipment List

Annex A - Test Methodologies

- RF Power Output
- Occupied Bandwidth (Voice & SAT)
- Occupied Bandwidth (WB Data)
- Occupied Bandwidth (ST)
- Occupied Bandwidth (Digital Modulation)
- Spurious Emission at Antenna Terminals
- Field Strength of Spurious Radiation
- Frequency Stability

Annex B - Test Diagrams

- R.F. Power Output
- Occupied Bandwidth
- Spurious Emissions at Antenna Terminals
- Field Strength of Spurious Radiation
- Frequency Stability

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Section 1. Summary of Test Results

Manufacturer: Allen Telecom Group

Model No.: TFA 2301H-2

Serial No.: Demo 2

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22, Subpart H.



New Submission




Production Unit



Class II Permissive Change



Pre-Production Unit



Equipment Code

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. None
See " Summary of Test Data".



NVLAP LAB CODE: 100351-0

TESTED BY: _____ DATE: _____
Kevin Carr, Technologist

TECHNICAL REVIEW: _____ DATE: _____

KTL Ottawa Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. KTL Ottawa Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	MEAS.	RESULT
RF Power Output	22.913(a)	500W ERP	20.3 dBm	Complies
Occupied Bandwidth (Voice & SAT)	22.917(c)	Mask C	Plot	Complies
Occupies Bandwidth (Wideband Data)	22.917(d)	Mask D	Plot	Complies
Occupied Bandwidth (ST)	22.917(d)	Mask D	Plot	Complies
Occupied Bandwidth (Digital)	None	Input vs. Output	Plot	Complies
Spurious Emissions at Antenna Terminals	22.917	-13 dBm	Plot	Complies
Field Strength of Spurious Emissions	22.917	-13 dBm E.I.R.P.	-45.0 dBm	Complies
Frequency Stability	22.355	1.5 ppm	N/A	N/A

Footnotes For N/A's:**Test Conditions:** Temperature: 22 °C
Humidity: 32 %

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Section 2. General Equipment Specification

Supply Voltage Input:		120 VAC, 60 Hz				
Frequency Range:	Downlink:	869.0 – 894.0 MHz				
20 dB Bandwidth:		49.30 MHz				
Type of Modulation and Designator:		CDMA (F9W)	GSM (GXW)	NADC (DXW)	CDPD (F9W)	AMPS (F8W, F1D)
		☒	☐	☒	☐	☒
AGC Threshold:		Not Applicable				
Output Impedance:		50 ohm				
Gain:		5 dB Nominal				
Max Input Power:		15.2 dBm				
RF Output (Rated):	Single:	19.1 dBm				
	Composite:	16.1 dBm / 2 Carrier				
Frequency Translation:		F1-F1		F1-F2	N/A	
		☒		☐	☐	
Band Selection:		Software		Duplexer Change	Fullband Coverage	
		☐		☐	☒	

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Description of Modifications For Class II Permissive Change

NOT APPLICABLE

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Modifications Made During Testing


NOT APPLICABLE

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Theory of Operation

The Brite Cell Dual Band is an active indoor coverage system incorporating fibre optic and RF technologies. The device operates in the 800 MHz cell band and the 1990 MHz band. It features dual RF outputs and can operate from a 120 VAC line or battery. This system is hardwired to the base station and only re-transmits the downlink signal.

System Diagram

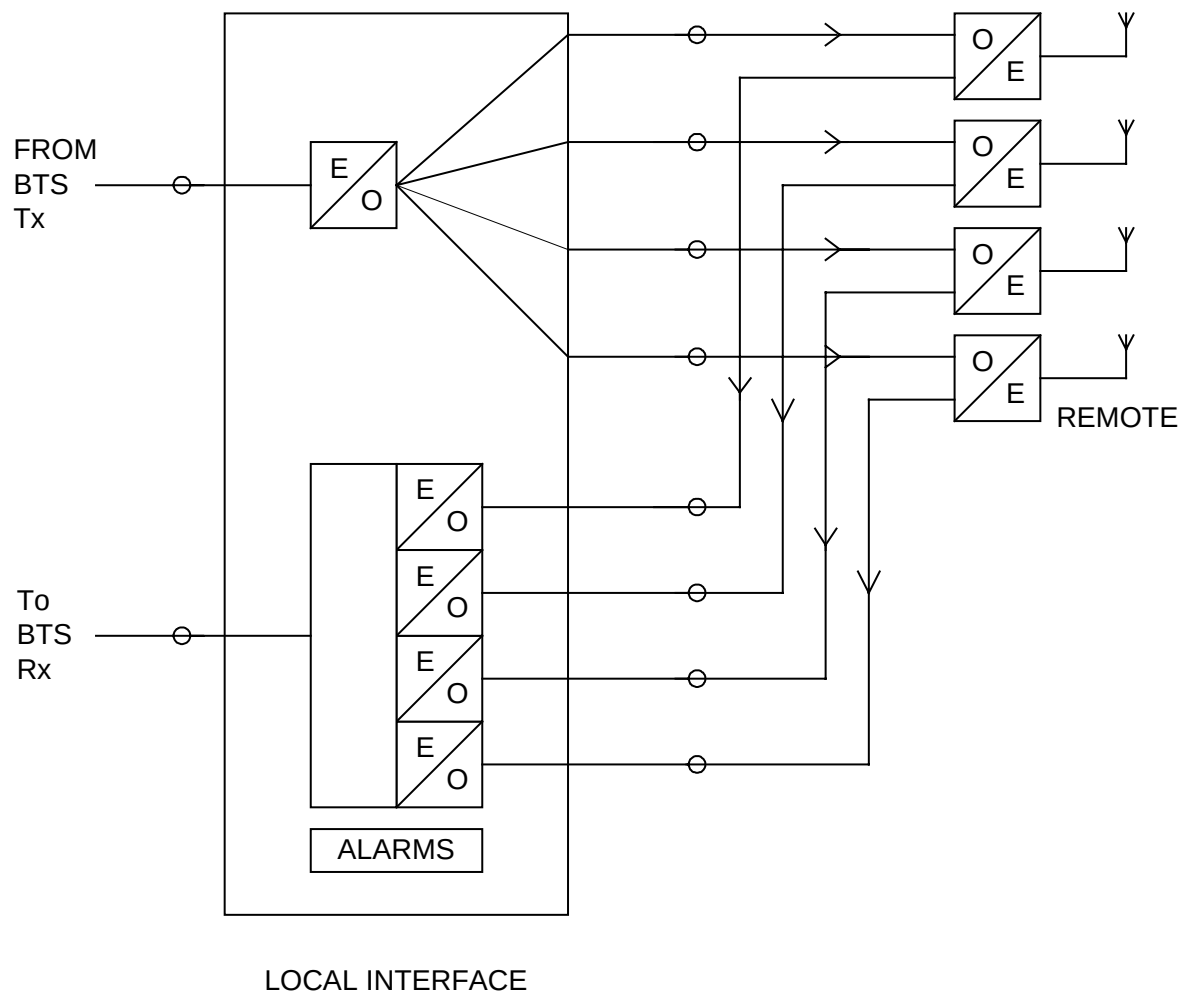

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND


Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.985
TESTED BY: Kevin Carr	DATE: November 26, 1998


Test Results: Complies.**Measurement Data:**

	Modulation Type	Per Channel Power Output (dBm)	Composite Power Output (dBm)
Downlink	AMPS	17.2	20.2
Downlink	CDMA	17.3	20.3
Downlink	NADC	16.1	19.1


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

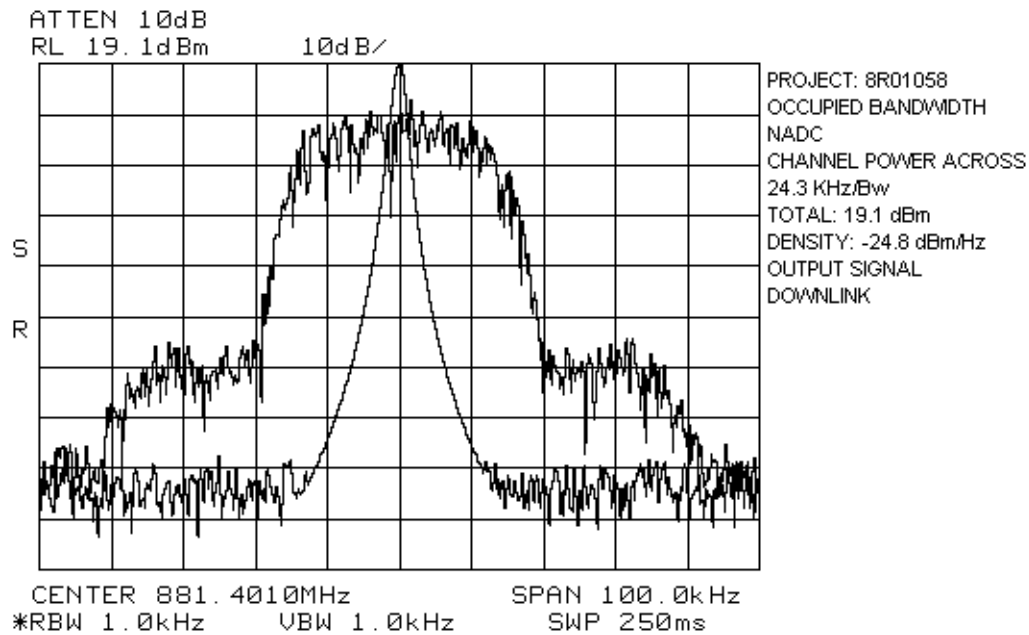


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

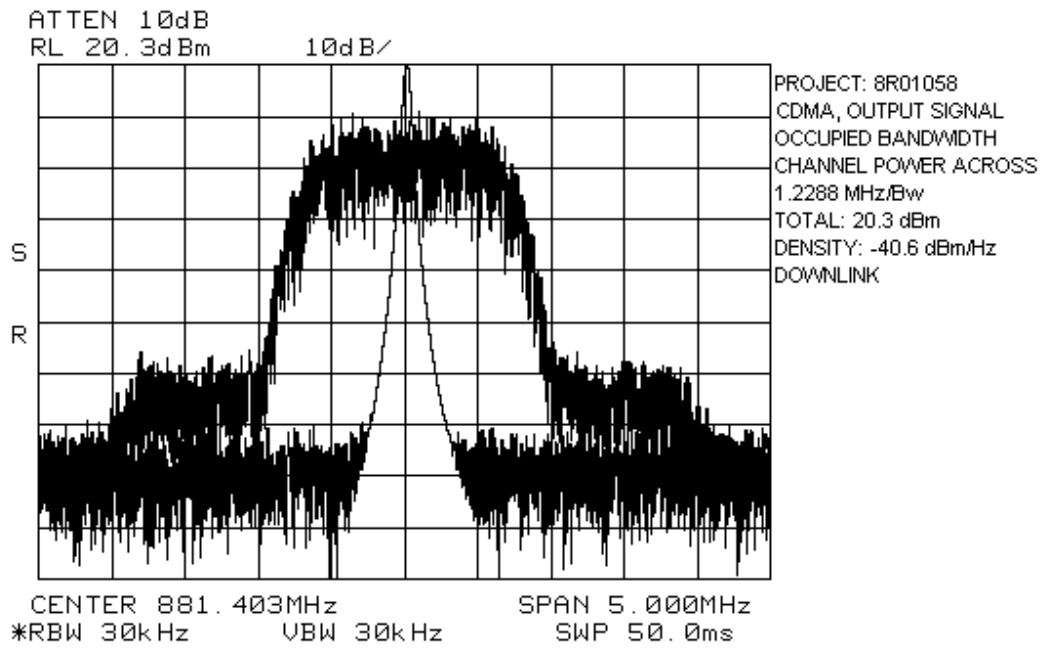

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

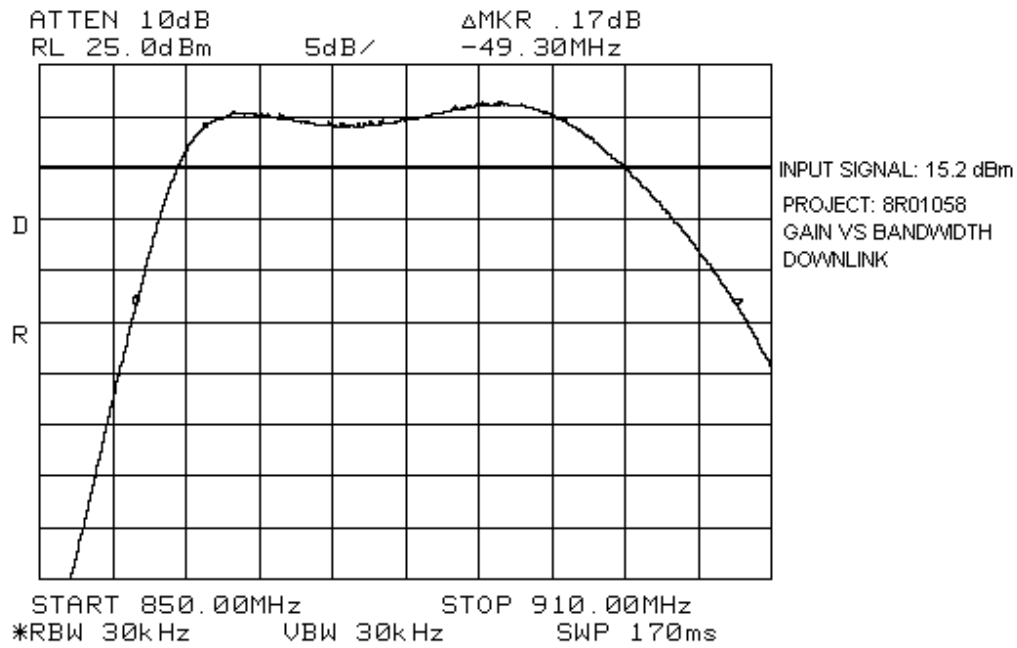

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

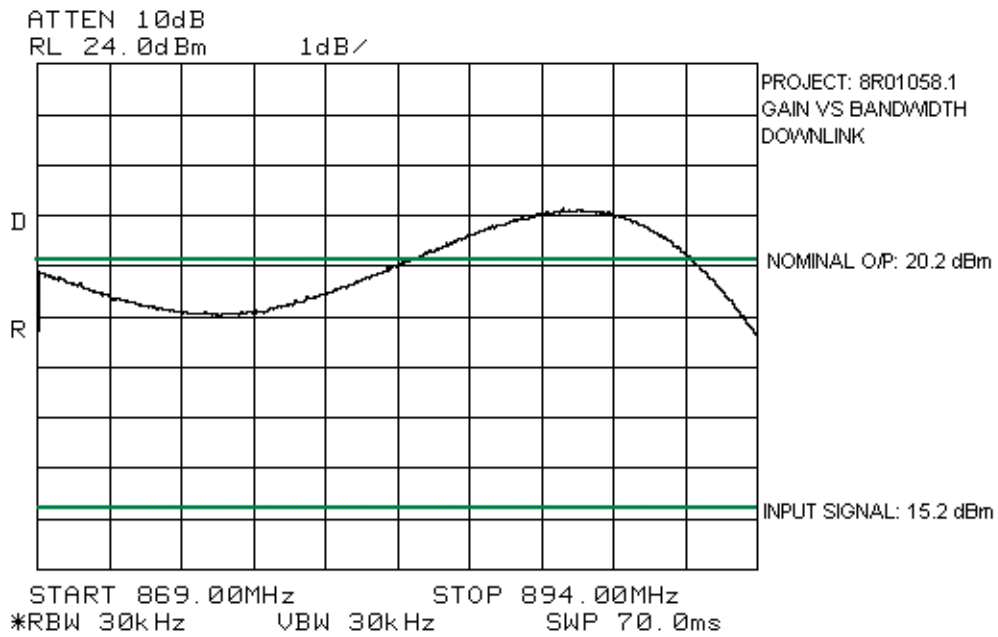

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND


Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth (Voice + SAT)	PARA. NO.: 2.917(c)
TESTED BY: Kevin Carr	DATE: November 26, 1998


Test Results: Complies.

Test Data: See attached graph(s).

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

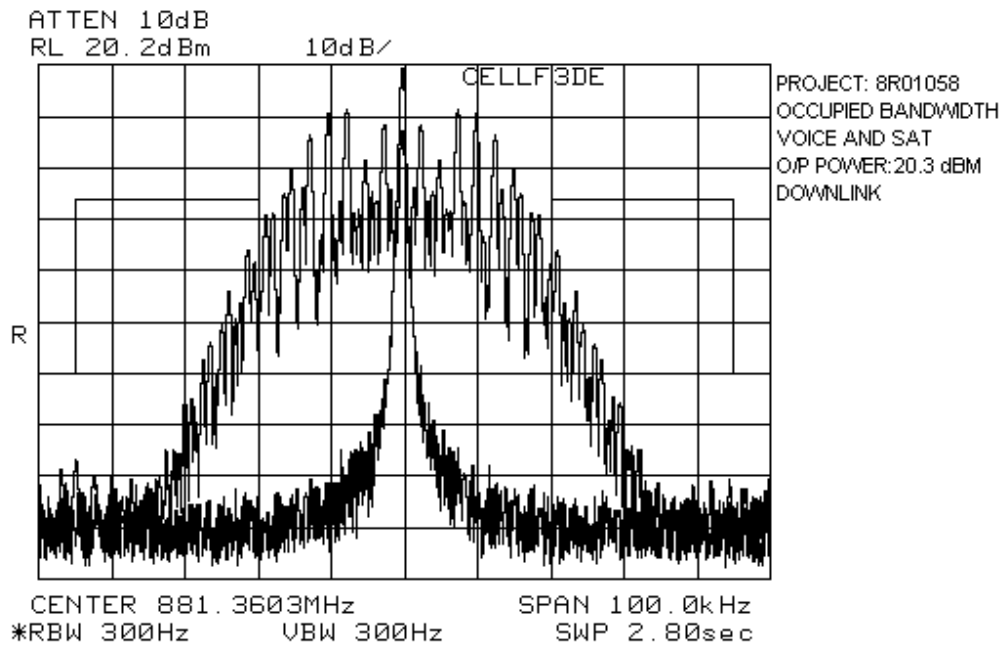

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

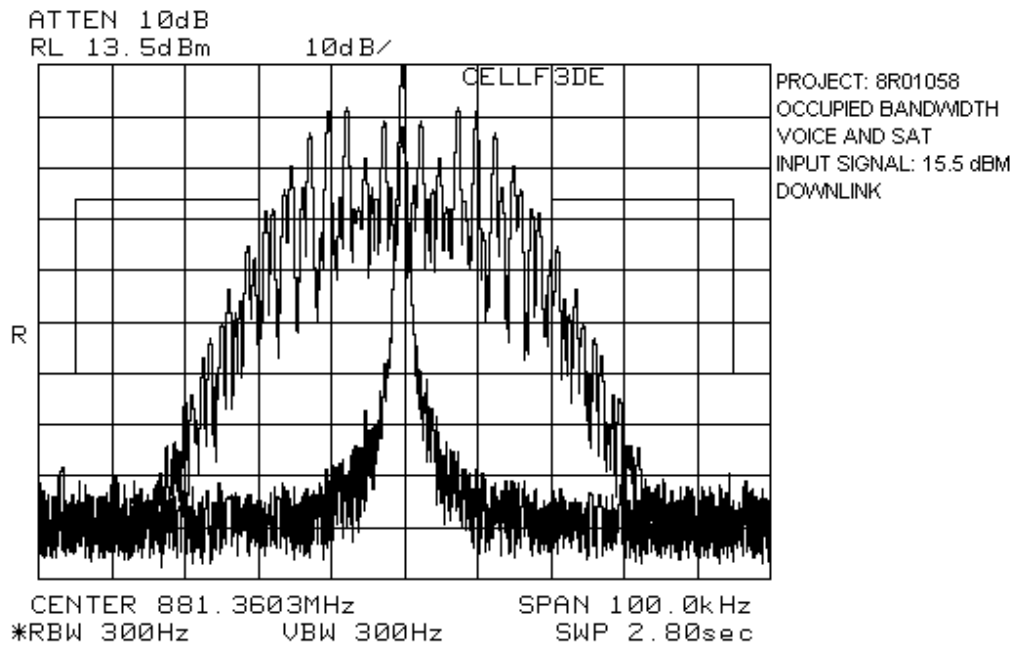


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Occupied Bandwidth (WB Data)	PARA. NO.: 2.917 (d)
TESTED BY: Kevin Carr	DATE: November 26, 1998


Test Results: Complies.

Test Data: See attached graph(s).

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

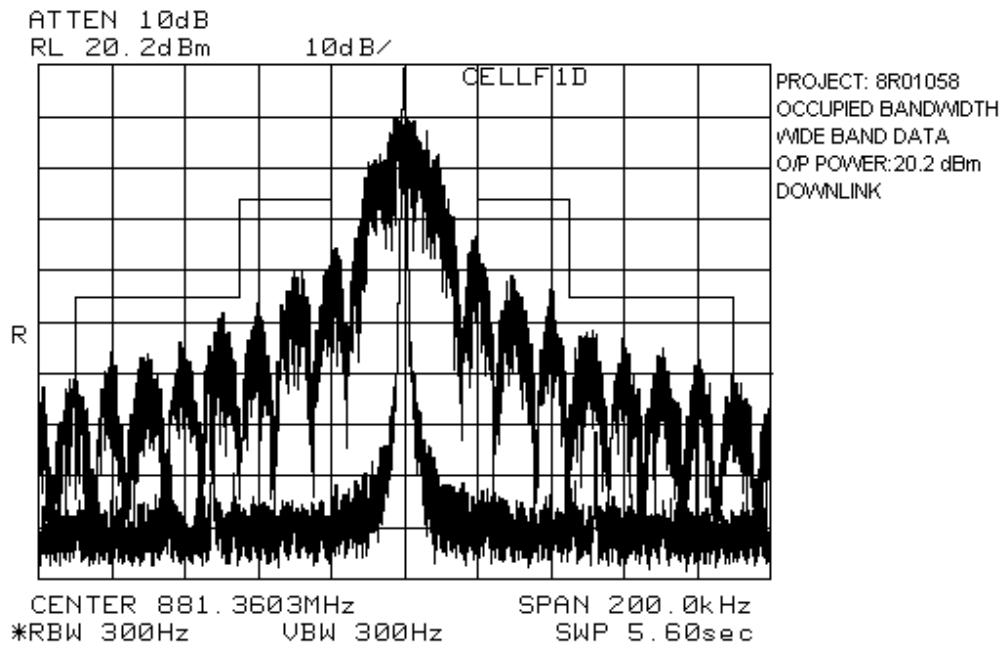

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

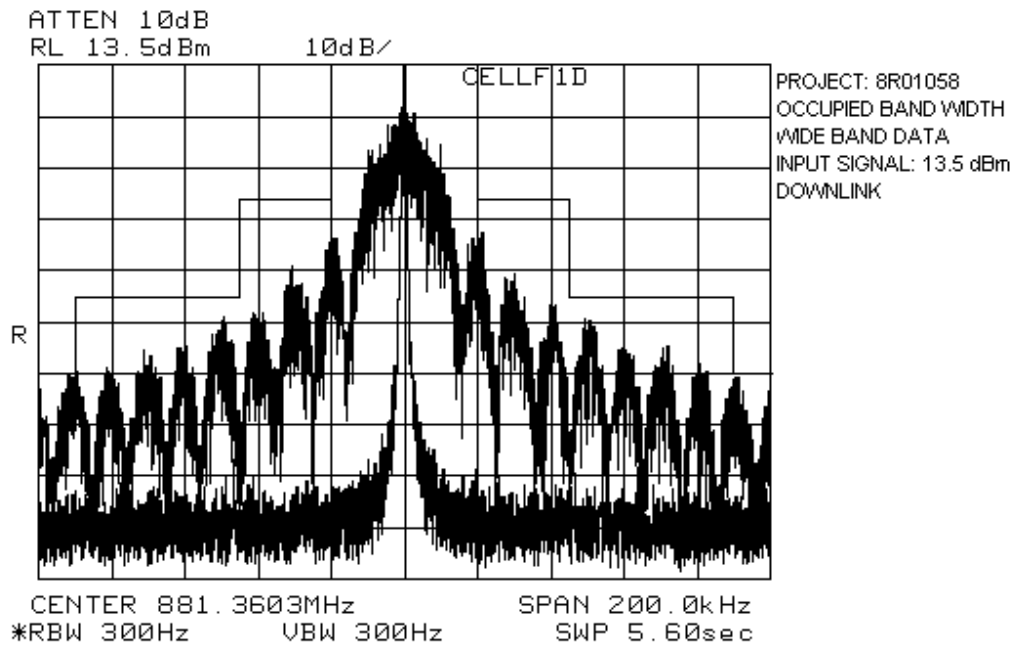


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Occupied Bandwidth (ST)	PARA. NO.: 2.917(d)
TESTED BY: Kevin Carr	DATE: November 26, 1998


Test Results: Complies.

Test Data: See attached graph(s).

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

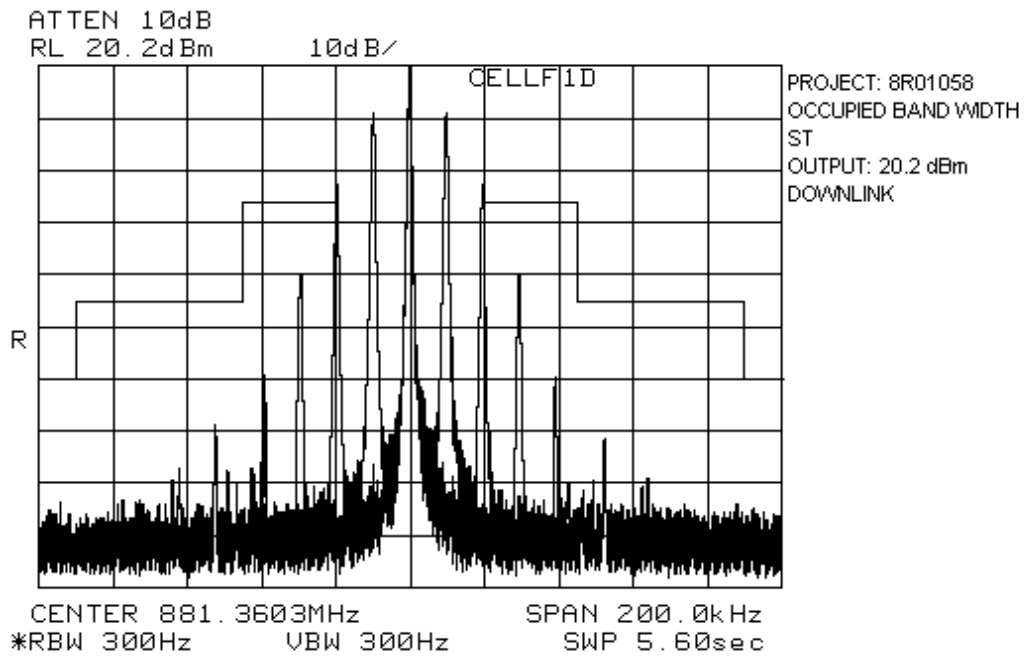

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

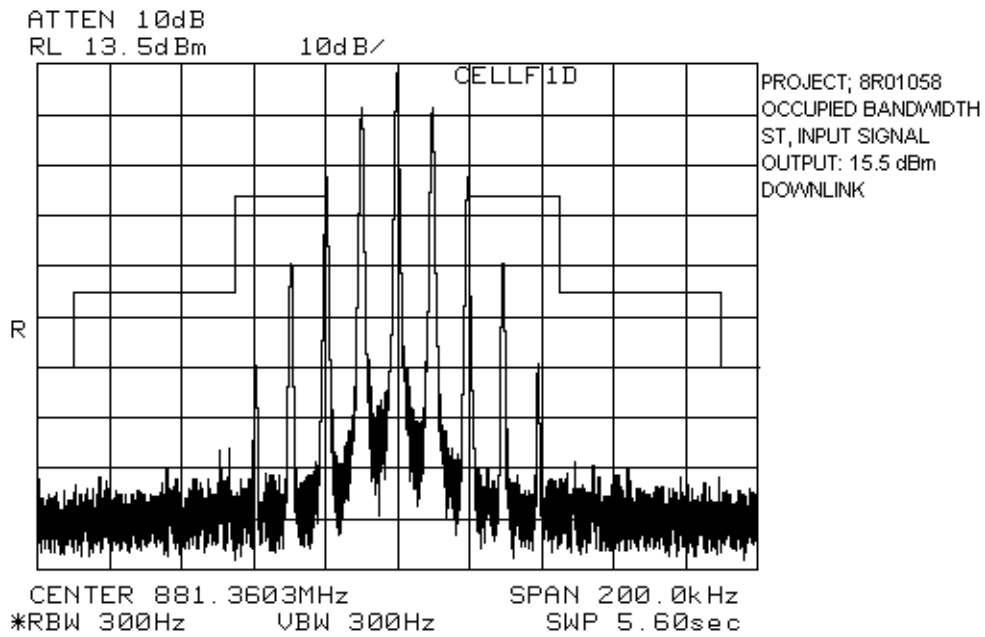


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Occupied Bandwidth (Digital Mod.)	PARA. NO.: 2.917(e)
TESTED BY: Kevin Carr	DATE: November 26, 1998


Test Results: Complies.

Test Data: See attached graph(s).


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

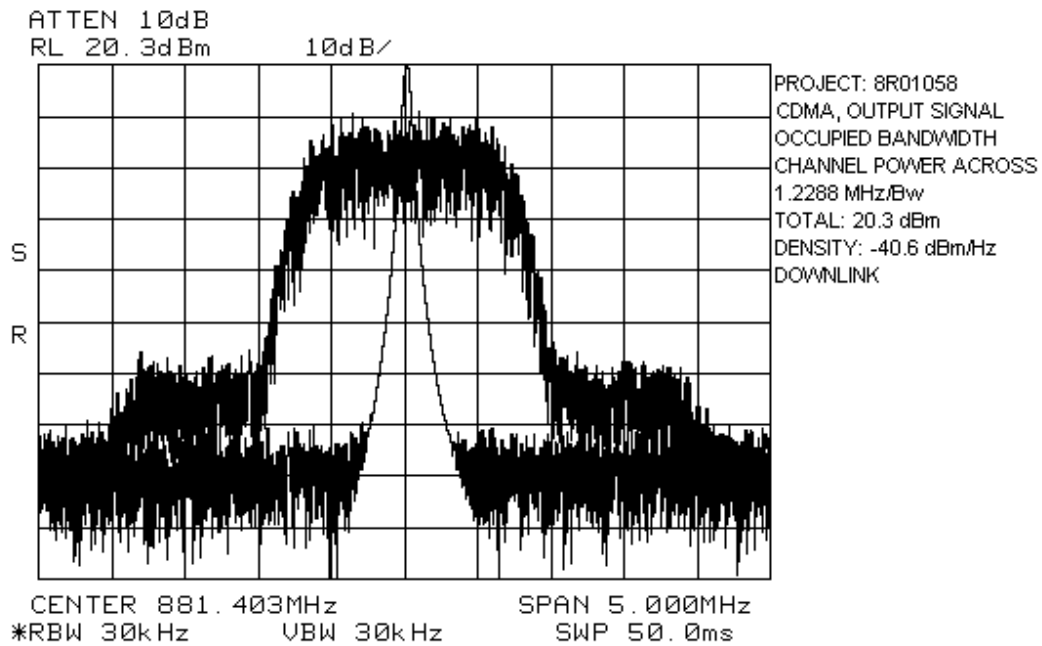


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

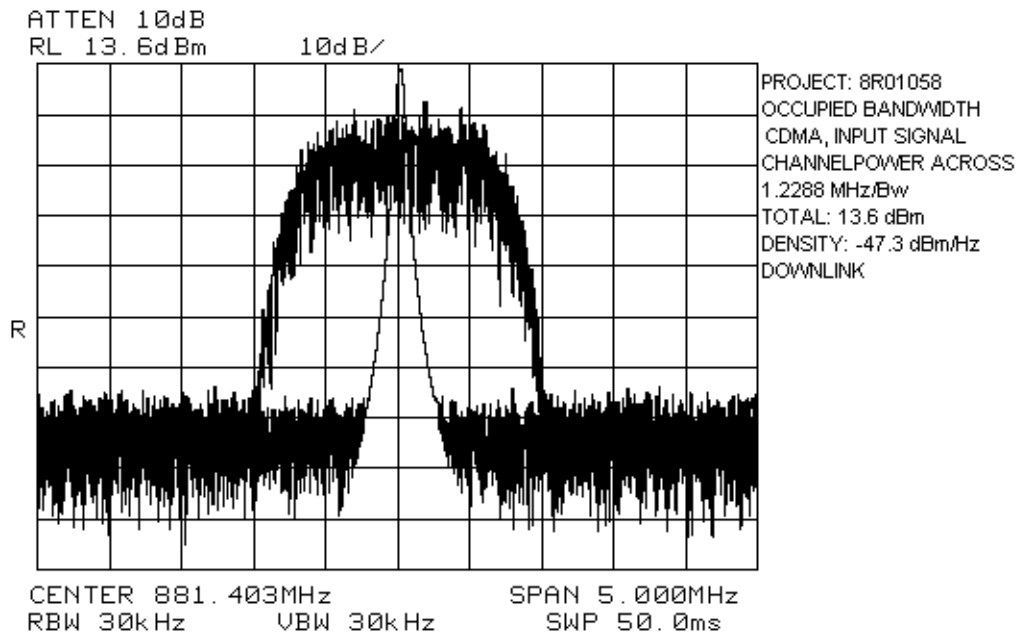

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

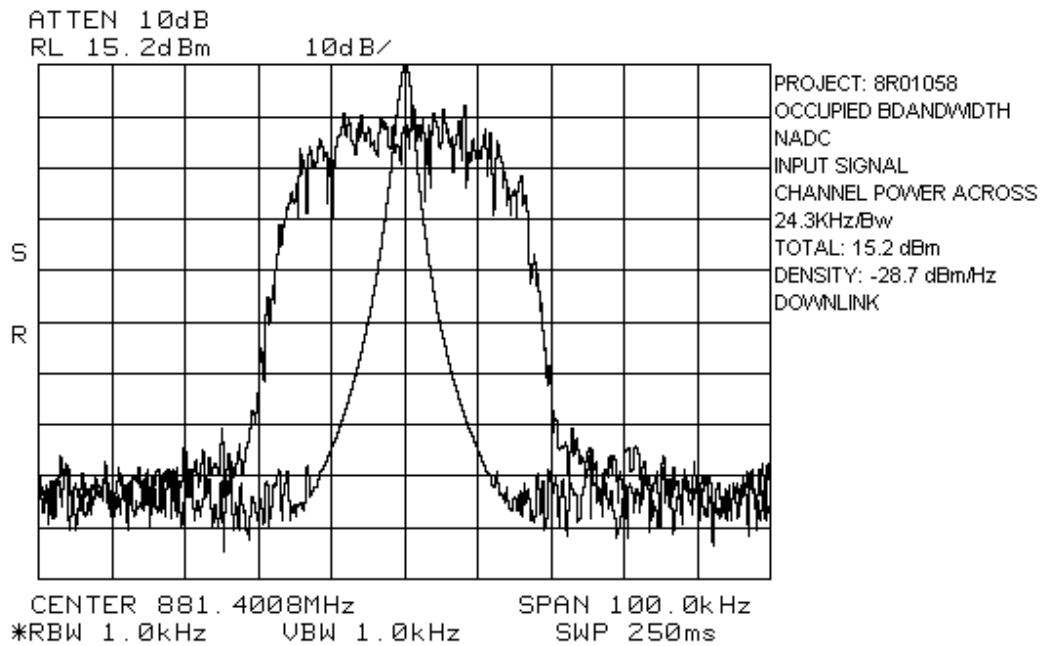

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

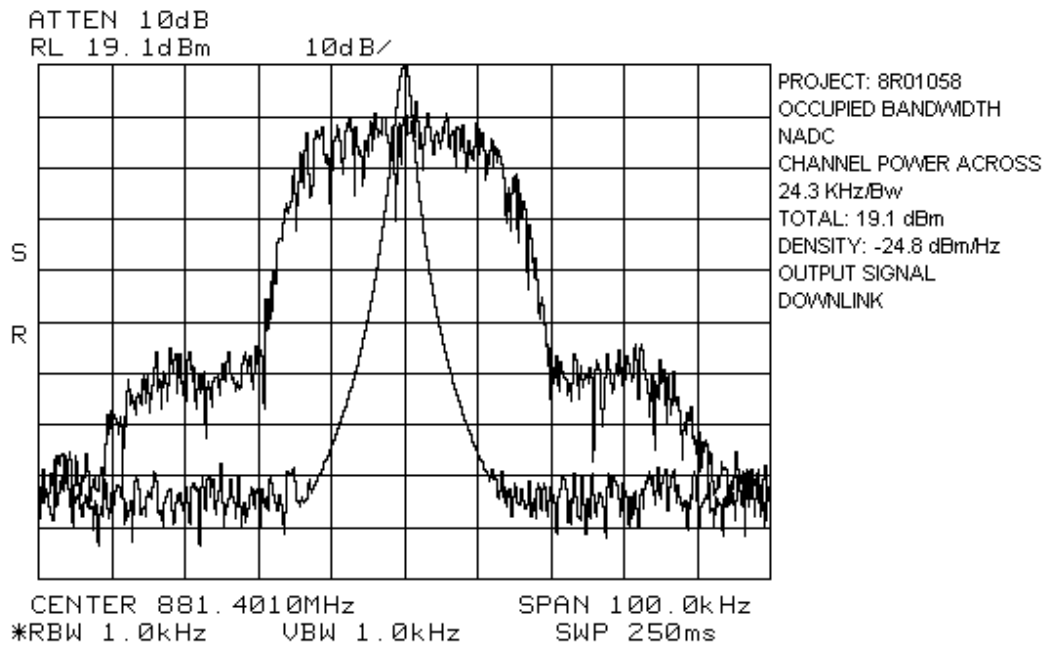

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Section 5. Spurious Emissions at Antenna Terminals


NAME OF TEST: Spurious Emissions @ Antenna Terminals PARA. NO.: 2.917(e)

TESTED BY: Kevin Carr DATE: November 26, 1998


Test Results: Complies.**Test Data:**

NAME OF TEST	WORST-CASE SPURIOUS LEVEL(dBm)
0 to 10 GHz spurious (Downlink)	-21.17
3 - signal intermodulation (Downlink)	-13.17
Lower band edge spurious (Downlink)	-15.70
Upper band edge spurious (Downlink)	-14.20


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

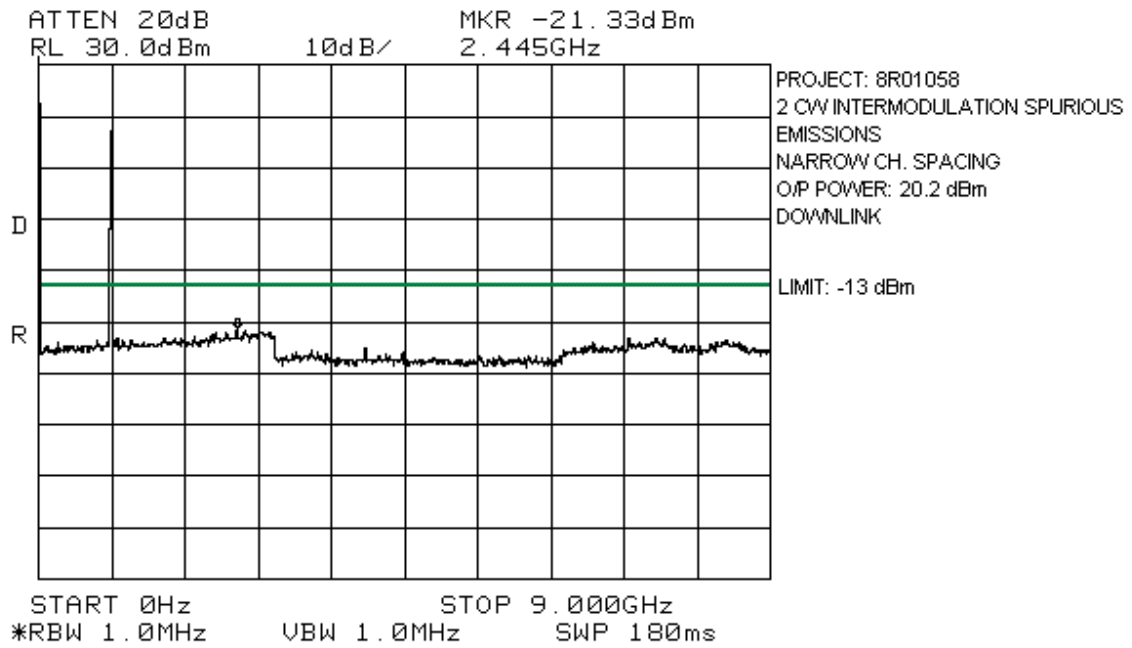


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

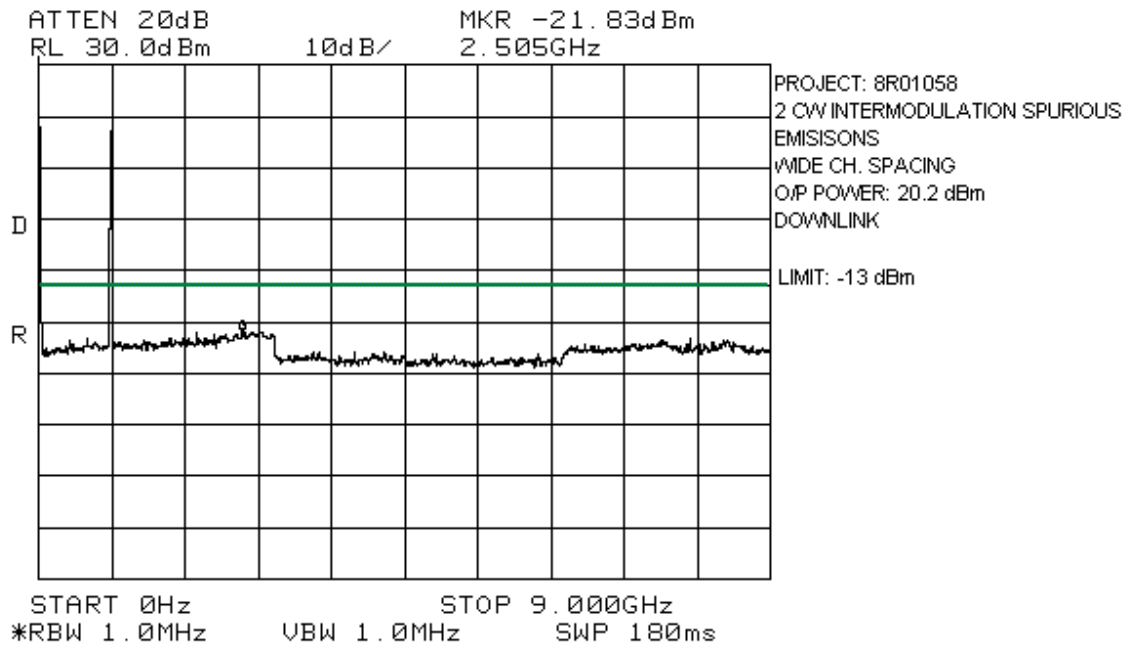


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

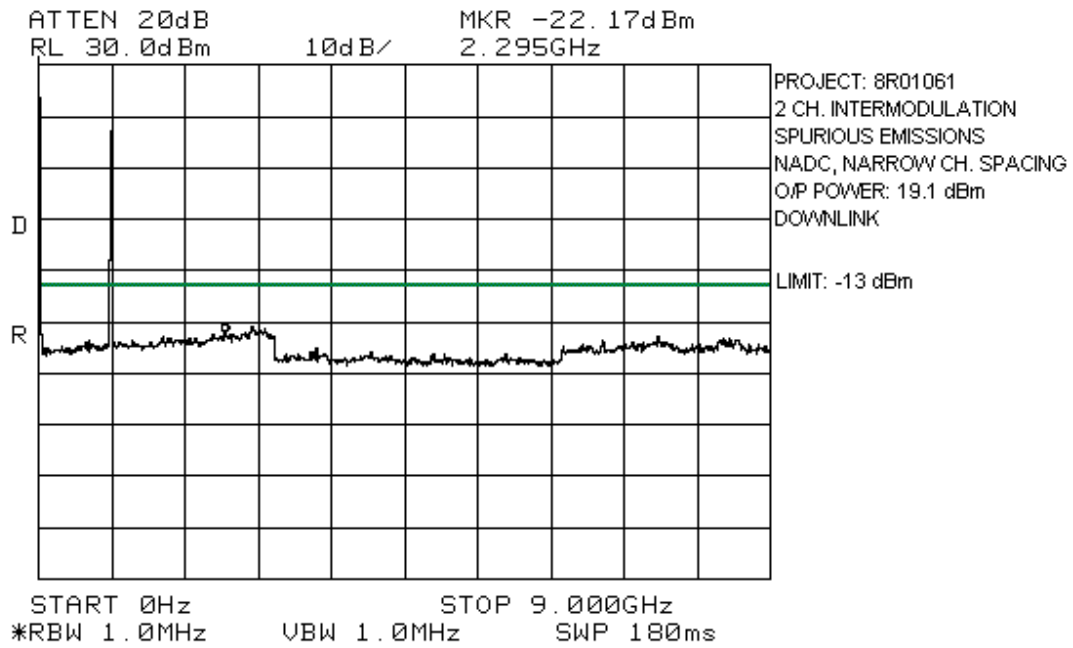


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

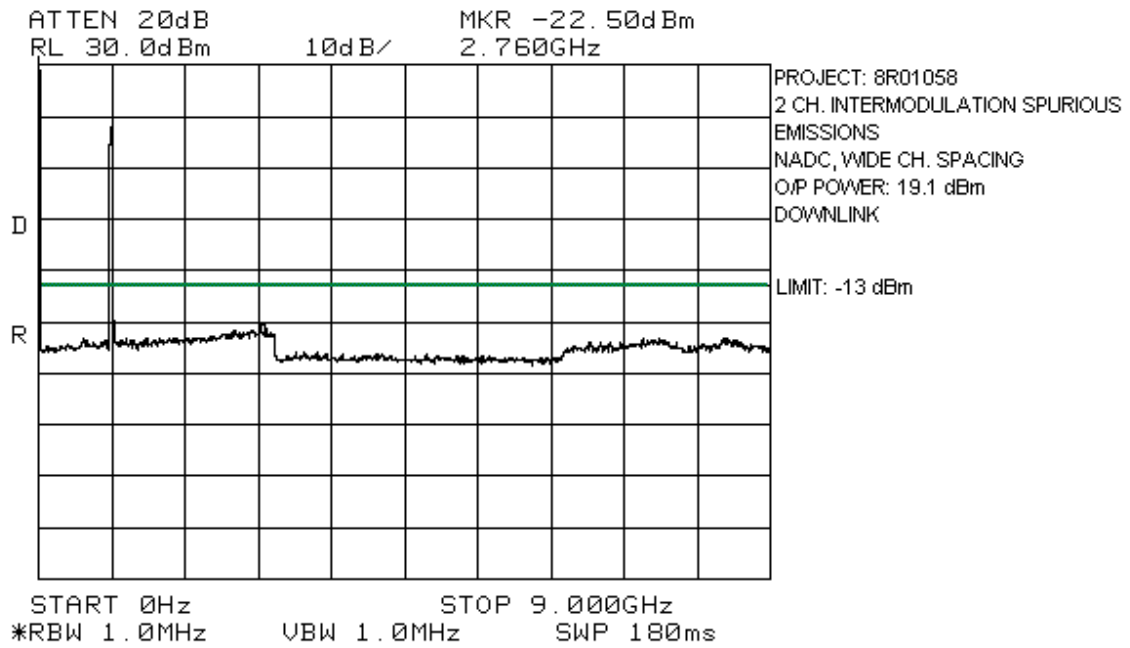


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

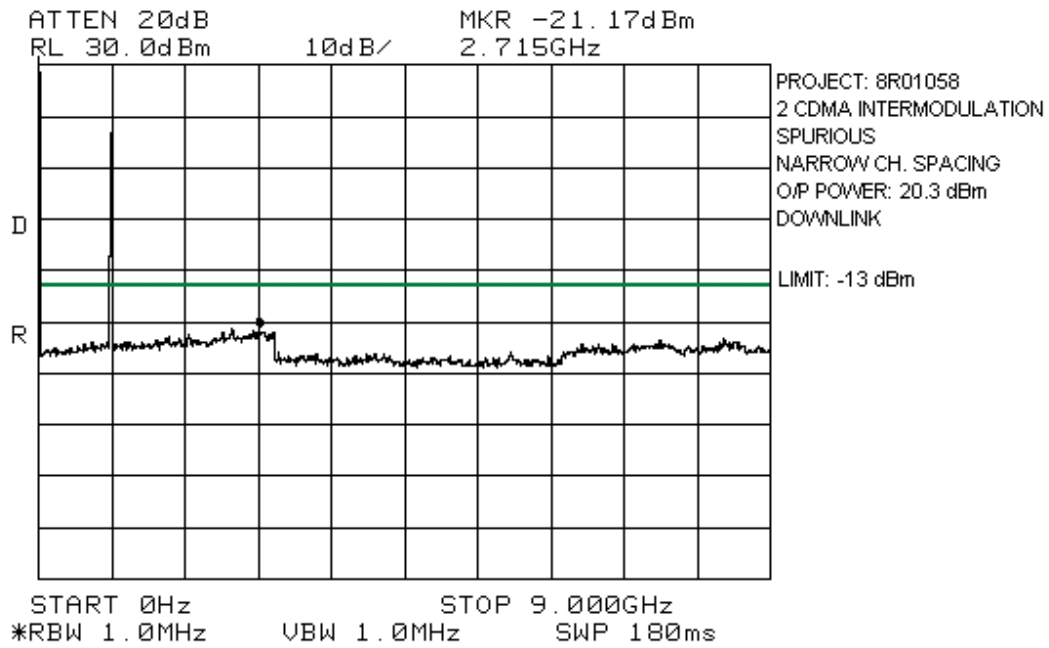


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

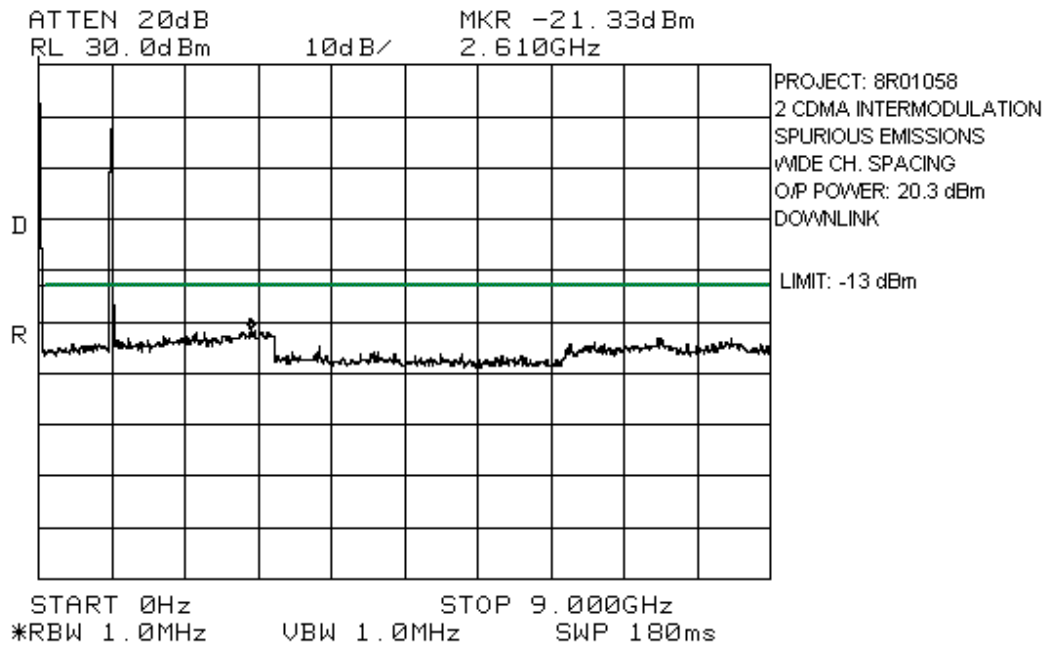


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

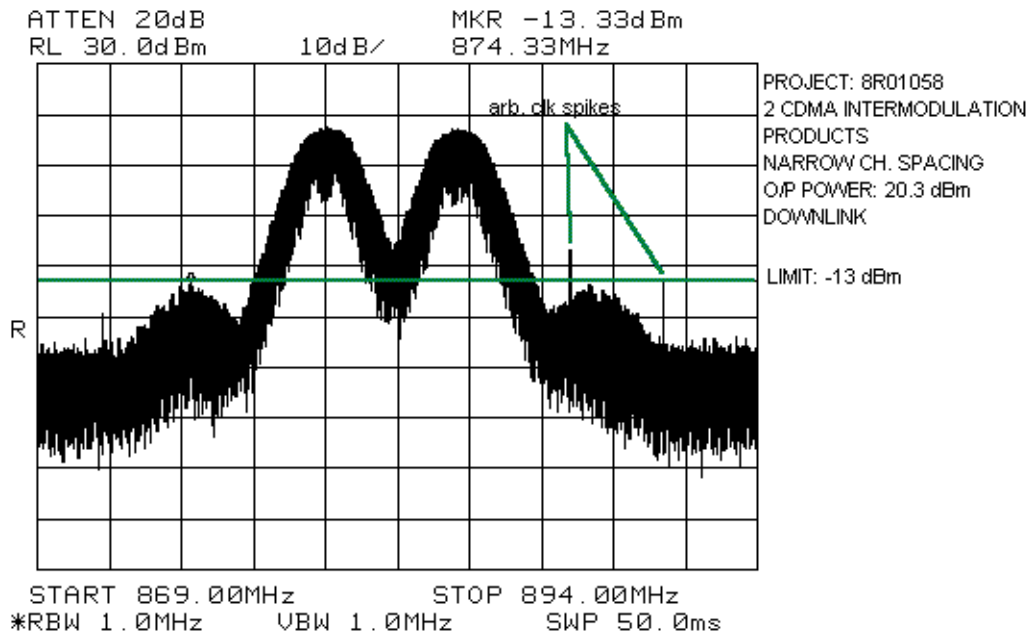


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

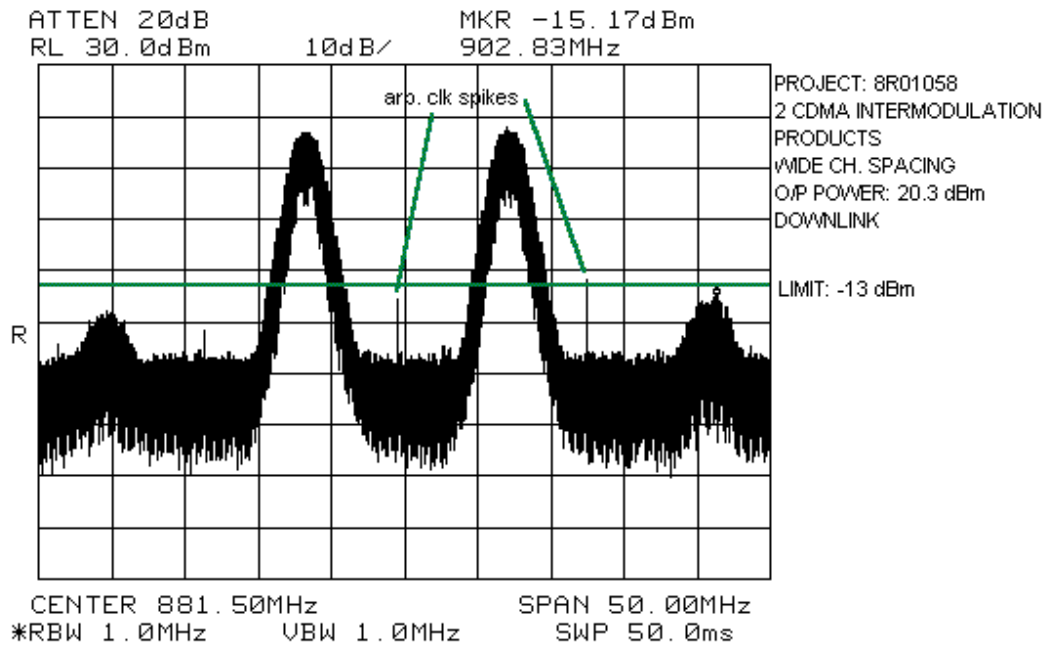


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

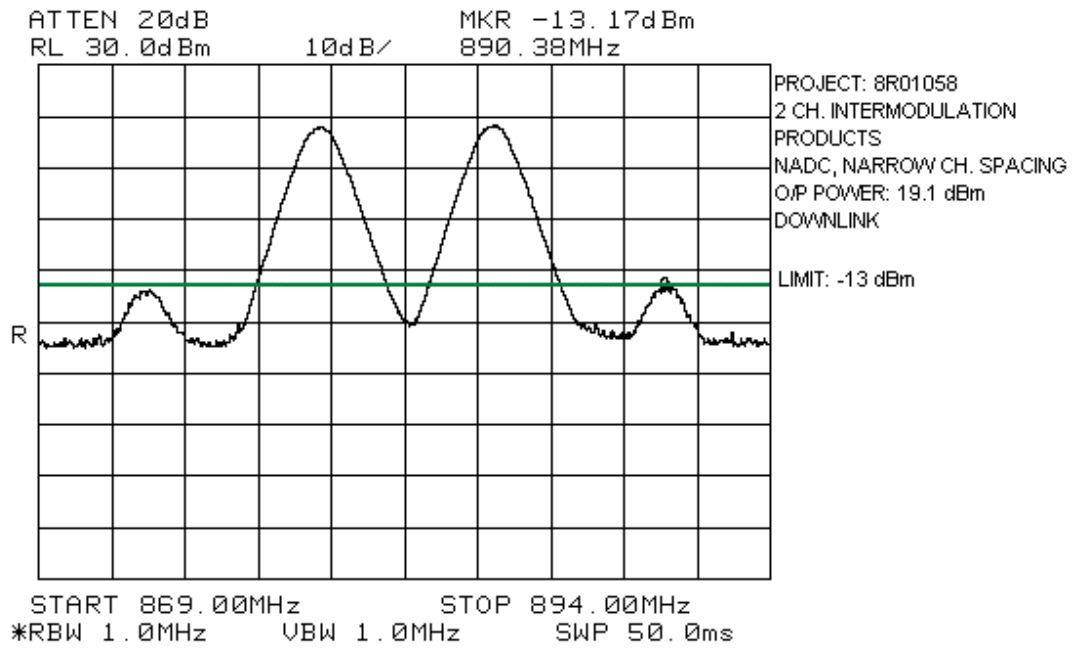


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

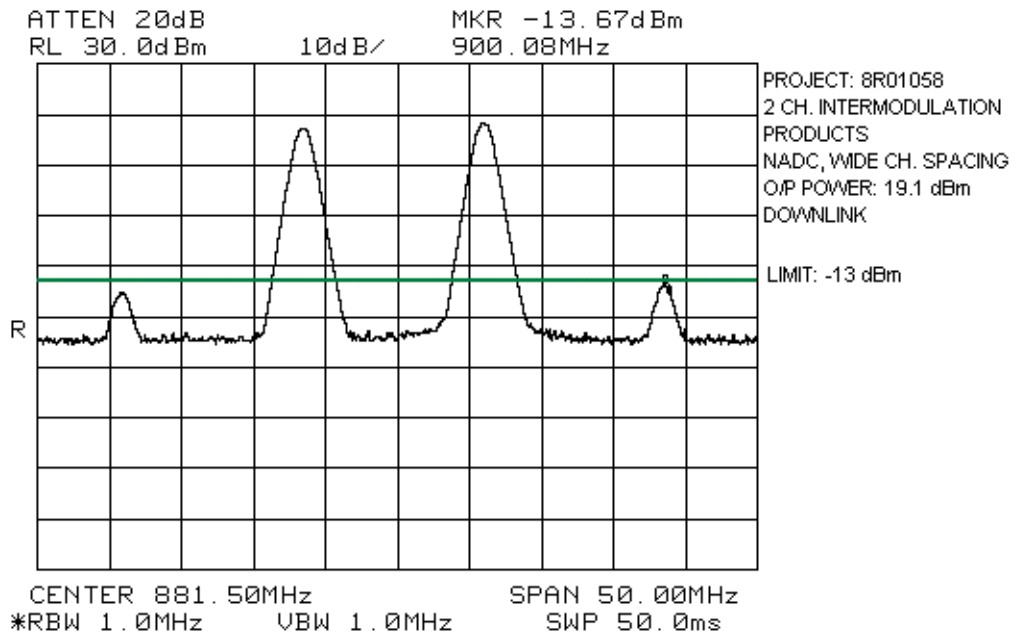


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

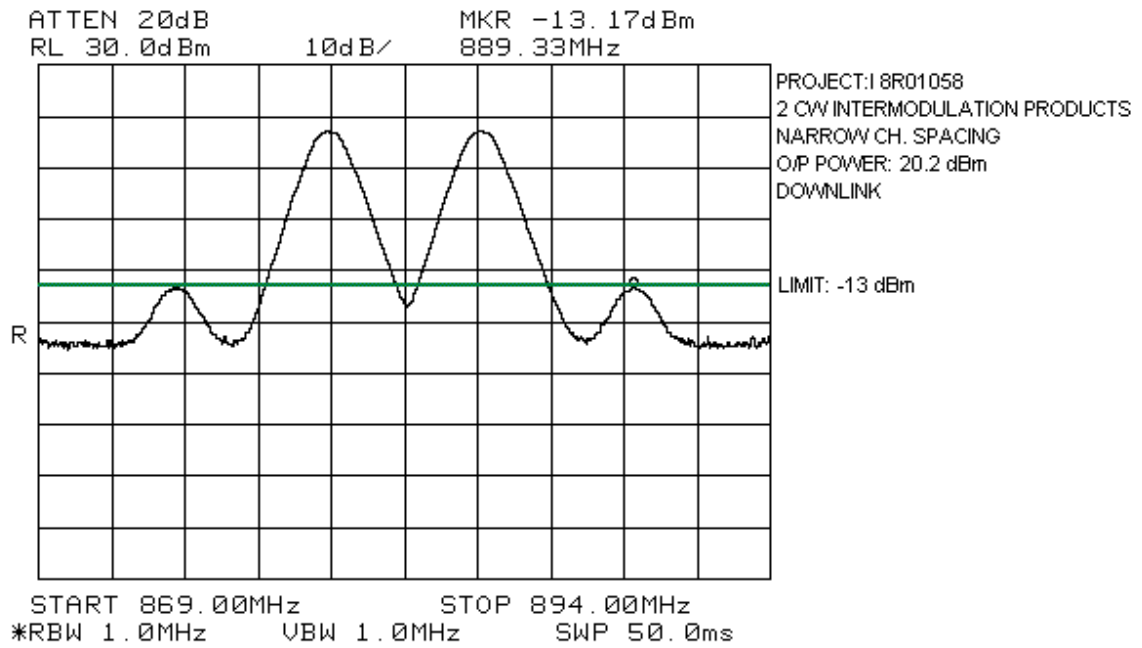


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

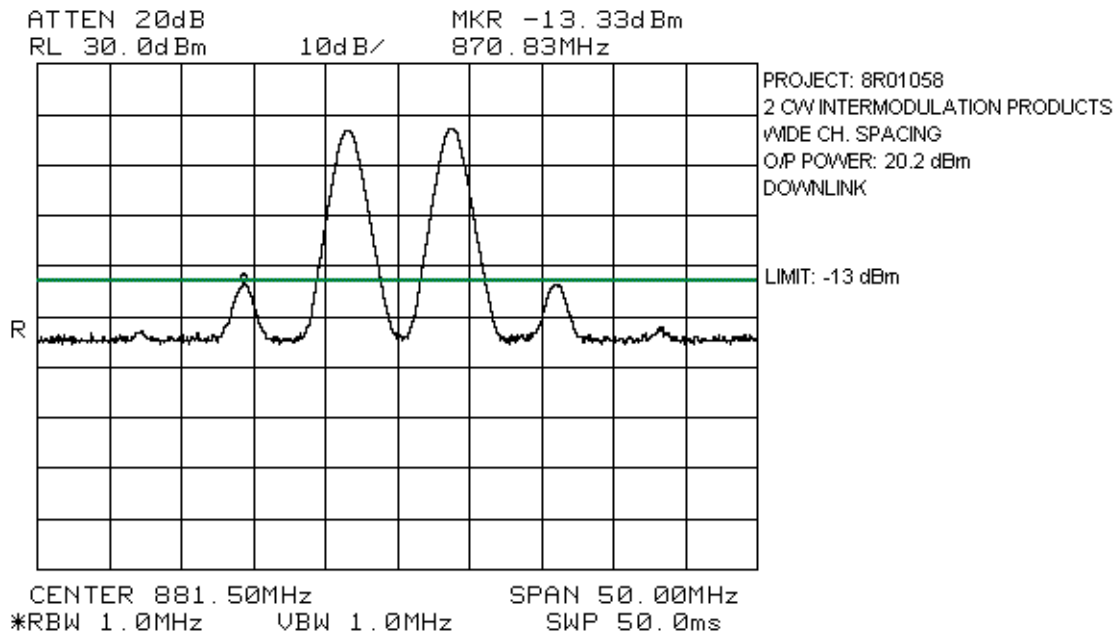


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

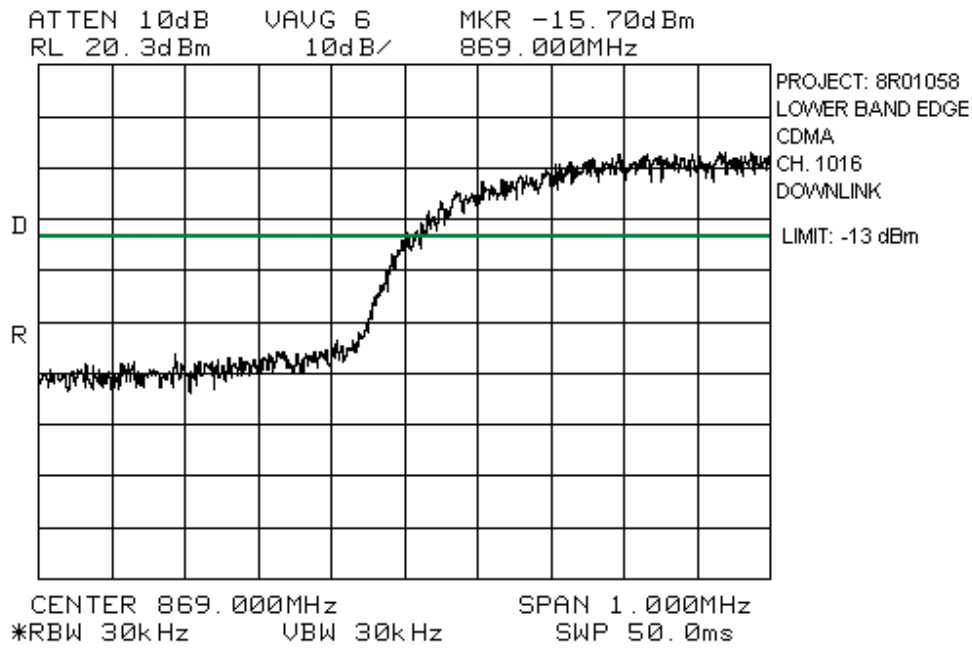


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

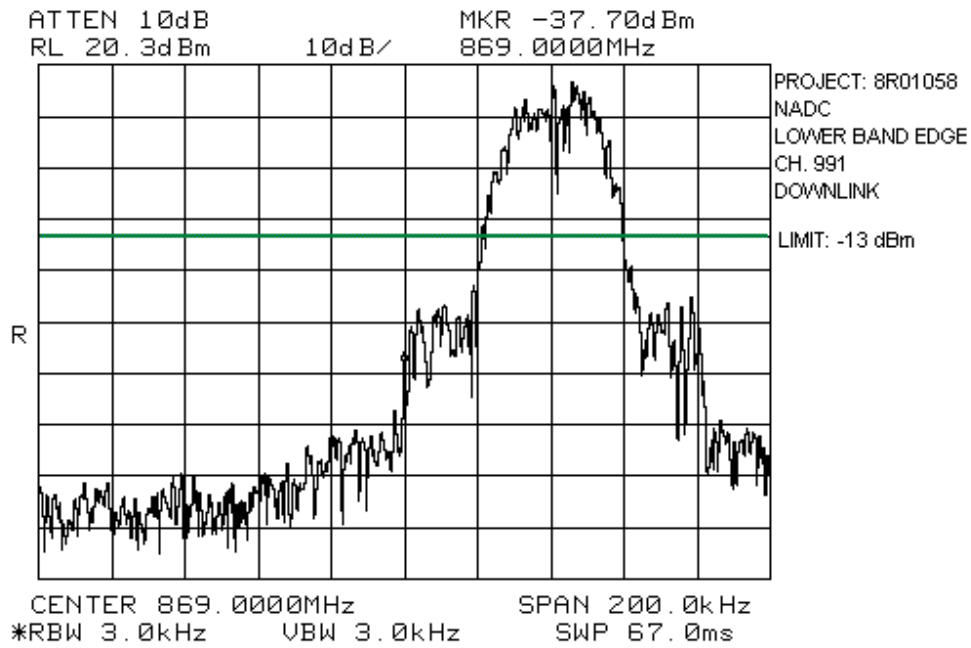

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

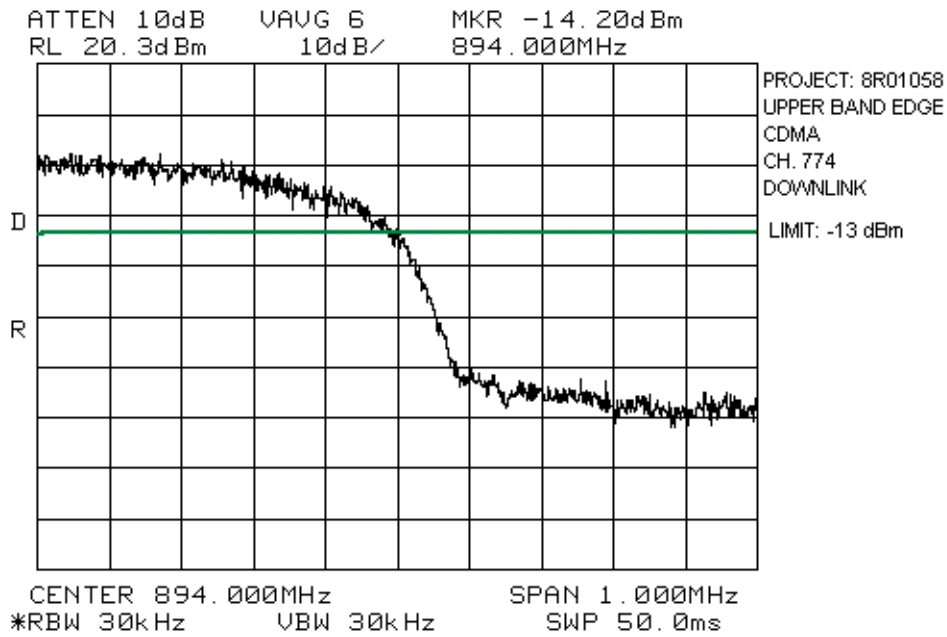

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

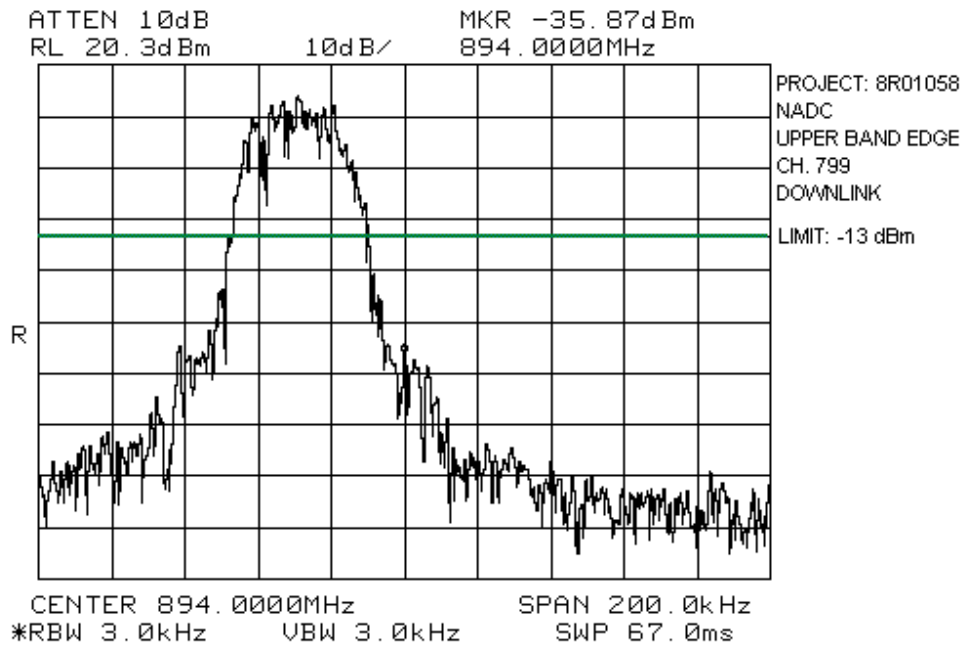

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Section 6. Field Strength of Spurious

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.917(e)
TESTED BY: Kevin Carr	DATE: November 26, 1998

Test Results: Complies.
The maximum field strength is 50.2 dB μ V/m @ 7920 & 8800
MHz @ 3m.

Test Data:

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Test Data - Radiated Emissions - Downlink

Test Distance (meters) : 3		Range: A Tower		Receiver: HP8566B		RBW(1 MHz): 1 MHz		Detector: PEAK			
Freq. (MHz)	Ant. *	Pol. (V/H)	Ant. HGT. (m)	Table (deg.)	RCVD Signal (dBμV/m)	Ant. Factor (dB)**	Amp. Gain (dB)***	Dist. Corr. (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1760.0	Hrn2	V			51.5	29.8	-43.1		38.2	82.3	44.1
1760.0	Hrn2	H			53.6	29.8	-43.1		40.3	82.3	42.0
2640.0	Hrn2	V			49.5	31.6	-45.5		35.6	82.3	46.7
2640.0	Hrn2	H			50.3	31.6	-45.5		36.4	82.3	45.9
3520.0	Hrn2	V			44.2	35.3	-42.2		37.3	82.3	45.0
3520.0	Hrn2	H			43.1	35.3	-42.2		36.2	82.3	46.1
4400.0	Hrn2	V			47.0	37.0	-43.2		40.8	82.3	41.5
4400.0	Hrn2	H			48.2	37.0	-43.2		42.0	82.3	40.3
5280.0	Hrn2	V			46.8	39.7	-44.0		42.5	82.3	39.8
5280.0	Hrn2	H			47.0	39.7	-44.0		42.7	82.3	39.6
6160.0	Hrn2	V			46.1	42.5	-40.8		47.8	82.3	34.5
6160.0	Hrn2	H			46.3	42.5	-40.8		48.0	82.3	34.3
7040.0	Hrn2	V			44.6	44.1	-42.6		46.1	82.3	36.2
7040.0	Hrn2	H			45.0	44.1	-42.6		46.5	82.3	35.8
7920.0	Hrn2	V			44.8	45.8	-40.6		50.0	82.3	32.3
7920.0	Hrn2	H			45.0	45.8	-40.6		50.2	82.3	32.1
8800.0	Hrn2	V			43.4	49.9	-43.1		50.2	82.3	32.1
8800.0	Hrn2	H			43.0	49.9	-43.1		49.8	82.3	32.5
Notes: The spectrum was search up to the 10 th harmonic of the fundamental frequency. B/C = Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole * Includes cable loss when amplifier is not used. ** Includes cable loss. () Denotes failing emission level.											

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Photographs of Test Setup

Front View



Rear View



EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Section 7. Frequency Stability

NAME OF TEST: Frequency Stability	PARA. NO.: 22.355
TESTED BY:	DATE:

Test Results: Complies/Does Not Comply.

Measurement Data: Standard Test Frequency: _____ MHz
 Standard Test Voltage: _____ Vdc

NOT APPLICABLE

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Section 8. Test Equipment List

CAL CYCLE	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.	
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	May 20/98	May 20/99	
1 Year	Spectrum Analyzer-2	Hewlett Packard	8566B	1950A00400	July 22/98	July 22/99	
1 Year	Spectrum Analyzer Display-2	Hewlett Packard	85662A	1950A01177	July 22/98	July 22/99	
1 Year	Quasi Peak Adaptor-2	Hewlett Packard	85650A	2251A00620	July 22/98	July 22/99	
	Power Supply	Astron	VS-50M	8405071	NCR	NCR	
1 Year	Attenuator	Narda	768-20	9507	July 24/98	July 24/99	
1 Year	Attenuator	Narda	765-20	9510	July 24/98	July 24/99	
1 Year	RF Millivoltmeter	Rohde & Schwarz	URV5	FA000420	July 23/98	July 23/99	
1 Year	Insertion Unit	Rohde & Schwarz	URV5-Z4	FA000905	July 23/98	July 23/99	
2 Year	Horn Antenna	EMCO #2	3115	4336	Oct. 30/97	Oct. 30/99	
1 Year	50 ohm Combiner Pad	Mini Circuits	ZA3PD-2	9746	July 23/98	July 23/99	
1 Year	Low Noise Amplifier	Avantek	AWT-8035	1005	Aug. 4/98	Aug. 4/99	
1 Year	Low Noise Amplifier	DBS Microwave	DWT-13035	9623	Aug. 4/98	Aug. 4/99	
1 Year	Signal Generator	Rohde & Schwarz	SM1Q03	1084-8004-03	July 23/98	July 23/99	
1 Year	Arbitrary Waveform Gen.	Sony/Tektronix	AWG2021	J310495	NCR	NCR	
3 Year	Standard Gain Horn	Electro-Metrics	SH-50/60-1	FA000479	July 29/97	July 29/00	
3 Year	RF Generator	Rohde & Schwarz	SME3	DE14439	June 29/96	June 29/99	
1 Year	RF Amp.	Comtest	GPA301	BCS320-1040	NCR	NCR	

NA: Not Applicable
NCR: No Cal Required

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

ANNEX A
TEST METHODOLOGIES

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: RF Power Output**PARA. NO.: 2.985****Test Conditions:** Standard Temperature & Humidity
Standard Test Voltage**Minimum Standard:** Para. No. 22.913(a). The maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 watts.**Method Of Measurement:**Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter. Power output is measured with the maximum rated input level.

Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Occupied Bandwidth (Voice & SAT)	PARA. NO.: 2.989
---	-------------------------

Test Conditions: Standard Temperature & Humidity
Standard Test Voltage

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

(i) On any frequency removed from the carrier frequency by more than 12 kHz but not more than 20 kHz:

at least $117 \log(f_d/12)$

(ii) On any frequency removed from the carrier frequency by more than 20 kHz, up to the first multiple of the carrier frequency:

at least $100 \log(f_d/11)$ dB or $43 + 10 \log(P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 300 Hz
VBW: $\geq$ RBW
Span: 100 kHz
Sweep: Auto
Mask: CELLF3E

Input Signal Characteristics (F3E/F3D):

RF level: Maximum recommended by manufacturer
AF1 frequency: 6 kHz
AF1 level: sufficient to produce 2 kHz deviation
AF2 frequency: 2.5 kHz
AF2 level: sufficient to produce 12 kHz deviation.

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Occupied Bandwidth (WB Data)**PARA. NO.: 2.989**

Test Conditions: Standard Temperature & Humidity
Standard Test Voltage

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

(1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz:

at least 26 dB

(2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz:

at least 45 dB

(3) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency:

at least 60 dB or $43 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:Spectrum Analyzer Settings:

RBW: 300 Hz

VBW: $\geq$ RBW

Span: 200 kHz

Sweep: Auto

Mask: CELLF1D

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

AF1 frequency: 10 kHz, random bit sequence

AF1 level: sufficient to produce 8 kHz deviation

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Occupied Bandwidth (ST)**PARA. NO.: 2.989**

Test Conditions: Standard Temperature & Humidity
Standard Test Voltage

Minimum Standard: 22.917(c) The mean power of any emission removed from the carrier frequency by a displacement frequency (f_d in kHz) must be attenuated below the mean power of the unmodulated carrier (P) as follows:

(1) On any frequency removed from the carrier frequency by more than 20 kHz but not more than 45 kHz:

at least 26 dB

(2) On any frequency removed from the carrier frequency by more than 45 kHz but not more than 90 kHz:

at least 45 dB

(3) On any frequency removed from the carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency:

at least 60 dB or $43 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Method Of Measurement:Spectrum Analyzer Settings:

RBW: 300 Hz

VBW: $\geq$ RBW

Span: 200 kHz

Sweep: Auto

Mask: CELLF1D

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

AF1 frequency: 10 kHz tone

AF1 level: sufficient to produce 8 kHz deviation

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Occupied Bandwidth (Digital Modulation) PARA. NO.: 2.989
--

Test Conditions: Standard Temperature & Humidity
 Standard Test Voltage

Minimum Standard: Not defined by FCC. Input vs. Output.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: CDMA (30 kHz), GSM (30 kHz), NADC (1 kHz) and CDPD (1 kHz)

VBW: $\geq$ RBW

Span: As required

Sweep: Auto

Mask:

Input Signal Characteristics:

RF level: Maximum recommended by manufacturer

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Spurious Emission at Antenna Terminals	PARA. NO.: 2.991
---	-------------------------

Test Conditions: Standard Temperature & Humidity
Standard Test Voltage

Minimum Standard: Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Method Of Measurement:

Spectrum Analyzer Settings:

RBW: 30 kHz (AMPS). As required for digital modulations.

VBW: $\geq$ RBW

Start Frequency: 0 MHz

Stop Frequency: 10 GHz

Sweep: Auto

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Field Strength of Spurious Radiation	PARA. NO.: 2.993
---	-------------------------

Test Conditions: Outdoor Range
Standard Test Voltage

Minimum Standard: Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Calculation Of Field Strength Limit:

An example of attenuation requirement of $43 + 10 \log P$ is equivalent to -13 dBm (5×10^{-5} Watts) at the antenna terminal. We determine the field strength limit by using the plane wave relation.

$$GP/4\pi R^2 = E^2/120\pi$$

For emissions ≤ 1 GHz:

$G = 1.64$ (Dipole Gain)

$P = 10^{-5}$ Watts (Maximum spurious output power)

$R = 3\text{m}$ (Measurement Distance)

$$E = \frac{\sqrt{30GP}}{R}$$

$$E = \frac{\sqrt{30 \times 1.64 \times 5 \times 10^{-5}}}{3} = 0.016533 \text{ V / m} = 84.4 \text{ dB}\mu\text{V / m}$$

For emissions > 1 GHz:

$G = 1$ (Isotropic Gain)

$P = 1 \times 10^{-5}$ Watts (Maximum spurious output power)

$R = 3\text{m}$ (Measurement Distance)

$$E = 84.4 - 20 \log \sqrt{1.64} = 82.3 \text{ dB}\mu\text{V / m} @ 3\text{m}$$

The spectrum is searched to 10 GHz.

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

NAME OF TEST: Frequency Stability**PARA. NO.: 2.995**

Test Conditions: As per measurement data.

Minimum Standard: Para. No. 22.355. The transmitter carrier frequency shall remain within the tolerances given in Table C-1.

Freq. Range (MHz)	Base, fixed	Mobile > 3 W	Mobile ≤ 3 W
821 to 896	1.5	2.5	2.5

Table C-1

Method Of Measurement:Frequency Stability With Voltage Variation:

The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10 MHz ref, in of the signal generator. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation:

The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

KTL Ottawa


FCC PART 22, SUBPART H
CELLULAR BAND REPEATERS
PROJECT NO.: 8R01058
ANNEX B

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND


ANNEX B
TEST DIAGRAMS

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Para. No. 2.985 - R.F. Power Output


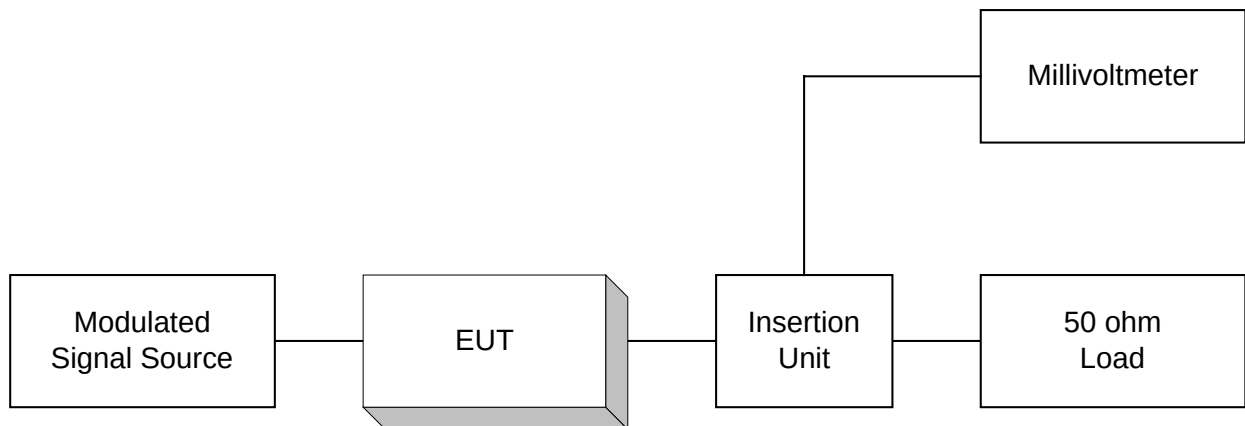


Para. No. 2.989 - Occupied Bandwidth

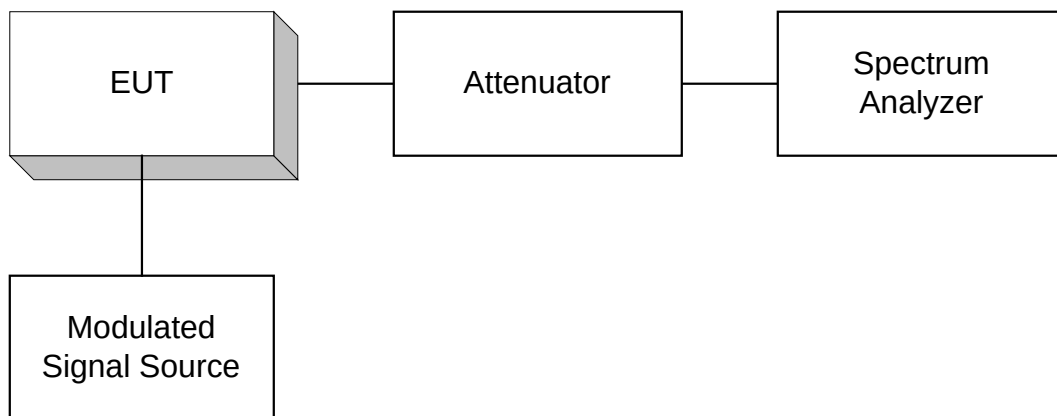


EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Para. No. 2.991 Spurious Emissions at Antenna Terminals

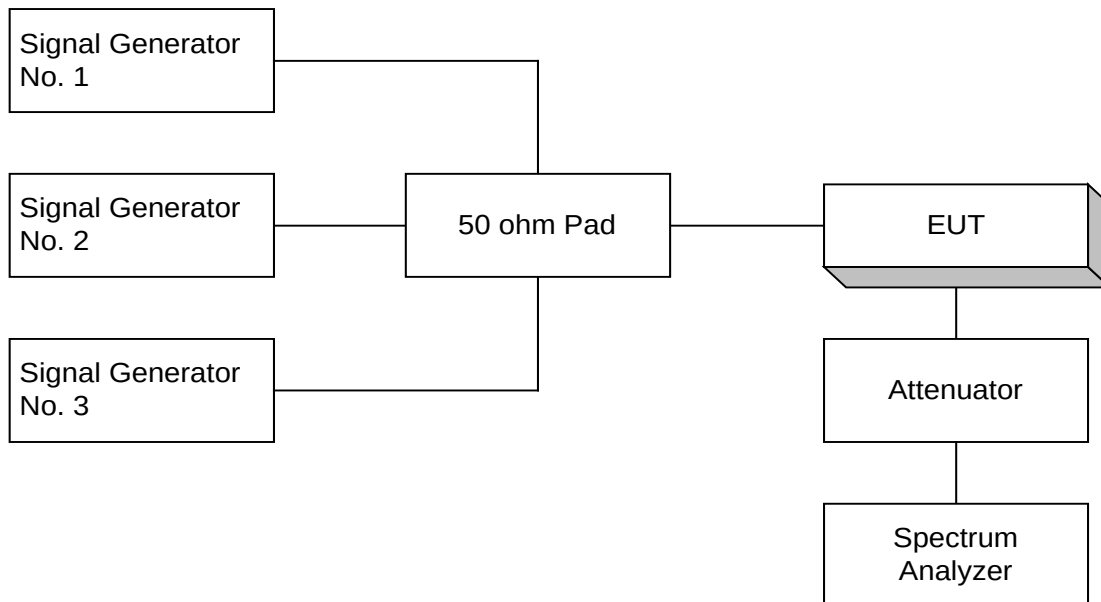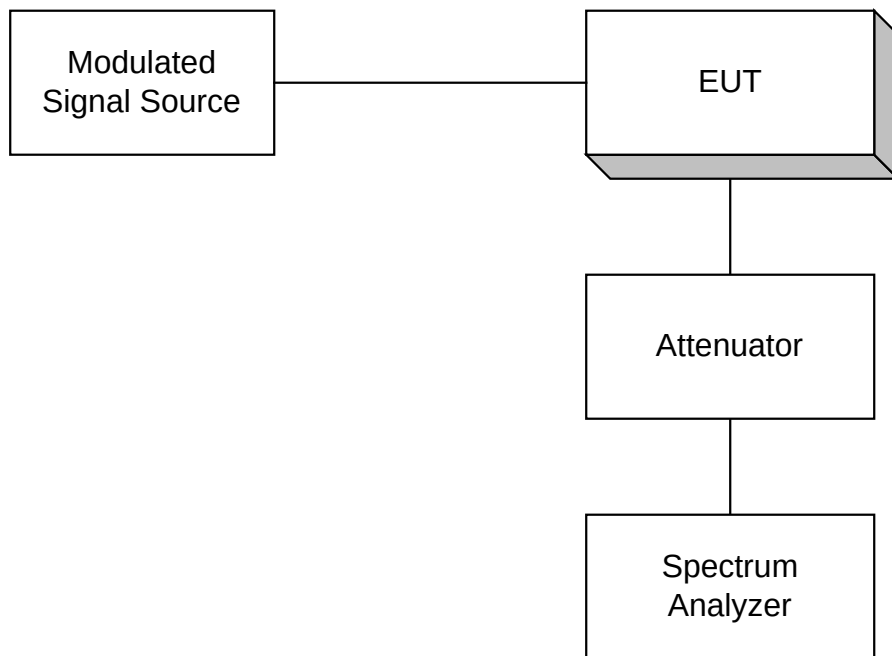

EQUIPMENT: Brite Cell Dual Band
FCC ID: BCR-BCEL-DUALBAND

Para. No. 2.993 - Field Strength of Spurious Radiation

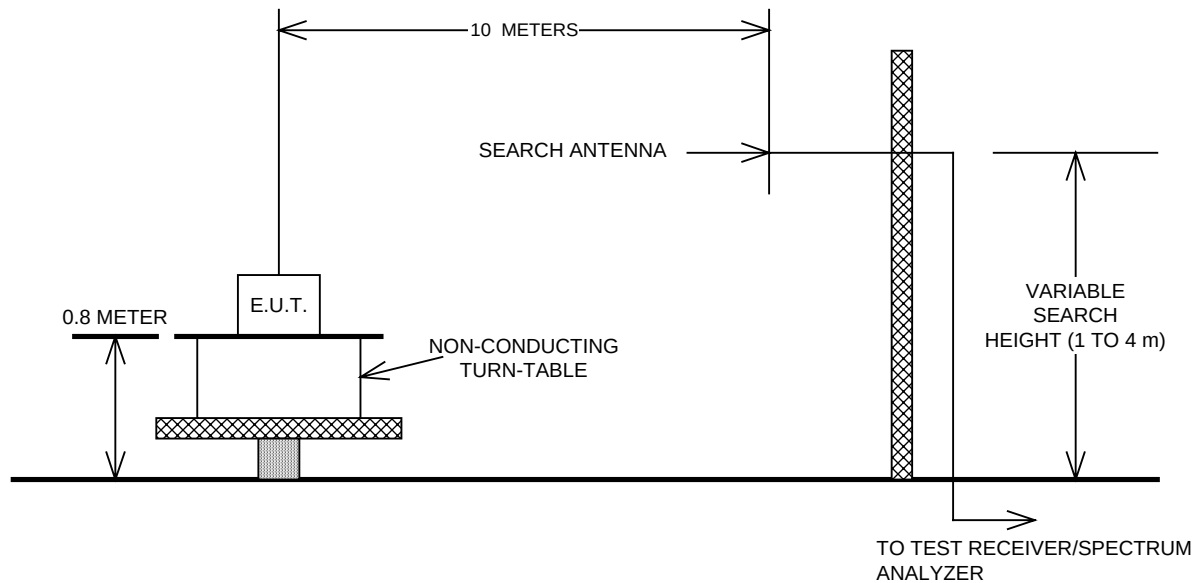

Para. No. 2.995 - Frequency Stability

