



KTL Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Test Plot: Intermodulation iDEN


Page 1 of 2

Job No.: 0L0367R Date: 04/06/01
Specification: Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 50
E.U.T.: MOR 801Bi Power
Configuration: Transmit two signals at lower bandedge
Serial Number: 0013
Location: Lab 1 RBW: 30 kHz
Detector Type: Peak VBW: 30 kHz

Test Equipment Used

Antenna: #N/A Directional Coupler: #N/A
Pre-Amp: #N/A Cable #1: 1082
Filter: #N/A Cable #2: #N/A
Receiver: 1036 Cable #3: #N/A
Attenuator #1: 1065 Cable #4: #N/A
Attenuator #2: 1065 Mixer: #N/A

Additional equipment used:
Measurement Uncertainty: #N/A

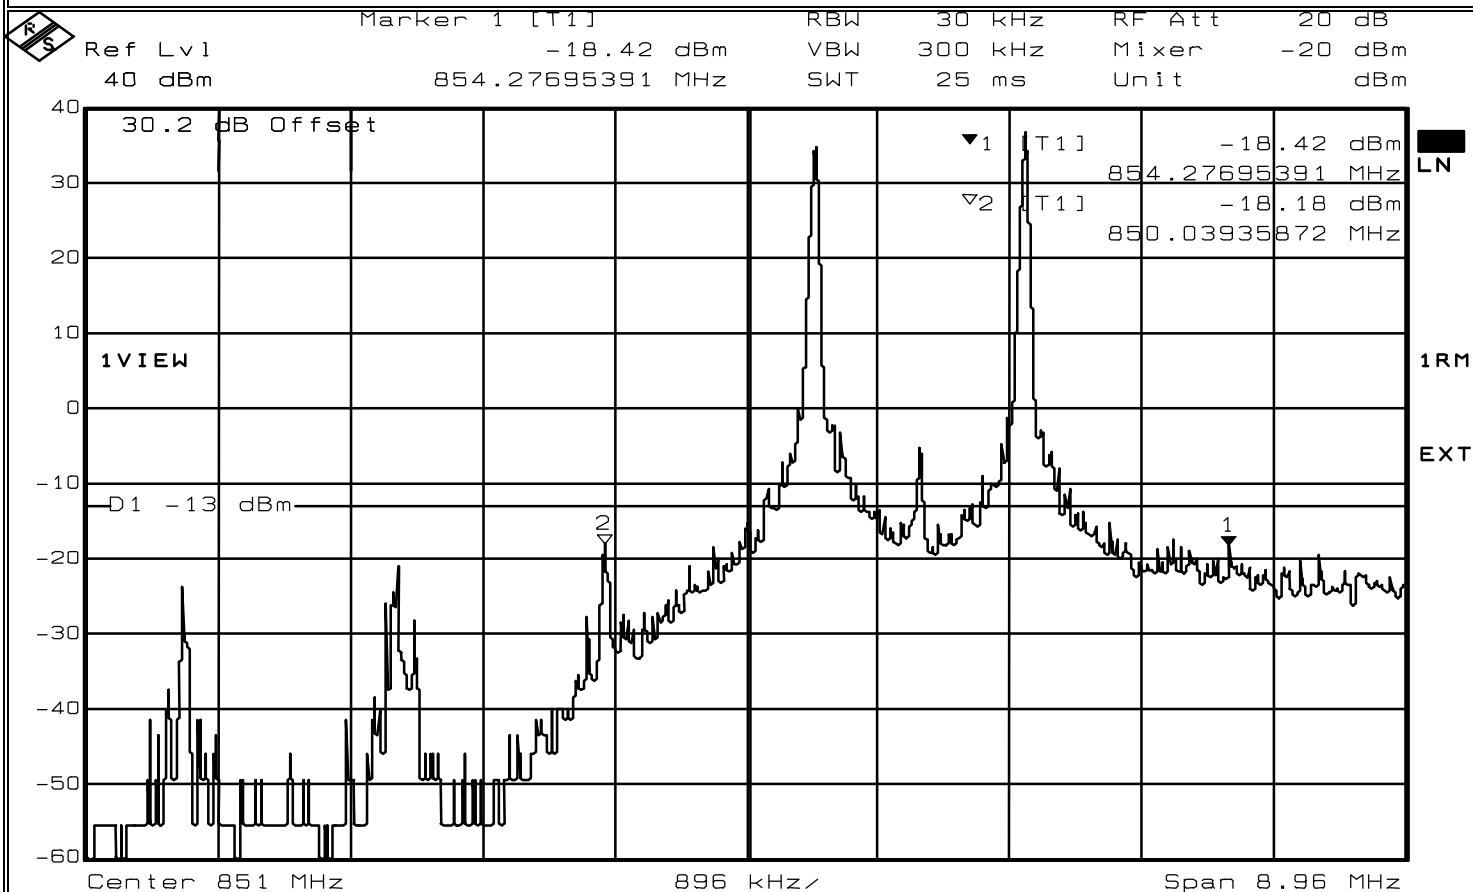

Date: 9.APR.2001 10:55:05

Notes: MARKER 1 INDICATES HIGHEST INBAND INTERMODULATION PRODUCT
MARKER 2 INDICATES HIGHEST OUT OF BAND INTERMODULATION PRODUCT

Hi-Pwr Lower Bandedge Intermod (RFTEST)
iDEN Modulation


**Dallas Headquarters:**

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

KTL Dallas, Inc.**Test Plot: Intermodulation iDEN**

Page 2 of 2

Job No.: 0L0367R Date: 4/6/01
Specification: Temperature(°C): 22
Tested By: David Light Relative Humidity(%) 50
E.U.T.: MOR 801Bi Power
Configuration: Transmit two signals at lower bandedge

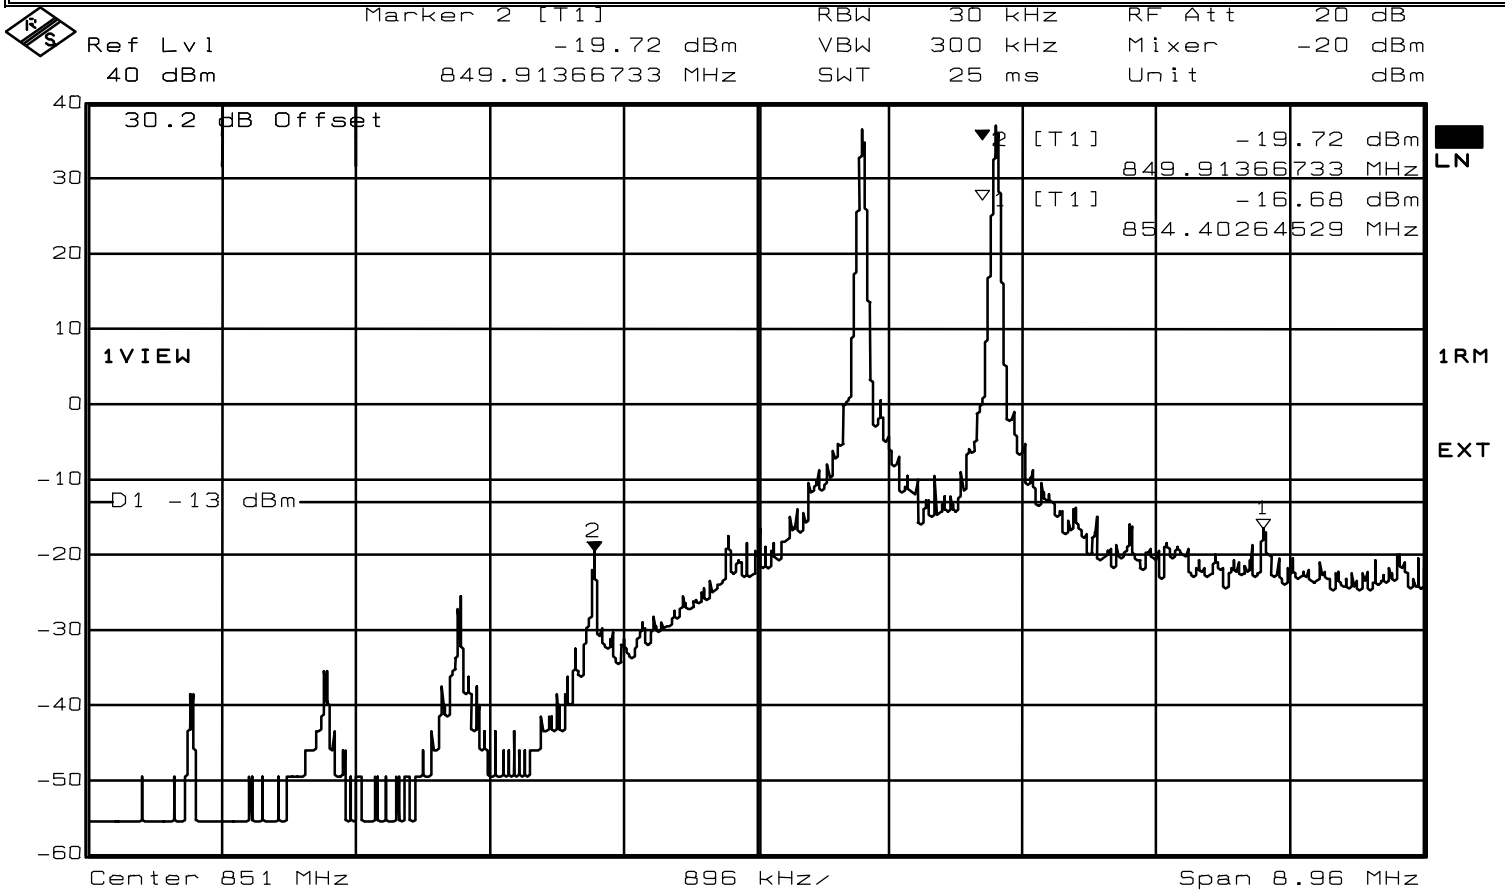

Date: 9. APR. 2001 11:02:30

Notes: **MARKER 1 INDICATES HIGHEST INBAND INTERMODULATION PRODUCT**
MARKER 2 INDICATES HIGHEST OUT OF BAND INTERMODULATION PRODUCT
LOWER BAND EDGE
Voice Modulation