



TEST REPORT

FCC/ISED BT LE Test for LCWB-003

APPLICANT

LG Electronics, Inc.

REPORT NO.

HCT-RF-2208-FI005-R2

DATE OF ISSUE

August 26, 2022

Tested by
Woong Jin Kim

Technical Manager
Jong Seok Lee

Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

고객비밀
CUSTOMER SECRET



TEST REPORT

FCC/ISED BT LE
Test for LCWB-003

REPORT NO.

HCT-RF-2208-FI005-R2

DATE OF ISSUE

August 26, 2022

Additional Model

-

Applicant

LG Electronics Inc.

170, Seongsanpaechong-ro, Seongsan-gu, Changwon-si Gyeongsangnam-do
51533 Republic of Korea

Eut Type Model Name

RF Module
LCWB-003

FCC ID IC

BEJ-LCWB003
2703N-LCWB003

Max. RF Output Power

6.257 dBm (4.22 mW)

Modulation type

GFSK

FCC Classification

Digital Transmission System(DTS)

FCC Rule Part(s)

Part 15.247

ISED Rule Part(s)

RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	August 12, 2022	Initial Release
1	August 25, 2022	Revised the ISED Certification Number.
2	August 26, 2022	Revised the FCC ID.

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

KOLAS Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	28
9. TEST RESULT	30
9.1 DUTY CYCLE	30
9.2 6 dB BANDWIDTH & 99 % BANDWIDTH	31
9.3 OUTPUT POWER	35
9.4 POWER SPECTRAL DENSITY	36
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	39
9.6 RADIATED SPURIOUS EMISSIONS	48
9.7 RADIATED RESTRICTED BAND EDGES	52
9.8 RECEIVER SPURIOUS EMISSIONS	54
9.9 POWERLINE CONDUCTED EMISSIONS	55
10. LIST OF TEST EQUIPMENT	59
11. ANNEX A_ TEST SETUP PHOTO	61

1. EUT DESCRIPTION

Model	LCWB-003	
Additional Model	-	
EUT Type	RF Module	
Power Supply	DC 5.0 V / 12.0 V	
Frequency Range	2 402 MHz – 2 480 MHz	
Max. RF Output Power	Peak	1M Bit/s : 6.257 dBm (4.22 mW)
	Average	1M Bit/s : 5.55 dBm (3.59 mW)
Modulation Type	GFSK	
Bluetooth Version	4.2	
Number of Channels	40 Channels	
Antenna Specification	WIFI Pattern Antenna Peak Gain : 1.72 dBi	
Date(s) of Tests	July 29, 2022 ~ August 12, 2022	
PMN (Product Marketing Number)	RF Module	
HVIN (Hardware Version Identification Number)	LCWB-003	
FVIN (Firmware Version Identification Number)	V1.0	
HMN (Host Marketing Name)	N/A	
EUT serial numbers	Radiated : 1C392973066F Conducted : 1C3929730634	
Factory	Ohsung Electronics 335-4, Sanho-daero, Gumi-si, Gyeongsangbuk-do, Republic of Korea	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

According to RSS-GEN(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

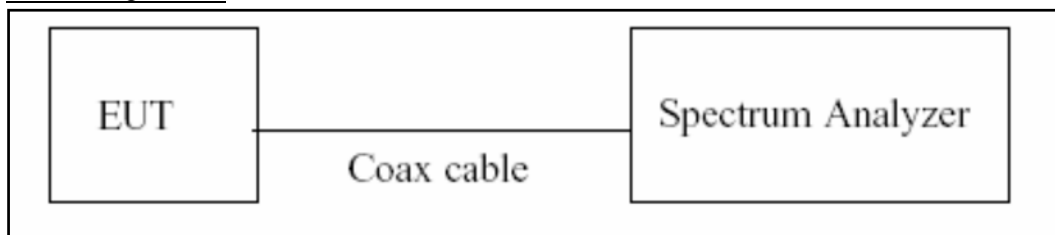

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth & 99 % Bandwidth(ISED)

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02,
Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = Max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1 % ~ 5 % of the occupied bandwidth

VBW $\div 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Level + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Level + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = Max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Measured Level + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = Max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.04
100	20.09
200	20.13
300	20.19
400	20.22
500	20.23
600	20.23
700	20.25
800	20.27
900	20.29
1000	20.31
2000	20.46
2400	20.52
2480	20.52
2500	20.52
3000	20.57
4000	20.67
5000	20.75
5150	20.77
5850	20.82
6000	20.82
7000	20.91
8000	20.98
9000	21.05
10000	21.12
11000	21.16
12000	21.24
13000	21.32
14000	21.30
15000	21.32
16000	21.37
17000	21.41
18000	21.47
19000	21.50
20000	21.56
21000	21.77
22000	21.74
23000	21.94
24000	21.77
25000	21.80
26000	21.80

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

7.6. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength ($\mu\text{A/m}$)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

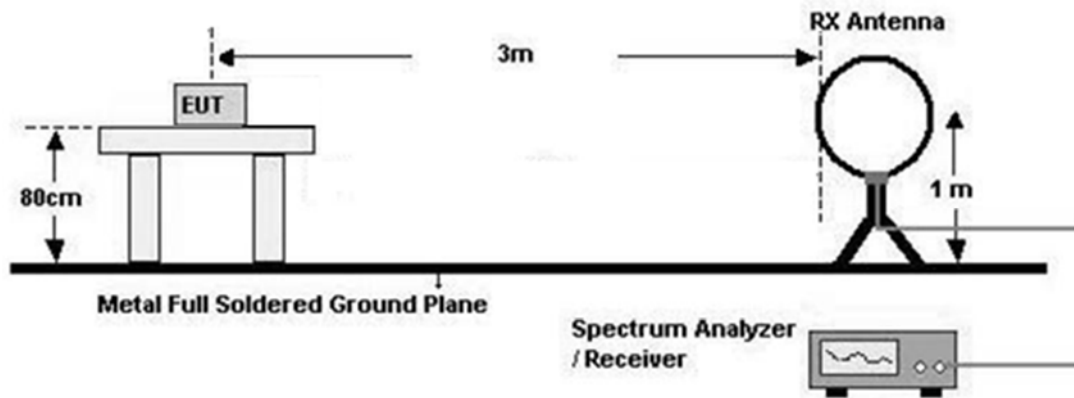

30 MHz - 1 GHz

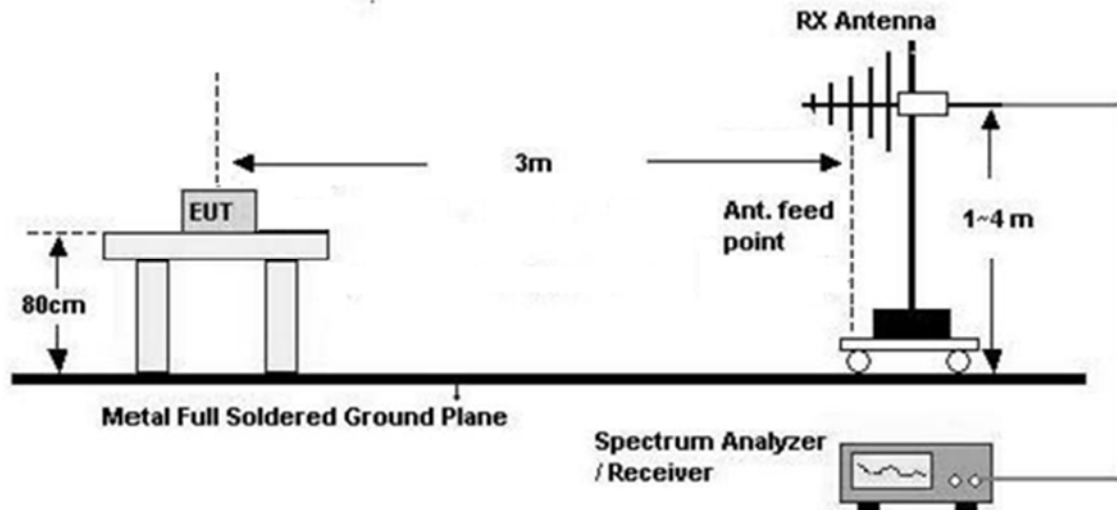

Above 1 GHz

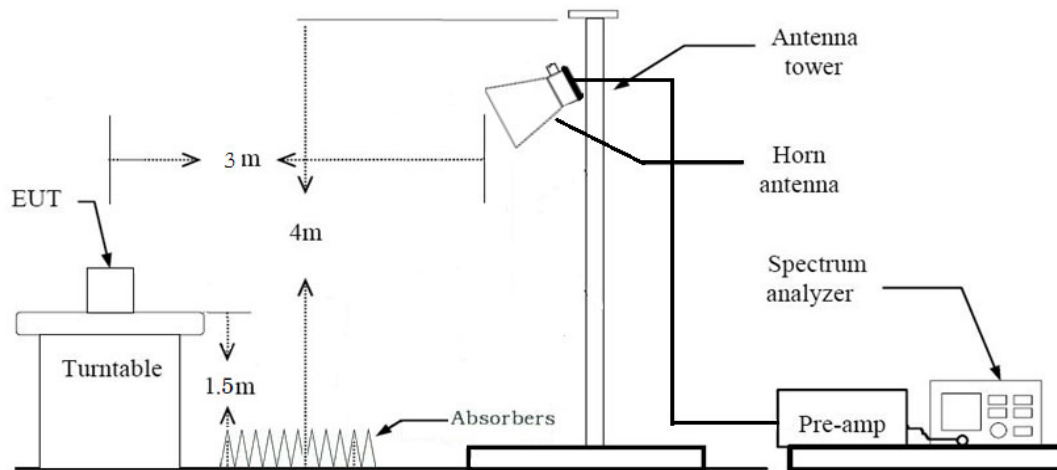

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq$ 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz

※In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range 1 GHz – 10th Harmonics
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq$ 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq$ 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total (Measurement Type : Peak)
 - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
- Total (Measurement Type : Average)
 - = Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F) + Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 10th Harmonics
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq$ 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98 %, duty cycle variations are less than ± 2 %
 - Measured Frequency Range : 1 GHz – 10th Harmonics
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq$ 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
8. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
9. Total(Measurement Type : Peak)

= Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)

Total(Measurement Type : Average)

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G) + Duty Cycle Factor
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

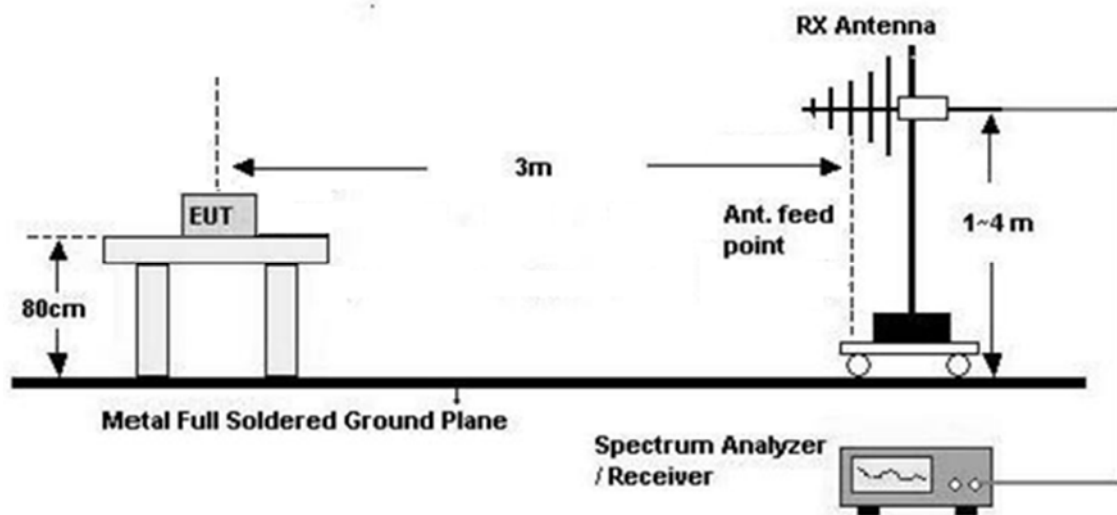

Test Procedure of Receiver Spurious Emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq$ 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

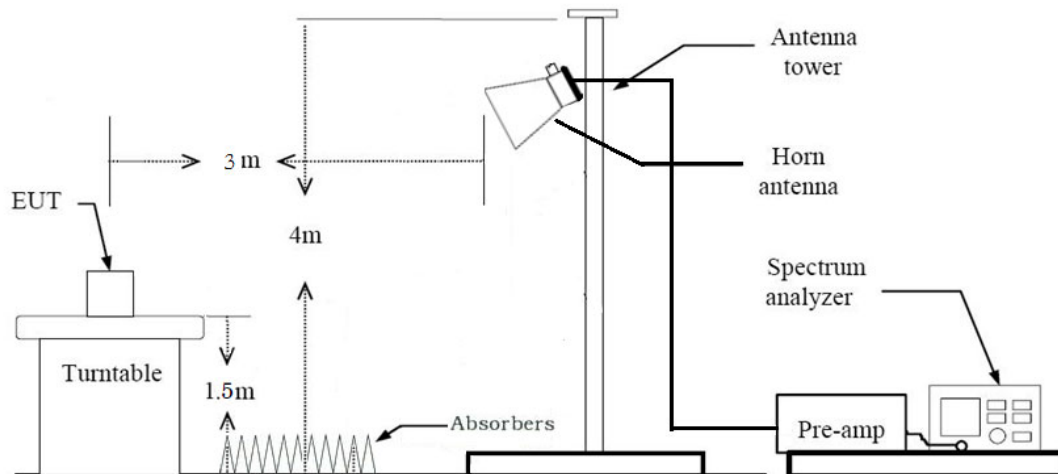

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 10th Harmonics
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 10 kHz

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

7.9. Worst case configuration and mode

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone
 - Worstcase : Stand alone
2. EUT Axis:
 - Radiated Spurious Emissions : Z
 - Radiated Restricted Band Edge : X
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.
(Worst case : Only 1M 37 Byte)
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook
 - Worstcase : Stand alone + Notebook

Conducted test

1. The EUT was configured with packet length of highest power.
 - ALL Mode Test

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2.(a)	> 500 kHz	Conducted	PASS
99 % Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.(d)	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2.(b)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	cf. Section 7.8		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.394	0.625	0.630	2.00

1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

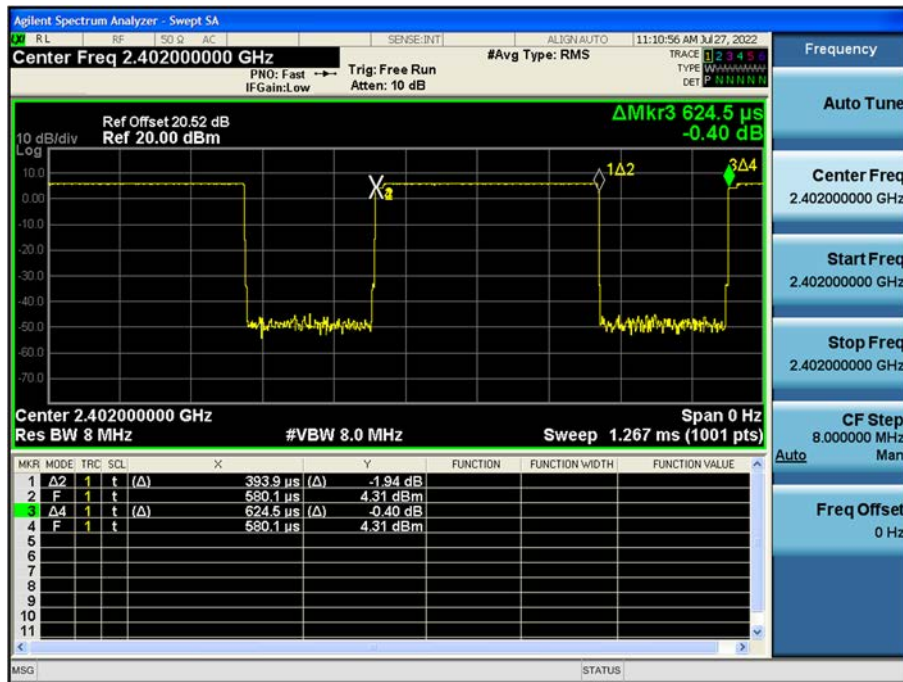

9.2 6 dB BANDWIDTH & 99 % BANDWIDTH

6 dB Bandwidth(FCC)

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37 Byte	0	709.3	> 500
	19	700.2	
	39	705.6	

▣ 1M Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)




99 % Bandwidth(ISED)


Mode (Bit/s)	Channel	99 % Bandwidth (MHz)	Limit (kHz)
1M(37)	0	1.0322	> 500
	19	1.0346	
	39	1.0405	

1M Bit/s (37 Byte) Test Plots


99 % Bandwidth plot (Low-CH 0)

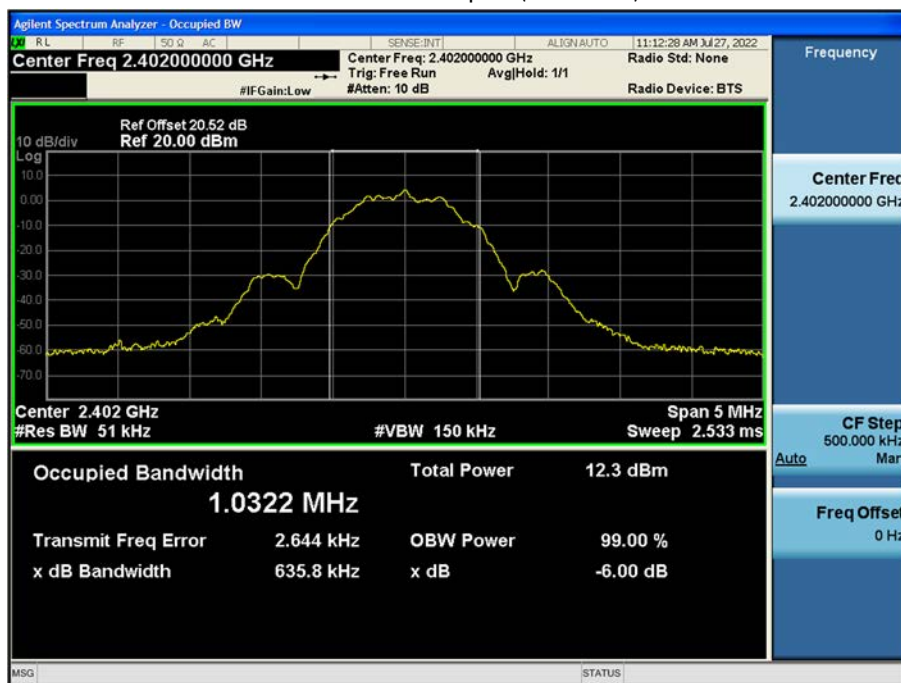

99 % Bandwidth plot (Mid-CH 19)

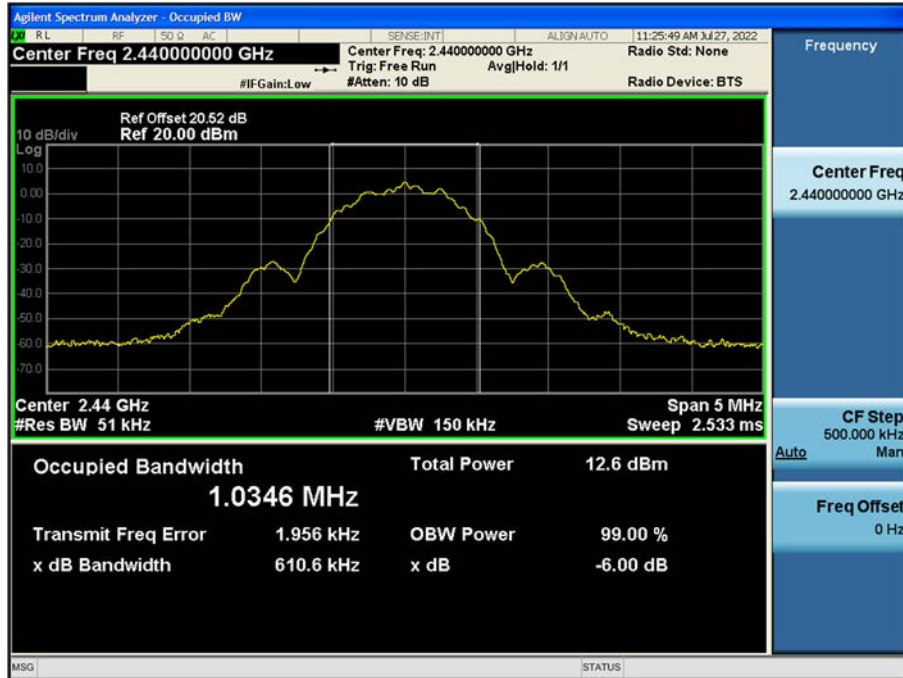

99 % Bandwidth plot (High-CH 39)

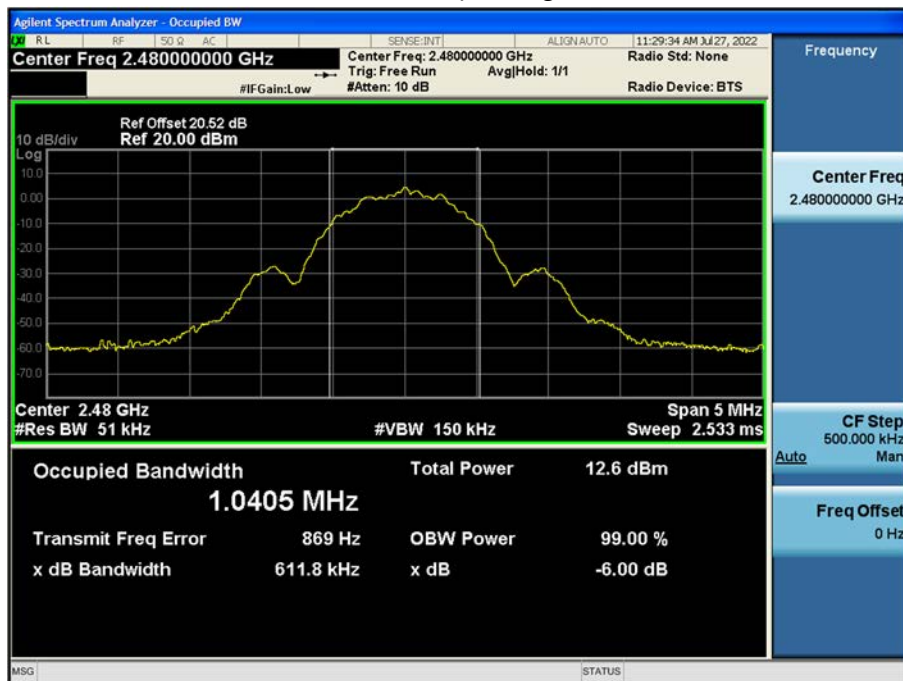

9.3 OUTPUT POWER

Peak Power

Data rate	Packet length	LE Mode		Measured Power(dBm)	Limit (dBm)
(Bit/s)	(Byte)	Frequency [MHz]	Channel		
1M	37	2402	0	5.841	30
		2440	19	6.257	
		2480	39	6.253	

Average Power

Data rate	Packet length	LE Mode		Measured Power (dBm)	Duty Cycle Factor	Result	Limit (dBm)
(Bit/s)	(Byte)	Frequency [MHz]	Channel		(dB)	(dBm)	
1M	37	2402	0	3.04	2.00	5.05	30
		2440	19	3.54	2.00	5.55	
		2480	39	3.51	2.00	5.52	

Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.52 dB is offset for 2.4 GHz Band.

9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm/3kHz)
2402	0	1 MBit/s 37 Byte	-10.412	8
2440	19		-8.219	
2480	39		-9.698	

Note :

1. The PSD measured results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.52 dB is offset for 2.4 GHz Band.

1 MBit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



Power Spectral Density (High-CH 39)






9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

1 M Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0

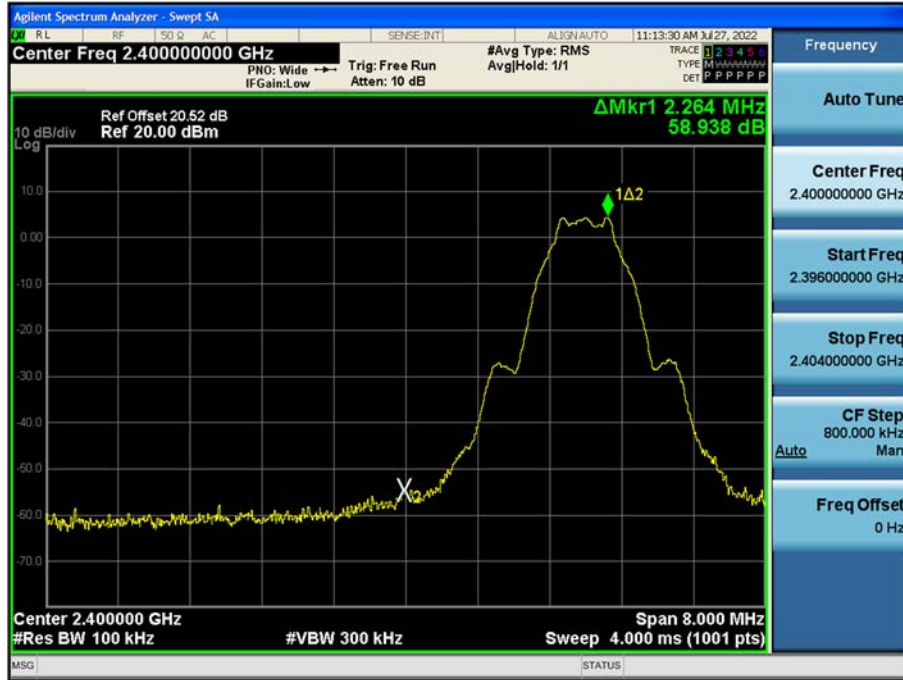


High-CH 39

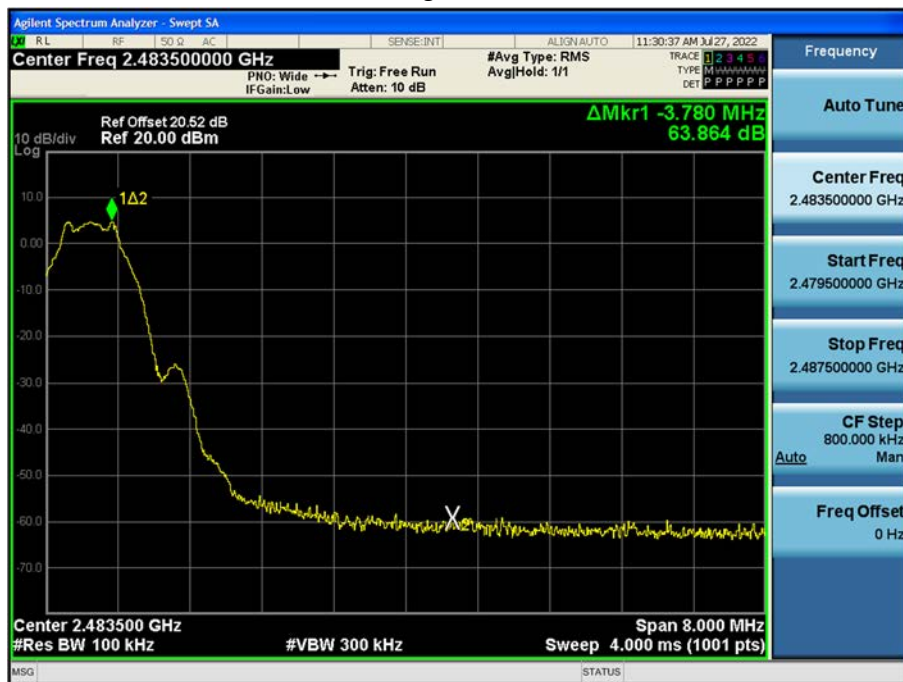

1 M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

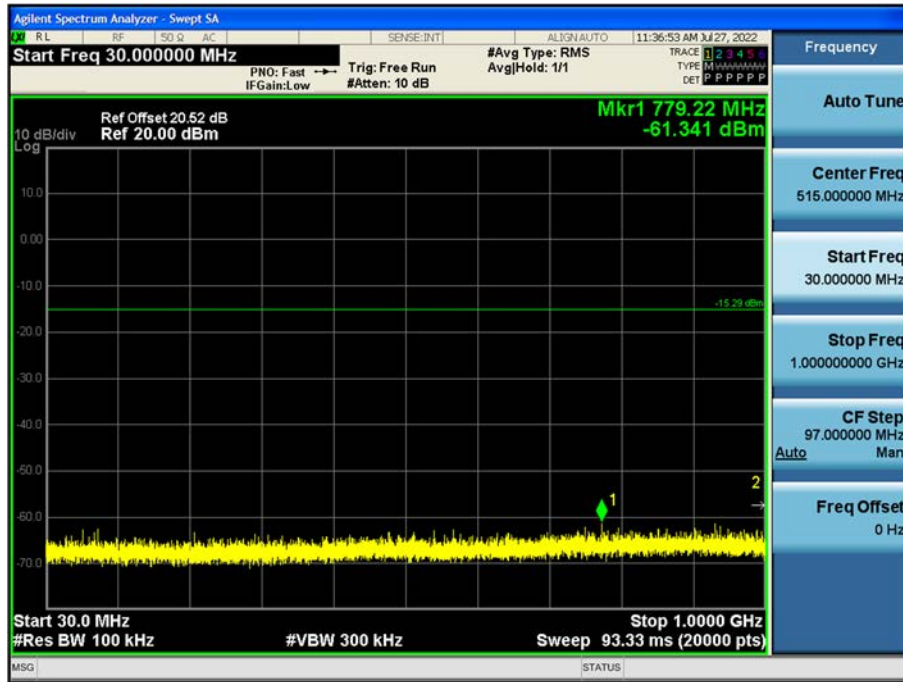


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

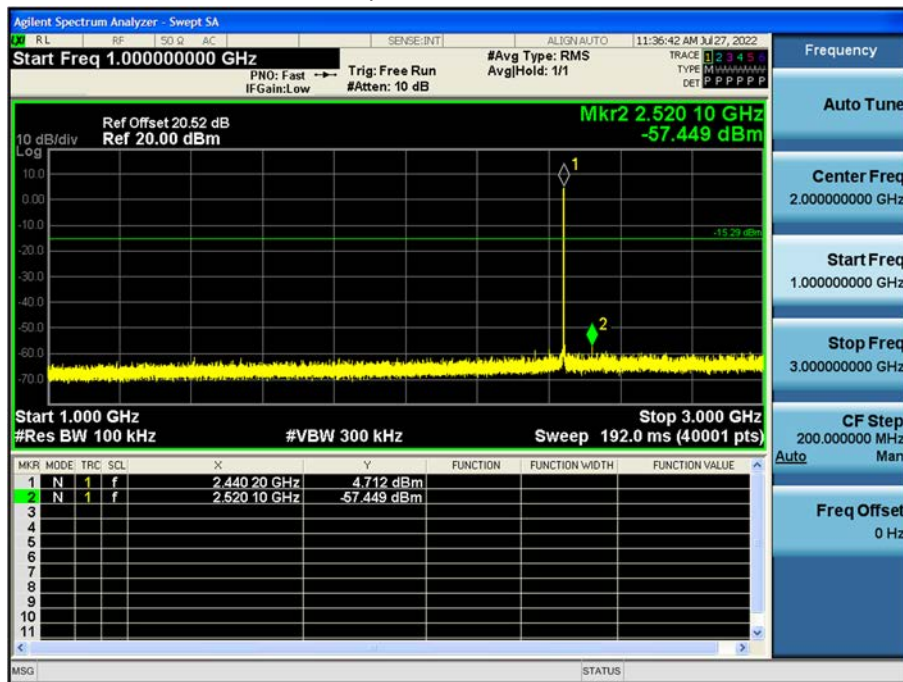


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

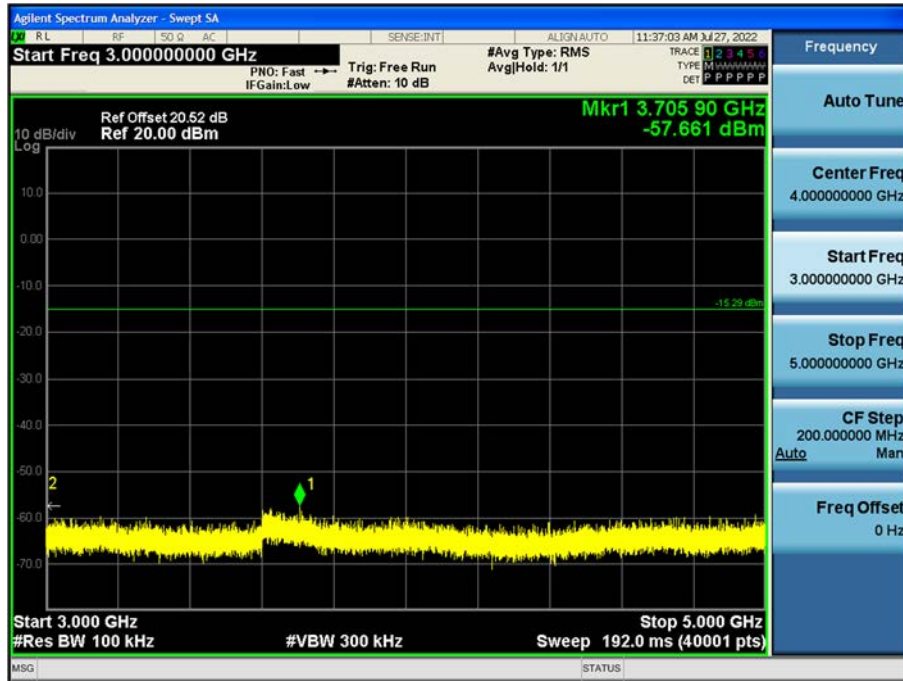


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

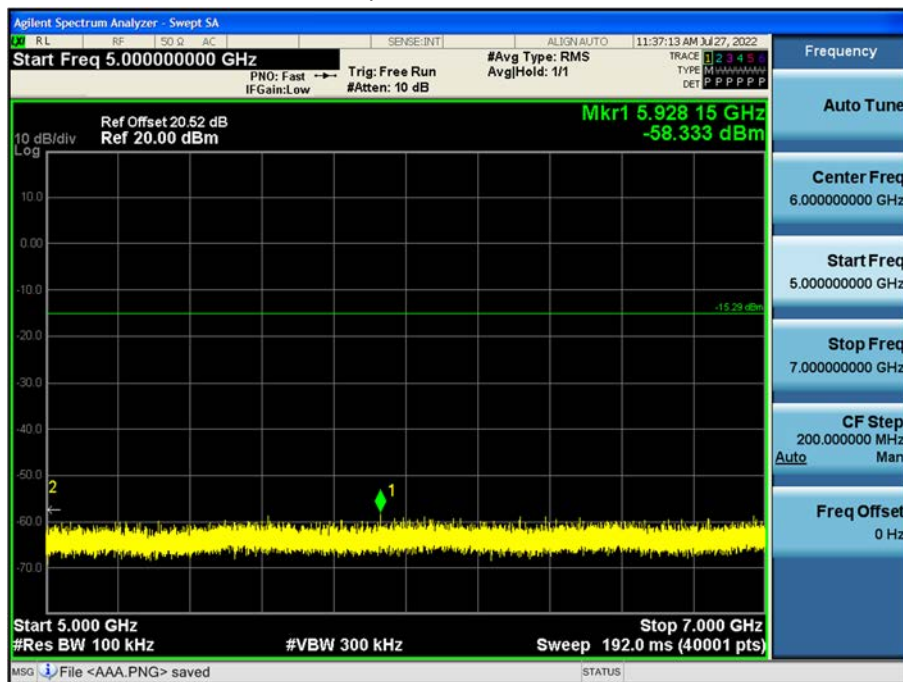


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

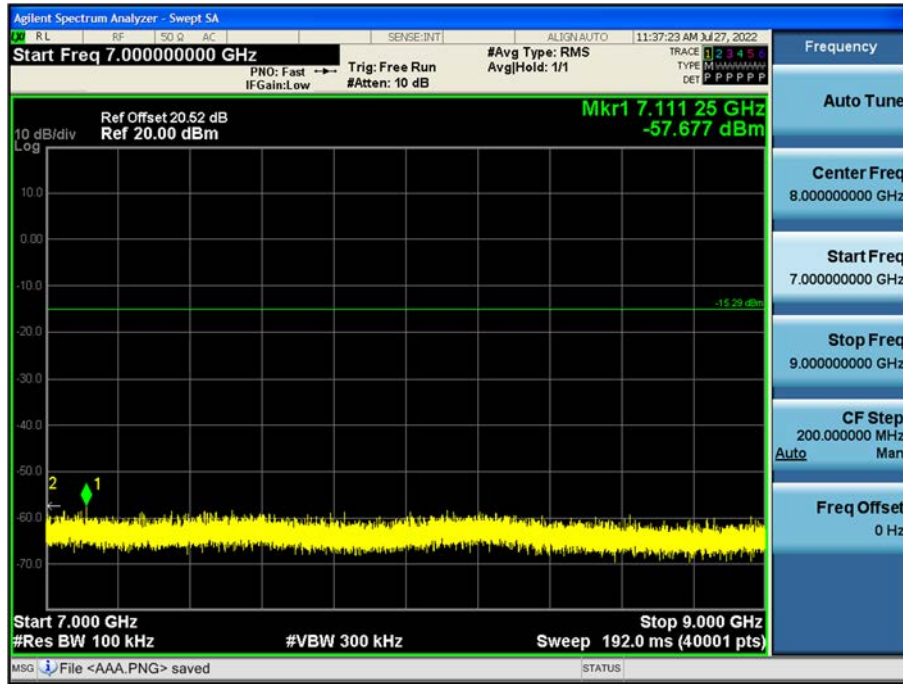


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

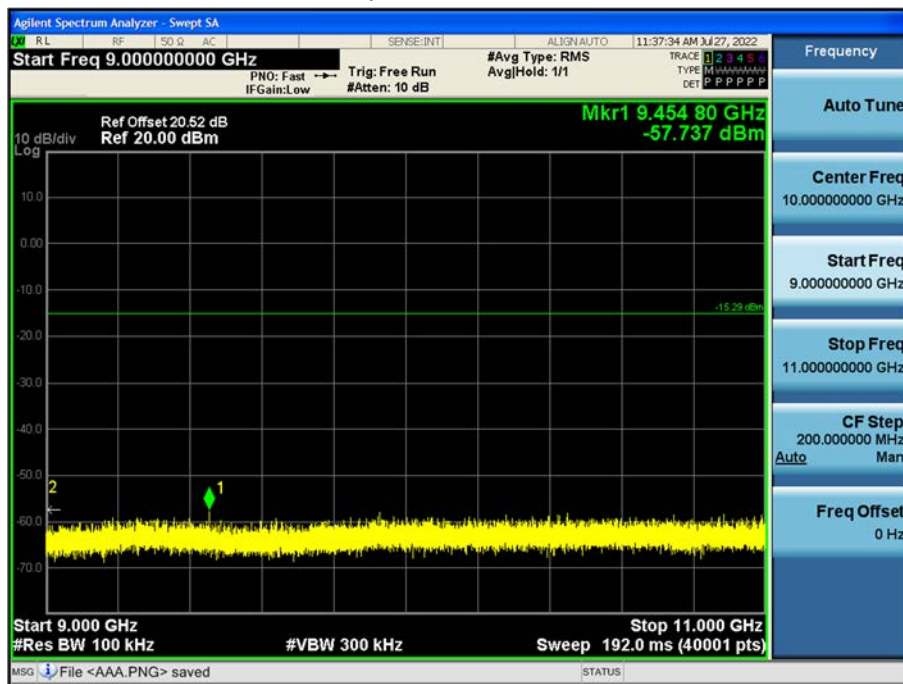


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

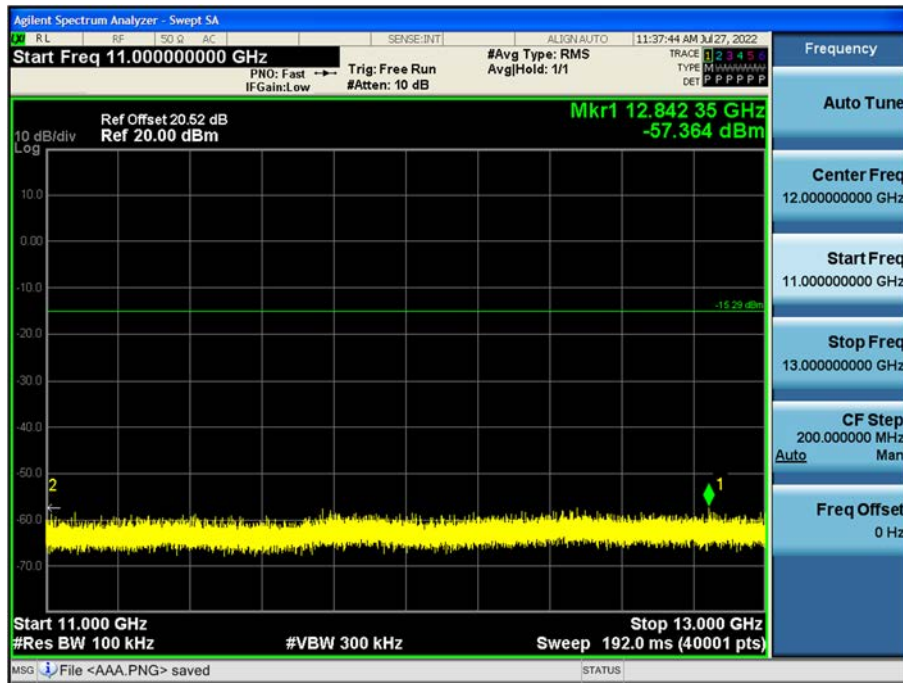


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

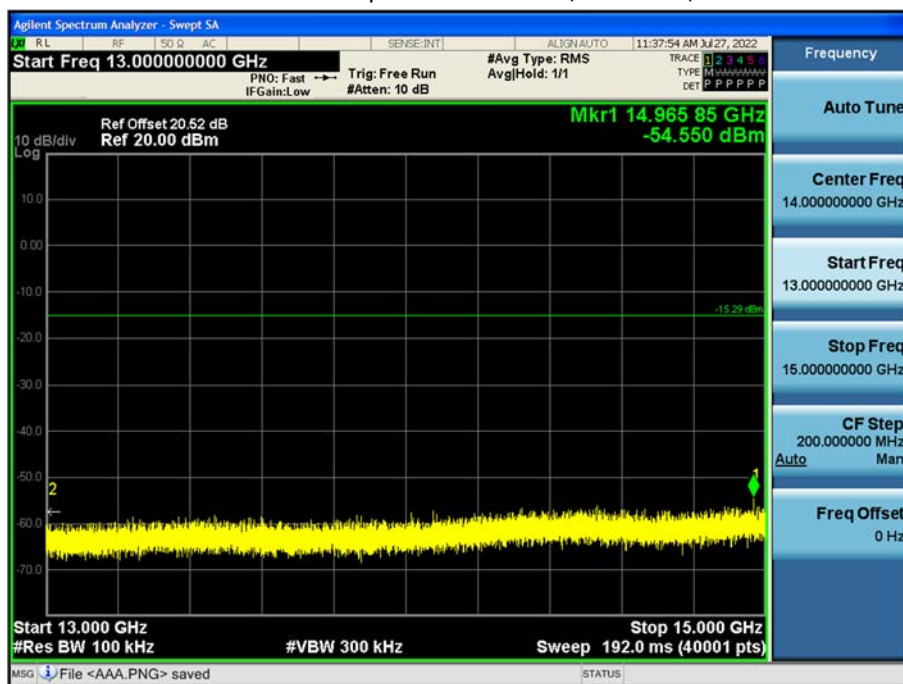


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

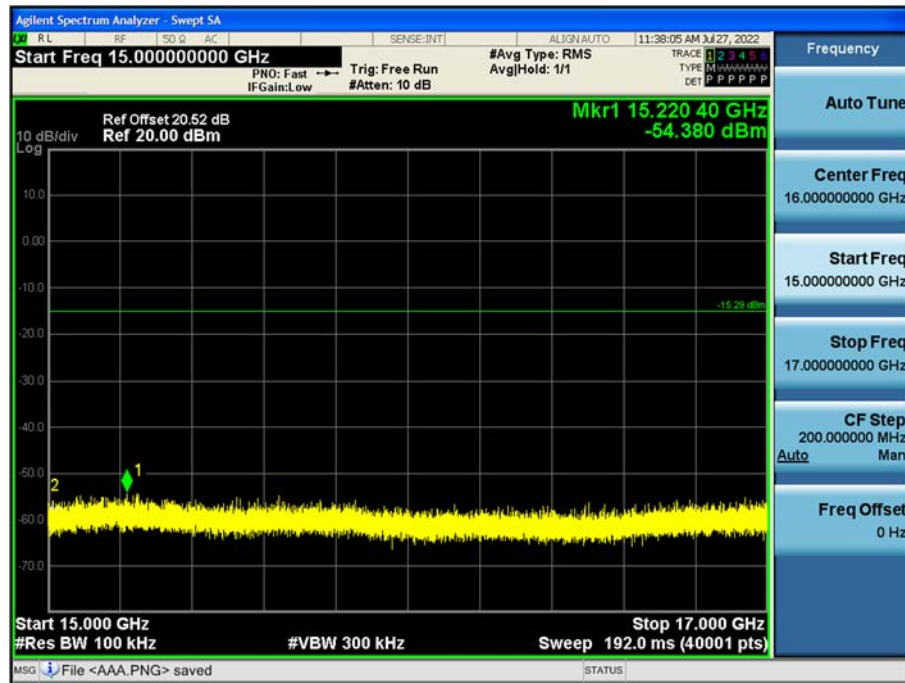


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

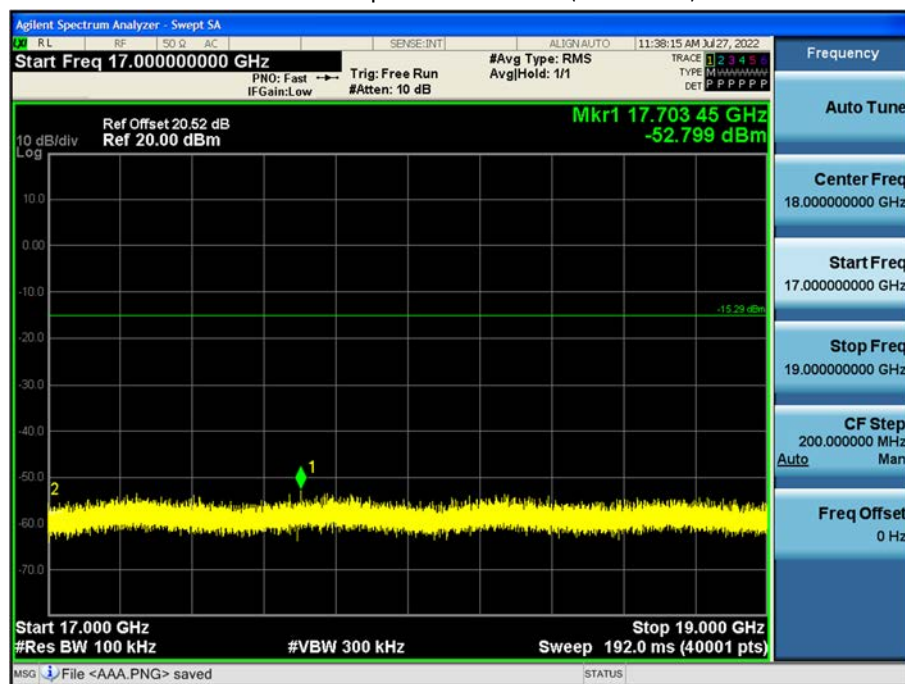


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

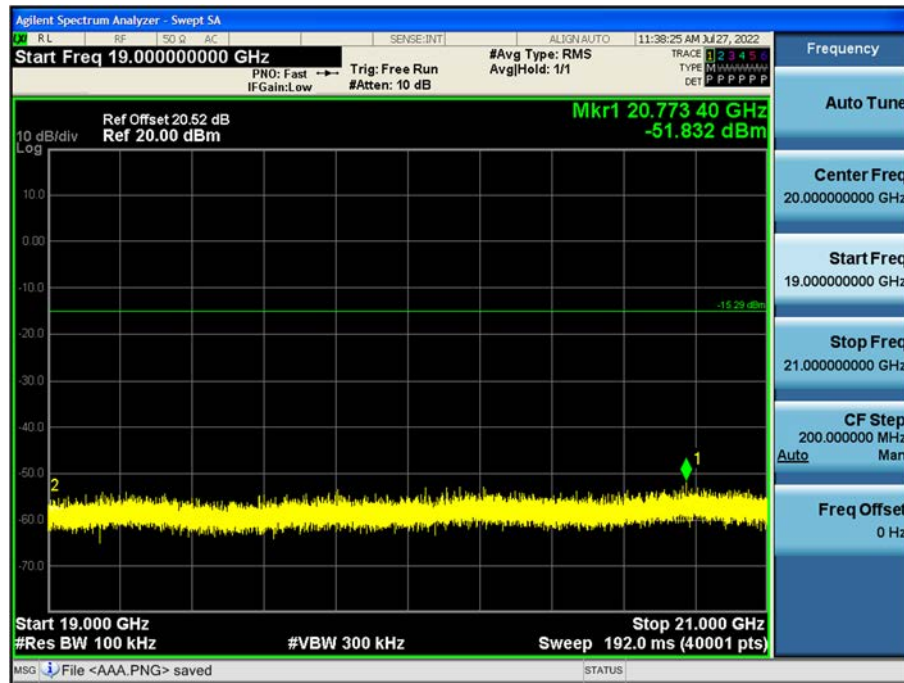


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

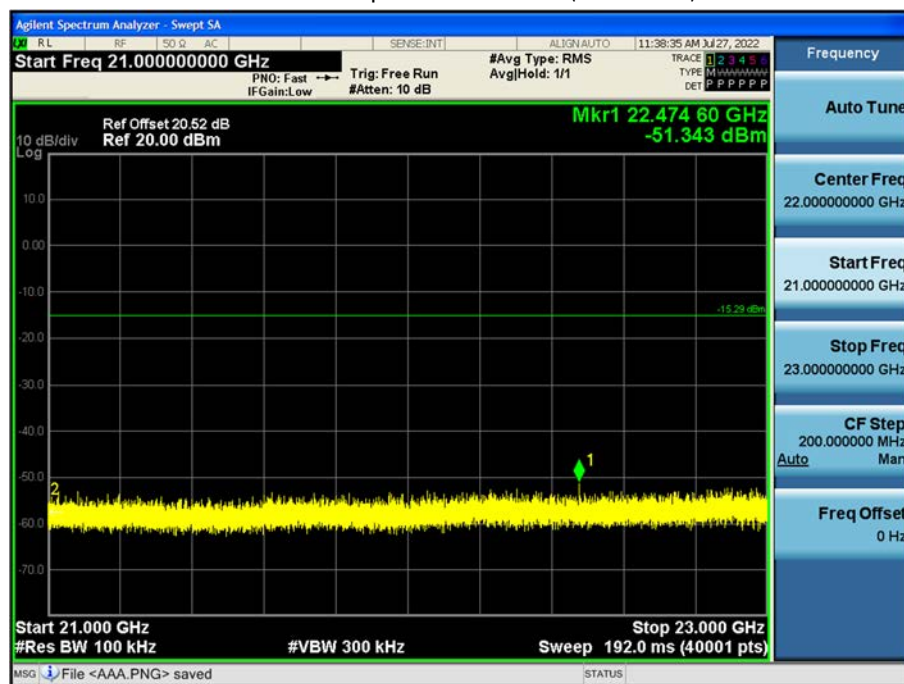

23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

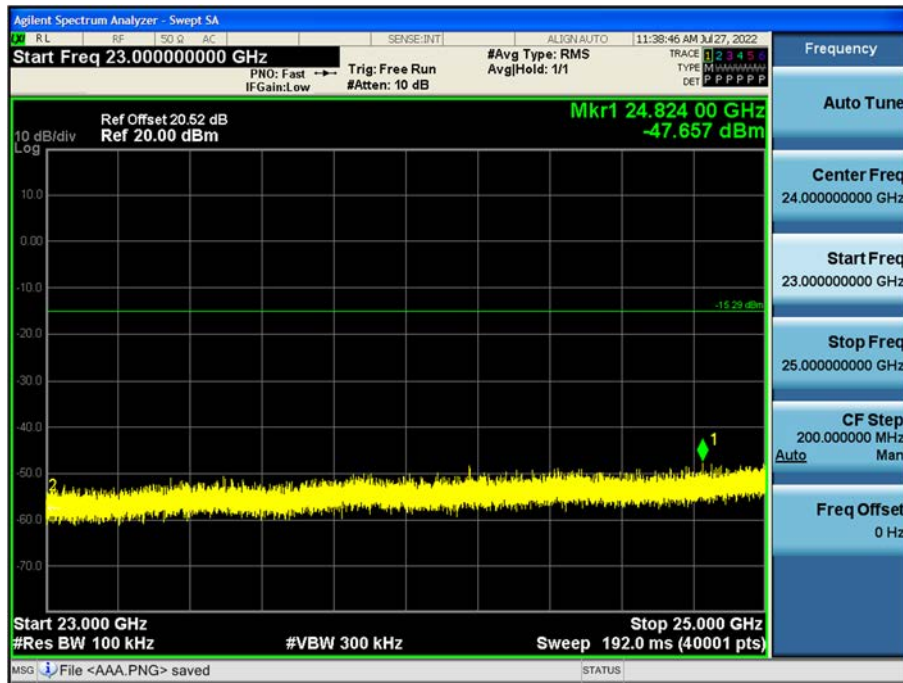

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F + C.L + D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured Value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F + C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1 M Bit/s (37 Byte)

Operation Mode: CH Low

Frequency	Measured Value	Duty Cycle Factor	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4804	43.07	0.00	3.87	V	46.94	73.98	27.04	PK
4804	32.57	2.00	3.87	V	38.44	53.98	15.54	AV
7206	38.62	0.00	11.52	V	50.14	73.98	23.84	PK
7206	26.01	2.00	11.52	V	39.53	53.98	14.45	AV
4804	42.89	0.00	3.87	H	46.76	73.98	27.22	PK
4804	32.33	2.00	3.87	H	38.20	53.98	15.78	AV
7206	38.81	0.00	11.52	H	50.33	73.98	23.65	PK
7206	26.05	2.00	11.52	H	39.57	53.98	14.41	AV

Operation Mode: CH Mid

Frequency	Measured Value	Duty Cycle Factor	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4880	42.25	0.00	4.28	V	46.53	73.98	27.45	PK
4880	31.05	2.00	4.28	V	37.33	53.98	16.65	AV
7320	38.22	0.00	11.86	V	50.08	73.98	23.90	PK
7320	25.98	2.00	11.86	V	39.84	53.98	14.14	AV
4880	42.10	0.00	4.28	H	46.38	73.98	27.60	PK
4880	31.02	2.00	4.28	H	37.30	53.98	16.68	AV
7320	38.45	0.00	11.86	H	50.31	73.98	23.67	PK
7320	26.02	2.00	11.86	H	39.88	53.98	14.10	AV




Operation Mode: CH High


Frequency	Measured Value	Duty Cycle Factor	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4960	42.59	0.00	4.81	V	47.40	73.98	26.58	PK
4960	31.48	2.00	4.81	V	38.29	53.98	15.69	AV
7440	38.29	0.00	11.99	V	50.28	73.98	23.70	PK
7440	26.22	2.00	11.99	V	40.21	53.98	13.77	AV
4960	42.39	0.00	4.81	H	47.20	73.98	26.78	PK
4960	31.28	2.00	4.81	H	38.09	53.98	15.89	AV
7440	38.34	0.00	11.99	H	50.33	73.98	23.65	PK
7440	26.33	2.00	11.99	H	40.32	53.98	13.66	AV

1M Bit/s 37 Byte Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Result (Ch.39 3rd Harmonic)

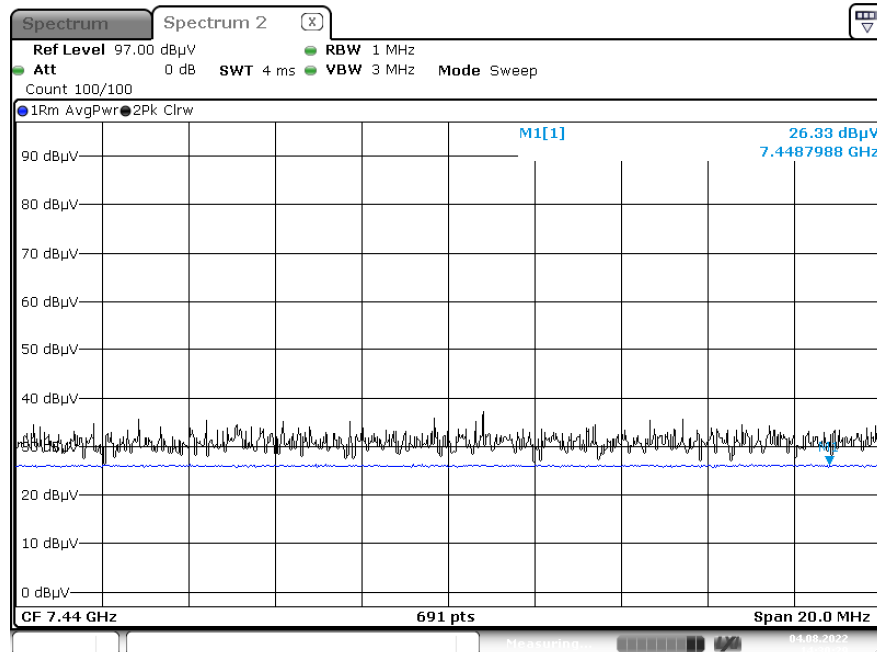

Radiated Spurious Emissions plot – Peak Result (Ch.39 3rd Harmonic)

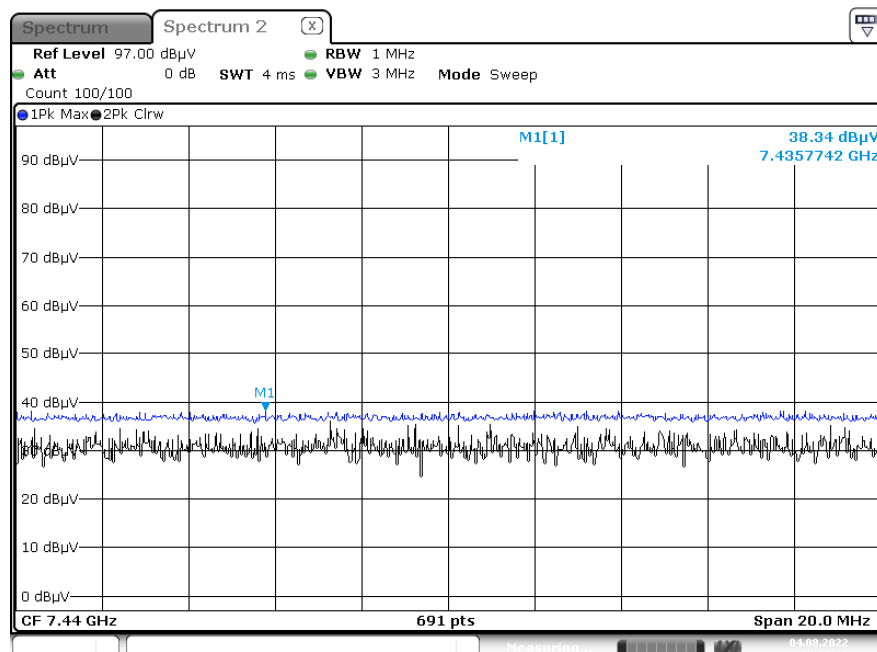

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Mode : 1M Bit/s (37 Byte)

Operating Frequency

2402 MHz & 2480 MHz


Channel No.

Ch 0 & Ch 39


Frequency	Measured Value	Duty Cycle Factor	AF+CL+DF	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	47.87	0.00	2.45	H	50.32	73.98	23.66	PK
2390.0	36.99	2.00	2.45	H	41.44	53.98	12.54	AV
2390.0	47.68	0.00	2.45	V	50.13	73.98	23.85	PK
2390.0	37.02	2.00	2.45	V	41.47	53.98	12.51	AV
2483.5	50.41	0.00	2.65	H	53.06	73.98	20.92	PK
2483.5	37.02	2.00	2.65	H	41.67	53.98	12.31	AV
2483.5	50.22	0.00	2.65	V	52.87	73.98	21.11	PK
2483.5	36.95	2.00	2.65	V	41.60	53.98	12.38	AV

1M Bit/s (37 Byte) Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Result (Ch.39)

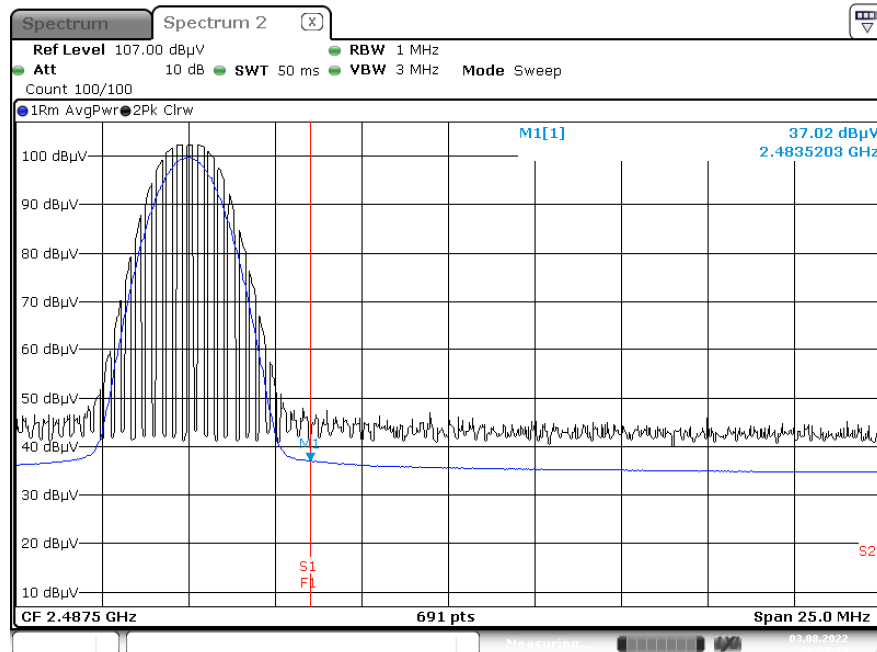

Radiated Restricted Band Edges plot – Peak Result (Ch.39)

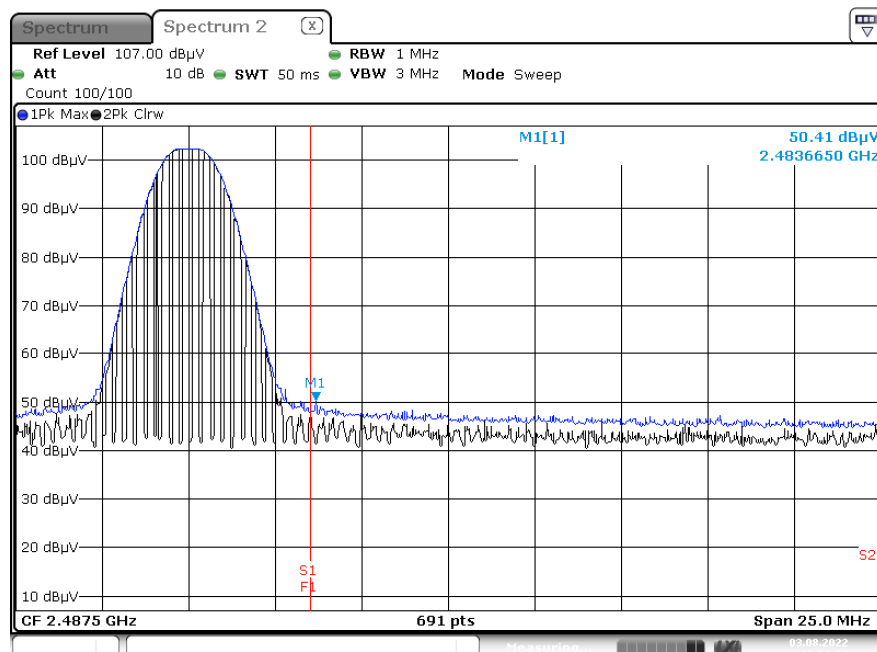

Note:

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F + C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Measured Value	A.F + C.L - A.G + D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

9.9 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

BTLE MODE_L1


1 / 2

Test Report

Common Information

EUT : LCWB-003
Manufacturer : LG
Test Site : SHIELD ROOM
Operating Conditions : BTLE MODE_L1

Full Spectrum

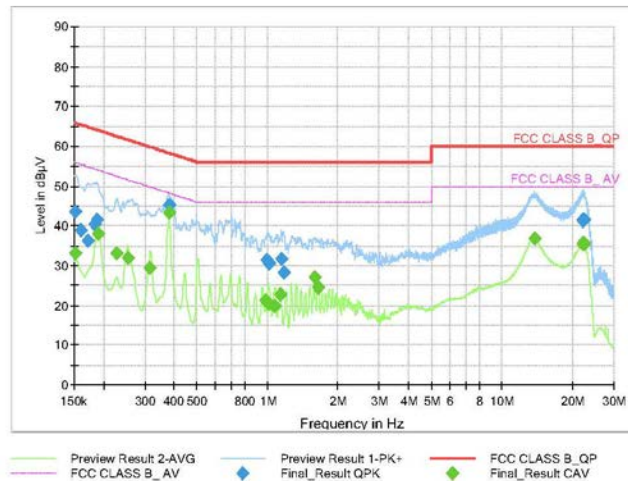

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	43.51	65.88	22.36	9.000	L1	OFF	9.6
0.1613	39.07	65.40	26.33	9.000	L1	OFF	9.6
0.1725	36.46	64.84	28.38	9.000	L1	OFF	9.6
0.1838	40.46	64.31	23.86	9.000	L1	OFF	9.6
0.1883	41.58	64.11	22.53	9.000	L1	OFF	9.6
0.3795	45.29	58.29	13.00	9.000	L1	OFF	9.6
0.9973	31.34	56.00	24.66	9.000	L1	OFF	9.6
1.0063	31.04	56.00	24.96	9.000	L1	OFF	9.6
1.0108	30.87	56.00	25.13	9.000	L1	OFF	9.6
1.0175	30.54	56.00	25.46	9.000	L1	OFF	9.6
1.1503	31.73	56.00	24.27	9.000	L1	OFF	9.6
1.1728	28.40	56.00	27.60	9.000	L1	OFF	9.6
22.0978	41.22	60.00	18.78	9.000	L1	OFF	9.9
22.1878	41.49	60.00	18.51	9.000	L1	OFF	9.9
22.1945	41.36	60.00	18.64	9.000	L1	OFF	9.9
22.2193	41.62	60.00	18.38	9.000	L1	OFF	9.9
22.2328	41.28	60.00	18.72	9.000	L1	OFF	9.9
22.4015	41.49	60.00	18.51	9.000	L1	OFF	9.9

2022-08-02

오전 9:11:18



BTLE MODE_L1

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	33.11	55.88	22.77	9.000	L1	OFF	9.6
0.1905	38.07	54.02	15.95	9.000	L1	OFF	9.6
0.2265	33.08	52.58	19.50	9.000	L1	OFF	9.6
0.2535	31.92	51.64	19.72	9.000	L1	OFF	9.6
0.3165	29.50	49.80	20.30	9.000	L1	OFF	9.6
0.3795	43.39	48.29	4.90	9.000	L1	OFF	9.6
0.9838	21.32	46.00	24.68	9.000	L1	OFF	9.6
1.0153	20.50	46.00	25.50	9.000	L1	OFF	9.6
1.0783	20.00	46.00	26.00	9.000	L1	OFF	9.6
1.1390	22.72	46.00	23.28	9.000	L1	OFF	9.6
1.5845	27.07	46.00	18.93	9.000	L1	OFF	9.6
1.6475	24.61	46.00	21.39	9.000	L1	OFF	9.6
13.7503	36.85	50.00	13.15	9.000	L1	OFF	9.8
22.0528	35.59	50.00	14.41	9.000	L1	OFF	9.9
22.2193	35.63	50.00	14.37	9.000	L1	OFF	9.9
22.4128	35.74	50.00	14.26	9.000	L1	OFF	9.9
22.4218	35.77	50.00	14.23	9.000	L1	OFF	9.9
22.5118	35.47	50.00	14.53	9.000	L1	OFF	9.9

2022-08-02

오전 9:11:18

Conducted Emissions (Line 2)

BTLE MODE_N


1 / 2

Test Report

Common Information

EUT : LCWB-003
Manufacturer : LG
Test Site: SHIELD ROOM
Operating Conditions : BTLE MODE_N

Full Spectrum

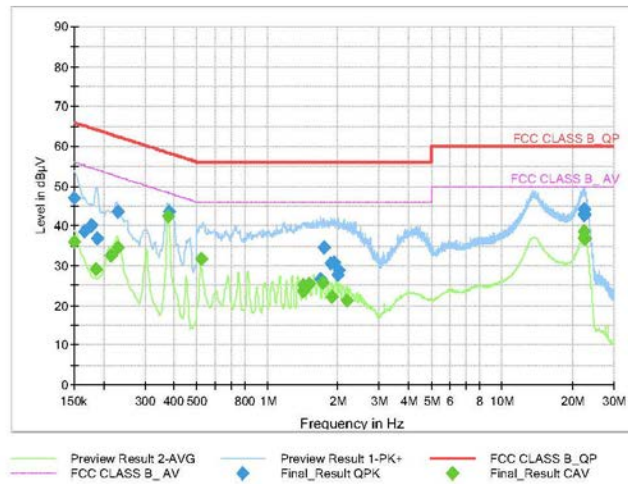

Final Result QPK

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	47.03	66.00	18.97	9.000	N	OFF	9.6
0.1658	38.77	65.17	26.40	9.000	N	OFF	9.6
0.1770	40.15	64.63	24.48	9.000	N	OFF	9.6
0.1883	37.04	64.11	27.07	9.000	N	OFF	9.6
0.2288	43.51	62.50	18.99	9.000	N	OFF	9.6
0.3795	43.66	58.29	14.63	9.000	N	OFF	9.6
1.6880	26.65	56.00	29.35	9.000	N	OFF	9.6
1.7353	34.66	56.00	21.34	9.000	N	OFF	9.6
1.8725	30.46	56.00	25.54	9.000	N	OFF	9.6
1.9243	30.85	56.00	25.15	9.000	N	OFF	9.6
1.9985	27.68	56.00	28.32	9.000	N	OFF	9.6
2.0120	28.79	56.00	27.21	9.000	N	OFF	9.6
22.2823	42.90	60.00	17.10	9.000	N	OFF	9.9
22.4533	42.70	60.00	17.30	9.000	N	OFF	9.9
22.4623	42.66	60.00	17.34	9.000	N	OFF	9.9
22.4870	42.73	60.00	17.27	9.000	N	OFF	9.9
22.5140	44.13	60.00	15.87	9.000	N	OFF	9.9
22.5185	42.74	60.00	17.26	9.000	N	OFF	9.9

2022-08-02

오전 9:05:52



BTLE MODE_N

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	36.11	56.00	19.89	9.000	N	OFF	9.6
0.1860	29.24	54.21	24.98	9.000	N	OFF	9.6
0.2153	32.60	53.00	20.40	9.000	N	OFF	9.6
0.2288	34.71	52.50	17.78	9.000	N	OFF	9.6
0.3773	42.54	48.34	5.80	9.000	N	OFF	9.6
0.5203	31.60	46.00	14.40	9.000	N	OFF	9.6
1.4158	25.16	46.00	20.84	9.000	N	OFF	9.6
1.4270	23.63	46.00	22.37	9.000	N	OFF	9.6
1.5080	25.30	46.00	20.70	9.000	N	OFF	9.6
1.7218	25.68	46.00	20.32	9.000	N	OFF	9.6
1.8815	22.12	46.00	23.88	9.000	N	OFF	9.6
2.1853	21.44	46.00	24.56	9.000	N	OFF	9.6
22.3813	37.27	50.00	12.73	9.000	N	OFF	9.9
22.4285	37.10	50.00	12.90	9.000	N	OFF	9.9
22.4533	38.62	50.00	11.38	9.000	N	OFF	9.9
22.4623	37.31	50.00	12.69	9.000	N	OFF	9.9
22.5185	36.89	50.00	13.11	9.000	N	OFF	9.9
22.6220	36.82	50.00	13.18	9.000	N	OFF	9.9

2022-08-02

오전 9:05:52

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/08/2023	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/14/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/24/2023	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/24/2023	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/03/2023	Annual
DC Power Supply	E3632A	Agilent	KR75303243	04/25/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/07/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
EM1000 / Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/18/2024	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/16/2023	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	03/11/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual
HPF(3~18GHz) + LNA1(1~18GHz)	FMSR-05B	TNM system	F6	01/19/2023	Annual
ATT(10dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual
ATT(3dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual
LNA1(1~18GHz)	FMSR -05B	TNM system	25540	01/19/2023	Annual
HPF(7~18GHz) + LNA2(6~18GHz)	FMSR -05B	TNM system	28550	01/19/2023	Annual
Thru(30MHz ~ 18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2208-FI005-P