

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-193-RWD-061

AGR No. : A18DA-151R

Applicant : LG Electronics USA

Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 07632

Manufacturer : LG Electronics Inc.

Address : 222 LG-ro, Jinwi-Myeon, Pyeongtaek -Si, Gyeonggi-Do, 451-713, Korea

Type of Equipment : Car Navigation

FCC ID. : BEJ-MIB3OI

Model Name : MIB3 OI

Serial number : N/A

Total page of Report : 168 pages (including this page)

Date of Incoming : January 11, 2019

Date of issue : March 26, 2019

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART E Section 15.407**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:


Yu-Seog Sim / Assistant Manager
ONETECH Corp.

Approved by:


Jae-Ho Lee / Chief Engineer
ONETECH Corp.

CONTENTS

PAGE

2. TEST SUMMARY	8
2.1 TEST ITEMS AND RESULTS	8
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	8
2.3 RELATED SUBMITTAL(S) / GRANT(S)	8
2.4 PURPOSE OF THE TEST	8
2.5 TEST METHODOLOGY	8
2.6 TEST FACILITY	8
3. GENERAL INFORMATION	9
3.1 PRODUCT DESCRIPTION	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT	11
4. EUT MODIFICATIONS	12
5. SYSTEM TEST CONFIGURATION	13
5.1 JUSTIFICATION	13
5.2 PERIPHERAL EQUIPMENT	13
5.3 CONFIGURATION OF TEST SYSTEM	14
5.4 ANTENNA REQUIREMENT	14
6. PRELIMINARY TEST	15
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	15
6.2 GENERAL RADIATED EMISSIONS TESTS	15
7. MINIMUM 26 DB BANDWIDTH	16
7.1 OPERATING ENVIRONMENT	16
7.2 TEST SET-UP	16
7.3 TEST EQUIPMENT USED	16
7.4 TEST DATA FOR 802.11A WLAN MODE	17
7.4.1 Test data for Antenna 0	17
7.4.2 Test data for Antenna 1	22
7.5 TEST DATA FOR 802.11N (HT 20) WLAN MODE	27
7.5.1 Test data for Antenna 0	27
7.5.2 Test data for Antenna 1	32
7.6 TEST DATA FOR 802.11N (HT 40) WLAN MODE	37
7.6.1 Test data for Antenna 0	37
7.6.2 Test data for Antenna 1	40
7.7 TEST DATA FOR 802.11AC (HT 80) WLAN MODE	43

7.7.1 Test data for Antenna 0	43
7.7.2 Test data for Antenna 1	45
8. 6 DB BANDWIDTH	47
8.1 OPERATING ENVIRONMENT	47
8.2 TEST SET-UP	47
8.3 TEST EQUIPMENT USED	47
8.4 TEST DATA FOR 802.11A WLAN MODE.....	48
8.5 TEST DATA FOR 802.11N (HT20) WLAN MODE	52
8.6 TEST DATA FOR 802.11N (HT40) WLAN MODE	56
8.7 TEST DATA FOR 802.11AC (HT80) WLAN MODE	60
9. MAXIMUM PEAK OUTPUT POWER.....	64
9.1 OPERATING ENVIRONMENT	64
9.2 TEST SET-UP	64
9.3 TEST EQUIPMENT USED	64
9.4 TEST DATA FOR 802.11A WLAN MODE.....	65
9.4.1 Test data for Antenna 0	65
9.4.2 Test data for Antenna 1	70
9.5 TEST DATA FOR 802.11N (HT20) WLAN MODE	75
9.5.1 Test data for Antenna 0	75
9.5.2 Test data for Antenna 1	80
9.5.3 Test data for Multiple Transmit	85
9.6 TEST DATA FOR 802.11N (HT40) WLAN MODE	86
9.6.1 Test data for Antenna 0	86
9.6.2 Test data for Antenna 1	89
9.6.3 Test data for Multiple Transmit	92
9.7 TEST DATA FOR 802.11AC (HT80) WLAN MODE	93
9.7.1 Test data for Antenna 0	93
9.7.2 Test data for Antenna 1	95
9.7.3 Test data for Multiple Transmit	97
10. PEAK POWER SPECTRAL DENSITY	98
10.1 OPERATING ENVIRONMENT	98
10.2 TEST SET-UP	98
10.3 TEST EQUIPMENT USED	98
10.4 TEST DATA FOR 802.11A WLAN MODE.....	99
10.4.1 Test data for Antenna 0	99
10.4.2 Test data for Antenna 1	104

10.5 TEST DATA FOR 802.11N_HT20 WLAN MODE	109
10.5.1 Test data for Antenna 0	109
10.5.2 Test data for Antenna 1	114
10.5.3 Test data for Multiple Transmit	119
10.6 TEST DATA FOR 802.11N_HT40 WLAN MODE	120
10.6.1 Test data for Antenna 0	120
10.6.2 Test data for Antenna 1	123
10.6.3 Test data for Multiple Transmit	126
10.7 TEST DATA FOR 802.11AC_HT80 WLAN MODE	127
10.7.1 Test data for Antenna 0	127
10.7.2 Test data for Antenna 1	129
10.7.3 Test data for Multiple Transmit	131
11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION	132
11.1 OPERATING ENVIRONMENT	132
11.2 TEST SET-UP	132
11.3 TEST EQUIPMENT USED	132
11.4 TEST DATA	133
12. FREQUENCY STABILITY WITH VOLTAGE VARIATION	135
12.1 OPERATING ENVIRONMENT	135
12.2 TEST SET-UP	135
12.3 TEST EQUIPMENT USED	135
12.4 TEST DATA	136
13. RADIATED SPURIOUS EMISSIONS	137
13.1 OPERATING ENVIRONMENT	137
13.2 TEST SET-UP	137
13.3 TEST EQUIPMENT USED	137
13.4 TEST DATA FOR 5.2 GHz	138
13.4.1 Test data for 30 MHz ~ 1 GHz	138
13.4.2 Test data for Below 30 MHz	139
13.4.3 Test data for above 1 GHz	140
13.5 TEST DATA FOR CO-LOCATION(BT + WLAN 2.4 GHz +WLAN 5.2 GHz)	144
13.5.1 Test data for 30 MHz ~ 1 GHz	144
13.5.2 Test data for Below 30 MHz	145
13.5.3 Test data for above 1 GHz	146
13.6 TEST DATA FOR 5.8 GHz	147
13.6.1 Test data for 30 MHz ~ 1 GHz	147

13.6.2 Test data for Below 30 MHz	148
13.6.3 Test data for above 1 GHz	149
13.7 TEST DATA FOR CO-LOCATION(BT + WLAN 2.4 GHz + WLAN 5.8 GHz)	153
13.7.1 Test data for 30 MHz ~ 1 GHz	153
13.7.2 Test data for Below 30 MHz	154
13.7.3 Test data for above 1 GHz	155
14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS	156
14.1 OPERATING ENVIRONMENT	156
14.2 TEST SET-UP	156
14.3 TEST EQUIPMENT USED	156
14.4 TEST DATA FOR RESTRICTED BAND (5.2 GHz)	157
14.4.1 Test data for 802.11a WLAN Mode.....	157
14.4.2 Test data for 802.11n (HT 20) WLAN Mode	158
14.4.3 TEST DATA FOR 802.11N (HT 40) WLAN MODE	159
14.4.4 Test data for 802.11ac (HT 80) WLAN Mode.....	160
14.5 TEST DATA FOR RESTRICTED BAND (5.8 GHz)	161
14.5.1 Test data for 802.11a WLAN Mode.....	161
14.5.2 Test data for 802.11n (HT 20) WLAN Mode	163
14.5.3 Test data for 802.11n (HT 40) WLAN Mode	165
14.5.4 Test data for 802.11ac (HT 80) WLAN Mode.....	167

REVISION HISTORY

Issued Report No.	Issued Date	Revisions	Effect Section
OT-193-RWD-061	March 26, 2019	Initial Issue	All

DOCUMENT HISTORY

Revision No.	Issued Date	Revisions	Effect Section
Original	April 28, 2017	Initial Issue	-
Rev. 01	May 30, 2019	9. MAXIMUM PEAK OUTPUT POWER 10. PEAK POWER SPECTRAL DENSITY	-
Rev. 02	June 04, 2019	Added test data for Co-location	13. RADIATED SPURIOUS EMISSIONS

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA
 Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 07632
 Contact Person : Kyung-Su Han / Director
 Telephone No. : (201) 266-2215
 FCC ID : BEJ-MIB3OI
 Model Name : MIB3 OI
 Brand Name : LG, Volkswagen, Seat
 Serial Number : N/A
 Date : March 26, 2019

EQUIPMENT CLASS	NII - Unlicensed National Information Infrastructure(UNII)
E.U.T. DESCRIPTION	Car Navigation
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 KDB 789033 D01 General UNII Test Procedures
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	26 dB Bandwidth	PASS
	99 % Occupied Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(a)	Peak Excursion	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bandsand Radiated Emission Limits)	Met the Limit / PASS
15.207	AC Conducted Emissions	N / A

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model MIB3 OI (referred to as the EUT in this report) is a Car Navigation. Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Car Navigation			
FREQUENCY RANGE	Bluetooth	2 402 MHz ~ 2 480 MHz		
	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))		
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n/ac(HT20))	
			5 190 MHz ~ 5 230 MHz (802.11n/ac(HT40))	
			5 210 MHz (802.11ac(VHT80))	
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n/ac(HT20))	
			5 755 MHz ~ 5 795 MHz (802.11n/ac(HT40))	
			5 775 MHz (802.11ac(VHT80))	
MAX. RF OUTPUT POWER	Bluetooth	1 Mbps	-1.40 dBm	
		2 Mbps	-0.61 dBm	
		3 Mbps	-0.07 dBm	
	WLAN 2.4 GHz Band	Wi-Fi 802.11b (15.43 dBm) Wi-Fi 802.11g (17.26 dBm) Wi-Fi 802.11n(HT20) (15.97 dBm)		
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (10.49 dBm) Wi-Fi 802.11n(HT20) (10.44 dBm) Wi-Fi 802.11n(HT40) (8.21 dBm) Wi-Fi 802.11ac(VHT80) (7.34 dBm)
			Antenna 1	Wi-Fi 802.11a (10.15 dBm) Wi-Fi 802.11n(HT20) (10.07 dBm) Wi-Fi 802.11n(HT40) (8.35 dBm) Wi-Fi 802.11ac(VHT80) (7.68 dBm)
			Multiple transmit	Wi-Fi 802.11n(HT20) (13.24 dBm) Wi-Fi 802.11n(HT40) (11.29 dBm) Wi-Fi 802.11ac(VHT80) (10.52 dBm)

MAX. RF OUTPUT POWER	WLAN 5 GHz Band	5 725 MHz ~ 5 850 MHz Band		Antenna 0	Wi-Fi 802.11a (9.37 dBm) Wi-Fi 802.11n(HT20) (9.39 dBm) Wi-Fi 802.11n(HT40) (7.29 dBm) Wi-Fi 802.11ac(VHT80) (6.34 dBm)	
				Antenna 1	Wi-Fi 802.11a (10.42 dBm) Wi-Fi 802.11n(HT20) (10.52 dBm) Wi-Fi 802.11n(HT40) (8.49 dBm) Wi-Fi 802.11ac(VHT80) (7.74 dBm)	
				Multiple transmit	Wi-Fi 802.11n(HT20) (12.84 dBm) Wi-Fi 802.11n(HT40) (10.94 dBm) Wi-Fi 802.11ac(VHT80) (10.11 dBm)	
MODULATION TYPE	Bluetooth		GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps			
	WLAN 2.4 GHz Band		DSSS Modulation(DBPSK/DQPSK/CCK) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)			
	WLAN 5 GHz Band		OFDM Modulation(BPSK/QPSK/16QAM/64QAM)			
ANTENNA TYPE	Bluetooth		PCB Antenna			
	WLAN (2.4GHz Band)		Chip Antenna			
	WLAN (5GHz Band)	Antenna 0	PCB Antenna			
		Antenna 1	Chip Antenna			
ANTENNA GAIN	Bluetooth		2.5 dBi			
	WLAN 2.4 GHz Band		3.8 dBi			
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz	ANT0	3.8 dBi		
			ANT1	1.6 dBi		
		5 725 MHz ~ 5 850 MHz	ANT0	5.5 dBi		
			ANT1	2.4 dBi		
	5 GHz Band (ANT 0 + 1)	5 150 MHz ~ 5 250 MHz	5.78 dBi			
		5 725 MHz ~ 5 850 MHz	7.10 dBi			
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)			31.25 MHz, 28.63636 MHz			
RATED SUPPLY VOLTAGE			DC 12.0 V			

- Directional Gain Calculations

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added config and their differences.:

Brand	Model	Config	Feature							Tested
			BT	Wi-Fi	RVC	DAB	Amp	Tuner Configuration	Platform	
LG Volkswagen Seat	MIB3 OI	L91VW3-N200	O	O	O	O	4CH	Mercury,Merlin	MQB	☒
		L91VW3-N20A	O	O	O	O	4CH	Titan,Merlin	MQB	☐
		L91VW3-N320	O	O	O	X	4CH	Mercury,Merlin	MQB	☐
		L91VW3-N160	O	O	O	O	4CH	Mercury,Merlin	MQB	☐
		L91VW3-N16A	O	O	O	O	4CH	Titan,Merlin	MQB	☐
		L91VW3-N740	O	O	O	X	4CH	Titan,Merlin	MQB	☐
		L91VW3-N760	O	O	O	X	4CH	Mercury,Merlin	MQB	☐
		L92VW3-N200	O	O	X	O	4CH	Mercury,Titan	MQB37	☐
		L92VW3-N20A	O	O	X	O	4CH	Mercury,Titan	MQB37	☐
		L92VW3-N320	O	O	X	X	4CH	Titan,Merlin	MQB37	☐
		L92VW3-N160	O	O	X	O	4CH	Mercury,Titan	MQB37	☐
		L92VW3-N16A	O	O	X	O	4CH	Mercury,Titan	MQB37	☐
		L92VW3-N740	O	O	X	X	4CH	Titan,Merlin	MQB37	☐
		L92VW3-N760	O	O	X	X	4CH	Titan,Merlin	MQB37	☐
		L91SE3-N200	O	O	O	O	4CH	Mercury,Merlin	MQB	☐
		L91SE3-N20A	O	O	O	O	4CH	Mercury,Merlin	MQB	☐
		L91SE3-N320	O	O	O	X	4CH	Titan,Merlin	MQB	☐
		L91SE3-N620	O	O	O	O	4CH	Mercury,Merlin	MQB	☐
		L91SE3-N62A	O	O	O	O	4CH	Mercury,Merlin	MQB	☐
		L91SE3-N670	O	O	O	X	4CH	Titan,Merlin	MQB	☐
		L91SE3-N680	O	O	O	X	4CH	Titan,Merlin	MQB	☐
		L92SE3-N620	O	O	X	O	4CH	Mercury,Titan	MQB37	☐
		L92SE3-N62A	O	O	X	O	4CH	Mercury,Titan	MQB37	☐
		L92SE3-N670	O	O	X	X	4CH	Titan,Merlin	MQB37	☐
		L92SE3-N680	O	O	X	X	4CH	Titan,Merlin	MQB37	☐

Note: 1. Applicants must delegate only the models with all features applied to be tested, Therefore, this test report only guarantees the unit tested.

2. The Applicant/manufacture is responsible for the compliance of all configs.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	N/A	N/A	-

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
G6-1121TV	HP	Notebook PC	EUT, AC/DC Adapter
PPP009C	HP	AC/DC Adapter	Notebook PC

5.3 Configuration of Test System

Line Conducted Test: The EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.4 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is PCB Antenna and Chip Antenna, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

- As this product is only using DC power, AC conducted emission test has not been performed.

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 24 °C

Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.



7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11a WLAN Mode

7.4.1 Test data for Antenna 0

-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.43
	Middle	5 220.00	20.58
	High	5 240.00	20.58
5 725 ~ 5 850	Low	5 745.00	20.83
	Middle	5 785.00	20.68
	High	5 825.00	20.43


Remark: See next page for measurement data.




Tested by: Ha-Ram Lee / Assistant Manager

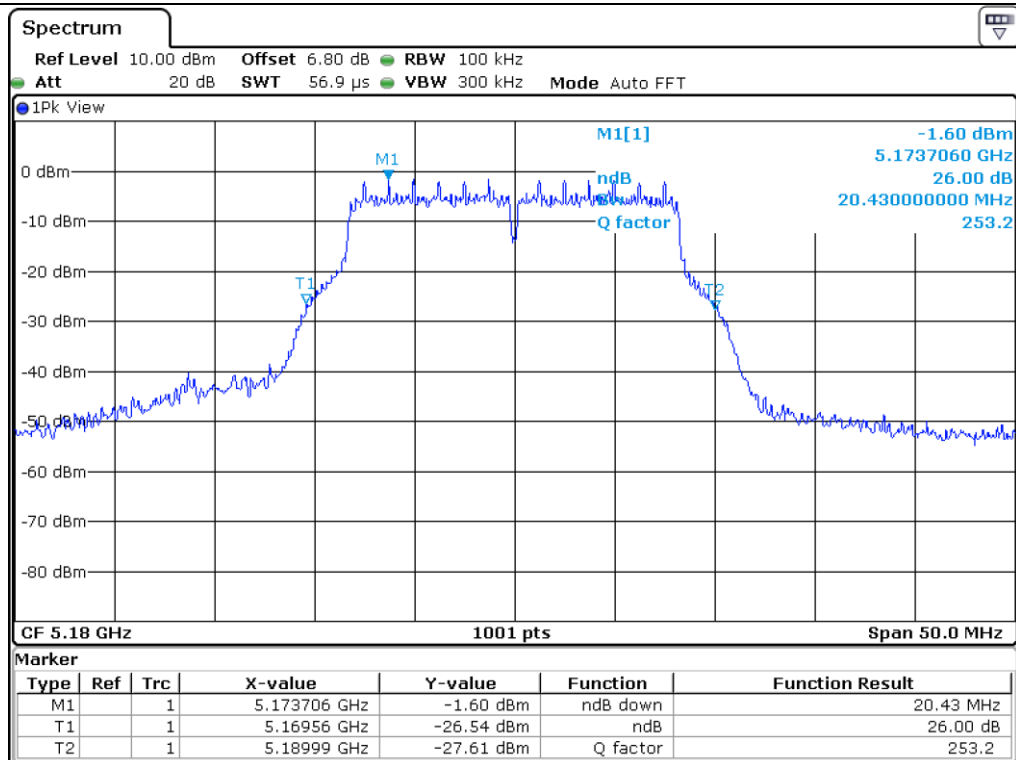


Low Channel (5 180 MHz)

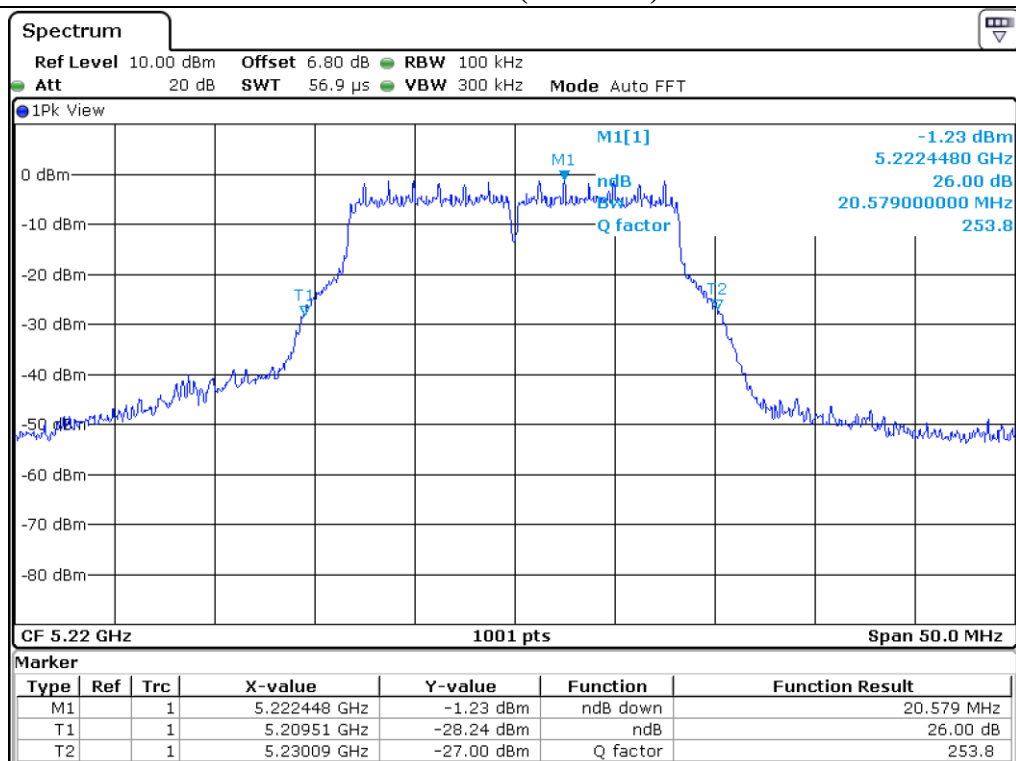


Middle Channel (5 220 MHz)

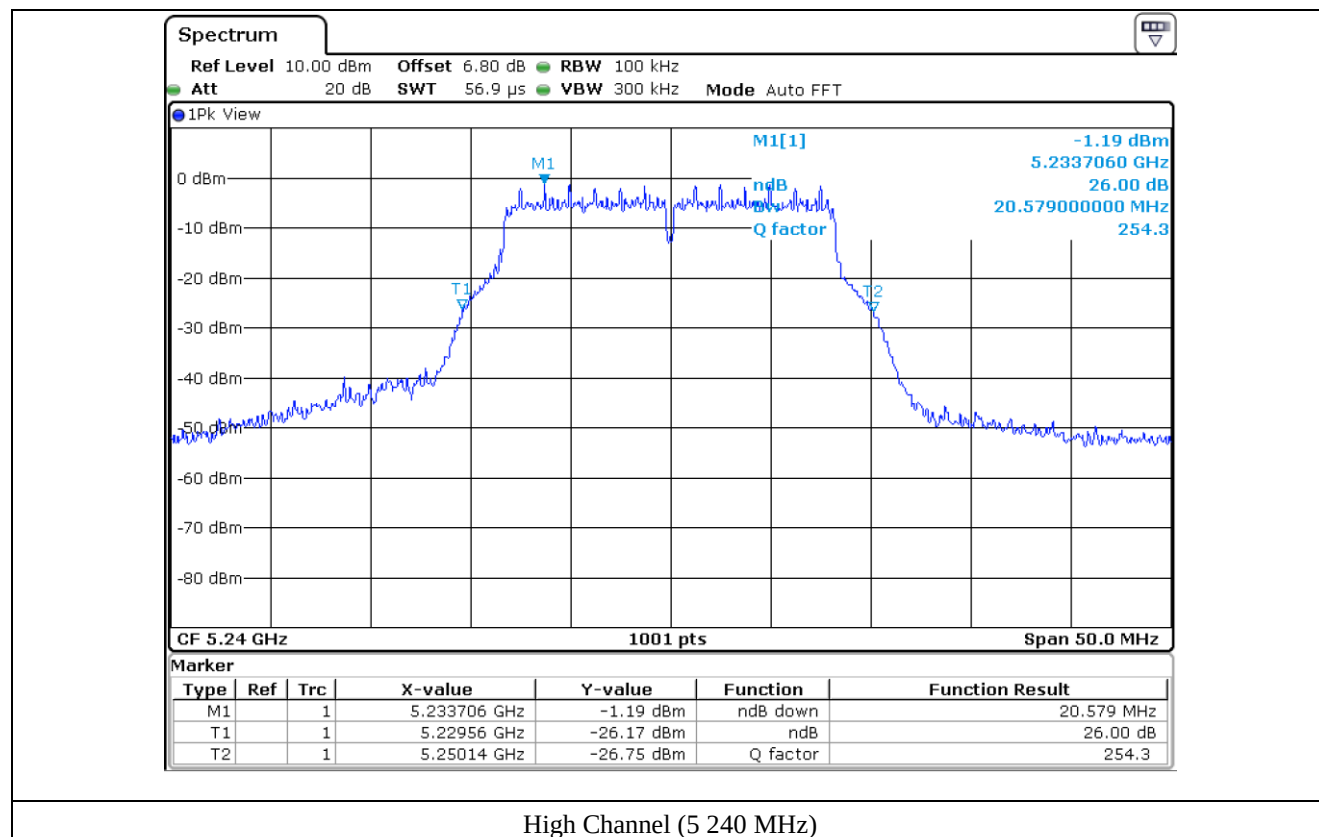


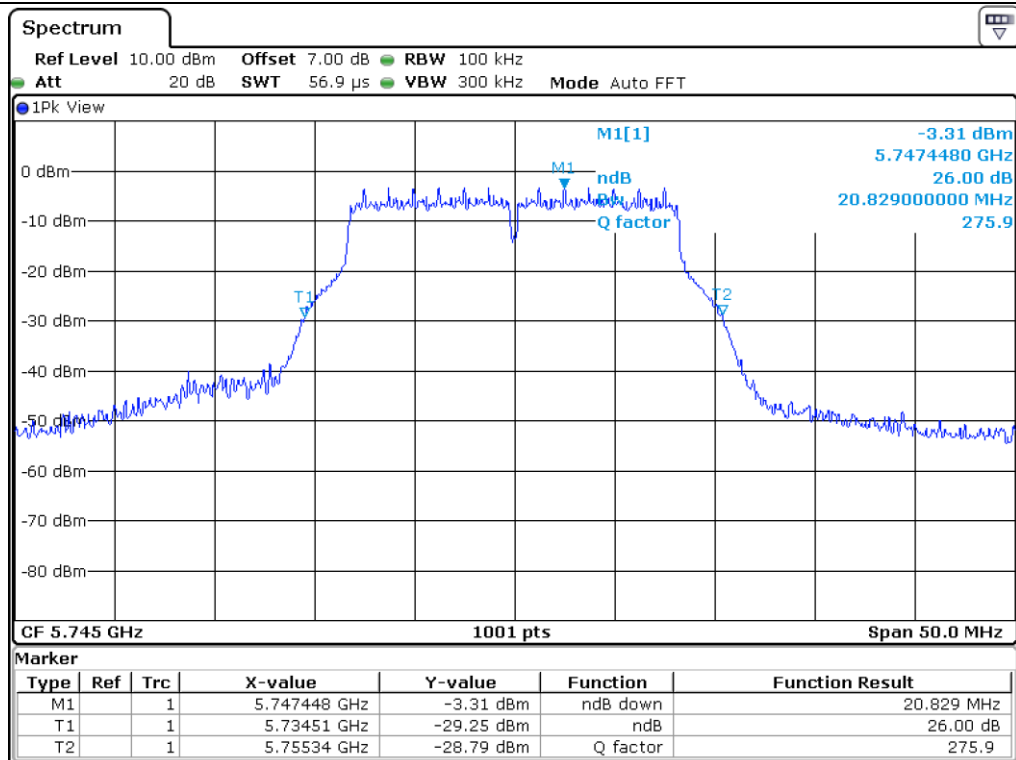

Low Channel (5 745 MHz)

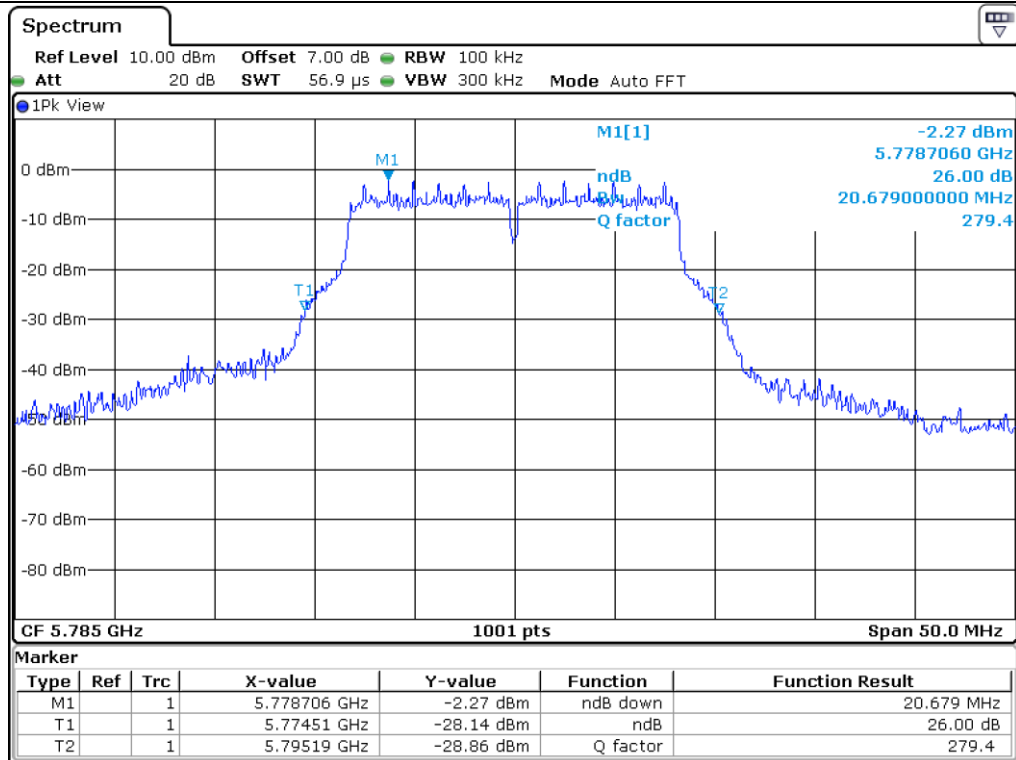

Middle Channel (5 785 MHz)

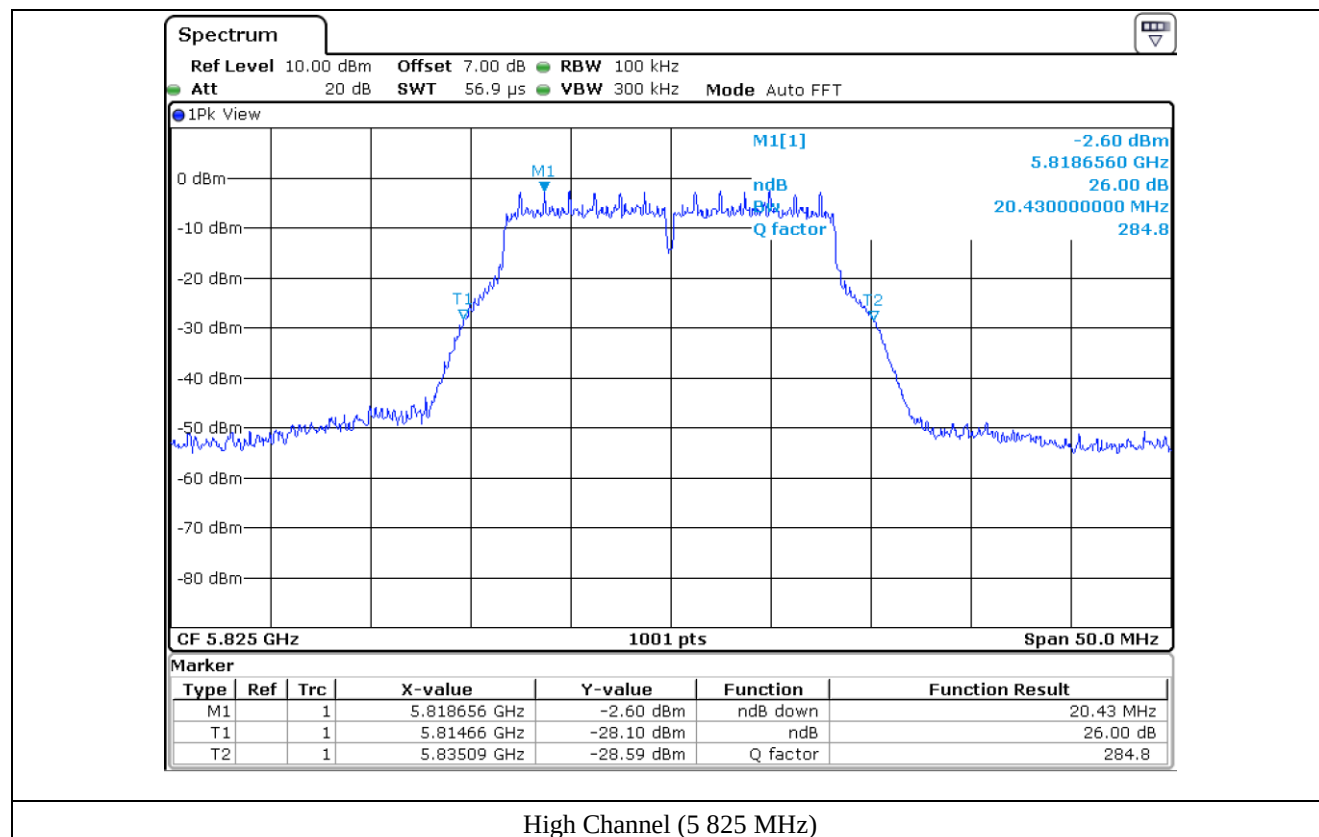

7.4.2 Test data for Antenna 1

-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.38
	Middle	5 220.00	20.63
	High	5 240.00	20.38
5 725 ~ 5 850	Low	5 745.00	20.38
	Middle	5 785.00	20.38
	High	5 825.00	20.38


Remark: See next page for measurement data.




Tested by: Ha-Ram Lee / Assistant Manager

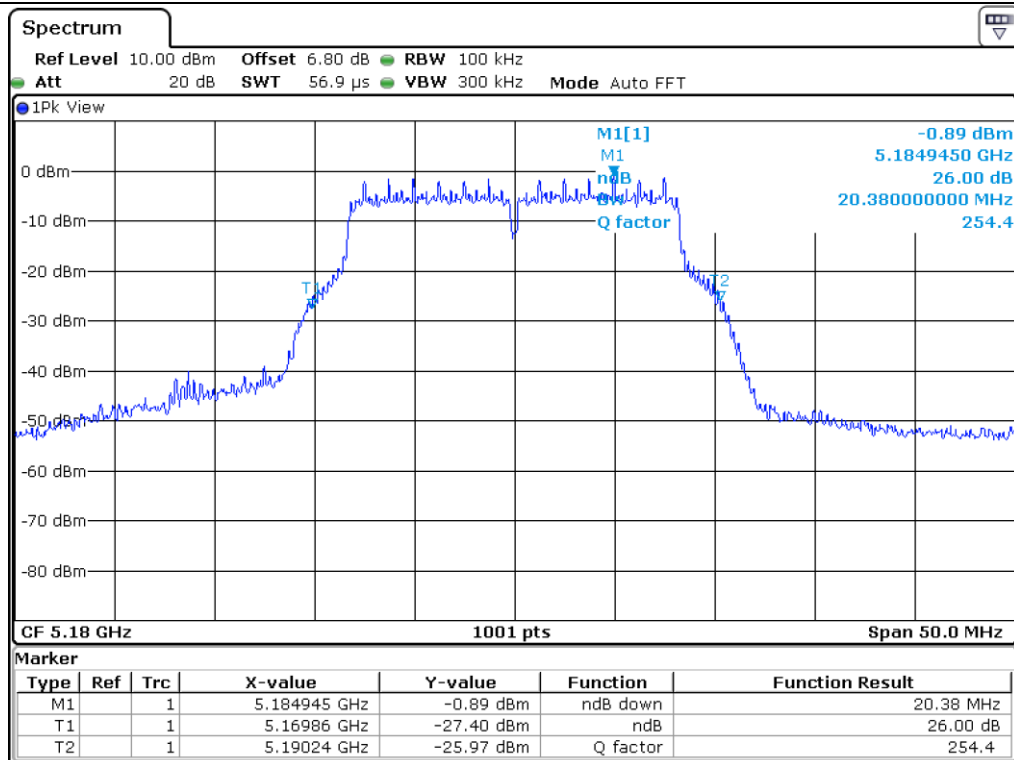


Low Channel (5 180 MHz)

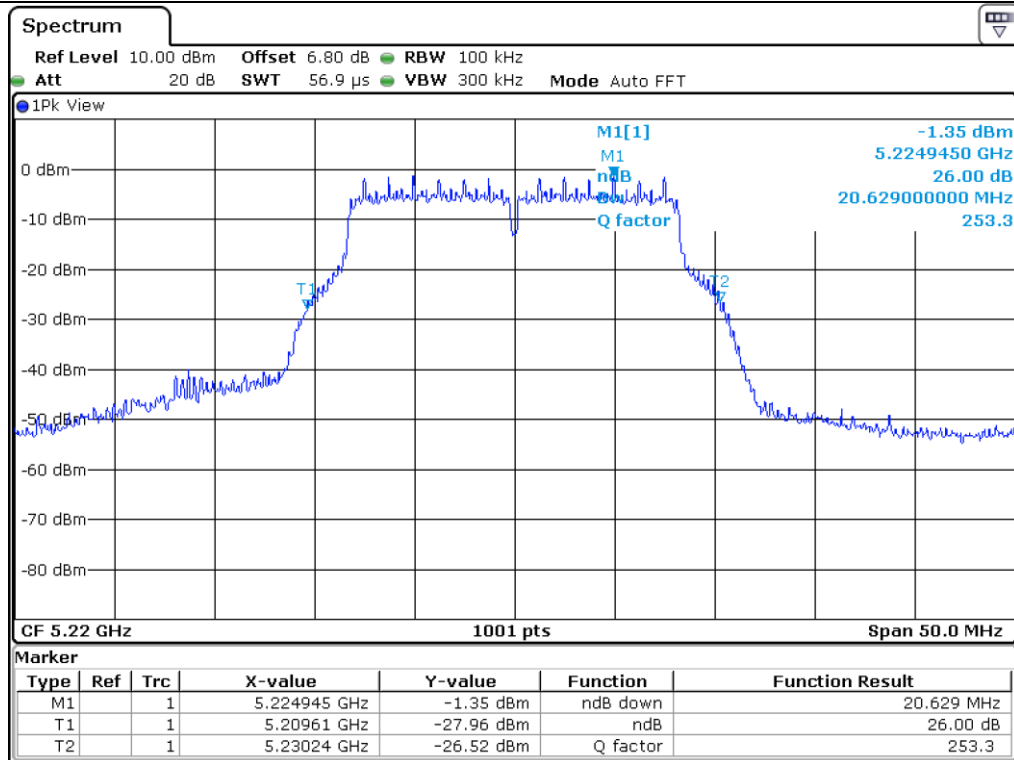


Middle Channel (5 220 MHz)

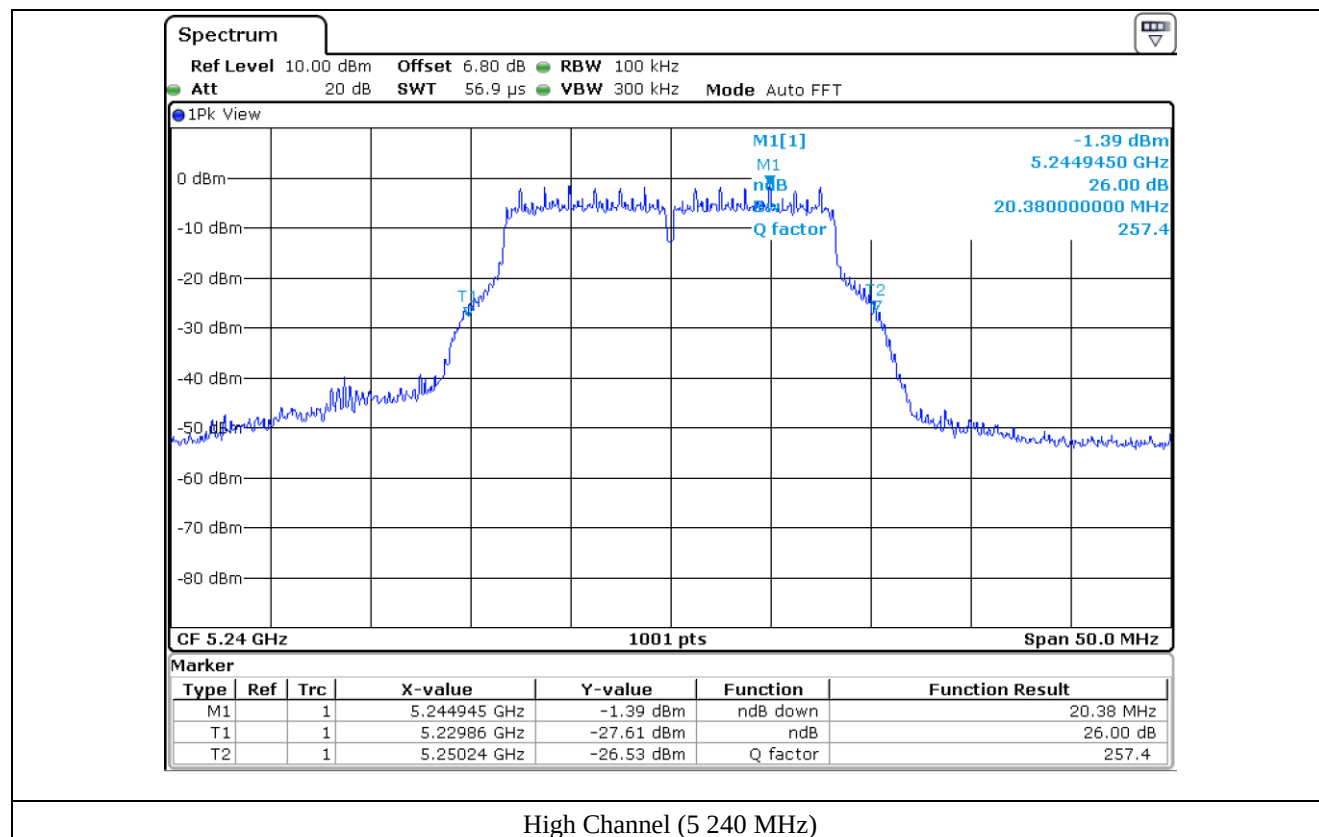


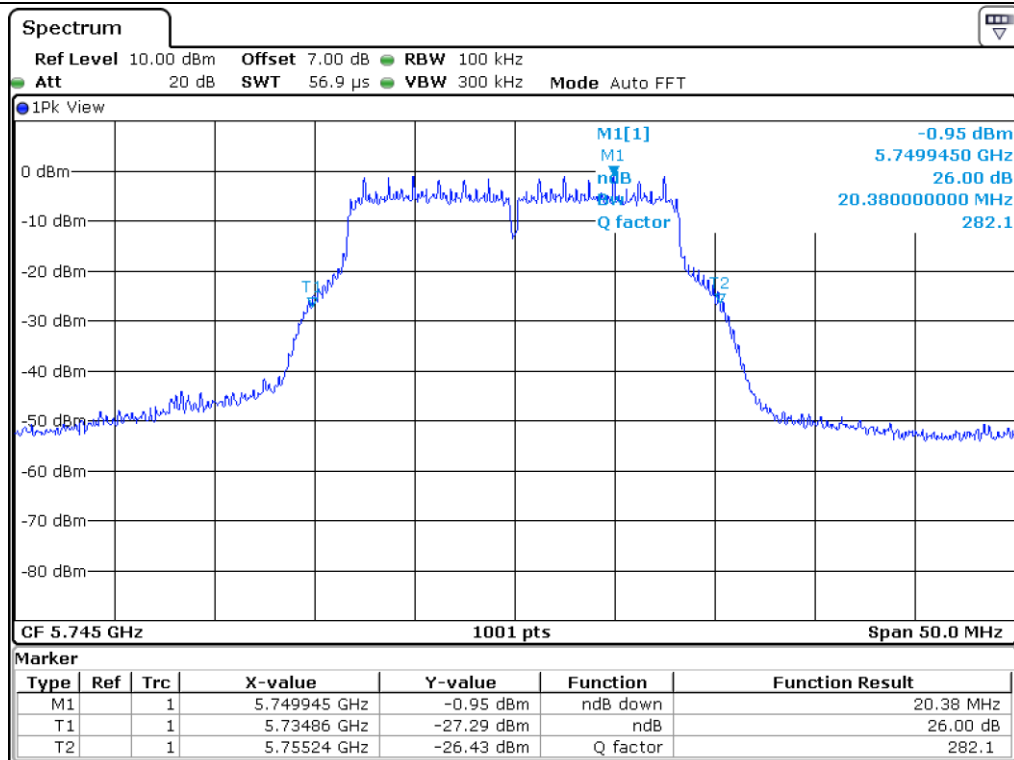

Low Channel (5 745 MHz)

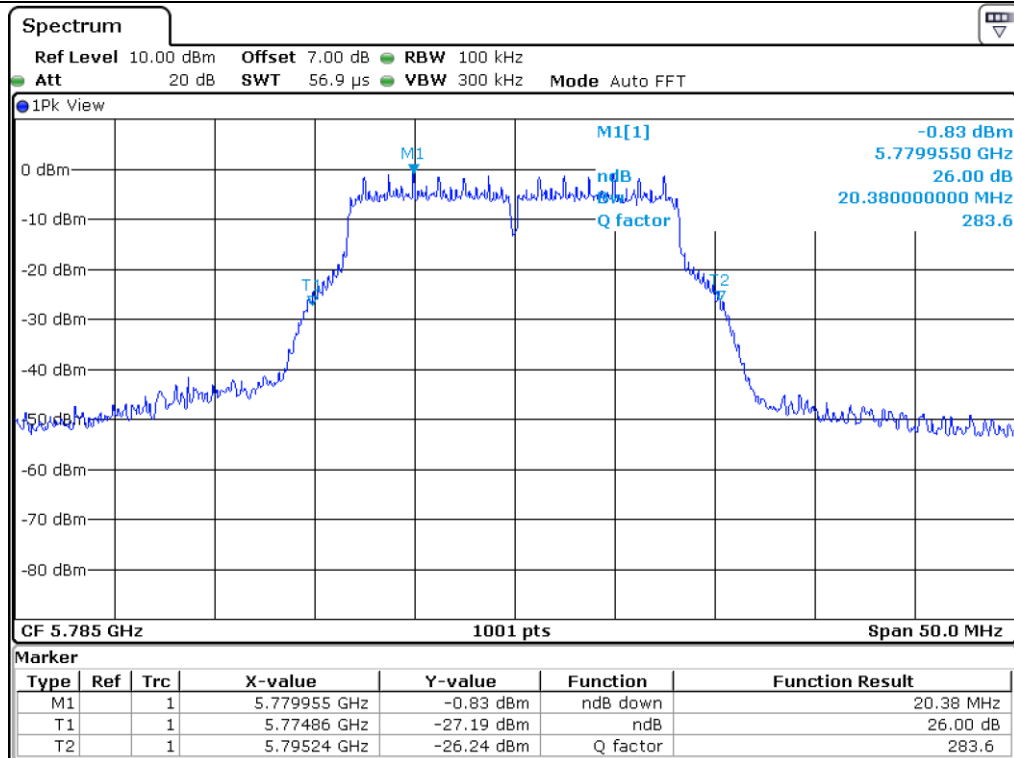

Middle Channel (5 785 MHz)

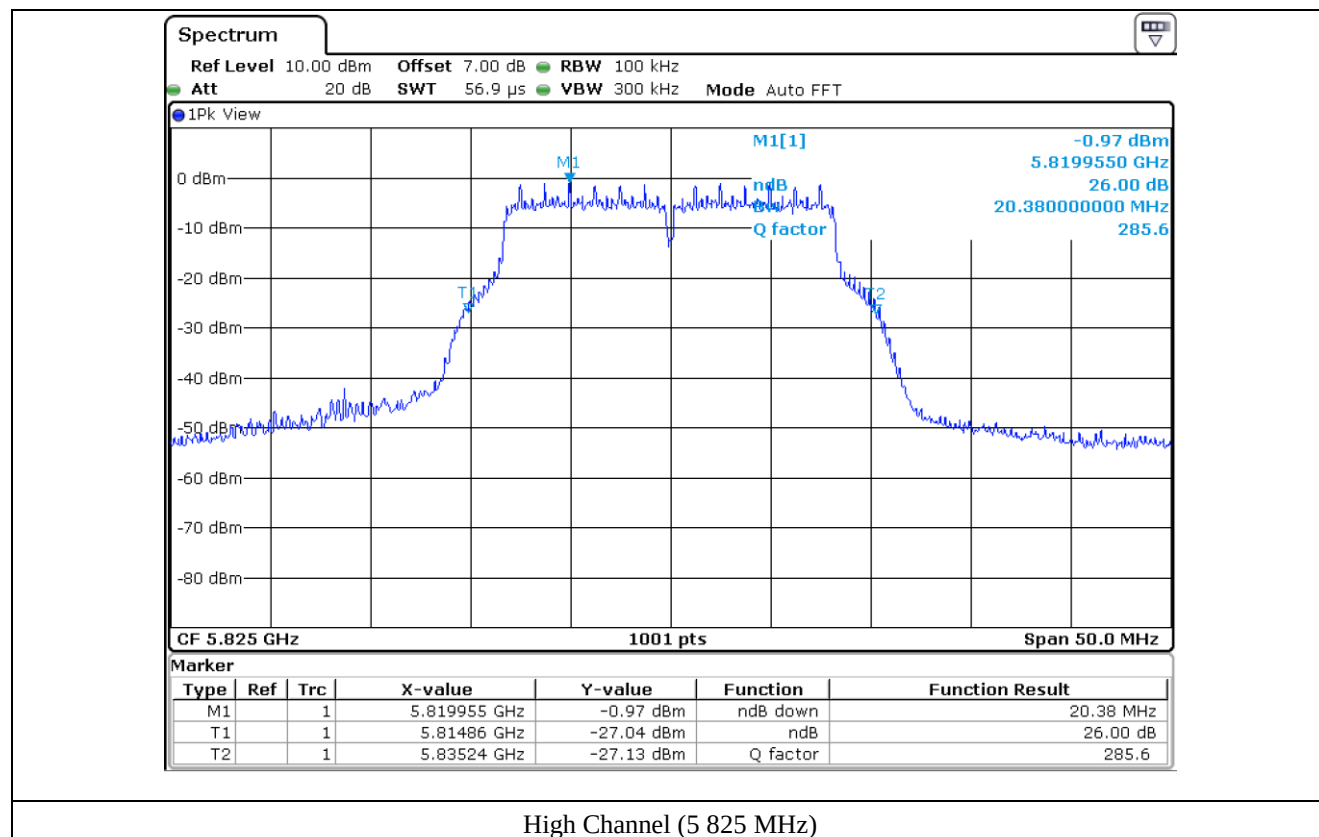

7.5 Test data for 802.11n (HT 20) WLAN Mode

7.5.1 Test data for Antenna 0

-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.03
	Middle	5 220.00	21.08
	High	5 240.00	20.93
5 725 ~ 5 850	Low	5 745.00	20.58
	Middle	5 785.00	20.48
	High	5 825.00	20.88


Remark: See next page for measurement data.




Tested by: Ha-Ram Lee / Assistant Manager

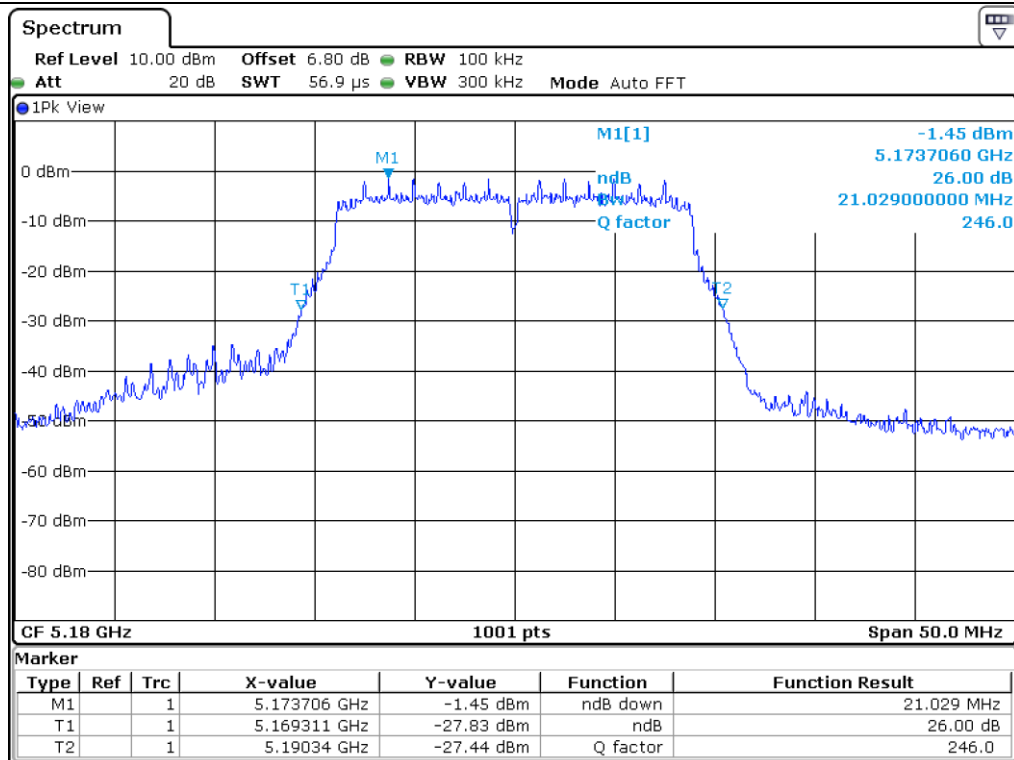


Low Channel (5 180 MHz)

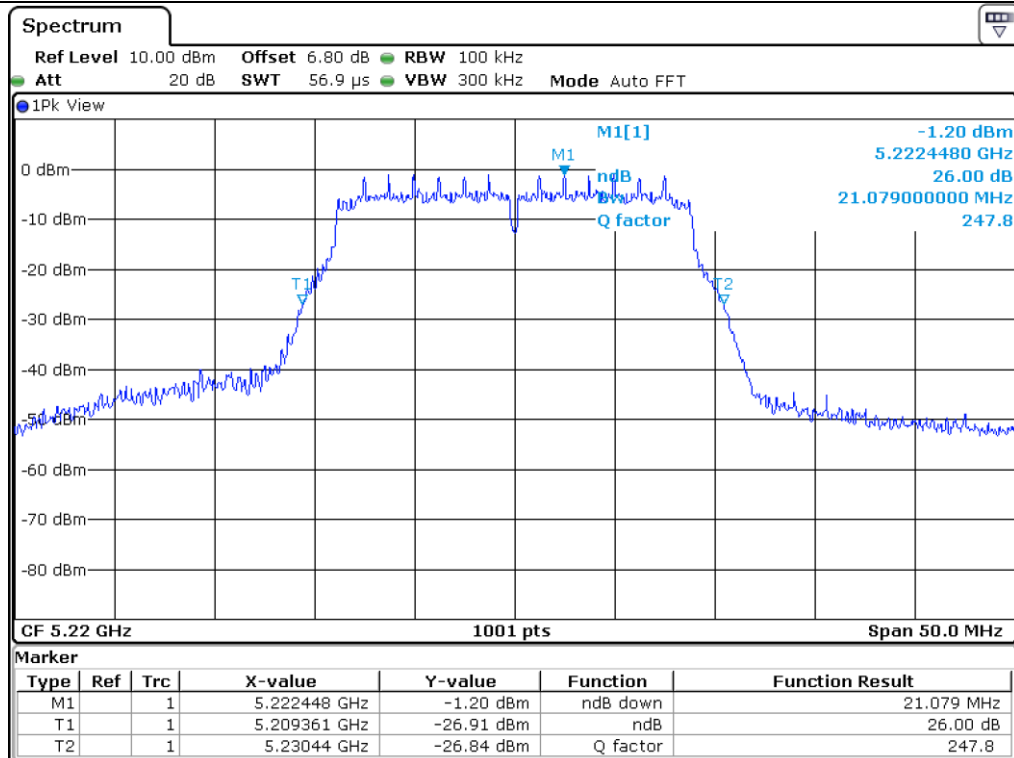


Middle Channel (5 220 MHz)

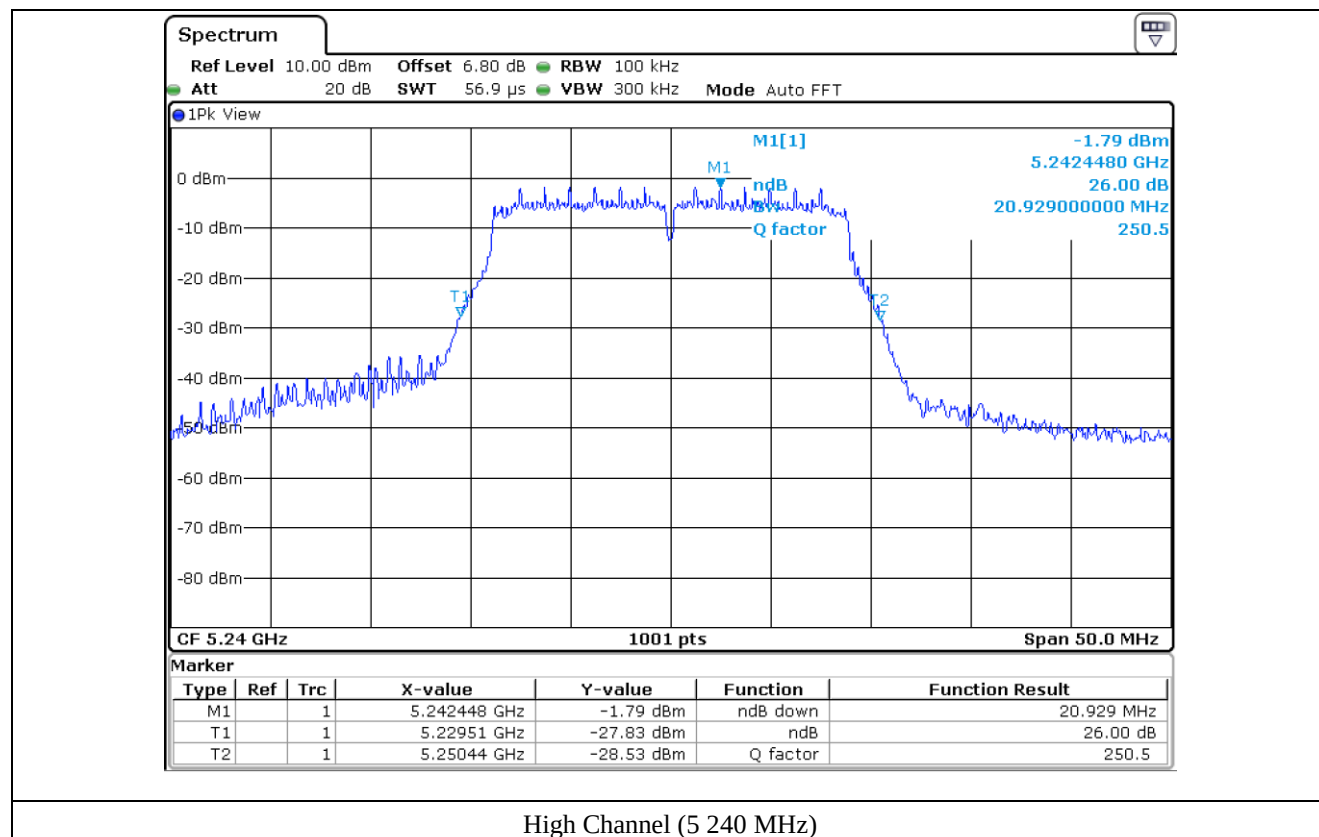


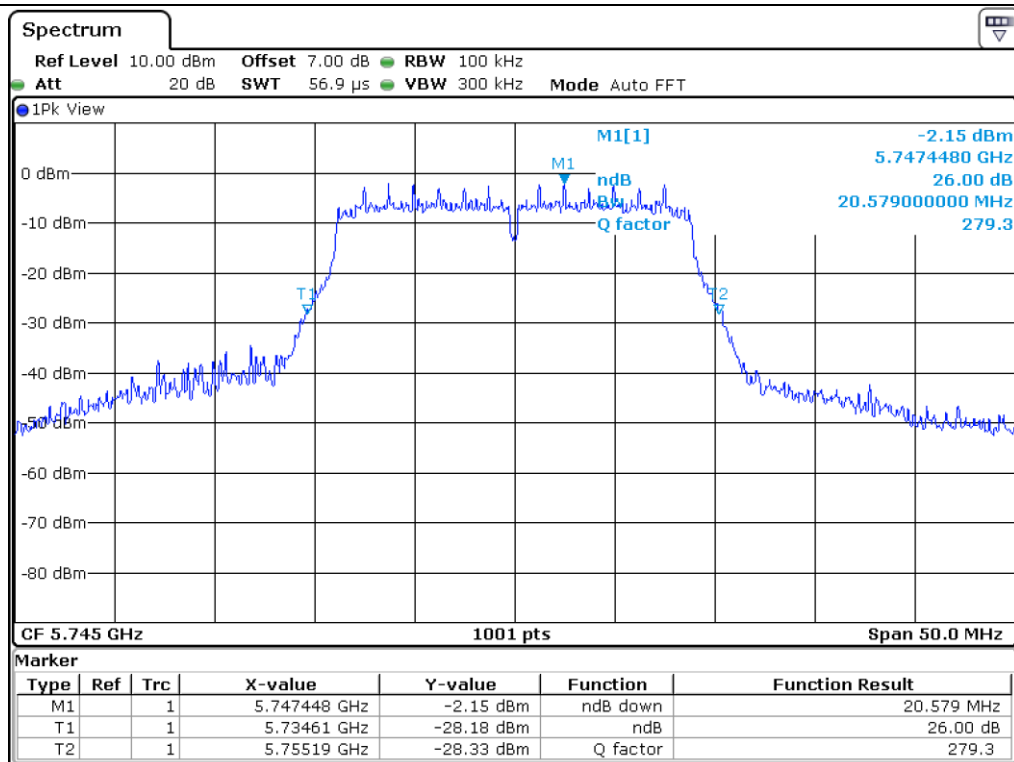

Low Channel (5 745 MHz)

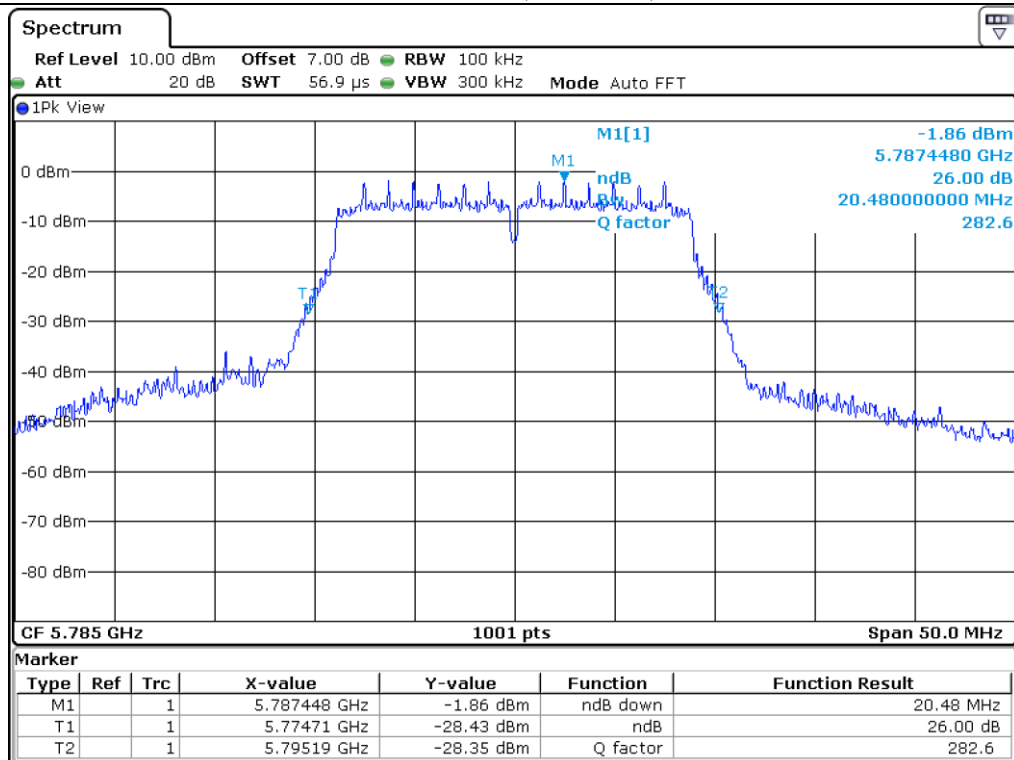

Middle Channel (5 785 MHz)

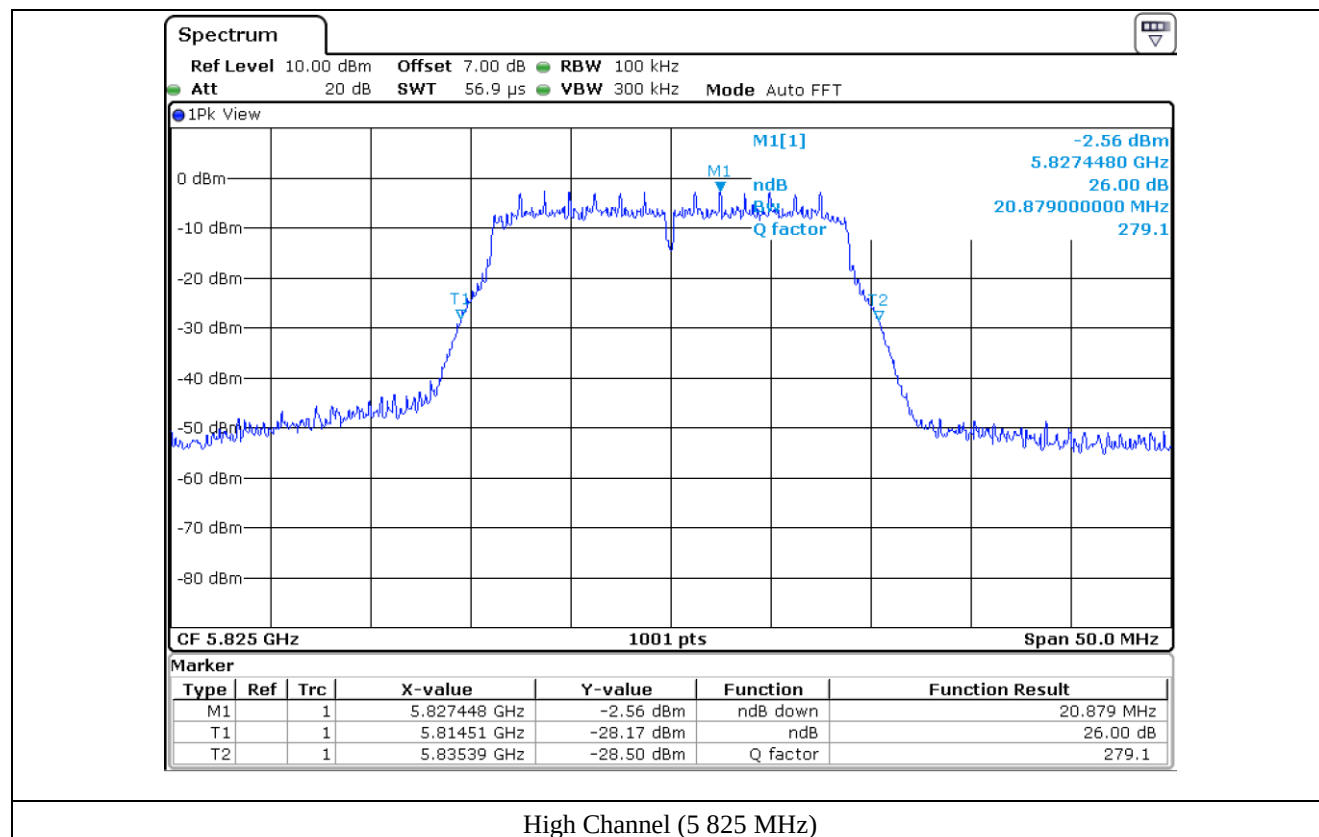

7.5.2 Test data for Antenna 1

-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5180.00	21.03
	Middle	5220.00	21.03
	High	5240.00	20.93
5 725 ~ 5 850	Low	5745.00	21.03
	Middle	5785.00	20.88
	High	5825.00	20.98


Remark: See next page for measurement data.




Tested by: Ha-Ram Lee / Assistant Manager

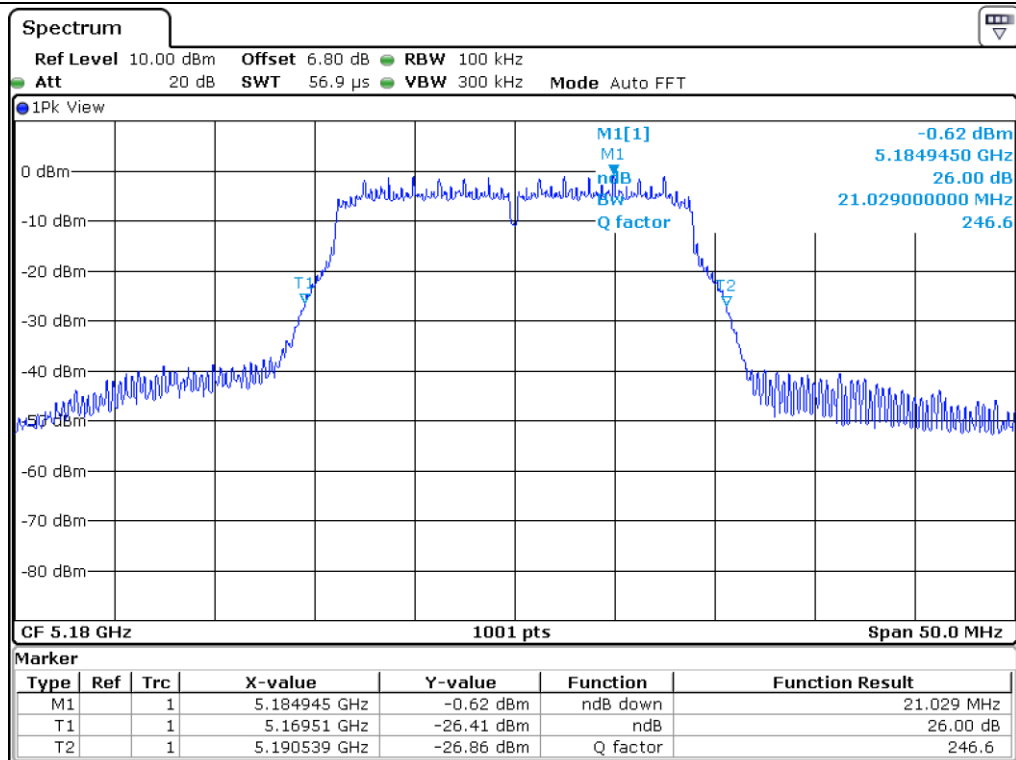


Low Channel (5 180 MHz)

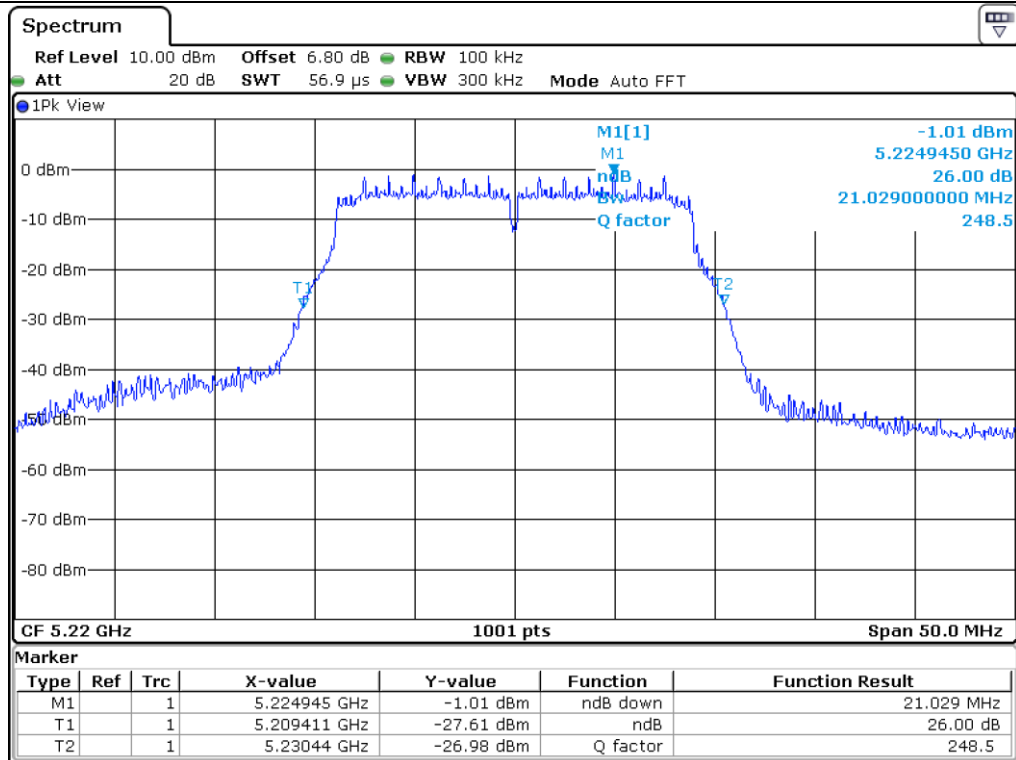


Middle Channel (5 220 MHz)

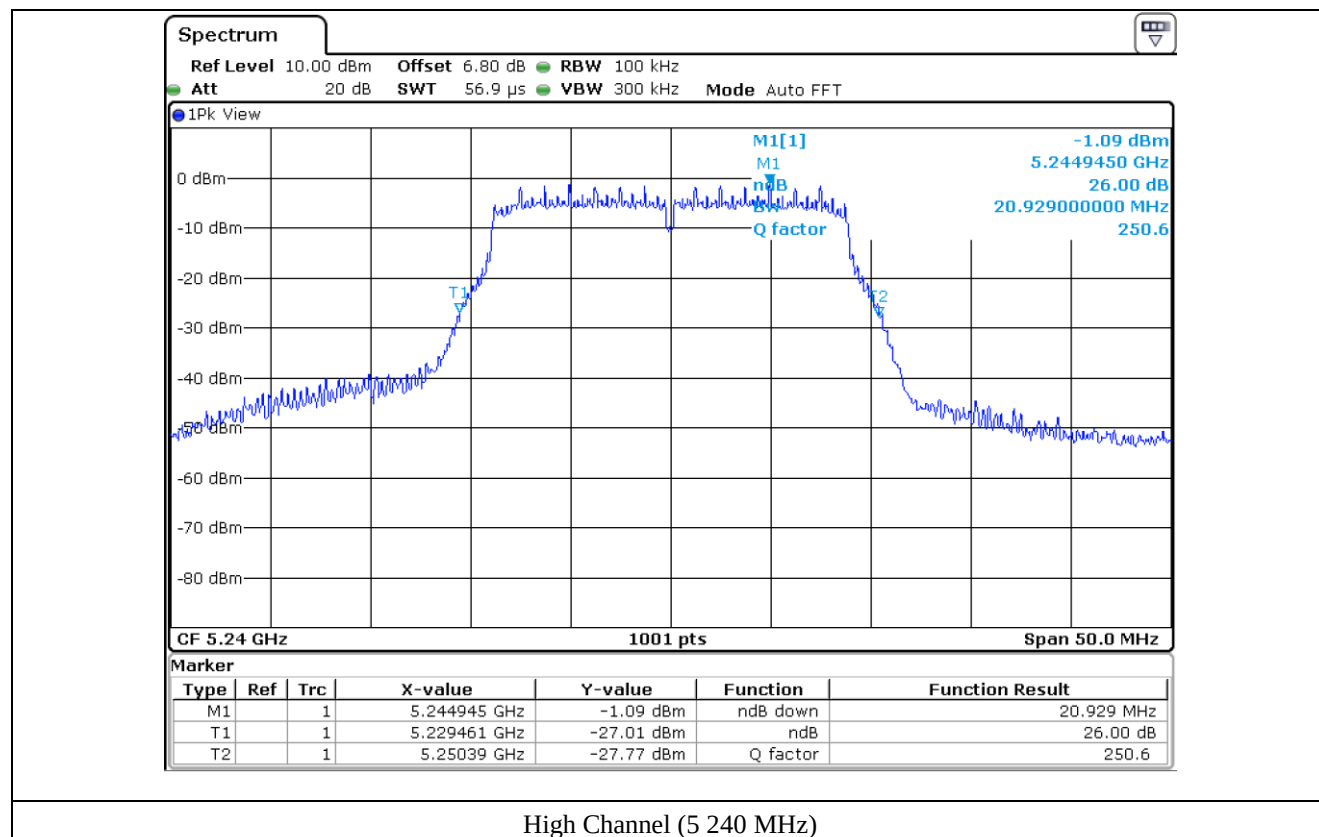


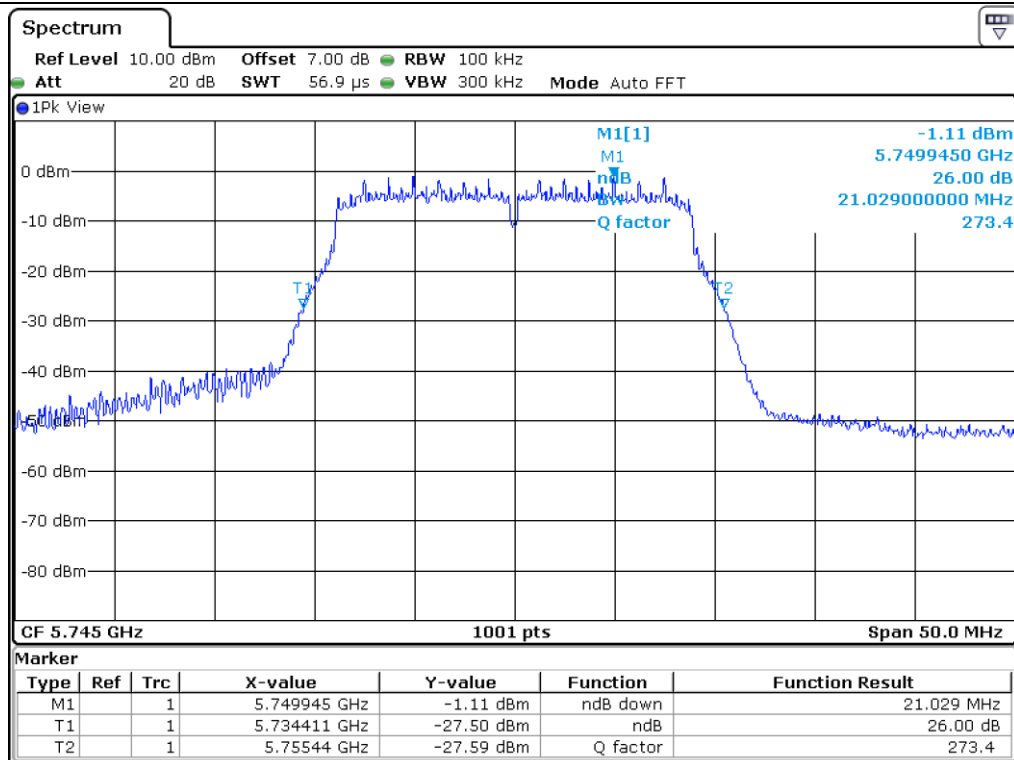

Low Channel (5 745 MHz)

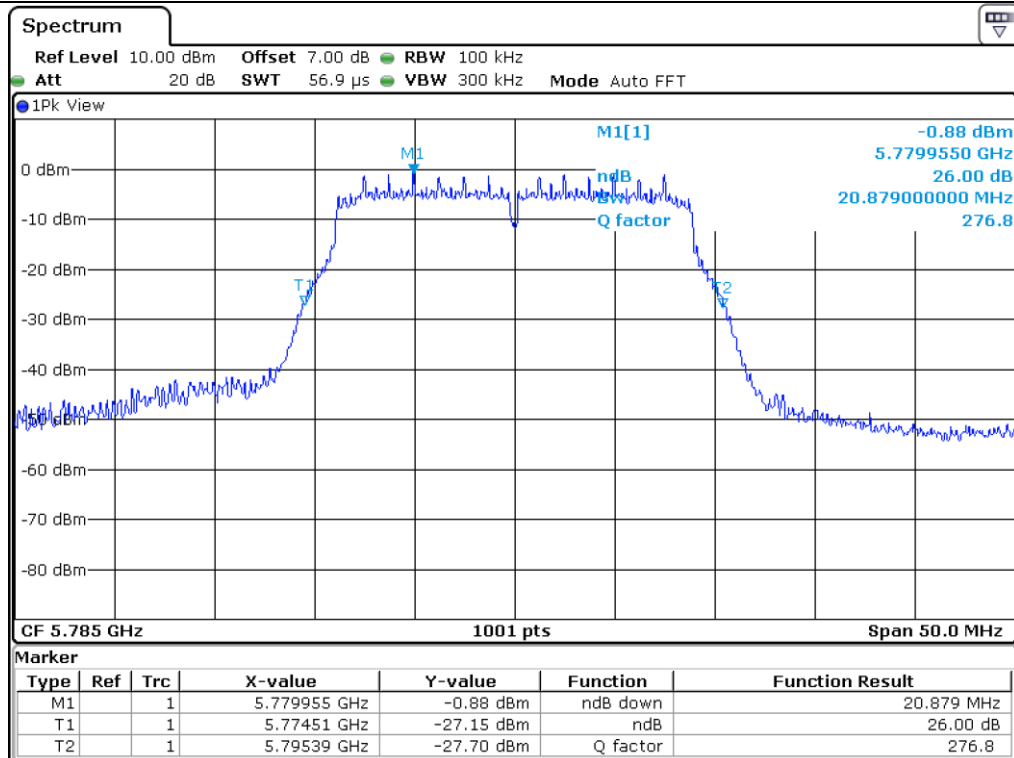

Middle Channel (5 785 MHz)

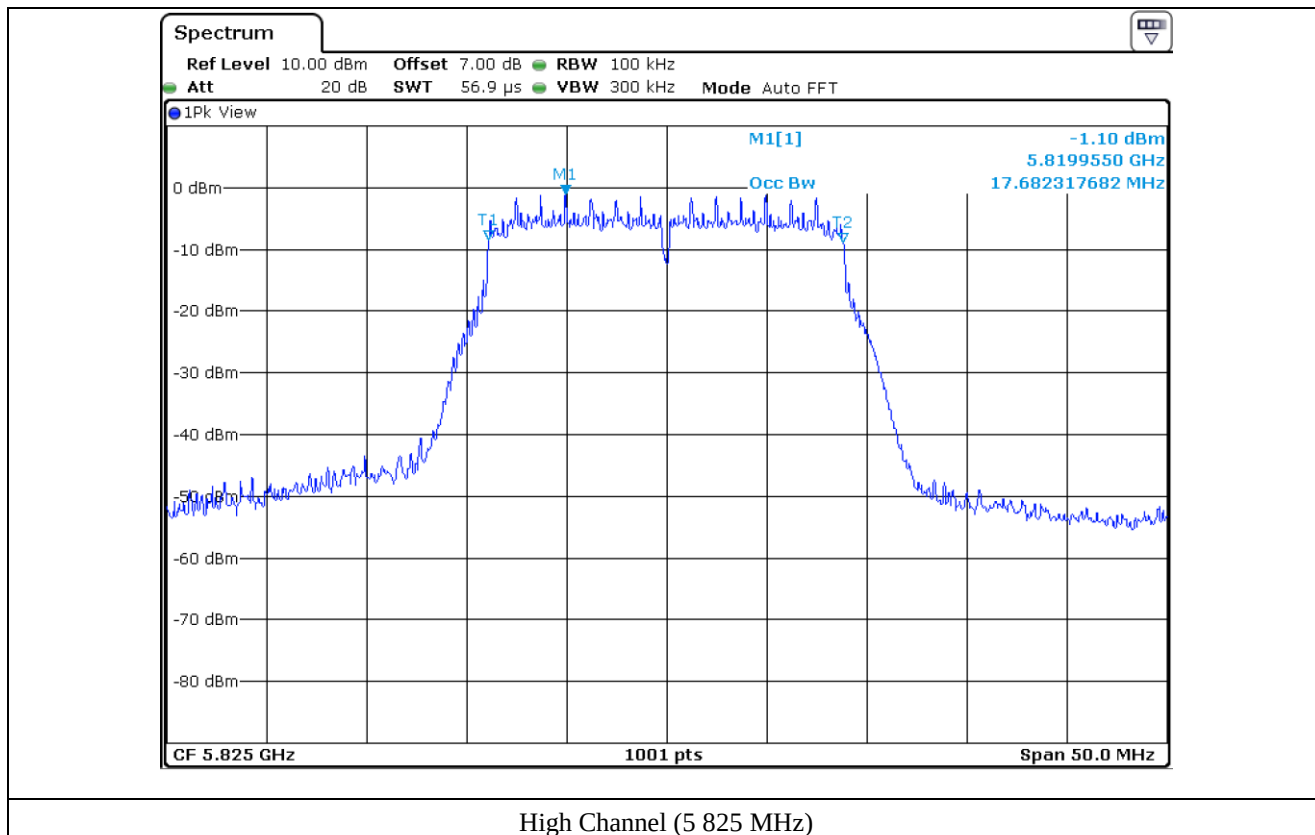

7.6 Test data for 802.11n (HT 40) WLAN Mode

7.6.1 Test data for Antenna 0

-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	38.96
	High	5 230.00	38.66
5 725 ~ 5 850	Low	5 755.00	38.66
	High	5 795.00	38.86


Remark: See next page for measurement data.




Tested by: Ha-Ram Lee / Assistant Manager

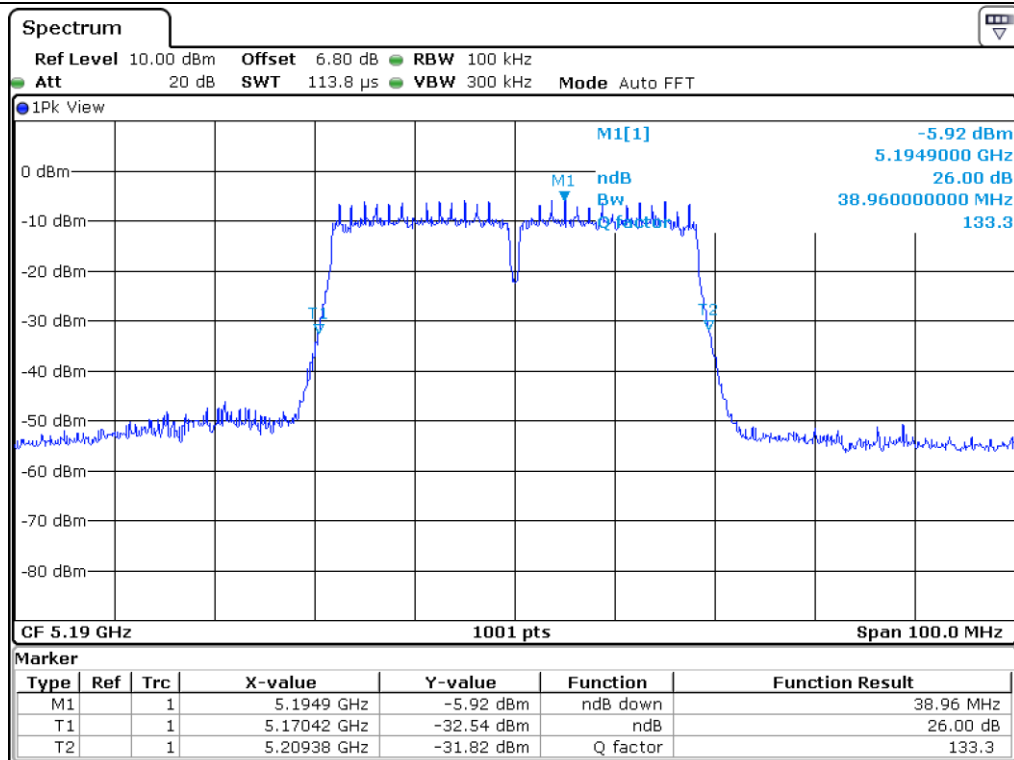


Low Channel (5 190 MHz)

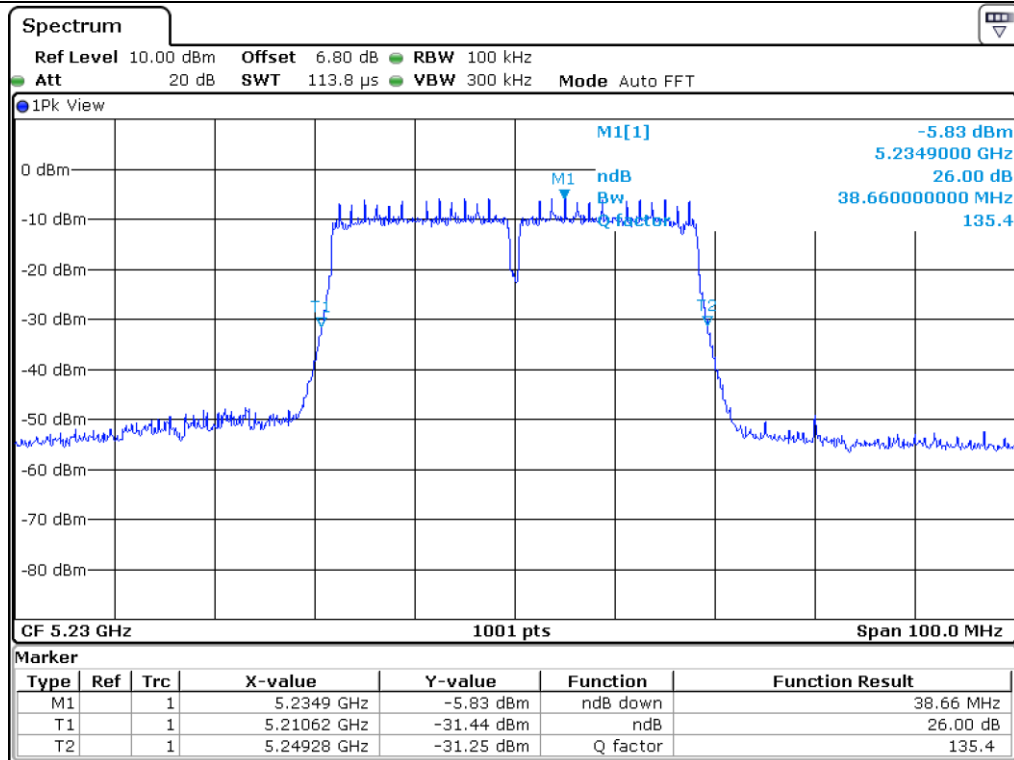

High Channel (5 230 MHz)

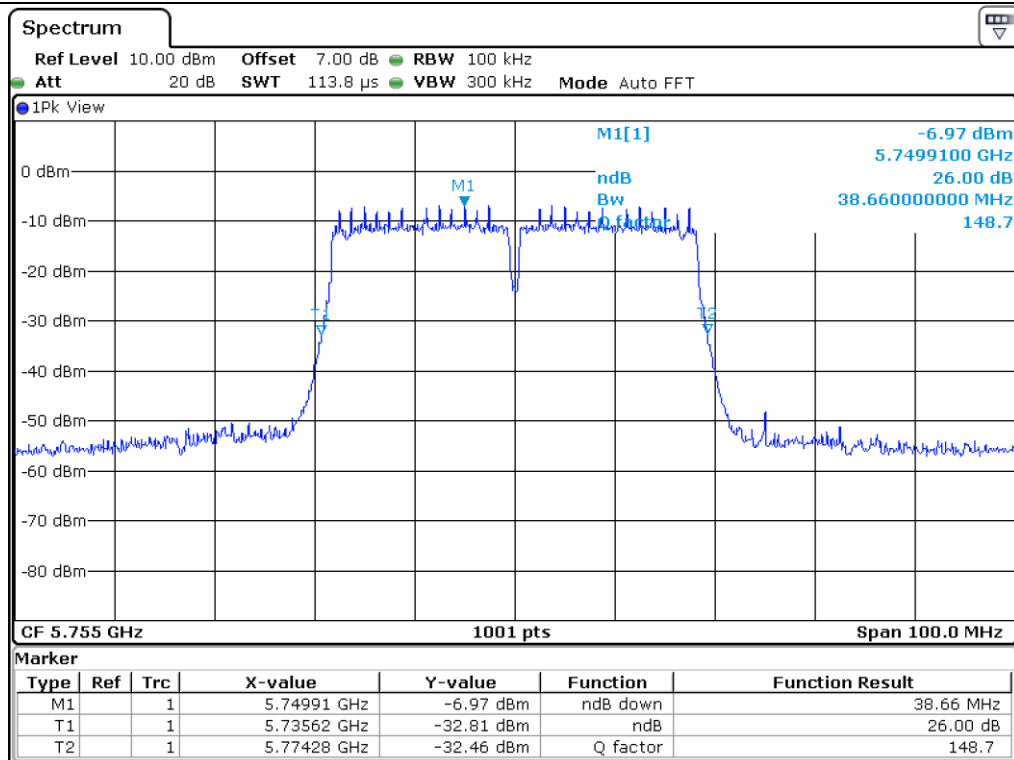

Low Channel (5 755 MHz)

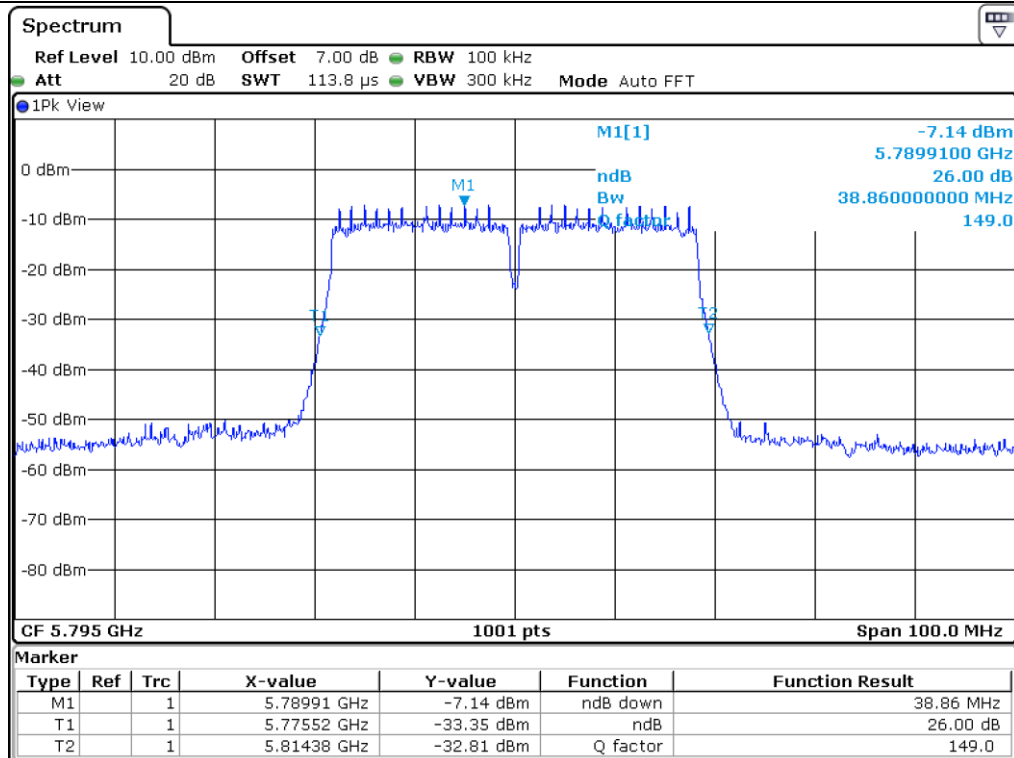

High Channel (5 795 MHz)

7.6.2 Test data for Antenna 1

-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	38.66
	High	5 230.00	38.76
5 725 ~ 5 850	Low	5 755.00	38.46
	High	5 795.00	38.76


Remark: See next page for measurement data.




Tested by: Ha-Ram Lee / Assistant Manager

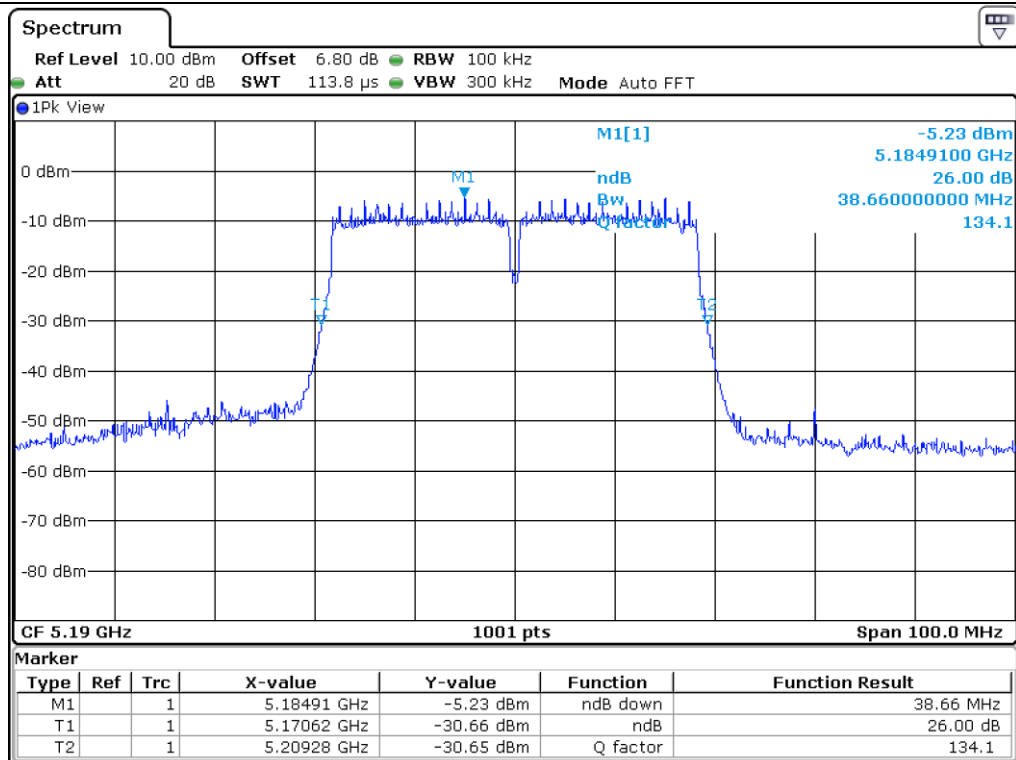


Low Channel (5 190 MHz)

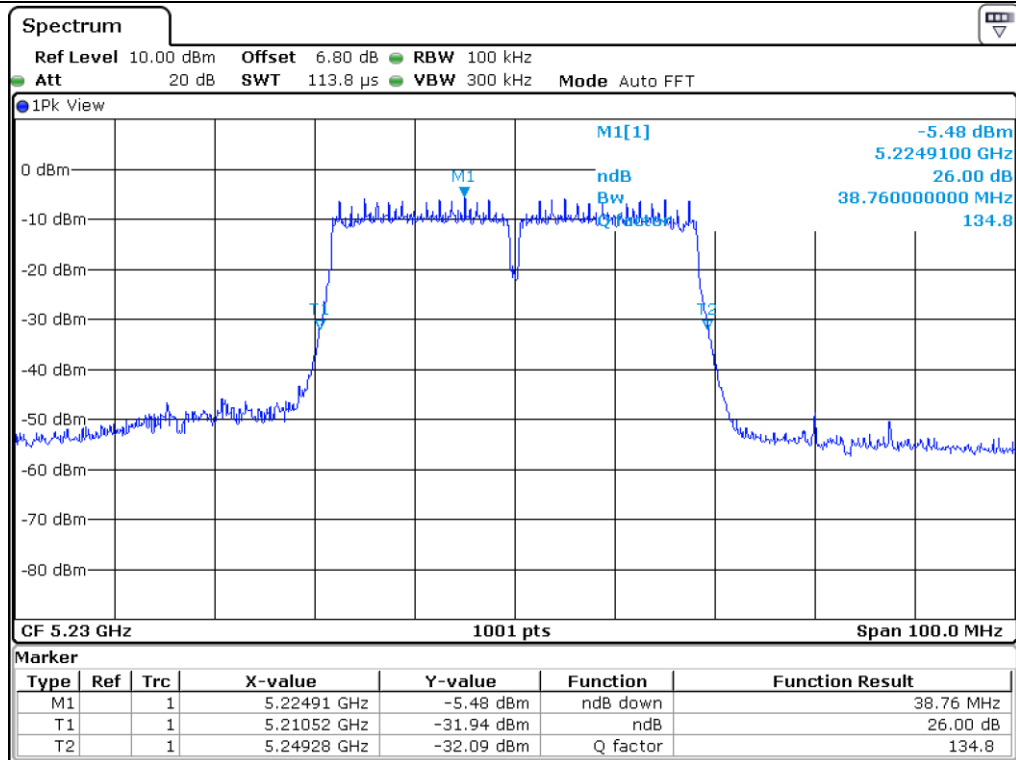

High Channel (5 230 MHz)

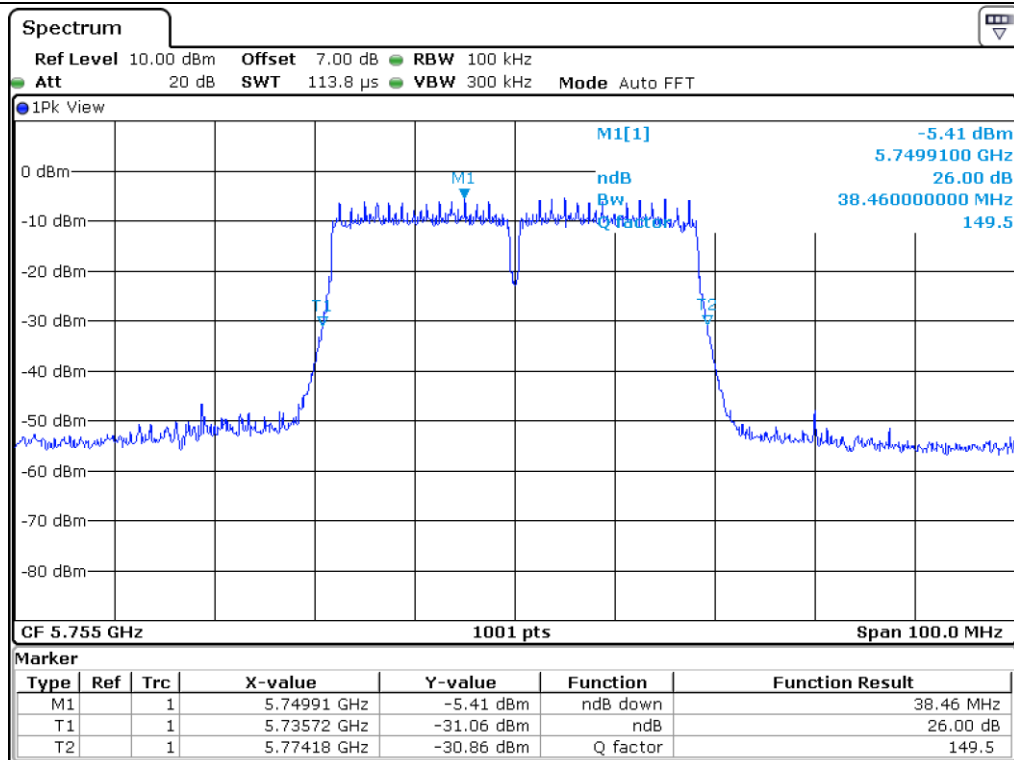

Low Channel (5 755 MHz)

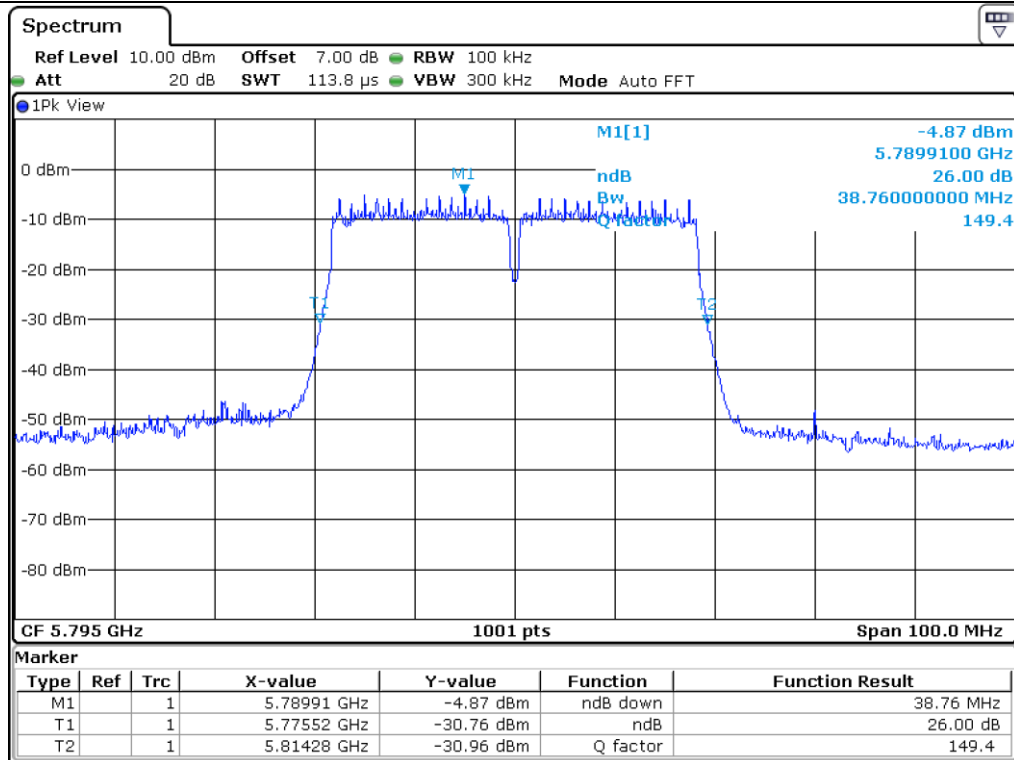

High Channel (5 795 MHz)

7.7 Test data for 802.11ac (HT 80) WLAN Mode

7.7.1 Test data for Antenna 0

-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 210.00	79.12
5 725 ~ 5 850	Low	5 775.00	78.92


Remark: See next page for measurement data.



Tested by: Ha-Ram Lee / Assistant Manager

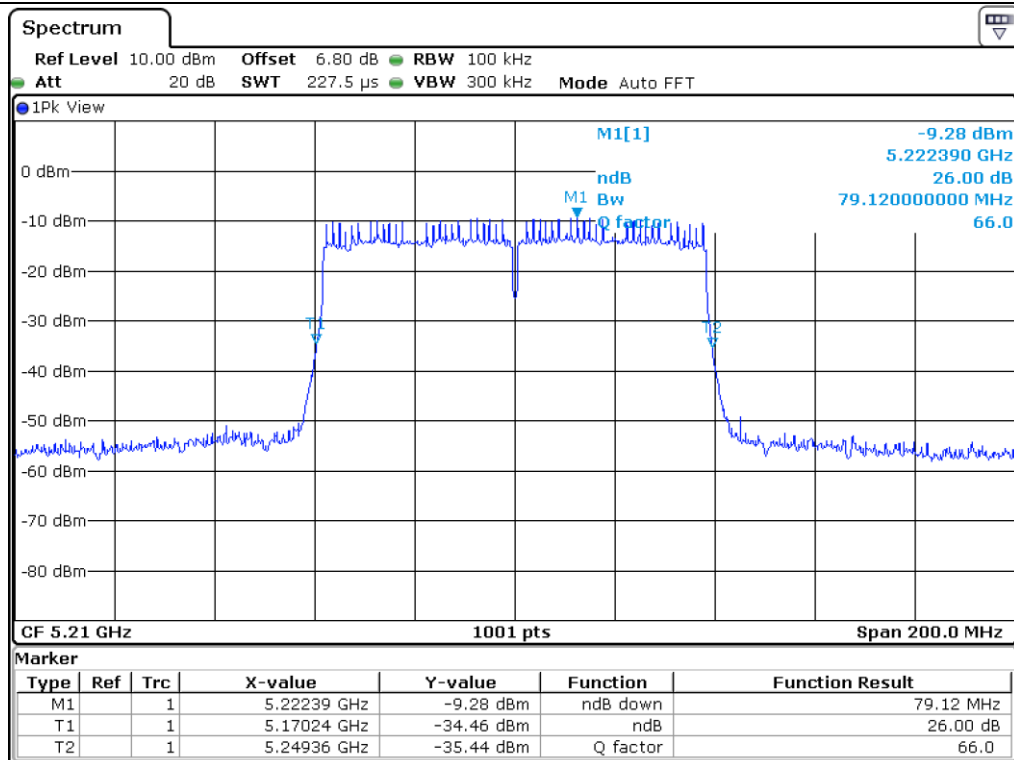

Low Channel (5 210 MHz)

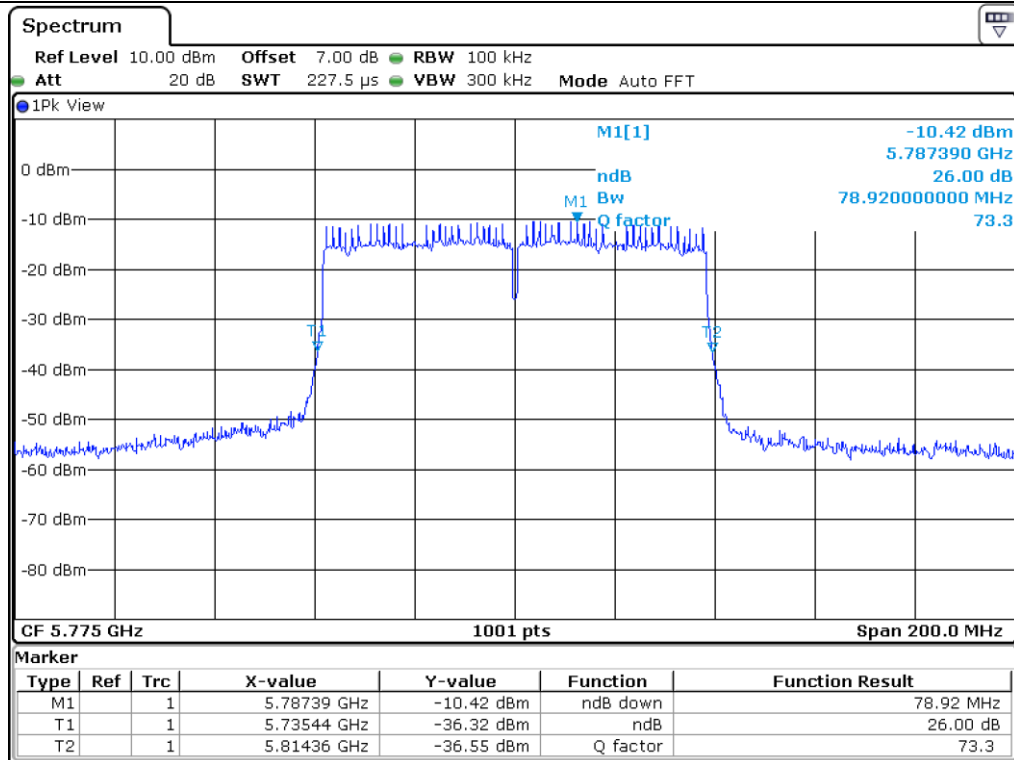

Low Channel (5 775 MHz)

7.7.2 Test data for Antenna 1

-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5210.00	78.92
5 725 ~ 5 850	Low	5775.00	78.52


Remark: See next page for measurement data.



Tested by: Ha-Ram Lee / Assistant Manager

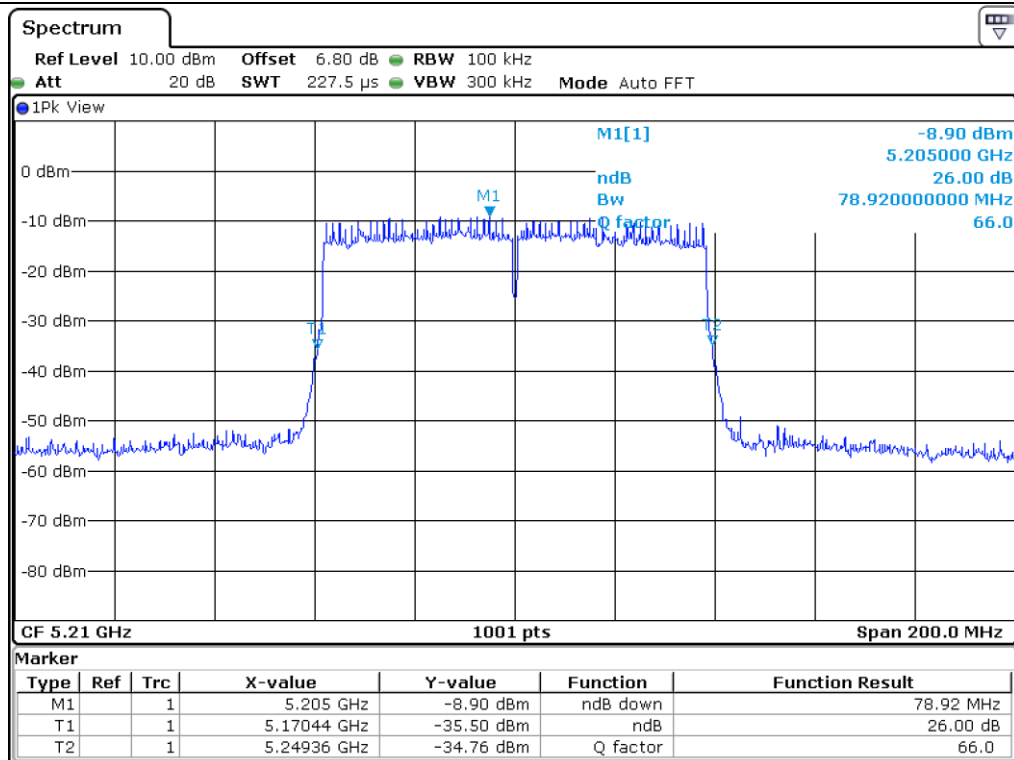

Low Channel (5 210 MHz)

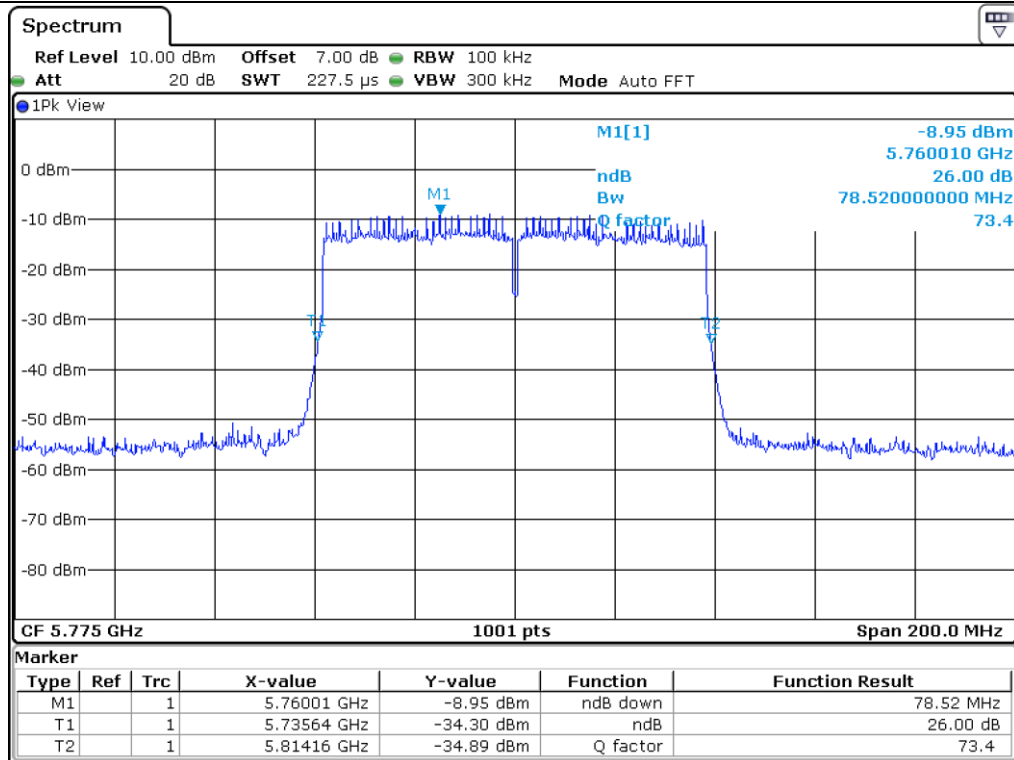

Low Channel (5 775 MHz)

8. 6 dB BANDWIDTH


8.1 Operating environment

Temperature : 24 °C

Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

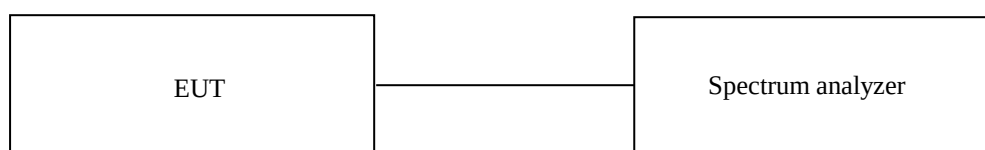

8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11a WLAN Mode

8.4.1 Test data for Antenna 0


-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.43
	Middle	5 785.00	16.38
	High	5 825.00	16.43


Handwritten signature

Tested by: Ha-Ram Lee / Assistant Manager

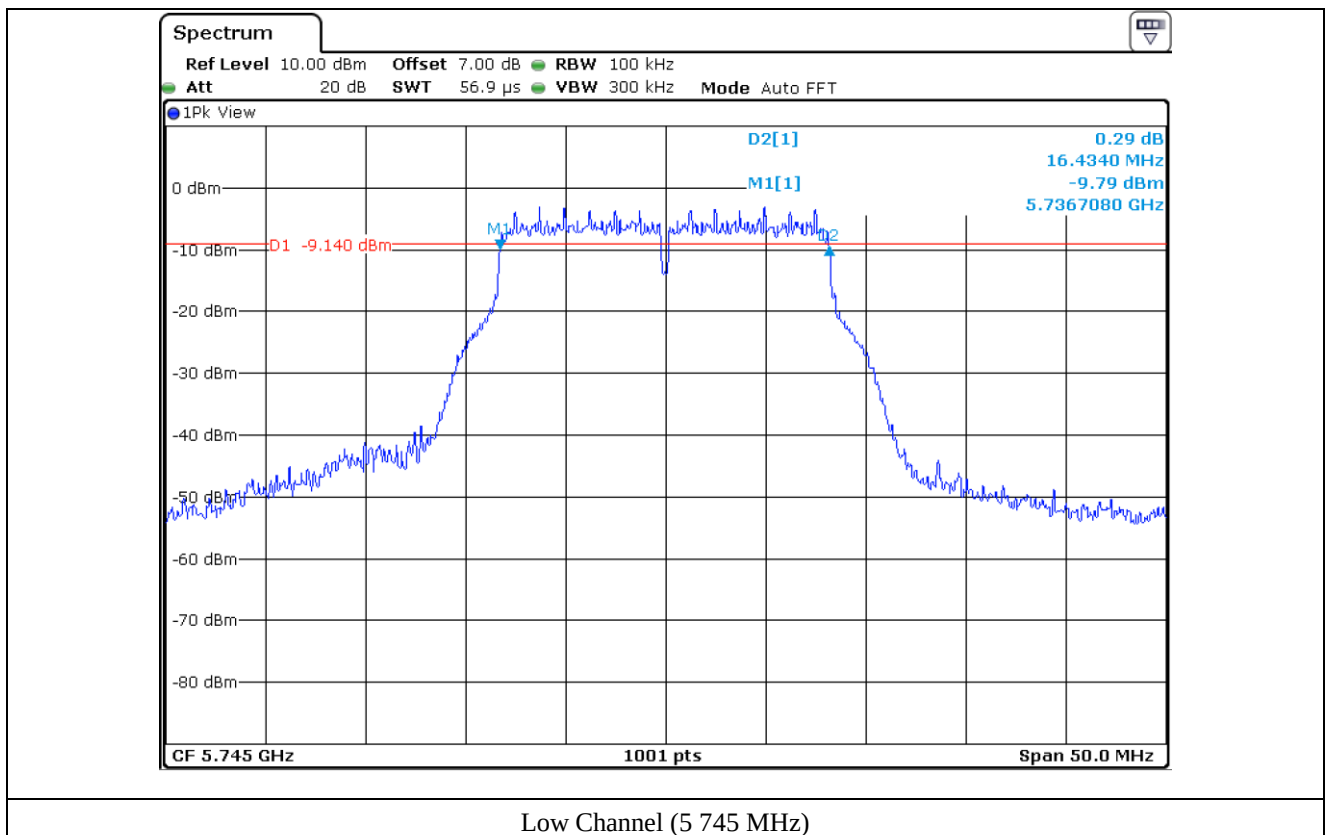

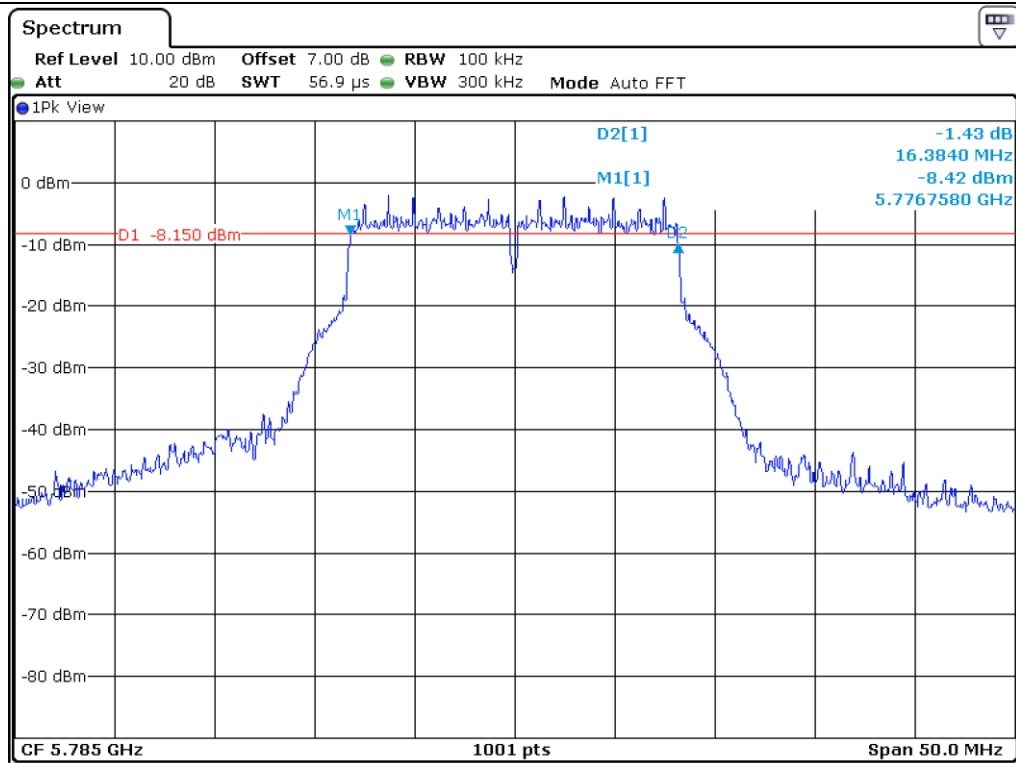

Middle Channel (5 785 MHz)

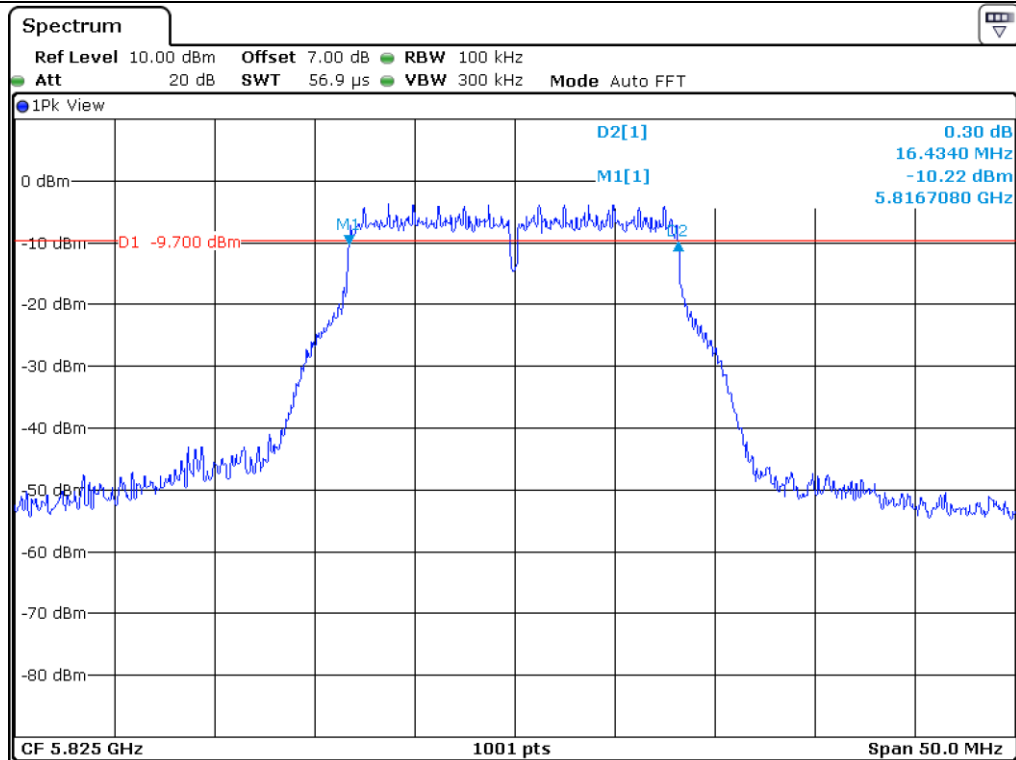

High Channel (5 825 MHz)

8.4.2 Test data for Antenna 1


-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.38
	Middle	5 785.00	16.38
	High	5 825.00	16.38




Tested by: Ha-Ram Lee / Assistant Manager

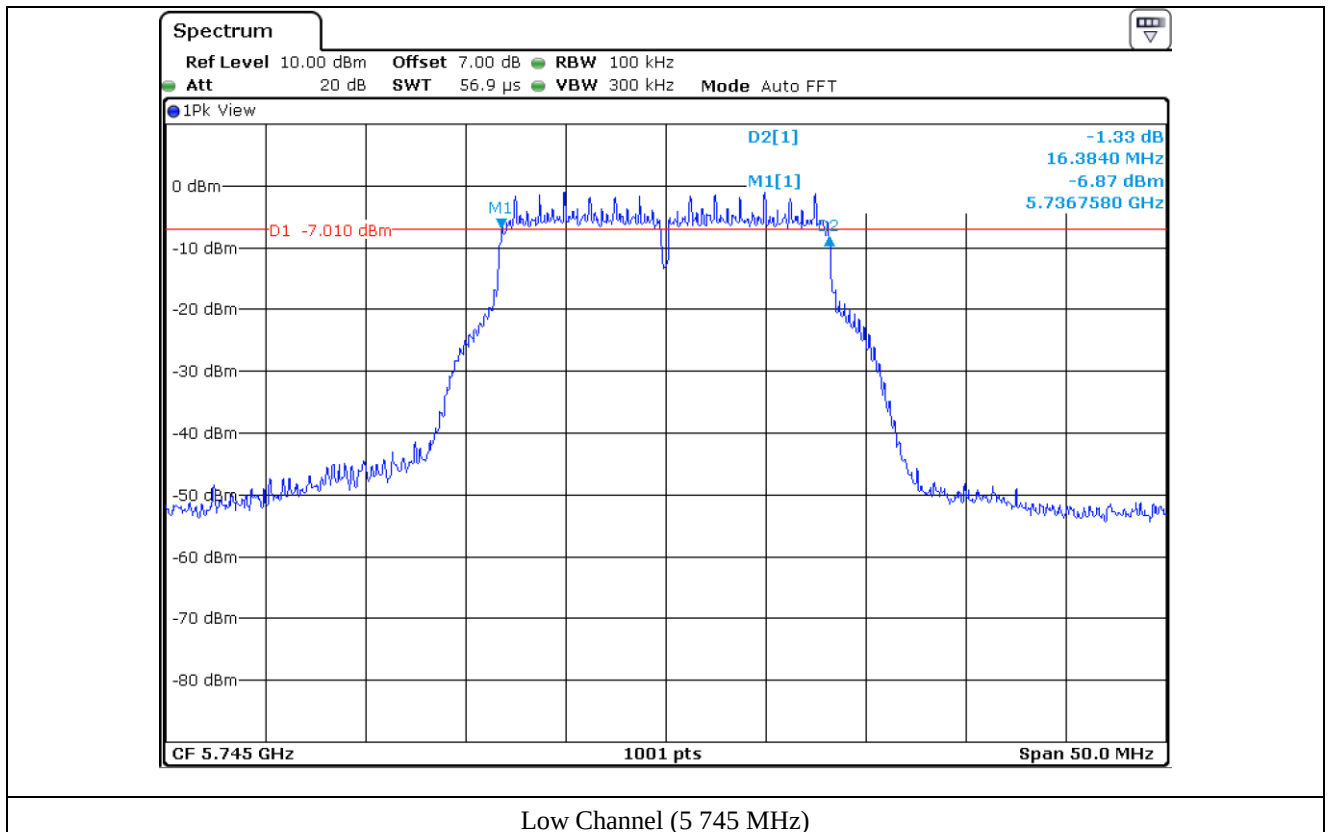

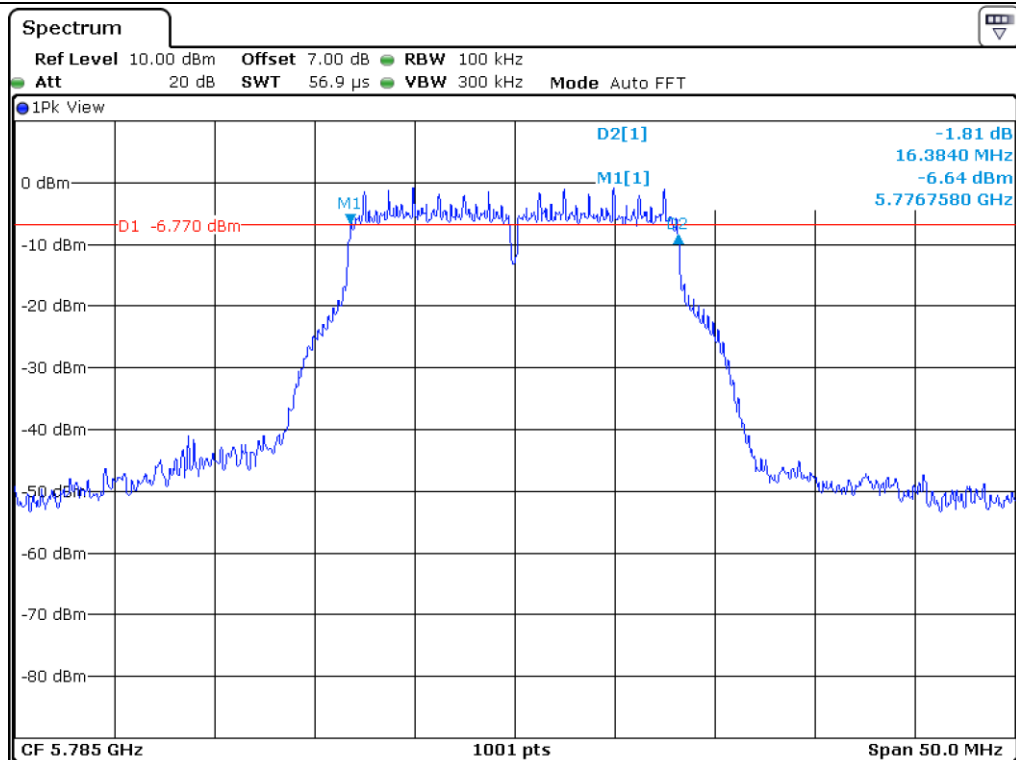

Middle Channel (5 785 MHz)

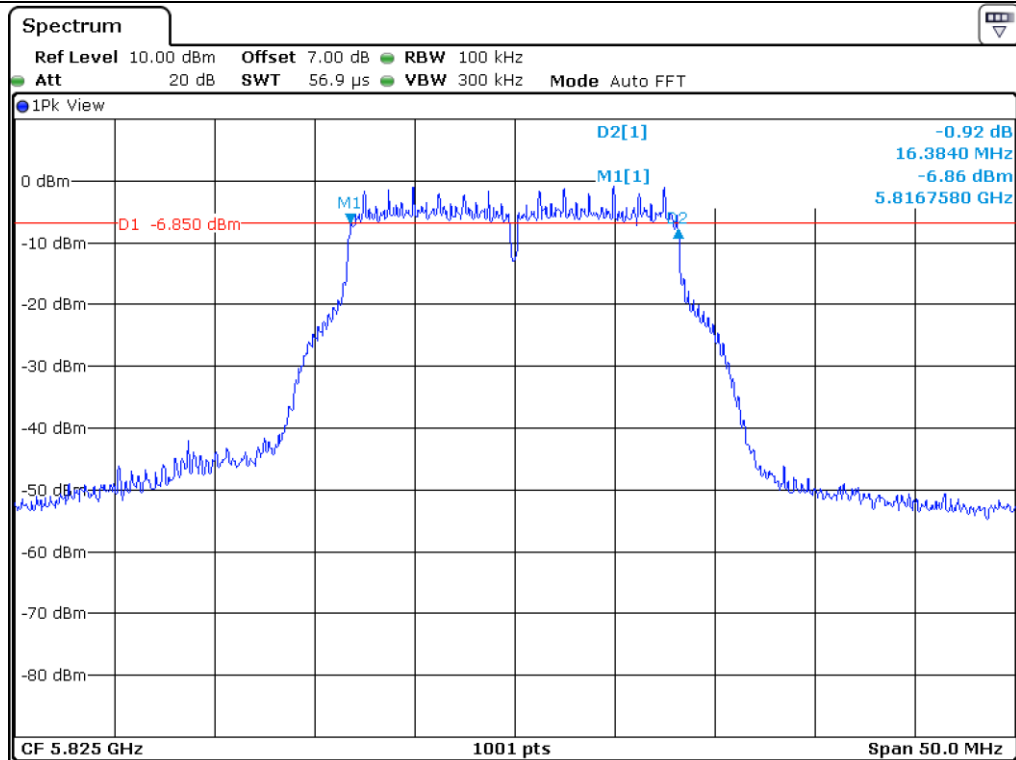

High Channel (5 825 MHz)

8.5 Test data for 802.11n (HT20) WLAN Mode

8.5.1 Test data for Antenna 0


-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.63
	Middle	5 785.00	17.63
	High	5 825.00	17.68




Tested by: Ha-Ram Lee / Assistant Manager

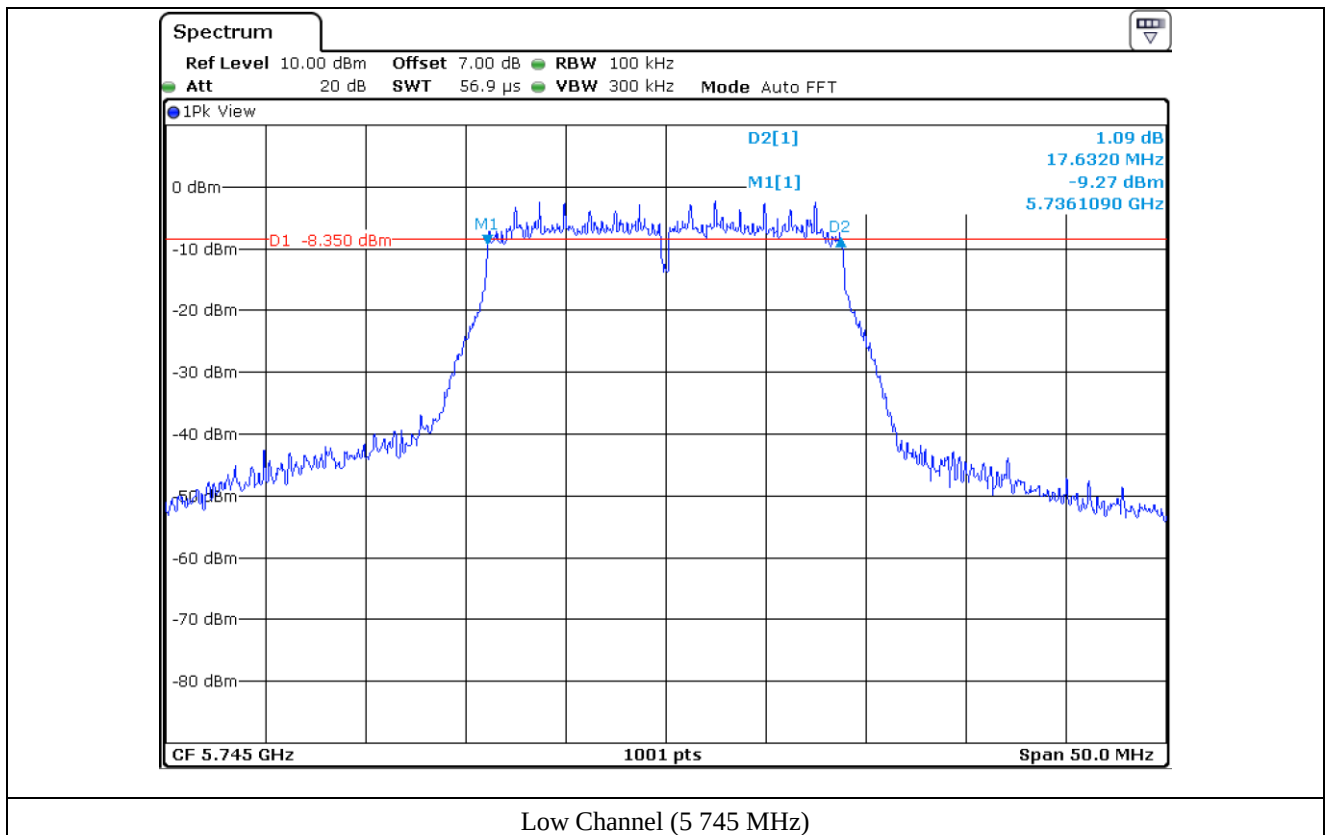

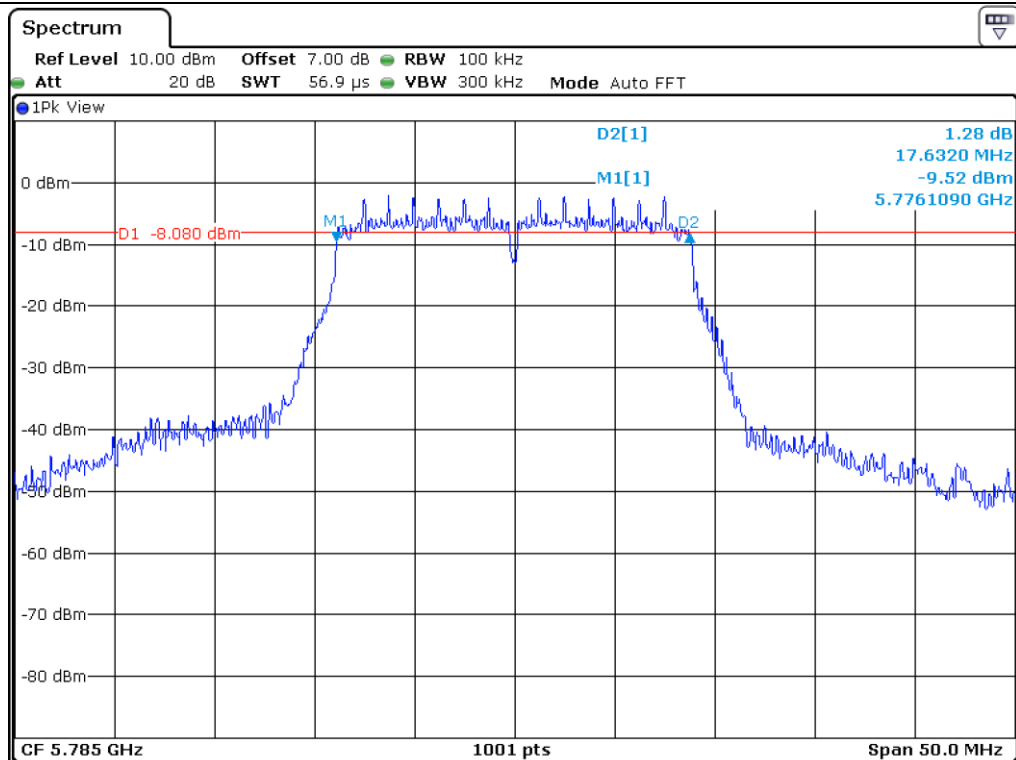

Middle Channel (5 785 MHz)

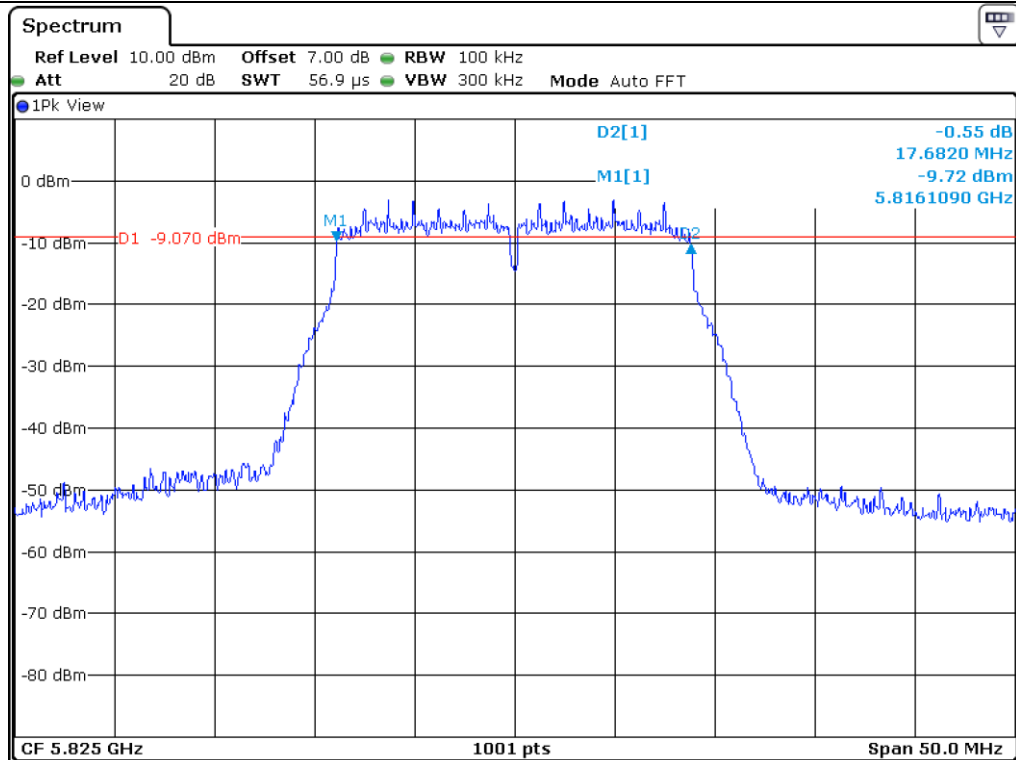

High Channel (5 825 MHz)

8.5.2 Test data for Antenna 1


-. Test Date : February 28, 2019


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.63
	Middle	5 785.00	17.68
	High	5 825.00	17.68


Handwritten signature

Tested by: Ha-Ram Lee / Assistant Manager

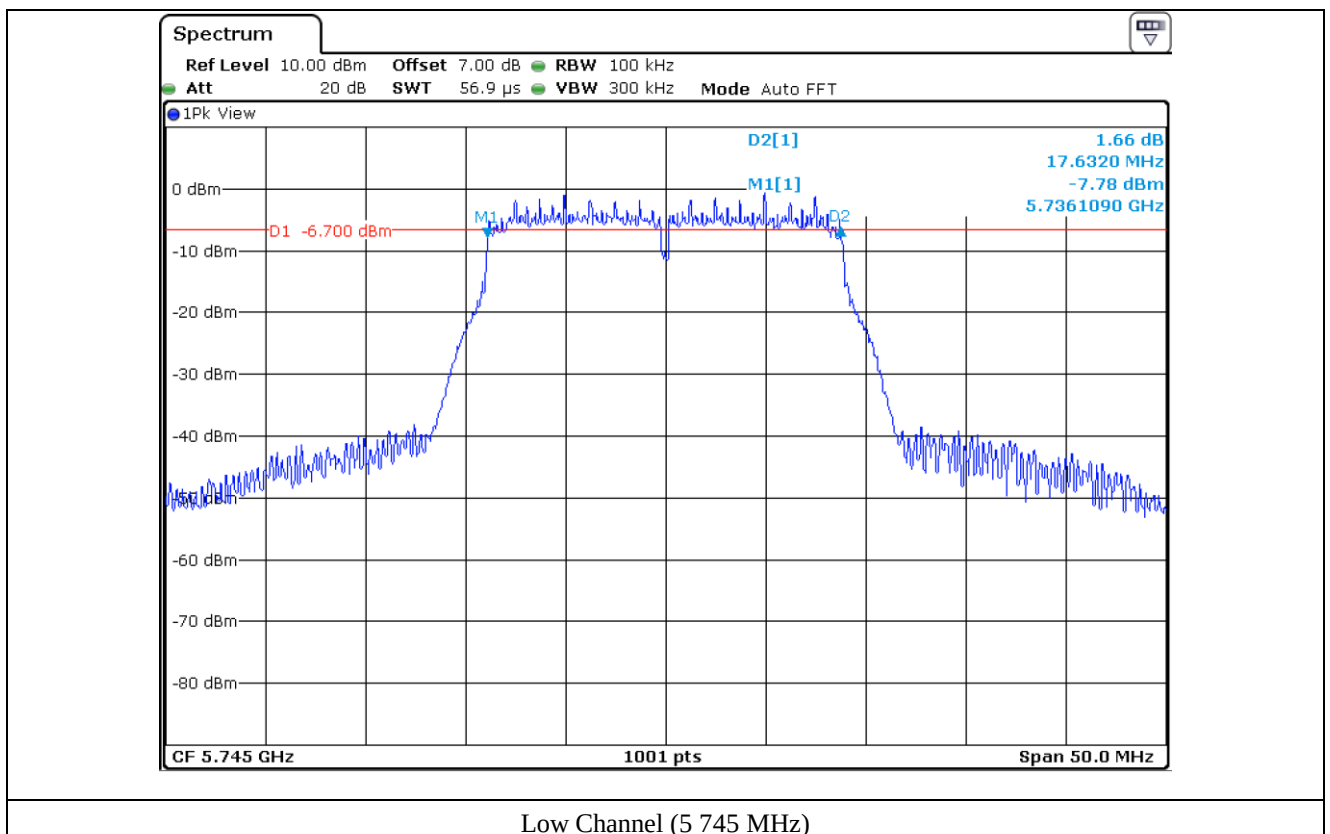

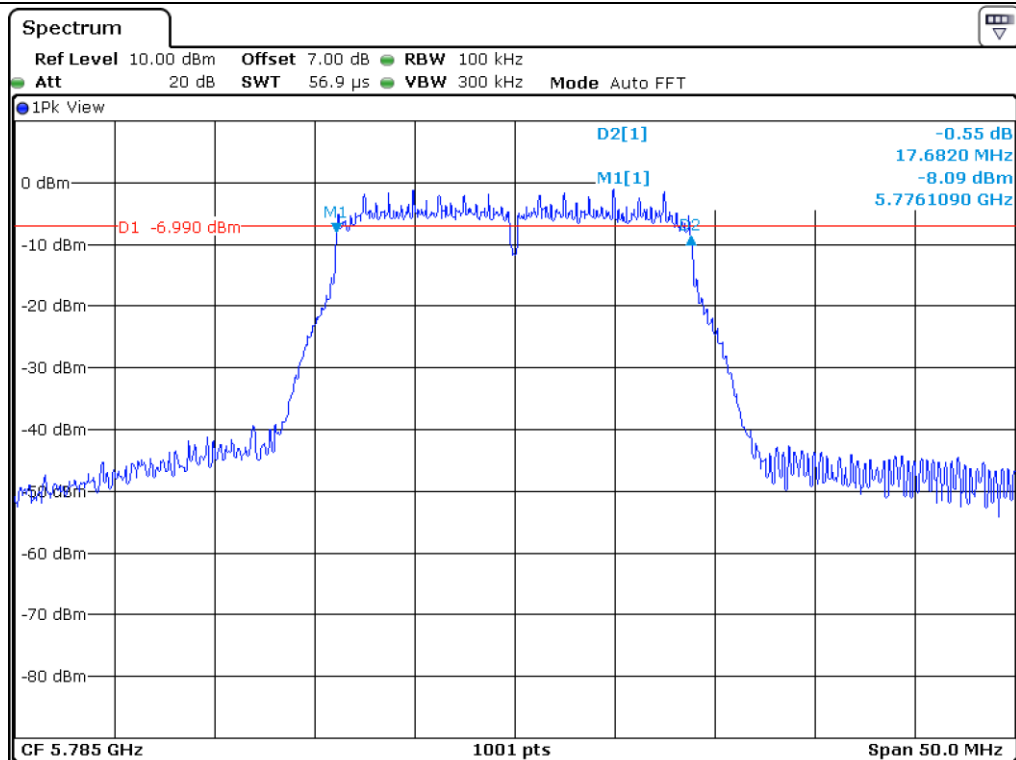

Middle Channel (5 785 MHz)

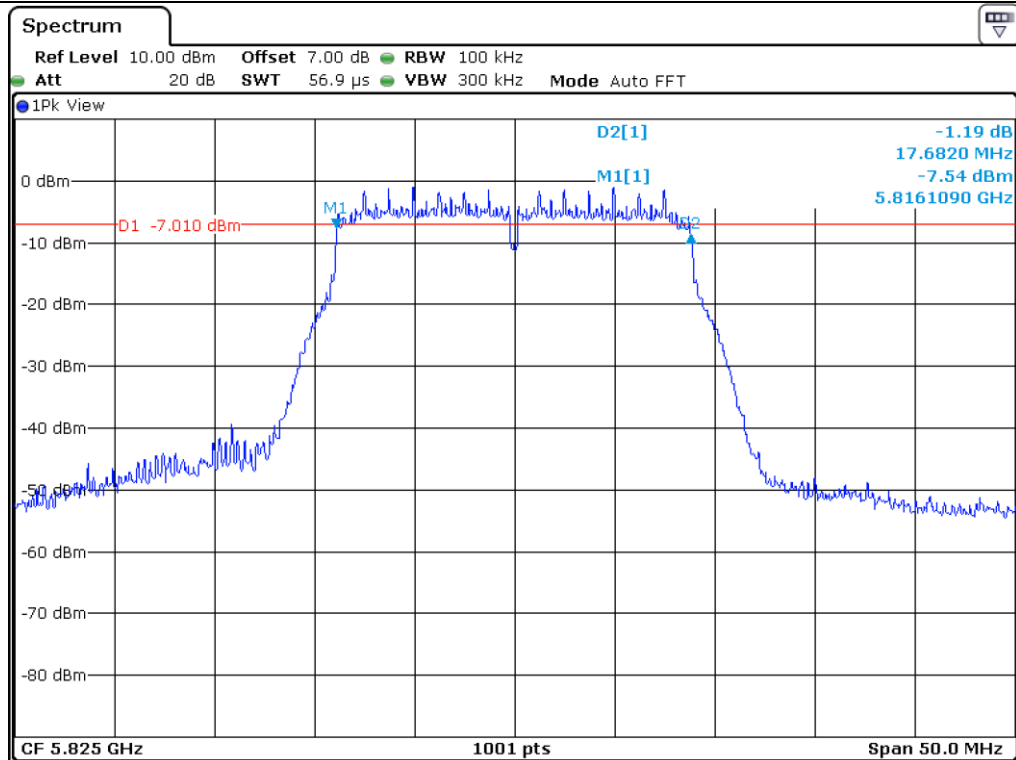

High Channel (5 825 MHz)

8.6 Test data for 802.11n (HT40) WLAN Mode

8.6.1 Test data for Antenna 0


-. Test Date : February 28, 2019

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	36.50
	High	5 795.00	36.46



Tested by: Ha-Ram Lee / Assistant Manager

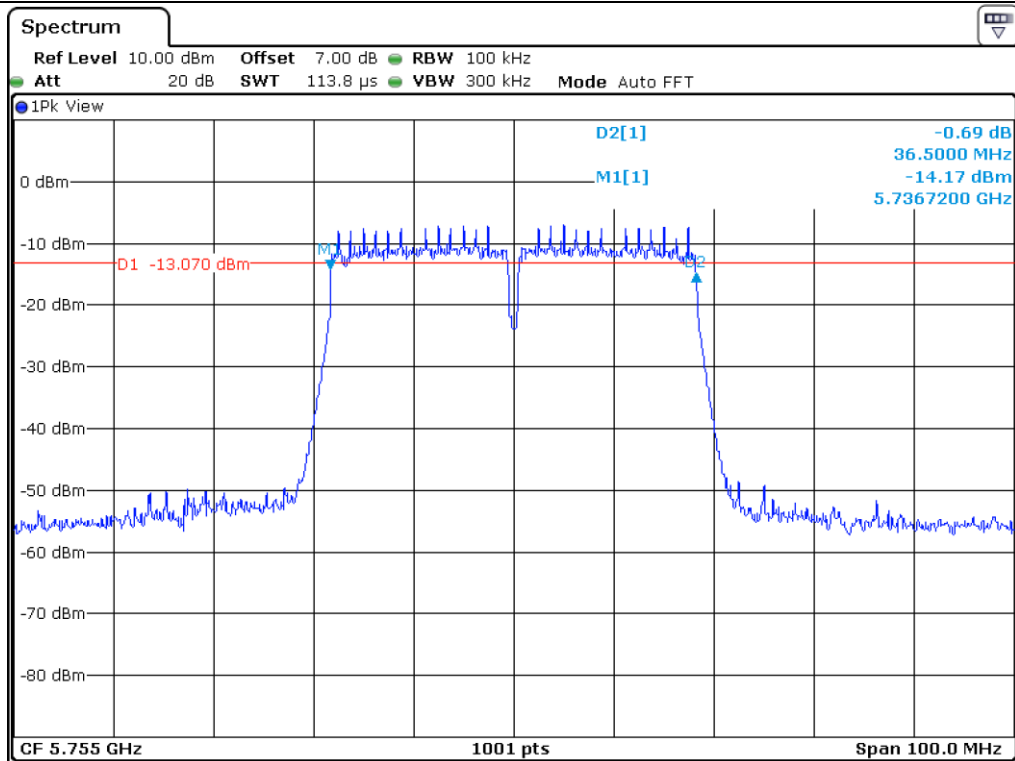

Low Channel (5 755 MHz)

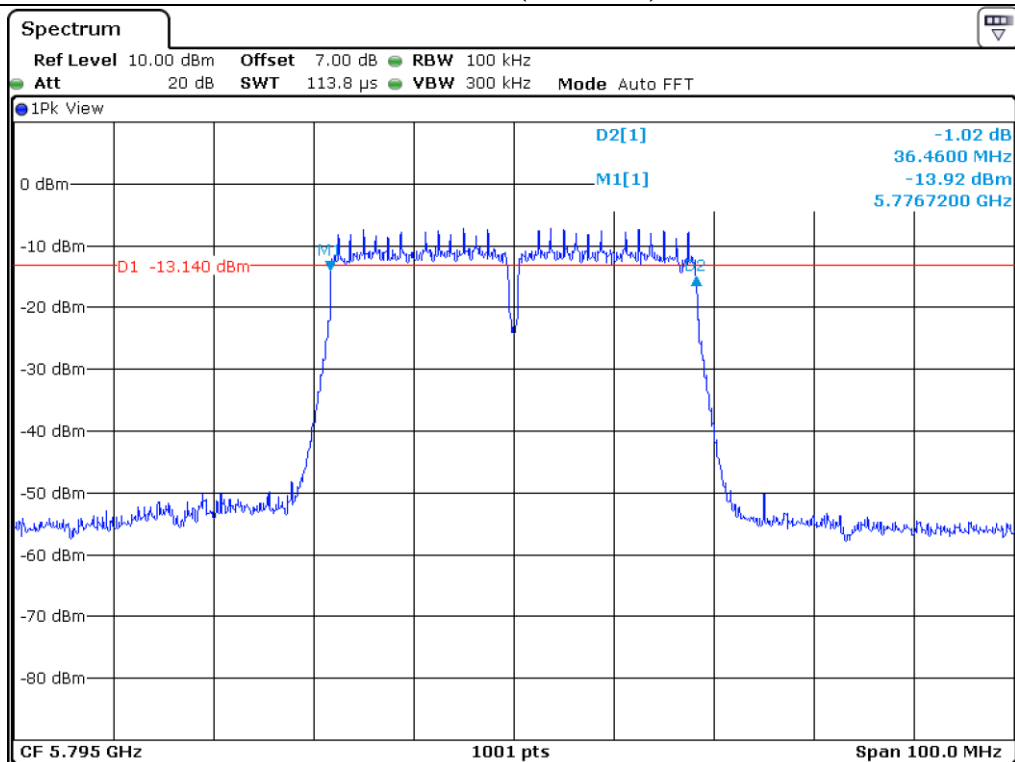

High Channel (5 795 MHz)

8.6.2 Test data for Antenna 1


-. Test Date : February 28, 2019

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	36.50
	High	5 795.00	36.46



Tested by: Ha-Ram Lee / Assistant Manager

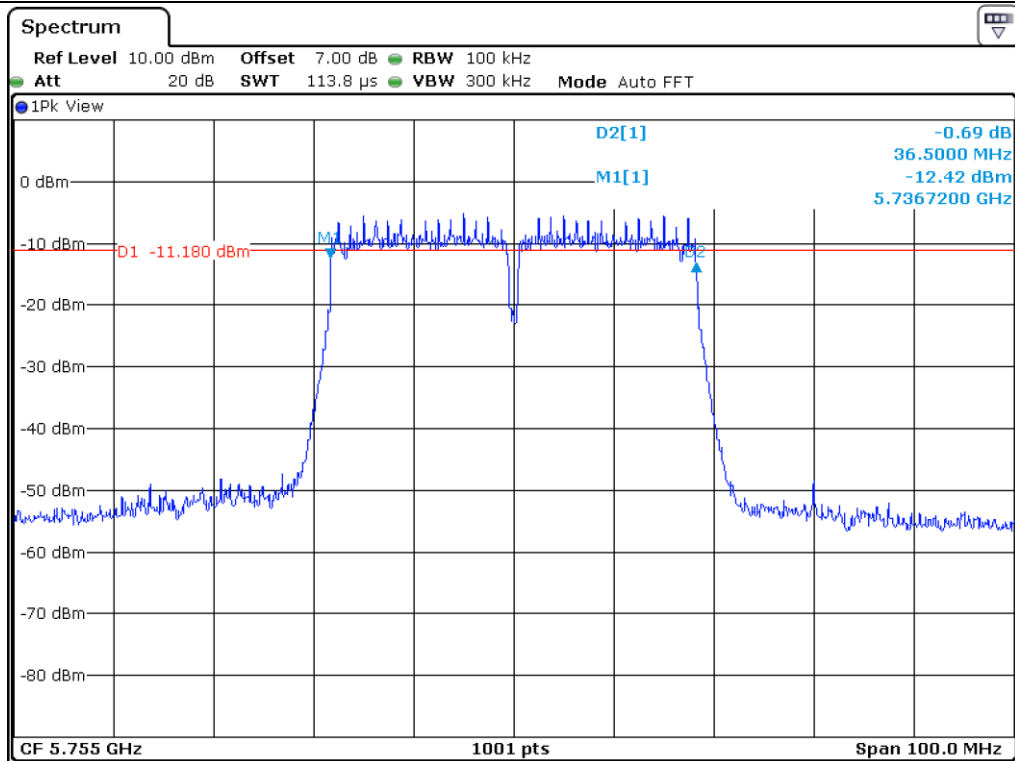

Low Channel (5.755 MHz)

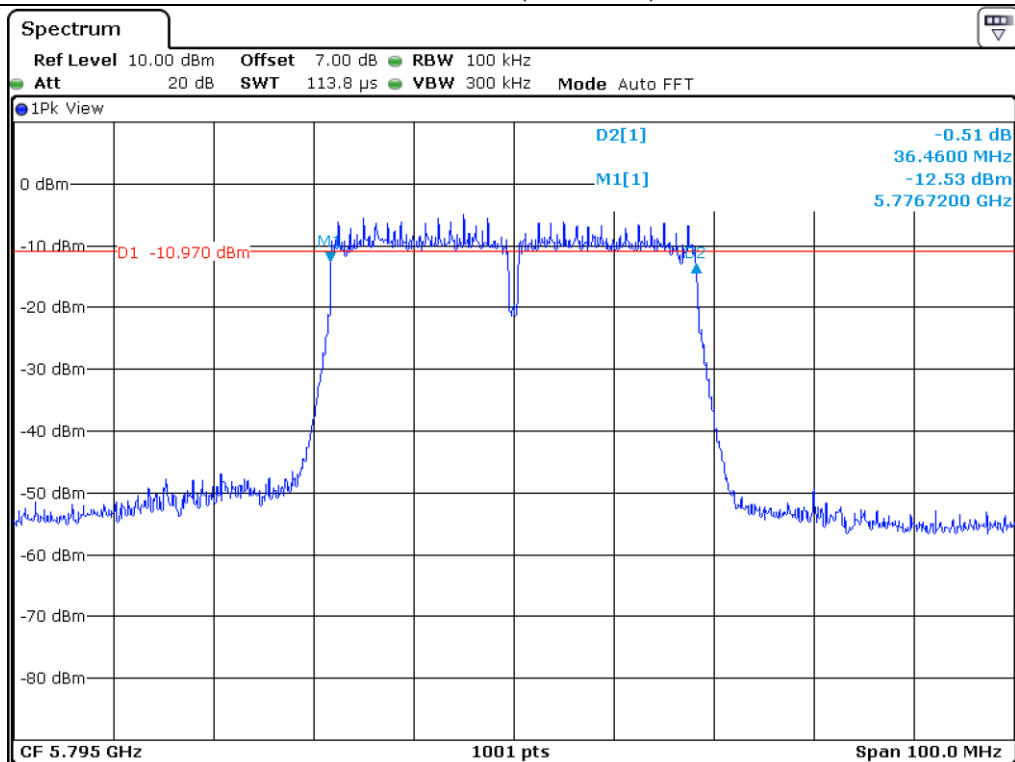

High Channel (5.795 MHz)

8.7 Test data for 802.11ac (HT80) WLAN Mode

8.7.1 Test data for Antenna 0


-. Test Date : February 28, 2019

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 775.00	76.12



Tested by: Ha-Ram Lee / Assistant Manager

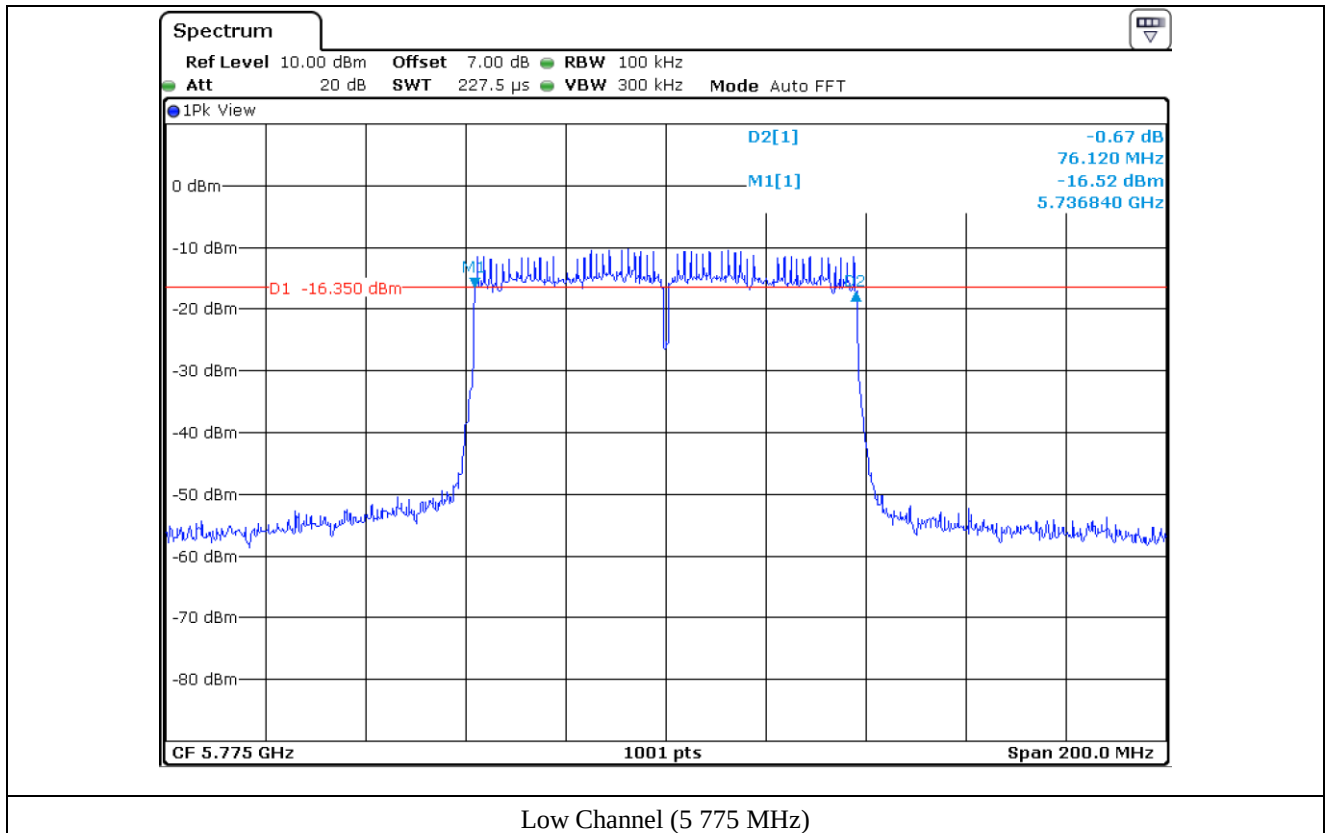

8.7.2 Test data for Antenna 1


-. Test Date : February 28, 2019

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	76.52



Tested by: Ha-Ram Lee / Assistant Manager

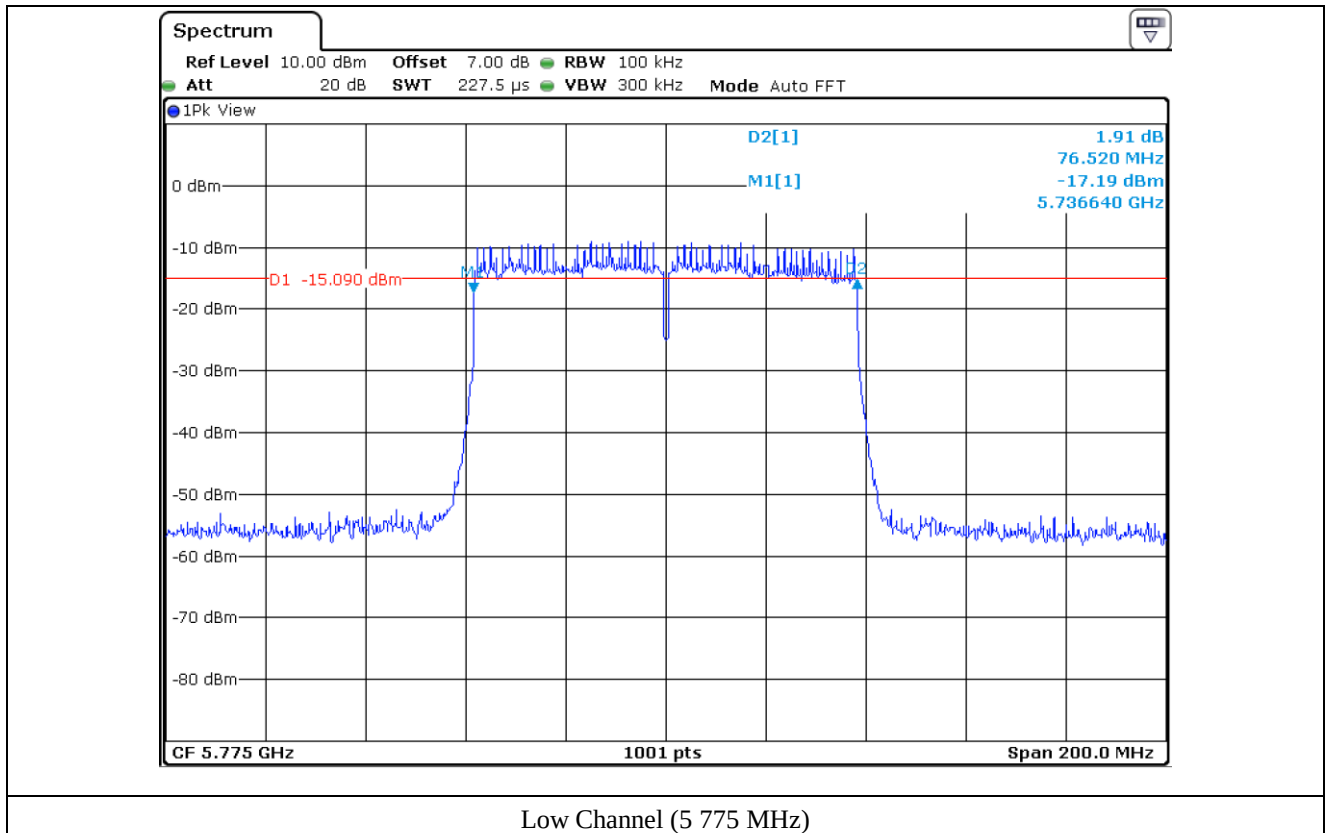

9. MAXIMUM PEAK OUTPUT POWER

9.1 Operating environment

Temperature : 24 °C

Relative humidity : 45 % R.H.

9.2 Test set-up

The maximum peak output power was measured with the Signal Analyzer connected to the antenna output of the EUT. The Signal Analyzer is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section E. 3.(KDB 789033 D02 General UNII Test Procedures New Rules v01r04).

Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.



9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

9.4 Test data for 802.11a WLAN Mode

9.4.1 Test data for Antenna 0

-. Test Date : February 28, 2019


-. Test Result : Pass

Frequency Range (MHz)	Channel	Frequency (MHz)	Measured Value (dBm)	Duty Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
5 150 ~ 5 250	Low	5 180.00	10.09	0.32	10.41	24.00	13.59
	Middle	5 220.00	10.08	0.32	10.40	24.00	13.60
	High	5 240.00	10.17	0.32	10.49	24.00	13.51
5 725 ~ 5 850	Low	5 745.00	9.05	0.32	9.37	30.00	20.63
	Middle	5 785.00	8.95	0.32	9.27	30.00	20.73
	High	5 825.00	8.56	0.32	8.88	30.00	21.12


Remark : Result = Measured Value + Duty Fator




Tested by: Ha-Ram Lee / Assistant Manager

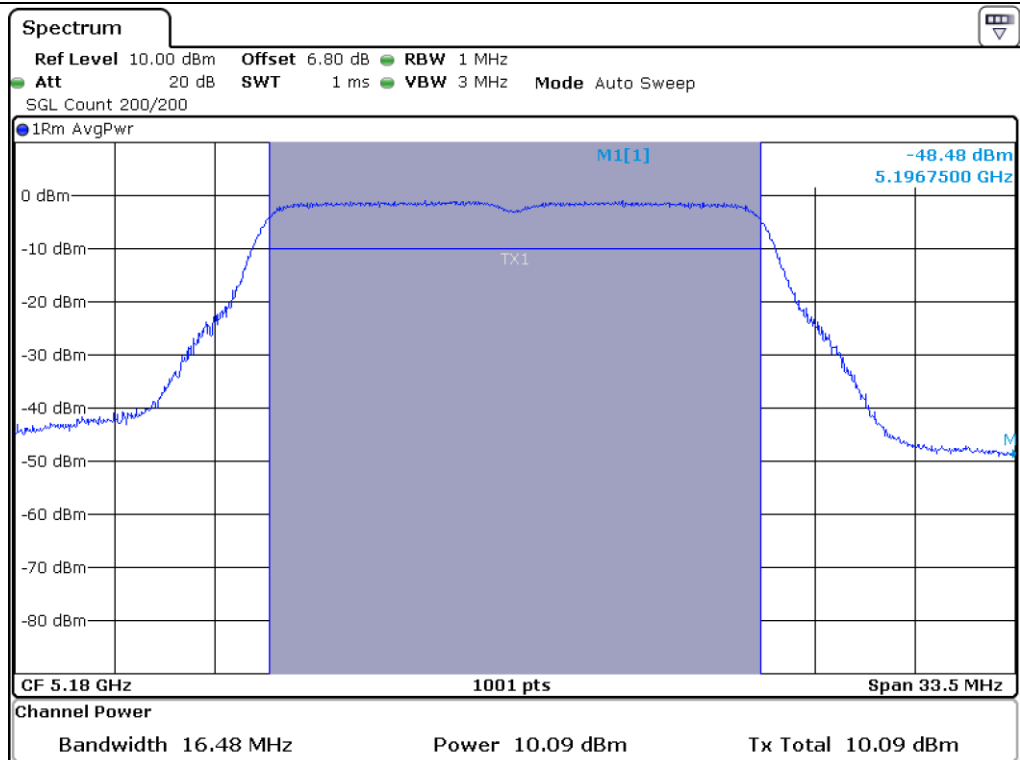


Low Channel (5 180 MHz)

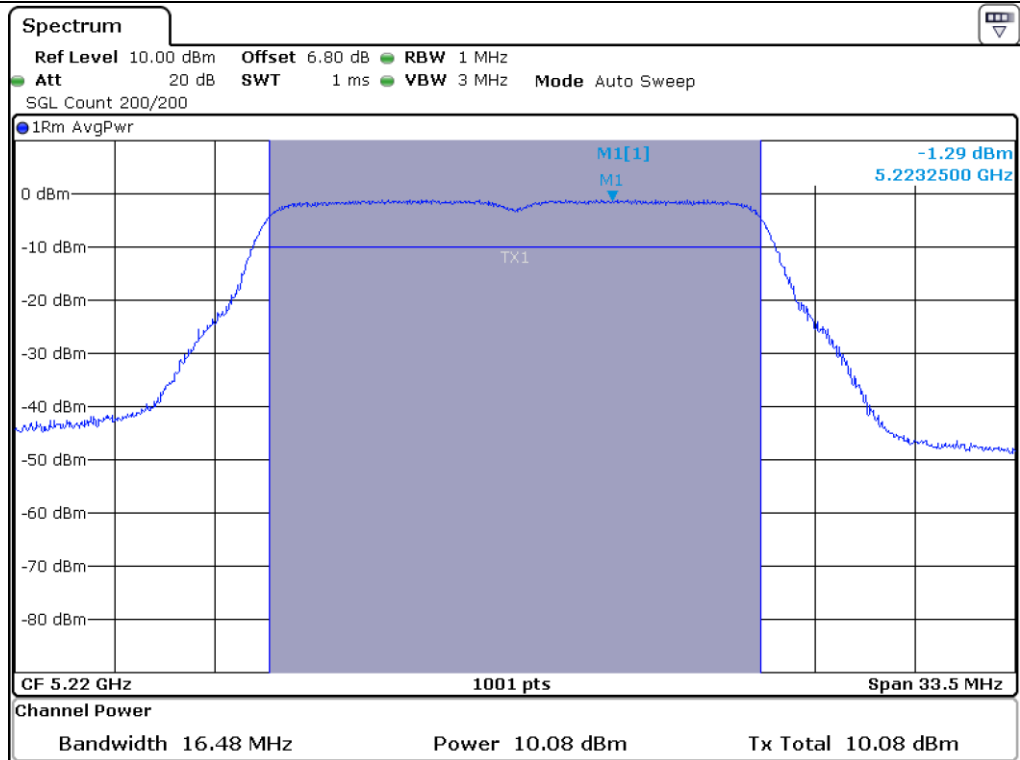


Middle Channel (5 220 MHz)

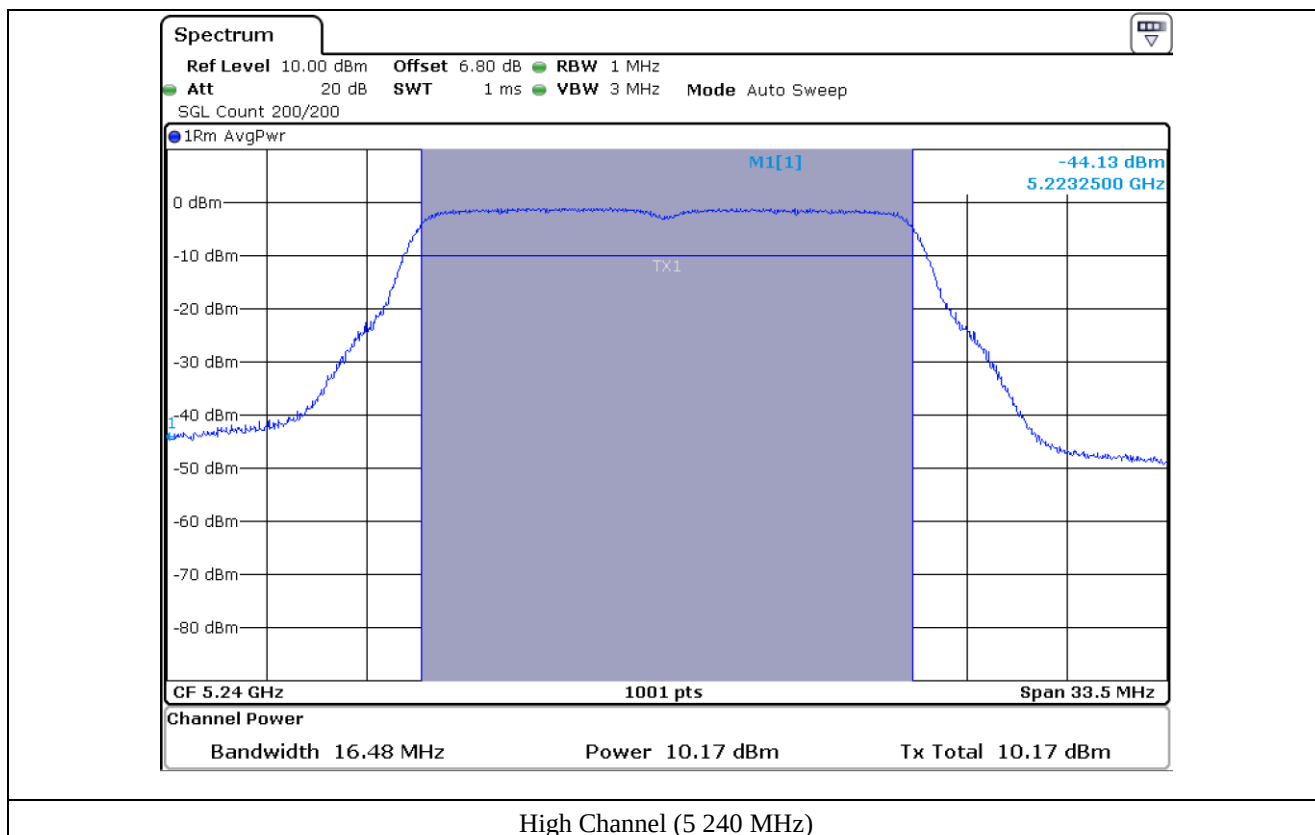


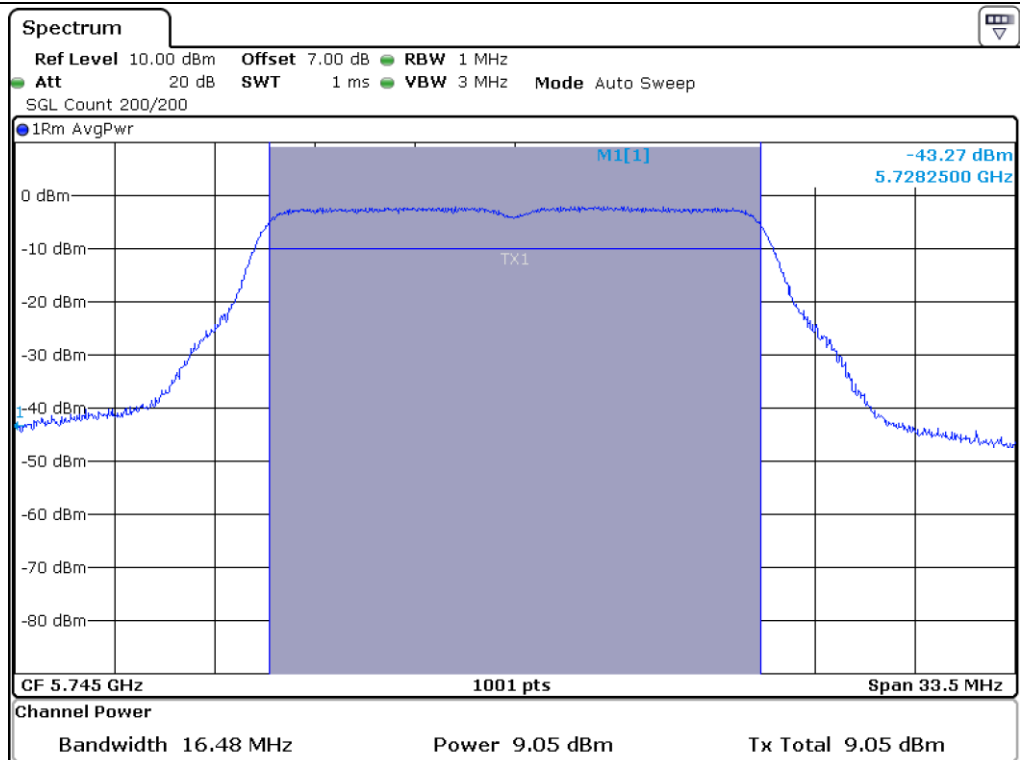

Low Channel (5 745 MHz)

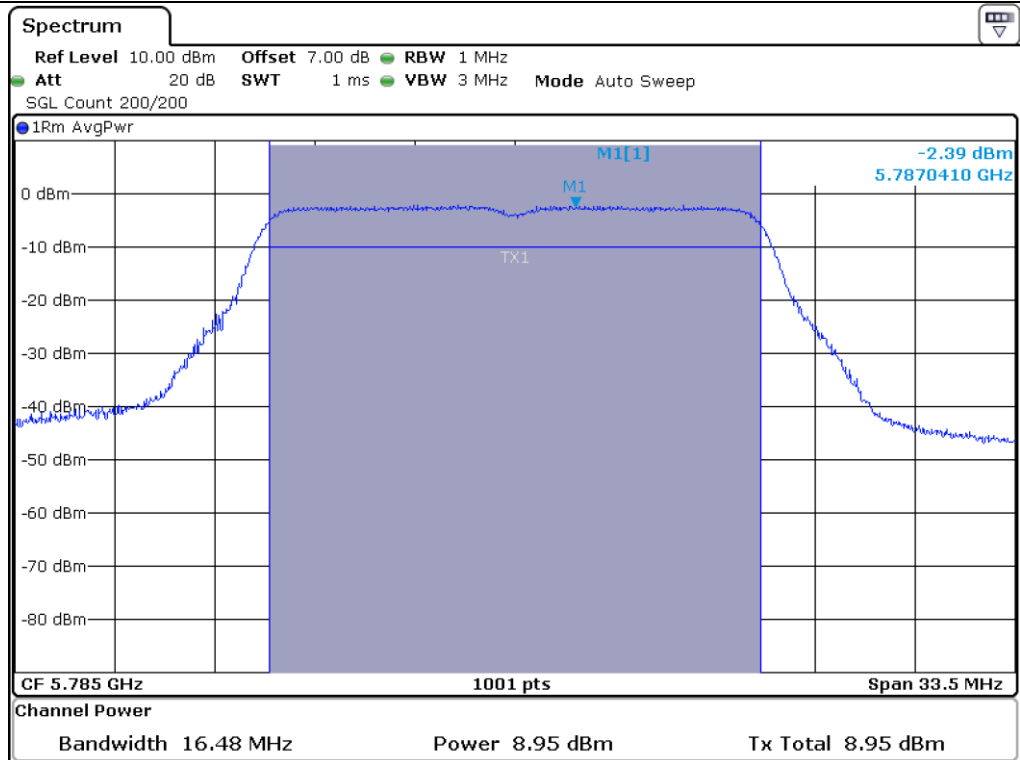

Middle Channel (5 785 MHz)

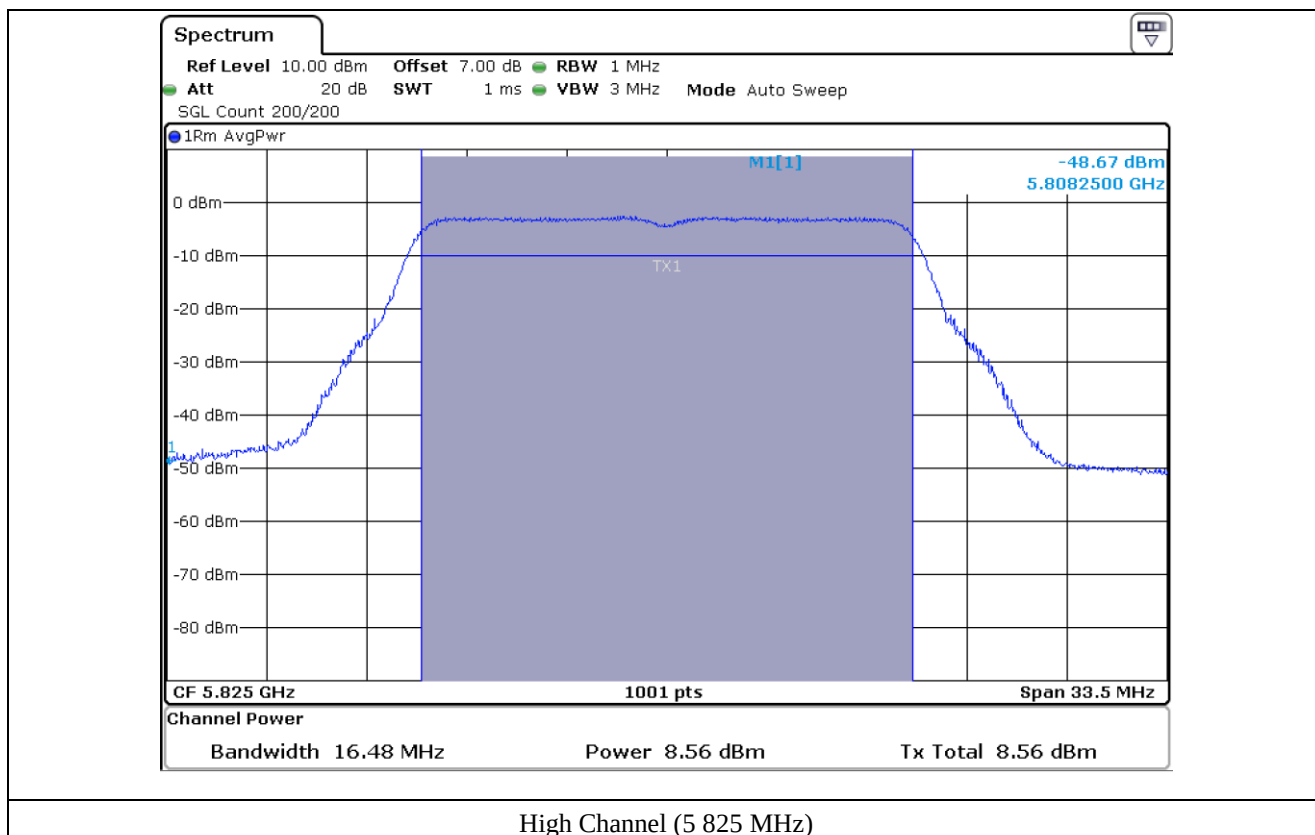

9.4.2 Test data for Antenna 1

-. Test Date : February 28, 2019


-. Test Result : Pass

Frequency Range (MHz)	Channel	Frequency (MHz)	Measured Value (dBm)	Duty Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
5 150 ~ 5 250	Low	5 180.00	9.83	0.32	10.15	24.00	13.85
	Middle	5 220.00	9.76	0.32	10.08	24.00	13.92
	High	5 240.00	9.65	0.32	9.97	24.00	14.03
5 725 ~ 5 850	Low	5 745.00	9.97	0.32	10.29	30.00	19.71
	Middle	5 785.00	9.69	0.32	10.01	30.00	19.99
	High	5 825.00	10.10	0.32	10.42	30.00	19.58


Remark : Result = Measured Value + Duty Fator




Tested by: Ha-Ram Lee / Assistant Manager

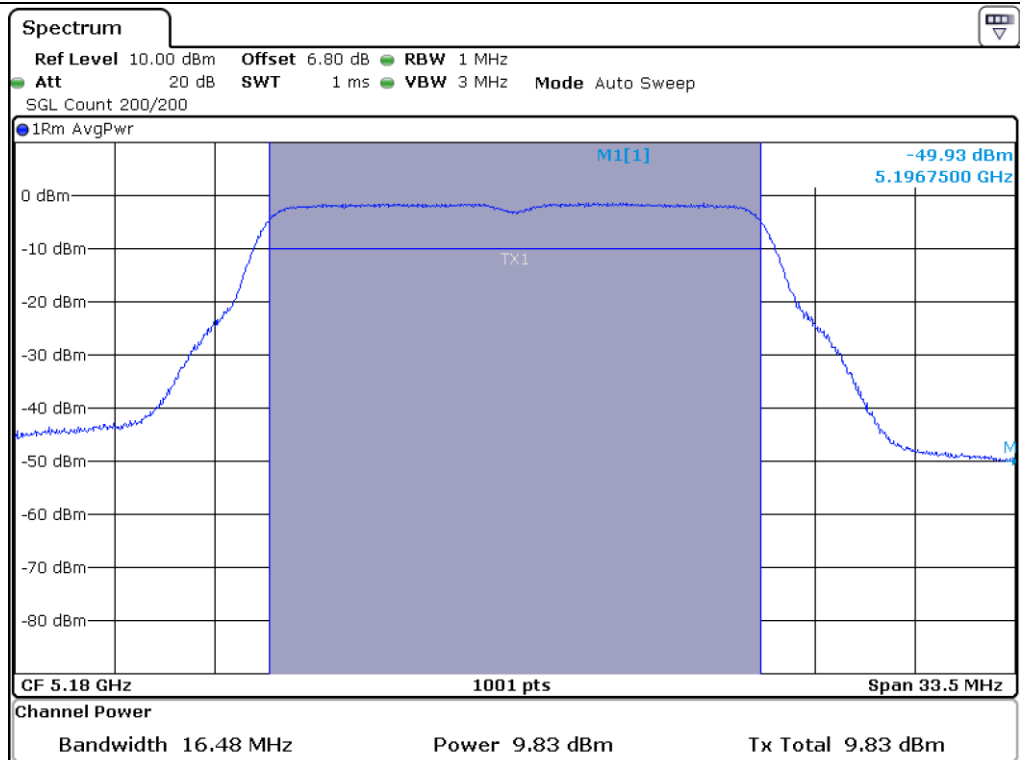


Low Channel (5 180 MHz)

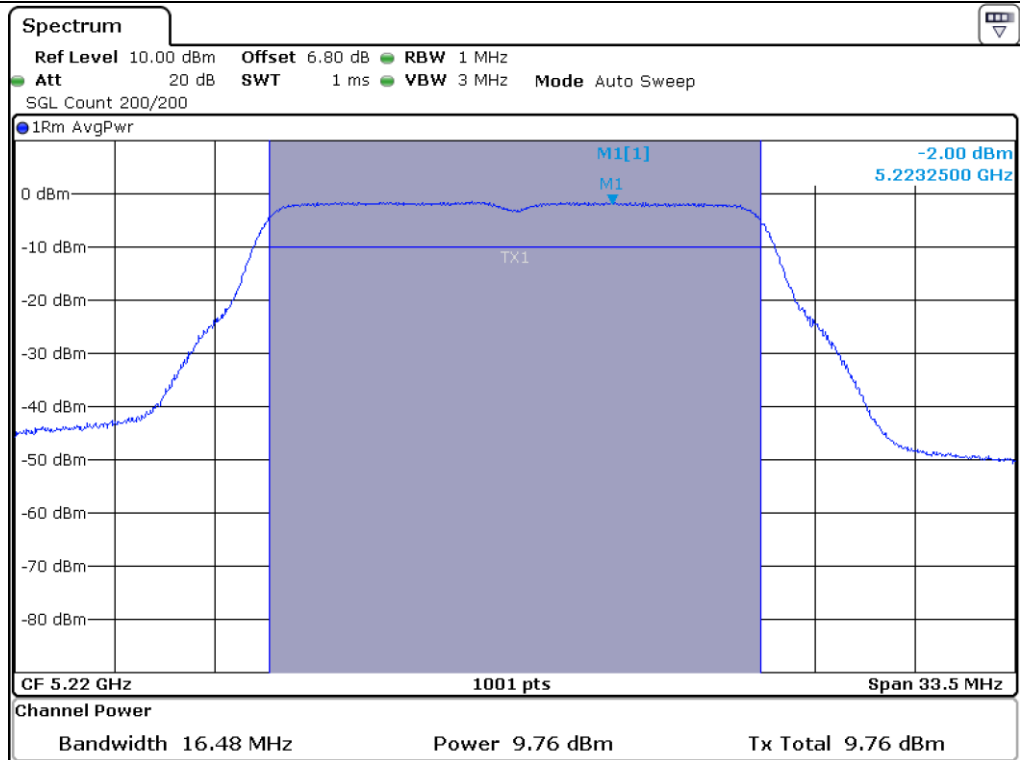


Middle Channel (5 220 MHz)

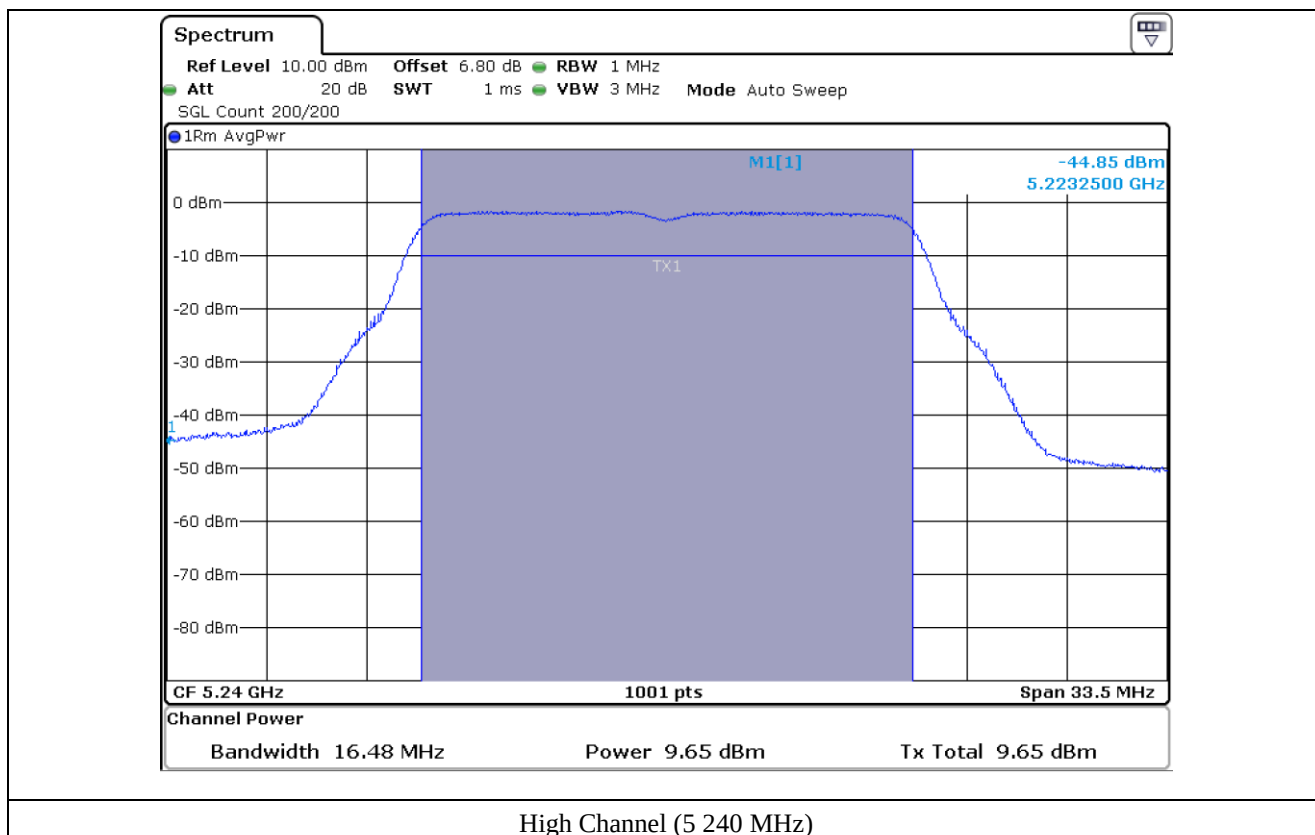


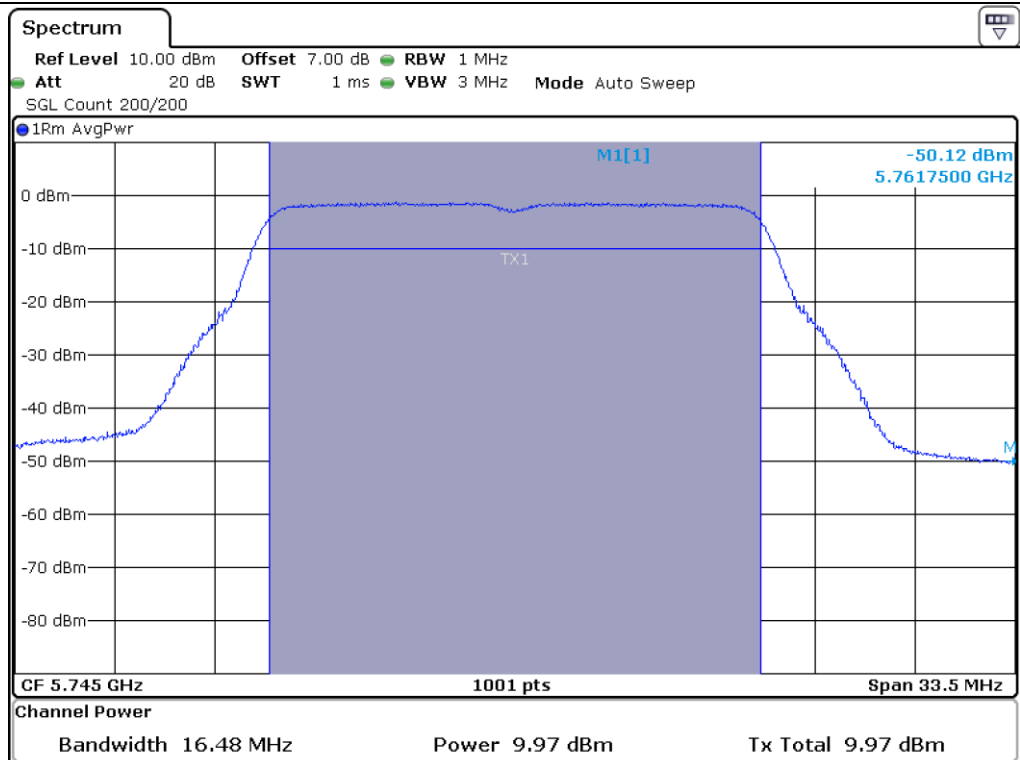

Low Channel (5 745 MHz)

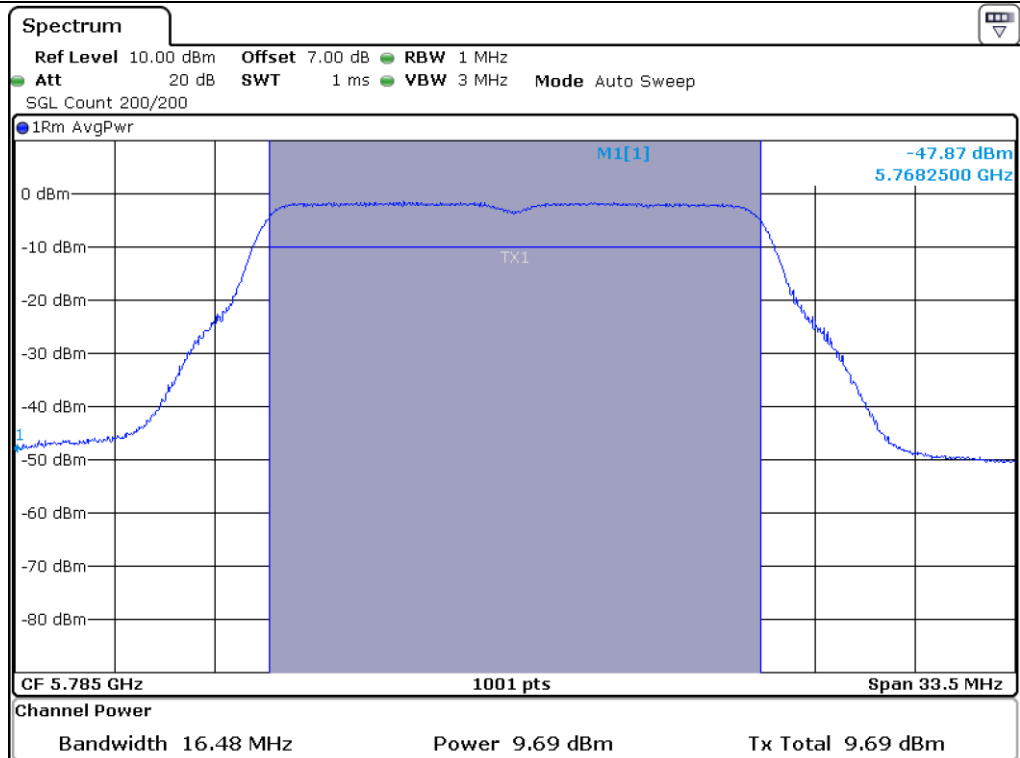

Middle Channel (5 785 MHz)

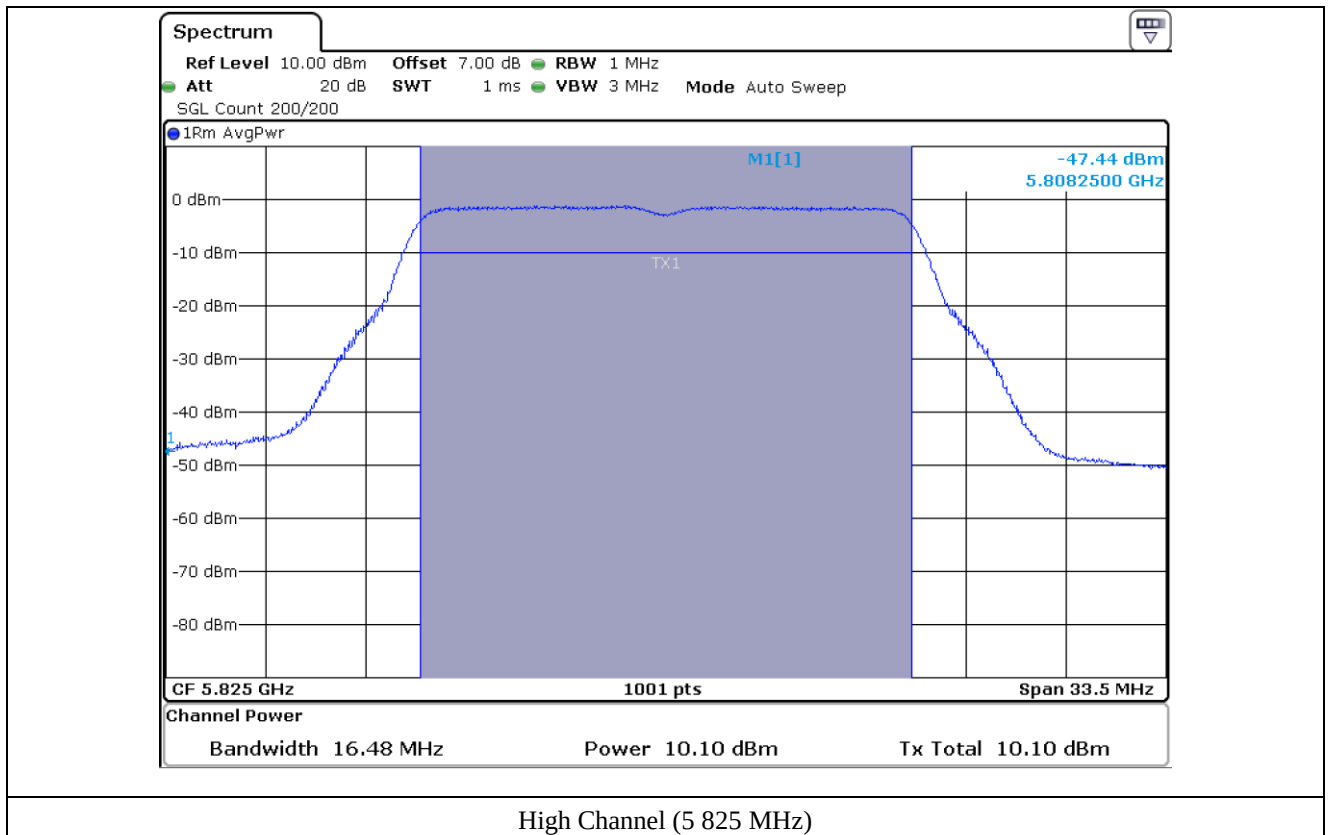

9.5 Test data for 802.11n (HT20) WLAN Mode

9.5.1 Test data for Antenna 0

-. Test Date : February 28, 2019


-. Test Result : Pass

Frequency Range (MHz)	Channel	Frequency (MHz)	Measured Value (dBm)	Duty Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
5 150 ~ 5 250	Low	5 180.00	10.03	0.34	10.37	24.00	13.63
	Middle	5 220.00	10.10	0.34	10.44	24.00	13.56
	High	5 240.00	10.03	0.34	10.37	24.00	13.63
5 725 ~ 5 850	Low	5 745.00	8.85	0.34	9.19	30.00	20.81
	Middle	5 785.00	9.05	0.34	9.39	30.00	20.61
	High	5 825.00	8.68	0.34	9.02	30.00	20.98


Remark : Result = Measured Value + Duty Fator




Tested by: Ha-Ram Lee / Assistant Manager

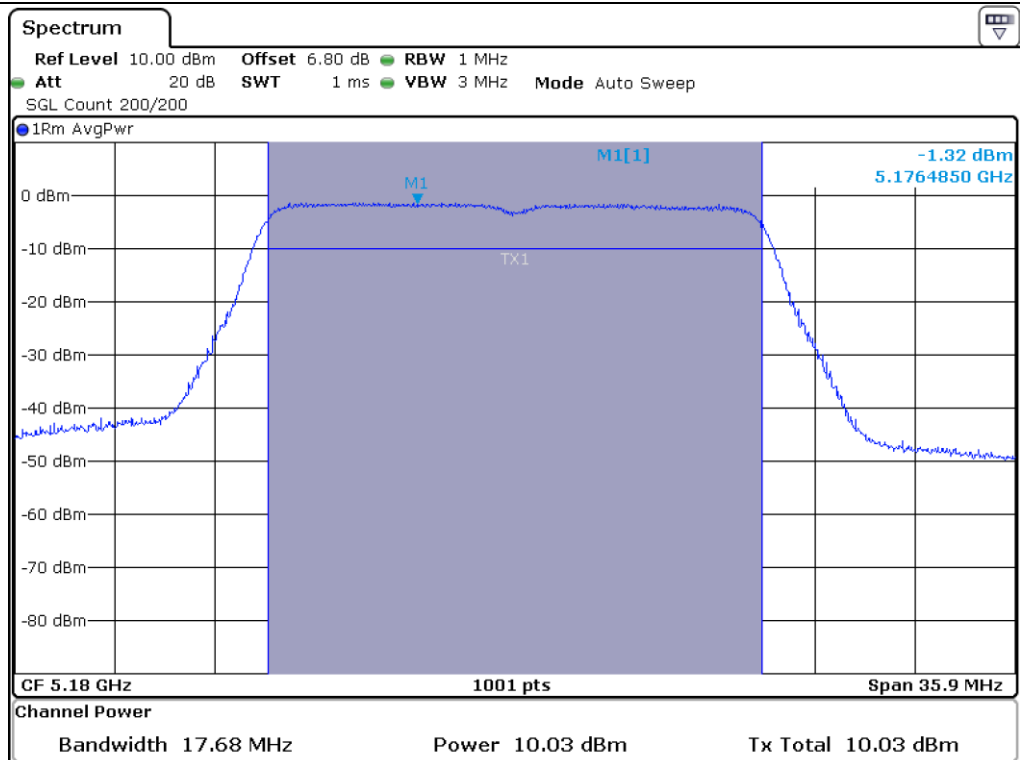


Low Channel (5 180 MHz)

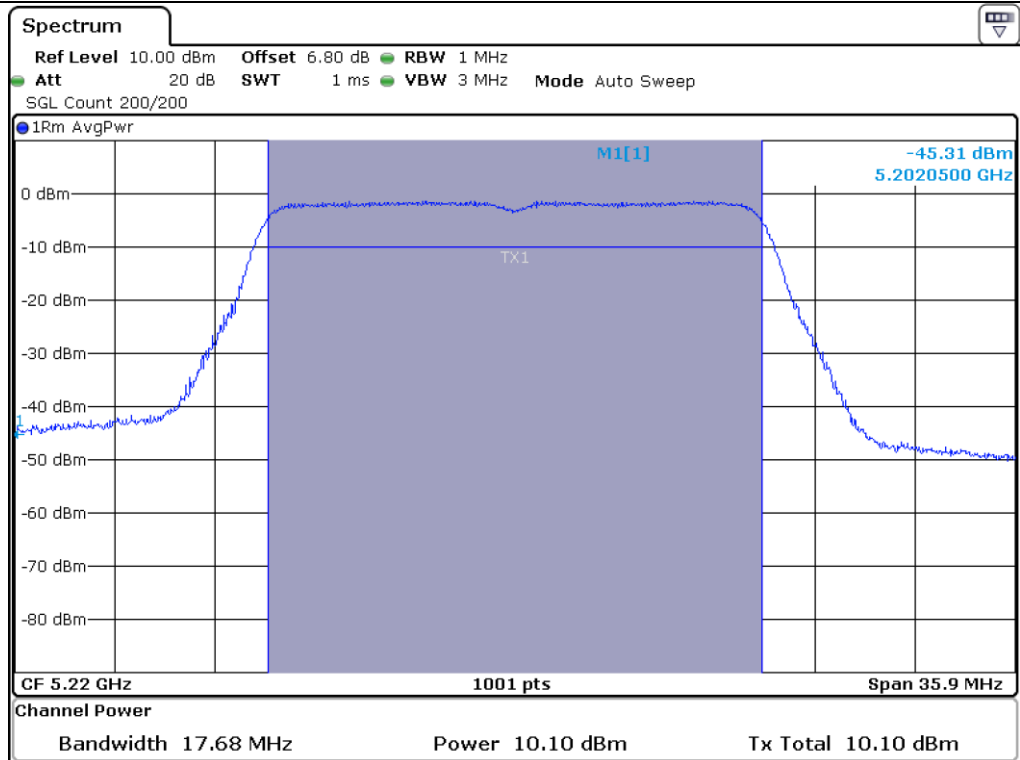


Middle Channel (5 220 MHz)

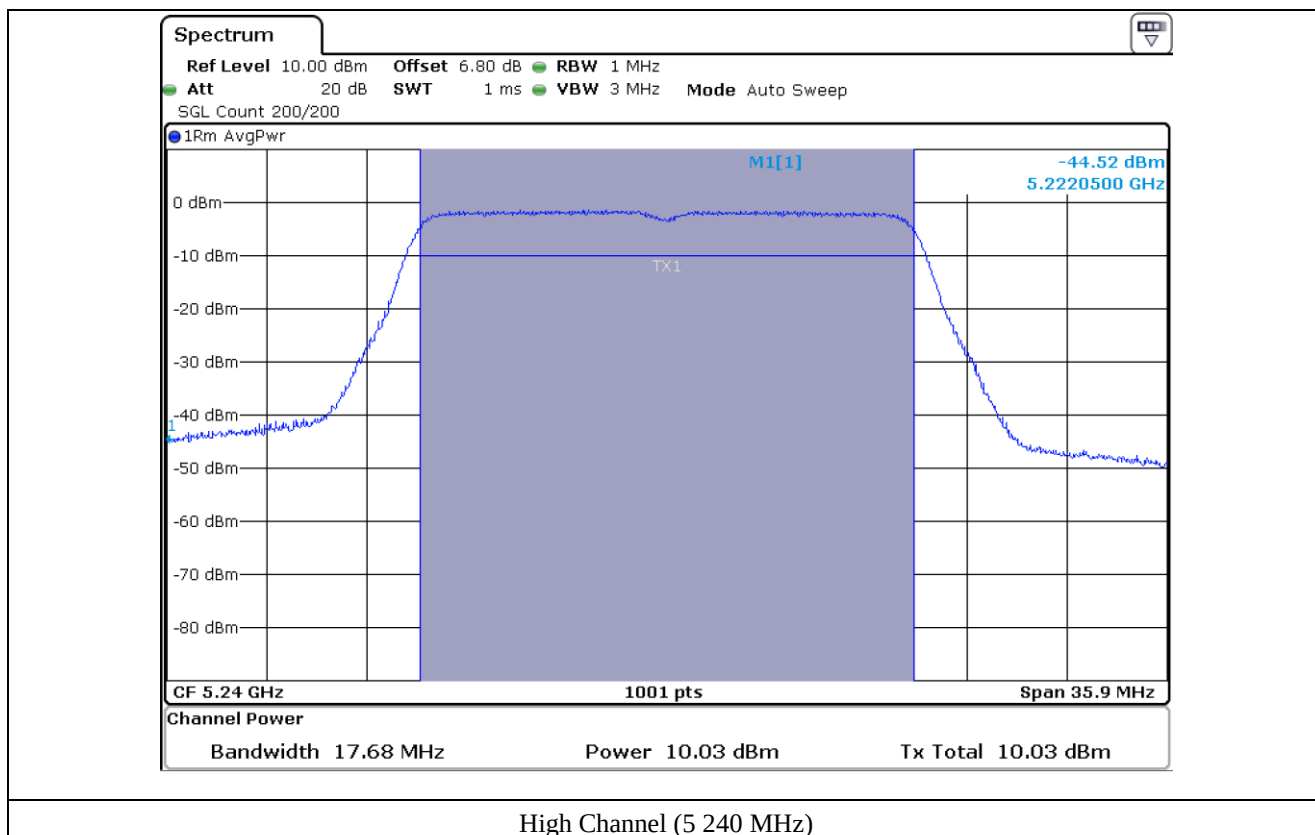


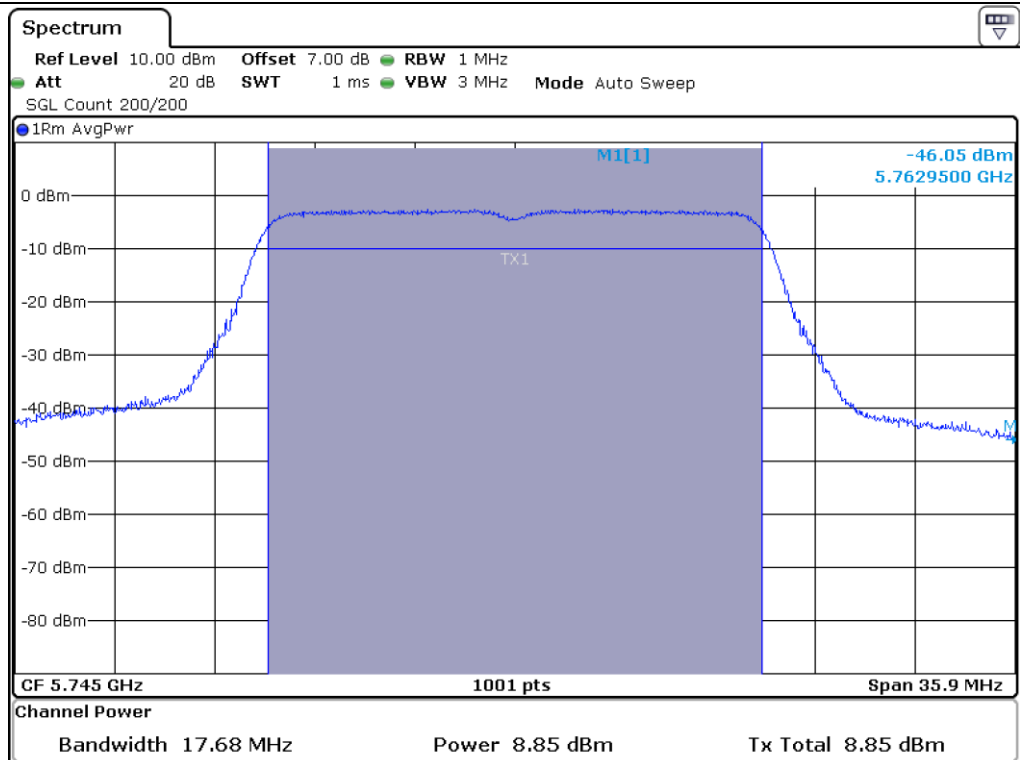

Low Channel (5 745 MHz)

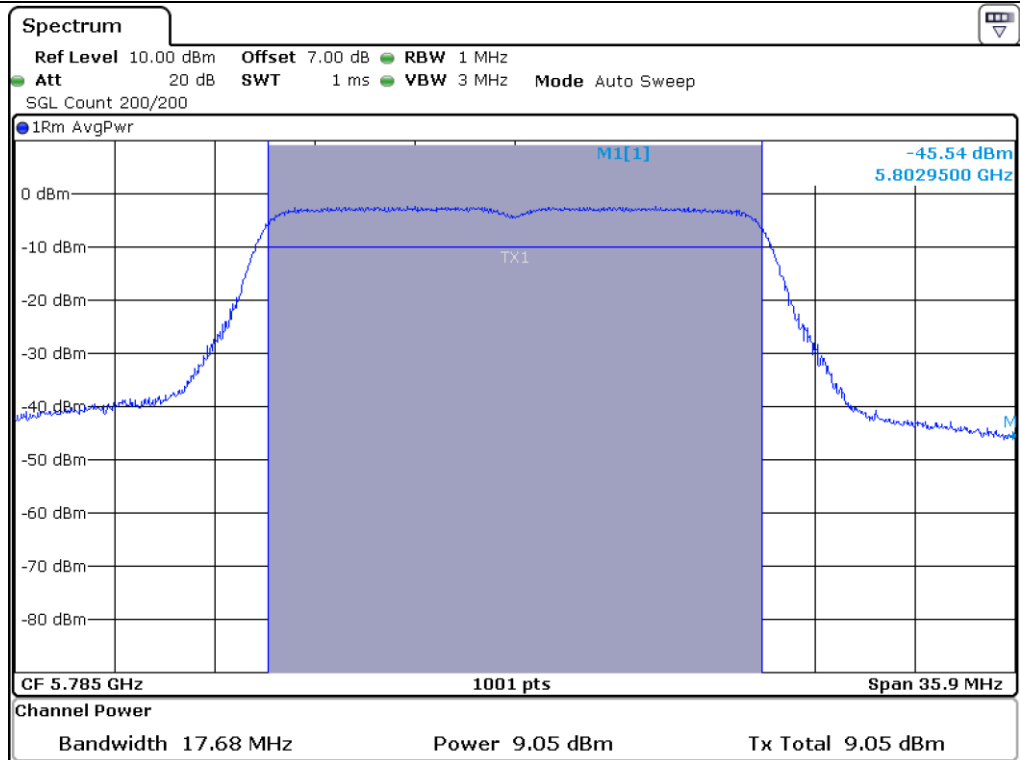

Middle Channel (5 785 MHz)

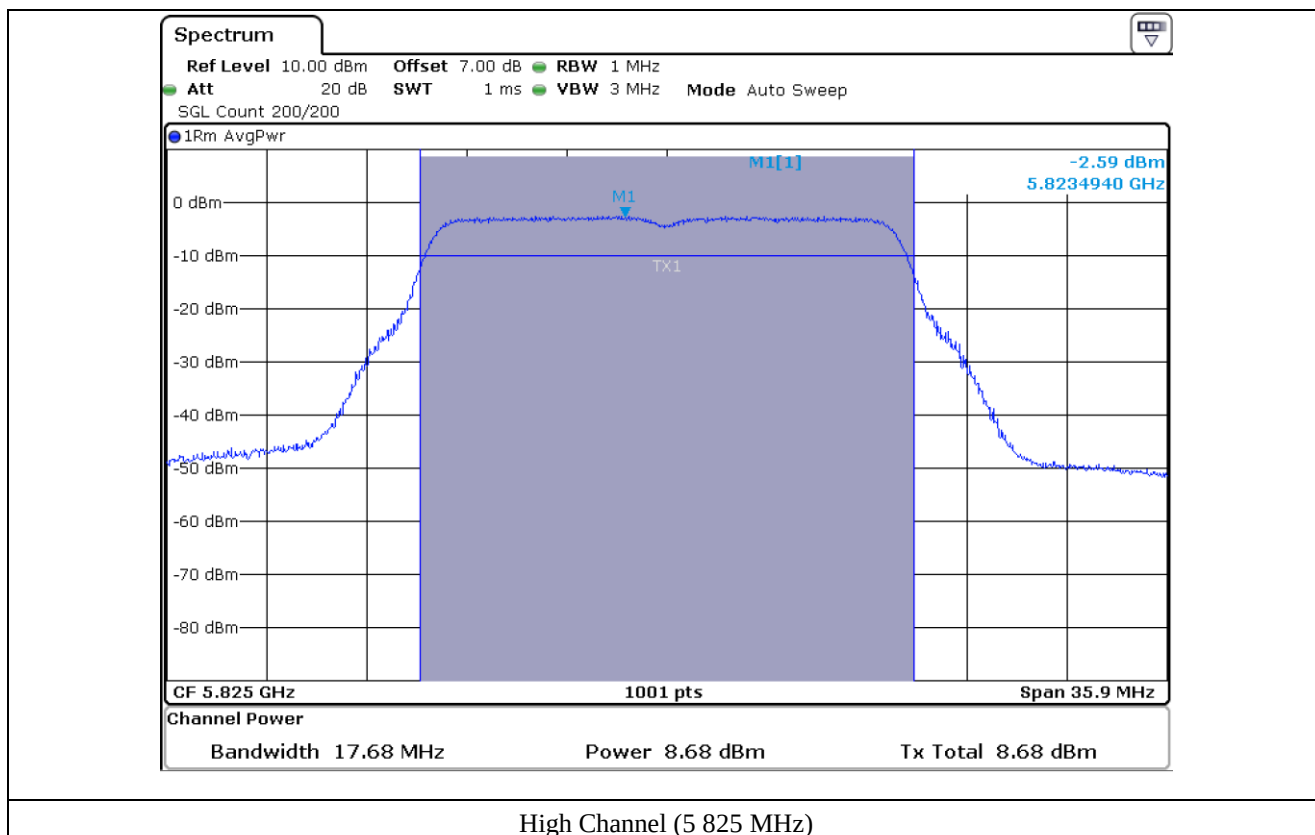

9.5.2 Test data for Antenna 1

-. Test Date : February 28, 2019


-. Test Result : Pass

Frequency Range (MHz)	Channel	Frequency (MHz)	Measured Value (dBm)	Duty Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
5 150 ~ 5 250	Low	5 180.00	9.73	0.34	10.07	24.00	13.93
	Middle	5 220.00	9.66	0.34	10.00	24.00	14.00
	High	5 240.00	9.51	0.34	9.85	24.00	14.15
5 725 ~ 5 850	Low	5 745.00	9.77	0.34	10.11	30.00	19.89
	Middle	5 785.00	9.84	0.34	10.18	30.00	19.82
	High	5 825.00	10.18	0.34	10.52	30.00	19.48


Remark : Result = Measured Value + Duty Fator



Tested by: Ha-Ram Lee / Assistant Manager

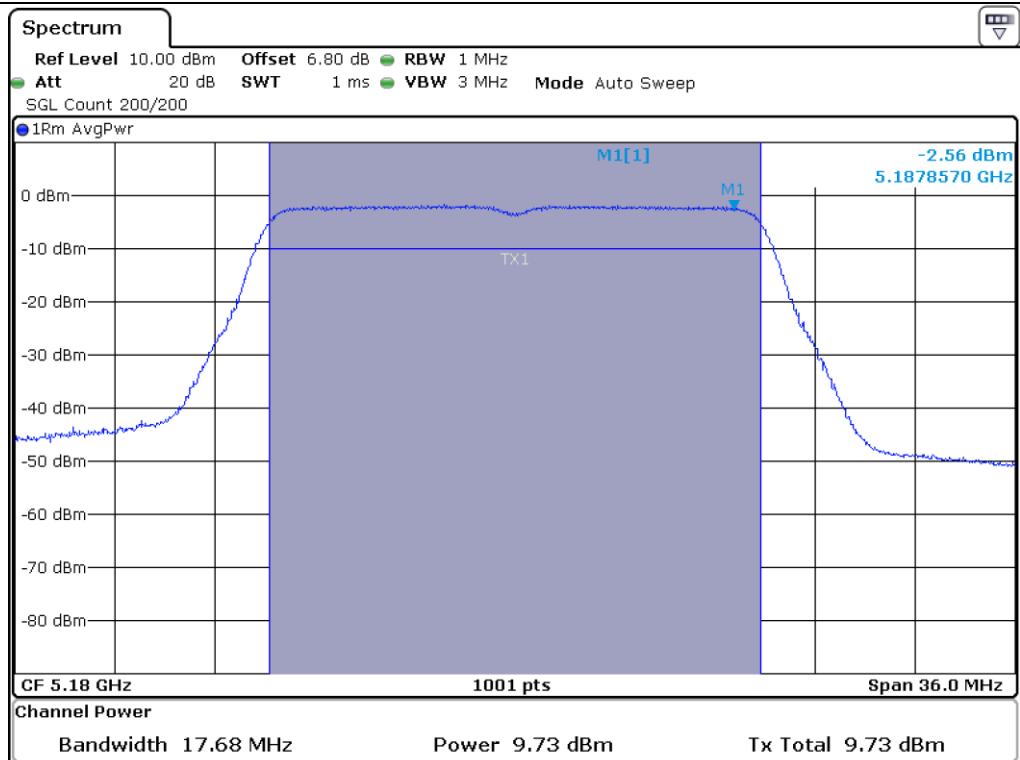

Low Channel (5 180 MHz)

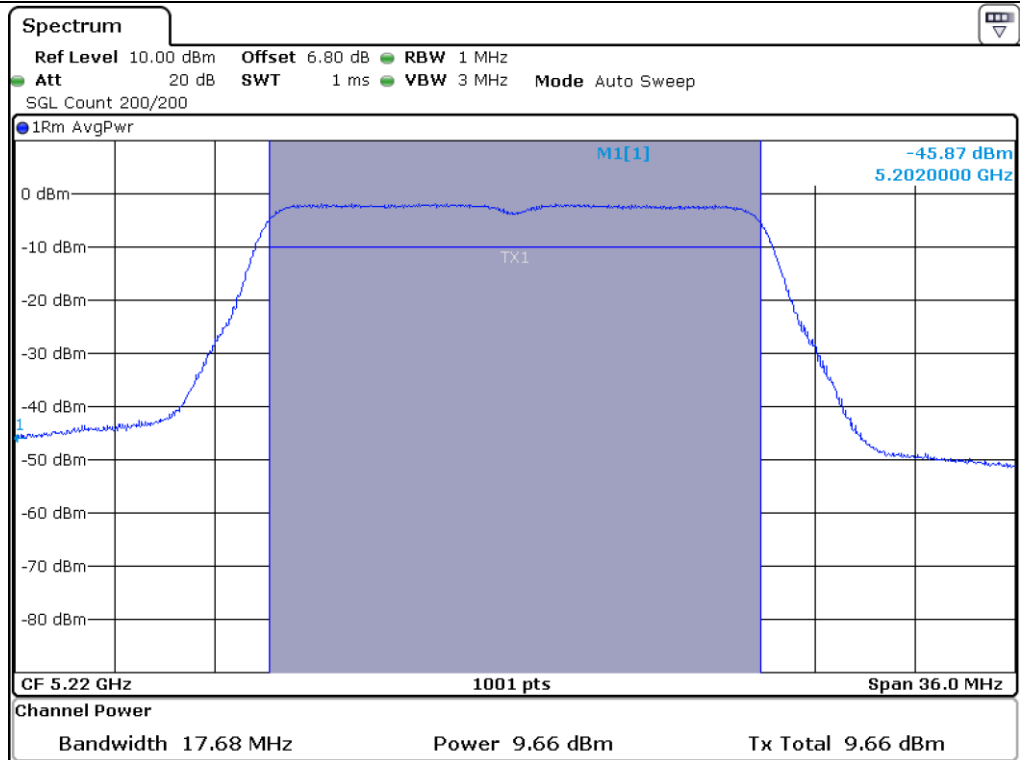

Middle Channel (5 220 MHz)