


Antenna Information

Item	Contents
Antenna Type	PCB Pattern Antenna
Antenna peak gain	0.95 dBi
Manufacturer / Model name	LG Innotek Co., Ltd. / ETWZBSBC01
Address of manufacturer	E1/E3, 30, Magokjungang 10-ro, Gangseo-gu, Seoul, 07796, Lorea
Test Laboratory	LG Innotek Co., Ltd.
Antenna 1 Length	2.0 cm
Antenna 1 Width	0.9 cm

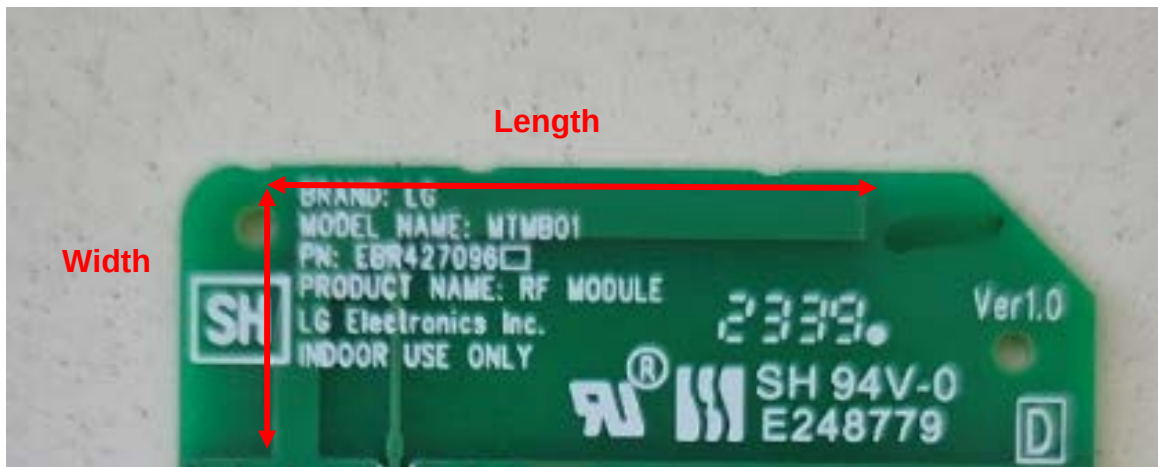

Model name: MTMB01

SPECIFICATIONS

PRODUCT NAME : 2.4GHz Thread Module

MODEL NAME : ETWZBSBC01

The information contained herein is the exclusive property of LG Innotek and shall not be distributed, reproduced or disclosed in whole or no in part without prior written permission of LG Innotek.

Designed	Checked	Approved	LG Innotek Co., Ltd.	
S.J.Han				
2024.01.16	-		DOCUMENT No.	2024RF-ANT-01
			PAGE	7



REG. DATE : 2024.01.16

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2024.01.16

MODEL NAME : ETWZBSBC01 (LGIT)

PAGE : 1 / 7

Change History of Revision

Revision	Date	Contents of Revision Change	Remark
1.0	2024.01.16	Thread ANT Spec	S.J.Han

		DOCUMENT No : 2024RF-ANT-01																									
REG. DATE : 2024.01.16	SPECIFICATION MODEL NAME : ETWZBSBC01 (LGIT)		REV.NO : 1.0																								
REV. DATE : 2024.01.16			PAGE : 2 / 7																								
Table of Contents <table><tr><th>No</th><th>Description</th><th>Page</th></tr><tr><td>1</td><td>ANT Features</td><td>3</td></tr><tr><td>2</td><td>Antenna Characteristics</td><td>3</td></tr><tr><td></td><td>2.1 Network Data</td><td>4</td></tr><tr><td></td><td>2.2 Efficiency</td><td>5</td></tr><tr><td></td><td>2.3 Radiation Pattern</td><td>6</td></tr><tr><td>3</td><td>ANT Test Condition</td><td>6</td></tr><tr><td>4</td><td>ANT Dimension</td><td>7</td></tr></table>				No	Description	Page	1	ANT Features	3	2	Antenna Characteristics	3		2.1 Network Data	4		2.2 Efficiency	5		2.3 Radiation Pattern	6	3	ANT Test Condition	6	4	ANT Dimension	7
No	Description	Page																									
1	ANT Features	3																									
2	Antenna Characteristics	3																									
	2.1 Network Data	4																									
	2.2 Efficiency	5																									
	2.3 Radiation Pattern	6																									
3	ANT Test Condition	6																									
4	ANT Dimension	7																									

		DOCUMENT No : 2024RF-ANT-01	
REG. DATE : 2024.01.16	SPECIFICATION MODEL NAME : ETWZBSBC01 (LGIT)	REV.NO : 1.0	
REV. DATE : 2024.01.16		PAGE : 3 / 7	

1. ANT Features

- Thread ANT
- Main Frequency: 2.45GHz
- Frequency range
 - : From 2.405 to 2.480 GHz
- Operating temperature range
 - : 0 to +85°C

2. Antenna Characteristics

Built-in performance					
Parameter		Min	Typ	Max	Unit
Frequency Range		2.405	2.45	2.480	GHz
Directivity		-	Omni	-	-
2.45GHz	Average Gain	-	-1.02	-	dBi
	Peak Gain	-	-	0.95	
V.S.W.R		-	-	3.0:1	Under
Impedance			50		Ohm
Radiation Material			PCB Printed PIFA type		



REG. DATE : 2024.01.16

SPECIFICATION

REV.NO : 1.0


REV. DATE : 2024.01.16

MODEL NAME : ETWZBSBC01 (LGIT)

PAGE : 4 / 7

2.1 Network Data

VSWR

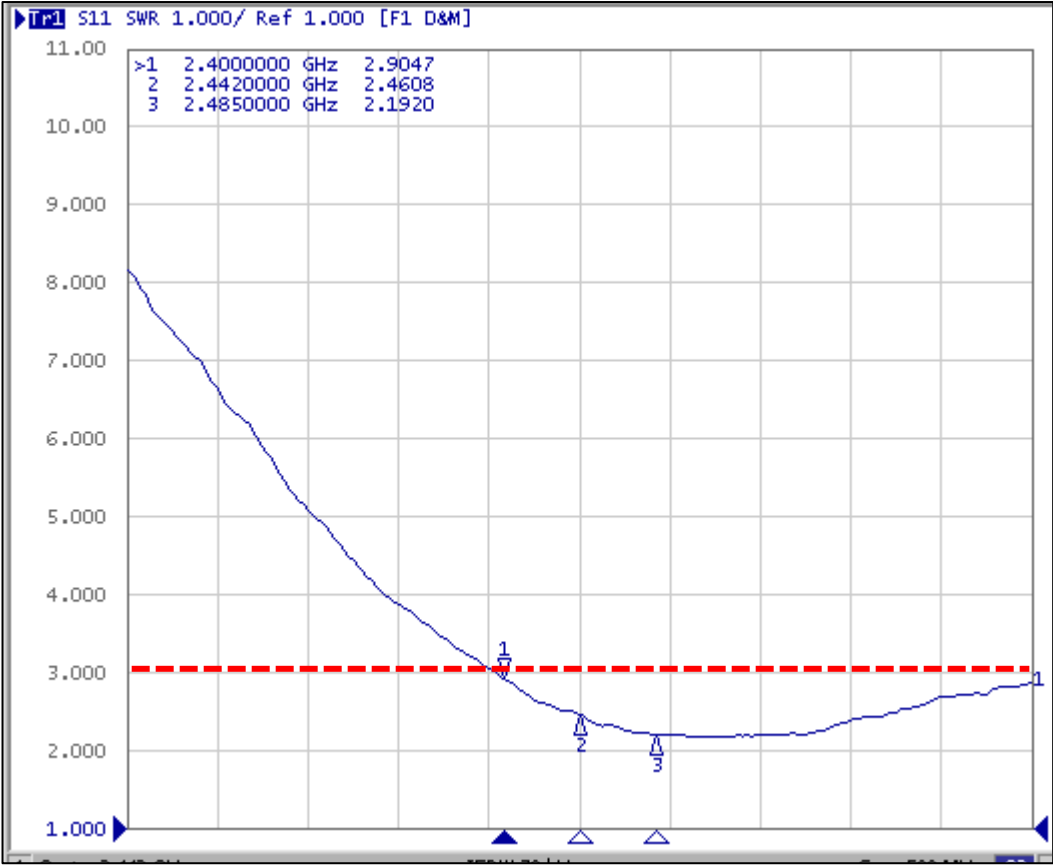

 LG Innotek		DOCUMENT No : 2024RF-ANT-01	
REG. DATE : 2024.01.16	SPECIFICATION MODEL NAME : ETWZBSBC01 (LGIT)		REV.NO : 1.0
REV. DATE : 2024.01.16			PAGE : 5 / 7


2.2. Efficiency

	1	2	3	4	5	6	7	8	9	10
Frequency(MHz)	2412	2420	2430	2440	2445	2450	2460	2470	2480	2485
Efficiency(dB)	-1.15	-1.13	-1.04	-0.95	-0.92	-1.02	-1.01	-0.91	-1.01	-1.08
Efficiency(%)	76.79	77.14	78.69	80.30	80.87	78.98	79.24	81.12	79.30	77.97
TRG(dB)	-1.15	-1.13	-1.04	-0.95	-0.92	-1.02	-1.01	-0.91	-1.01	-1.08
TRG _{Theta} (dB)	-3.26	-3.30	-3.36	-3.29	-3.26	-3.44	-3.46	-3.35	-3.47	-3.49
TRG _{Phi} (dB)	-5.29	-5.18	-4.87	-4.75	-4.73	-4.72	-4.67	-4.57	-4.64	-4.79
UHRG(dB)	-3.67	-3.63	-3.55	-3.41	-3.41	-3.44	-3.47	-3.37	-3.47	-3.56
UHRG/TRG(%)	56.00	56.23	56.07	56.78	56.42	57.30	56.79	56.77	56.74	56.51
H-Plane	-2.99	-2.83	-2.83	-2.84	-2.67	-3.19	-3.12	-2.92	-3.34	-3.18
E1-Plane, AVG(dB)	-5.56	-5.79	-5.87	-5.98	-5.98	-6.18	-6.20	-6.26	-6.48	-6.56
E2-Plane, AVG(dB)	-2.37	-2.36	-2.59	-2.47	-2.45	-2.33	-2.23	-2.24	-2.37	-2.47
Peak Gain(dB)	0.91	0.85	0.92	0.91	0.95	0.82	0.78	0.93	0.88	0.94
Directivity(dB)	2.61	2.58	2.49	2.41	2.27	2.48	2.42	2.29	2.47	2.40
Minimum Gain(dB)	-6.30	-6.54	-6.44	-6.30	-6.08	-6.08	-5.63	-5.58	-5.89	-6.06
Test Condition	FS									
Antenna Type										

Average Efficiency	-1.02 dB,	79.04 %
--------------------	-----------	---------


		DOCUMENT No : 2024RF-ANT-01	
REG. DATE : 2024.01.16	SPECIFICATION MODEL NAME : ETWZBSBC01 (LGIT)		REV.NO : 1.0
REV. DATE : 2024.01.16			PAGE : 6 / 7

2.3. Radiation Pattern

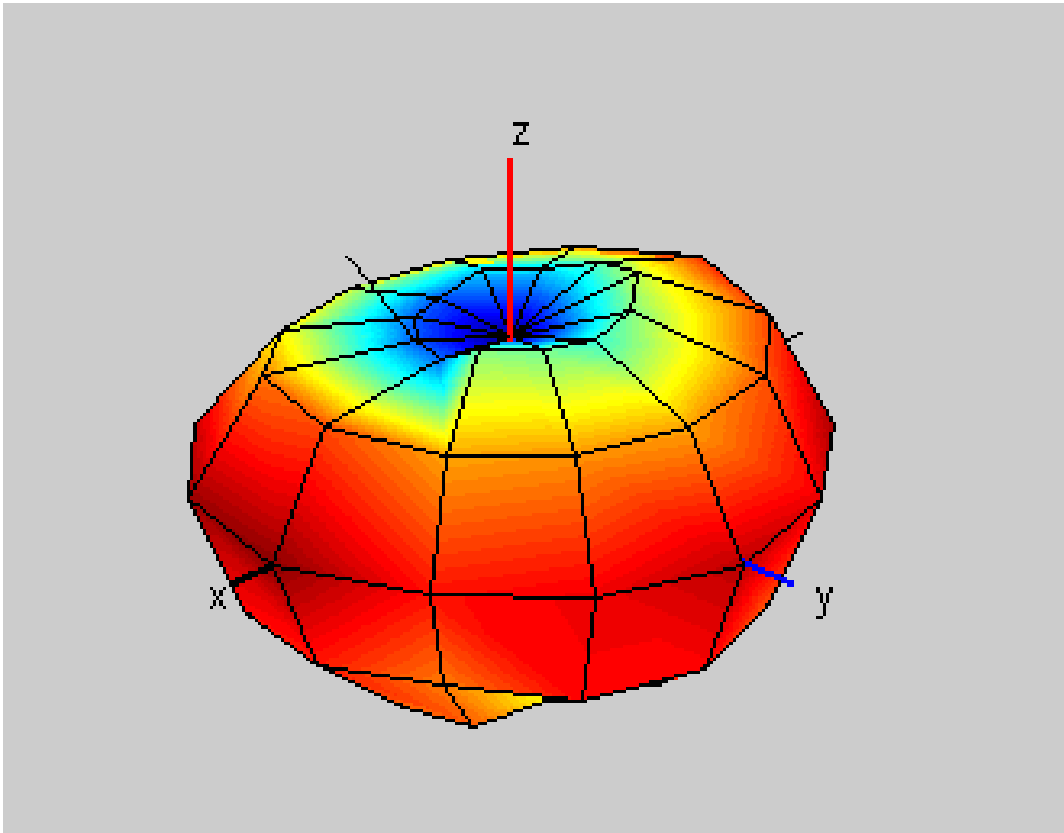

3. ANT Test Condition

CTIA-OTA Test Chamber : 3x6x3m

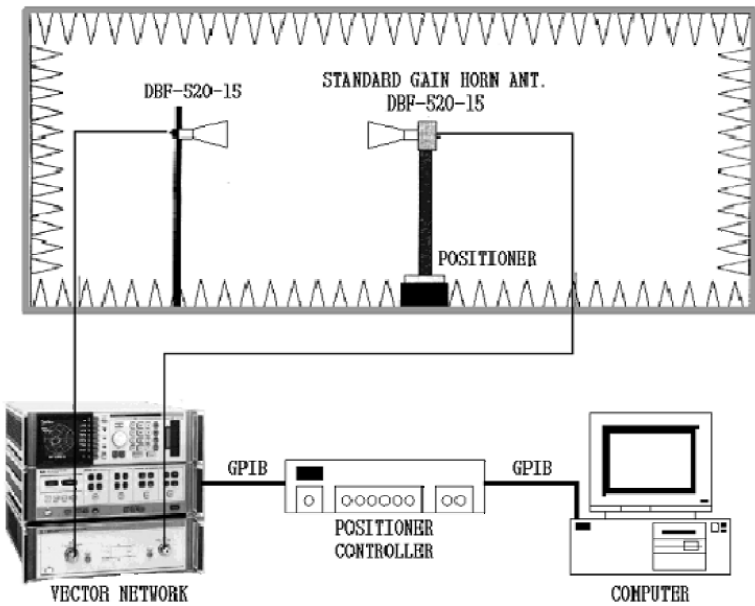

		DOCUMENT No : 2024RF-ANT-01	
REG. DATE : 2024.01.16	SPECIFICATION MODEL NAME : ETWZBSBC01 (LGIT)		REV.NO : 1.0
REV. DATE : 2024.01.16			PAGE : 7 / 7

4. ANT Dimensions

