

**FCC 15.247
2.4 GHz Report**

for

LG Electronics Inc.

**222 LG-ro Jinwi-myeon 451-713
Pyeongtaek-si, Gyeonggi-do 451-713, Korea**

Brand : LG
Product Name : Pocket Photo
Model Name : (1)PD261 (2)PD261W (3)PD261P
FCC ID : BEJ-PD261

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. REPORT HISTORY.....	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of EUT	7
3.2. EUT Specifications Assessed in Current Report	8
3.3. Antenna Information	9
3.4. Test Configuration	9
3.5. Tested Supporting System List	10
3.6. Setup Configuration	10
3.7. Operating Condition of EUT	11
3.8. Description of Test Facility	11
3.9. Measurement Uncertainty	12
4. MEASUREMENT EQUIPMENT LIST	13
4.1. Conducted Emission Measurement	13
4.2. Radiated Emission Measurement	13
4.3. RF Conducted Measurement	13
5. CONDUCTED EMISSION MEASUREMENT	14
5.1. Block Diagram of Test Setup	14
5.2. Power Line Conducted Emission Limit	14
5.3. Test Procedure	14
5.4. Conducted Emission Measurement Results	15
6. RADIATED EMISSION MEASUREMENT	17
6.1. Block Diagram of Test Setup	17
6.2. Radiated Emission Limits	18
6.3. Test Procedure	18
6.4. Measurement Result Explanation	19
6.5. Test Results	19
7. 20dB BANDWIDTH MEASUREMENT	33
7.1. Block Diagram of Test Setup	33
7.2. Specification Limits	33
7.3. Test Procedure	33
7.4. Test Results	33
8. CARRIER FREQUENCY SEPARATION MEASUREMENT	34
8.1. Block Diagram of Test Setup	34
8.2. Specification Limits	34
8.3. Test Procedure	34
8.4. Test Results	34
9. TIME OF OCCUPANCY MEASUREMENT	35
9.1. Block Diagram of Test Setup	35
9.2. Specification Limits	35
9.3. Test Procedure	35
9.4. Test Results	35

10. NUMBER OF HOPPING CHANNELS MEASUREMENT	36
10.1. Block Diagram of Test Setup	36
10.2. Specification Limits	36
10.3. Test Procedure	36
10.4. Test Results	36
11. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	37
11.1. Block Diagram of Test Setup	37
11.2. Specification Limits	37
11.3. Test Procedure	37
11.4. Test Results	37
12. EMISSION LIMITATIONS MEASUREMENT	38
12.1. Block Diagram of Test Setup	38
12.2. Specification Limits	38
12.3. Test Procedure	38
12.4. Test Results	38
13. DEVIATION TO TEST SPECIFICATIONS.....	39

APPENDIX A TEST PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : LG Electronics Inc.
Manufacture : LG Electronics Inc.
Factory : LG Electronics (Huizhou) Inc. Huitai Factory
Product Name : Pocket Photo
Model No. : (1)PD261 (2)PD261W (3)PD261P
Serial No. : N/A
Brand : LG
Power Supply : DC 5V

Applicable Standards:

FCC Rules and Regulations Part 15 Subpart C, Oct. 2014
ANSI C63.10:2013
FCC Public Notice DA 00-705

AUDIX Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **AUDIX Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2016. 02. 22 ~ 24

Date of Report: 2016. 03. 01

Producer: Annie Yu
(Annie Yu/Administrator)

Signatory: Ben Cheng
(Ben Cheng/Manager)

1. REPORT HISTORY

Revision	Date	Revision Summary	Report Number
0	2016. 03. 01	Original Report.	EM-F160121

2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(1)	20dB Bandwidth	PASS
15.247(a)(1)	Carrier Frequency Separation	PASS
15.247(a)(1)(iii)	Time of Occupancy	PASS
15.247(a)(1)(iii)	Number of Hopping Channels	PASS
15.247(b)(1)	Maximum Peak Output Power	PASS
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.203	Antenna Requirement	PASS

3. GENERAL INFORMATION

3.1. Description of EUT

Product	Pocket Photo	
Model Number	(1)PD261 (2)PD261W (3)PD261P	
	The difference lists for all models please see as below:	
	Model	Appearance Color
	PD261	White or Pink
	PD261W	White
	PD261P	Pink
The model PD261P was tested in this report.		
Serial Number	N/A	
Brand Name	LG	
Applicant	LG Electronics Inc. 222 LG-ro Jinwi-myeon 451-713 Pyeongtaek-si, Gyeonggi-do 451-713, Korea	
Manufacture	LG Electronics Inc. 222 LG-ro Jinwi-myeon 451-713 Pyeongtaek-si, Gyeonggi-do 451-713, Korea	
Factory	LG Electronics (Huizhou) Inc. Huitai Factory No.13 Hui Feng Dong Yi Road HuiTai Industrial Park of ZhongKai Development Zone 516006 HuiZhou City, GuangDong China	
USB Cable	Shielded, Detachable, 1.0m, Bonded a ferrite core	
RF Features	Bluetooth 4.0	
Transmit Type	1T1R	
Date of Receipt of Sample	2016. 02. 17	

3.2. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
Bluetooth	2402-2480	79	FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK)	1/2/3

Channel List					
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3.3. Antenna Information

Antenna Part Number	Manufacture	Antenna Type	Frequency	Max Gain (dBi)
SDBTPTR3015	partron	Dielectric Chip Antenna	2400-2485MHz	-0.22

3.4. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
Bluetooth	N/A	2.9	N/A

AC Conduction	
Test Case	Normal operation

Item		Modulation	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge ^{Note1}	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Radiated Spurious Emission ^{Note1}	GFSK	1Mbps	00/39/78
Conducted Test Case ^{Note2}	20dB Bandwidth	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Carrier Frequency Separation	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Time of Occupancy	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Number of Hopping Channels	GFSK	1Mbps	39
		8-DPSK	3Mbps	39
	Maximum Peak Output Power	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Band Edges	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Spurious Emission	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78

Note 1:

☐ Mobile Device

■ Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

■ Lie

☐ Side

☐ Stand

Note 2: We performed testing of the highest and lowest data rate.

3.5. Tested Supporting System List

3.5.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook PC	ASUS	N20A	N/A	TLZ-BT253
2.	Notebook PC	ASUS	X5502E	N/A	PPD-AAR5B225

3.5.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	Adapter: ACBEL, M/N AA90PM111, DC Cord: Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord: Unshielded, Detachable, 1.8m
2.	Adapter: Enerironix, M/N EXA1208UH, DC Cord: Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord: Unshielded, Detachable, 1.8m

3.6. Setup Configuration

3.6.1. EUT Configuration for Power Line and Radiated Emission



3.6.2. EUT Configuration for Conducted Test Items

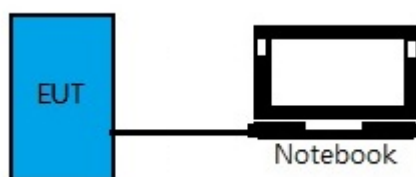

3.7. Operating Condition of EUT

Test program “dogmon (cmd.exe)” is used for enabling EUT RF function under continues transmitting and choosing data rate / channel.

3.8. Description of Test Facility

Test Firm Name	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	No. 8 Shielded Room No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Date of Renewal: May 06, 2015 Federal Communication Commission Registration Number: 90993 Fully Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan IC Test Site Registration No.: 5183B-4 Renewal on August 31, 2015
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

3.9. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.5dB
Radiation Test (Distance: 3m)	30MHz~300MHz	± 3.64dB
	300MHz~1000MHz	± 4.70dB
	Above 1GHz	± 1.60dB

Remark : Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
20dB Bandwidth	±0.2kHz
Carrier Frequency Separation	±0.2kHz
Time of Occupancy	±0.03sec
Maximum peak Output power	± 0.52dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2016. 02. 04	1 Year
2.	A.M.N.	R&S	ENV4200	100169	2015. 11. 17	1 Year
3.	Pulse Limiter	R&S	ESH3-Z2	100354	2016. 01. 17	1 Year

4.2. Radiated Emission Measurement

4.2.1. Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2015. 09. 14	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2015. 06. 24	1 Year
3.	Amplifier	HP	8447D	2944A06305	2016. 02. 11	1 Year
4.	Bilog Antenna	CHASE	CBL6112D	33821	2015. 02. 27	1 Year

4.2.2. Frequency Range Above 1000MHz (Fully Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	2015. 08. 20	1 Year
2.	Amplifier	HP	8449B	3008A02678	2015. 03. 04	1 Year
3.	Horn Antenna	ETS-Lindgren	3117	00135902	2015. 03. 06	1 Year
4.	Horn Antenna	EMCO	3116	2653	2015. 10. 20	1 Year
5.	2.4GHz Notch Filter	K&L	7NSL10-244 1.5E130.5-00	1	2015. 07. 22	1 Year


4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2015. 06. 10	1 Year
2.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2015. 11. 28	1 Year

5. CONDUCTED EMISSION MEASUREMENT

5.1. Block Diagram of Test Setup

Shielded Room Setup Diagram

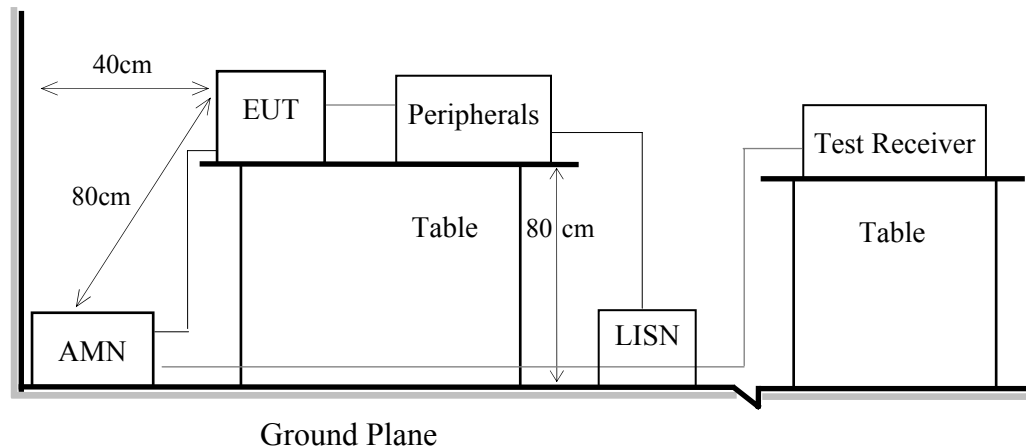

5.2. Power Line Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.


5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Conducted Emission Measurement Results

PASSED.


Test Date	2016/02/24	Temp./Hum.	20 /57%
Test Voltage	DC 5V (via USB)		

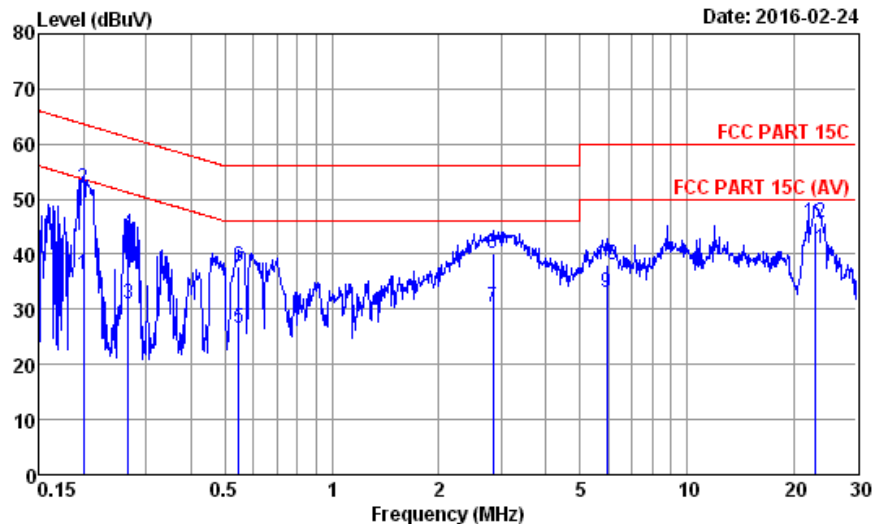

Site no. : No.8 Shielded Room Data no. : 4
Condition : ENV4200 100169 Phase : NEUTRAL
Limit : FCC PART 15C
Env. / Ins. : 20°C / 57% ESR3 (1774) Engineer : Tim
EUT : PD261P
Power Rating : DC 5V (via USB)
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.200	11.25	0.03	9.87	15.17	36.32	53.62	17.30	Average
2	0.200	11.25	0.03	9.87	30.74	51.89	63.62	11.73	QP
3	0.267	11.15	0.03	9.87	9.96	31.01	51.20	20.19	Average
4	0.267	11.15	0.03	9.87	22.67	43.72	61.20	17.48	QP
5	0.546	10.98	0.04	9.88	5.64	26.54	46.00	19.46	Average
6	0.546	10.98	0.04	9.88	16.87	37.77	56.00	18.23	QP
7	2.839	11.09	0.10	9.88	9.38	30.45	46.00	15.55	Average
8	2.839	11.09	0.10	9.88	19.06	40.13	56.00	15.87	QP
9	5.929	11.56	0.16	9.90	11.30	32.92	50.00	17.08	Average
10	5.929	11.56	0.16	9.90	16.45	38.07	60.00	21.93	QP
11	22.896	15.07	0.28	9.96	15.76	41.07	50.00	8.93	Average
12	22.896	15.07	0.28	9.96	20.32	45.63	60.00	14.37	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

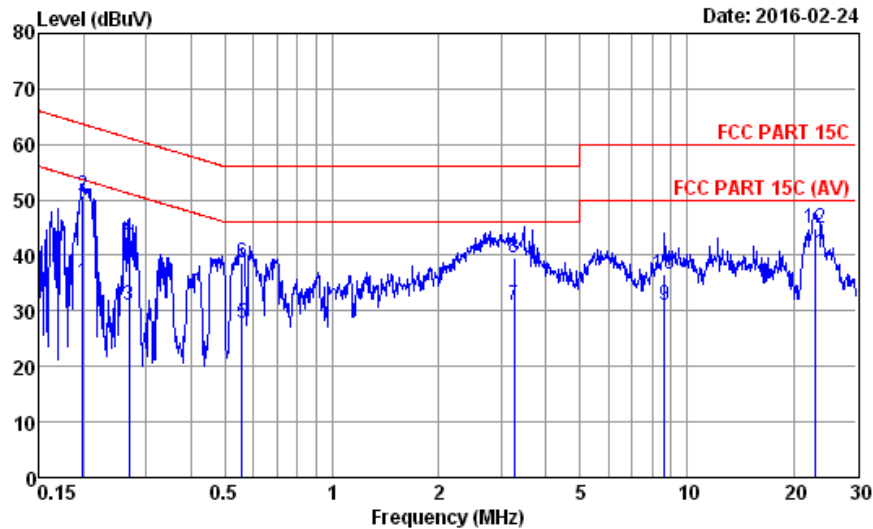

Site no. : No.8 Shielded Room Data no. : 3
Condition : ENV4200 100169 Phase : LINE
Limit : FCC PART 15C
Env. / Ins. : 20°C / 57% ESR3 (1774) Engineer : Tim
EUT : PD261P
Power Rating : DC 5V (via USB)
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.199	10.68	0.03	9.87	14.42	35.00	53.67	18.67	Average
2	0.199	10.68	0.03	9.87	30.28	50.86	63.67	12.81	QP
3	0.269	10.62	0.03	9.87	10.60	31.12	51.16	20.04	Average
4	0.269	10.62	0.03	9.87	22.61	43.13	61.16	18.03	QP
5	0.558	10.55	0.04	9.88	7.21	27.68	46.00	18.32	Average
6	0.558	10.55	0.04	9.88	18.30	38.77	56.00	17.23	QP
7	3.258	10.63	0.11	9.88	10.37	30.99	46.00	15.01	Average
8	3.258	10.63	0.11	9.88	19.02	39.64	56.00	16.36	QP
9	8.637	11.13	0.20	9.90	9.74	30.97	50.00	19.03	Average
10	8.637	11.13	0.20	9.90	15.39	36.62	60.00	23.38	QP
11	23.018	14.07	0.28	9.96	16.20	40.51	50.00	9.49	Average
12	23.018	14.07	0.28	9.96	20.65	44.96	60.00	15.04	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.


6. RADIATED EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup

6.1.1. Block Diagram of EUT


Indicated as section 3.6

6.1.2. Setup Diagram for 30-1000 MHz

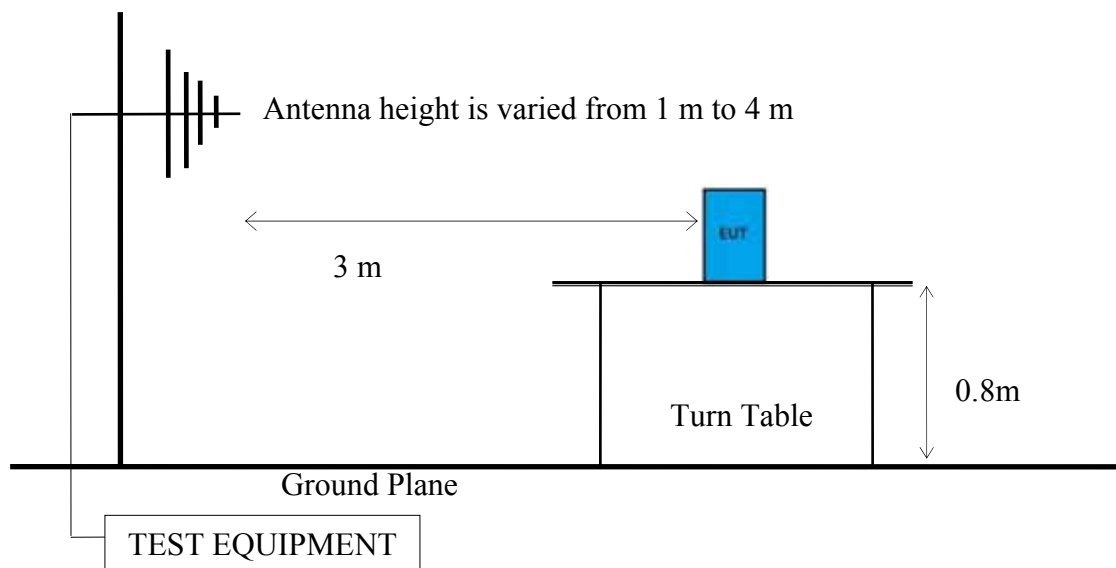

6.1.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

Antenna Tower

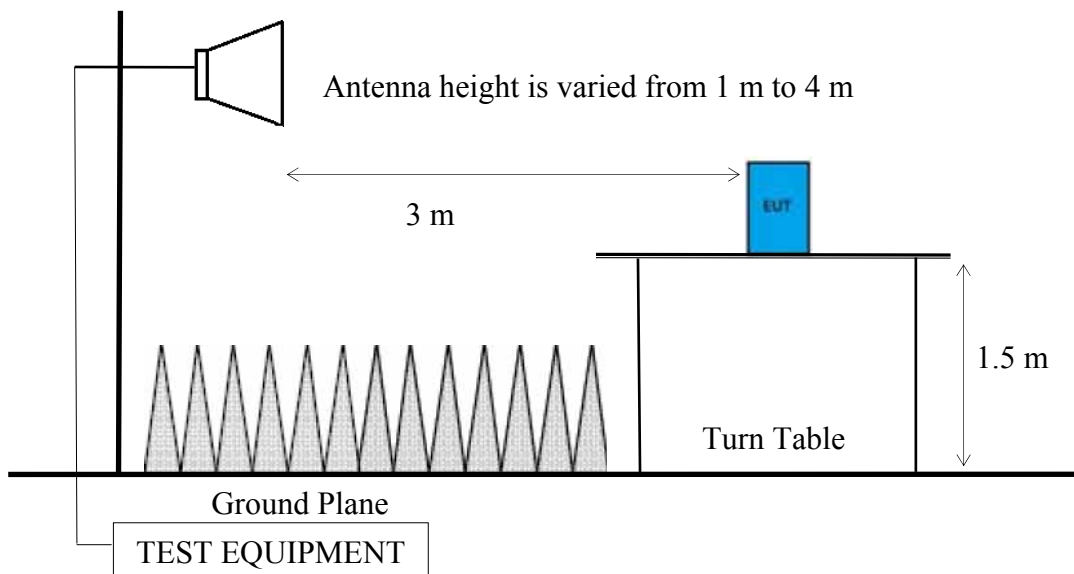

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Field Strengths Limits	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

Remark : (1) $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

The EUT setup on the turn table which has 1.5m height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

Frequency above 1GHz to 10th harmonic:

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average for finally measurement.

Average Measurement:

■ **Option 1:**

- (1) RBW = 1 MHz
- (2) VBW = 1/T
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

□ **Option 2:**

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

- Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading
- Average Emission Level = Antenna Factor + Cable Loss + Meter Reading
- Average Emission Level = Peak Emission Level + DCCF
Duty Cycle Correction Factor (DCCF) = $20\log(TX_{on}/100ms)$ presented in section 3.4
- EPR = Peak Emission Level - 95.2dB - 2.14dBi

6.5. Test Results

PASSED.

Test Date	2016/02/23	Temp./Hum.	23 /53%
Test Voltage	DC 5V (via USB)		

6.5.1. Emissions within Restricted Frequency Bands

6.5.1.1. Frequency Below 1 GHz

Modulation	GFSK	Frequency	TX 2402MHz
------------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
208.48	9.86	4.05	21.34	35.25	43.50	8.25	Peak
288.02	12.96	4.58	20.04	37.58	46.00	8.42	Peak
416.06	15.80	5.80	14.89	36.49	46.00	9.51	Peak
499.48	16.95	6.44	9.78	33.17	46.00	12.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
208.48	9.86	4.05	22.15	36.06	43.50	7.44	Peak
359.80	14.64	5.28	17.50	37.42	46.00	8.58	Peak
484.93	16.77	6.34	14.02	37.13	46.00	8.87	Peak
696.39	18.72	6.71	8.26	33.69	46.00	12.31	Peak

Modulation	GFSK	Frequency	TX 2441MHz
------------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
208.48	9.86	4.05	22.03	35.94	43.50	7.56	Peak
288.02	12.96	4.58	21.67	39.21	46.00	6.79	Peak
416.06	15.80	5.80	14.89	36.49	46.00	9.51	Peak
499.48	16.95	6.44	9.62	33.01	46.00	12.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
208.48	9.86	4.05	21.89	35.80	43.50	7.70	Peak
418.00	15.82	5.81	15.59	37.22	46.00	8.78	Peak
499.48	16.95	6.44	13.20	36.59	46.00	9.41	Peak
693.48	18.71	6.71	8.54	33.96	46.00	12.04	Peak

Modulation	GFSK	Frequency	TX 2480MHz
------------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
208.48	9.86	4.05	23.35	37.26	43.50	6.24	Peak
288.02	12.96	4.58	21.67	39.21	46.00	6.79	Peak
418.00	15.82	5.81	14.89	36.52	46.00	9.48	Peak
497.54	16.93	6.43	9.89	33.25	46.00	12.75	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
208.48	9.86	4.05	23.34	37.25	43.50	6.25	Peak
359.80	14.64	5.28	17.68	37.60	46.00	8.40	Peak
418.00	15.82	5.81	15.01	36.64	46.00	9.36	Peak
693.48	18.71	6.71	6.95	32.37	46.00	13.63	Peak

6.5.1.2. Frequency Above 1 GHz to 10th harmonics


Band Edge:

Modulation	GFSK	Frequency	TX 2402MHz
------------	------	-----------	------------

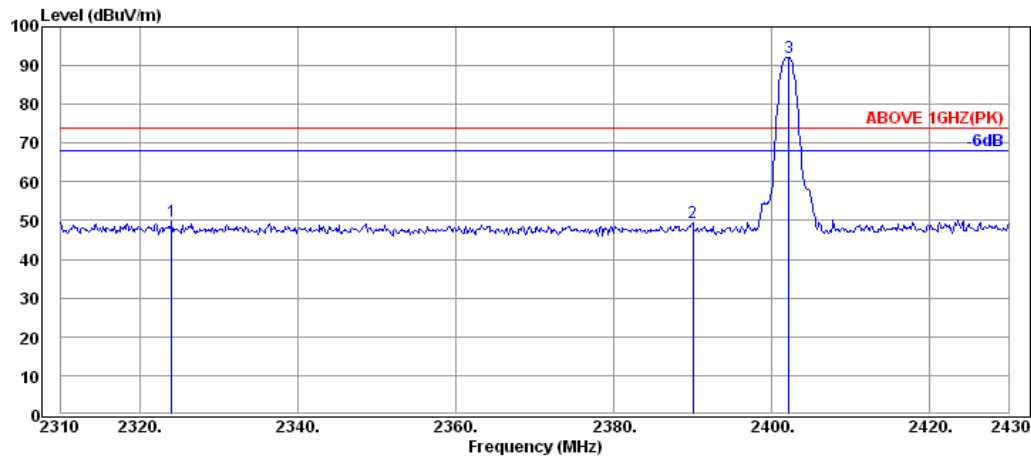

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2324.04	32.06	5.67	12.01	49.74	74.00	24.26	Peak
2390.04	32.16	5.72	11.63	49.51	74.00	24.49	Peak
2402.16	32.16	5.72	54.26	92.14	---	---	Peak

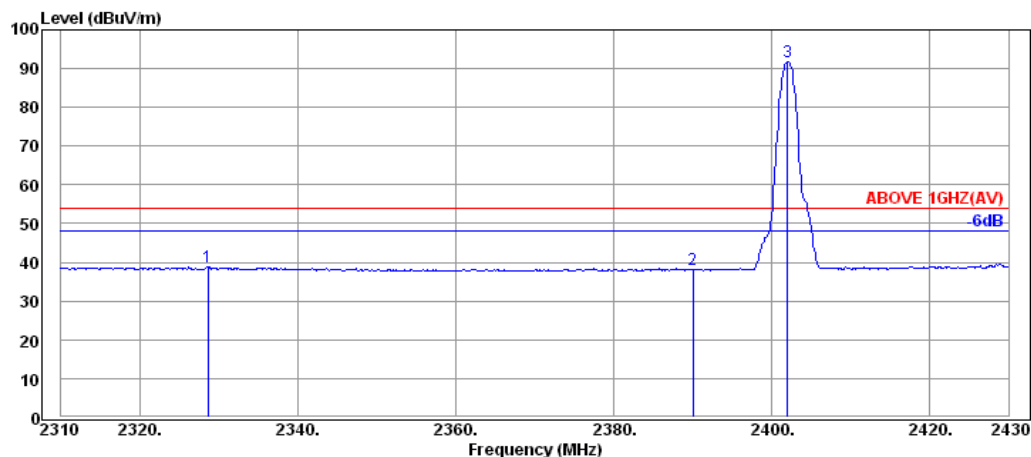

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2328.60	32.06	5.67	1.11	38.84	54.00	15.16	Average
2390.04	32.16	5.72	0.27	38.15	54.00	15.85	Average
2402.04	32.16	5.72	53.91	91.79	---	---	Average

Modulation	GFSK	Frequency	TX 2402MHz
------------	------	-----------	------------

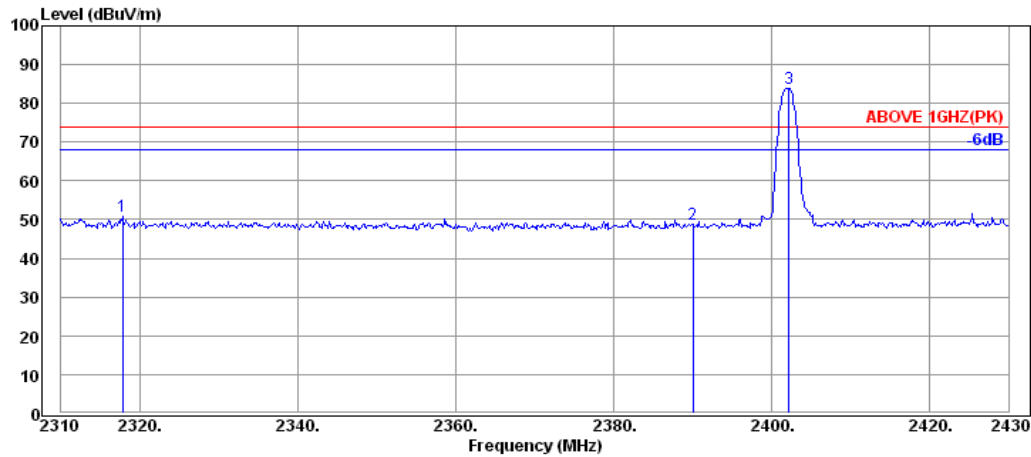

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2317.80	32.06	5.67	13.07	50.80	74.00	23.20	Peak
2390.04	32.16	5.72	11.09	48.97	74.00	25.03	Peak
2402.16	32.16	5.72	46.03	83.91	---	---	Peak

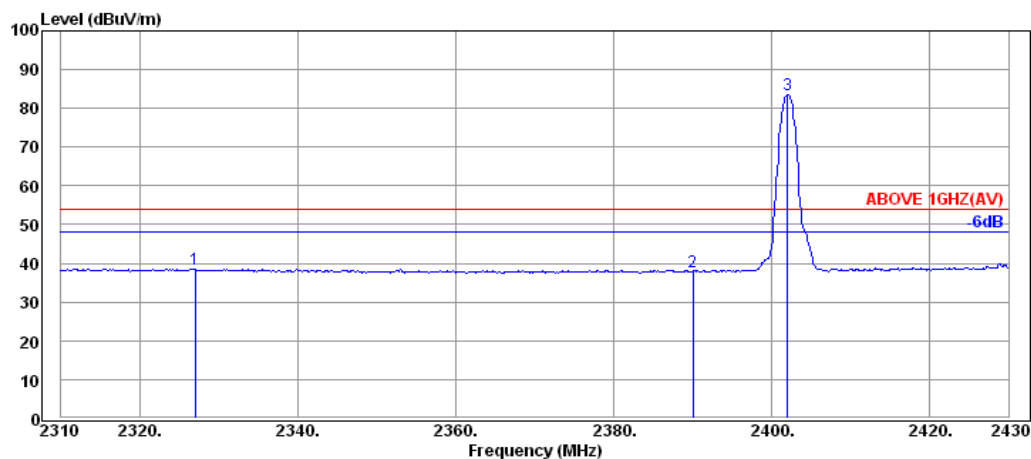

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2327.04	32.06	5.67	0.87	38.60	54.00	15.40	Average
2390.04	32.16	5.72	0.04	37.92	54.00	16.08	Average
2402.04	32.16	5.72	45.53	83.41	---	---	Average

Modulation	GFSK	Frequency	TX 2480MHz
------------	------	-----------	------------

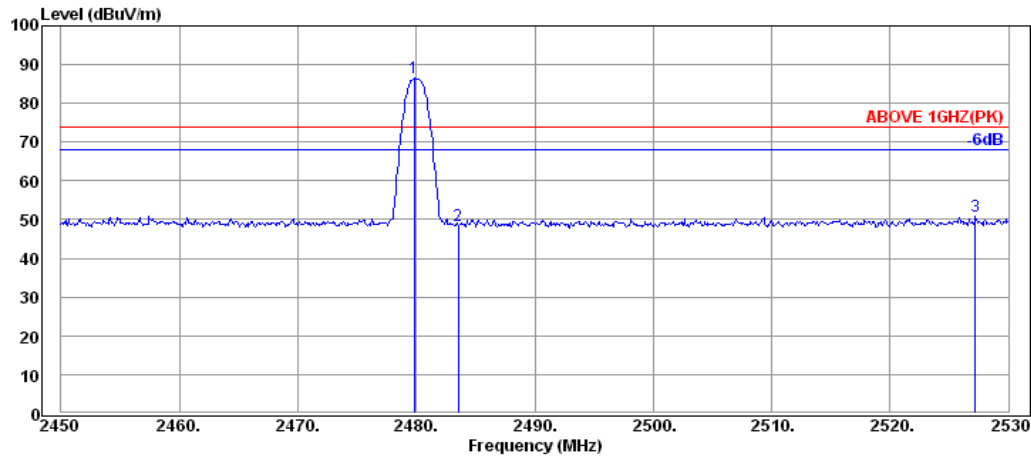

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	5.82	48.34	86.44	---	---	Peak
2483.52	32.28	5.82	10.52	48.62	74.00	25.38	Peak
2527.20	32.34	5.89	12.61	50.84	74.00	23.16	Peak

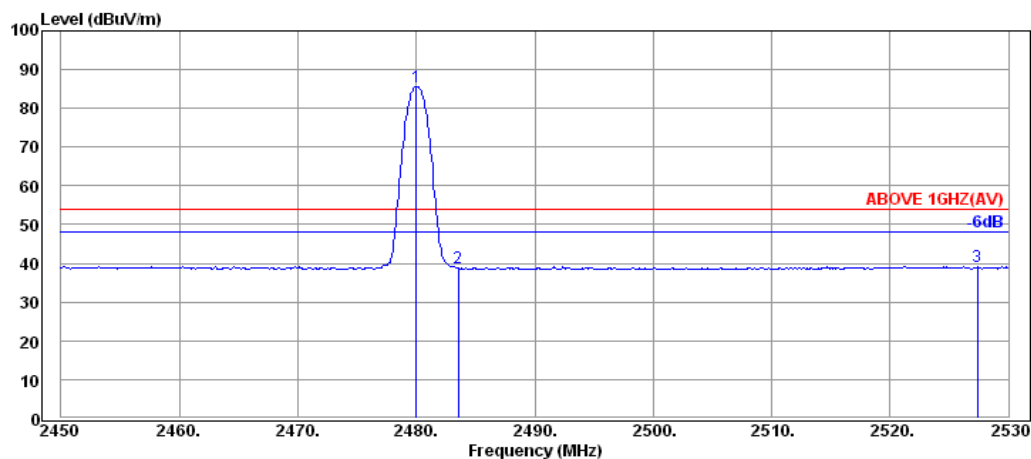

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	5.82	47.62	85.72	---	---	Average
2483.52	32.28	5.82	0.58	38.68	54.00	15.32	Average
2527.36	32.34	5.89	0.97	39.20	54.00	14.80	Average

Modulation	GFSK	Frequency	TX 2480MHz
------------	------	-----------	------------

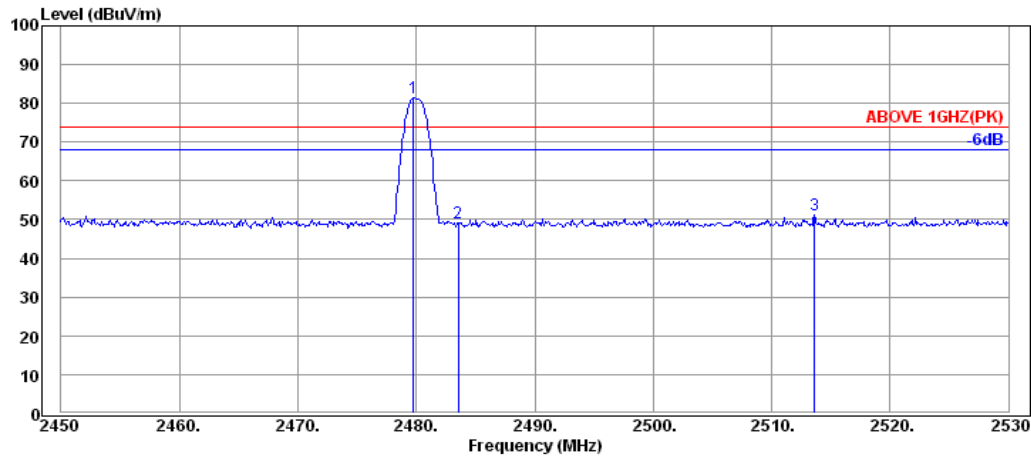

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.76	32.28	5.82	43.22	81.32	---	---	Peak
2483.52	32.28	5.82	11.01	49.11	74.00	24.89	Peak
2513.60	32.32	5.87	13.13	51.32	74.00	22.68	Peak

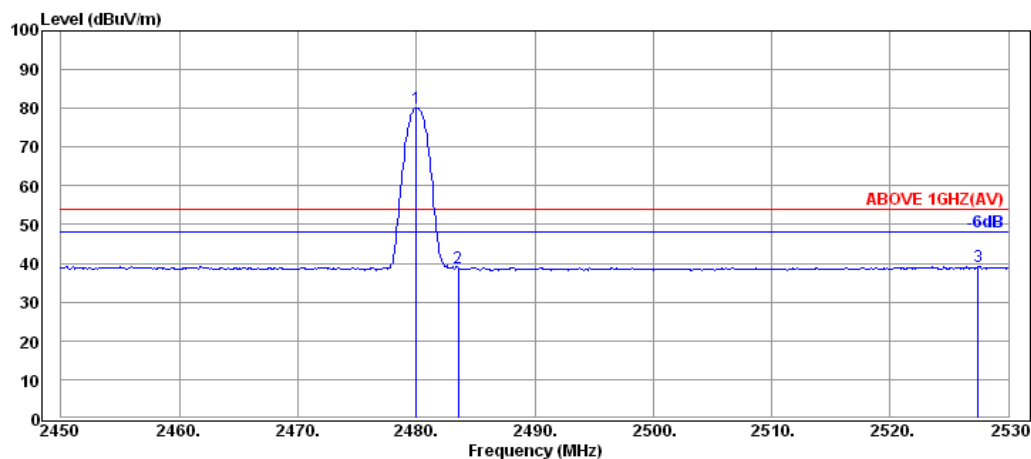

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	5.82	42.08	80.18	---	---	Average
2483.52	32.28	5.82	0.78	38.88	54.00	15.12	Average
2527.44	32.34	5.89	0.83	39.06	54.00	14.94	Average

Modulation	8-DPSK	Frequency	TX 2402MHz
------------	--------	-----------	------------

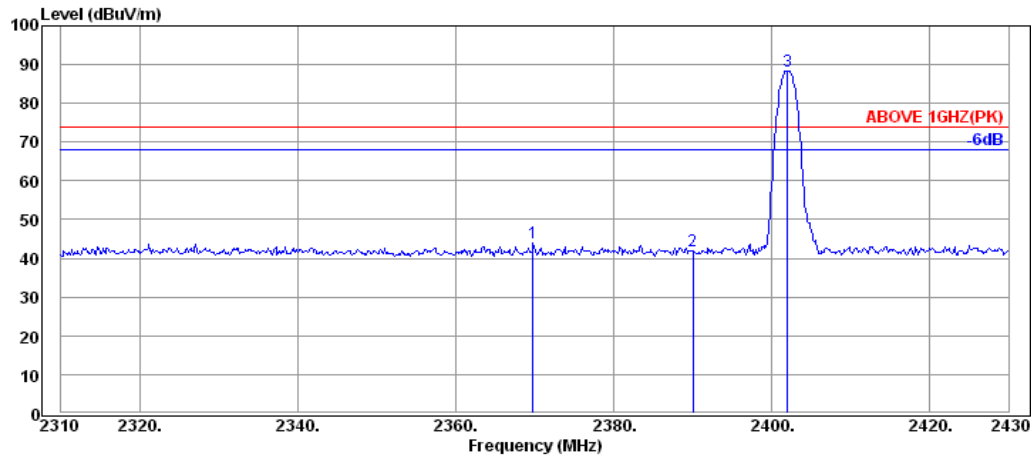

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2369.76	32.13	5.71	6.12	43.96	74.00	30.04	Peak
2390.04	32.16	5.72	3.97	41.85	74.00	32.15	Peak
2402.04	32.16	5.72	50.61	88.49	---	---	Peak

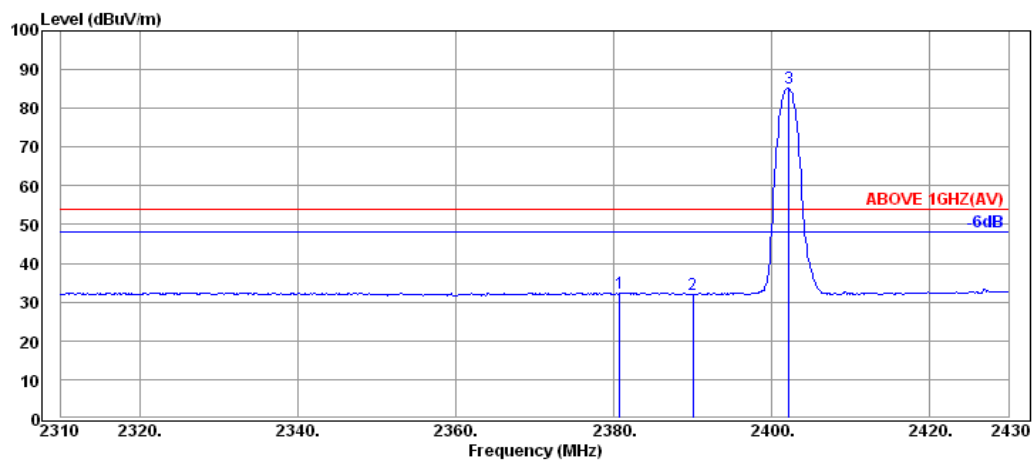

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.80	32.13	5.71	-5.38	32.46	54.00	21.54	Average
2390.04	32.16	5.72	-5.83	32.05	54.00	21.95	Average
2402.16	32.16	5.72	47.34	85.22	---	---	Average

Modulation	8-DPSK	Frequency	TX 2402MHz
------------	--------	-----------	------------

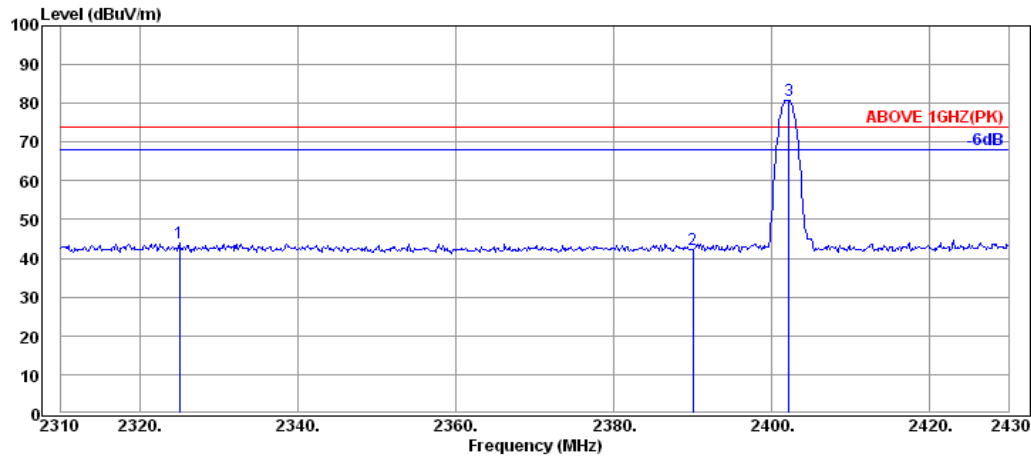

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2325.00	32.06	5.67	6.38	44.11	74.00	29.89	Peak
2390.04	32.16	5.72	4.35	42.23	74.00	31.77	Peak
2402.16	32.16	5.72	43.04	80.92	---	---	Peak

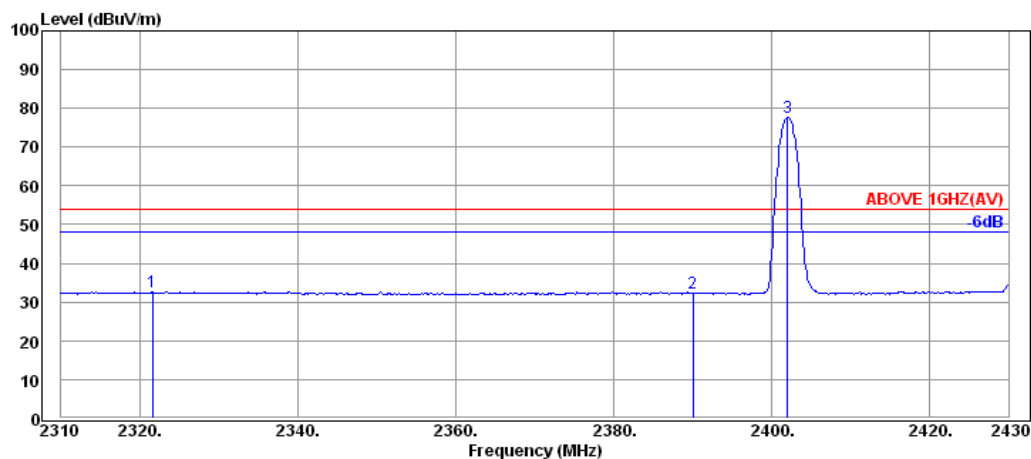

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2321.64	32.06	5.67	-5.05	32.68	54.00	21.32	Average
2390.04	32.16	5.72	-5.55	32.33	54.00	21.67	Average
2402.04	32.16	5.72	39.70	77.58	---	---	Average

Modulation	8-DPSK	Frequency	TX 2480MHz
------------	--------	-----------	------------

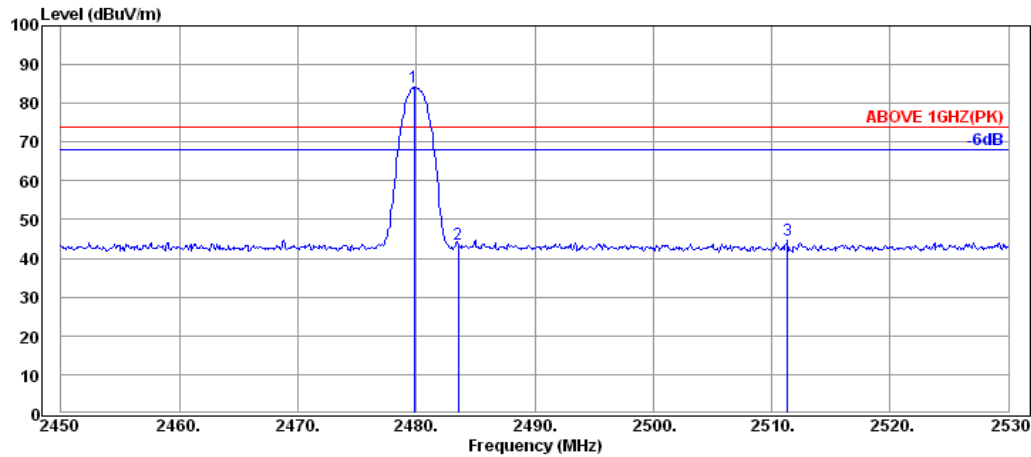

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	5.82	45.96	84.06	---	---	Peak
2483.52	32.28	5.82	5.65	43.75	74.00	30.25	Peak
2511.36	32.32	5.87	6.60	44.79	74.00	29.21	Peak

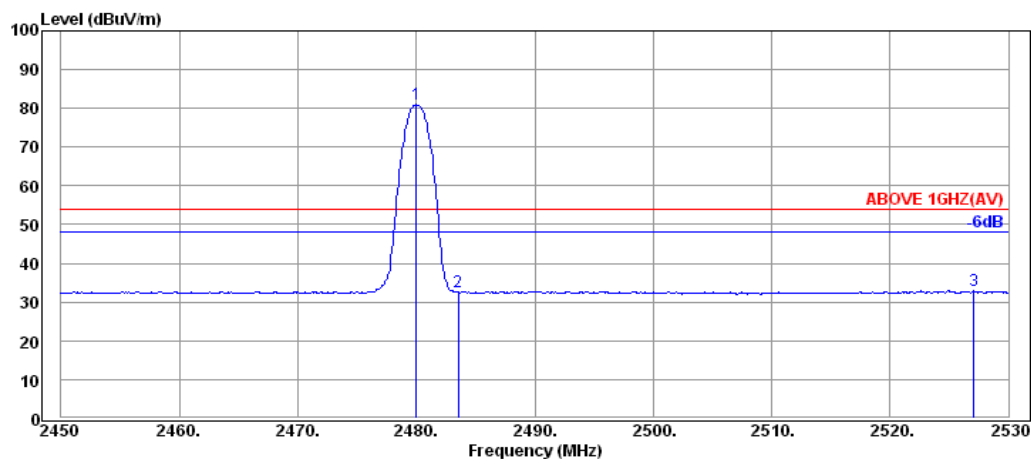

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	5.82	42.83	80.93	---	---	Average
2483.52	32.28	5.82	-5.62	32.48	54.00	21.52	Average
2527.04	32.34	5.89	-5.28	32.95	54.00	21.05	Average

Modulation	8-DPSK	Frequency	TX 2480MHz
------------	--------	-----------	------------

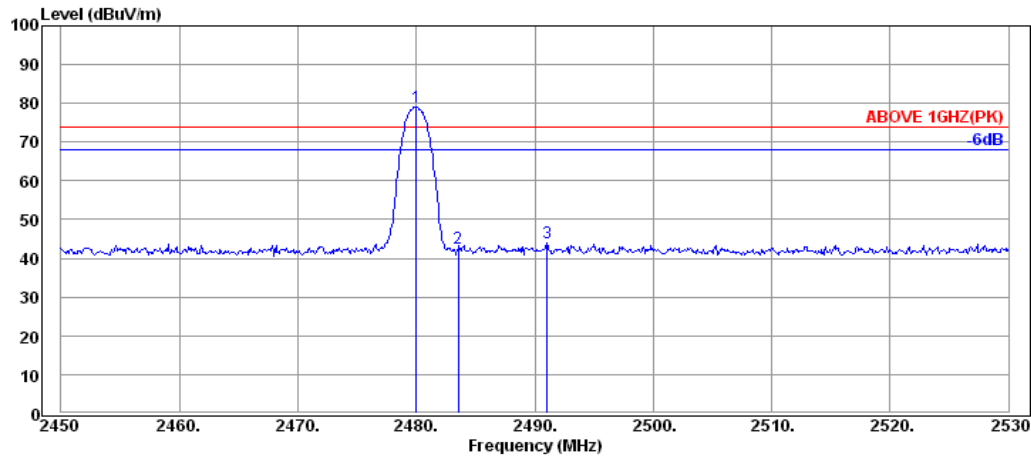

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	5.82	40.87	78.97	---	---	Peak
2483.52	32.28	5.82	4.66	42.76	74.00	31.24	Peak
2491.04	32.30	5.84	5.71	43.85	74.00	30.15	Peak

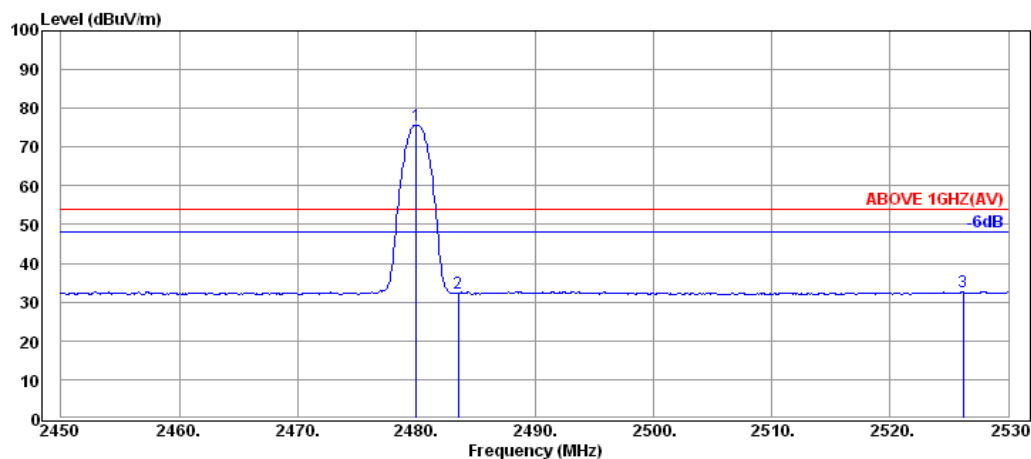

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	5.82	37.64	75.74	---	---	Average
2483.52	32.28	5.82	-5.67	32.43	54.00	21.57	Average
2526.16	32.34	5.89	-5.50	32.73	54.00	21.27	Average

6.5.2. Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Modulation	GFSK	Frequency	TX 2402MHz
------------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4805.00	34.22	7.86	-0.63	41.45	54.00	12.55	Peak
7205.00	35.80	9.22	-3.13	41.89	54.00	12.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4805.00	34.22	7.86	-0.46	41.62	54.00	12.38	Peak
7205.00	35.80	9.22	-3.36	41.66	54.00	12.34	Peak

Modulation	GFSK	Frequency	TX 2441MHz
------------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	34.25	8.35	-0.15	42.45	54.00	11.55	Peak
7325.00	35.80	9.89	-1.31	44.38	54.00	9.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	34.25	8.35	1.07	43.67	54.00	10.33	Peak
7325.00	35.80	9.89	-2.49	43.20	54.00	10.80	Peak

Modulation	GFSK	Frequency	TX 2480MHz
------------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.29	8.68	-0.53	42.44	54.00	11.56	Peak
7440.00	35.80	10.40	-2.39	43.81	54.00	10.19	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.29	8.68	-0.47	42.50	54.00	11.50	Peak
7440.00	35.80	10.40	-1.78	44.42	54.00	9.58	Peak

6.5.3. Emissions in Non-restricted Frequency Bands

All emission levels below the 15.209 general radiated emissions limits is not required.

7. 20dB BANDWIDTH MEASUREMENT

7.1. Block Diagram of Test Setup

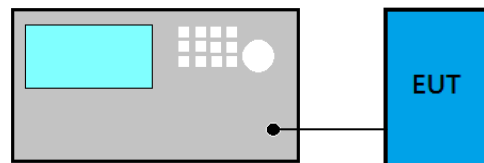

7.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.3. Test Procedure

Following measurement procedure is reference to DA00-705:


- (1) Set RBW close to 1% of OBW.
- (2) Set $VBW \geq RBW$.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.

7.4. Test Results

Please refer to Appendix A

8. CARRIER FREQUENCY SEPARATION MEASUREMENT

8.1. Block Diagram of Test Setup

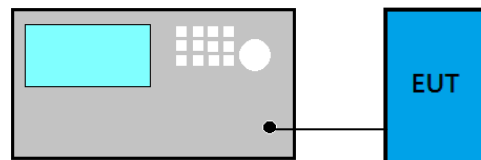

8.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

8.3. Test Procedure

Following measurement procedure is reference to DA00-705:


- (1) Span = wide enough to capture the peaks of two adjacent channels
- (2) RBW $\geq$ 1% of the span
- (3) VBW $\geq$ RBW
- (4) Sweep = auto
- (5) Detector function = peak
- (6) Trace = max hold

8.4. Test Results

Please refer to Appendix A

9. TIME OF OCCUPANCY MEASUREMENT

9.1. Block Diagram of Test Setup

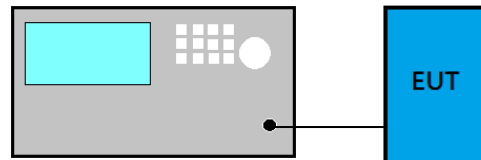

9.2. Specification Limits

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

9.3. Test Procedure

Following measurement procedure is reference to DA00-705:


- (1) Span = zero span, centered on a hopping channel
- (2) RBW = 1 MHz
- (3) VBW $\geq$ RBW
- (4) Sweep = as necessary to capture the entire dwell time per hopping channel
- (5) Detector function = peak
- (6) Trace = max hold

9.4. Test Results

Please refer to Appendix A

10. NUMBER OF HOPPING CHANNELS MEASUREMENT

10.1. Block Diagram of Test Setup

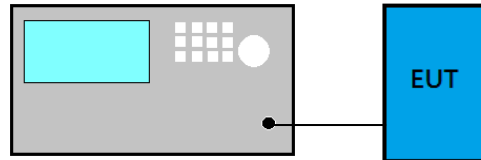

10.2. Specification Limits

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

10.3. Test Procedure

Following measurement procedure is reference to DA00-705:


- (1) Span = the frequency band of operation
- (2) RBW $\geq$ 1% of the span
- (3) VBW $\geq$ RBW
- (4) Sweep = auto
- (5) Detector function = peak
- (6) Trace = max hold

10.4. Test Results

Please refer to Appendix A

11. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

11.1. Block Diagram of Test Setup

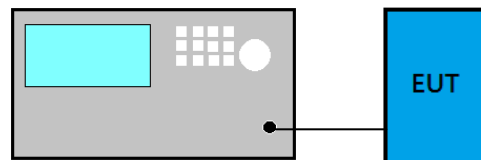

11.2. Specification Limits

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

11.3. Test Procedure

Following measurement procedure is reference to DA00-705:


- (1) Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- (2) RBW $\geq$ 1% of the span
- (3) VBW $\geq$ RBW
- (4) Sweep = auto
- (5) Detector function = peak
- (6) Trace = max hold

11.4. Test Results

Please refer to Appendix A

12. EMISSION LIMITATIONS MEASUREMENT

12.1. Block Diagram of Test Setup

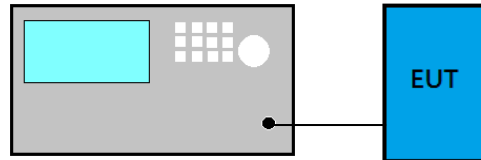

12.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).

12.3. Test Procedure

Following measurement procedure is reference to DA00-705:

- (1) Set span wide enough to capture the peak level of the in-band emission and all spurious emissions; up to 10th harmonic.
- (2) RBW = 100 kHz
- (3) VBW $\geq$ RBW
- (4) Sweep = auto
- (5) Detector function = peak
- (6) Trace = max hold

12.4. Test Results

Please refer to Appendix A

13.DEVIATION TO TEST SPECIFICATIONS

【NONE】



AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX A

TEST PLOTS

(Model: (1)PD261 (2)PD261W (3)PD261P)

TABLE OF CONTENTS

A.1	20dB BANDWIDTH MEASUREMENT.....	2
A.1.1	20dB Bandwidth Result.....	2
A.1.2	Measurement Plots	3
A.2	CARRIER FREQUENCY SEPARATION MEASUREMENT.....	4
A.2.1	Measurement Plots	4
A.3	TIME OF OCCUPANCY MEASUREMENT	6
A.3.1	Time of Occupancy.....	6
A.3.2	Measurement Plots	10
A.4	NUMBER OF HOPPING CHANNELS MEASUREMENT	16
A.4.1	Measurement Plots	16
A.5	MAXIMUM PEAK OUTPUT POWER MEASUREMENT	17
A.5.1	Output Power	17
A.5.2	Measurement Plots	18
A.6	EMISSION LIMITATIONS MEASUREMENT	19
A.6.1	Band Edge	19
A.6.2	Spurious Emission	21

A.1 20dB BANDWIDTH MEASUREMENT

Test Date	2016/02/22	Temp./Hum.	23 /61%
Cable Loss	---	Test Voltage	DC 5V (via USB)

A.1.1 20dB Bandwidth Result

Modulation	Centre Frequency (MHz)	20 dB Bandwidth (MHz)	2/3 (20dB Bandwidth)
GFSK	2402	0.9208	0.614
	2441	0.9197	0.613
	2480	0.9195	0.613

Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.

Modulation	Centre Frequency (MHz)	20 dB Bandwidth (MHz)	2/3 (20dB Bandwidth)
8-DPSK	2402	1.265	0.843
	2441	1.267	0.845
	2480	1.267	0.845

Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.

A.1.2 Measurement Plots

Modulation: GFSK




Modulation: 8-DPSK



A.2 CARRIER FREQUENCY SEPARATION MEASUREMENT

Test Date	2016/02/22	Temp./Hum.	23 /61%
Cable Loss	1.7dB	Test Voltage	DC 5V (via USB)

A.2.1 Measurement Plots

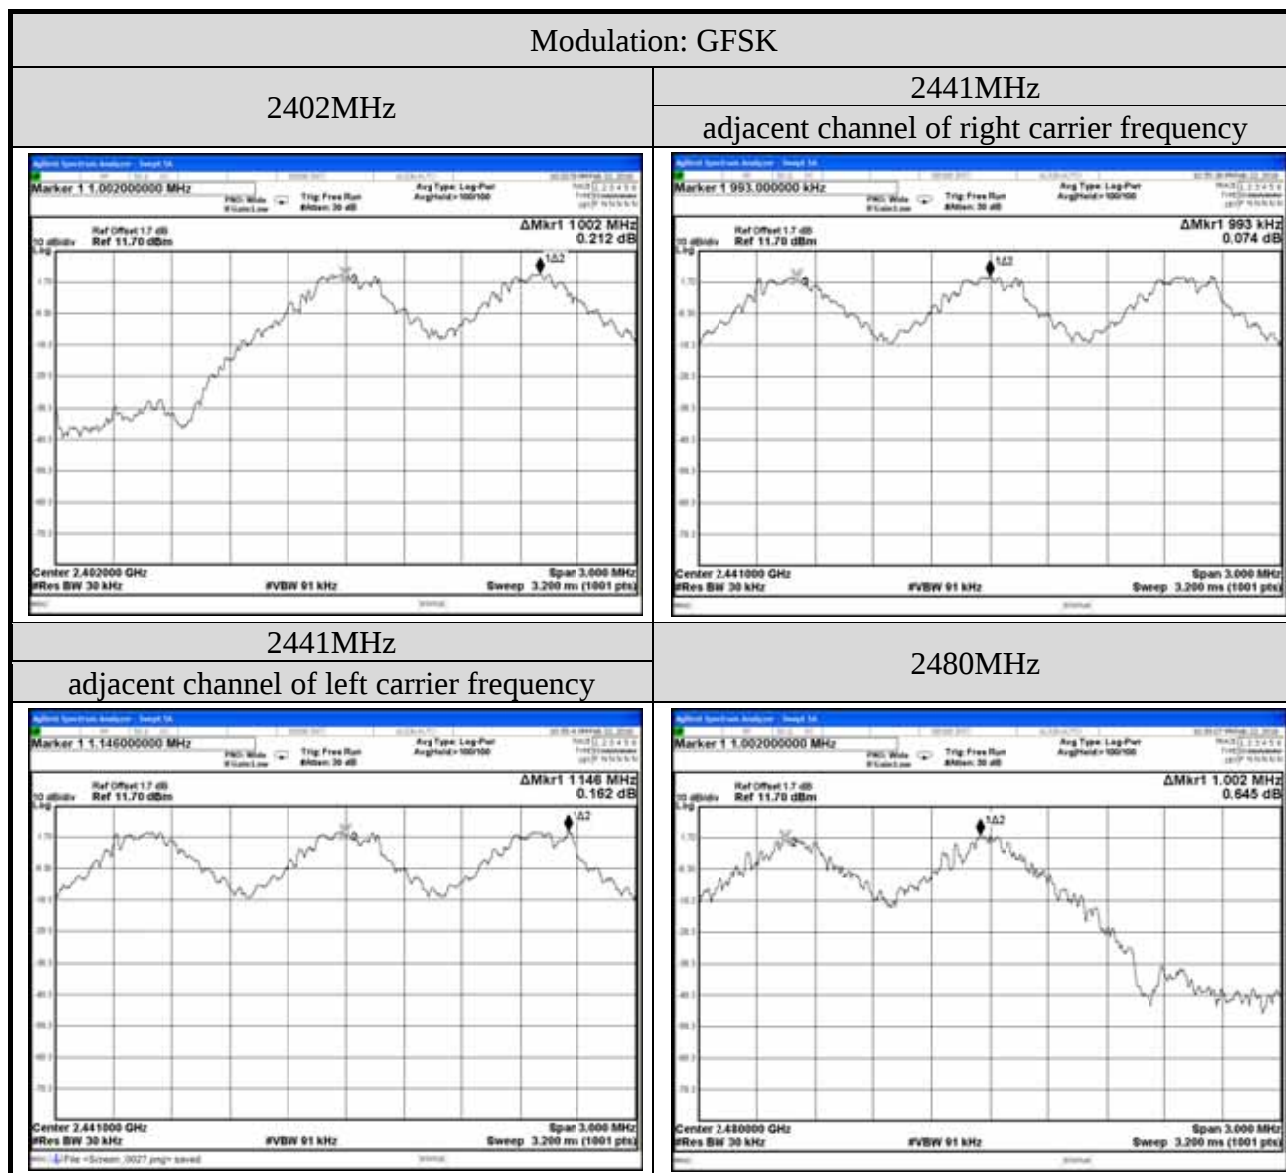


Modulation: 8-DPSK

2402MHz



2441MHz

adjacent channel of right carrier frequency

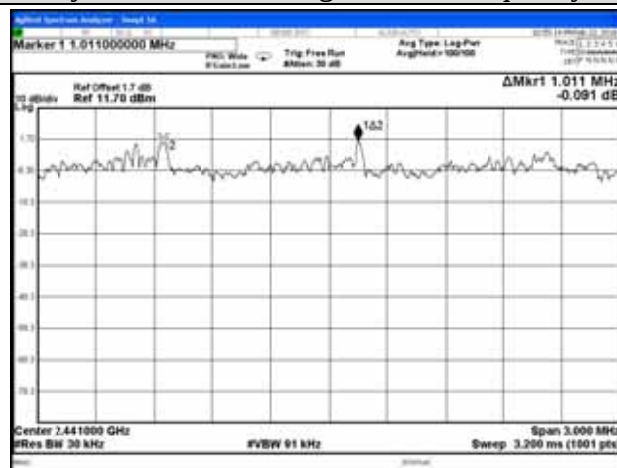

2441MHz

adjacent channel of left carrier frequency



2480MHz



A.3 TIME OF OCCUPANCY MEASUREMENT

Test Date	2016/02/22	Temp./Hum.	23 /61%
Cable Loss	1.7dB	Test Voltage	DC 5V (via USB)

A.3.1 Time of Occupancy

Modulation	Centre Frequency (MHz)	Mode	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2402	DH1	0.39	123.240	<400
		DH3	1.64	259.120	<400
		DH5	2.89	273.972	<400
	2441	DH1	0.39	123.240	<400
		DH3	1.64	259.120	<400
		DH5	2.89	273.972	<400
	2480	DH1	0.39	123.240	<400
		DH3	1.64	259.120	<400
		DH5	2.89	273.972	<400

Observation Period: 79 channels*0.4 seconds = 31.6 seconds

Centre Frequency: 2402MHz

DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

10 channels*31.6 seconds* 0.39 ms= 123.240 ms

DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

5 channels*31.6 seconds* 1.64 ms= 259.120 ms

DH5: For each second of 3 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

3 channels*31.6 seconds* 2.89 ms= 273.972 ms

Centre Frequency: 2441MHz

DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

10 channels*31.6 seconds* **0.39** ms= **123.240** ms

DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

5 channels*31.6 seconds* **1.64** ms= **259.120** ms

DH5: For each second of 3 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

3 channels*31.6 seconds* **2.89** ms= **273.972** ms

Centre Frequency: 2480MHz

DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

10 channels*31.6 seconds* **0.39** ms= **123.240** ms

DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

5 channels*31.6 seconds* **1.64** ms= **259.120** ms

DH5: For each second of 3 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

3 channels*31.6 seconds* **2.89** ms= **273.972** ms

Modulation	Centre Frequency (MHz)	Mode	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2402	3DH1	0.40	126.400	<400
		3DH3	1.65	260.700	<400
		3DH5	2.90	274.920	<400
	2441	3DH1	0.40	126.400	<400
		3DH3	1.65	260.700	<400
		3DH5	2.90	274.920	<400
	2480	3DH1	0.40	126.400	<400
		3DH3	1.65	260.700	<400
		3DH5	2.90	274.920	<400

Observation Period: 79 channels*0.4 seconds = 31.6 seconds

Centre Frequency: 2402MHz

3DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

10 channels*31.6 seconds* **0.40** ms= **126.400** ms

3DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

5 channels*31.6 seconds* **1.65** ms= **260.700** ms

3DH5: For each second of 3 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

3 channels*31.6 seconds* **2.90** ms= **274.920** ms

Centre Frequency: 2441MHz

3DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

10 channels*31.6 seconds* **0.40** ms= **126.400** ms

3DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

5 channels*31.6 seconds* **1.65** ms= **260.700** ms

3DH5: For each second of 3 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

3 channels*31.6 seconds* **2.90** ms= **274.920** ms

Centre Frequency: 2480MHz

3DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

10 channels*31.6 seconds* **0.40** ms= **126.400** ms

3DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

5 channels*31.6 seconds* **1.65** ms= **260.700** ms

3DH5: For each second of 3 channel appearance, the longest time of occupancy for each of 31.6 seconds is:



3 channels*31.6 seconds* **2.90** ms= **274.920** ms

A.3.2 Measurement Plots



Modulation: GFSK

Centre Frequency: 2402MHz



Mode: DH1

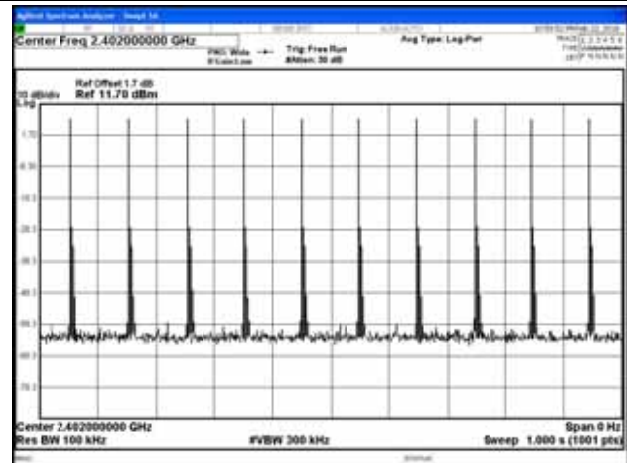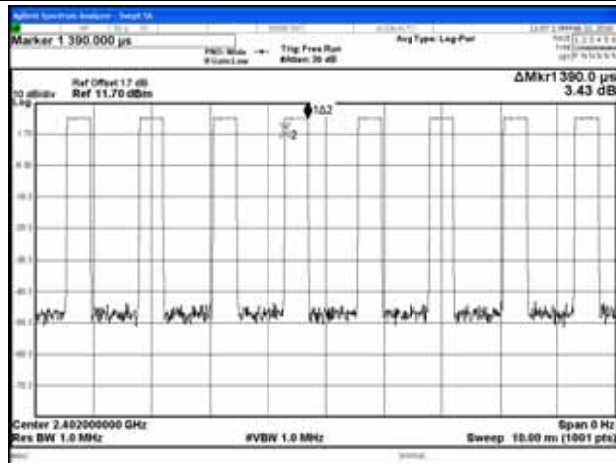

Mode: DH3

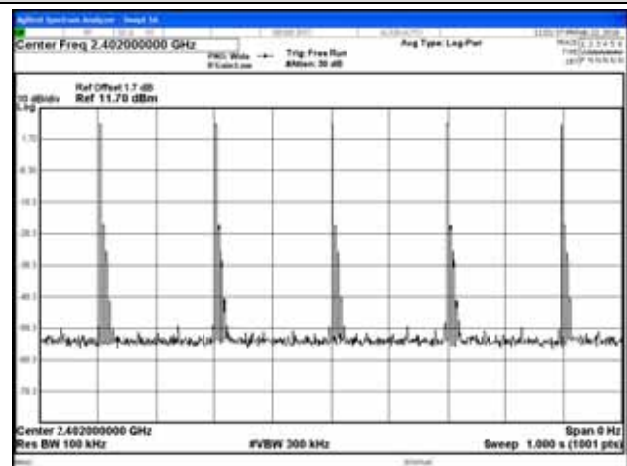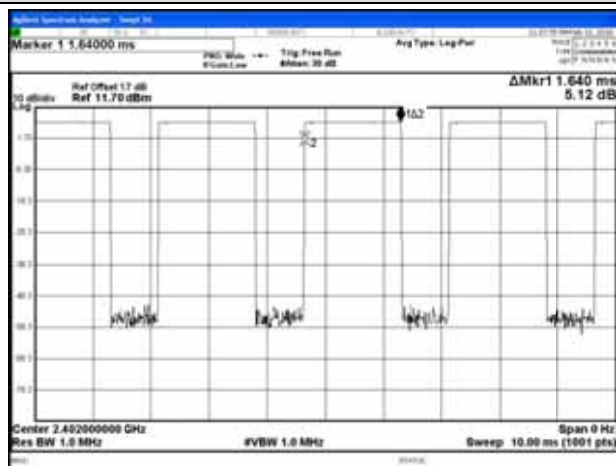



Mode: DH5

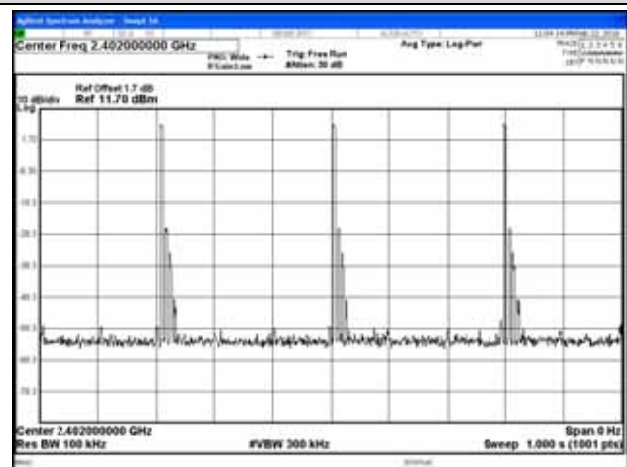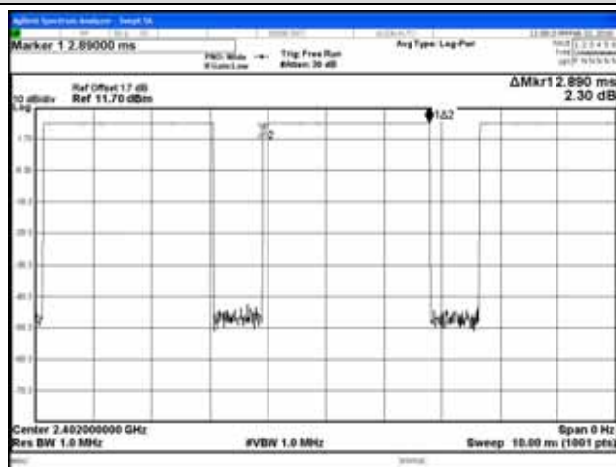


Modulation: GFSK

Centre Frequency: 2441MHz


Mode: DH1

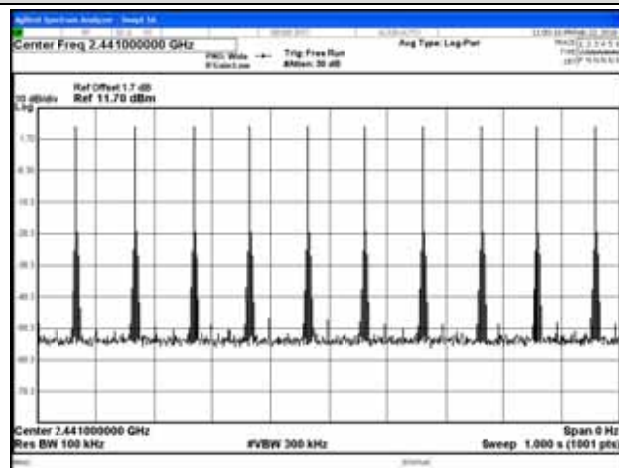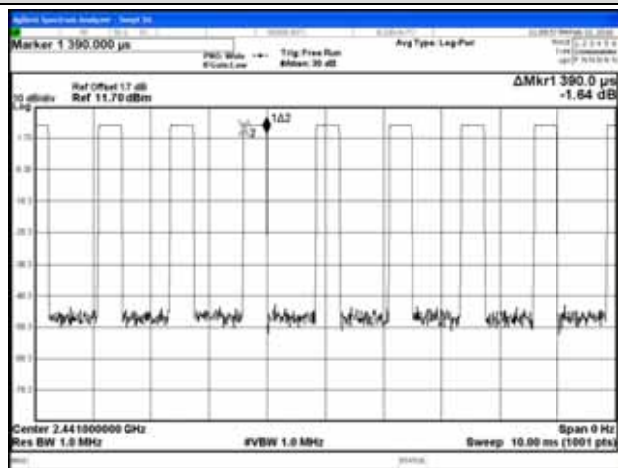

Mode: DH3

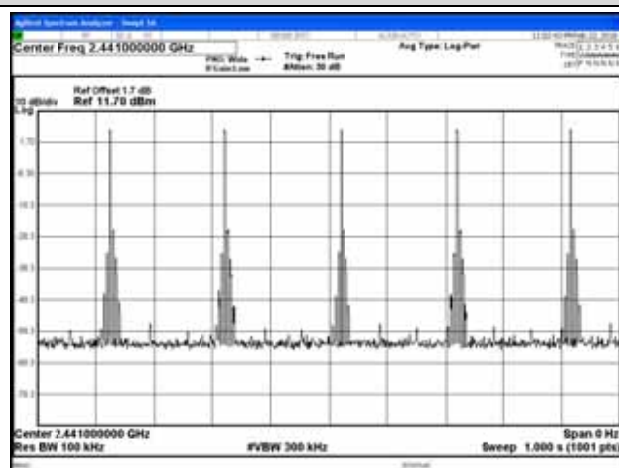



Mode: DH5

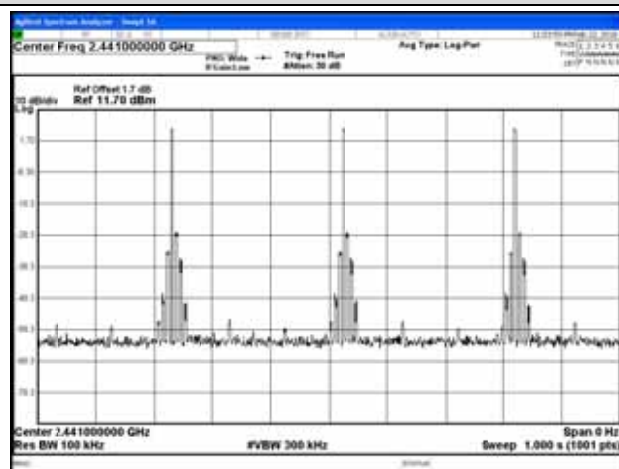



Modulation: GFSK

Centre Frequency: 2480MHz



Mode: DH1

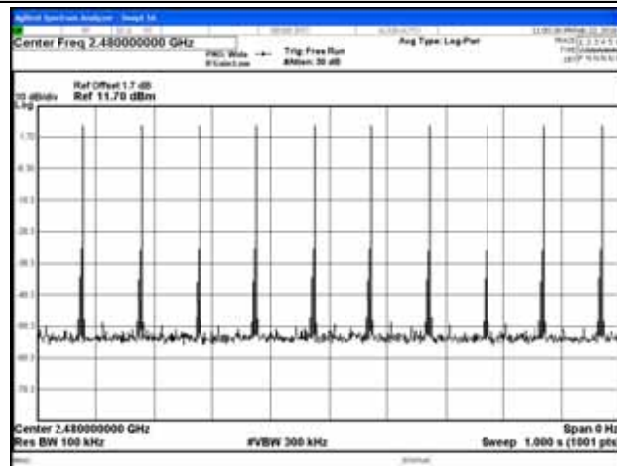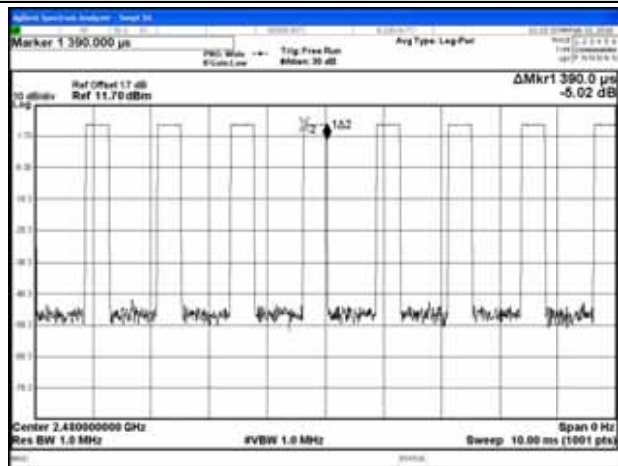

Mode: DH3

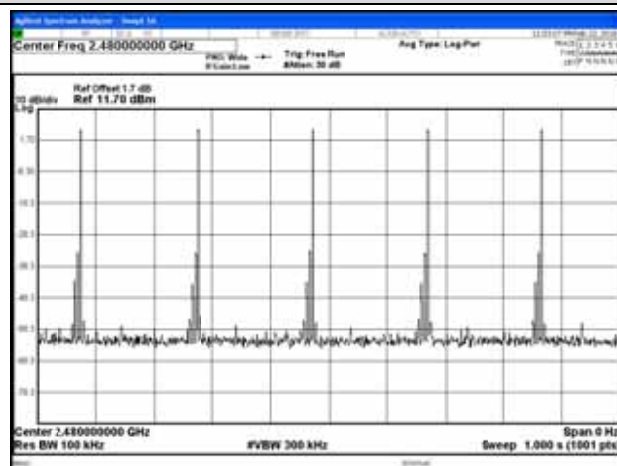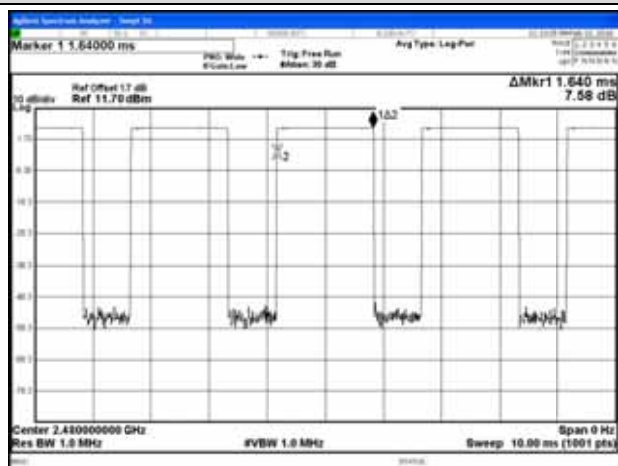



Mode: DH5

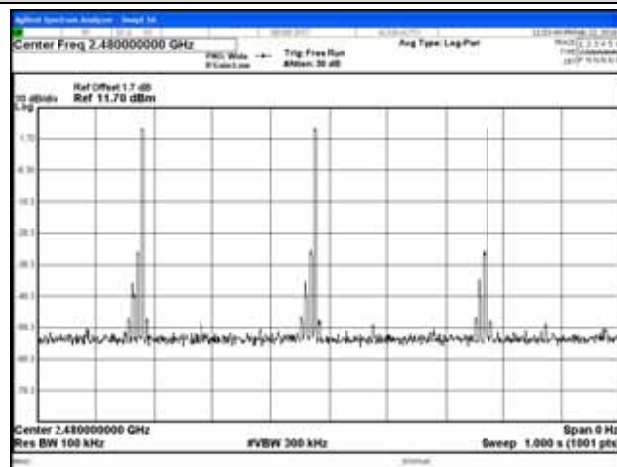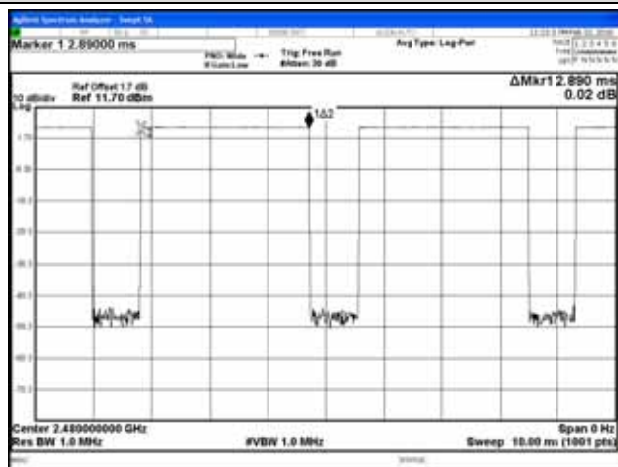



Modulation: 8-DPSK

Centre Frequency: 2402MHz


Mode: 3DH1

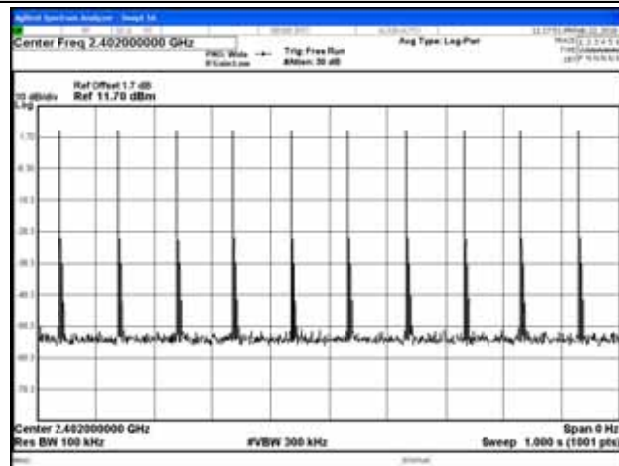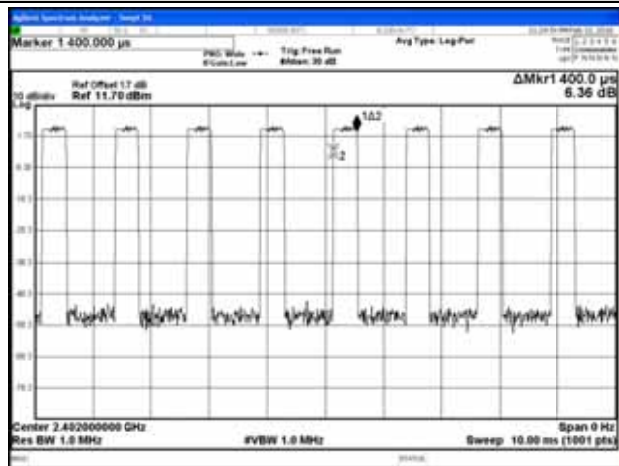

Mode: 3DH3

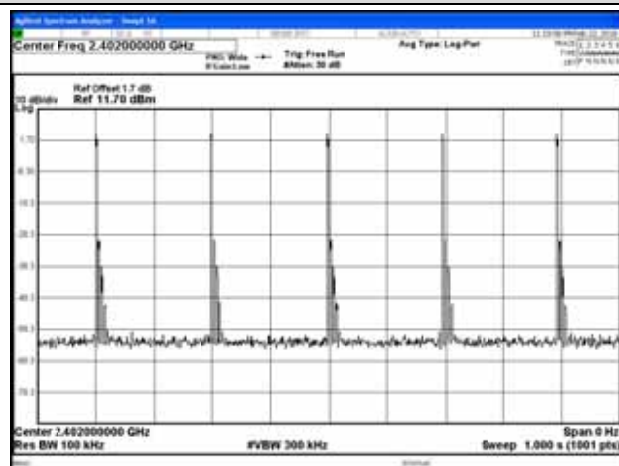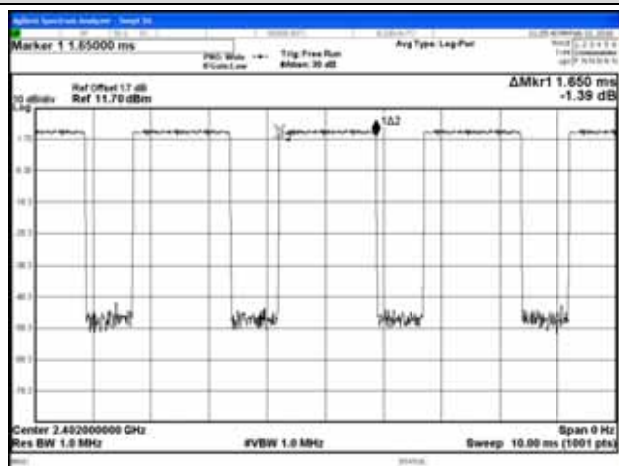



Mode: 3DH5

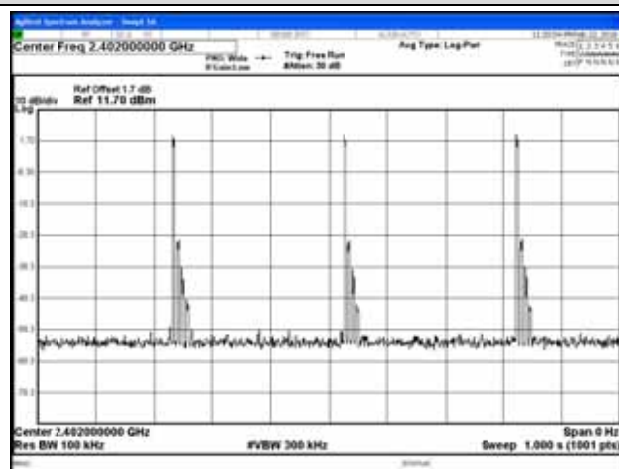



Modulation: 8-DPSK

Centre Frequency: 2441MHz



Mode: 3DH1

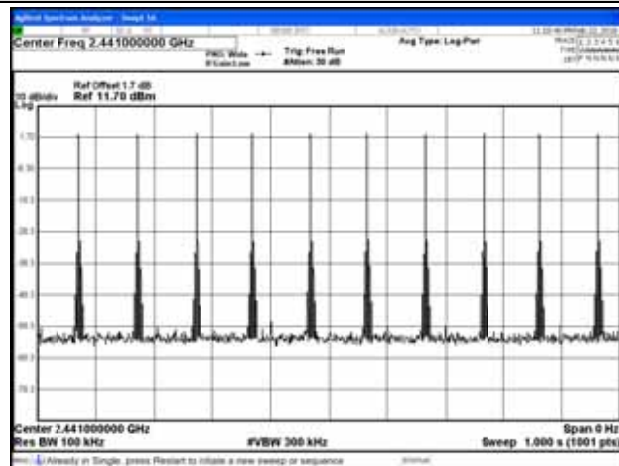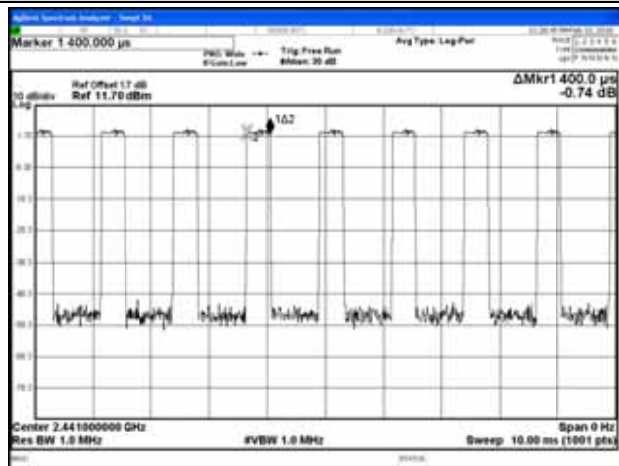

Mode: 3DH3

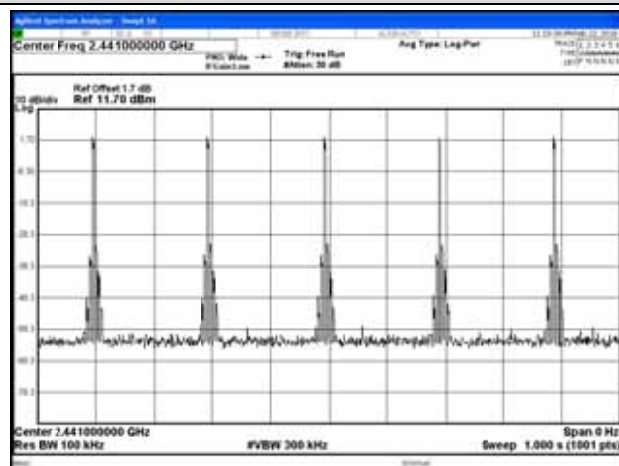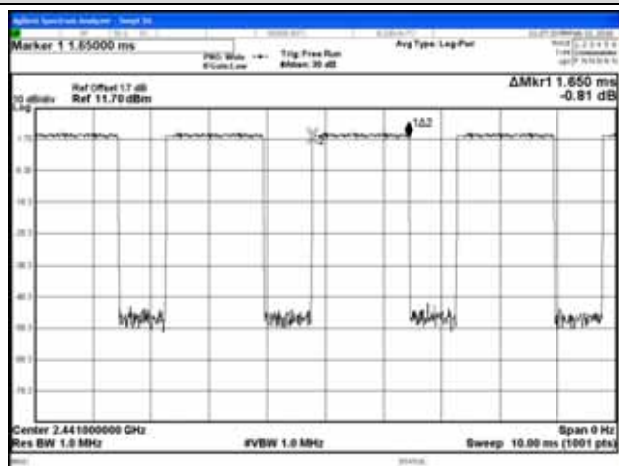



Mode: 3DH5

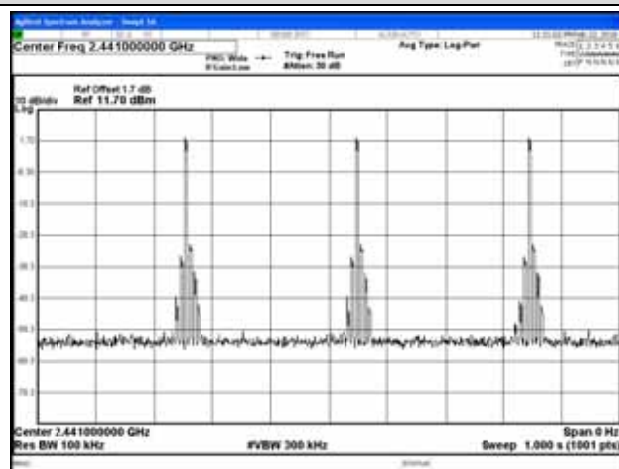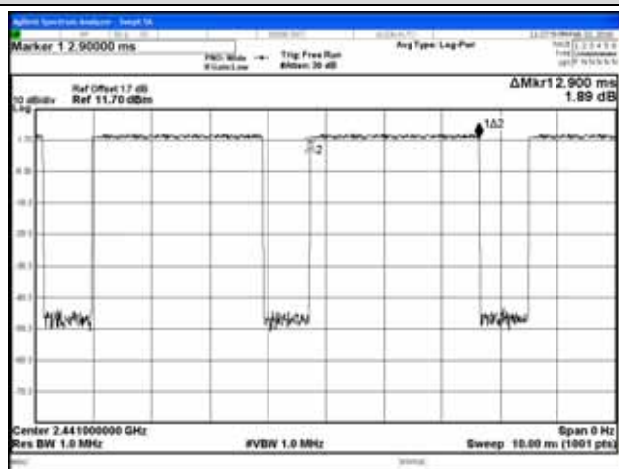



Modulation: 8-DPSK

Centre Frequency: 2480MHz



Mode: 3DH1

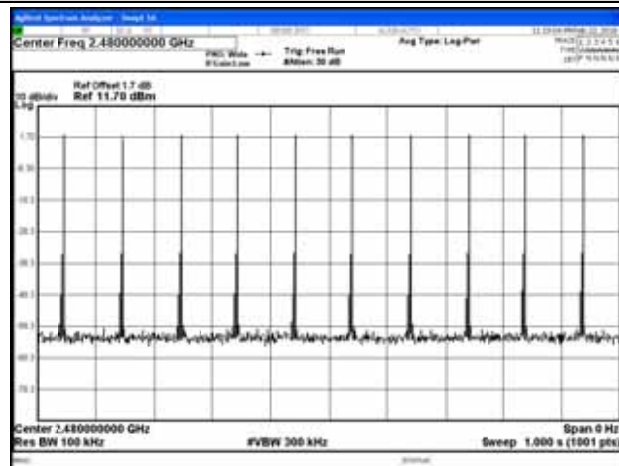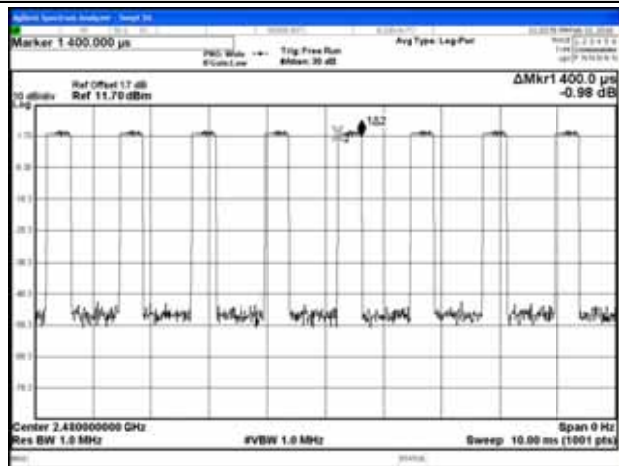

Mode: 3DH3

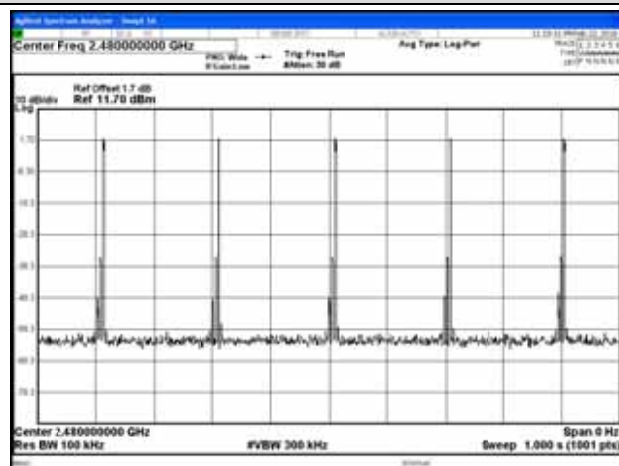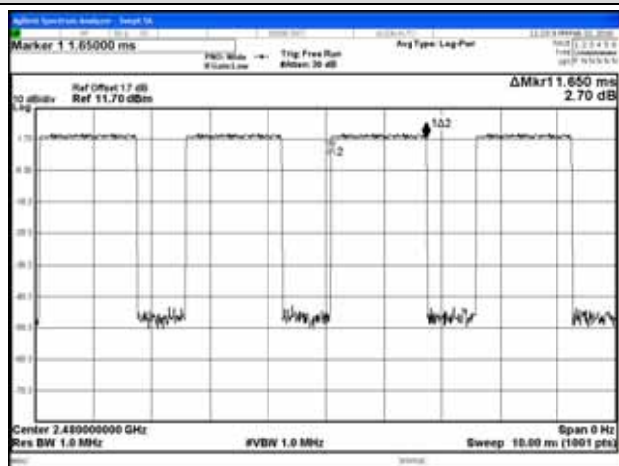



Mode: 3DH5

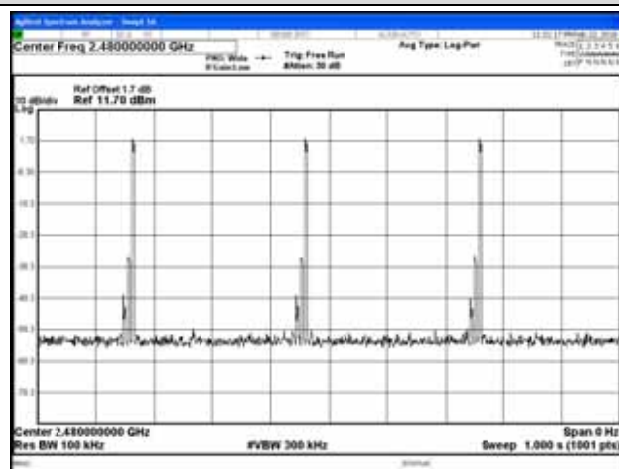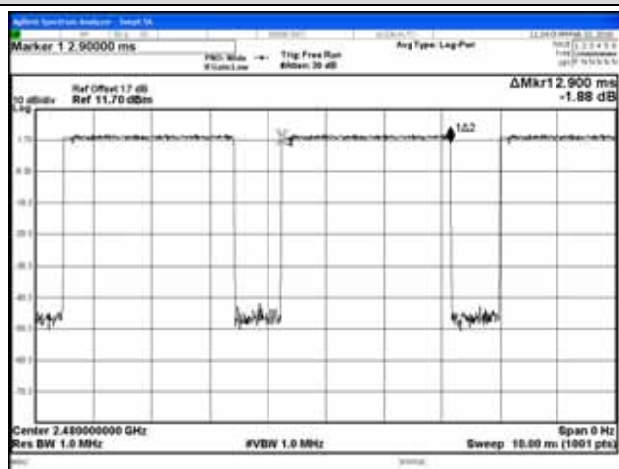

A.4 NUMBER OF HOPPING CHANNELS MEASUREMENT

Test Date	2016/02/22	Temp./Hum.	23 /61%
Cable Loss	1.7dB	Test Voltage	DC 5V (via USB)

A.4.1 Measurement Plots

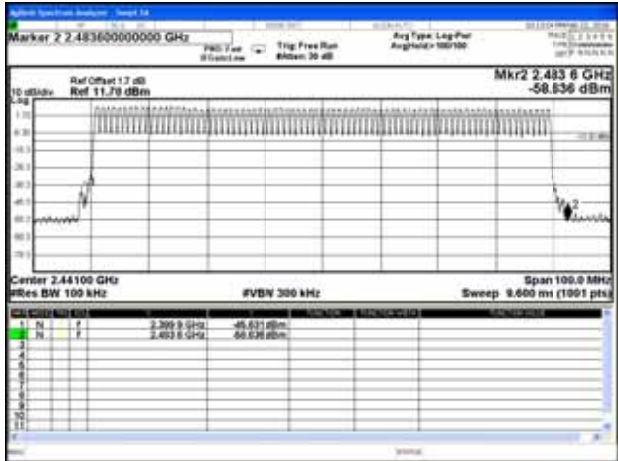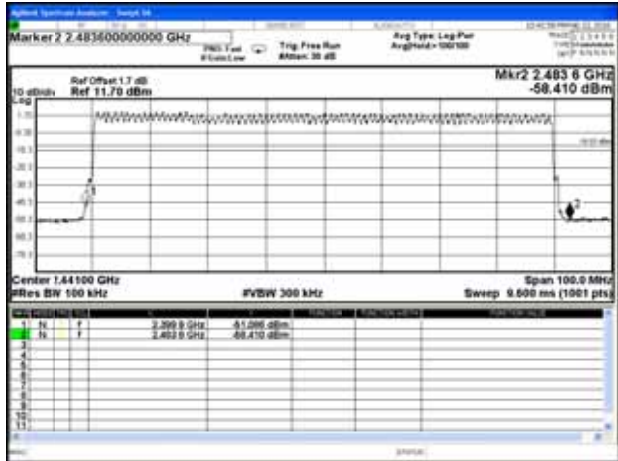Modulation: GFSK	Modulation: 8-DPSK
	
The number hopping channel is 79.	The number hopping channel is 79.

A.5 MAXIMUM PEAK OUTPUT POWER MEASUREMENT

Test Date	2016/02/22	Temp./Hum.	23 /61%
Cable Loss	1.7dB	Test Voltage	DC 5V (via USB)


A.5.1 Output Power

Modulation	Centre Frequency (MHz)	Peak Output Power		Limit
		dBm	W	
GFSK	2402	6.883	0.004879	21dBm (0.125W)
	2441	5.981	0.003964	
	2480	5.486	0.003537	






Modulation	Centre Frequency (MHz)	Peak Output Power		Limit
		dBm	W	
8-DPSK	2402	5.423	0.003486	21dBm (0.125W)
	2441	4.506	0.002822	
	2480	4.137	0.002592	

A.5.2 Measurement Plots

Modulation: GFSK

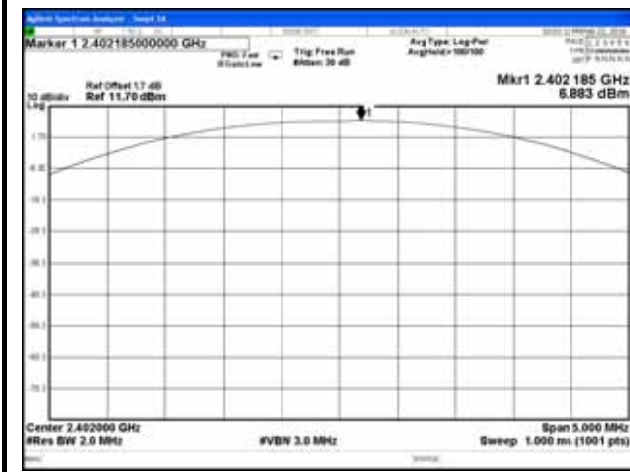


Modulation: 8-DPSK

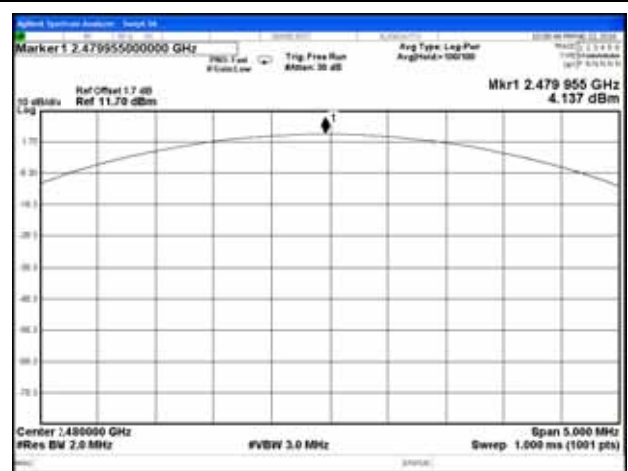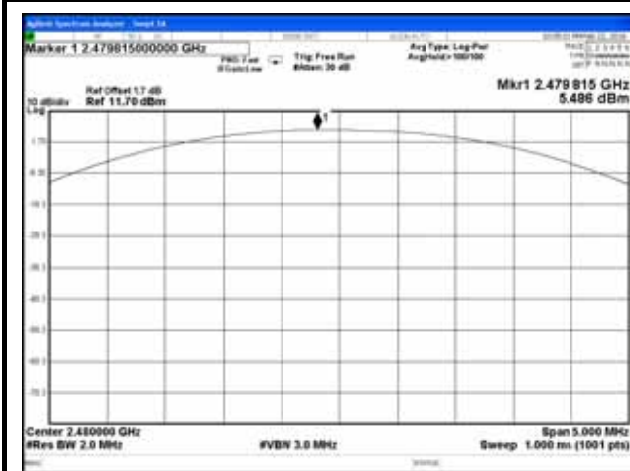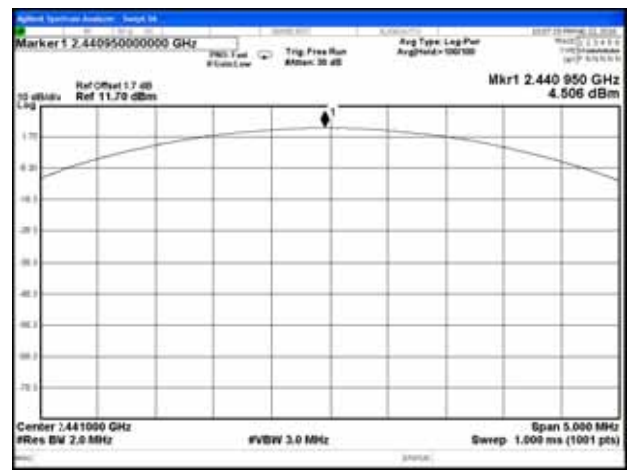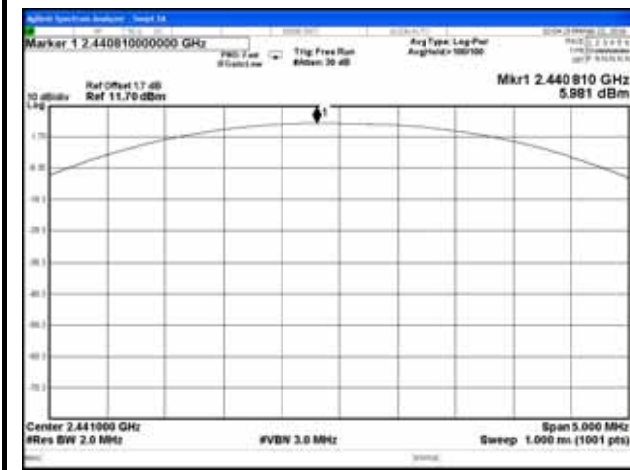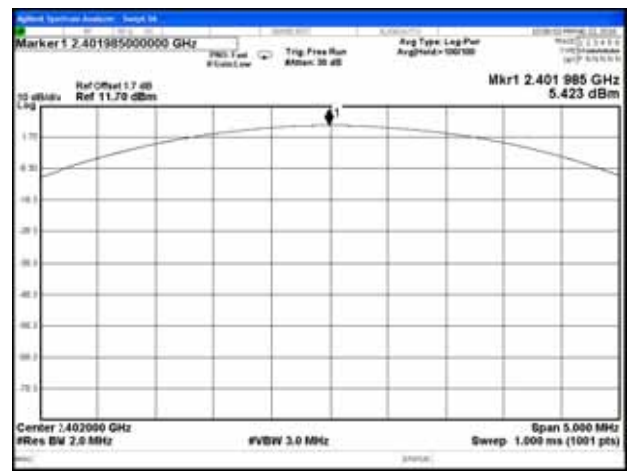


A.6 EMISSION LIMITATIONS MEASUREMENT

A.6.1 Band Edge


Test Date	2016/02/22	Temp./Hum.	23 /61%
Cable Loss	1.7dB	Test Voltage	DC 5V (via USB)

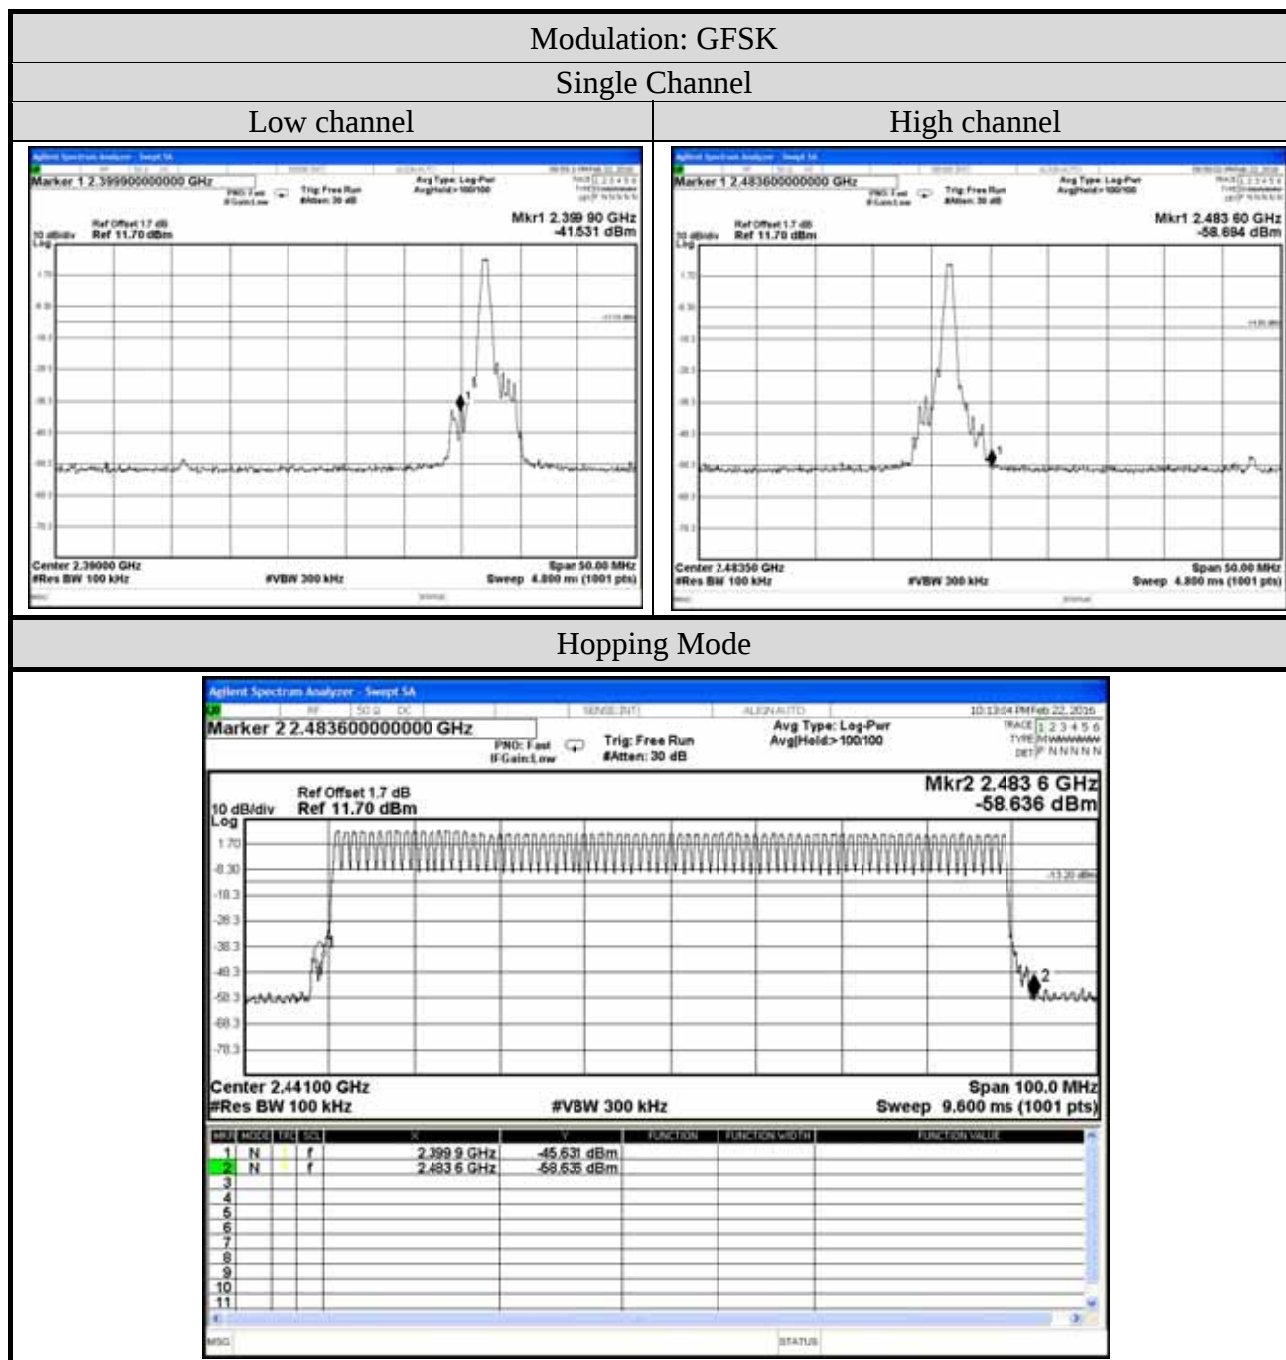

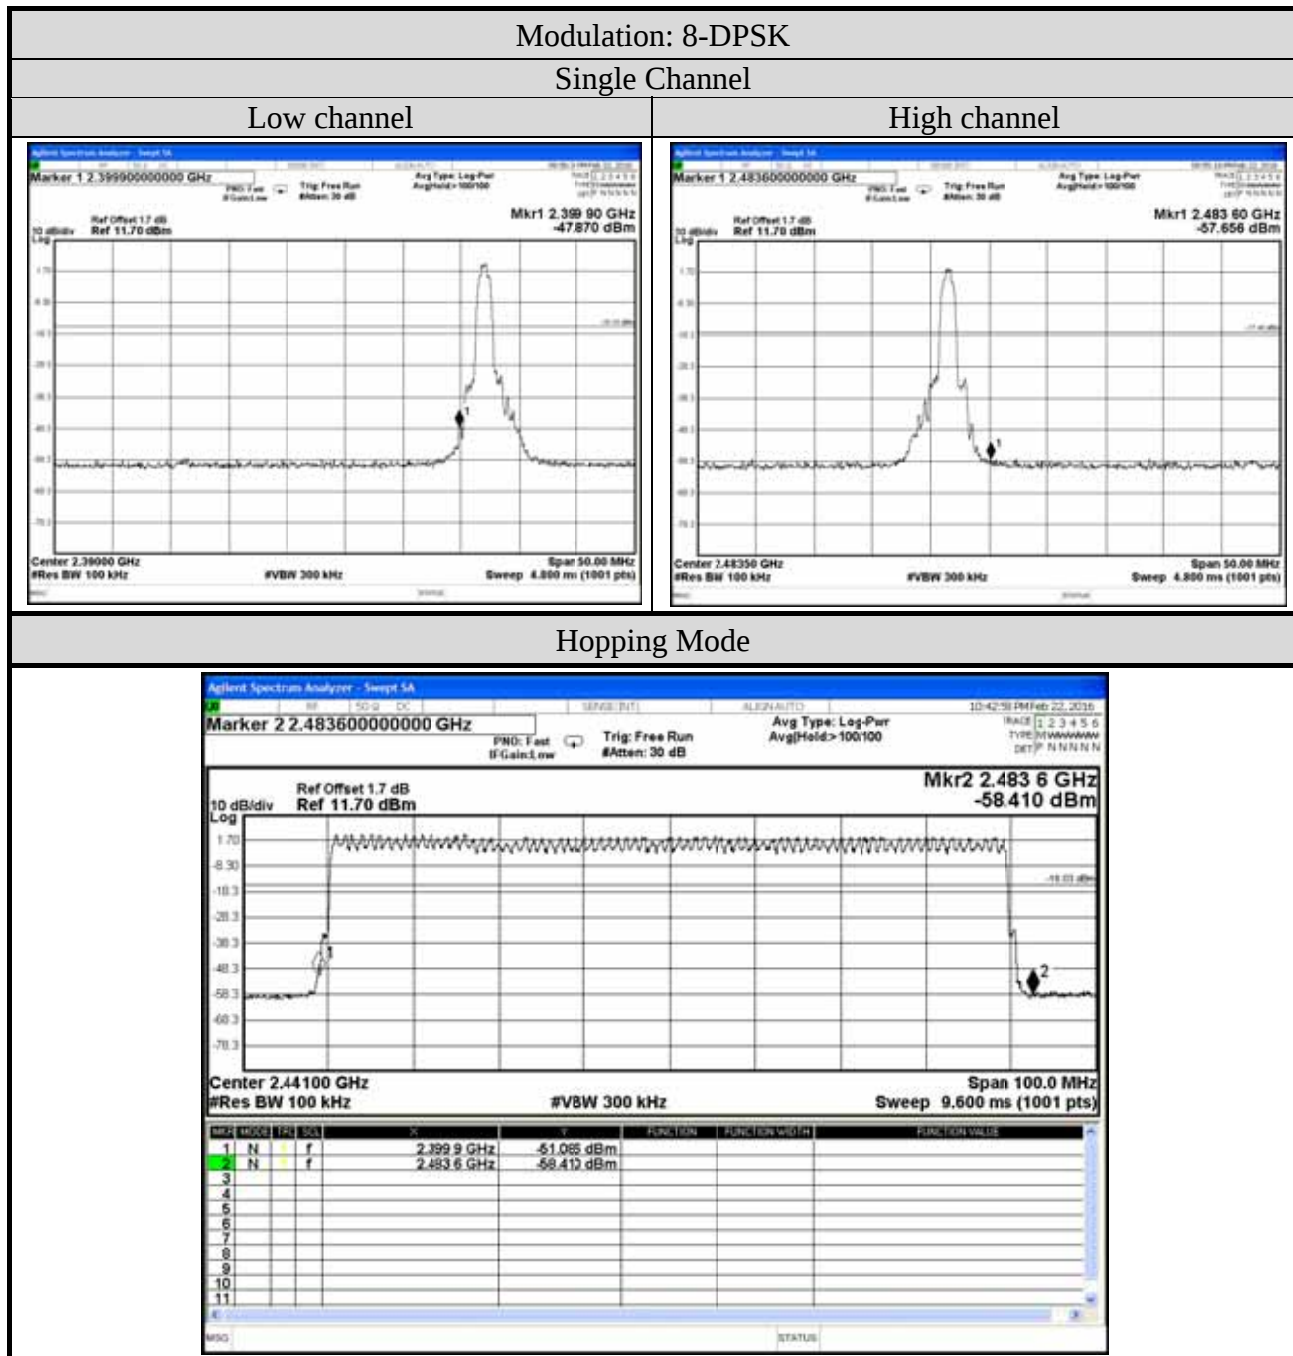


A.6.2 Spurious Emission

Test Date	2016/02/24	Temp./Hum.	23 /61%
Modulation	GFSK	Frequency	2402MHz
Cable Loss	1dB	Test Voltage	DC 5V (via USB)

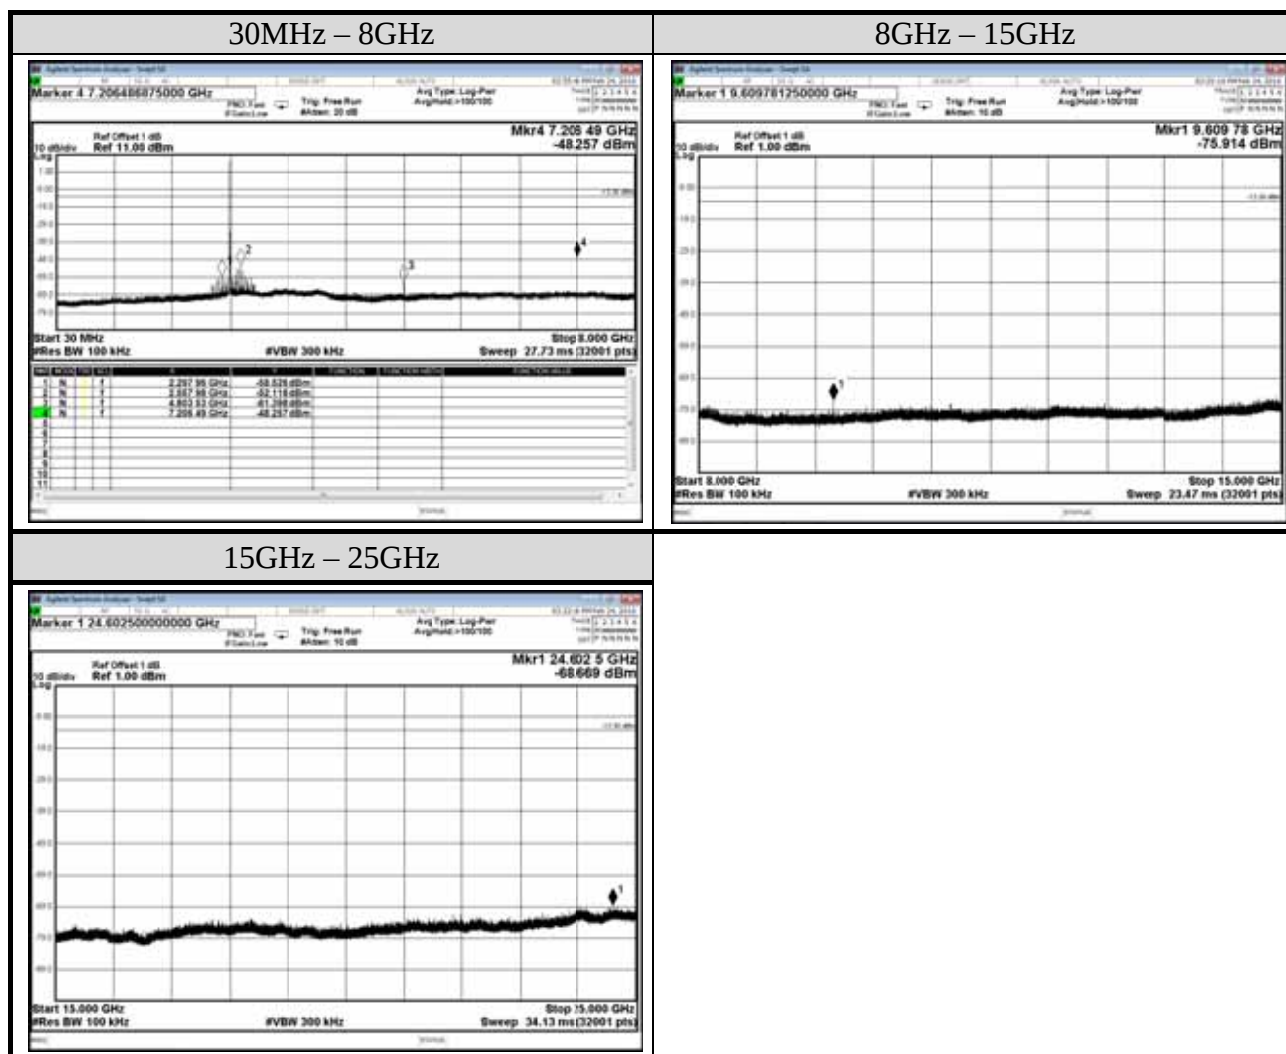


Note: All results have been included cable loss.

Test Date	2016/02/24	Temp./Hum.	23 /61%
Modulation	GFSK	Frequency	2441MHz
Cable Loss	1dB	Test Voltage	DC 5V (via USB)

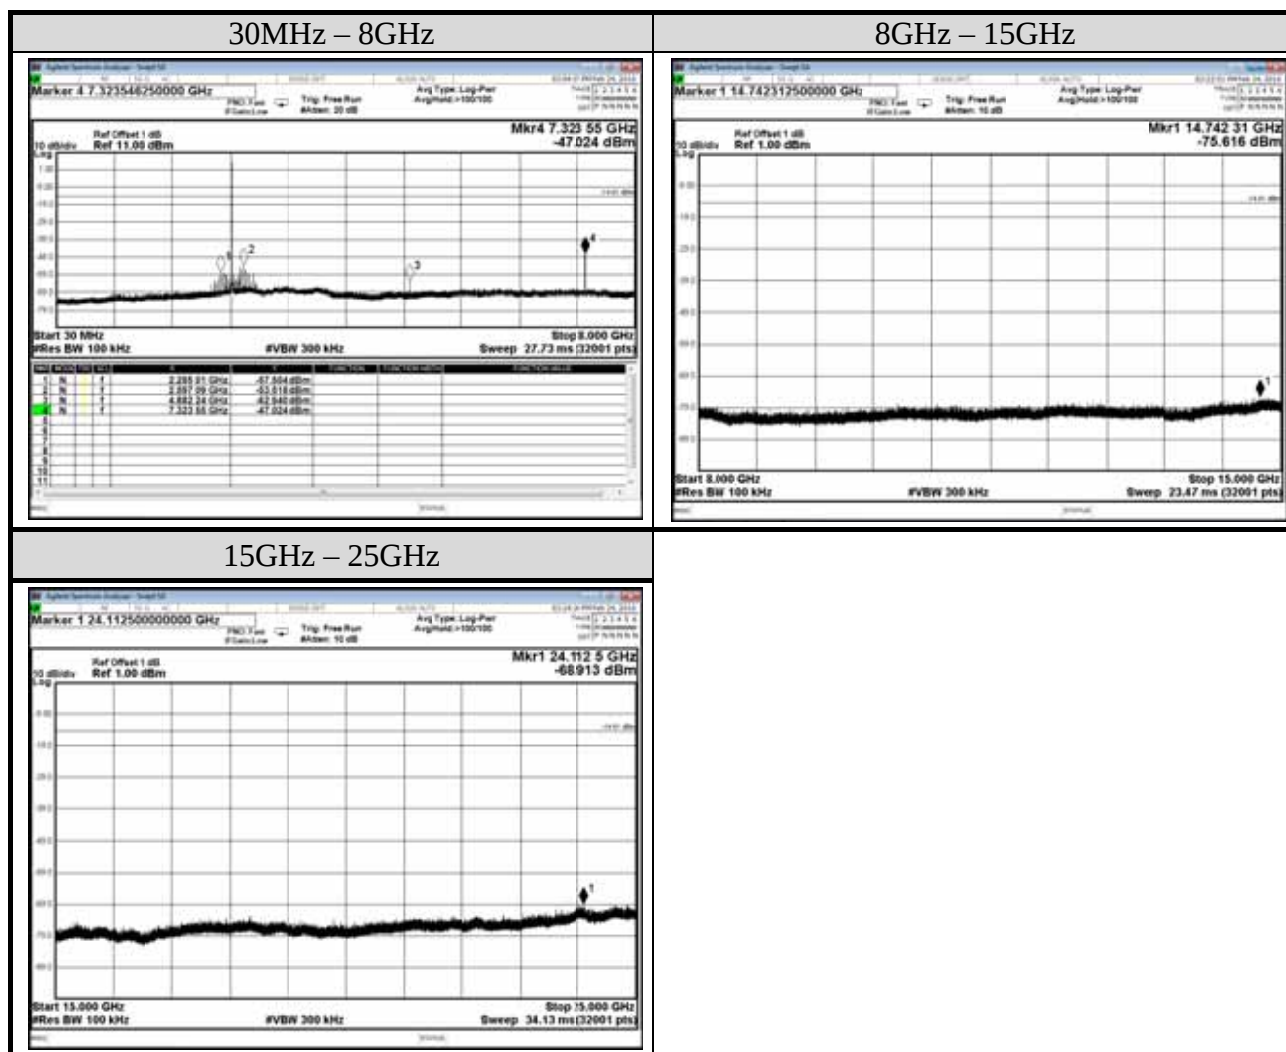


Note: All results have been included cable loss.

Test Date	2016/02/24	Temp./Hum.	23 /61%
Modulation	GFSK	Frequency	2480MHz
Cable Loss	1dB	Test Voltage	DC 5V (via USB)

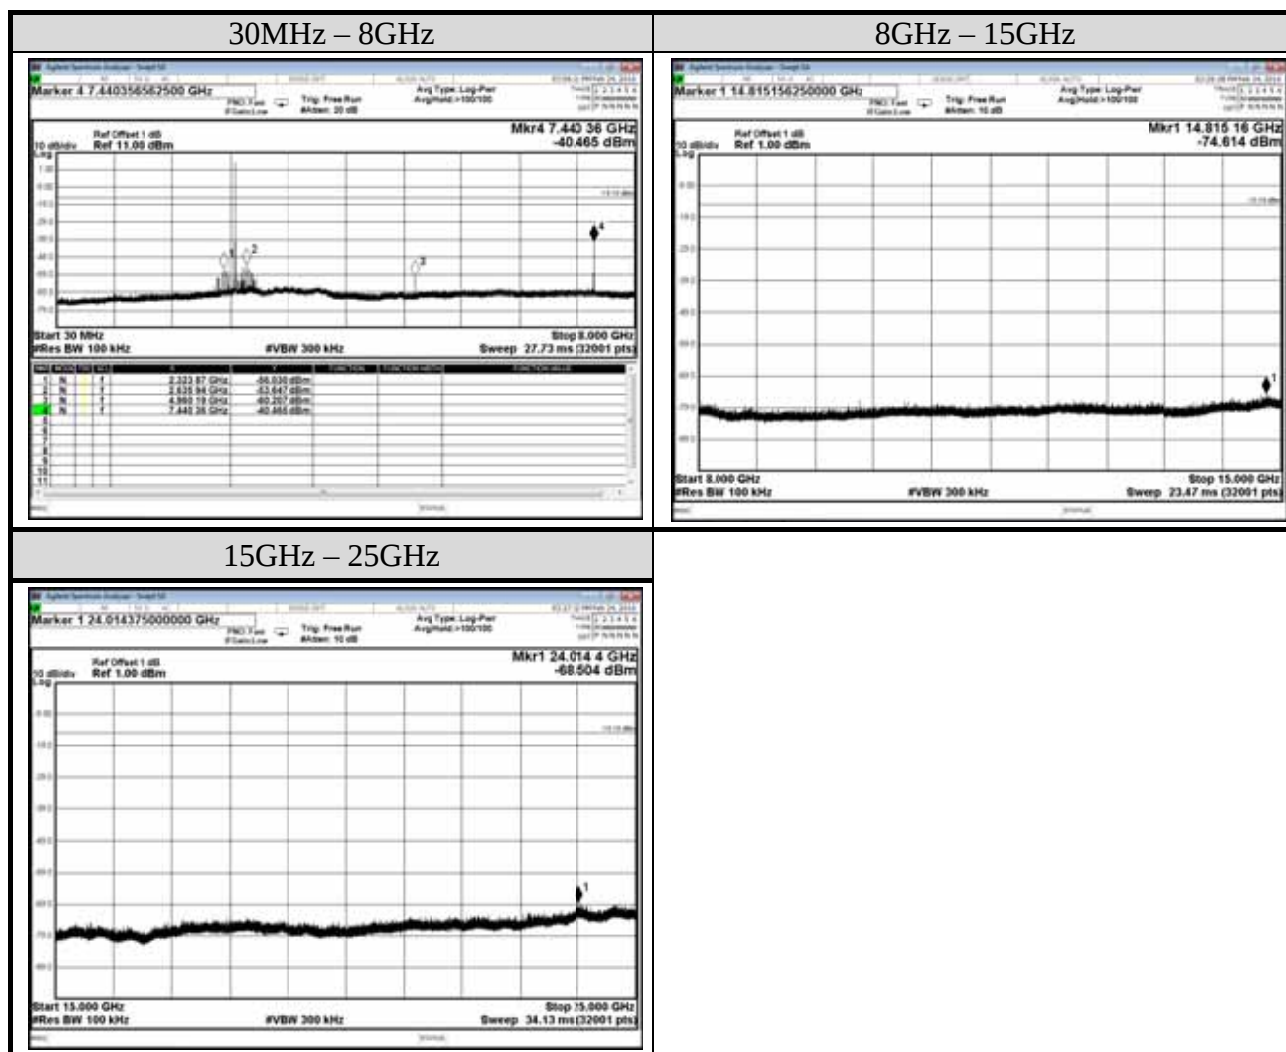


Note: All results have been included cable loss.

Test Date	2016/02/24	Temp./Hum.	23 /61%
Modulation	8-DPSK	Frequency	2402MHz
Cable Loss	1dB	Test Voltage	DC 5V (via USB)

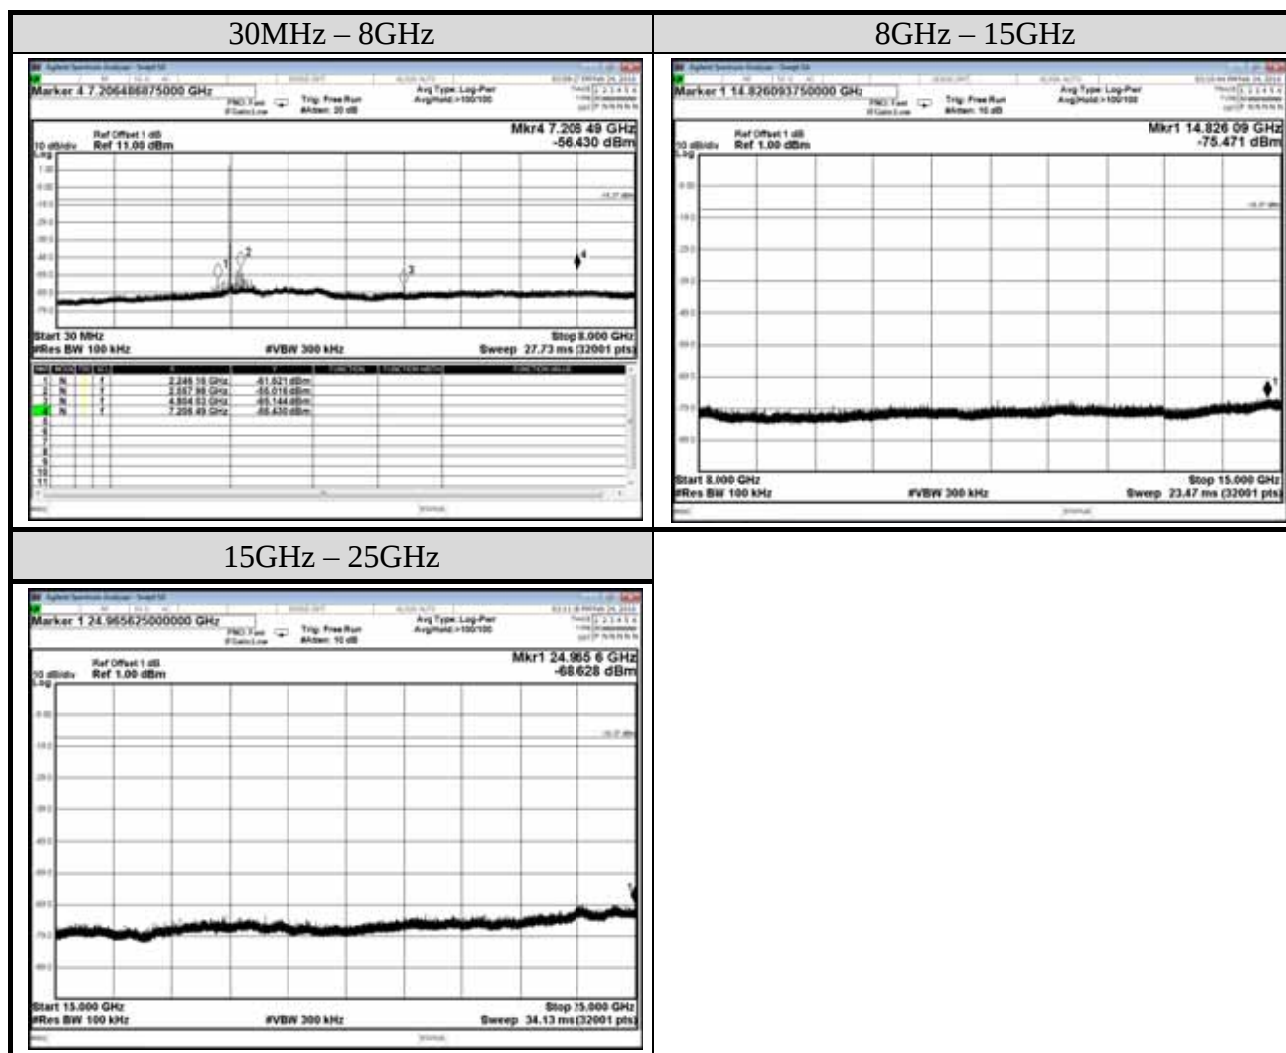


Note: All results have been included cable loss.

Test Date	2016/02/24	Temp./Hum.	23 /61%
Modulation	8-DPSK	Frequency	2441MHz
Cable Loss	1dB	Test Voltage	DC 5V (via USB)

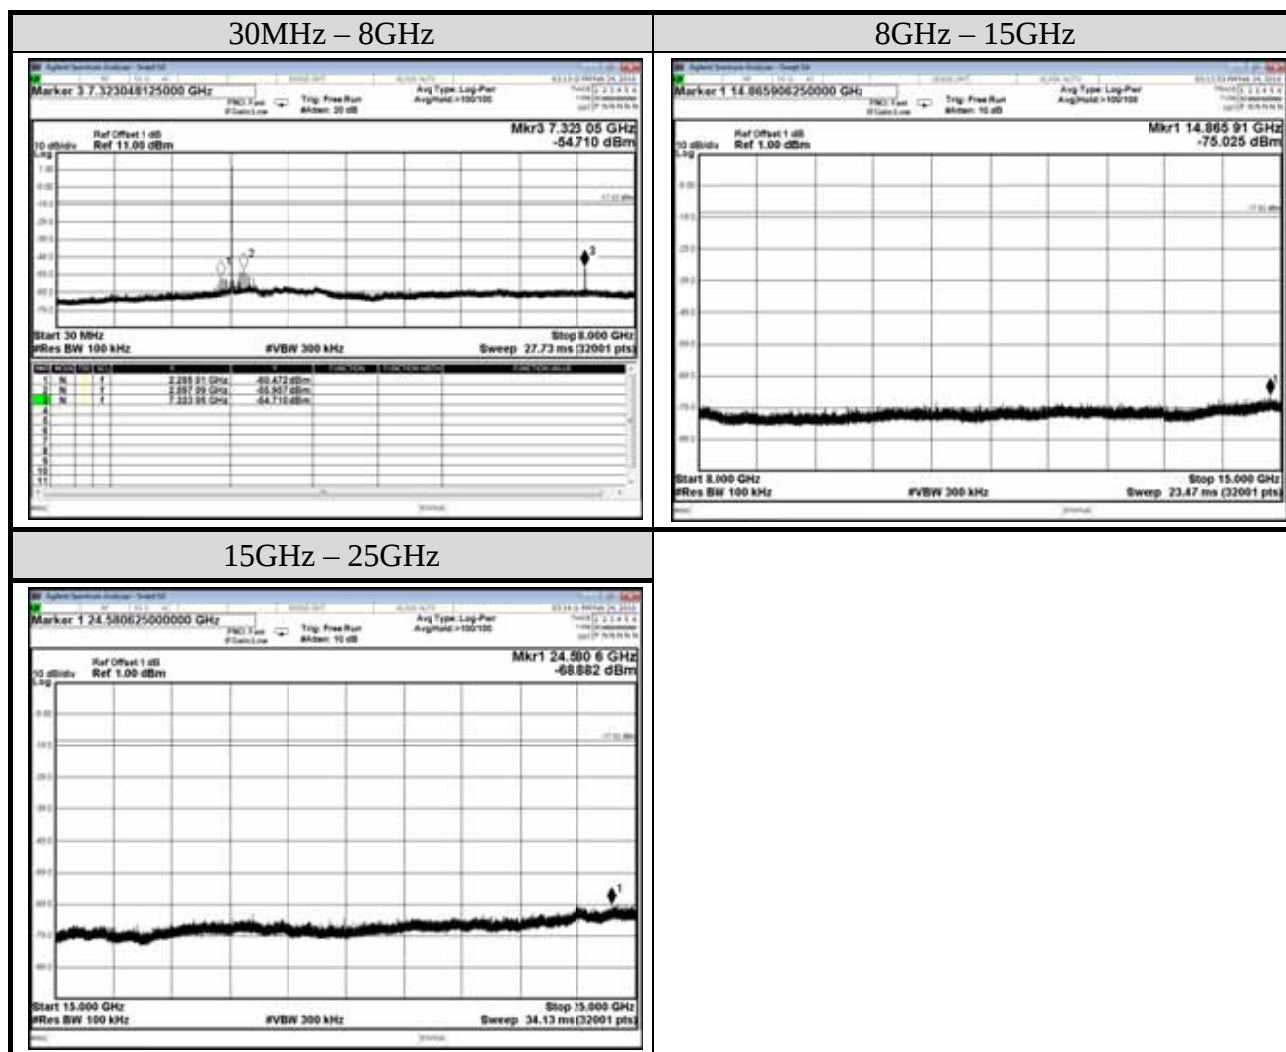

Note: All results have been included cable loss.

Test Date	2016/02/24	Temp./Hum.	23 /61%
Modulation	8-DPSK	Frequency	2480MHz
Cable Loss	1dB	Test Voltage	DC 5V (via USB)

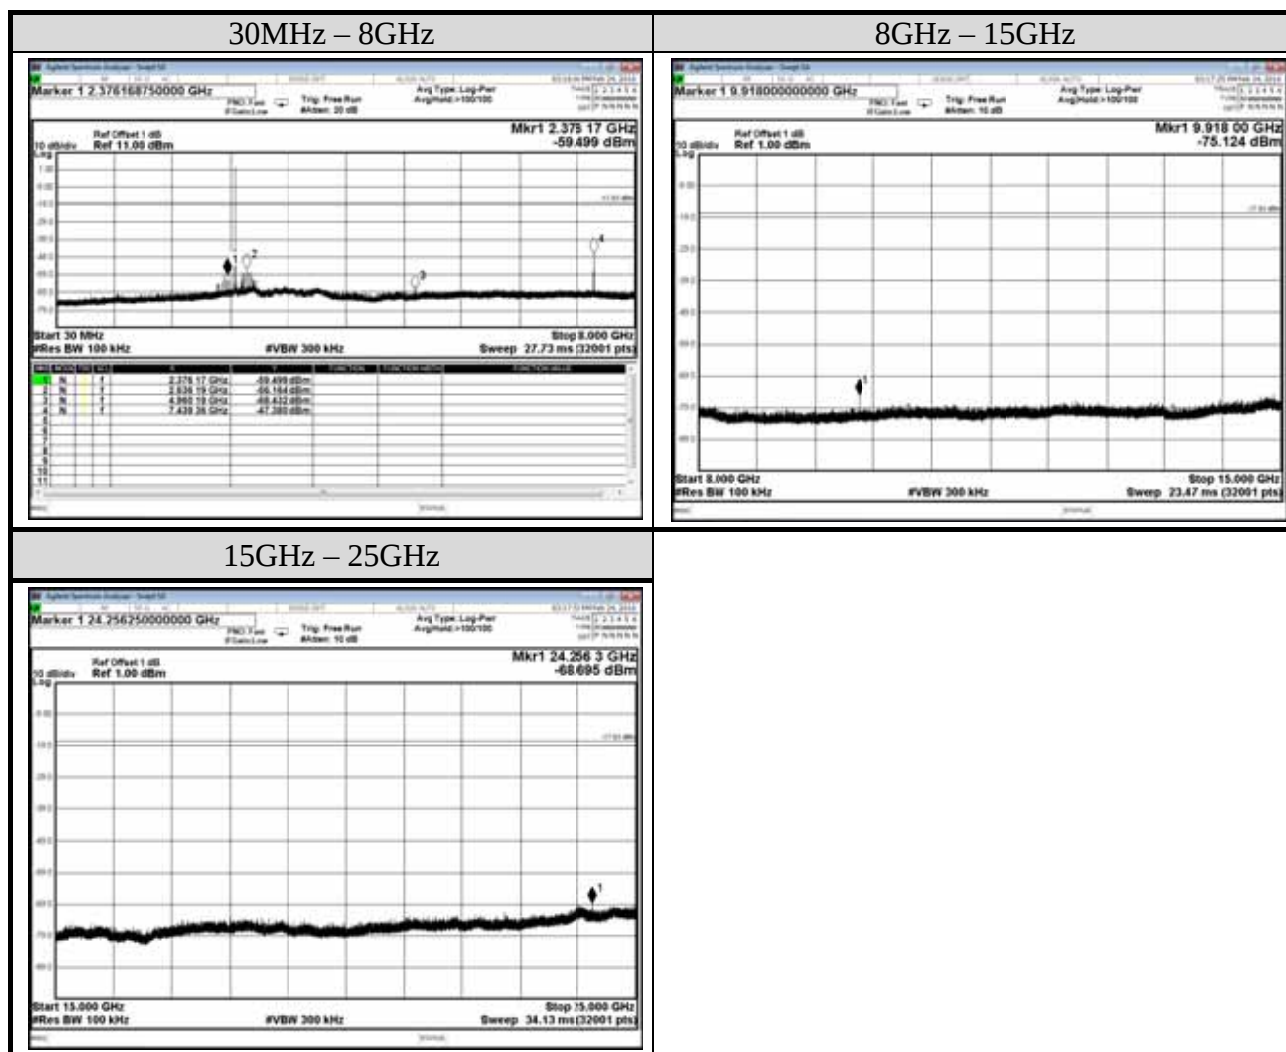

Note: All results have been included cable loss.