

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-218-RWD-052

Reception No. : 2108003620

Applicant : LG Electronics USA

Address : 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States

Manufacturer : LG Electronics Inc.

Address : Pyeongtaek-si, Gyeonggi-do 17709, Republic of Korea

Type of Equipment : Wireless Audio Transmitter

FCC ID. : BEJ-WTP3

Model Name : WTP3

Serial number : N/A

Total page of Report : 410 pages (including this page)

Date of Incoming : March 26, 2021

Date of issue : August 17, 2021

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART E Section 15.407**

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
Ju Yun Park / Manager
ONETECH Corp.



Reviewed by
Ha-Ram Lee / Manager
ONETECH Corp.



Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	9
2. TEST SUMMARY.....	10
2.1 TEST ITEMS AND RESULTS	10
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	10
2.3 RELATED SUBMITTAL(S) / GRANT(S)	10
2.4 PURPOSE OF THE TEST	10
2.5 TEST METHODOLOGY.....	10
2.6 TEST FACILITY.....	10
3. GENERAL INFORMATION.....	11
3.1 PRODUCT DESCRIPTION.....	11
4. EUT MODIFICATIONS.....	15
5. SYSTEM TEST CONFIGURATION	16
5.1 JUSTIFICATION.....	16
5.2 PERIPHERAL EQUIPMENT	16
5.3 MODE OF OPERATION DURING THE TEST	17
5.4 CONFIGURATION OF TEST SYSTEM.....	48
5.5 ANTENNA REQUIREMENT	48
6. PRELIMINARY TEST	48
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	48
6.2 GENERAL RADIATED EMISSIONS TESTS	48
7. 99 % OCCUPIED BANDWIDTH & MIMIMUM 26 DB BANDWIDTH	49
7.1 OPERATING ENVIRONMENT	49
7.2 TEST SET-UP	49
7.3 TEST DATE	49
7.4 TEST DATA FOR 802.11A RLAN MODE.....	50
7.4.1 Test data for Antenna 0	50
7.4.2 Test data for Antenna 1	68
7.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	86
7.5.1 Test data for Antenna 0	86
7.5.2 Test data for Antenna 1	105
7.6 TEST DATA FOR 802.11N_HT40 RLAN MODE.....	123
7.6.1 Test data for Antenna 0	123

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

7.6.2 Test data for Antenna 1	135
7.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE.....	147
7.7.1 Test data for Antenna 0	147
7.7.2 Test data for Antenna 1	154
8. 6 DB BANDWIDTH	161
8.1 OPERATING ENVIRONMENT	161
8.2 TEST SET-UP	161
8.3 TEST DATE	161
8.4 TEST DATA FOR 802.11A RLAN MODE.....	162
8.4.1 Test data for Antenna 0	162
8.4.2 Test data for Antenna 1	164
8.4.3 Test data for Staddle Channel_Antenna 0	166
8.4.4 Test data for Staddle Channel_Antenna 1	167
8.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	168
8.5.1 Test data for Antenna 0	168
8.5.2 Test data for Antenna 1	171
8.5.3 Test data for Staddle Channel_Antenna 0	173
8.5.4 Test data for Staddle Channel_Antenna 1	174
8.6 TEST DATA FOR 802.11N_HT40 RLAN MODE.....	175
8.6.1 Test data for Antenna 0	175
8.6.2 Test data for Antenna 1	177
8.6.3 Test data for Staddle Channel_Antenna 0	179
8.6.4 Test data for Staddle Channel_Antenna 1	180
8.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE.....	181
8.7.1 Test data for Antenna 0	181
8.7.2 Test data for Antenna 1	182
8.7.3 Test data for Staddle Channel_Antenna 0	183
8.7.4 Test data for Staddle Channel_Antenna 1	184
9. MAXIMUM PEAK OUTPUT POWER.....	185
9.1 OPERATING ENVIRONMENT	185
9.2 TEST SET-UP	185
9.3 TEST DATE	185
9.4 TEST DATA FOR 802.11A RLAN MODE.....	186
9.4.1 Test data for Antenna 0	186
9.4.2 Test data for Antenna 1	195
9.4.3 Test data for Staddle Channel_Antenna 0	204
9.4.4 Test data for Staddle Channel_Antenna 1	206

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

9.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	208
9.5.1 Test data for Antenna 0	208
9.5.2 Test data for Antenna 1	217
9.5.3 Test data for Staddle Channel_Antenna 0	227
9.5.4 Test data for Staddle Channel_Antenna 1	229
9.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	232
9.6.1 Test data for Antenna 0	232
9.6.2 Test data for Antenna 1	238
9.6.3 Test data for Multiple Transmit	244
9.5.4 Test data for Staddle Channel_Antenna 0	245
9.5.5 Test data for Staddle Channel_Antenna 1	247
9.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE	250
9.7.1 Test data for Antenna 0	250
9.7.2 Test data for Antenna 1	253
9.7.3 Test data for Multiple Transmit	256
9.5.4 Test data for Staddle Channel_Antenna 0	257
9.5.5 Test data for Staddle Channel_Antenna 1	259
10. PEAK POWER SPECTRUL DENSITY	262
10.1 OPERATING ENVIRONMENT	262
10.2 TEST SET-UP	262
10.3 TEST DATE	262
10.4 TEST DATA FOR 802.11A RLAN MODE	263
10.4.1 Test data for Antenna 0	263
10.4.2 Test data for Antenna 1	272
10.4.3 Test data for Staddle Channel_Antenna 0	281
10.4.4 Test data for Staddle Channel_Antenna 1	283
10.5 Test data for 802.11n_HT20 RLAN Mode	285
10.5.1 Test data for Antenna 0	285
10.5.2 Test data for Antenna 1	294
10.5.3 Test data for Multiple Transmit	303
10.5.4 Test data for Staddle Channel_Antenna 0	304
10.5.5 Test data for Staddle Channel_Antenna 1	306
10.5.6 Test data for Staddle Channel_Multiple Transmit	308
10.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	309
10.6.1 Test data for Antenna 0	309
10.6.2 Test data for Antenna 1	315
10.6.3 Test data for Multiple Transmit	321

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

10.6.4 Test data for Staddle Channel_Antenna 0	322
10.6.5 Test data for Staddle Channel_Antenna 1	324
10.6.6 Test data for Staddle Channel_Multiple Transmit	326
10.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	327
10.7.1 Test data for Antenna 0	327
10.7.2 Test data for Antenna 1	330
10.7.3 Test data for Multiple Transmit	333
10.7.4 Test data for Staddle Channel_Antenna 0.....	334
10.7.5 Test data for Staddle Channel_Antenna 1	336
10.7.6 Test data for Staddle Channel_Multiple Transmit	338
11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	339
11.1 OPERATING ENVIRONMENT	339
11.2 TEST SET-UP	339
11.3 TEST DATE	339
11.4 TEST DATA FOR U-NII-1	340
11.5 TEST DATA FOR U-NII-2A.....	341
11.6 TEST DATA FOR U-NII-2C.....	342
11.7 TEST DATA FOR U-NII-3	343
12. FREQUENCY STABILITY WITH VOLTAGE VARIATION.....	344
12.1 OPERATING ENVIRONMENT	344
12.2 TEST SET-UP	344
12.3 TEST DATE	344
12.4 TEST DATA FOR U-NII-1	345
12.5 TEST DATA FOR U-NII-2A.....	345
12.6 TEST DATA FOR U-NII-2C.....	346
12.7 TEST DATA FOR U-NII-3	346
13. RADIATED SPURIOUS EMISSIONS.....	347
13.1 OPERATING ENVIRONMENT	347
13.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	347
13.3 TEST DATE	347
13.4 TEST DATA FOR BELOW 30 MHz	348
13.5 TEST DATA FOR 30 MHz ~ 1 000 MHz	349
13.5.1 Test data for WLAN 5 GHz	349
13.5.2 Test data for Intermodulation Mode(WLAN 2.4 GHz + WLAN 5 GHz)	350
13.6 TEST DATA FOR ABOVE 1 GHz.....	351
13.6.1 Test data for Frequency UNII I	351
13.6.2 Test data for Frequency UNII 2A	355

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

13.6.3 Test data for Frequency UNII 2C	360
13.6.4 Test data for Frequency UNII 3.....	365
14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS	370
14.1 OPERATING ENVIRONMENT	370
14.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	370
14.3 TEST DATE	370
14.4 TEST DATA FOR FREQUENCY UNII I.....	371
14.4.1 Test data for 802.11a RLAN Mode	371
14.4.2 Test data for 802.11n_HT20 RLAN Mode.....	372
14.4.3 Test data for 802.11n_HT40 RLAN Mode.....	373
14.4.4 Test data for 802.11ac_HT80 RLAN Mode	374
14.5 TEST DATA FOR FREQUENCY UNII 2A.....	375
14.5.1 Test data for 802.11a RLAN Mode	375
14.5.2 Test data for 802.11n_HT20 RLAN Mode.....	376
14.5.3 Test data for 802.11n_HT40 RLAN Mode.....	377
14.5.4 Test data for 802.11ac_HT80 RLAN Mode	378
14.6 TEST DATA FOR FREQUENCY UNII 2C.....	379
14.6.1 Test data for 802.11a RLAN Mode	379
14.6.2 Test data for 802.11n_HT20 RLAN Mode.....	380
14.6.3 Test data for 802.11n_HT40 RLAN Mode.....	381
14.6.4 Test data for 802.11ac_HT80 RLAN Mode	382
14.7 TEST DATA FOR FREQUENCY U-NII-3.....	383
14.7.1 Test data for 802.11a RLAN Mode	383
14.7.2 Test data for 802.11n_HT20 RLAN Mode.....	387
14.7.3 Test data for 802.11n_HT40 RLAN Mode.....	389
14.7.4 Test data for 802.11ac_HT80 RLAN Mode	391
14.7.5 U-NII-3 Emission Limits	392
15. CONDUCTED EMISSION TEST.....	393
15.1 OPERATING ENVIRONMENT	393
15.2 TEST SET-UP	393
15.3 TEST DATE	393
15.4 TEST DATA FOR WLAN 5 GHz	394
16. DYNAMIC FREQUENCY SELECTION (DFS)	398
16.1 OPERATING ENVIRONMENT	398
16.2 TEST SET-UPS	398
16.3 DFS TEST SIGNALS	400

16.4 TECHNICAL REQUIREMENT SPECIFICATION	401
16.5 TEST DATE	401
16.6 TEST DATA.....	402
16.6.1 UNII 2A.....	402
16.6.2 UNII 3	406
17. LIST OF TEST EQUIPMENT	410

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-218-RWD-052	August 17, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA
 Address : 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States
 Contact Person : Sung Soo Kim / Director, Regulatory and Environmental Affairs
 Telephone No. : 201-266-2215
 FCC ID : BEJ-WTP3
 Model Name : WTP3
 Brand Name : LG
 Serial Number : N/A
 Date : August 17, 2021

EQUIPMENT CLASS	Unlicensed National Information infrastructure(UNII)
E.U.T. DESCRIPTION	Wireless Audio Transmitter
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 789033 D02 General UNII Test Procedures New Rules v02r01
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	99 % Occupied bandwidth & Minimum 26 dB bandwidth	Met the Limit / PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(e)	6 dB Bandwidth	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Met the Limit / PASS
15.207	AC Conducted Emissions 150 kHz-30 MHz	Met the Limit / PASS
15.407(h)	Dynamic frequency Selection	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model WTP3 (referred to as the EUT in this report) is a Wireless Audio Transmitter. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Wireless Audio Transmitter	
Temperature Range	0 °C ~ 60 °C	
MAX RF OUTPUT POWER	WLAN 2.4 GHz	17.16 dBm
	5 150 MHz ~ 5 250 MHz Band	15.67 dBm
	5 250 MHz ~ 5 350 MHz Band	20.88 dBm
	5 470 MHz ~ 5 725 MHz Band	19.07 dBm
	5 725 MHz ~ 5 850 MHz Band	20.94 dBm
OPERATING FREQUENCY	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 720 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 710 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz ~ 5 690 MHz (802.11ac(VHT80))
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
		5 775 MHz (802.11ac(VHT80))
MODULATION TYPE	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80):

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

		OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
--	--	--

RF OUTPUT POWER	WLAN 2.4 GHz	Antenna 0	12.32 dBm(802.11b) <u>14.76 dBm(802.11g)</u> 13.96 dBm(802.11n_HT20)
		Antenna 1	13.84 dBm(802.11b) 15.34 dBm(802.11g) 14.34 dBm(802.11n_HT20)
		Multiple Antenna	<u>17.16 dBm(802.11n_HT20)</u>
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	<u>15.67 dBm(802.11a)</u> 10.81 dBm(802.11n_HT20) 11.06 dBm(802.11n_HT40) 3.04 dBm(802.11ac_VHT80)
		Antenna 1	15.45 dBm(802.11a) 10.64 dBm(802.11n_HT20) 10.97 dBm(802.11n_HT40) 2.17 dBm(802.11ac_VHT80)
		Multiple Antenna	13.74 dBm(802.11n_HT20) <u>14.03 dBm(802.11n_HT40)</u> 5.64 dBm(802.11ac_VHT80)
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	16.68 dBm(802.11a) 15.16 dBm(802.11n_HT20) <u>18.48 dBm(802.11n_HT40)</u> 5.31 dBm(802.11ac_VHT80)
		Antenna 1	15.61 dBm(802.11a) 12.96 dBm(802.11n_HT20) 17.15 dBm(802.11n_HT40) 2.96 dBm(802.11ac_VHT80)
		Multiple Antenna	17.21 dBm(802.11n_HT20) <u>20.88 dBm(802.11n_HT40)</u> 7.20 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 470 MHz ~ 5 725 MHz Band	Antenna 0	17.88 dBm(802.11a) 15.36 dBm(802.11n_HT20) 15.93 dBm(802.11n_HT40) 5.10 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	16.58 dBm(802.11a) 14.06 dBm(802.11n_HT20) 9.98 dBm(802.11n_HT40) 4.57 dBm(802.11ac_VHT80)
		Antenna 1	<u>18.37 dBm(802.11a)</u> 15.29 dBm(802.11n_HT20) 16.18 dBm(802.11n_HT40) 4.83 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	16.90 dBm(802.11a) 13.89 dBm(802.11n_HT20) 9.43 dBm(802.11n_HT40) 4.78 dBm(802.11ac_VHT80)
		Multiple Antenna	18.20 dBm(802.11n_HT20) <u>19.07 dBm(802.11n_HT40)</u> 7.98 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	16.99 dBm(802.11n_HT20) 12.72 dBm(802.11n_HT40) 7.69 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 725 MHz ~ 5 850 MHz Band	Antenna 0	<u>19.37 dBm(802.11a)</u> 18.00 dBm(802.11n_HT20) 16.10 dBm(802.11n_HT40) 7.67 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	8.65 dBm(802.11a) 6.79 dBm(802.11n_HT20) -2.25 dBm(802.11n_HT40) -12.51 dBm(802.11ac_VHT80)
		Antenna 1	19.11 dBm(802.11a) 17.85 dBm(802.11n_HT20) 15.60 dBm(802.11n_HT40) 7.60 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	8.89 dBm(802.11a) 6.26 dBm(802.11n_HT20) -2.75 dBm(802.11n_HT40) -10.04 dBm(802.11ac_VHT80)
		Multiple Antenna	<u>20.94 dBm(802.11n_HT20)</u> 18.87 dBm(802.11n_HT40) 10.65 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	9.54 dBm(802.11n_HT20) 0.52 dBm(802.11n_HT40) -8.09 dBm(802.11ac_VHT80)

ANTENNA TYPE		Antenna 0	PCB Antenna
		Antenna 1	
ANTENNA GAIN	WLAN 2.4 GHz	Antenna 0	0.61 dBi
		Antenna 1	0.90 dBi
		Multiple Antenna	3.77 dBi
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	0.30 dBi
		Antenna 1	0.65 dBi
		Multiple Antenna	3.49 dBi
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	0.30 dBi
		Antenna 1	0.28 dBi
		Multiple Antenna	3.30 dBi
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	0.70 dBi
		Antenna 1	0.67 dBi
		Multiple Antenna	3.70 dBi
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	0.66 dBi
		Antenna 1	0.62 dBi
		Multiple Antenna	3.65 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		26 MHz, 27 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Electronics Inc.	-	-

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WTP3	LG Electronics Inc.	Wireless Audio Transmitter (EUT)	
HP Probook 4540s	HP	Notebook PC	EUT
Series PPP009H	Hipro Electronics(Dongguan)Co., Ltd	AC Adapter	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

-. Frequency / Channel Operations

		Channel	Frequency
802.11a 802.11n 802.11ac(20 MHz)	Band 1	36	5 180
		44	5 220
		48	5 240
	Band 2A	52	5 260
		60	5 300
		64	5 320
	Band 2C	100	5 500
		116	5 580
		140	5 700
	Straddle	144	5 720
	Band 3	149	5 745
		157	5 785
		165	5 825
802.11n 802.11ac(40 MHz)	Band 1	38	5 190
		46	5 230
	Band 2A	54	5 270
		62	5 310
	Band 2C	102	5 510
		110	5 550
		134	5 670
	Straddle	142	5 710
	Band 3	151	5 755
		5 795	5 795
802.11ac(80 MHz)	Band 1	42	5 210
	Band 2A	58	5 290
	Band 2C	106	5 530
	Straddle	138	5 690
	Band 3	155	5 775

UNII 1

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	15.67	15.45
	9 Mbps	15.61	15.38
	12 Mbps	15.64	15.39
	18 Mbps	15.49	15.23
	24 Mbps	15.58	15.31
	36 Mbps	15.57	15.11
	48 Mbps	15.20	15.11
	54 Mbps	14.01	13.79
HT 20 (Middle Channel)	6.5 Mbps	10.79	10.50
	13 Mbps	10.68	10.40
	19.5 Mbps	10.65	10.35
	26 Mbps	10.57	10.13
	39 Mbps	9.43	9.28
	52 Mbps	9.59	9.20
	58.5 Mbps	9.30	9.13
	65 Mbps	8.23	8.02
HT 40 (Low Channel)	13.5 Mbps	4.69	4.26
	27 Mbps	4.24	3.61
	40.5 Mbps	3.19	2.73
	54 Mbps	3.19	2.91
	81 Mbps	2.81	2.31
	108 Mbps	2.63	2.21
	121.5 Mbps	2.74	2.24
	135 Mbps	1.73	1.15

VHT80 (Middle Channel)	29.3 Mbps	3.04	2.17
	58.5 Mbps	1.92	0.90
	87.8 Mbps	3.00	2.06
	117 Mbps	2.72	1.63
	175.5 Mbps	2.91	1.84
	234 Mbps	2.50	1.57
	263.3 Mbps	2.46	1.13
	292.5 Mbps	2.04	1.07
	351 Mbps	1.04	0.18
	390 Mbps	1.81	0.96

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 2A

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	15.86	14.72
	9 Mbps	15.80	14.65
	12 Mbps	15.83	14.66
	18 Mbps	15.68	14.50
	24 Mbps	15.77	14.58
	36 Mbps	15.76	14.38
	48 Mbps	15.39	14.38
	54 Mbps	14.20	13.06
HT 20 (Middle Channel)	6.5 Mbps	13.46	10.80
	13 Mbps	13.35	10.70
	19.5 Mbps	13.32	10.65
	26 Mbps	13.24	10.43
	39 Mbps	12.10	9.58
	52 Mbps	12.26	9.50
	58.5 Mbps	11.97	9.43
	65 Mbps	10.90	8.32
HT 40 (Low Channel)	13.5 Mbps	18.48	17.15
	27 Mbps	18.03	16.50
	40.5 Mbps	16.98	15.62
	54 Mbps	16.98	15.80
	81 Mbps	16.60	15.20
	108 Mbps	16.42	15.10
	121.5 Mbps	16.53	15.13
	135 Mbps	15.52	14.04

VHT80 (Middle Channel)	29.3 Mbps	5.31	2.69
	58.5 Mbps	3.94	1.30
	87.8 Mbps	5.12	2.62
	117 Mbps	4.98	2.27
	175.5 Mbps	4.82	2.30
	234 Mbps	4.63	2.03
	263.3 Mbps	4.83	2.13
	292.5 Mbps	4.17	1.64
	351 Mbps	3.19	0.84
	390 Mbps	3.94	1.57

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 2C

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	17.14	18.37
	9 Mbps	17.08	18.30
	12 Mbps	17.11	18.31
	18 Mbps	16.96	18.15
	24 Mbps	17.05	18.23
	36 Mbps	17.04	18.03
	48 Mbps	16.67	18.03
	54 Mbps	15.48	16.71
HT 20 (Middle Channel)	6.5 Mbps	14.62	15.29
	13 Mbps	14.51	15.19
	19.5 Mbps	14.48	15.14
	26 Mbps	14.40	14.92
	39 Mbps	13.26	14.07
	52 Mbps	13.42	13.99
	58.5 Mbps	13.13	13.92
	65 Mbps	12.06	12.81
HT 40 (Low Channel)	13.5 Mbps	10.52	10.01
	27 Mbps	10.07	9.36
	40.5 Mbps	9.02	8.48
	54 Mbps	9.02	8.66
	81 Mbps	8.64	8.06
	108 Mbps	8.46	7.96
	121.5 Mbps	8.57	7.99
	135 Mbps	7.56	6.90

VHT80 (Middle Channel)	29.3 Mbps	5.10	4.83
	58.5 Mbps	3.72	3.53
	87.8 Mbps	5.06	4.73
	117 Mbps	4.71	4.48
	175.5 Mbps	4.75	4.47
	234 Mbps	4.48	4.17
	263.3 Mbps	4.68	4.53
	292.5 Mbps	3.98	3.80
	351 Mbps	3.04	2.97
	390 Mbps	3.81	3.74

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

UNII 3

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	19.37	19.11
	9 Mbps	19.31	19.04
	12 Mbps	19.34	19.05
	18 Mbps	19.19	18.89
	24 Mbps	19.28	18.97
	36 Mbps	19.27	18.77
	48 Mbps	18.90	18.77
	54 Mbps	17.71	17.45
HT 20 (Middle Channel)	6.5 Mbps	18.00	17.85
	13 Mbps	17.89	17.75
	19.5 Mbps	17.86	17.70
	26 Mbps	17.78	17.48
	39 Mbps	16.64	16.63
	52 Mbps	16.80	16.55
	58.5 Mbps	16.51	16.48
	65 Mbps	15.44	15.37
HT 40 (Low Channel)	13.5 Mbps	16.05	15.41
	27 Mbps	15.60	14.76
	40.5 Mbps	14.55	13.88
	54 Mbps	14.55	14.06
	81 Mbps	14.17	13.46
	108 Mbps	13.99	13.36
	121.5 Mbps	14.10	13.39
	135 Mbps	13.09	12.30

VHT80 (Middle Channel)	29.3 Mbps	7.67	7.86
	58.5 Mbps	6.46	6.56
	87.8 Mbps	7.61	7.77
	117 Mbps	7.41	7.46
	175.5 Mbps	7.41	7.53
	234 Mbps	7.46	7.41
	263.3 Mbps	7.25	7.18
	292.5 Mbps	6.65	6.86
	351 Mbps	5.83	6.02
	390 Mbps	6.59	6.79

- . The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- . To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XY" axis.

- Duty Cycle

	Band	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Antenna 0	UNII 1	802.11 a	1.37	0.14	90.73	0.42
		802.11 HT 20	0.65	0.12	84.42	0.74
		802.11 HT 40	0.33	0.12	73.33	1.35
		802.11 VHT 80	0.85	0.78	52.15	2.83
	UNII 2A	802.11 a	1.37	0.13	91.33	0.39
		802.11 HT 20	0.66	0.11	85.71	0.67
		802.11 HT 40	0.33	0.12	73.33	1.35
		802.11 VHT 80	0.85	0.74	53.46	2.72
	UNII 2C	802.11 a	1.38	0.12	92.00	0.36
		802.11 HT 20	0.66	0.12	84.62	0.73
		802.11 HT 40	0.33	0.12	73.33	1.35
		802.11 VHT 80	0.85	0.71	54.49	2.64
	UNII 3	802.11 a	1.38	0.12	92.00	0.36
		802.11 HT 20	0.66	0.12	84.62	0.73
		802.11 HT 40	0.32	0.13	71.11	1.48
		802.11 VHT 80	0.8	0.78	50.63	2.96
Antenna 1	UNII 1	802.11 a	1.36	0.12	91.89	0.37
		802.11 HT 20	0.66	0.12	84.62	0.73
		802.11 HT 40	0.31	0.13	70.45	1.52
		802.11 VHT 80	0.85	0.72	54.14	2.66
	UNII 2A	802.11 a	1.36	0.12	91.89	0.37
		802.11 HT 20	0.65	0.12	84.42	0.74
		802.11 HT 40	0.33	0.12	73.33	1.35
		802.11 VHT 80	0.80	0.79	50.31	2.98
	UNII 2C	802.11 a	1.38	0.11	92.62	0.33
		802.11 HT 20	0.64	0.13	83.12	0.80
		802.11 HT 40	0.33	0.12	73.33	1.35
		802.11 VHT 80	0.8	0.79	50.31	2.98
	UNII 3	802.11 a	1.37	0.12	91.95	0.36
		802.11 HT 20	0.65	0.13	83.33	0.79
		802.11 HT 40	0.33	0.11	75.00	1.25
		802.11 VHT 80	0.85	0.71	54.49	2.64

		Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Staddle	Antenna 0	802.11 a	1.37	0.12	91.95	0.36
		802.11 HT 20	0.65	0.12	84.42	0.74
		802.11 HT 40	0.32	0.13	71.11	1.48
		802.11 VHT 80	0.80	0.78	50.63	2.96
	Antenna 1	802.11 a	1.37	0.13	91.33	0.39
		802.11 HT 20	0.65	0.12	84.42	0.74
		802.11 HT 40	0.33	0.12	73.33	1.35
		802.11 VHT 80	0.85	0.73	53.80	2.69

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot



UNII 1_802.11 a_Antenna 0




UNII 1_802.11 HT 20_Antenna 0

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

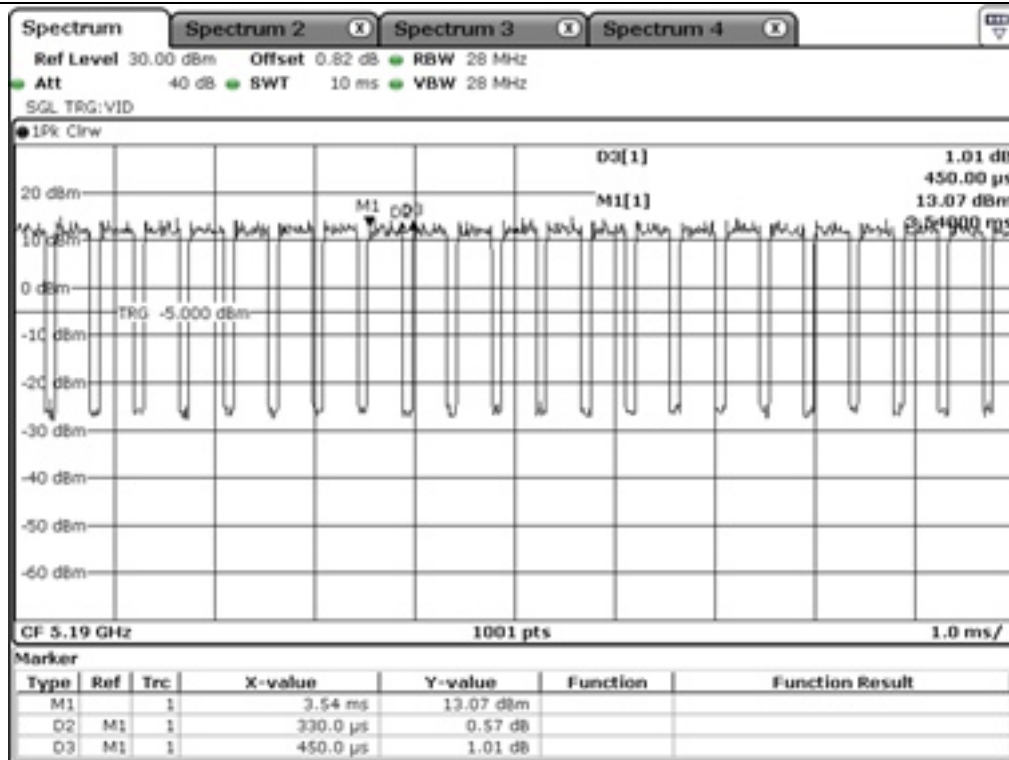


UNII 1_802.11 HT40_Antenna 0

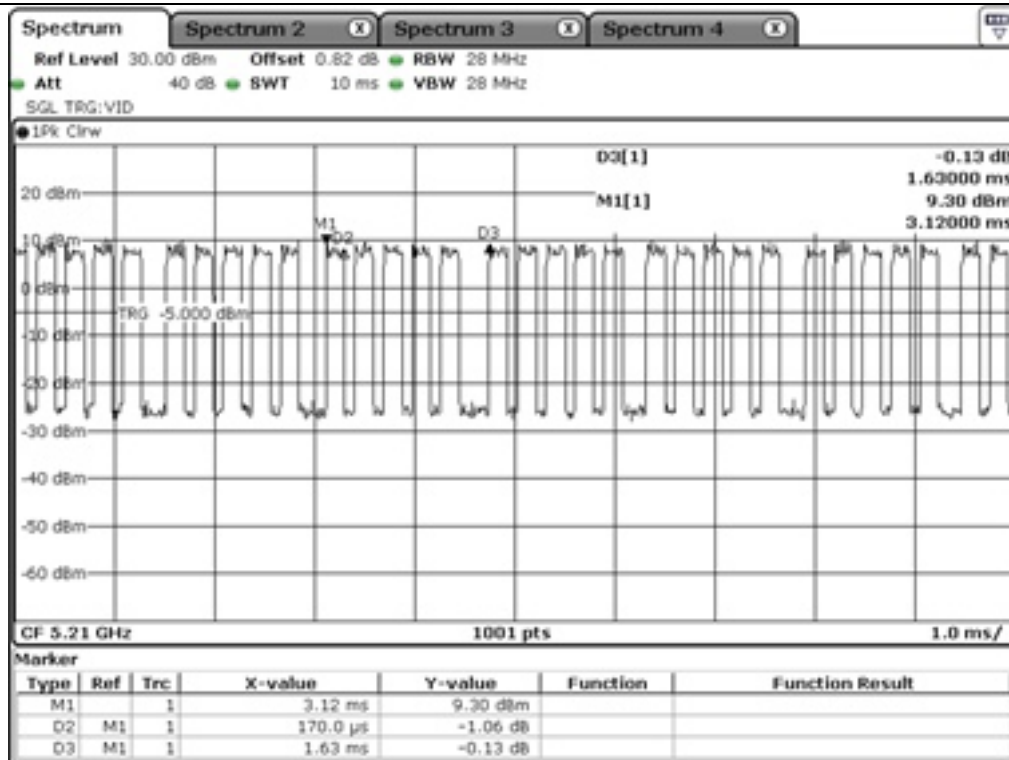


UNII 1_802.11 VHT 80_Antenna 0




UNII 2A_802.11 a_Antenna 0

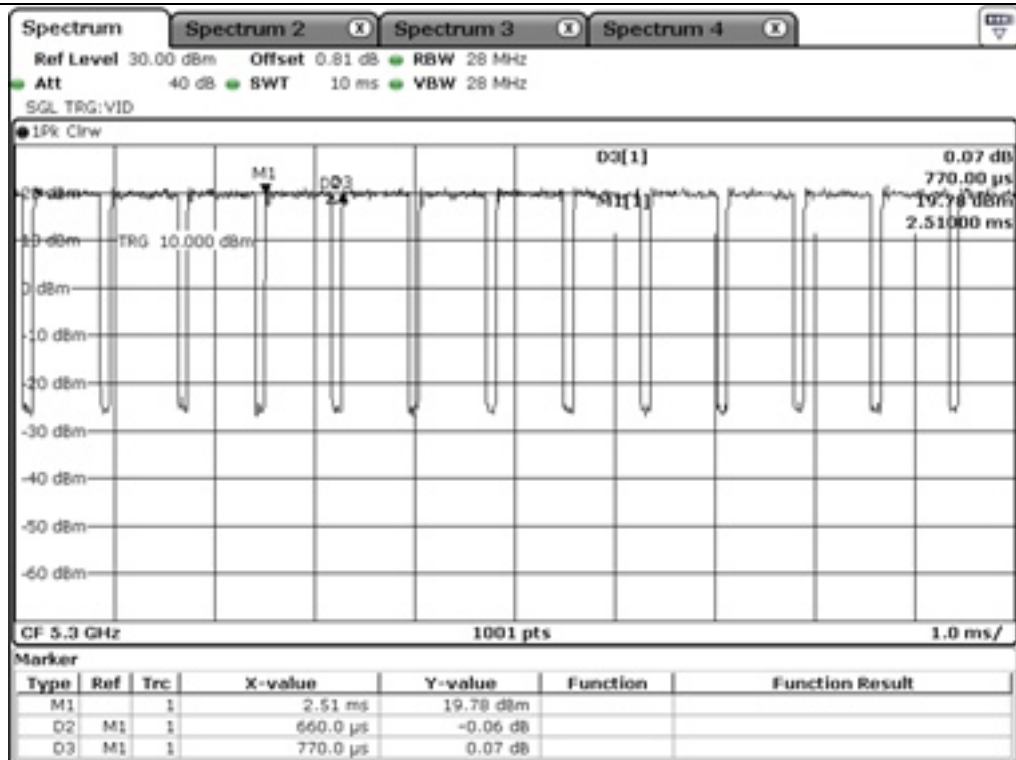

UNII 2A_802.11 HT 20_Antenna 0

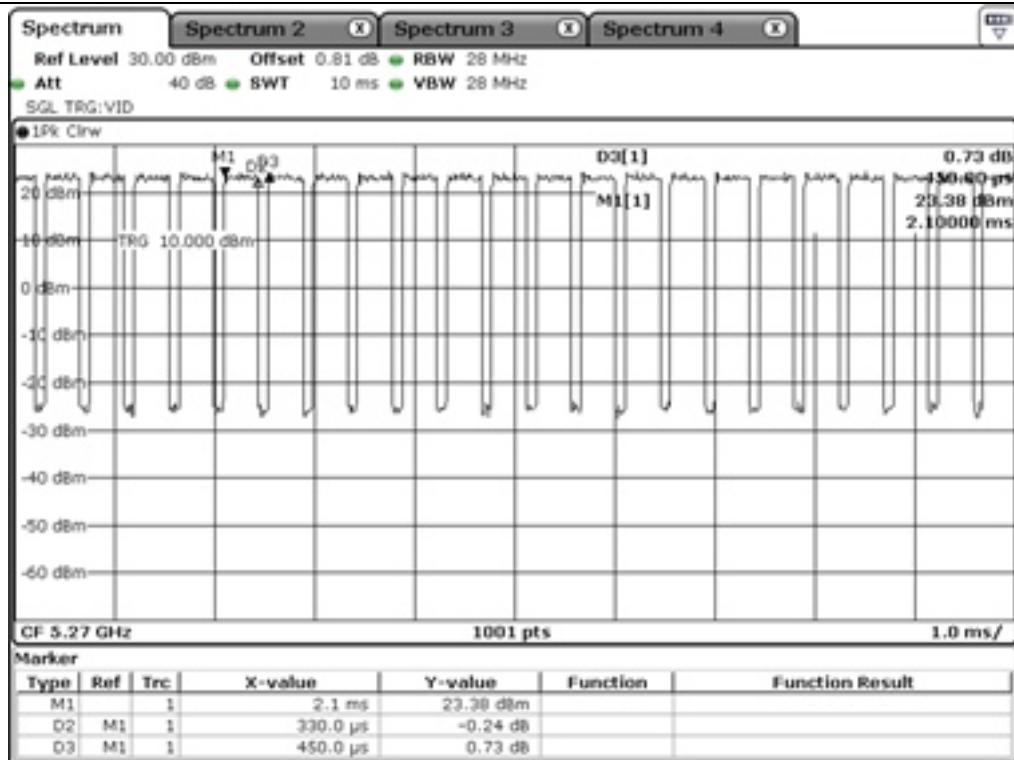


UNII 2A_802.11 HT40_Antenna 0

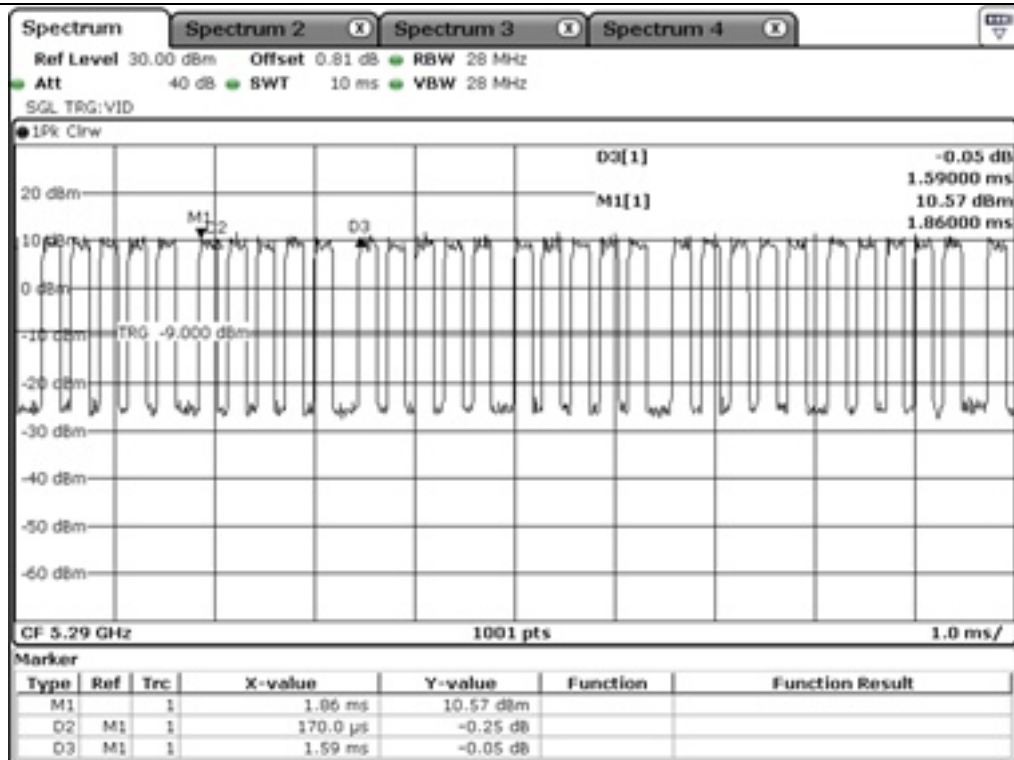


UNII 2A_802.11 VHT 80_Antenna 0




UNII 2C_802.11 a_Antenna 0

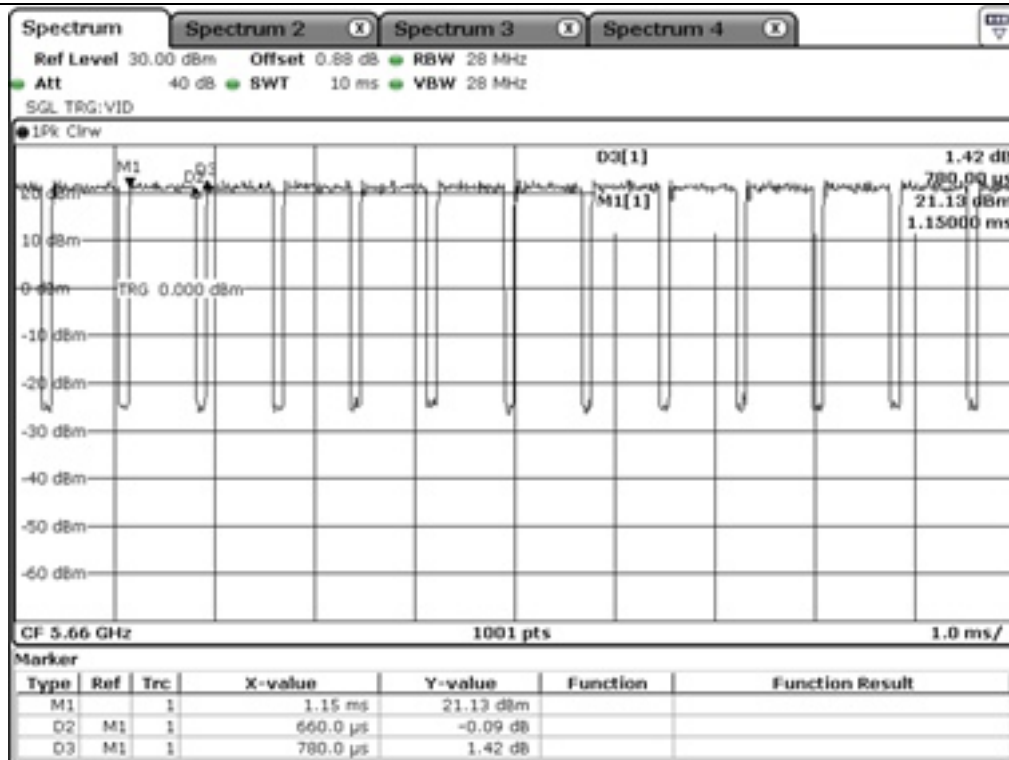

UNII 2C_802.11 HT 20_Antenna 0

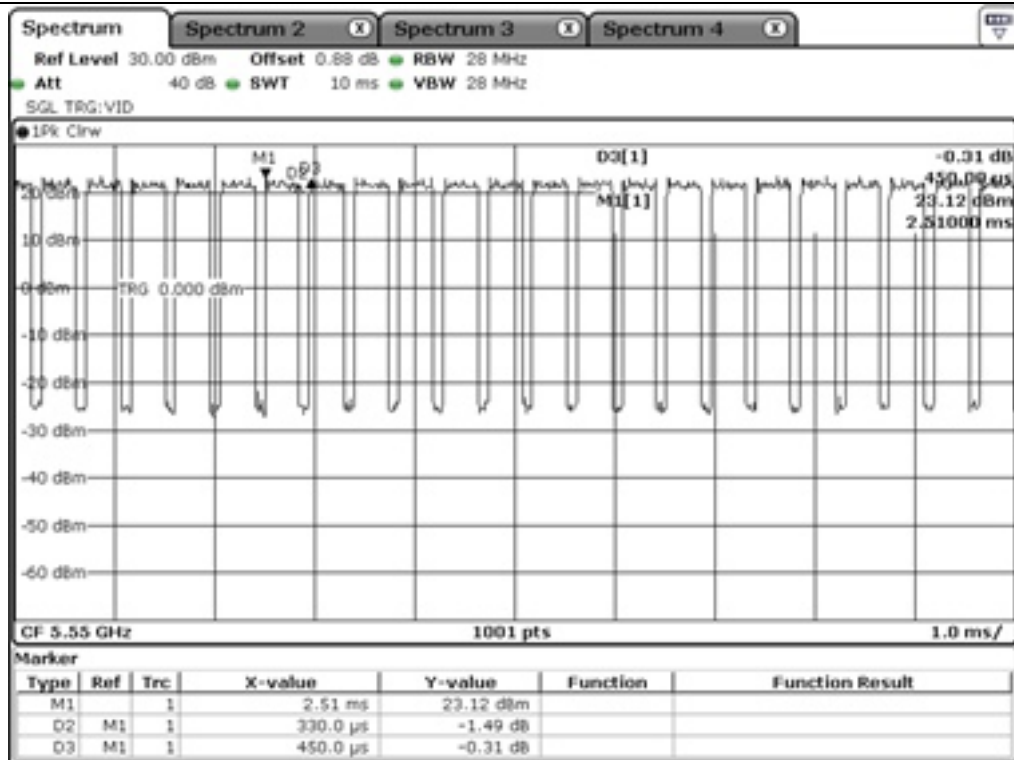


UNII 2C_802.11 HT40_Antenna 0

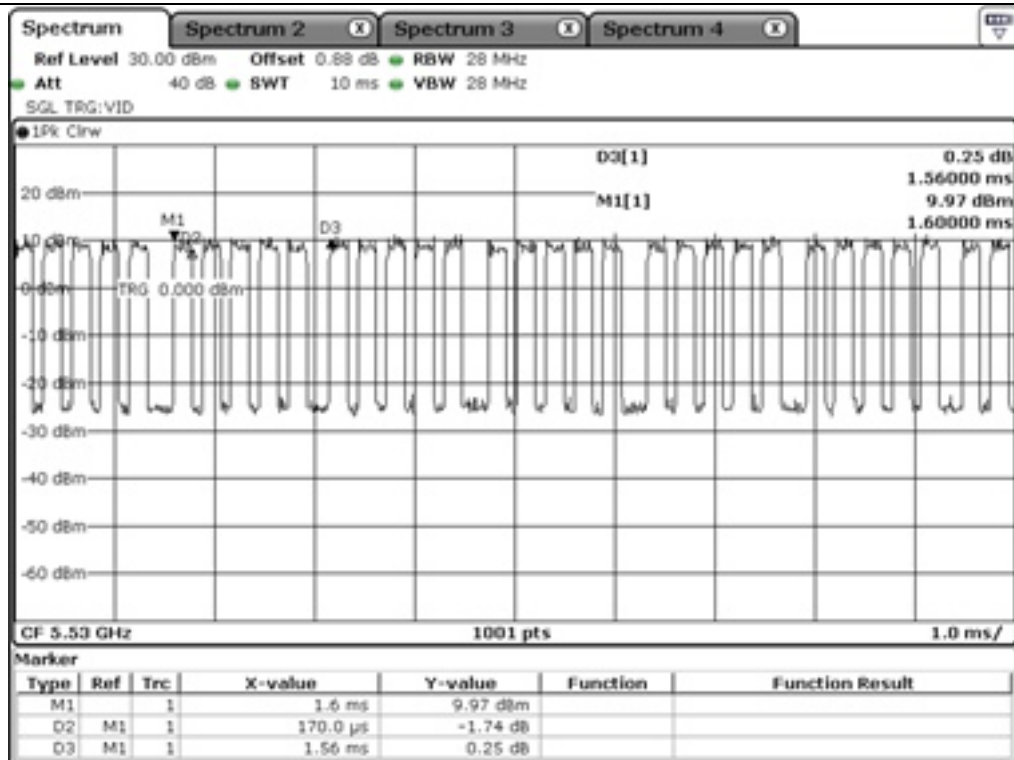


UNII 2C_802.11 VHT 80_Antenna 0




UNII 3_802.11 a_Antenna 0

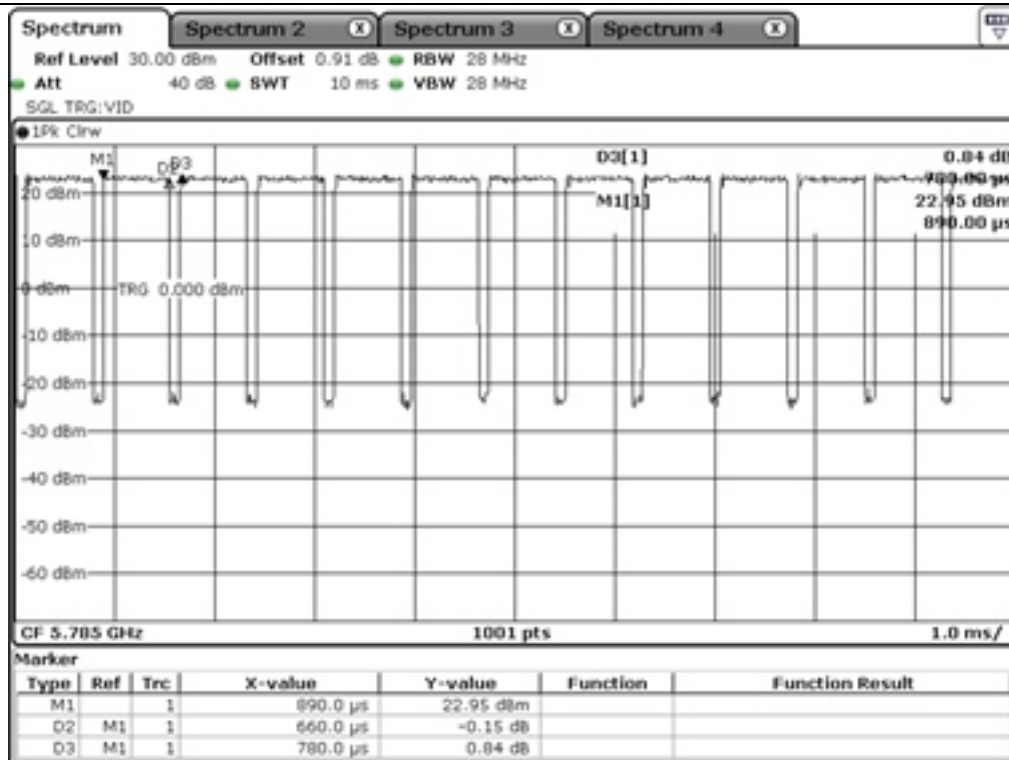


UNII 3_802.11 HT 20_Antenna 0

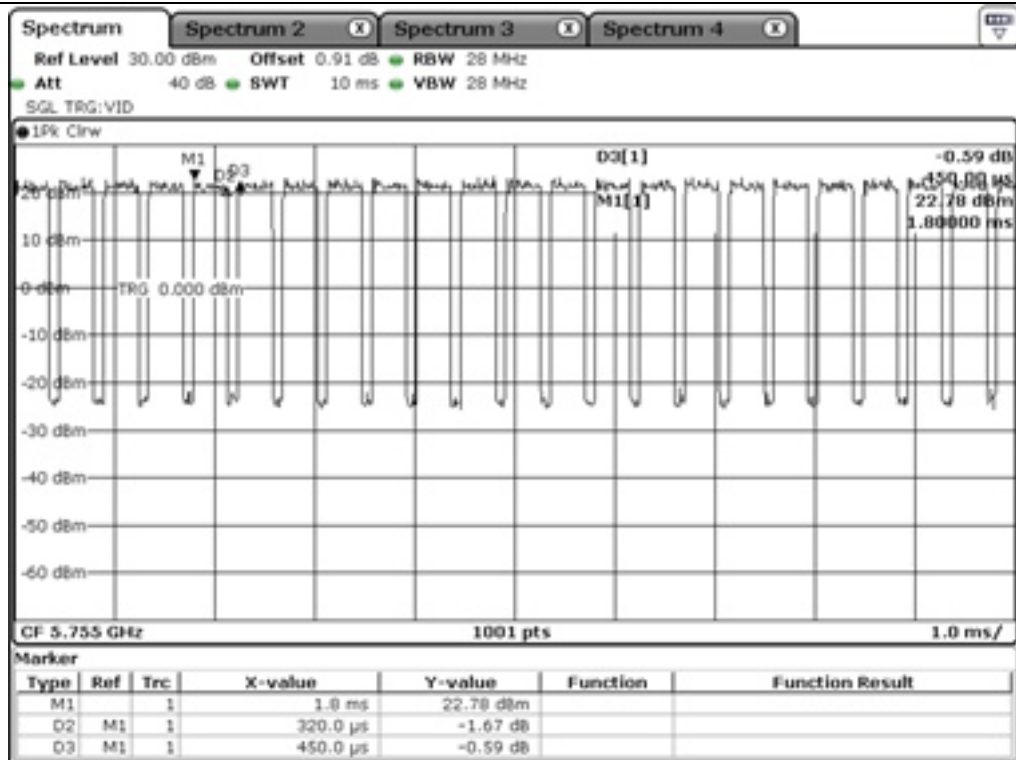


UNII 3_802.11 HT40_Antenna 0

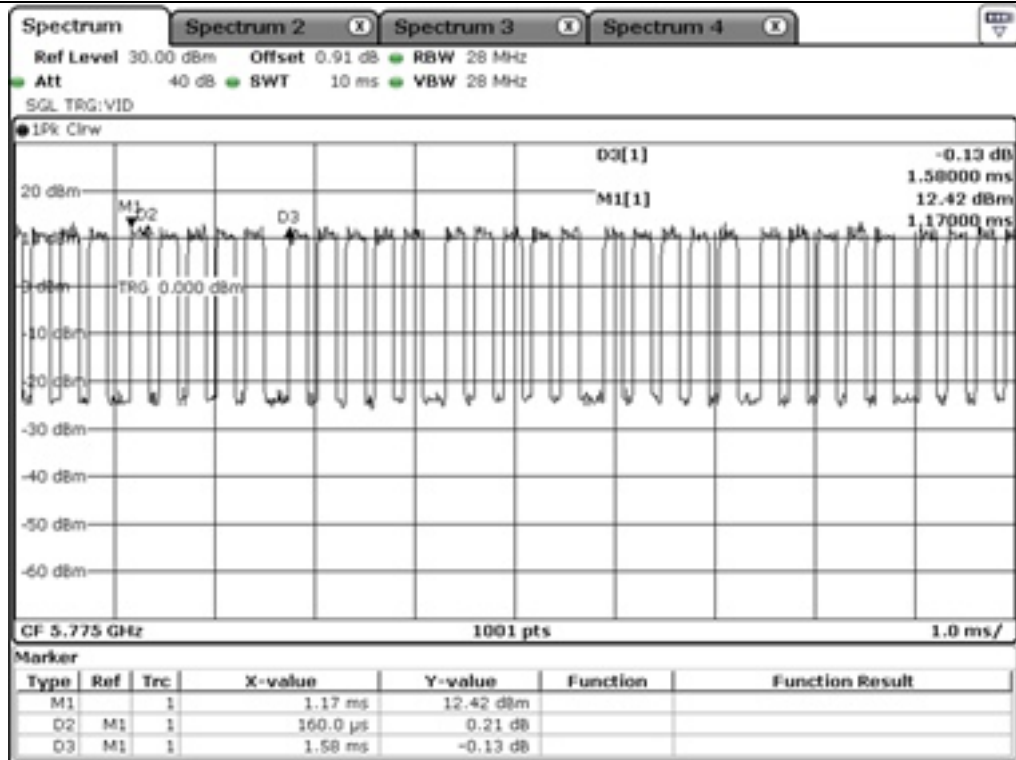


UNII 3_802.11 VHT 80_Antenna 0

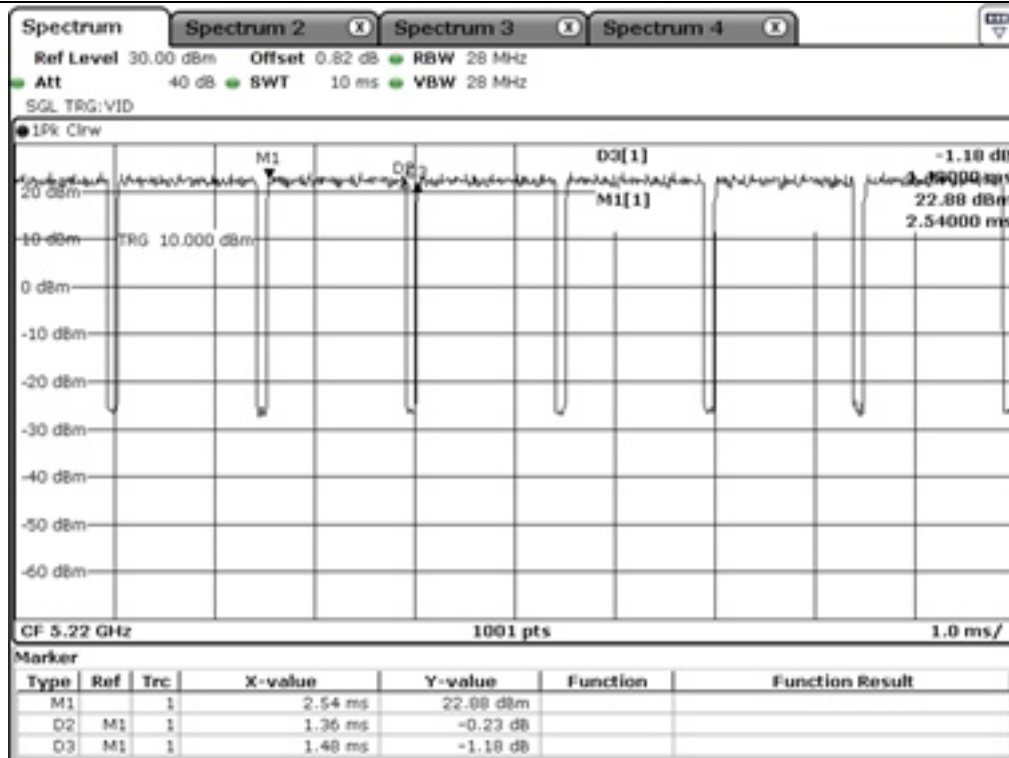


UNII 1_802.11 a_Antenna 1

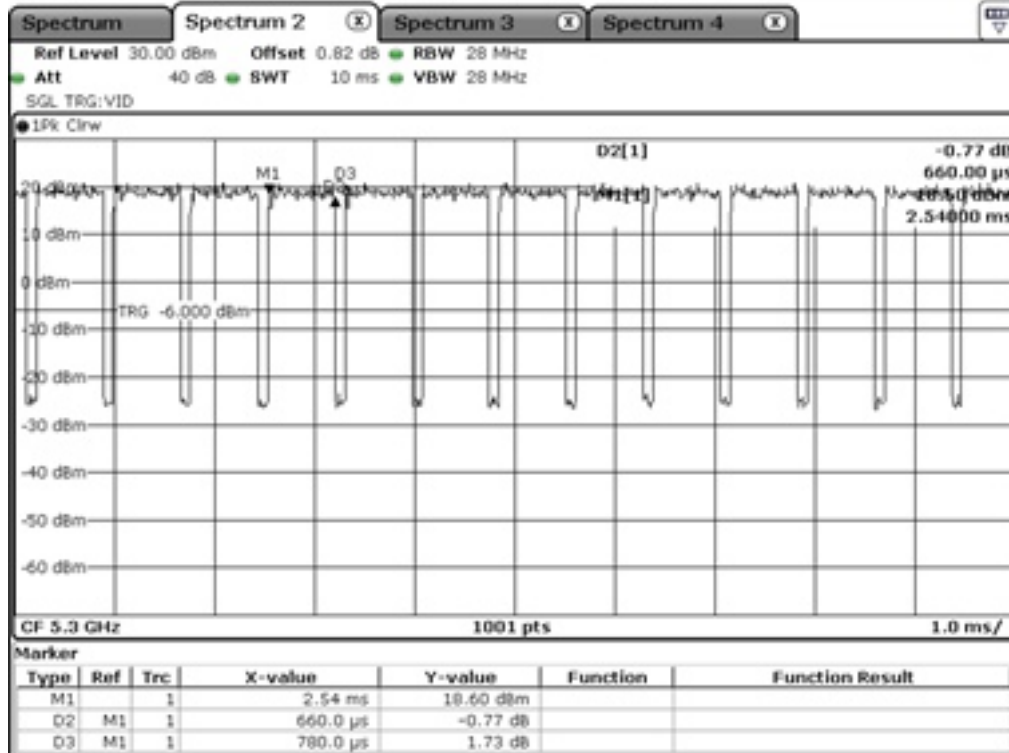

UNII 1_802.11 HT 20_Antenna 1

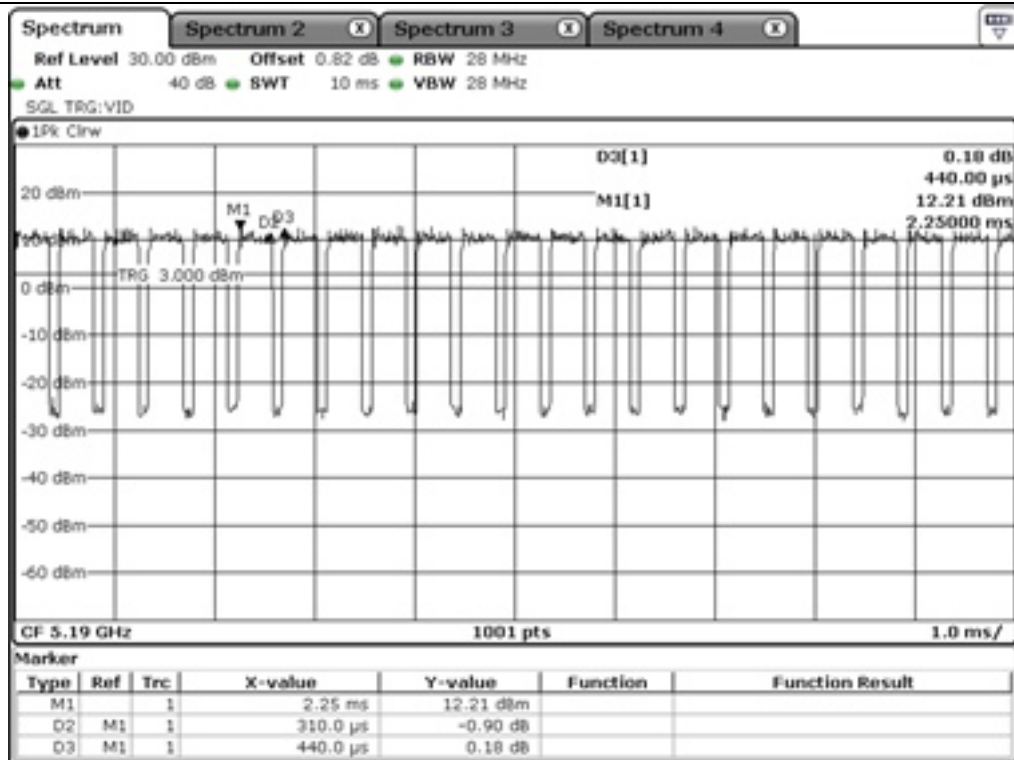


UNII 1_802.11 HT40_Antenna 1

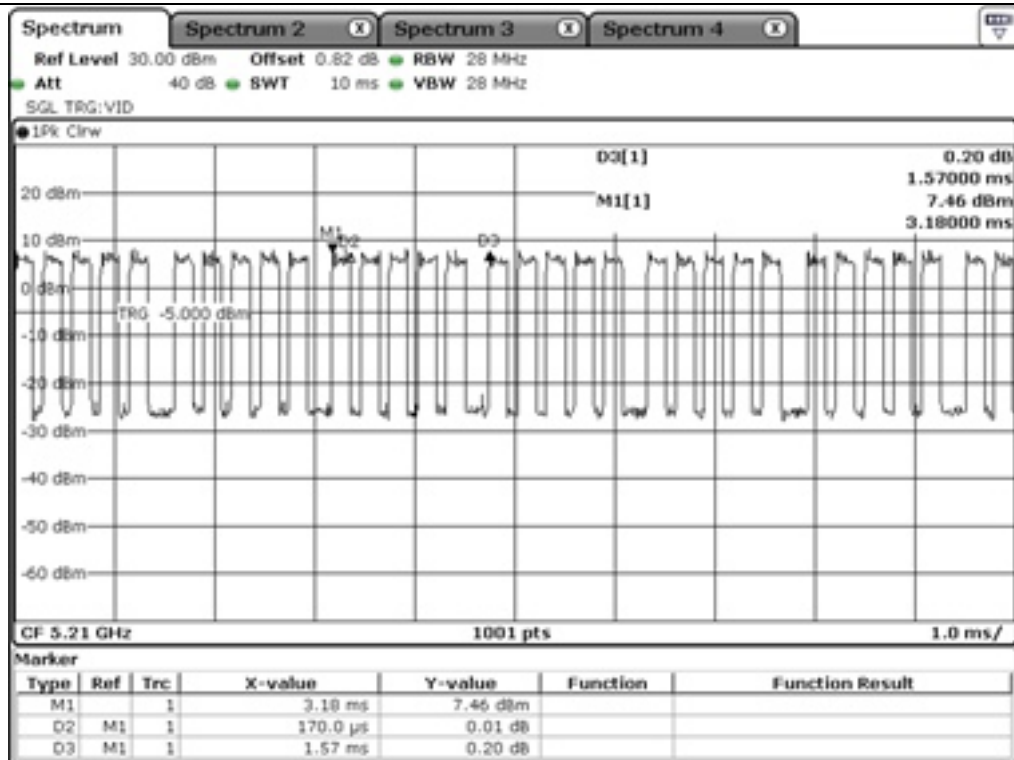


UNII 1_802.11 VHT 80_Antenna 1




UNII 2A_802.11 a_Antenna 1

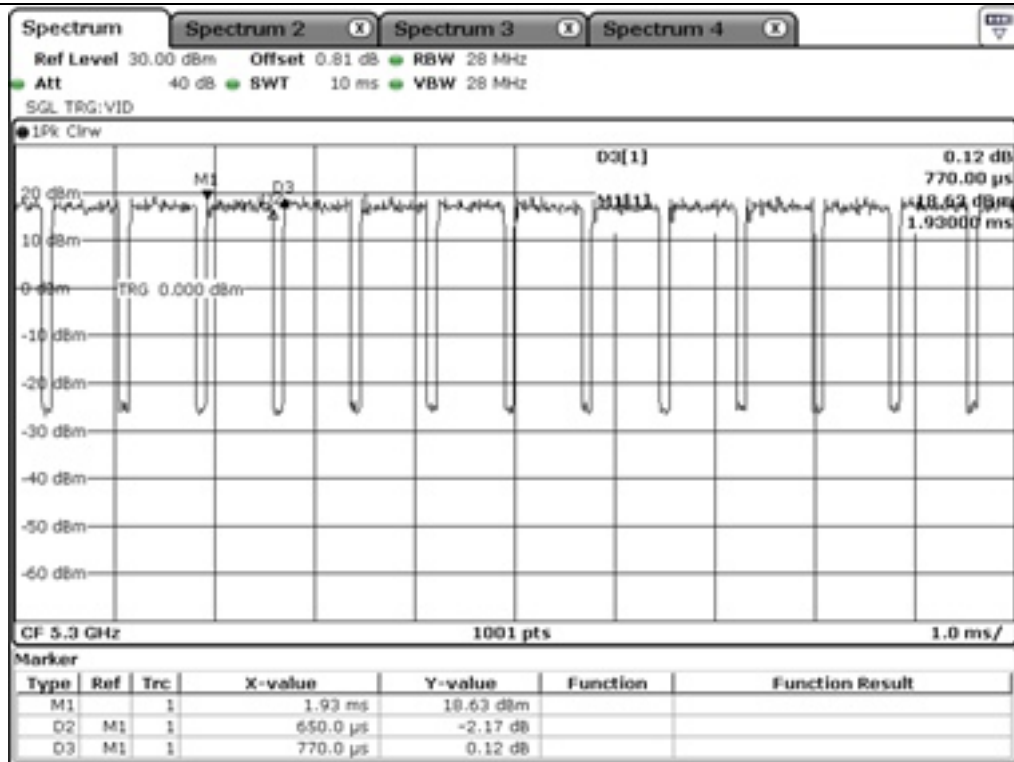

UNII 2A_802.11 HT 20_Antenna 1

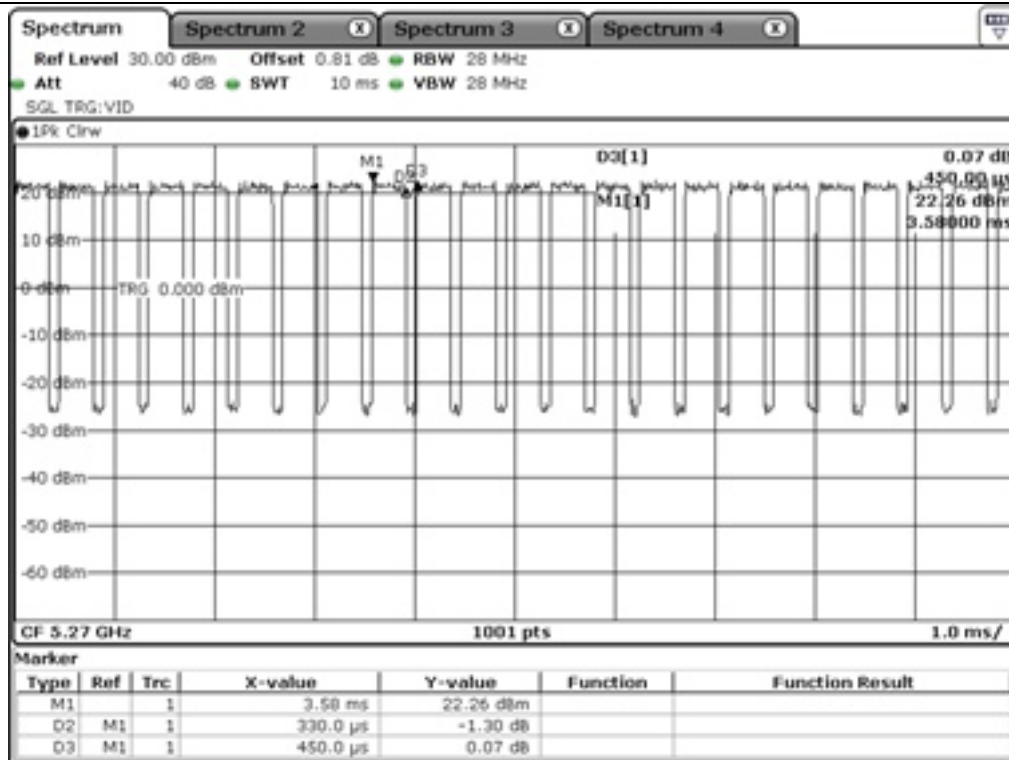


UNII 2A_802.11 HT40_Antenna 1

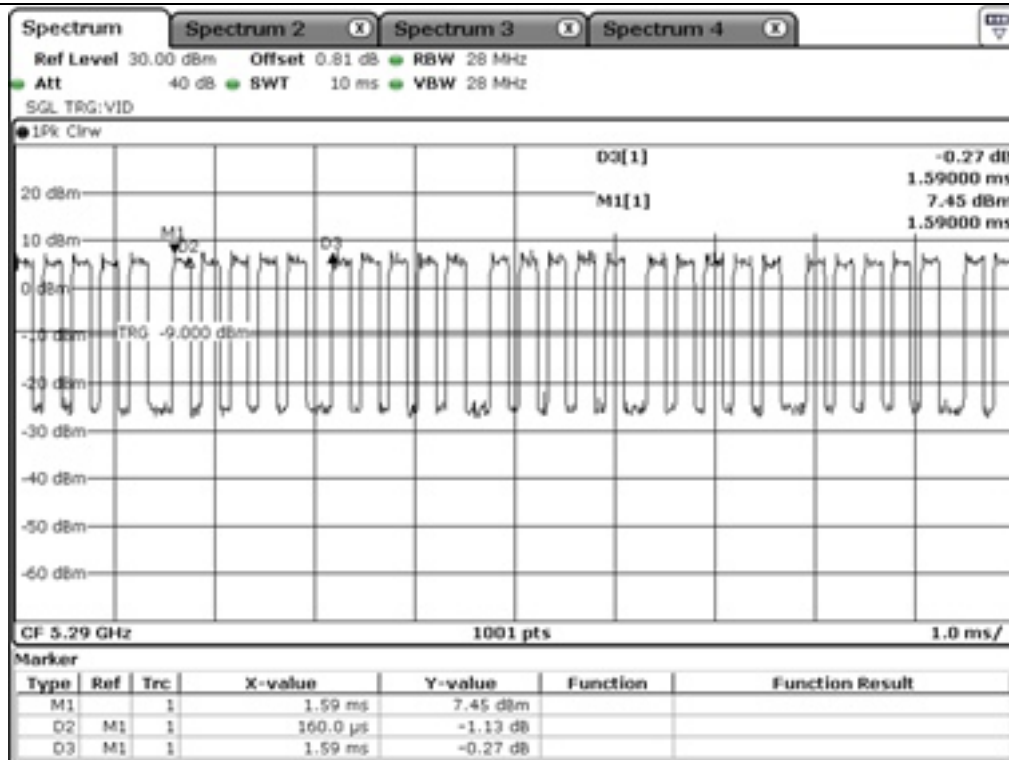


UNII 2A_802.11 VHT 80_Antenna 1




UNII 2C_802.11 a_Antenna 1

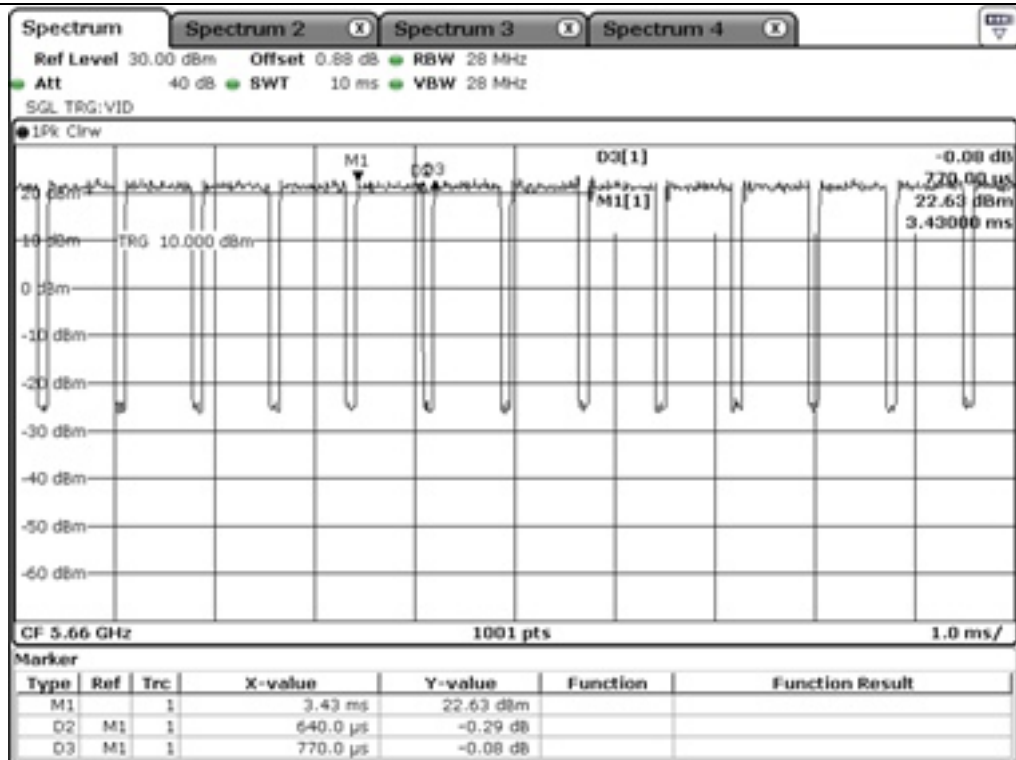


UNII 2C_802.11 HT 20_Antenna 1

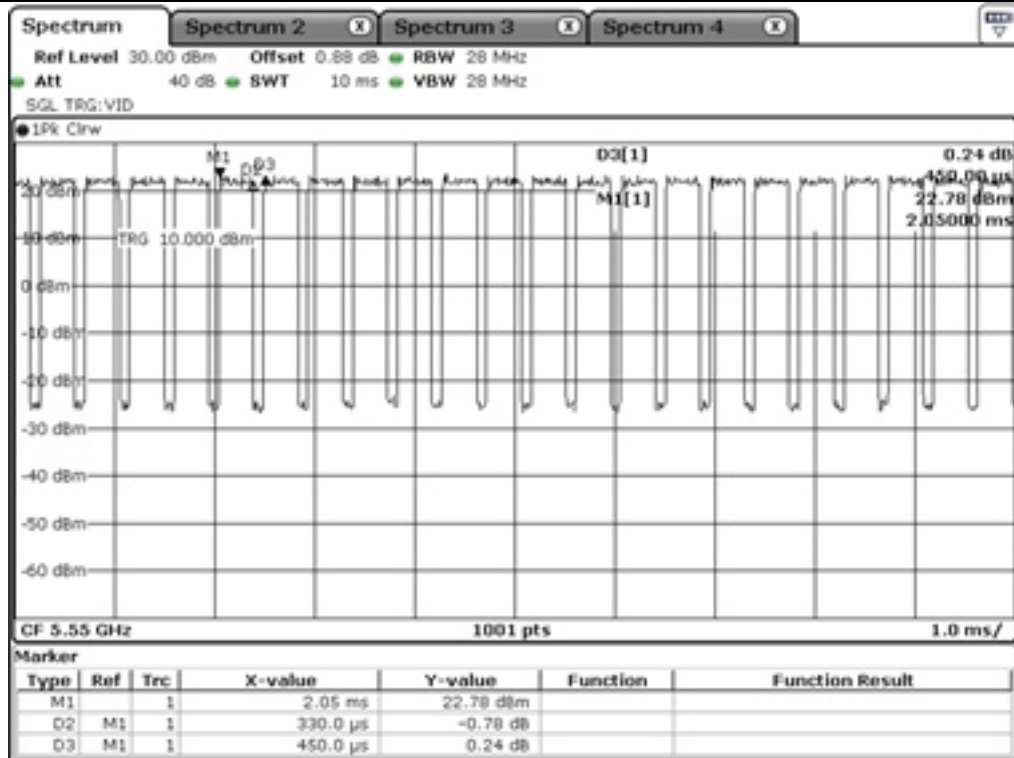


UNII 2C_802.11 HT40_Antenna 1

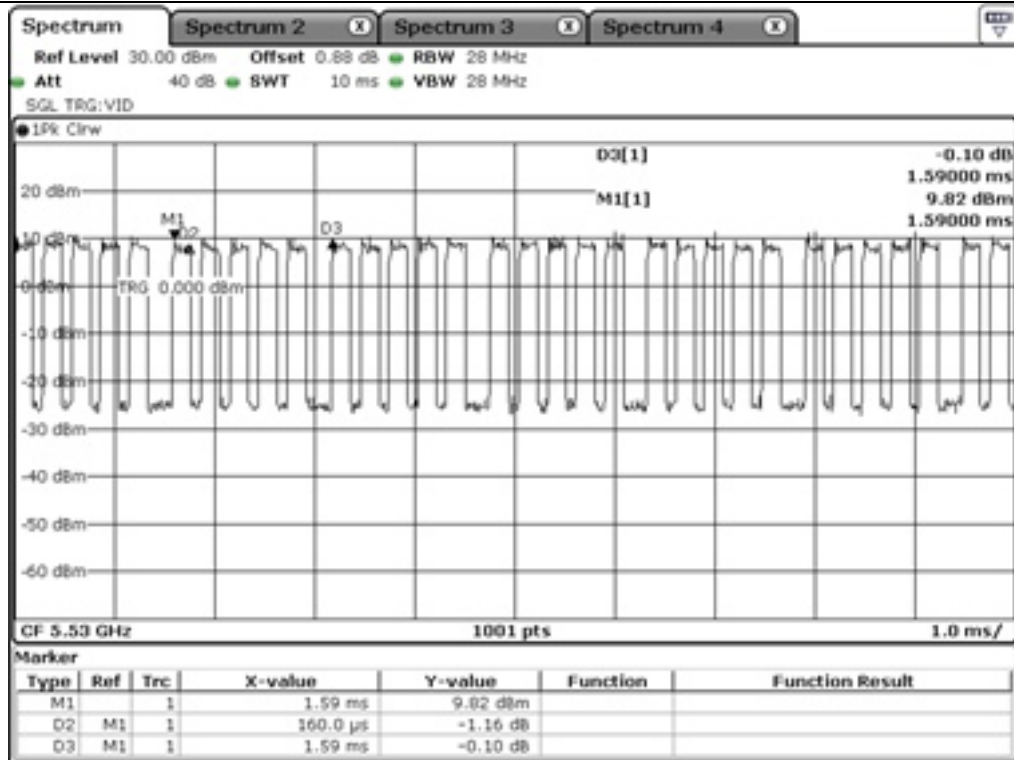


UNII 2C_802.11 VHT 80_Antenna 1

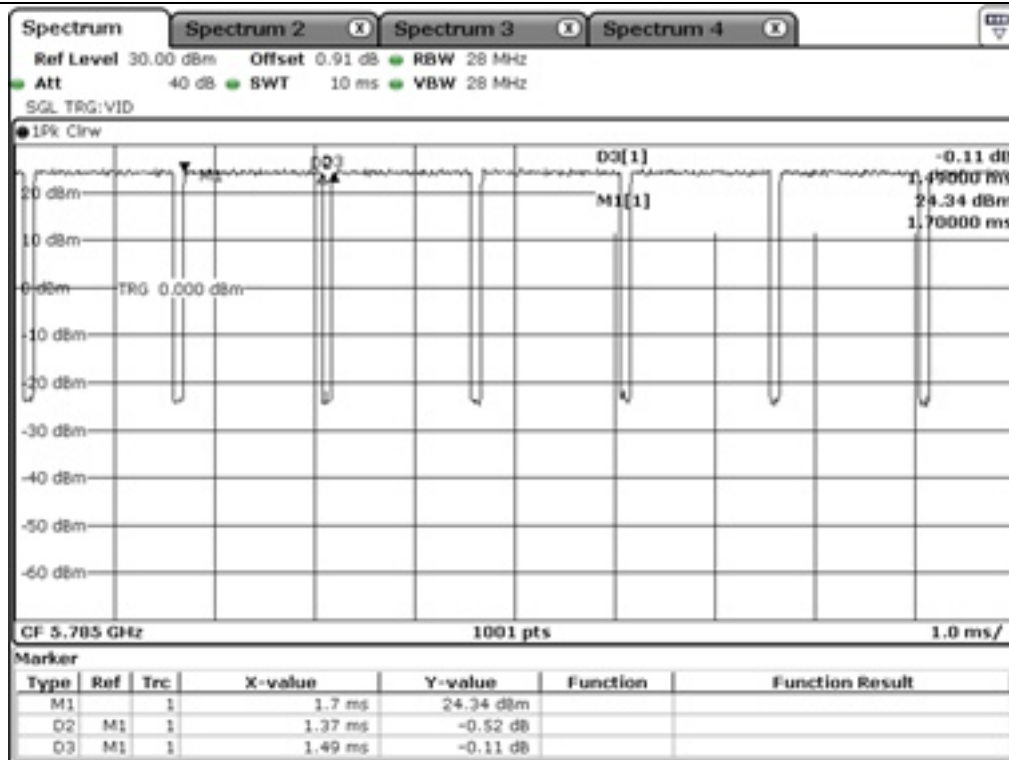


UNII 3_802.11 a_Antenna 1

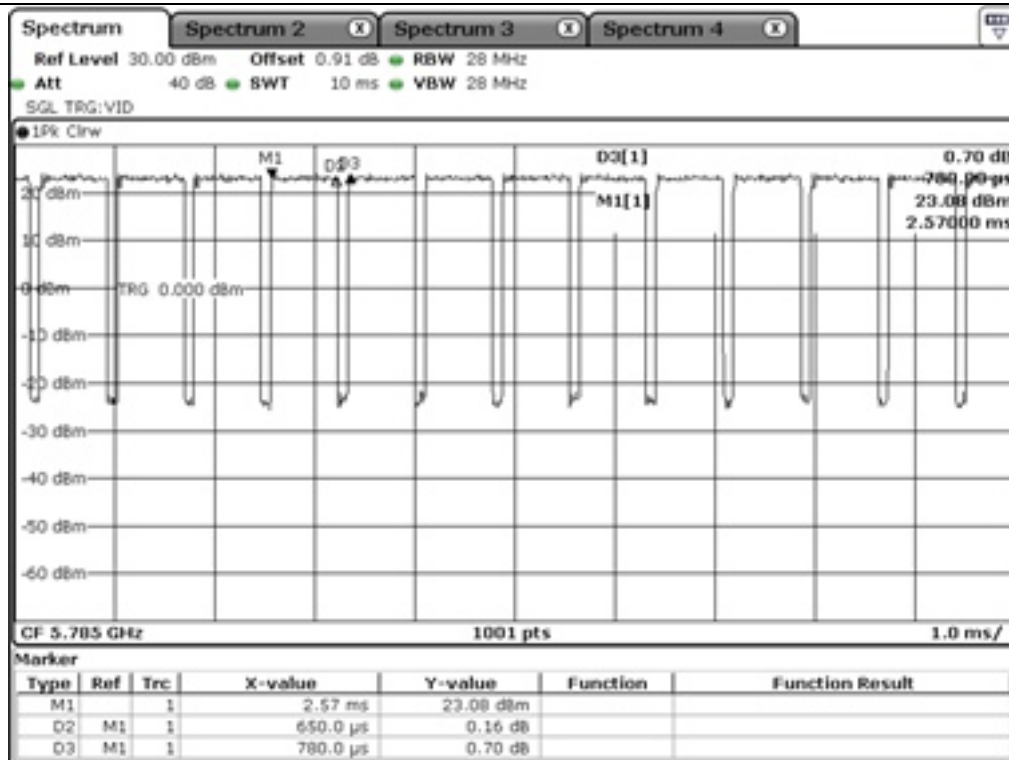

UNII 3_802.11 HT 20_Antenna 1

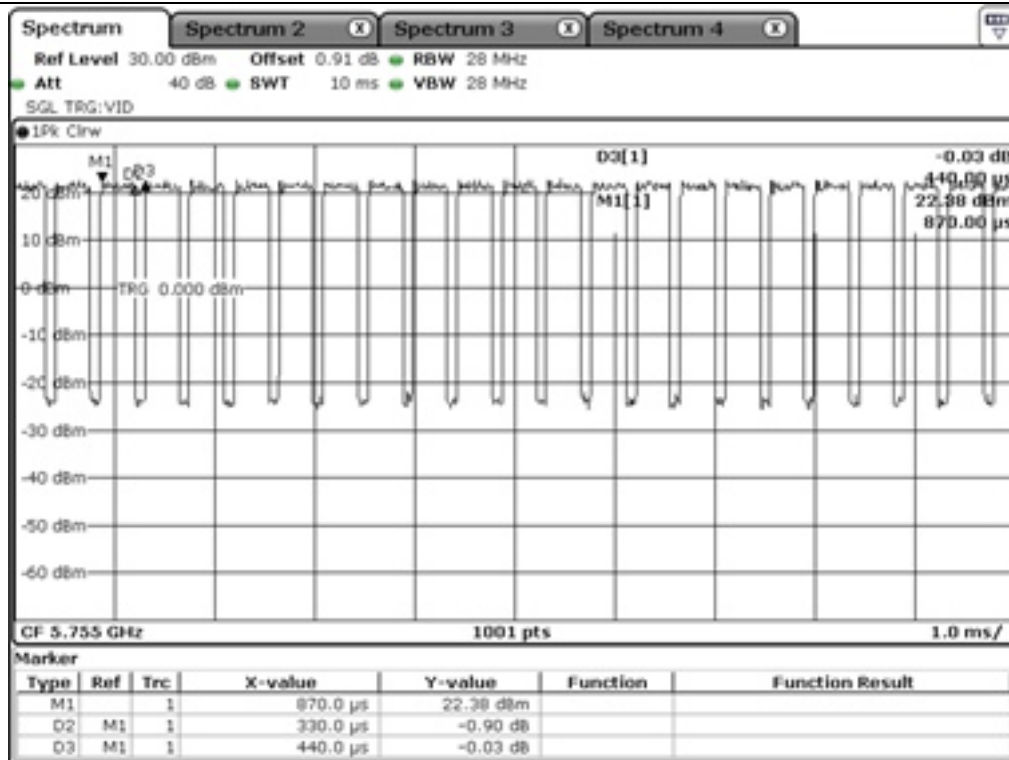


UNII 3_802.11 HT40_Antenna 1

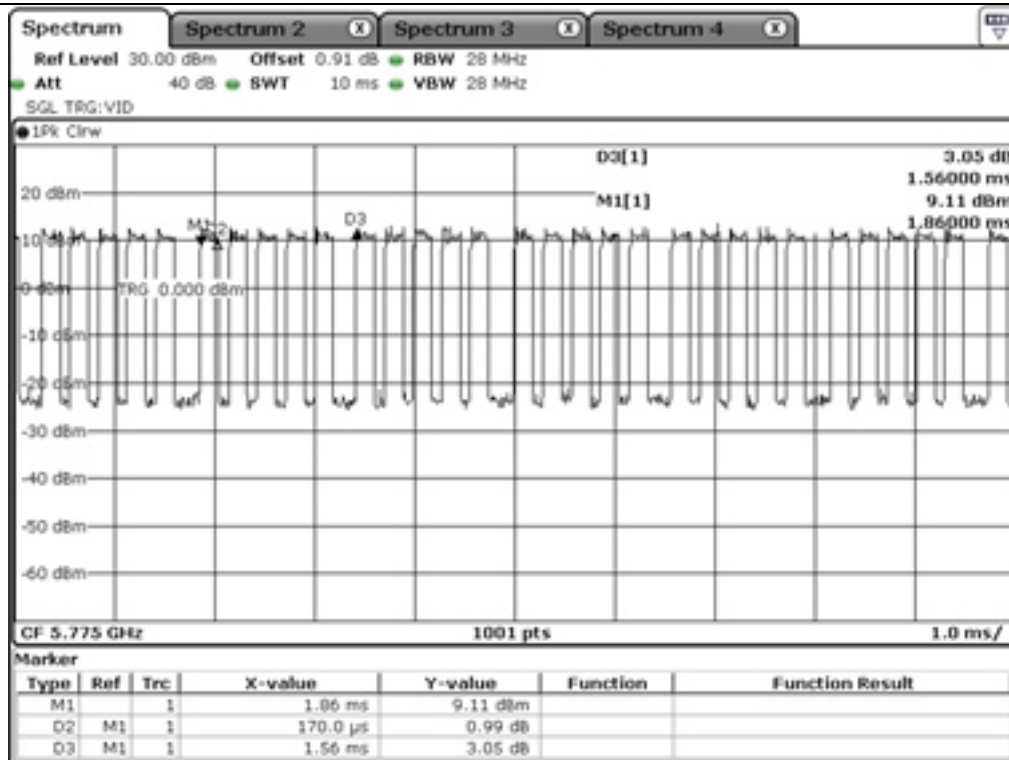


UNII 3_802.11 VHT 80_Antenna 1




Staddle_802.11 a_Antenna 0

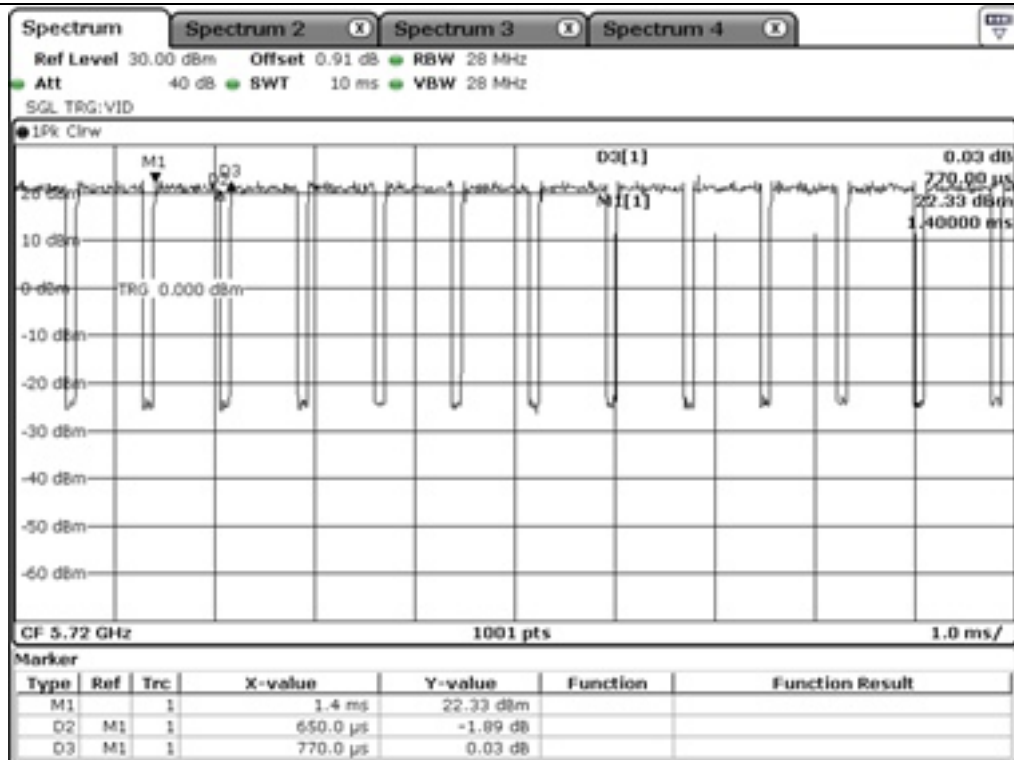


Staddle_802.11 HT 20_Antenna 0

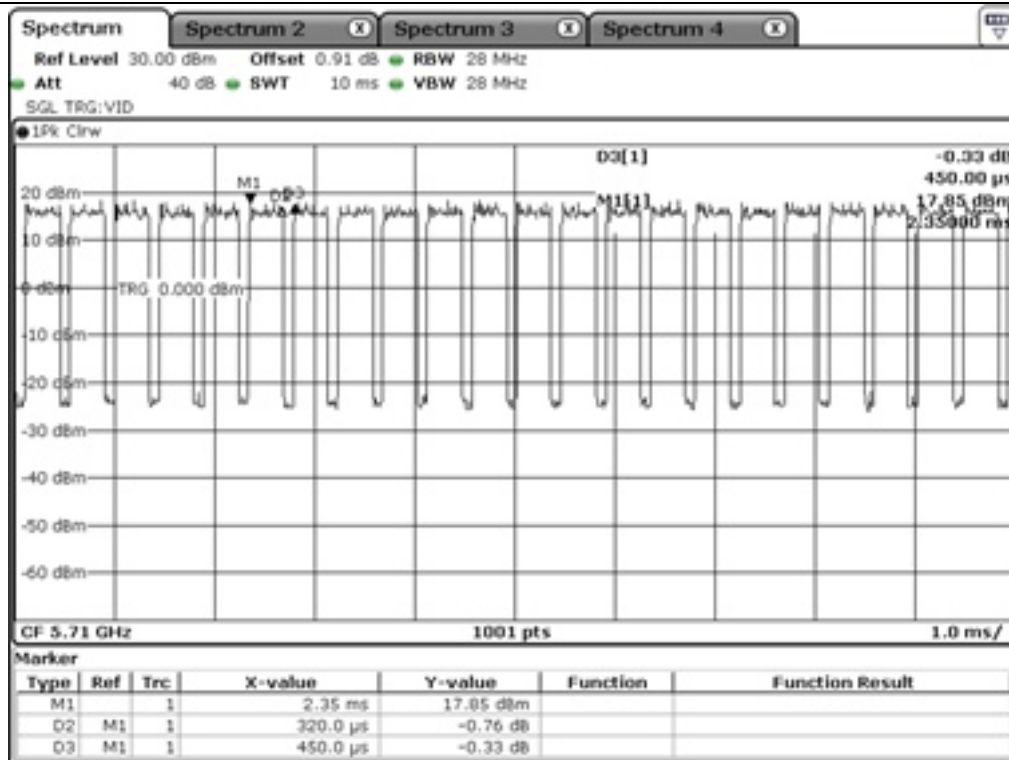


Staddle_802.11 HT40_Antenna 0

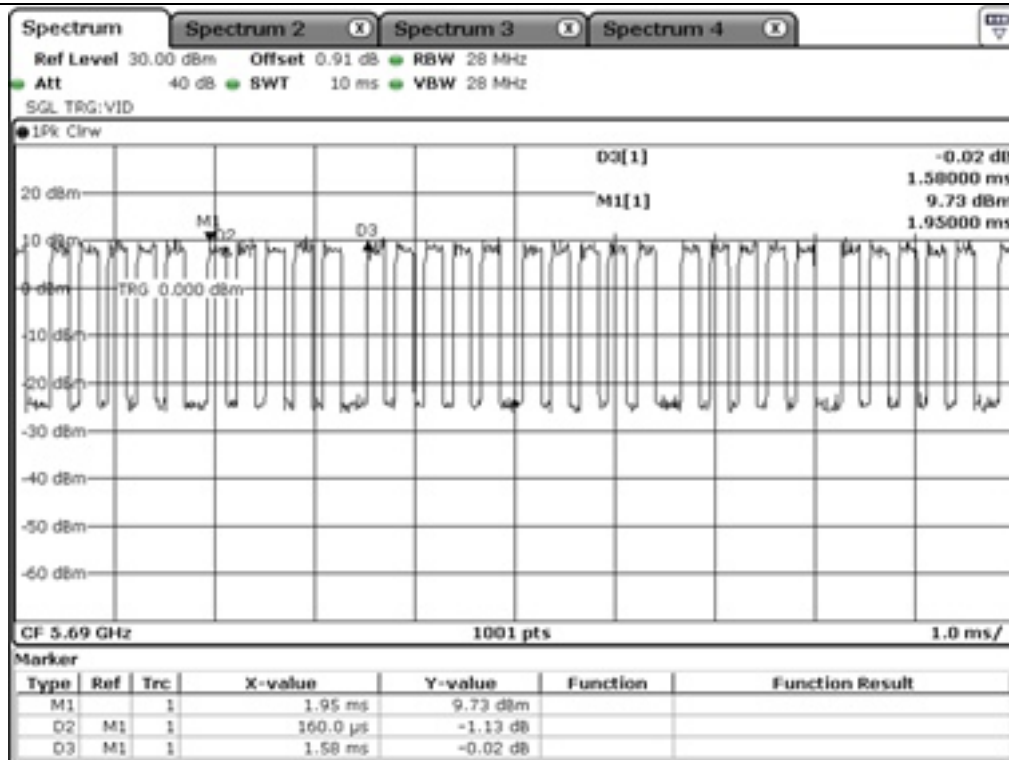


Staddle_802.11 VHT 80_Antenna 0

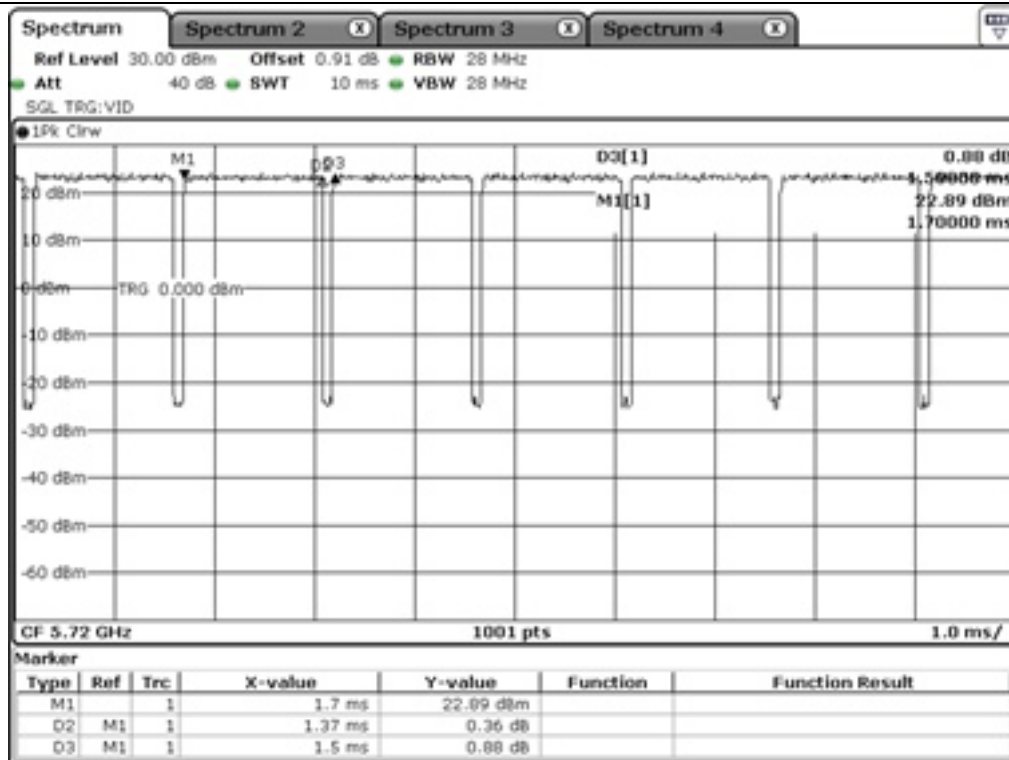


Staddle_802.11 a_Antenna 1

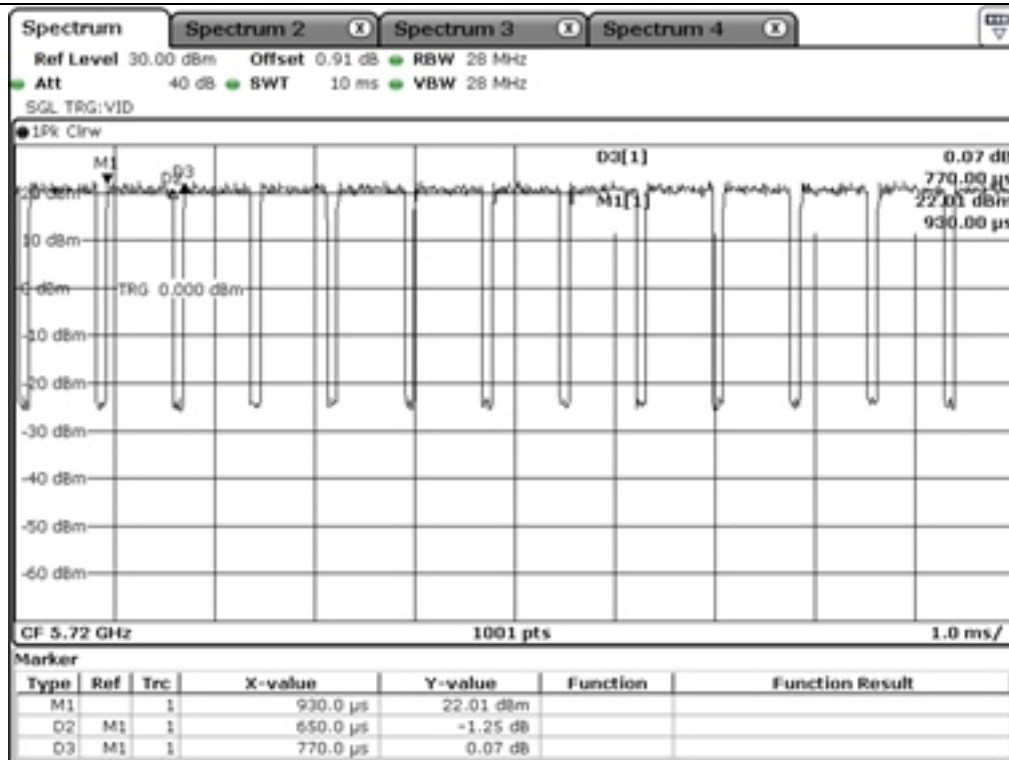

Staddle_802.11 HT 20_Antenna 1

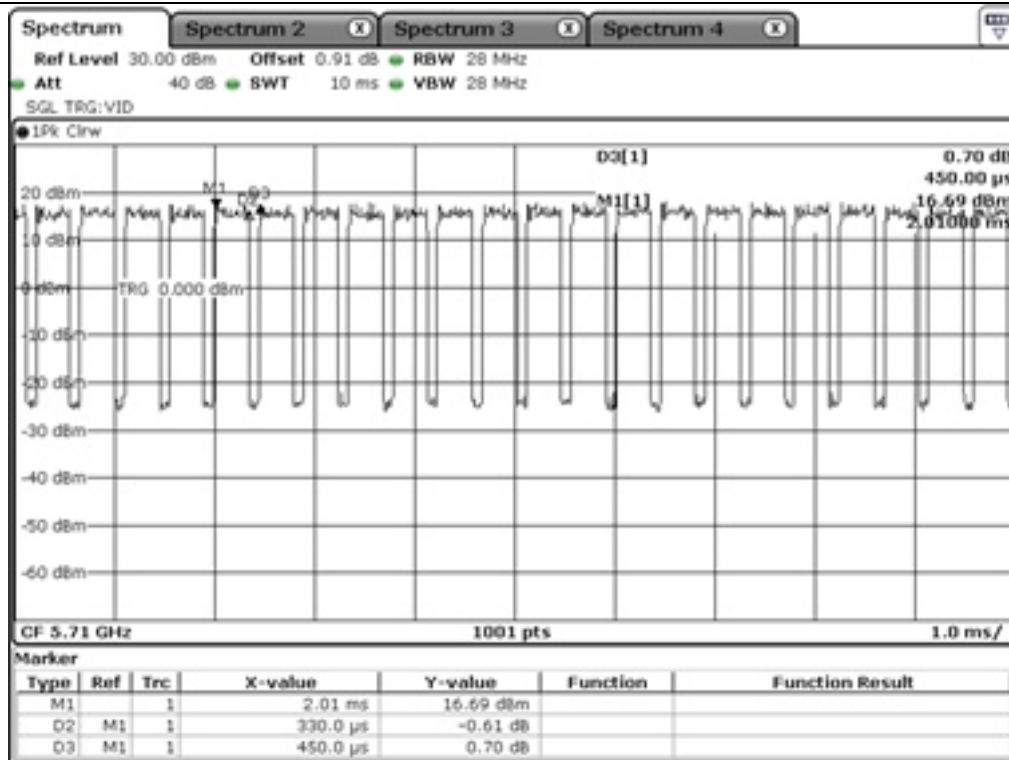

Staddle_802.11 HT40_Antenna 1

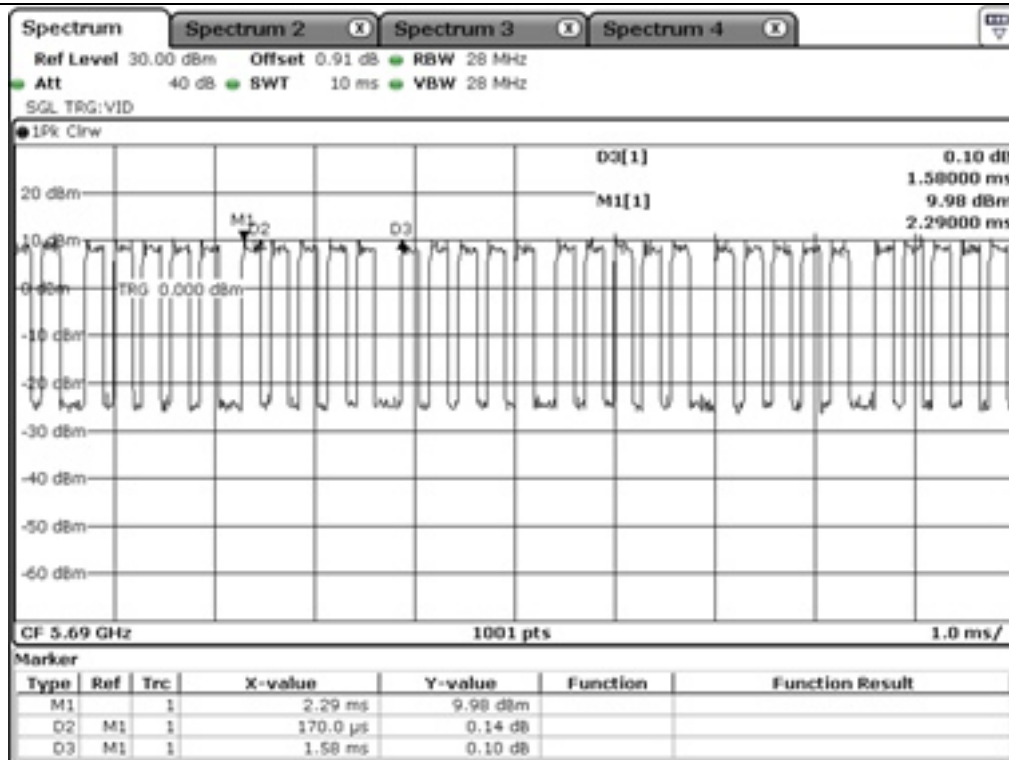

Staddle_802.11 VHT 80_Antenna 1

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in the Transmitting mode. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is PCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. 99 % OCCUPIED BANDWIDTH & MIMIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 24 °C
Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 1%-5% OBW for 99% bandwidth, and peak detection was used. The 99 % bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission.

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to approximately 1% of the emission bandwidth, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.



7.3 Test Date

March 29, 2021 ~ April 13, 2021


7.4 Test data for 802.11a RLAN Mode

7.4.1 Test data for Antenna 0


7.4.1.1 99 % OCCUPIED BANDWIDTH

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	16.38
	Middle	5 220.00	16.38
	High	5 240.00	16.33
5 250 ~ 5 350	Low	5 260.00	16.33
	Middle	5 300.00	16.33
	High	5 320.00	16.33
5 470 ~ 5 725	Low	5 500.00	16.38
	Middle	5 660.00	16.38
	High	5 700.00	16.48
5 725 ~ 5 850	Low	5 745.00	16.73
	Middle	5 785.00	16.68
	High	5 825.00	16.63

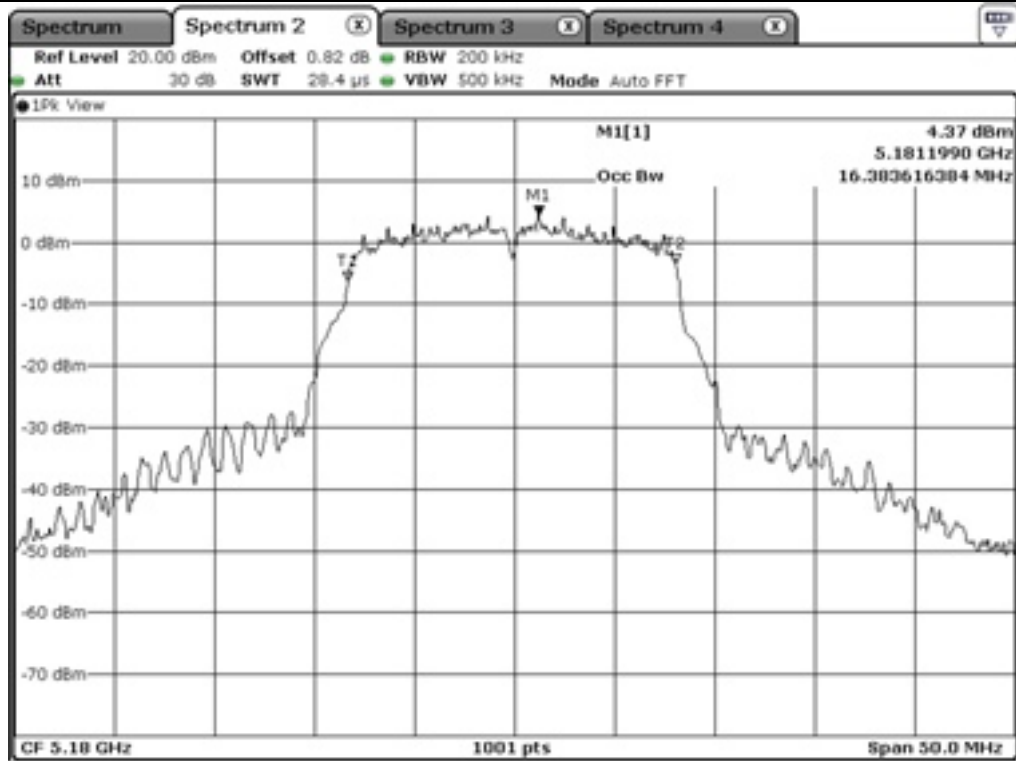

Low Channel (5 180 MHz)

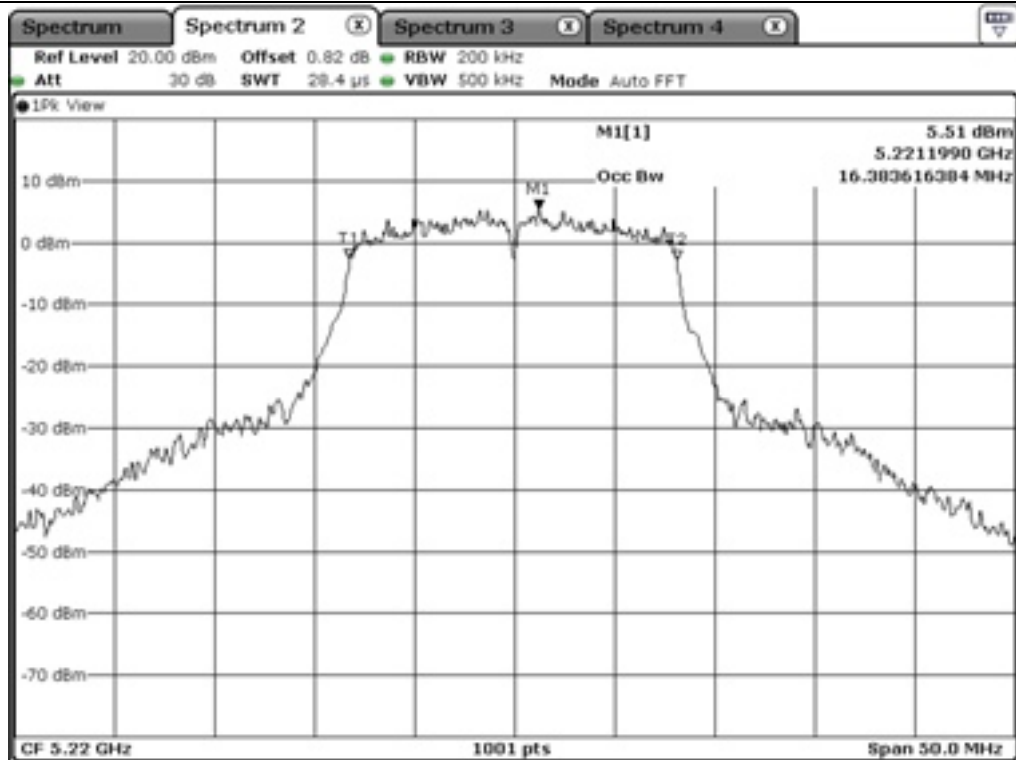


Middle Channel (5 220 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

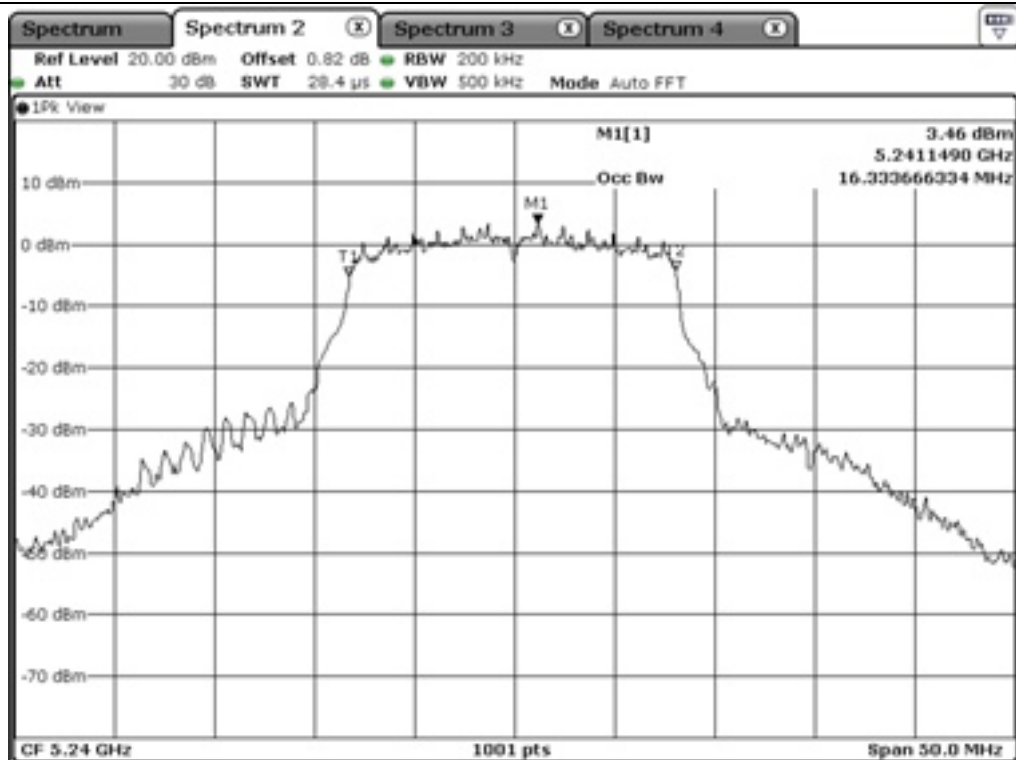

High Channel (5 240 MHz)

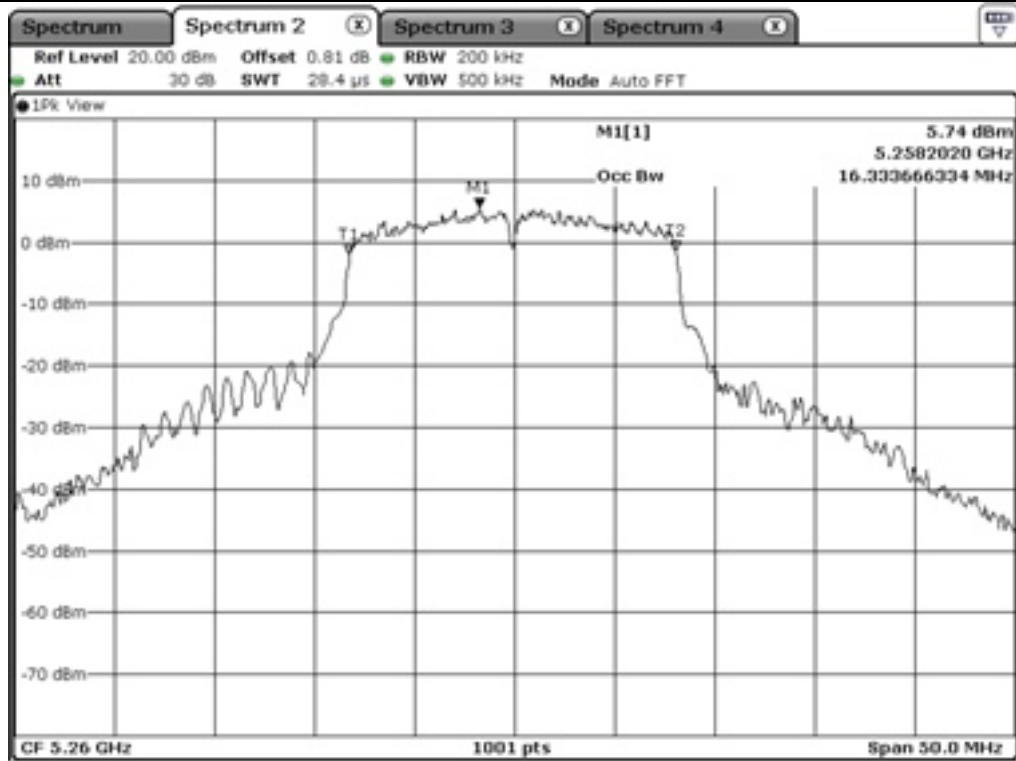

Low Channel (5 260 MHz)

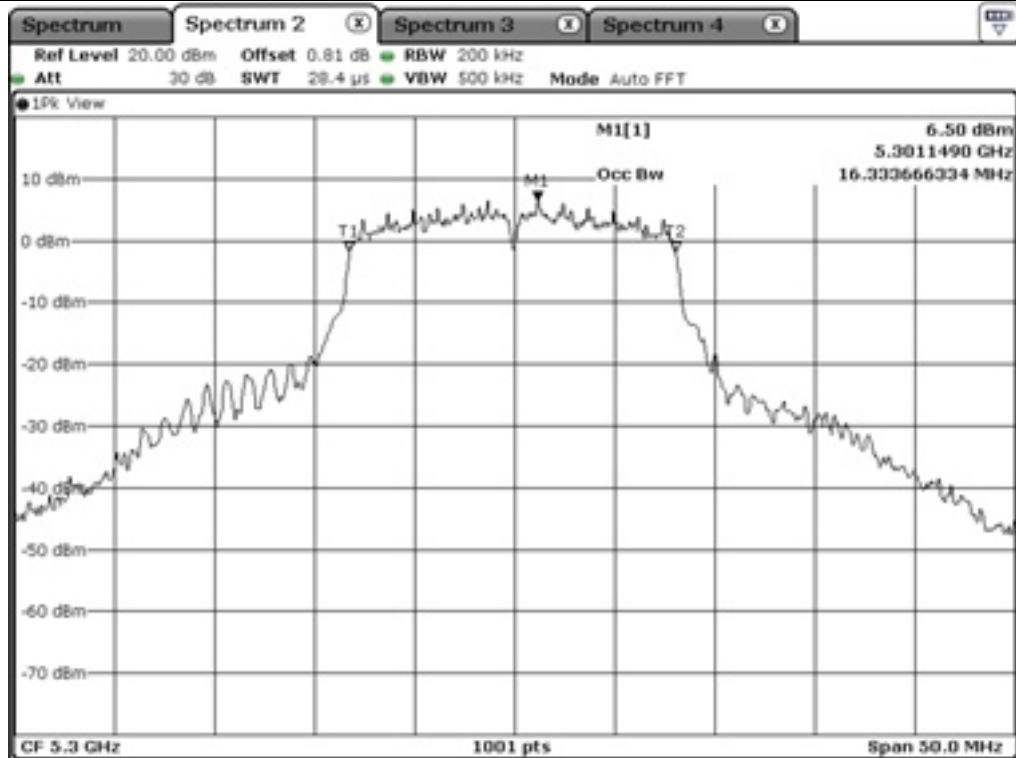


Middle Channel (5 300 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

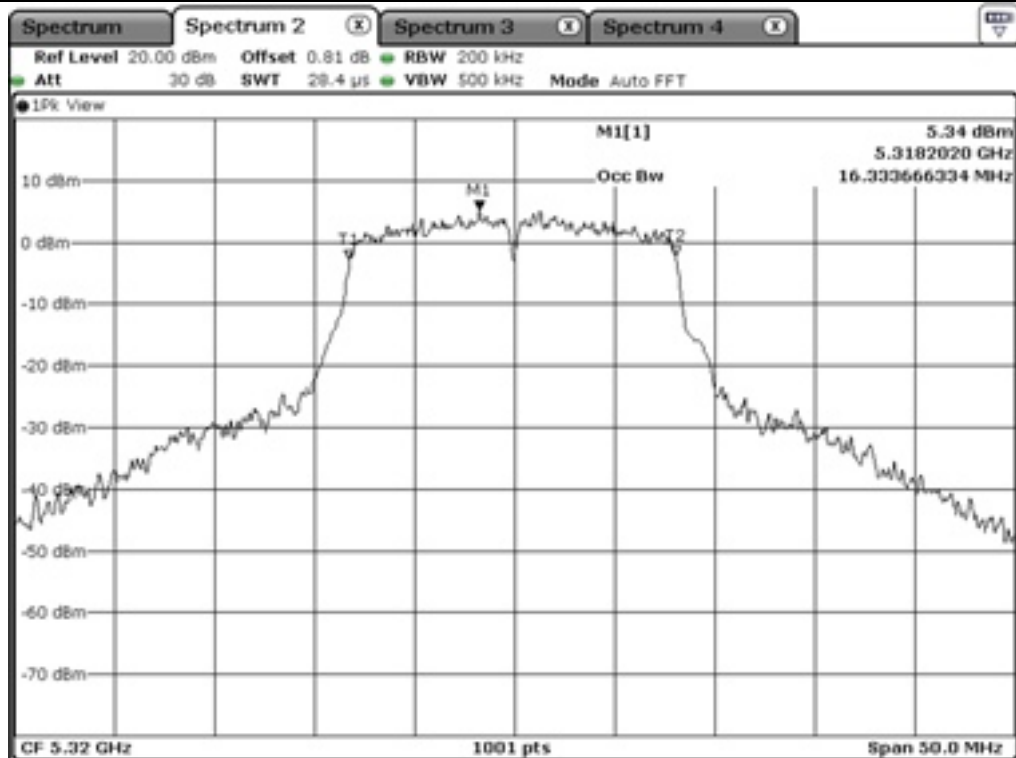


High Channel (5 320 MHz)

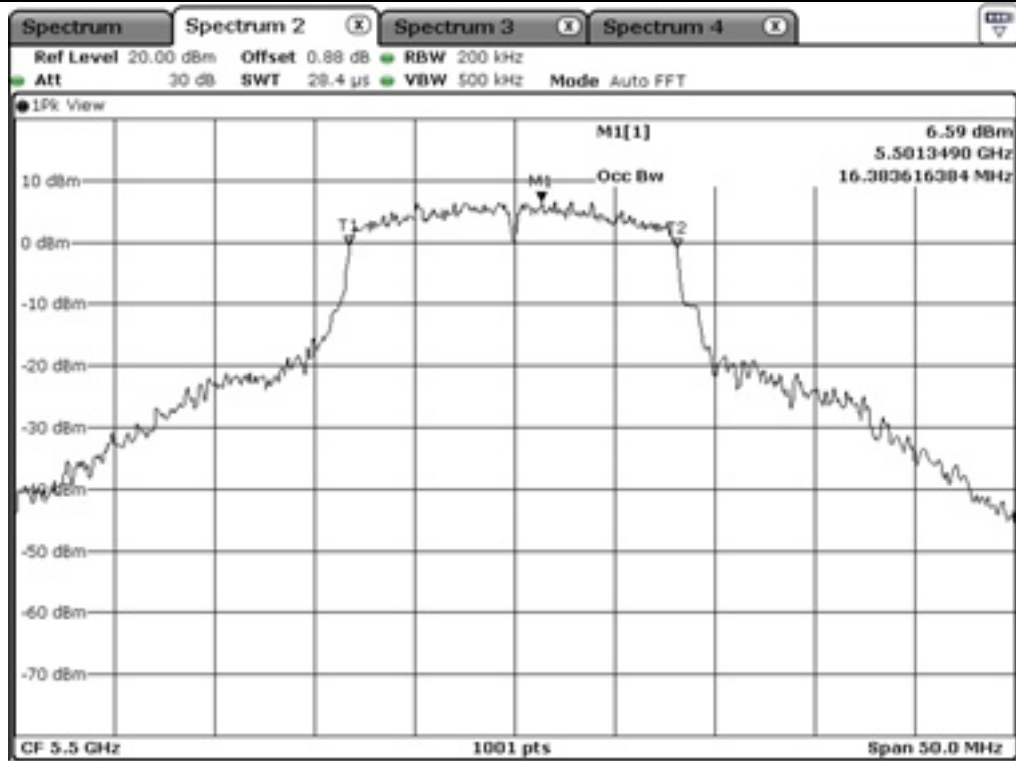


Low Channel (5 500 MHz)

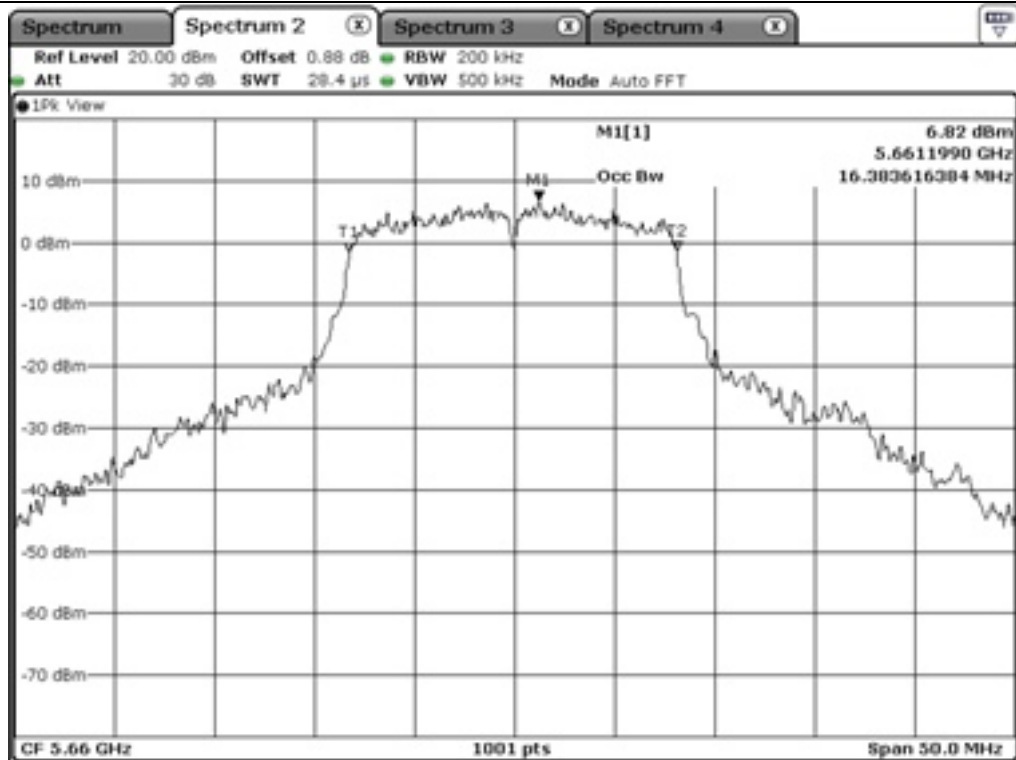


Middle Channel (5 660 MHz)

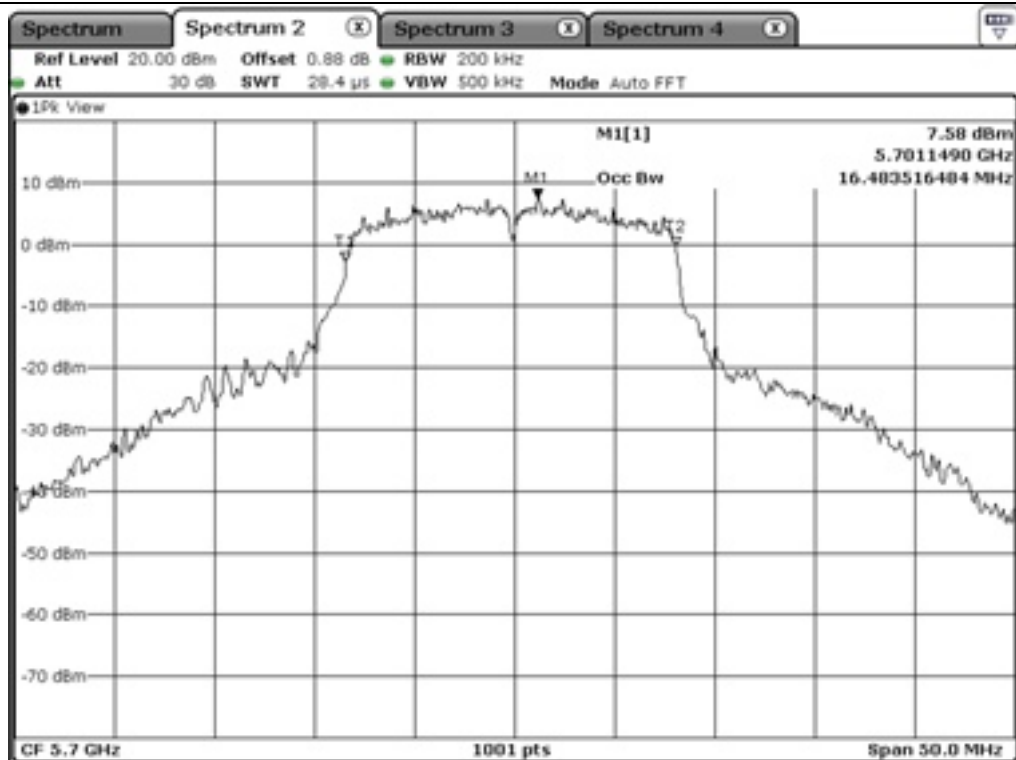

High Channel (5 700 MHz)

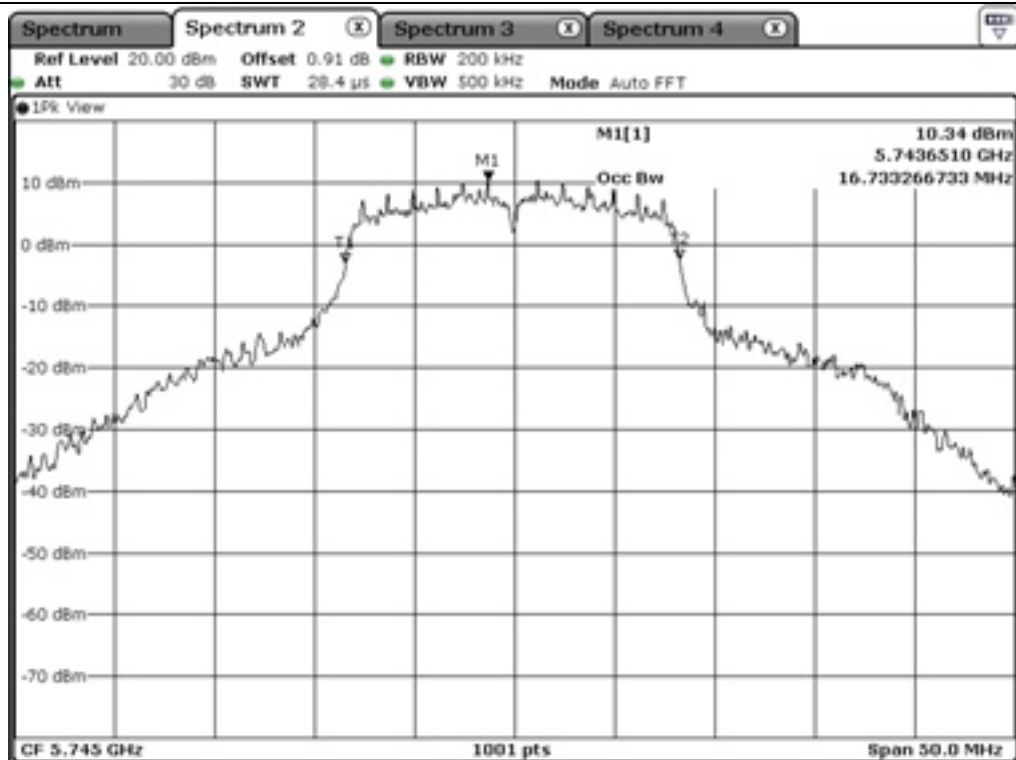

Low Channel (5.745 MHz)

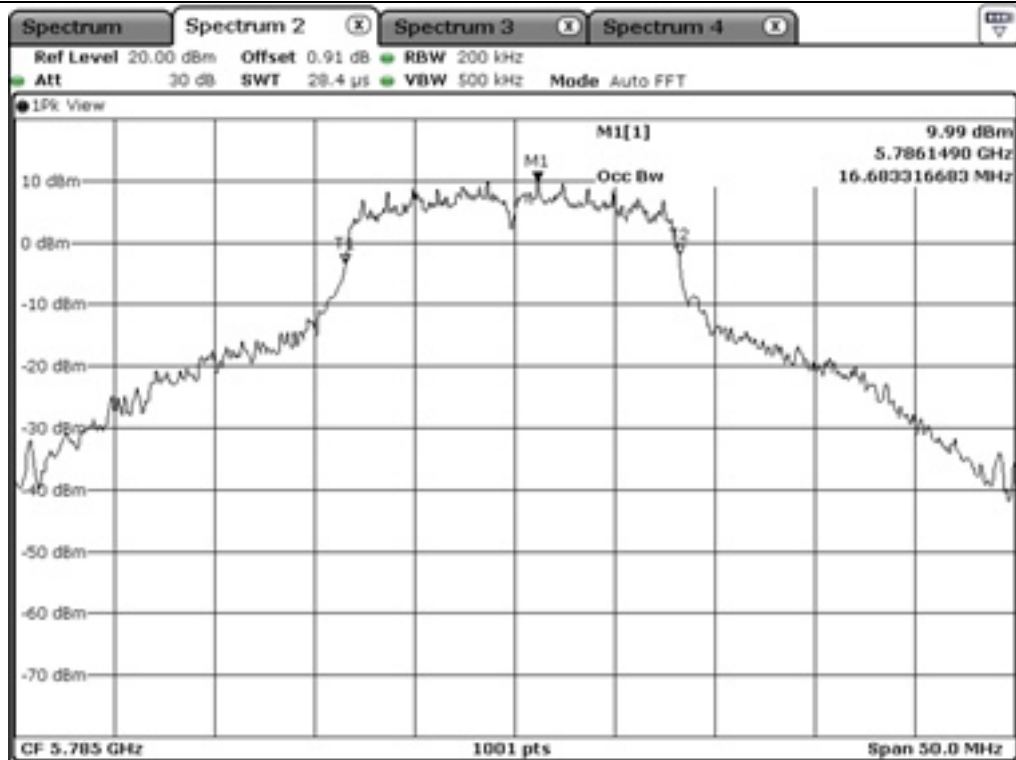


Middle Channel (5.785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

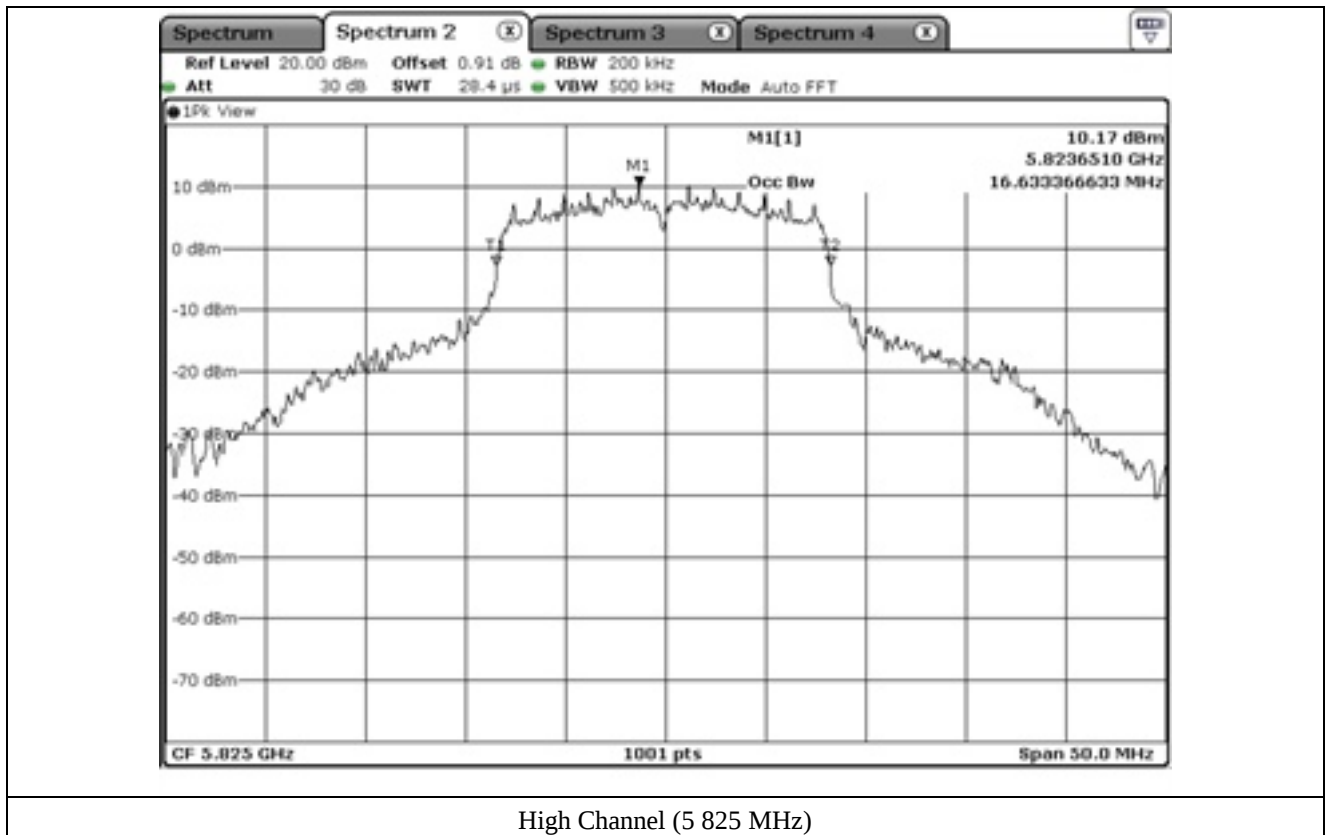

7.4.1.2 MINIMUM 26 dB BANDWIDTH


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	19.58
	Middle	5 220.00	19.63
	High	5 240.00	19.53
5 250 ~ 5 350	Low	5 260.00	19.48
	Middle	5 300.00	19.93
	High	5 320.00	19.48
5 470 ~ 5 725	Low	5 500.00	20.18
	Middle	5 660.00	19.33
	High	5 700.00	20.92
5 725 ~ 5 850	Low	5 745.00	20.73
	Middle	5 785.00	20.23
	High	5 825.00	21.58


[Staddle Channel]

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.89
5 725 ~ 5 850	5 720.00	6.59


Remark: See next page for measurement data.

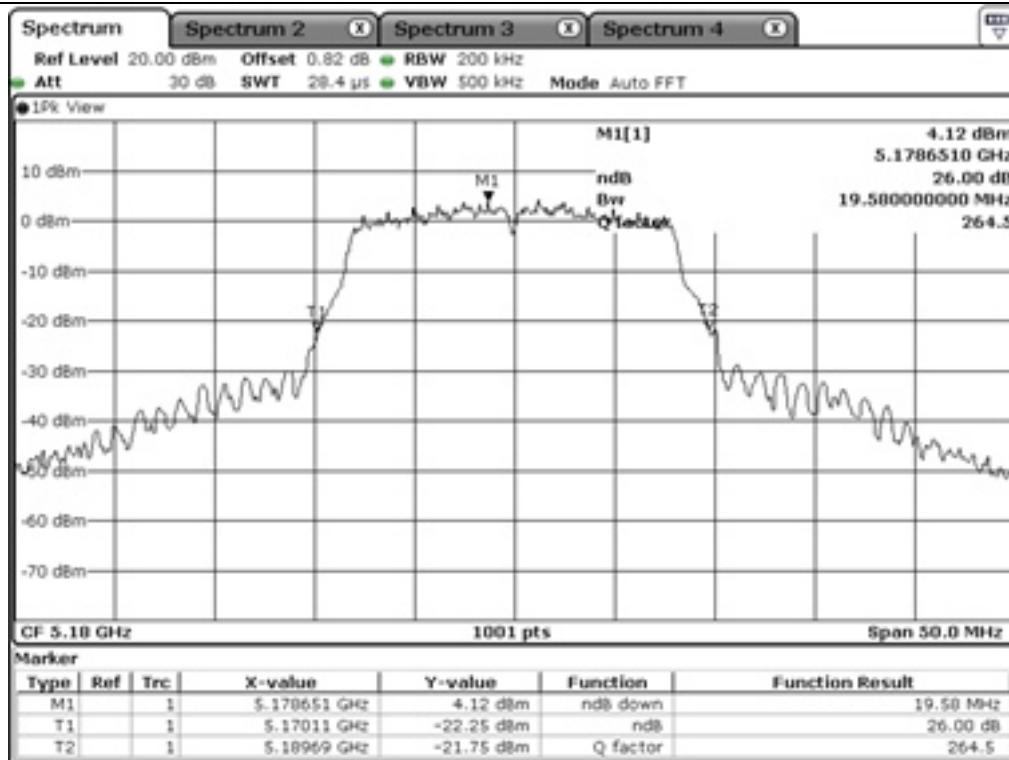


Low Channel (5 180 MHz)

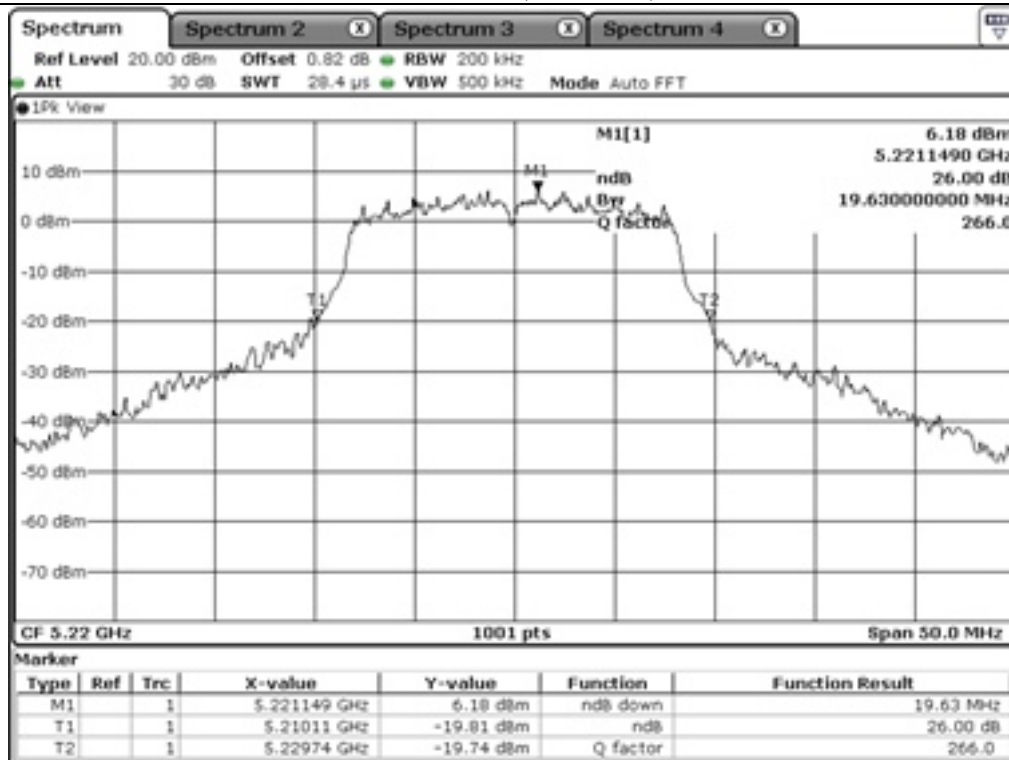


Middle Channel (5 220 MHz)

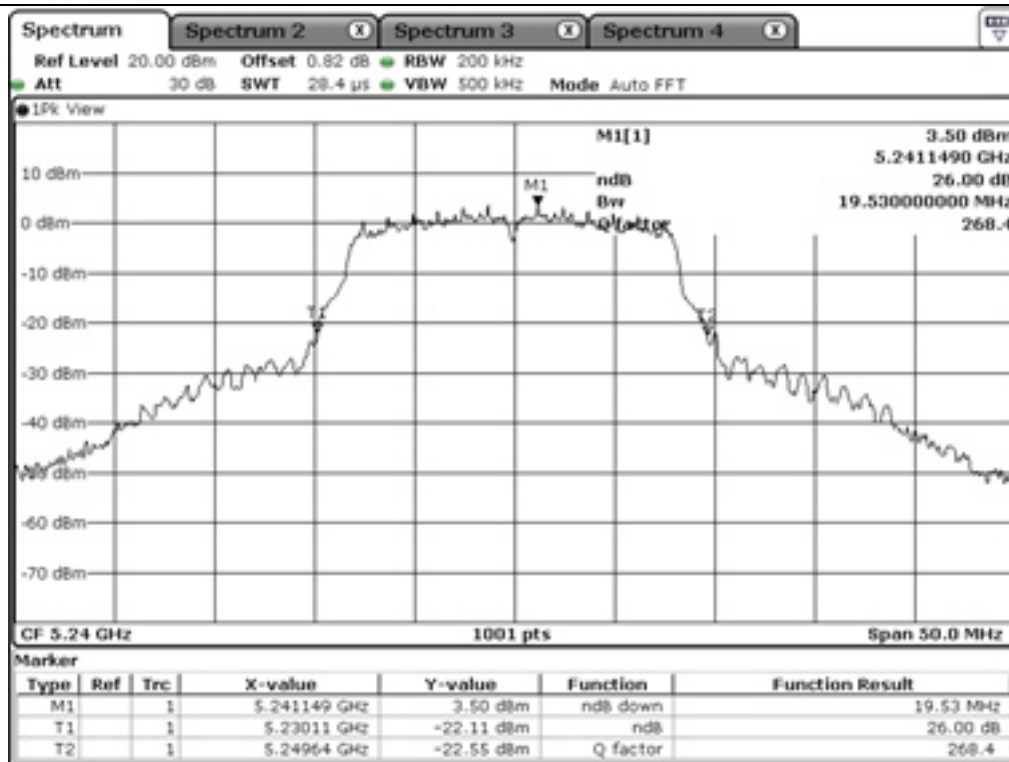

High Channel (5 240 MHz)

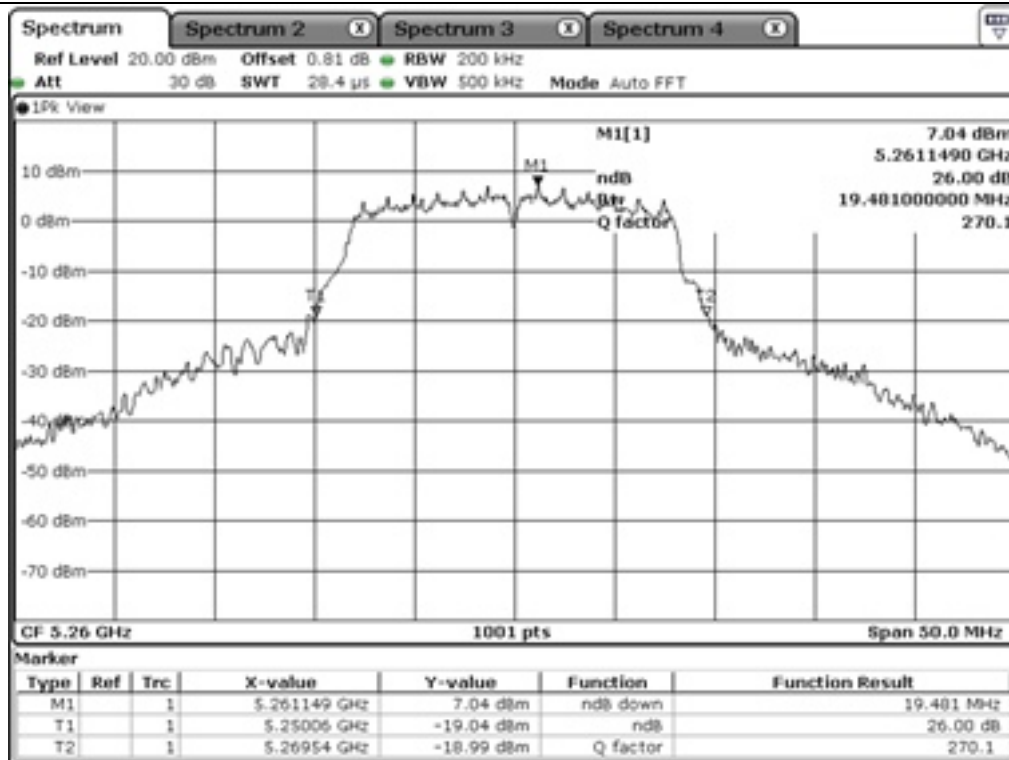

Low Channel (5 260 MHz)

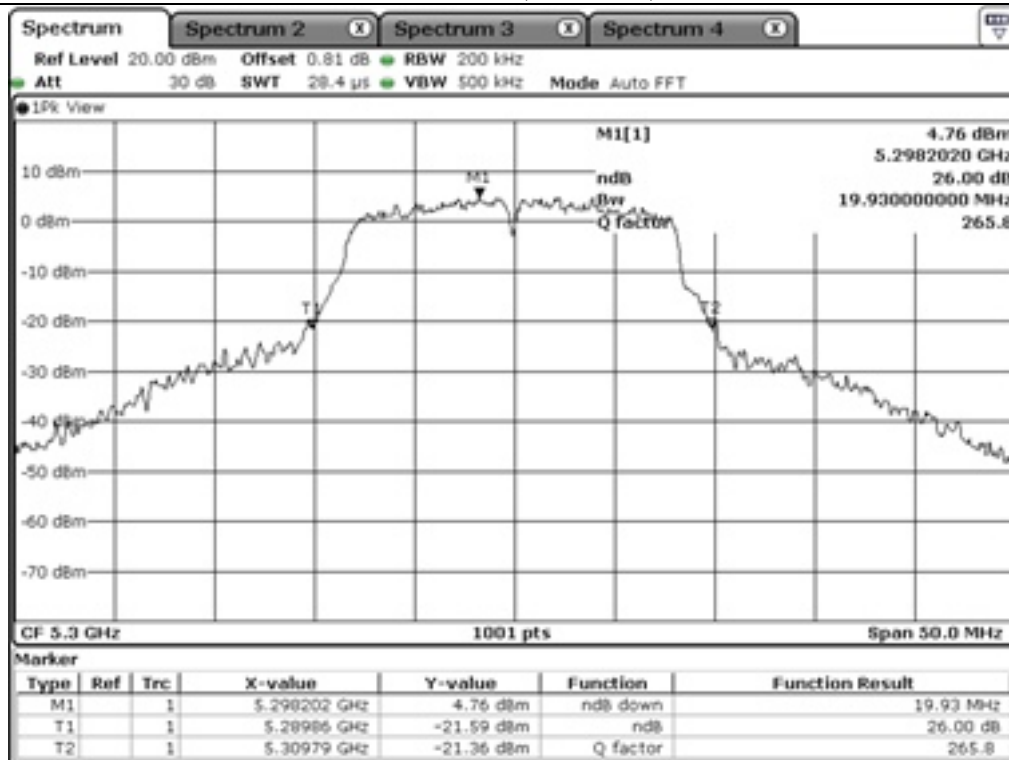


Middle Channel (5 300 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

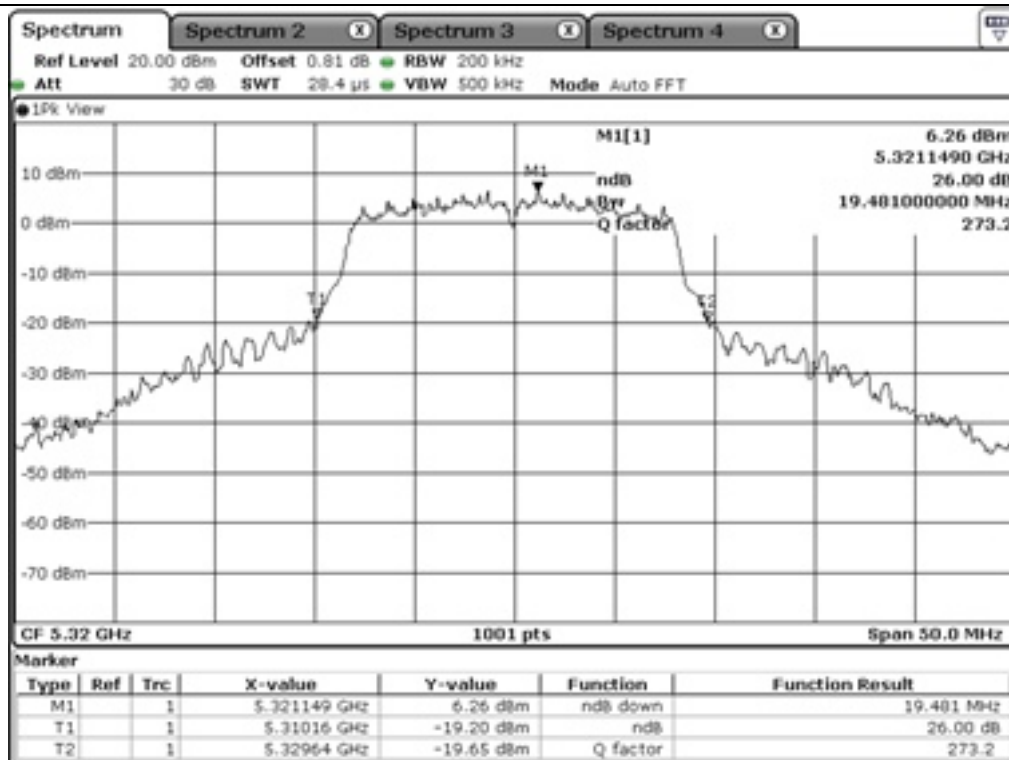


High Channel (5 320 MHz)

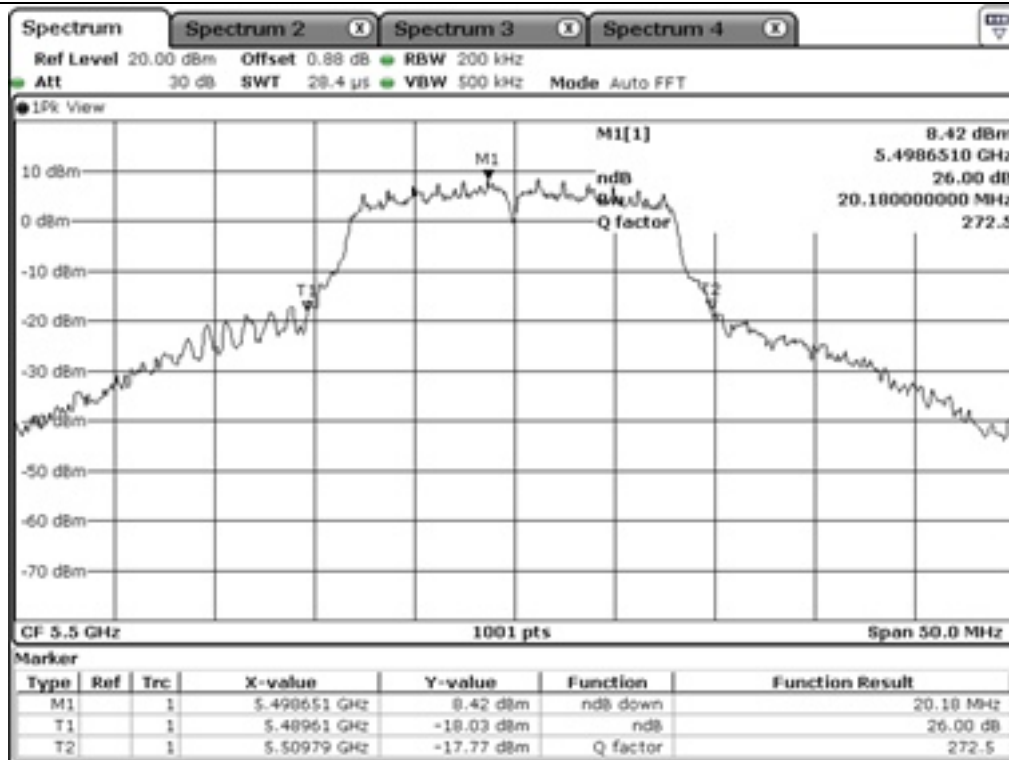


Low Channel (5 500 MHz)

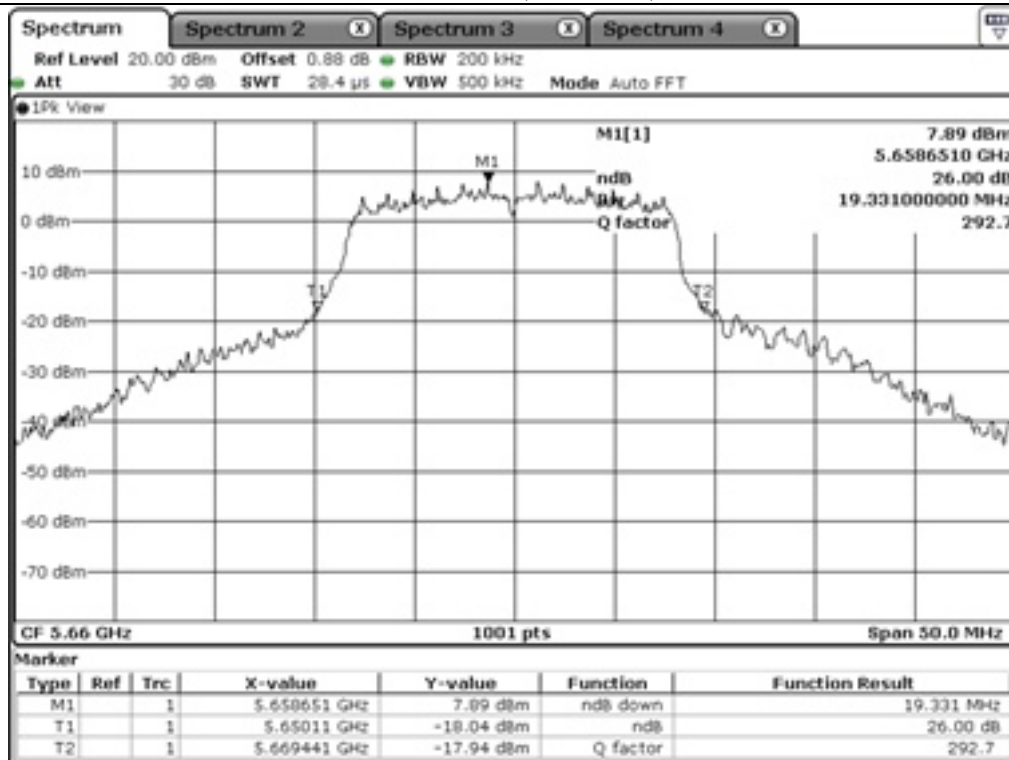


Middle Channel (5 660 MHz)

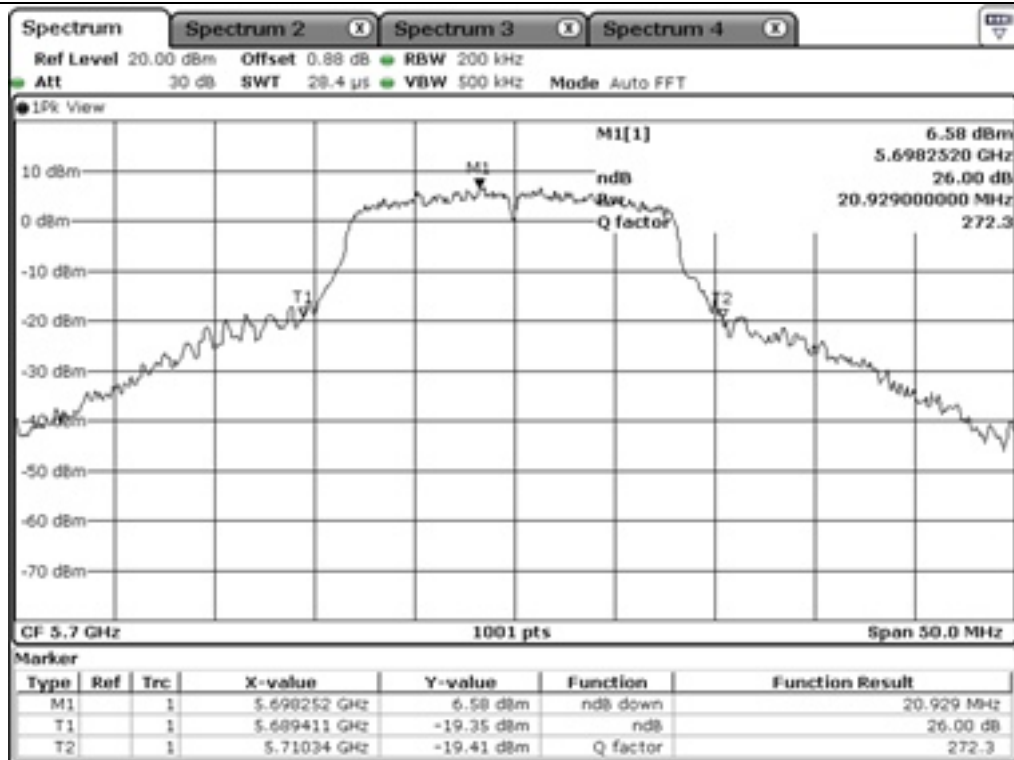


High Channel (5 700 MHz)

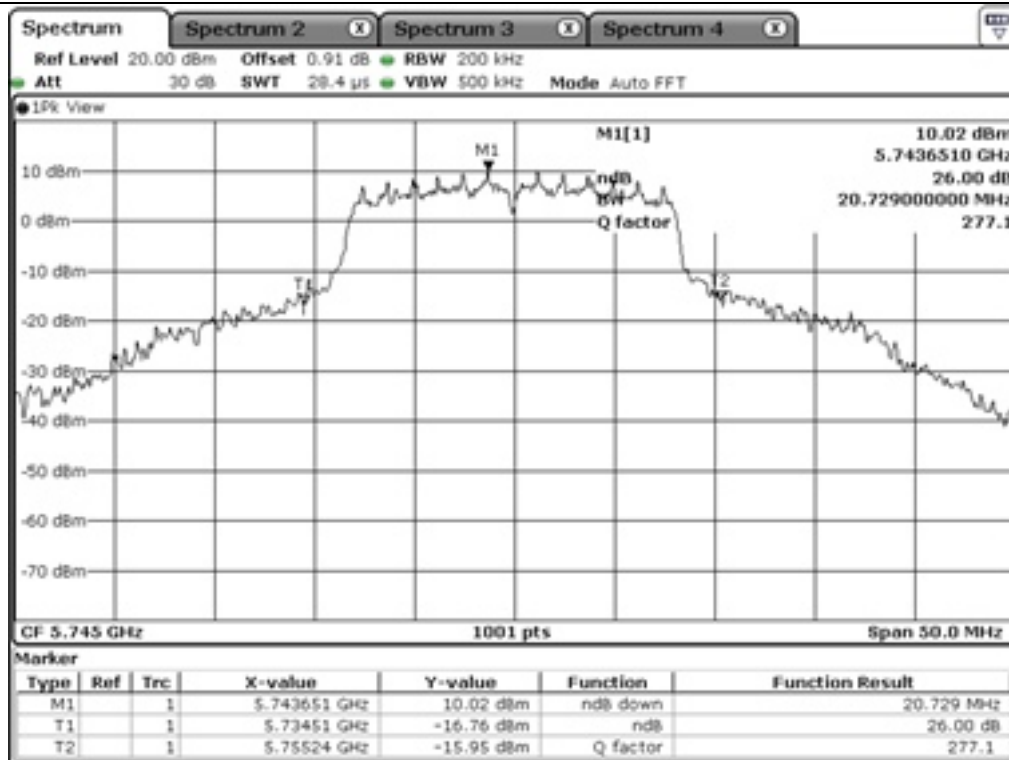


Low Channel (5 745 MHz)

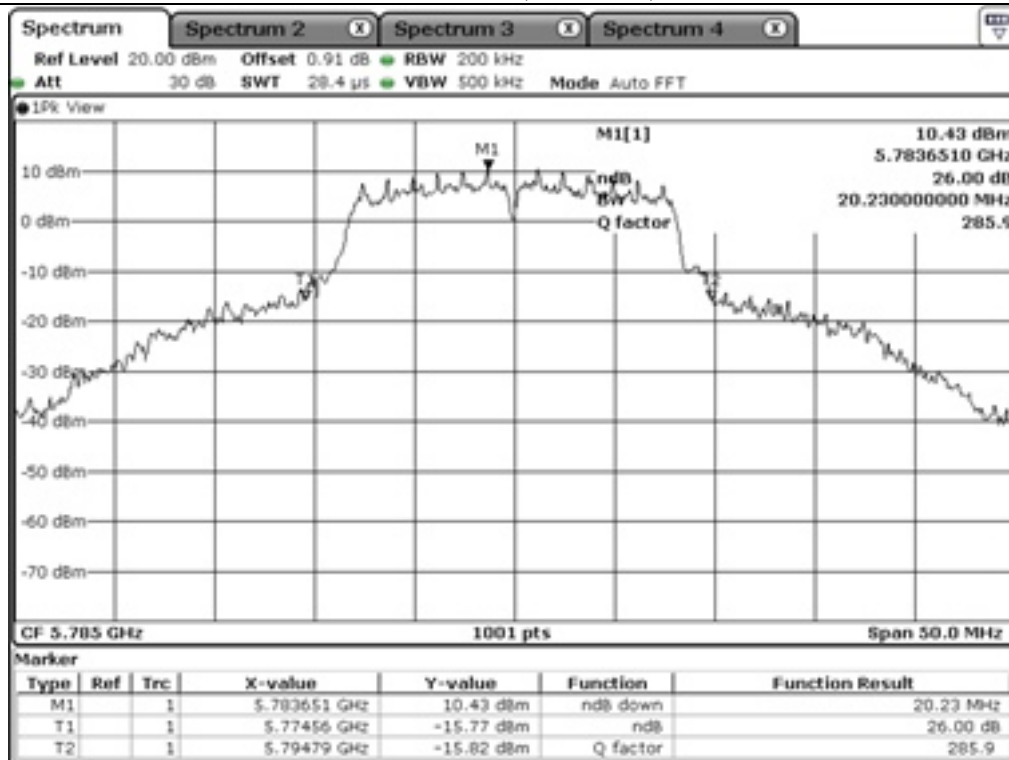

Middle Channel (5 785 MHz)

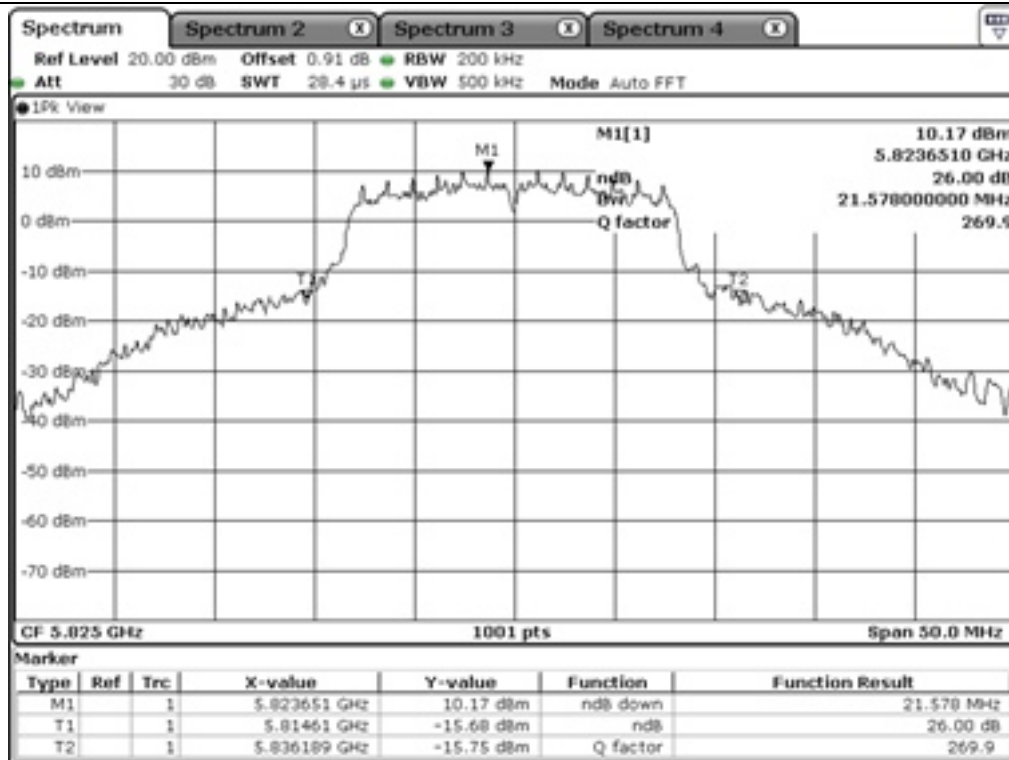

High Channel (5 825 MHz)

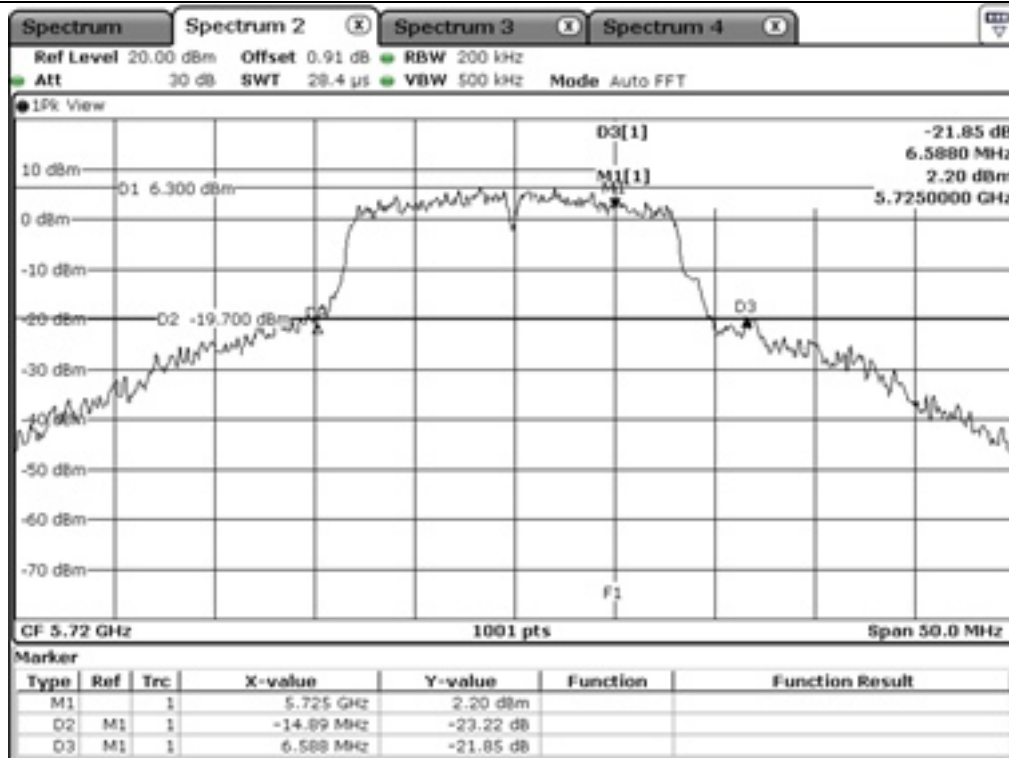


Staddle Channel (5 720 MHz)

7.4.2 Test data for Antenna 1


7.4.2.1 99 % OCCUPIED BANDWIDTH

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	16.33
	Middle	5 220.00	16.33
	High	5 240.00	16.38
5 250 ~ 5 350	Low	5 260.00	16.38
	Middle	5 300.00	16.33
	High	5 320.00	16.38
5 470 ~ 5 725	Low	5 500.00	16.58
	Middle	5 660.00	16.63
	High	5 700.00	16.43
5 725 ~ 5 850	Low	5 745.00	16.48
	Middle	5 785.00	16.48
	High	5 825.00	16.48

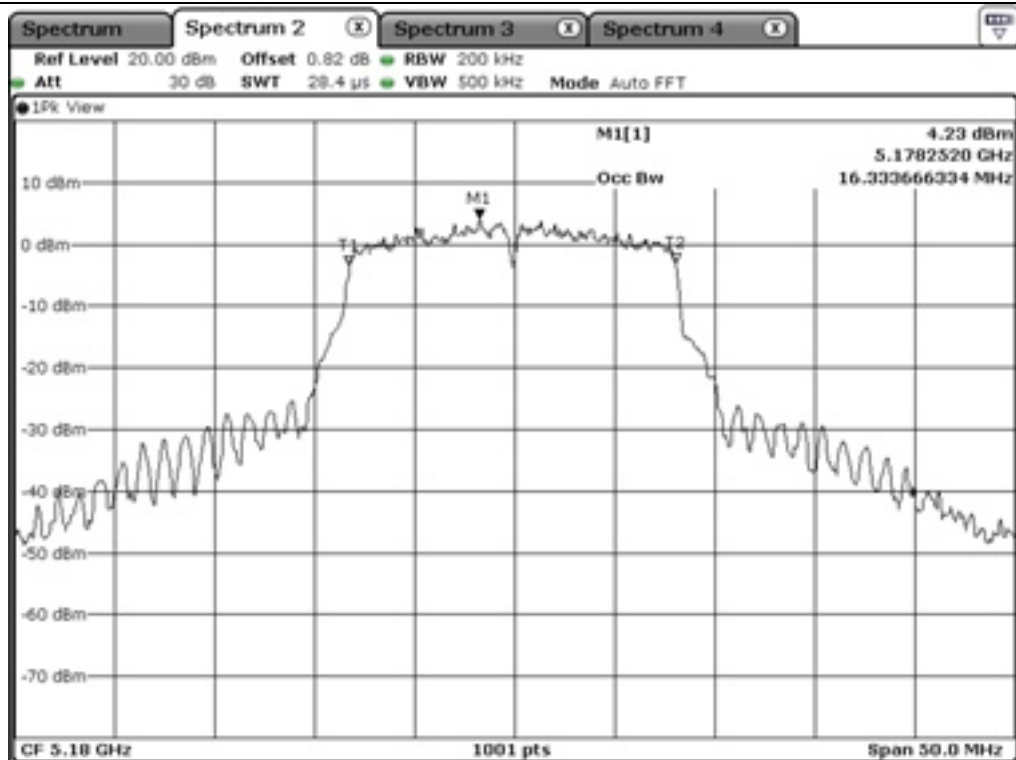

Low Channel (5 180 MHz)

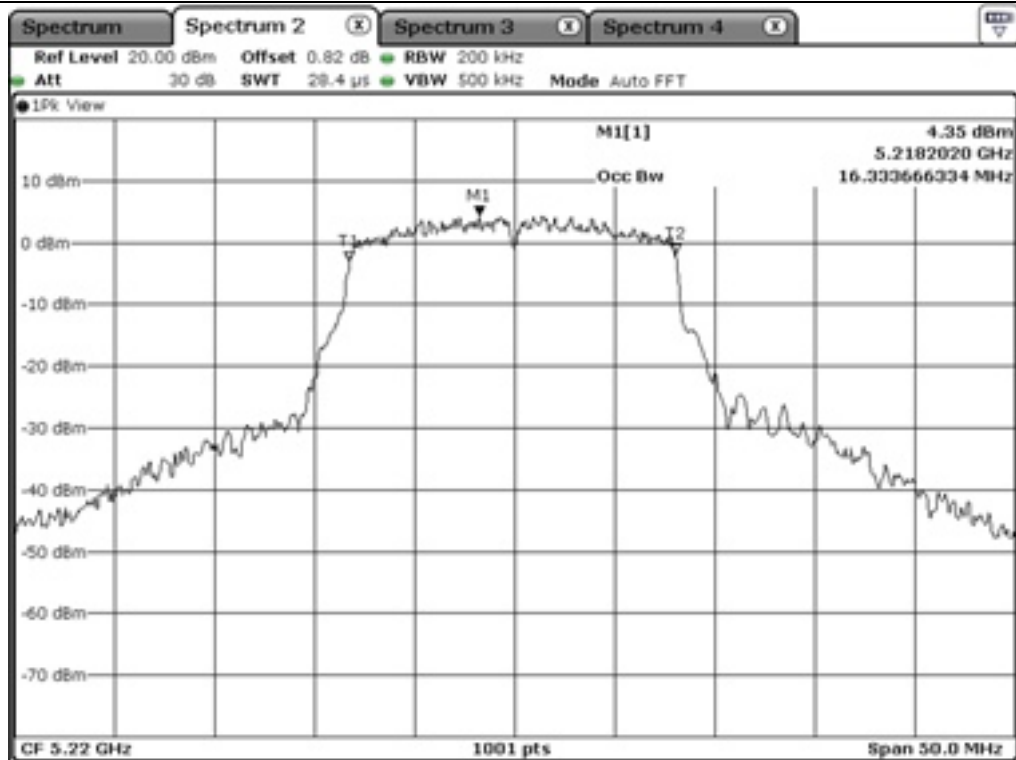


Middle Channel (5 220 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

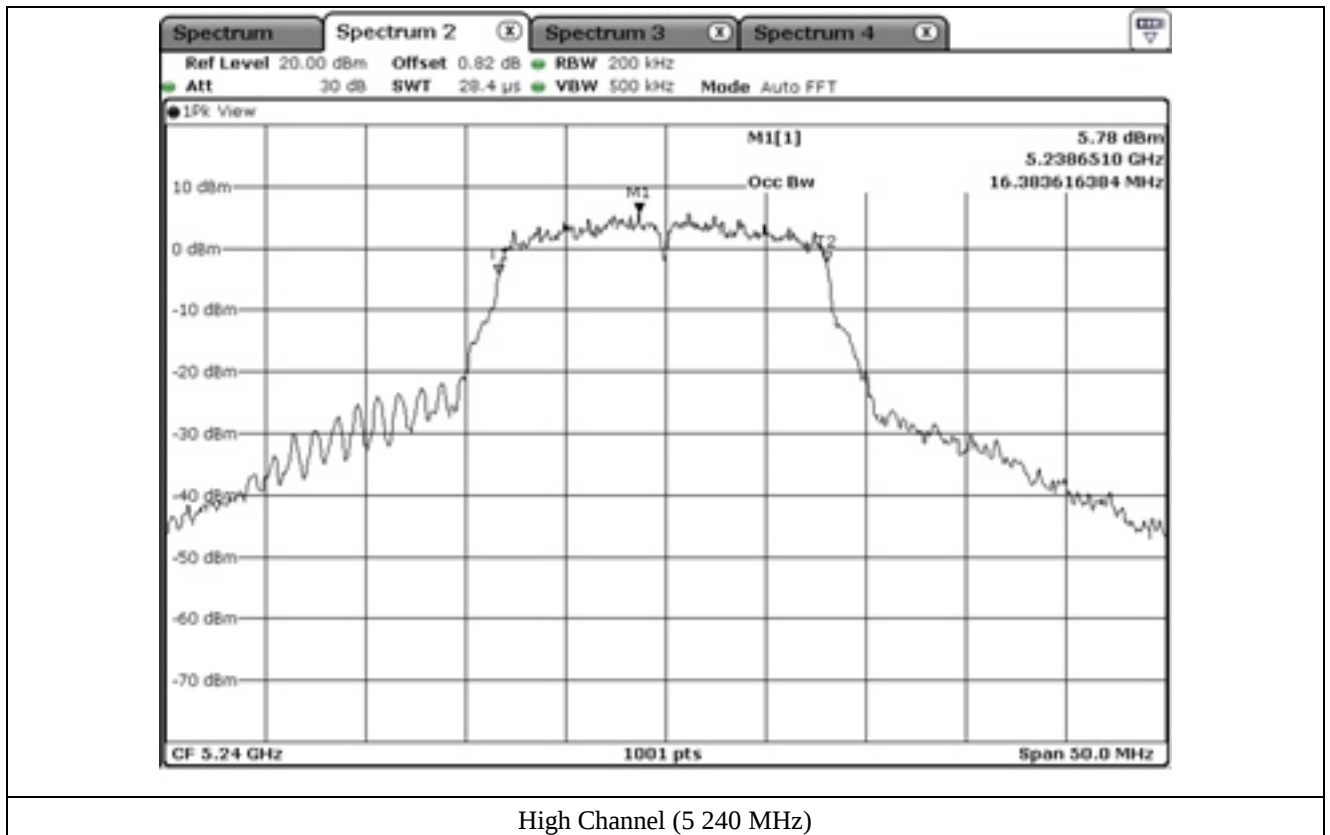


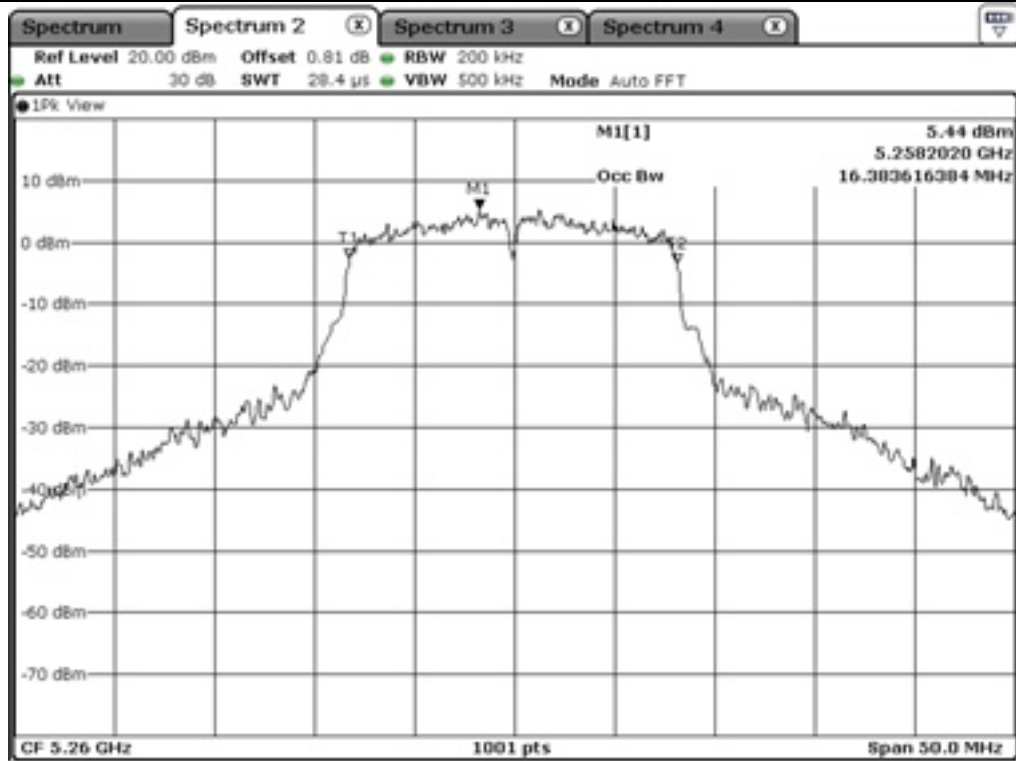


Low Channel (5 260 MHz)

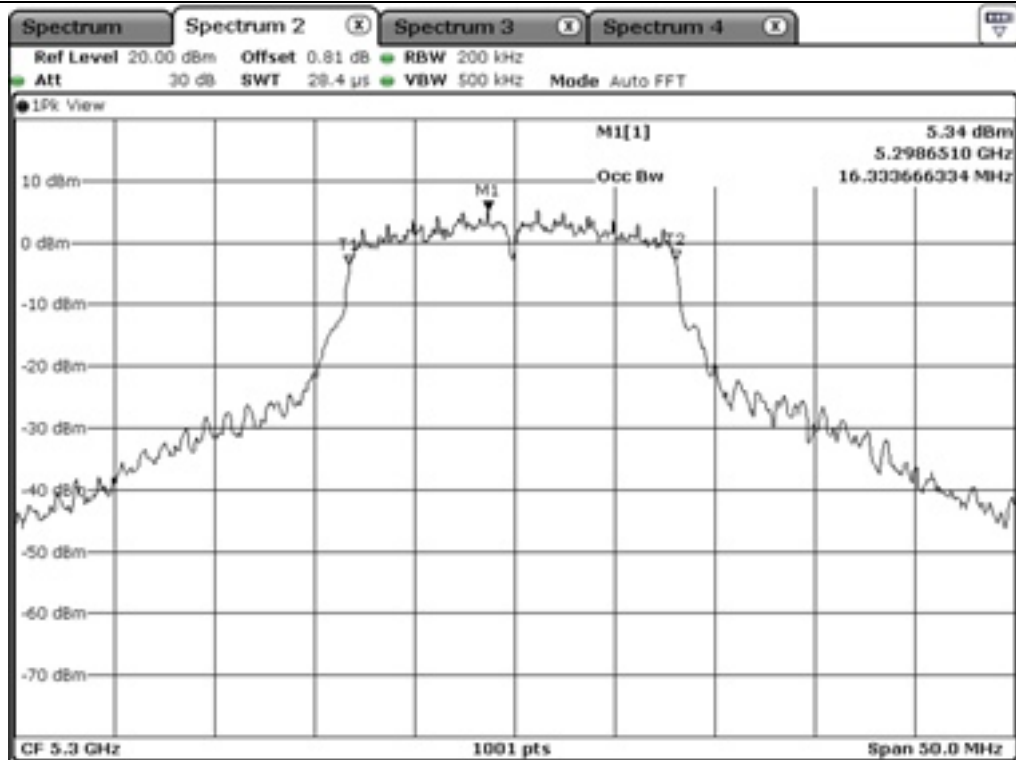


Middle Channel (5 300 MHz)

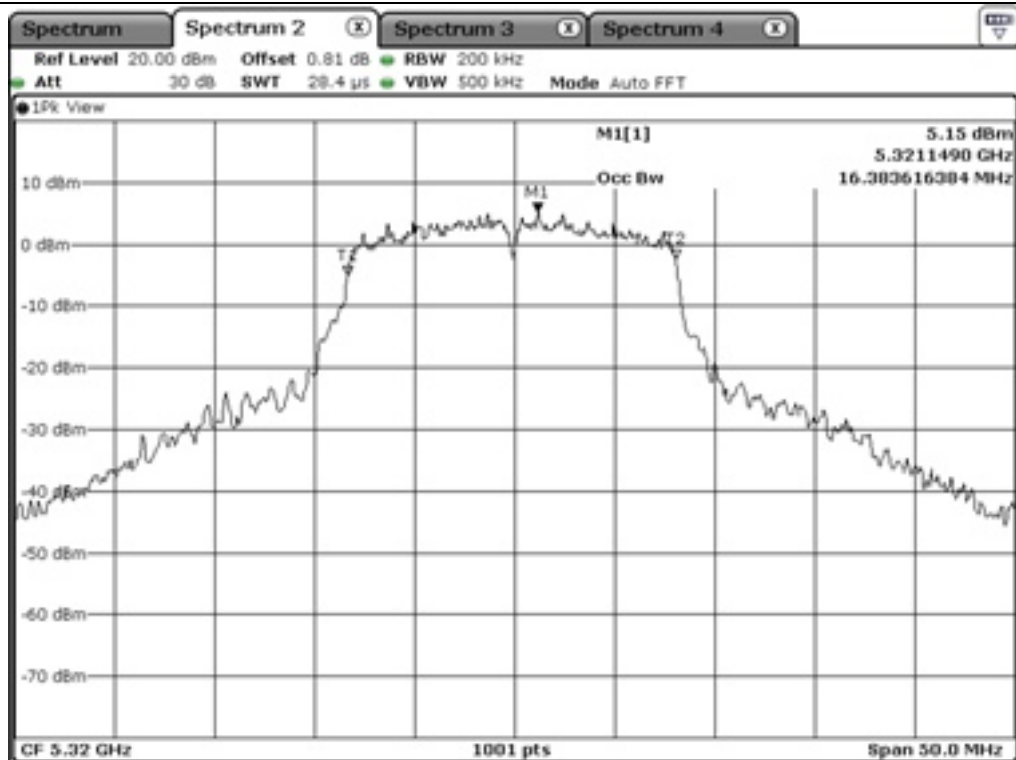

High Channel (5 320 MHz)

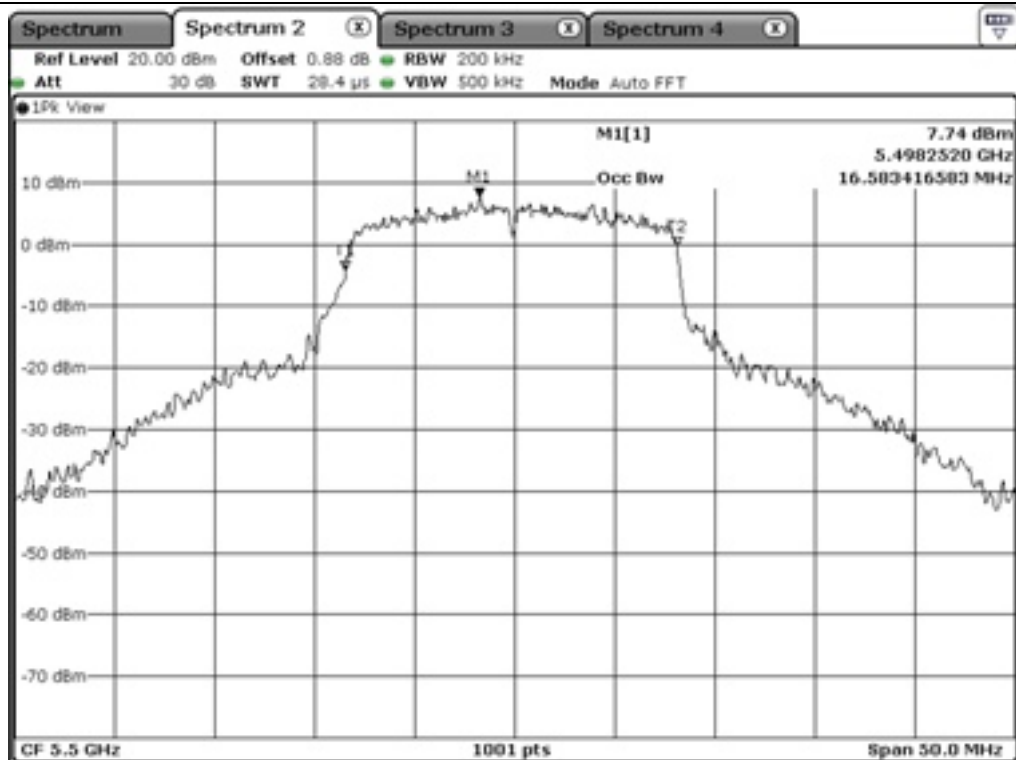

Low Channel (5 500 MHz)

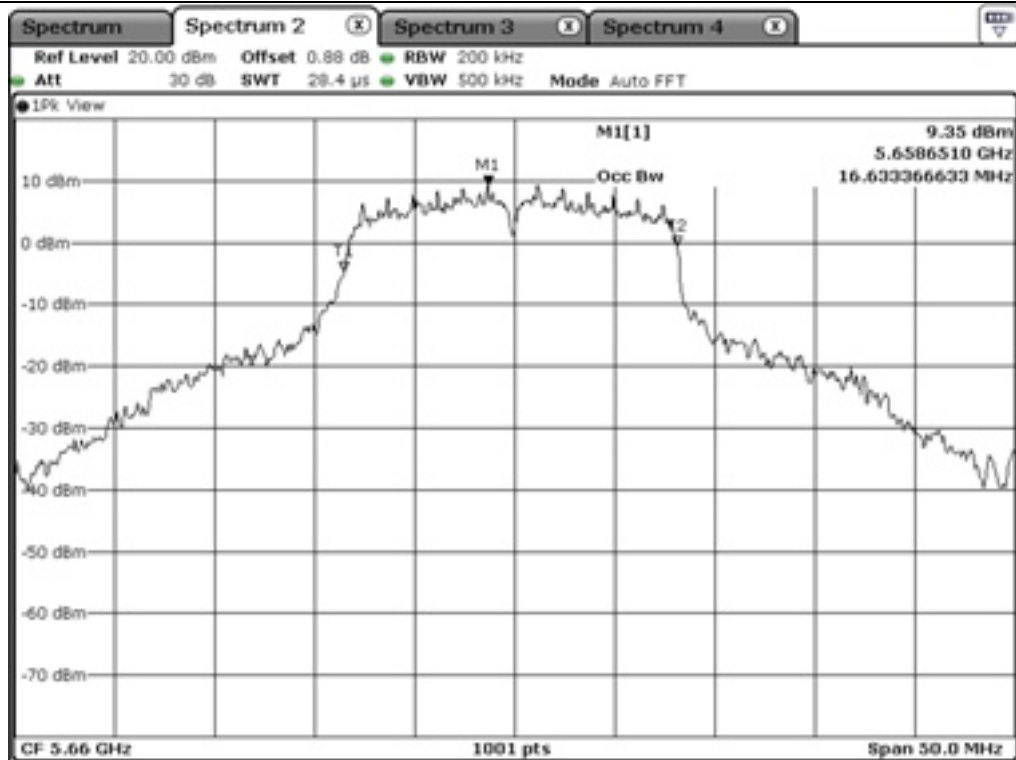


Middle Channel (5 660 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

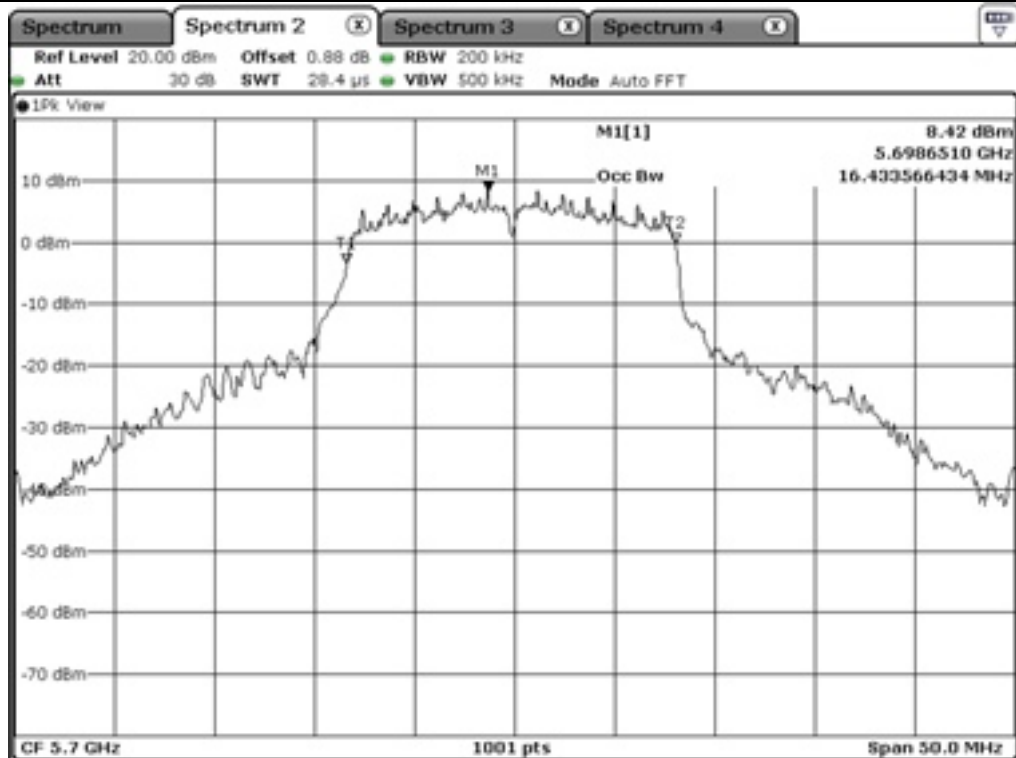

High Channel (5 700 MHz)

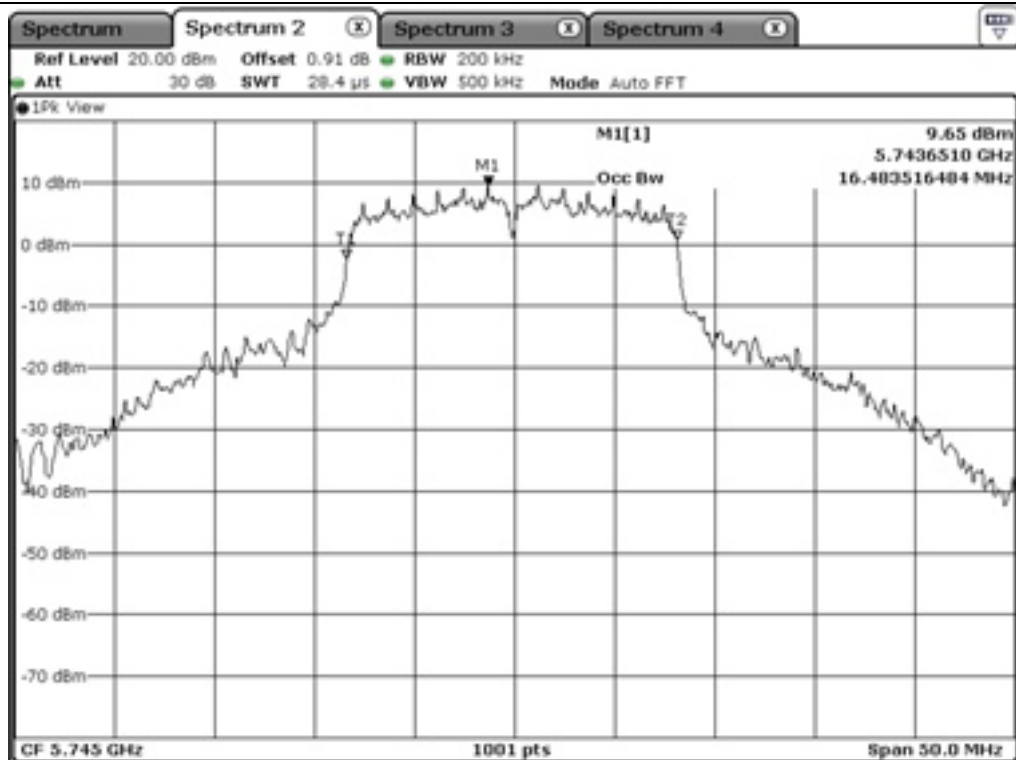

Low Channel (5 745 MHz)

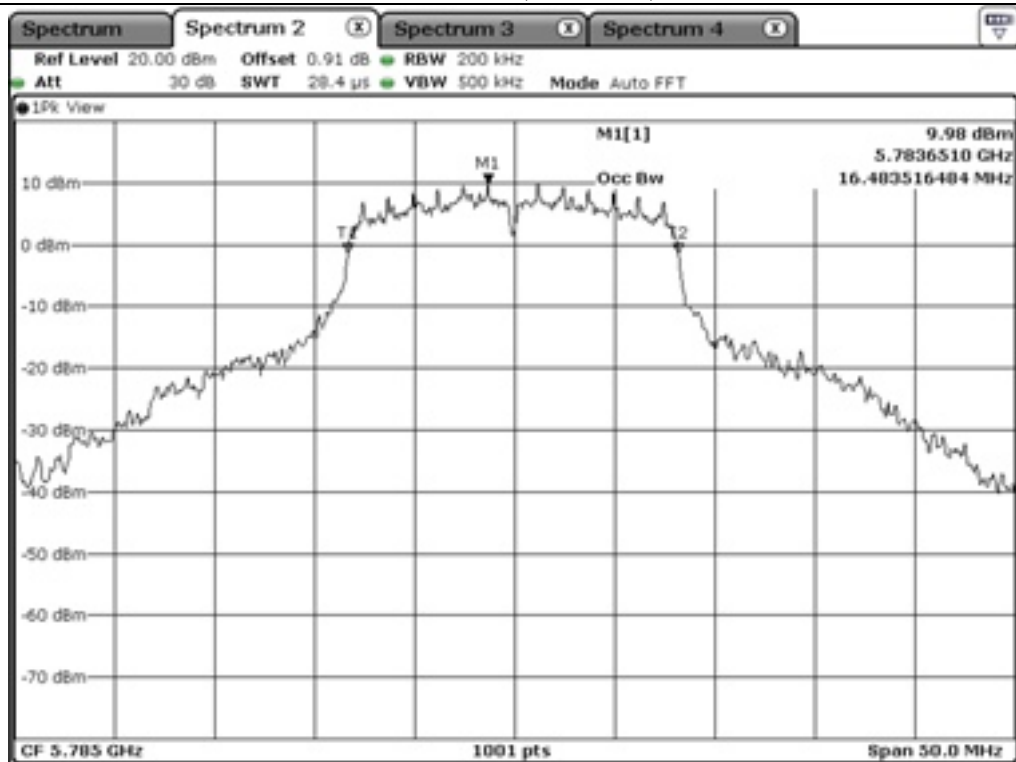


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

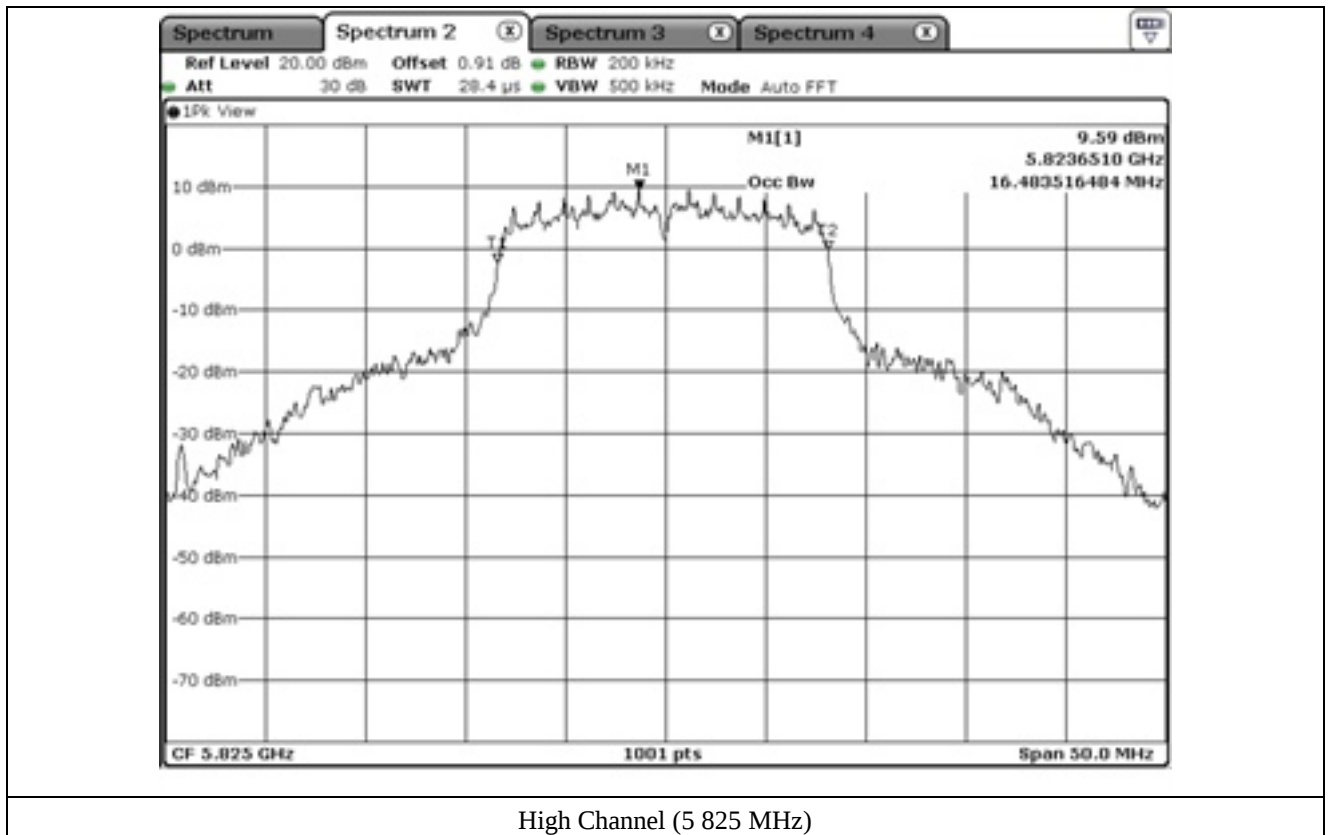

7.4.2.2 MINIMUM 26 dB BANDWIDTH


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	19.58
	Middle	5 220.00	19.58
	High	5 240.00	19.58
5 250 ~ 5 350	Low	5 260.00	19.48
	Middle	5 300.00	19.63
	High	5 320.00	20.03
5 470 ~ 5 725	Low	5 500.00	20.68
	Middle	5 660.00	20.53
	High	5 700.00	19.93
5 725 ~ 5 850	Low	5 745.00	20.38
	Middle	5 785.00	20.38
	High	5 825.00	20.23


[Staddle Channel]

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	15.54
5 725 ~ 5 850	5 720.00	5.79

Remark: See next page for measurement data.

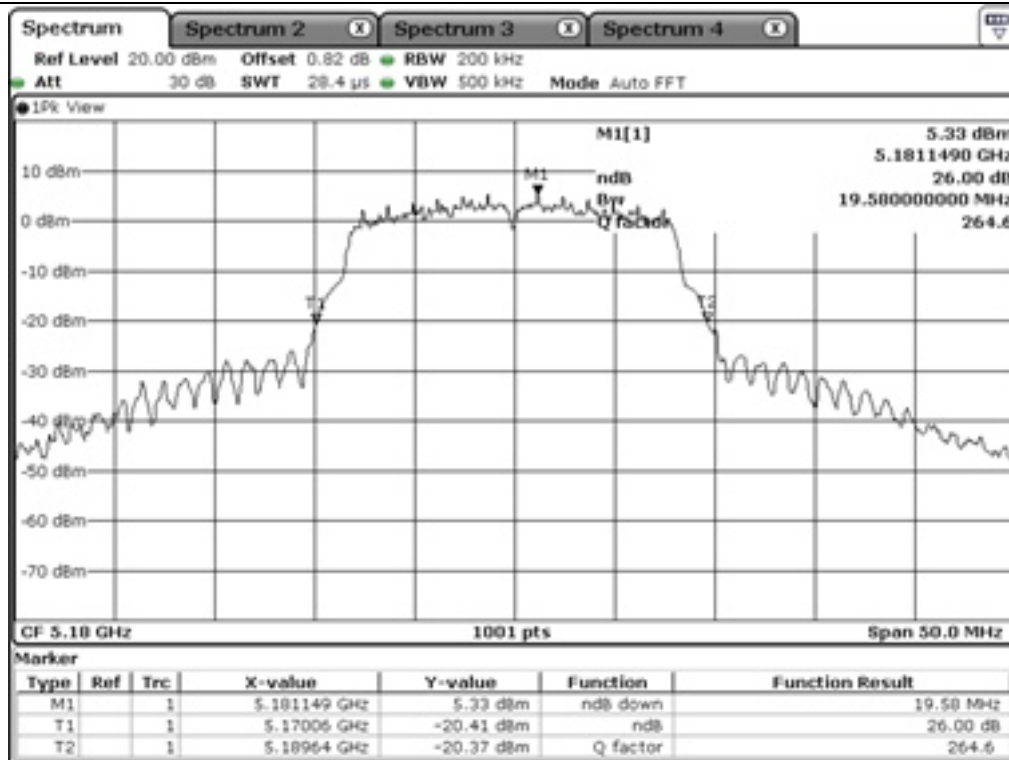

Low Channel (5 180 MHz)

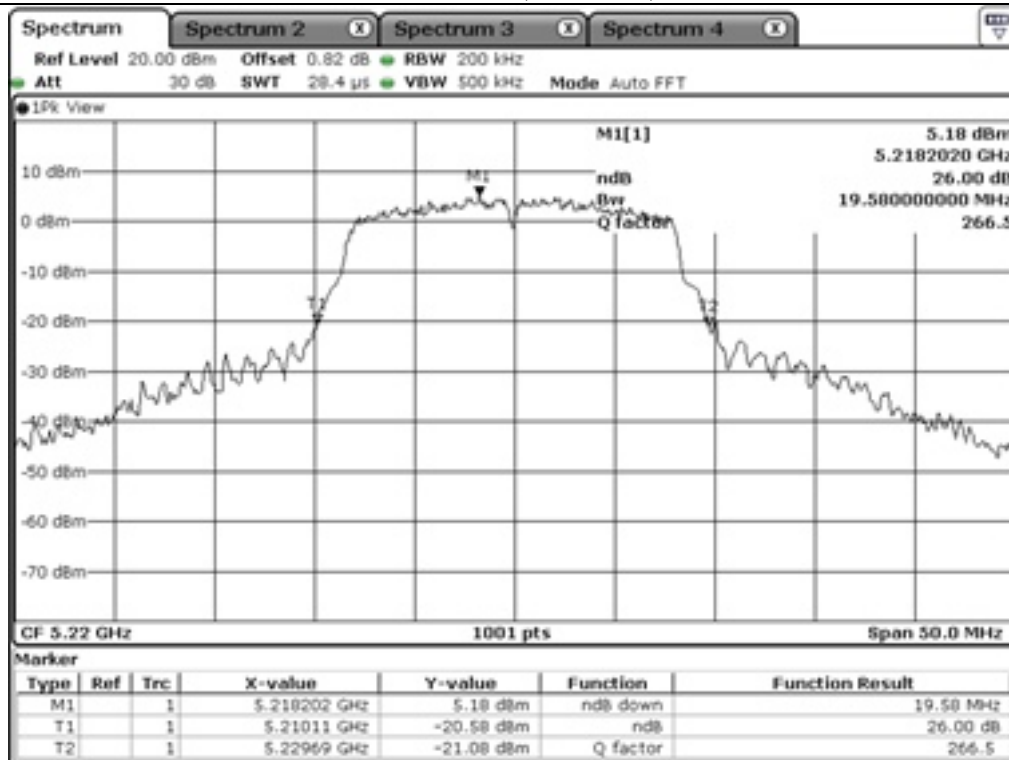


Middle Channel (5 220 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

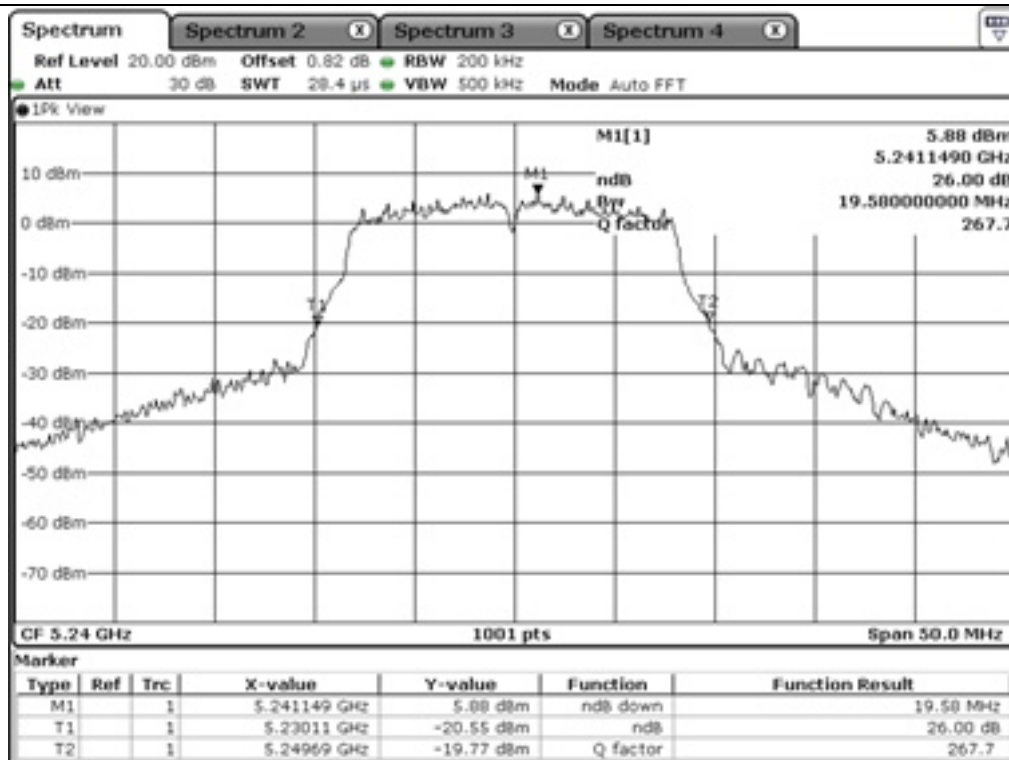


High Channel (5 240 MHz)

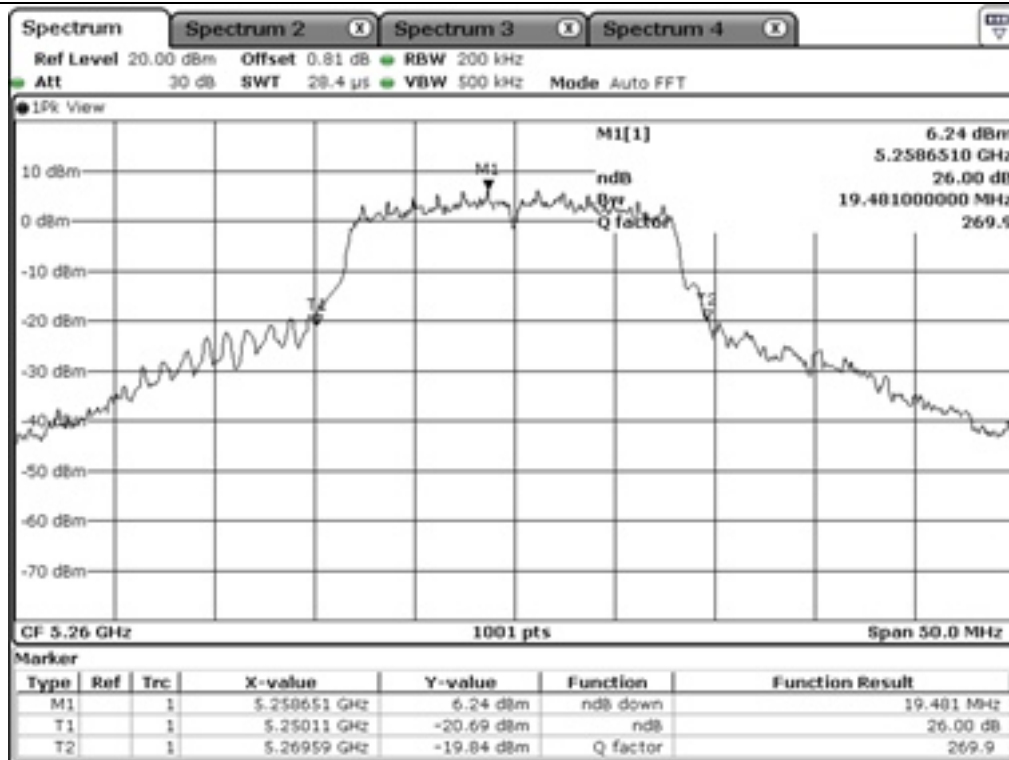


Low Channel (5 260 MHz)

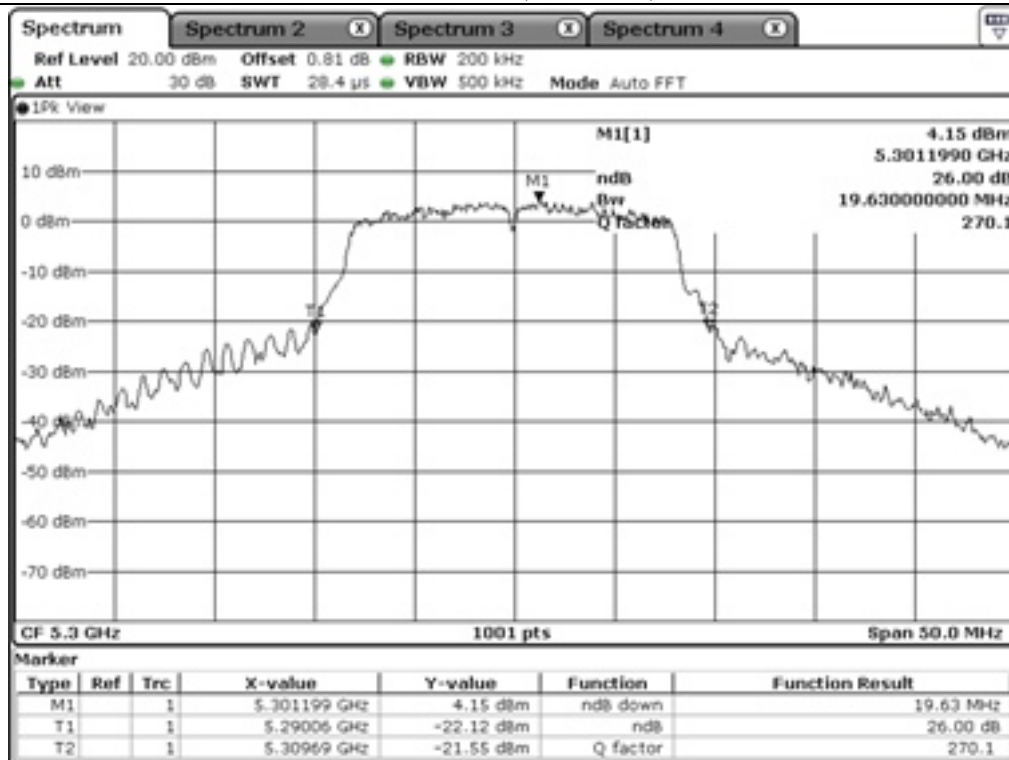


Middle Channel (5 300 MHz)

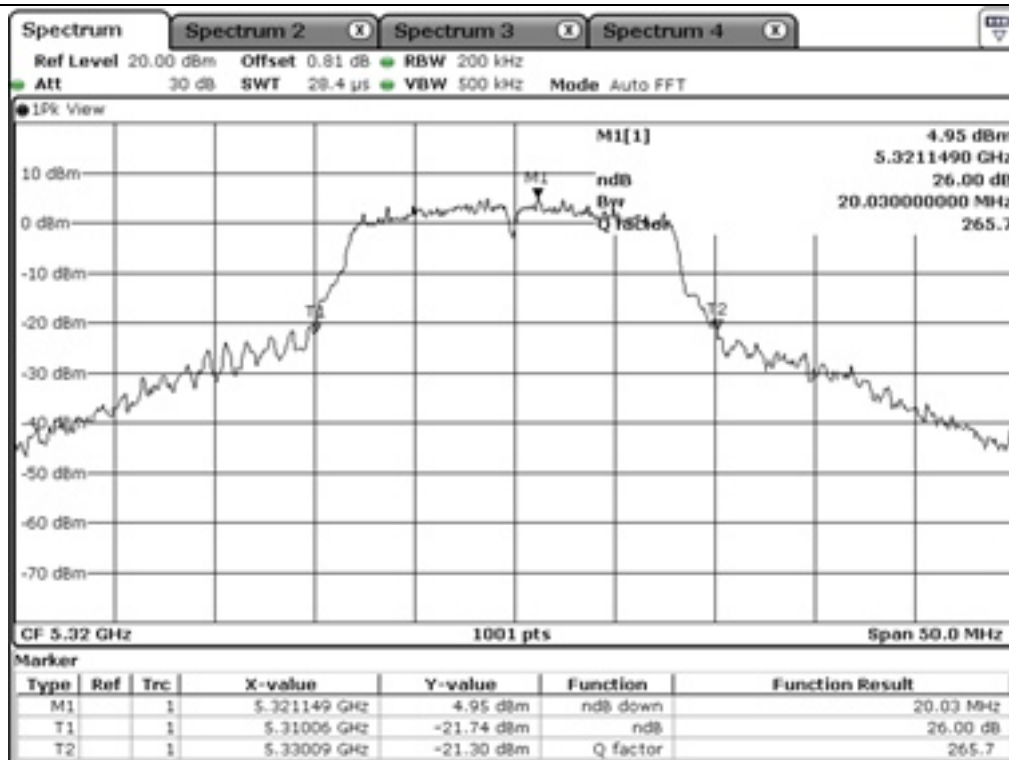


High Channel (5 320 MHz)

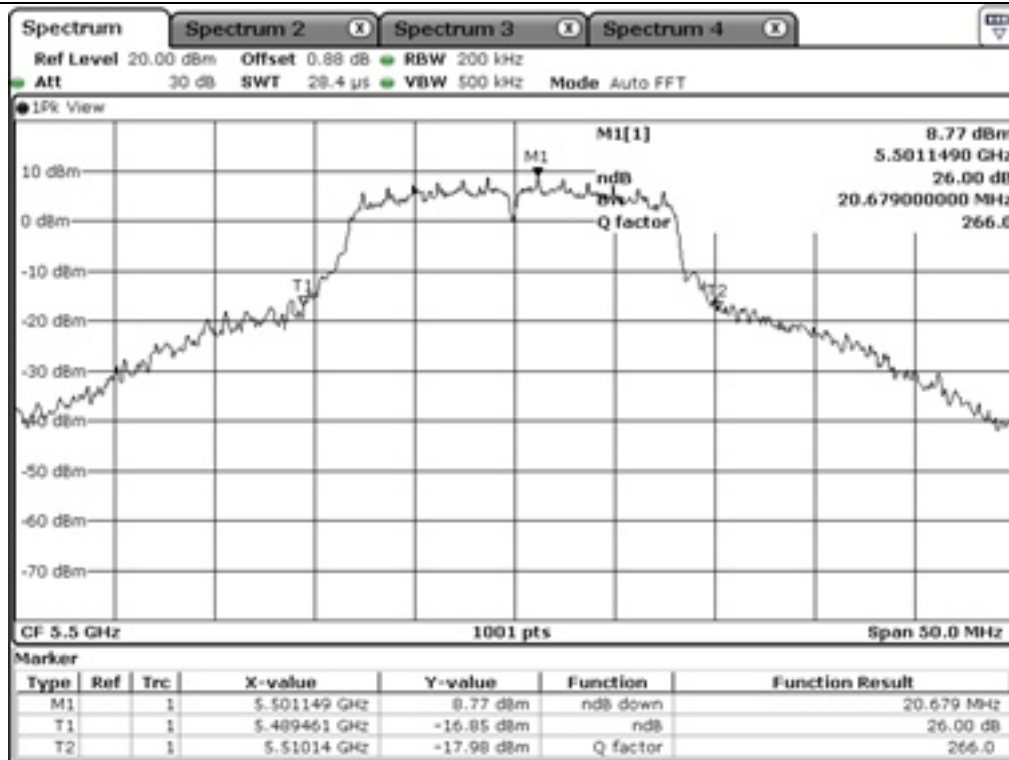


Low Channel (5 500 MHz)

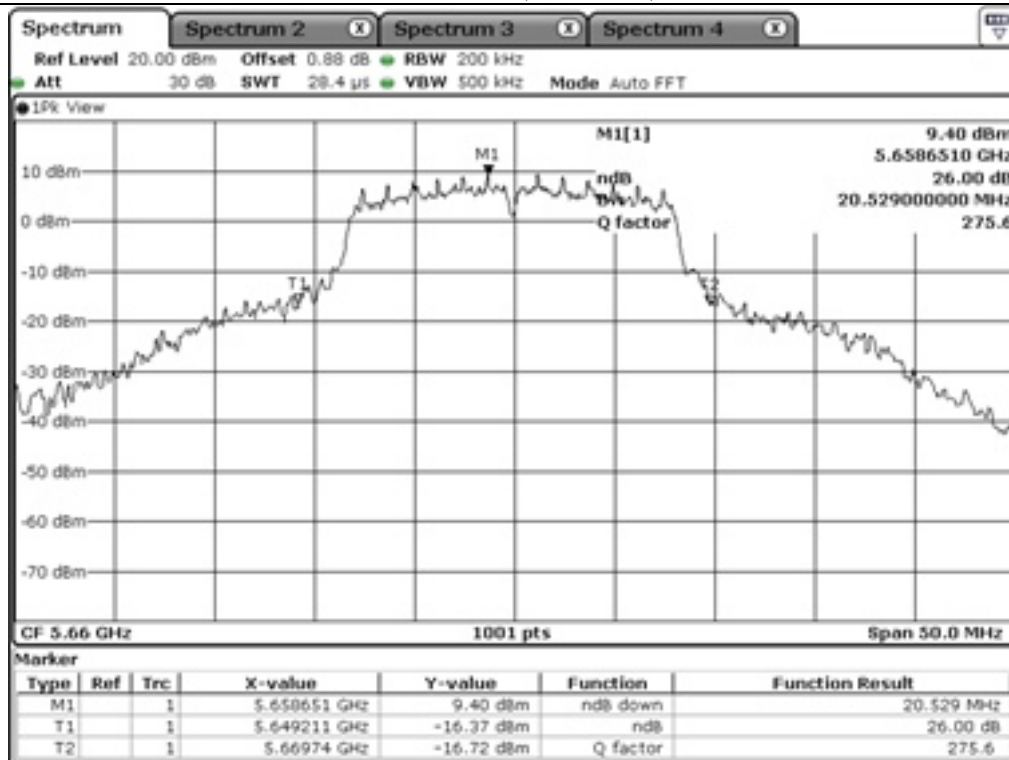


Middle Channel (5 660 MHz)

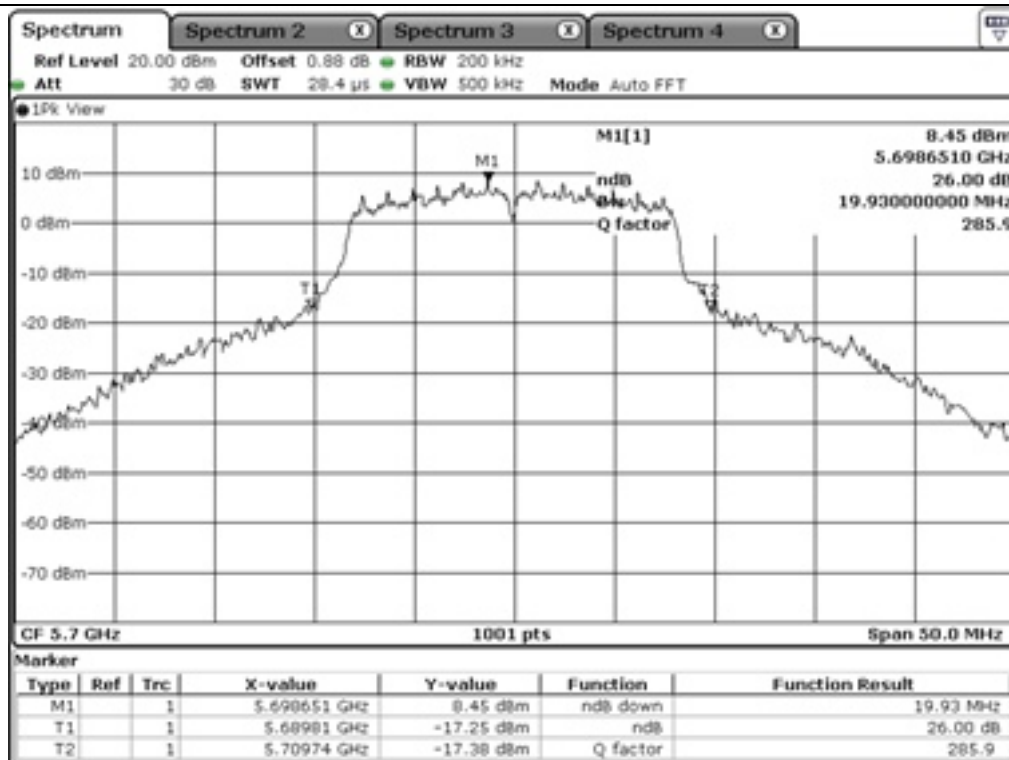


High Channel (5 700 MHz)

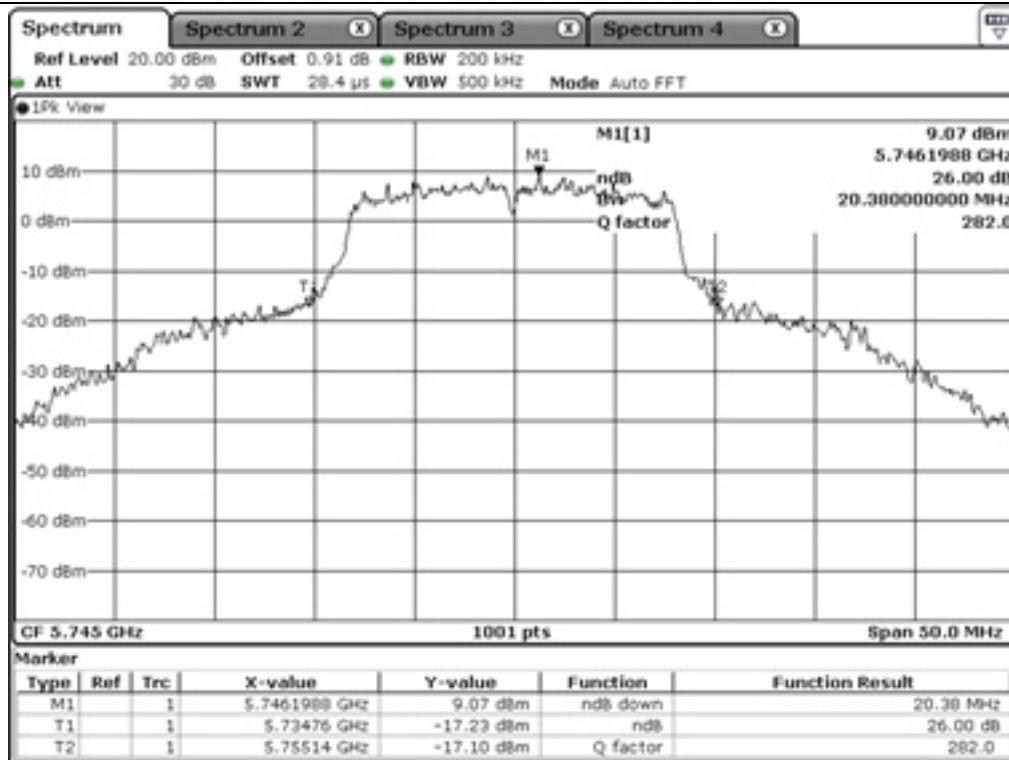


Low Channel (5 745 MHz)

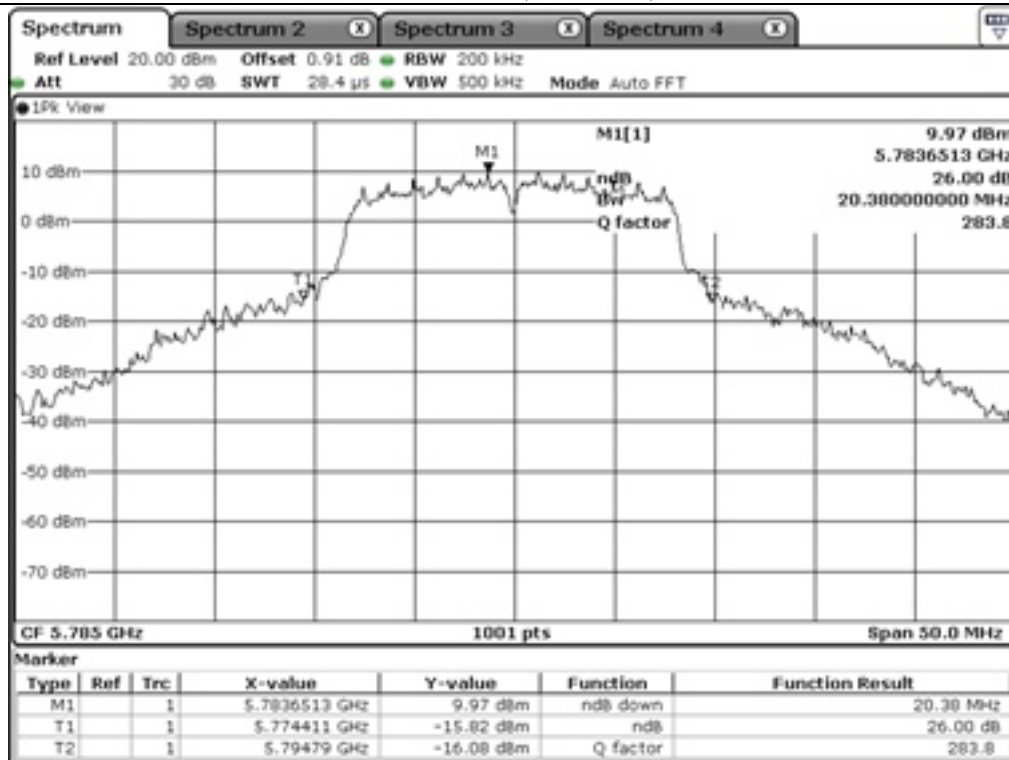

Middle Channel (5 785 MHz)

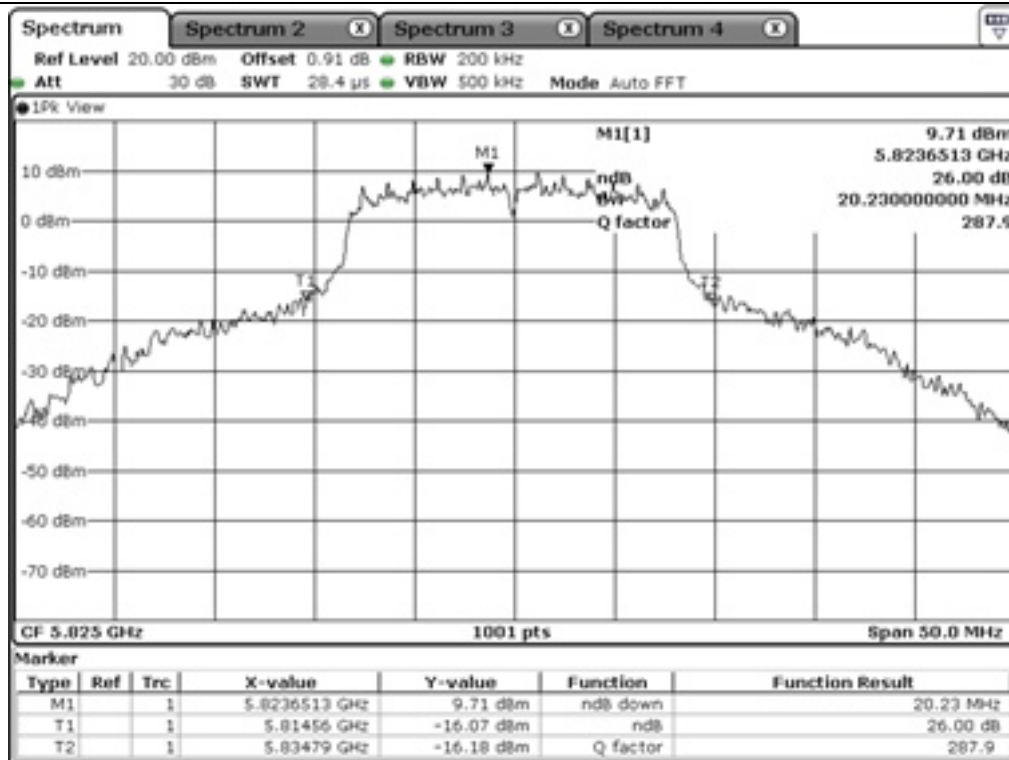

High Channel (5 825 MHz)

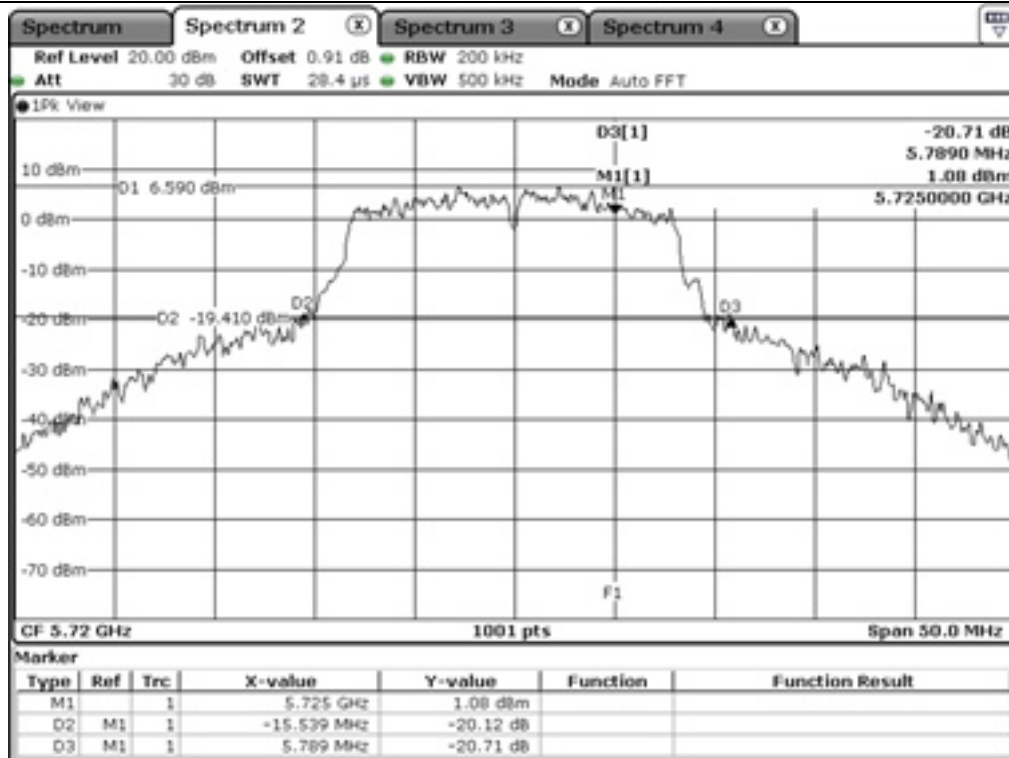

Staddle Channel (5 720 MHz)


7.5 Test data for 802.11n_HT20 RLAN Mode

7.5.1 Test data for Antenna 0


7.5.1.1 99 % OCCUPIED BANDWIDTH

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	17.48
	Middle	5 220.00	17.53
	High	5 240.00	17.53
5 250 ~ 5 350	Low	5 260.00	17.48
	Middle	5 300.00	17.48
	High	5 320.00	17.53
5 470 ~ 5 725	Low	5 500.00	17.53
	Middle	5 660.00	17.53
	High	5 700.00	17.48
5 725 ~ 5 850	Low	5 745.00	17.58
	Middle	5 785.00	17.63
	High	5 825.00	17.68

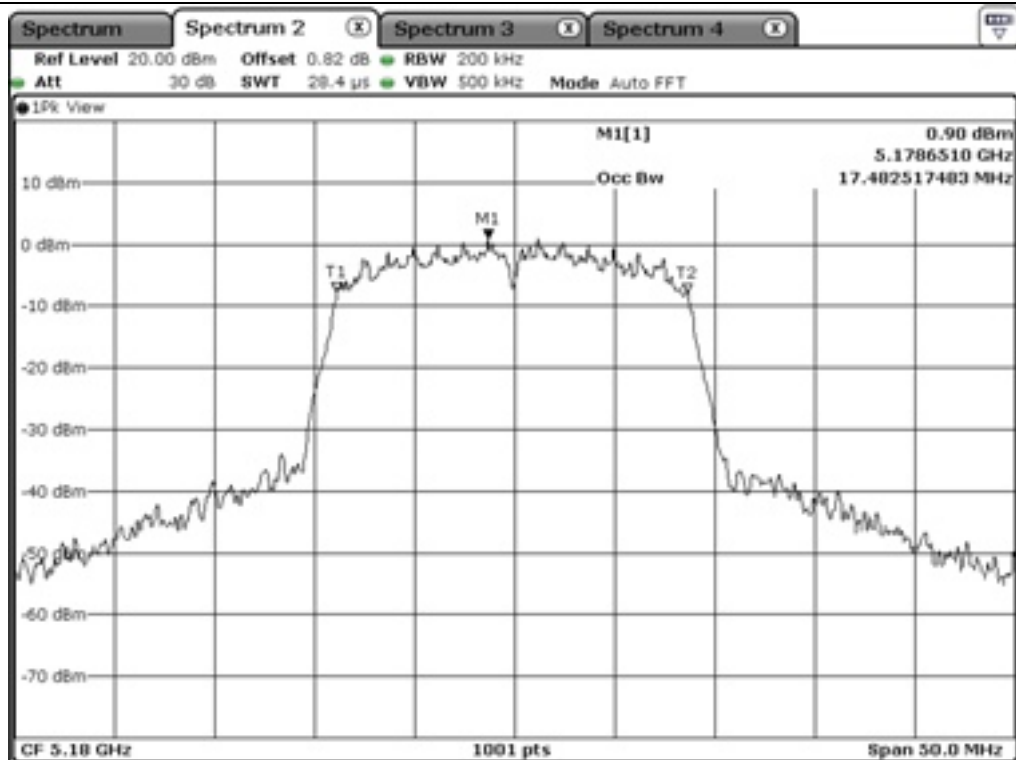


Low Channel (5 180 MHz)

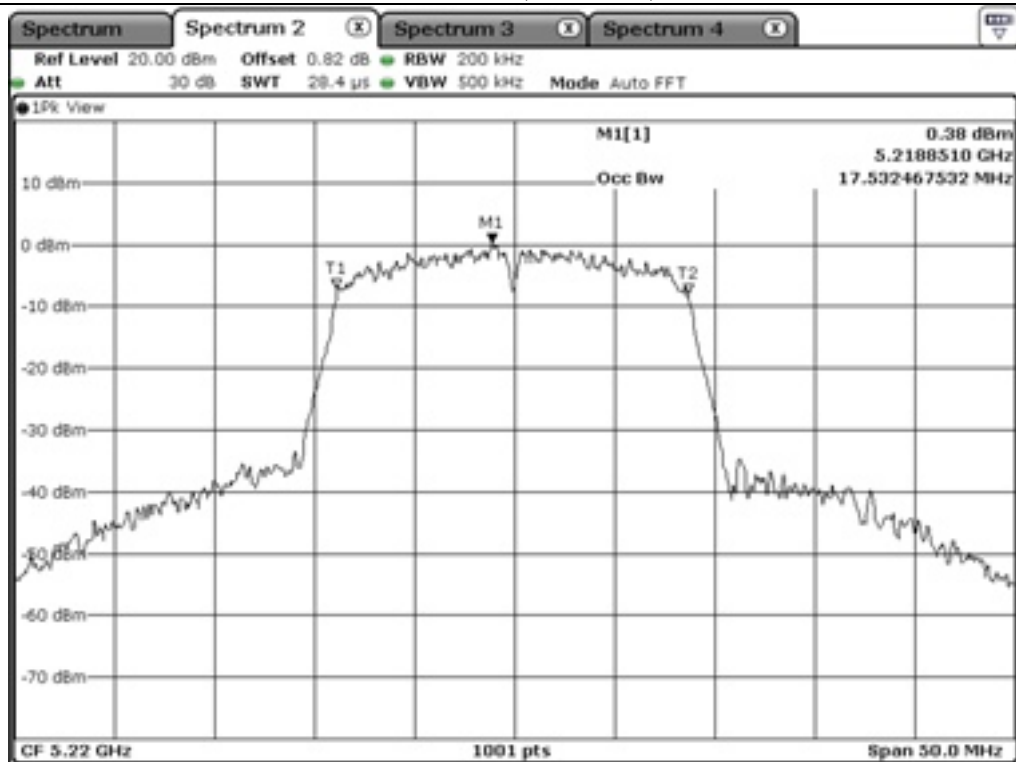


Middle Channel (5 220 MHz)

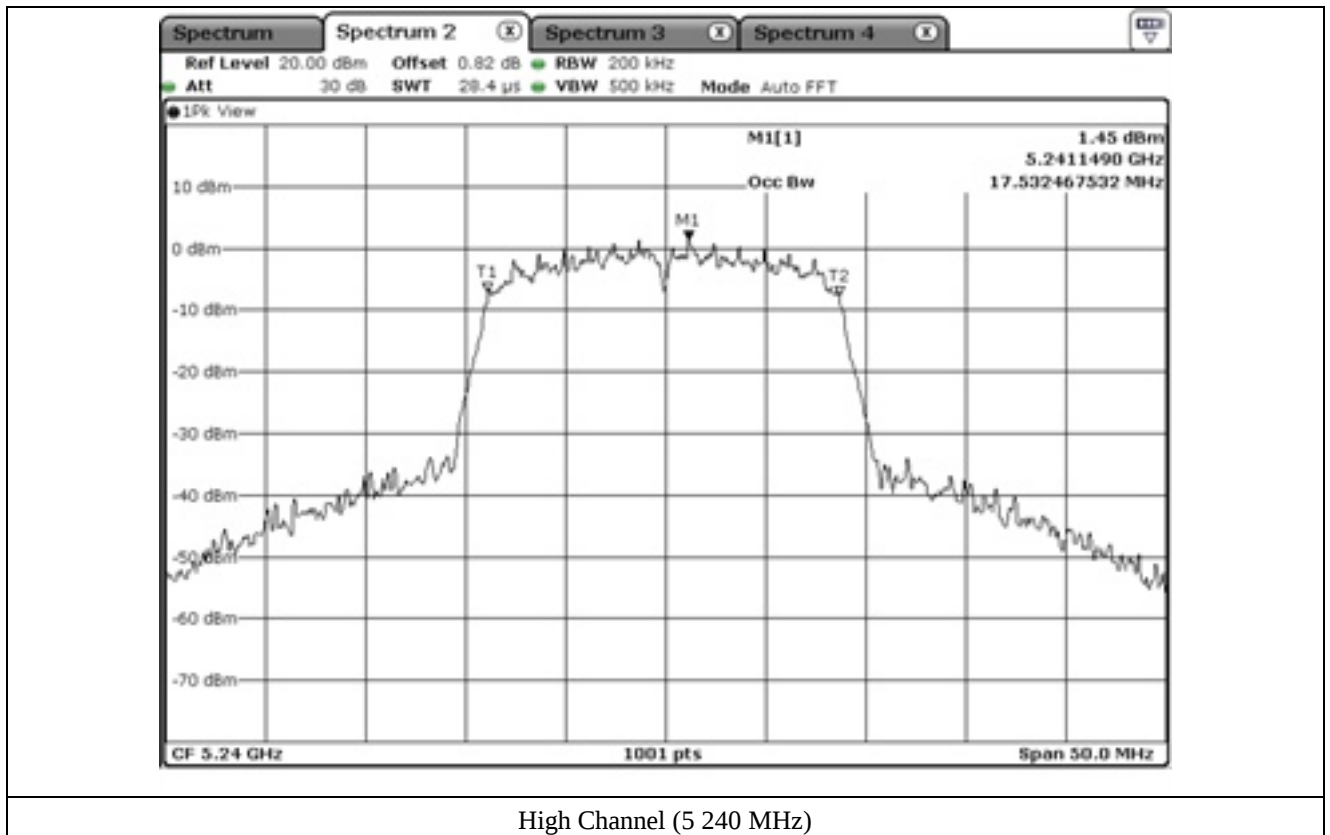

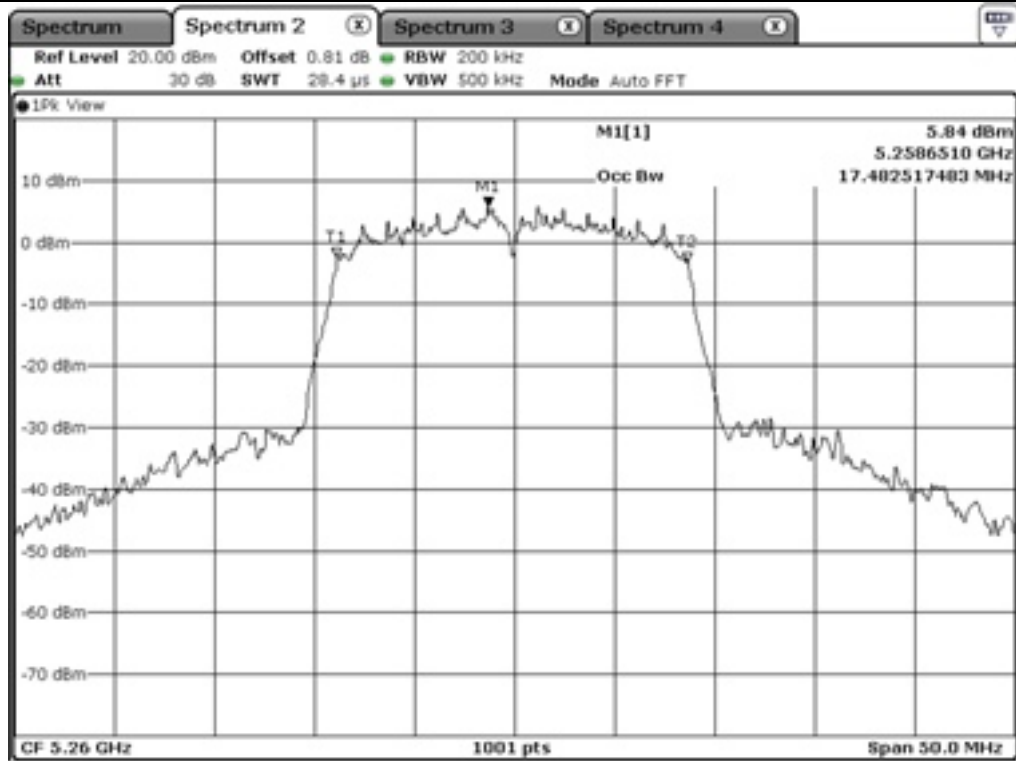

Low Channel (5 260 MHz)

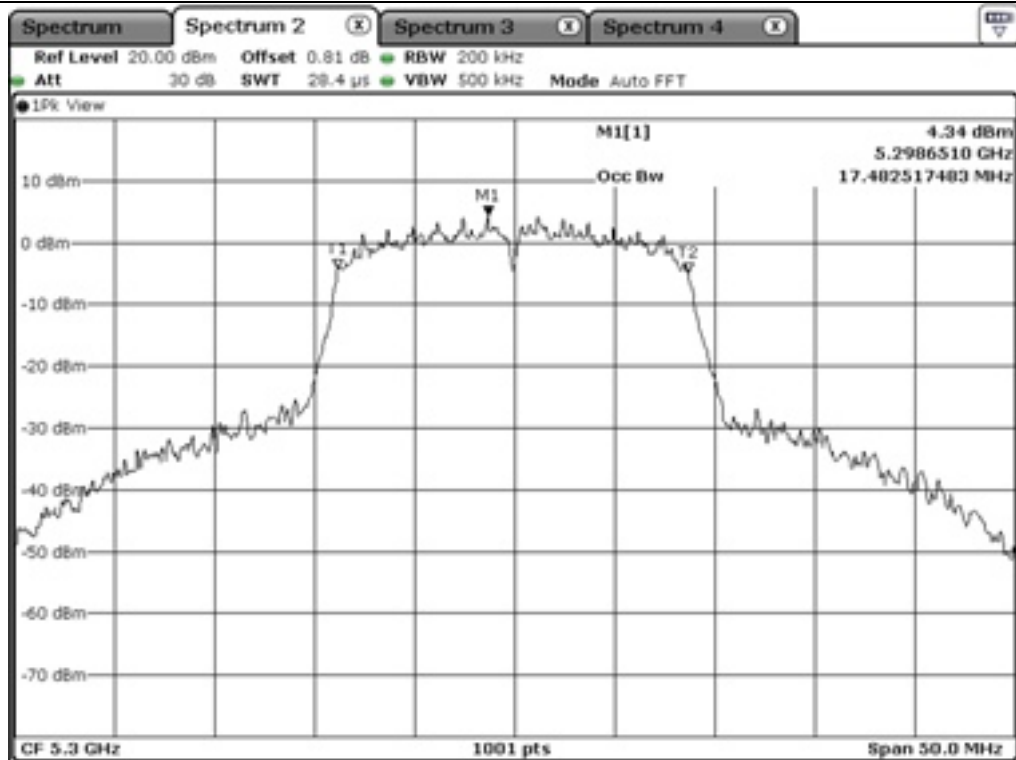


Middle Channel (5 300 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

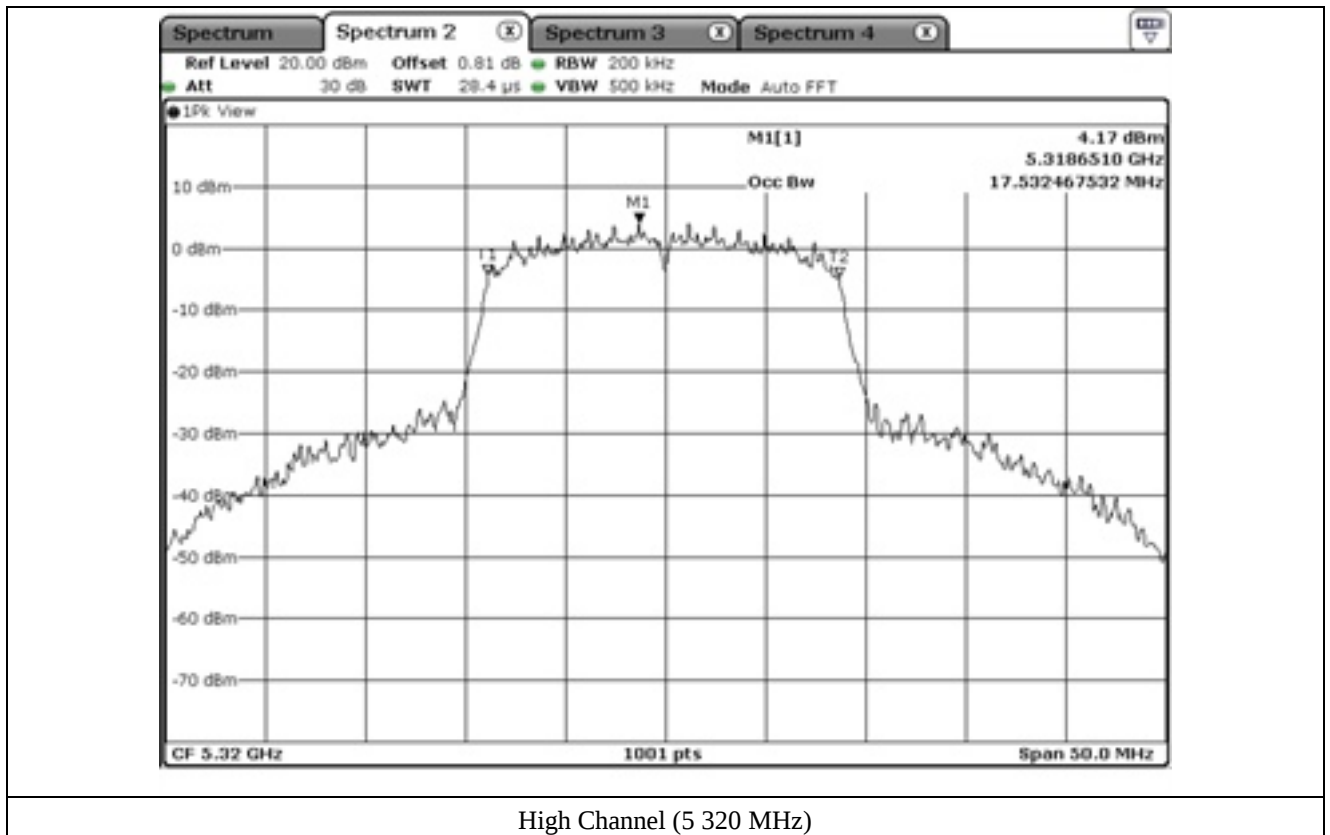


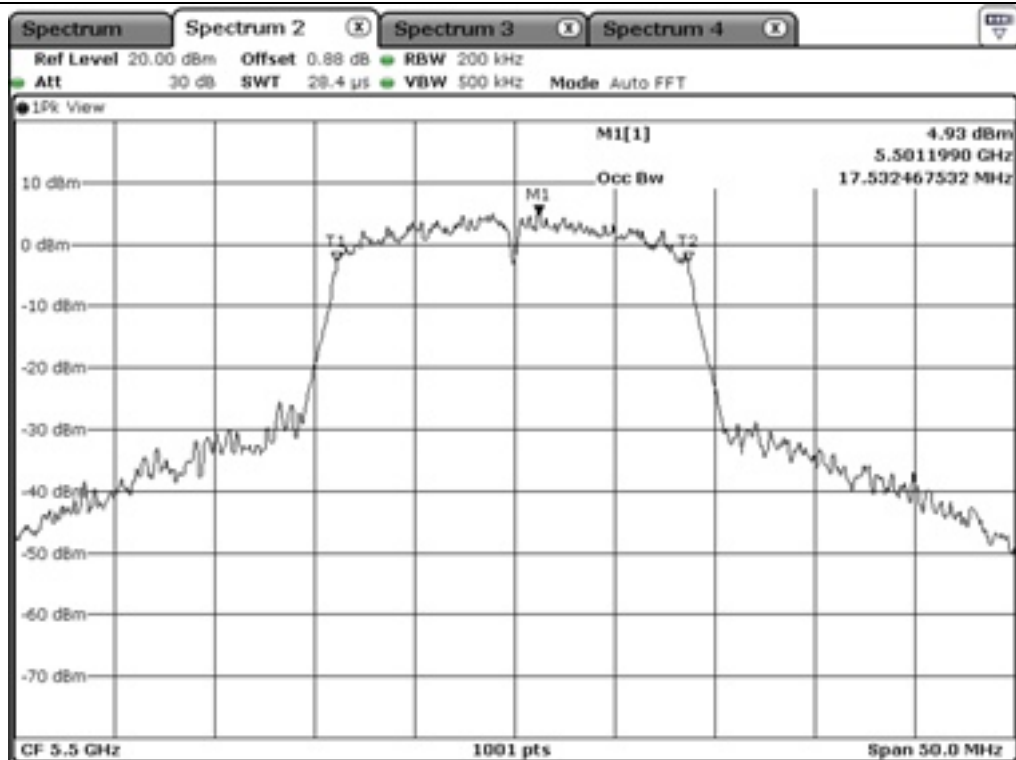


Low Channel (5 500 MHz)

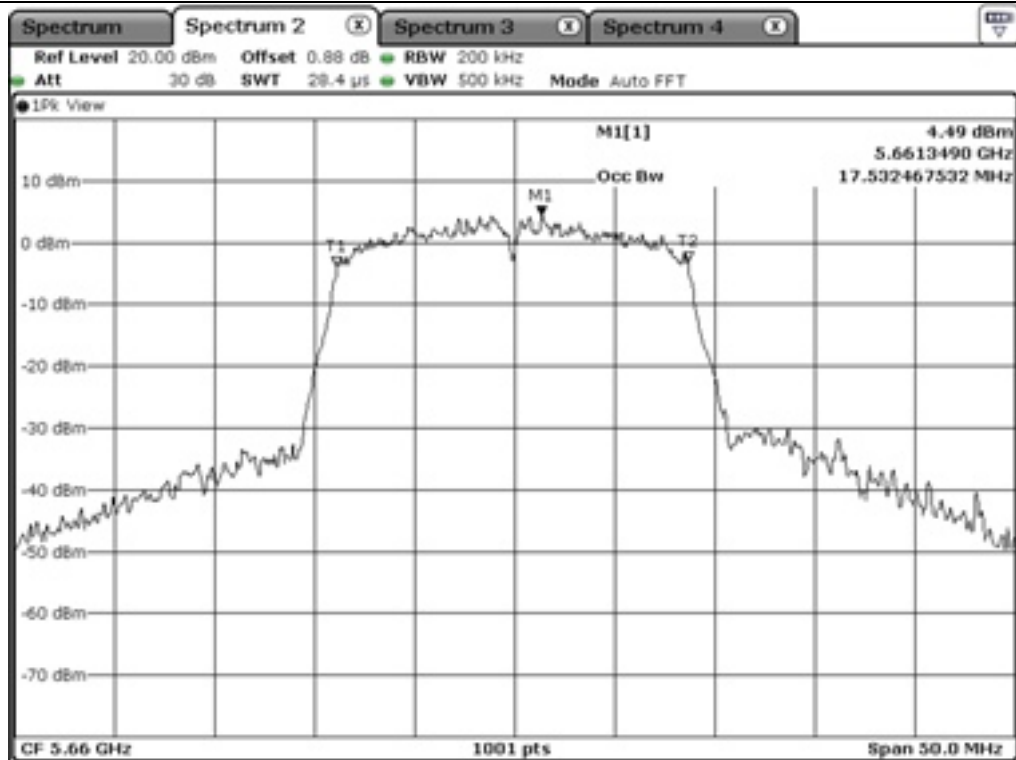


Middle Channel (5 660 MHz)

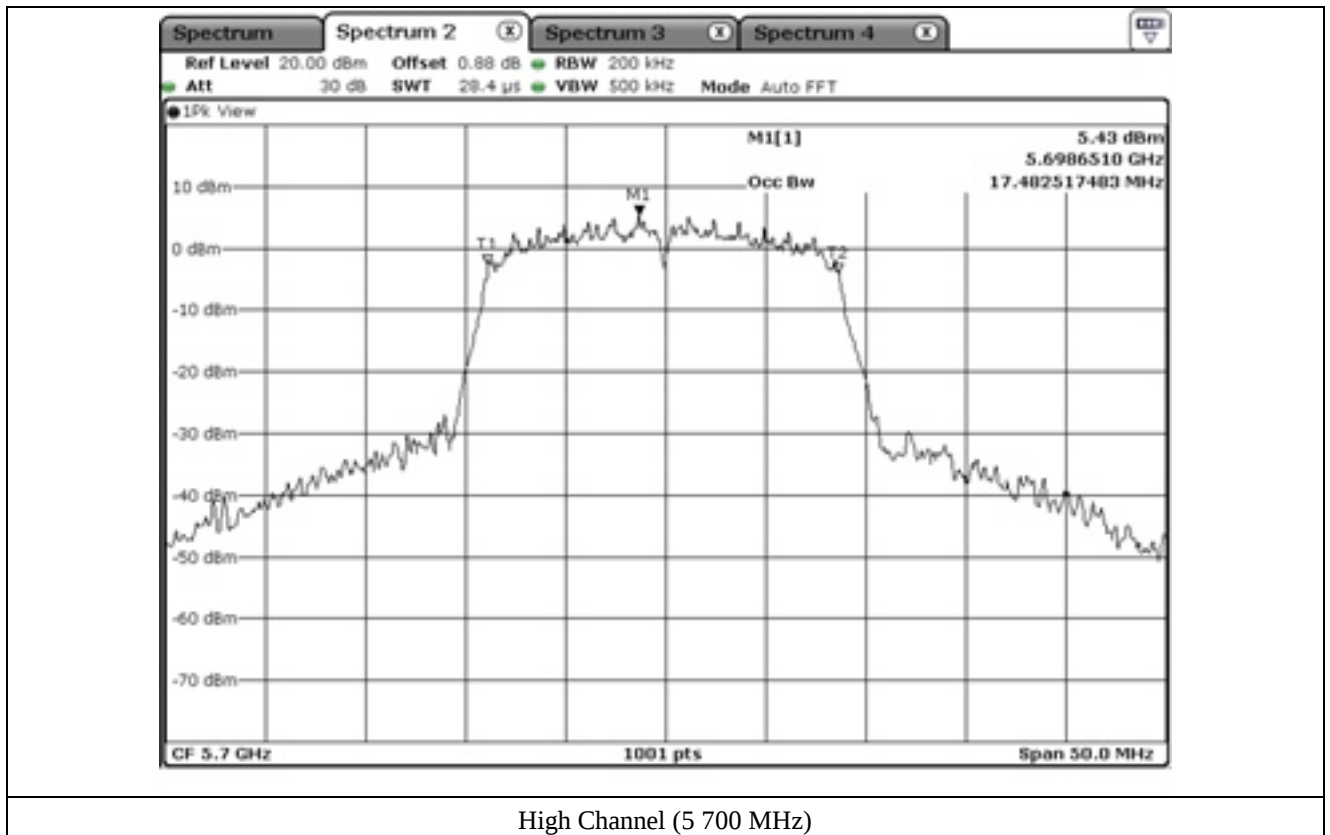

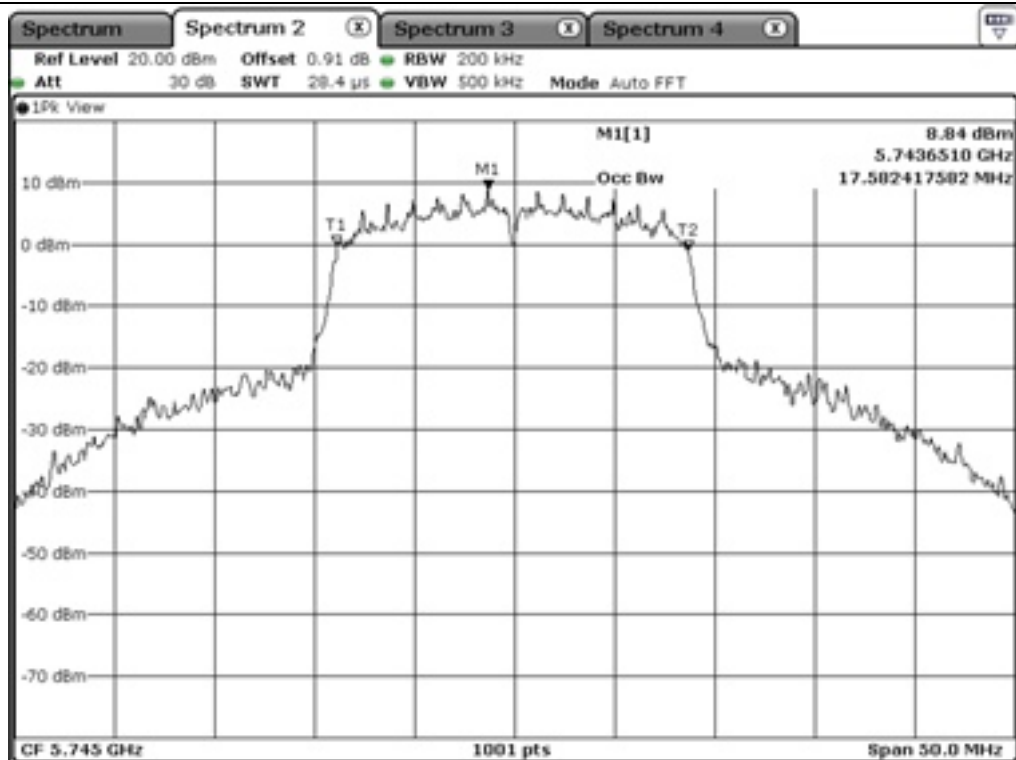

Low Channel (5.745 MHz)

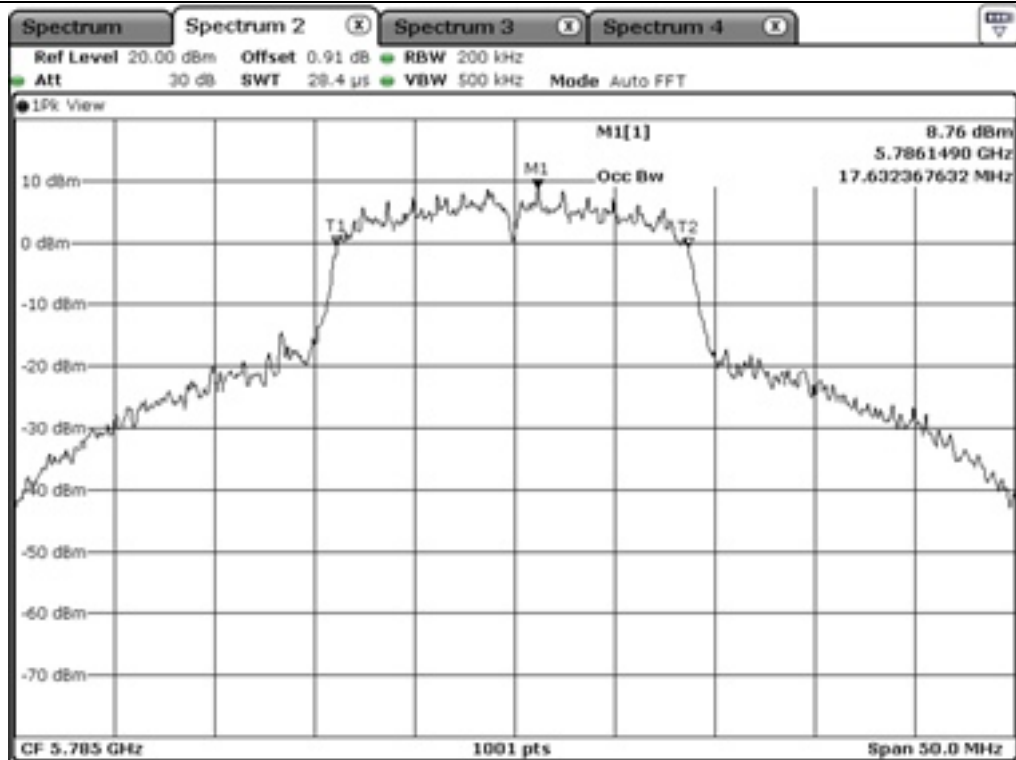


Middle Channel (5.785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

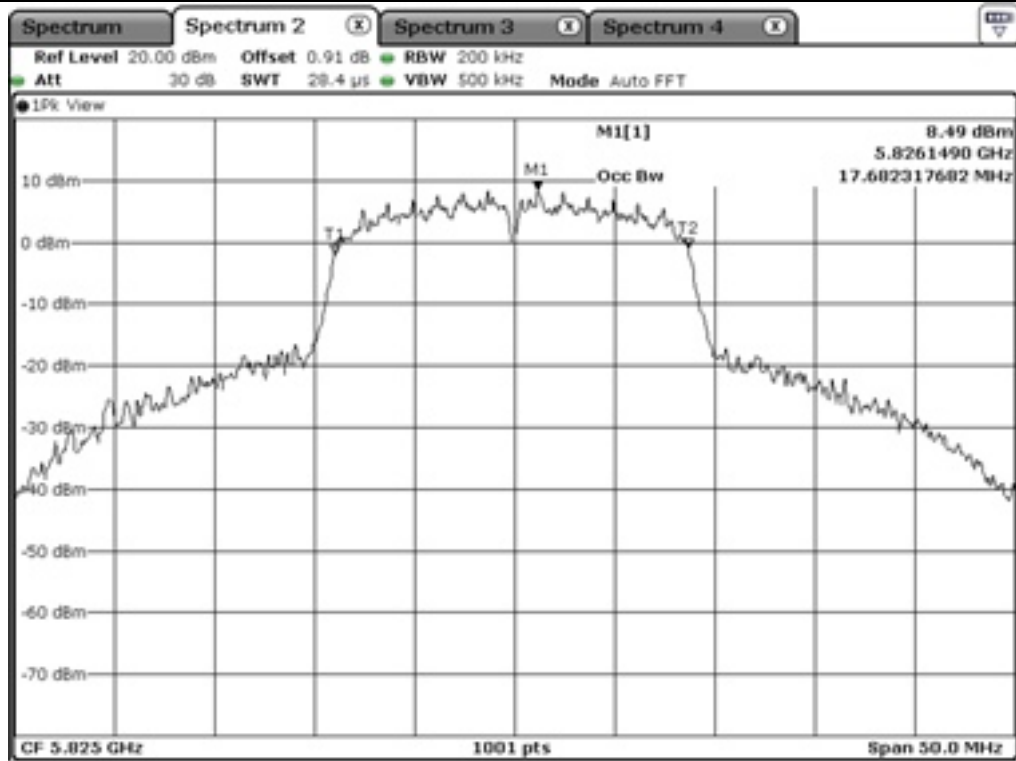

High Channel (5 825 MHz)

7.5.1.2 MINIMUM 26 dB BANDWIDTH


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.03
	Middle	5 220.00	19.78
	High	5 240.00	19.83
5 250 ~ 5 350	Low	5 260.00	19.93
	Middle	5 300.00	20.08
	High	5 320.00	19.83
5 470 ~ 5 725	Low	5 500.00	20.13
	Middle	5 660.00	20.03
	High	5 700.00	19.98
5 725 ~ 5 850	Low	5 745.00	19.73
	Middle	5 785.00	20.18
	High	5 825.00	20.03


[Staddle Channel]

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	15.19
5 725 ~ 5 850	5 720.00	4.84


Remark: See next page for measurement data.

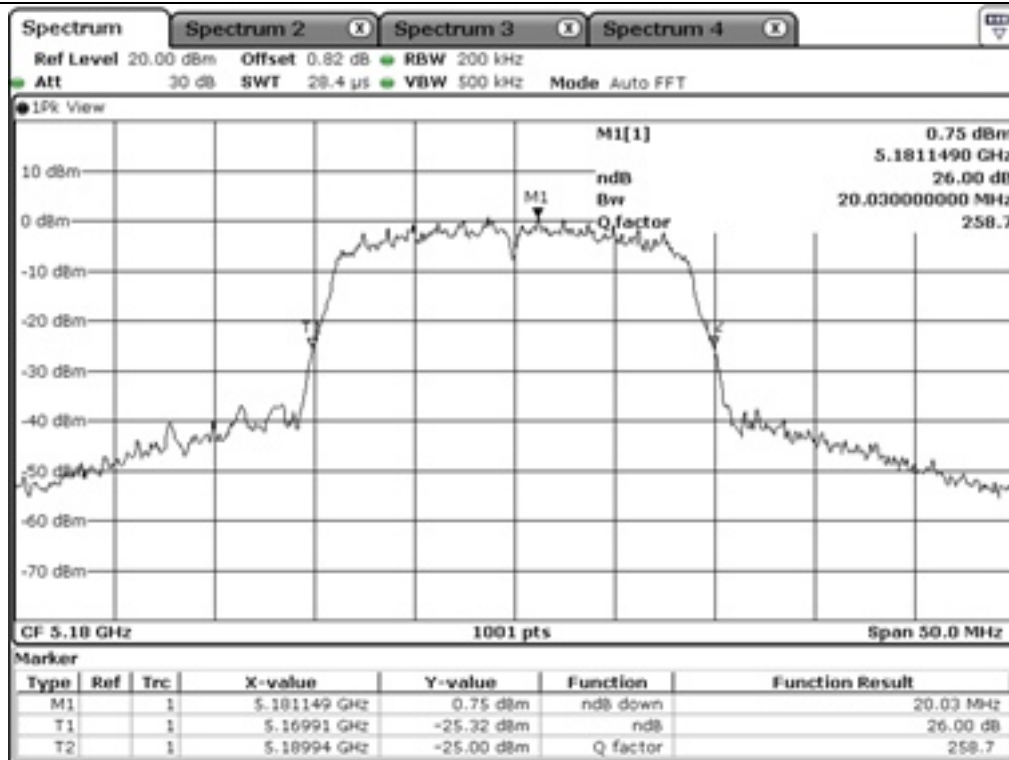


Low Channel (5 180 MHz)

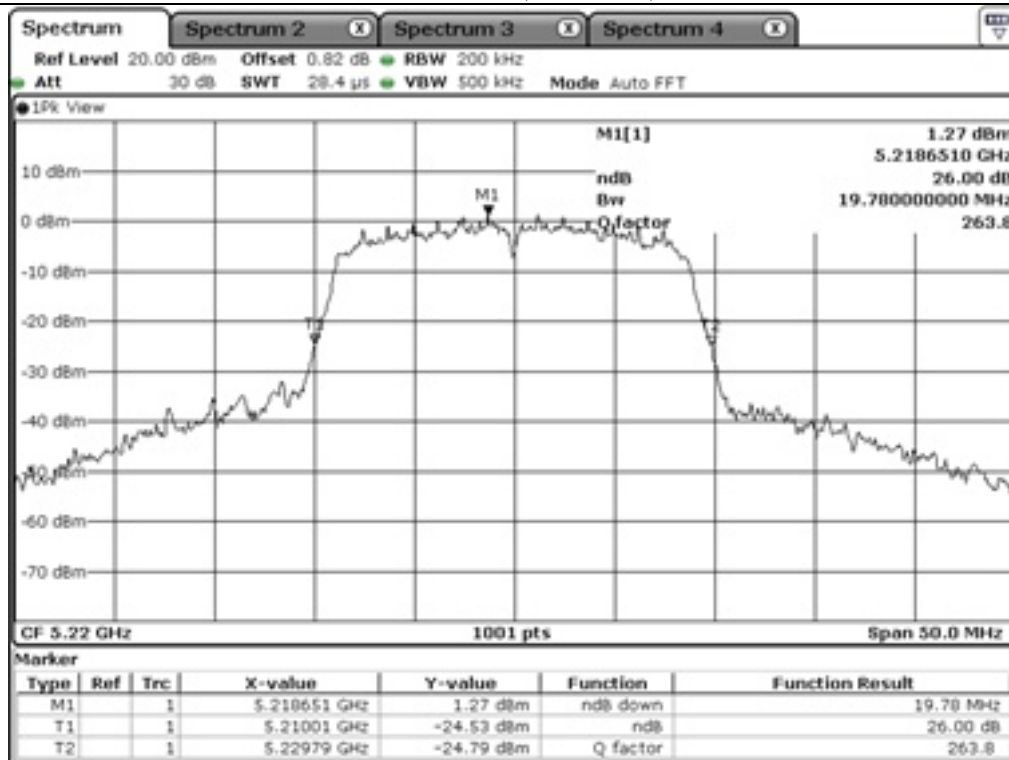


Middle Channel (5 220 MHz)

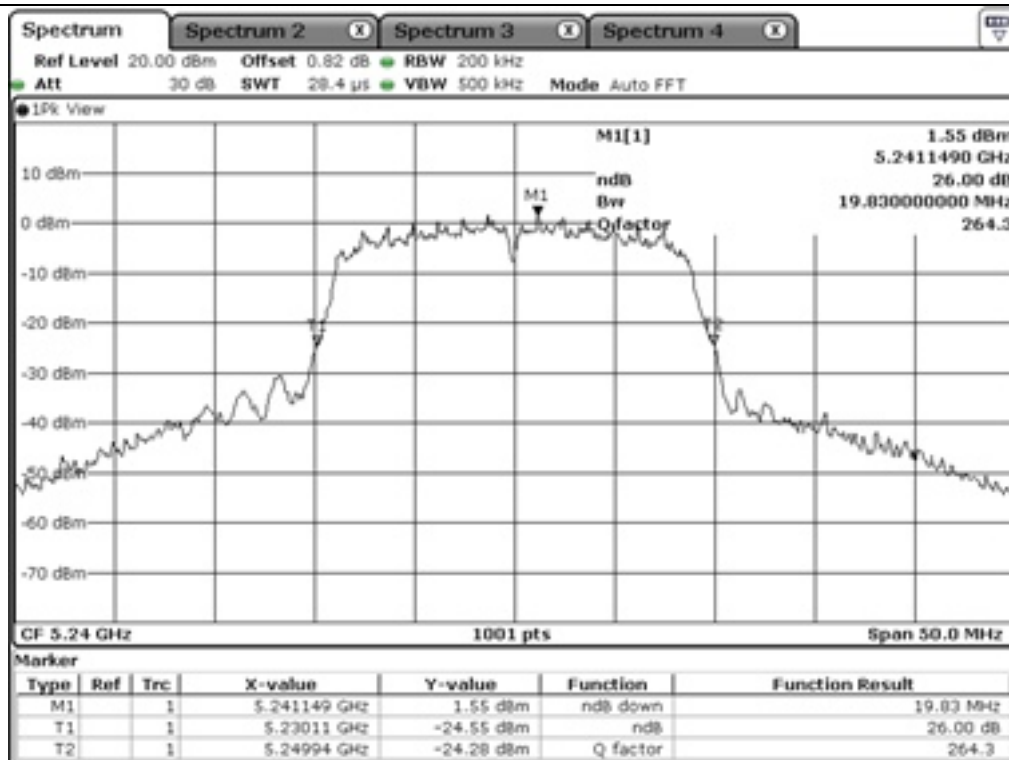


High Channel (5 240 MHz)

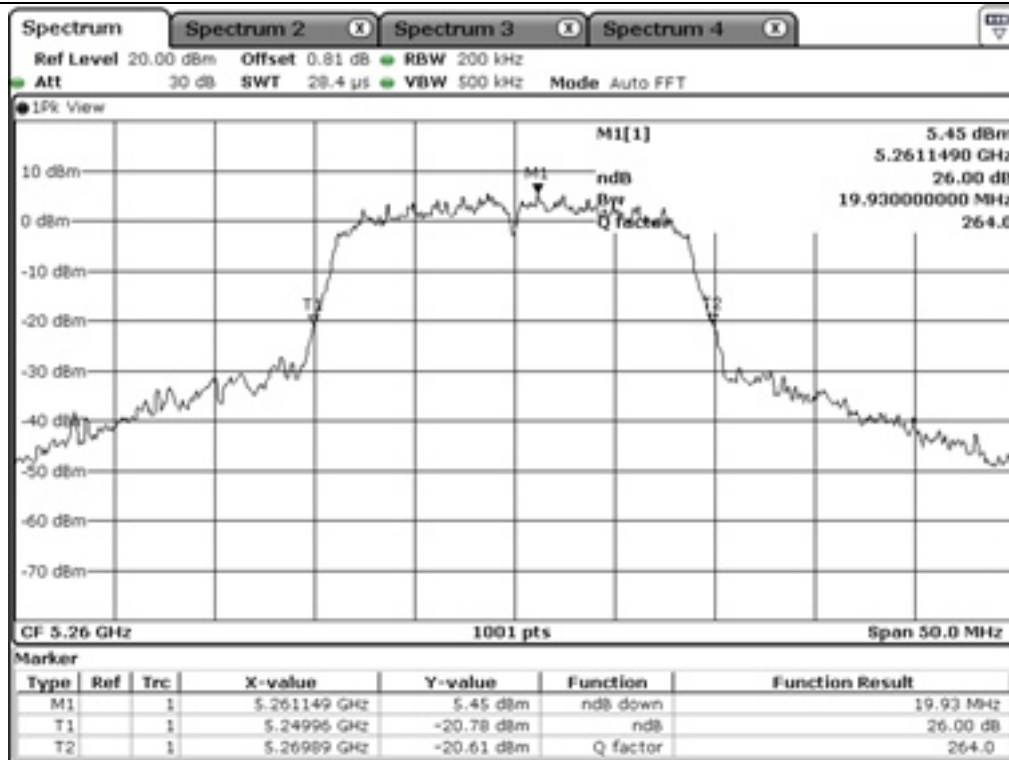


Low Channel (5 260 MHz)

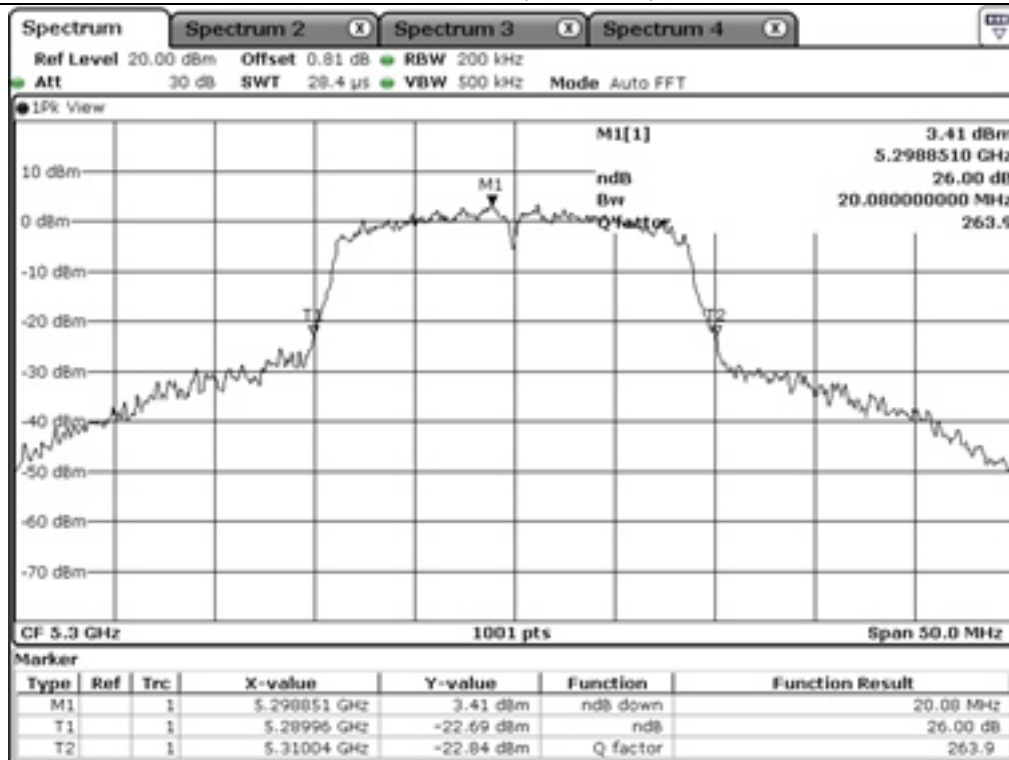


Middle Channel (5 300 MHz)

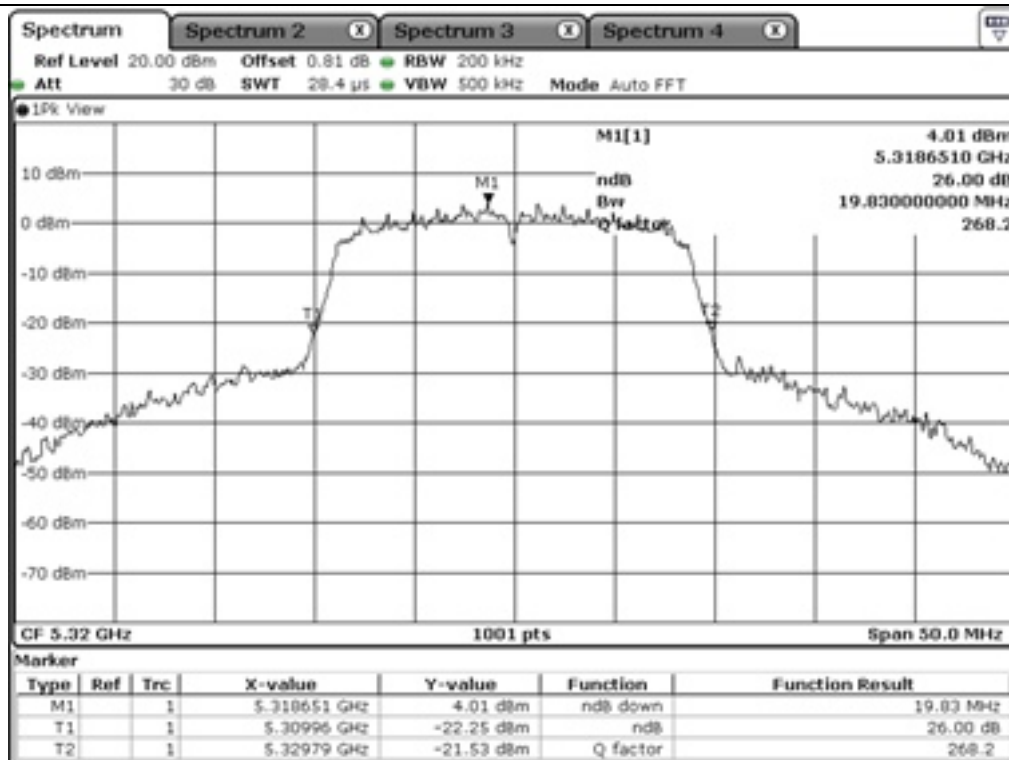


High Channel (5 320 MHz)

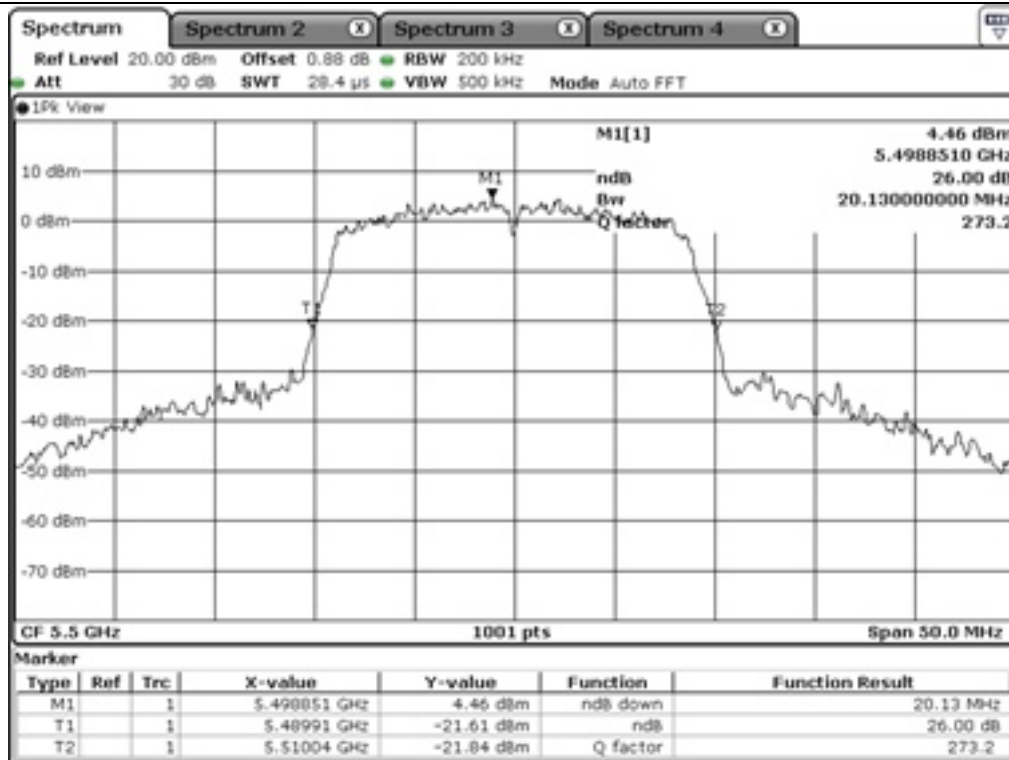


Low Channel (5 500 MHz)

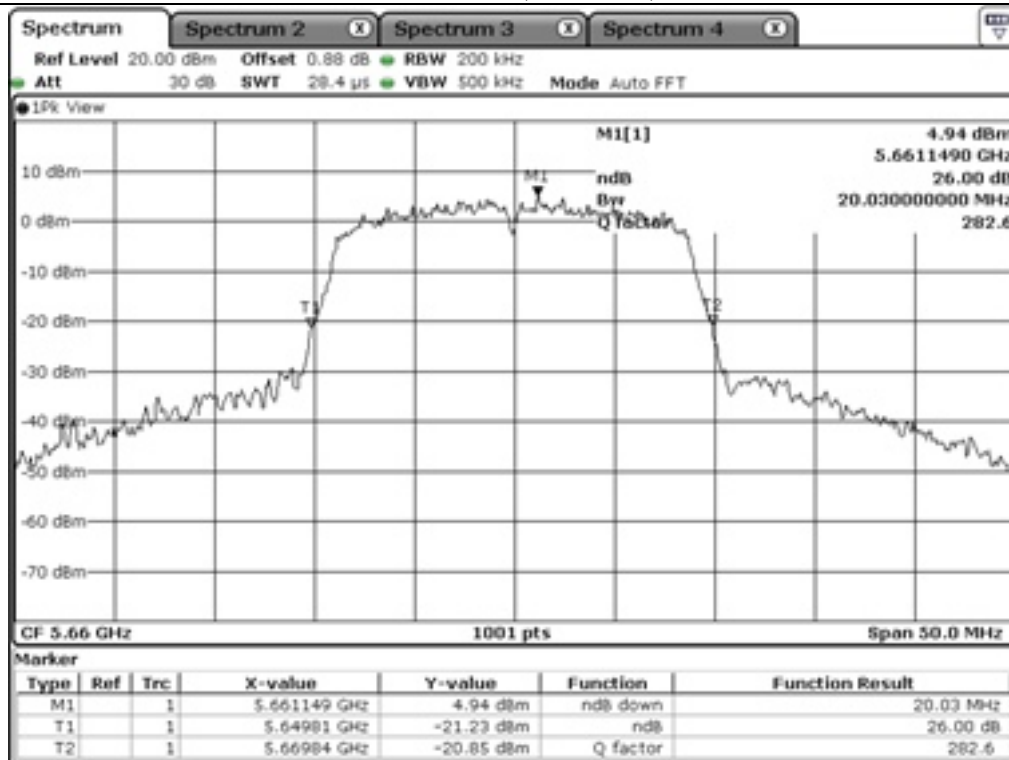


Middle Channel (5 660 MHz)

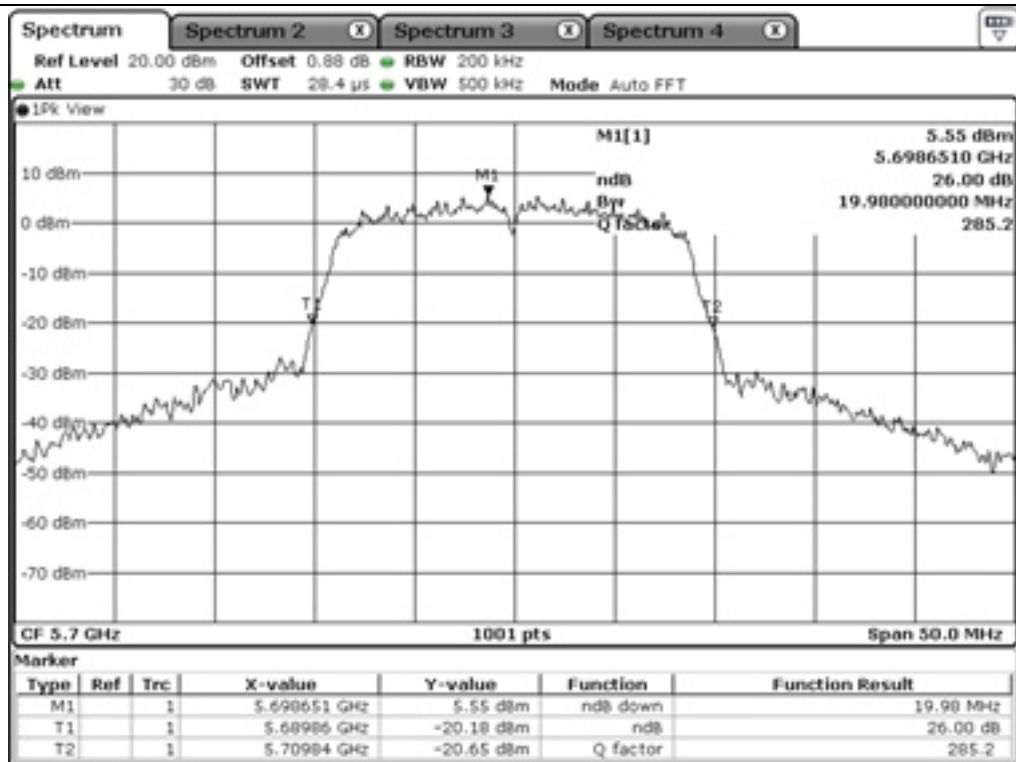


High Channel (5 700 MHz)

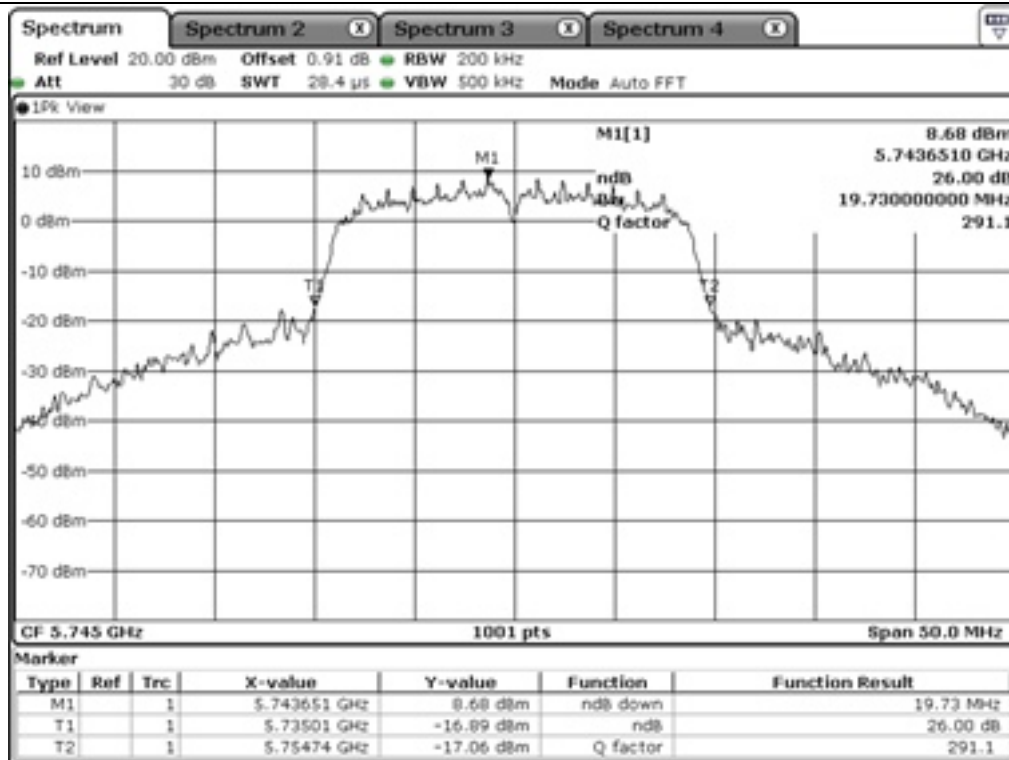


Low Channel (5 745 MHz)

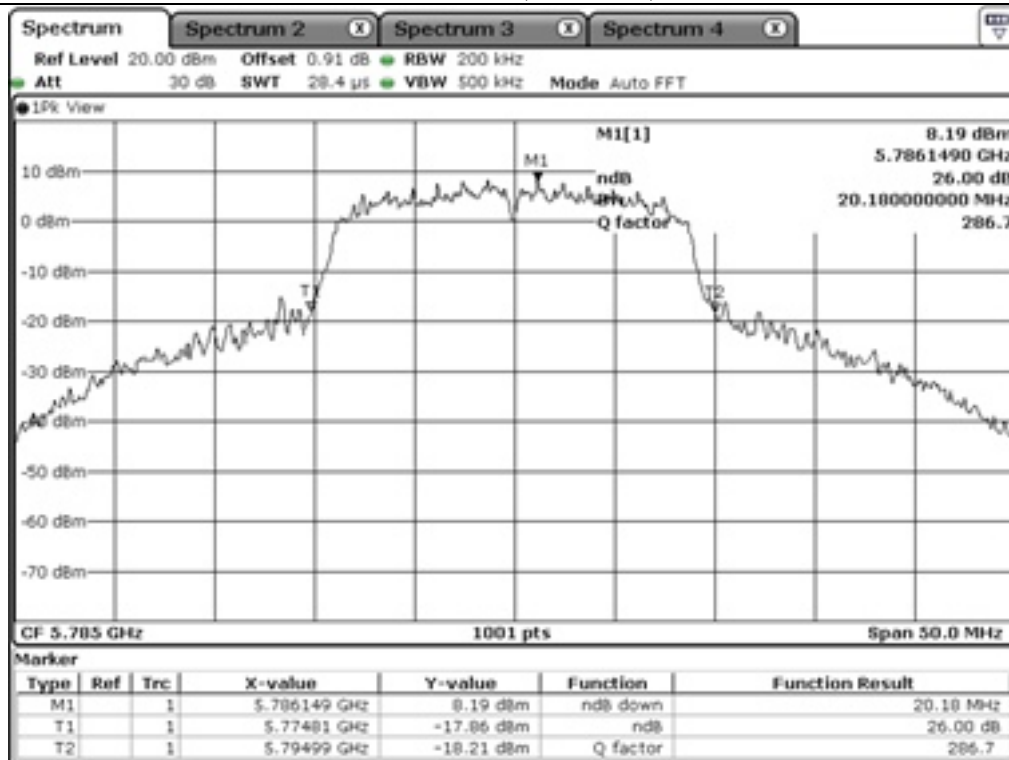

Middle Channel (5 785 MHz)

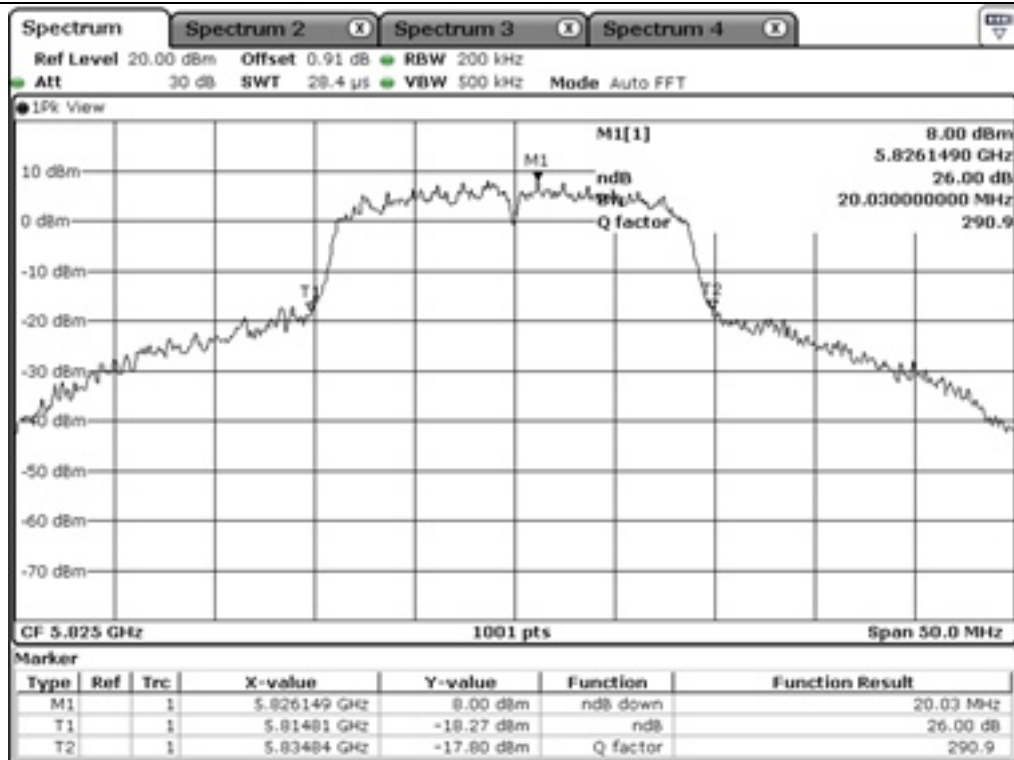

High Channel (5.825 MHz)

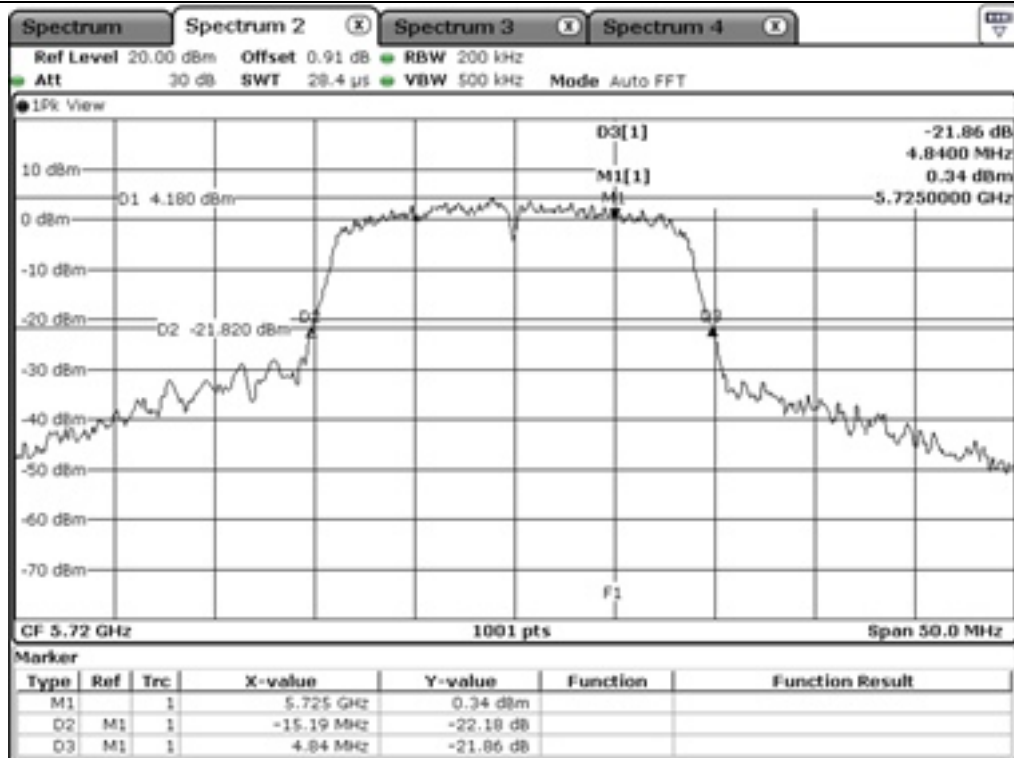


Staddle Channel (5.720 MHz)

7.5.2 Test data for Antenna 1


7.5.2.1 99 % OCCUPIED BANDWIDTH

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	17.53
	Middle	5 220.00	17.58
	High	5 240.00	17.53
5 250 ~ 5 350	Low	5 260.00	17.53
	Middle	5 300.00	17.53
	High	5 320.00	17.58
5 470 ~ 5 725	Low	5 500.00	17.53
	Middle	5 660.00	17.53
	High	5 700.00	17.58
5 725 ~ 5 850	Low	5 745.00	17.73
	Middle	5 785.00	17.58
	High	5 825.00	17.73

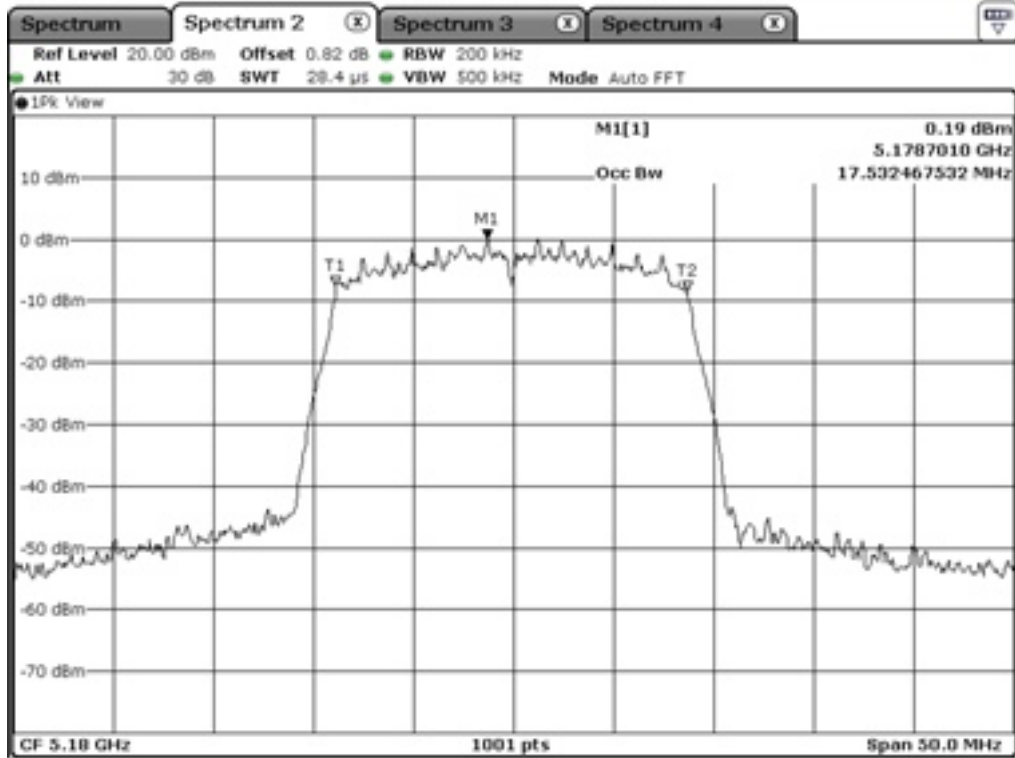

Low Channel (5 180 MHz)

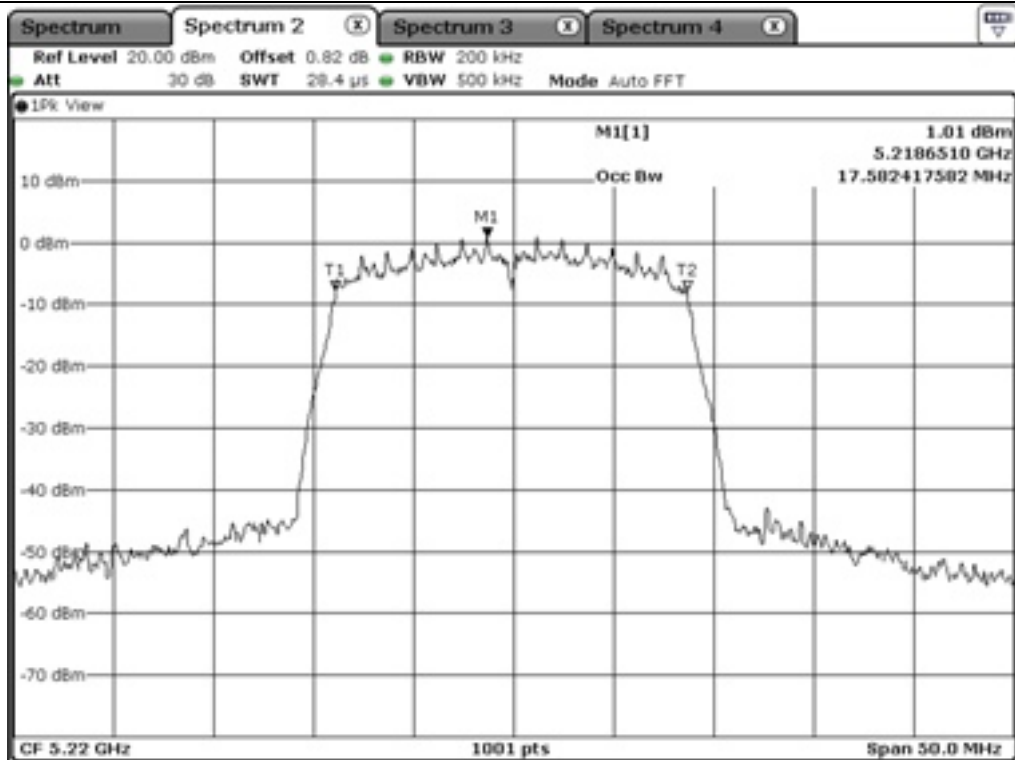


Middle Channel (5 220 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

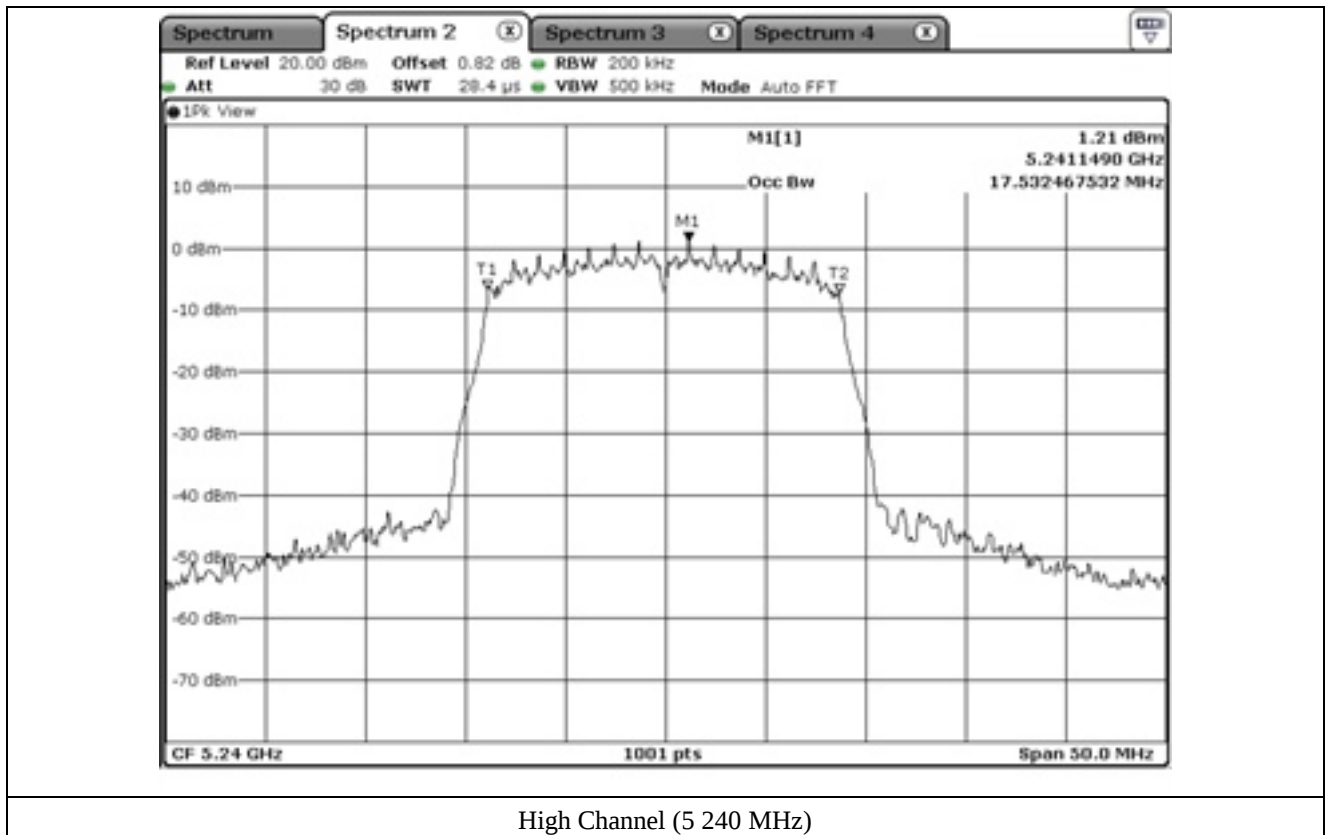


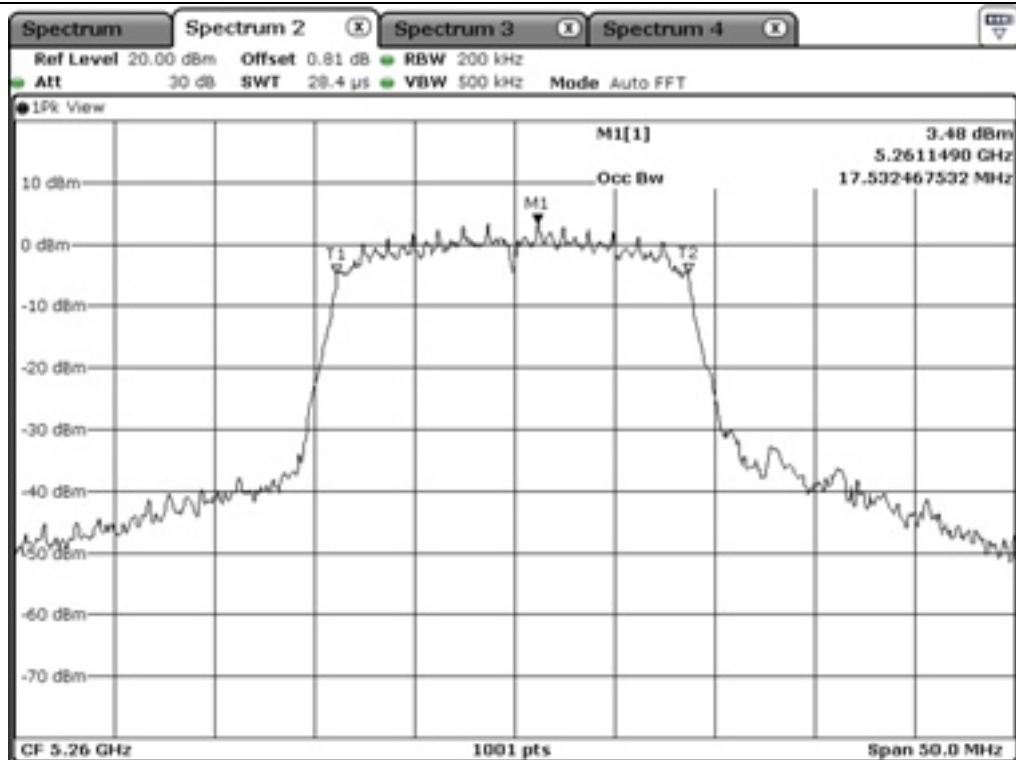


Low Channel (5 260 MHz)

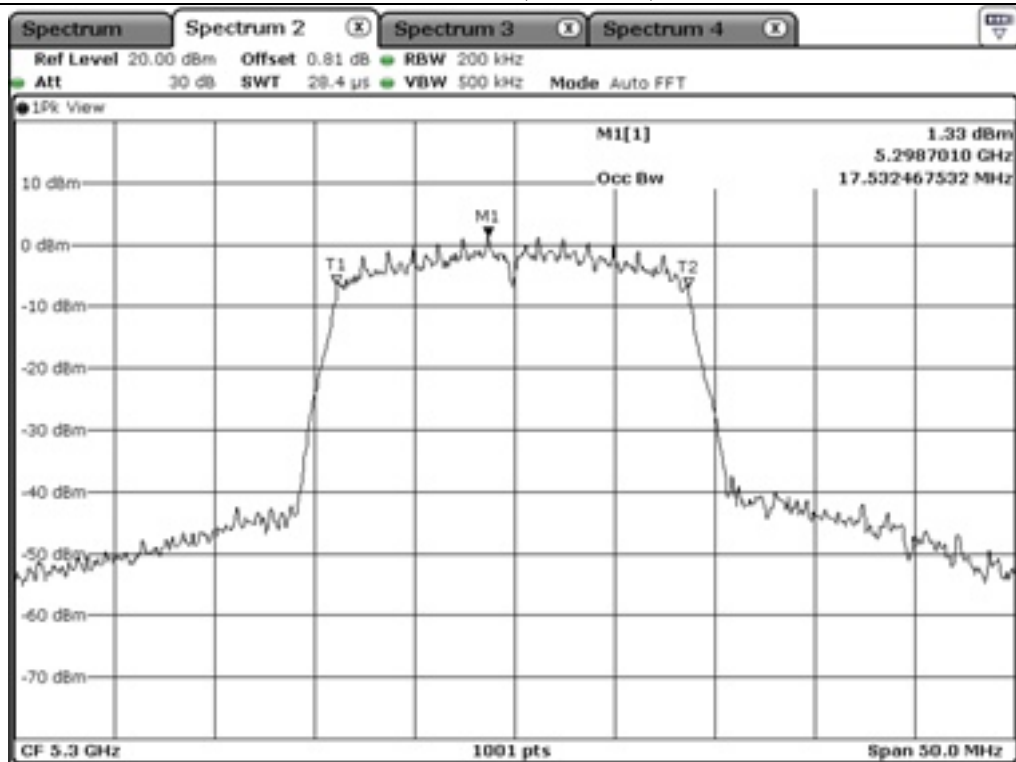


Middle Channel (5 300 MHz)

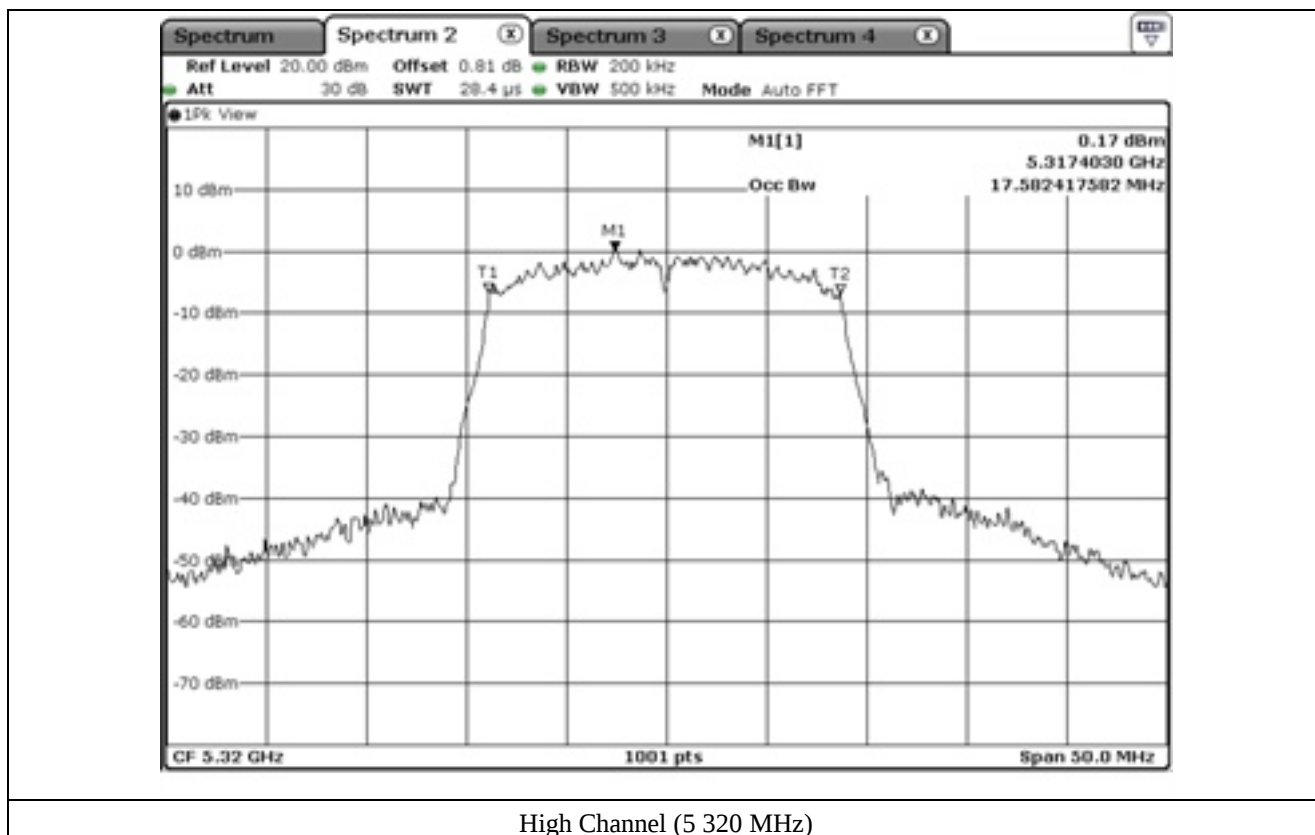

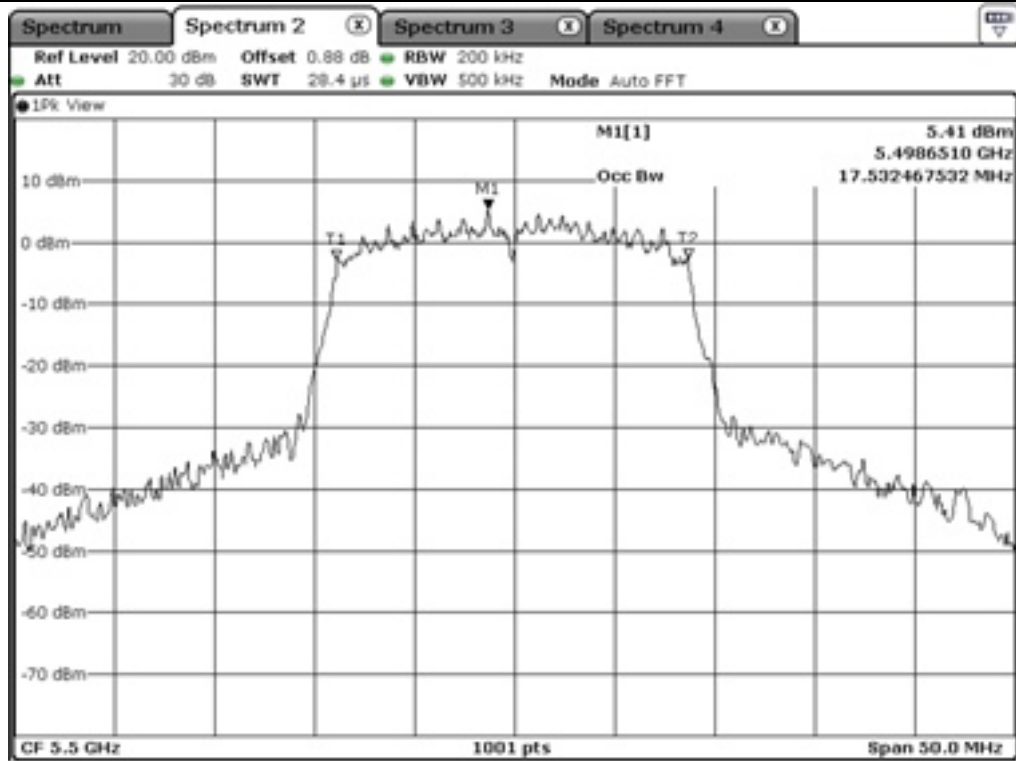

Low Channel (5 500 MHz)

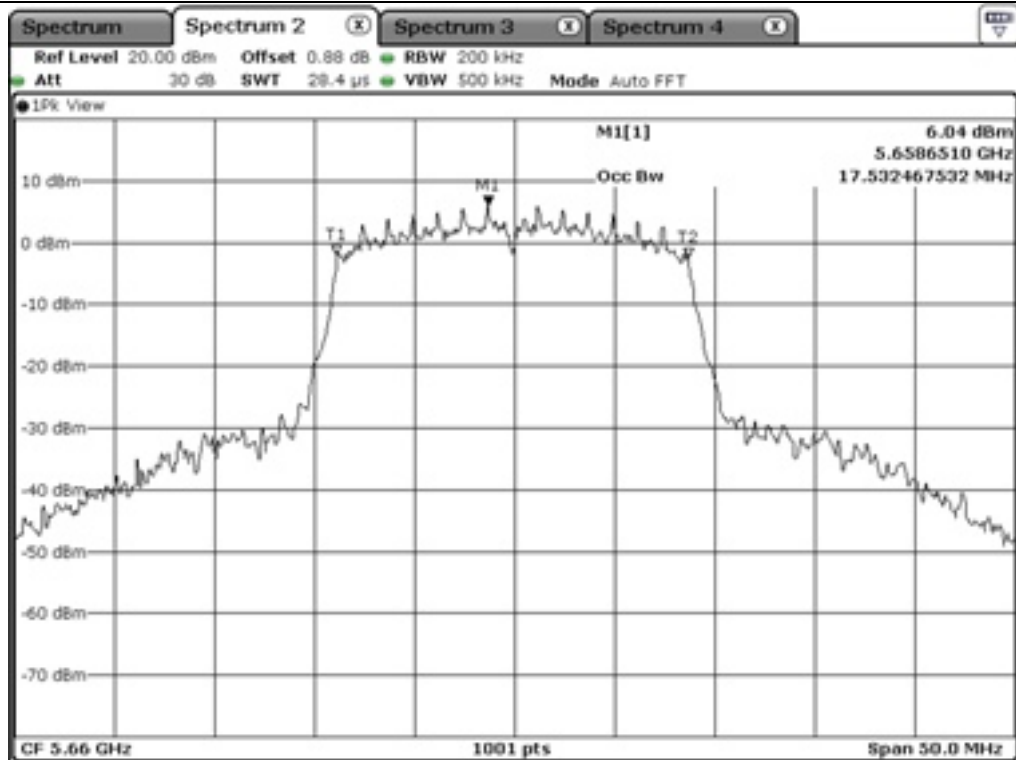


Middle Channel (5 660 MHz)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

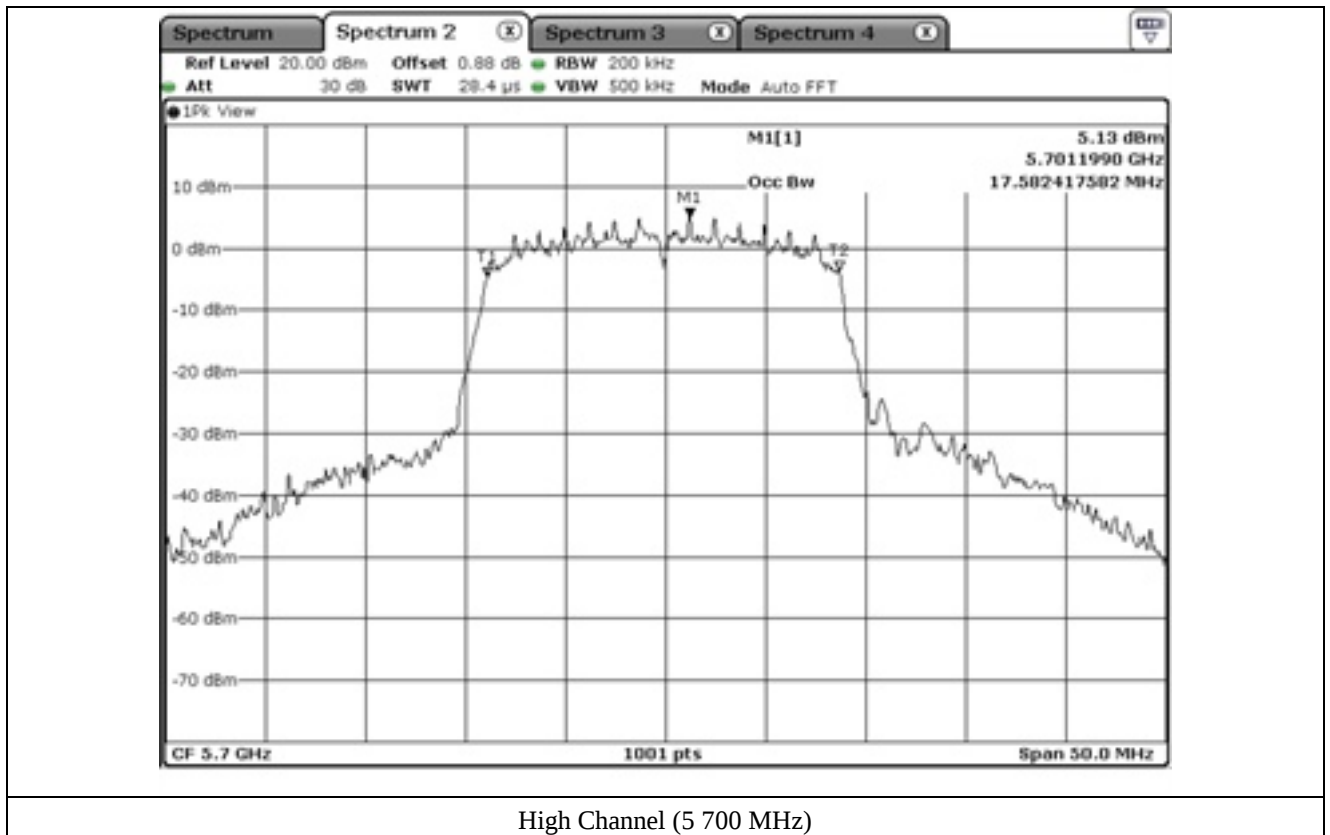

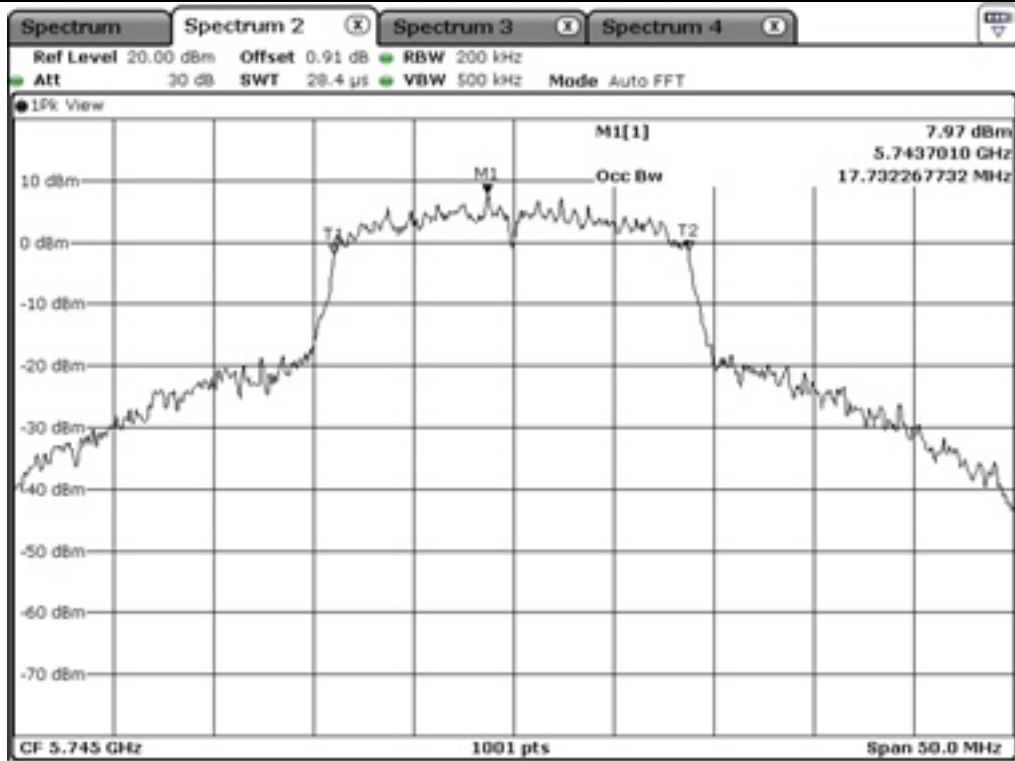

Low Channel (5 745 MHz)

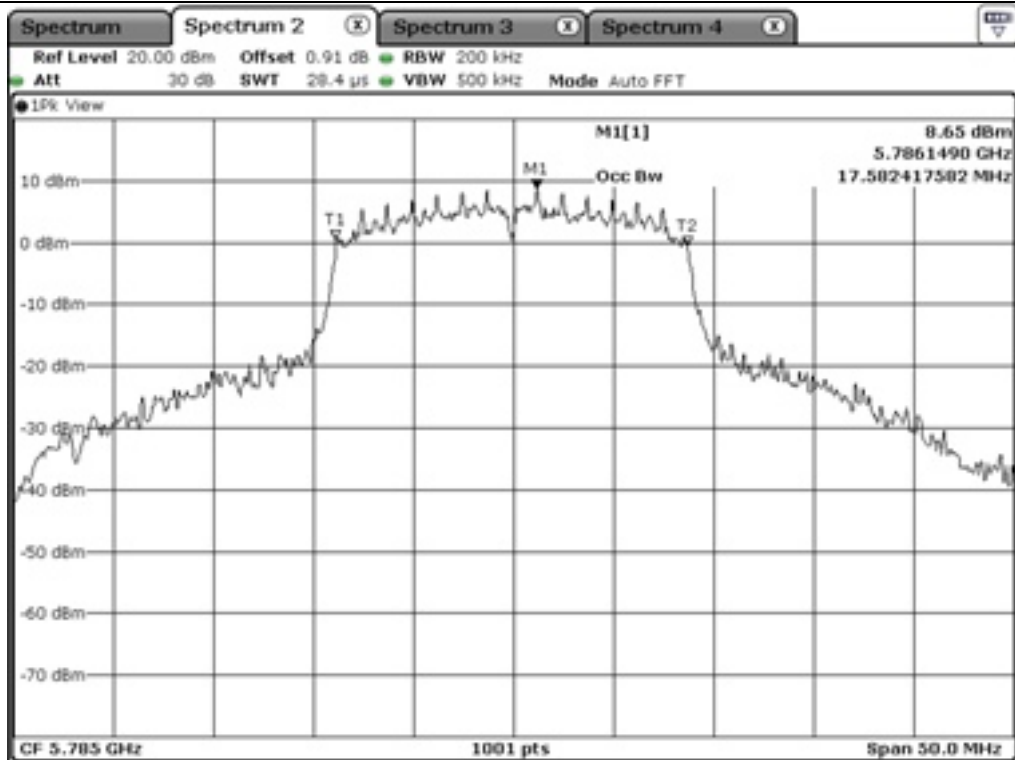


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

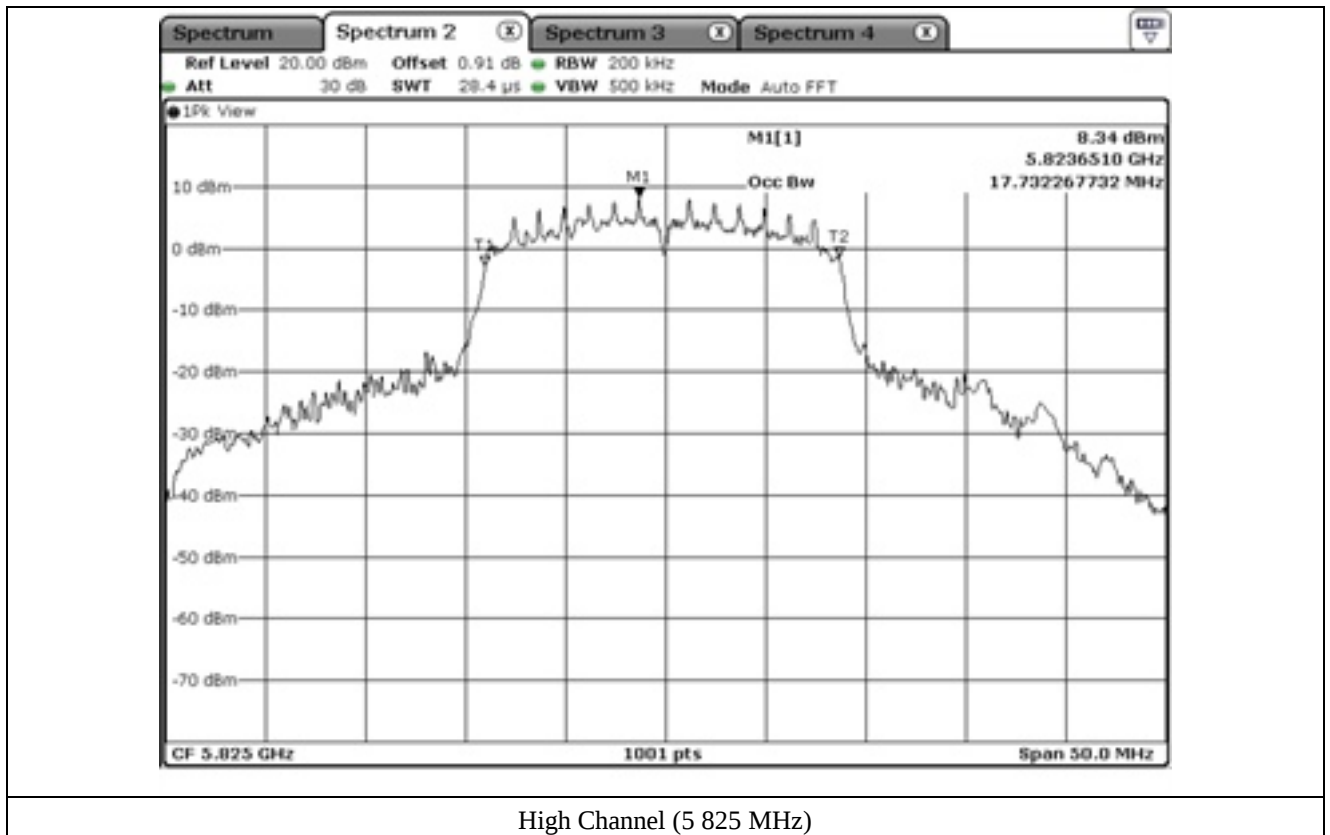

7.5.2.2 MINIMUM 26 dB BANDWIDTH


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	19.78
	Middle	5 220.00	19.93
	High	5 240.00	19.73
5 250 ~ 5 350	Low	5 260.00	19.73
	Middle	5 300.00	19.83
	High	5 320.00	19.83
5 470 ~ 5 725	Low	5 500.00	19.63
	Middle	5 660.00	19.98
	High	5 700.00	19.78
5 725 ~ 5 850	Low	5 745.00	20.28
	Middle	5 785.00	20.08
	High	5 825.00	20.18


[Staddle Channel]

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.89
5 725 ~ 5 850	5 720.00	4.84


Remark: See next page for measurement data.

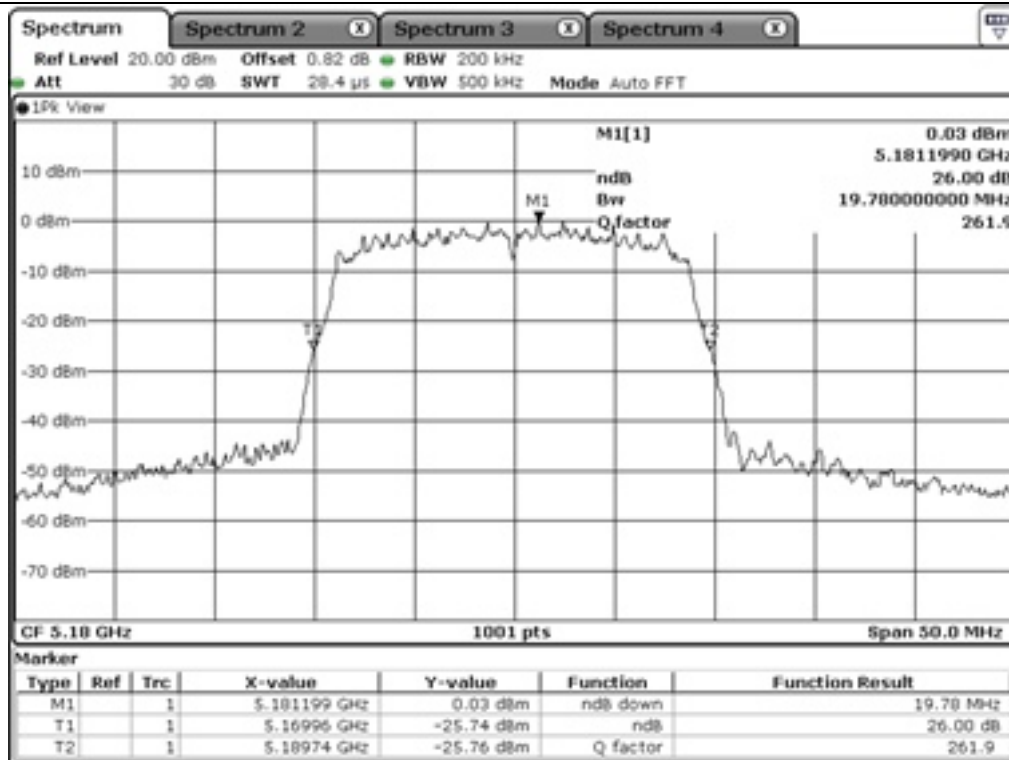


Low Channel (5 180 MHz)

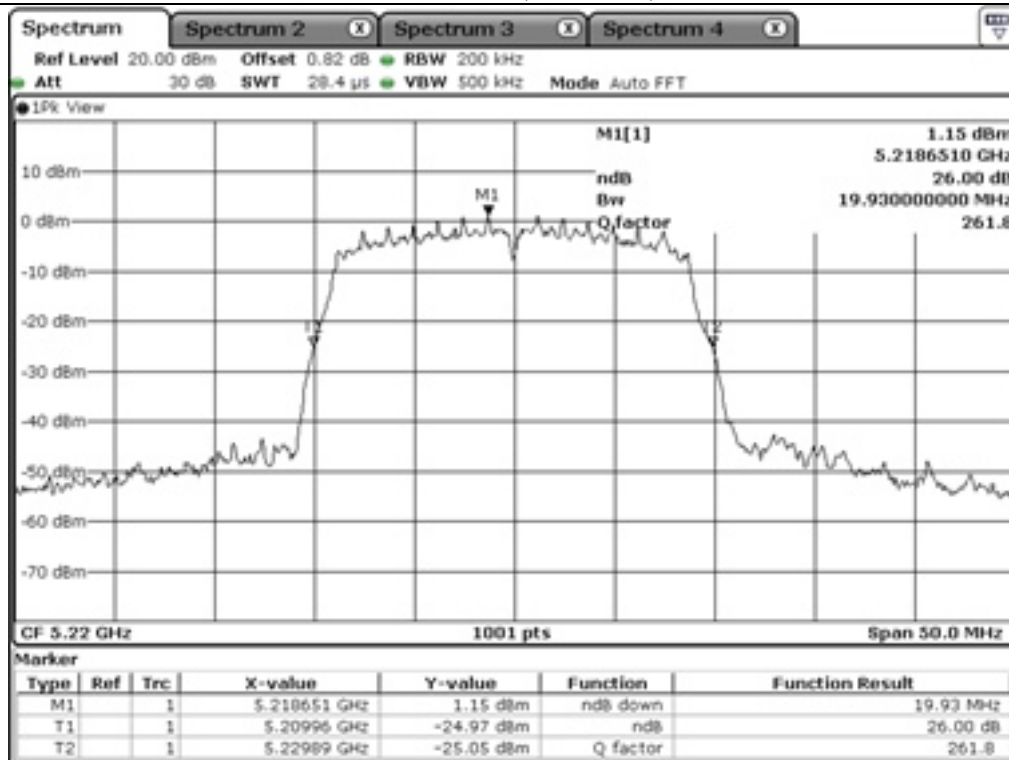


Middle Channel (5 220 MHz)

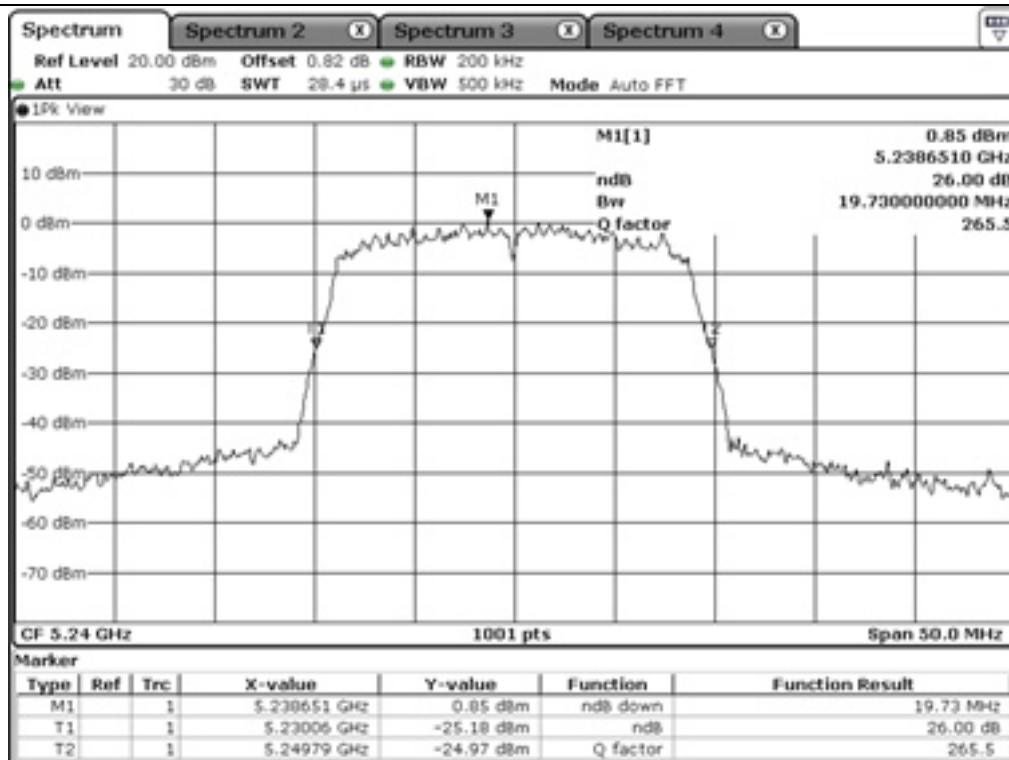


High Channel (5 240 MHz)

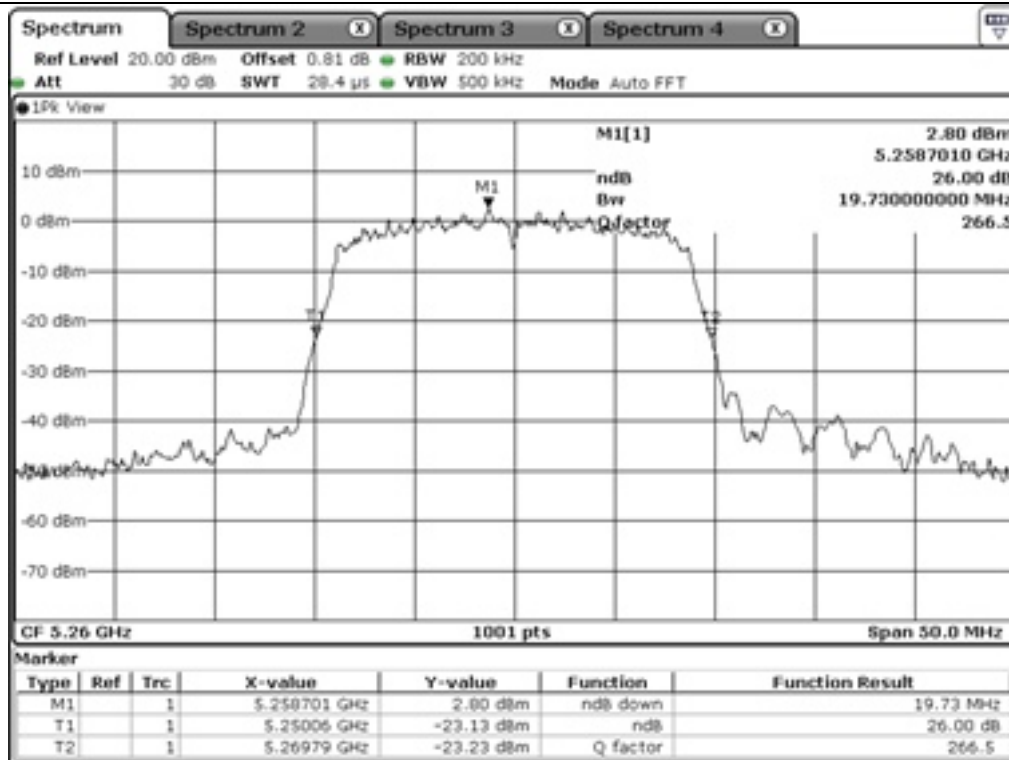


Low Channel (5 260 MHz)

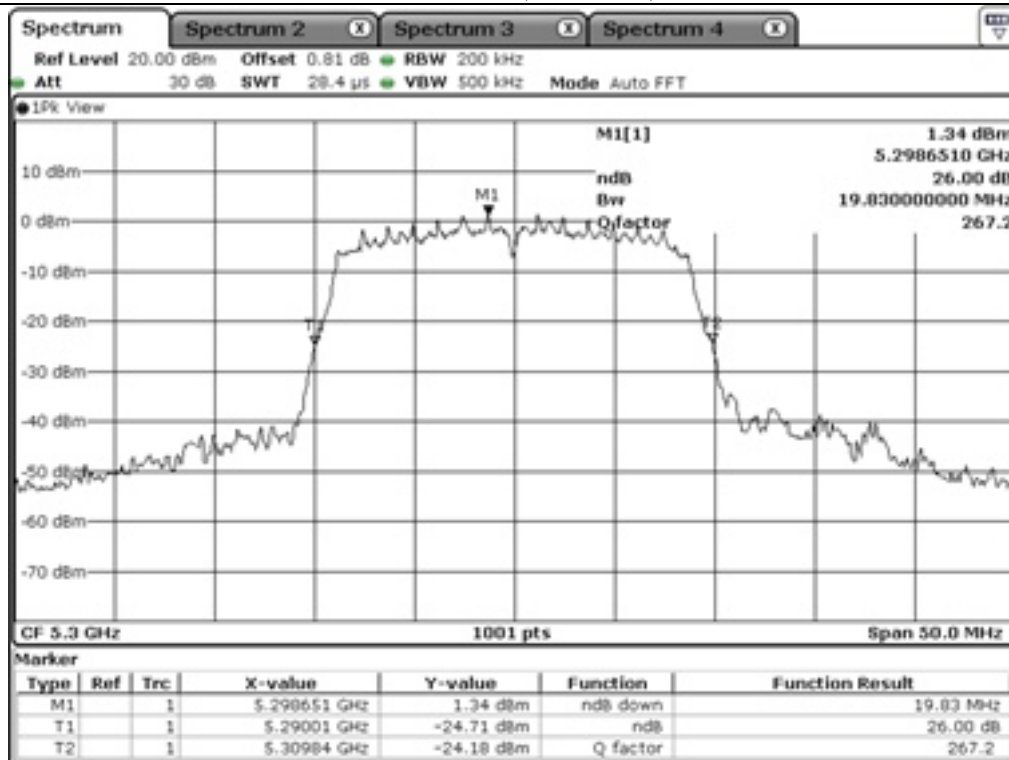


Middle Channel (5 300 MHz)

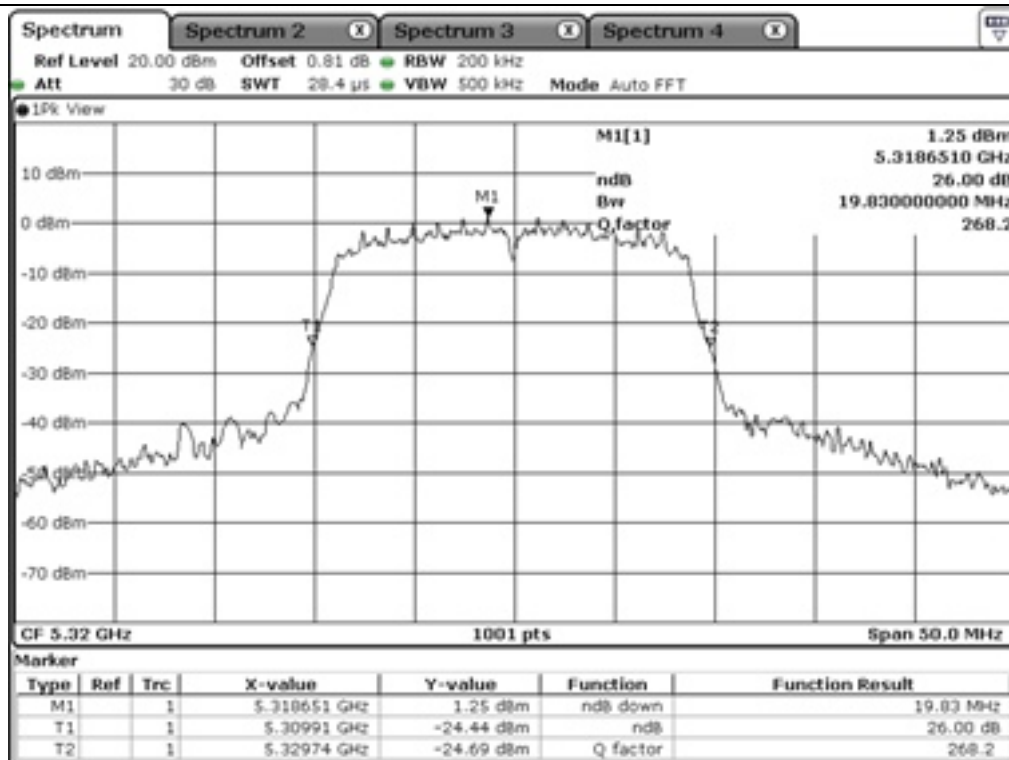


High Channel (5 320 MHz)

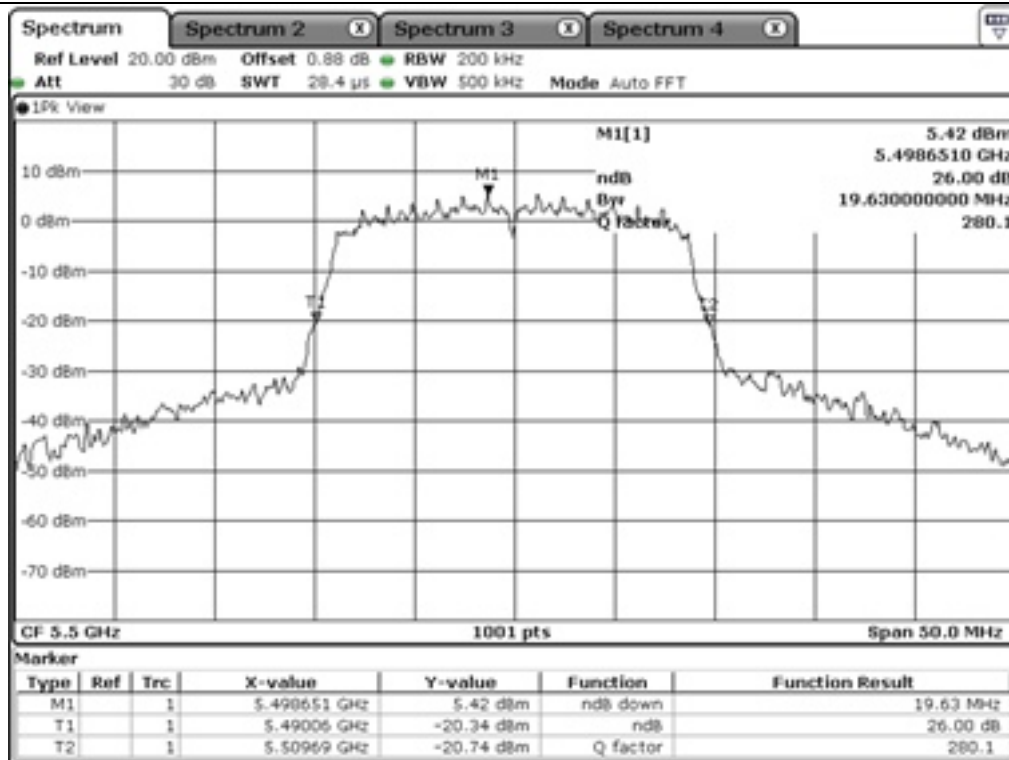


Low Channel (5 500 MHz)

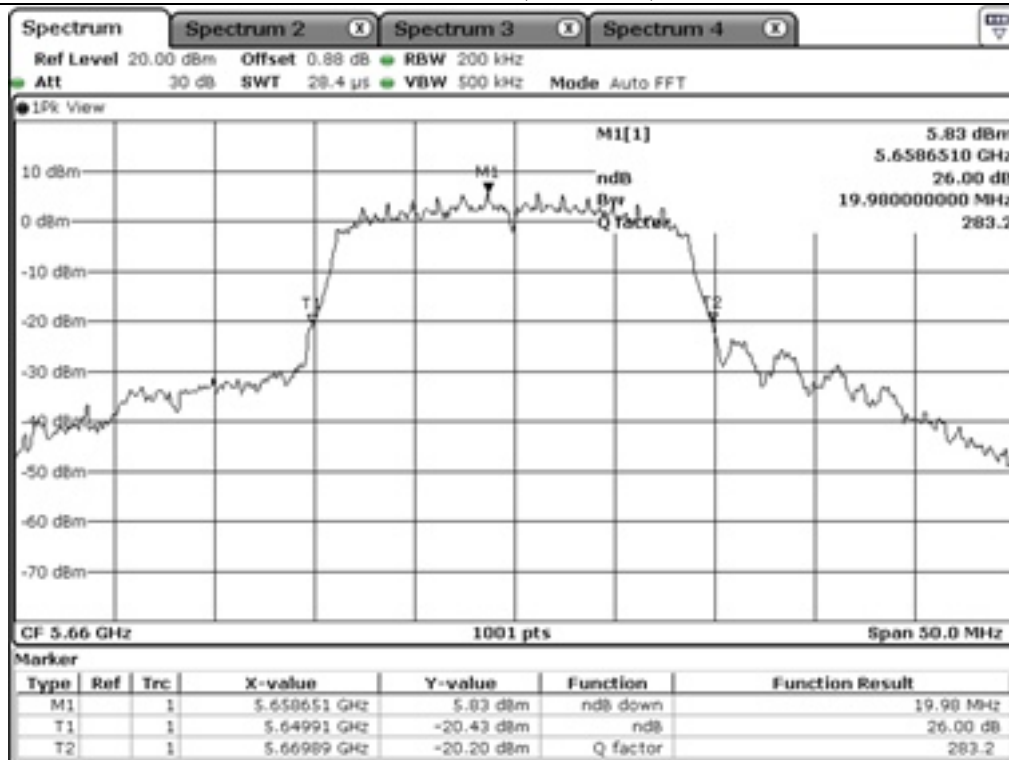


Middle Channel (5 660 MHz)

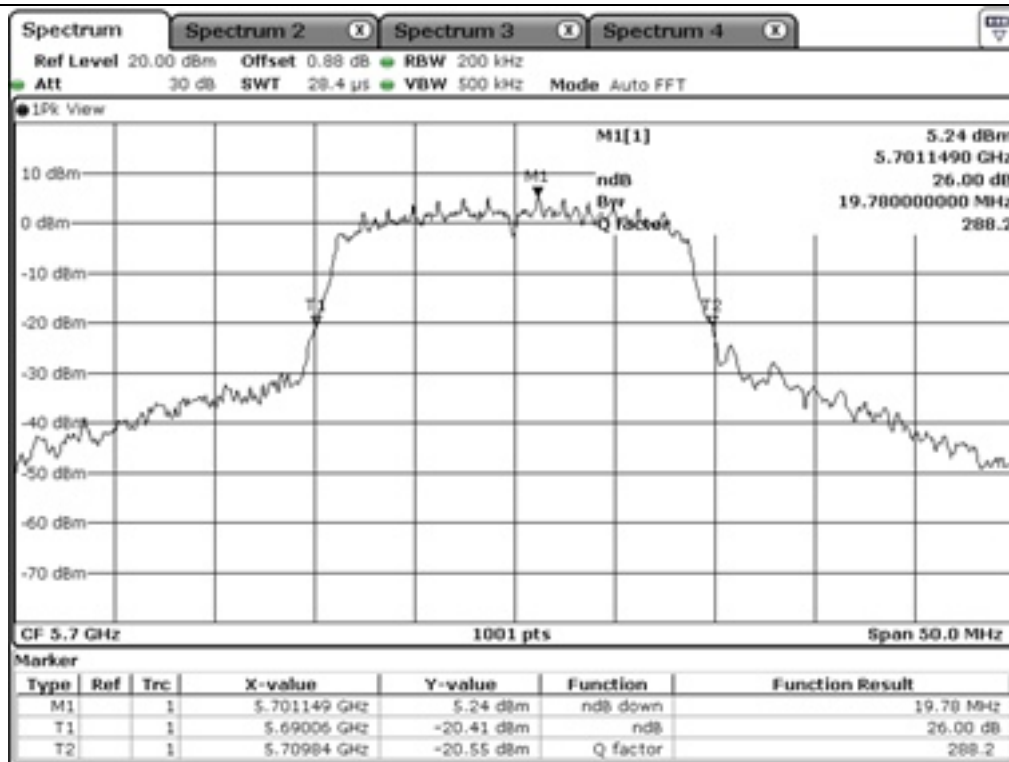

High Channel (5 700 MHz)

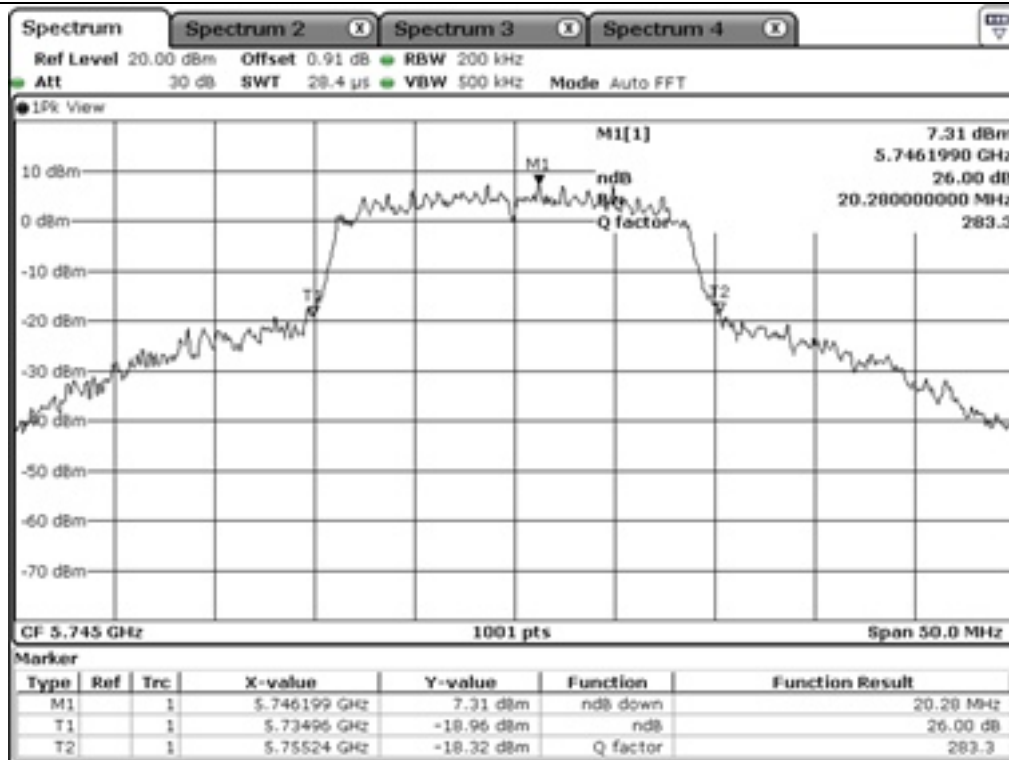

Low Channel (5 745 MHz)

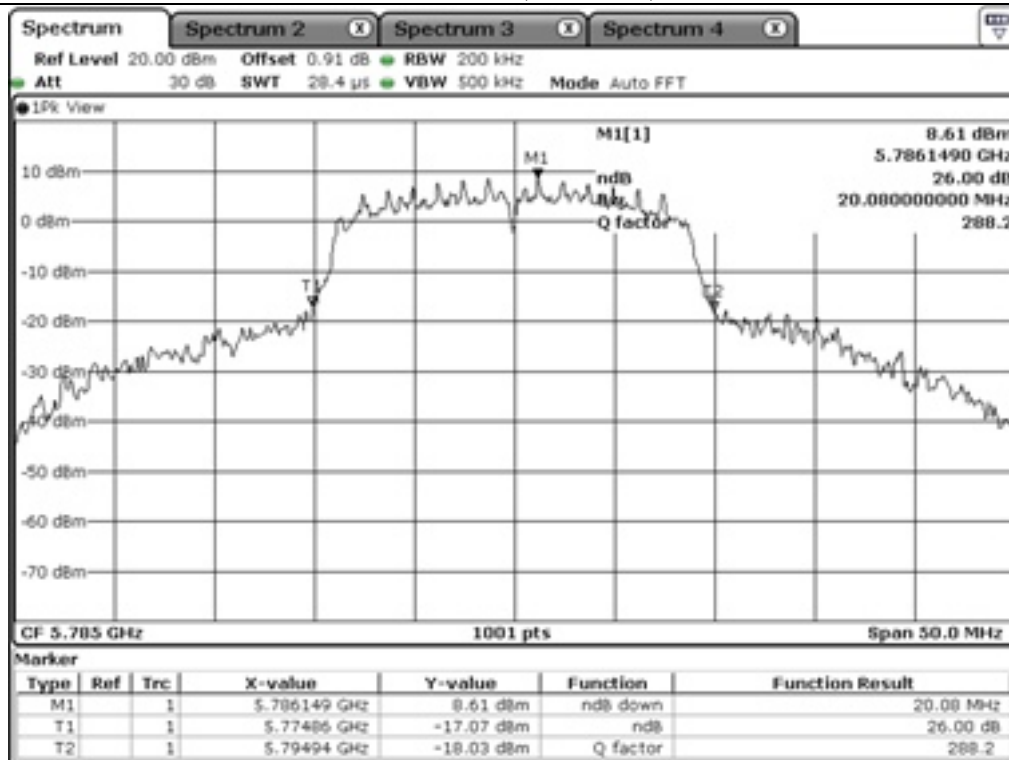


Middle Channel (5 785 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

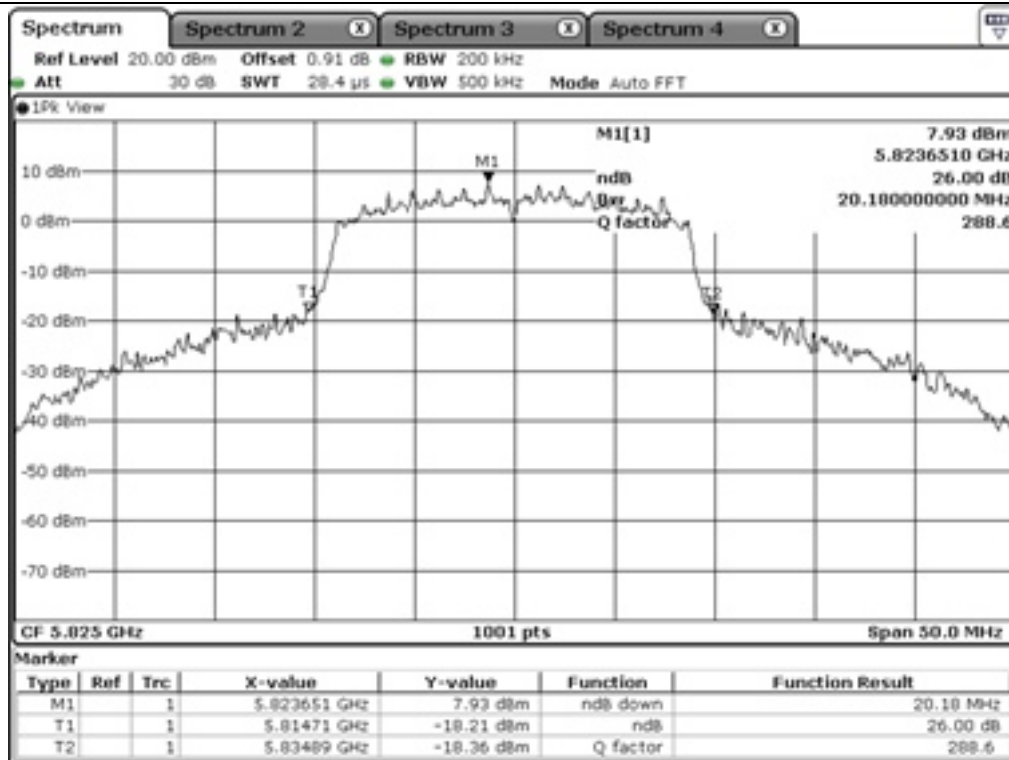

High Channel (5.825 MHz)

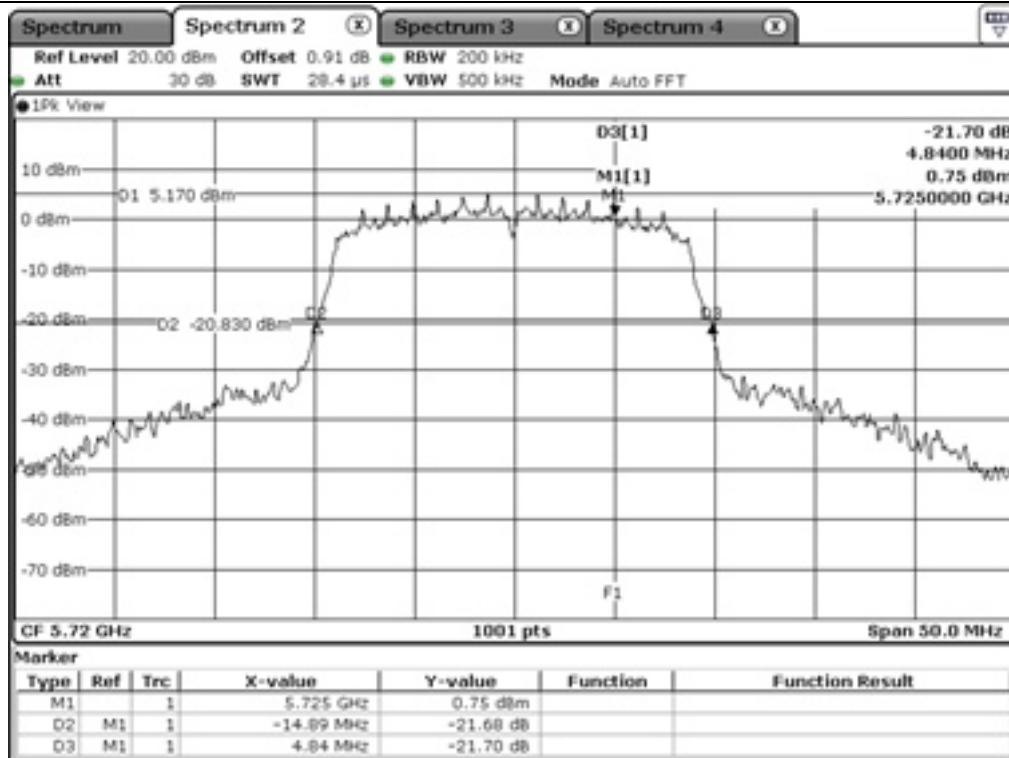

Staddle Channel (5.720 MHz)


7.6 Test data for 802.11n_HT40 RLAN Mode

7.6.1 Test data for Antenna 0


7.6.1.1 99 % OCCUPIED BANDWIDTH

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	99 % Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	36.16
	High	5 230.00	36.26
5 250 ~ 5 350	Low	5 270.00	36.26
	High	5 310.00	36.26
5 470 ~ 5 725	Low	5 510.00	36.26
	Middle	5 550.00	36.26
	High	5 670.00	36.26
5 725 ~ 5 850	Low	5 755.00	36.36
	High	5 795.00	36.16

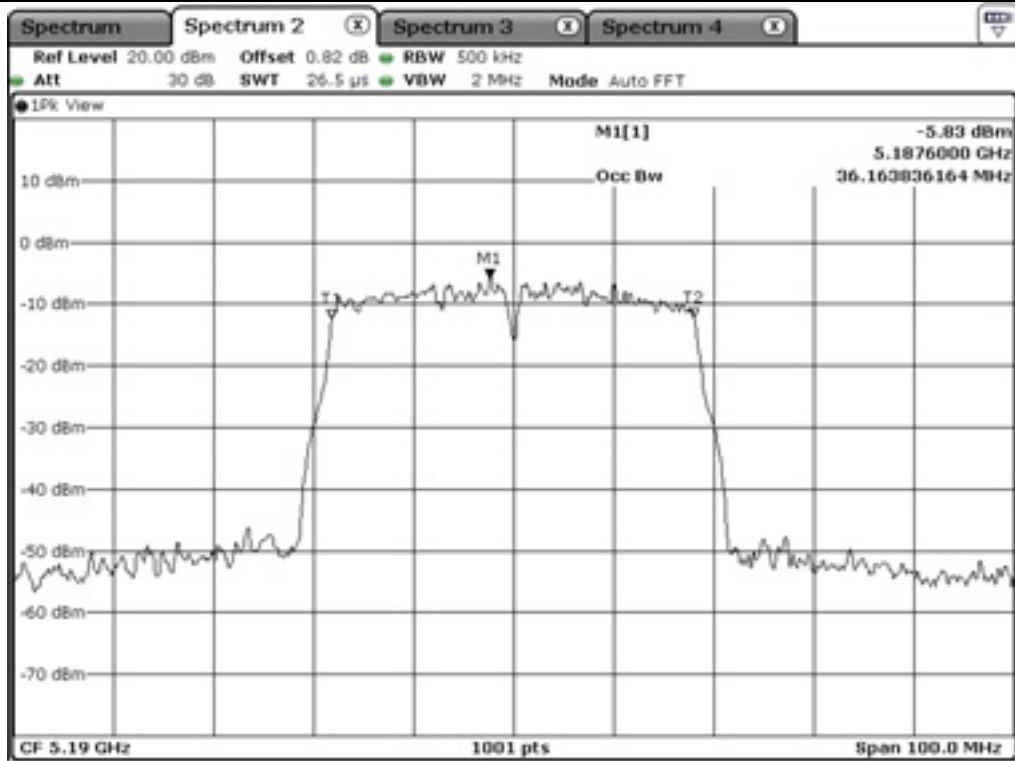


Low Channel (5 190 MHz)

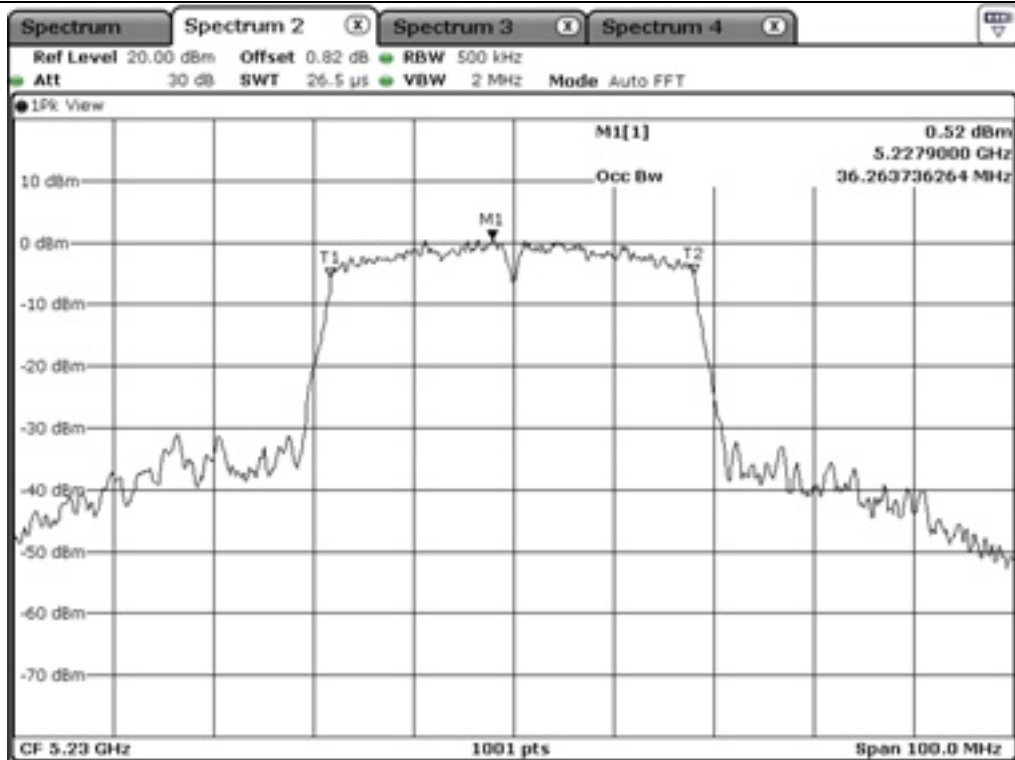


High Channel (5 230 MHz)

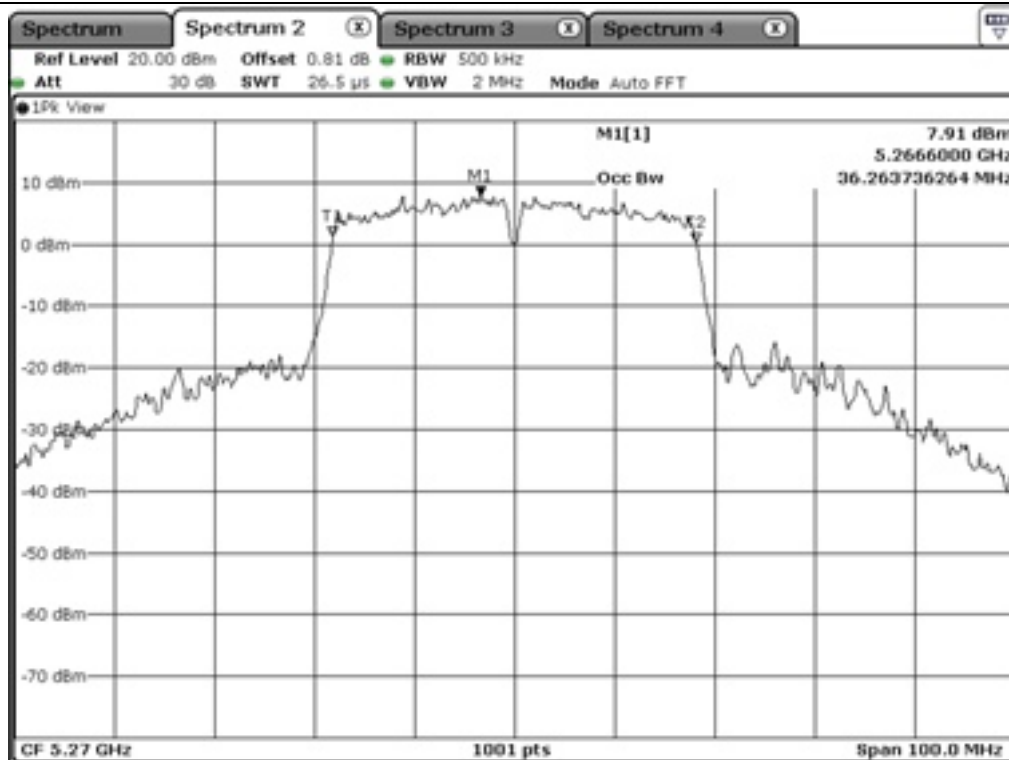


Low Channel (5 270 MHz)

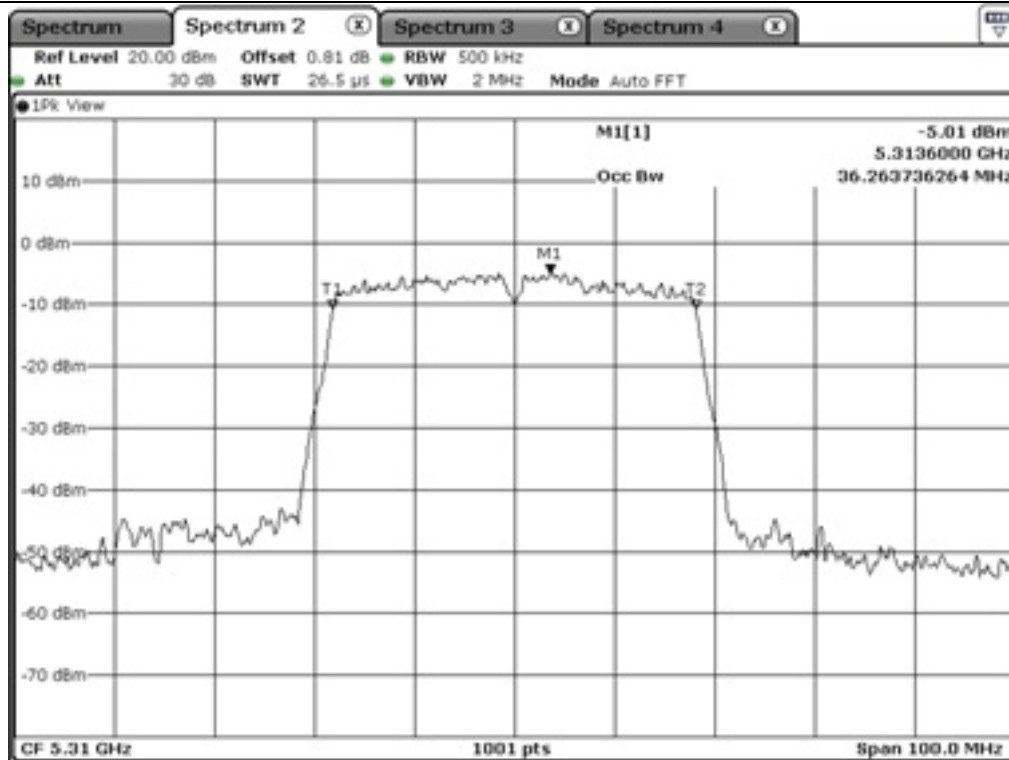

High Channel (5 310 MHz)

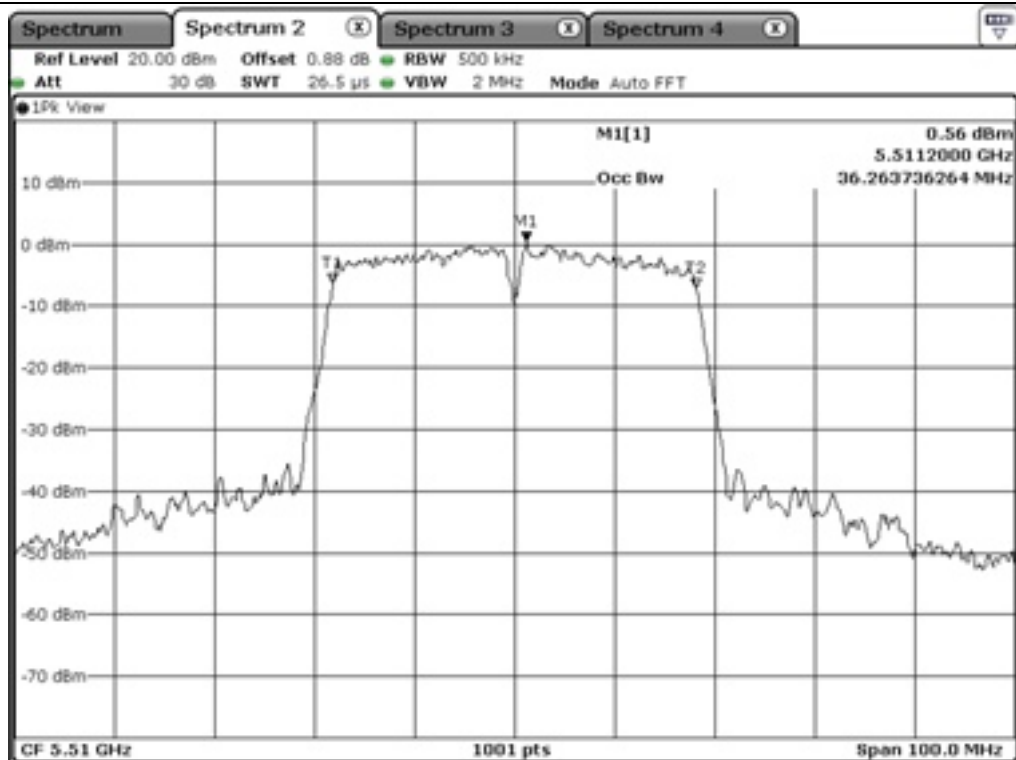

Low Channel (5 510 MHz)

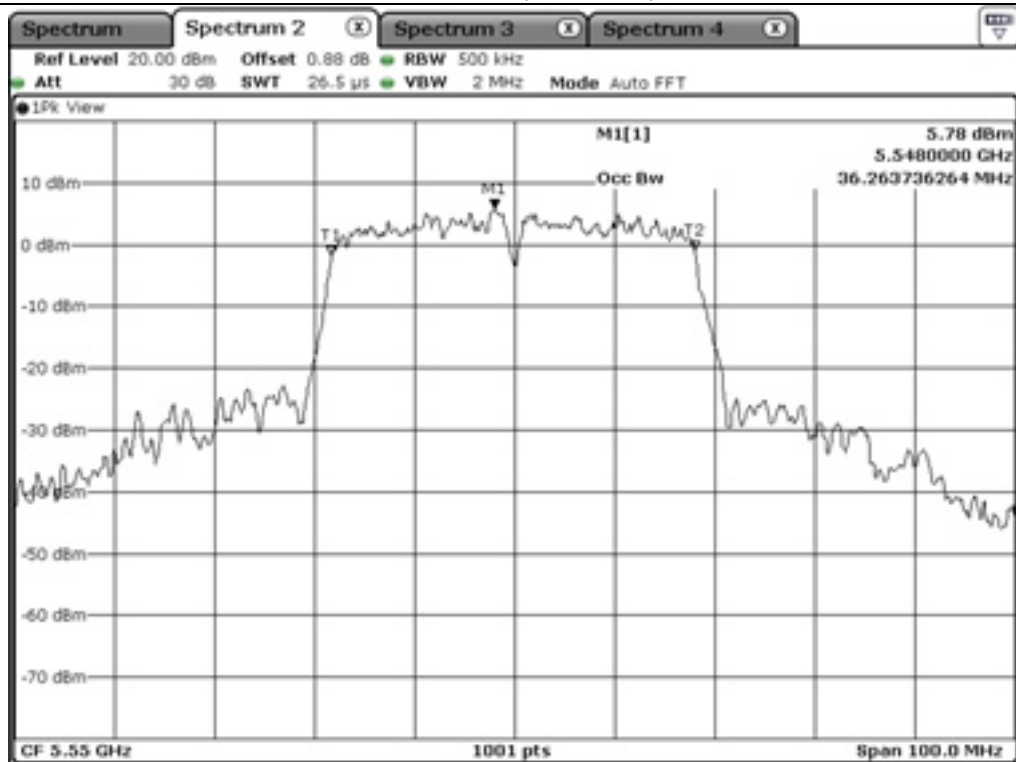


Middle Channel (5 550 MHz)

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

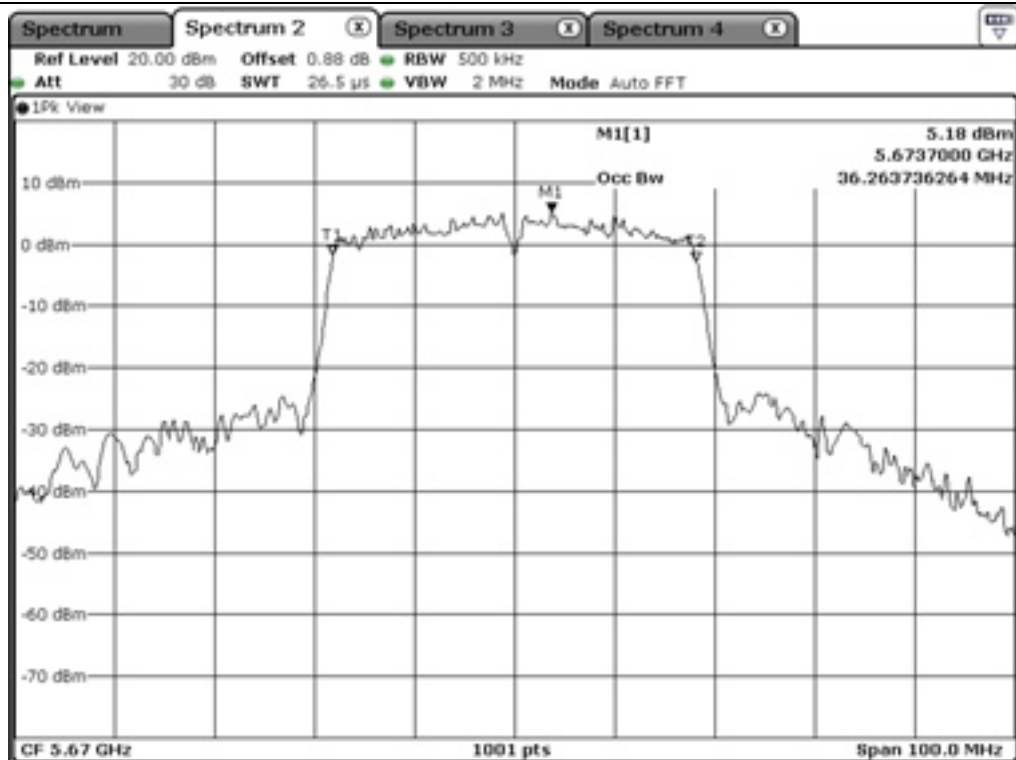

High Channel (5 670 MHz)

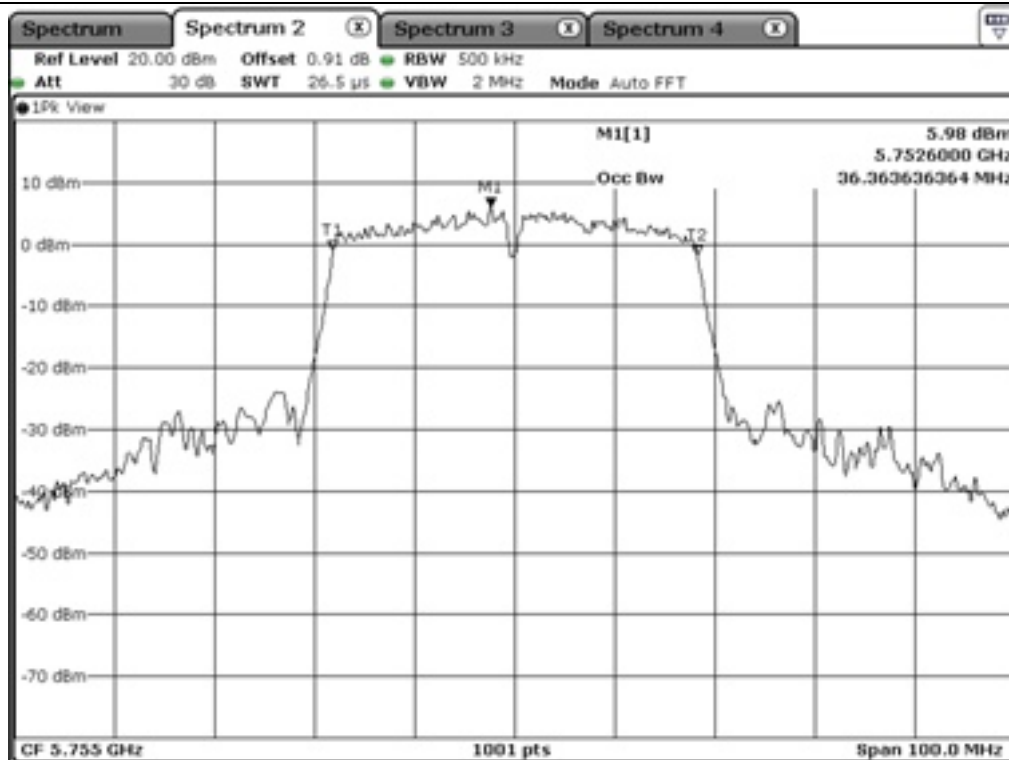

Low Channel (5 755 MHz)

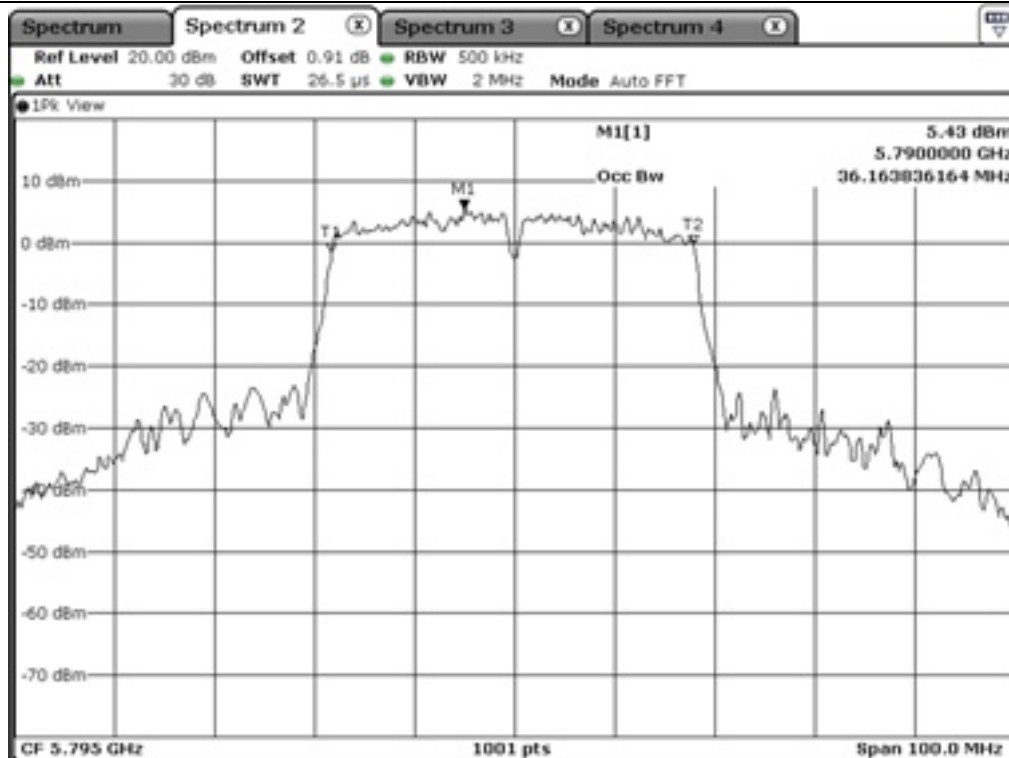

High Channel (5 795 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

7.6.1.2 MINIMUM 26 dB BANDWIDTH


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.36
	High	5 230.00	40.36
5 250 ~ 5 350	Low	5 270.00	41.06
	High	5 310.00	40.76
5 470 ~ 5 725	Low	5 510.00	40.16
	Middle	5 550.00	41.06
	High	5 670.00	40.56
5 725 ~ 5 850	Low	5 755.00	39.86
	High	5 795.00	40.76


[Staddle Channel]

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 710.00	35.28
5 725 ~ 5 850	5 710.00	4.88

Remark: See next page for measurement data.

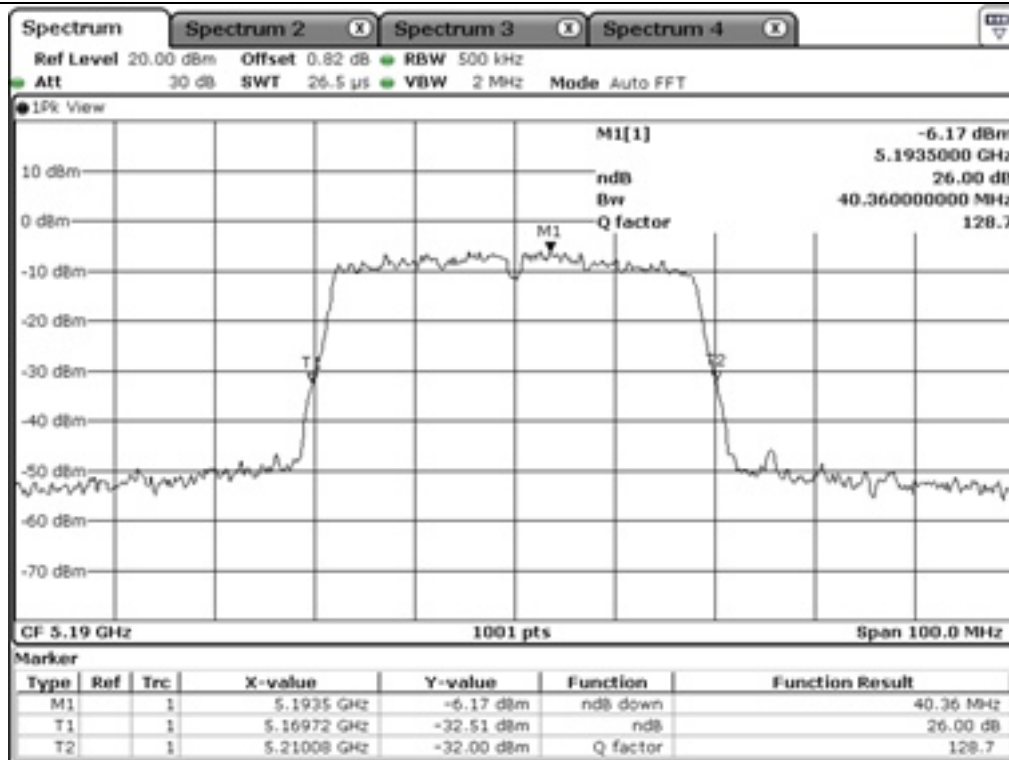

Low Channel (5 190 MHz)

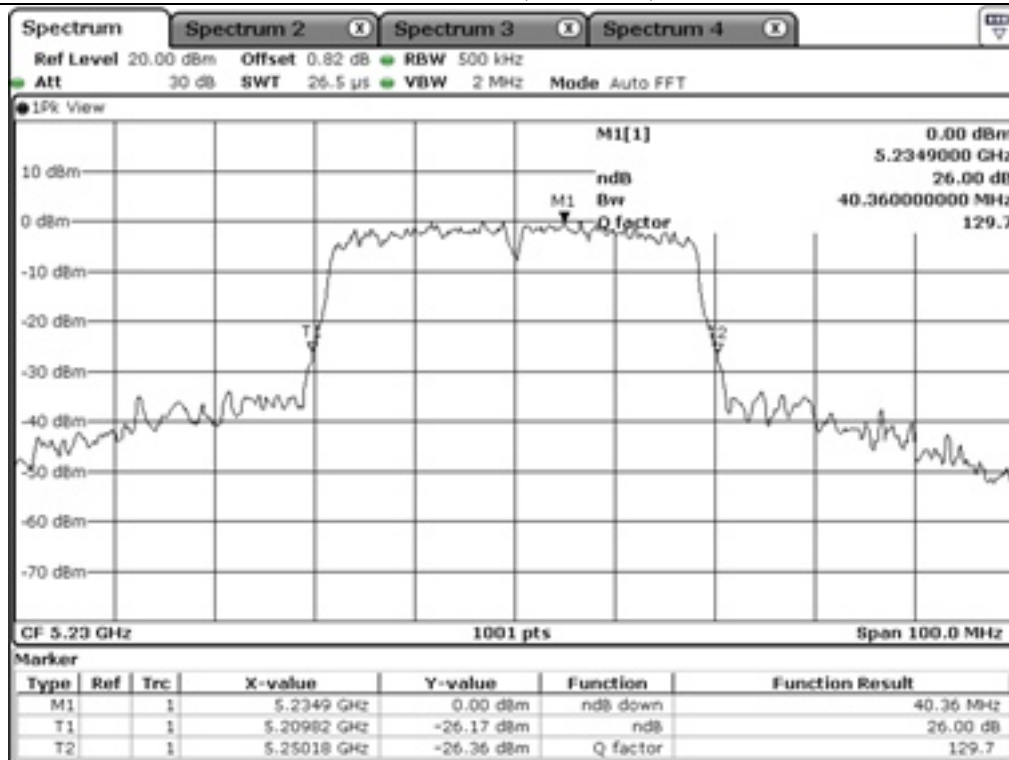

High Channel (5 230 MHz)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)