

APPLICATION FOR CERTIFICATION

On Behalf of

LG Electronics Inc.

Bluetooth Adapter Card

Models No. : MB8811C0

FCC ID : BEJ9QK-DMMB8811C0

IC : 2703H-DMMB8811C0

Brand : LG

Prepared for : LG Electronics Inc.
19-1, Cheongho-ri, Jinwi-myeon,
Pyeongtaek-si, Gyeonggi-do,
451-713 Korea

Prepared By : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist., New Taipei
City 244, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : C1M1307080
Report Number : EM-F1010518
Date of Test : Jul. 08 ~ 12, 2013
Date of Report : Jul. 16, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. Tested Supporting System Details	6
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty	7
2. POWERLINE CONDUCTED EMISSION MEASUREMENT.....	8
2.1. Test Equipment.....	8
2.2. Block Diagram of Test Setup.....	8
2.3. Powerline Conducted Emission Limit (§15.207, RSS-Gen §7.2.2/Table 2)	8
2.4. Operating Condition of EUT	9
2.5. Test Procedure	9
2.6. Powerline Conducted Emission Measurement Results.....	9
3. RADIATED EMISSION MEASUREMENT	12
3.1. Test Equipment.....	12
3.2. Block Diagram of Test Setup.....	12
3.3. Radiated Emission Limits (§15.209, RSS-210 §2.7/Table 2).....	14
3.4. Operating Condition of EUT	14
3.5. Test Procedure	14
3.6. Radiated Emission Measurement Results.....	15
4. 20dB BANDWIDTH MEASUREMENT	30
4.1. Test Equipment.....	30
4.2. Block Diagram of Test Setup.....	30
4.3. Specification Limits [§15.247(a)(1), RSS-210 §A8.2 (a)]	30
4.4. Operating Condition of EUT	30
4.5. Test Procedure	30
4.6. Test Results.....	31
5. CARRIER FREQUENCY SEPARATION MEASUREMENT	35
5.1. Test Equipment.....	35
5.2. Block Diagram of Test Setup.....	35
5.3. Specification Limits [§15.247(a)(1), RSS-210 §A8.2 (b)]	35
5.4. Operating Condition of EUT	35
5.5. Test Procedure	35
5.6. Test Results.....	36
6. TIME OF OCCUPANCY MEASUREMENT	41
6.1. Test Equipment.....	41
6.2. Block Diagram of Test Setup.....	41
6.3. Specification Limits [§15.247(a)(1)(iii), RSS-210 §A8.2 (d)]	41
6.4. Operating Condition of EUT	41
6.5. Test Procedure	41
6.6. Test Results.....	42
7. NUMBER OF HOPPING CHANNELS MEASUREMENT	50
7.1. Test Equipment.....	50
7.2. Block Diagram of Test Setup.....	50
7.3. Specification Limits [§15.247(a)(1)(iii), RSS-210 §A8.2 (d)]	50
7.4. Operating Condition of EUT	50
7.5. Test Procedure	50
7.6. Test Results.....	51

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	53
8.1. Test Equipment.....	53
8.2. Block Diagram of Test Setup.....	53
8.3. Specification Limits [§15.247(b)-(1), RSS-210 §A8.4 (2)].....	53
8.4. Operating Condition of EUT	53
8.5. Test Procedure	53
8.6. Test Results.....	54
9. EMISSION LIMITATIONS MEASUREMENT	58
10. BAND EDGES MEASUREMENT.....	59
10.1. Test Equipment.....	59
10.2. Block Diagram of Test Setup	59
10.3. Specification Limits [§15.247(c), RSS-210 §A8.5]	59
10.4. Operating Condition of EUT	59
10.5. Test Procedure	59
10.6. Test Results	60
11. DEVIATION TO TEST SPECIFICATIONS	63
12. PHOTOGRAPHS	64
12.1. Photos of Conducted Disturbance Measurement.....	64
12.2. Photos of Radiated Emission Measurement at Semi-Anechoic Chamber.....	65
12.3. Photo of Section RF Conducted Measurement	66

TEST REPORT CERTIFICATION

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
EUT Description : Bluetooth Adapter Card
FCC ID : BEJ9QK-DMMB8811C0
IC : 2703H-DMMB8811C0
(A) Model No. : MB8811C0
(B) Serial No. : N/A
(C) Power Supply : DC 3.3V
(D) Test Voltage : DC 3.3V (Transferred via JIG Board)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C, Oct 2012
(FCC CFR 47 Part 15C, §15.205, §15.207, §15.209 and §15.247)
ANSI C63.4/2003
FCC Public Notice DA 00-705, Mar. 2000

Industry Canada Rules and Regulations RSS-Gen (Issue 3), December 2010 and
RSS-210 (Issue 8), December 2010

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 Subpart C and Canada RSS-Gen, RSS-210 limits.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC Part 15 and Industry Canada RSS-Gen, RSS-210 standards.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Jul. 08 ~ 12, 2013 Date of Report : Jul. 16, 2013

Producer: Annie Yu
(Annie Yu/Administrator)

Signatory: Leon Liu
(Leon Liu/Deputy General Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product	Bluetooth Adapter Card
Model Number	MB8811C0
Serial Number	N/A
Brand Name	LG
Applicant	LG Electronics Inc. 19-1, Cheongho-Ri, Jinwuy-Myeon, Pyeongtaek-City, Gyeonggi-Do, 451-713, Korea
Manufacturer	LG Electronics Inc. 19-1, Cheongho-Ri, Jinwuy-Myeon, Pyeongtaek-City, Gyeonggi-Do, 451-713, Korea
FCC ID	BEJ9QK-DMMB8811C0
IC	2703H-DMMB8811C0
Fundamental Range	2402MHz ~ 2480MHz
Frequency Channel	79 channels (GFSK, $\pi/4$ DQPSK, 8-DPSK) 40 channels (Low Energy)
Radio Technology	FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK) DSSS (Low Energy)
Data Transfer Rate	1/2/3Mbps
Date of Receipt of Sample	Jul. 08, 2012
Date of Test	Jul. 08 ~ 12, 2013
Note: This EUT has BT and Low Energy function. See below for related test reports based on radio functionality. 1. The BT function has been test in other report of EM-F1020518. 2. The Low Energy has been test in other report of EM-F1020519.	

1.2. Tested Supporting System Details

1.2.1. NOTEBOOK PC

Model Number	:	ZL5
Serial Number	:	N/A
Manufacturer	:	acer
AC Adapter	:	LITEON, M/N PA-1650-02
		DC Cord: Non-Shielded, Undetachable, 1.8m
AC Power Cord	:	Non-Shielded, Detachable, 1.8m

1.2.2. JIG BOARD

Model Number	:	N/A
Serial Number	:	N/A
Brand	:	LG
Bus Cable	:	Non-Shielded, Undetachable, 0.20m
USB Cable	:	Non-Shielded, Detachable, 0.55m

1.3. Description of Test Facility

Name of Firm	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan, R.O.C.
Test Location & Facility (C8/AC)	:	No. 8 Shielded Room No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan, R.O.C. Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan, R.O.C. May 11, 2012 File on Federal Communication Commission Registration Number: 90993
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

1.4. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conduction Test	150kHz~30MHz	$\pm 1.73\text{dB}$
Radiation Test (Distance: 3m)	30MHz~300MHz	$\pm 2.91\text{dB}$
	300MHz~1000MHz	$\pm 2.94\text{dB}$
	Above 1GHz	$\pm 5.02\text{dB}$

Remark : Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
20dB Bandwidth	$\pm 0.2\text{kHz}$
Carrier Frequency Separation	$\pm 0.2\text{kHz}$
Time Of Occupancy	$\pm 0.03\text{sec}$
Maximum peak Output power	$\pm 0.52\text{dBm}$
Emission Limitations	$\pm 0.13\text{dB}$
Band Edges	$\pm 0.13\text{dB}$


2. POWERLINE CONDUCTED EMISSION MEASUREMENT

2.1. Test Equipment

The following test equipment were used during the power line conducted measurement: (No. 8 Shielded Room)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCS30	100265	Aug. 24, 12'	Aug. 23, 13'
2.	A.M.N.	R&S	ESH2-Z5	100366	Mar. 19, 13'	Mar. 18, 14'

2.2. Block Diagram of Test Setup

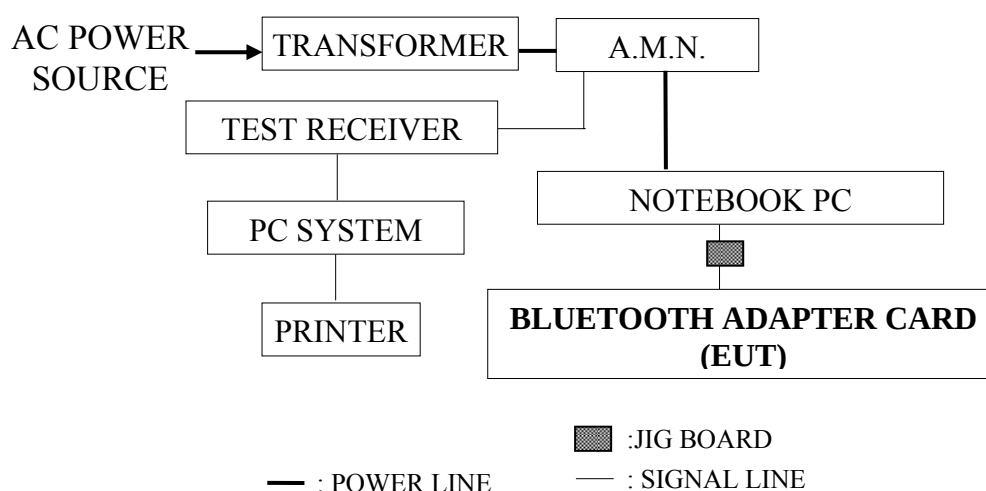

2.3. Powerline Conducted Emission Limit (§15.207, RSS-Gen §7.2.2/Table 2)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

2.: The lower limit applies at the band edges.

2.4. Operating Condition of EUT

- 2.4.1. Setup the **EUT (Bluetooth Adapter Card)** as shown on 2.2.
- 2.4.2. Turn on the power of all equipment.
- 2.4.3. The Notebook PC was running test software “CSR” to set EUT (Bluetooth Adapter Card) on transmitting and receiving during all testing.

2.5. Test Procedure

The EUT link AC adapter was put on table which was above the ground by 80cm and power cord was connected to power mains through an Artificial Mains Network (A.M.N.). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.) Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to FCC ANSI C63.4-2003 , RSS-Gen and RSS-210 during conducted measurement.

The bandwidth of the R & S Test Receiver ESCS 30 was set at 9kHz.

The frequency range from 150kHz to 30MHz was checked.

All the final readings from Test Receiver were measured with the Quasi-Peak detector and Average detector. (Remark: If the Average limit is met when using a Quasi-Peak detector, the Average detector is unnecessary)

2.6. Powerline Conducted Emission Measurement Results

PASSED. All emissions not reported below are too low against the prescribed limits.

The EUT was measured during this section testing and all the test results are listed in next pages.

EUT : Bluetooth Adapter Card Model No. : MB8811C0

Test Date : Jul. 12, 2013 Temperature : 25°C Humidity : 65%

The details are as follows :

Mode	Reference Test Data	
	Neutral	Line
1.	# 4	# 3




AUDIX TECHNOLOGY Corp. EMC Department
No.53-11, Dingfu, Linkou Dist., New Taipei City
24442, Taiwan R.O.C.
Tel: +886-2-26092133 Fax: +886-2-26099303
Email: emc@audixtech.com

Data: 4

File: D:\test data\REPORT\2013\1M1307XXX\1M1307080-C-D.EM6 (4)

Date: 2013-07-12

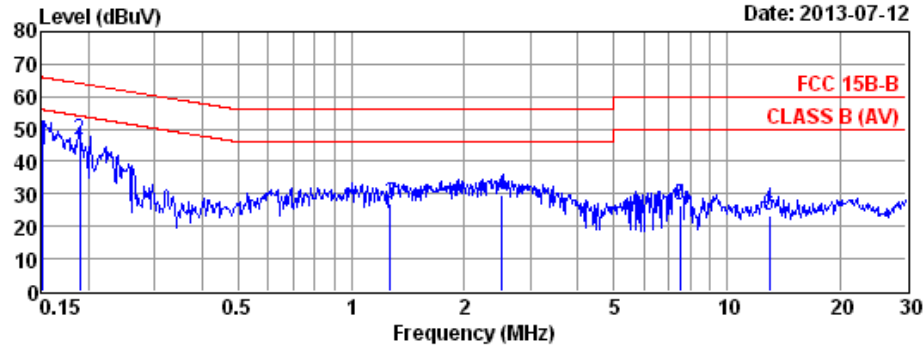

Site no. : No.8 Shielded Room Data no. : 4
Dis. / Ant. : ESH2-Z5 366 Ant. pol. : NEUTRAL
Limit : FCC 15B-B
Env. / Ins. : 25°C / 65% ESCS (265) Engineer : Jack_Wu
EUT : MB8811C0
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	0.10	0.04	49.67	49.81	65.99	16.18	QP
2	0.189	0.10	0.04	46.62	46.76	64.06	17.30	QP
3	1.269	0.20	0.06	26.74	27.00	56.00	29.00	QP
4	2.513	0.20	0.09	29.39	29.68	56.00	26.32	QP
5	7.486	0.27	0.17	26.26	26.70	60.00	33.30	QP
6	12.920	0.36	0.21	22.95	23.52	60.00	36.48	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.




AUDIX TECHNOLOGY Corp. EMC Department
No.53-11, Dingfu, Linkou Dist., New Taipei City
24442, Taiwan R.O.C.
Tel: +886-2-26092133 Fax: +886-2-26099303
Email: emc@audixtech.com

Data: 3

File: D:\test data\REPORT\2013\1M1307XXX\1M1307080-C-D.EM6 (4)

Date: 2013-07-12

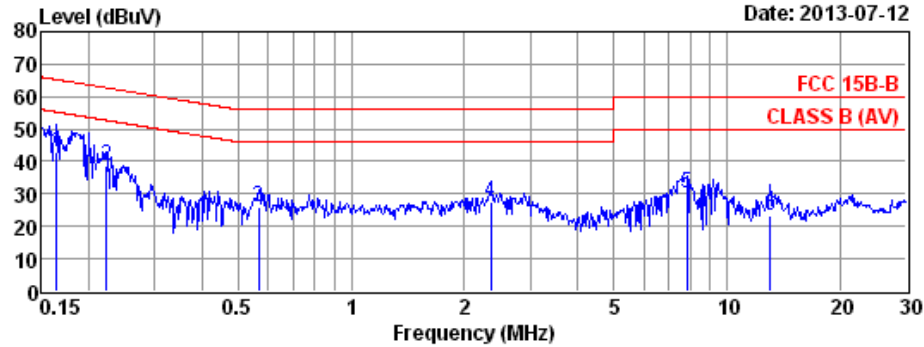

Site no. : No.8 Shielded Room Data no. : 3
Dis. / Ant. : ESH2-Z5 366 Ant. pol. : LINE
Limit : FCC 15B-B
Env. / Ins. : 25°C / 65% ESCS (265) Engineer : Jack_Wu
EUT : MB8811C0
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.164	0.10	0.04	42.75	42.89	65.25	22.36	QP
2	0.223	0.10	0.04	38.59	38.73	62.70	23.97	QP
3	0.567	0.14	0.04	25.59	25.77	56.00	30.23	QP
4	2.346	0.20	0.09	27.14	27.43	56.00	28.57	QP
5	7.810	0.27	0.17	29.93	30.37	60.00	29.63	QP
6	12.988	0.36	0.21	22.70	23.27	60.00	36.73	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission measurement:

3.1.1. For Frequency Range 30MHz~1000MHz (at Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100338	Jul. 01, 13'	Jun. 30, 14'
3.	Amplifier	HP	8447D	2944A06305	Feb. 19, 13'	Feb. 18, 14'
4.	Log Periodic Antenna	Schwarzbeck	UHALP 9108-A	0810	Mar. 02, 13'	Mar. 01, 14'
5.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 02, 13'	Mar. 01, 14'

3.1.2. For Frequency Above 1GHz (at Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Test Receiver	R & S	ESCS30	100338	Jul. 01, 13'	Jun. 30, 14'
3.	Pre-Amplifier	HP	8449B	3008A02676	Mar. 01, 13'	Feb. 28, 14'
4.	2.4GHz Notch Filter	K&L	7NSL10-24 41.5E130.5 -00	1	Jun. 13, 13'	Jun. 12, 14'
5.	3.5G High Pass Filter	Microwave Circuits	H3G018G1	484796	Jun. 13, 13'	Jun. 12, 14'
6.	Horn Antenna	EMCO	3115	9112-3775	May 07, 13'	May 06, 14'
7.	Horn Antenna	EMCO	3116	2653	Oct. 15, 12'	Oct. 14, 13'


3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

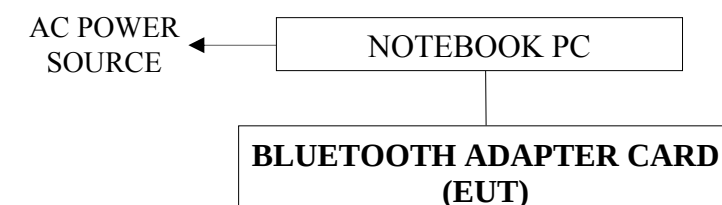


■ : JIG BOARD

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

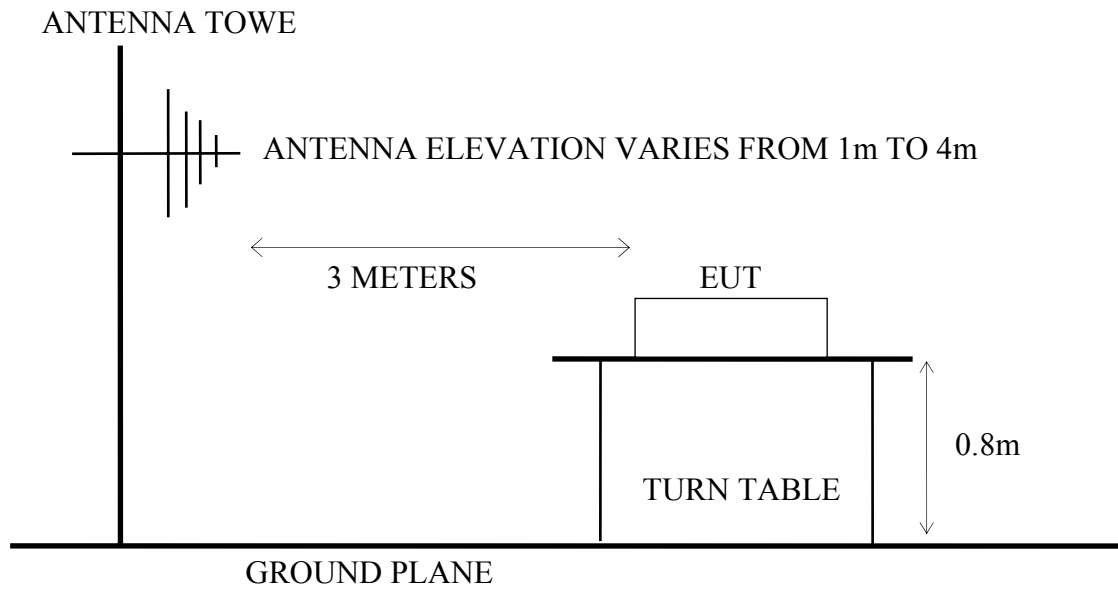

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

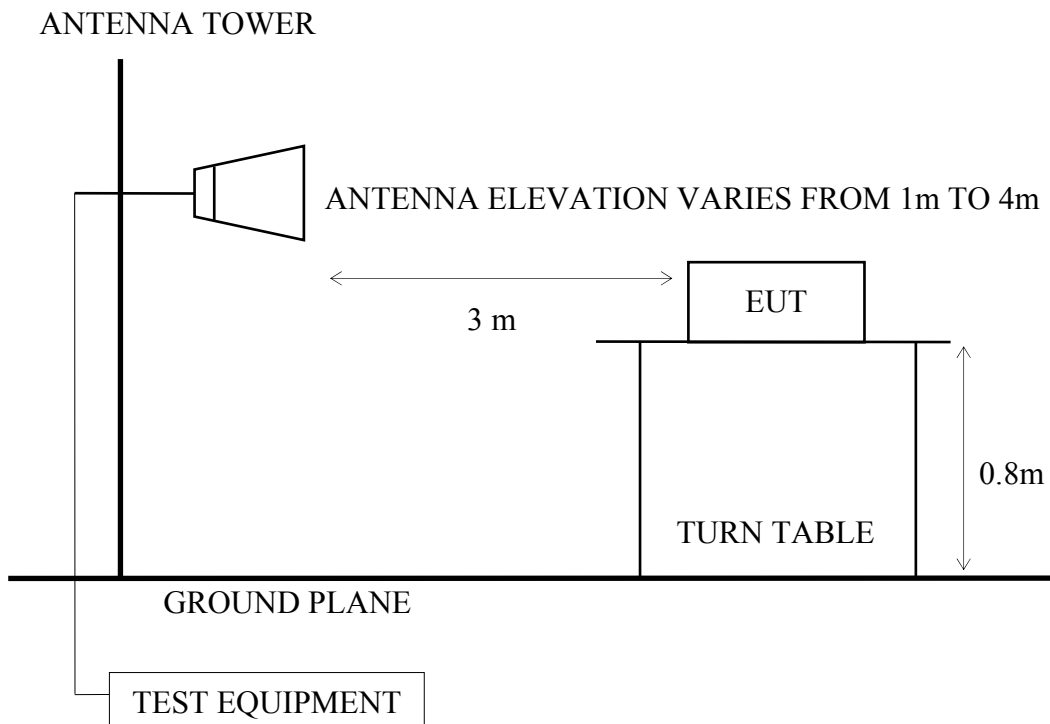

3.3. Radiated Emission Limits (§15.209, RSS-210 §2.7/Table 2)

Frequency MHz	Distance Meters	Field Strengths Limits	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a).
 - (5) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(e) and Part 15.207(c).

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT (Bluetooth Adapter Card) and simulator as shown on 3.2.1.
- 3.4.2. To turn on the power of all equipments.
- 3.4.3. The Notebook PC was running test software “CSR” to set EUT (Bluetooth Adapter Card) on transmitting and receiving during all testing.
- 3.4.4. The EUT set to continuously transmit signals at 2402MHz, 2441MHz and 2480MHz during all test time.

3.5. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003, RSS-Gen and RSS-210 regulation, and the measurement guideline was according to FCC Public Notice DA 00-705.

The bandwidth of the R&S Test Receiver ESCS30 was set at 120kHz. (For 30MHz to 1000MHz)

The resolution bandwidth and video bandwidth of test spectrum analyzer is 1MHz for peak detection (PK) at frequency above 1GHz.

The resolution bandwidth of test spectrum analyzer is 1MHz and the video bandwidth is 10Hz for average detection (AV) at frequency above 1GHz.

The frequency range from 30MHz to 25GHz (Up to 10th harmonics from fundamental frequency) was checked.

Above 1GHz was measured with peak and average detector. For frequency from 1GHz to 25GHz, we checked it in 1 meter distance and with a shorter cable 2 meter instead of original's. There is no signal exist.

3.6. Radiated Emission Measurement Results

PASSED. (All the emissions not reported below are too low against the prescribed limits.)

EUT : Bluetooth Adapter Card M/N : MB8811C0

Test Date : Jul. 11, 2013 Temperature : 26°C Humidity : 61%

The radiation tests on three different axes (stand, lie and side), we assessed the value and we selected the worst radiation position "lie" for our measured results.

For Frequency Range 30MHz-1000MHz:

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only the worst case (GFSK) was reported in this report.]

The EUT with following test modes were performed during this section testing and all the test results are listed in section 3.6.1.

No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting	2402MHz (CH0)	# 12	# 11
2.		2441MHz (CH39)	# 12	# 11
3.		2480MHz (CH78)	# 14	# 13

* Type of modulation: GFSK.

* All above final readings were measured with Quasi-Peak detector.

For Frequency Range above 1GHz:

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only the worst case (GFSK) was reported in this report.]

The EUT with following test modes was performed during this section testing and all the test results are listed in section 3.6.2.

No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting	2402MHz (CH0)	# 6	--(Note 3)
2.		2441MHz (CH39)	--(Note 3)	--(Note 3)
3.		2480MHz (CH78)	# 6	# 5

* Type of modulation: GFSK.

Note: 1. Above all final readings were measured with Peak detector.

2. For measurements above 4GHz-5.5GHz, the peak measured value complies with the average limit, it is unnecessary to perform an average measurement. (According to ANSI C63.4-2003 section 8.3.1.2)

3. The emissions (up to 25GHz) not reported are too low to be measured.

For Restricted Bands:

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but the two case (GFSK & 8-DPSK) were reported in this report.]

The EUT with following test modes was performed during this section testing and all the test results are listed in section 3.6.3. (The restricted bands defined in part 15.205(a))

No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting (GFSK)	2402MHz (CH0)	# 3, 4	# 1 , 2
2.		2480MHz (CH78)	# 7, 8	# 5, 6
3.	Transmitting (8-DPSK)	2402MHz (CH0)	# 3, 4	# 1 , 2
4.		2480MHz (CH78)	# 7, 8	# 5, 6

3.6.1. Frequency Range 30MHz-1000MHz Measurement Result

Transmit, Frequency: 2402MHz (GFSK)

Site no. : A/C Chamber Data no. : 12
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : MB8811C0
 Power Rating : DC3.3V
 Test Mode : TX2402

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	297.720	26.68	3.98	23.40	28.36	46.00	17.64	QP
2	484.930	18.80	6.20	30.97	29.20	46.00	16.80	QP
3	855.470	25.87	7.10	26.06	31.90	46.00	14.10	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 11
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : MB8811C0
 Power Rating : DC3.3V
 Test Mode : TX2402

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	296.750	26.59	4.00	24.01	28.90	46.00	17.10	QP
2	581.930	20.91	6.30	27.10	27.17	46.00	18.83	QP
3	828.310	24.62	7.10	30.32	34.84	46.00	11.16	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Transmit, Frequency: 2441MHz (GFSK)

Site no. : A/C Chamber Data no. : 12
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : MB8811C0
 Power Rating : DC3.3V
 Test Mode : TX2441

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	277.350	25.25	3.80	28.50	31.83	46.00	14.17	QP
2	483.960	18.84	6.14	34.83	33.03	46.00	12.97	QP
3	831.220	24.79	7.10	30.30	34.99	46.00	11.01	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 11
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : MB8811C0
 Power Rating : DC3.3V
 Test Mode : TX2441

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	207.510	21.88	3.12	31.30	30.51	43.50	12.99	QP
2	347.190	15.14	4.39	36.74	30.10	46.00	15.90	QP
3	831.220	24.79	7.10	30.17	34.85	46.00	11.15	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Transmit, Frequency: 2480MHz (GFSK)

Site no. : A/C Chamber Data no. : 14
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : MB8811C0
 Power Rating : DC3.3V
 Test Mode : TX2480

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	347.190	15.14	4.39	35.45	28.82	46.00	17.18	QP
2	483.960	18.84	6.14	37.27	35.48	46.00	10.52	QP
3	845.770	25.35	7.10	26.14	31.44	46.00	14.56	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : A/C Chamber Data no. : 13
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : VERTICAL
 Limit : FCC PART-15C
 Env. / Ins. : E4446A 26°C/61% Wenbin_yang
 EUT : MB8811C0
 Power Rating : DC3.3V
 Test Mode : TX2480

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	345.250	15.05	4.40	36.03	29.34	46.00	16.66	QP
2	824.430	24.16	7.00	30.62	34.55	46.00	11.45	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.2. For Above 1GHz Frequency Range Measurement Results

Transmit, Frequency: 2402MHz (GFSK)

Site no.	: A/C Chamber	Data no.	: 6
Dis. / Ant.	: 3m 3115(4927)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: E4446A 26°C/61%		Wenbin_yang
EUT	: MB8811C0		
Power Rating	: DC3.3V		
Test Mode	: TX2402		

		Ant.	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)	
1	4801.000	33.06	9.14	43.36	51.01	54.00	2.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Transmit, Frequency: 2480MHz (GFSK)

Site no.	: A/C Chamber	Data no.	: 6
Dis. / Ant.	: 3m 3115(4927)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: E4446A 26°C/61%		Wenbin_yang
EUT	: MB8811C0		
Power Rating	: DC3.3V		
Test Mode	: TX2480		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	4958.500	33.34	9.10	42.55	50.40	54.00	3.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no.	: A/C Chamber	Data no.	: 5
Dis. / Ant.	: 3m 3115(4927)	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-AV)		
Env. / Ins.	: E4446A 26°C/61%		Wenbin_yang
EUT	: MB8811C0		
Power Rating	: DC3.3V		
Test Mode	: TX2480		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	4958.500	33.34	9.10	42.73	50.58	54.00	3.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

3.6.3. Restricted Bands Measurement Results

Date of Test : Jul. 11, 2013 Temperature : 26°C


EUT : Bluetooth Adapter Card Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2402MHz (CH0), GFSK

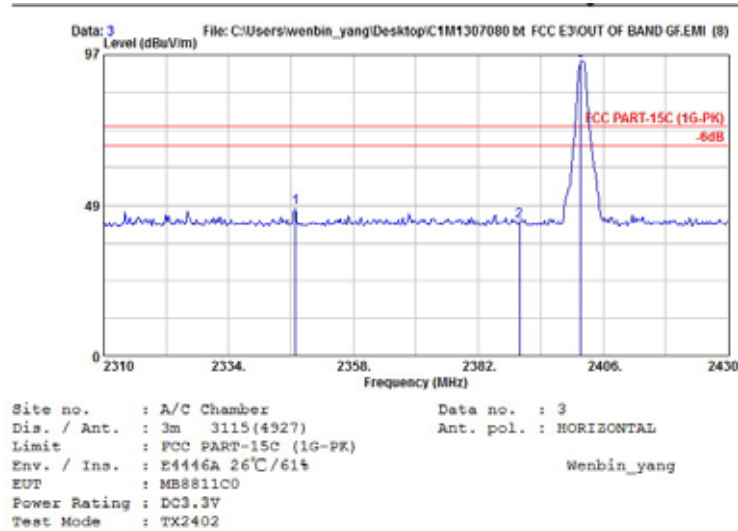

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2346.640	28.36	6.29	12.80	47.45	74.00	26.55	Peak
2	2390.000	28.47	6.34	8.63	43.44	74.00	30.56	Peak
3	2401.680	28.47	6.35	60.27	95.09	74.00	-21.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

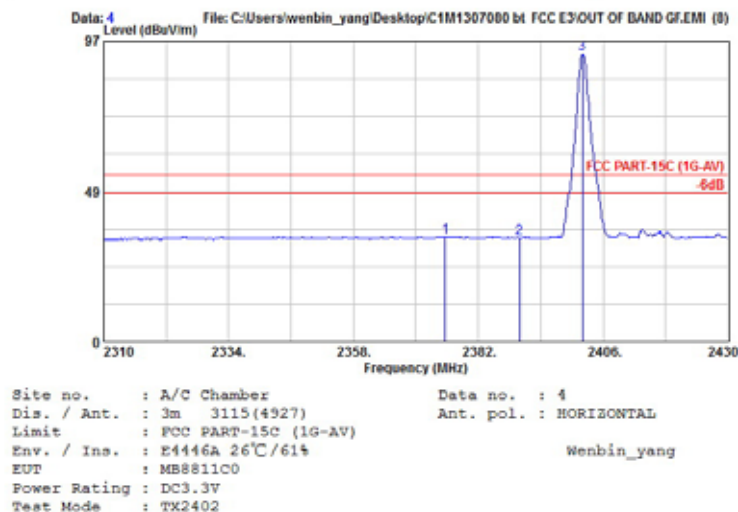


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
1	2375.640	28.43	6.32	-0.85	33.91	54.00	20.09	Average
2	2390.000	28.47	6.34	-1.36	33.45	54.00	20.55	Average
3	2402.040	28.47	6.36	58.21	93.04	54.00	-39.04	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 11, 2013 Temperature : 26°C


EUT : Bluetooth Adapter Card Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2402MHz (CH0), GFSK

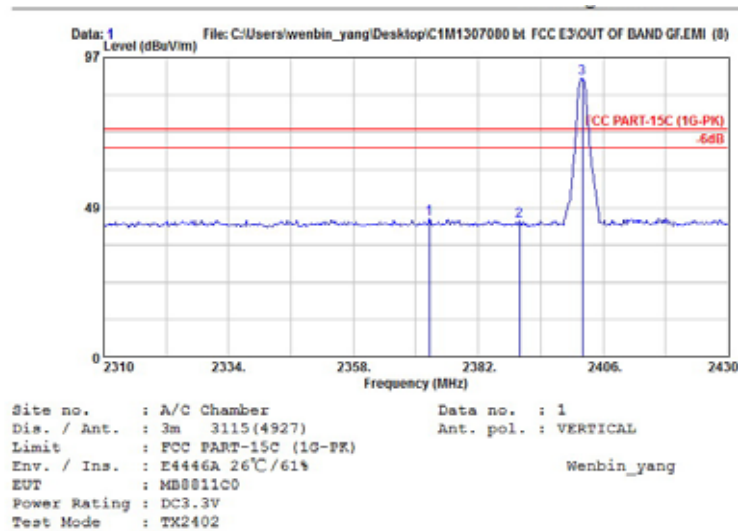

		Ant.	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limit	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2372.640	28.43	6.31	10.01	44.76	74.00	29.24	Peak
2	2390.000	28.47	6.34	9.35	44.17	74.00	29.83	Peak
3	2402.040	28.47	6.36	55.53	90.36	74.00	-16.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

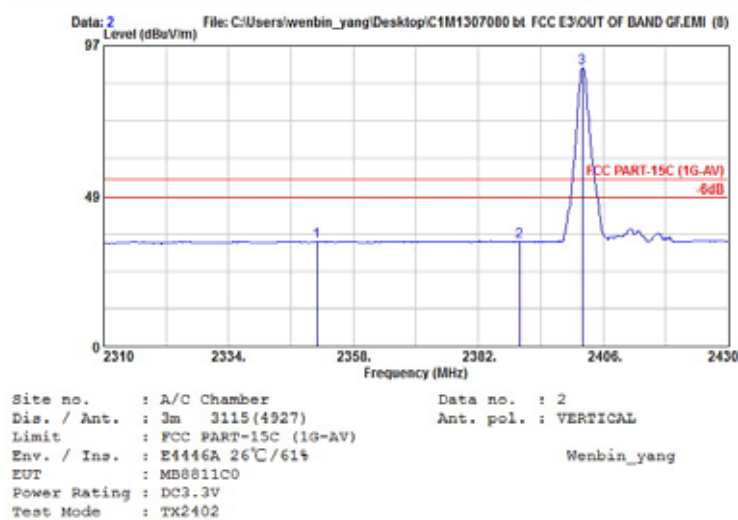


		Ant.	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limit	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2351.040	28.36	6.29	-0.75	33.90	54.00	20.10	Average
2	2390.000	28.47	6.34	-1.12	33.69	54.00	20.31	Average
3	2402.040	28.47	6.36	55.15	89.98	54.00	-35.98	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 11, 2013 Temperature : 26°C


EUT : Bluetooth Adapter Card Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2480MHz (CH78), GFSK

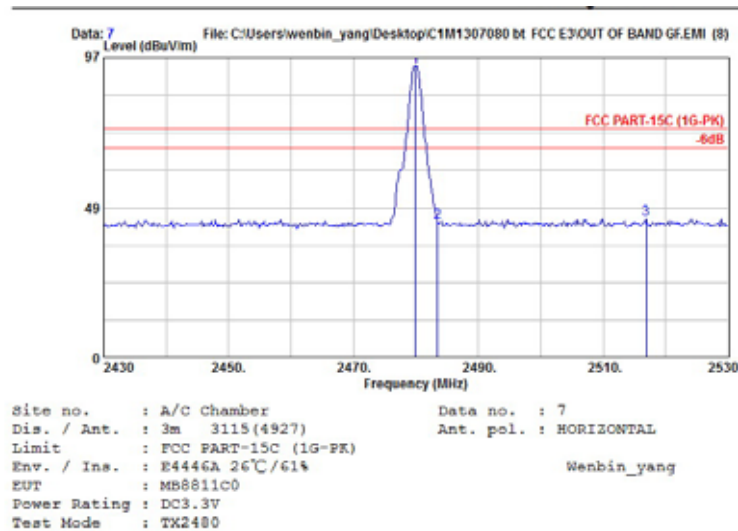

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.66	6.44	59.21	94.31	74.00	-20.31	Peak
2	2483.500	28.66	6.45	8.72	43.84	74.00	30.16	Peak
3	2516.900	28.76	6.49	9.53	44.77	74.00	29.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

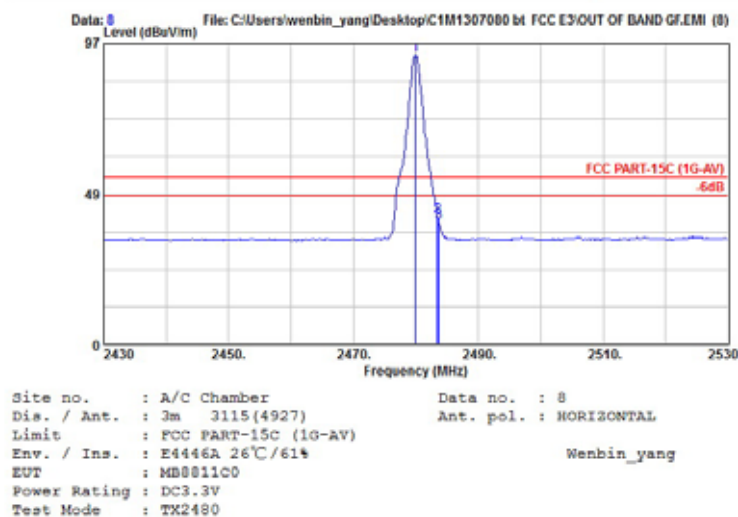


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.66	6.44	58.17	93.27	54.00	-39.27	Average
2	2483.500	28.66	6.45	6.13	41.25	54.00	12.75	Average
3	2483.700	28.66	6.45	4.44	39.55	54.00	14.45	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 11, 2013 Temperature : 26°C


EUT : Bluetooth Adapter Card Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2480MHz (CH78), GFSK

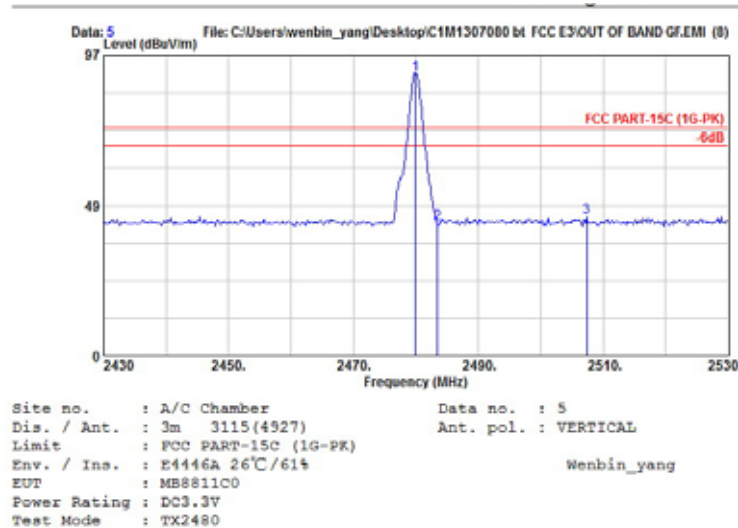

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.66	6.44	55.98	91.09	74.00	-17.09	Peak
2	2483.500	28.66	6.45	7.51	42.62	74.00	31.38	Peak
3	2507.400	28.76	6.48	9.48	44.72	74.00	29.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

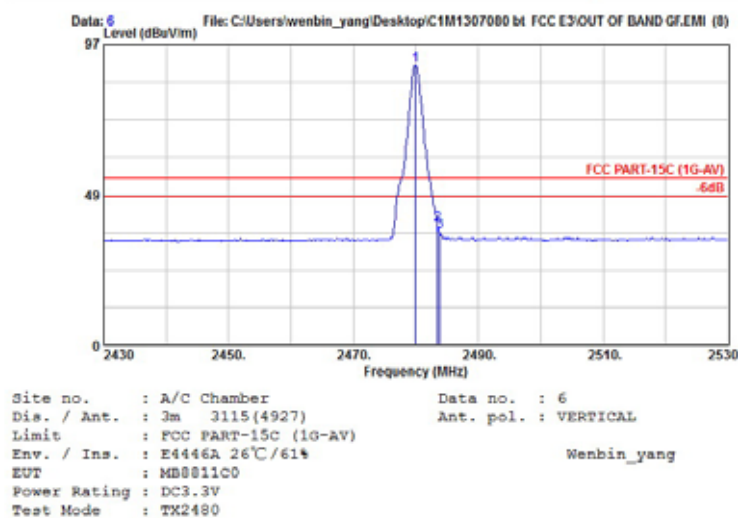


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.66	6.44	55.22	90.32	54.00	-36.32	Average
2	2483.500	28.66	6.45	3.68	38.80	54.00	15.20	Average
3	2483.800	28.66	6.45	1.58	36.69	54.00	17.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 11, 2013 Temperature : 26°C


EUT : Bluetooth Adapter Card Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2402MHz (CH0), 8-DPSK

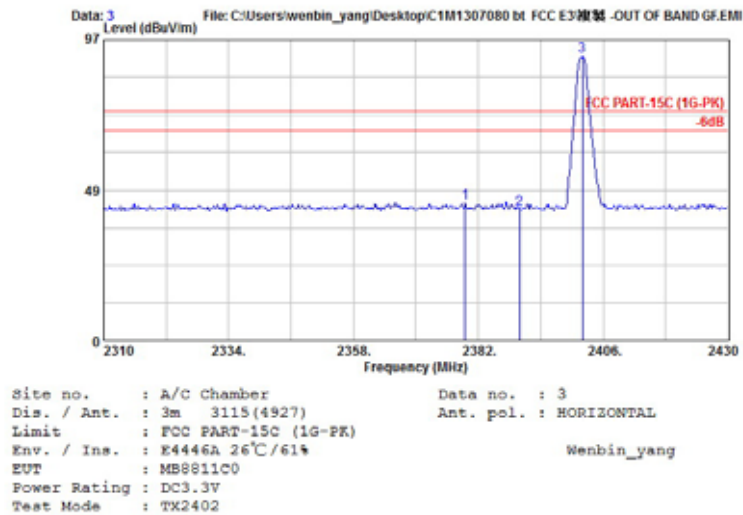

		Ant.	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limit	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2379.480	28.43	6.32	9.74	44.50	74.00	29.50	Peak
2	2390.000	28.47	6.34	7.59	42.40	74.00	31.60	Peak
3	2402.040	28.47	6.36	56.67	91.50	74.00	-17.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

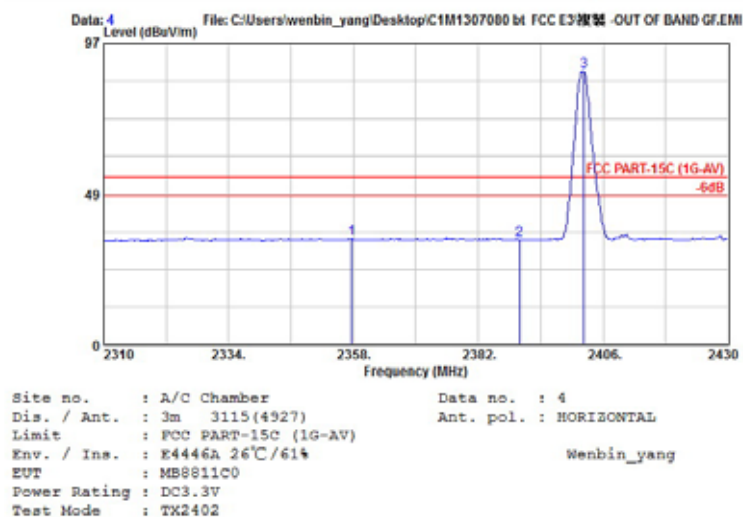


		Ant.	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limit	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2357.640	28.40	6.29	-0.60	34.09	54.00	19.91	Average
2	2390.000	28.47	6.34	-0.91	33.91	54.00	20.09	Average
3	2402.280	28.47	6.36	53.44	88.28	54.00	-34.28	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 11, 2013 Temperature : 26°C


EUT : Bluetooth Adapter Card Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2402MHz (CH0), 8-DPSK

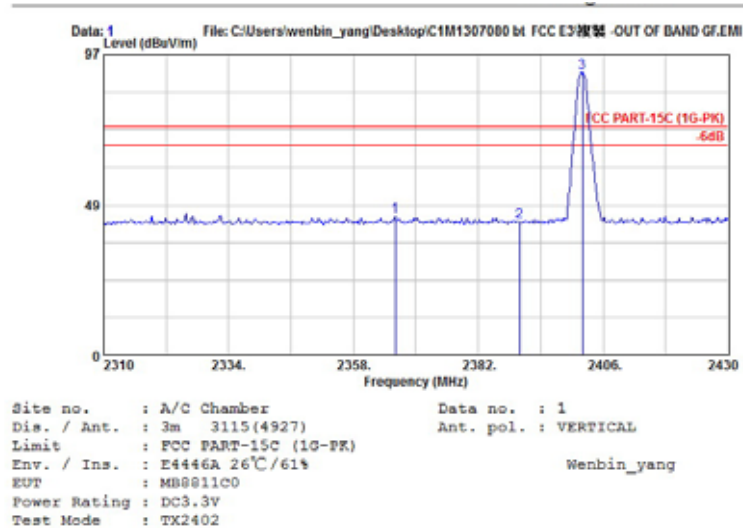

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2366.040	28.40	6.30	9.95	44.65	74.00	29.35	Peak
2	2390.000	28.47	6.34	8.13	42.95	74.00	31.05	Peak
3	2402.040	28.47	6.36	56.65	91.48	74.00	-17.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

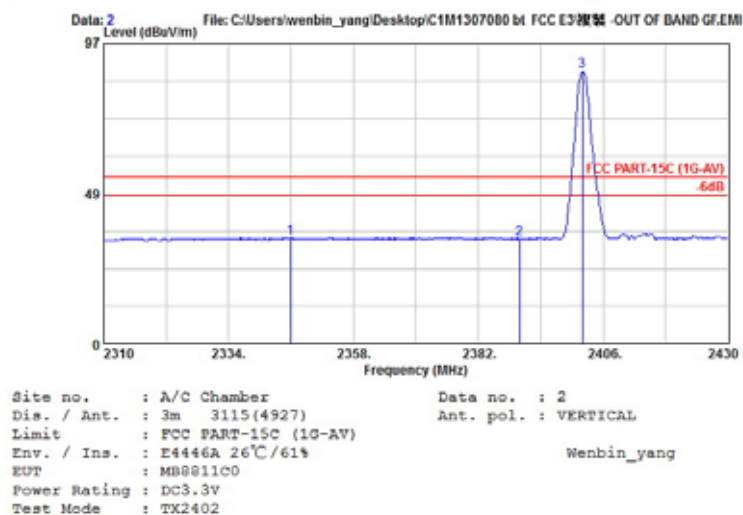


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2345.880	28.36	6.29	-0.50	34.15	54.00	19.85	Average
2	2390.000	28.47	6.34	-0.97	33.85	54.00	20.15	Average
3	2402.040	28.47	6.36	53.23	88.06	54.00	-34.06	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 11, 2013 Temperature : 26°C


EUT : Bluetooth Adapter Card Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2480MHz (CH78), 8-DPSK

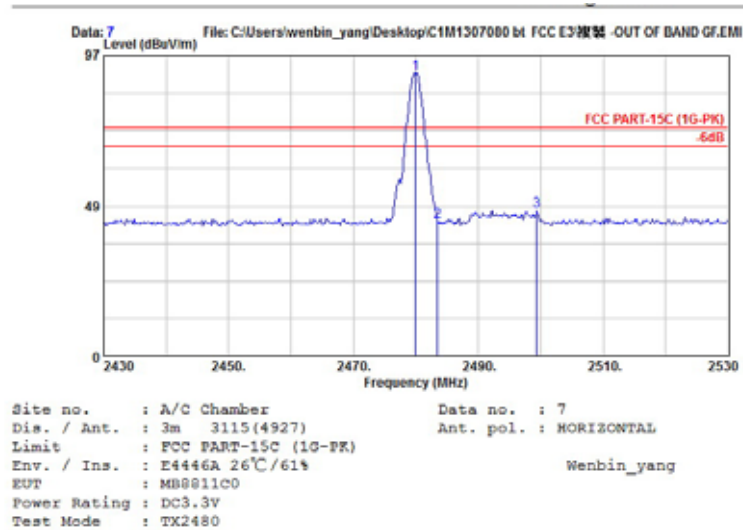

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.66	6.44	56.37	91.48	74.00	-17.48	
2	2483.500	28.66	6.45	8.32	43.44	74.00	30.56	
3	2499.400	28.70	6.47	11.77	46.94	74.00	27.06	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

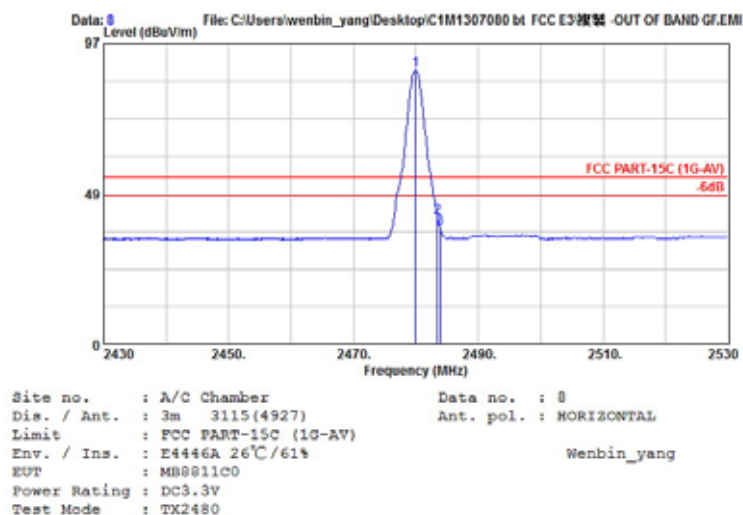


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.66	6.44	53.28	88.39	54.00	-34.39	Average
2	2483.500	28.66	6.45	5.86	40.98	54.00	13.02	Average
3	2483.900	28.66	6.45	2.25	37.36	54.00	16.64	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Date of Test : Jul. 11, 2013 Temperature : 26°C


EUT : Bluetooth Adapter Card Humidity : 61%

Test Mode : Transmitting Mode, Frequency: 2480MHz (CH78), 8-DPSK

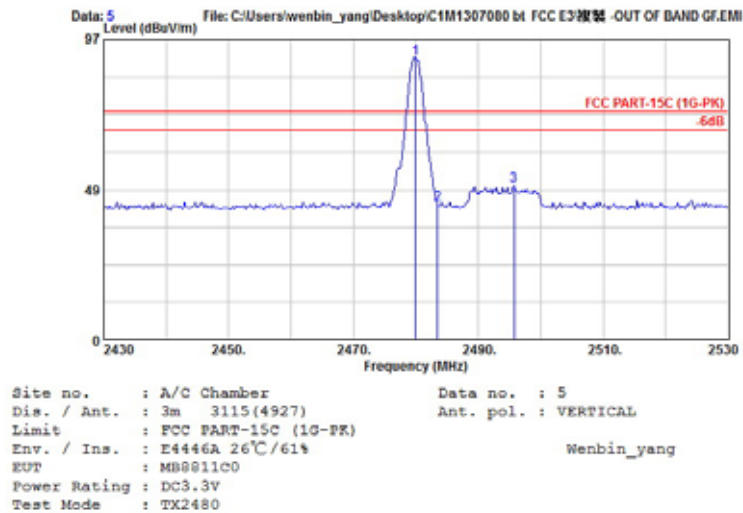

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.66	6.44	56.03	91.13	74.00	-17.13	
2	2483.500	28.66	6.45	8.46	43.57	74.00	30.43	
3	2495.700	28.70	6.46	14.70	49.86	74.00	24.14	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

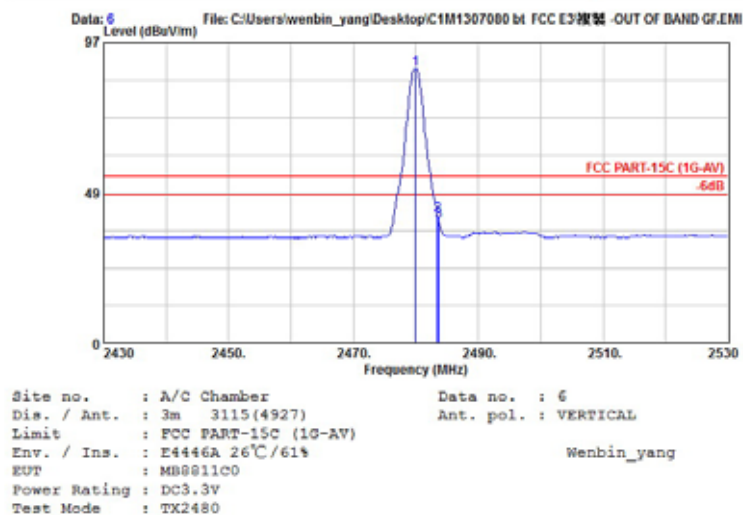

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	28.66	6.44	53.48	88.59	74.00	-34.59	Average
2	2483.500	28.66	6.45	5.96	41.08	74.00	12.92	Average
3	2495.700	28.66	6.45	4.50	39.61	74.00	14.39	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.


4. 20dB BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the 20dB bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

4.2. Block Diagram of Test Setup

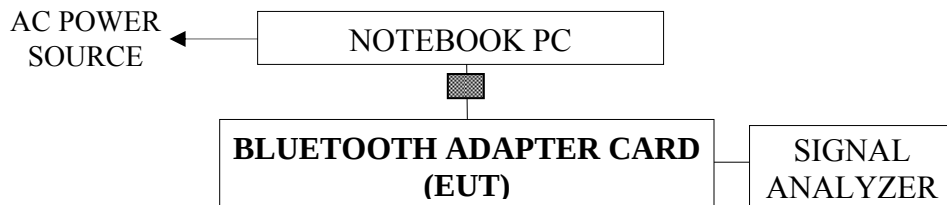

■ : JIG BOARD

4.3. Specification Limits [§15.247(a)(1), RSS-210 §A8.2 (a)]

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

4.4. Operating Condition of EUT

- 4.4.1. Set up the EUT and simulator as shown on 4.2.
- 4.4.2. To turn on the power of all equipment.
- 4.4.3. The Notebook PC was running test software “CSR” to set EUT (Bluetooth Adapter Card) on transmitting and receiving during all testing.

4.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The RBW of the fundamental frequency was measure by spectrum analyzer 1% of the 20dB bandwidth and the setting equal to RBW and VBW is equal to RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The measurement guideline was according to FCC Public Notice DA 00-705.

4.6. Test Results

PASSED. All the test results are attached in next pages.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Bluetooth Adapter Card

M/N : MB8811C0

Test Date : Jul. 08, 2013 Temperature : 25°C Humidity : 65%

4.6.1. Type of Modulation: 8-DPSK

No.	Channel	Test Frequency	20dB Bandwidth	2/3 (20dB Bandwidth)
1.	0	2402MHz	1.265MHz	0.843MHz
2.	39	2441MHz	1.265MHz	0.843MHz
3.	78	2480MHz	1.265MHz	0.843MHz

The maximum two-thirds of the 20dB bandwidth shall be at maximum 0.843MHz.

4.6.2. Type of Modulation: GFSK

No.	Channel	Test Frequency	20dB Bandwidth	2/3 (20dB Bandwidth)
1.	0	2402MHz	0.924MHz	0.616MHz
2.	39	2441MHz	0.924MHz	0.616MHz
3.	78	2480MHz	0.924MHz	0.616MHz

The maximum two-thirds of the 20dB bandwidth shall be at maximum 0.616MHz.

Figure 1: 8-DPSK, Channel 0, Frequency: 2402MHz



Figure 2: 8-DPSK, Channel 39, Frequency: 2441MHz



Figure 3: 8-DPSK, Channel 78, Frequency: 2480MHz

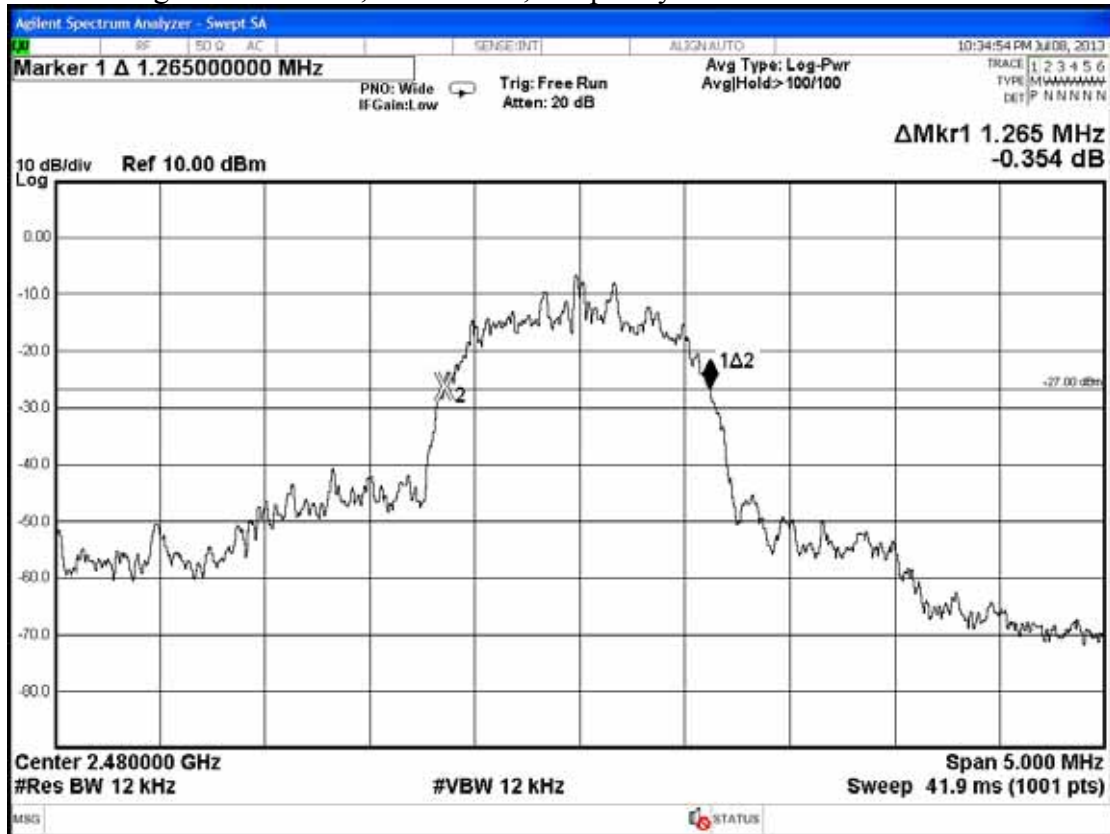


Figure 4: GFSK, Channel 0, Frequency: 2402MHz



Figure 5: GFSK, Channel 39, Frequency: 2441MHz



Figure 6: GFSK, Channel 78, Frequency: 2480MHz



5. CARRIER FREQUENCY SEPARATION MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the carrier frequency separation measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

5.2. Block Diagram of Test Setup

The same as section.4.2.

5.3. Specification Limits [§15.247(a)(1), RSS-210 §A8.2 (b)]

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

5.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

5.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The channel separation was measure by spectrum analyzer with RBW equal to 1% of the span. The video bandwidth not to be smaller than resolution bandwidth, the peak was mark on adjacent bandwidth, the between of peak is carrier frequency separation. The measurement guideline was according to FCC Public Notice DA 00-705.

5.6. Test Results

PASSED. All the test results are attached in next pages.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Bluetooth Adapter Card M/N : MB8811C0

Test Date : Jul. 08, 2013 Temperature : 25°C Humidity : 65%

5.6.1. Type of Modulation: 8-DPSK

1. 2402MHz adjacent channel of carrier frequency separation: 1.000MHz.
2. 2441MHz adjacent channel of right carrier frequency separation: 1.000MHz.
3. 2441MHz adjacent channel of left carrier frequency separation: 1.000MHz.
4. 2480MHz adjacent channel of carrier frequency separation: 1.000MHz.

[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

5.6.2. Type of Modulation: GFSK

1. 2402MHz adjacent channel of carrier frequency separation: 1.000MHz.
2. 2441MHz adjacent channel of right carrier frequency separation: 1.000MHz.
3. 2441MHz adjacent channel of left carrier frequency separation: 1.000MHz.
4. 2480MHz adjacent channel of carrier frequency separation: 1.000MHz.

[Above values have met the requirement as specified in section 4.3: frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.]

Figure 1: 8-DPSK, 2402MHz adjacent channel of carrier frequency separation

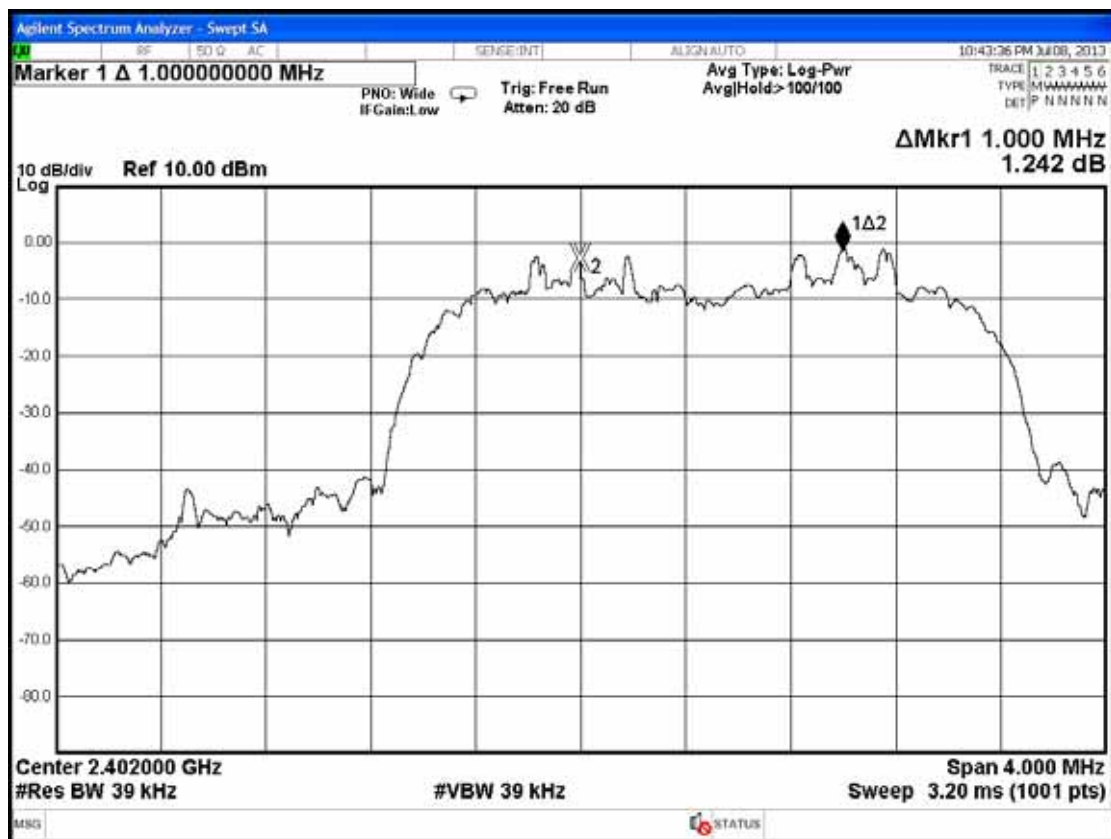


Figure 2: 8-DPSK, 2441MHz adjacent channel of right carrier frequency separation

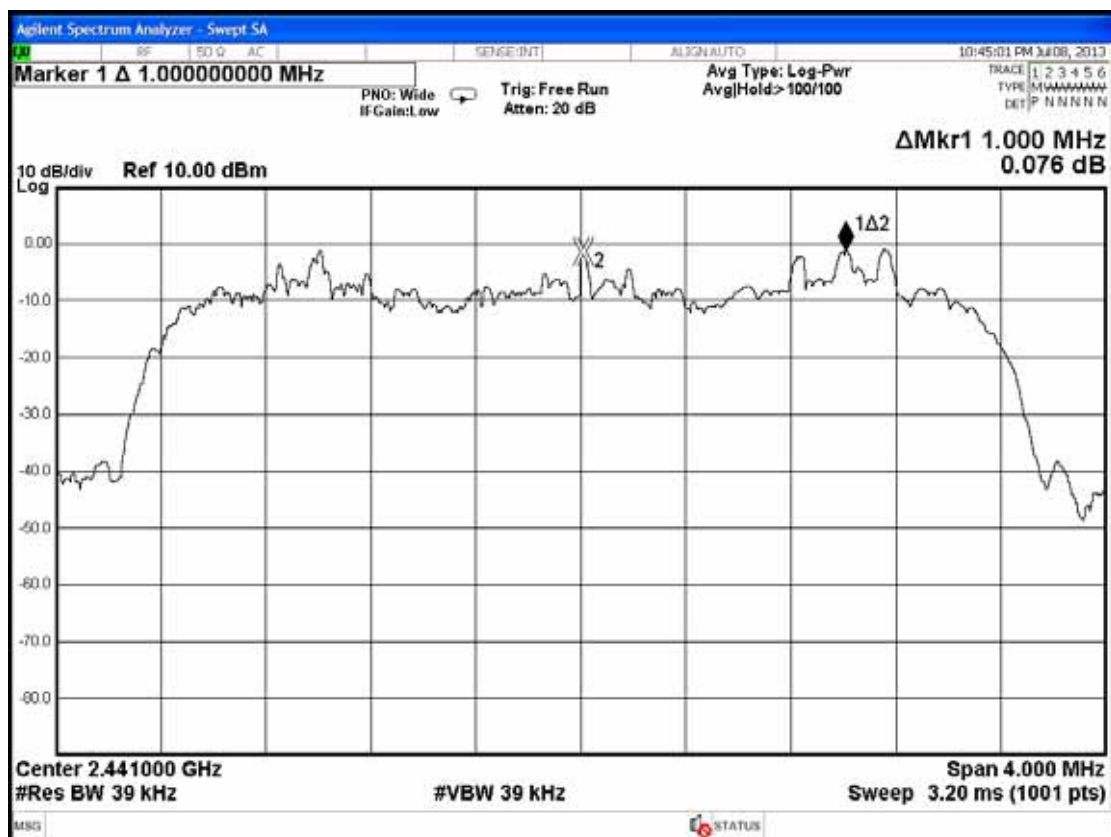


Figure 3: 8-DPSK, 2441MHz adjacent channel of left carrier frequency separation

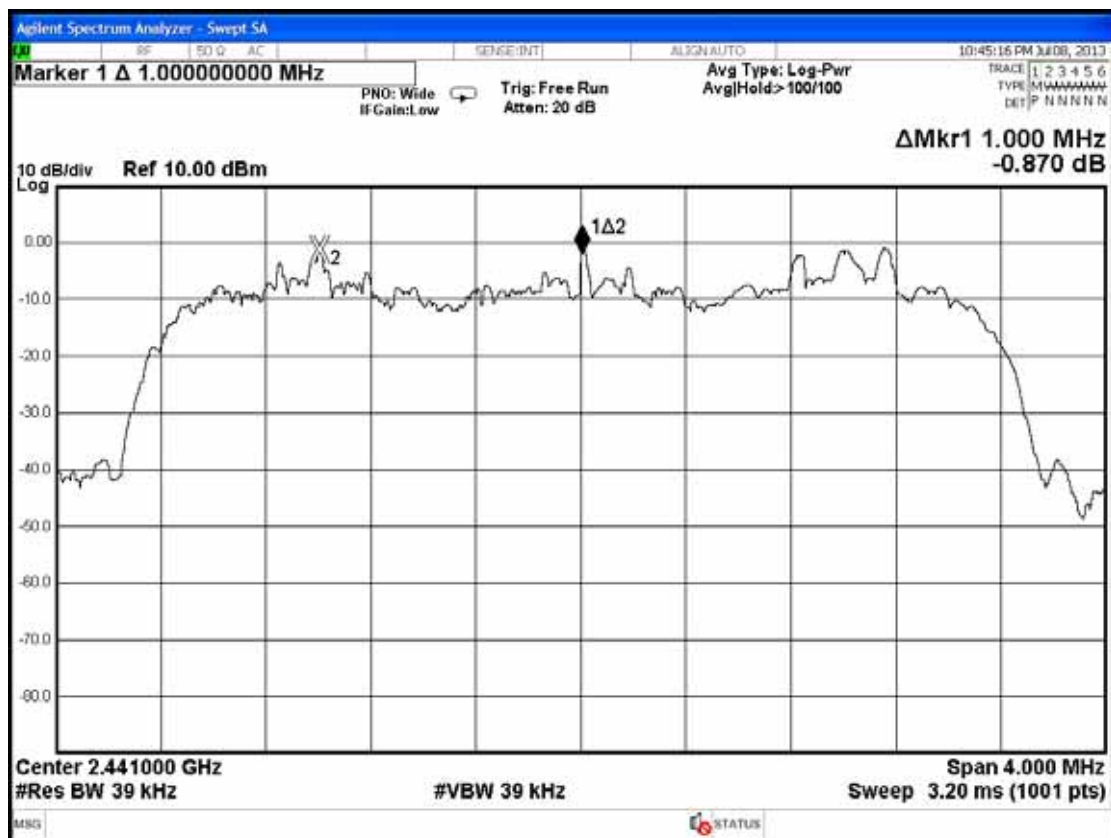


Figure 4: 8-DPSK, 2480MHz adjacent channel of carrier frequency separation



Figure 5: GFSK, 2402MHz adjacent channel of carrier frequency separation



Figure 6: GFSK, 2441MHz adjacent channel of right carrier frequency separation

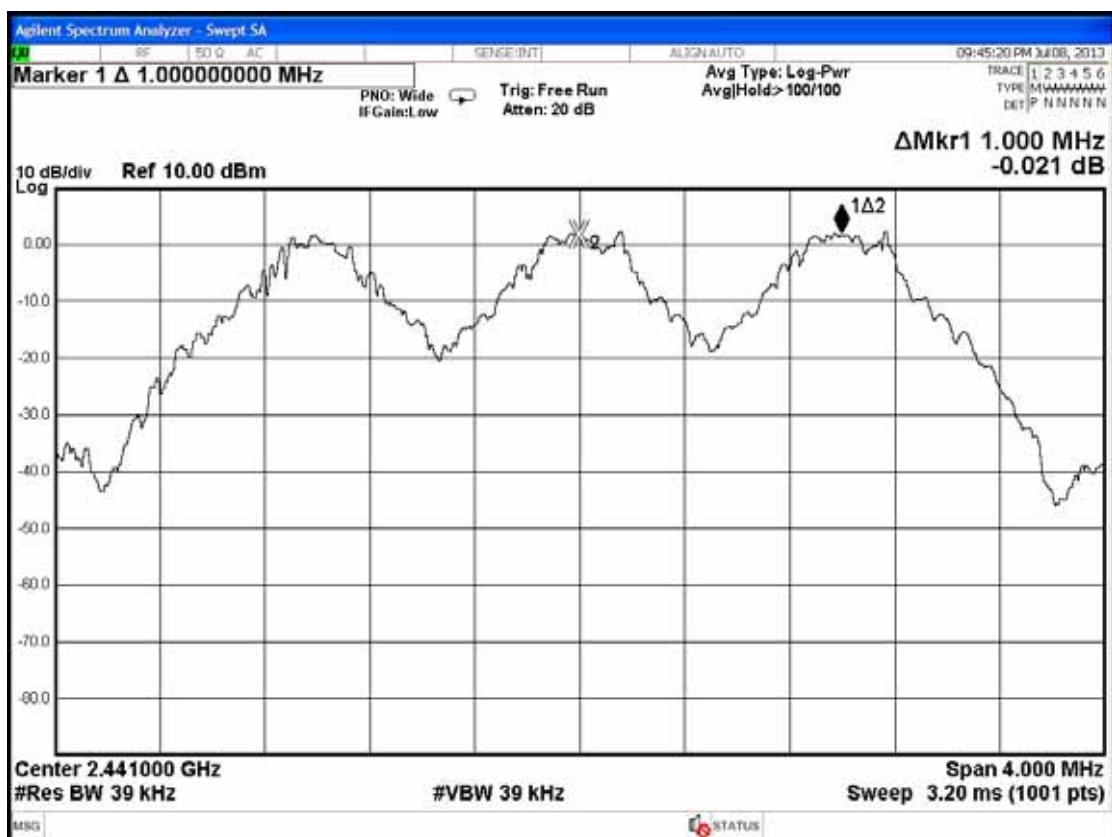


Figure 7: GFSK, 2441MHz adjacent channel of left carrier frequency separation

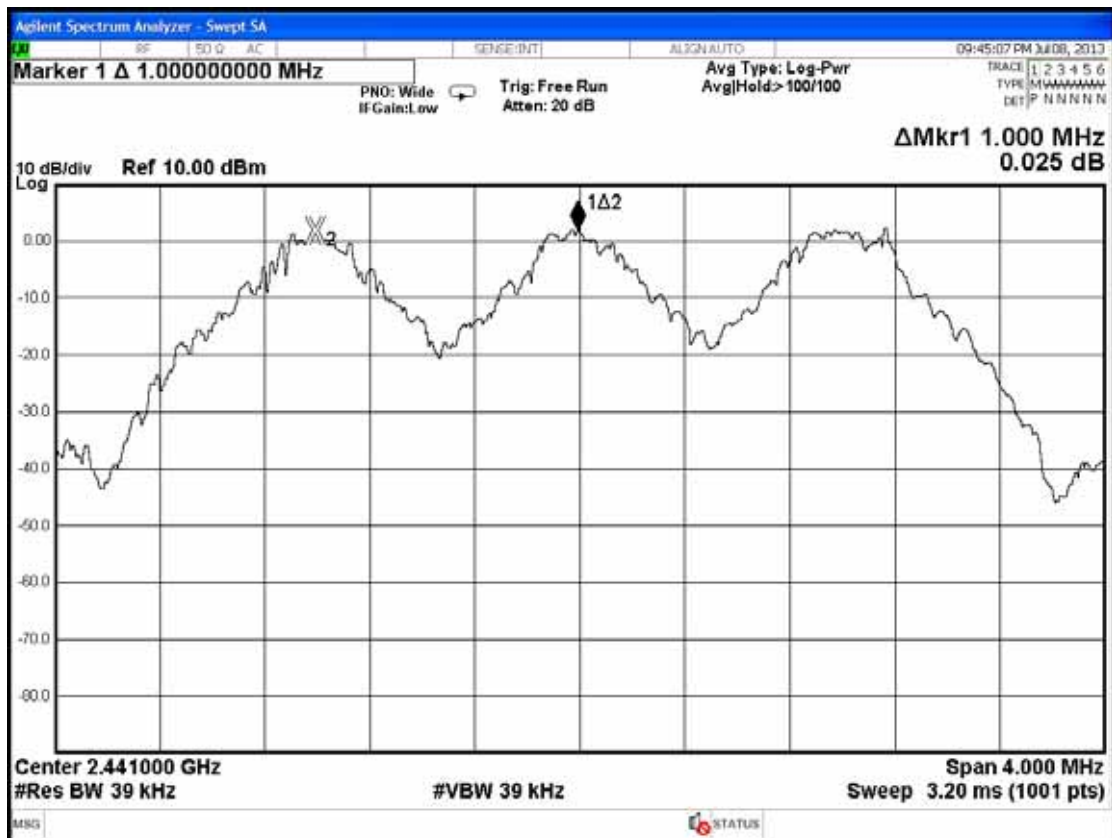


Figure 8: GFSK, 2480MHz adjacent channel of carrier frequency separation



6. TIME OF OCCUPANCY MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the time of occupancy measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

6.2. Block Diagram of Test Setup

The same as section.4.2.

6.3. Specification Limits [§15.247(a)(1)(iii), RSS-210 §A8.2 (d)]

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

6.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

6.5. Test Procedure

The EUT was connected to the notebook. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 1MHz RBW and 1MHz VBW. VBW≥RBW ; Span=zero span.

Centred on a hopping channel sweep=as necessary to capture the entire dwell time per hopping channel ; Detector function=peak ; Trace=Max hold

The measurement guideline was according to FCC Public Notice DA 00-705.

6.6. Test Results

PASSED. All the test results are attached in next pages.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Bluetooth Adapter Card

M/N : MB8811C0

Test Date : Jul. 08, 2013 Temperature : 25°C Humidity : 65%

6.6.1. Type of Modulation : 8-DPSK, Test Frequency : 2441MHz

Duty cycle: 79channels*0.4 seconds = 31.6 seconds

3DH1 : For each 5 seconds of 50 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$50 \text{ channels} * 31.6 \text{ seconds} / 5 * 0.39\text{ms} = 123.24\text{ms} (<400\text{ms})$

3DH3 : For each 5 seconds of 25 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$25 \text{ channels} * 31.6 \text{ seconds} / 5 * 1.63\text{ms} = 257.54\text{ms} (<400\text{ms})$

3DH5 : For each 5 seconds of 17 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$17 \text{ channels} * 31.6 \text{ seconds} / 5 * 2.88\text{ms} = 309.43\text{ms} (<400\text{ms})$

Figure 1: 8-DPSK, 2441MHz, 3DH1

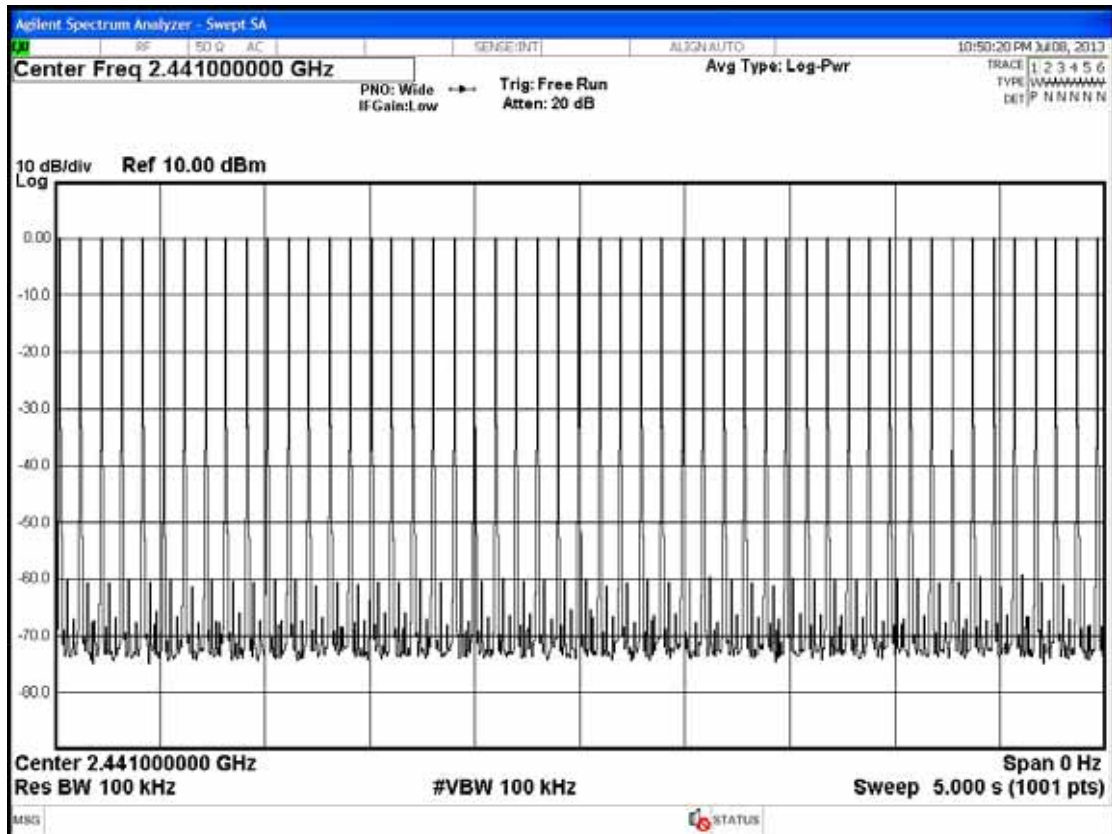
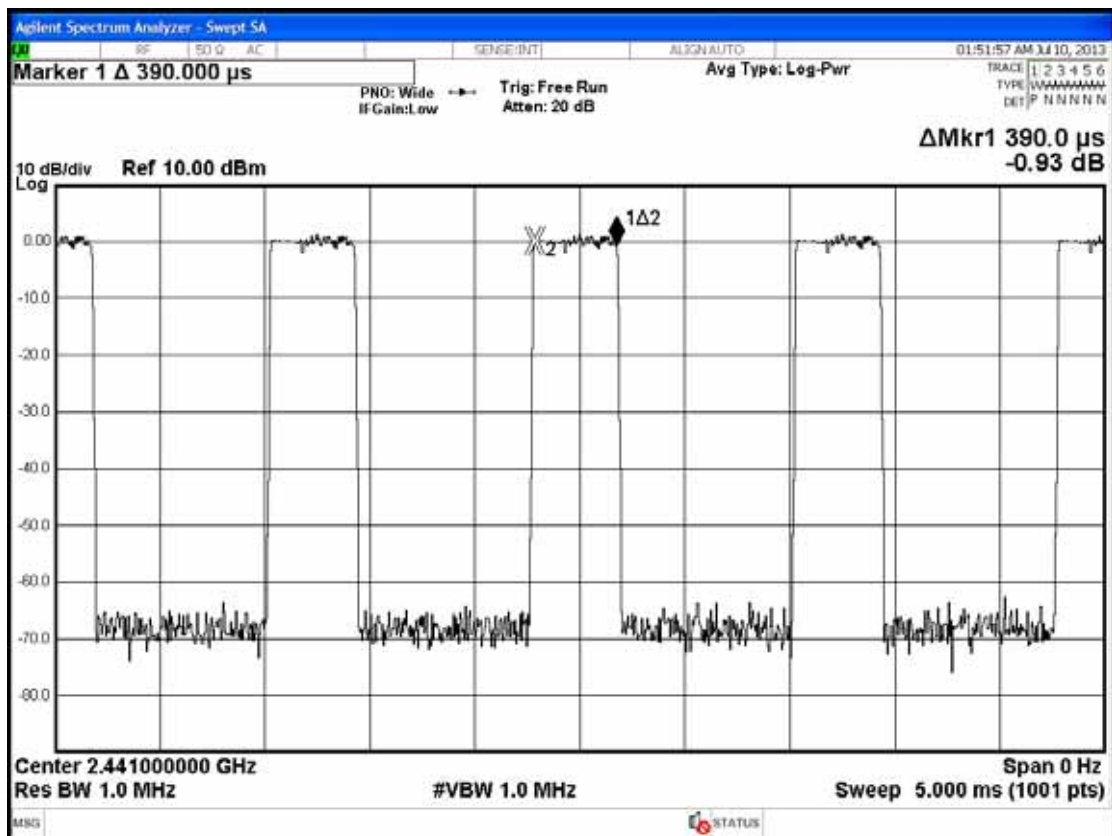


Figure 2: 8-DPSK, 2441MHz, 3DH3




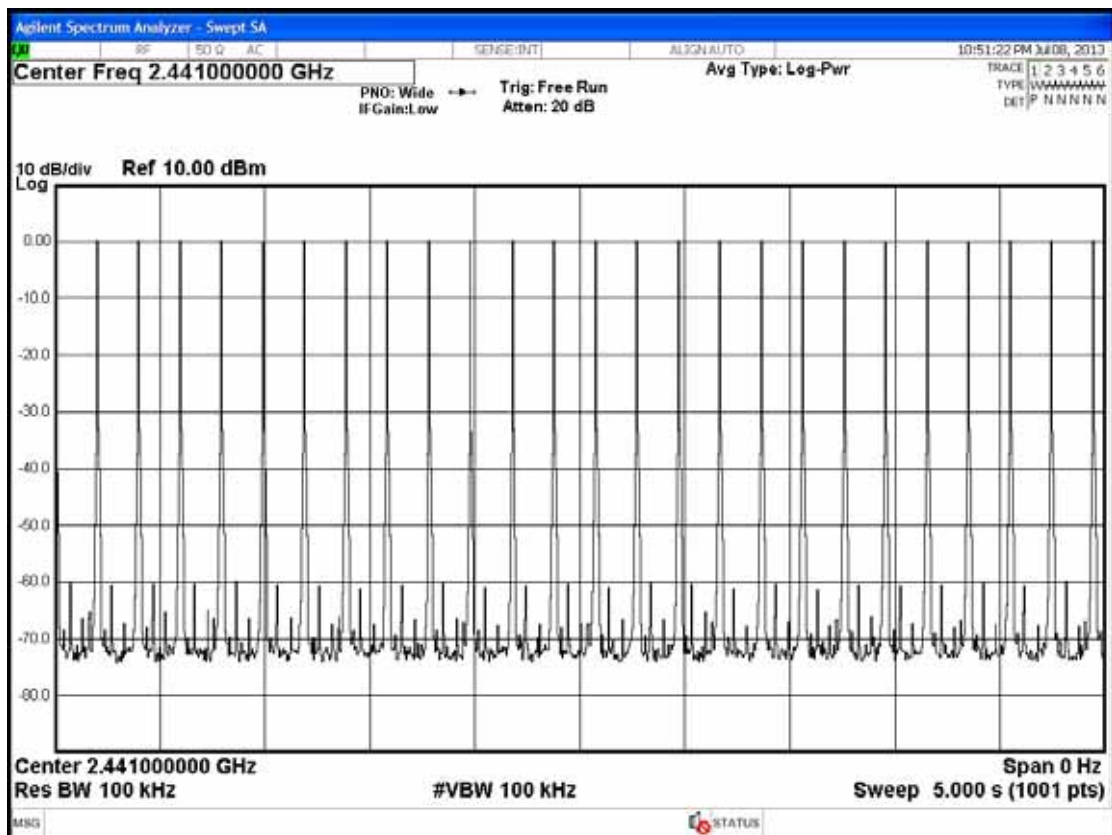


Figure 3: 8-DPSK, 2402MHz, 3DH5

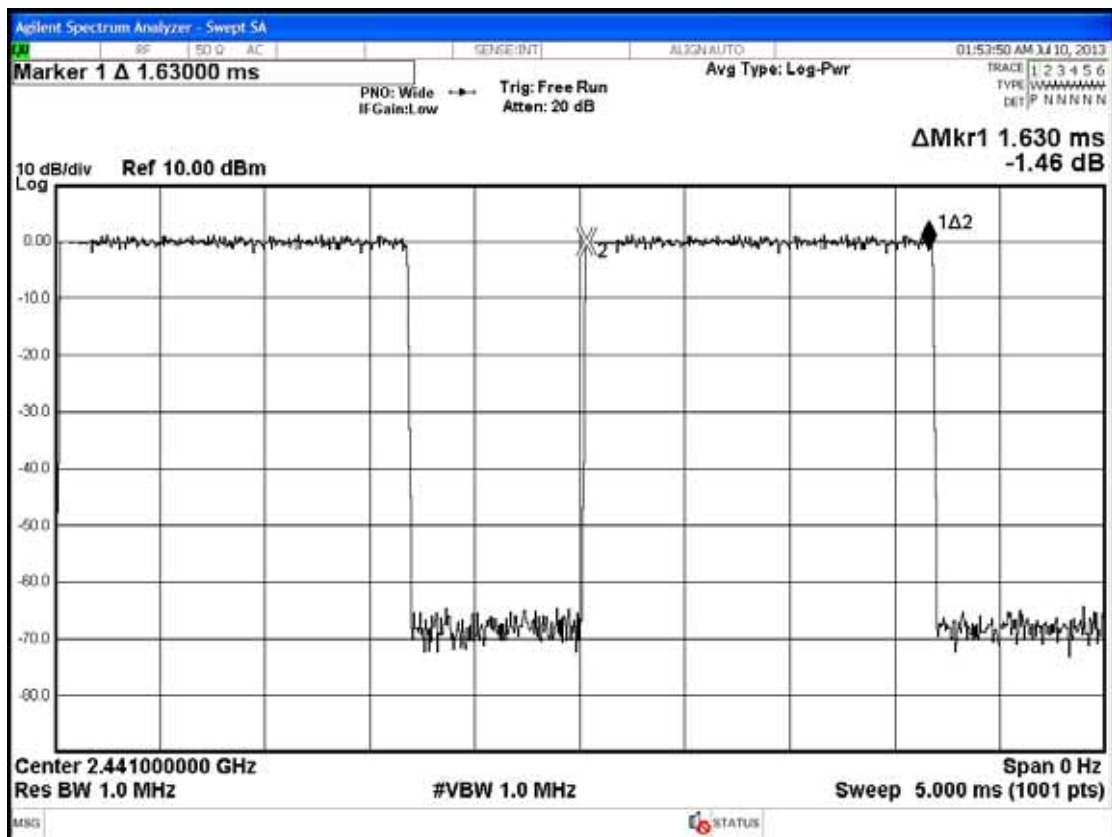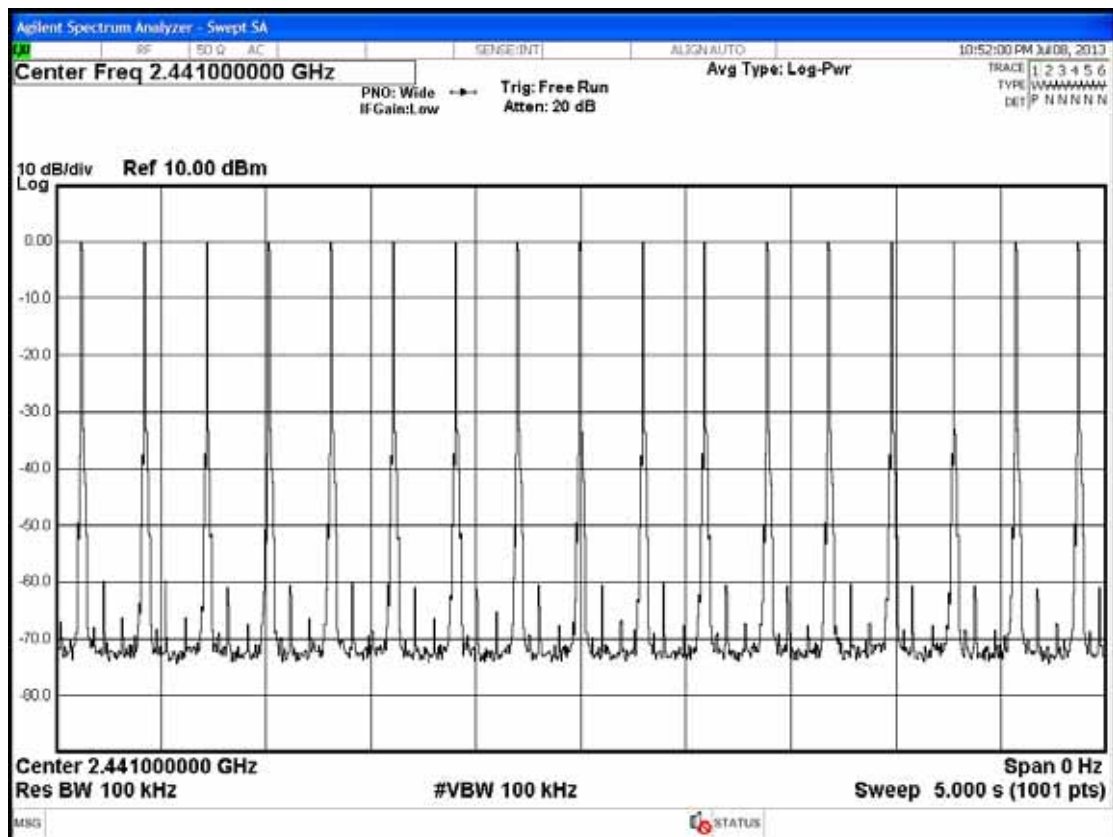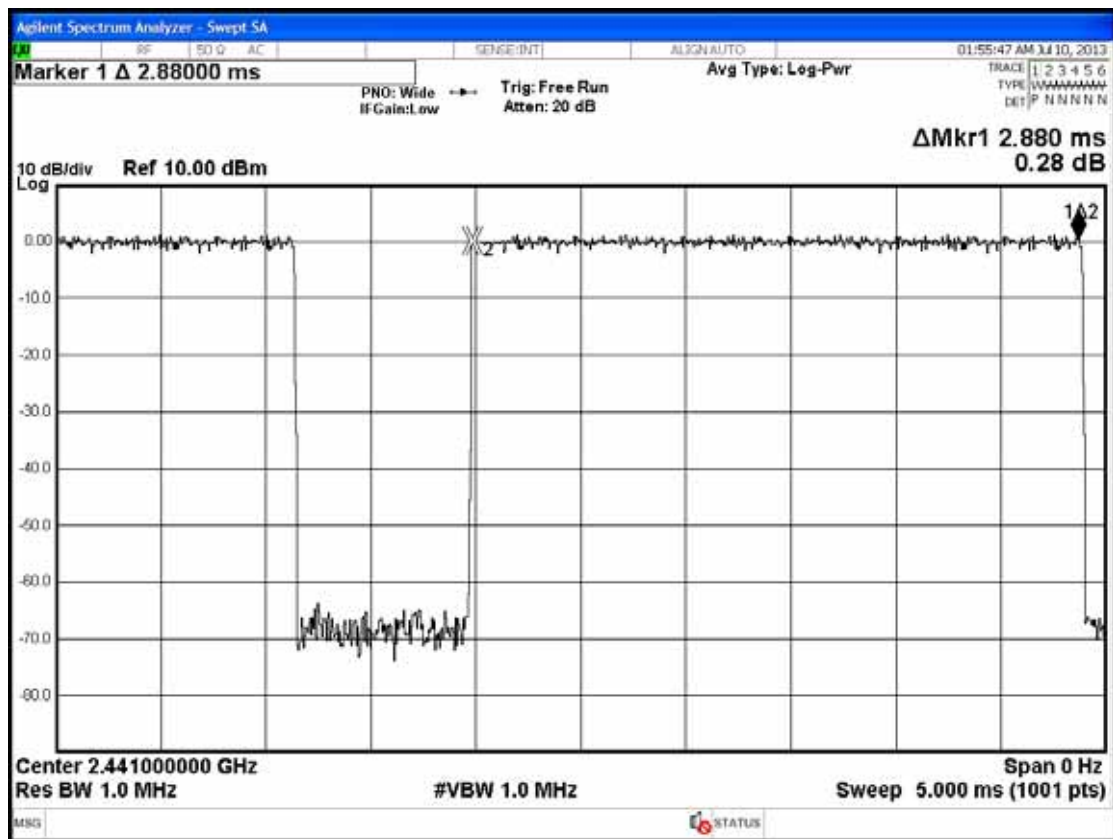

6.6.2. Type of Modulation : GFSK, Test Frequency : 2441MHz

Duty cycle: 79channels*0.4 seconds = 31.6 seconds

DH1 : For each 5 seconds of 50 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$$50 \text{ channels} * 31.6 \text{ seconds} / 5 * 0.385 \text{ ms} = 121.66 \text{ ms} (< 400 \text{ ms})$$

DH3 : For each 5 seconds of 25 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$$25 \text{ channels} * 31.6 \text{ seconds} / 5 * 1.63 \text{ ms} = 257.54 \text{ ms} (< 400 \text{ ms})$$

DH5 : For each 5 seconds of 17 channels appearance, the longest time of occupancy for each of 31.6 seconds is:

$$17 \text{ channels} * 31.6 \text{ seconds} / 5 * 2.88 \text{ ms} = 309.43 \text{ ms} (< 400 \text{ ms})$$

Figure 4: GFSK, 2441MHz, DH1

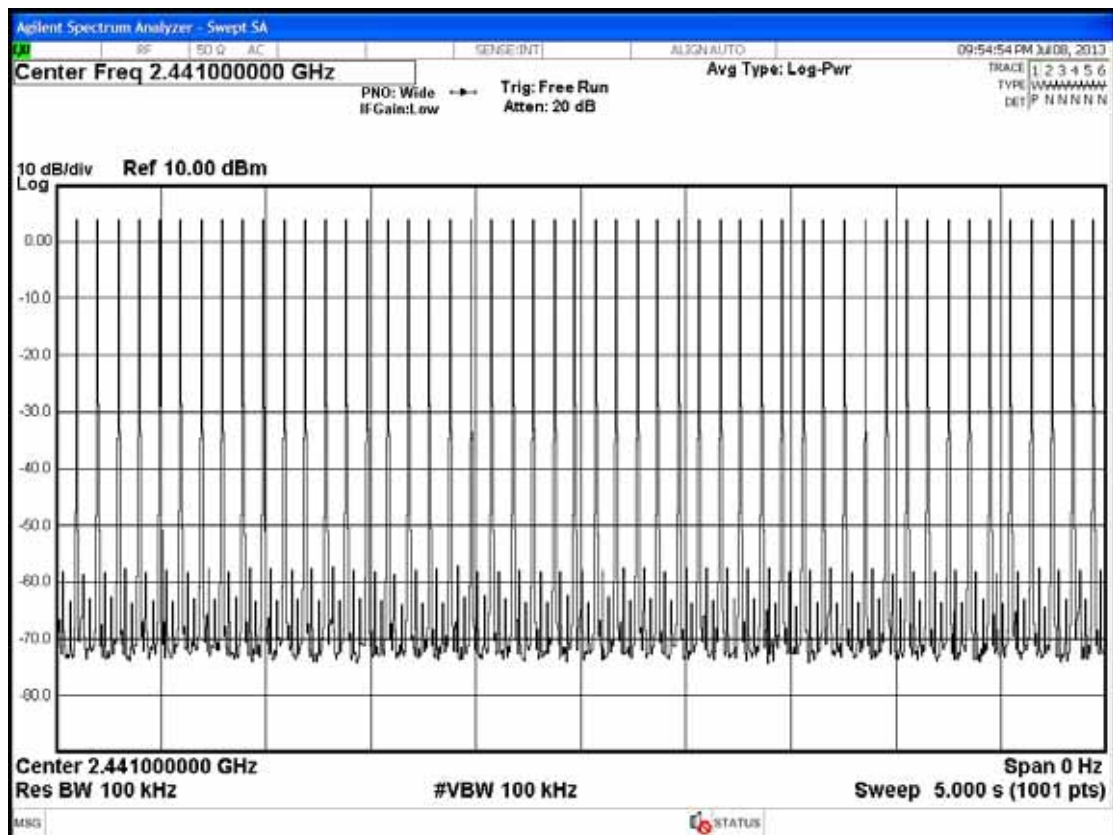
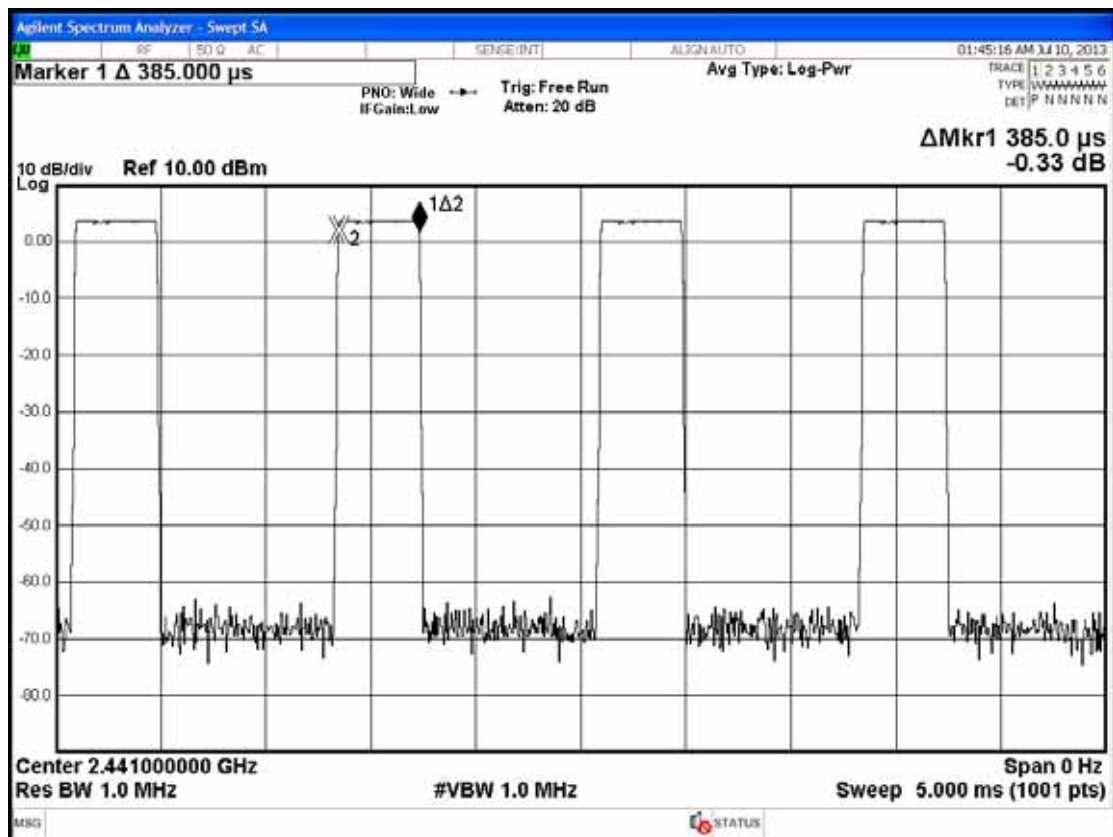


Figure 5: GFSK, 2441MHz, DH3




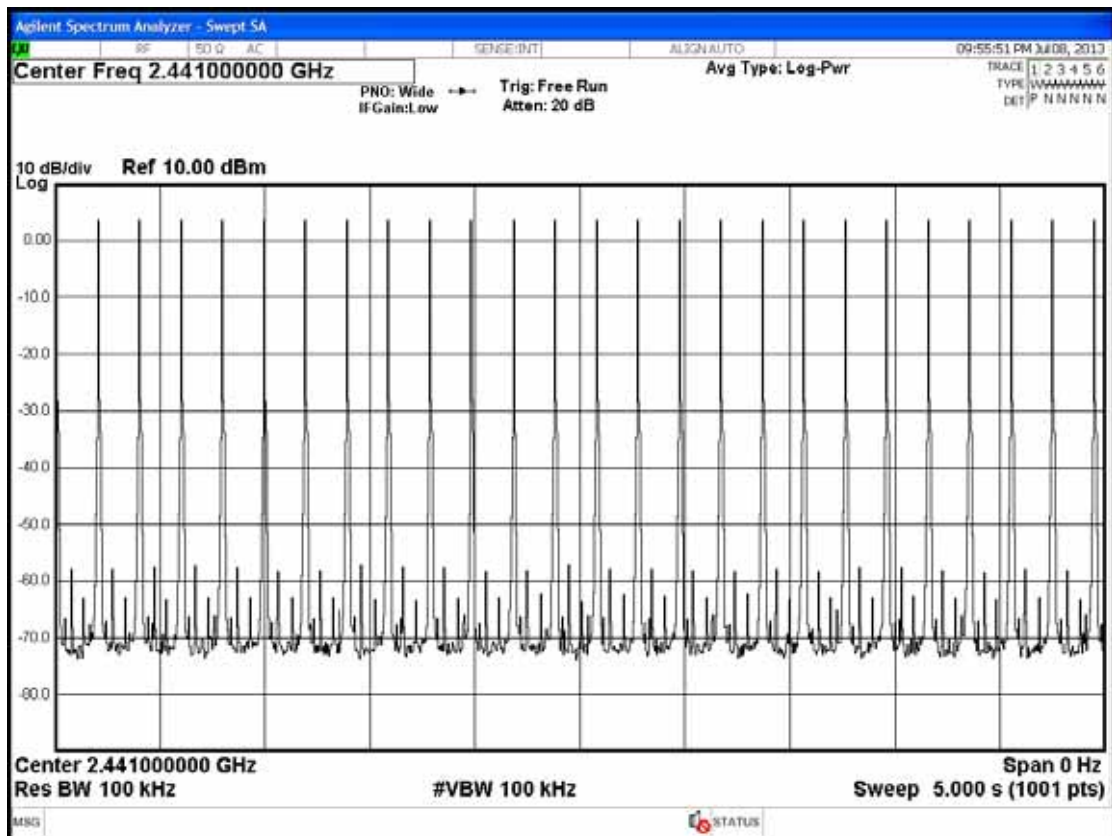


Figure 6: GFSK, 2441MHz, DH5

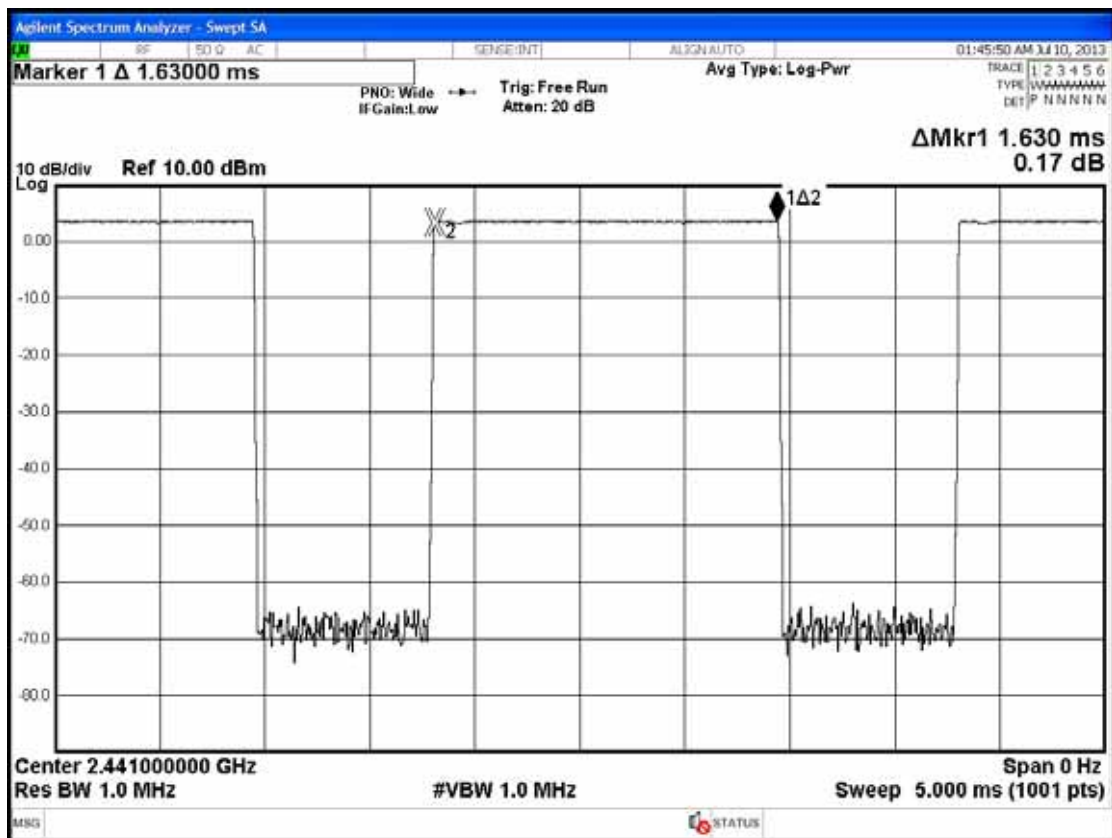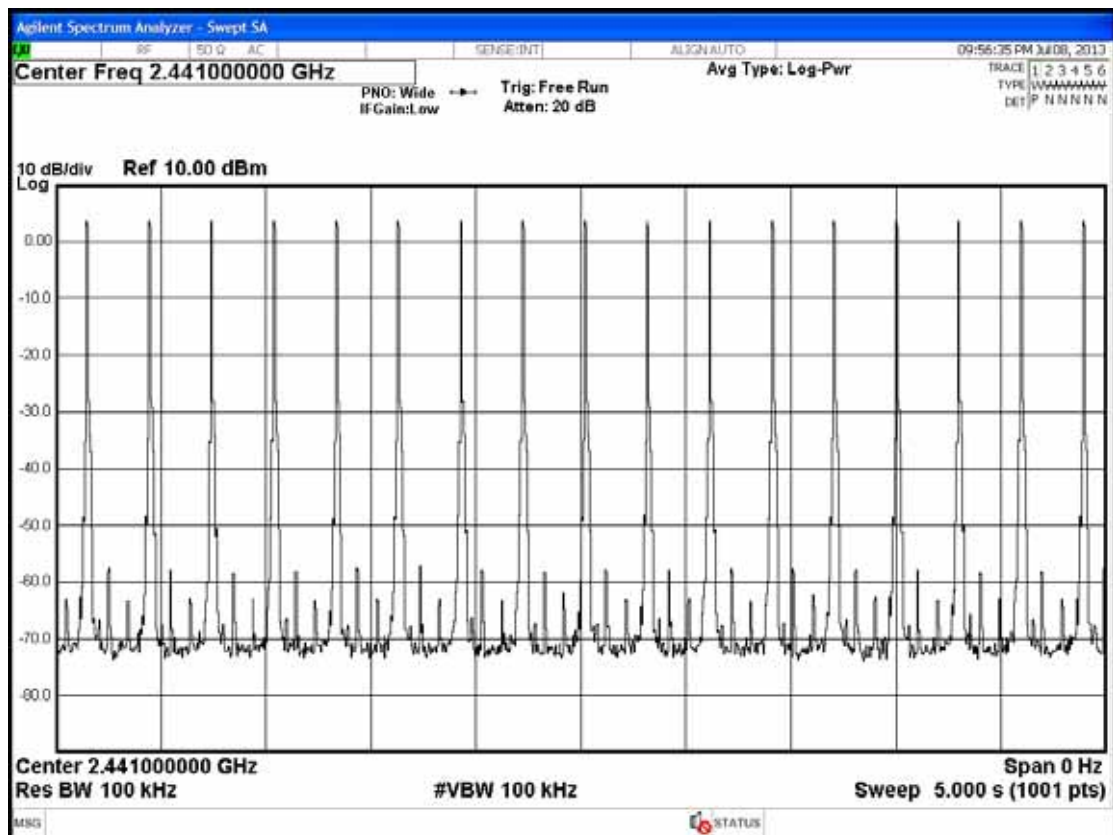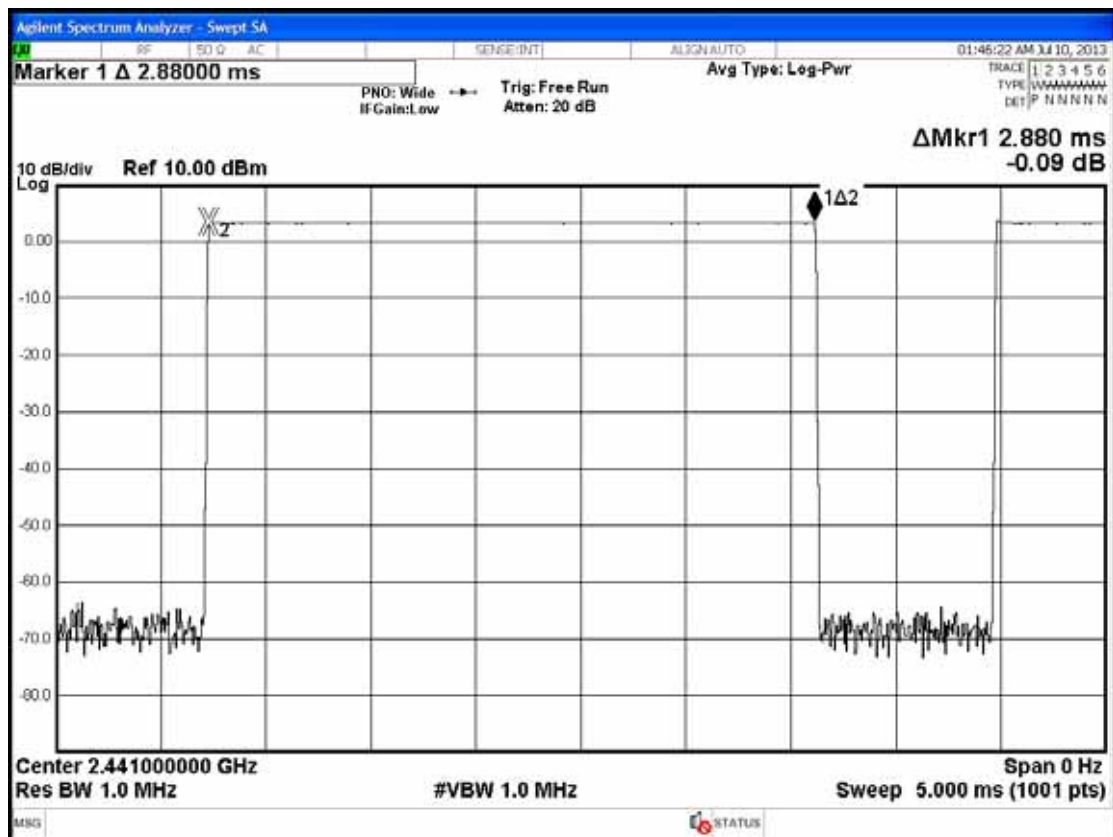

7. NUMBER OF HOPPING CHANNELS MEASUREMENT

7.1. Test Equipment

The following test equipment was used during the number of hopping channels measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

7.2. Block Diagram of Test Setup

The same as section.4.2.

7.3. Specification Limits [§15.247(a)(1)(iii), RSS-210 §A8.2 (d)]

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

7.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

7.5. Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100kHz RBW and 100kHz VBW. Sweep=Auto ; Detector function=peak ; Trace=Max hold
The measurement guideline was according to FCC Public Notice DA 00-705.

7.6. Test Results

PASSED. All the test results are attached in next page.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Bluetooth Adapter Card

M/N : MB8811C0

Test Date : Jul. 08, 2013 Temperature : 25°C Humidity : 65%

7.6.1.Type of Modulation: 8-DPSK

The number hopping channel is 79.

7.6.2.Type of Modulation: GFSK

The number hopping channel is 79.

Figure 1: 8-DPSK


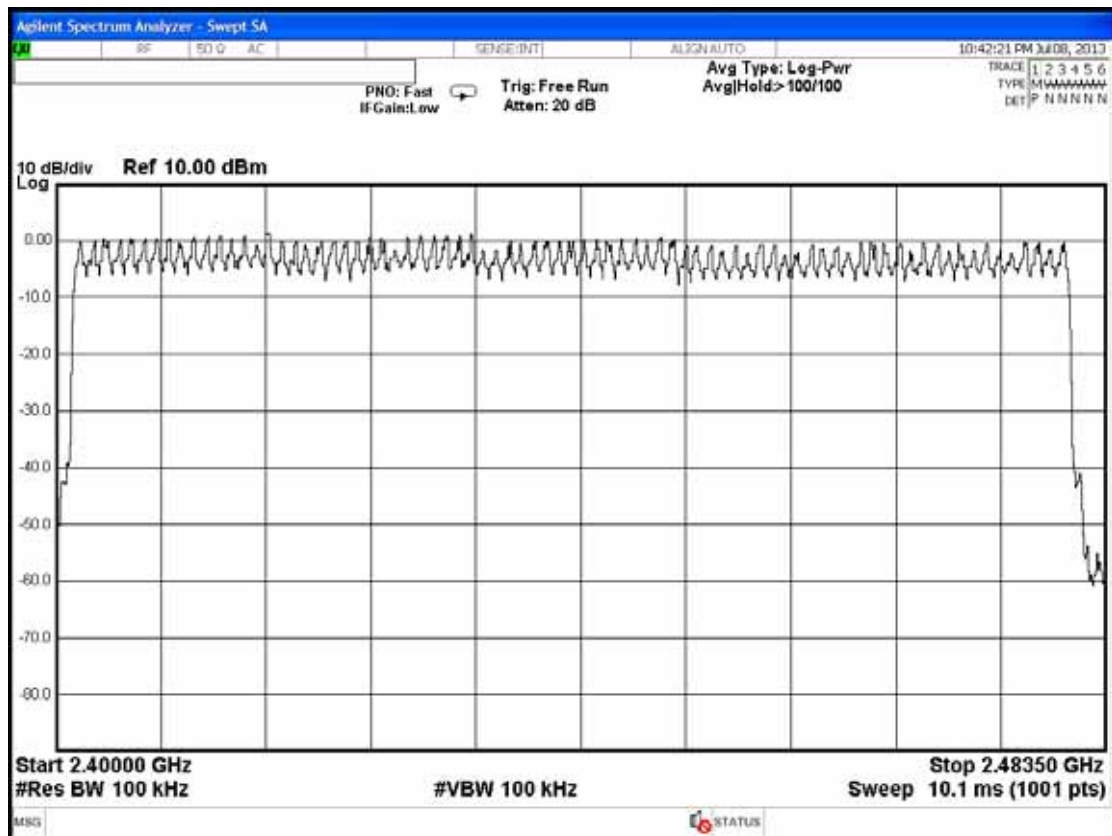


Figure 2: GFSK

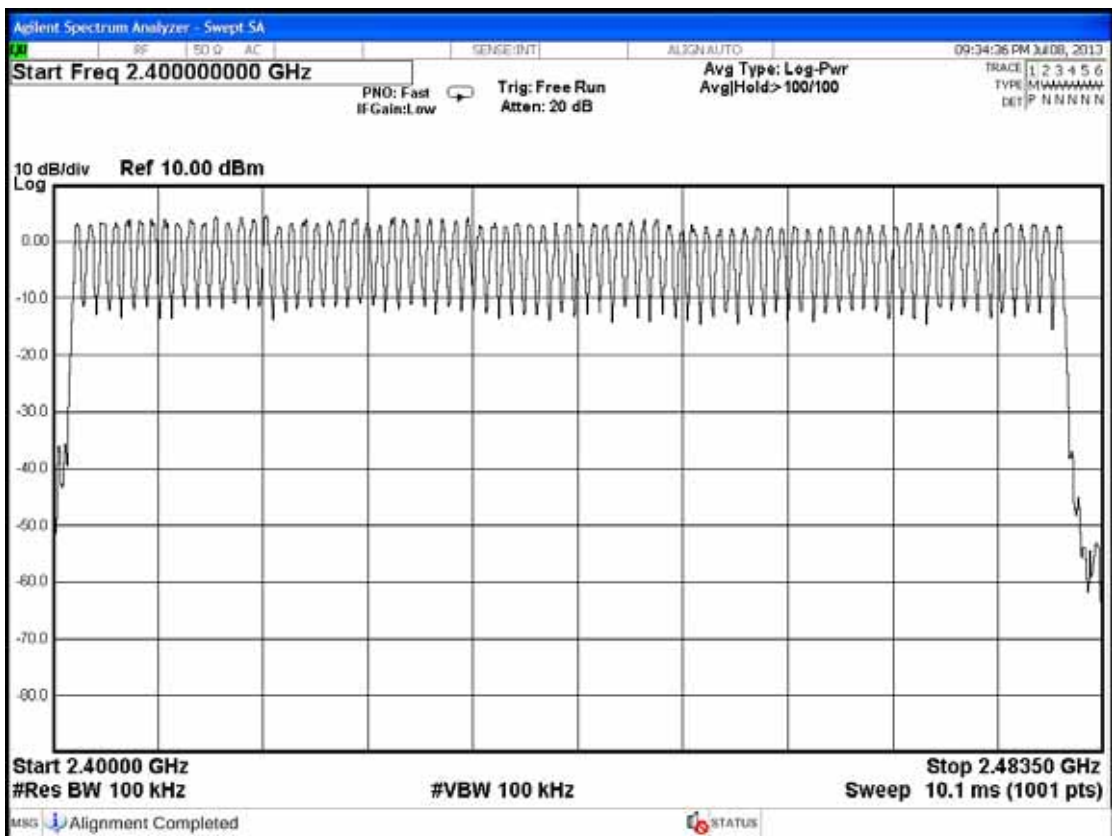

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

8.2. Block Diagram of Test Setup

The same as section.4.2.

8.3. Specification Limits [§15.247(b)-(1), RSS-210 §A8.4 (2)]

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

8.4. Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in 4.4 .

8.5. Test Procedure

The transmitter output was connected to the spectrum analyzer.

Span can encompass the waveform

$RBW > EBW$

$VBW \geq RBW$

Sweep=5MHz

The measurement guideline was according to FCC Public Notice DA 00-705.

8.6. Test Results

PASSED. All the test results are listed below.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Bluetooth Adapter Card M/N : MB8811C0

Test Date : Jul. 08, 2013 Temperature : 25°C Humidity : 65%

8.6.1.Type of Modulation: 8-DPSK

No.	Channel	Test Frequency	Peak Output Power	Limit
1.	0	2402MHz	1.935 dBm	21dBm
2.	39	2441MHz	1.979 dBm	21dBm
3.	78	2480MHz	1.690 dBm	21dBm

8.6.2.Type of Modulation: GFSK

No.	Channel	Test Frequency	Peak Output Power	Limit
1.	0	2402MHz	3.992 dBm	21dBm
2.	39	2441MHz	4.147 dBm	21dBm
3.	78	2480MHz	4.011 dBm	21dBm

Figure 1: 8-DPSK, Channel 0, Frequency: 2402MHz

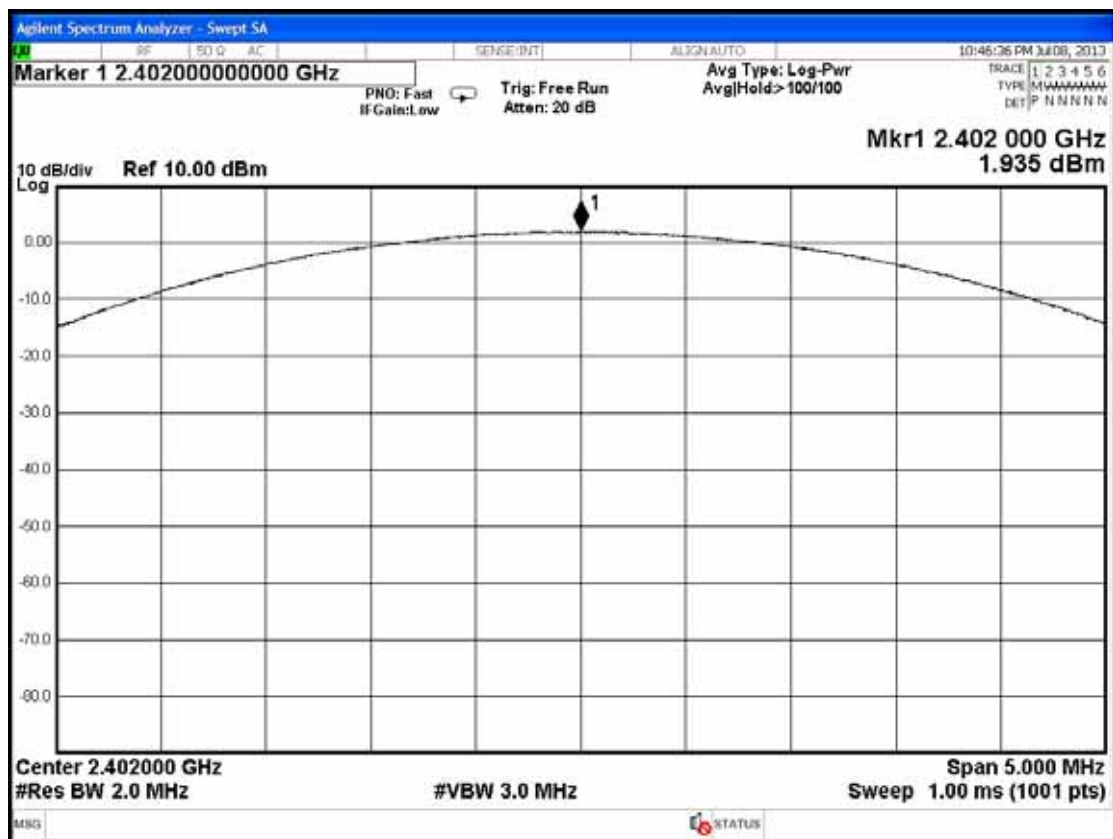


Figure 2: 8-DPSK, Channel 39, Frequency: 2441MHz

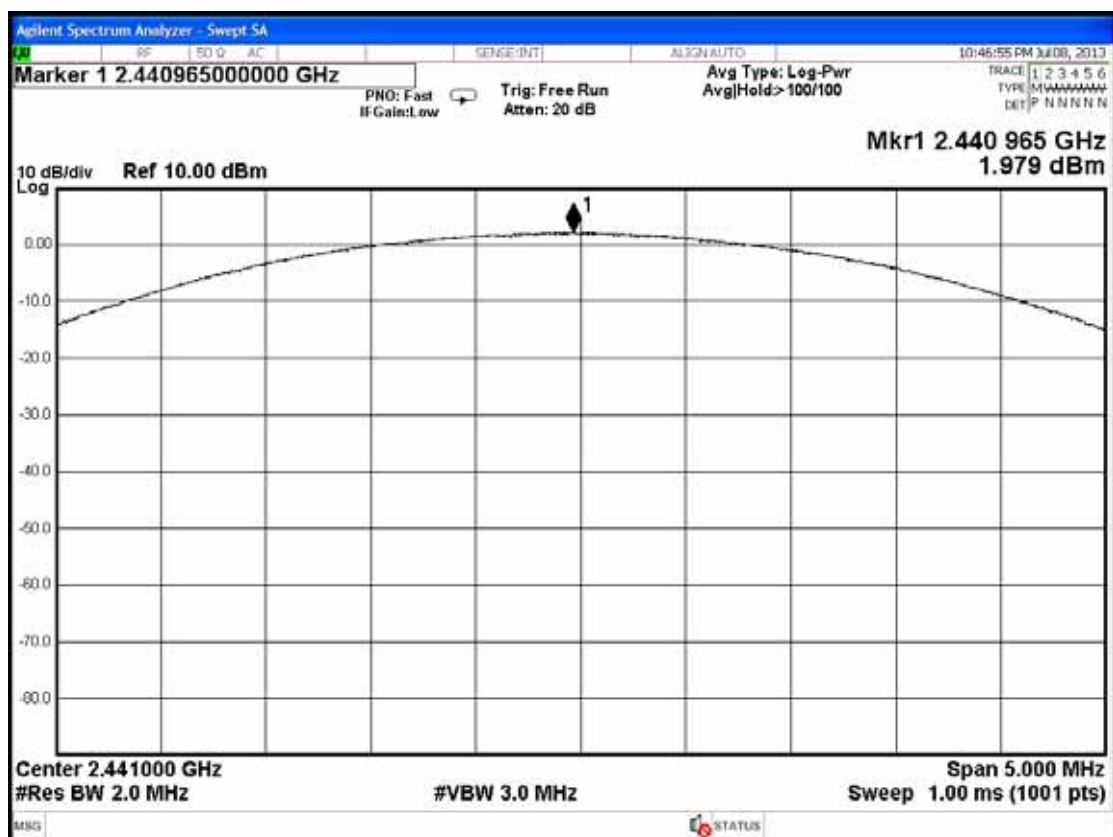


Figure 3: 8-DPSK, Channel 78, Frequency: 2480MHz

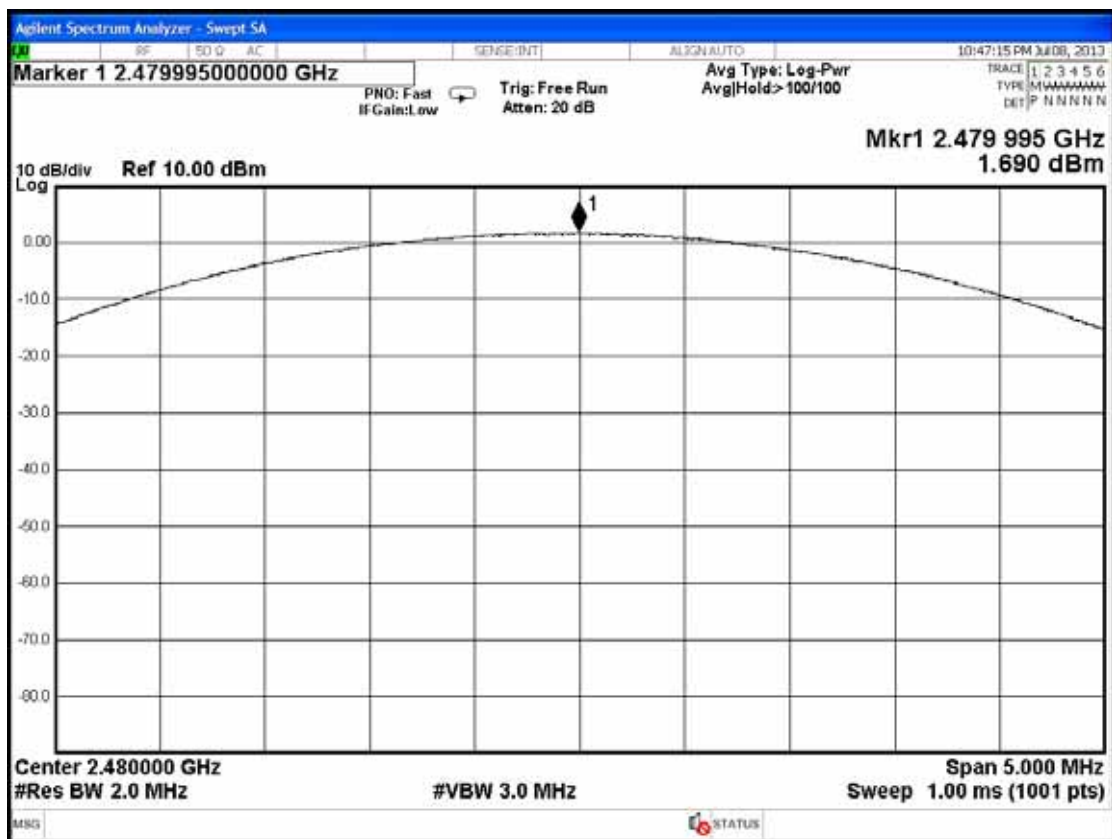


Figure 4: GFSK, Channel 0, Frequency: 2402MHz

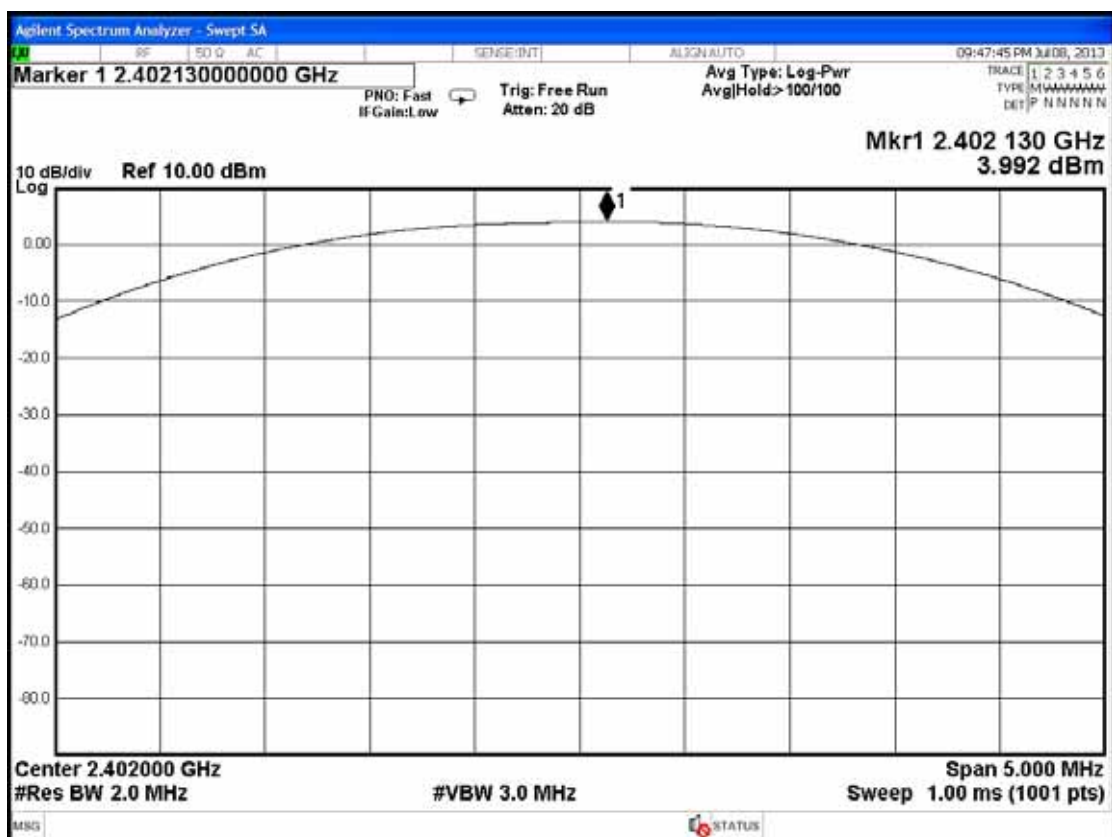


Figure 5: GFSK, Channel 39, Frequency: 2441MHz


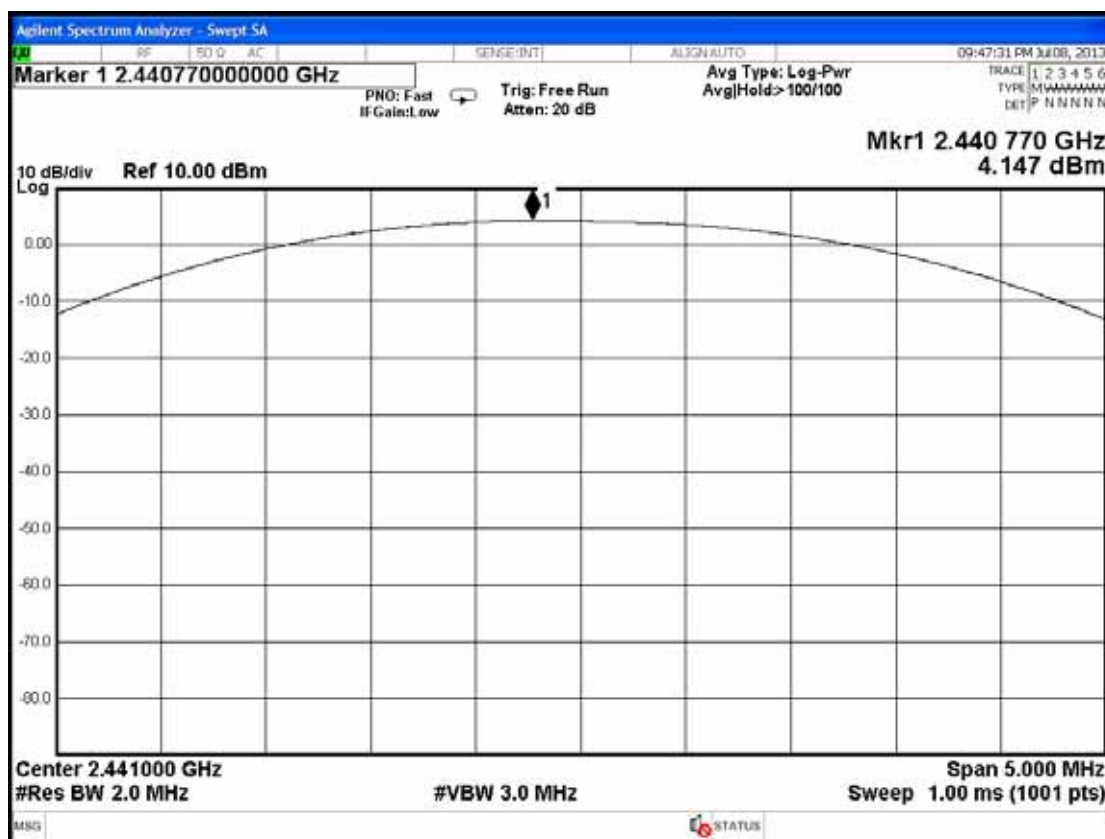


Figure 6: GFSK, Channel 78, Frequency: 2480MHz

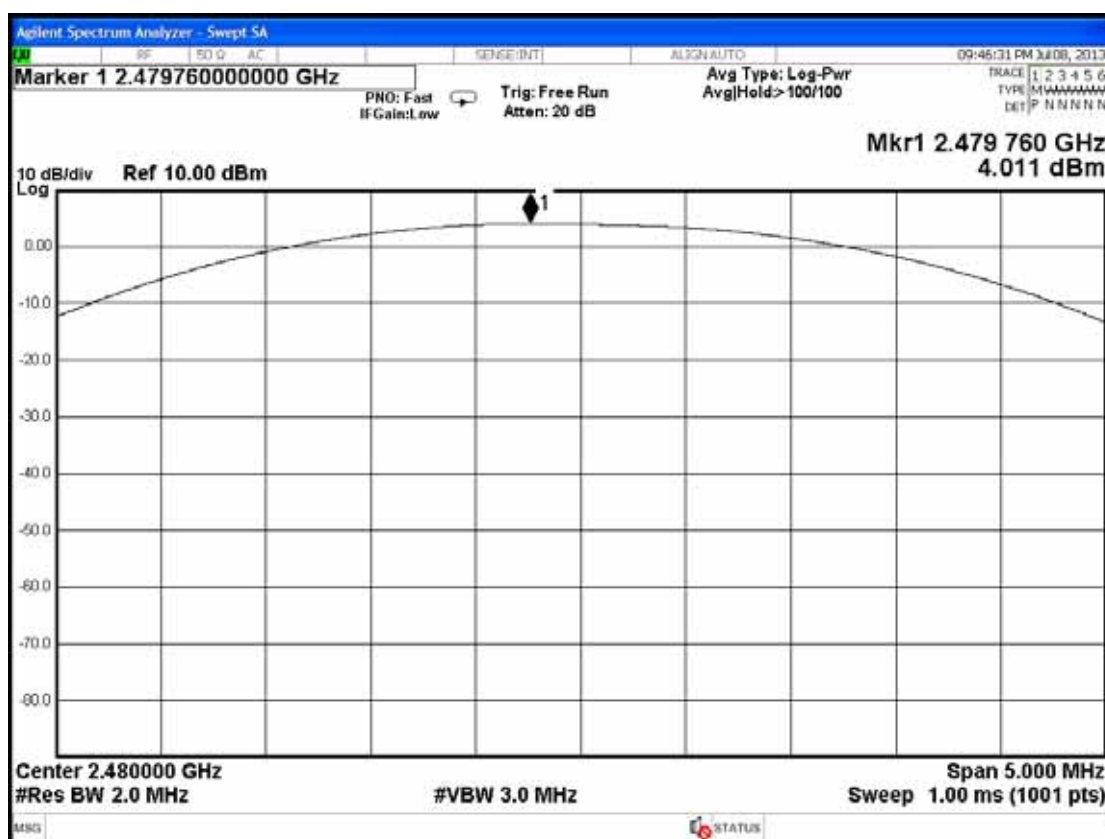

9. EMISSION LIMITATIONS MEASUREMENT

All emission levels have been compliance with the limit specified in 15.209, thus conducted limitation is not required and presented.

10.BAND EDGES MEASUREMENT

10.1.Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Signal Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'

10.2.Block Diagram of Test Setup

The same as section.4.2.

10.3.Specification Limits [§15.247(c), RSS-210 §A8.5]

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)). (※ This test result attaching to §3.6.3)

10.4.Operating Condition of EUT

Same as carrier frequency separation measurement which was listed in section 4.4.

10.5.Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.

The measurement guideline was according to FCC Public Notice DA 00-705.

10.6. Test Results

PASSED. The testing data was attached in the next pages.

[Note: Three types of modulation (8-DPSK, π /4DQPSK, GFSK) were evaluated but only two types of modulation (8-DPSK and GFSK) were reported in this report.]

EUT : Bluetooth Adapter Card

M/N : MB8811C0

Test Date : Jul. 08, 2013 Temperature : 25°C Humidity : 65%

10.6.1. Type of Modulation: 8-DPSK

1. Below Band edge : The highest emission level is -54.944dBm on 2.39990GHz.
2. Upper Band edge: The highest emission level is -56.023dBm on 2.48360GHz.

10.6.2. Type of Modulation: GFSK

1. Below Band edge : The highest emission level is -60.758dBm on 2.39990GHz.
2. Upper Band edge: The highest emission level is -66.881dBm on 2.48360GHz.

10.6.3. Hopping Mode

Type of Modulation: 8-DPSK

1. Below Band edge : The highest emission level is -61.247dBm on 2.39900GHz.
2. Upper Band edge: The highest emission level is -58.744dBm on 2.48360GHz.

Type of Modulation: GFSK

1. Below Band edge : The highest emission level is -56.111dBm on 2.39900GHz.
2. Upper Band edge: The highest emission level is -52.559dBm on 2.48360GHz.

Figure 1: 8-DPSK, Below Band edge

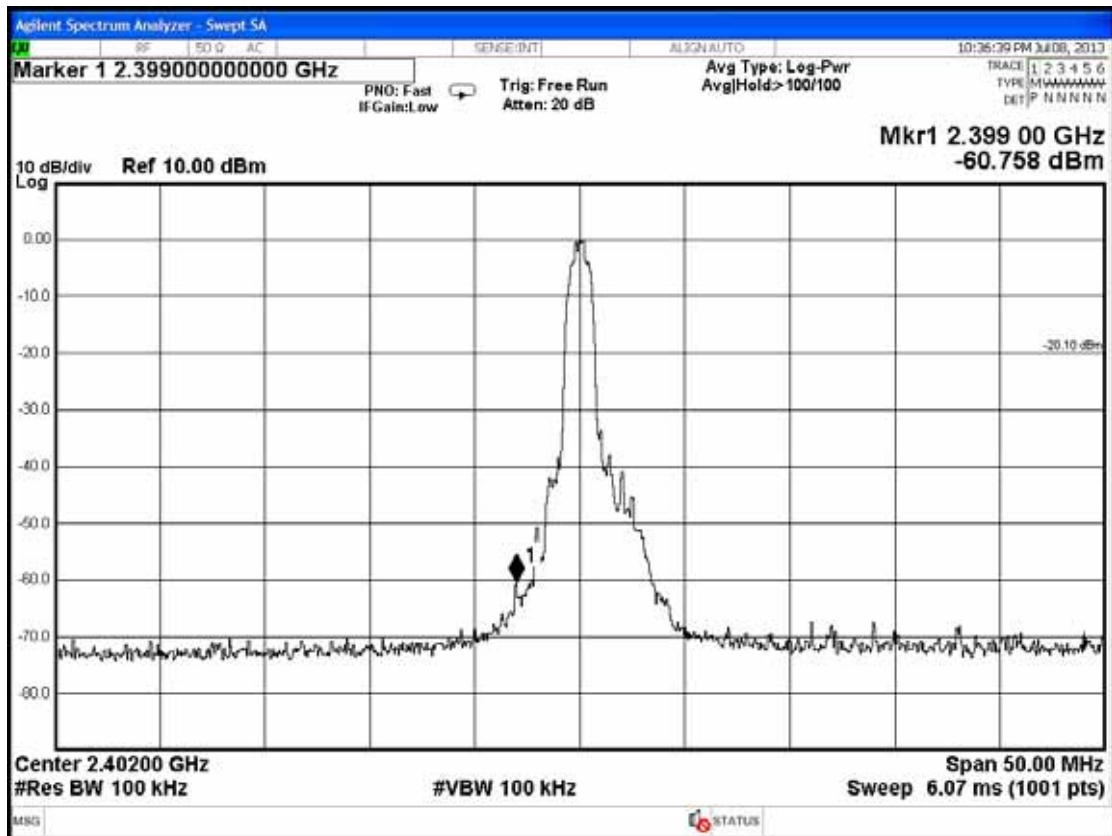


Figure 2: 8-DPSK, Upper Band edge

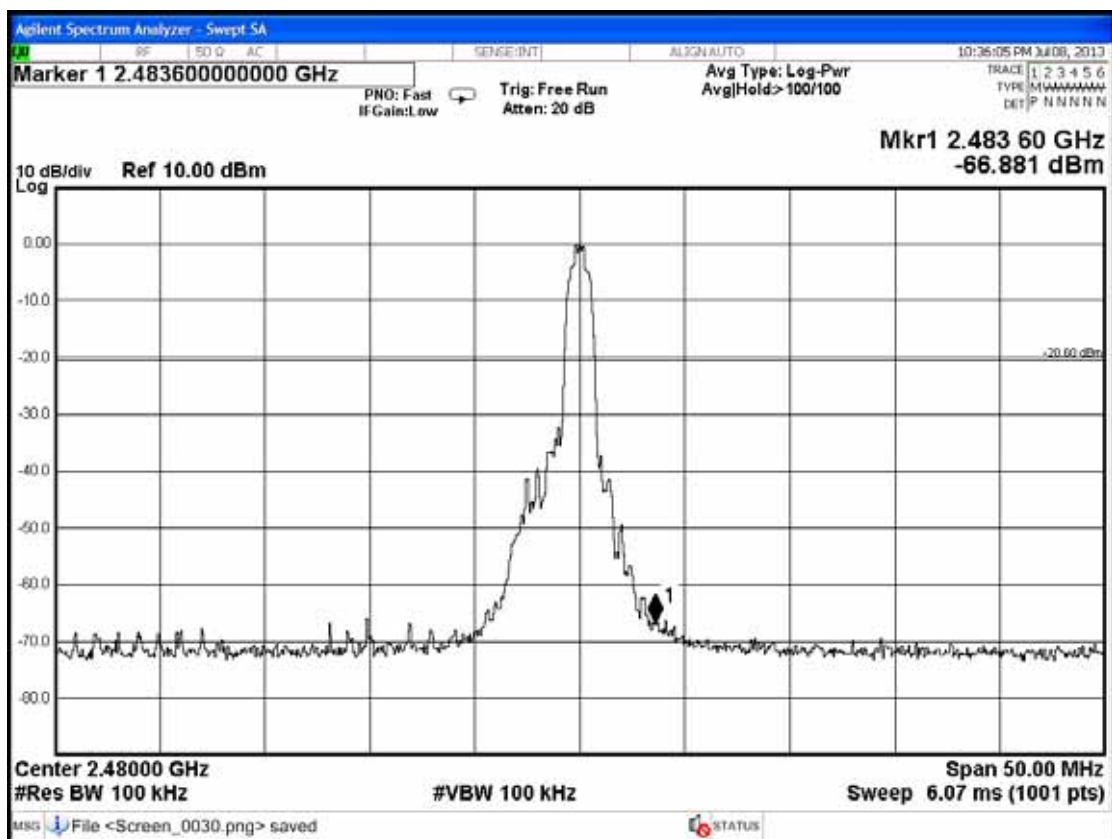


Figure 3: GFSK, Below Band edge


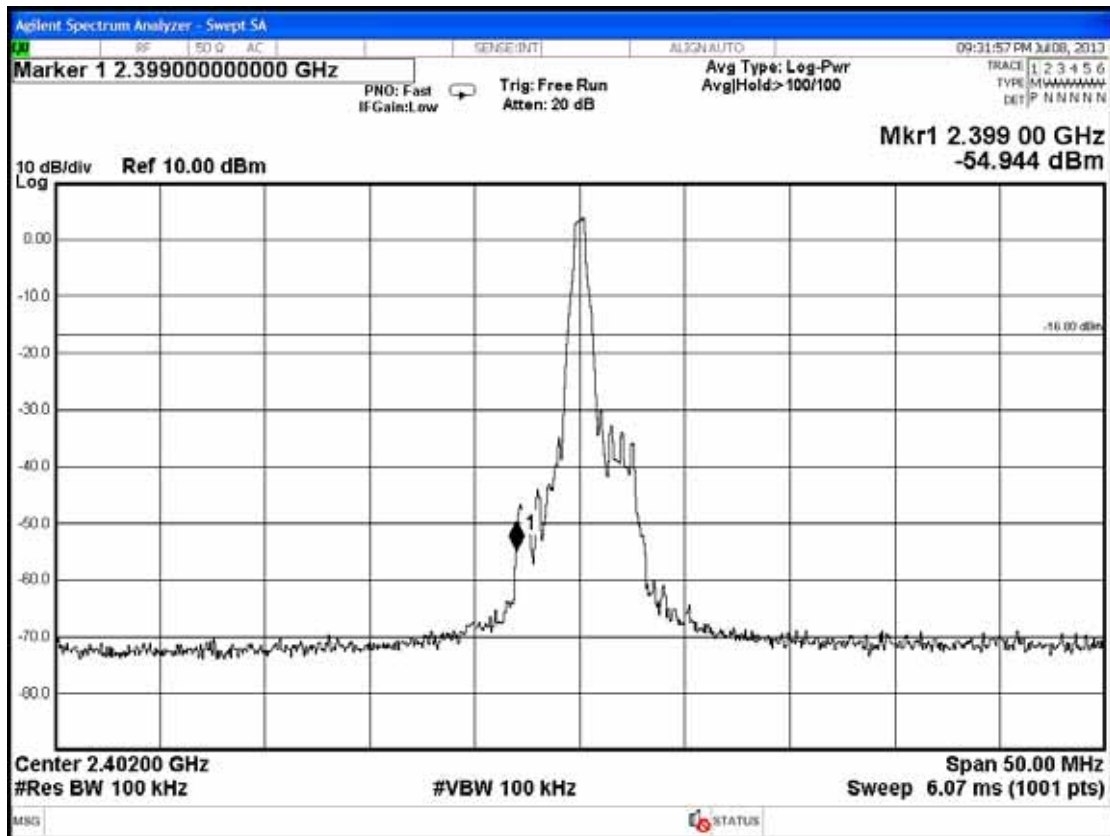


Figure 4: GFSK, Upper Band edge

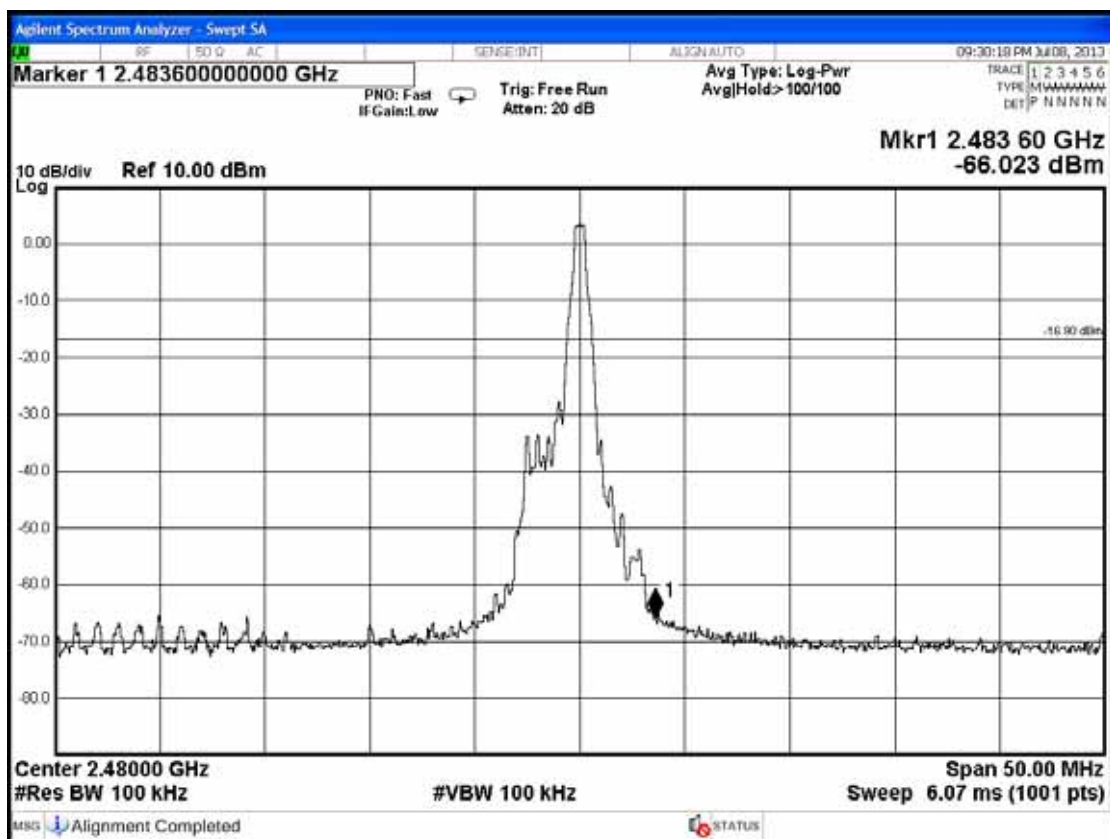

11.DEVIATION TO TEST SPECIFICATIONS

【NONE】

12. PHOTOGRAPHS

12.1. Photos of Conducted Disturbance Measurement



FRONT VIEW OF CONDUCTED MEASUREMENT



BACK VIEW OF CONDUCTED MEASUREMENT

12.2.Photos of Radiated Emission Measurement at Semi-Anechoic Chamber

12.2.1. Frequency Range 30MHz-1GHz



12.2.2. Frequency Range Above 1GHz



12.3.Photo of Section RF Conducted Measurement

