

**FCC 15.247 & RSS-247
2.4 GHz Report**

for

LG Electronics Inc.

**1, Gwanak-ro, Gwanak-gu, Seoul, 151-919,
Rep. of Korea**

Brand	: LG
Product Name	: Wireless Scheduling Switch
Model Name	: (1)9SSA2B1T520 (2)9SSA2B2T520
FCC ID	: BEJ9SSA2B2T520
IC	: 2703H-9SSA2B2T520

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. REPORT HISTORY.....	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of EUT	7
3.2. EUT Specifications Assessed in Current Report	8
3.3. Antenna Information	8
3.4. Test Configuration	9
3.5. Tested Supporting System List	12
3.6. Setup Configuration	12
3.7. Operating Condition of EUT	12
3.8. Description of Test Facility	13
3.9. Measurement Uncertainty	13
4. MEASUREMENT EQUIPMENT LIST	14
4.1. Radiated Emission Measurement	14
4.2. RF Conducted Measurement	14
5. CONDUCTED EMISSION MEASUREMENT	15
6. RADIATED EMISSION MEASUREMENT	16
6.1. Block Diagram of Test Setup	16
6.2. Radiated Emission Limits	17
6.3. Test Procedure	17
6.4. Measurement Result Explanation	18
6.5. Test Results	18
7. 6dB BANDWIDTH MEASUREMENT	30
7.1. Block Diagram of Test Setup	30
7.2. Specification Limits	30
7.3. Test Procedure	30
7.4. Test Results	30
8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	32
8.1. Block Diagram of Test Setup	32
8.2. Specification Limits	32
8.3. Test Procedure	32
8.4. Test Results	33
9. EMISSION LIMITATIONS MEASUREMENT	35
9.1. Block Diagram of Test Setup	35
9.2. Specification Limits	35
9.3. Test Procedure	35
9.4. Test Results	36
10. POWER SPECTRAL DENSITY	39
10.1. Block Diagram of Test Setup	39
10.2. Specification Limits	39
10.3. Test Procedure	39
10.4. Test Results	40

11. DEVIATION TO TEST SPECIFICATIONS..... 41

APPENDIX A TEST PHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : LG Electronics Inc.
Manufacture : LG Electronics Inc.
Factory : OHSUNG ELECTRONICS CO., LTD.
Product Name : Wireless Scheduling Switch
Model No. : (1)9SSA2B1T520 (2)9SSA2B2T520
Serial No. : N/A
Brand : LG
Power Supply : DC 3V


Applicable Standards:

FCC Rules and Regulations Part 15 Subpart C, Oct. 2014
RSS-Gen (Issue 4), November 2014
RSS-247 (Issue 1), May 2015
ANSI C63.10:2013
KDB 558074 D01 DTS Meas Guidance v03r03

AUDIX Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **AUDIX Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2015. 07. 23 ~ 28

Date of Report: 2015. 07. 29

Producer: 
(Tina Huang/Administrator)

Signatory: 
(Ben Cheng/Manager)

1. REPORT HISTORY

Revision	Date	Revision Summary	Report Number
0	2015. 07. 29	Original Report.	EM-F150434

2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	N/A, Note
15.247(d)/ 15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)	RSS-247 §5.2(1)	6dB Bandwidth	PASS
15.247(b)	RSS-247 §5.4(4)	Maximum Peak Output	PASS
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	RSS-247 §5.2(2)	Power Spectral Density	PASS
15.203	---	Antenna Requirement	PASS
Note: The EUT only employs battery power for operation, so it is unnecessary to test.			

3. GENERAL INFORMATION

3.1. Description of EUT

Product	Wireless Scheduling Switch	
Model Number	(1)9SSA2B1T520 (2)9SSA2B2T520	
	The difference lists for all models please see as below:	
	Model	Switch
	9SSA2B1T520	1-Group
Model Number	9SSA2B2T520	2-Group
	The model 9SSA2B2T520 was tested in this report, and 9SSA2B1T520 was assessed frequency below 1GHz for different appearance.	
Serial Number	N/A	
Brand Name	LG	
Applicant	LG Electronics Inc. 1, Gwanak-ro, Gwanak-gu, Seoul, 151-919, Rep. of Korea	
Manufacture	LG Electronics Inc. 1, Gwanak-ro, Gwanak-gu, Seoul, 151-919, Rep. of Korea	
Factory	OHSUNG ELECTRONICS Co., Ltd. 335-4, Sanho-daero, Gumi-si, Gyeongsangbuk-do, Korea	
RF Features	ZigBee (IEEE 802.15.4)	
Transmit Type	1T1R	
Device Category	☐ Outdoor Access Point ☐ Fixed point-to-point Access Point ☐ Indoor Access Point ☒ Mobile and Portable client device	
Date of Receipt of Sample	2015. 07. 17	

3.2. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
ZigBee (IEEE 802.15.4)	2405-2480	16	DSSS (O-QPSK)	0.25

Channel List			
ZigBee (IEEE 802.15.4)			
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480


3.3. Antenna Information

Antenna Part Number	Manufacture	Antenna Type	Frequency	Max Gain (dBi)
---	partron	Chip Antenna	2400~2485MHz	1.99

3.4. Test Configuration

Duty Cycle of EUT

IEEE 802.15.4-2003 MAC Constants		
maxBE	5	IEEE 802.15.4 specifies 5, ZigBee specifies 8
a Max Frame Response Time	1220	symbols
a Max Frame Retries	3	
a Unit Back off Period	20	symbols
mac Ack Wait Duration	54	symbols
mac Batt Life Ext Periods	6	Backoff periods
mac Max CSMA Back offs	4	
mac Min BE	3	IEEE 802.15.4 specifies 3, ZigBee specifies 5
a Min LIFS Period	40	symbols
a Min SIFS Period	12	symbols
a Min CAP Length	440	symbols
NB	0	
CW	2	
BE	3	

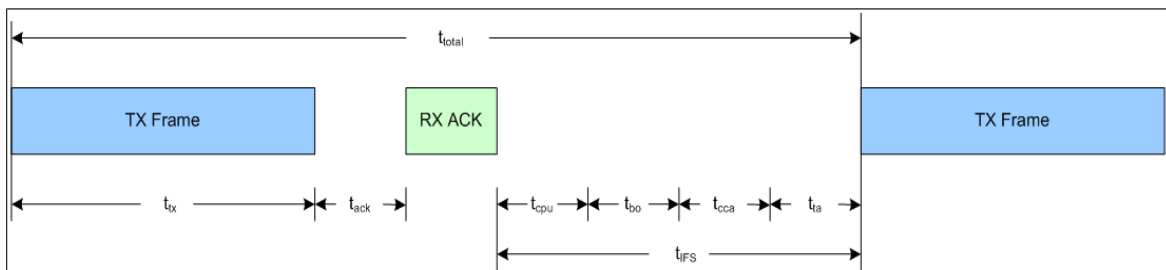

MAC-Level Calculation (SIFS)

Short Frame Scenario:	
1) TX Frame	Assume Frame is Data Frame
2) Wait for ACK	
3) RX ACK	
4) CPU Processing of ACK	
5) Wait for Back off	
6) Repeat 1)	

MAC-Level Calculation (SIFS)

Short Frame Scenario:		
1) TX Frame	Assume Frame is Data Frame	Assume Frame is Data Frame
2) Wait for ACK		
3) RX ACK		
4) CPU Processing of ACK		
5) Wait for Back off		
6) Repeat 1)		

Short Inter Frame Spacing (Slotted w/ ACK)

Short Inter Frame Spacing (Slotted w/ ACK)		
Short Frame	18	bytes
Data Frame Payload	18	bytes
ACK Frame	5	bytes
tack	12	sym
SIFS	12	sym
Back off Period	20	sym
Maximum Back off	7	
Back off Required	2	
Back off Time	70	sym

Transmit Time

Transmit Time		
TX Time (Packet)	0.000768	
Total TX Time (sec)	0.000768	

NOT Transmit time (RX or Idle)

NOT Transmit time (RX or Idle)		
Wait for ACK (tack)	0.000192	
RX Time (ACK)	0.000352	
Back off Time (tbo)	0.00112	(Backoff Time * Backoff Period)
CPU Processing (tcpu)	0.0002	(0.2ms average on EM2xx running EmberZNet)
CCA Assessment (tcca)	0.000128	(averaged over 8 symbols in RX Mode)
Turn Around Time (RX to TX)	0.000192	(After CCA, Radio turns over to TX in 12 symbols)
Total Off Time (sec)	0.002184	

Total Time (ttotal)	0.002952
Number of periods in 100ms Window	33.87533875
Worse Case (100ms window)	
TX Frame 15 times	0.01152
RX or IDLE 15 Times	0.03276
Sum	0.04428

Duty Cycle correction = $20 \cdot \log[0.01152 / (0.01152 + 0.03276)] = -11.34\text{dB}$

Item		Mode	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge ^{Note1}	ZigBee	0.25 Mbps	11/26
	Radiated Spurious Emission (30MHz-1GHz) ^{Note1}	ZigBee	0.25 Mbps	11/18/26 18 (For model 9SSA2B1T520)
	Radiated Spurious Emission (Above 1GHz) ^{Note1}	ZigBee	0.25 Mbps	11/18/26
Conducted Test Case	6dB Bandwidth	ZigBee	0.25 Mbps	11/18/26
	Peak Power Spectral Density	ZigBee	0.25 Mbps	11/18/26
	Peak Output Power	ZigBee	0.25 Mbps	11/18/26
	Band Edge	ZigBee	0.25 Mbps	11/18/26
	Spurious Emission	ZigBee	0.25 Mbps	11/18/26

Note 1:

☐ Mobile Device

☒ Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

☒ Lie

☐ Side

☐ Stand

3.5. Tested Supporting System List

3.5.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook PC	acer	MS2362	N/A	PPD-AAR5B225
2.	Test Jig	N/A	N/A	N/A	N/A

3.5.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	LAN Cable: Shielded, Detachable, 1.0m USB Cable: Shielded, Detachable, 1.8m Adapter: Chicony, M/N CPA09-A065N1, DC Cord: Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord: Unshielded, Detachable, 1.8m
2.	BUS Cable: Unshielded, Detachable, 0.1m

3.6. Setup Configuration

3.6.1. EUT Configuration for Radiated Emission

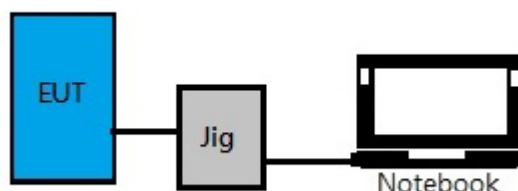

3.6.2. EUT Configuration for Conducted Test Items

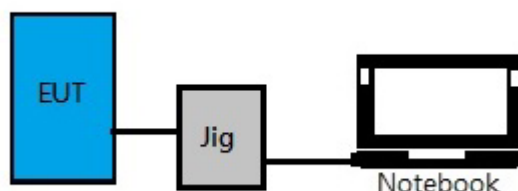

3.7. Operating Condition of EUT

Test program “ember.desktop” is used for enabling EUT RF function under continues transmitting and choosing data rate/ channel.

3.8. Description of Test Facility

Test Firm Name	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan May 06, 2015 File on Federal Communication Commission Registration Number: 90993
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

3.9. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Radiation Test (Distance: 3m)	30MHz~300MHz	± 3.64dB
	300MHz~1000MHz	± 4.07dB
	Above 1GHz	± 2.94dB

Remark : Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Radiated Emission Measurement

4.1.1. Frequency Range 30MHz~1000MHz

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2014. 09. 15	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2015. 06. 24	1 Year
3.	Amplifier	HP	8447D	2944A06305	2015. 02. 12	1 Year
4.	Bilog Antenna	TESEQ	CBL6112D	33821	2015. 02. 27	1 Year

4.1.2. Frequency Range Above 1GHz

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2014. 09. 15	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2015. 06. 24	1 Year
3.	Amplifier	Agilent	8449B	3008A02676	2015. 02. 11	1 Year
4.	2.4GHz Notch Filter	K&L	7NSL10-244 1.5E130.5-0 0	1	2015. 07. 22	1 Year
5.	3G High Pass Filter	Microwave Circuits	H3G018G1	484796	2014. 08. 25	1 Year
6.	Double-Ridged Waveguide Horn	ETS-Lindgren	3115	00114104	2015. 04. 07	1 Year
7.	Horn Antenna	EMCO	3116	2653	2014. 10. 14	1 Year

4.2. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2014. 07. 24	1 Year

5. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】


6. RADIATED EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.6

6.1.2. Setup Diagram for 30-1000 MHz

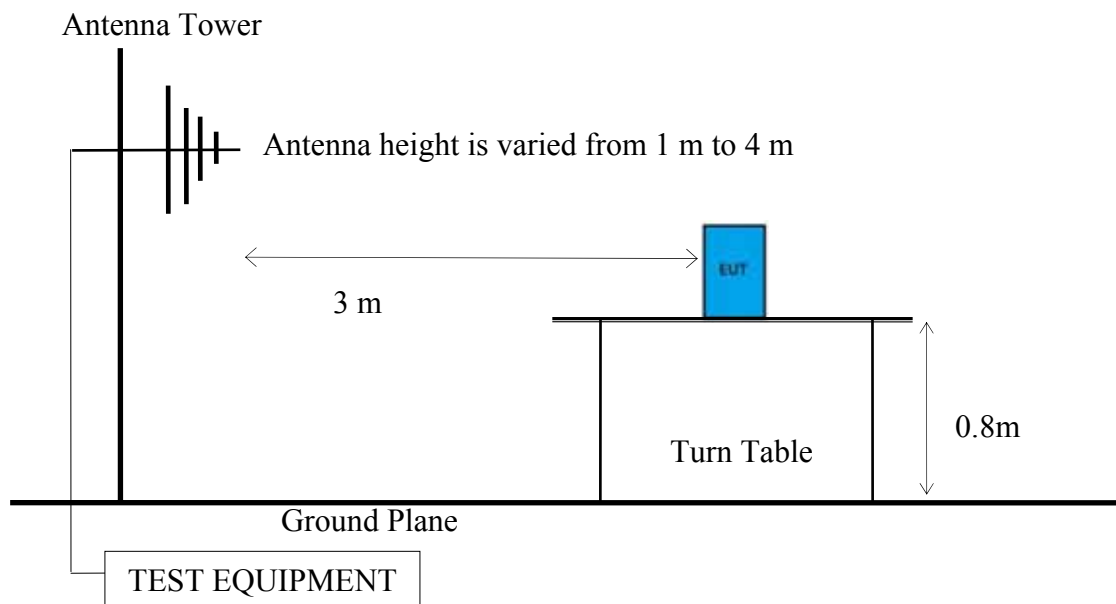

6.1.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

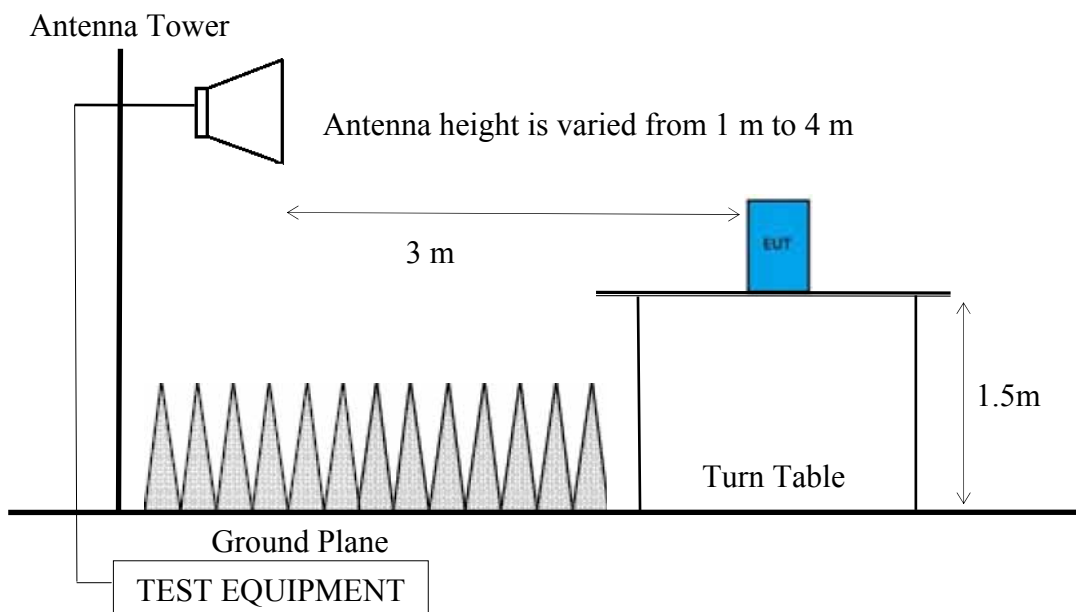

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205 and RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Field Strengths Limits	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

Remark : (1) $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

The EUT setup on the turn table which has 1.5m height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013, RSS-Gen and RSS-247 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

Frequency above 1GHz to 10th harmonic:

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average detector for finally measurement.

Average Measurement:

☐ **Option 1:**

- (1) RBW = 1 MHz
- (2) VBW = 1/T
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

☒ **Option 2:**

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

☒ Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading

☐ Average Emission Level = Antenna Factor + Cable Loss + Meter Reading

☒ Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) = $20 \log (TX_{on}/TX_{on+off})$ presented in section 3.4

☐ EPR = Peak Emission Level - 95.2dB - 2.14dBi

6.5. Test Results

PASSED.

Test Date	2015/07/23	Temp./Hum.	23°C/41%
Test Voltage	DC 3V (via batteries)		

6.5.1. Emissions within Restricted Frequency Bands

6.5.1.1. Frequency Below 1 GHz

Mode	ZigBee	Frequency	TX 2405MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
144.46	10.93	3.56	25.35	39.84	43.50	3.66	Peak
350.10	14.43	5.20	22.07	41.70	46.00	4.30	Peak
499.48	16.95	6.44	18.48	41.87	46.00	4.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
125.06	12.01	3.41	20.40	35.82	43.50	7.68	Peak
299.66	13.12	4.65	23.47	41.24	46.00	4.76	Peak
500.45	16.98	6.44	17.97	41.39	46.00	4.61	Peak

Mode	ZigBee	Frequency	TX 2440MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
144.46	10.93	3.56	25.66	40.15	43.50	3.35	Peak
299.66	13.12	4.65	24.70	42.47	46.00	3.53	Peak
499.48	16.95	6.44	18.55	41.94	46.00	4.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
125.06	12.01	3.41	20.51	35.93	43.50	7.57	Peak
299.66	13.12	4.65	23.89	41.66	46.00	4.34	Peak
500.45	16.98	6.44	18.32	41.74	46.00	4.26	Peak

Mode	ZigBee	Frequency	TX 2480MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
125.06	12.01	3.41	23.74	39.16	43.50	4.34	Peak
350.10	14.43	5.20	21.01	40.64	46.00	5.36	Peak
500.45	16.98	6.44	17.15	40.57	46.00	5.43	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
125.06	12.01	3.41	17.21	32.63	43.50	10.87	Peak
299.66	13.12	4.65	19.89	37.66	46.00	8.34	Peak
500.45	16.98	6.44	17.41	40.83	46.00	5.17	Peak

Mode	ZigBee	Frequency	TX 2440MHz
Model:	9SSA2B1T520		

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
143.49	11.00	3.55	26.47	41.02	43.50	2.48	Peak
350.10	14.43	5.20	23.17	42.80	46.00	3.20	Peak
500.45	16.98	6.44	17.91	41.33	46.00	4.67	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
106.63	11.41	3.27	19.19	33.87	43.50	9.63	Peak
324.88	13.78	4.93	23.57	42.28	46.00	3.72	Peak
500.45	16.98	6.44	18.46	41.88	46.00	4.12	Peak

6.5.1.2. Frequency Above 1 GHz to 10th harmonics

Band Edge:

Mode	ZigBee	Frequency	TX 2405MHz
------	--------	-----------	------------

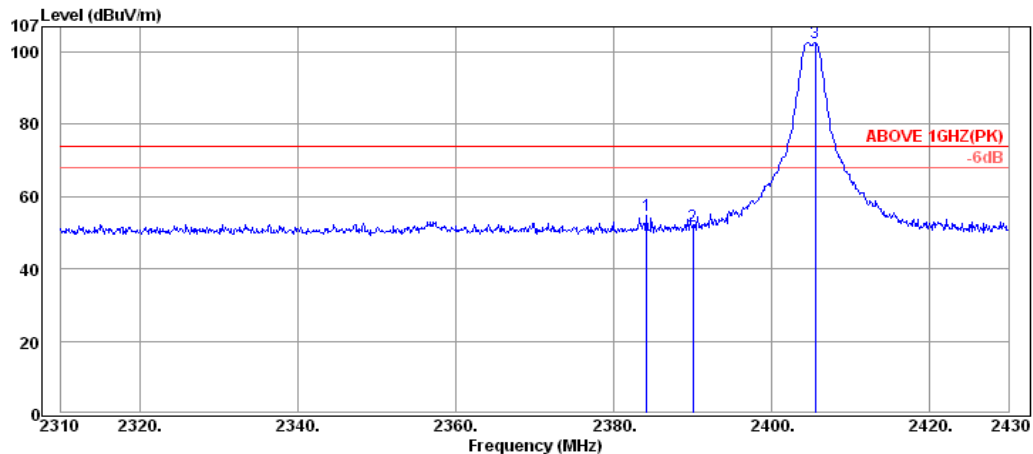


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.16	28.40	5.23	55.36	54.77	74.00	19.23	Peak
2390.04	28.40	5.24	52.39	51.80	74.00	22.20	Peak
2405.52	28.42	5.26	103.06	102.51	---	---	Peak

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
2384.16	54.77	-11.34	43.43	54.00	10.57	Average
2390.04	51.8	-11.34	40.46	54.00	13.54	Average

Mode	ZigBee	Frequency	TX 2405MHz
------	--------	-----------	------------

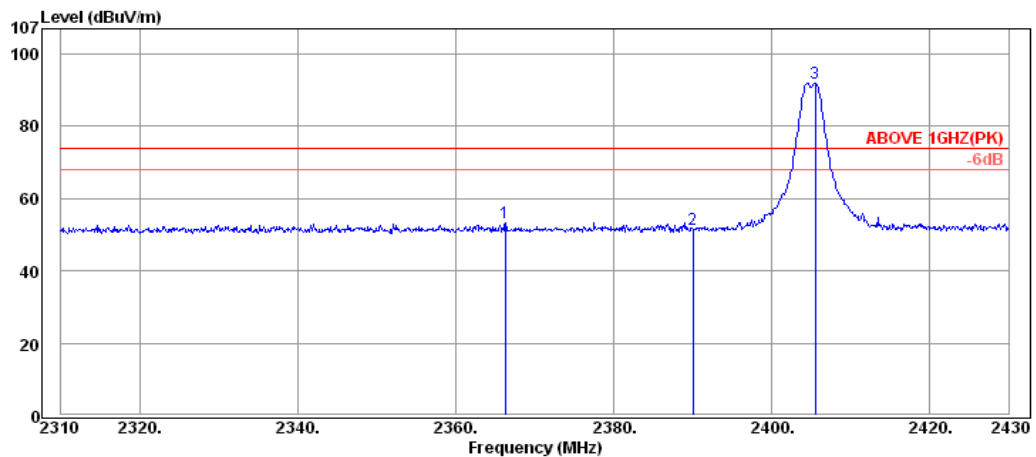


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2366.28	28.38	5.21	19.81	53.40	74.00	20.60	Peak
2390.04	28.40	5.24	17.95	51.59	74.00	22.41	Peak
2405.52	28.42	5.26	58.21	91.89	---	---	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
2366.28	53.4	-11.34	42.06	54.00	11.94	Average
2390.04	51.59	-11.34	40.25	54.00	13.75	Average

Mode	ZigBee	Frequency	TX 2480MHz
------	--------	-----------	------------

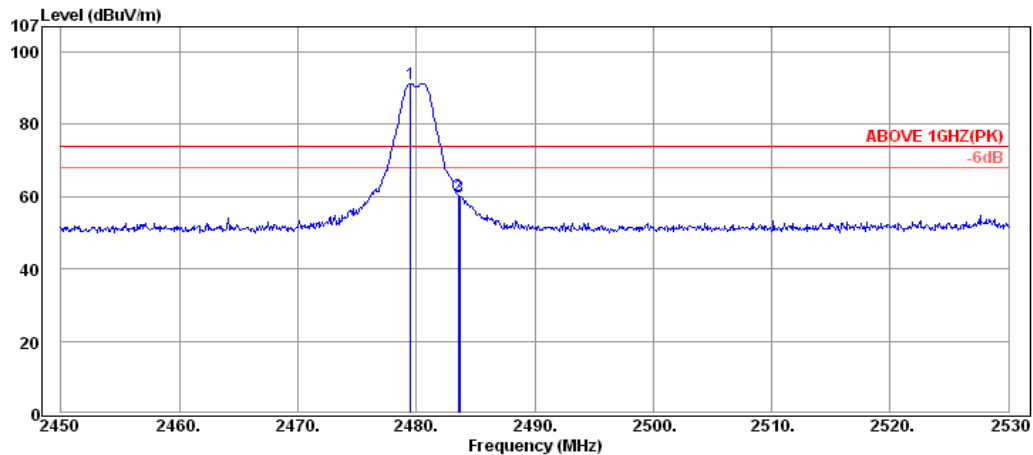


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.52	28.48	5.36	57.48	91.32	---	---	Peak
2483.52	28.49	5.37	26.46	60.32	74.00	13.68	Peak
2483.68	28.49	5.37	26.21	60.07	74.00	13.93	Peak

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
2483.52	60.32	-11.34	48.98	54.00	5.02	Average
2483.68	60.07	-11.34	48.73	54.00	5.27	Average

Mode	ZigBee	Frequency	TX 2480MHz
------	--------	-----------	------------

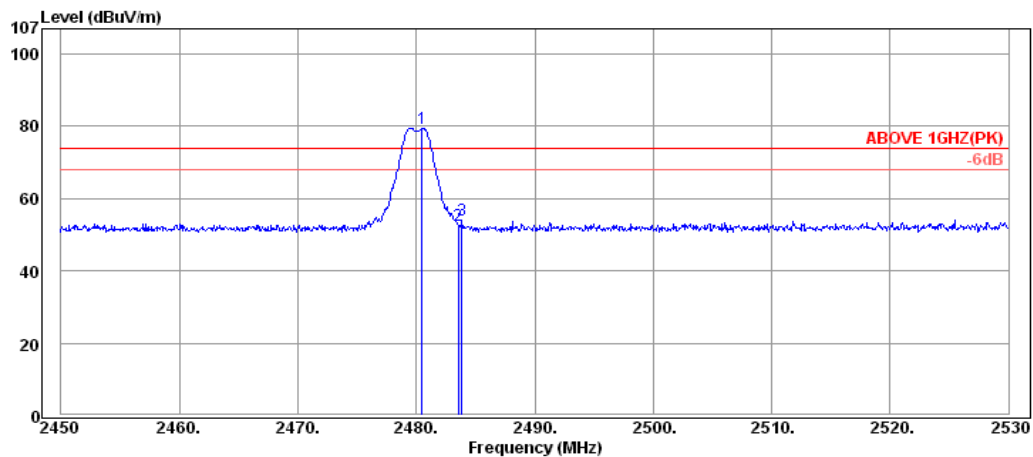

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.48	28.48	5.36	45.74	79.58	---	---	Peak
2483.52	28.49	5.37	18.80	52.66	74.00	21.34	Peak
2483.84	28.49	5.37	20.20	54.06	74.00	19.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
2483.52	52.66	-11.34	41.32	54.00	12.68	Average
2483.84	54.06	-11.34	42.72	54.00	11.28	Average

6.5.2. Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	ZigBee	Frequency	TX 2405MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4811.50	33.01	8.09	14.87	55.97	74.00	18.03	Peak
7214.00	35.80	9.98	45.01	56.06	74.00	17.94	Peak

Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
4811.50	55.97	-11.34	44.63	54.00	9.37	Average
7214.00	56.06	-11.34	44.72	54.00	9.28	Average

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.00	32.98	8.09	19.28	60.35	74.00	13.65	Peak
7214.00	35.80	9.98	51.36	62.41	74.00	11.59	Peak

Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
4810.00	60.35	-11.34	49.01	54.00	4.99	Average
7214.00	62.41	-11.34	51.07	54.00	2.93	Average

Mode	ZigBee	Frequency	TX 2440MHz
------	--------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4879.00	33.13	8.17	8.99	50.29	74.00	23.71	Peak

Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
4879.00	50.29	-11.34	38.95	54.00	15.05	Average

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4880.50	33.13	8.17	16.02	57.32	74.00	16.68	Peak
7322.00	36.07	10.04	44.88	56.23	74.00	17.77	Peak

Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Remark
4880.50	57.32	-11.34	45.98	54.00	8.02	Average
7322.00	56.23	-11.34	44.89	54.00	9.11	Average

Mode	ZigBee	Frequency	TX 2480MHz
------	--------	-----------	------------

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4958.50	33.31	8.24	11.71	53.26	74.00	20.74	Peak


Emission Frequency (MHz)	Peak Emission Level (dB/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
4958.50	53.26	-11.34	41.92	54.00	12.08	Average

6.5.3. Emissions in Non-restricted Frequency Bands

Pursuant to KDB 558074 D01 v03r03 that emission levels below the 15.209 RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

7. 6dB BANDWIDTH MEASUREMENT

7.1. Block Diagram of Test Setup

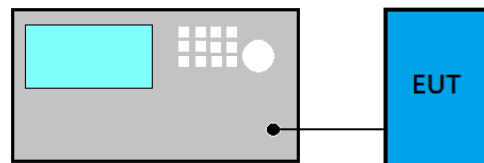

7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r03:

■ Option 2

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.


7.4. Test Results

Test Date	2015/07/27~2015/07/28	Temp./Hum.	25°C/37%
Cable Loss	0.5dB	Test Voltage	DC 3V (via batteries)

7.4.1. 6dB Bandwidth Result


Modulation Type	Centre Frequency (MHz)	6 dB Bandwidth (MHz)
ZigBee	2405	1.174
	2440	1.201
	2480	1.368

7.4.2. Measurement Plots

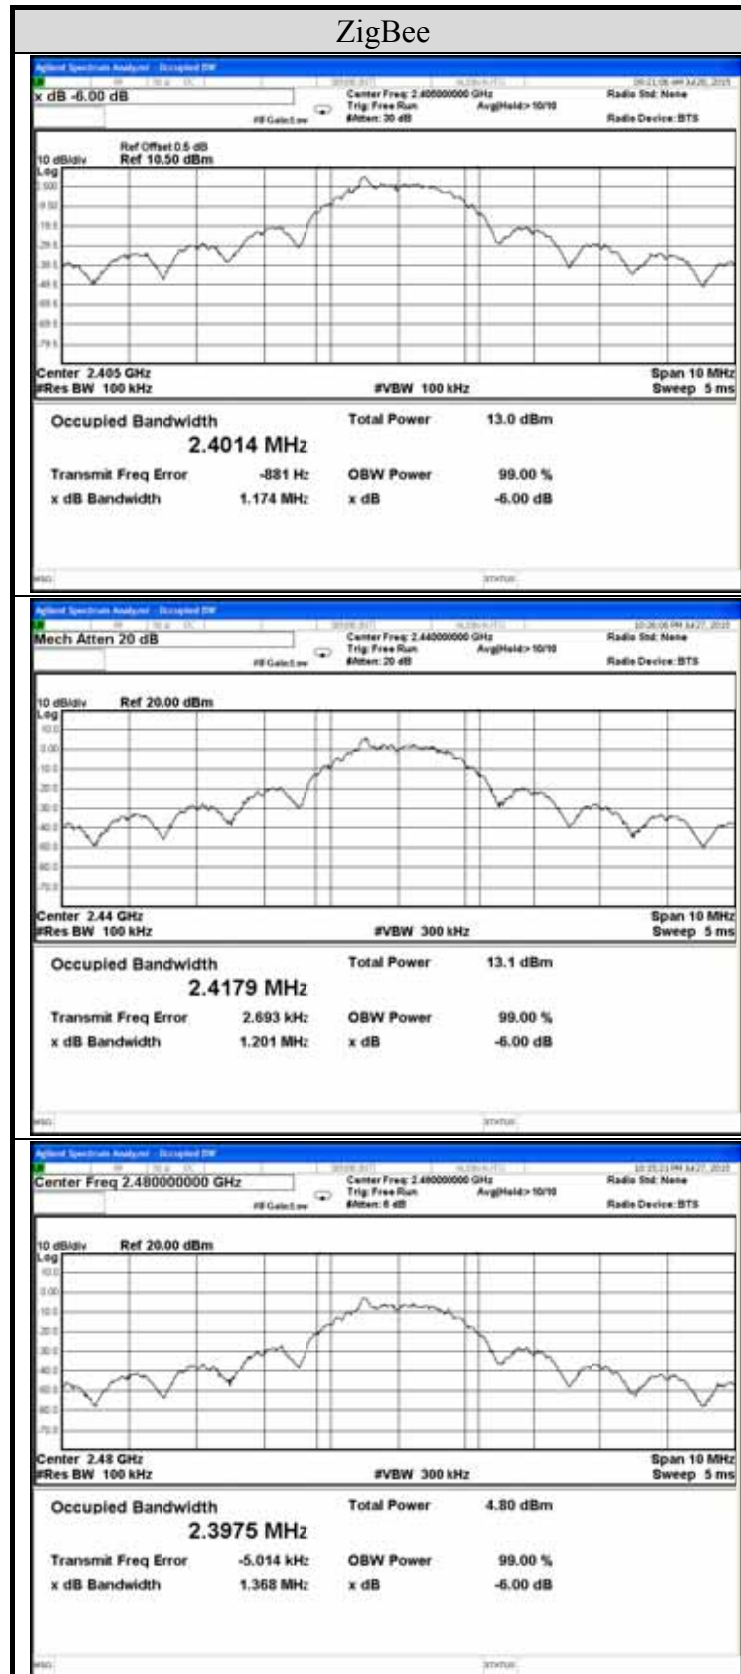

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Block Diagram of Test Setup

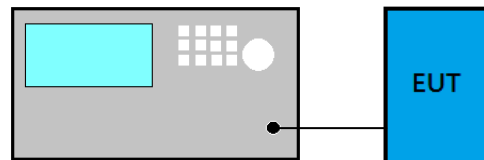

8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm)

8.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r03:

☐ **PKPM1 Peak power meter method:**

EUT is connected to power sensor and record the maximum output power.

☐ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.5.1 is < 98%.

☒ **RBW ≥ DTS bandwidth**

- (1) Set span to at least 3 times the OBW
- (2) Set $RBW \geq OBW$
- (3) Set the video bandwidth (VBW) $\geq 3 \times RBW$.
- (4) Detector = Peak
- (5) Trace mode = max hold
- (6) Sweep = auto couple.
- (7) To find the peak amplitude level.

8.4. Test Results


Test Date	2015/07/24	Temp./Hum.	24°C/40%
Cable Loss	0.5dB	Test Voltage	DC 3V (via batteries)

8.4.1. Peak Output Power

Modulation Type	Centre Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	
ZigBee	2405	7.046	0.005065	< 30 dBm (1 W)
	2440	7.183	0.005228	
	2480	-1.470	0.000713	


Note: The results have been included cable loss.

8.4.2. Peak Measurement Plots

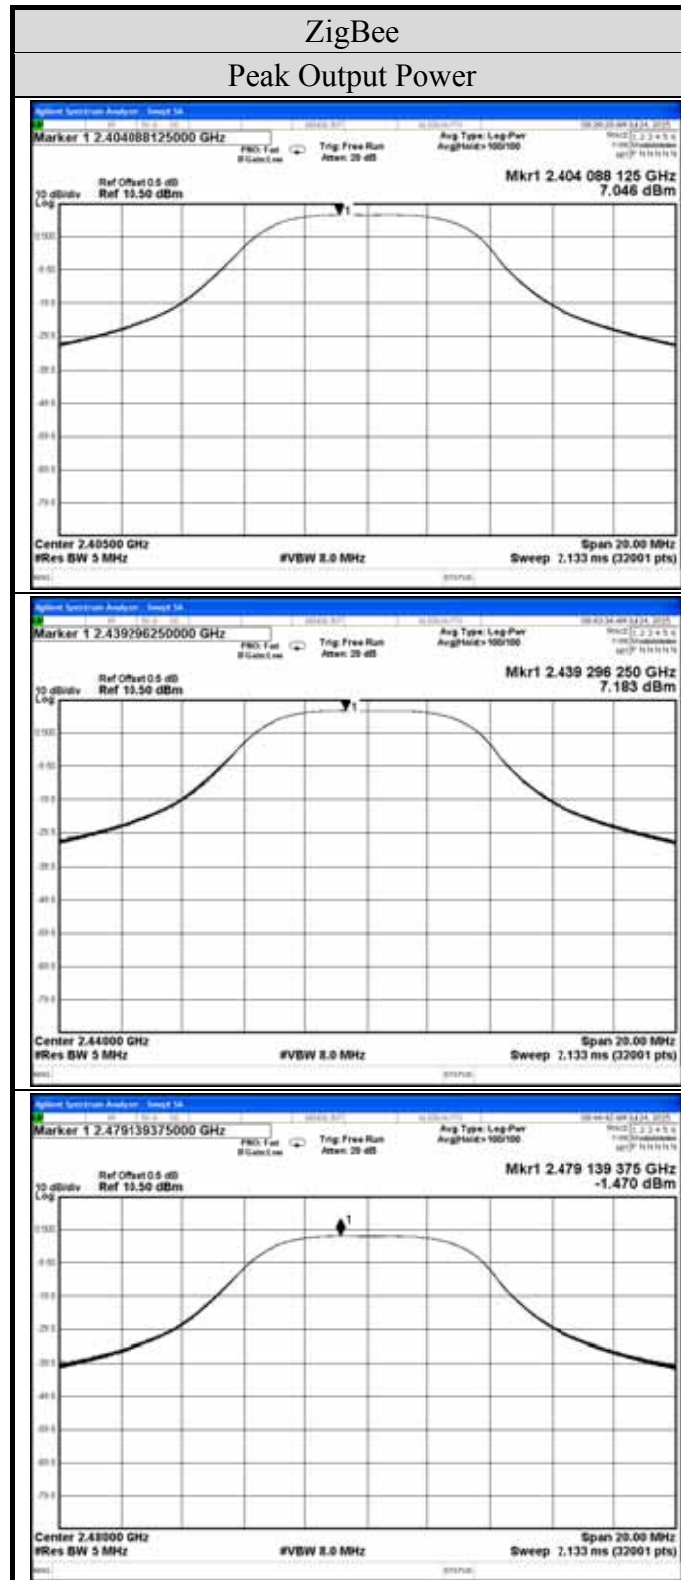

9. EMISSION LIMITATIONS MEASUREMENT

9.1. Block Diagram of Test Setup

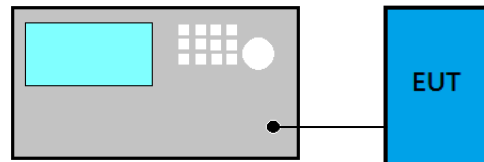

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

9.3. Test Procedure

■ Reference Level


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

■ Emission Level Measurement

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

9.4. Test Results


Test Date	2015/07/28	Temp./Hum.	25°C/37%
Mode	ZigBee	Frequency	TX 2405MHz
Cable Loss	0.5dB	Test Voltage	DC 3V (via batteries)

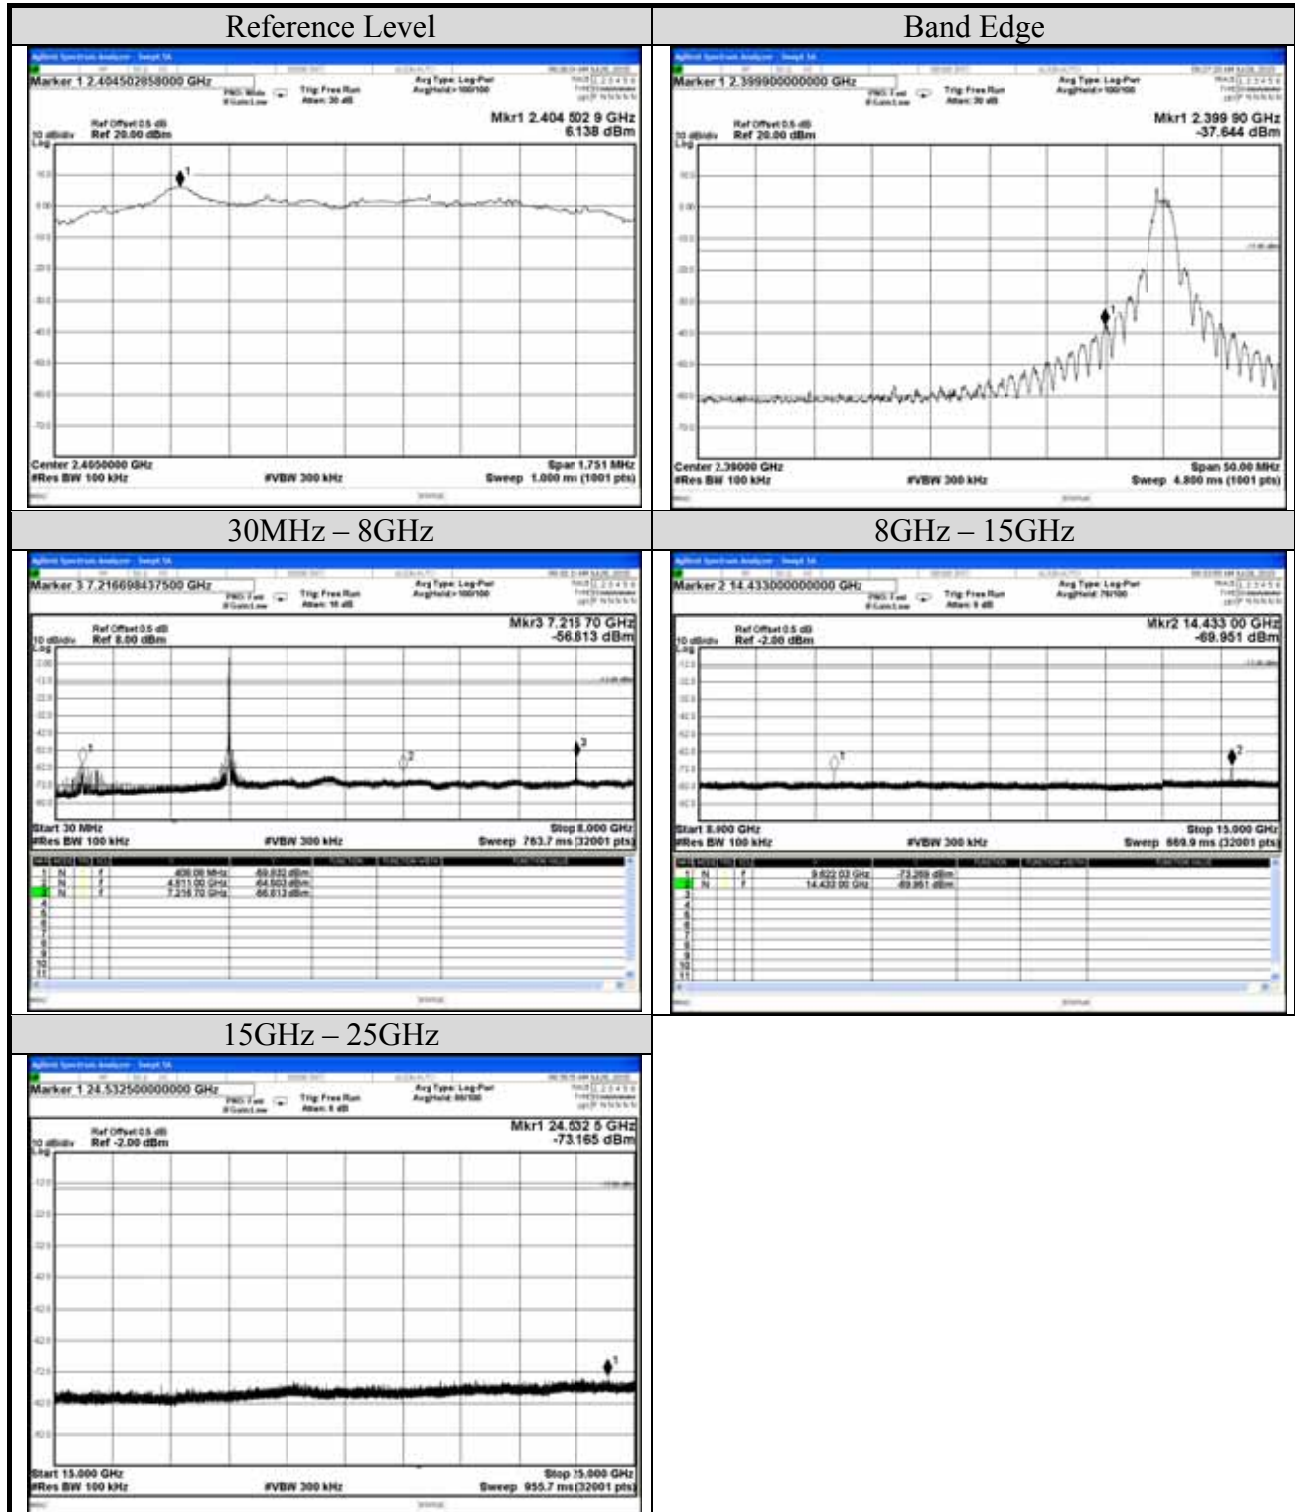

AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2015/07/27	Temp./Hum.	25°C/37%
Mode	ZigBee	Frequency	TX 2440MHz
Cable Loss	0.5dB	Test Voltage	DC 3V (via batteries)

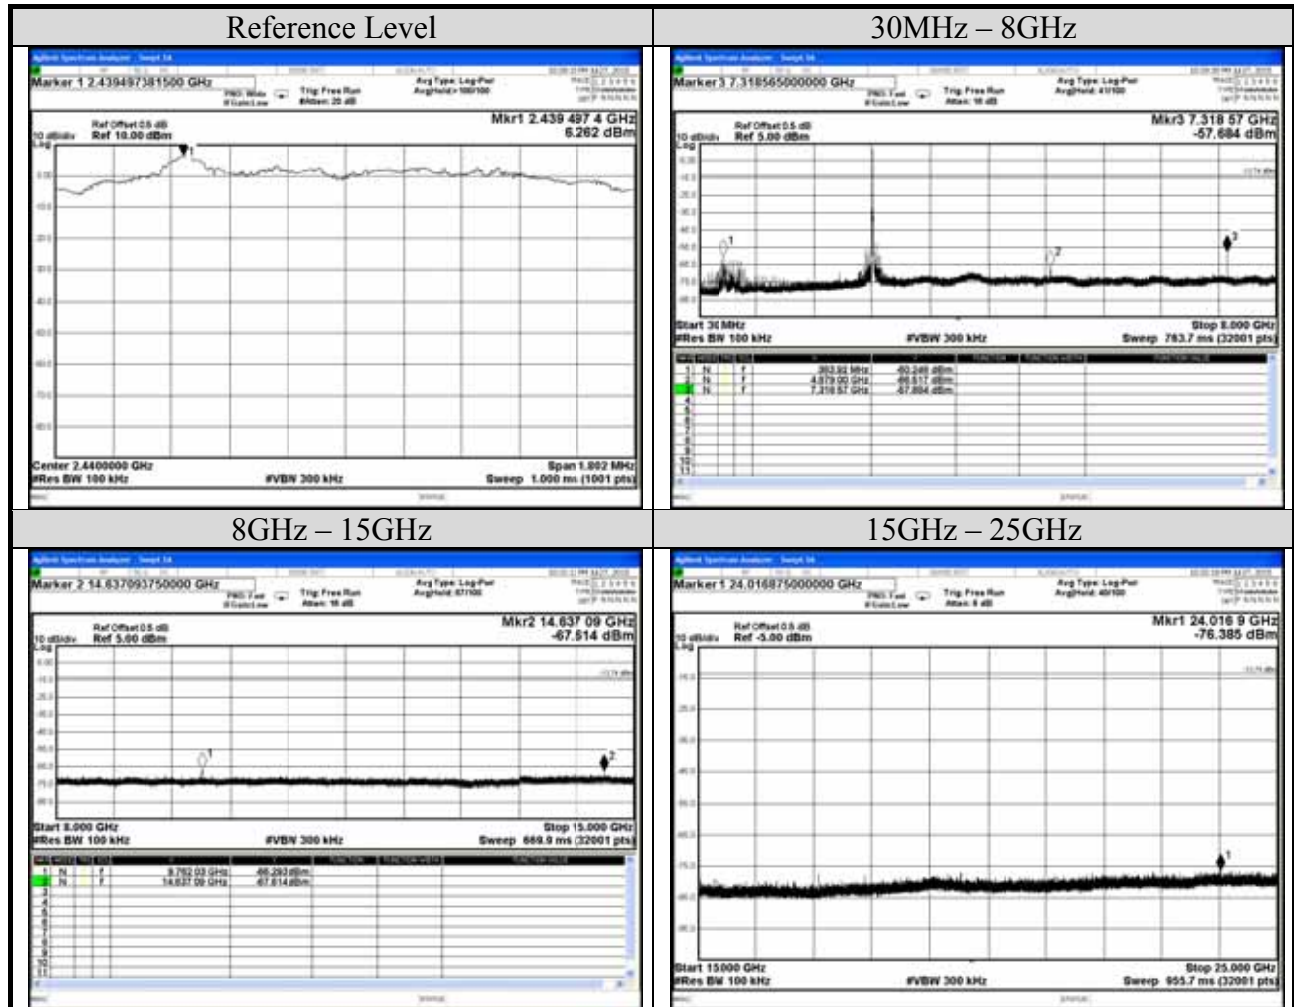

AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2015/07/27	Temp./Hum.	25°C/37%
Mode	ZigBee	Frequency	TX 2480MHz
Cable Loss	0.5dB	Test Voltage	DC 3V (via batteries)

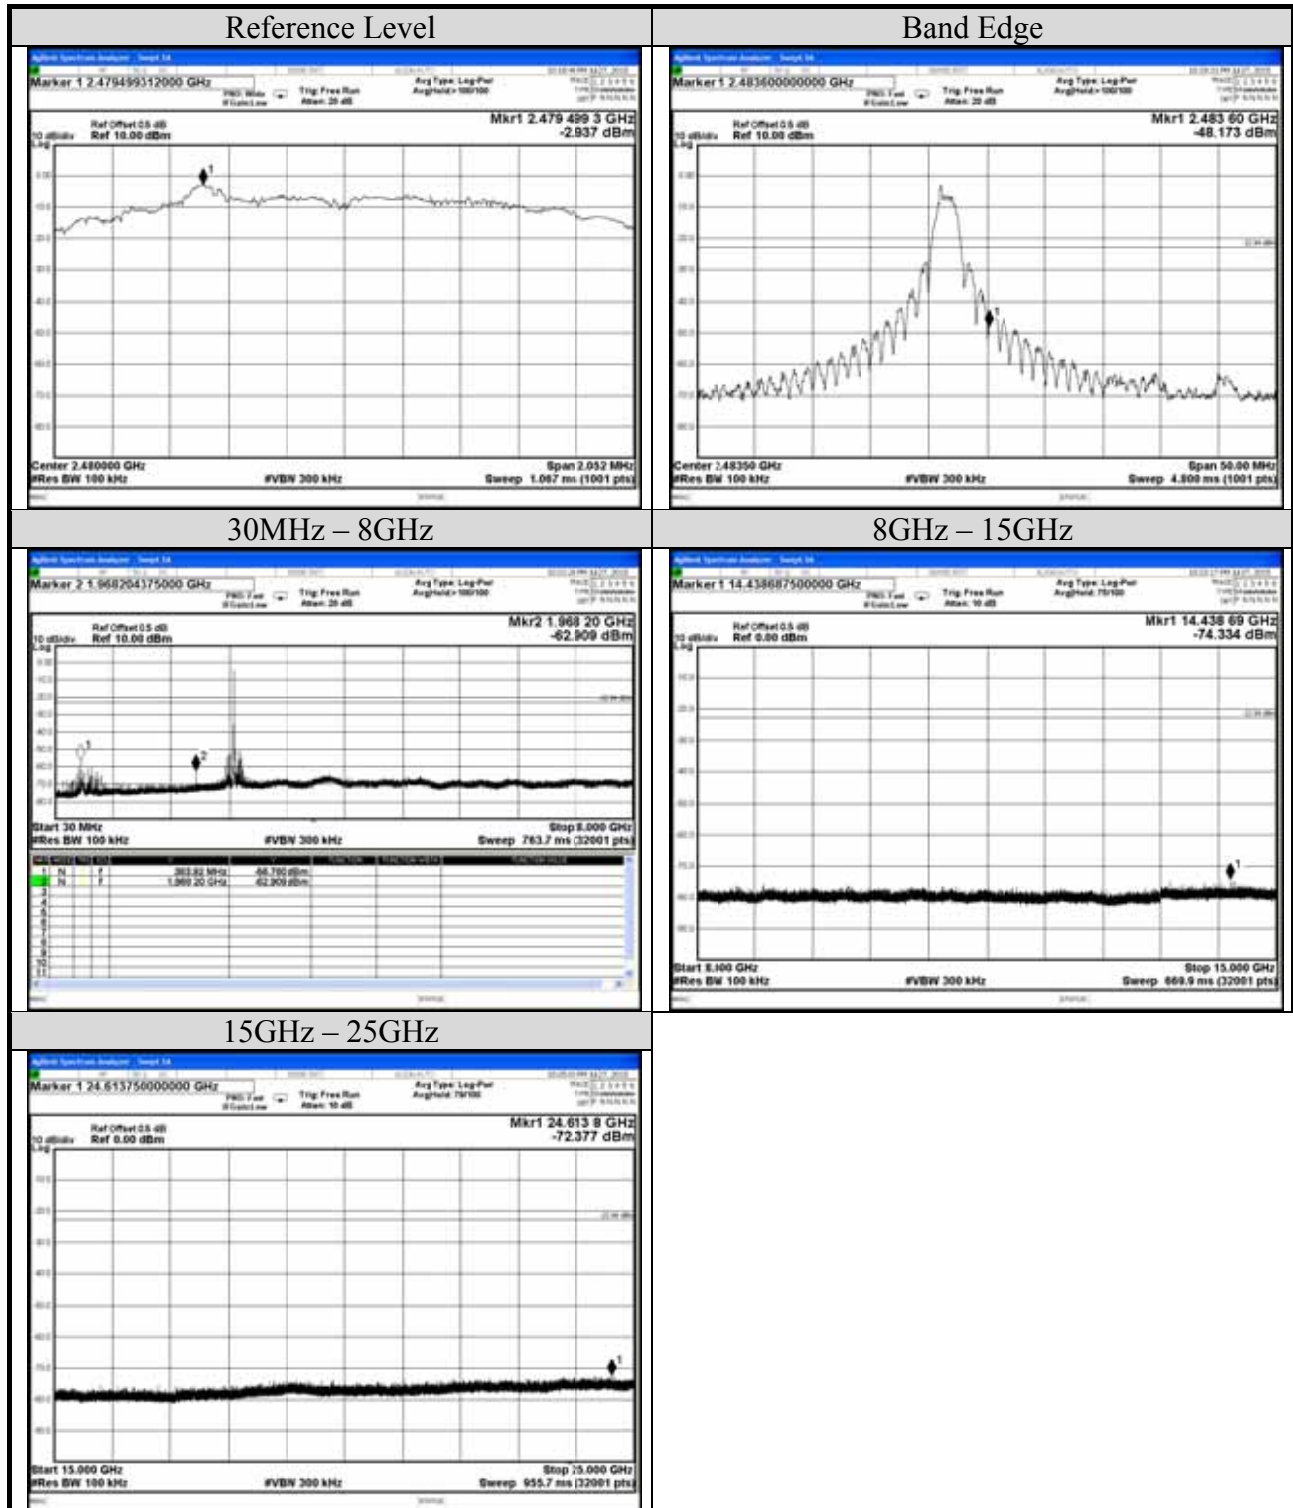

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

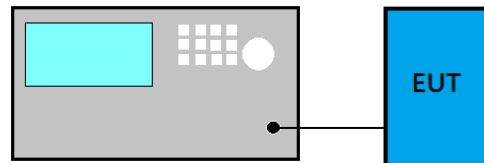

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r03:

■ Method PKPSD (peak PSD)


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

□ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.5.1. $< 98\%$.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Test Date	2015/07/27~2015/07/28	Temp./Hum.	25°C/37%
Cable Loss	0.5dB	Test Voltage	DC 3V (via batteries)

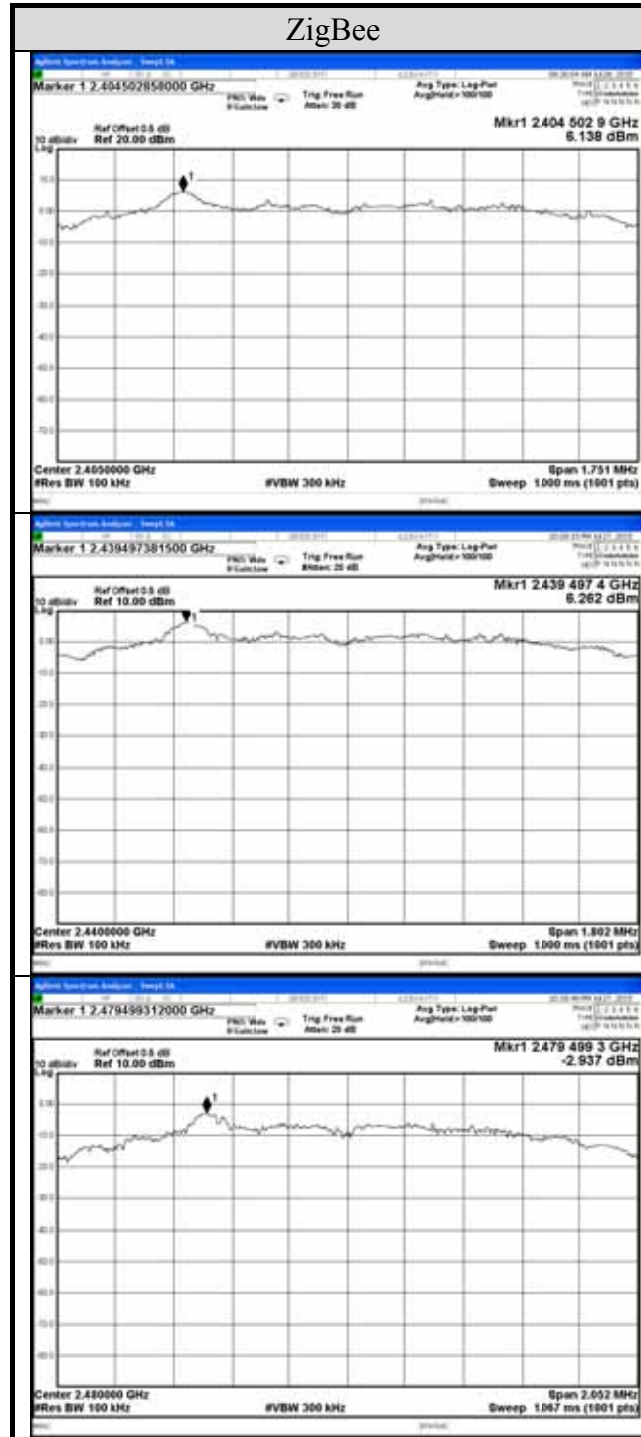

11.DEVIATION TO TEST SPECIFICATIONS

【NONE】