

RF TEST REPORT

Test item : Cellular/PCS GSM/GPRS Phone with Bluetooth and EDGE RX
Model No. : LG-A250, A250, LG-A255, A255, LGA250, LGA255
Order No. : 1102-00239
Date of receipt : 2011-02-21
Test duration : 2011-03-21 ~ 2011-03-28
Date of issue : 2011-03-28
Use of report : FCC Original Grant


Applicant : LG Electronics, Inc.
60-39, Gasan-dong, Gumchon-gu, Seoul, 153-023, Korea

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : FCC Part 15 Subpart C 247
Test environment : See appended test report
Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:




Engineer
D.C. CHA

Witnessed by:

N/A

Reviewed by:



Manager
W.J. Lee

Table of Contents

1. General Information	3
1.1 Testing Laboratory	3
1.2 Details of Applicant	3
1.3 Description of EUT	3
1.4 Declaration by the manufacturer.....	3
1.5. Information about the FHSS characteristics:	4
1.5.1. Pseudorandom Frequency Hopping Sequence	4
1.5.2. Equal Hopping Frequency Use.....	4
1.5.3. System Receiver Input Bandwidth	4
1.6. Test Equipment List	5
1.7. Summary of Test Results	6
1.8 Conclusion of worst-case and operation mode	7
1.9 Test report revision	7
2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	8
2.1. Test Setup.....	8
2.1.1. Transmitter Radiated Spurious Emissions.....	8
2.1.2. Conducted Spurious Emissions.....	8
2.2. Limit	9
2.3. Test Procedures.....	10
2.3.1. Test Procedures for Radiated Spurious Emissions	10
2.3.2. Test Procedures for Conducted Spurious Emissions	10
2.4. Test Results.....	11
2.4.1. Radiated Emission.....	11
2.4.2. Conducted Spurious Emissions.....	17
3. 99 % & 20dBc BW.....	32
3.1. Test Setup.....	32
3.2. Limit	32
3.3. Test Procedure.....	32
3.4. Test Results.....	32
5. Maximum Peak Output Power Measurement	38
5.1. Test Setup.....	38
5.2. Limit	38
5.3. Test Procedure	38
5.4. Test Results.....	39
6. Transmitter AC Power Line Conducted Emission	45
6.1. Test Setup.....	45
6.2. Limit	45
6.3. Test Procedures	45
6.4. Test Results.....	46

1. General Information

1.1 Testing Laboratory

Digital EMC Co., Ltd.

683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

www.digitalemcc.com

Telephone : + 82-31-321-2664

FAX : + 82-31-321-1664

1.2 Details of Applicant

Applicant : LG Electronics Inc.

Address : 60-39, Gasan-dong, Gumchon-gu, Seoul, 153-023, Korea

Contact person : Hyeon Kyun, Kim

Phone No. : +82-2-2033-1113

1.3 Description of EUT

Product	Cellular/PCS GSM/GPRS Phone with Bluetooth and EDGE RX
Model Name	LG-A250, A250, LG-A255, A255, LGA250, LGA255
Serial Number	Identical prototype
Power Supply	Lithium Ion Battery: DC 3.7V
Frequency Range	2402 ~ 2480MHz
Modulation Technique	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channels	79
Antenna Type	Internal Antenna
Antenna Gain	PK -2.99dBi

1.4. Declaration by the manufacturer

- N/A

1.5. Information about the FHSS characteristics:

1.5.1. Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

1.5.2. Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

1.5.3. System Receiver Input Bandwidth

Each channel bandwidth is 1MHz

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	Next.Due.Date (dd/mm/yy)	S/N
Spectrum Analyzer	Agilent	E4440A	30/09/10	30/09/11	MY45304199
Spectrum Analyzer	Rohde Schwarz	FSQ26	11/01/11	11/01/12	200445
Spectrum Analyzer	Agilent	N9020A	07/01/11	07/01/12	MY49100833
Power Splitter	Anritsu	K241B	05/10/10	05/10/11	020611
Digital Multimeter	H.P	34401A	07/03/11	07/03/12	3146A13475, US36122178
Signal Generator	Rohde Schwarz	SMR20	08/03/11	08/03/12	101251
Vector Signal Generator	Rohde Schwarz	SMJ100A	11/01/11	11/01/12	100148
Bluetooth Tester	TESCOM	TC-3000B	01/07/10	01/07/11	3000B000268
Thermo hygrometer	BODYCOM	BJ5478	13/01/11	13/01/12	090205-2
DC Power Supply	HP	6622A	07/03/11	07/03/12	3448A03760
High-pass filter	Wainwright	WHNX3.0	N/A	N/A	9
BICONICAL ANT.	Schwarzbeck	VHA 9103	06/10/09	06/10/11	91031946
LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A	07/07/10	07/07/11	590
HORN ANT	ETS	3115	14/07/10	14/07/11	6419
HORN ANT	A.H.Systems	SAS-574	10/06/09	10/06/11	154
Amplifier (25dB)	Agilent	8447D	07/03/11	07/03/12	2944A10144
Amplifier (30dB)	Agilent	8449B	23/04/10	23/04/11	3008A01590
EMI TEST RECEIVER	R&S	ESU	20/01/11	20/01/12	100014
Spectrum Analyzer(CE)	H.P	8591E	07/03/11	07/03/12	3649A05889
LISN	Kyoritsu	KNW-407	11/01/11	11/01/12	8-317-8
LISN	Kyoritsu	KNW-242	11/01/11	11/01/12	8-654-15
CVCF	NF Electronic	4420	08/03/11	08/03/12	304935/337980
50 ohm Terminator	HME	CT-01	11/01/11	11/01/12	N/A
RFI/FIELD Intensity Meter	Kyoritsu	KNM-2402	02/07/10	02/07/11	4N-170-3

1.7. Summary of Test Results

FCC Part Section(s)	Parameter	Limit (Using in 2400 ~ 2483.5MHz)	Test Condition	Status Note 1
15.247(a)	99% & 20 dB Bandwidth	None	Conducted	C
15.247(b)	Transmitter Output Power	=< 1Watt , if CHs >= 75 Others =<0.125W		C
15.247(d)	Band-edge	The radiated emission to any 100 kHz of out-band shall be at least 20dB below the highest in-band spectral density.		C
	Conducted Spurious Emissions			C
15.205 15.209	Radiated Emissions	FCC 15.209 Limits	Radiated	C
15.207	AC Conducted Emissions	FCC 15.207 Limits	AC Line Conducted	C
15.203	Antenna Requirements	FCC 15.203	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: The sample was tested according to the following specification: ANSI C-63.4-2003, DA00-705				

1.8 Conclusion of worst-case and operation mode

The EUT has three type of modulation (GFSK, $\pi/4$ DQPSK and 8DPSK).

Therefore all applicable requirements were tested all the modulation.

The field strength of spurious emission was measured in three orthogonal EUT positions(x-axis, y-axis and z-axis).

Tested frequency information,

- Hopping Function: Enable

	TX Frequency (MHz)	RX Frequency (MHz)
Hopping Band	2402 ~ 2480	2402 ~ 2480

- Hopping Function: Disable

	TX Frequency (MHz)	RX Frequency (MHz)
Lowest Channel	2402	2402
Middle Channel	2441	2441
Highest Channel	2480	2480

1.9 Test report revision

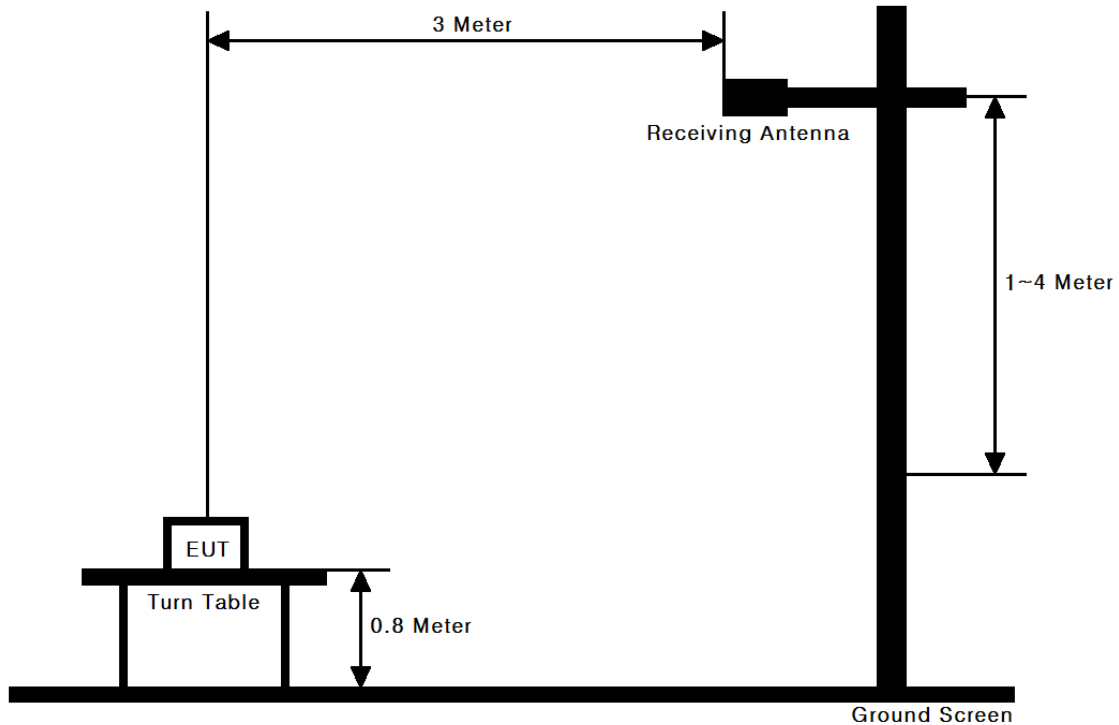
Test Report No.	Date	Description
DRTFCC1103-0099	Mar. 28, 2011	Final version for approval

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

2.1. Test Setup

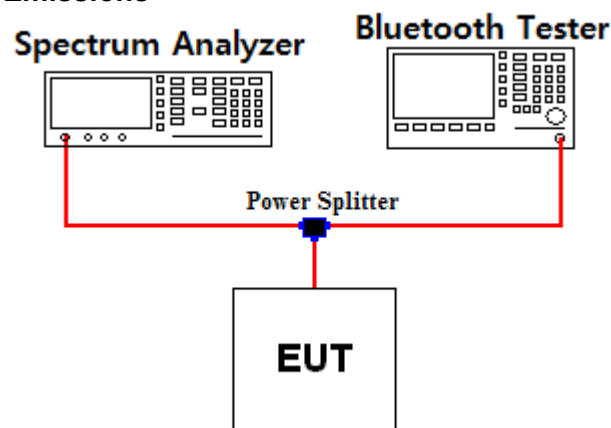
2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 25 GHz Emissions.



Refer to test setup photo.

2.1.2. Conducted Spurious Emissions



2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	37.5 ~ 38.25	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	608 ~ 614	3345.8 ~ 3358		
		960 ~ 1240			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

2.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE ;

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

2.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=100 kHz.

2.4. Test Results

Ambient temperature : 22 ~ 25 °C
Relative humidity : 30 ~ 36%

2.4.1. Radiated Emission

30MHz ~ 1GHz Data(Modulation: GFSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.502	H	Z Axis	37.90	-8.30	29.60	43.50	13.90
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.644	V	Y Axis	38.54	-8.30	30.24	43.50	13.26
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.249	H	X Axis	37.85	-8.30	29.55	43.50	13.95
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG} + \text{D.C.F}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

1GHz ~ 25GHz Data(Modulation: GFSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
2388.800	H	Y Axis	54.46	45.65	-2.81	0.00	51.65	42.84	74.00	54.00	22.35	11.16
2389.070	V	Y Axis	52.32	41.90	-2.81	0.00	49.51	39.09	74.00	54.00	24.49	14.91
4804.308	H	X Axis	56.90	49.72	5.14	-30.55	31.49	24.31	74.00	54.00	42.51	29.69
4803.725	V	Z Axis	57.42	50.22	5.14	-30.55	32.01	24.81	74.00	54.00	41.99	29.19
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
4881.700	H	X Axis	59.13	51.62	5.32	-30.55	33.90	26.39	74.00	54.00	40.10	27.61
4881.733	V	Z Axis	58.37	51.02	5.32	-30.55	33.14	25.79	74.00	54.00	40.86	28.21
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
2493.240	H	Y Axis	54.08	44.97	-2.52	0.00	51.56	42.45	74.00	54.00	22.44	11.55
2492.770	V	Y Axis	51.24	40.94	-2.52	0.00	48.72	38.42	74.00	54.00	25.28	15.58
4959.800	H	X Axis	59.32	51.79	5.90	-30.55	34.67	27.14	74.00	54.00	39.33	26.86
4959.717	V	Z Axis	58.35	50.84	5.90	-30.55	33.70	26.19	74.00	54.00	40.30	27.81
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG} + \text{D.C.F}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
D.C.F = Duty cycle Correction Factor

30MHz ~ 1GHz Data(Modulation: $\pi/4$ DQPSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.500	V	Z Axis	37.55	-8.30	29.25	43.50	14.25
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.319	H	Y Axis	38.27	-8.30	29.97	43.50	13.53
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.667	V	Z Axis	38.08	-8.30	29.78	43.50	13.72
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG} + \text{D.C.F}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

1GHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
2388.800	H	Y Axis	54.54	43.72	-2.81	0.00	51.73	40.91	74.00	54.00	22.27	13.09
2389.200	V	Y Axis	51.93	40.35	-2.81	0.00	49.12	37.54	74.00	54.00	24.88	16.46
4803.767	H	X Axis	56.56	46.10	5.14	-30.08	31.62	21.16	74.00	54.00	42.38	32.84
4803.725	V	Z Axis	57.08	46.57	5.14	-30.08	32.14	21.63	74.00	54.00	41.86	32.37
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
4882.325	H	X Axis	58.84	47.84	5.32	-30.08	34.08	23.08	74.00	54.00	39.92	30.92
4881.683	V	Z Axis	58.24	47.29	5.32	-30.08	33.48	22.53	74.00	54.00	40.52	31.47
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
2493.100	H	X Axis	53.54	43.73	-2.52	0.00	51.02	41.21	74.00	54.00	22.98	12.79
2492.240	V	Y Axis	51.29	39.59	-2.52	0.00	48.77	37.07	74.00	54.00	25.23	16.93
4960.375	H	X Axis	59.08	48.13	5.90	-30.08	34.90	23.95	74.00	54.00	39.10	30.05
4959.683	V	Z Axis	57.72	47.27	5.90	-30.08	33.54	23.09	74.00	54.00	40.46	30.91
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG} + \text{D.C.F}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
D.C.F = Duty cycle Correction Factor

30MHz ~ 1GHz Data(Modulation: 8DPSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.526	H	X Axis	38.45	-8.30	30.15	43.50	13.35
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.331	V	Z Axis	37.86	-8.30	29.56	43.50	13.94
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)	T.F (dB/m)	Result(dBuV/m)	Limit(dBuV/m)	Margin(dB)
			QP		QP	QP	QP
175.669	V	Y Axis	38.51	-8.30	30.21	43.50	13.29
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG} + \text{D.C.F}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

1GHz ~ 25GHz Data(Modulation: 8DPSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
2388.800	H	Y Axis	55.21	43.79	-2.81	0.00	52.40	40.98	74.00	54.00	21.60	13.02
2389.200	V	X Axis	51.68	40.32	-2.81	0.00	48.87	37.51	74.00	54.00	25.13	16.49
4803.842	H	X Axis	56.81	46.21	5.14	-30.46	31.49	20.89	74.00	54.00	42.51	33.11
4803.925	V	Z Axis	57.63	46.72	5.14	-30.46	32.31	21.40	74.00	54.00	41.69	32.60
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
4882.367	H	X Axis	59.04	48.24	5.32	-30.46	33.90	23.10	74.00	54.00	40.10	30.90
4881.975	V	Z Axis	58.73	47.43	5.32	-30.46	33.59	22.29	74.00	54.00	40.41	31.71
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

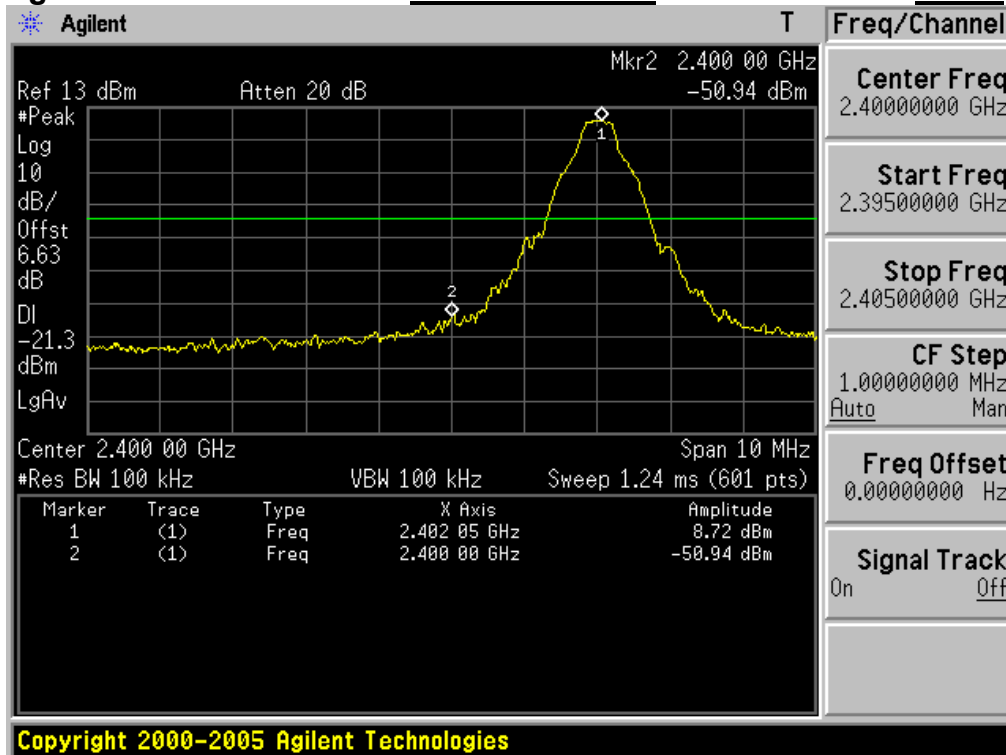
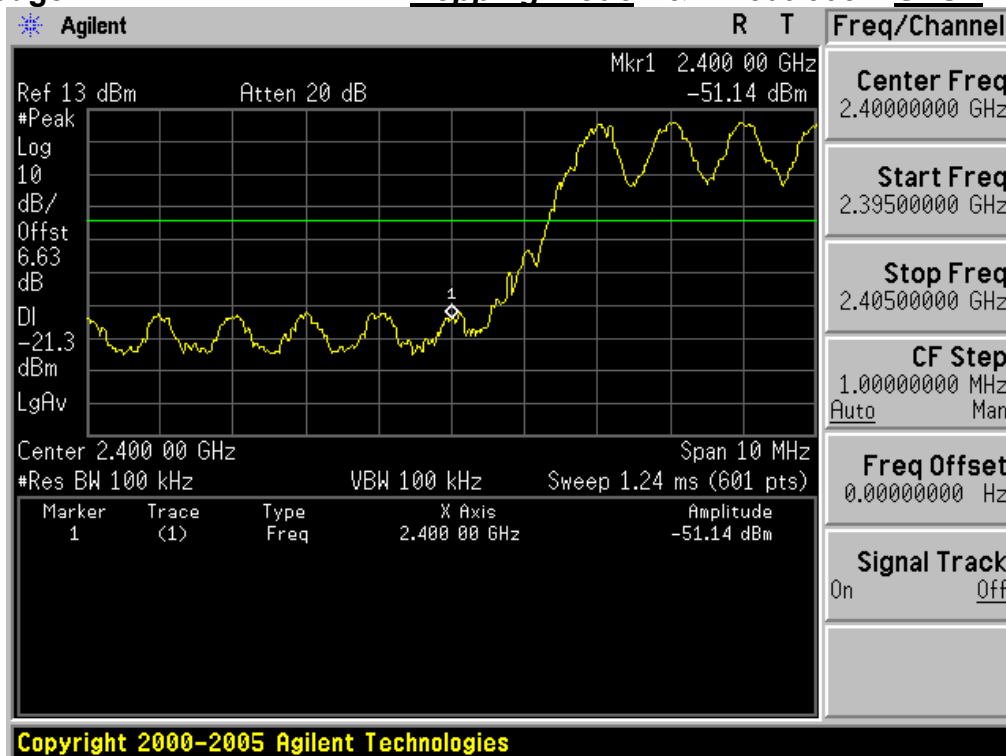
▪ Highest Channel

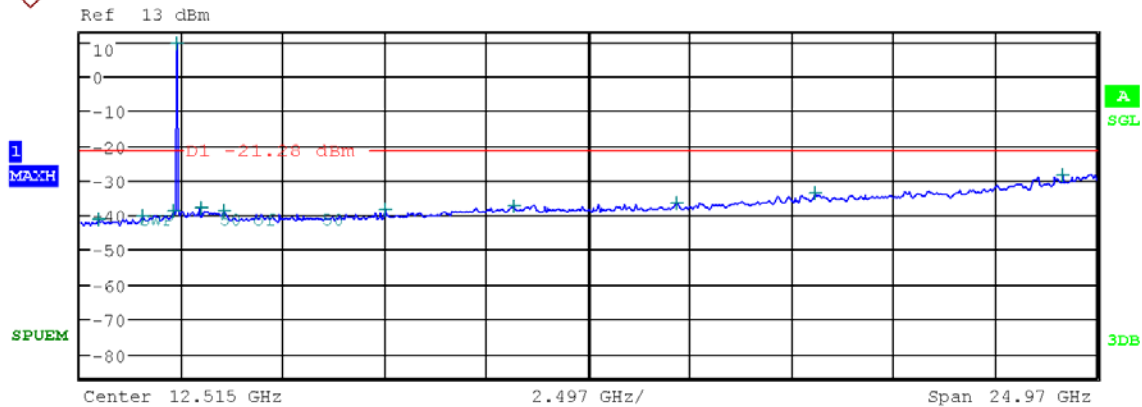
Frequency (MHz)	ANT Pol	The worst case EUT Position	Reading(dBuV)		T.F (dB/m)	D.C.F (dB)	Result(dBuV/m)		Limit(dBuV/m)		Margin(dB)	
			PK	AV			PK	AV	PK	AV	PK	AV
2492.850	H	X Axis	53.77	43.71	-2.52	0.00	51.25	41.19	74.00	54.00	22.75	12.81
2493.120	V	Y Axis	50.31	39.61	-2.52	0.00	47.79	37.09	74.00	54.00	26.21	16.91
4960.342	H	X Axis	59.10	48.31	5.90	-30.46	34.54	23.75	74.00	54.00	39.46	30.25
4960.367	V	Z Axis	48.04	47.38	5.90	-30.46	23.48	22.82	74.00	54.00	50.52	31.18
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

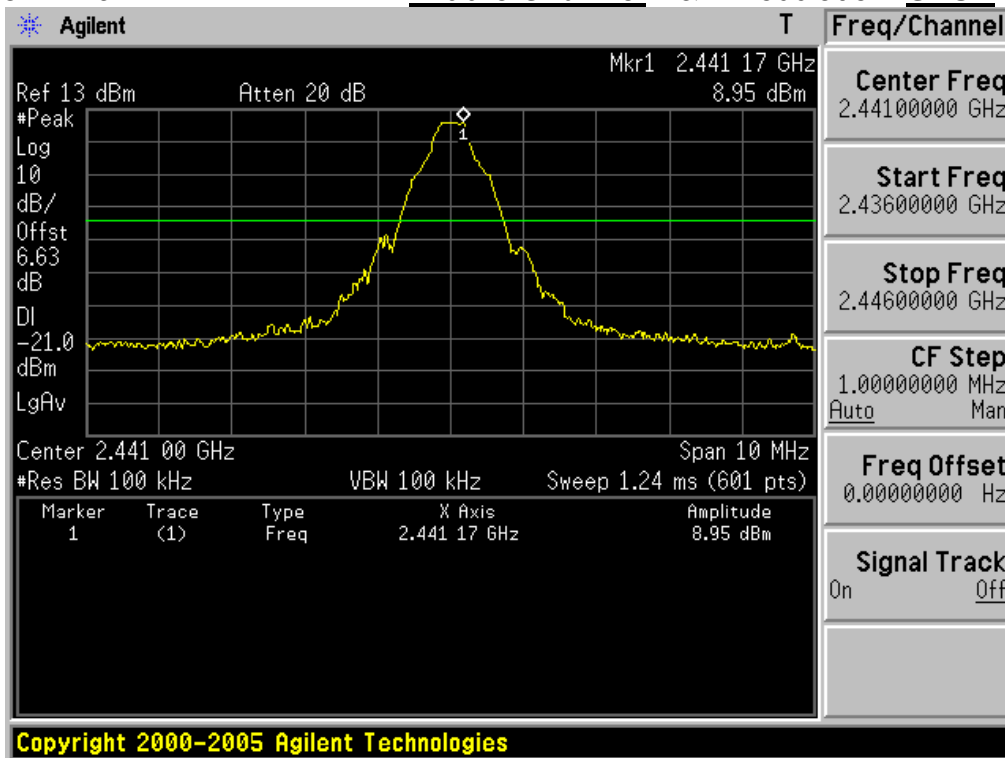
Margin = Limit – Result / Result = Reading + T.F / T.F = AF + CL – AG + D.C.F
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 D.C.F = Duty cycle Correction Factor

2.4.2. Conducted Spurious Emissions**Low Band-edge****Lowest Channel** & Modulation: **GFSK****Low Band-edge****Hopping mode** & Modulation: **GFSK**

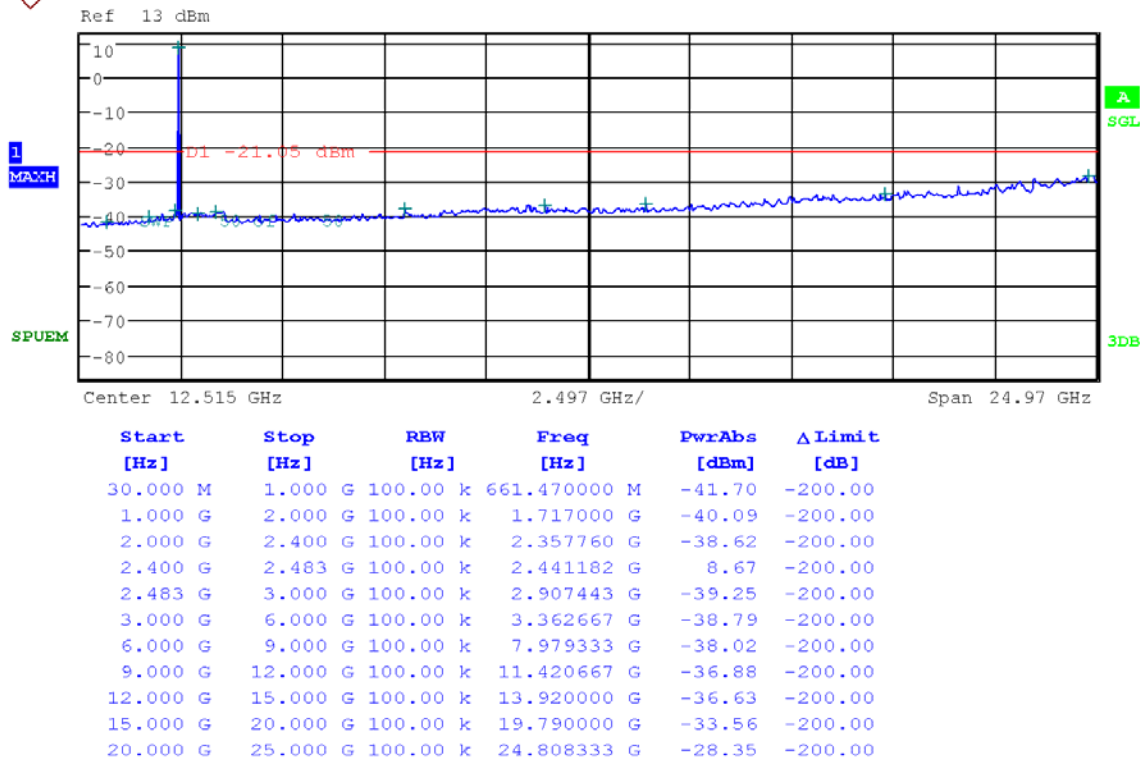
Conducted Spurious Emissions**Lowest Channel** & Modulation: **GFSK**

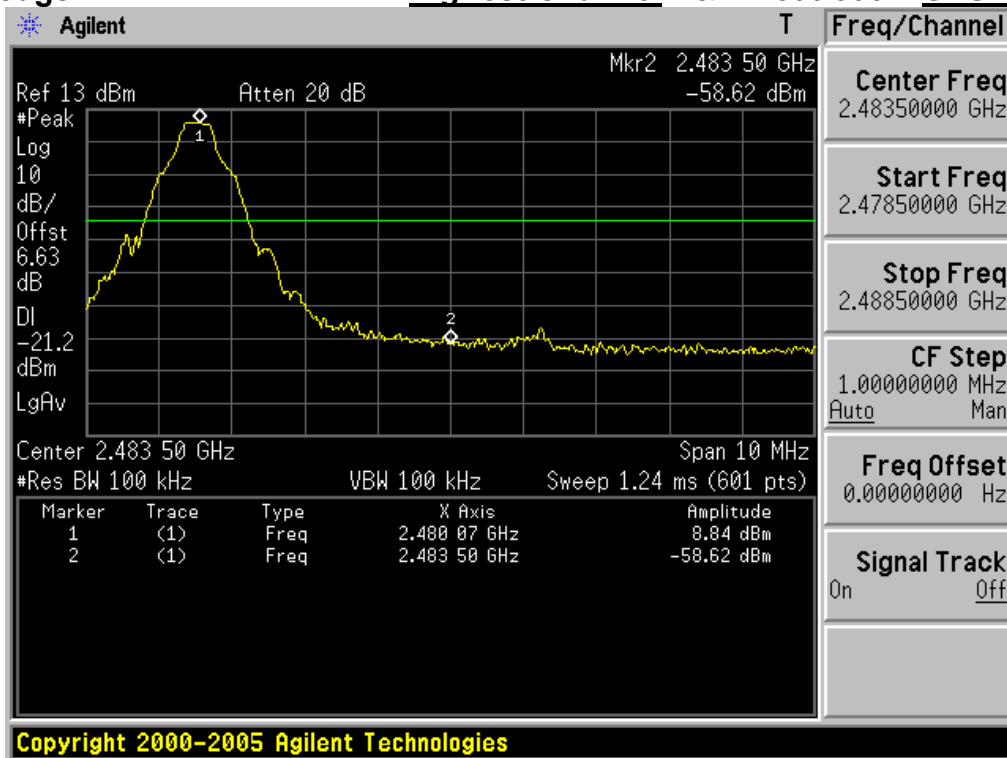
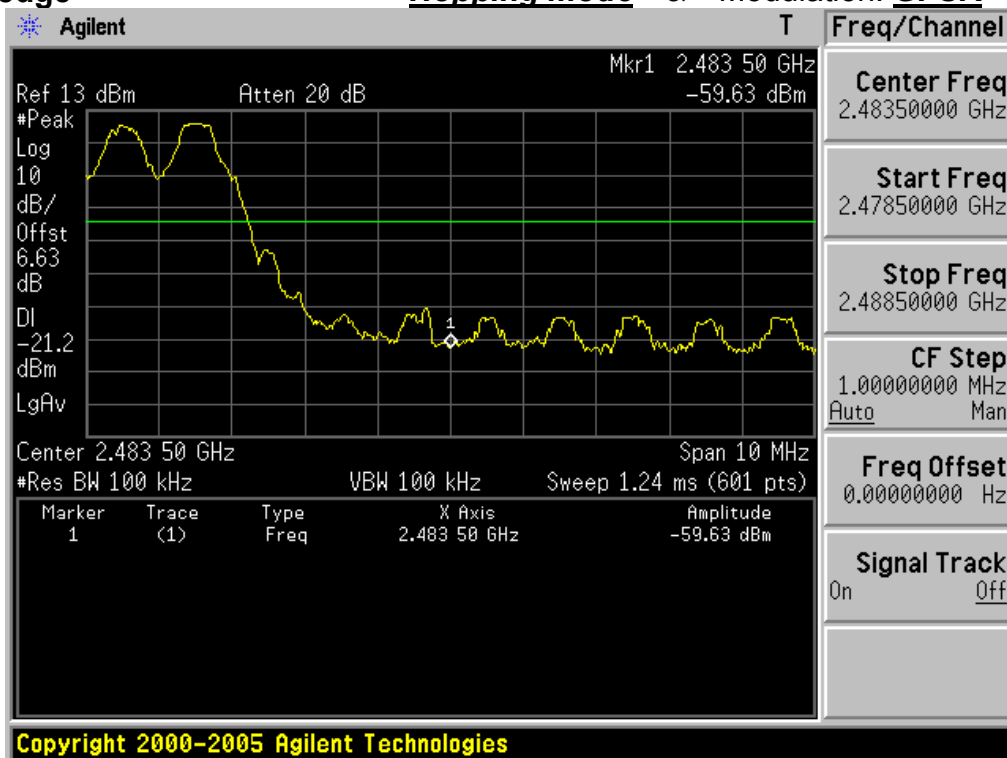
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	483.960000 M	-41.05	-200.00
1.000 G	2.000 G	100.00 k	1.567000 G	-40.18	-200.00
2.000 G	2.400 G	100.00 k	2.304760 G	-39.02	-200.00
2.400 G	2.483 G	100.00 k	2.402004 G	9.25	-200.00
2.483 G	3.000 G	100.00 k	2.999793 G	-38.00	-200.00
3.000 G	6.000 G	100.00 k	3.564000 G	-38.66	-200.00
6.000 G	9.000 G	100.00 k	7.510000 G	-38.60	-200.00
9.000 G	12.000 G	100.00 k	10.667000 G	-37.33	-200.00
12.000 G	15.000 G	100.00 k	14.656333 G	-36.70	-200.00
15.000 G	20.000 G	100.00 k	18.095556 G	-33.49	-200.00
20.000 G	25.000 G	100.00 k	24.148333 G	-28.55	-200.00

Reference for limit

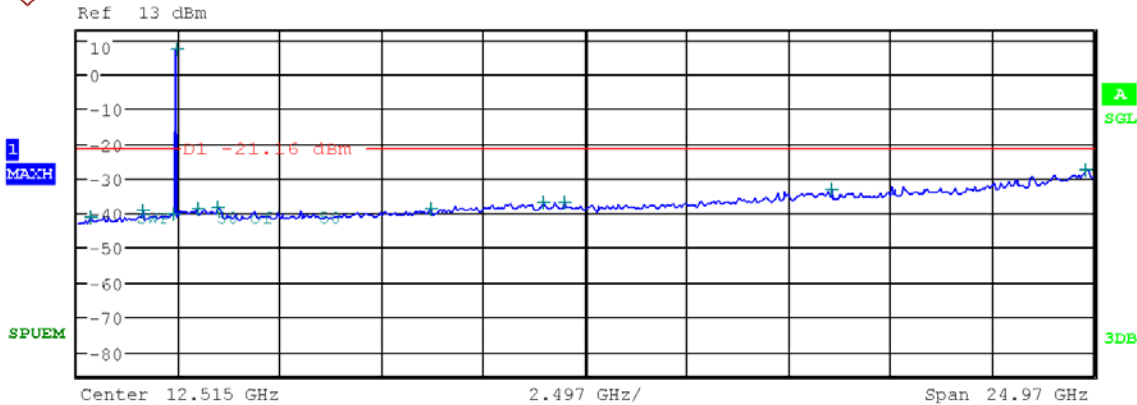
Middle Channel & Modulation: GFSK

Conducted Spurious Emissions

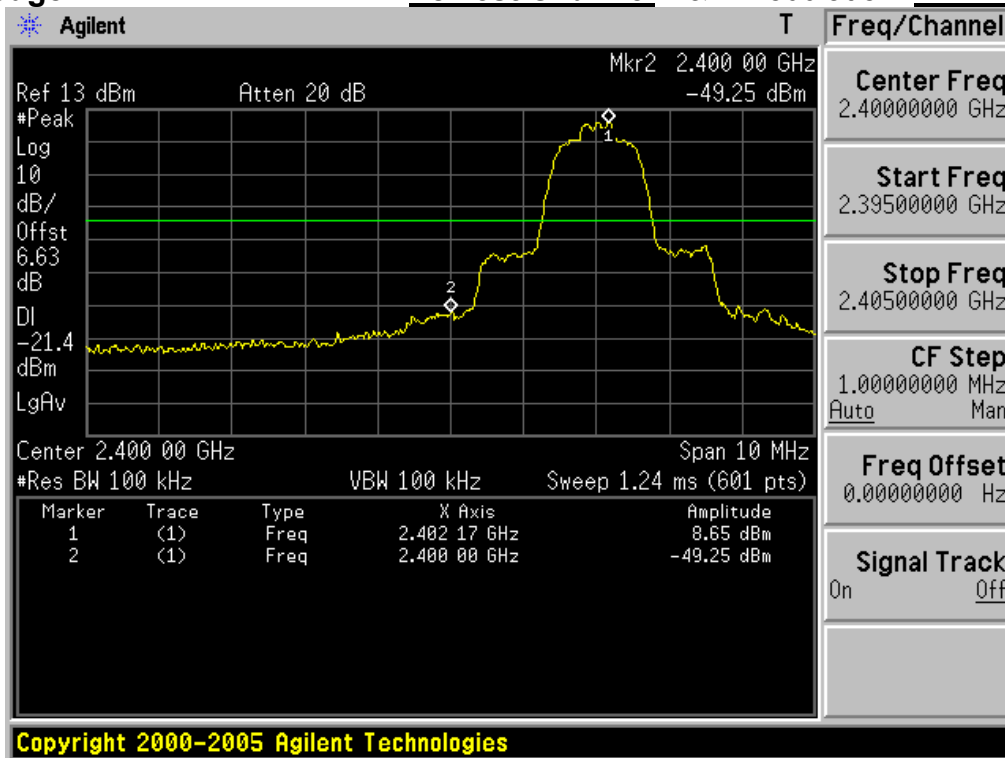
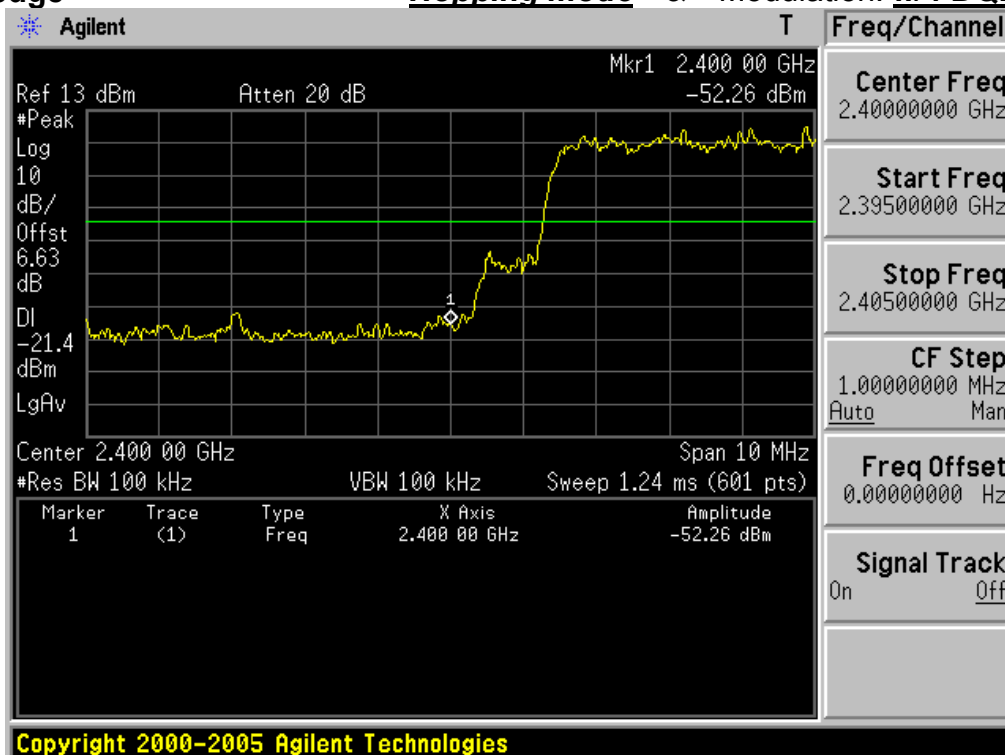
Middle Channel & Modulation: GFSK

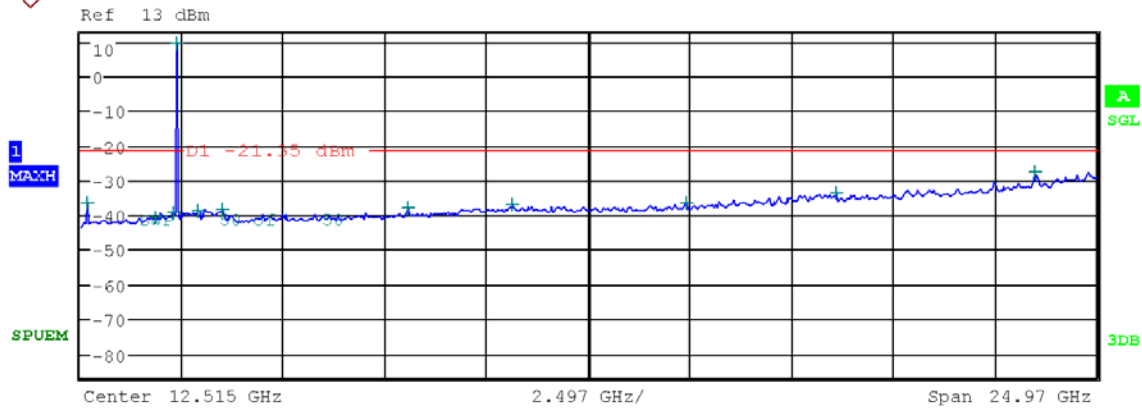
High Band-edge **Highest Channel** & Modulation: **GFSK****High Band-edge** **Hopping mode** & Modulation: **GFSK**

Conducted Spurious Emissions Highest Channel & Modulation: GFSK



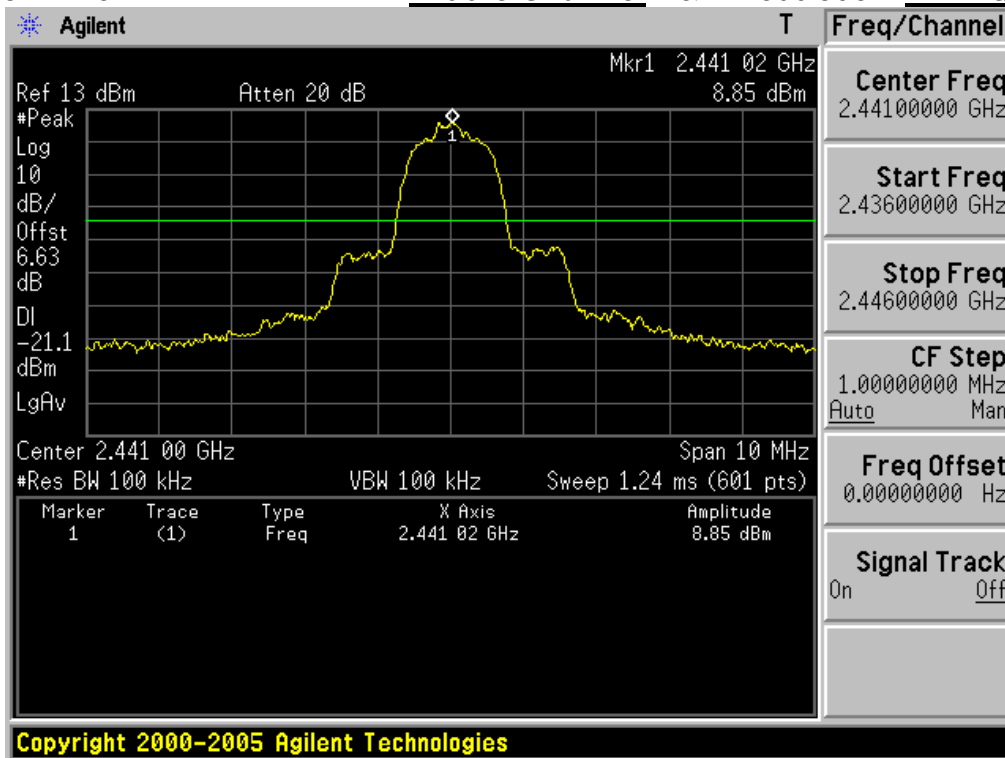
Start	Stop	RBW	Freq	PwrAbs	Δ Limit
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]
30.000 M	1.000 G	100.00 k	358.830000 M	-41.20	-200.00
1.000 G	2.000 G	100.00 k	1.623000 G	-39.38	-200.00
2.000 G	2.400 G	100.00 k	2.398040 G	-40.43	-200.00
2.400 G	2.483 G	100.00 k	2.480018 G	7.21	-200.00
2.483 G	3.000 G	100.00 k	2.983110 G	-38.94	-200.00
3.000 G	6.000 G	100.00 k	3.478000 G	-38.35	-200.00
6.000 G	9.000 G	100.00 k	8.712667 G	-38.93	-200.00
9.000 G	12.000 G	100.00 k	11.490333 G	-37.13	-200.00
12.000 G	15.000 G	100.00 k	12.009667 G	-37.08	-200.00
15.000 G	20.000 G	100.00 k	18.550000 G	-33.12	-200.00
20.000 G	25.000 G	100.00 k	24.809444 G	-27.79	-200.00

Low Band-edge**Lowest Channel** & Modulation: **$\pi/4$ DQPSK****Low Band-edge****Hopping mode** & Modulation: **$\pi/4$ DQPSK**

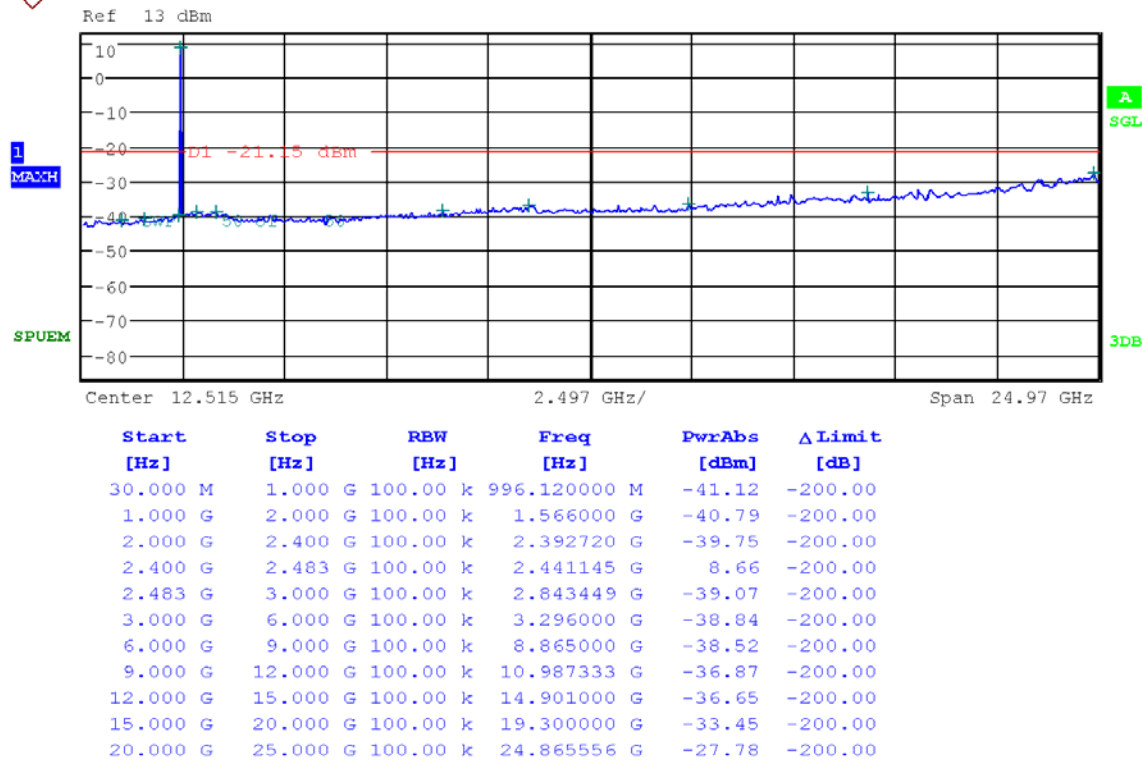
Conducted Spurious Emissions**Lowest Channel** & Modulation: **$\pi/4$ DQPSK**

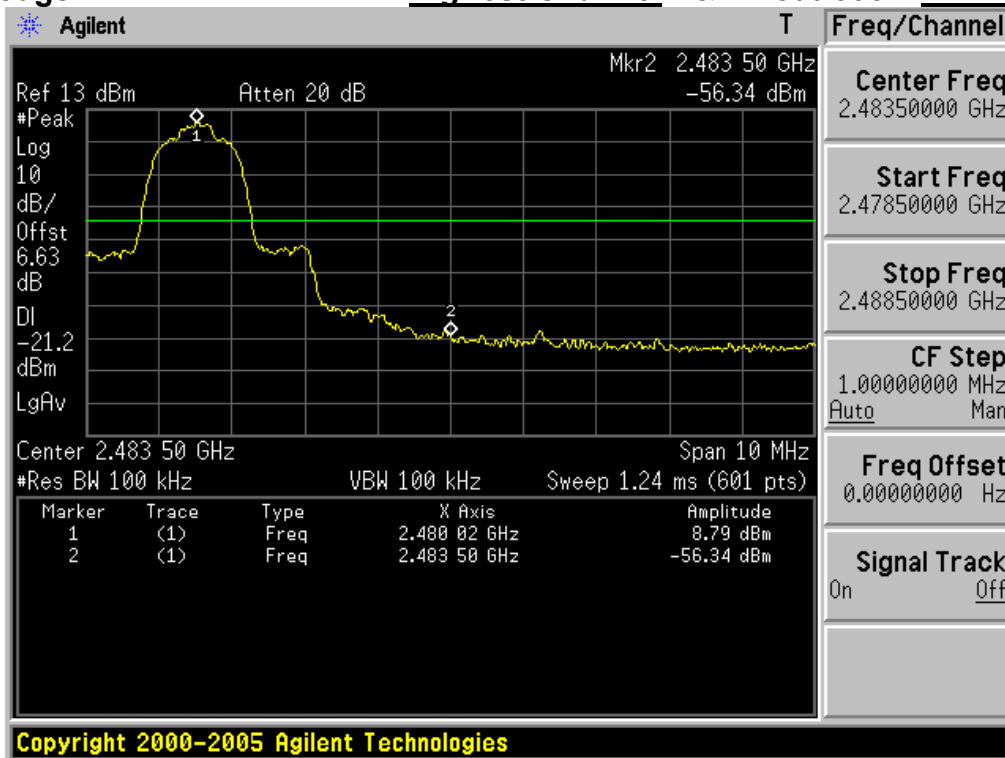
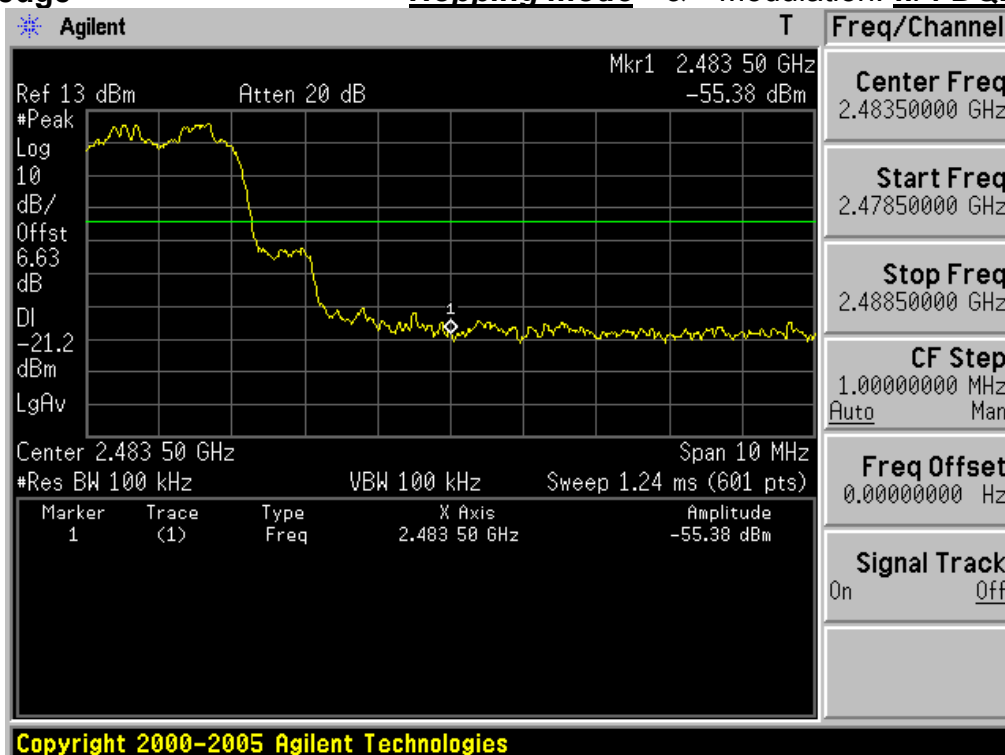
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	170.650000 M	-36.61	-200.00
1.000 G	2.000 G	100.00 k	1.859000 G	-40.56	-200.00
2.000 G	2.400 G	100.00 k	2.302320 G	-39.23	-200.00
2.400 G	2.483 G	100.00 k	2.401996 G	9.36	-200.00
2.483 G	3.000 G	100.00 k	2.901039 G	-38.66	-200.00
3.000 G	6.000 G	100.00 k	3.503000 G	-38.19	-200.00
6.000 G	9.000 G	100.00 k	8.074667 G	-38.06	-200.00
9.000 G	12.000 G	100.00 k	10.641333 G	-37.09	-200.00
12.000 G	15.000 G	100.00 k	14.897000 G	-36.62	-200.00
15.000 G	20.000 G	100.00 k	18.595000 G	-33.67	-200.00
20.000 G	25.000 G	100.00 k	23.486667 G	-27.66	-200.00

Reference for limit

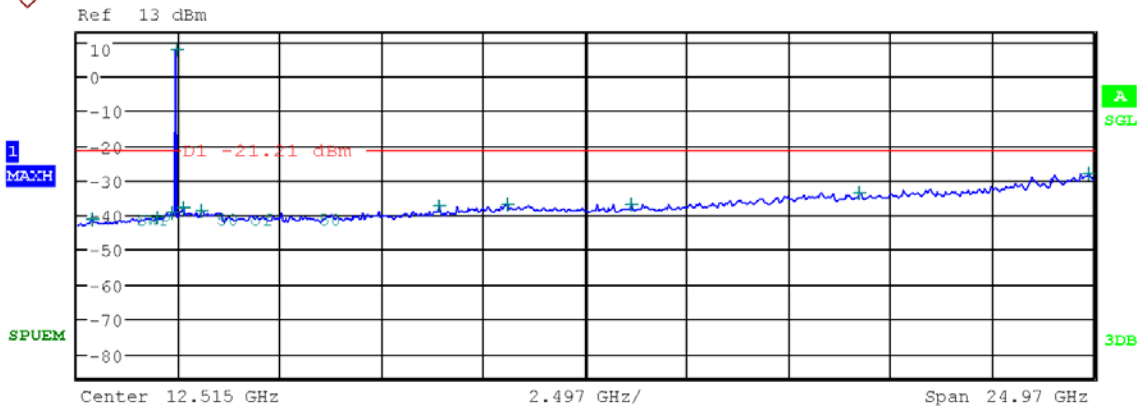
Middle Channel & Modulation: $\pi/4$ DQPSK

Conducted Spurious Emissions

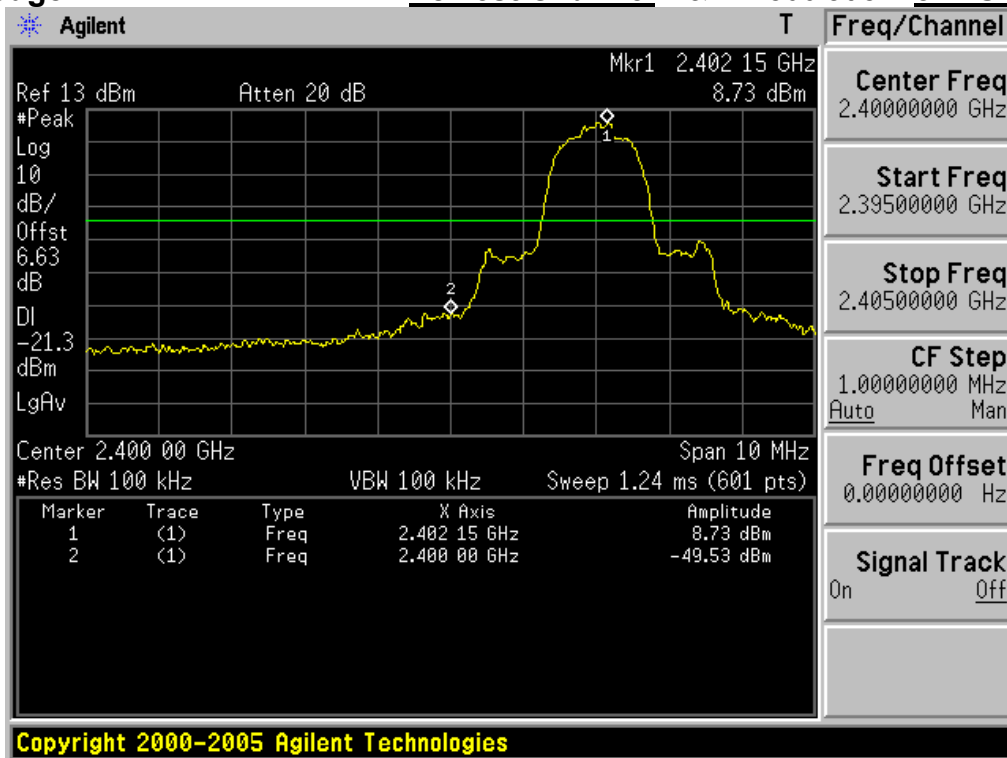
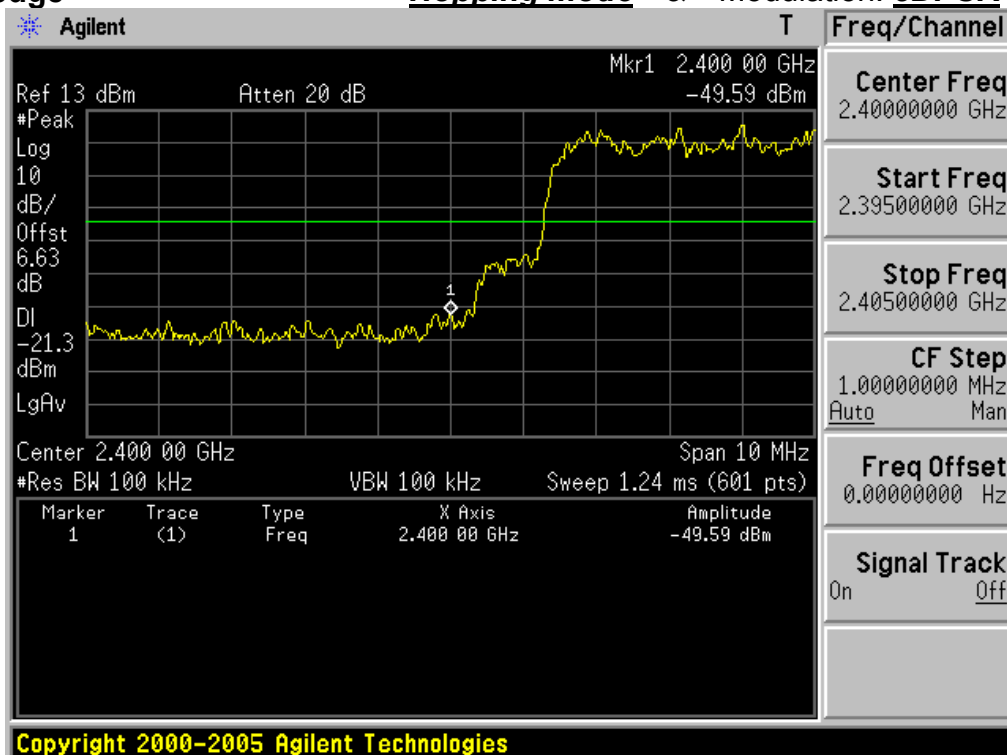
Middle Channel & Modulation: $\pi/4$ DQPSK

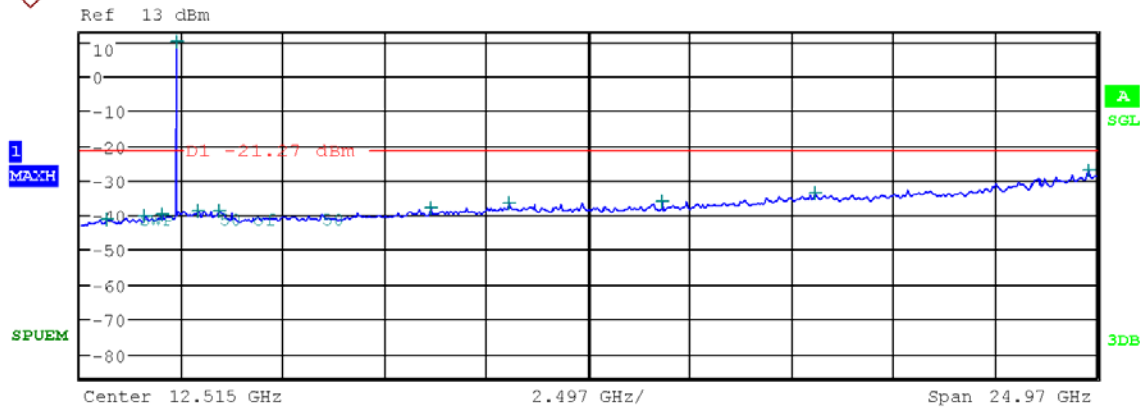
High Band-edge**Highest Channel** & Modulation: **$\pi/4$ DQPSK****High Band-edge****Hopping mode** & Modulation: **$\pi/4$ DQPSK**

Conducted Spurious Emissions

Highest Channel & Modulation: $\pi/4$ DQPSK

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	401.510000 M	-41.37	-200.00
1.000 G	2.000 G	100.00 k	1.987000 G	-40.93	-200.00
2.000 G	2.400 G	100.00 k	2.354280 G	-39.17	-200.00
2.400 G	2.483 G	100.00 k	2.480156 G	7.60	-200.00
2.483 G	3.000 G	100.00 k	2.647850 G	-38.14	-200.00
3.000 G	6.000 G	100.00 k	3.081333 G	-38.73	-200.00
6.000 G	9.000 G	100.00 k	8.919000 G	-37.66	-200.00
9.000 G	12.000 G	100.00 k	10.597333 G	-37.04	-200.00
12.000 G	15.000 G	100.00 k	13.625667 G	-36.95	-200.00
15.000 G	20.000 G	100.00 k	19.224444 G	-33.63	-200.00
20.000 G	25.000 G	100.00 k	24.871667 G	-28.02	-200.00

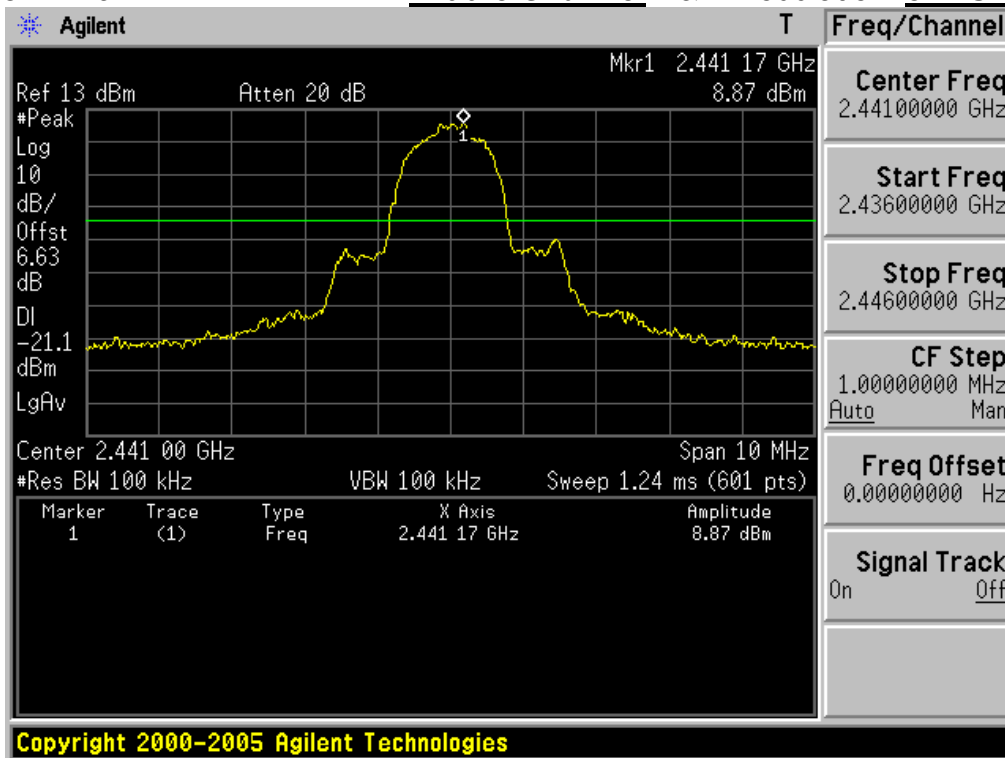
Low Band-edge**Lowest Channel** & Modulation: **8DPSK****Low Band-edge****Hopping mode** & Modulation: **8DPSK**

Conducted Spurious Emissions**Lowest Channel** & Modulation: **8DPSK**

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	675.050000 M	-41.19	-200.00
1.000 G	2.000 G	100.00 k	1.610000 G	-40.37	-200.00
2.000 G	2.400 G	100.00 k	2.035520 G	-40.00	-200.00
2.400 G	2.483 G	100.00 k	2.402158 G	9.75	-200.00
2.483 G	3.000 G	100.00 k	2.911317 G	-38.85	-200.00
3.000 G	6.000 G	100.00 k	3.424000 G	-39.04	-200.00
6.000 G	9.000 G	100.00 k	8.632667 G	-37.97	-200.00
9.000 G	12.000 G	100.00 k	10.564000 G	-36.68	-200.00
12.000 G	15.000 G	100.00 k	14.296333 G	-36.07	-200.00
15.000 G	20.000 G	100.00 k	18.074444 G	-33.90	-200.00
20.000 G	25.000 G	100.00 k	24.782222 G	-27.12	-200.00

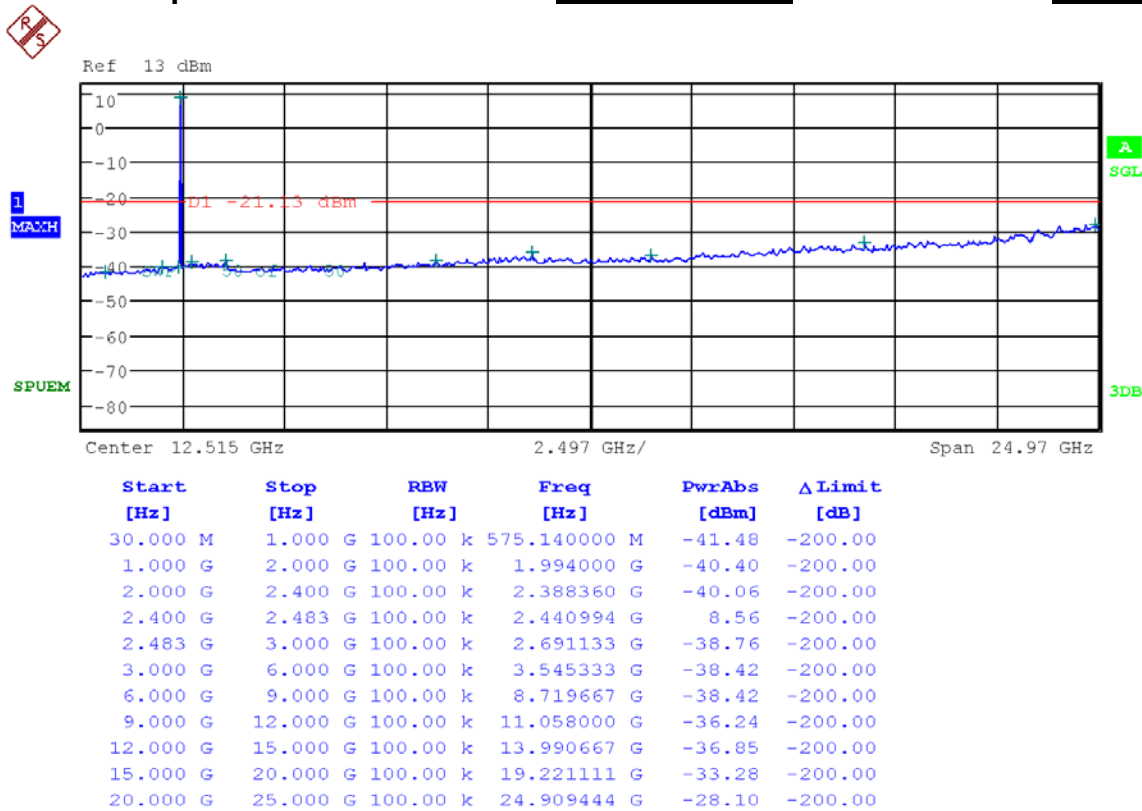
Reference for limit

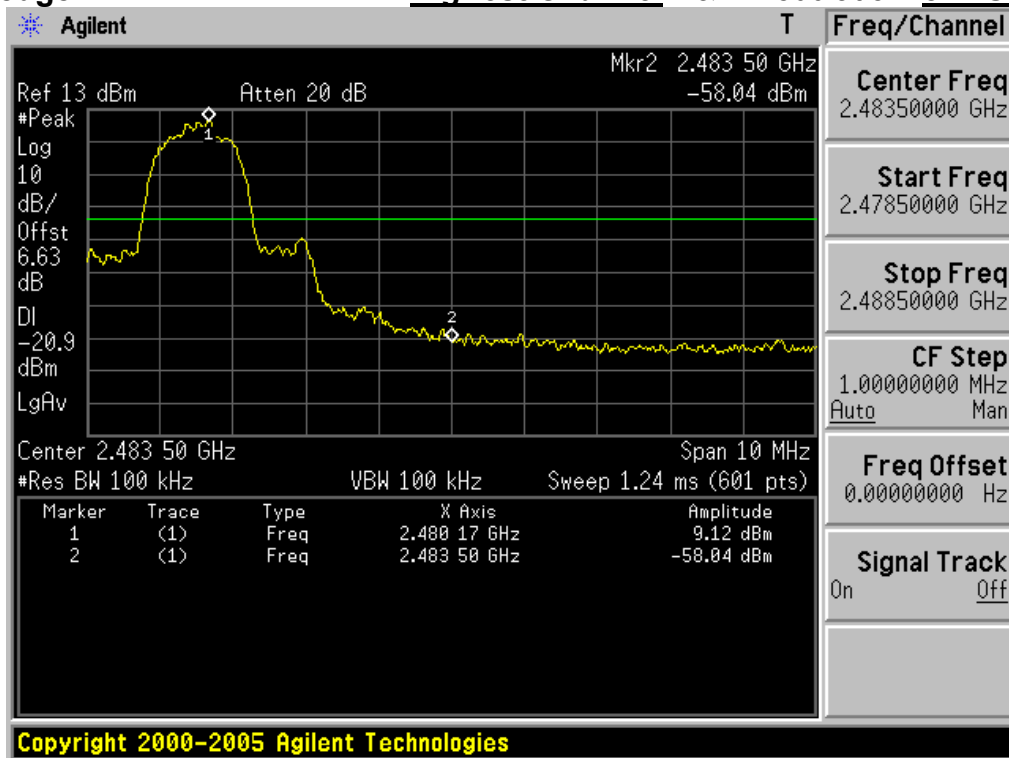
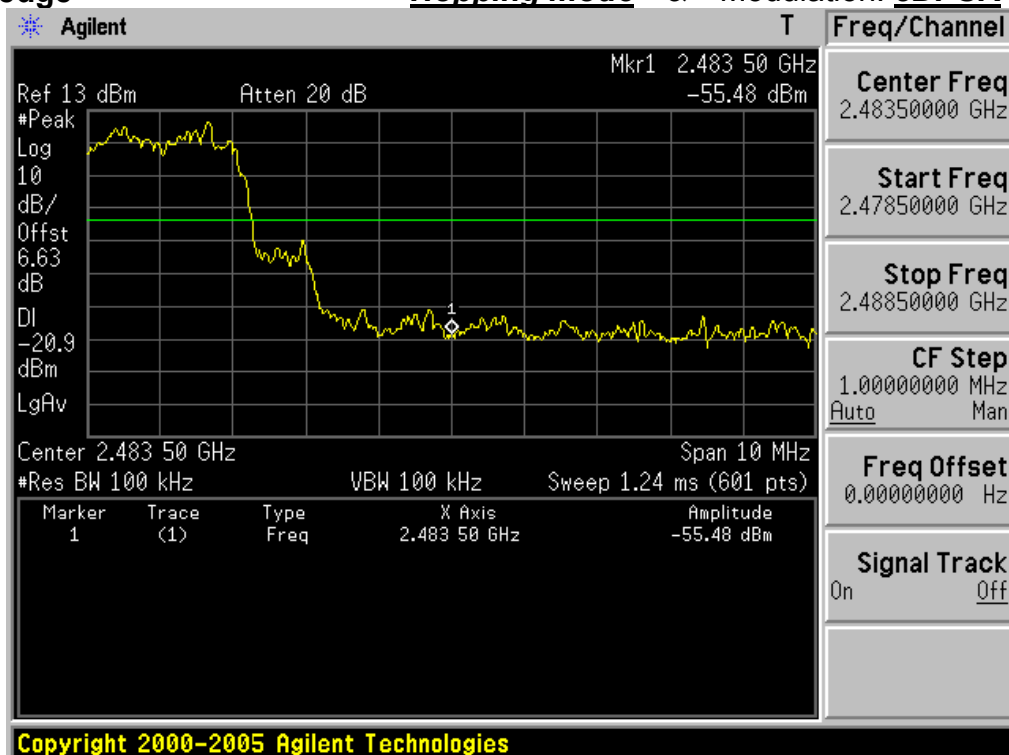
Middle Channel & Modulation: **8DPSK**



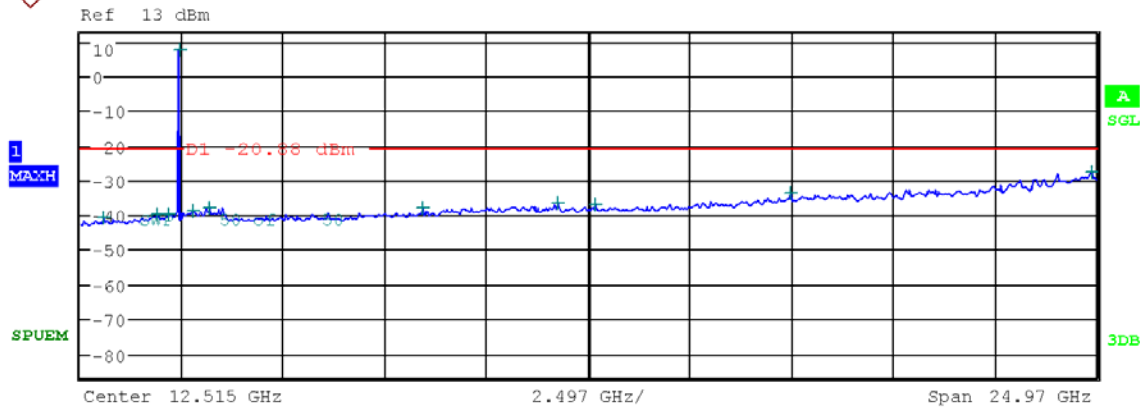
Conducted Spurious Emissions

Middle Channel & Modulation: **8DPSK**



High Band-edge Highest Channel & Modulation: **8DPSK****High Band-edge** Hopping mode & Modulation: **8DPSK**

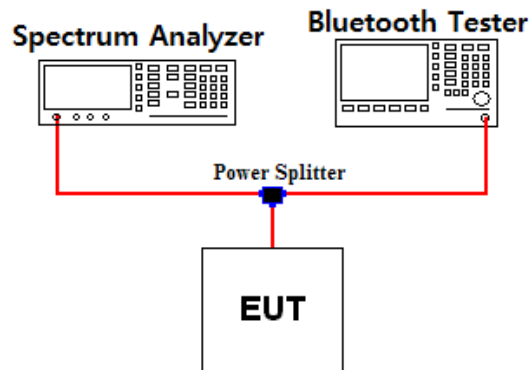
Conducted Spurious Emissions

Highest Channel & Modulation: 8DPSK

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	585.810000 M	-40.95	-200.00
1.000 G	2.000 G	100.00 k	1.906000 G	-39.97	-200.00
2.000 G	2.400 G	100.00 k	2.186560 G	-39.71	-200.00
2.400 G	2.483 G	100.00 k	2.480160 G	7.74	-200.00
2.483 G	3.000 G	100.00 k	2.790353 G	-39.05	-200.00
3.000 G	6.000 G	100.00 k	3.185000 G	-37.87	-200.00
6.000 G	9.000 G	100.00 k	8.422000 G	-37.93	-200.00
9.000 G	12.000 G	100.00 k	11.761667 G	-36.70	-200.00
12.000 G	15.000 G	100.00 k	12.688000 G	-36.87	-200.00
15.000 G	20.000 G	100.00 k	17.470556 G	-33.76	-200.00
20.000 G	25.000 G	100.00 k	24.883333 G	-27.57	-200.00

3. 99 % & 20dBc BW

3.1. Test Setup



3.2. Limit

Limit: Not Applicable

3.3. Test Procedure

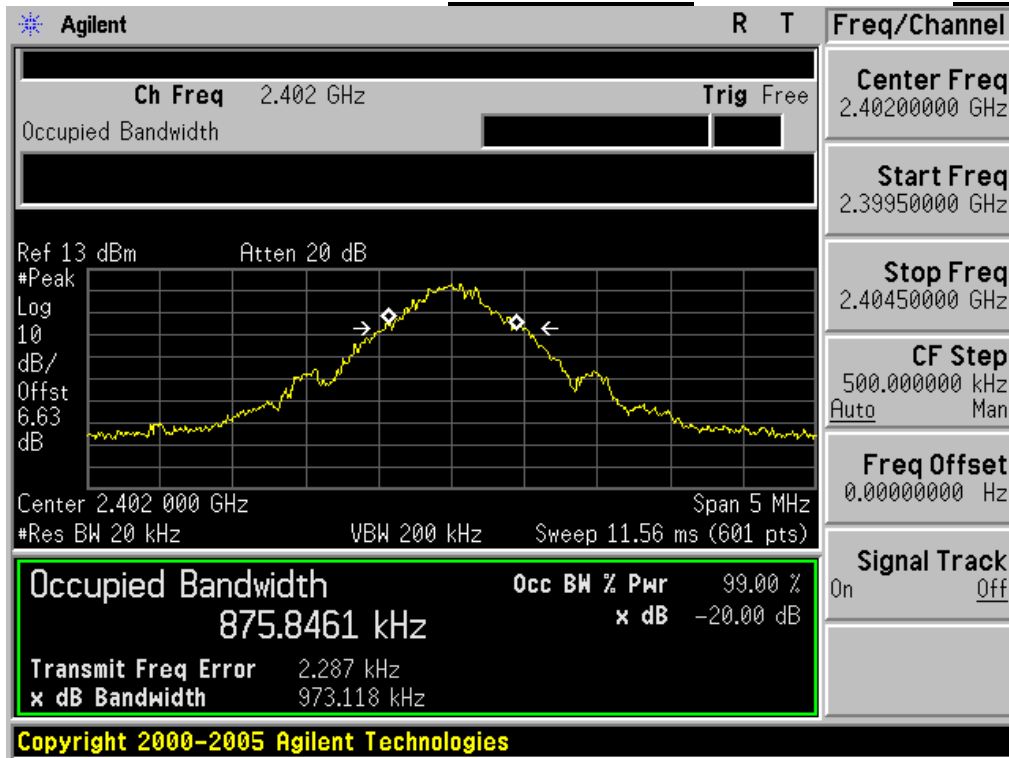
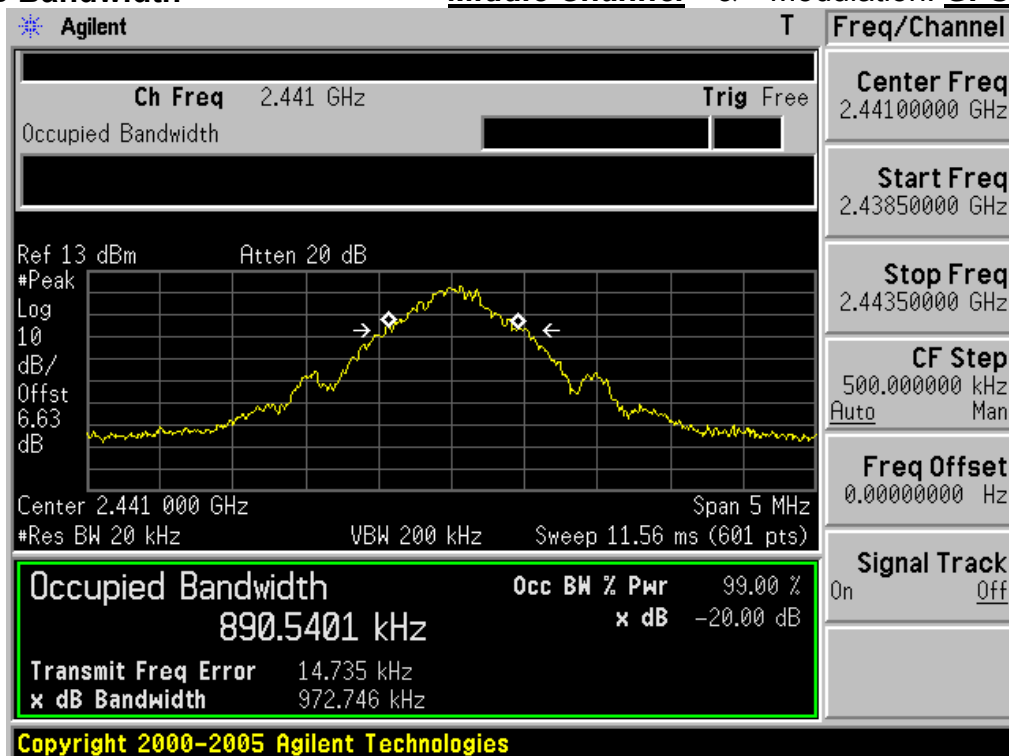
1. The 99% and 20dBc bandwidth were measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 10 kHz, VBW = 100 kHz, Span = 5 MHz.

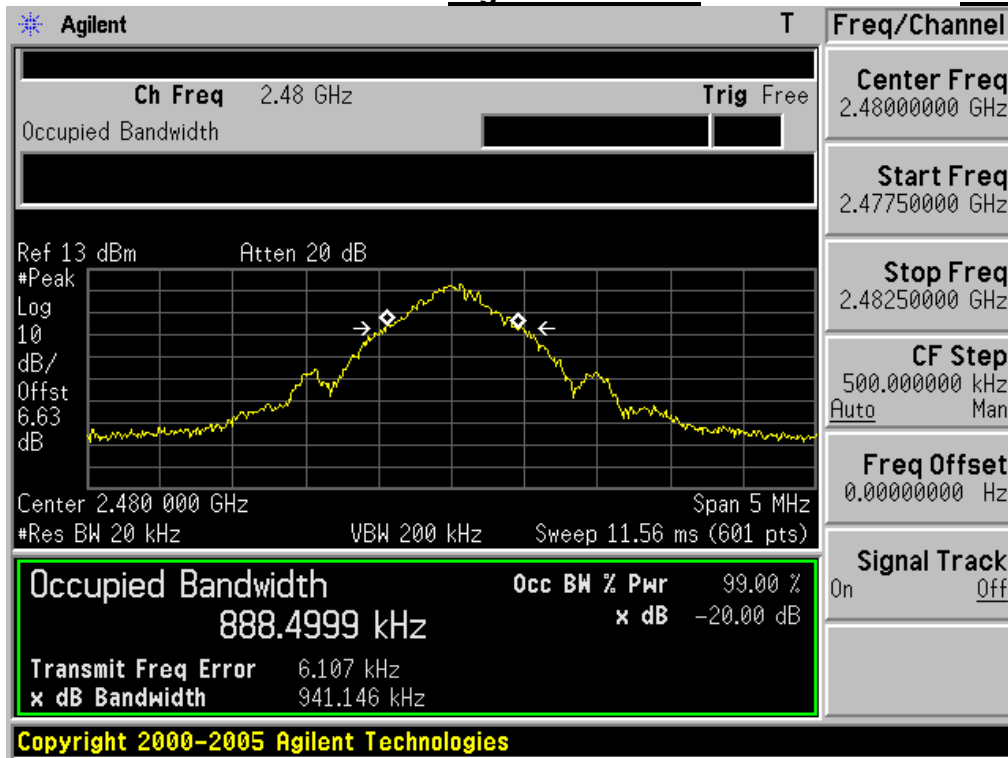
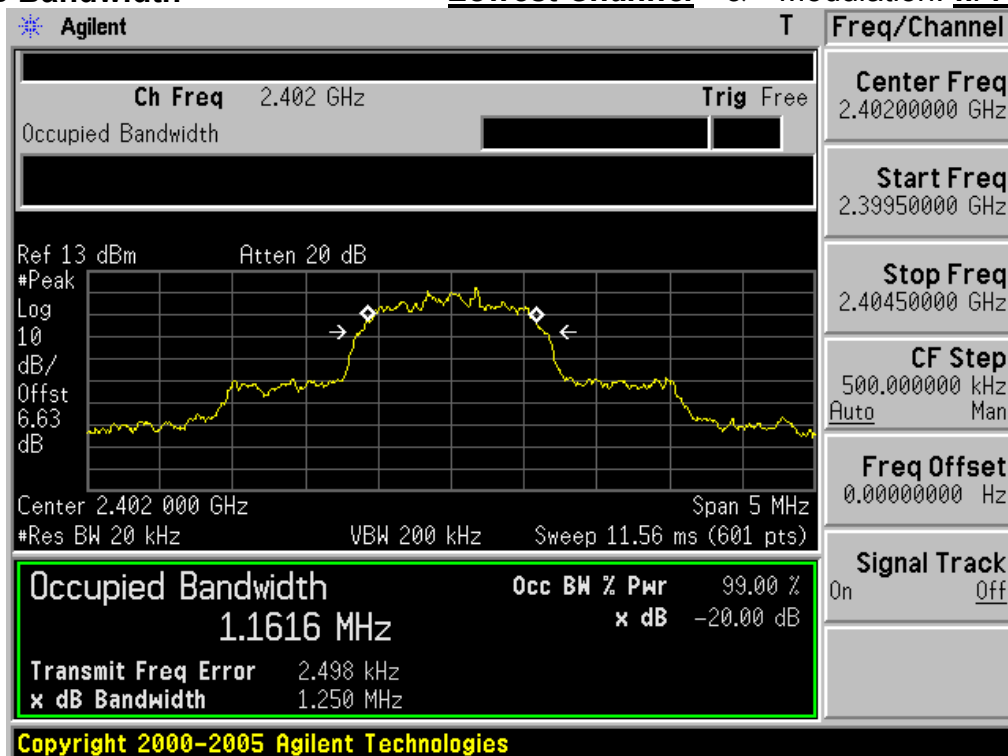
3.4. Test Results

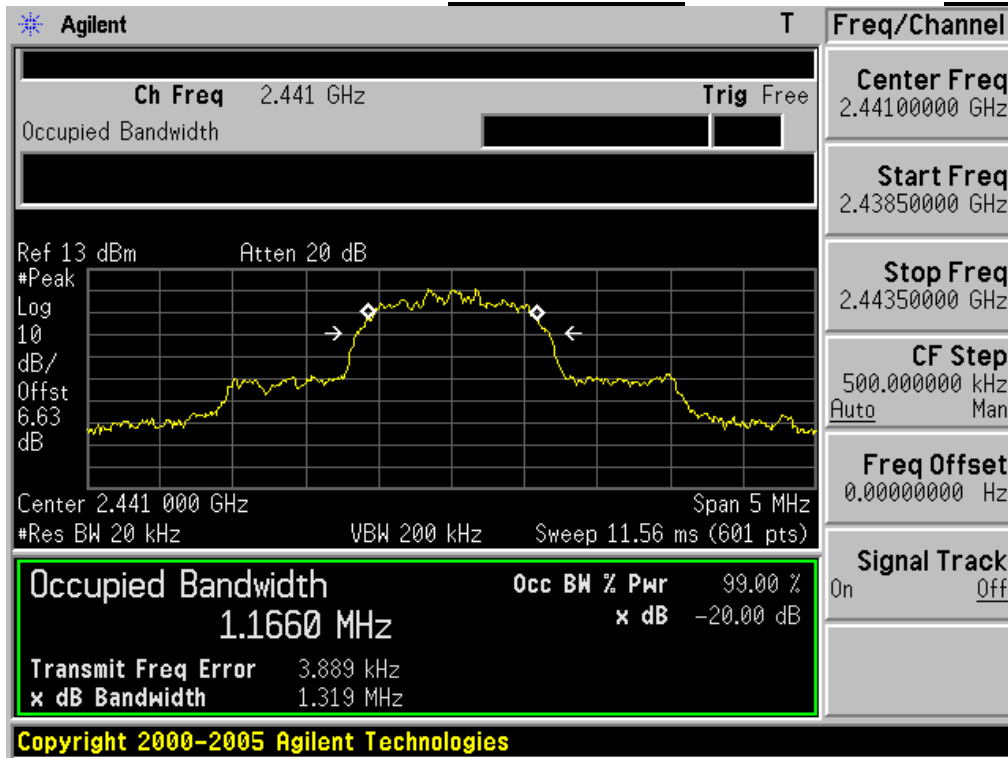
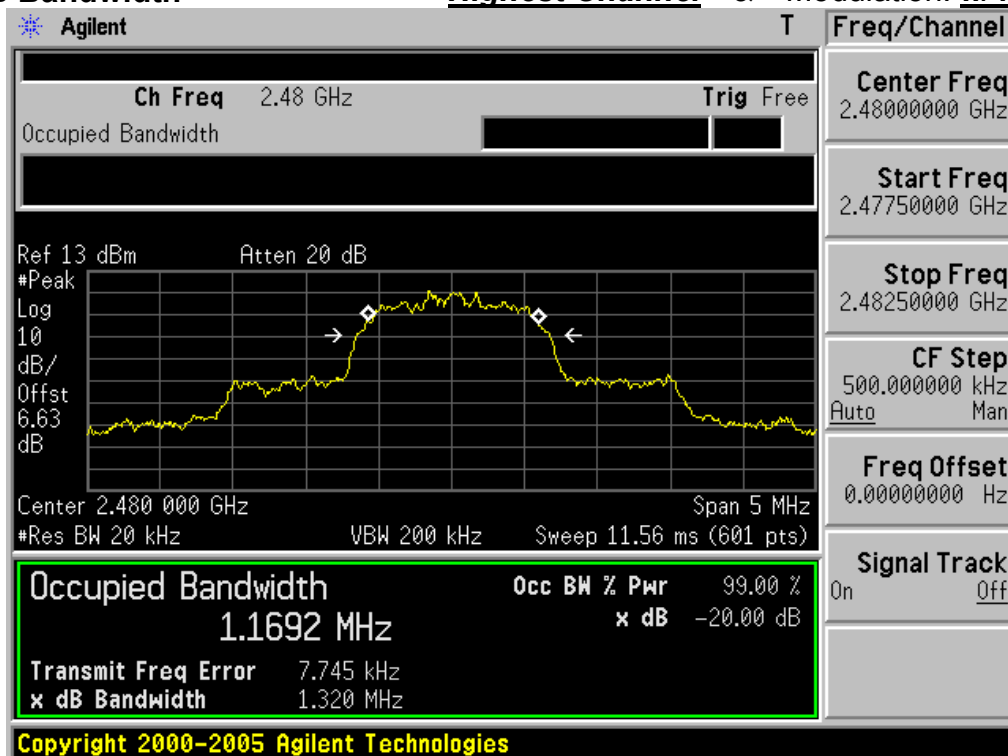
Ambient temperature : 22 °C
Relative humidity : 31%

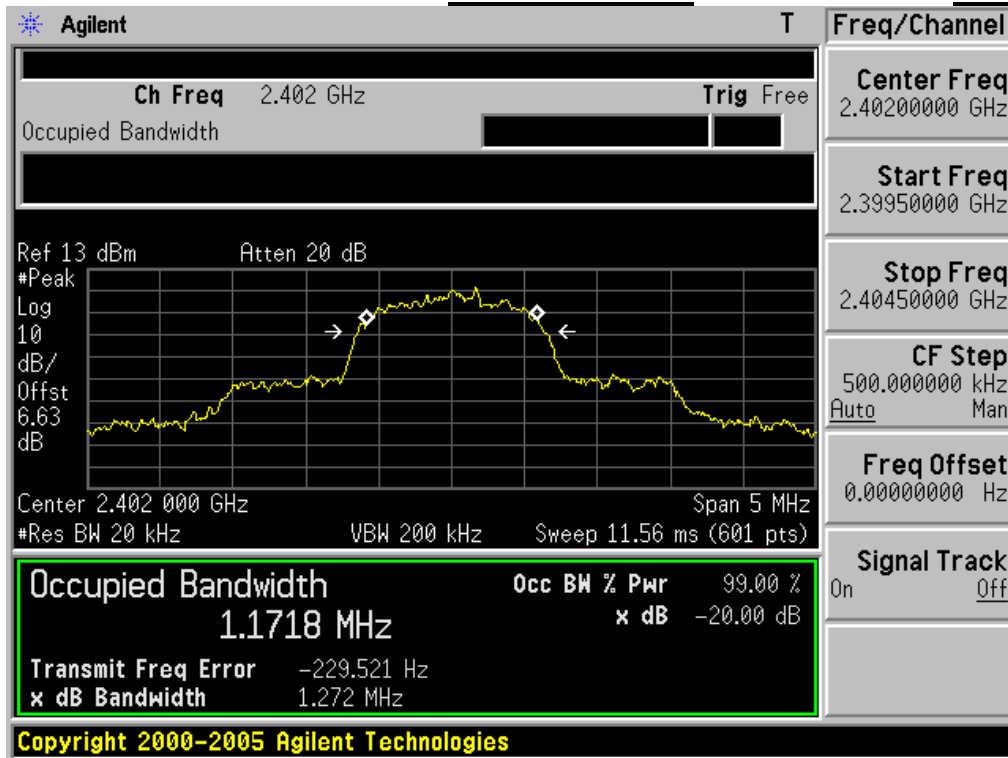
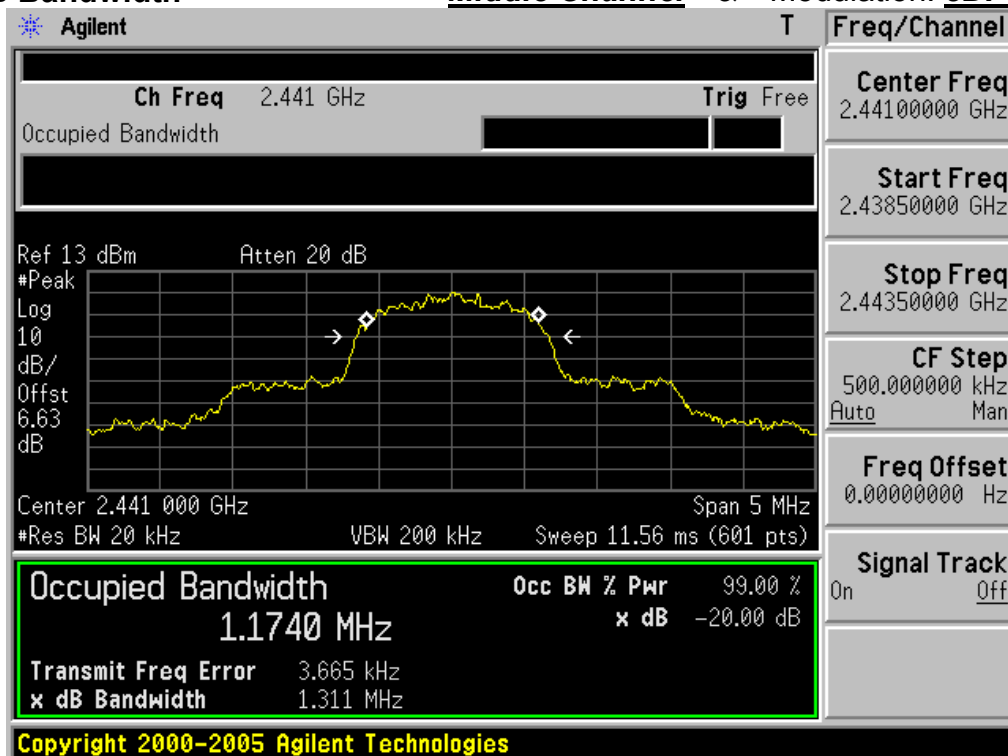
Modulation	Tested Channel	99% BW (MHz)	20dBc BW (MHz)
<u>GFSK</u>	Lowest	0.8758	0.973
	Middle	0.8905	0.973
	Highest	0.8885	0.941
<u>$\pi/4$ DQPSK</u>	Lowest	1.1616	1.250
	Middle	1.1660	1.319
	Highest	1.1692	1.320
<u>8DPSK</u>	Lowest	1.1718	1.272
	Middle	1.1740	1.311
	Highest	1.1832	1.298

Note 1: See next pages for actual measured spectrum plots.

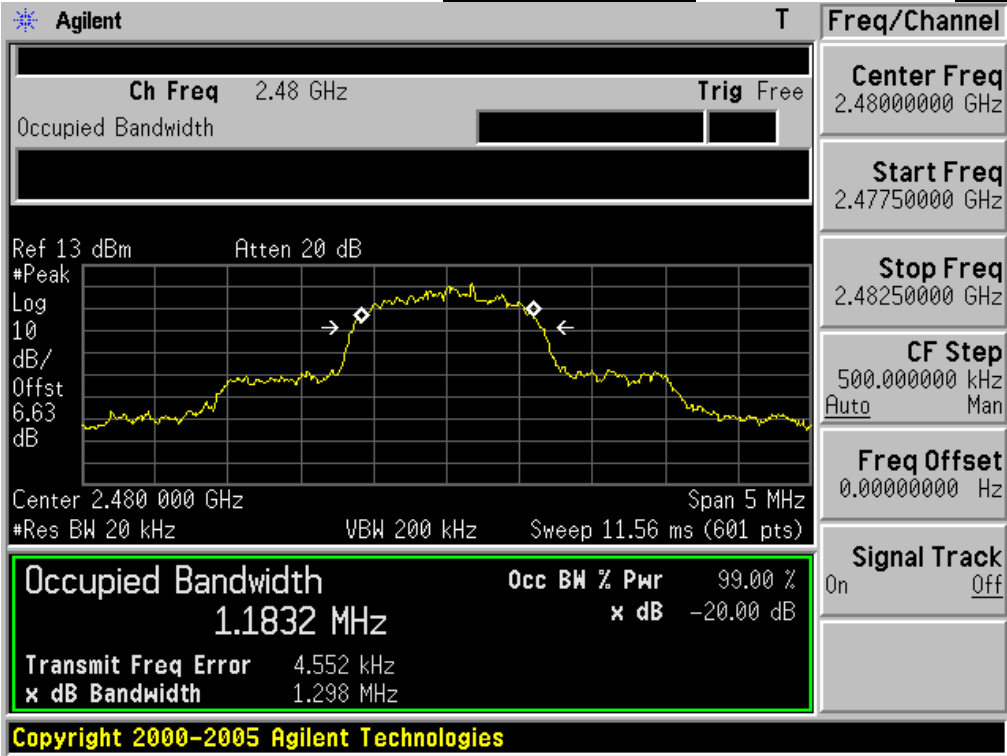
99% & 20dB Bandwidth**Lowest Channel** & Modulation: **GFSK****99% & 20dB Bandwidth****Middle Channel** & Modulation: **GFSK**

99% & 20dB Bandwidth**Highest Channel** & Modulation: **GFSK****99% & 20dB Bandwidth****Lowest Channel** & Modulation: **$\pi/4$ DQPSK**

99% & 20dB Bandwidth**Middle Channel** & Modulation: **$\pi/4$ DQPSK****99% & 20dB Bandwidth****Highest Channel** & Modulation: **$\pi/4$ DQPSK**

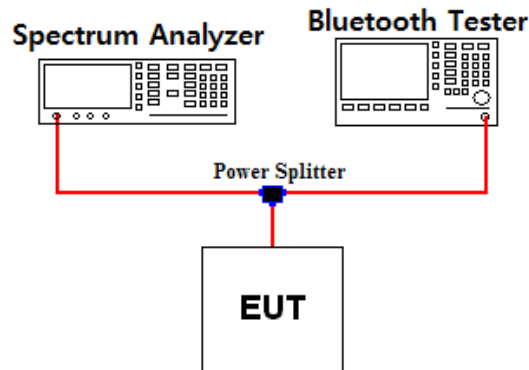
99% & 20dB Bandwidth**Lowest Channel & Modulation: 8DPSK****99% & 20dB Bandwidth****Middle Channel & Modulation: 8DPSK**

99% & 20dB Bandwidth **Highest Channel** & Modulation: **8DPSK**



5. Maximum Peak Output Power Measurement

5.1. Test Setup



5.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

5.3. Test Procedure

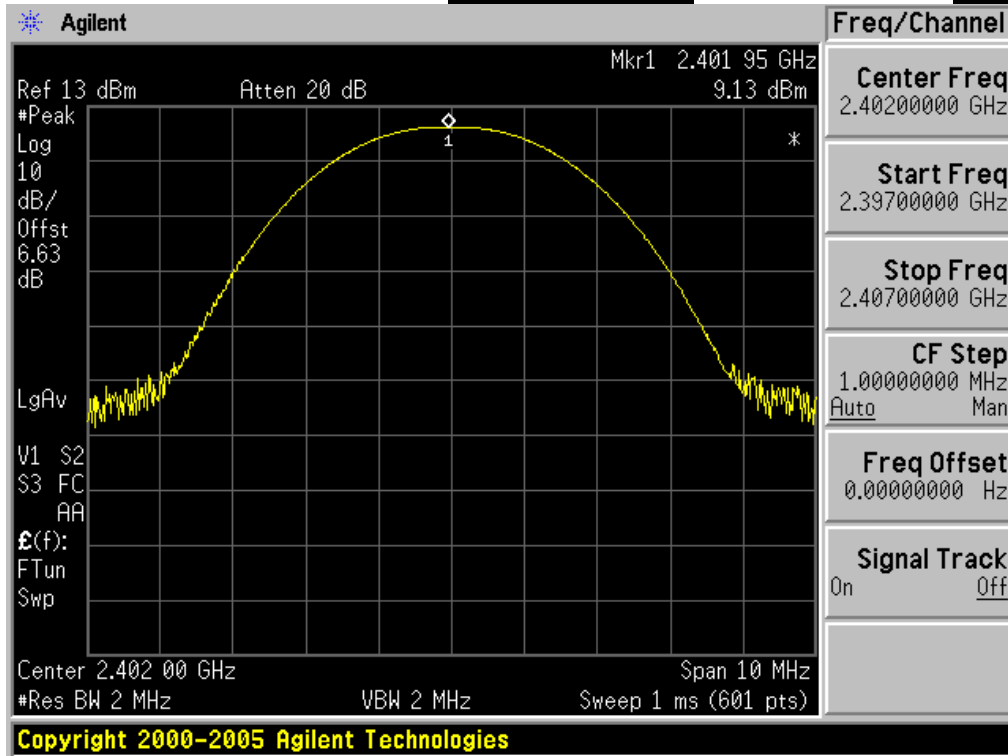
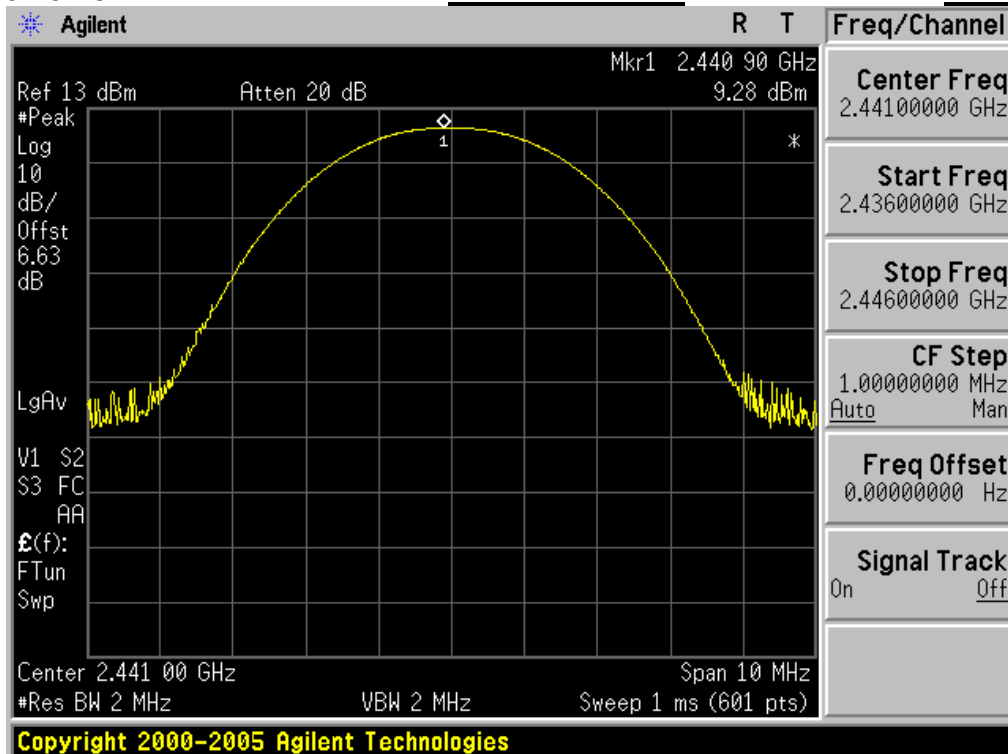
1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ 20dB BW
 VBW $\geq$ RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold

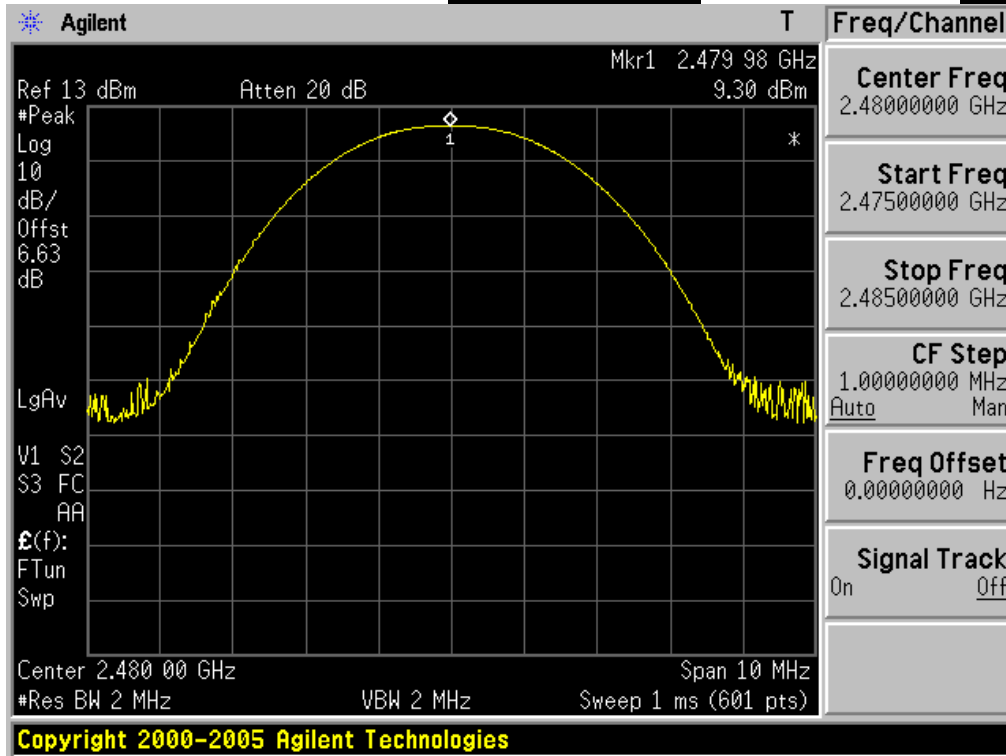
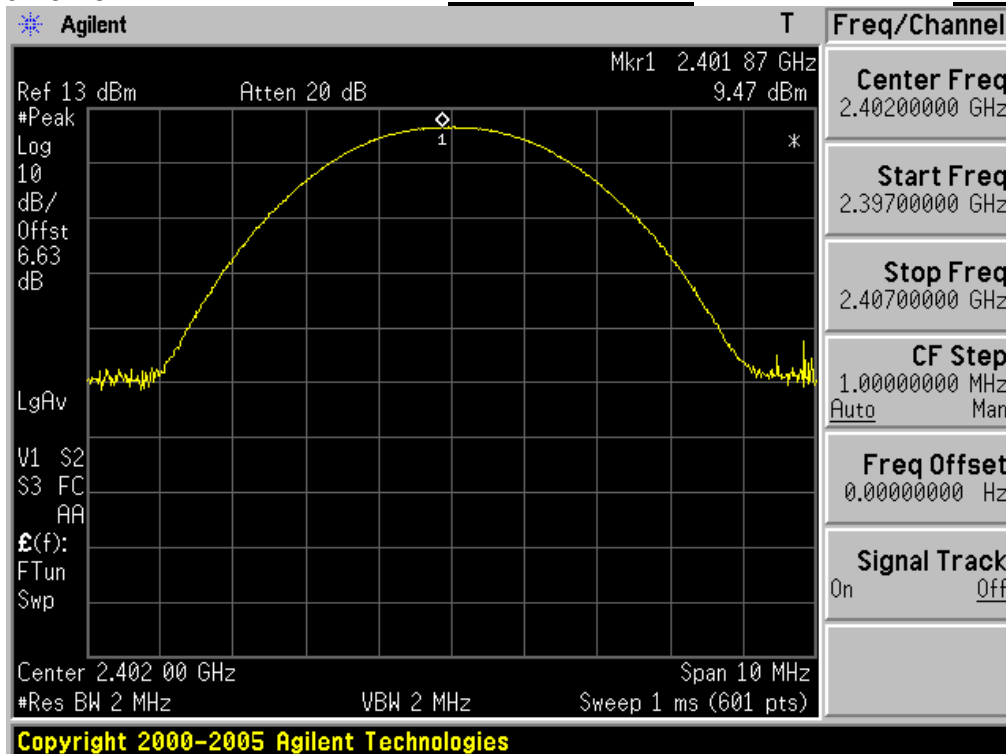
5.4. Test Results

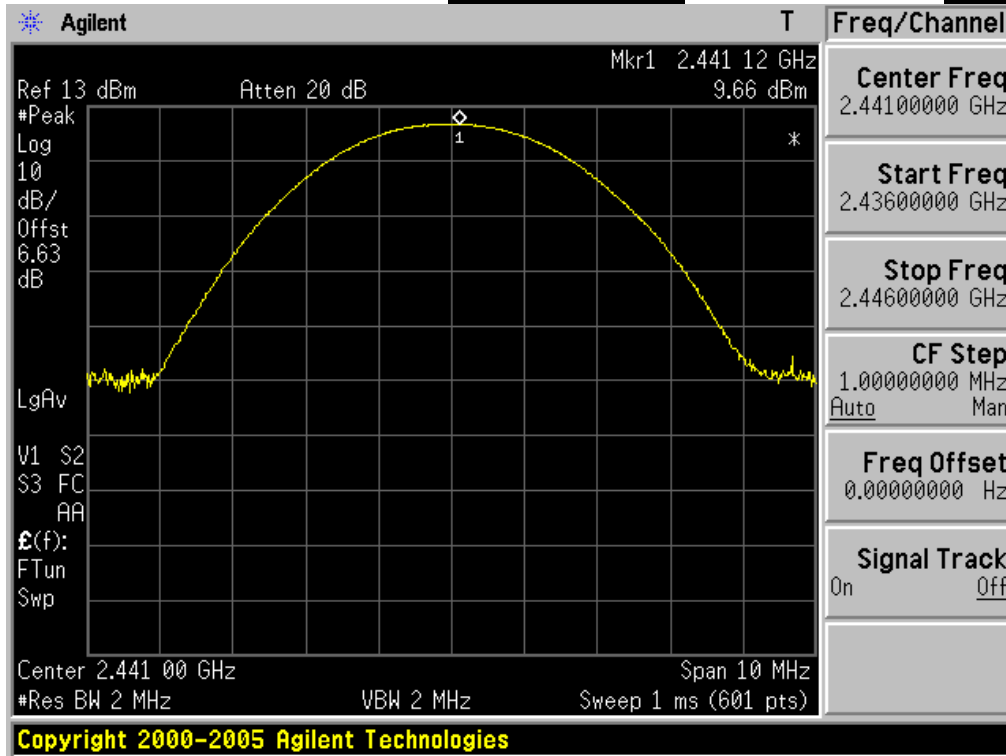
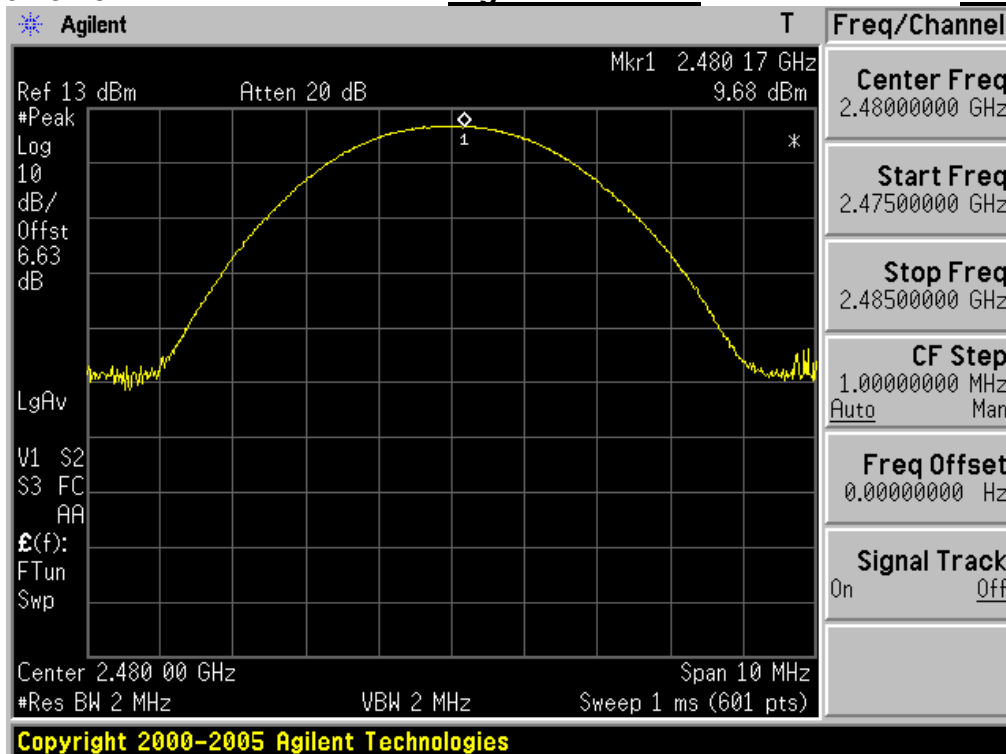
Ambient temperature : 22 °C
Relative humidity : 31%

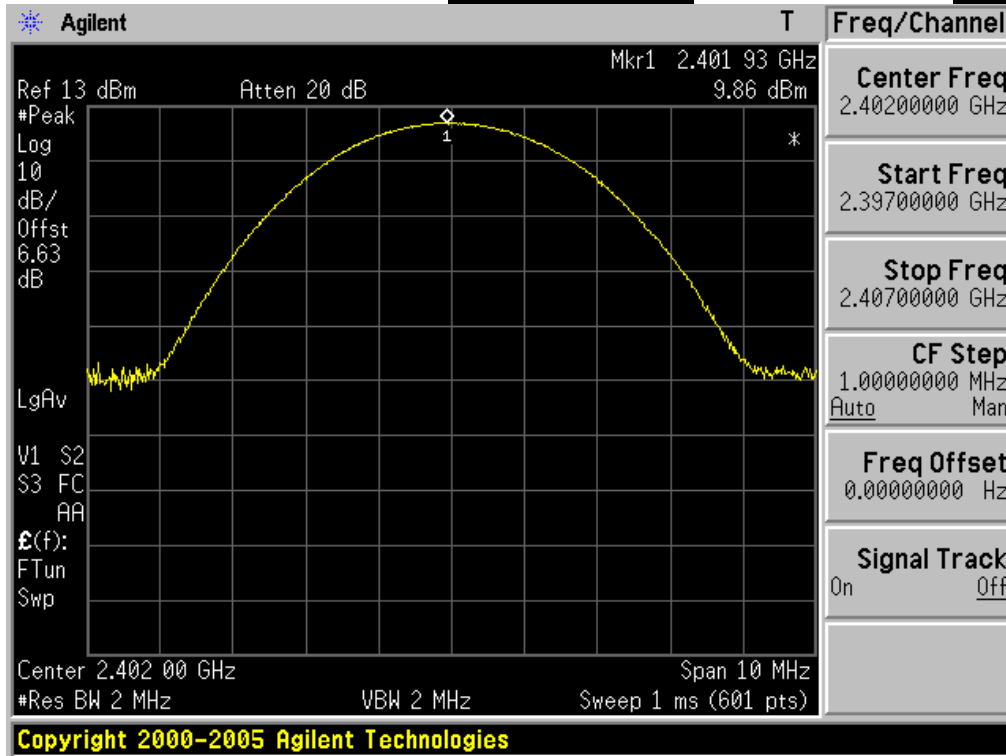
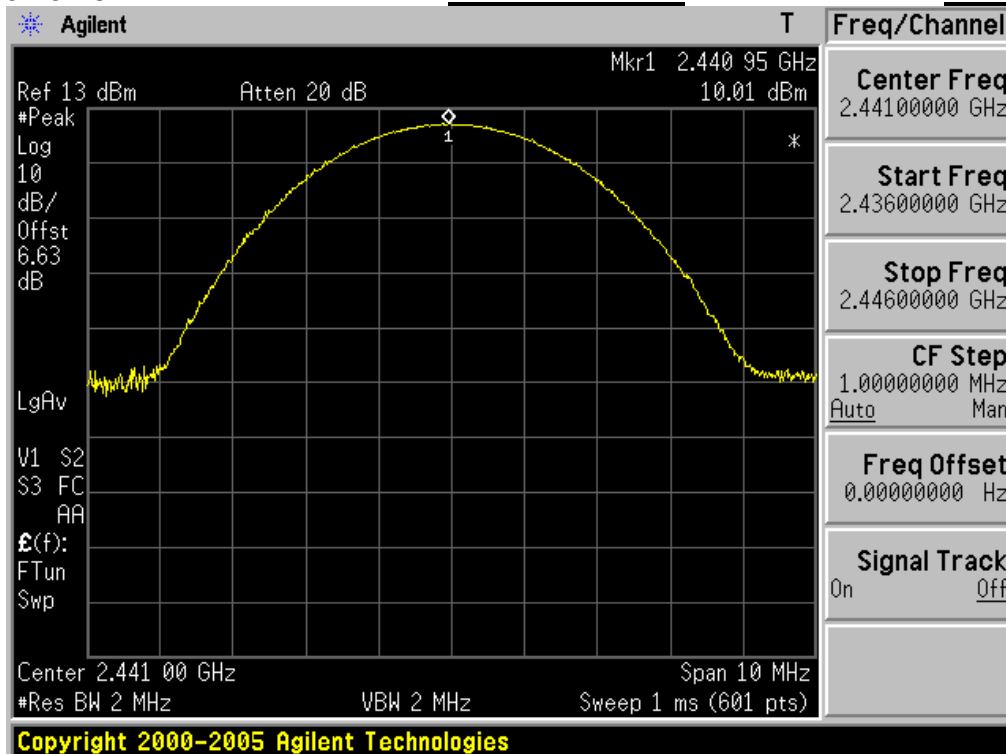
Modulation	Tested Channel	Peak Output Power	
		dBm	mW
<u>GFSK</u>	Lowest	9.13	8.185
	Middle	9.28	8.472
	Highest	9.30	8.511
<u>$\pi/4$ DQPSK</u>	Lowest	9.47	8.851
	Middle	9.66	9.247
	Highest	9.68	9.290
<u>8DPSK</u>	Lowest	9.86	9.683
	Middle	10.01	10.023
	Highest	10.06	10.139

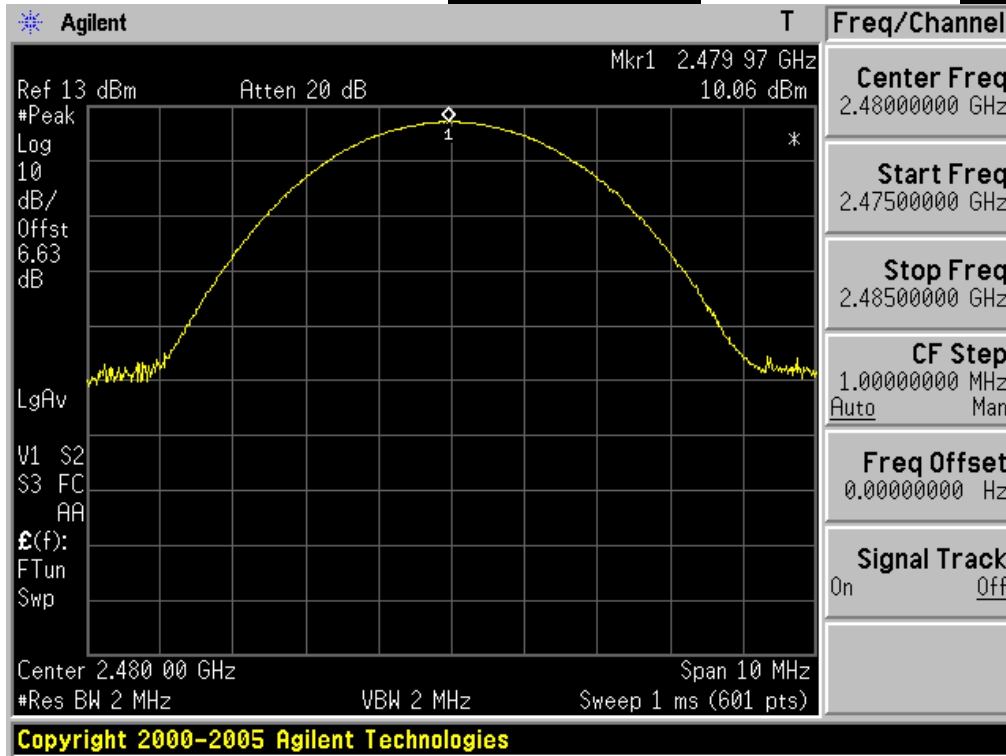
Note 1: See next pages for actual measured spectrum plots.

Peak Output Power**Lowest Channel** & Modulation: **GFSK****Peak Output Power****Middle Channel** & Modulation: **GFSK**

Peak Output Power**Highest Channel** & Modulation: **GFSK****Peak Output Power****Lowest Channel** & Modulation: **$\pi/4$ DQPSK**

Peak Output Power**Middle Channel** & Modulation: **$\pi/4$ DQPSK****Peak Output Power****Highest Channel** & Modulation: **$\pi/4$ DQPSK**

Peak Output Power**Lowest Channel** & Modulation: **8DPSK****Peak Output Power****Middle Channel** & Modulation: **8DPSK**

Peak Output Power**Highest Channel** & Modulation: **8DPSK**

6. Transmitter AC Power Line Conducted Emission

6.1. Test Setup

Refer to test setup photo.

6.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

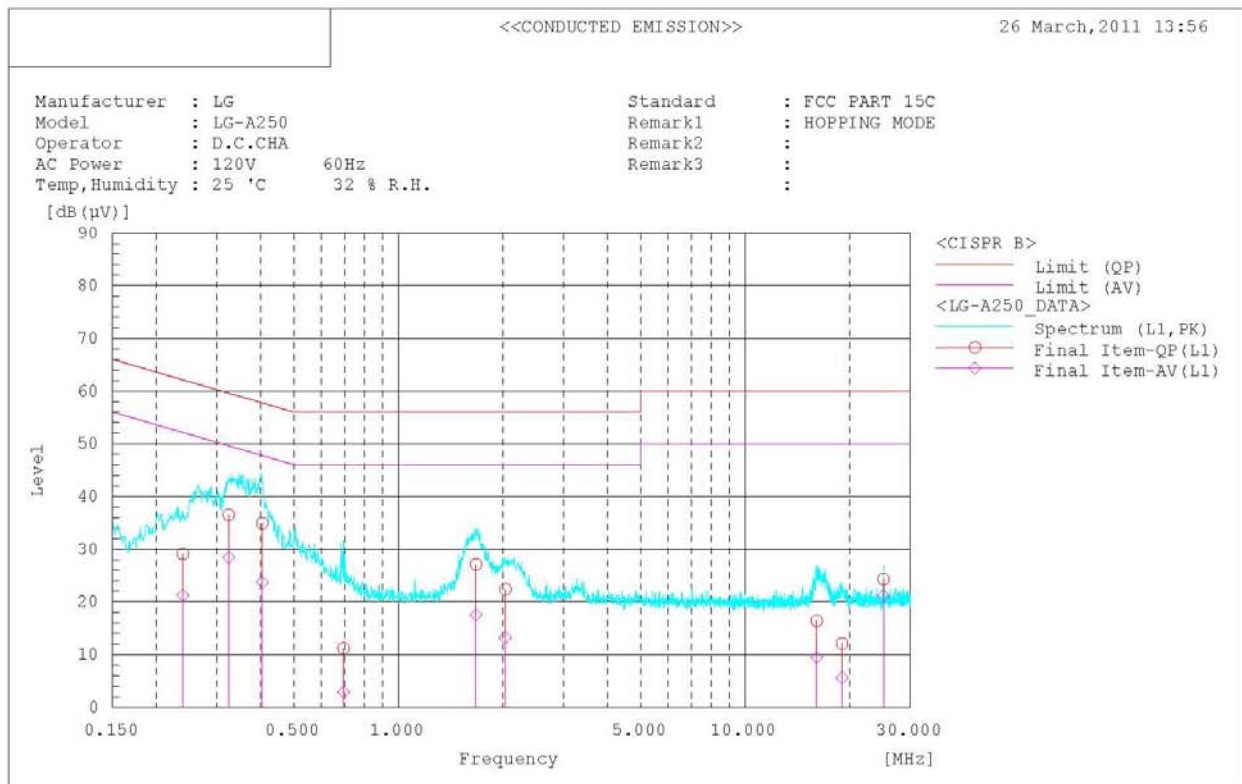
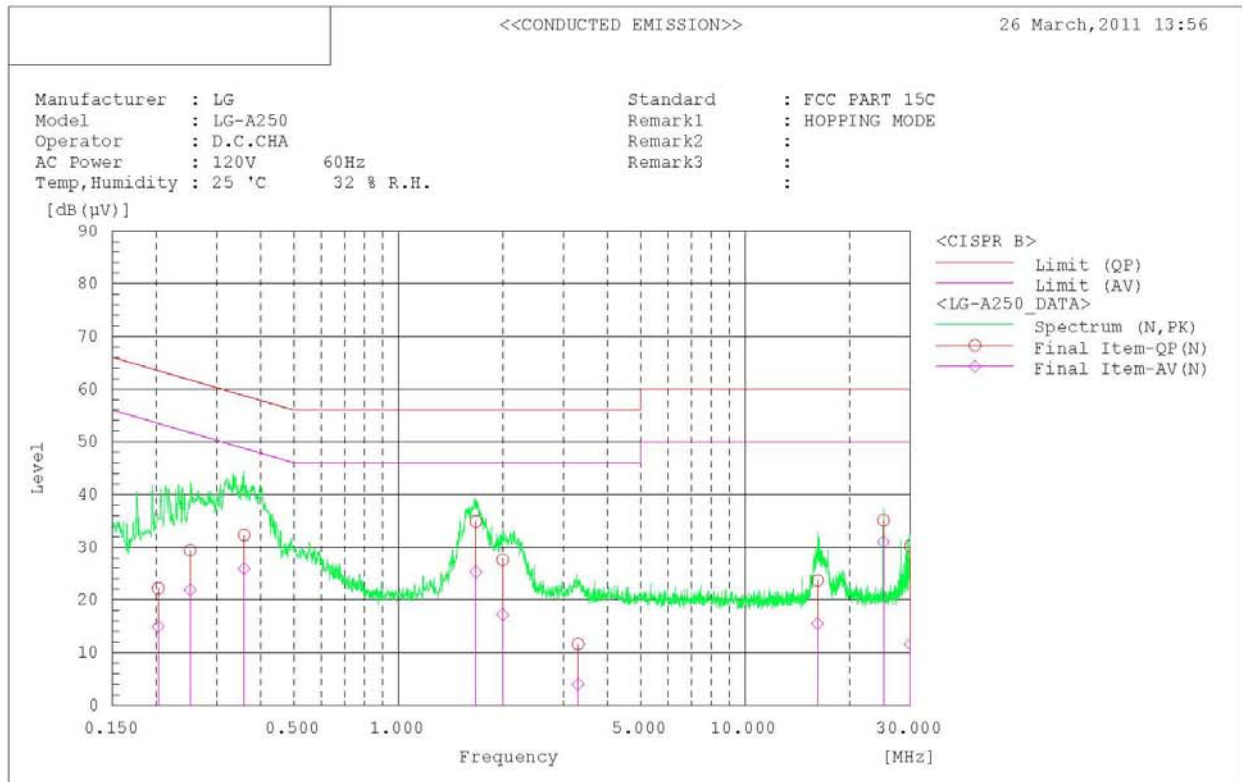
6.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

6.4. Test Results

AC Line Conducted Emissions (Graph)



AC Line Conducted Emissions (List)

<<CONDUCTED EMISSION>>

26 March, 2011 13:56

Standard : FCC PART 15C
Manufacturer : LG
Model : LG-A250
Operator : D.C.CHA
AC Power : 120V 60Hz
Temp, Humidity : 25 °C 32 % R.H.
Remark1 : HOPPING MODE
Remark2 :
Remark3 :

Final Result

--- N Phase ---

No.	Frequency	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]	Remark
1	0.251	29.3	21.8	0.1	29.4	21.9	61.7	51.7	32.3	29.8	
2	0.359	32.2	25.8	0.1	32.3	25.9	58.8	48.8	26.5	22.9	
3	0.203	22.1	14.9	0.1	22.2	15.0	63.5	53.5	41.3	38.5	
4	1.674	34.7	25.1	0.2	34.9	25.3	56.0	46.0	21.1	20.7	
5	1.998	27.4	17.0	0.2	27.6	17.2	56.0	46.0	28.4	28.8	
6	3.297	11.3	3.7	0.3	11.6	4.0	56.0	46.0	44.4	42.0	
7	16.175	22.8	14.6	0.9	23.7	15.5	60.0	50.0	36.3	34.5	
8	25.059	33.6	29.5	1.5	35.1	31.0	60.0	50.0	24.9	19.0	
9	29.943	28.4	9.8	1.8	30.2	11.6	60.0	50.0	29.8	38.4	

--- L1 Phase ---

No.	Frequency	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]	Remark
1	0.239	28.8	21.0	0.3	29.1	21.3	62.1	52.1	33.0	30.8	
2	0.324	36.2	28.2	0.3	36.5	28.5	59.6	49.6	23.1	21.1	
3	0.405	34.6	23.4	0.3	34.9	23.7	57.8	47.8	22.9	24.1	
4	0.695	10.9	2.6	0.3	11.2	2.9	56.0	46.0	44.8	43.1	
5	1.673	26.8	17.2	0.3	27.1	17.5	56.0	46.0	28.9	28.5	
6	2.034	22.1	12.9	0.3	22.4	13.2	56.0	46.0	33.6	32.8	
7	16.082	15.4	8.5	1.0	16.4	9.5	60.0	50.0	43.6	40.5	
8	25.059	22.9	19.8	1.4	24.3	21.2	60.0	50.0	35.7	28.8	
9	19.028	11.0	4.5	1.1	12.1	5.6	60.0	50.0	47.9	44.4	