



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

Applicant Name:

LG Electronics Inc.

Address:60-39, Gasan-dong, Gumchon-gu,
Seoul 153-023, Korea**Date of Issue:**

October 21, 2010

Test Site/Location:HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si,
Kyunggi-Do, Korea(Lab)**Test Report No.:** HCTR1010FR09-1**HCT FRN:** 0005866421**IC Recognition No.:** 5944A-2**FCC ID : BEJA260****APPLICANT : LG Electronics Inc.****Model(s):**

LG-A260

Additional Model(s):

A260

EUT Type:

Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC

RF Output Field Strength

15.94 dBuV/m

Frequency of Operation:

13.56305 MHz

Modulation type

ASK

FCC Classification:

Low Power Communication Device – Transmitter

FCC Rule Part(s):

FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 862

Report prepared by

: Jong Seok Lee

Test engineer of RF Team

Approved by

: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1010FR09-1	Date of Issue: October 21, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC	FCC ID: BEJA260	Page 1 of 24



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1010FR09	October 12, 2010	First Approval Report
HCTR1010FR09-1	October 21, 2010	Change the EUT Type



Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
3.5 STANDARDS	6
4. INSTRUMENT CALIBRATION	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. TEST SUMMARY	8
8. RADIATED EMISSION MEASUREMENT	9
8.1. RADIATED EMISSION 9 kHz – 30 MHz	1 0
8.2. RADIATED EMISSION 30 MHz – 1000 MHz	1 2
9. EMISSION BANDWIDTH PLOT	1 3
10. FREQUENCY TOLERANCE	1 4
11. POWERLINE CONDUCTE EMISSIONS	1 5
12. LIST OF TEST EQUIPMENT	2 4



1. GENERAL INFORMATION

Applicant: LG Electronics Inc.

Address: 60-39, Gasan-dong, Gumchon-gu,
Seoul 153-023, Korea

FCC ID: BEJA260

EUT: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC

Model: LG-A260

Additional Model: A260

Date of Test: August 23, 2010 ~ October 08, 2010

Contact person: Name: Hyon Kyun, Kim
Tel/ Fax: Phone #: +82-2-2033-1107
Fax #: +82-2-2033-1222

2. EUT DESCRIPTION

Product	Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC
Model Name	LG-A260
Additional Model:	A260
Power Supply	DC 3.7 V
Battery Type	Li-ion Battery(Standard)
Frequency of Operation	13.56305 MHz
Transmit Power	15.94 dBuV/m
Modulation Type	ASK
Manufacturer	LG Electronics Inc.
Antenna Specification	Manufacturer: LG Electronics Inc. Antenna type: Loop Antenna



3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1010FR09-1	Date of Issue: October 21, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC	FCC ID: BEJA260	Page 5 of 24



3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With

FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.4:2003	13.553MHz to 13.567MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.4:2003	outside of the 13.110-14.010 MHz band
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.209	ANSI C63.4:2003	9kHz to 30MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.209	ANSI C63.4:2003	30MHz to 1GHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.207	ANSI C63.4:2003	150kHz to 30MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.4:2003	0.01% of nominal
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.4:2003	-



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1010FR09-1	Date of Issue: October 21, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC	FCC ID: BEJA260	Page 7 of 24



7. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emissions	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	N/A
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass



8. RADIATED EMISSION MEASUREMENT

Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Minimum Standard: FCC Part 15.225 / 15.209

Rule Part	Frequency (MHz)	Limit
Part 15. 209	0.009 ~ 0.490	2400/F(kHz)uV/m@300
	0.490 ~1.705	24000/F(kHz)uV/m@30
	1.705 ~ 30	30 uV/m@30
	30 ~ 88	100 ** uV/m@3m
	88 ~ 216	150 ** uV/m@3m
	216 ~ 960	200 ** uV/m@3m
	Above 960	500 uV/m@3m

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.


15.225 Operation within the band 13.110 – 14.010 MHz.

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.
- (e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
- (f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1010FR09-1	Date of Issue: October 21, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC	FCC ID: BEJA260	Page 9 of 24

8.1. RADIATED EMISSION 9 kHz – 30 MHz

Test Set-up

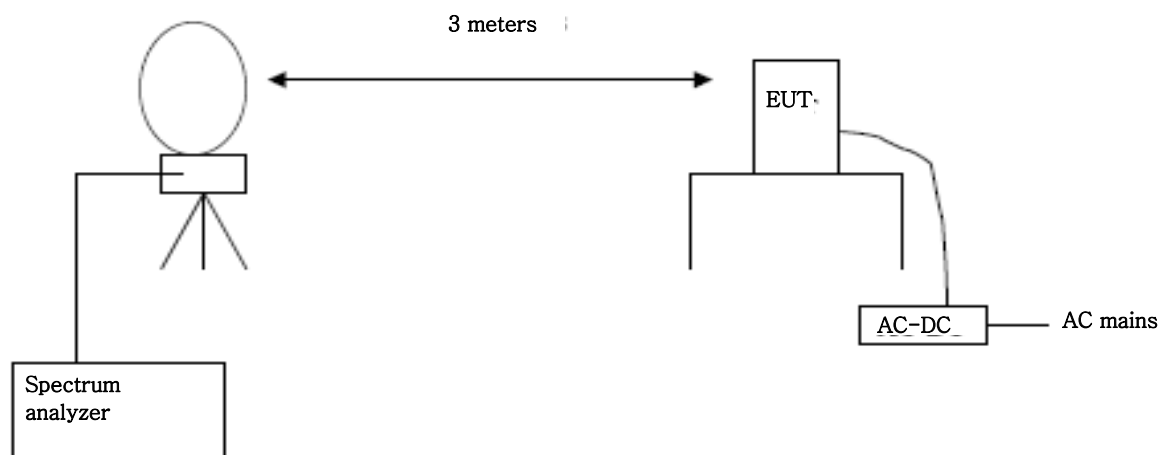

Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

Corrected Amplitude = Raw Amplitude(dBμV/m) + ACF(dB) + Cable Loss(dB) – Distance Correction Factor

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1GHz

RBW = 9 kHz (9 kHz ~ 30MHz)
= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

Test Results

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.56186	43.73	12.21	-40	15.94	84	68.06

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5531	32.19	12.21	-40	4.4	50.47	46.07
13.5672	41.12	12.21	-40	13.33	50.47	37.14

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.3494	23.57	12.21	-40	-4.22	40.51	44.73
13.7766	20.21	12.21	-40	-7.58	40.51	48.09


9 kHz-30 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
21.67	13.68	10.78	-40	-15.54	29.54	45.08
28.24	15.44	9.33	-40	-15.23	29.54	44.77

Remark :

1. Distance Correction Below 30MHz = $40\log(3m/30m) = -40$ dB Measurement Distance : 3 m (Below 30MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level

8.2. RADIATED EMISSION 30 MHz – 1000 MHz

Test Set-up

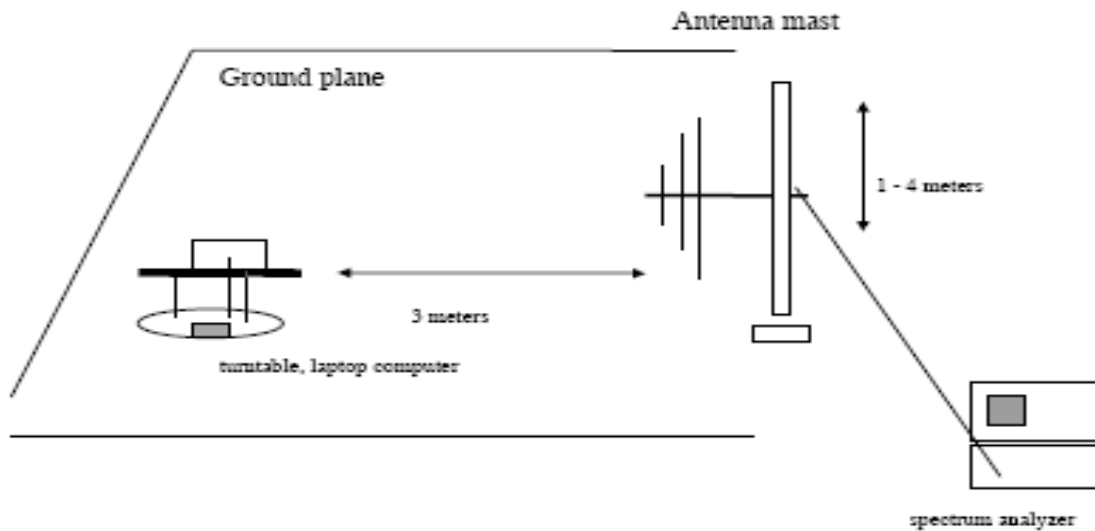

Test Procedures: Radiated emissions were measured according to ANSI C63.4.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
113.42	12.8	10.8	1.3	H	24.92	43.5	18.6
858.38	12.4	22.7	4.1	V	39.16	46.0	6.8
990.30	11.6	24.1	4.4	H	40.14	54.0	13.9

Remark


1. Result Level = Read Level + (ANT+ CL Factor)
2. Margin = Limit – Result Level

9. EMISSION BANDWIDTH PLOT.

Requirement(s):

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20dB bandwidth was measured by using a spectrum analyzer.

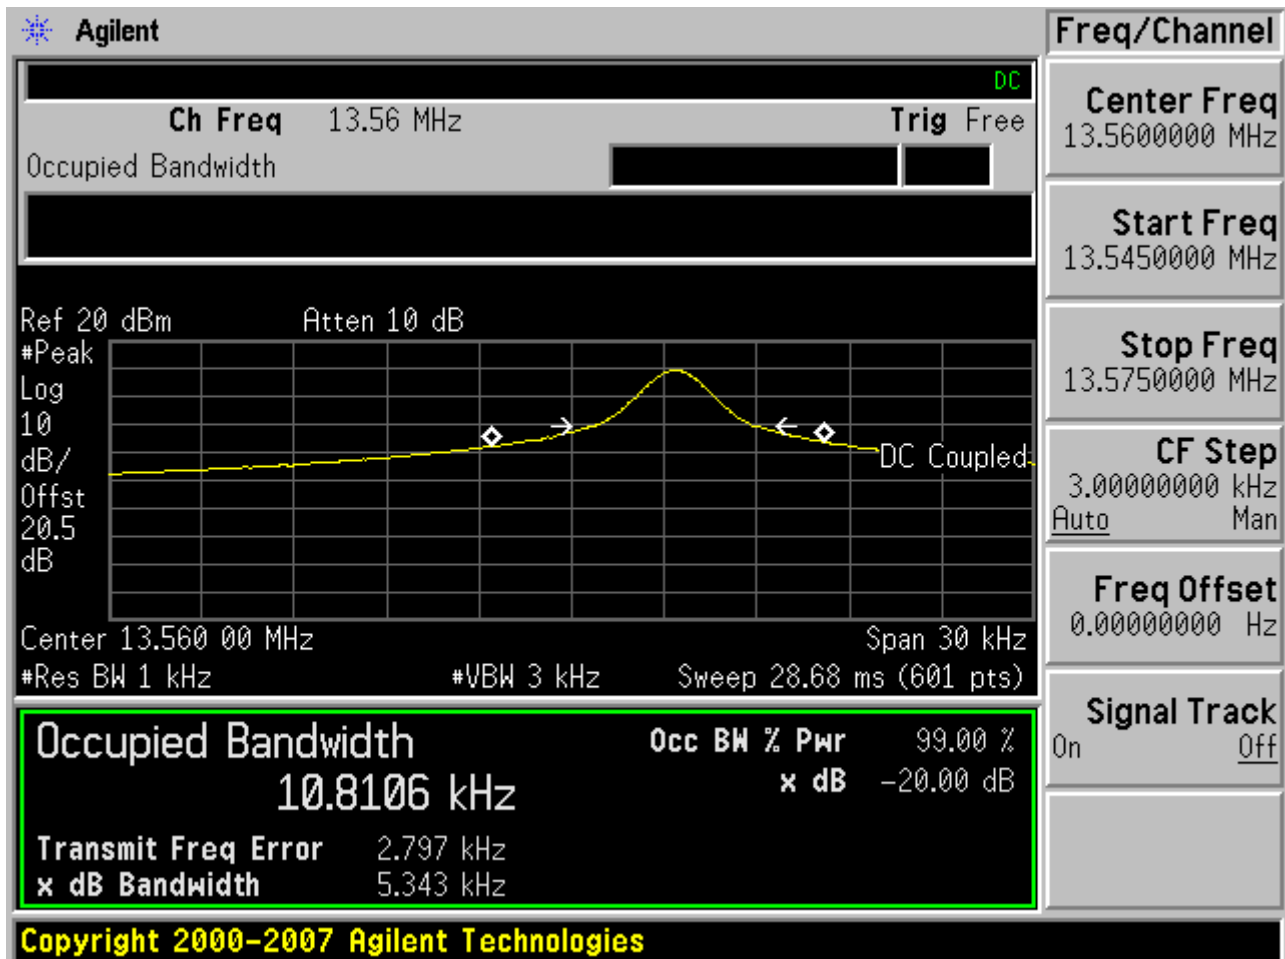

10. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.4

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Measurement Result:

VOLTAGE (%)	POWER	Temperature (°C)	Frequency (MHz)	Frequency Error (%)
100%	3.7 V	-20	13.562400	0.00065
100%		-10	13.561980	0.00107
100%		0	13.562000	0.00105
100%		10	13.562200	0.00085
100%		20	13.563050	0.00000
100%		30	13.563080	-0.00003
100%		40	13.563080	-0.00003
100%		50	13.562400	0.00065

Notes:

1. The EUT is supplied with the fully re-charged battery.



11. POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.



Test Plots

Untermine the Antenna

Conducted Emissions (Line 1)


HCT

EMC

EUT: LG-A260
Manufacturer: LG
Operating Condition: NFC MODE
Test Site: SHIELD ROOM
Operator: JS LEE
Test Specification: CISPR22 CLASS B
Comment: N

SCAN TABLE: "CISPR22 CLASS B"

Short Description:				KN22 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

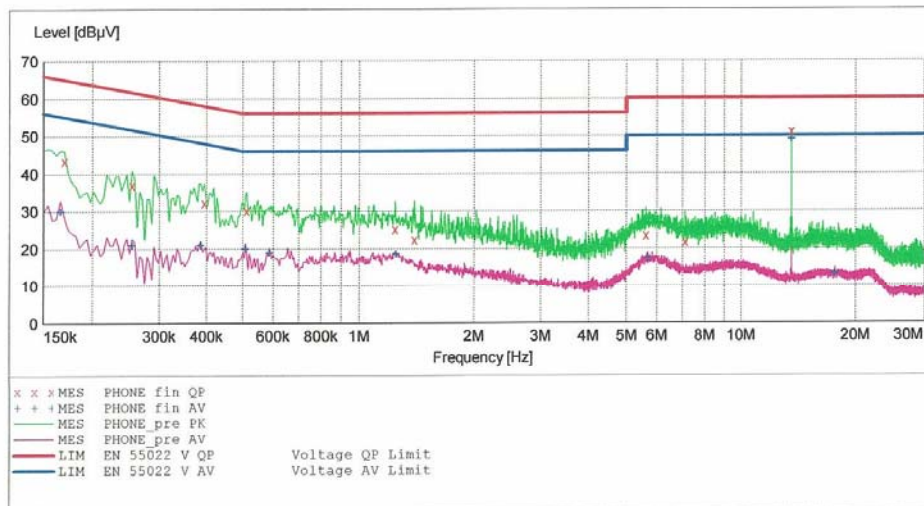

MEASUREMENT RESULT: "PHONE_fin QP"

9/8/2010 11:08AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.170000	43.40	10.1	65	21.5	---	---
0.254000	37.00	10.1	62	24.6	---	---
0.394000	32.20	10.1	58	25.8	---	---
0.512000	30.20	10.1	56	25.8	---	---
1.240000	25.20	10.2	56	30.8	---	---
1.392000	22.40	10.2	56	33.6	---	---
5.612000	23.50	10.5	60	36.5	---	---
7.088000	21.60	10.6	60	38.4	---	---
13.564000	51.00	10.8	60	9.0	---	---



MEASUREMENT RESULT: "PHONE_fin AV"

9/8/2010 11:08AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.166000	29.90	10.1	55	25.3	---	---
0.254000	20.90	10.1	52	30.8	---	---
0.386000	20.90	10.1	48	27.2	---	---
0.508000	19.90	10.1	46	26.1	---	---
0.588000	18.80	10.1	46	27.2	---	---
1.248000	18.40	10.2	46	27.6	---	---
5.676000	17.20	10.5	50	32.8	---	---
13.564000	48.80	10.8	50	1.2	---	---
17.644000	13.10	11.2	50	36.9	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1010FR09-1	Date of Issue: October 21, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC	FCC ID: BEJA260	Page 17 of 24



Conducted Emissions (Line 2)


HCT

EMC

EUT: LG-A260
Manufacturer: LG
Operating Condition: NFC MODE
Test Site: SHIELD ROOM
Operator: JS LEE
Test Specification: CISPR22 CLASS B
Comment: H

SCAN TABLE: "CISPR22 CLASS B"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

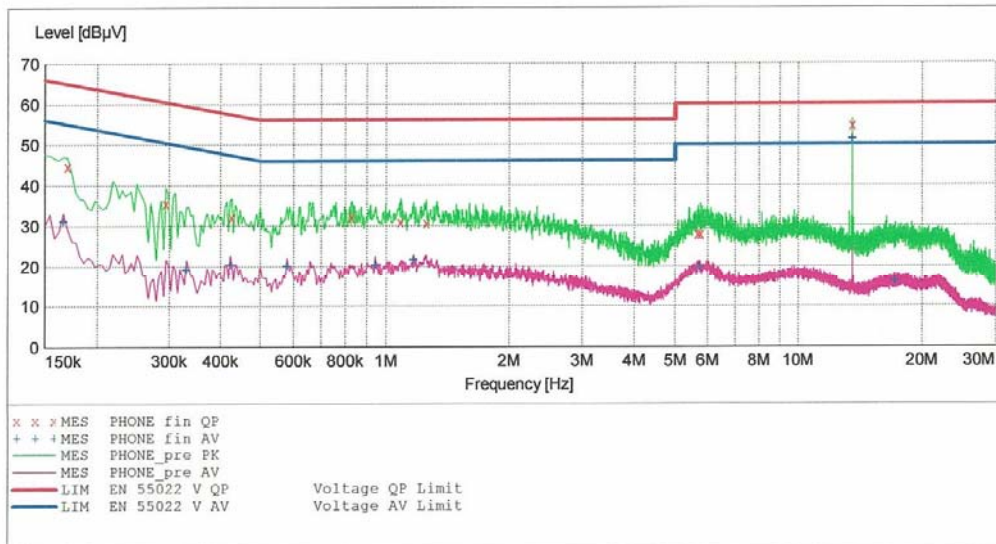

MEASUREMENT RESULT: "PHONE_fin QP"

9/8/2010 11:04AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.170000	44.60	10.1	65	20.3	---	---
0.294000	35.50	10.1	60	24.9	---	---
0.426000	32.10	10.1	57	25.2	---	---
0.828000	32.20	10.1	56	23.8	---	---
1.088000	30.90	10.2	56	25.1	---	---
1.252000	30.70	10.2	56	25.3	---	---
5.696000	27.80	10.5	60	32.2	---	---
5.768000	27.80	10.5	60	32.2	---	---
13.564000	54.70	10.8	60	5.3	---	---



MEASUREMENT RESULT: "PHONE_fin AV"

9/8/2010 11:04AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.166000	31.00	10.1	55	24.2	---	---
0.330000	19.20	10.1	50	30.3	---	---
0.422000	20.30	10.1	47	27.1	---	---
0.580000	20.00	10.1	46	26.0	---	---
0.944000	20.30	10.1	46	25.7	---	---
1.168000	21.50	10.2	46	24.5	---	---
5.748000	19.60	10.5	50	30.4	---	---
13.564000	51.20	10.8	50	-1.2	---	---
17.184000	16.10	11.2	50	33.9	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1010FR09-1	Date of Issue: October 21, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC	FCC ID: BEJA260	Page 19 of 24



Terminate the Antenna


HCT

EMC

EUT: LG-A260
Manufacturer: LG
Operating Condition: NFC MODE
Test Site: SHIELD ROOM
Operator: JS LEE
Test Specification: CISPR22 CLASS B
Comment: N

SCAN TABLE: "CISPR22 CLASS B"

Short Description:				CISPR 22 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
				Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
				Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
				Average			

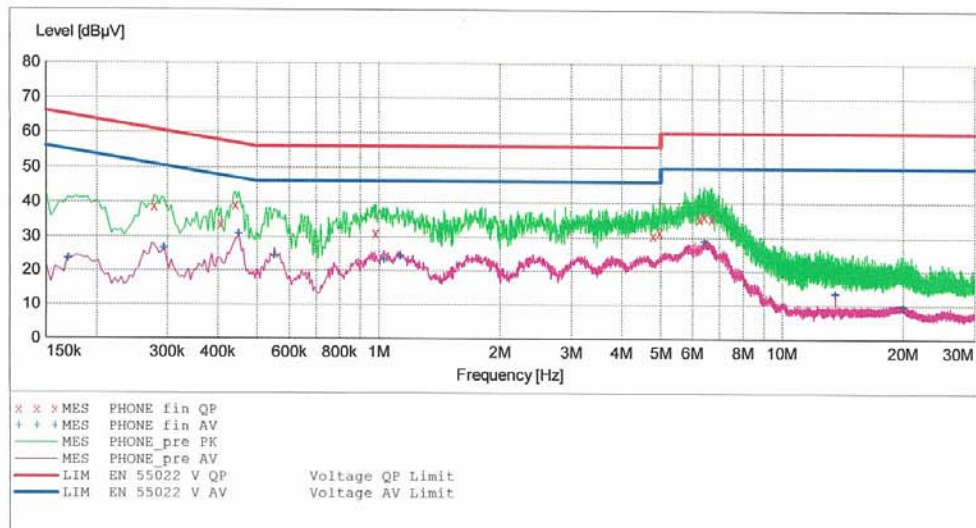

MEASUREMENT RESULT: "PHONE_fin QP"

10/21/2010 1:54PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.278000	38.90	10.1	61	22.0	---	---
0.406000	33.80	10.1	58	23.9	---	---
0.442000	39.20	10.1	57	17.9	---	---
0.984000	31.10	10.1	56	24.9	---	---
4.796000	30.60	10.4	56	25.4	---	---
4.980000	31.60	10.5	56	24.4	---	---
6.260000	35.60	10.5	60	24.4	---	---
6.432000	36.20	10.6	60	23.8	---	---
6.696000	35.50	10.6	60	24.5	---	---



MEASUREMENT RESULT: "PHONE_fin AV"

10/21/2010 1:54PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.170000	23.40	10.1	55	31.6	---	---
0.294000	26.70	10.1	50	23.7	---	---
0.450000	30.90	10.1	47	15.9	---	---
0.552000	24.40	10.1	46	21.6	---	---
1.032000	23.30	10.2	46	22.7	---	---
1.132000	24.30	10.2	46	21.7	---	---
6.452000	28.80	10.6	50	21.2	---	---
13.564000	13.50	10.8	50	36.5	---	---
19.952000	9.40	11.6	50	40.6	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1010FR09-1	Date of Issue: October 21, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC	FCC ID: BEJA260	Page 21 of 24




HCT

EMC

EUT: LG-A260
Manufacturer: LG
Operating Condition: NFC MODE
Test Site: SHIELD ROOM
Operator: JS LEE
Test Specification: CISPR22 CLASS B
Comment: H

SCAN TABLE: "CISPR22 CLASS B"

Short Description:			CISPR 22 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

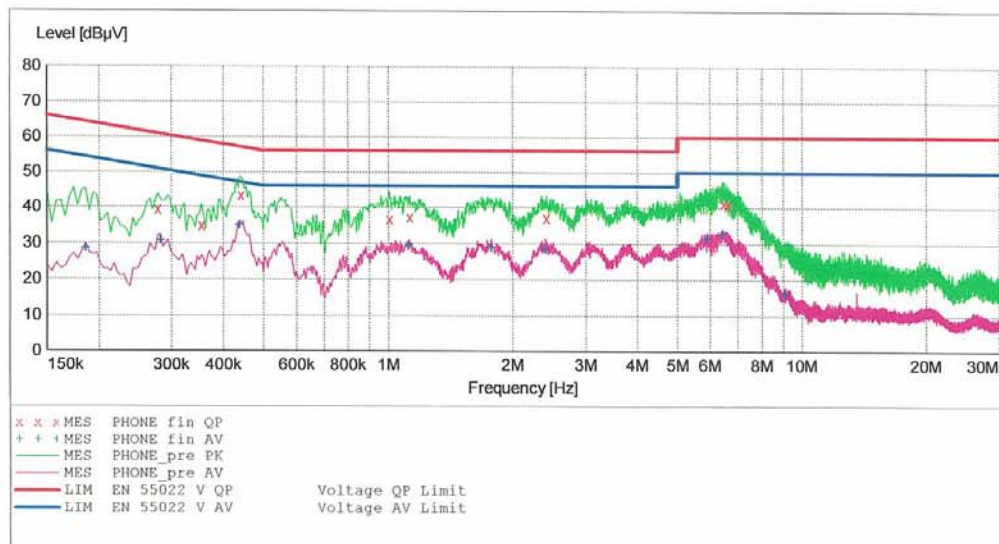

MEASUREMENT RESULT: "PHONE_fin QP"

10/21/2010 1:51PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.278000	39.40	10.1	61	21.4	---	---
0.354000	34.90	10.1	59	24.0	---	---
0.442000	43.40	10.1	57	13.6	---	---
1.008000	36.60	10.2	56	19.4	---	---
1.128000	37.20	10.2	56	18.8	---	---
2.420000	37.10	10.3	56	18.9	---	---
6.488000	41.30	10.6	60	18.7	---	---
6.632000	40.90	10.6	60	19.1	---	---
6.644000	40.70	10.6	60	19.3	---	---



MEASUREMENT RESULT: "PHONE_fin AV"

10/21/2010 1:51PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.186000	28.60	10.1	54	25.6	---	---
0.282000	30.70	10.1	51	20.1	---	---
0.438000	34.90	10.1	47	12.2	---	---
1.124000	29.40	10.2	46	16.6	---	---
1.776000	28.80	10.2	46	17.2	---	---
2.404000	28.40	10.3	46	17.6	---	---
5.912000	31.40	10.5	50	18.6	---	---
6.444000	32.60	10.6	50	17.4	---	---
9.128000	16.10	10.7	50	33.9	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1010FR09-1	Date of Issue: October 21, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & NFC	FCC ID: BEJA260	Page 23 of 24



12. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	03/24/2011	861741/013
Rohde & Schwarz	ESH3-Z6/ LISN	Annual	03/05/2011	100329
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	12/18/2010	9160-3150
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/30/2010	375.8810.352
MITEQ	AMF-6D-001180-35-20P/AMP	Annual	05/20/2011	990893
MITEQ	AFS44-00101800-35-20P-44-PS/AMP	Annual	04/05/2011	1119544
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	09/23/2011	296
Rohde & Schwarz	FSP30 / Spectrum Analyzer	Annual	03/25/2011	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	06/09/2011	US45303008
Agilent	E4416A /Power Meter	Annual	01/14/2011	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	07/23/2011	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	06/25/2011	1
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	07/23/2011	1
Hewlett Packard	11636B/Power Divider	Annual	12/24/2010	11377
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/08/2011	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	12/01/2010	010002156287001199
TESCOM	TC-3000A / BLUETOOTH TESTER	Annual	01/11/2011	3000A490112
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	06/24/2011	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/13/2012	9009-2536