



HCT.CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8535

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:

LG Electronics, Inc.

Address:

60-39, Gasan-dong, Gumchon-gu, Seoul 153-023,
Korea

Date of Issue:

July 21, 2009

Location:

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,
Kyoungki-do, Korea

Test Report No.: HCT-RF09-0725

HCT FRN: 0005866421

IC Recognition No.: IC 5944A-1

FCC ID:	BEJBL40G
IC ID:	2703C-BL40
APPLICANT:	LG Electronics, Inc.

FCC Model(s):

BL40g

IC Model(s):

BL40g

EUT Type:

Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT

Tx Frequency:

824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.4 - 1 907.6 MHz (WCDMA1900)

Rx Frequency:

869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 (WCDMA850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.4 - 1 987.6 MHz (WCDMA1900)

Max. RF Output Power:

1.054 W ERP GSM850 (30.23 dBm) / 0.493 W EIRP GSM1900 (26.93 dBm)
0.634 W ERP EDGE850 (28.02 dBm) / 0.450 W EIRP EDGE1900 (26.53 dBm)
0.208 W ERP WCDMA850(23.19 dBm) / 0.187 W EIRP WCDMA1900(22.72 dBm)

Emission Designator(s):

246KGXW (GSM850) 249KGXW (GSM1900)
244 KG7W (GSM850 EDGE) 244 KG7W (GSM1900 EDGE)
4M19F9W (WCDMA850) 4M18F9W (WCDMA1900)

FCC Classification:

Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s):

§22, §24, §2

IC Rule:

RSS-132, RSS-133, RSS-GEN

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by
: Jong Seok Lee

Test engineer of RF Team



Approved by
: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

Table of Contents

1. GENERAL INFORMATION	3
2. INTRODUCTION.....	4
2.1. EUT DESCRIPTION.....	4
2.2. MEASURING INSTRUMENT CALIBRATION	4
2.3. TEST FACILITY	4
3. DESCRIPTION OF TESTS.....	5
3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power.....	5
3.2 Peak- to- Average Ratio	6
3.3 Occupied bandwidth.....	7
3.4 Spurious and Harmonic Emissions at Antenna Terminal.....	8
3.5 Radiated Spurious and Harmonic Emissions	9
3.6 Frequency stability / variation of ambient temperature.....	10
4. LIST OF TEST EQUIPMENT	11
5. SUMMARY OF TEST RESULTS	12
6. SAMPLE CALCULATION.....	13
7. TEST DATA	14
7.1 Conducted Output Power.....	14
7.2 Peak-to-Average Ratio	15
7.3 Occupied Bandwidth.....	16
7.4 Conducted Spurious Emissions.....	17
7.4.1 Band Edge	17
7.5 Effective Radiated Power Output (GSM / WCDMA)	18
7.6 Equivalent Isotropic Radiated Power (GSM / WCDMA).....	19
7.7 Radiated Spurious Emissions	20
7.7.1 Radiated Spurious Emissions (GSM850).....	20
7.7.2 Radiated Spurious Emissions (GSM1900)	21
7.7.3 Radiated Spurious Emissions (WCDMA850).....	22
7.7.4 Radiated Spurious Emissions (WCDMA1900).....	23
7.8 Frequency stability / variation of ambient temperature.....	24
7.8.1 FREQUENCY STABILITY (GSM850)	24
7.8.2 FREQUENCY STABILITY (GSM1900)	25
7.8.3 FREQUENCY STABILITY (WCDMA850).....	26
7.8.4 FREQUENCY STABILITY (WCDMA1900).....	27
8. TEST PLOTS.....	28



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics, Inc.

Address: 60-39, Gasan-dong, Gumchon-gu, Seoul 153-023, Korea

FCC ID: BEJBL40G

IC ID: 2703C-BL40

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §22, §24, §2

EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT

Model name(s): FCC: BL40g
IC: BL40g

Battery **Model Name:** LGIP-520N(Standard)
 Power Rating: 3.7 V, 1000mAh, 3.7Wh
 Type: Li-Ion Battery

Tx Frequency: 824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.4 - 1 907.6 MHz (WCDMA1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 (WCDMA850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.4 - 1 987.6 MHz (WCDMA1900)

Max. RF Output Power: 1.054 W ERP GSM850 (30.23 dBm) / 0.493 W EIRP GSM1900 (26.93 dBm)
0.634 W ERP EDGE850 (28.02 dBm) / 0.450 W EIRP EDGE1900 (26.53 dBm)
0.208 W ERP WCDMA850(23.19 dBm) / 0.187 W EIRP WCDMA1900(22.72 dBm)

Emission Designator(s): 246KGXW (GSM850) 249KGXW (GSM1900)
244 KG7W (GSM850 EDGE) 244 KG7W (GSM1900 EDGE)
4M19F9W (WCDMA850) 4M18F9W (WCDMA1900)

Antenna Specification Manufacturer: E.M.W Antenna Co., Ltd.

Antenna type: Internal Antenna

Peak Gain: 1.718 dBi

Date(s) of Tests: July 01, 2009 ~ July 02, 2009

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics, Inc. BL40g Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT consists of GSM850, GSM1900, GPRS Class12, EDGE, WCDMA850 and WCDMA1900 and HSDPA.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009(Registration Number: 90661)

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

3. DESCRIPTION OF TESTS

3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power

Test Set-up

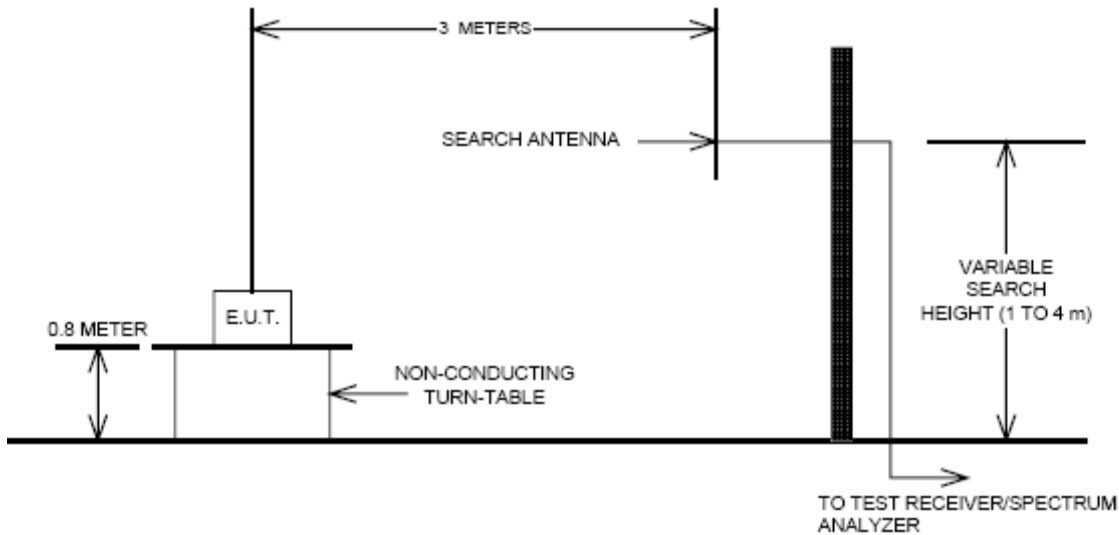

Test Procedure

Radiated emission measurements were performed at an open Site.

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



3.2 Peak- to- Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a

spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



3.3 Occupied bandwidth.

Test set-up



(Configuration of conducted Emission measurement)

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



3.4 Spurious and Harmonic Emissions at Antenna Terminal.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

3.5 Radiated Spurious and Harmonic Emissions

Test Set-up



The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The open field test site is situated in open field with ground screen whose site attenuation characteristics meet ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable wooden platform mounted at three from the antenna mast.

- 1) The unit mounted on a wooden table 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10th harmonic of the fundamental frequency.

Test Procedure

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

3.6 Frequency stability / variation of ambient temperature

Test Set-up



* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.000\ 25\ \%$ ($\pm 2.5\ \text{ppm}$) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
R&S	ESI40/ Spectrum Analyzer	831564/003	Annual	10/31/2009
Agilent	E4416A/ Power Meter	GB41291412	Annual	01/21/2010
Agilent	E9327A/ Power Sensor	MY4442009	Annual	07/28/2009
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/10/2010
MITEQ	AMF-60-0010 1800-35-20P / AMP	1200937	Annual	05/20/2010
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	06/29/2010
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	06/29/2010
Agilent	775D/ Dual Directional Coupler	12922	Annual	12/24/2009
Agilent	11636B/ Power Divider	11377	Annual	12/24/2009
Digital	EP-3010/ Power Supply	3110117	Annual	01/07/2010
Schwarzbeck	UHAP/ Dipole Antenna	585	Annual	02/13/2011
Schwarzbeck	UHAP/ Dipole Antenna	558	Annual	02/13/2011
Korea Engineering	KR-1005L / Chamber	KRAB07063-2CH	Annual	12/31/2009
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	03/26/2010
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	12/23/2009

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
2.1046	Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$ $< 6.3 \text{ Watts max. ERP(IC)}$	RADIATED	PASS
	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of band emissions		PASS



6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)	Level(dBm)	LEVEL(dBm)				W	dBm
GSM850	128	824.20	-11.56	34.28	-8.32	1.17	H	0.30	24.79

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



7. TEST DATA

7.1 Conducted Output Power

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

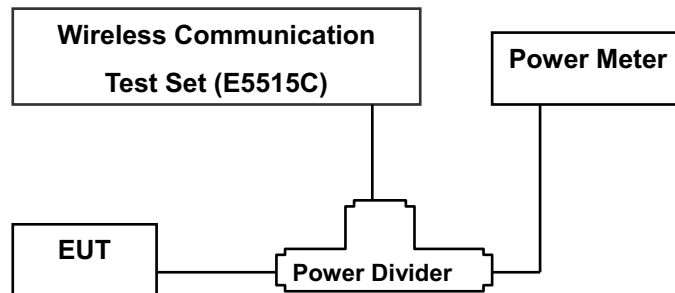

Test Result

Band	Channel	Voice	GPRS Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)
GSM 850	128	32.76	32.73	31.18	29.28	28.13
	190	32.73	32.71	31.15	29.25	28.11
	251	32.68	32.66	31.11	29.20	28.07
GSM 1900	512	29.55	29.53	29.50	29.45	29.43
	661	29.64	29.62	29.59	29.54	29.51
	810	29.79	29.77	29.74	29.68	29.66

(GSM Conducted Output Powers)

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

Band	Channel	EDGE Data			
		EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 850	128	27.29	27.26	27.25	27.21
	190	27.26	27.24	27.22	27.20
	251	27.21	27.20	27.17	27.15
GSM 1900	512	26.09	26.08	26.05	26.04
	661	26.18	26.16	26.13	26.11
	810	26.31	26.31	26.26	26.25

(GSM EDGE Conducted Output Powers)

Band	Channel	HSDPA INACTIVE		HSDPA ACTIVE
		12.2kbps RMC (dBm)	12.2kbps ARM (dBm)	12.2kbps RMC (dBm)
WCDMA 850	4132	22.48	22.46	22.16
	4183	22.51	22.38	22.08
	4233	22.43	22.40	22.22
WCDMA 1900	9262	22.32	22.32	22.11
	9400	22.33	22.32	22.08
	9538	22.27	22.30	22.02

(WCDMA Conducted Output Powers)

7.2 Peak-to-Average Ratio

- Plots of the EUT's Peak- to- Average Ratio are shown Page 33, 37.



7.3 Occupied Bandwidth

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	245.8492
	190	836.60	243.4495
	251	848.80	243.7700
GSM850 EDGE	128	824.20	243.6153
GSM1900	512	1850.20	243.9623
	661	1880.00	247.1073
	810	1909.80	248.9932
GSM1900 EDGE	810	1909.80	244.4788
WCDMA850	4132	826.40	4.1914
	4183	836.60	4.1603
	4233	846.60	4.1827
WCDMA1900	9262	1852.40	4.1636
	9400	1880.00	4.1812
	9538	1907.60	4.1819

- Plots of the EUT's Occupied Bandwidth are shown Page 29 ~ 32, 34 ~ 36.



7.4 Conducted Spurious Emissions

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	7.0125	-30.69
	190	7.0000	-29.99
	251	6.9750	-29.71
GSM1900	512	14.4530	-27.25
	661	14.0800	-27.37
	810	13.9470	-27.73
WCDMA850	4132	7.8500	-40.99
	4183	7.0625	-40.17
	4233	7.7625	-40.93
WCDMA1900	9262	13.6000	-38.31
	9400	13.6530	-38.12
	9538	14.3200	-38.06

- Plots of the EUT's Conducted Spurious Emissions are shown Page 45 ~ 57.

7.4.1 Band Edge

- Plots of the EUT's Band Edge are shown Page 37 ~ 45.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



7.5 Effective Radiated Power Output (GSM / WCDMA)

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-8.45	37.39	-8.32	1.17	V	0.62	27.90
190	836.60	-7.45	39.04	-8.22	1.19	V	0.92	29.63
251	848.80	-7.57	39.55	-8.12	1.20	V	1.05	30.23
EDGE 251	848.80	-9.78	37.34	-8.12	1.20	V	0.63	28.02

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
4132	826.40	-13.94	32.01	-8.30	1.17	V	0.18	22.54
4183	836.60	-14.30	32.19	-8.22	1.19	V	0.19	22.78
4233	846.60	-14.48	32.53	-8.14	1.20	V	0.21	23.19

Note: Standard batteries are the only options for this phone

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



7.6 Equivalent Isotropic Radiated Power (GSM / WCDMA)

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
512	1,850.20	-12.81	18.80	10.05	1.91	V	0.49	26.93
661	1,880.00	-13.99	17.83	10.05	1.95	V	0.39	25.93
810	1,909.80	-16.15	15.75	10.06	1.97	V	0.24	23.84
EDGE 512	1,850.20	-13.21	18.40	10.05	1.91	V	0.45	26.53

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
9262	1,852.40	-17.03	14.58	10.05	1.91	V	0.19	22.72
9400	1,880.00	-18.12	13.70	10.05	1.95	V	0.15	21.80
9538	1,907.60	-19.59	12.33	10.06	1.97	V	0.11	20.42

Note: Standard batteries are the only options for this phone

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



7.7 Radiated Spurious Emissions

7.7.1 Radiated Spurious Emissions (GSM850)

■ MEASURED OUTPUT POWER: 30.23 dBm = 1.054 W
■ MODULATION SIGNAL: GSM850
■ DISTANCE: 3 meters
■ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 43.23 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-44.34	7.09	-51.02	1.73	V	-45.66	-75.89
	2,472.60	-44.38	8.12	-46.95	2.28	H	-41.11	-71.34
	3,296.80	-56.79	9.72	-59.52	2.57	V	-52.37	-82.60
190 (836.6)	1,673.20	-42.27	7.23	-49.16	1.79	V	-43.72	-73.95
	2,509.80	-44.49	8.14	-47.06	2.33	H	-41.25	-71.48
	3,346.40	-57.00	9.99	-60.07	2.66	V	-52.74	-82.97
251 (848.8)	1,697.60	-38.14	7.41	-44.84	1.83	V	-39.26	-69.49
	2,546.40	-41.30	8.21	-44.00	2.34	H	-38.13	-68.36
	3,395.20	-58.46	9.91	-61.24	2.85	V	-54.18	-84.41

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for
all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



7.7.2 Radiated Spurious Emissions (GSM1900)

■ MEASURED OUTPUT POWER: 26.93 dBm = 0.493 W
 ■ MODULATION SIGNAL: GSM1900
 ■ DISTANCE: 3 meters
 ■ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 39.93 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-56.21	12.46	-57.63	2.73	V	-47.90	-74.83
	5,550.60	-52.01	12.70	-49.35	3.60	H	-40.25	-67.18
	7,400.80	-54.12	11.36	-40.83	3.88	V	-33.35	-60.28
661 (1880.0)	3,760.00	-55.62	12.47	-56.51	2.73	V	-46.76	-73.69
	5,640.00	-54.84	10.60	-50.19	3.60	H	-43.19	-70.12
	7,520.00	-56.57	11.33	-42.80	3.88	V	-35.35	-62.28
810 (1909.8)	3,819.60	-56.88	12.49	-57.66	2.73	V	-47.90	-74.83
	5,729.40	-59.58	12.80	-56.84	3.60	H	-47.64	-74.57
	7,639.20	-56.11	11.30	-42.05	3.88	V	-34.63	-61.56

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for
 all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



7.7.3 Radiated Spurious Emissions (WCDMA850)

☐ MEASURED OUTPUT POWER: 23.19 dBm = 0.208 W
☐ MODULATION SIGNAL: WCDMA850
☐ DISTANCE: 3 meters
☐ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 36.19 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-49.70	7.09	-56.41	1.73	H	-51.05	-74.24
	2,479.20	-54.69	8.12	-57.27	2.28	H	-51.43	-74.62
	3,305.60	-58.53	9.72	-61.14	2.57	H	-53.99	-77.18
4,183 (836.6)	1,673.20	-49.64	7.23	-56.53	1.79	H	-51.09	-74.28
	2,509.80	-52.36	8.14	-54.93	2.33	H	-49.12	-72.31
	3,346.40	-58.13	9.99	-61.20	2.66	H	-53.87	-77.06
4,233 (846.6)	1,693.20	-48.82	7.41	-55.59	1.83	H	-50.01	-73.20
	2,539.80	-51.12	8.21	-53.80	2.34	H	-47.93	-71.12
	3,386.40	-56.36	9.91	-59.04	2.85	H	-51.98	-75.17

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for
 all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40



7.7.4 Radiated Spurious Emissions (WCDMA1900)

- ☐ MEASURED OUTPUT POWER: 22.72 dBm = 0.187 W
☐ MODULATION SIGNAL: WCDMA850
☐ DISTANCE: 3 meters
☐ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 35.72 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262	3,704.80	-59.88	12.46	-61.27	2.73	H	-51.54	-74.26
	5,557.20	-57.85	12.71	-55.22	3.60	V	-46.12	-68.84
	7,409.60	-58.50	11.36	-44.99	3.88	V	-37.52	-60.24
9400	3,760.00	-59.00	12.47	-59.89	2.73	H	-50.14	-72.86
	5,640.00	-57.83	12.75	-55.33	3.60	H	-46.18	-68.90
	7,520.00	-60.11	11.33	-46.34	3.88	H	-38.89	-61.61
9538	3,815.20	-59.62	12.46	-60.39	2.73	H	-50.66	-73.38
	5,722.80	-57.42	12.79	-54.70	3.60	V	-45.50	-68.22
	7,630.40	-59.64	11.30	-45.60	3.88	V	-38.18	-60.90

- NOTES:** 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40




7.8 Frequency stability / variation of ambient temperature

7.8.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 190
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 599 964	-36.34	-0.000 004	-0.043
100%		-30	836 599 975	-25.07	-0.000 003	-0.030
100%		-20	836 599 970	-30.20	-0.000 004	-0.036
100%		-10	836 599 977	-23.16	-0.000 003	-0.028
100%		0	836 599 979	-20.55	-0.000 002	-0.025
100%		+10	836 599 969	-31.13	-0.000 004	-0.037
100%		+20	836 599 983	-16.92	-0.000 002	-0.020
100%		+30	836 599 973	-27.14	-0.000 003	-0.032
100%		+40	836 599 982	-17.91	-0.000 002	-0.021
100%		+50	836 599 976	-24.24	-0.000 003	-0.029
115%	4.255	+20	836 599 973	-26.67	-0.000 003	-0.032
Batt. Endpoint	3.400	+20	836 599 980	-19.68	-0.000 002	-0.024

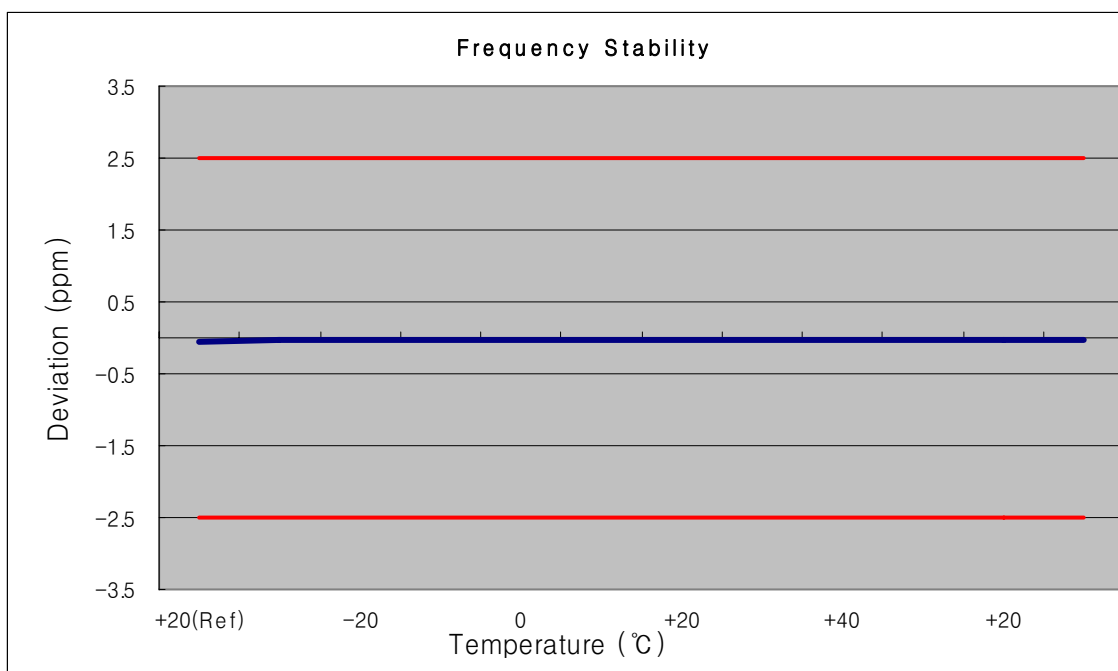




7.8.2 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY: 1880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1879 999 937	-62.74	-0.000 003	-0.033
100%		-30	1879 999 944	-56.12	-0.000 003	-0.030
100%		-20	1879 999 933	-67.28	-0.000 004	-0.036
100%		-10	1879 999 945	-54.83	-0.000 003	-0.029
100%		0	1879 999 922	-78.23	-0.000 004	-0.042
100%		+10	1879 999 917	-83.50	-0.000 004	-0.044
100%		+20	1879 999 943	-57.29	-0.000 003	-0.030
100%		+30	1879 999 925	-75.13	-0.000 004	-0.040
100%		+40	1879 999 921	-79.12	-0.000 004	-0.042
100%		+50	1879 999 933	-66.62	-0.000 004	-0.035
115%	4.255	+20	1879 999 917	-83.06	-0.000 004	-0.044
Batt. Endpoint	3.400	+20	1879 999 938	-62.45	-0.000 003	-0.033

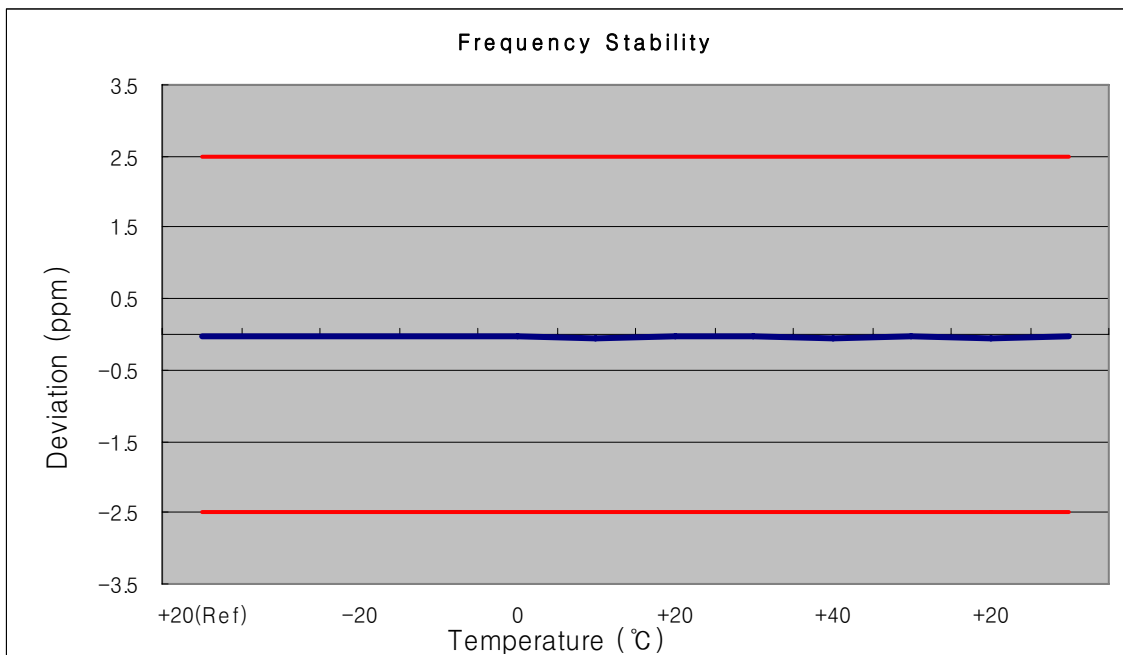


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

7.8.3 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 599 992	-7.70	-0.000 009	-0.009
100%		-30	836 599 987	-12.83	-0.000 015	-0.015
100%		-20	836 599 991	-9.07	-0.000 011	-0.011
100%		-10	836 599 986	-13.82	-0.000 017	-0.017
100%		0	836 600 002	2.02	0.000 002	0.002
100%		+10	836 599 987	-12.51	-0.000 015	-0.015
100%		+20	836 599 991	-9.00	-0.000 011	-0.011
100%		+30	836 600 003	3.38	0.000 004	0.004
100%		+40	836 599 987	-12.71	-0.000 015	-0.015
100%		+50	836 599 998	-1.93	-0.000 002	-0.002
115%	4.255	+20	836 600 007	6.73	0.000 008	0.008
Batt. Endpoint	3.400	+20	836 599 984	-16.02	-0.000 019	-0.019

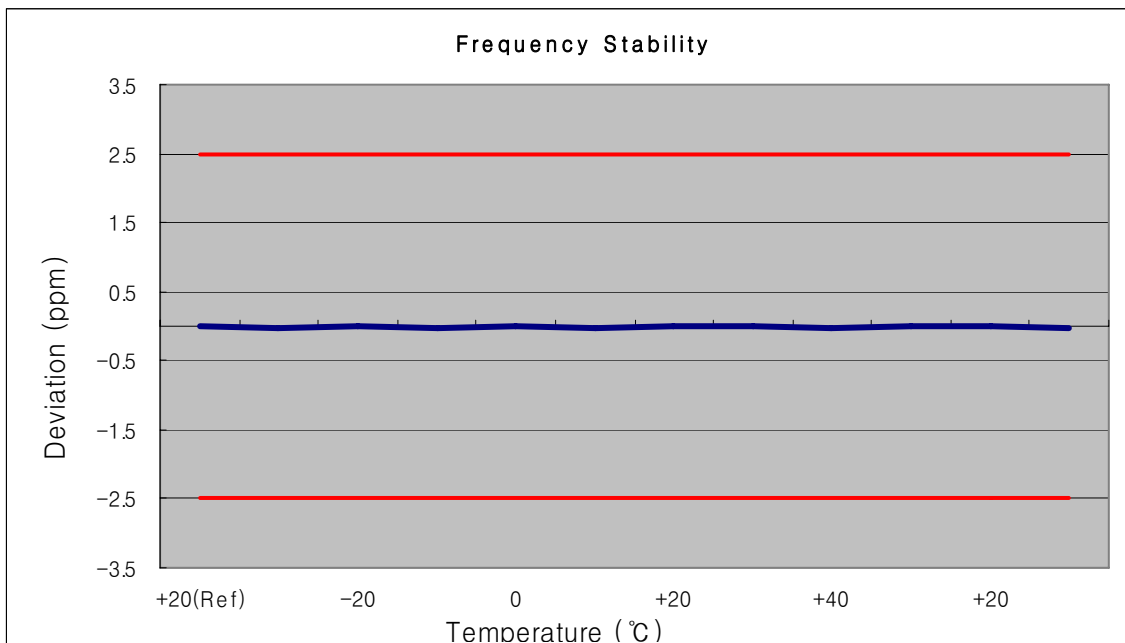




7.8.4 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 9400
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1,879,999,972	-28.14	-0.000001	-0.015
100%		-30	1,880,000,015	15.16	0.000001	0.008
100%		-20	1,879,999,974	-26.26	-0.000001	-0.014
100%		-10	1,879,999,982	-17.93	-0.000001	-0.010
100%		0	1,879,999,968	-32.25	-0.000002	-0.017
100%		+10	1,879,999,980	-20.10	-0.000001	-0.011
100%		+20	1,879,999,983	-17.33	-0.000001	-0.009
100%		+30	1,880,000,012	11.57	0.000001	0.006
100%		+40	1,879,999,978	-21.51	-0.000001	-0.011
100%		+50	1,880,000,007	7.23	0.000000	0.004
115%	4.255	+20	1,879,999,979	-20.96	-0.000001	-0.011
Batt. Endpoint	3.400	+20	1,880,000,016	15.85	0.000001	0.008

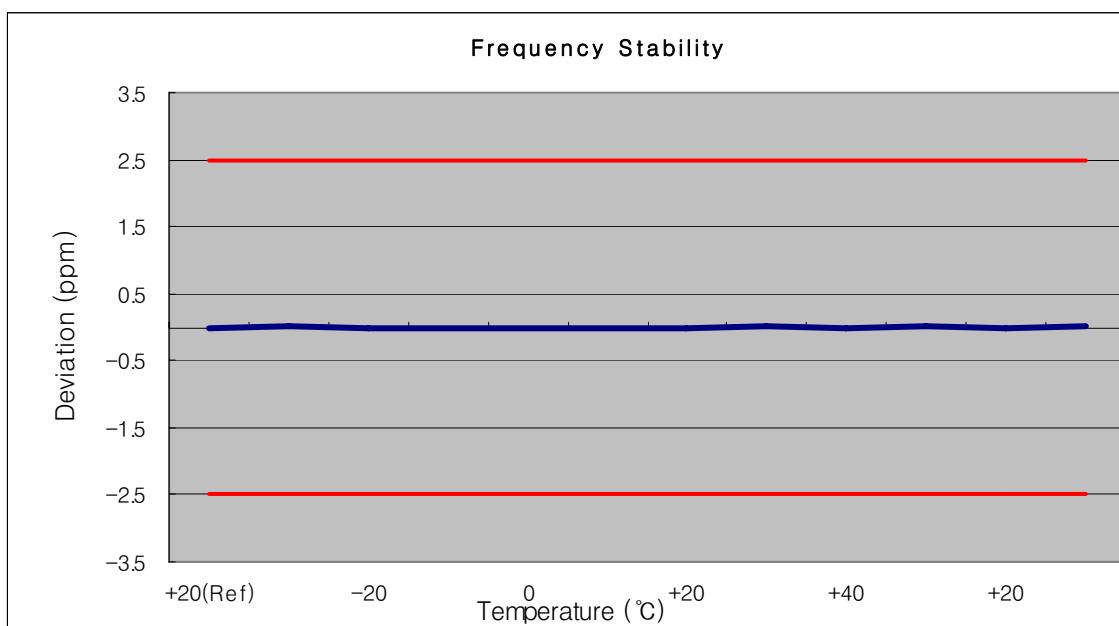





8. TEST PLOTS

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40


■ GSM850 MODE (128 CH.) Occupied Bandwidth

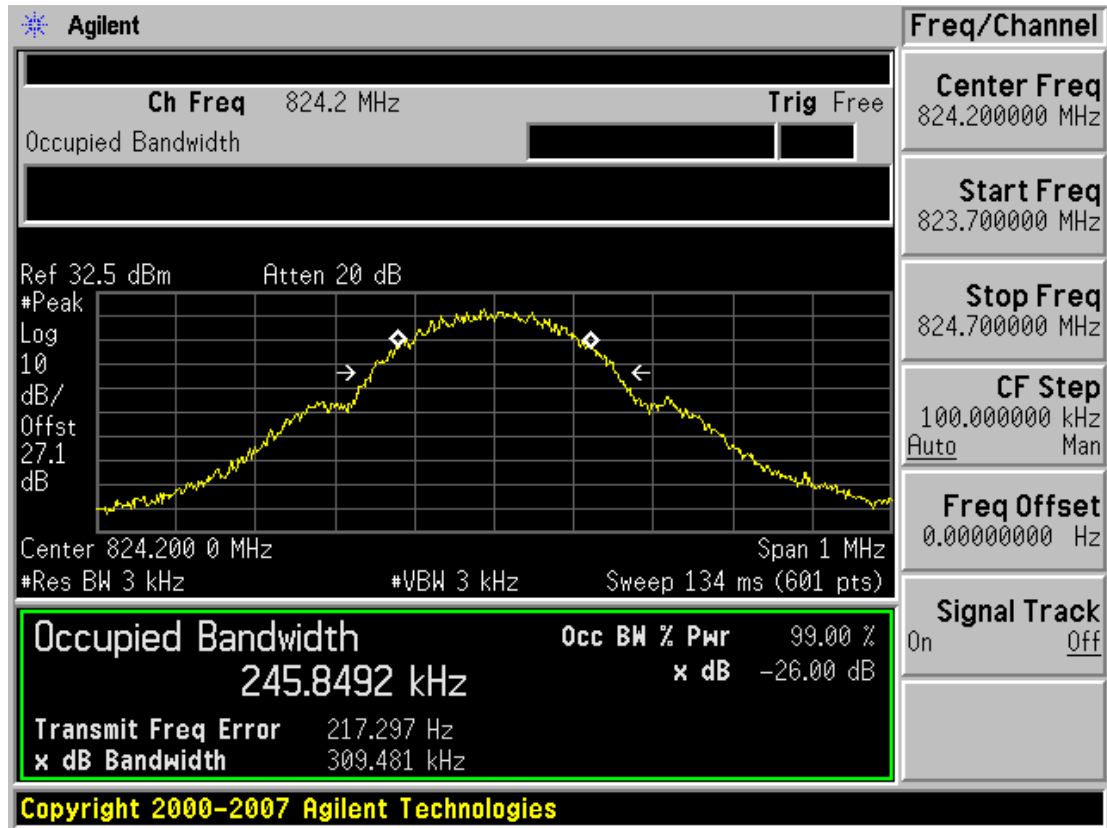


■ GSM850 MODE (190 CH.) Occupied Bandwidth

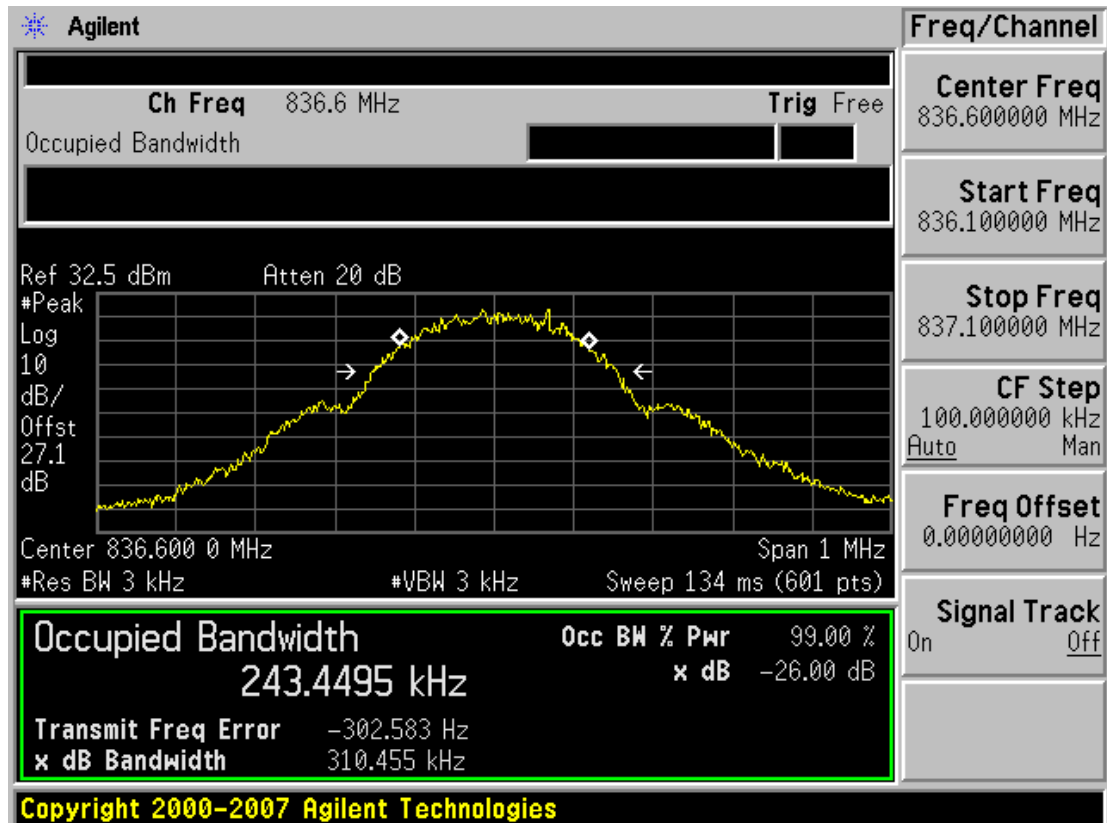


■ GSM850 MODE (251 CH.) Occupied Bandwidth

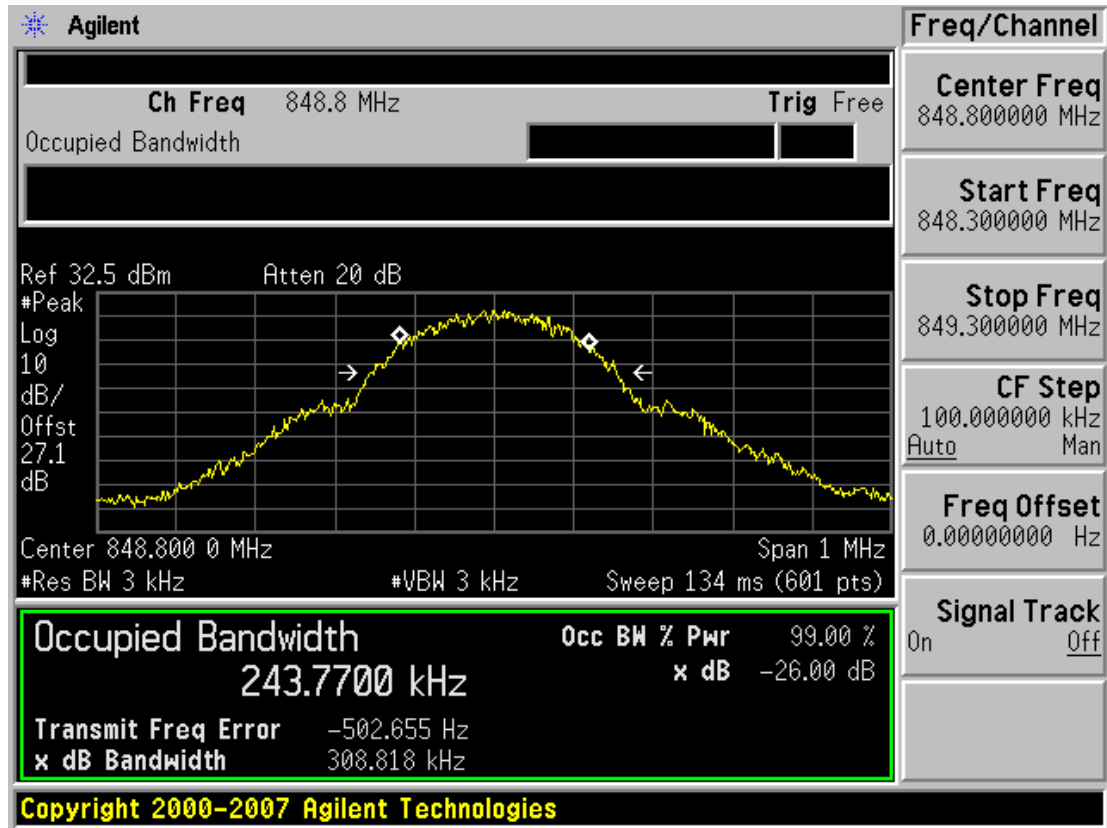


■ GSM850 EDGE (128 CH.) Occupied Bandwidth

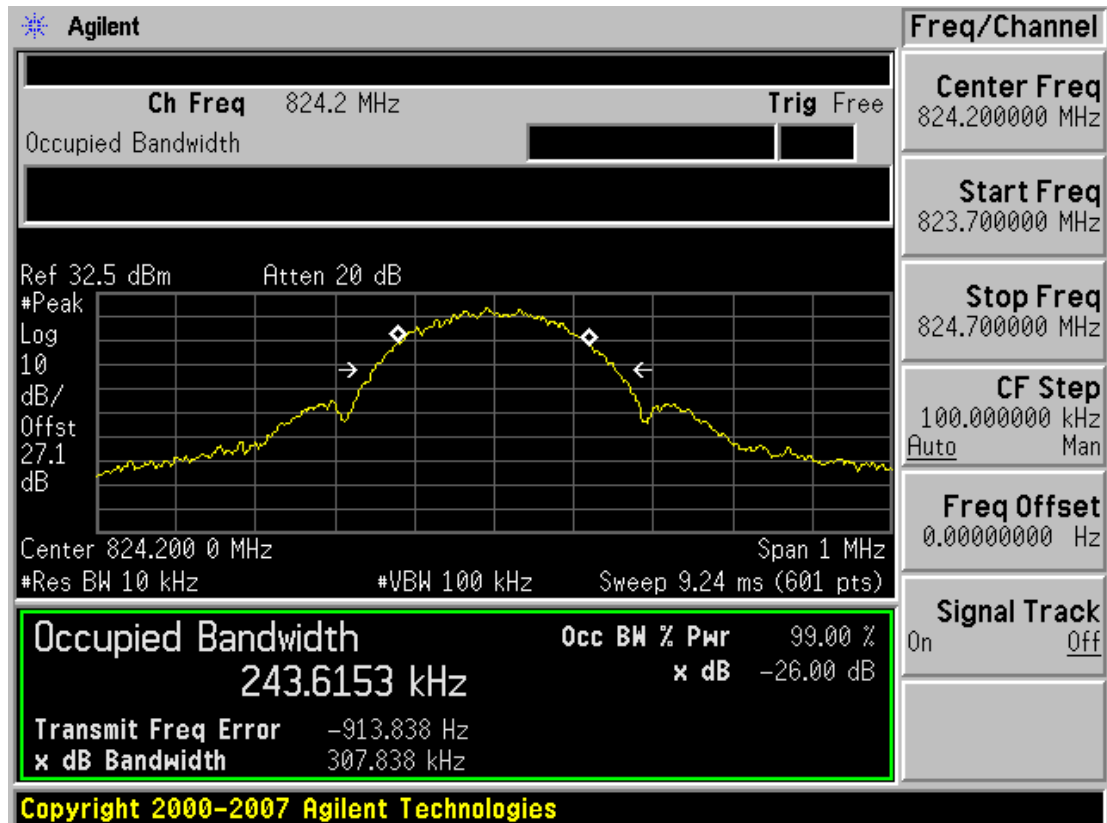


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

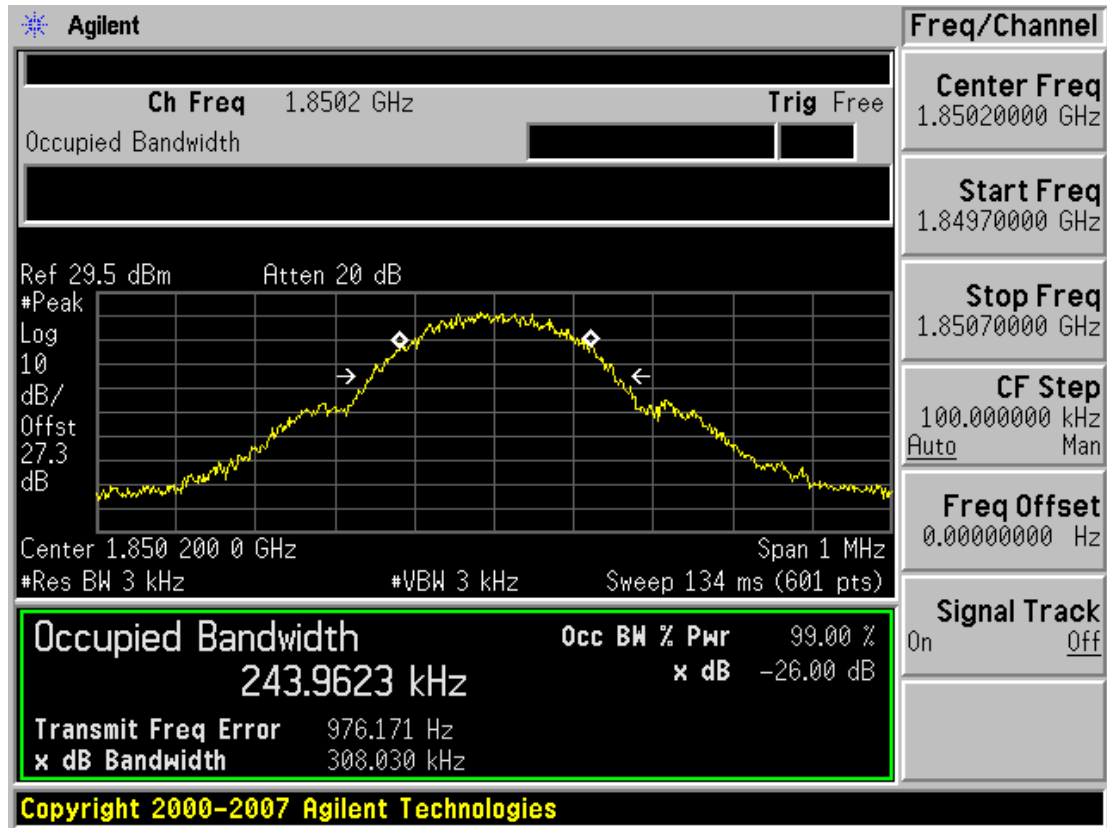


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

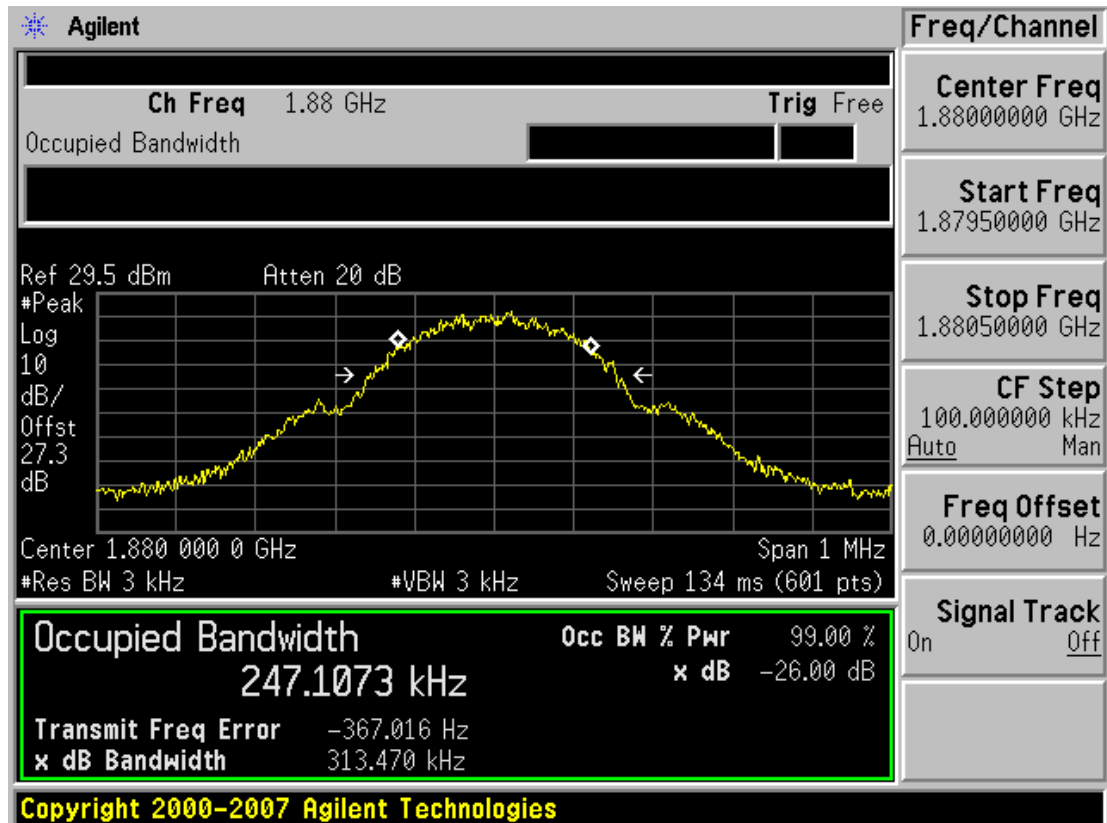


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

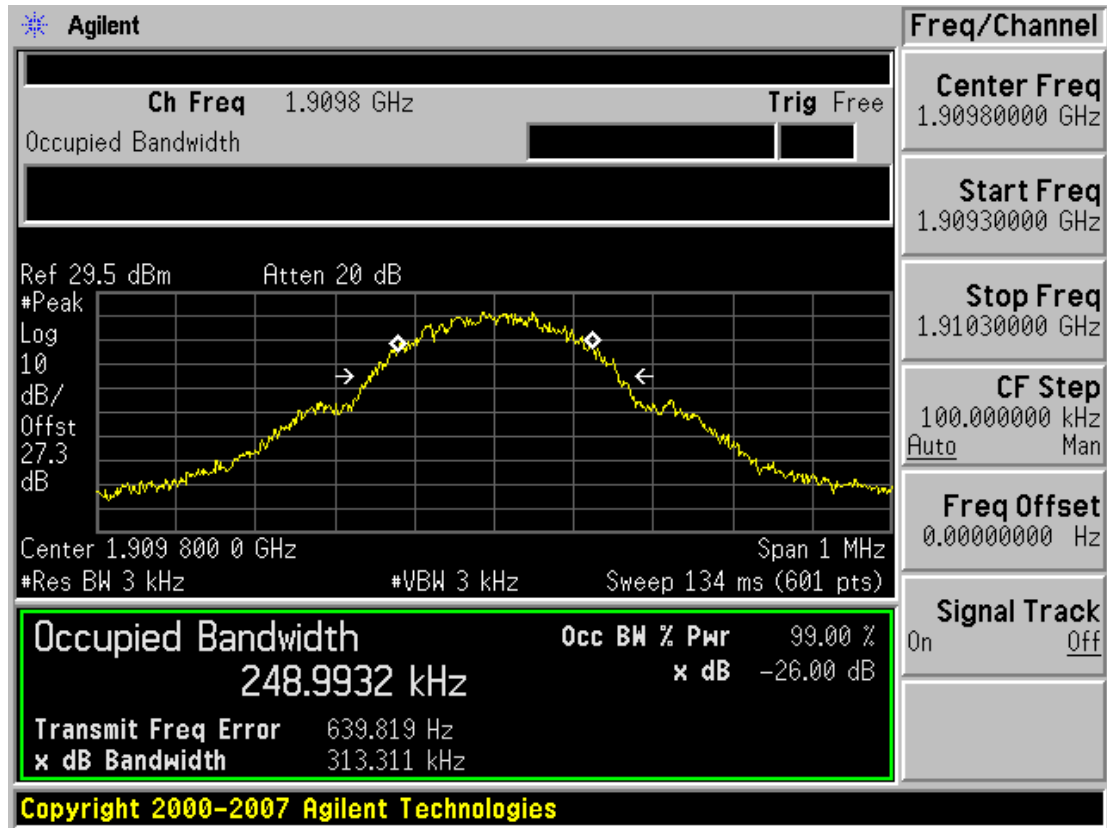


■ GSM1900 EDGE (810 CH.) Occupied Bandwidth

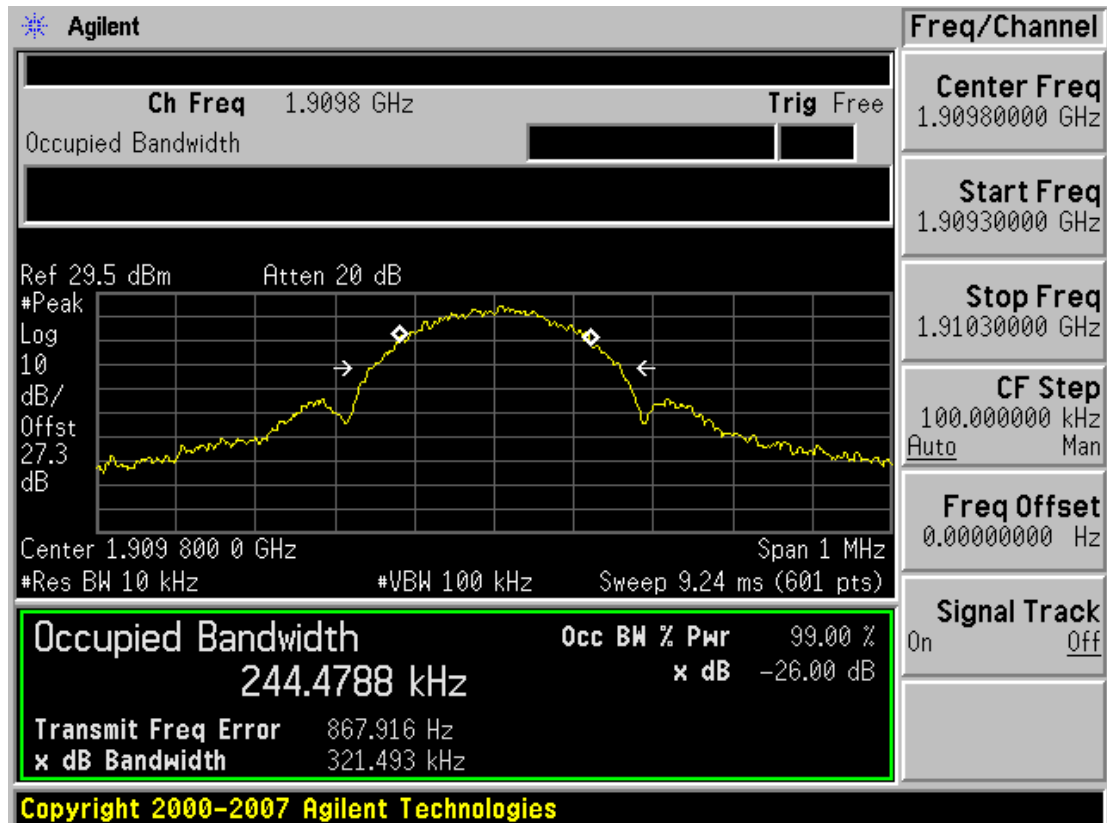

■ PCS MODE (661 CH.) Peak-to-Average Ratio

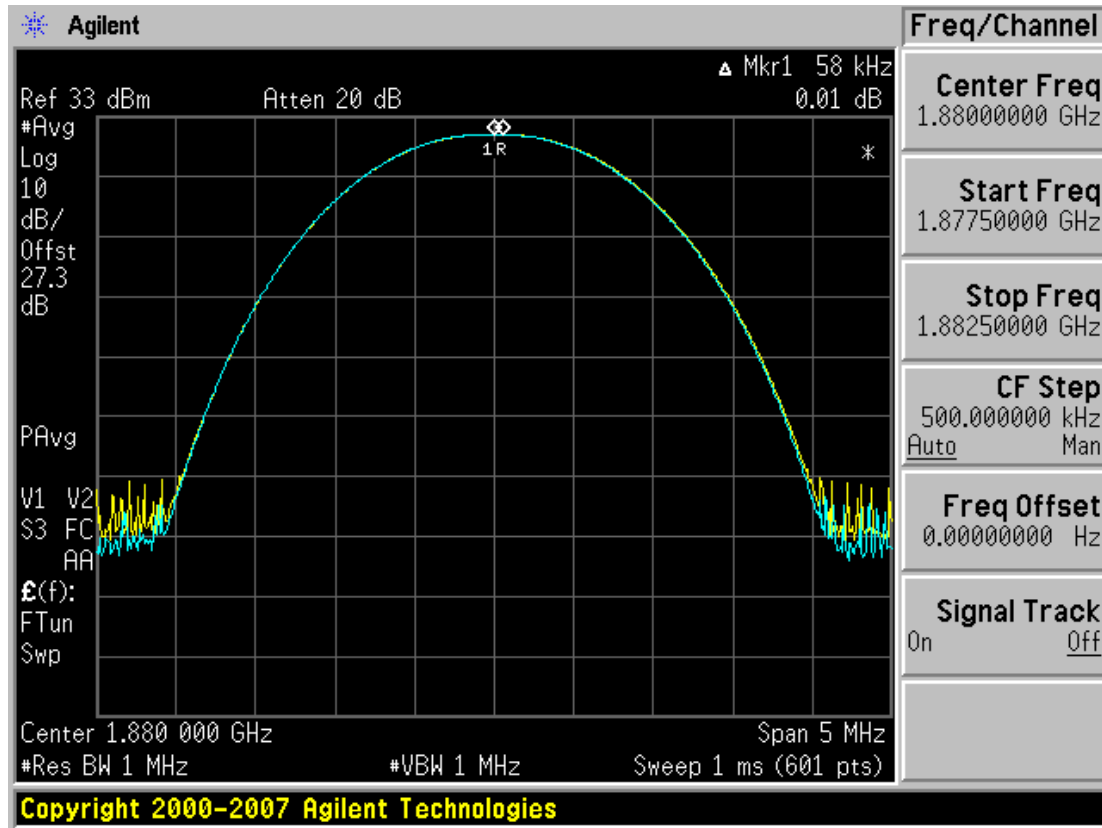


■ PCS EDGE MODE (661 CH.) Peak-to-Average Ratio

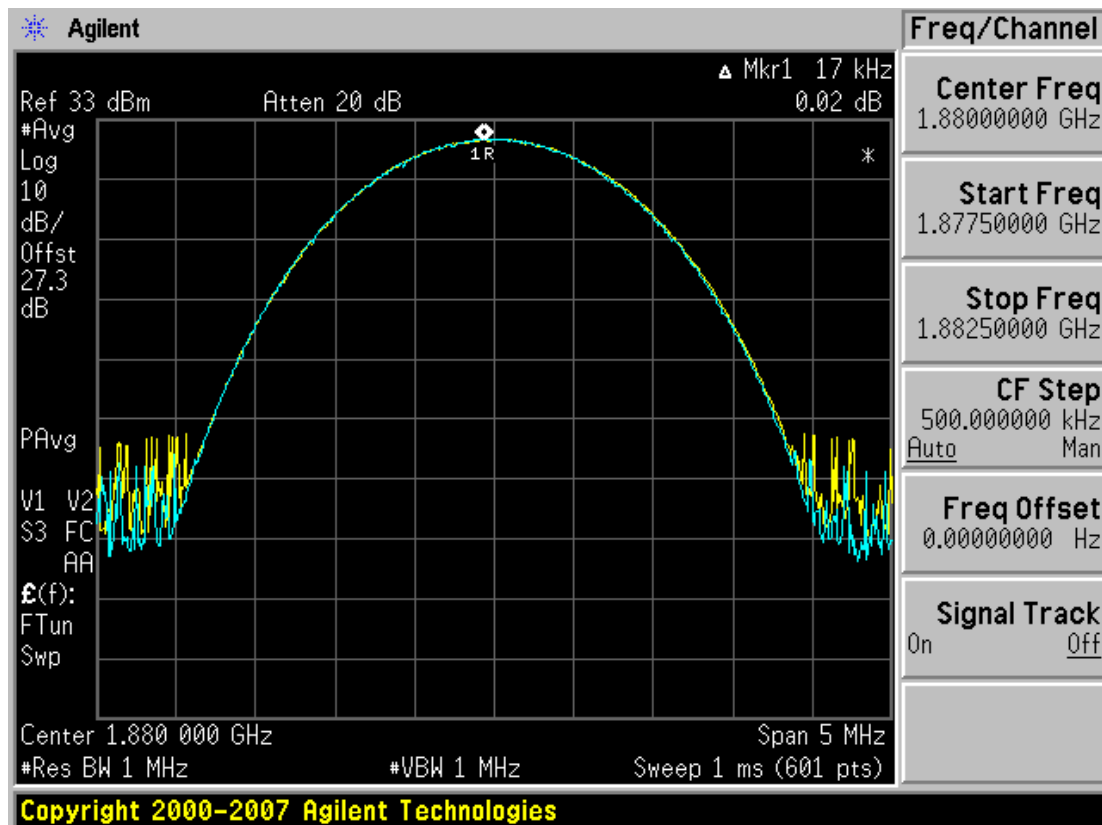


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

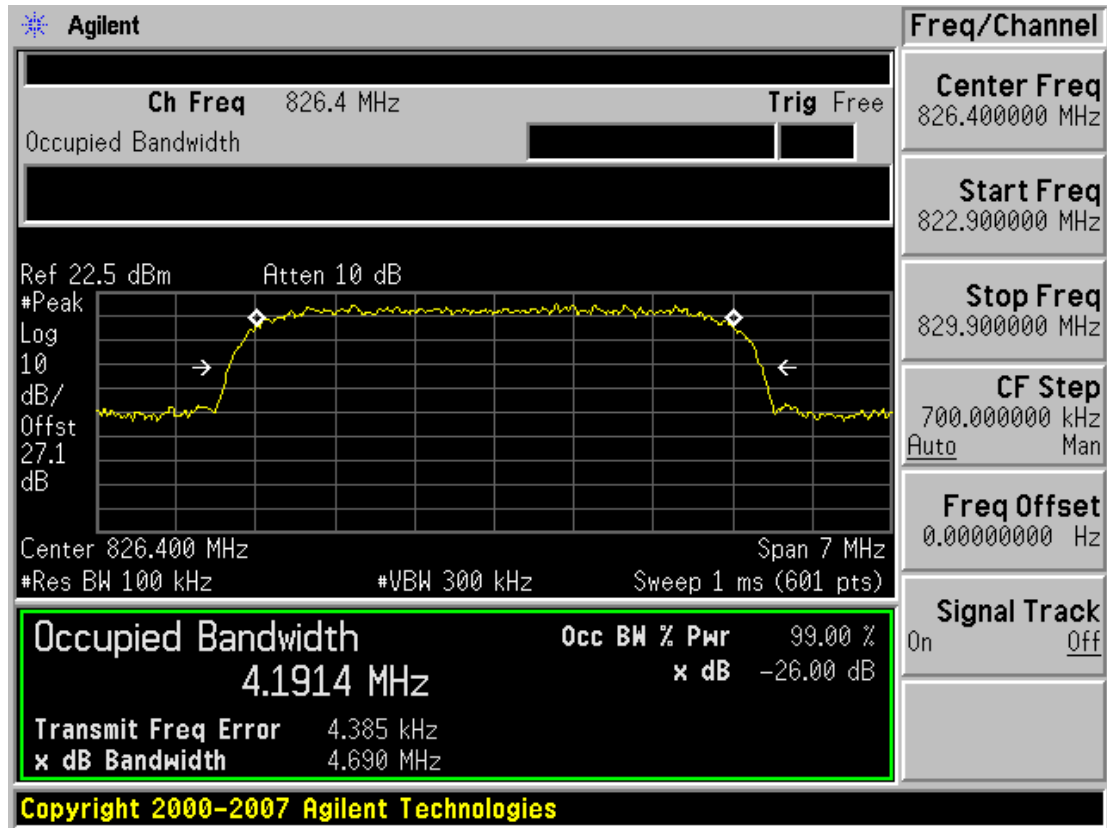


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

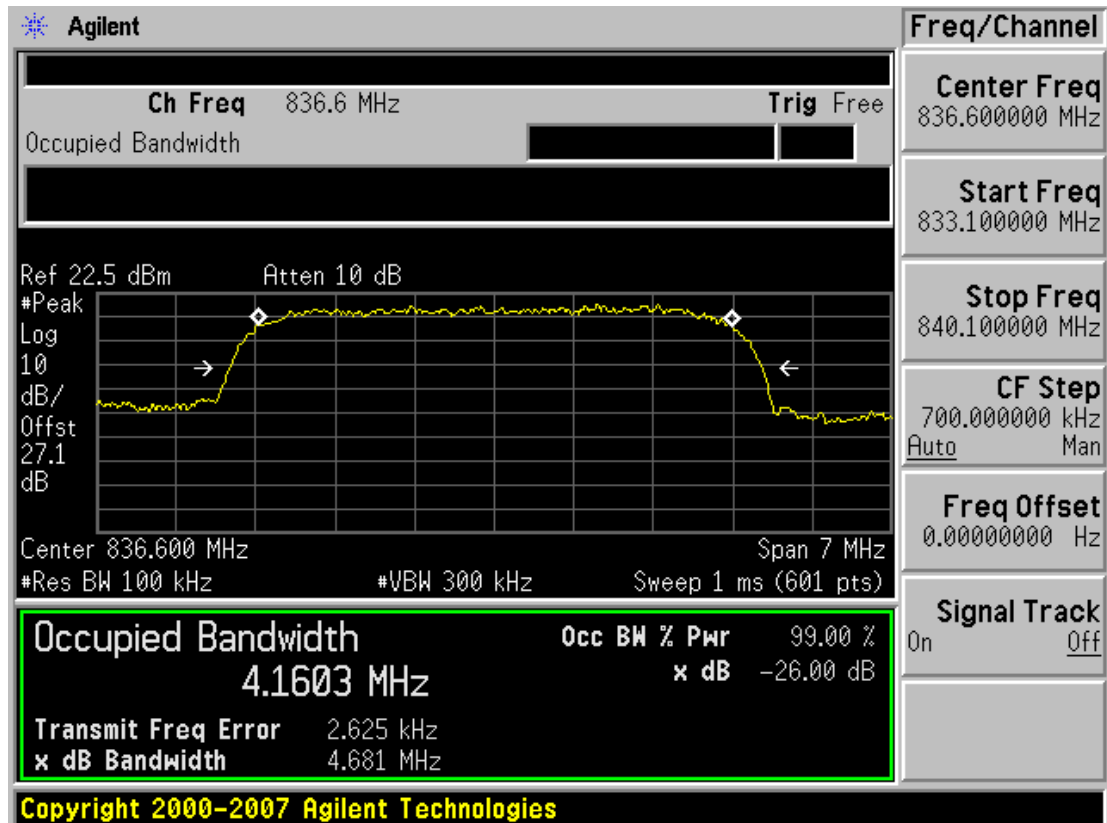


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

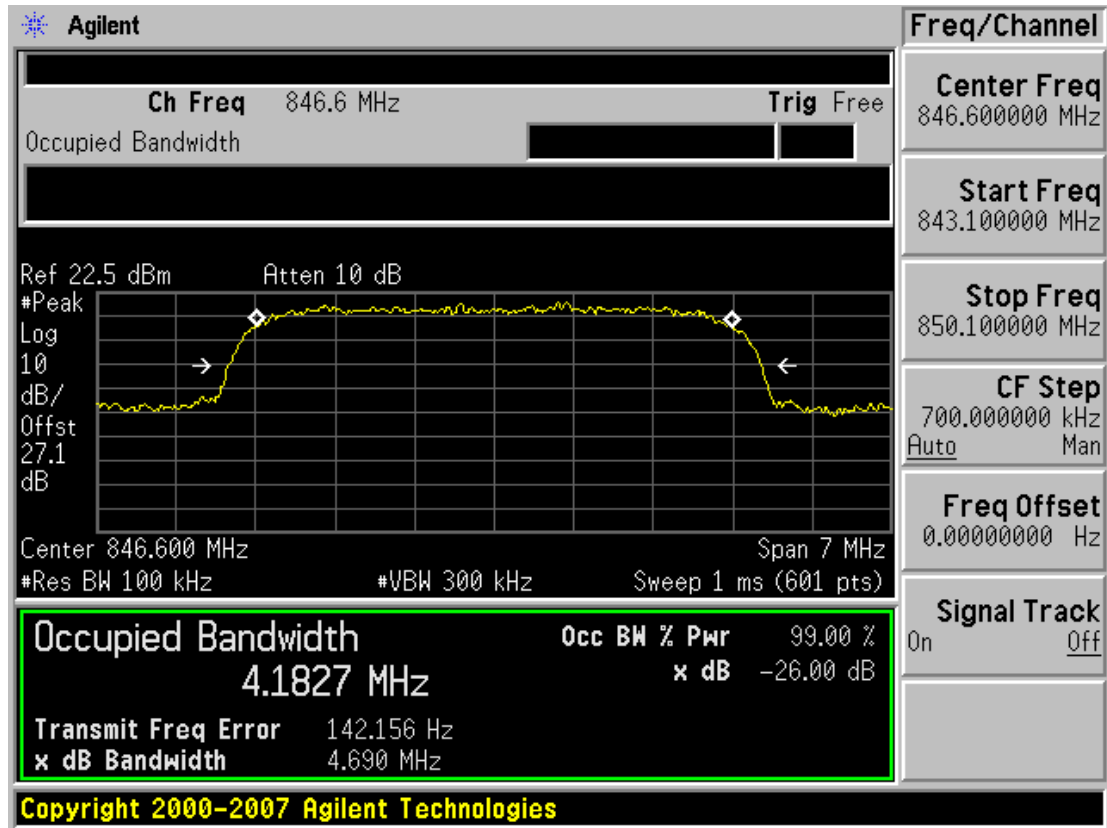


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

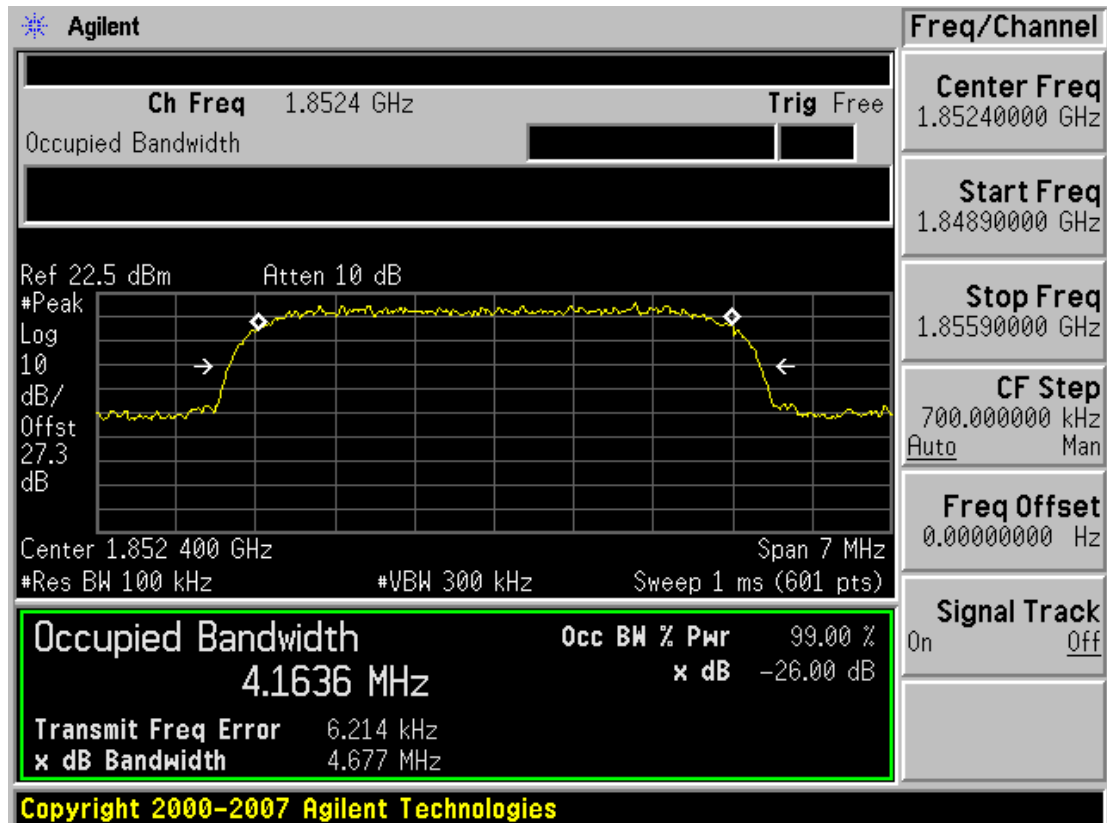


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

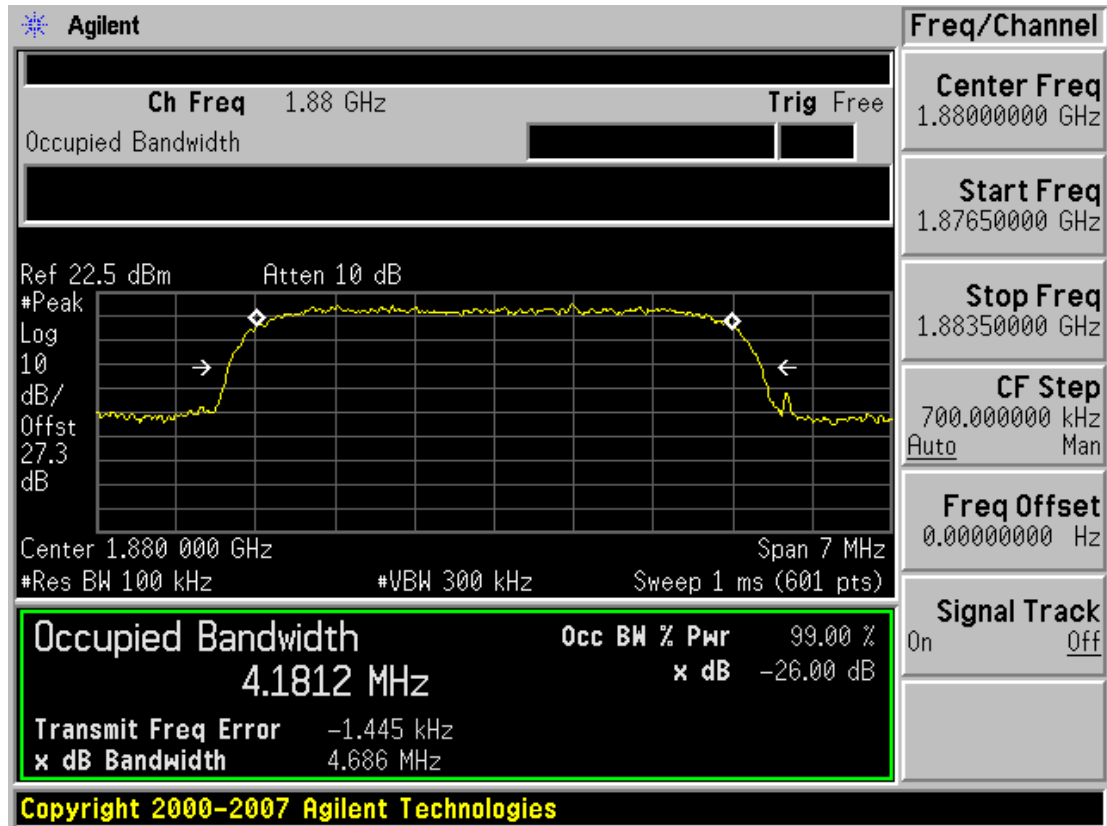


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

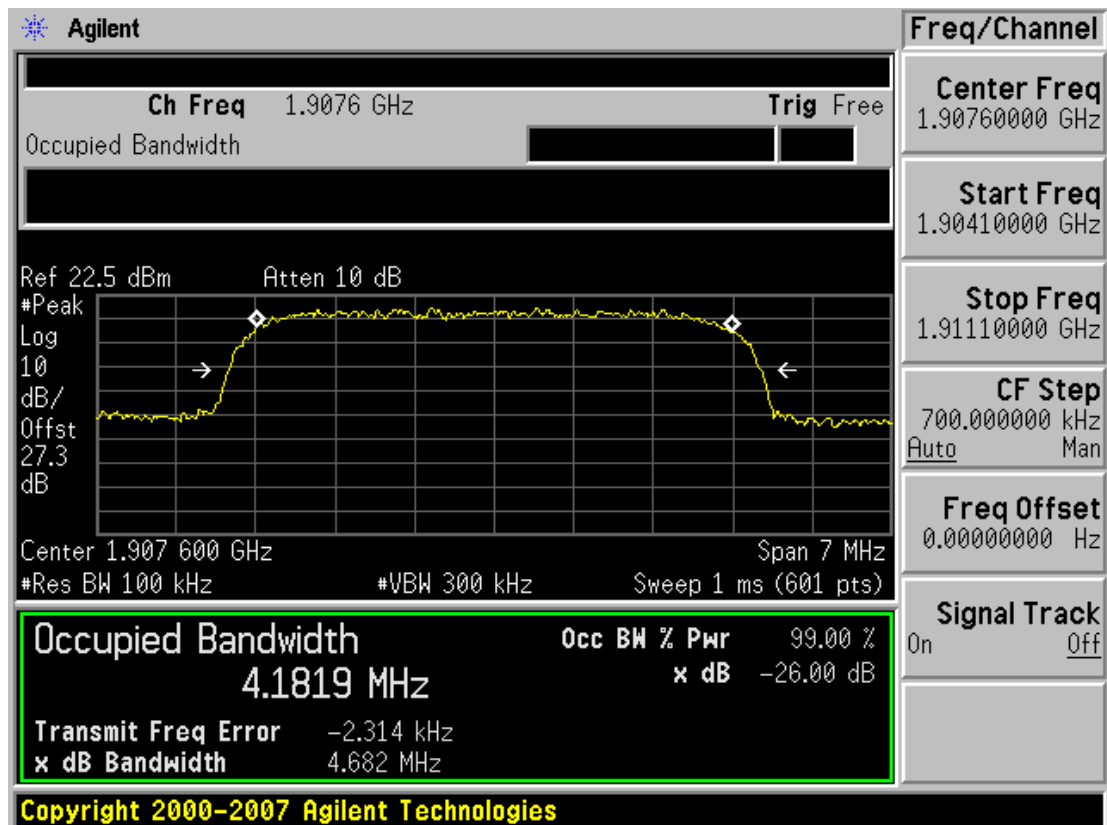


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

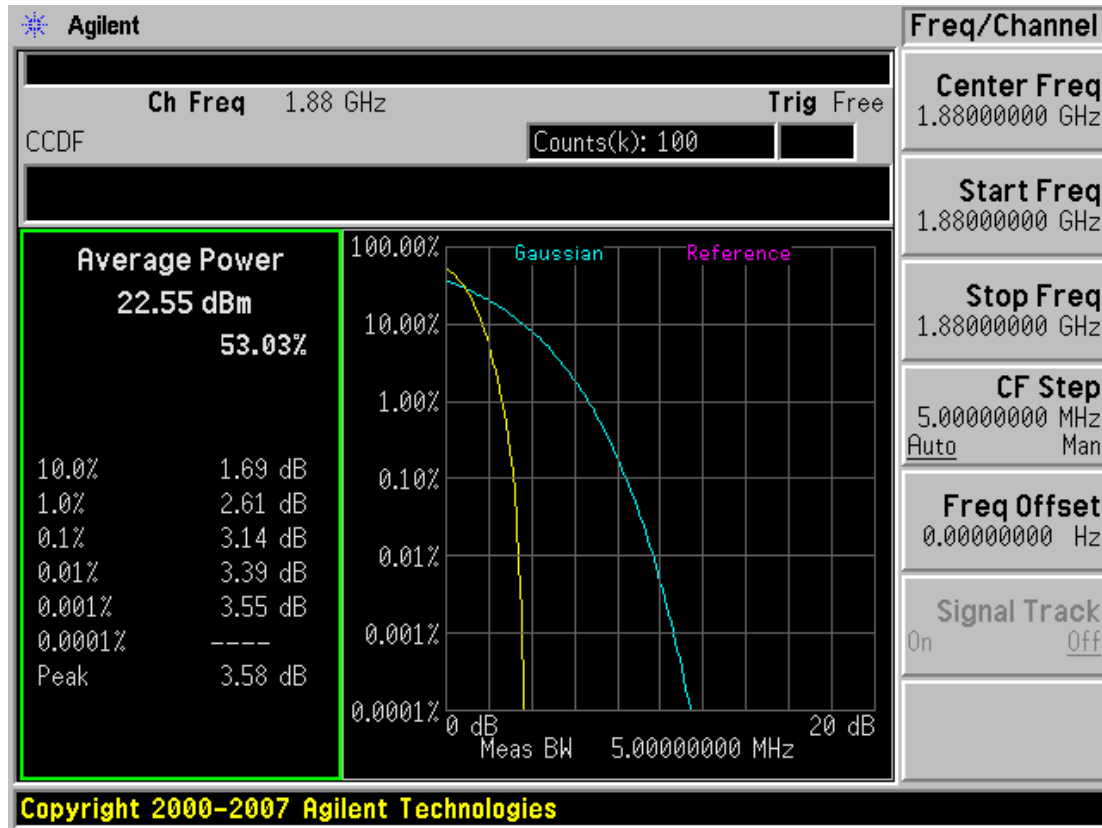


■ GSM850 MODE (128 CH.) Block Edge

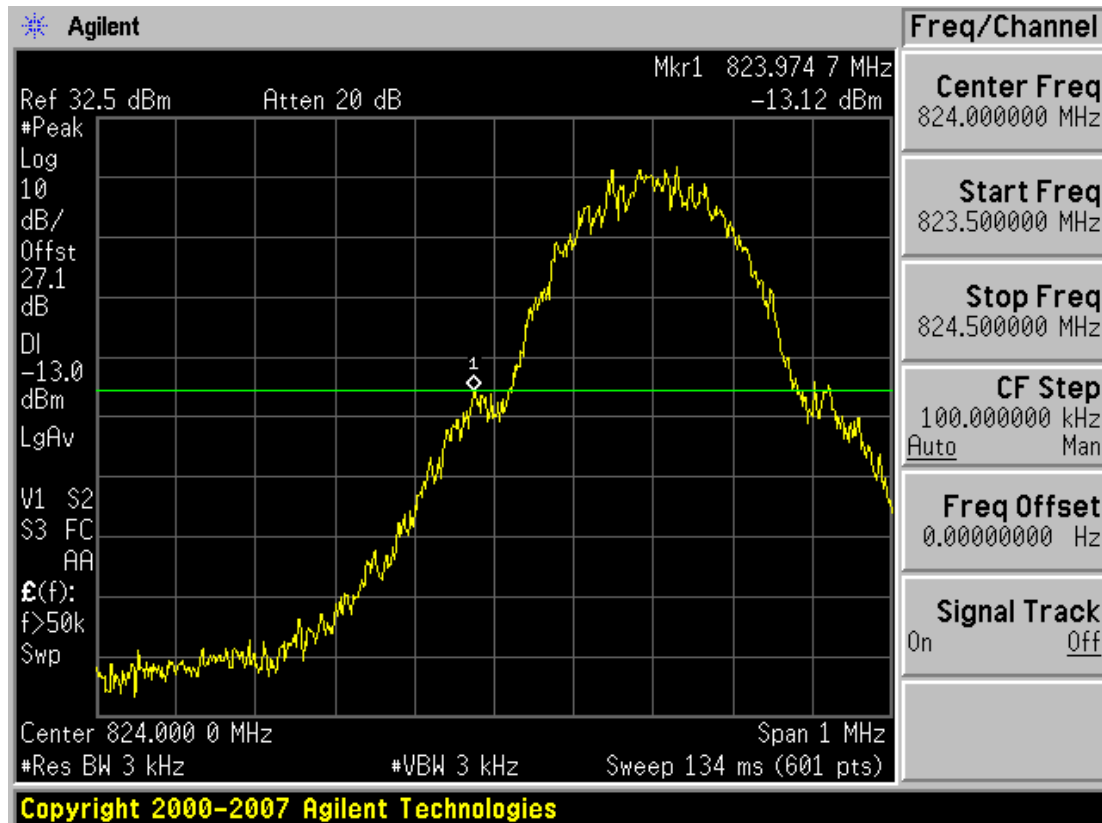


■ GSM850 MODE (251 CH.) Block Edge

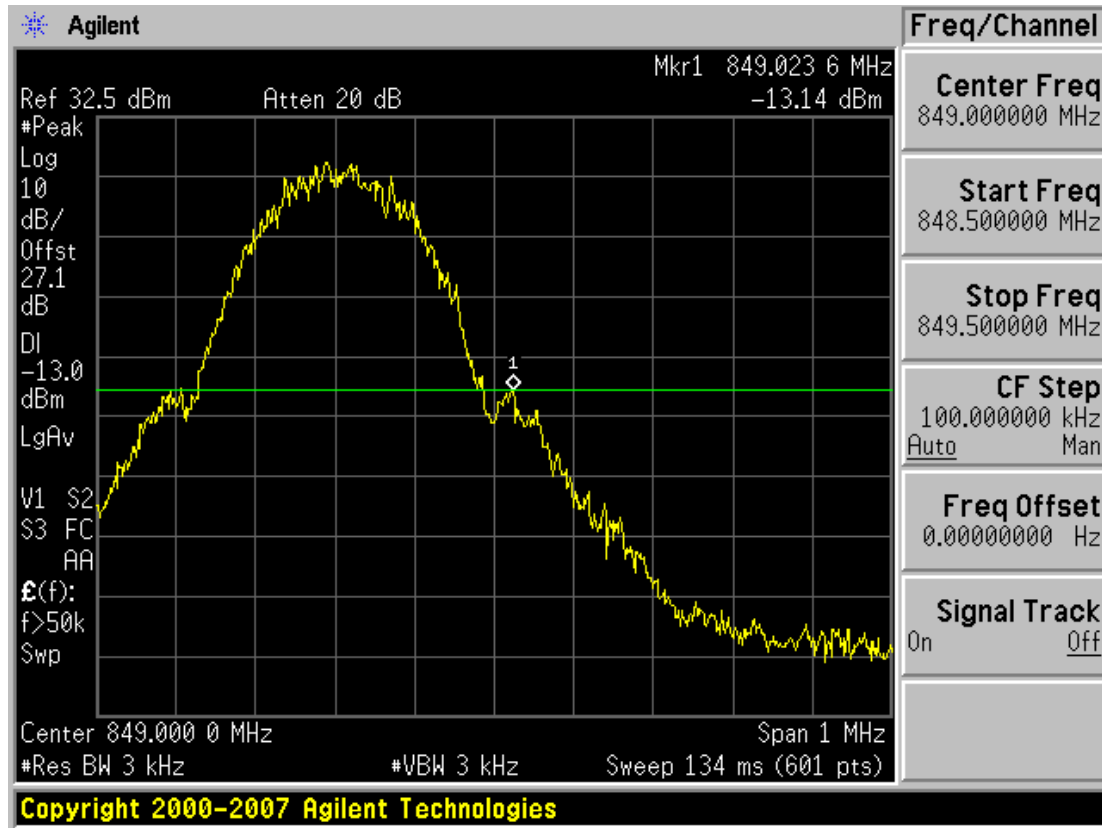


■ EDGE MODE (128 CH.) Block Edge

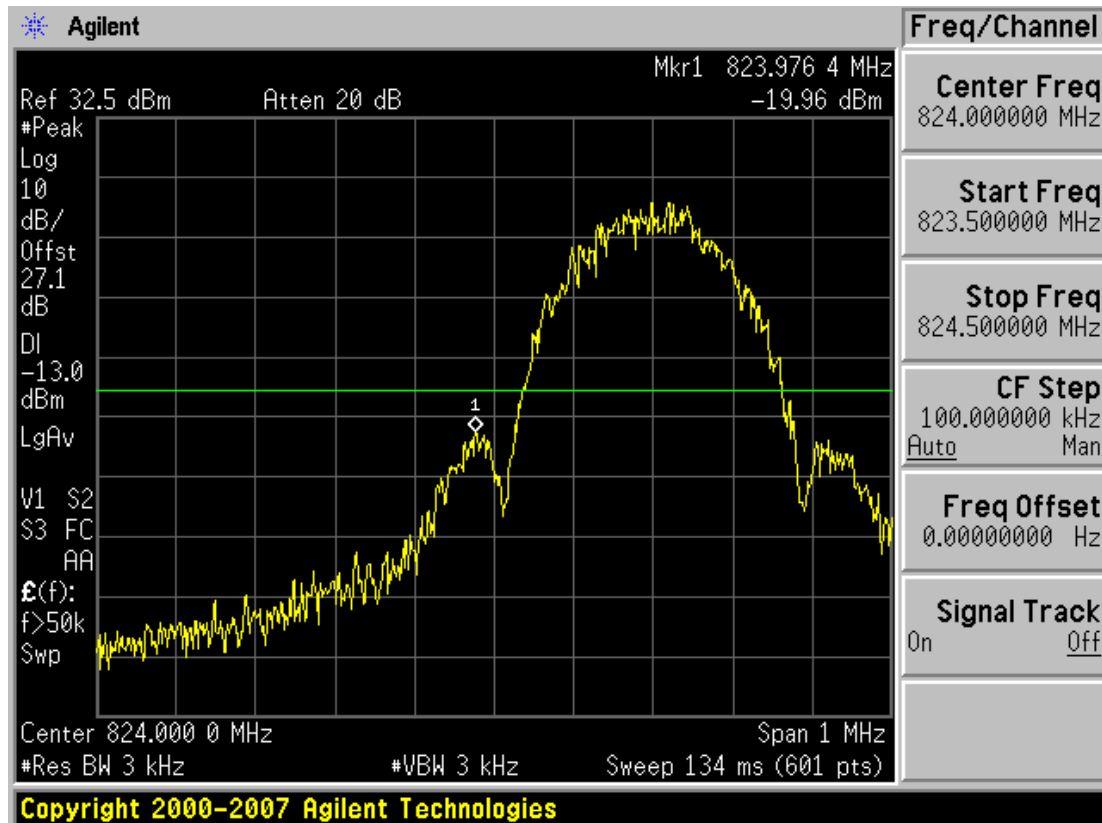

■ EDGE MODE (251 CH.) Block Edge

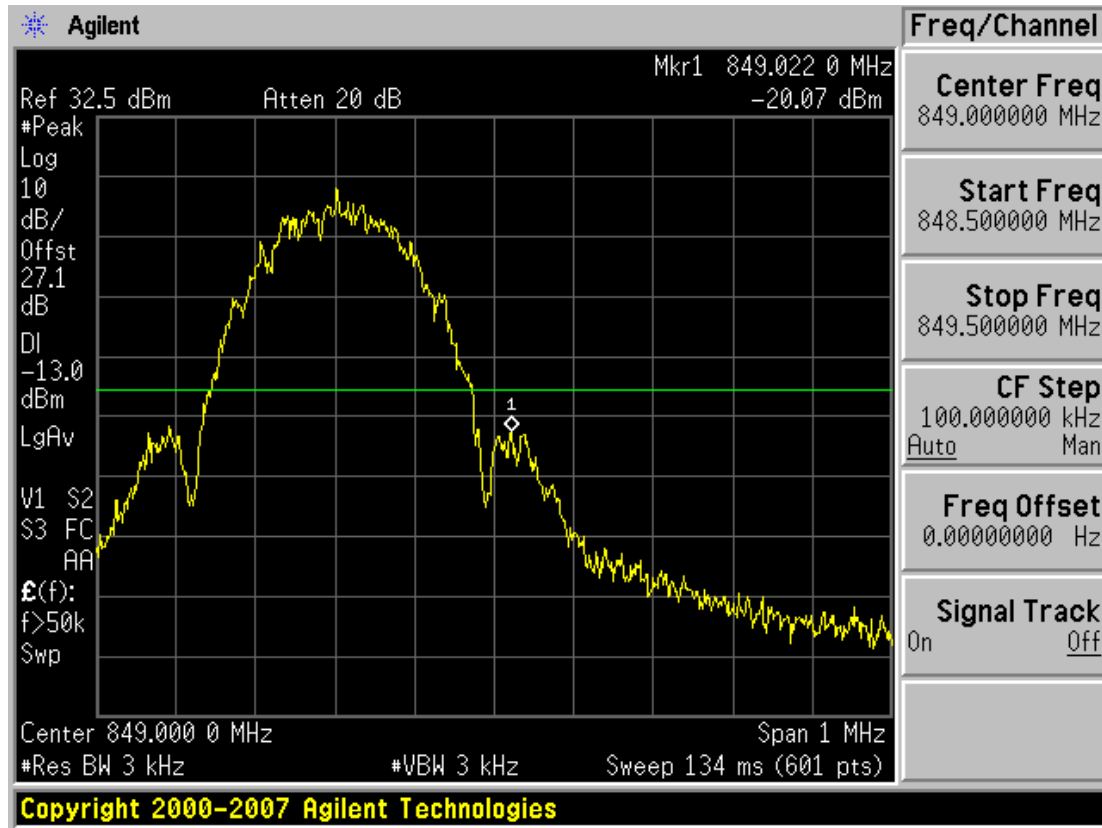


■ GSM1900 MODE (512 CH.) Block Edge

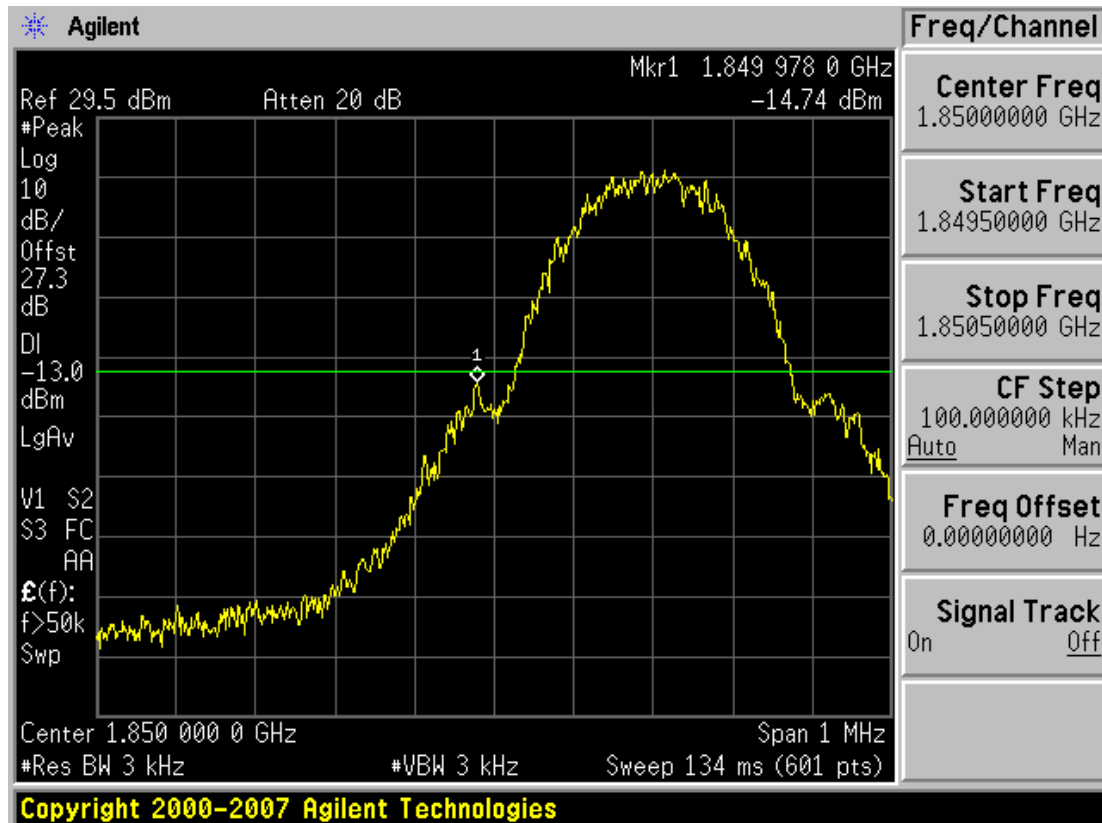


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

■ GSM1900 MODE (810 CH.) Block Edge

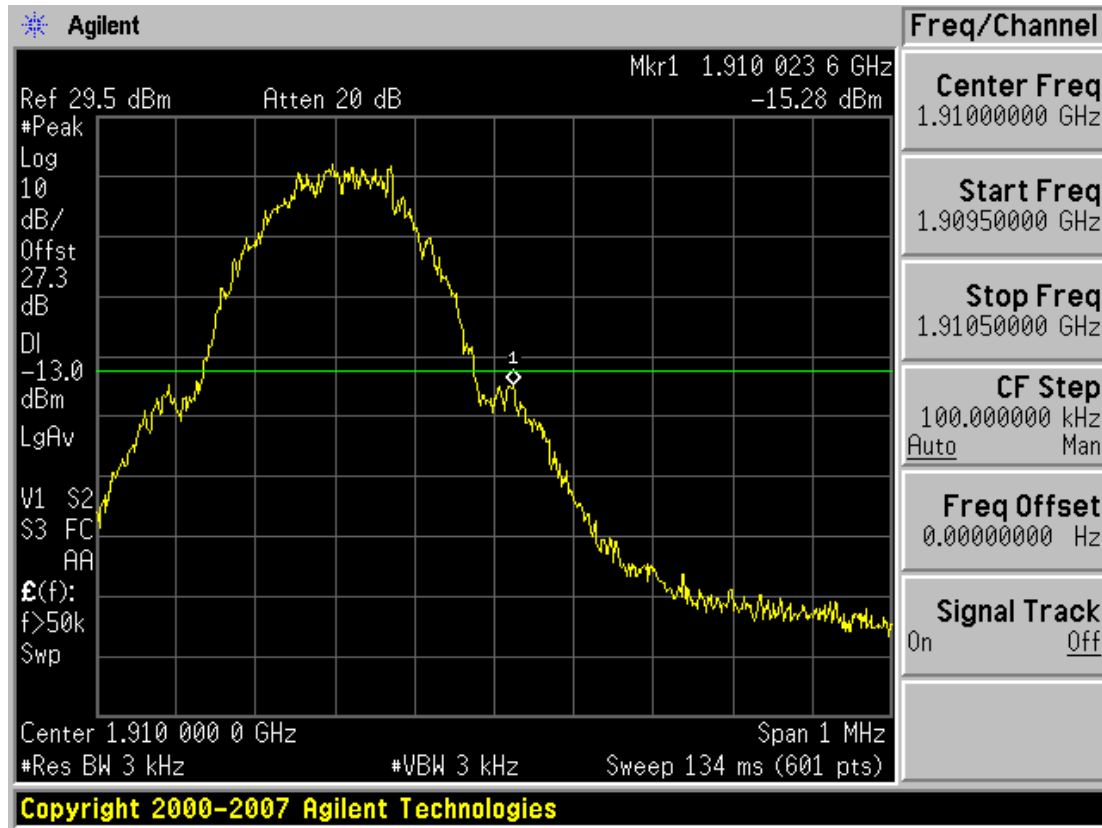


■ EDGE MODE (512 CH.) Block Edge

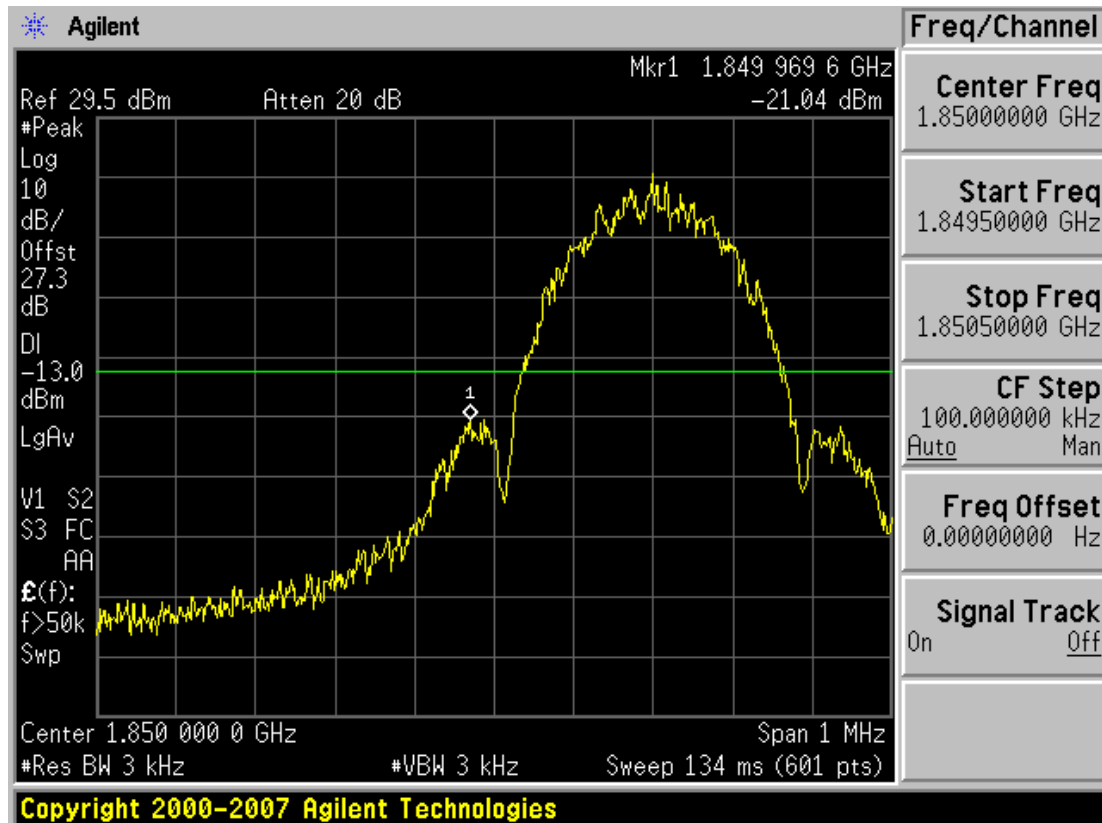


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

■ EDGE MODE (810 CH.) Block Edge

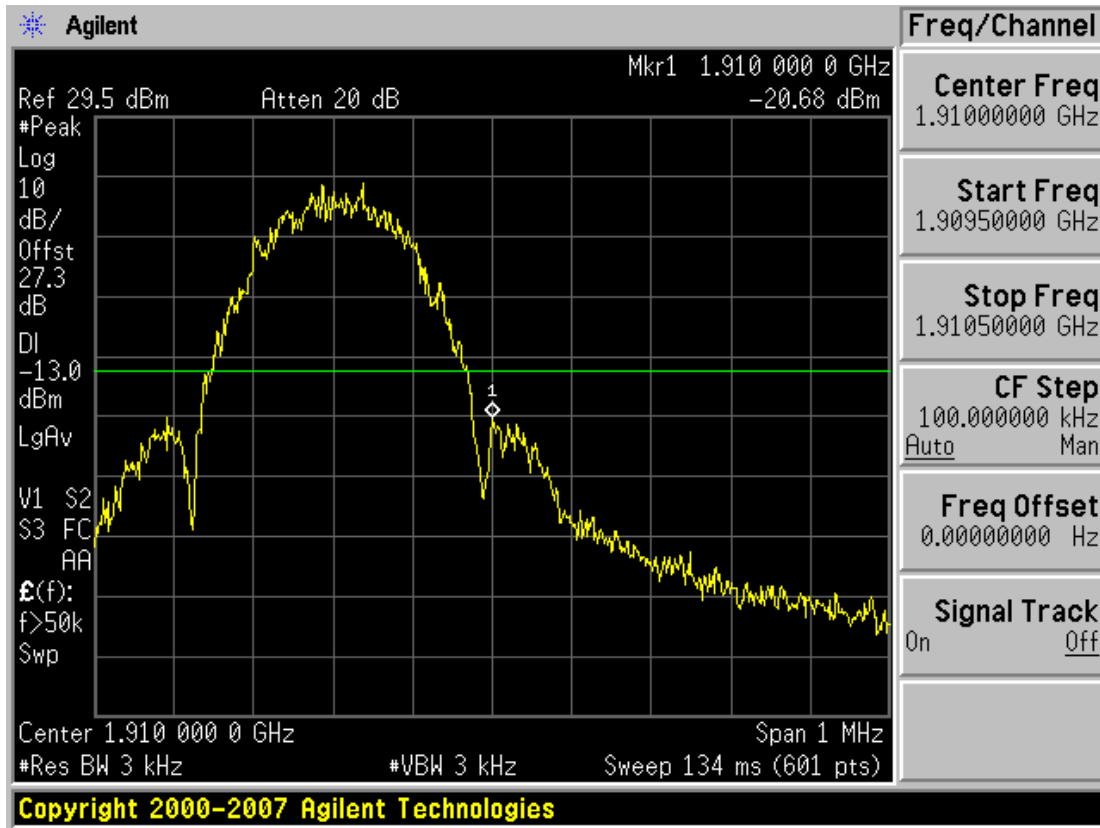


■ WCDMA850 MODE (4132 CH.) Block Edge

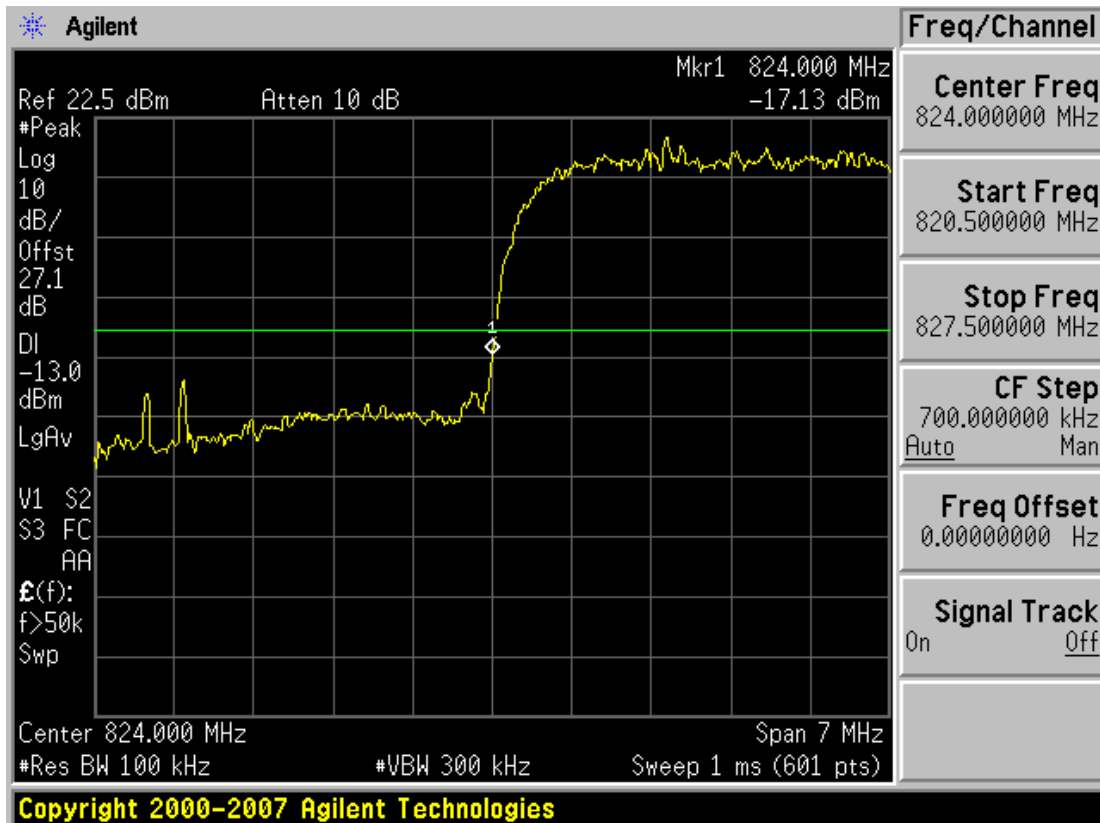


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40


■ WCDMA850MODE (4233 CH.) Block Edge

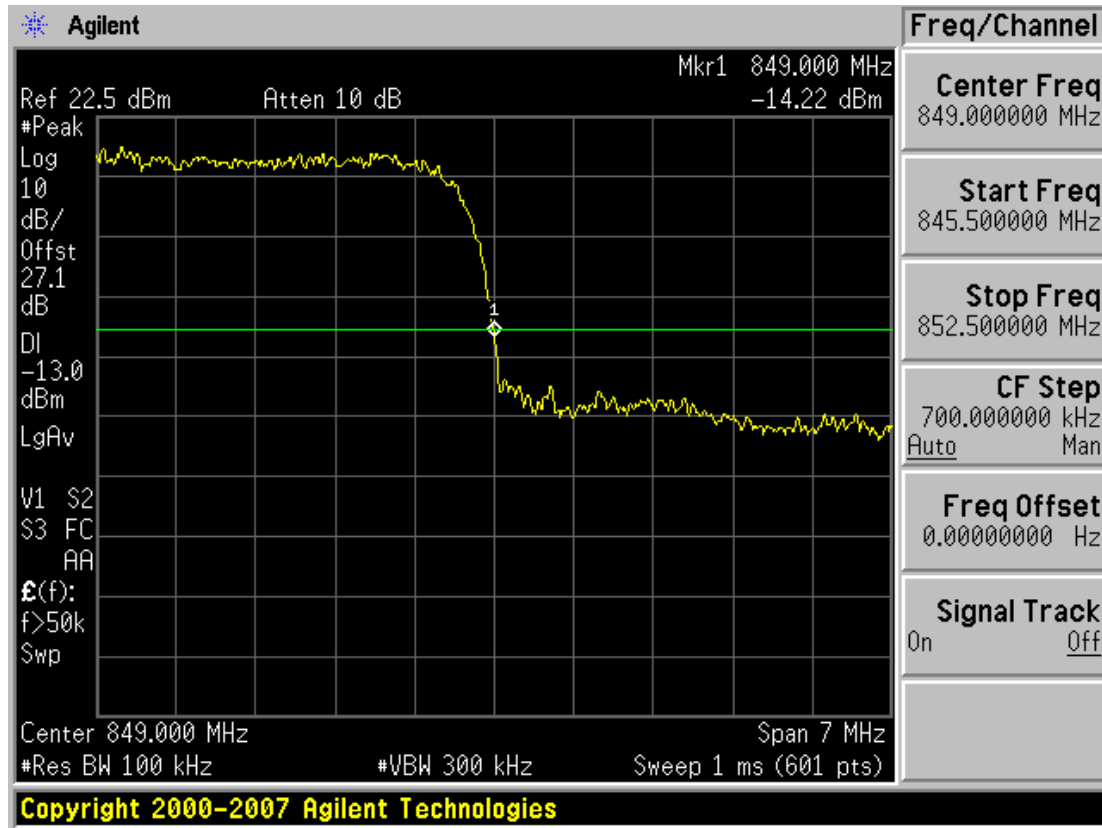


■ WCDMA850 MODE (4132 CH.) – 4 MHz Span

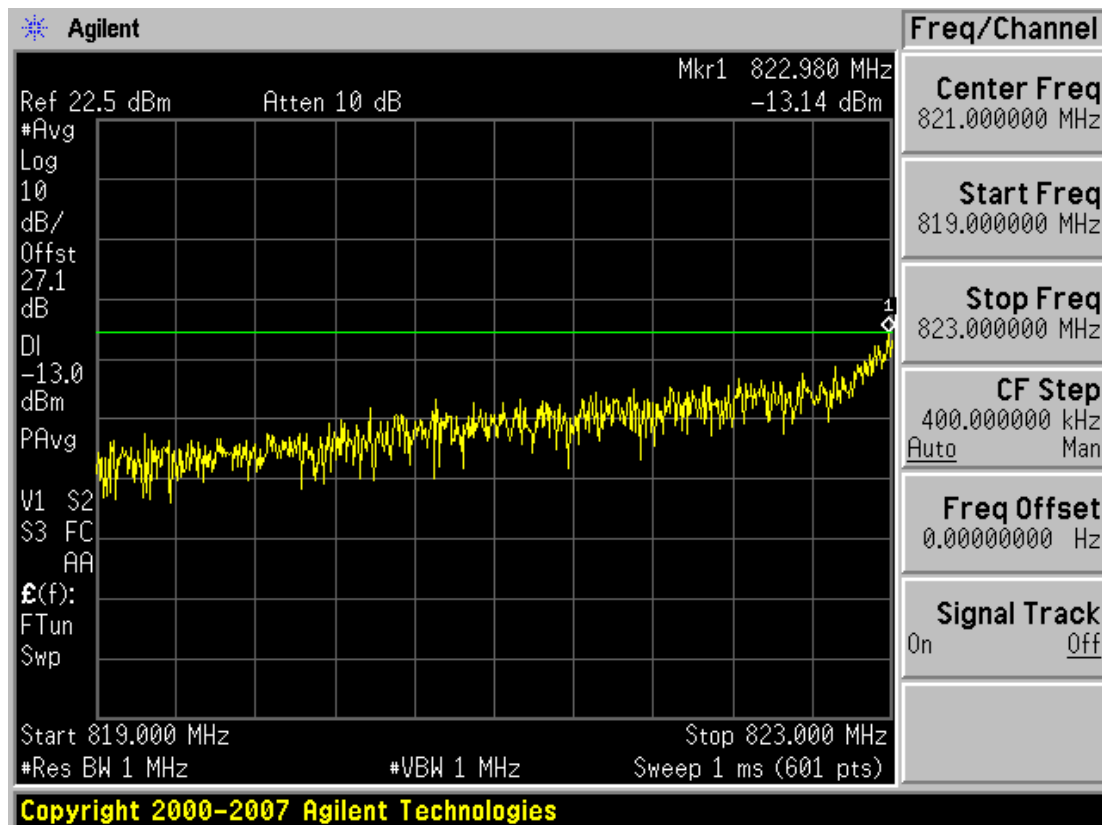


■ WCDMA850MODE (4233 CH.) – 4 MHz Span

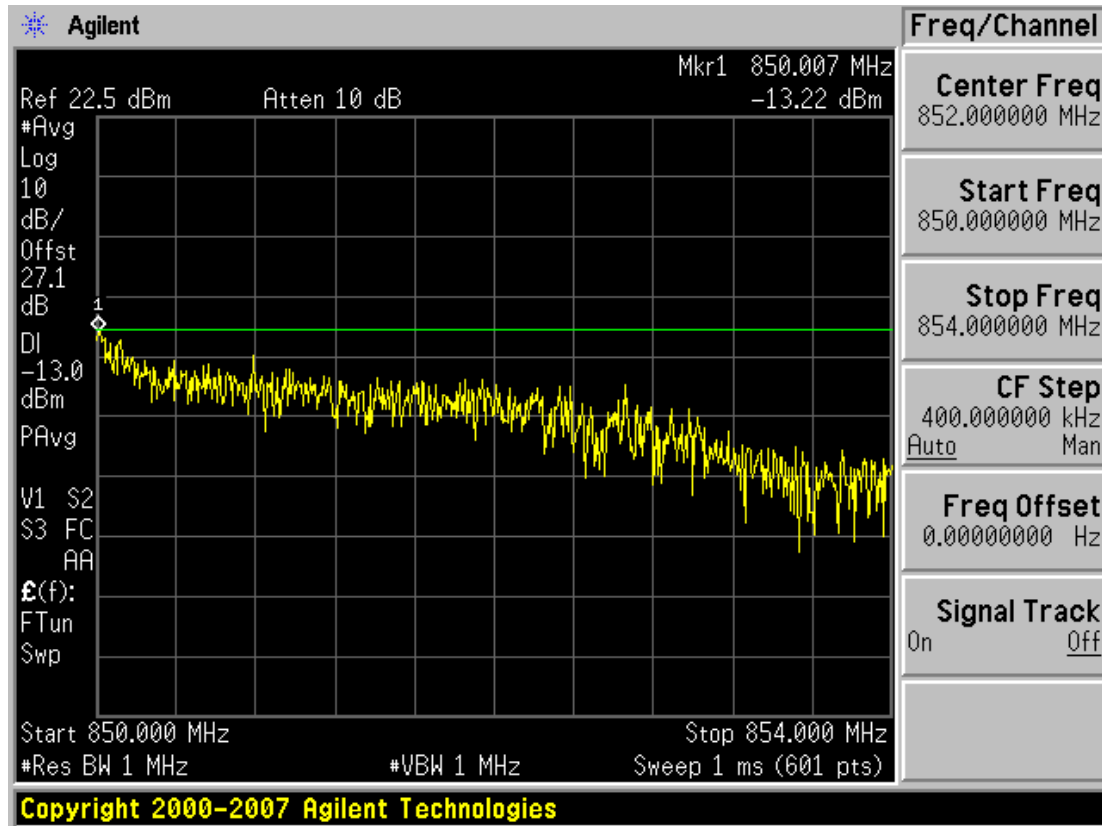


■ WCDMA1900 MODE (9262 CH.) Block Edge

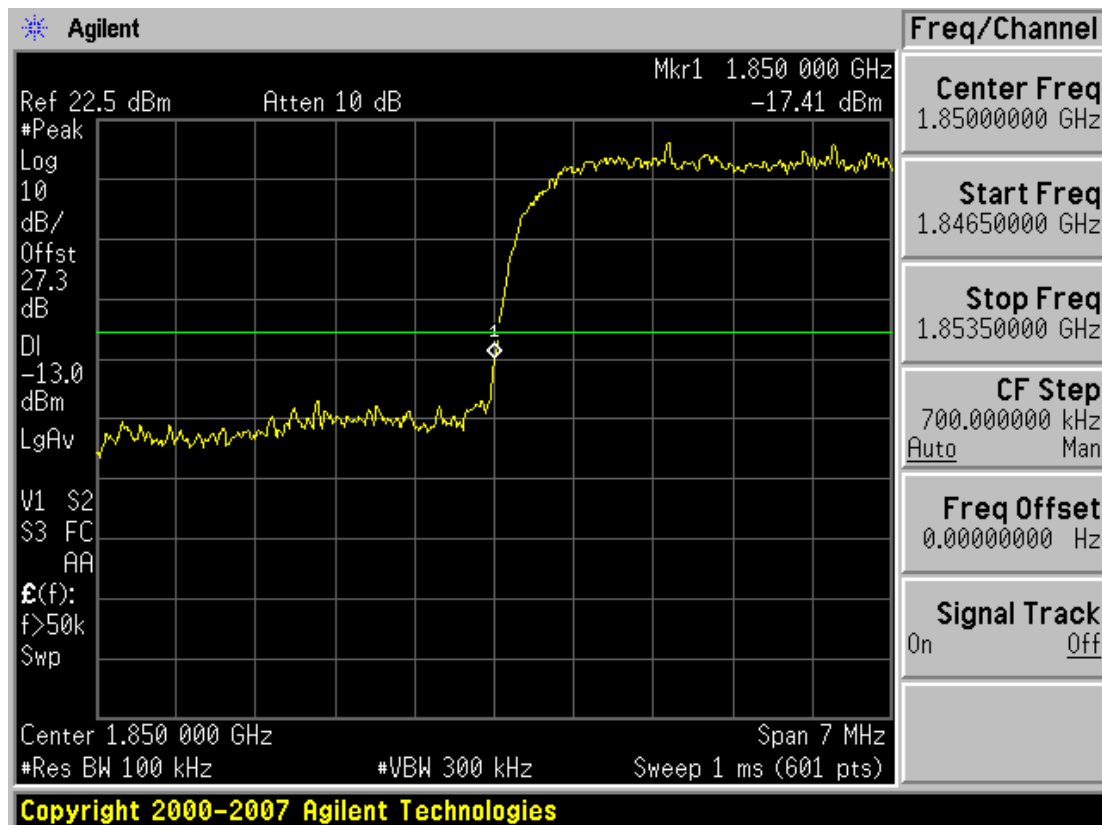


■ WCDMA1900 MODE (9538 CH.) Block Edge

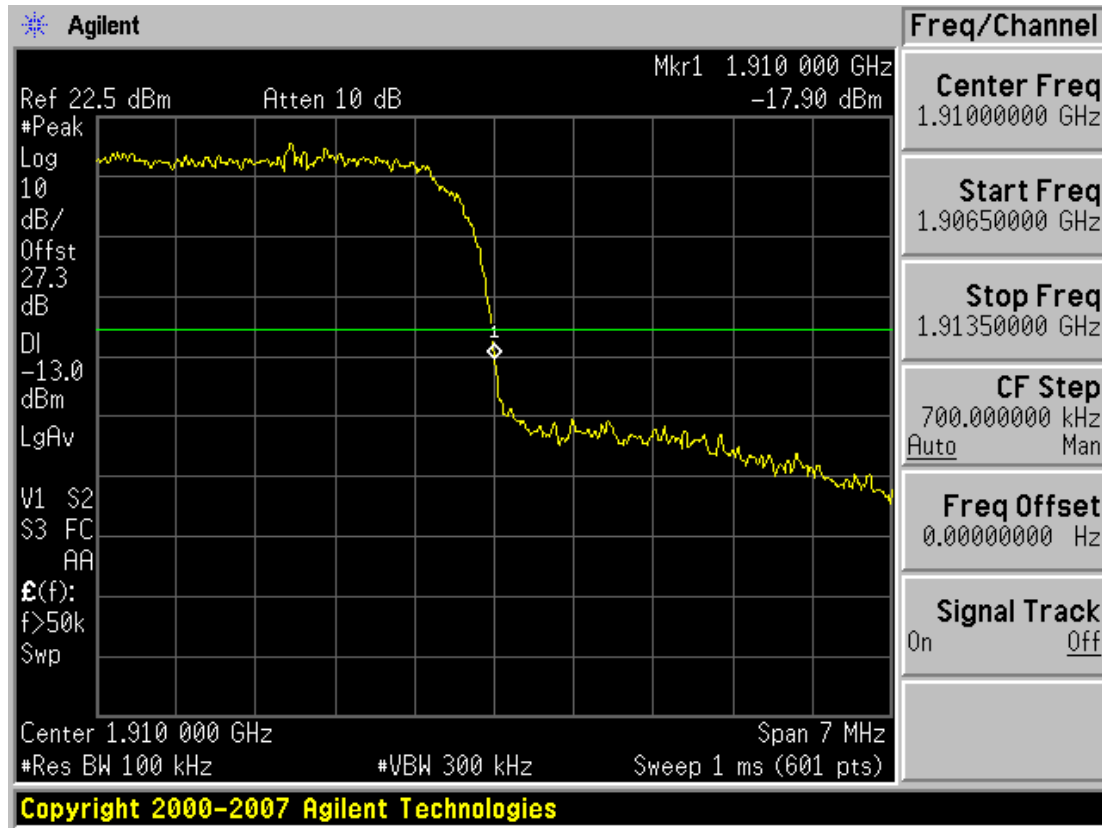


■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span

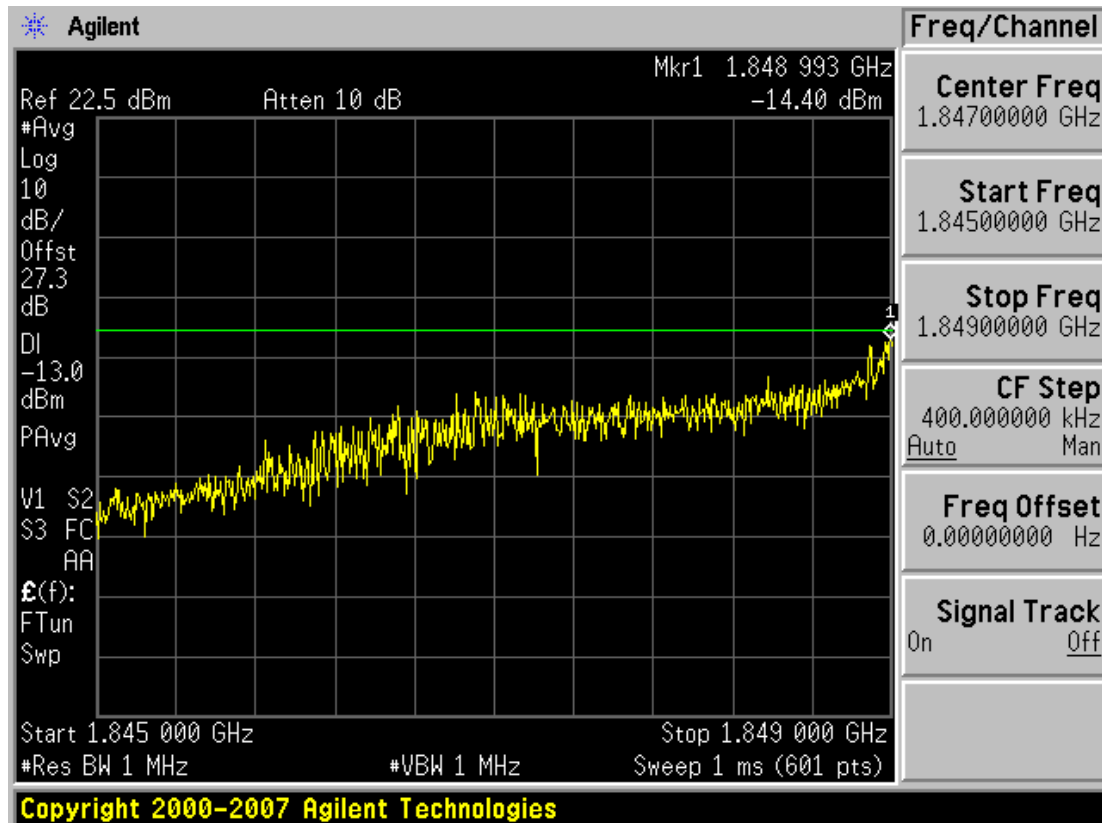


■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span

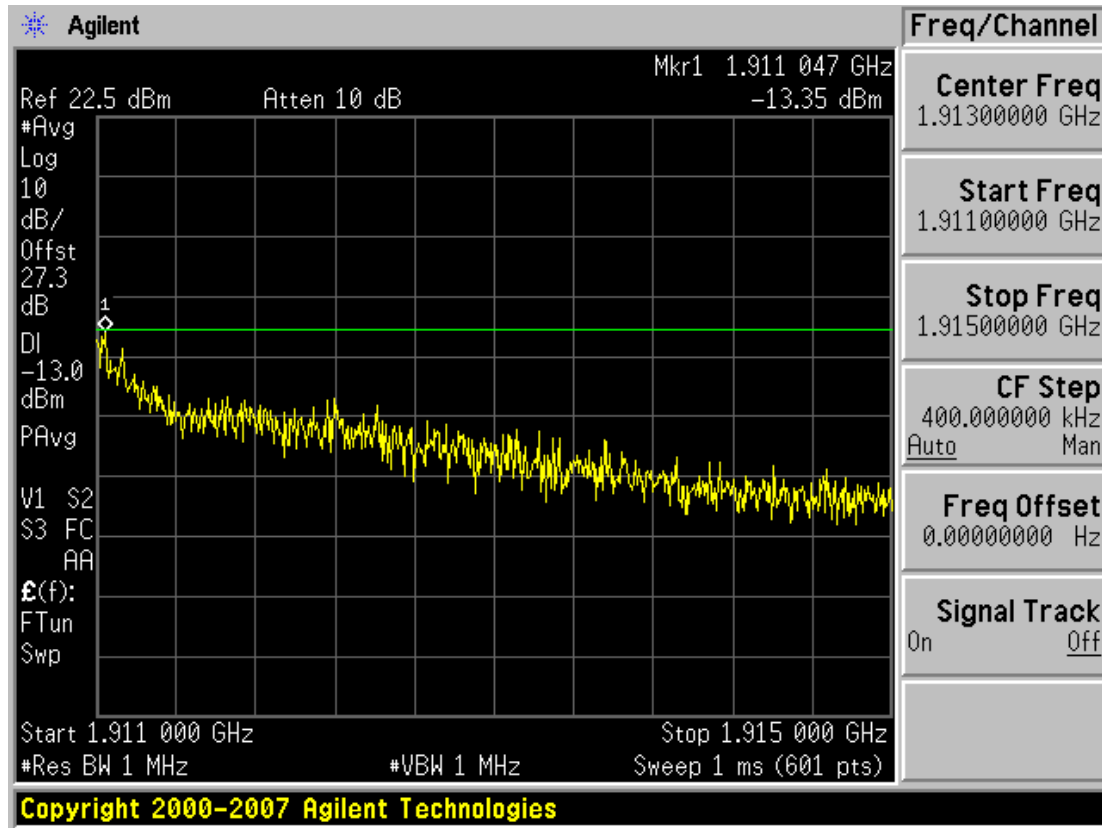


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

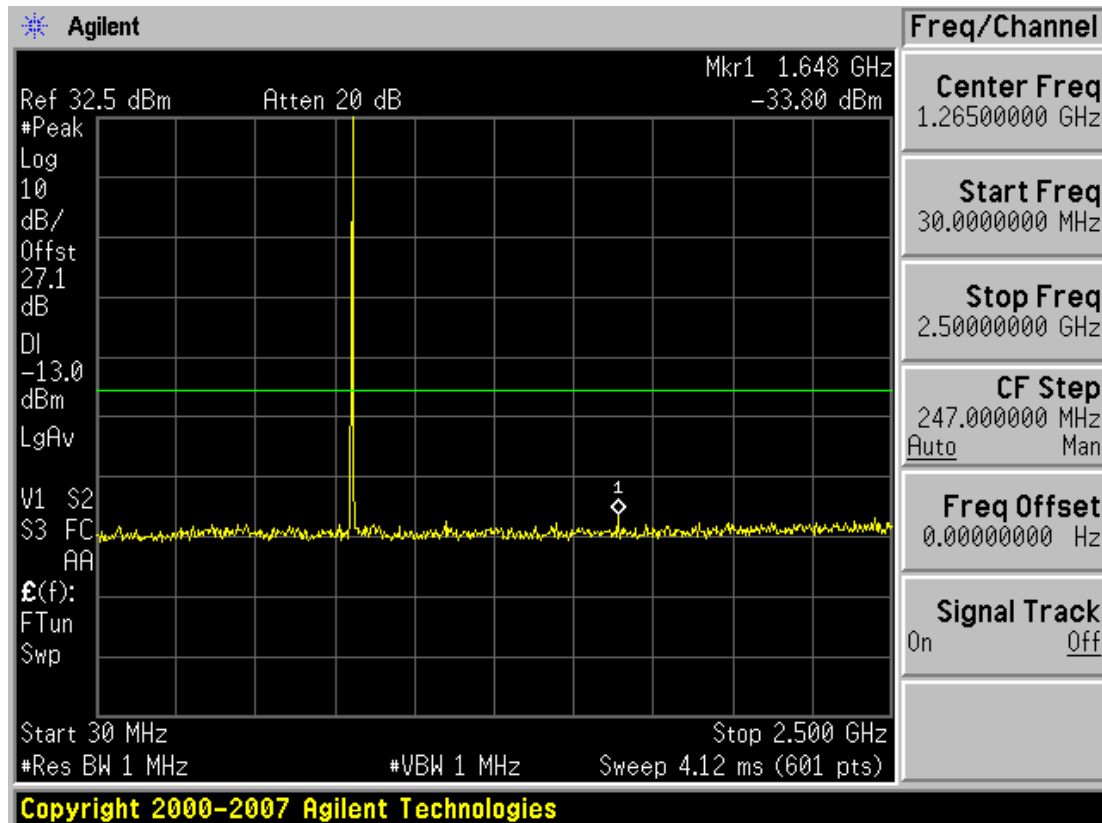

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

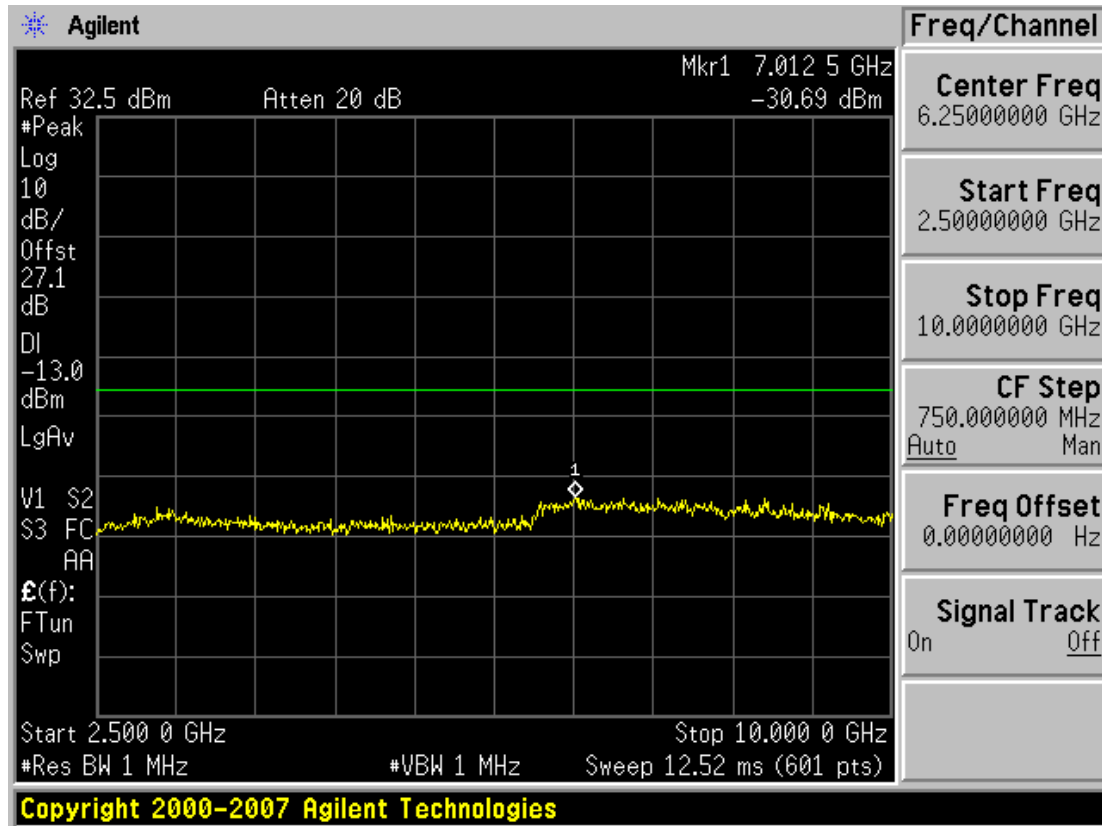


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

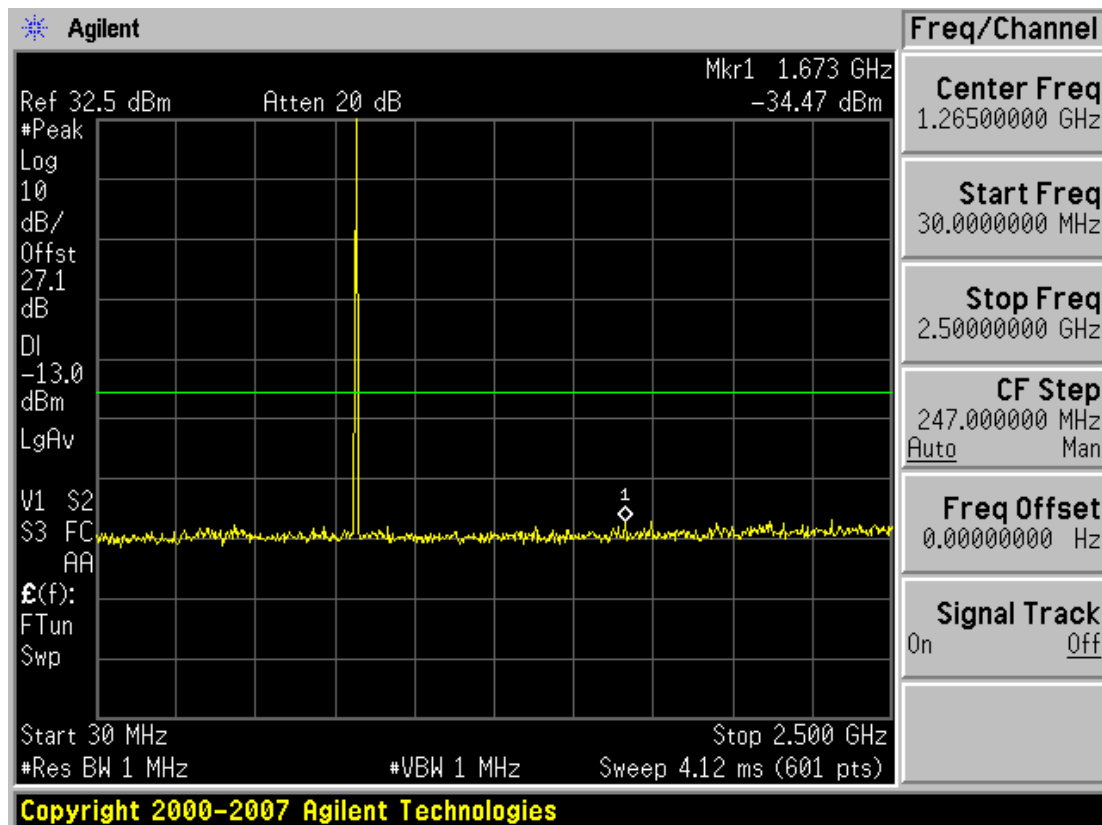


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2

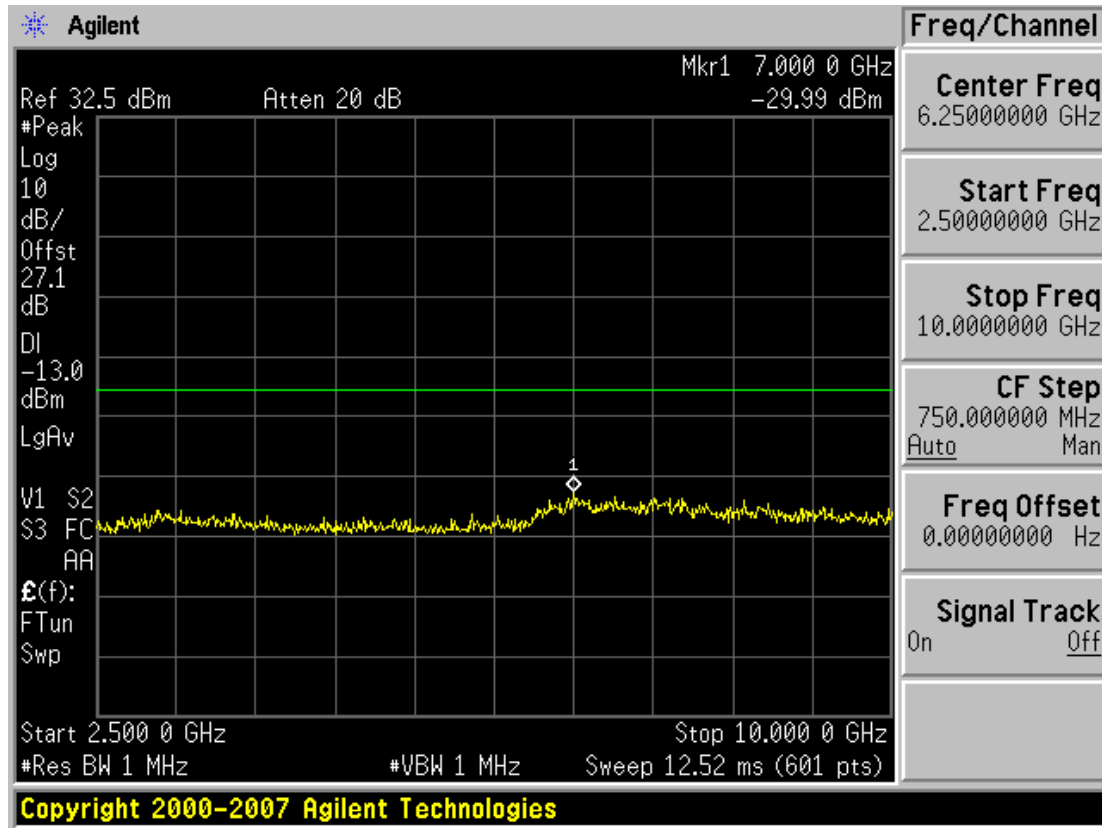


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

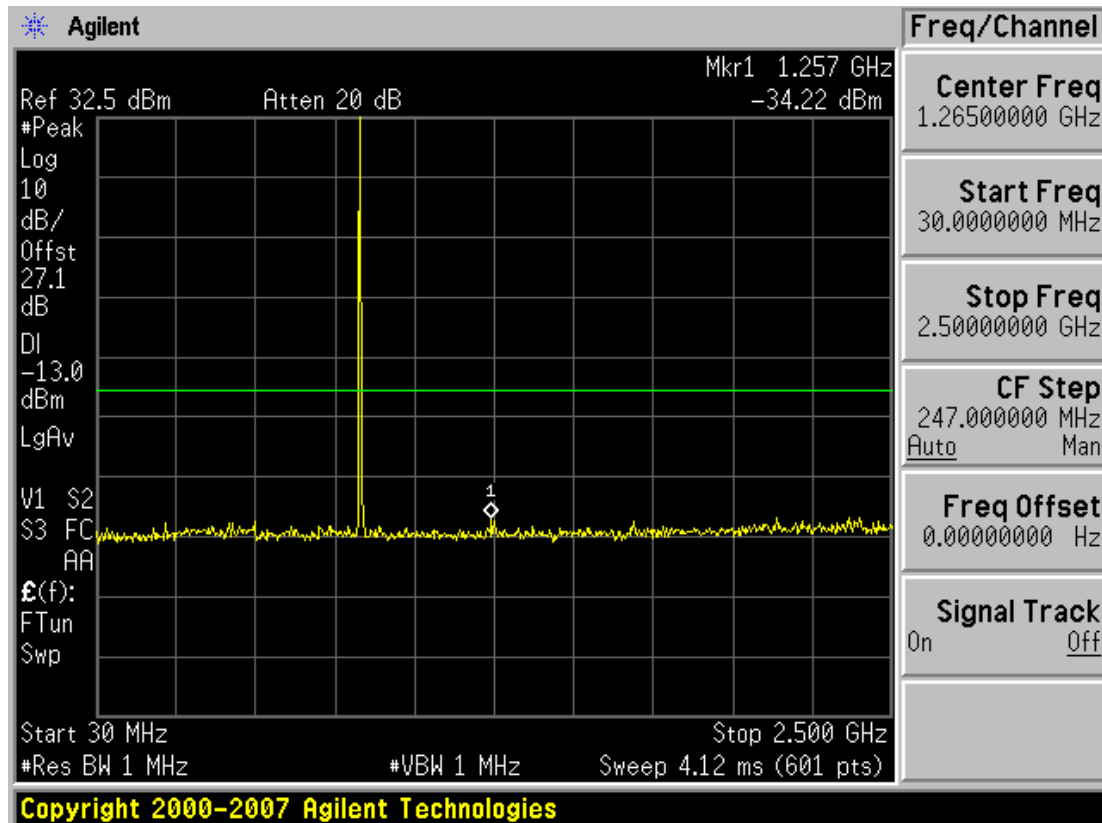


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

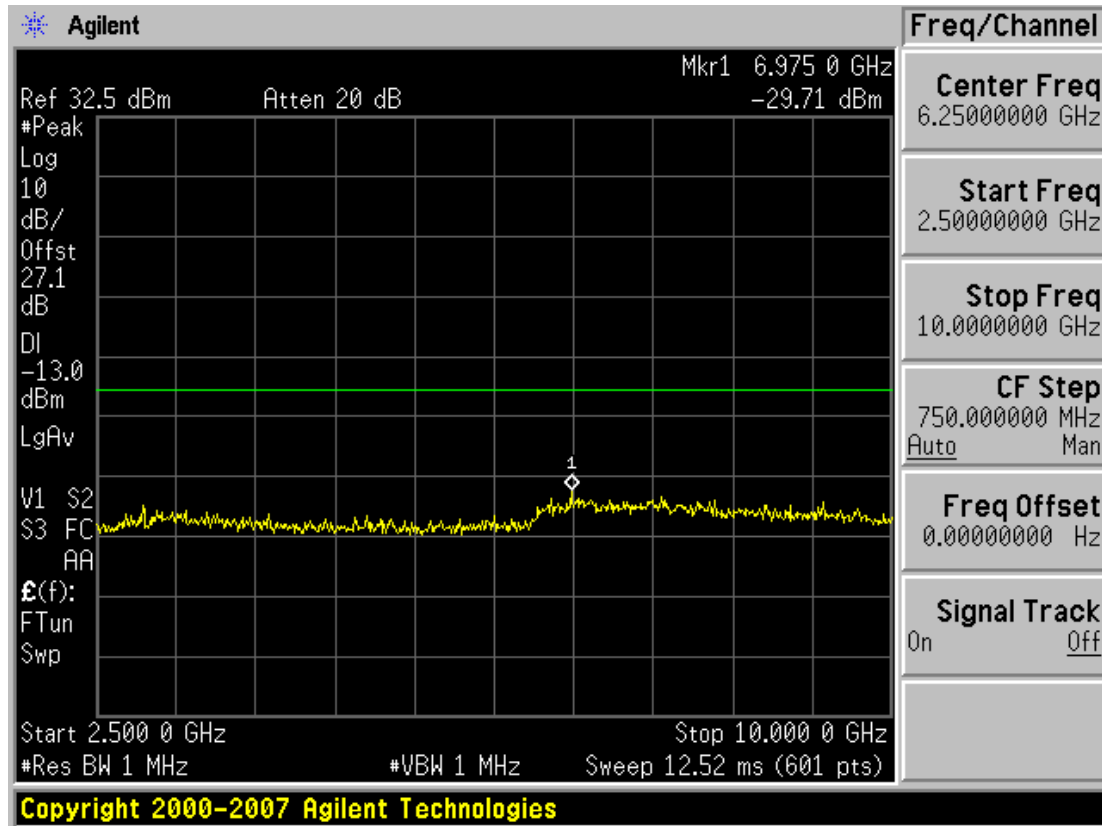


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

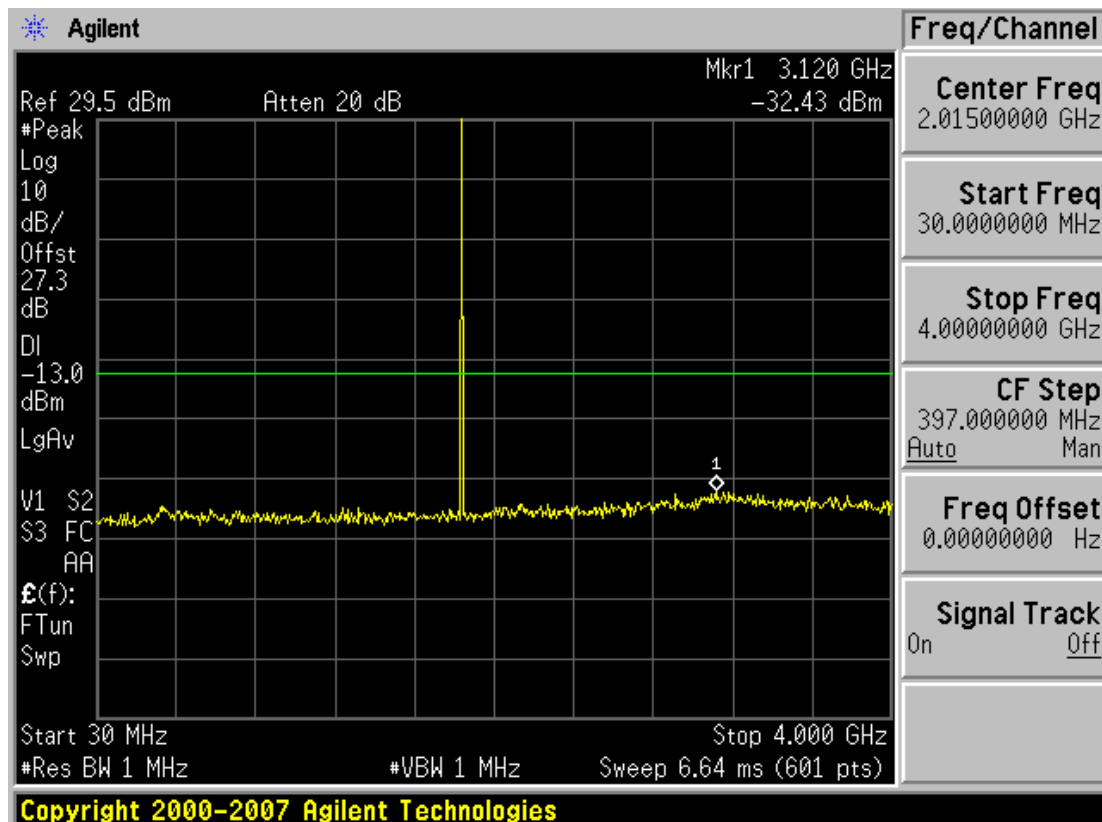

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

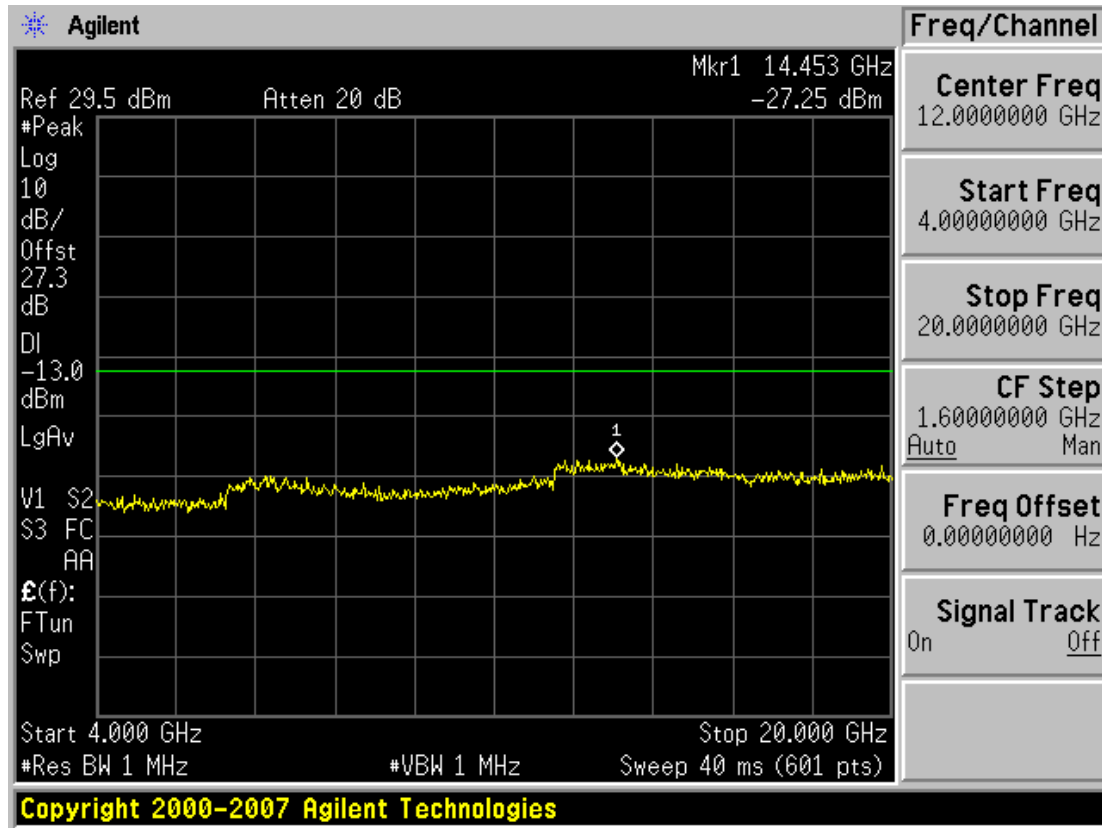


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions1

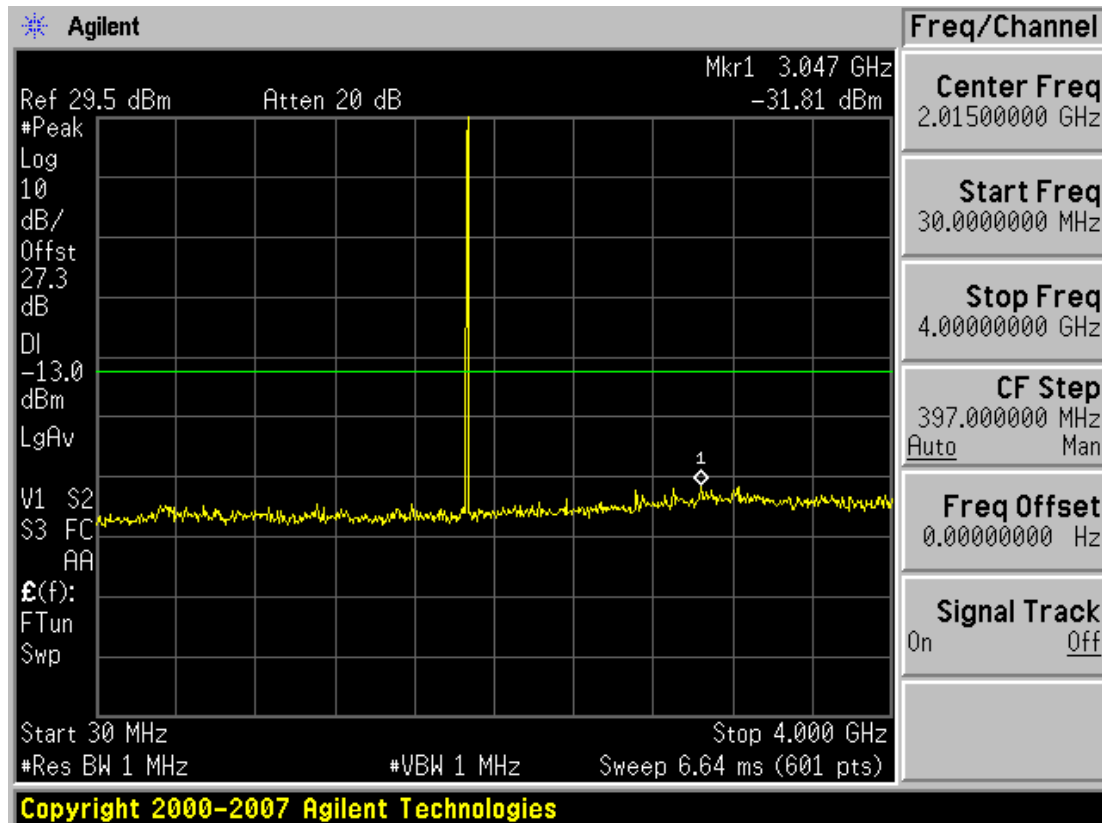


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

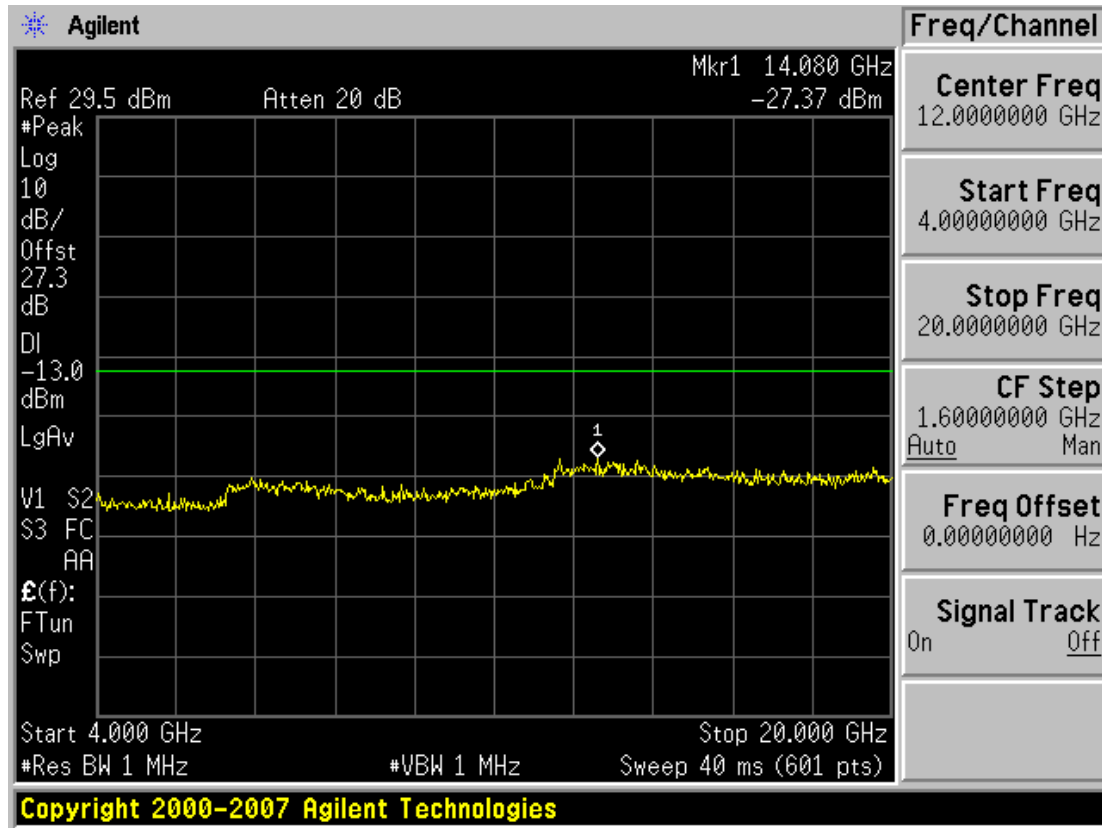


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

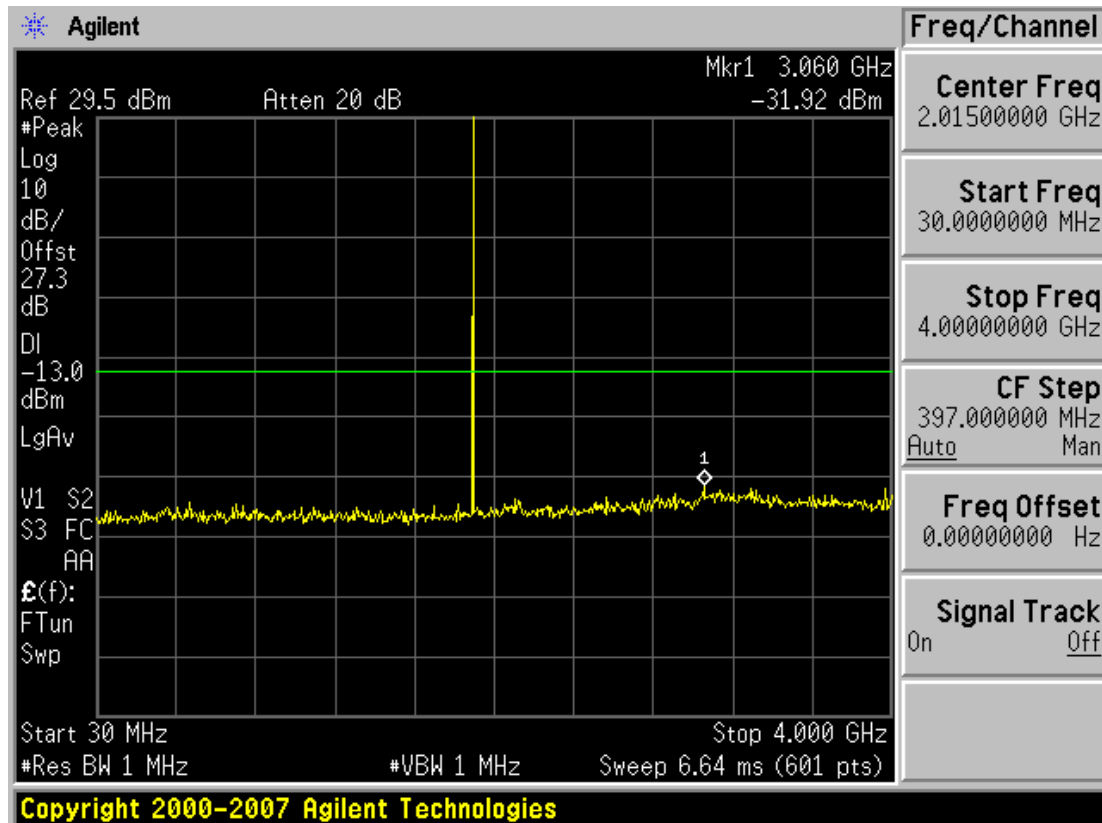


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

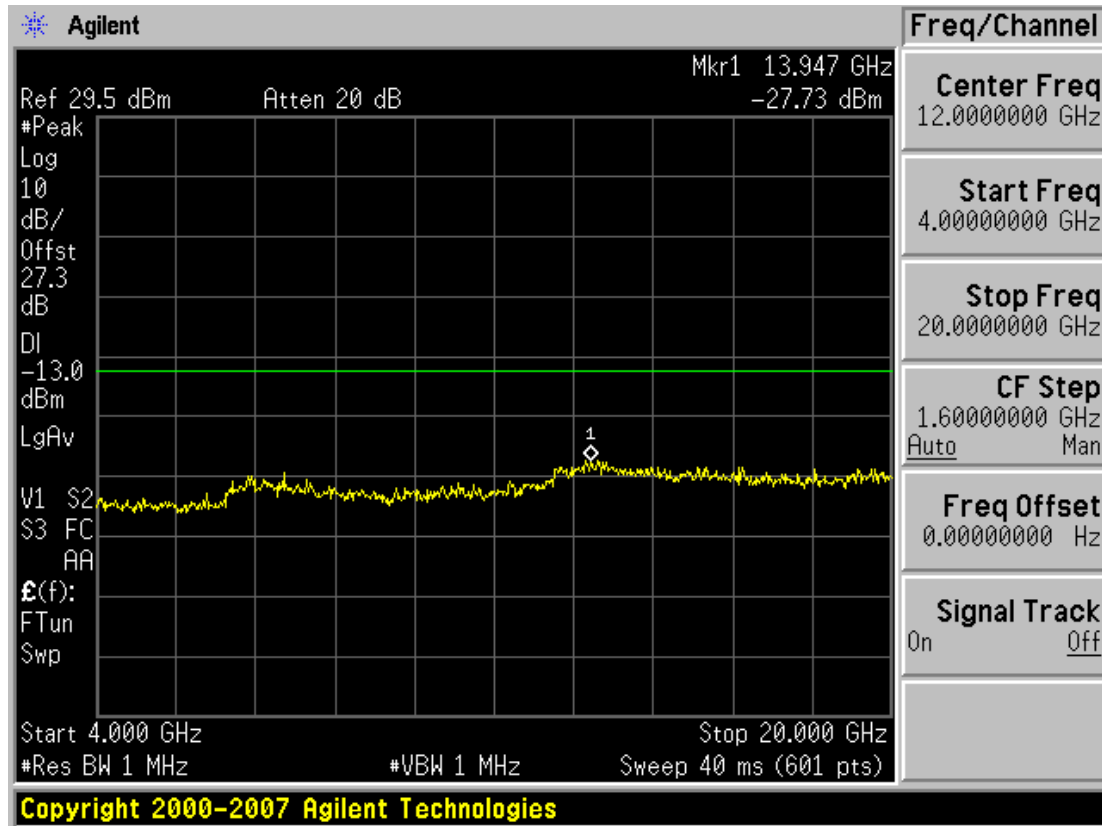


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions1

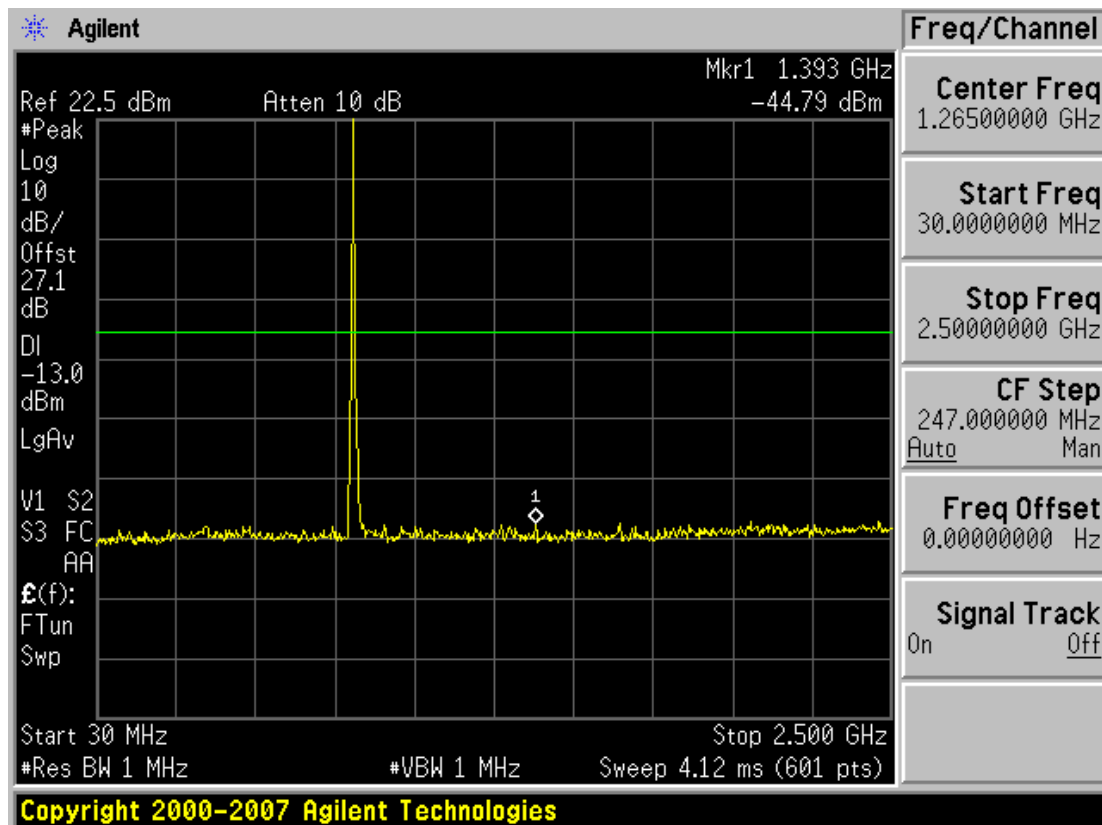


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions2

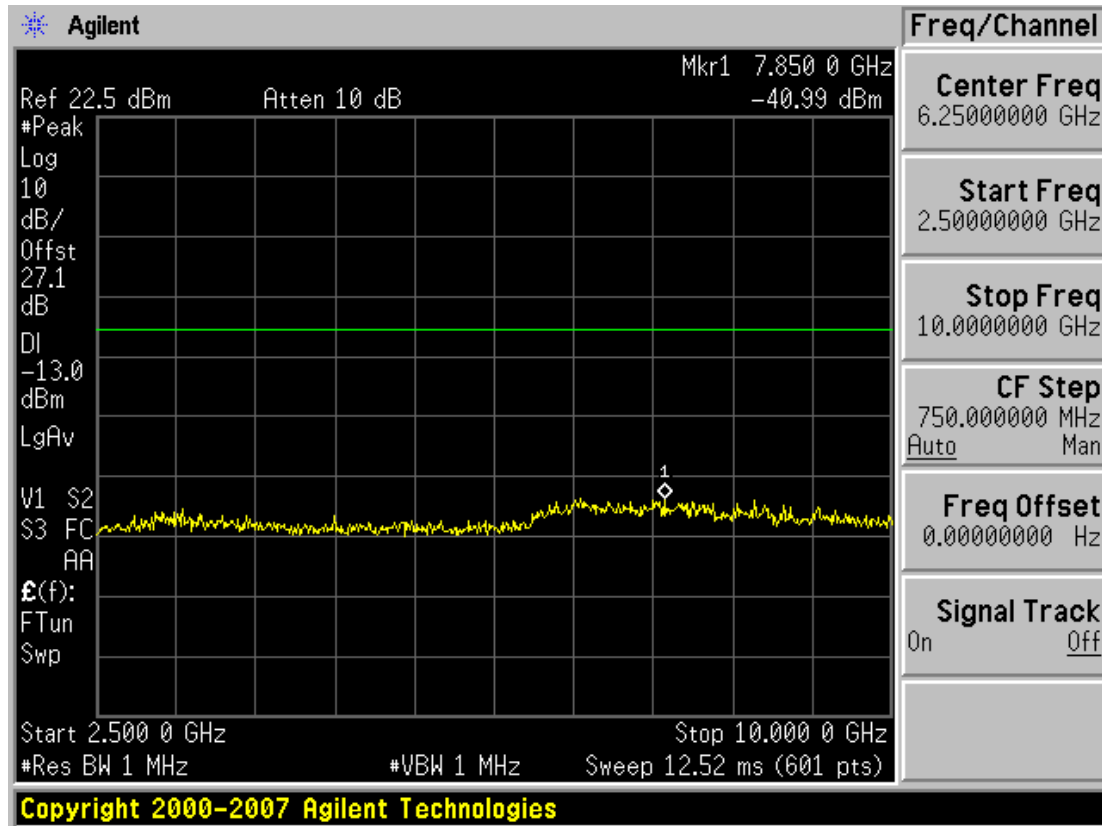


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions1

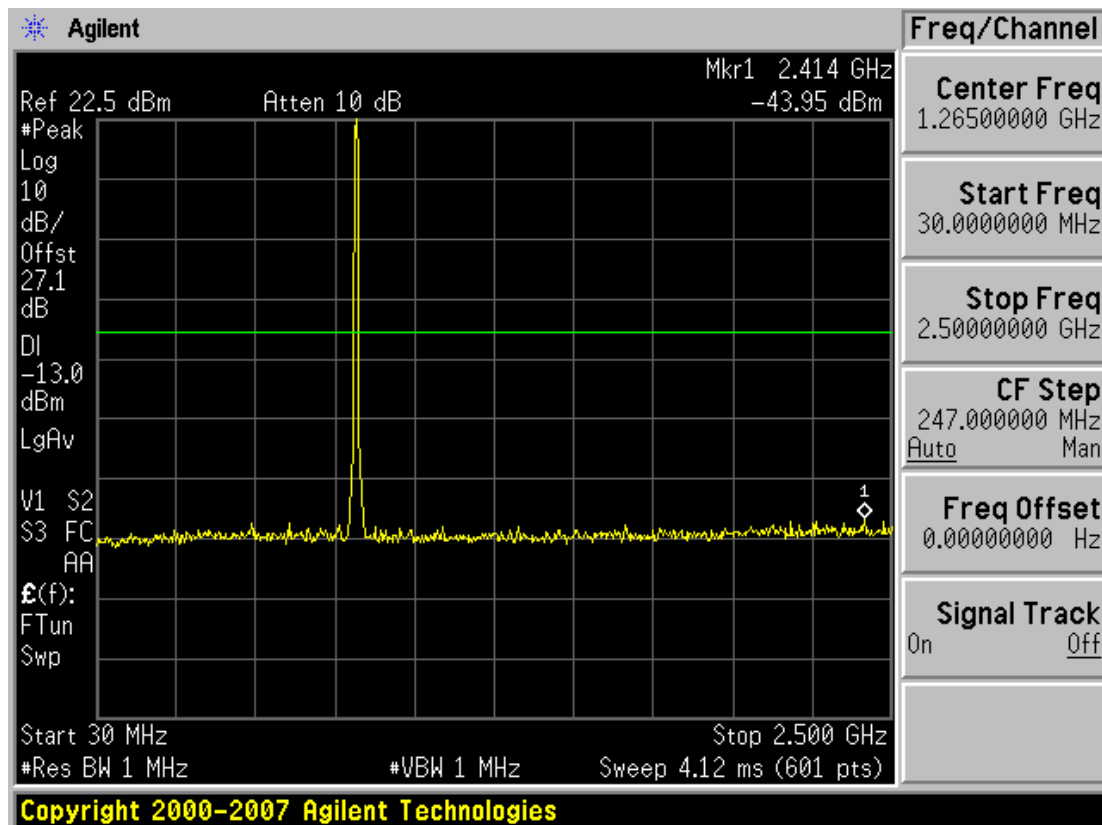

■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions2

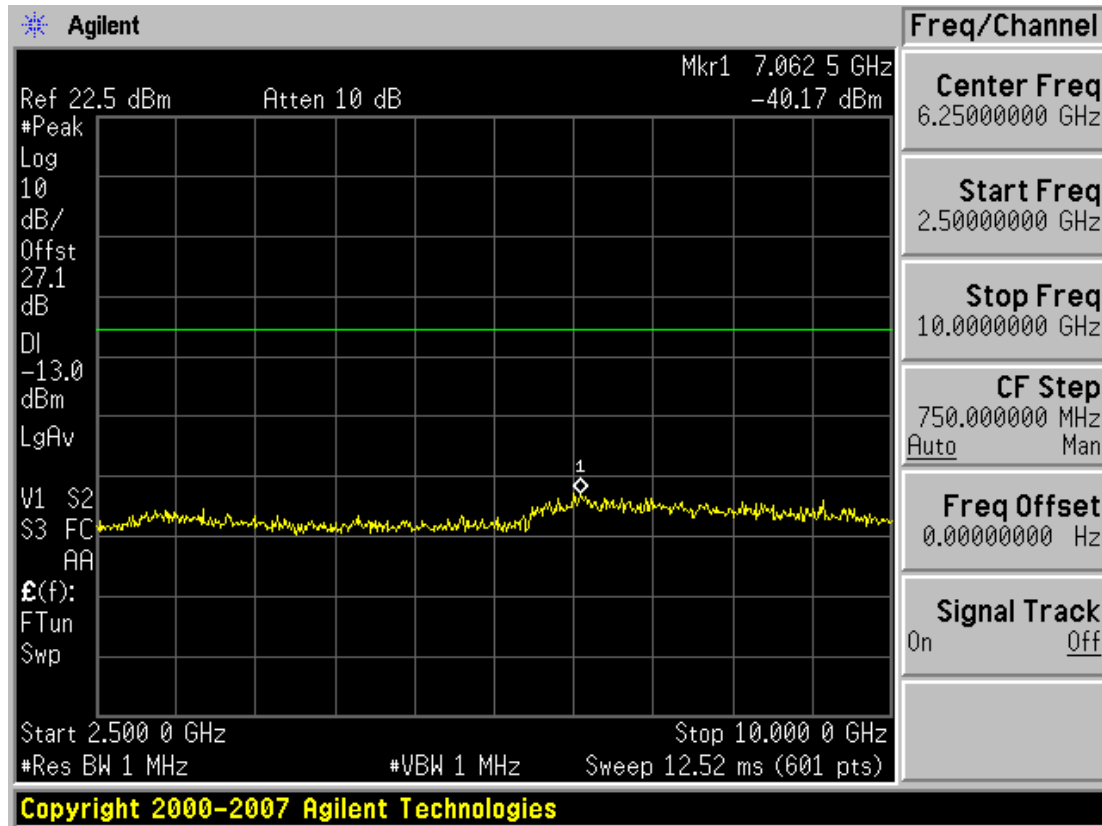


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions1

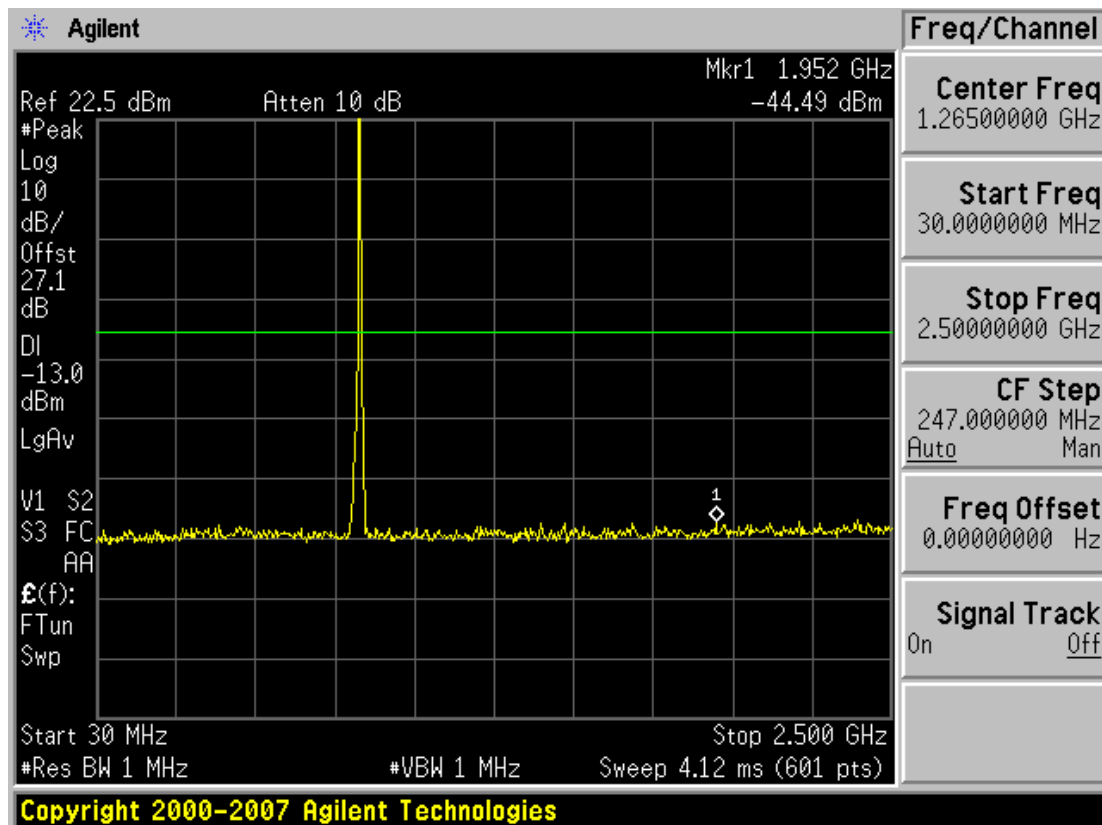


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions2

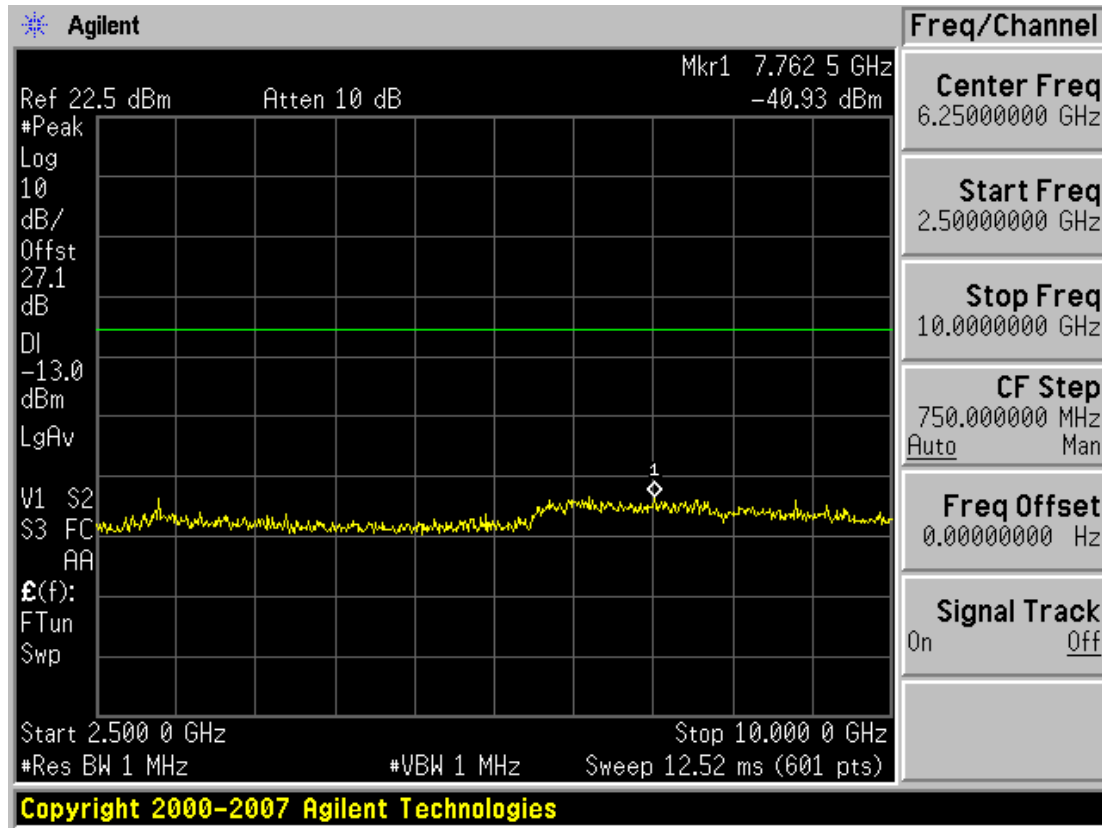


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

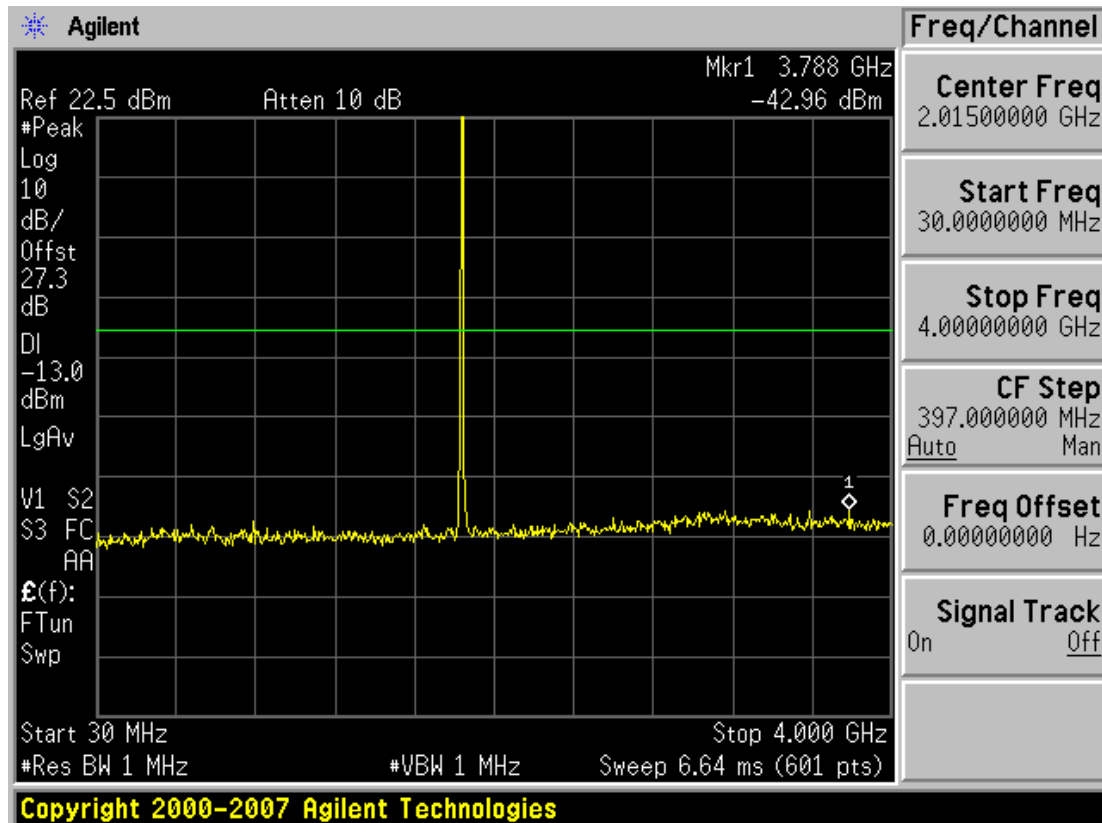


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

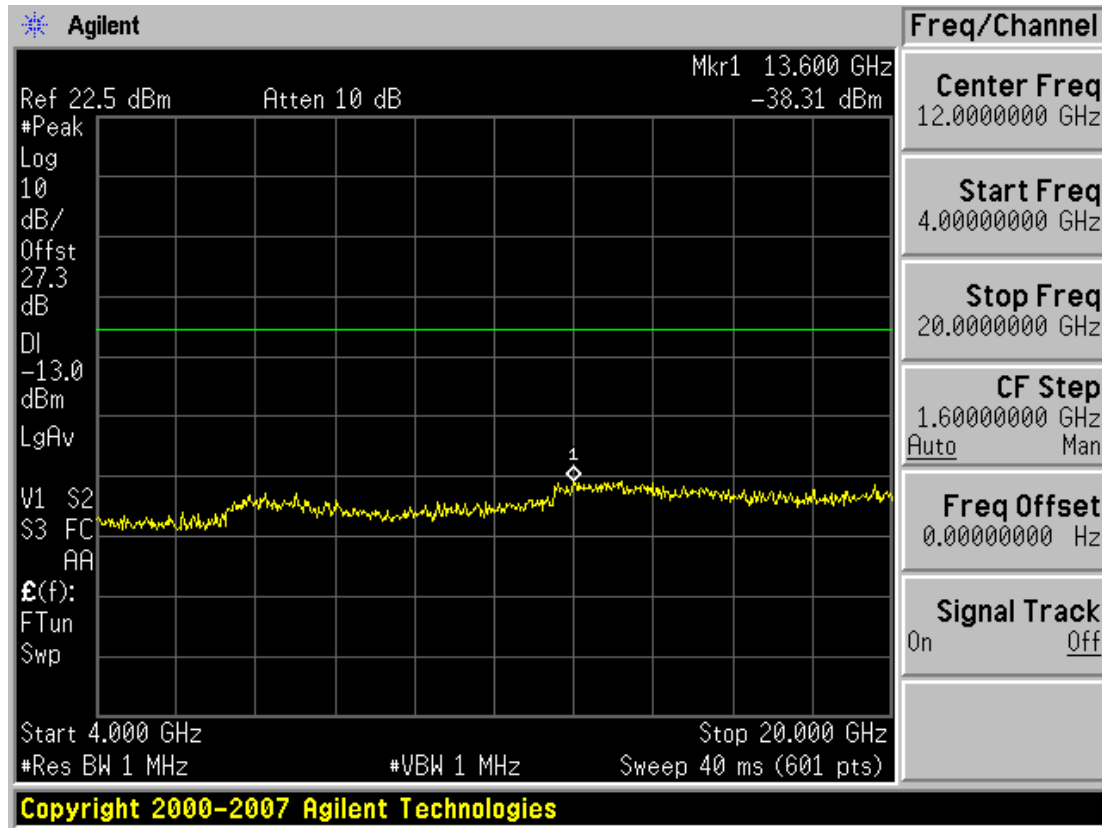


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

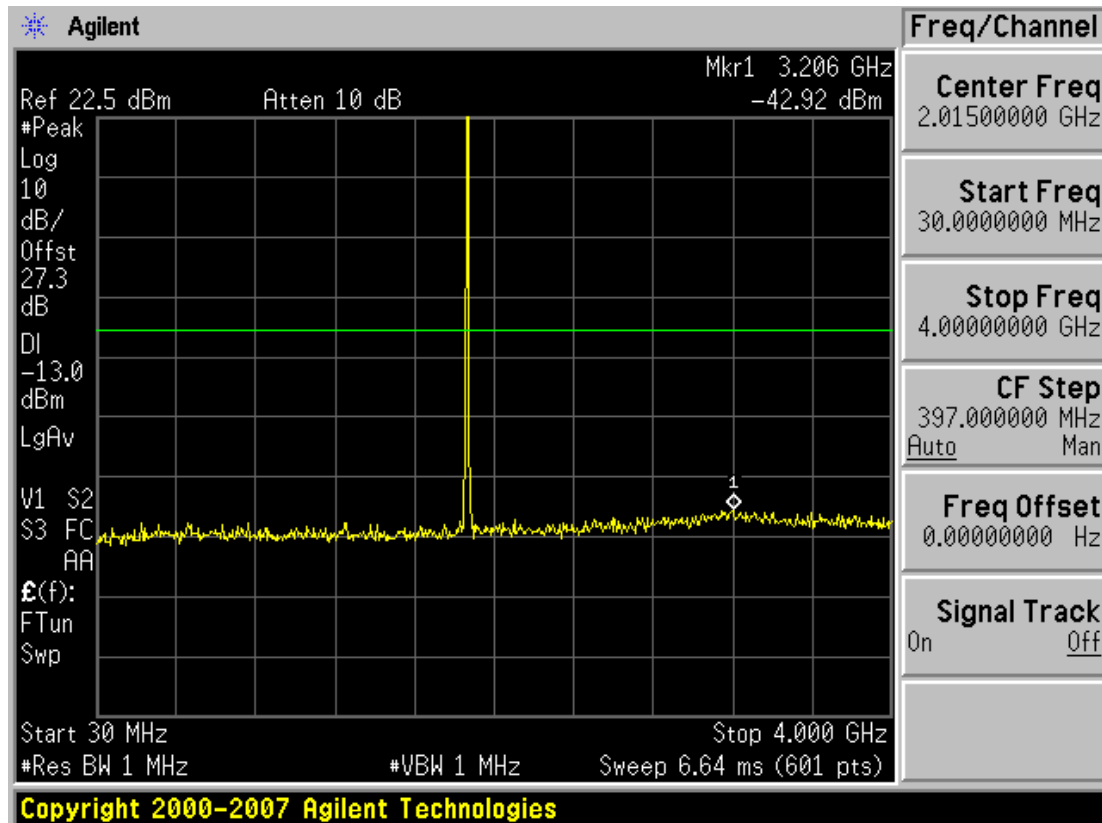


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2

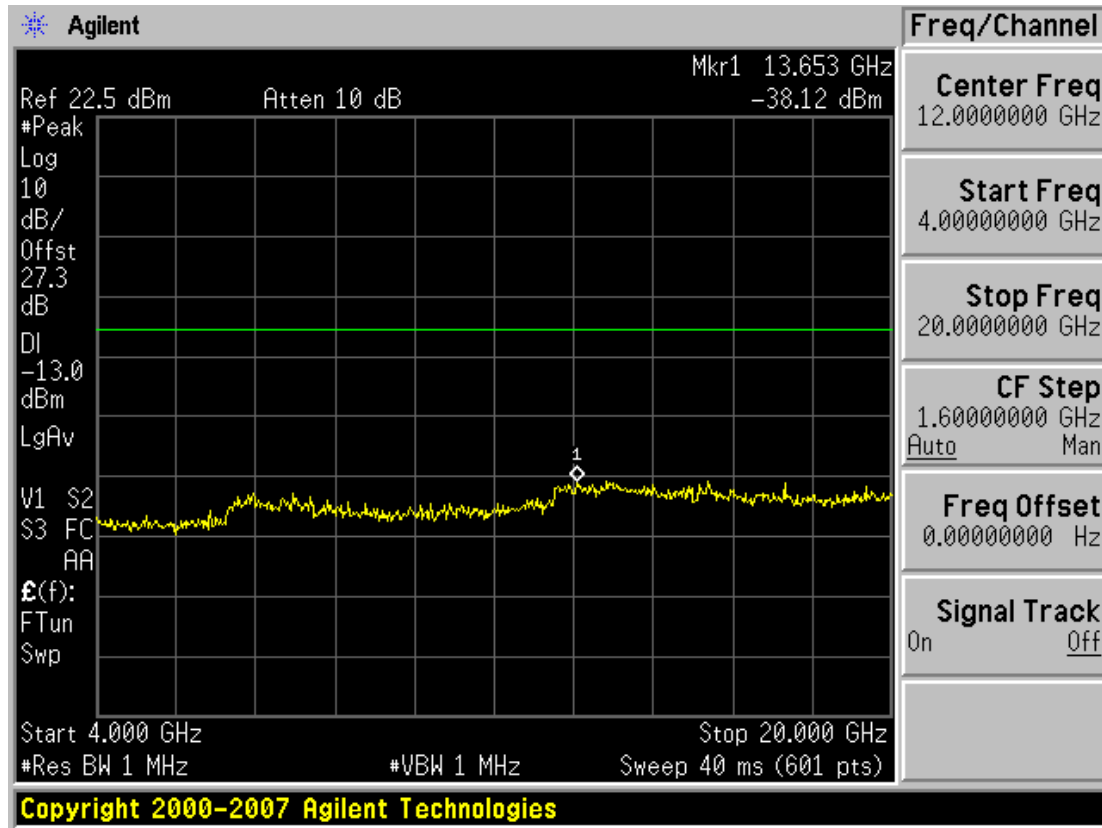


■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

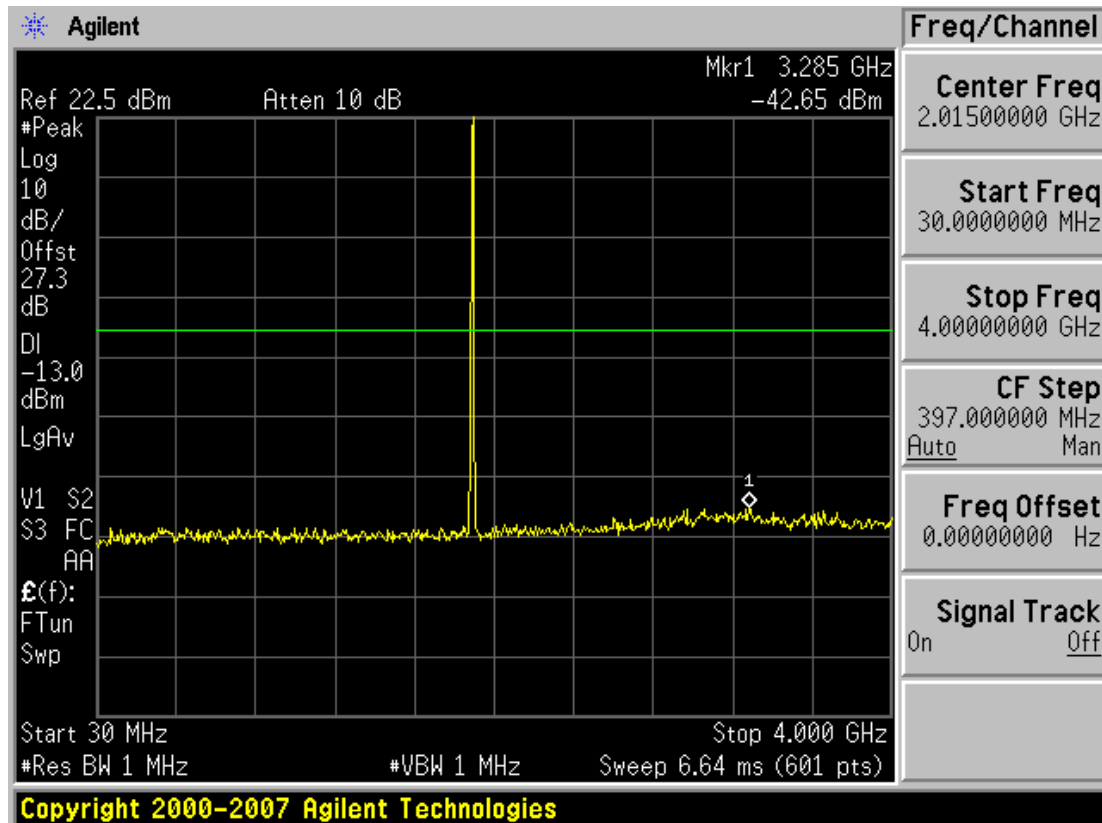

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

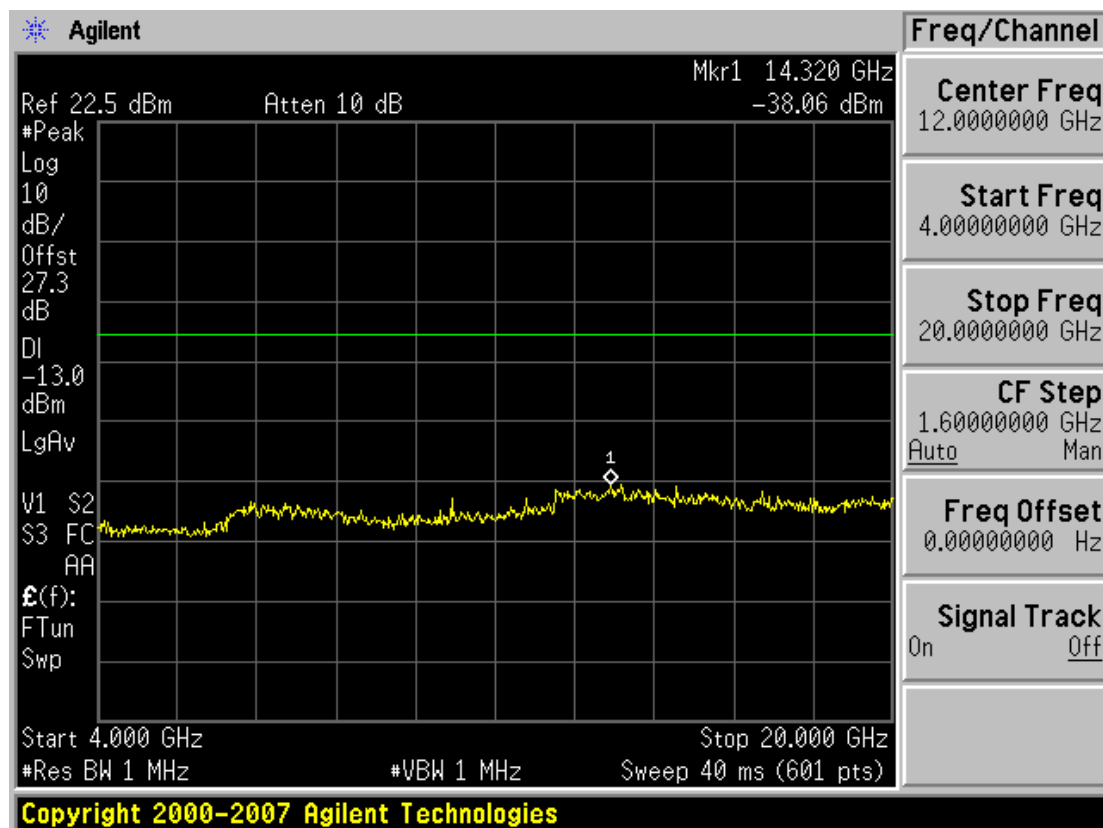

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-RF09-0725	Date of Issue: July 21, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with WLAN, Bluetooth & FMT	FCC ID: BEJBL40G	IC ID: 2703C-BL40