

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 55.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-13; Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.507 W/kg

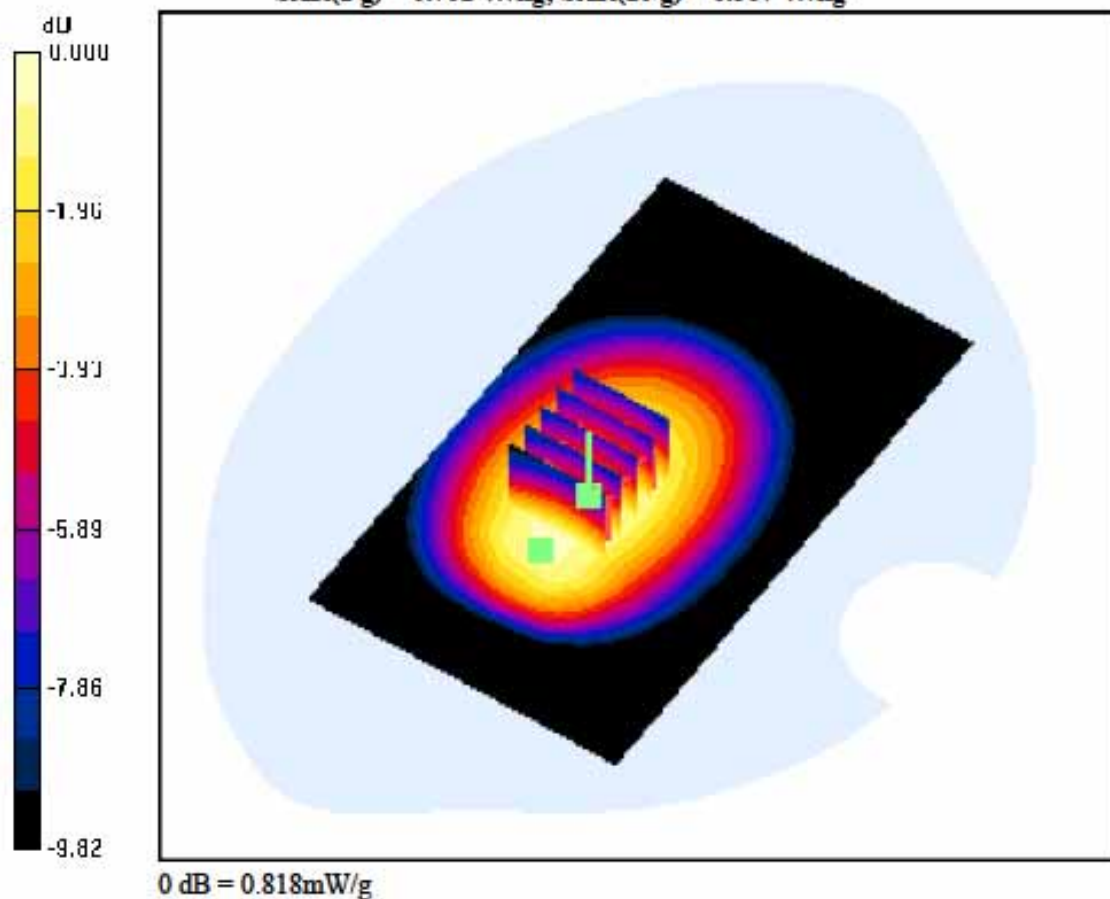

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 55.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-13; Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.910 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.419 W/kg

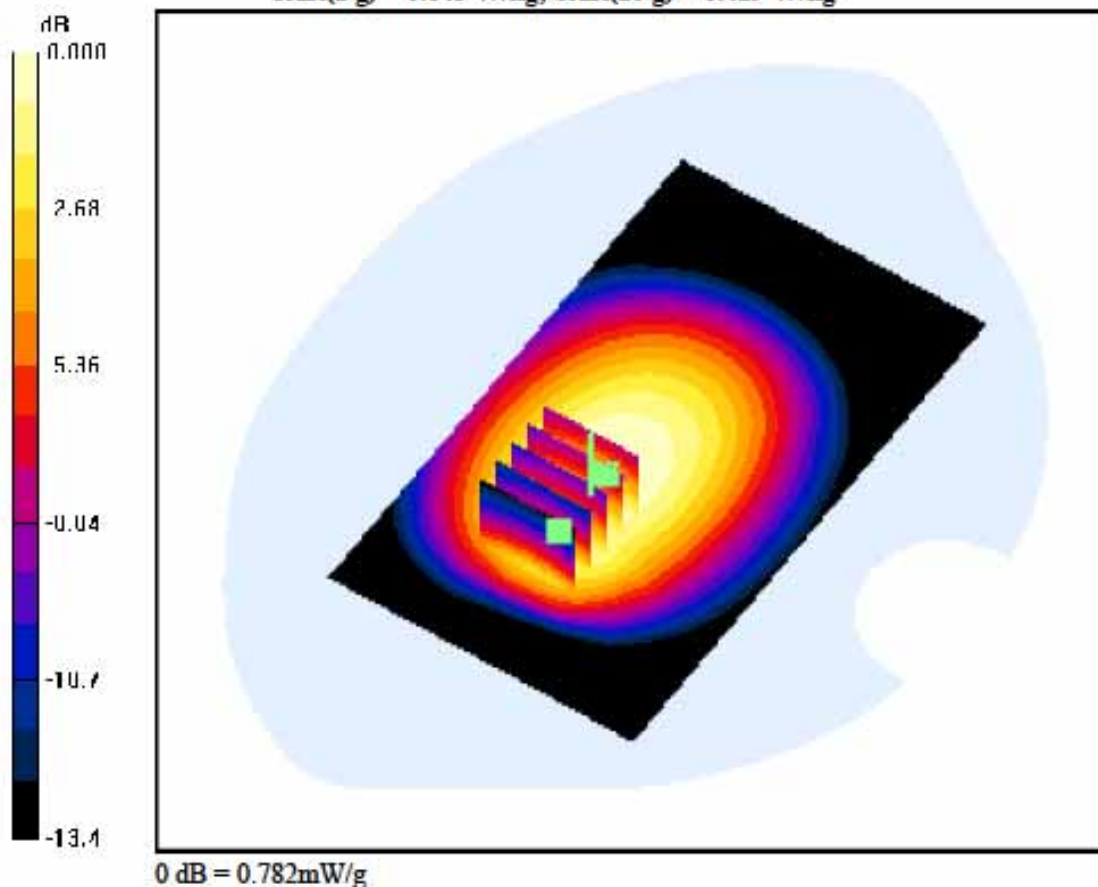

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 55.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-13; Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Rear, GSM850 GPRS Class 12 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.924 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.523 W/kg

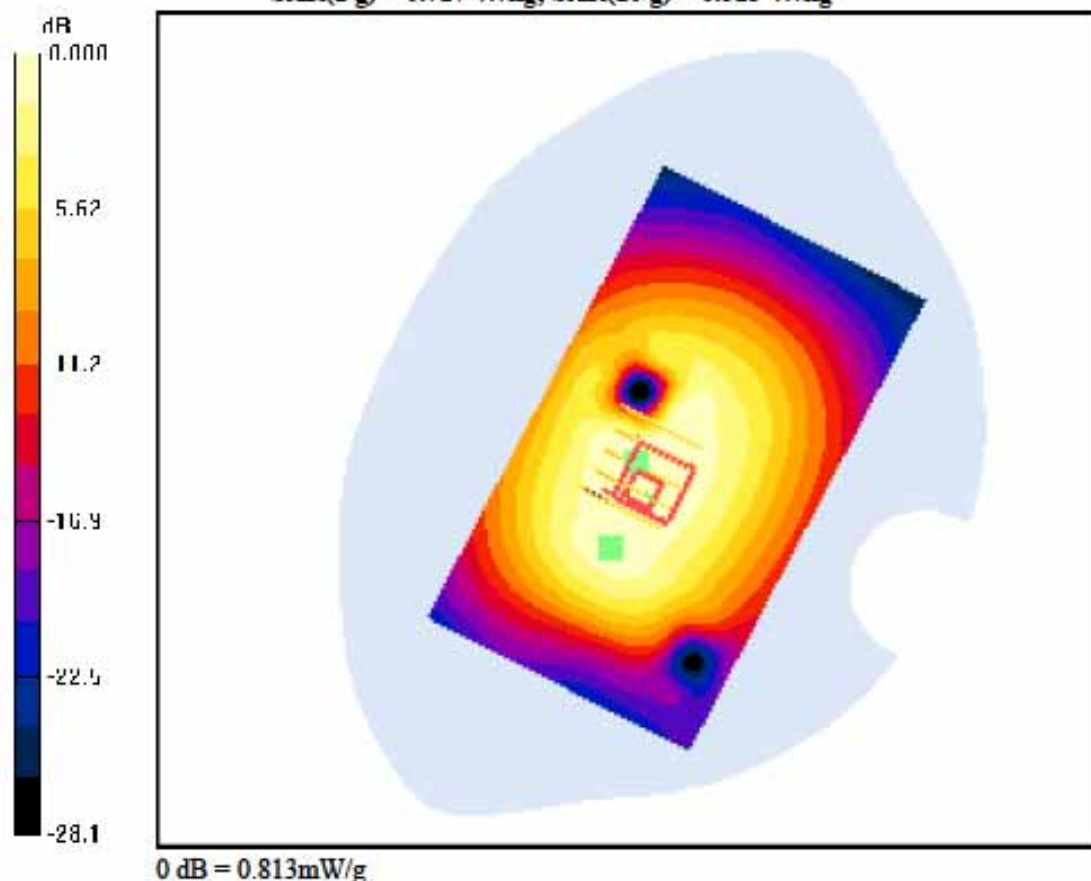

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 55.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-13; Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Rear, GSM850 GPRS Class 12 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.423 W/kg

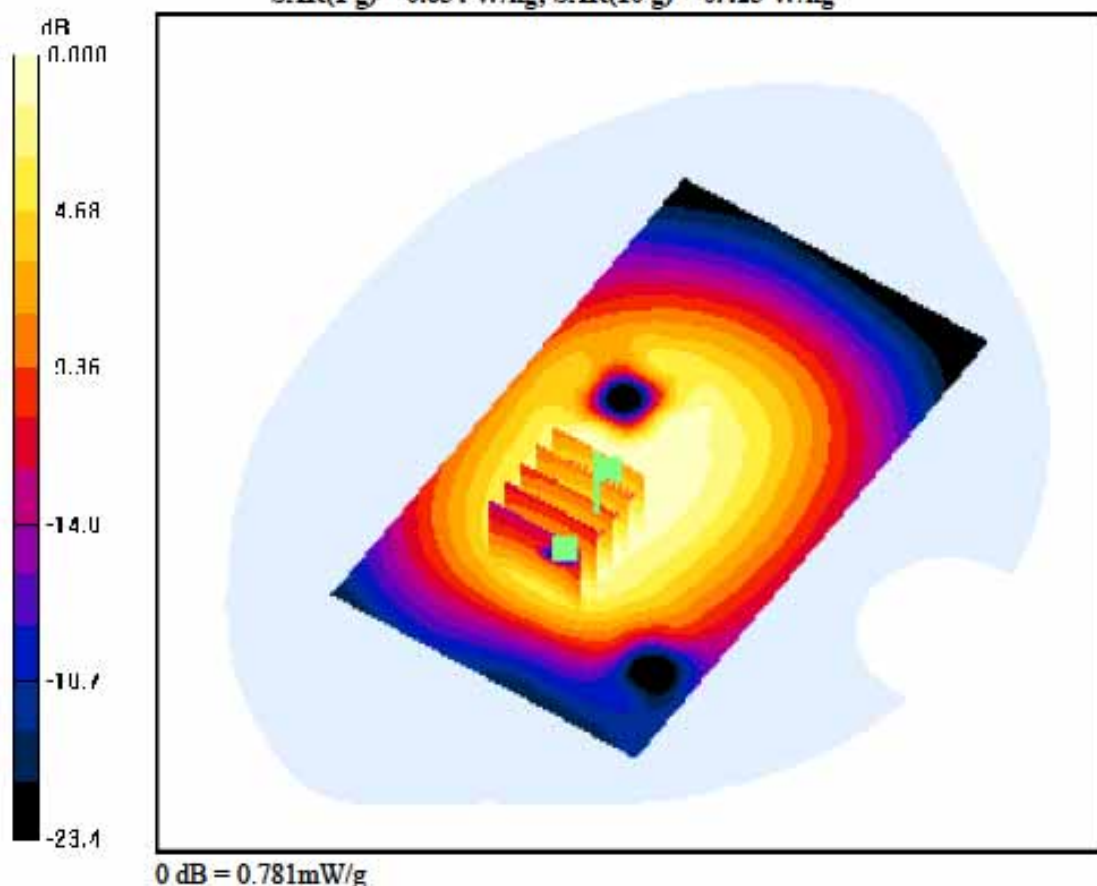

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 55.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-13; Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Right, GSM850 GPRS Class 10 Ch. 190, Ant Internal


Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.219 W/kg

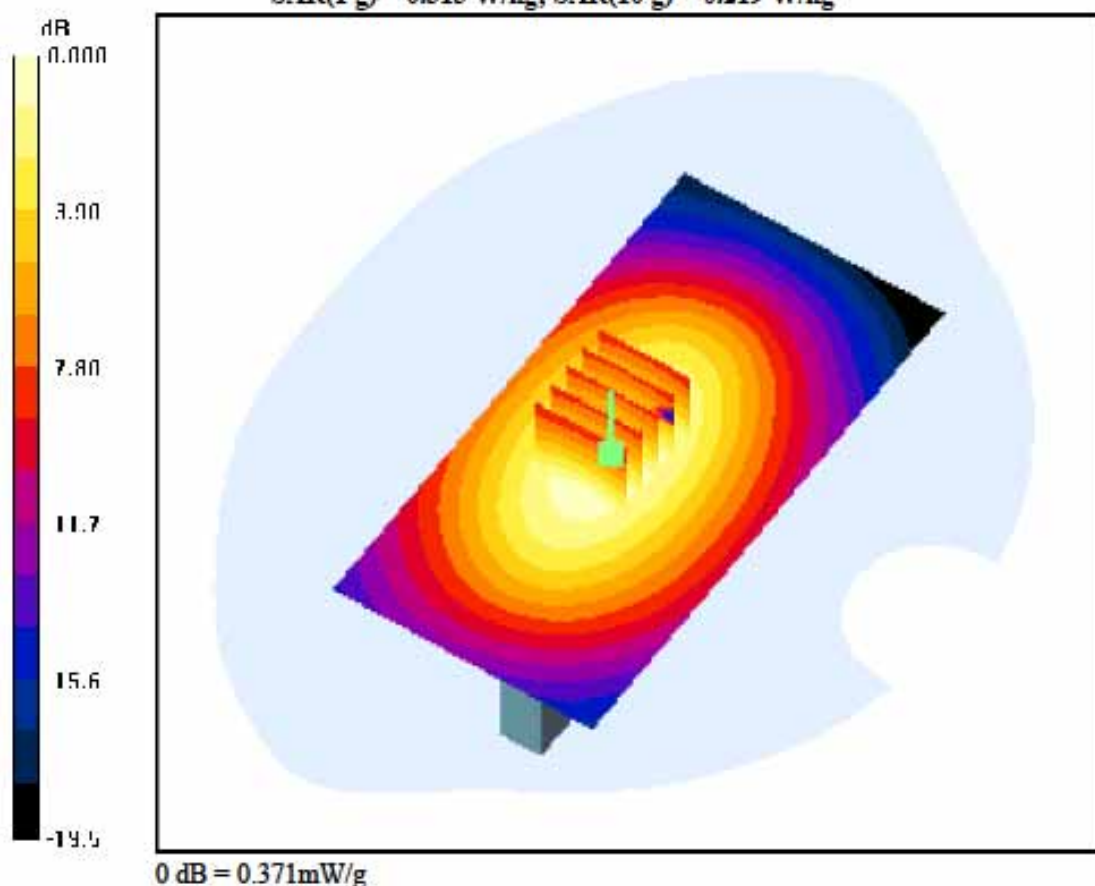

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 55.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-13; Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Left, GSM850 GPRS Class 10 Ch. 190, Ant Internal


Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.241 W/kg

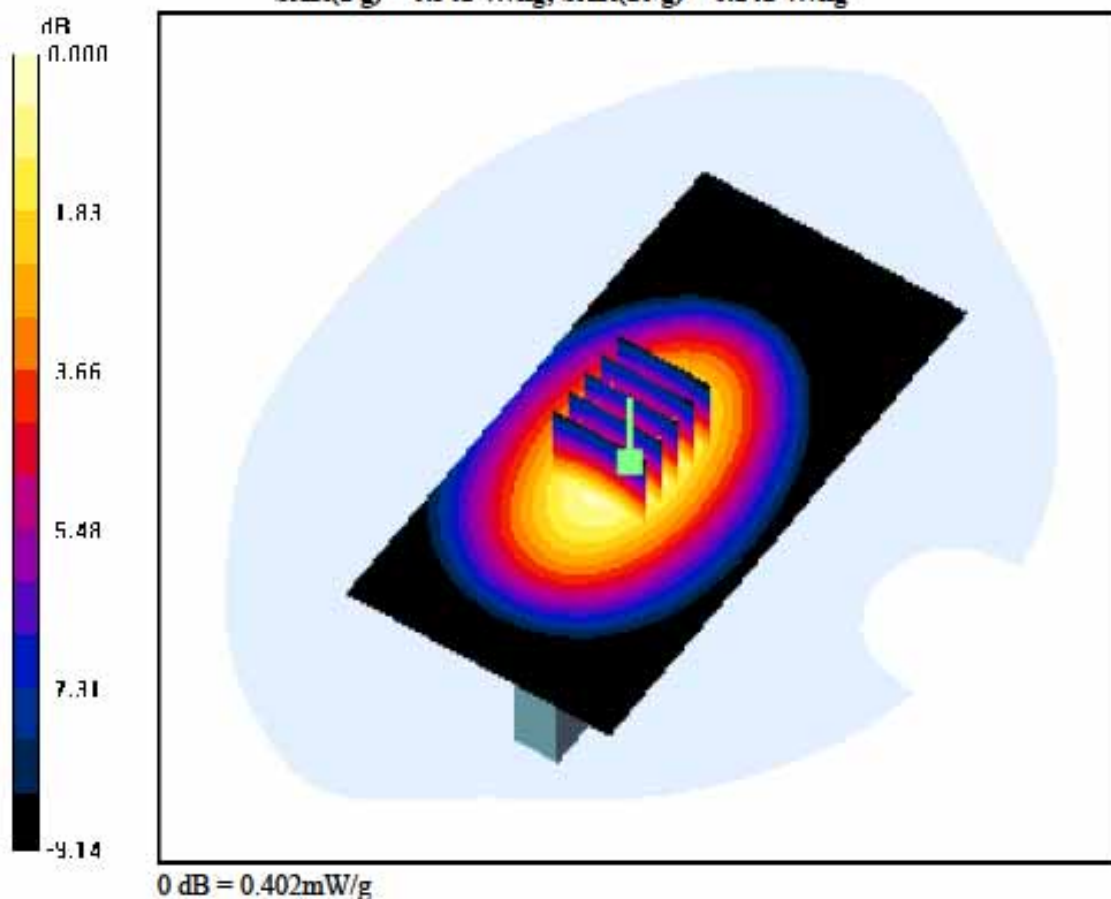

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Bottom, PCS1900 GPRS Class 8 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.057 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.157 W/kg

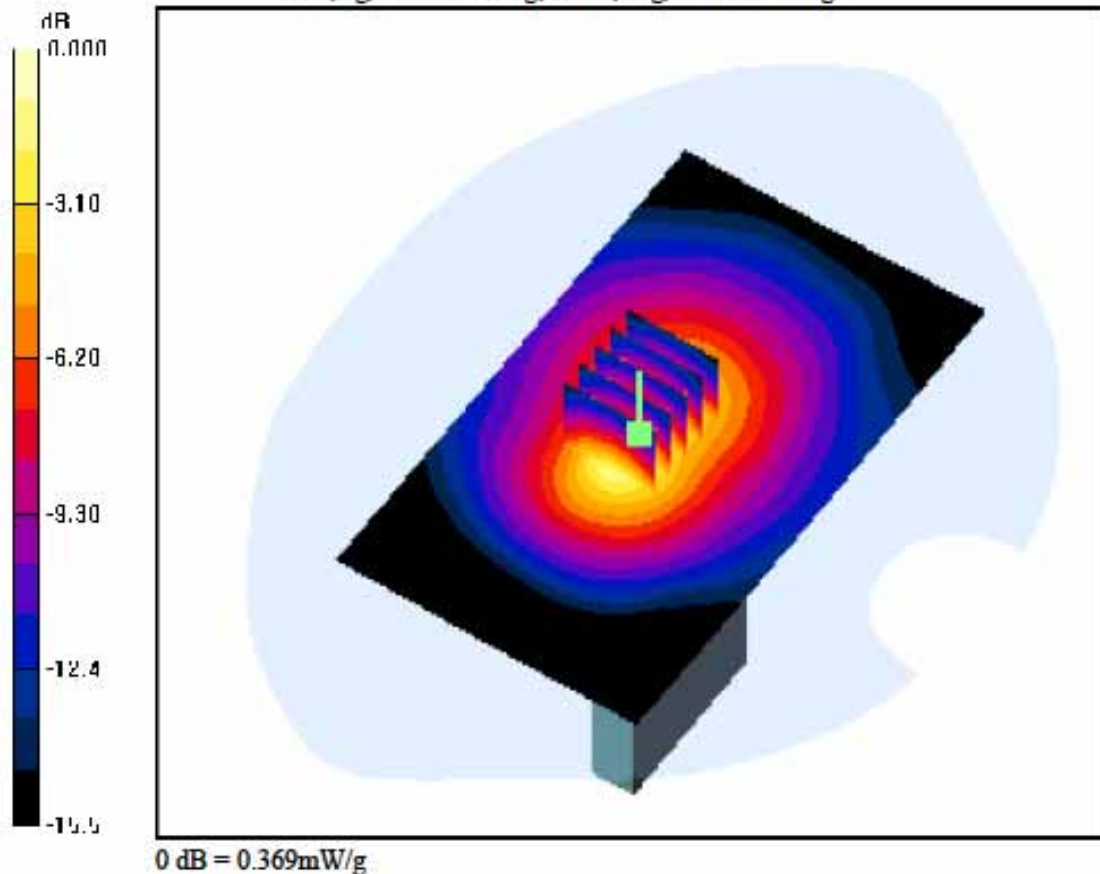

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Front, PCS1900 GPRS Class 8 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.197 W/kg

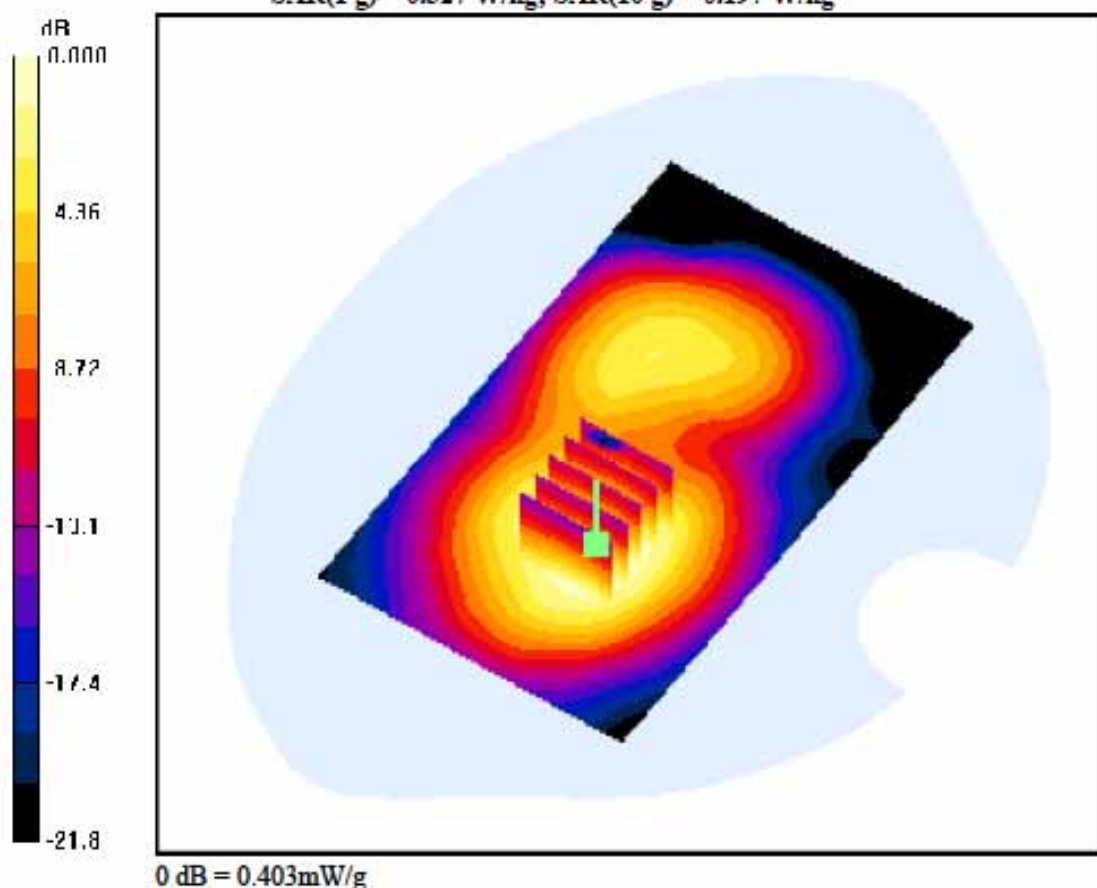

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Rear, PCS1900 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.267 W/kg

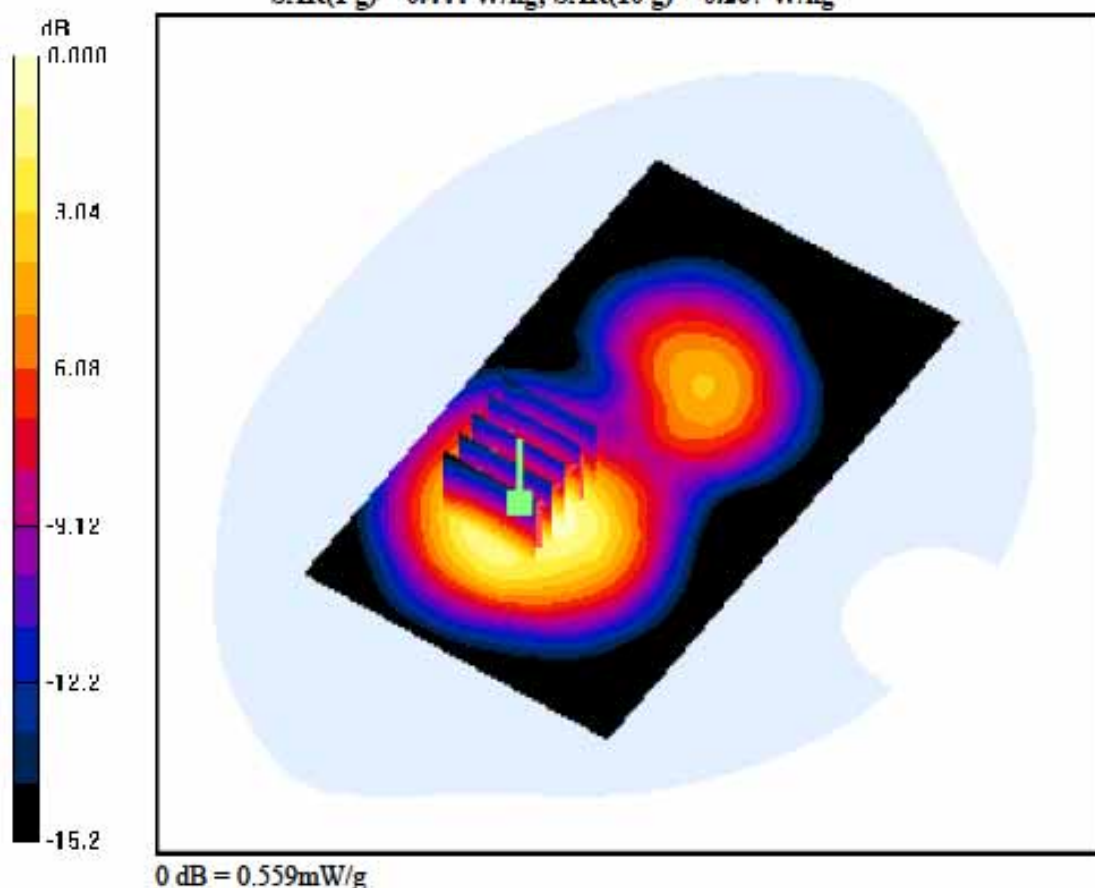

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Rear, PCS1900 GPRS Class 8 Ch. 512, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.295 W/kg

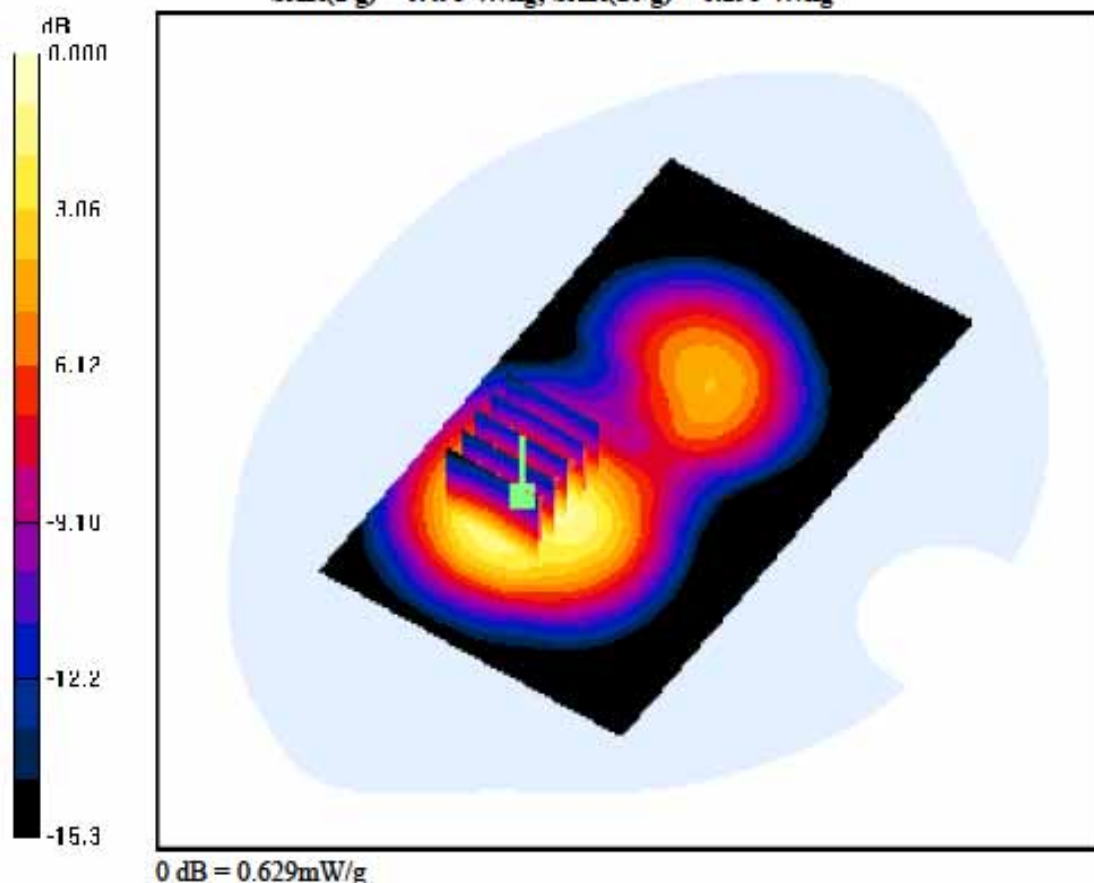

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Rear, PCS1900 GPRS Class 8 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.758 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.277 W/kg

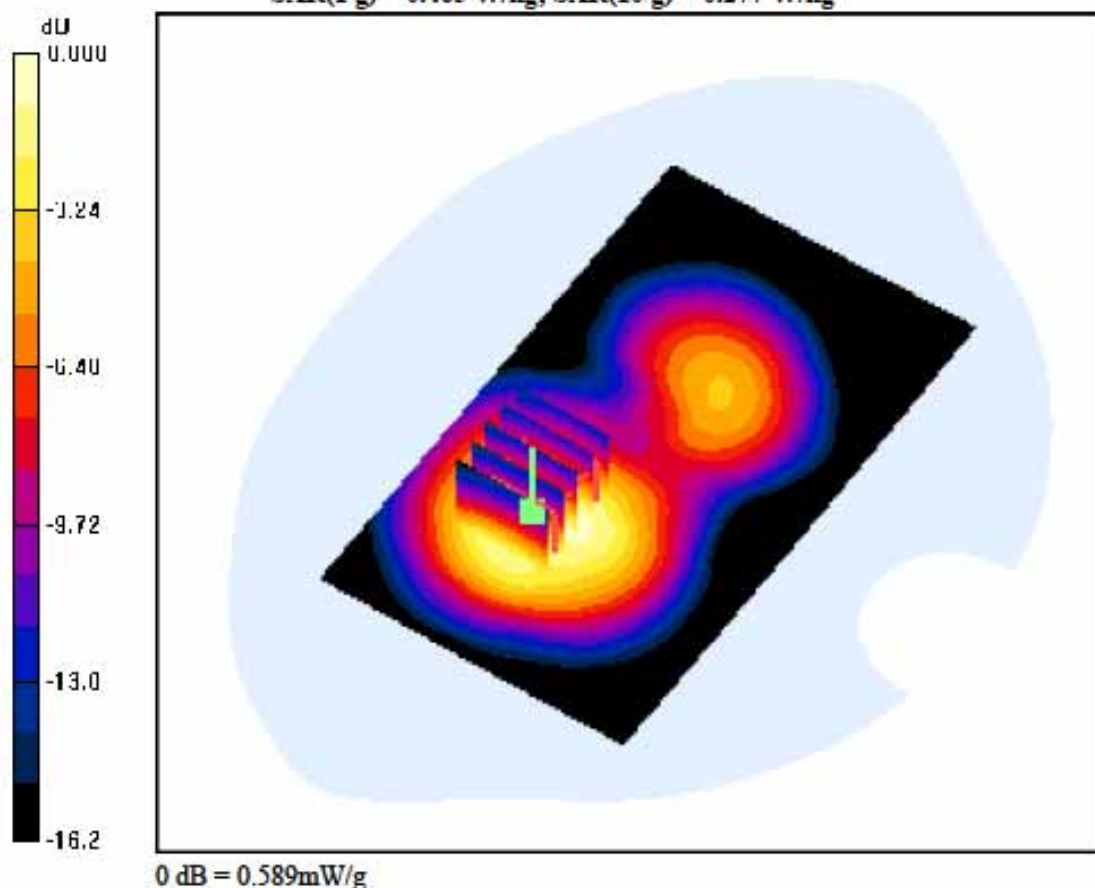

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Rear, PCS1900 GPRS Class 8 Ch. 810, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.146 dB
Peak SAR (extrapolated) = 0.705 W/kg
SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.266 W/kg

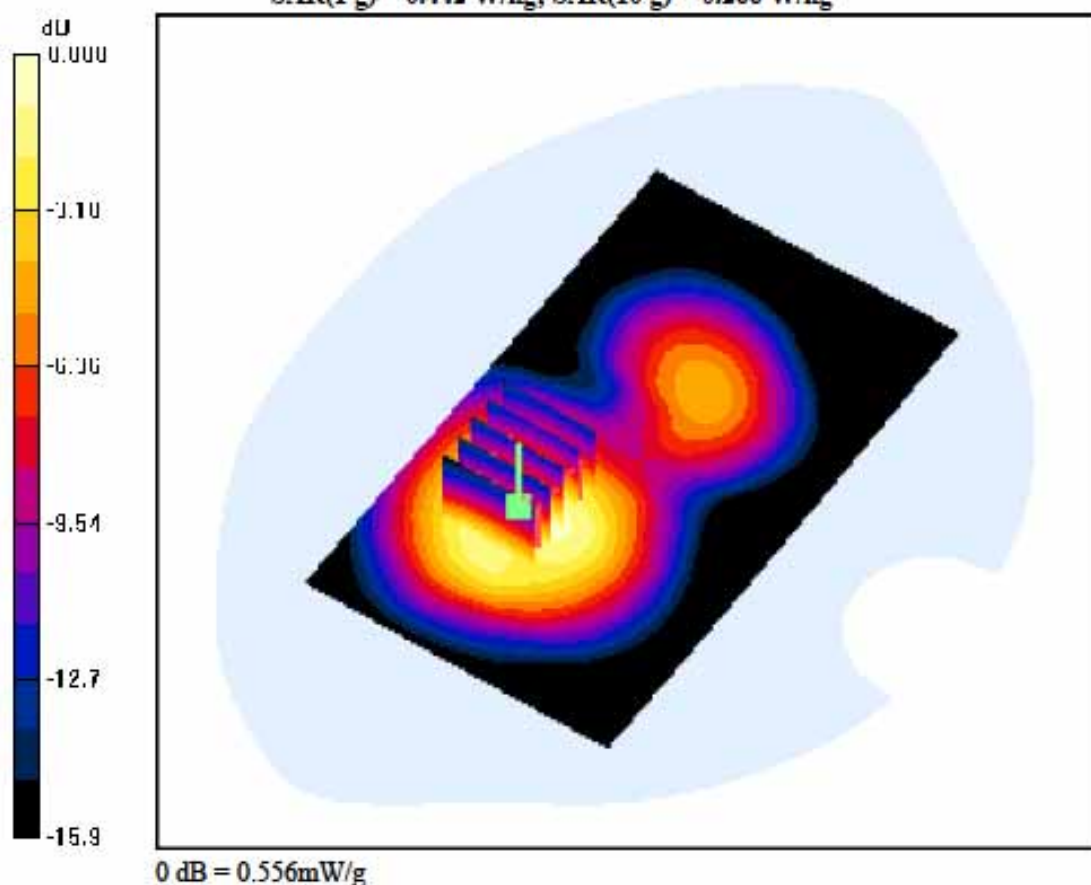

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Rear, PCS1900 GPRS Class 10 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.687 W/kg

SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.255 W/kg

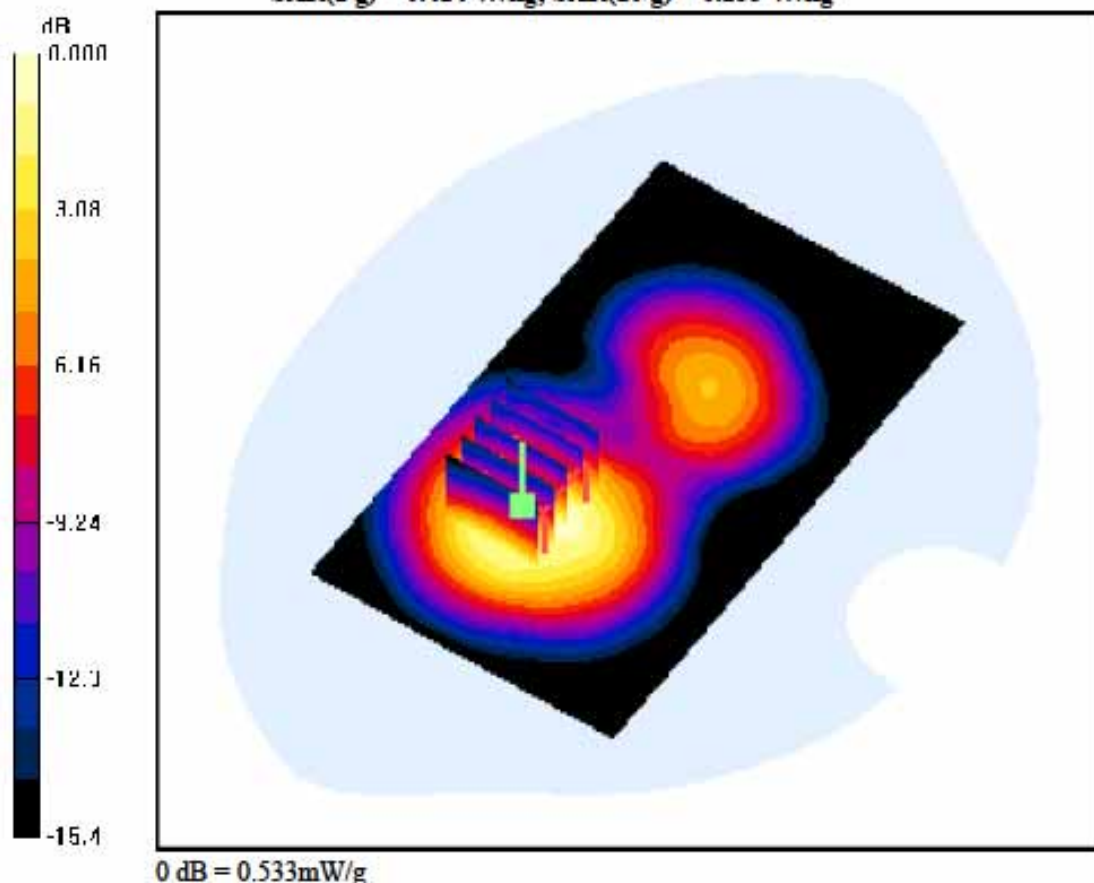

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Rear, PCS1900 GPRS Class 11 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.246 W/kg

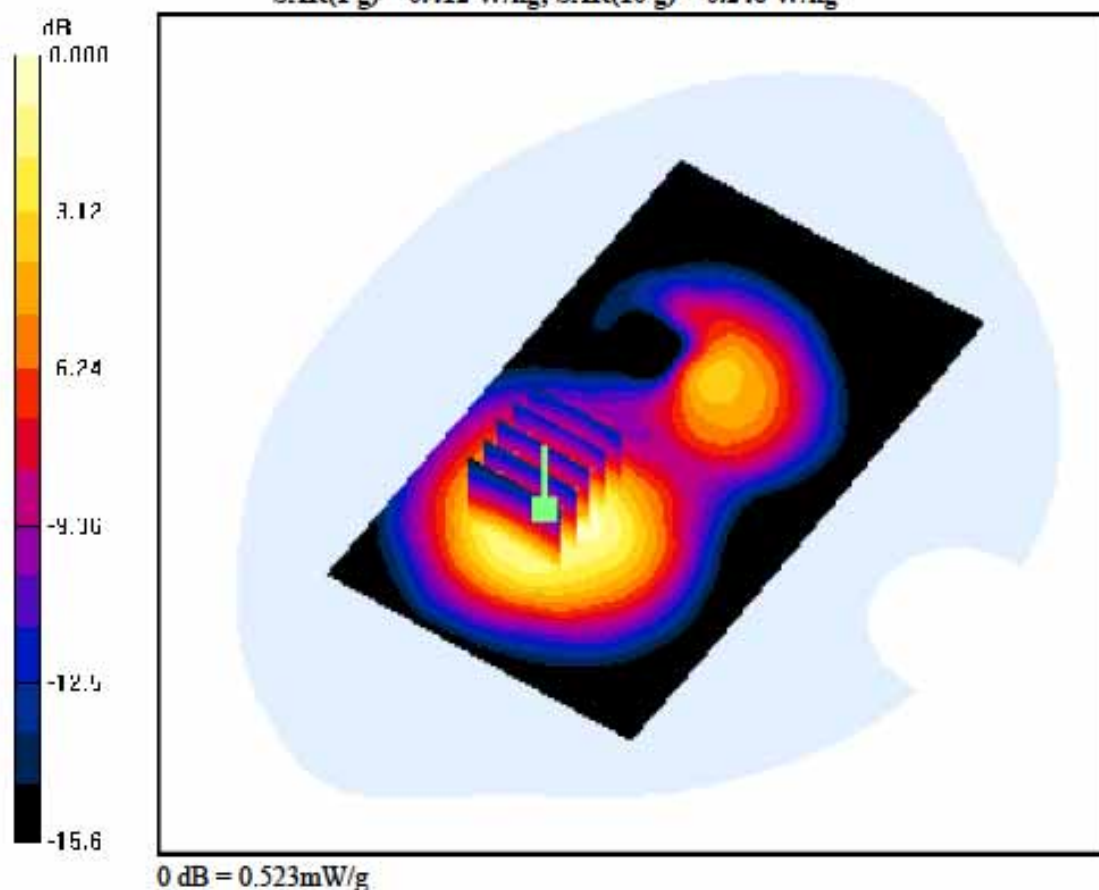

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Rear, PCS1900 GPRS Class 12 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.254 W/kg

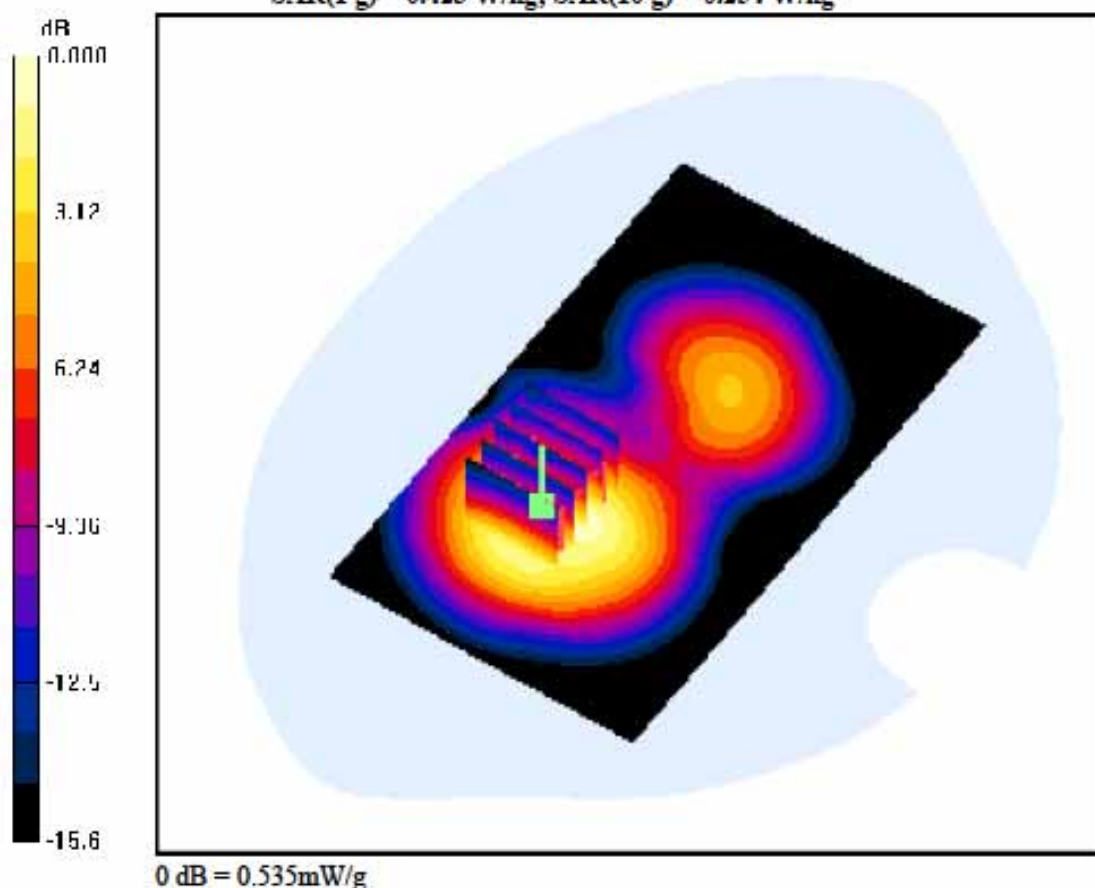

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Right, PCS1900 GPRS Class 8 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.087 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.056 W/kg

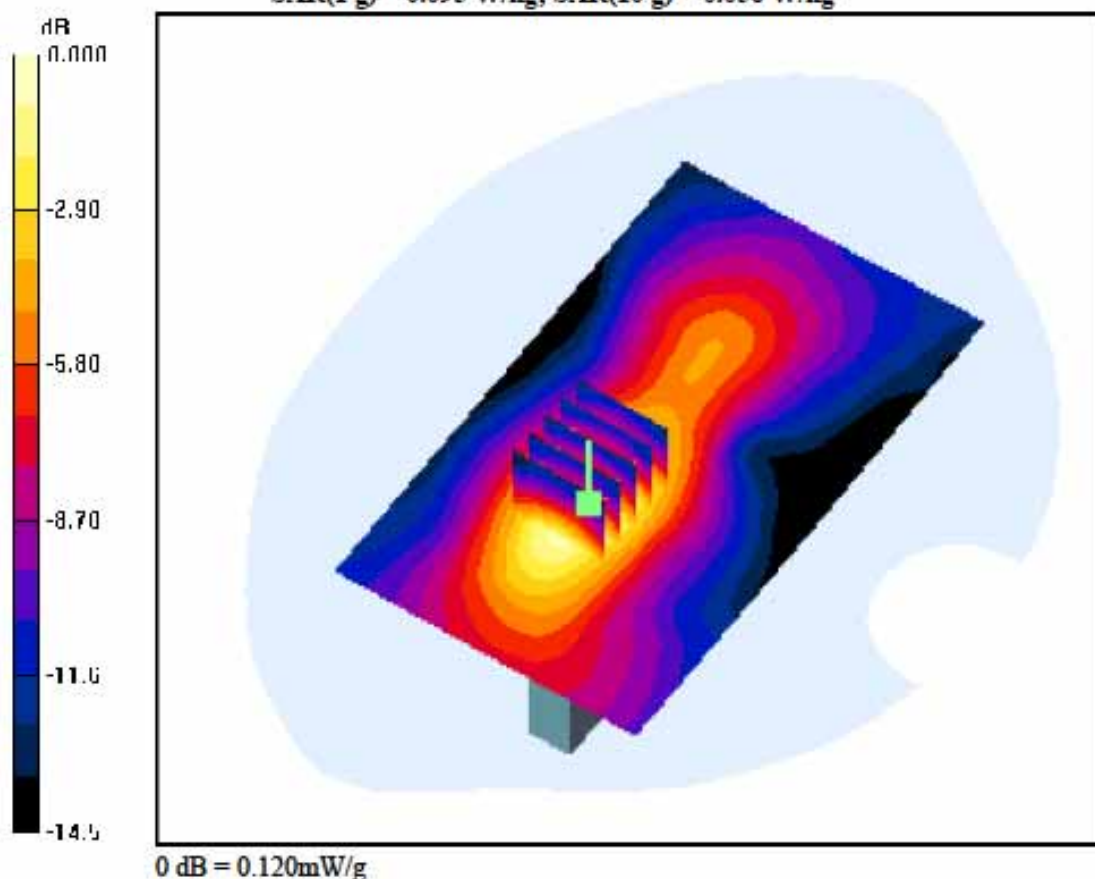

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Left, PCS1900 GPRS Class 8 Ch. 661, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.142 dB
Peak SAR (extrapolated) = 0.150 W/kg
SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.057 W/kg

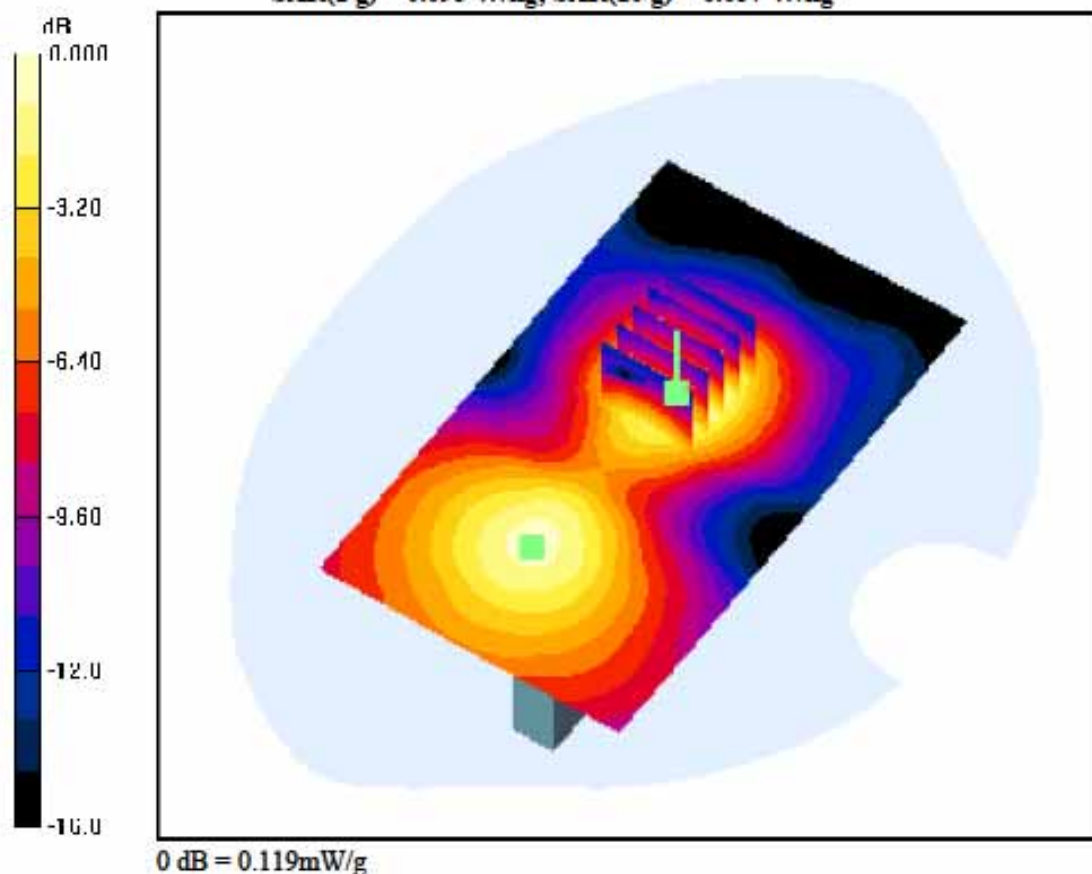

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Left, PCS1900 GPRS Class 8 Ch. 661, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.051 W/kg

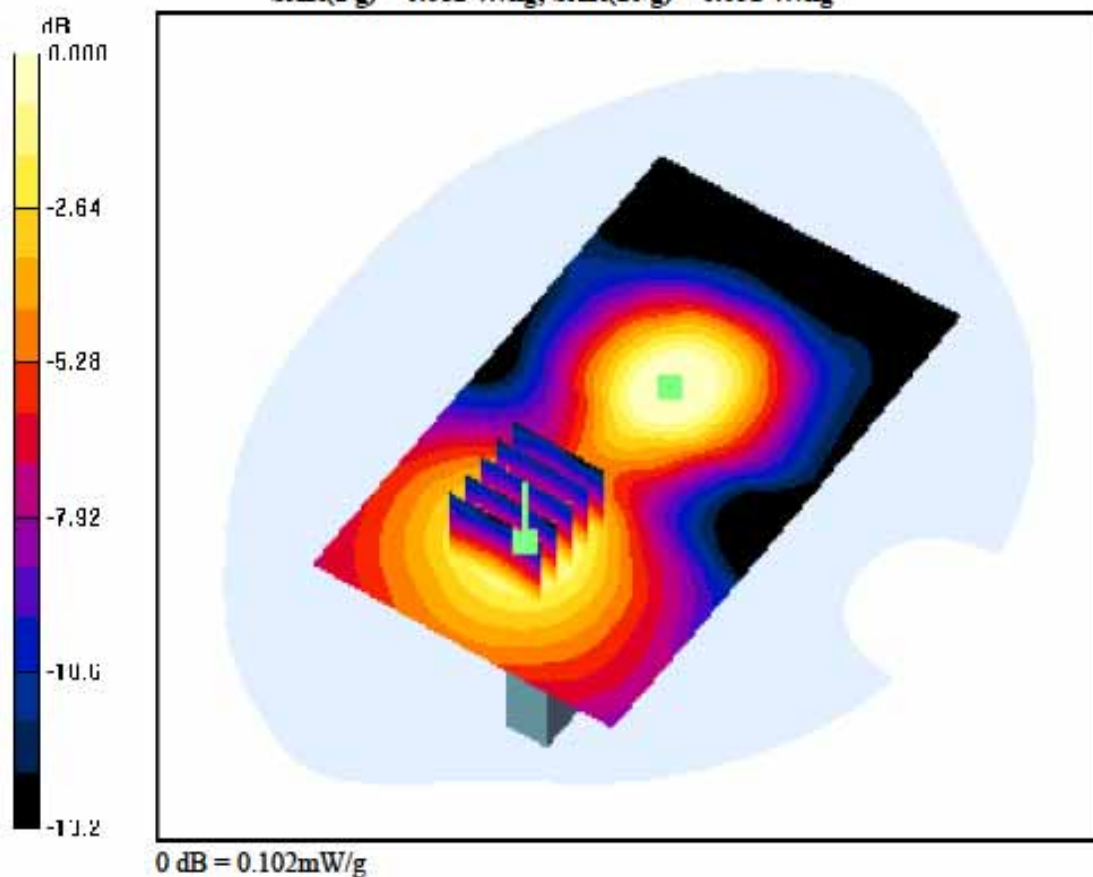

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Bottom, WCDMA850 Ch. 4183, Ant Internal


Area Scan (61x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.118 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.042 W/kg

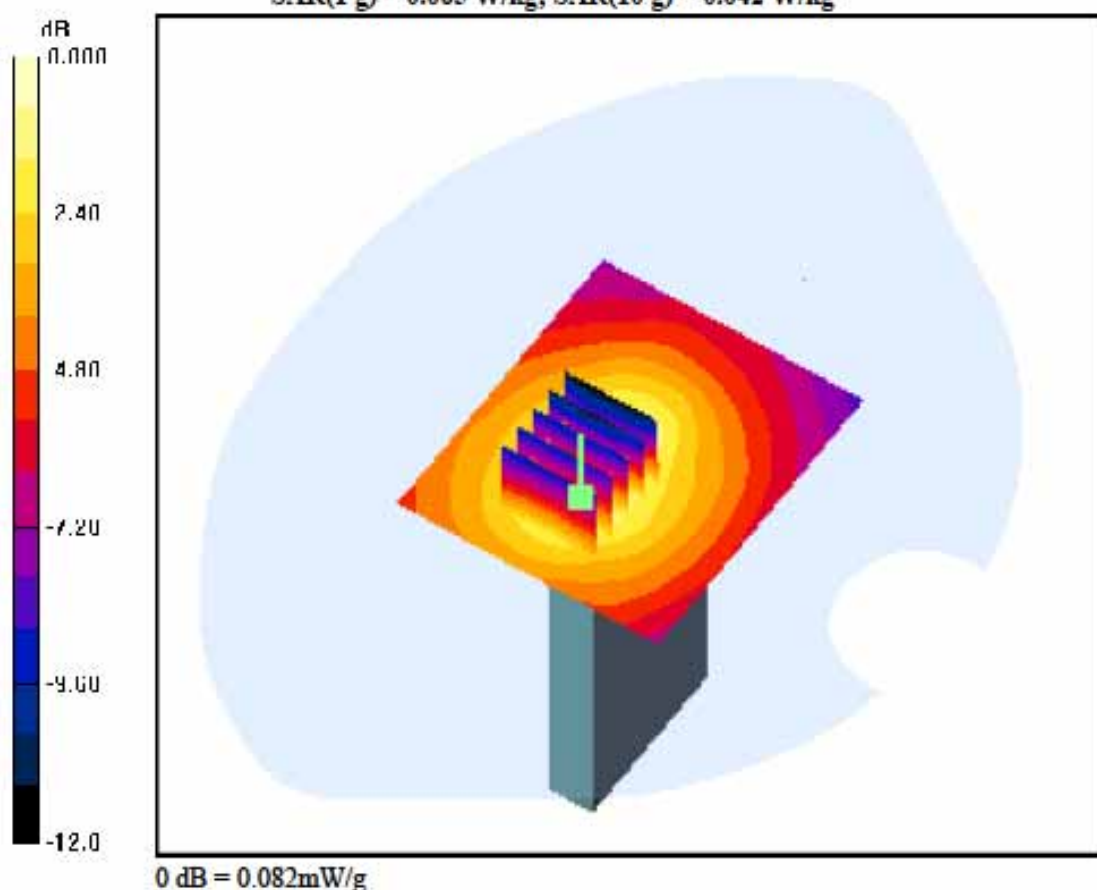

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Front, WCDMA850 Ch. 4183, Ant Internal


Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.356 W/kg

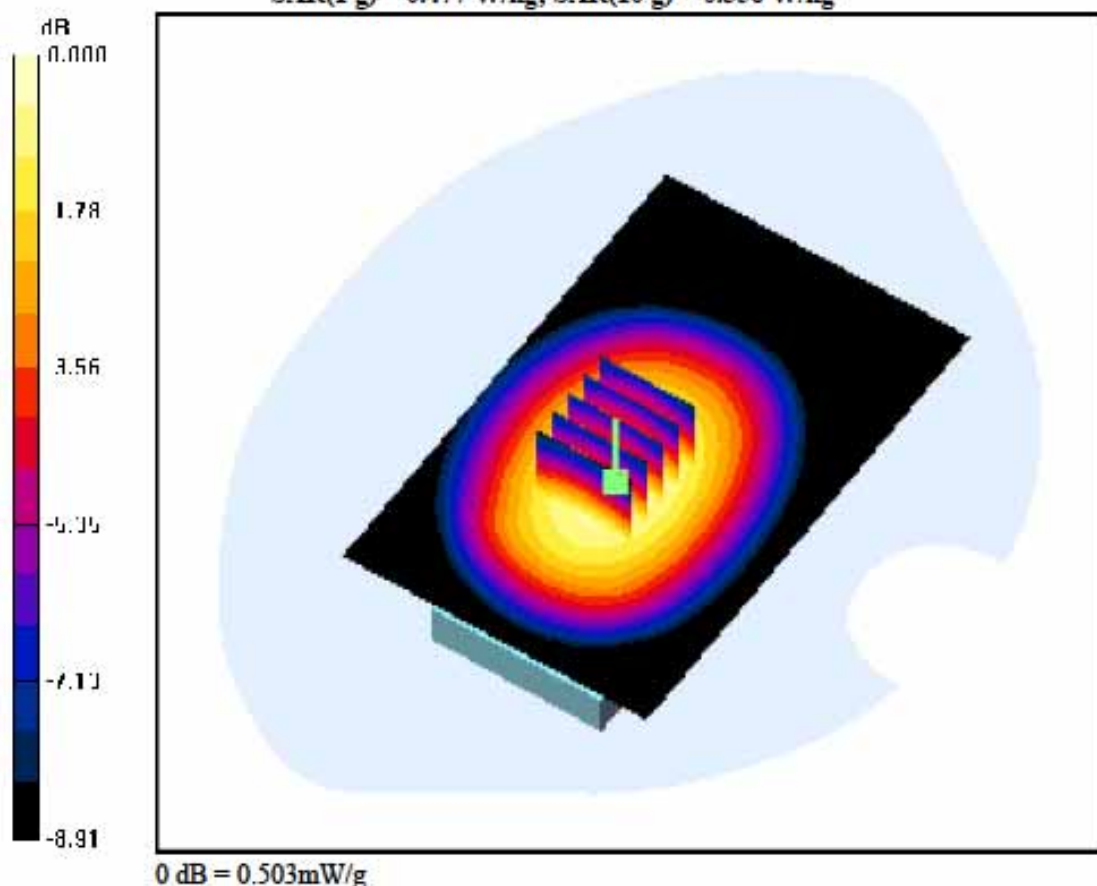

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.946 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Rear, WCDMA850 Ch. 4132, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.005 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.645 W/kg

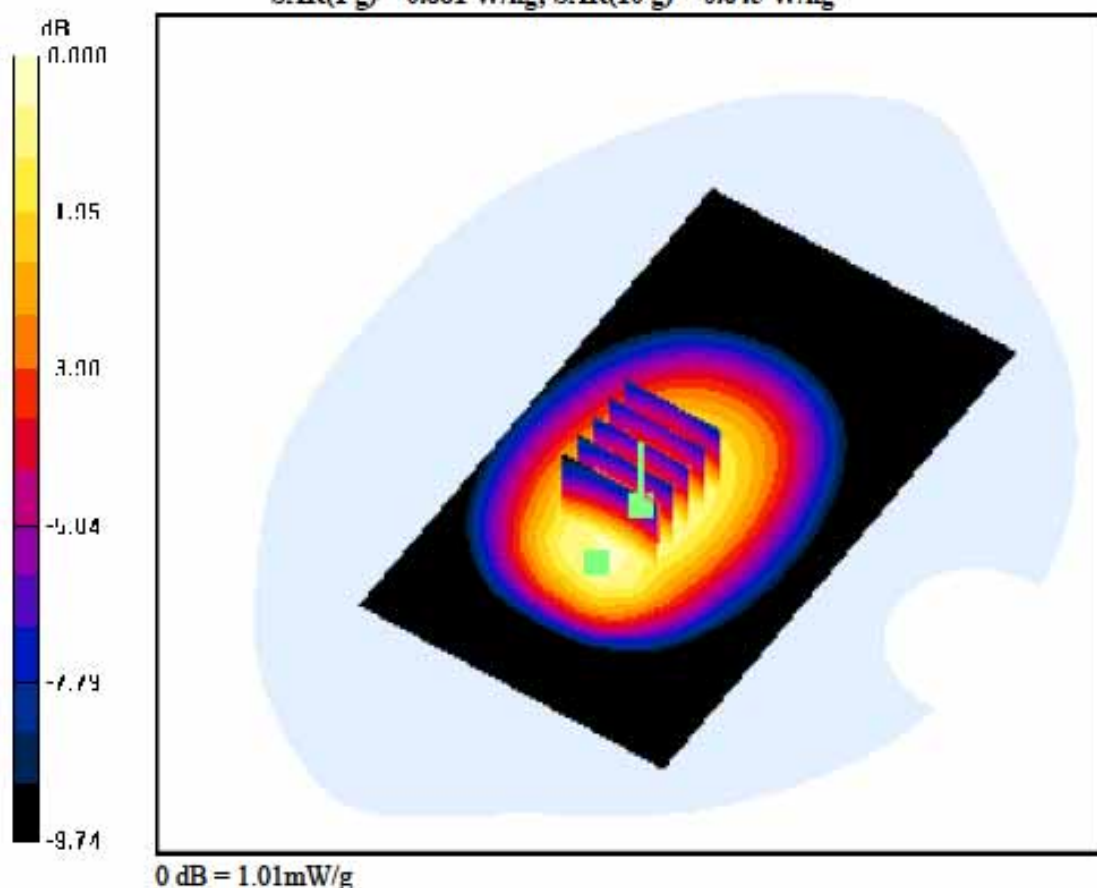

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.946 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Rear, WCDMA850 Ch. 4132, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.005 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.543 W/kg

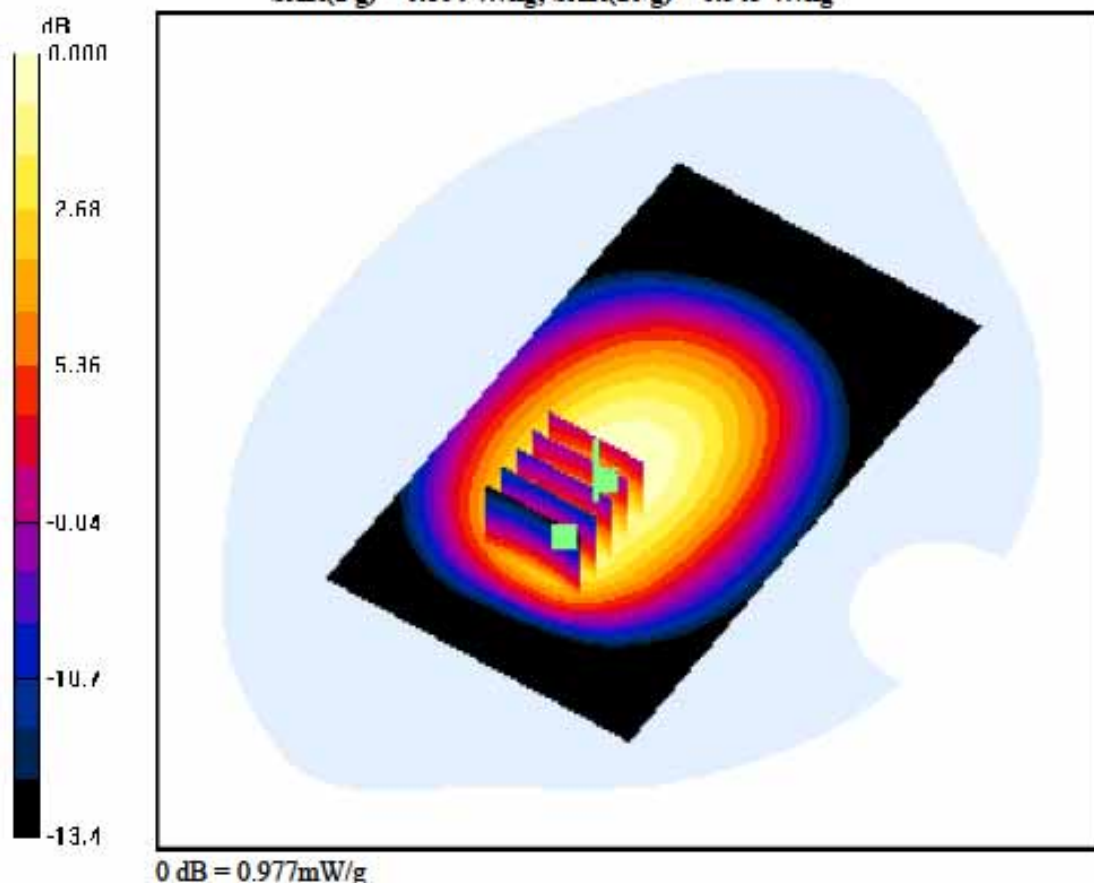

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Rear, WCDMA850 Ch. 4183, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.819 W/kg; SAR(10 g) = 0.601 W/kg

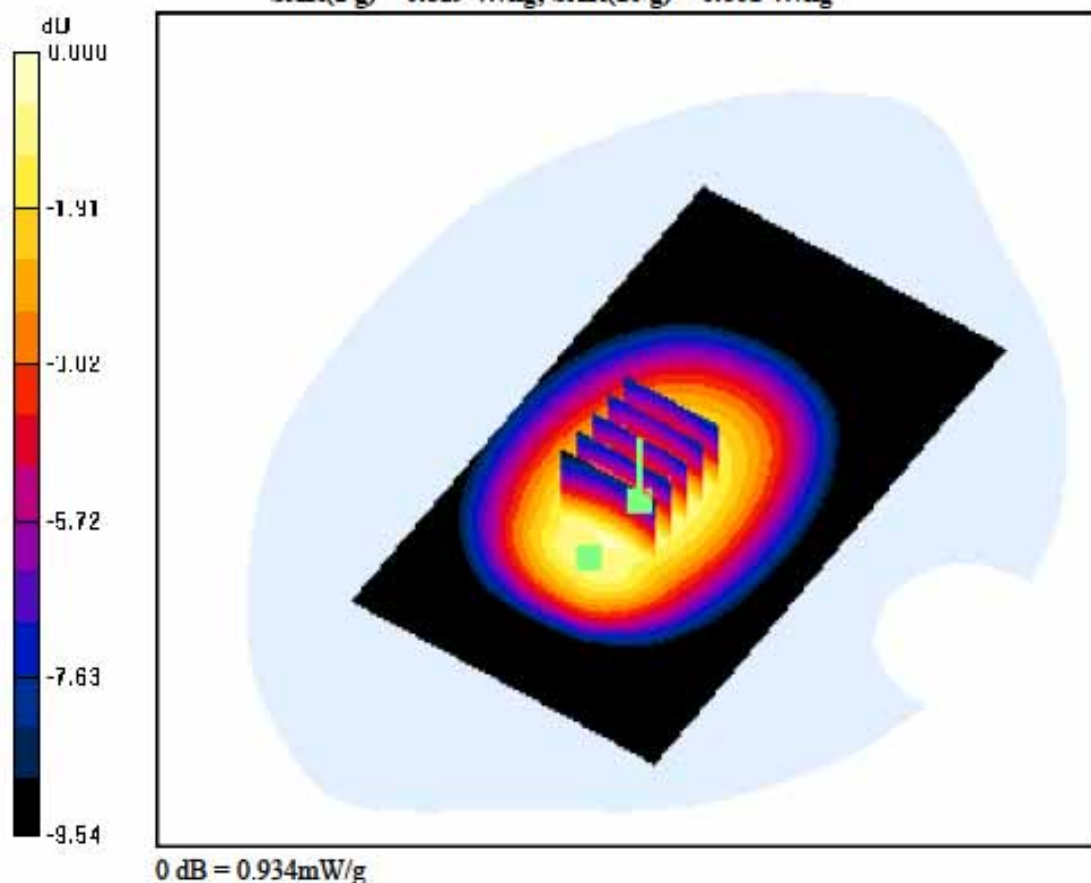

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Rear, WCDMA850 Ch. 4183, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.749 W/kg; SAR(10 g) = 0.501 W/kg

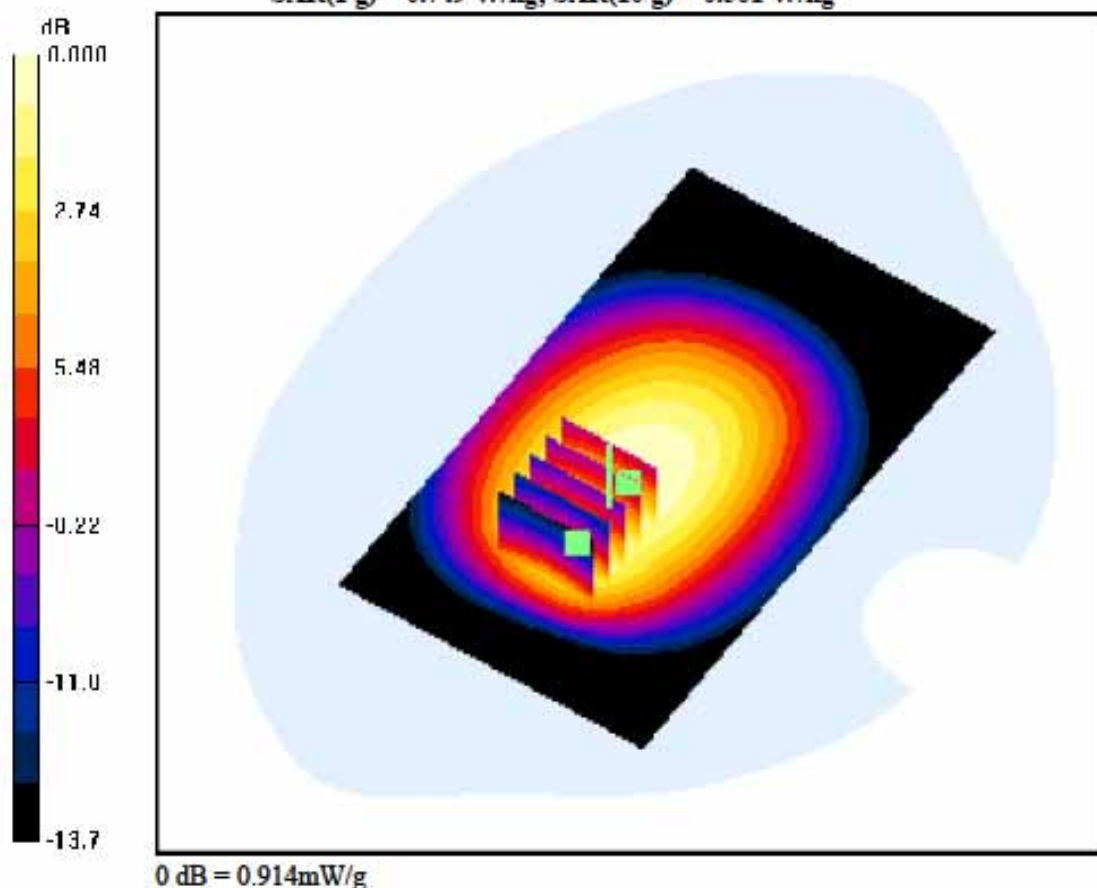

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Rear, WCDMA850 Ch. 4233, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.973 W/kg; SAR(10 g) = 0.711 W/kg

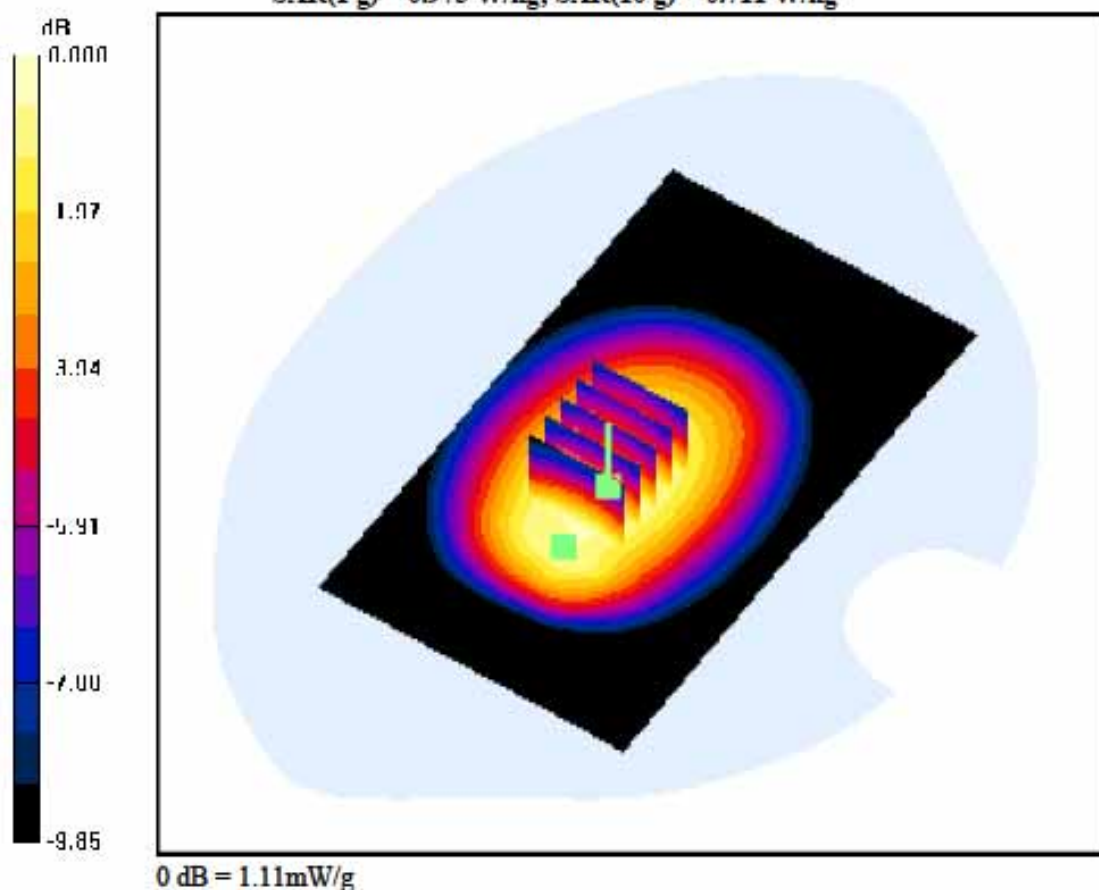

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Rear, WCDMA850 Ch. 4233, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.577 W/kg

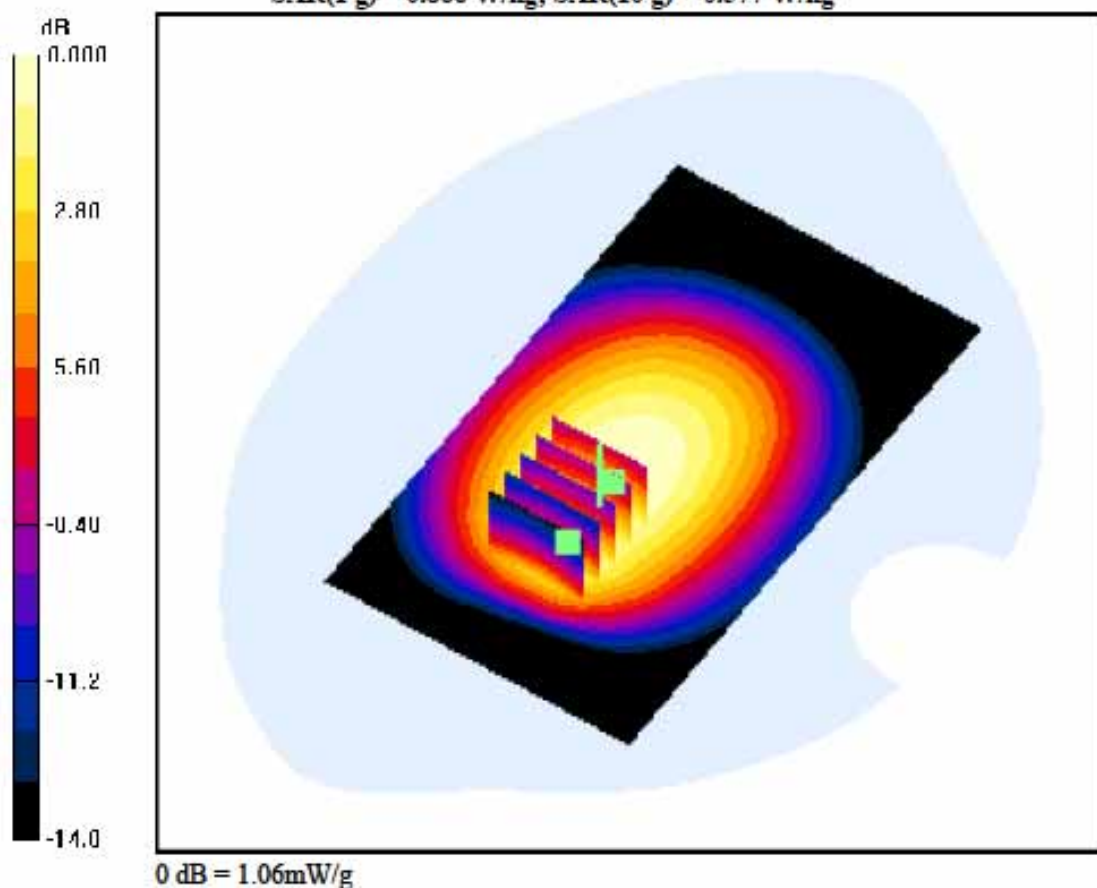

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Right, WCDMA850 Ch. 4183, Ant Internal


Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.274 W/kg

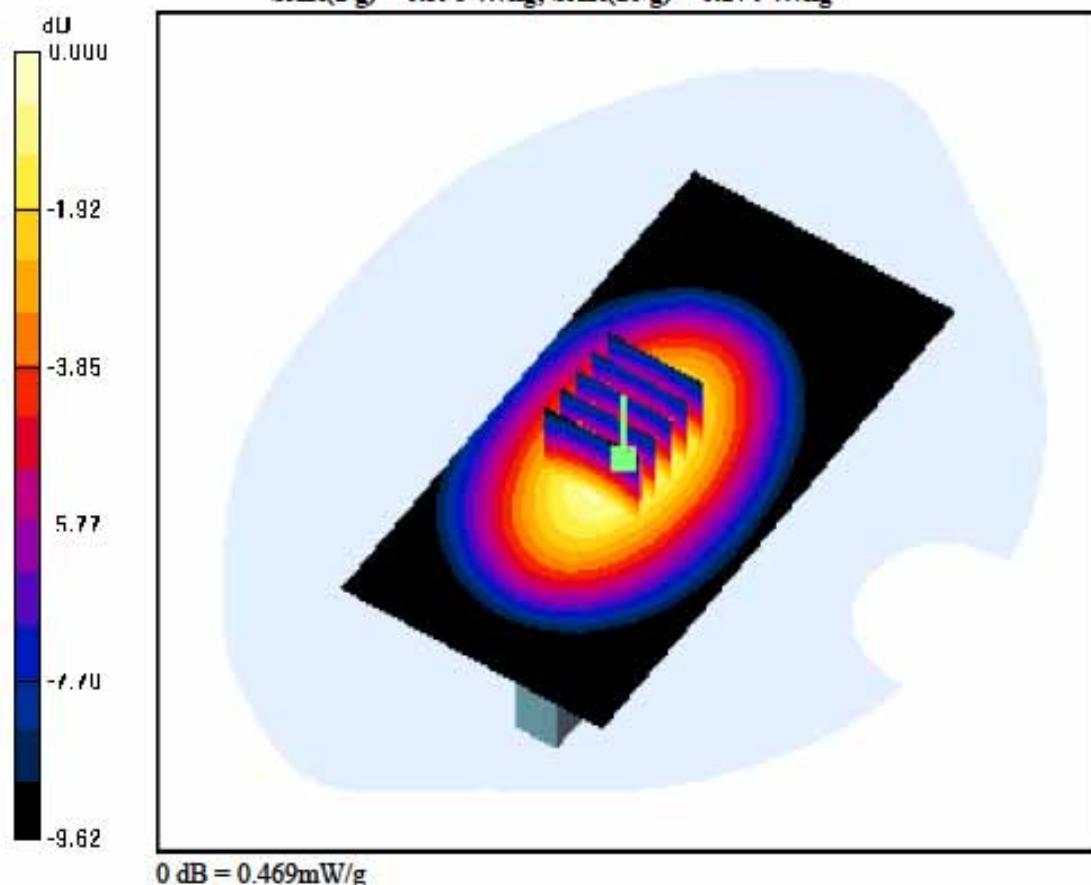

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Left, WCDMA850 Ch. 4183, Ant Internal


Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.285 W/kg

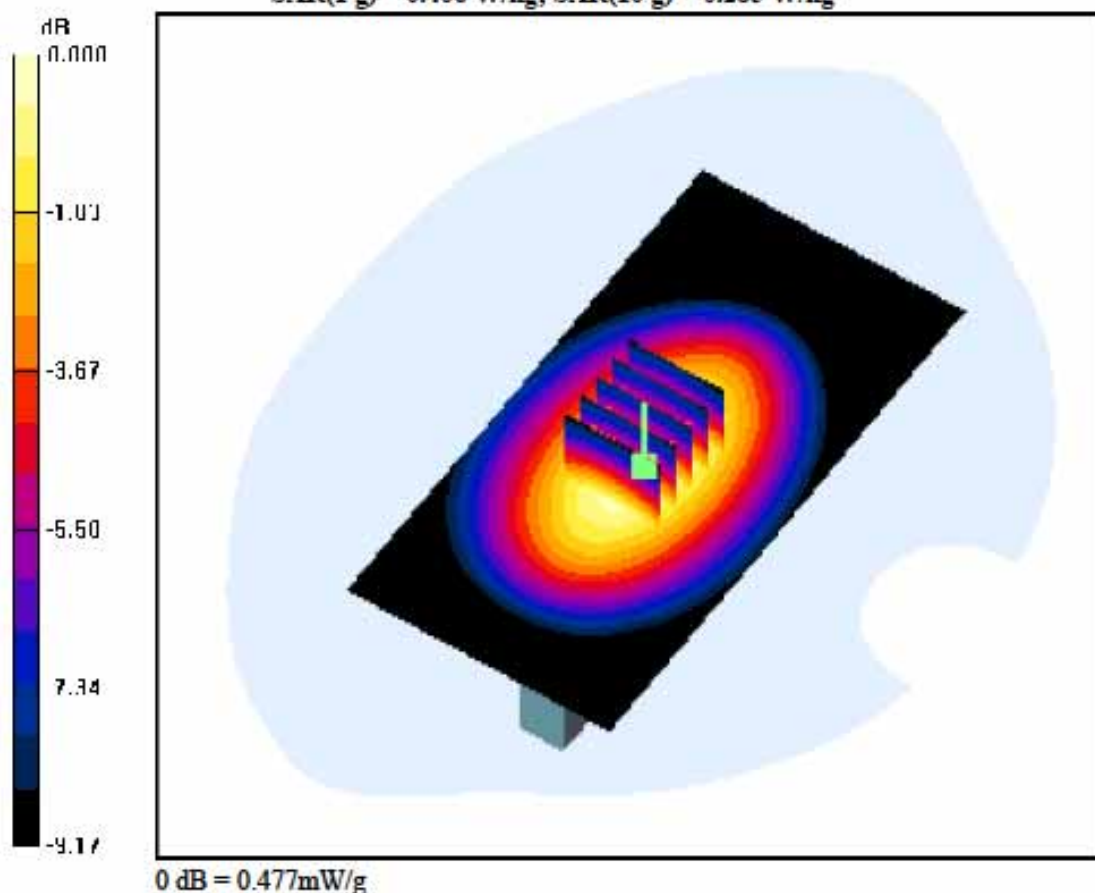

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

1cm space from Body, Bottom, WCDMA1900 Ch. 9400, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Power Drift = 0.107 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.331 W/kg

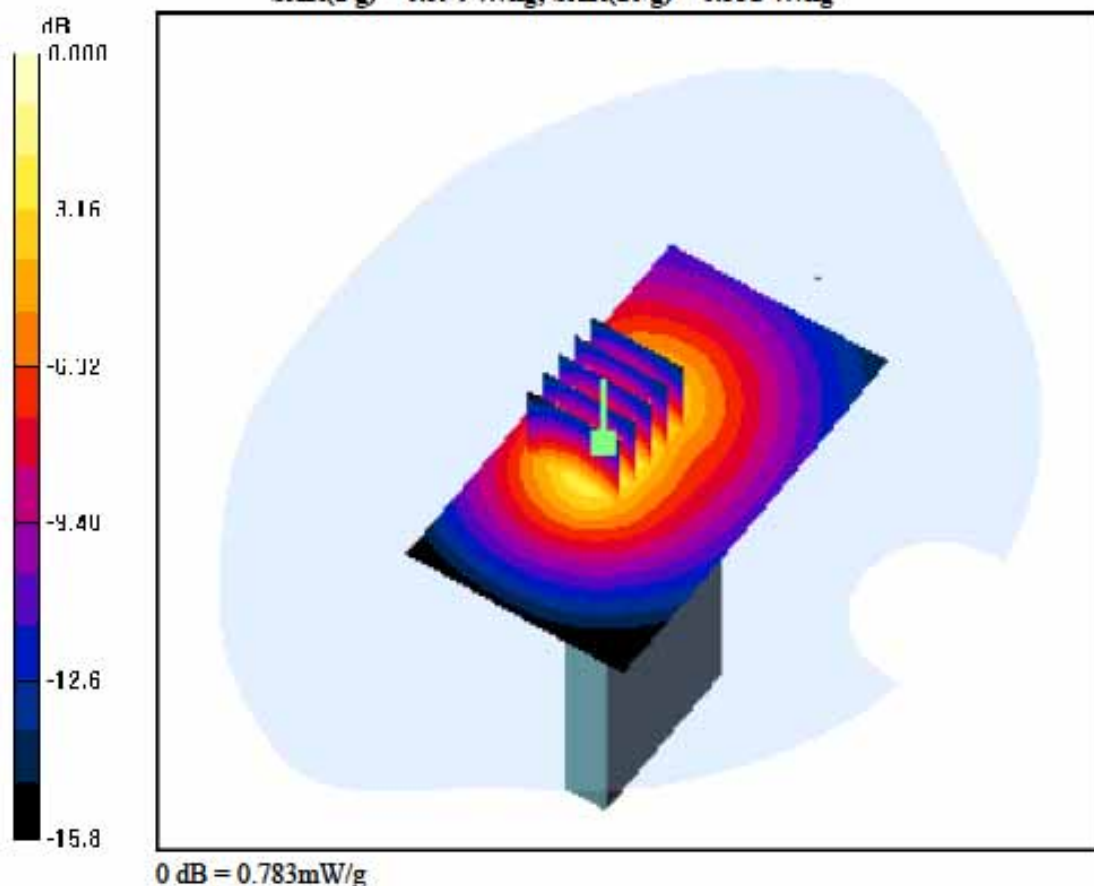

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

1cm space from Body, Front, WCDMA1900 Ch. 9400, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.362 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.432 W/kg

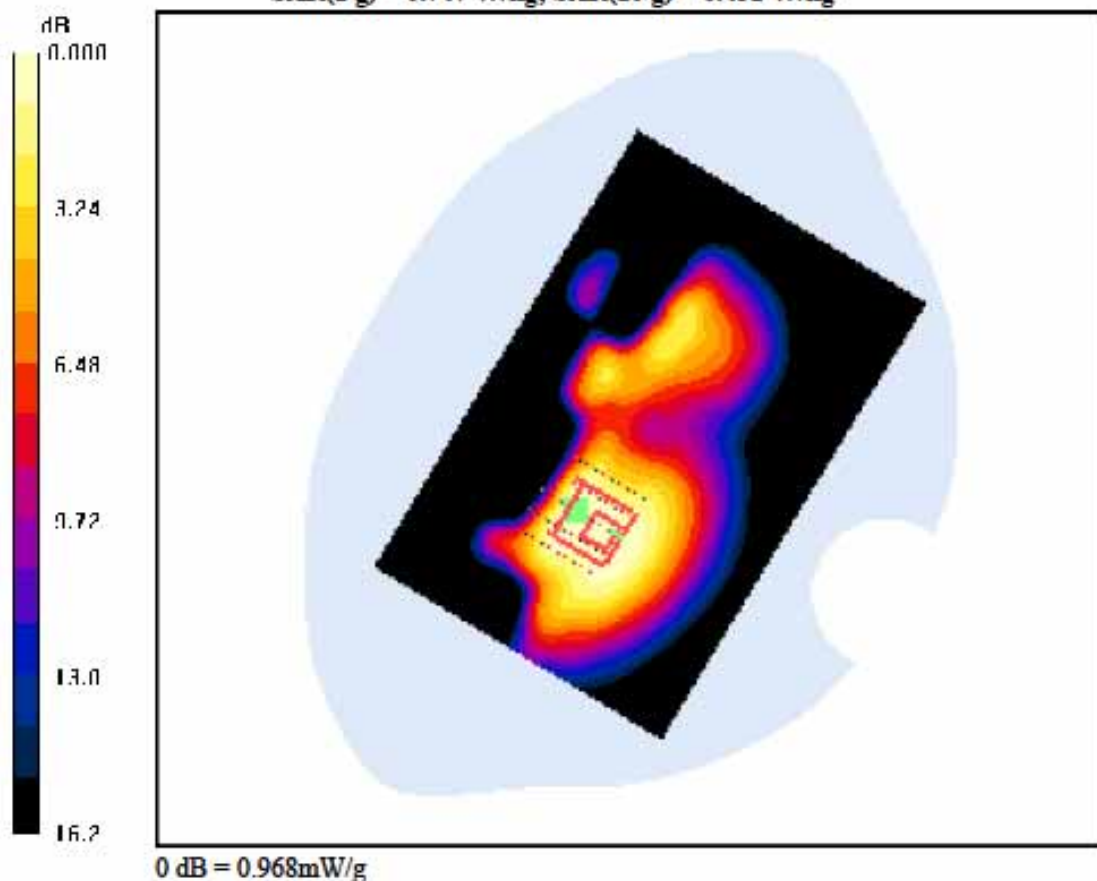

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

1cm space from Body, Rear, WCDMA1900 Ch. 9262, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.674 W/kg

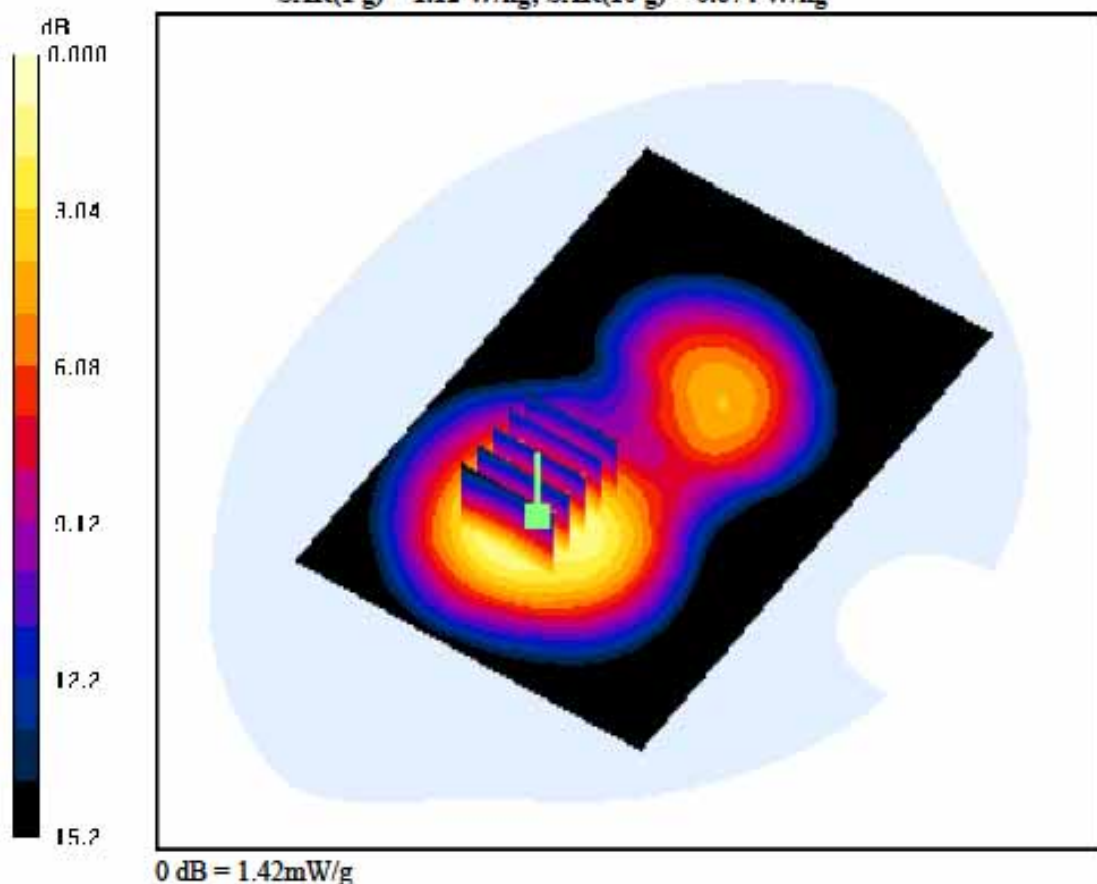

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

1cm space from Body, Rear, WCDMA1900 Ch. 9400, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.229 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.692 W/kg

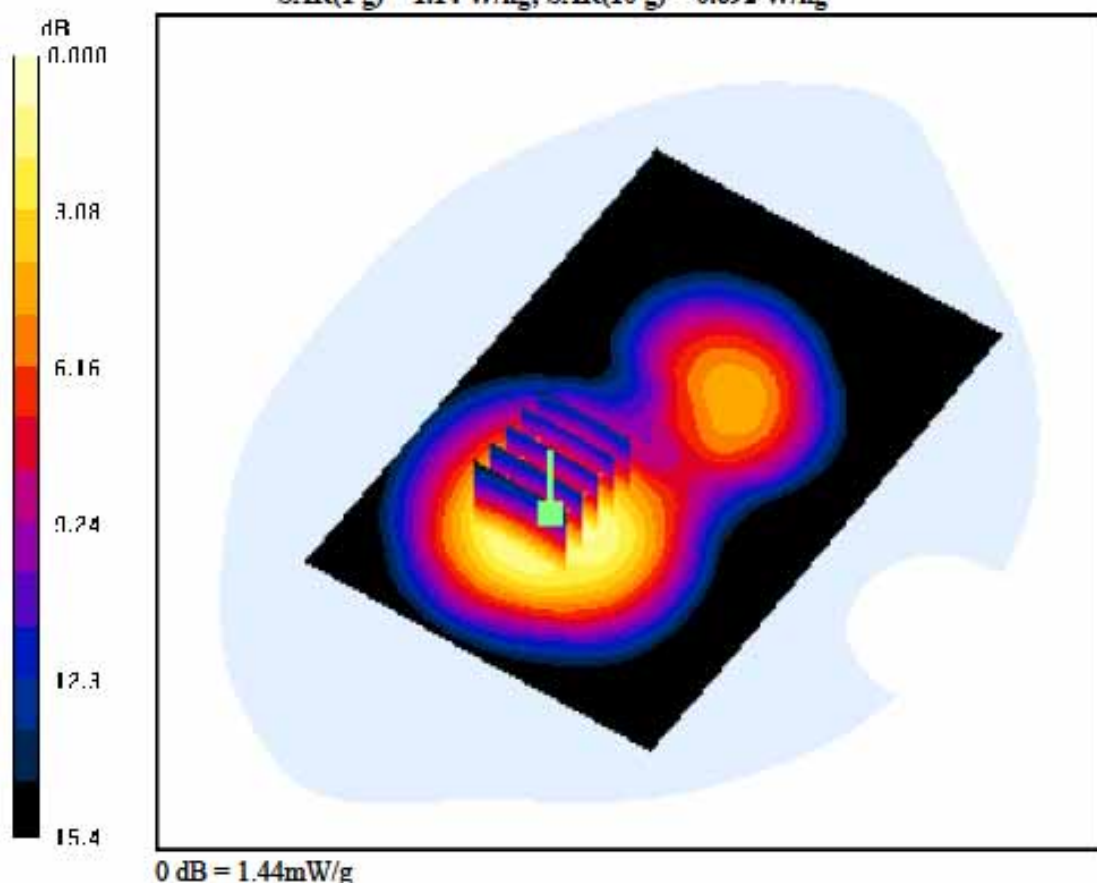

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

1cm space from Body, Rear, WCDMA1900 Ch. 9538, Ant Internal**Area Scan (81x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.070 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.697 W/kg

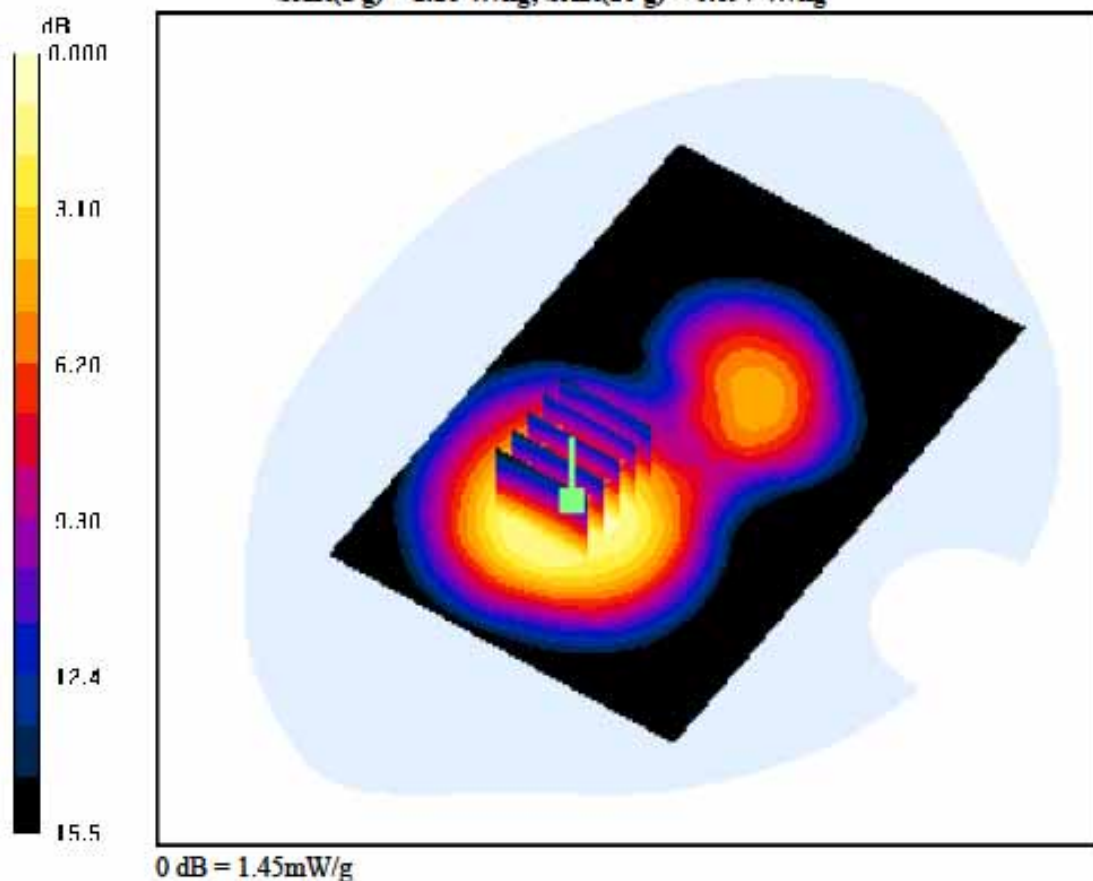

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

1cm space from Body, Right, WCDMA1900 Ch. 9400, Ant Internal**Area Scan (61x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.158 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.146 W/kg

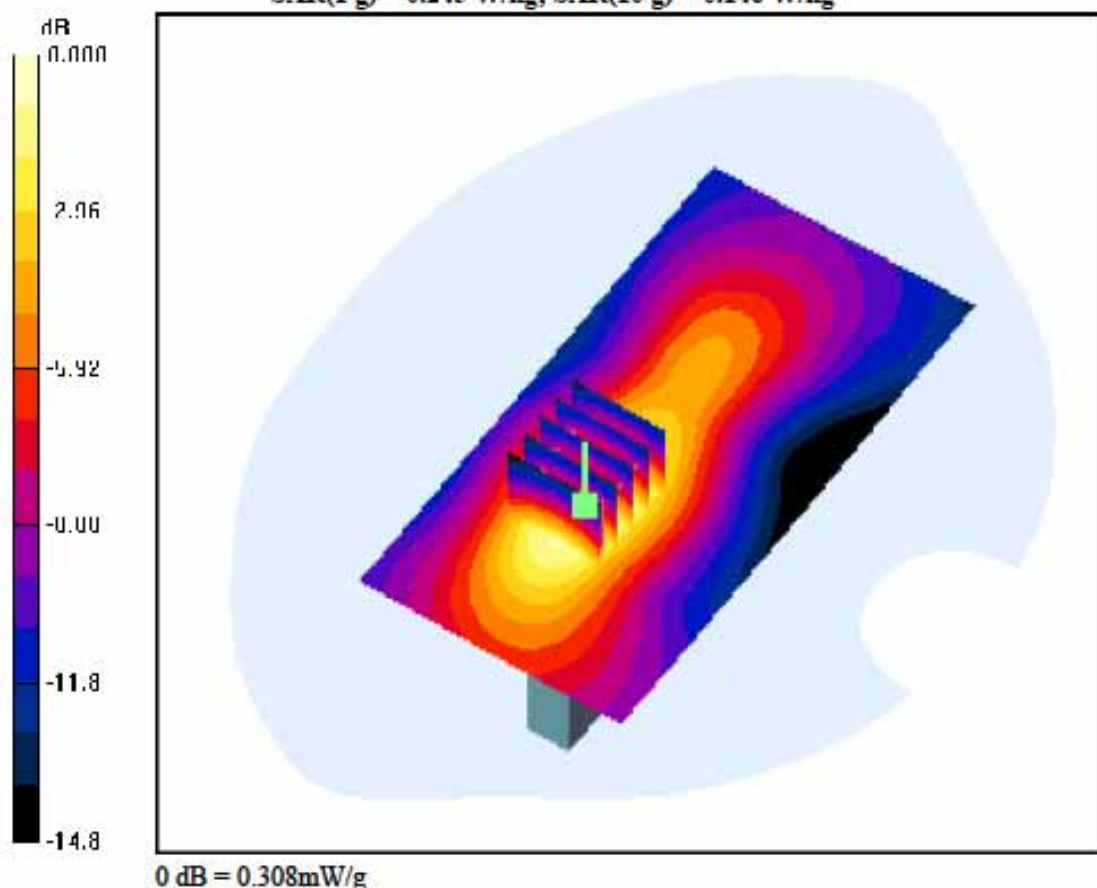

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

1cm space from Body, Left, WCDMA1900 Ch. 9400, Ant Internal


Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.242 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.133 W/kg

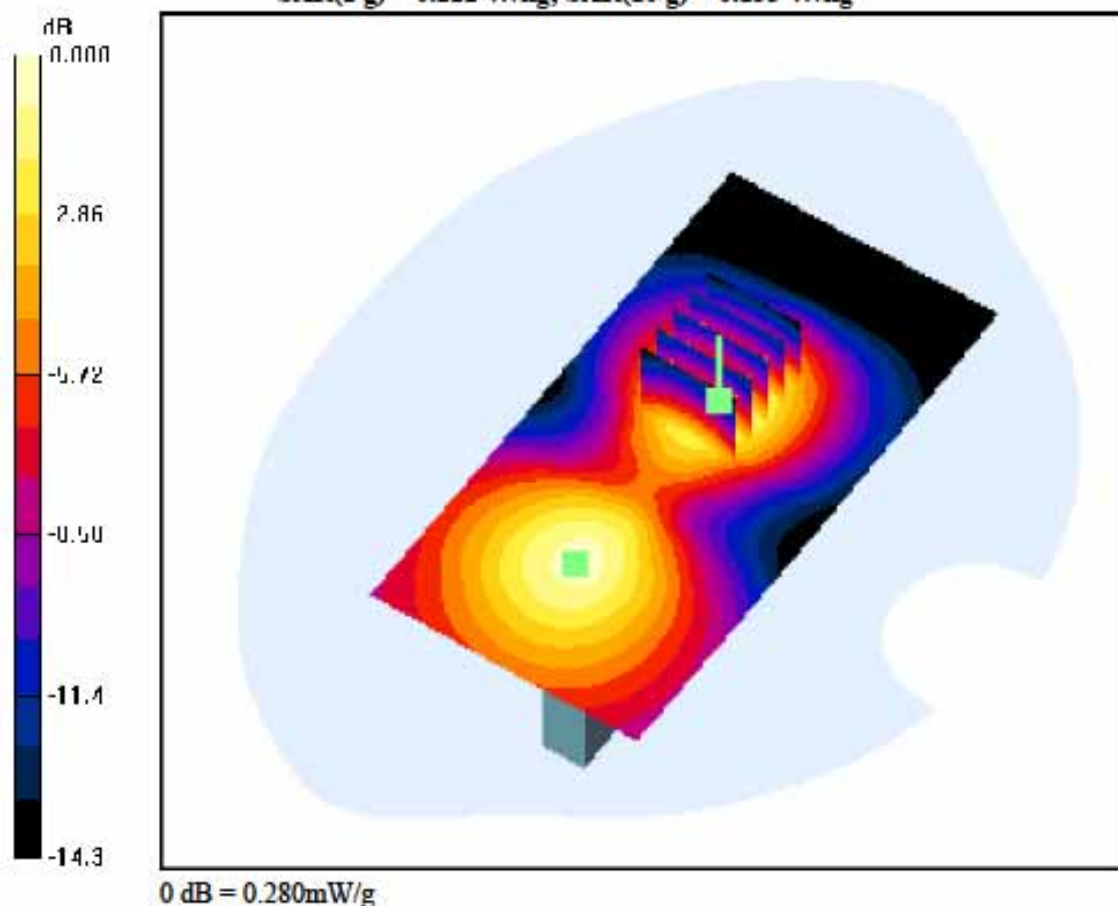

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

1cm space from Body, Left, WCDMA1900 Ch. 9400, Ant Internal


Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.242 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.127 W/kg

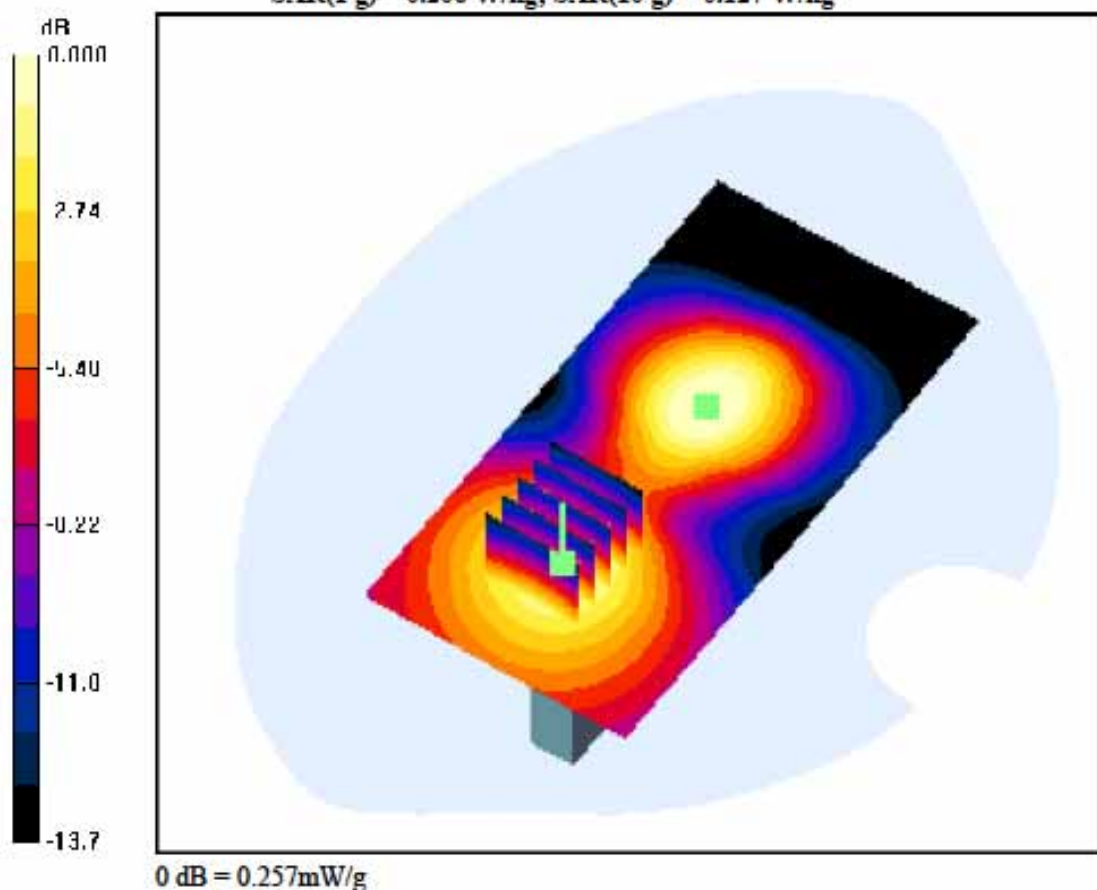

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-17; Ambient Temp: 22.3; Tissue Temp: 22.8

1cm space from Body, Top, W-LAN(802.11b) Ch. 6, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.071 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.020 W/kg

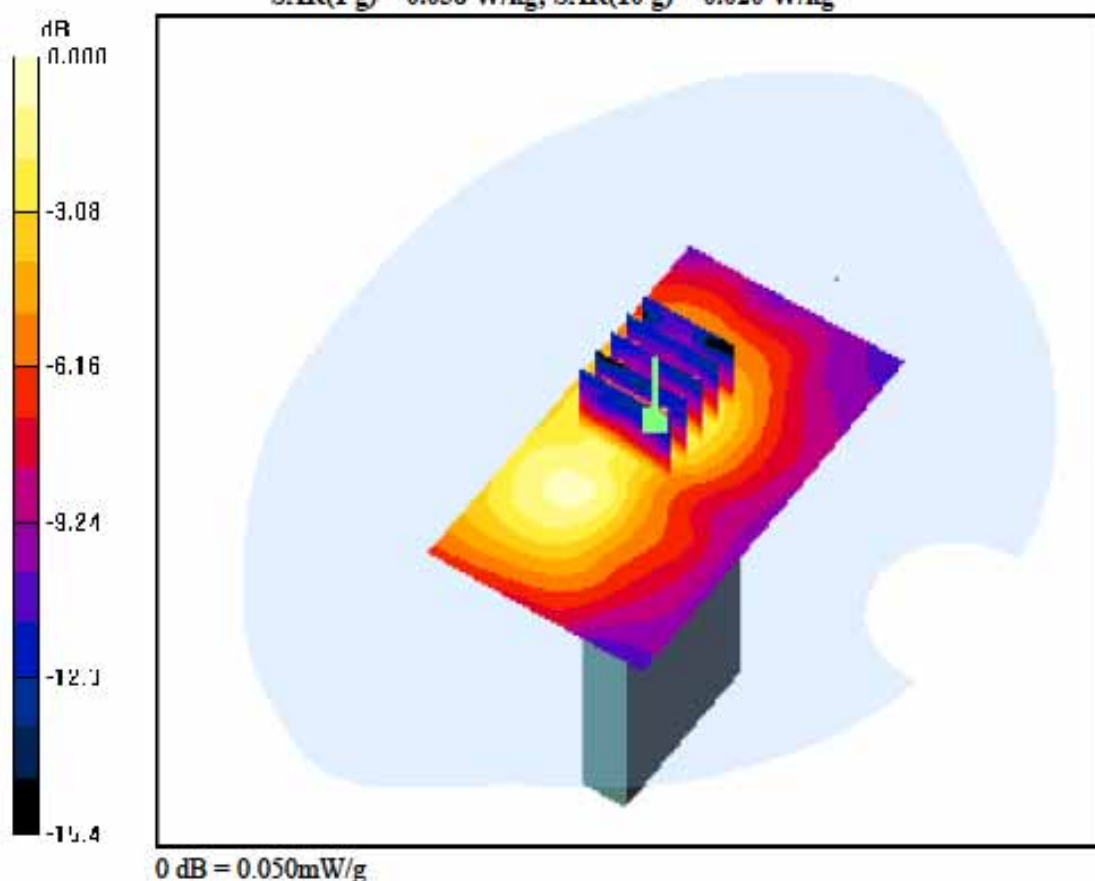

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-17; Ambient Temp: 22.3; Tissue Temp: 22.8

1cm space from Body, Front, W-LAN(802.11b) Ch. 6, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.217 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.037 W/kg

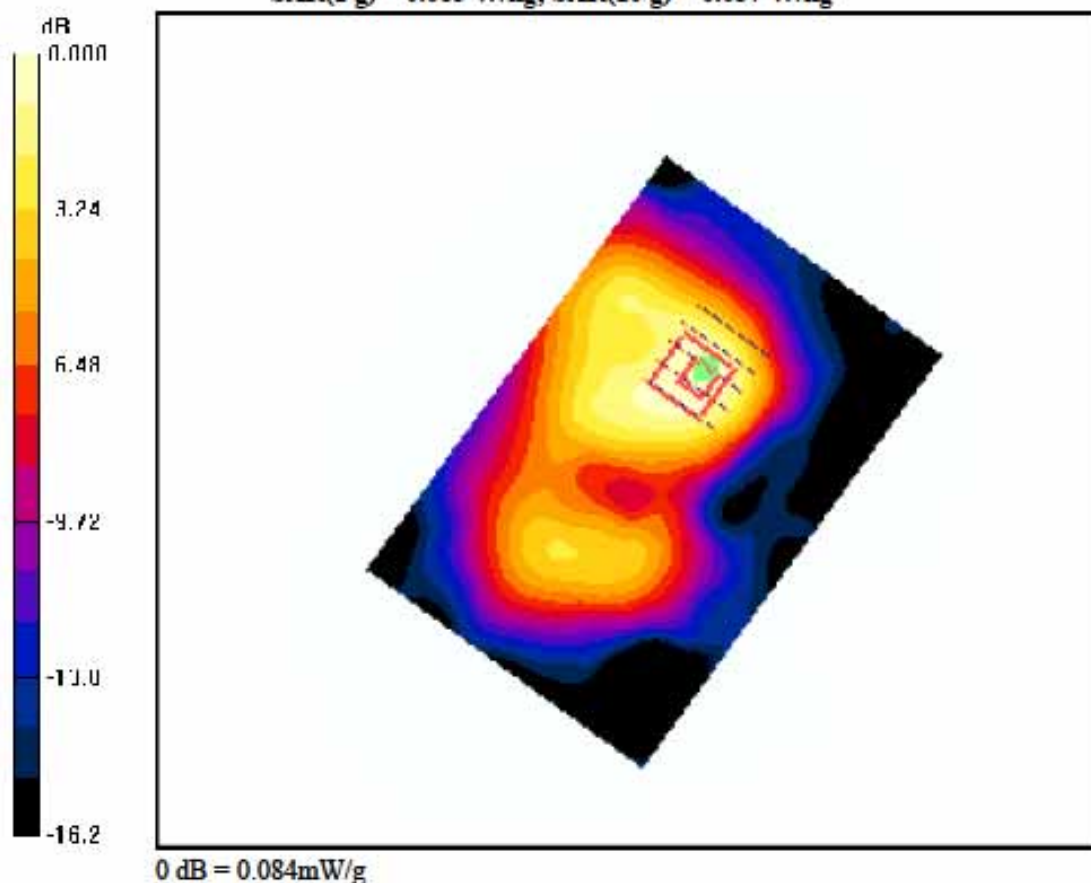

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-17; Ambient Temp: 22.3; Tissue Temp: 22.8

1cm space from Body, Rear, W-LAN(802.11b) Ch. 1, Ant Internal


Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.179 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.077 W/kg

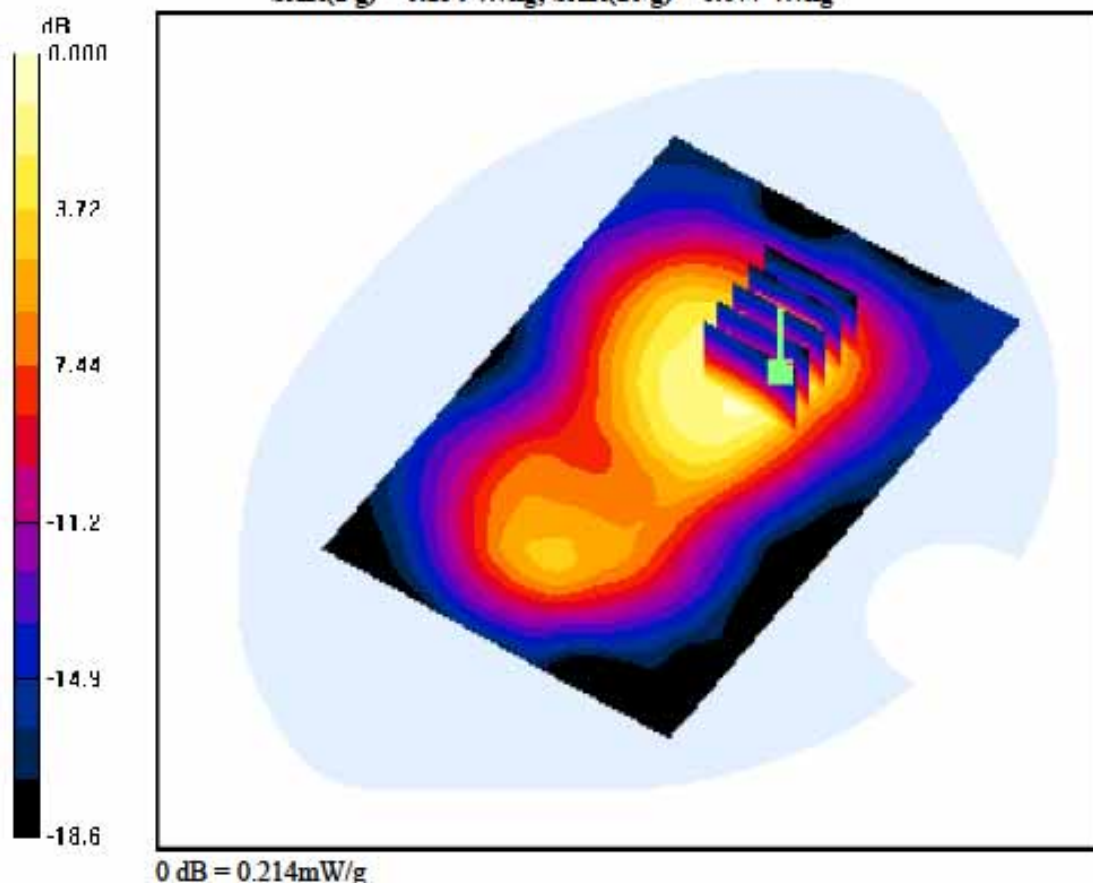

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-17; Ambient Temp: 22.3; Tissue Temp: 22.8

1cm space from Body, Rear, W-LAN(802.11b) Ch. 6, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.230 dB

Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.095 W/kg

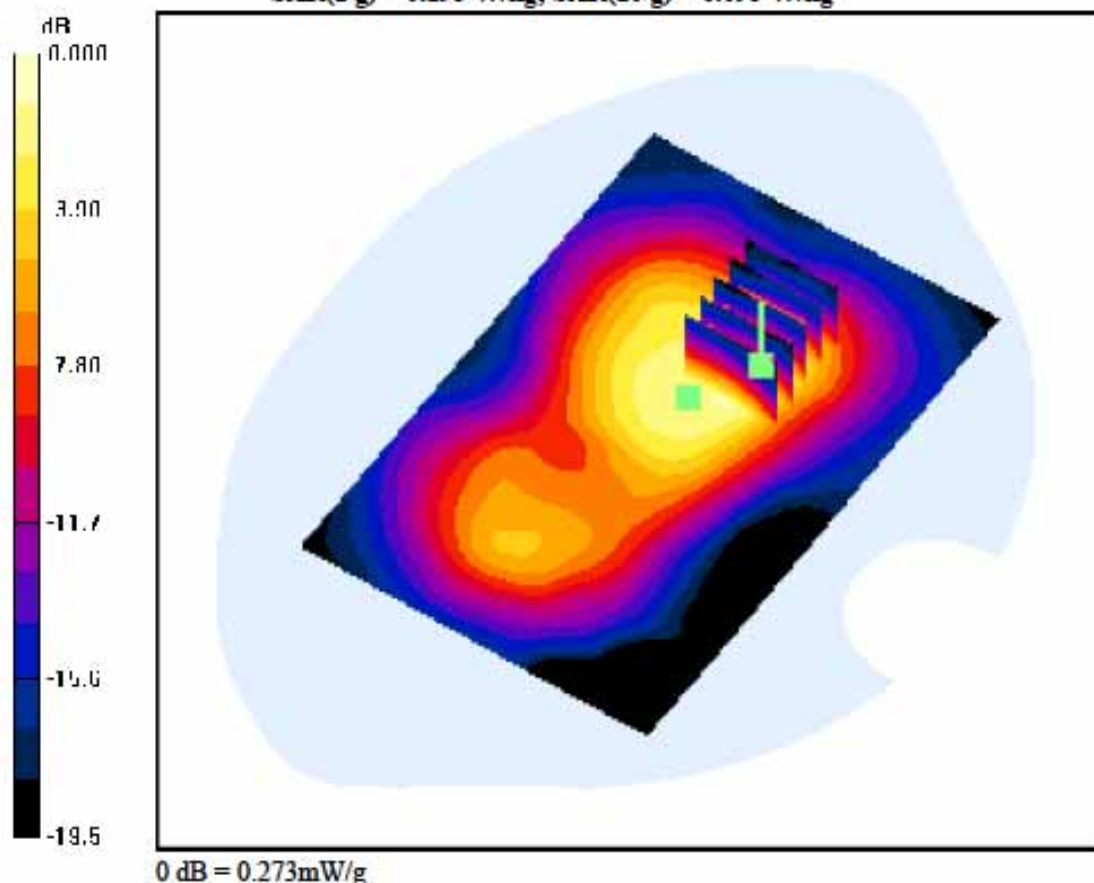

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-17; Ambient Temp: 22.3; Tissue Temp: 22.8

1cm space from Body, Rear, W-LAN(802.11b) Ch. 6, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.230 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.087 W/kg

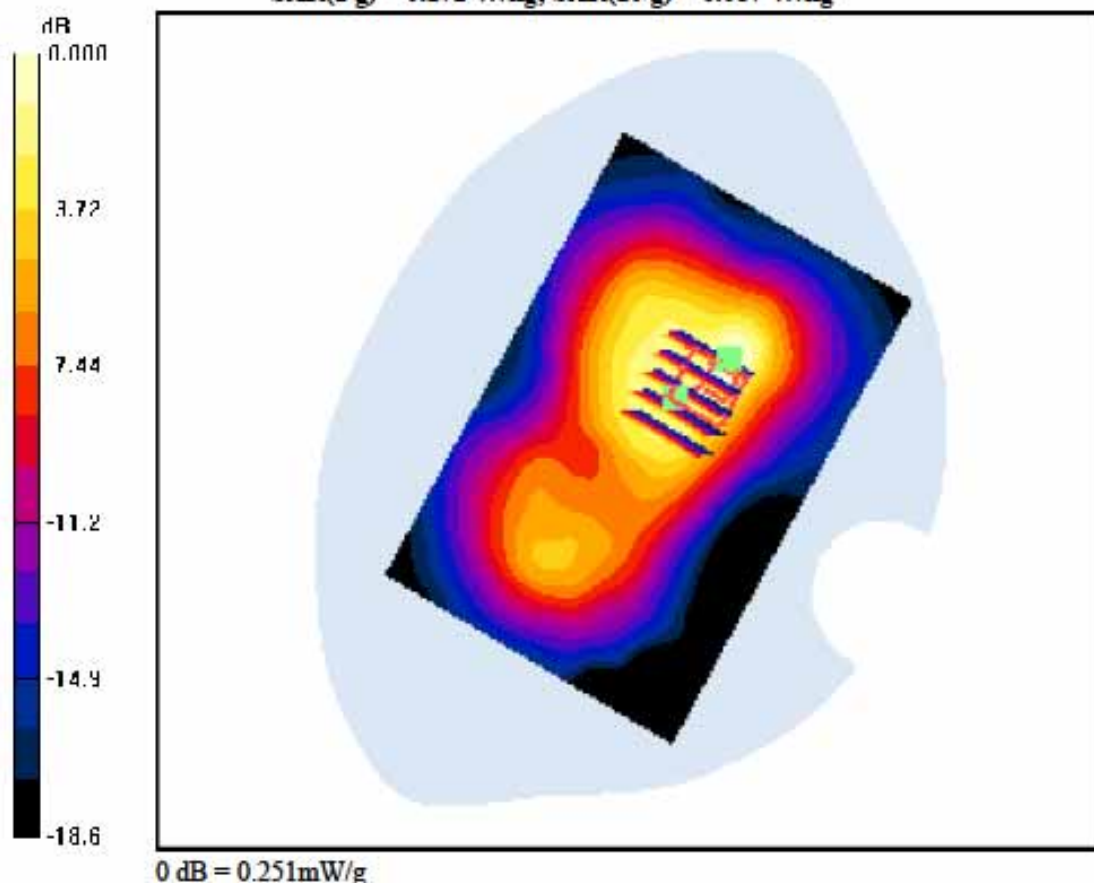

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-17; Ambient Temp: 22.3; Tissue Temp: 22.8

1cm space from Body, Rear, W-LAN(802.11b) Ch. 11, Ant Internal


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.069 W/kg

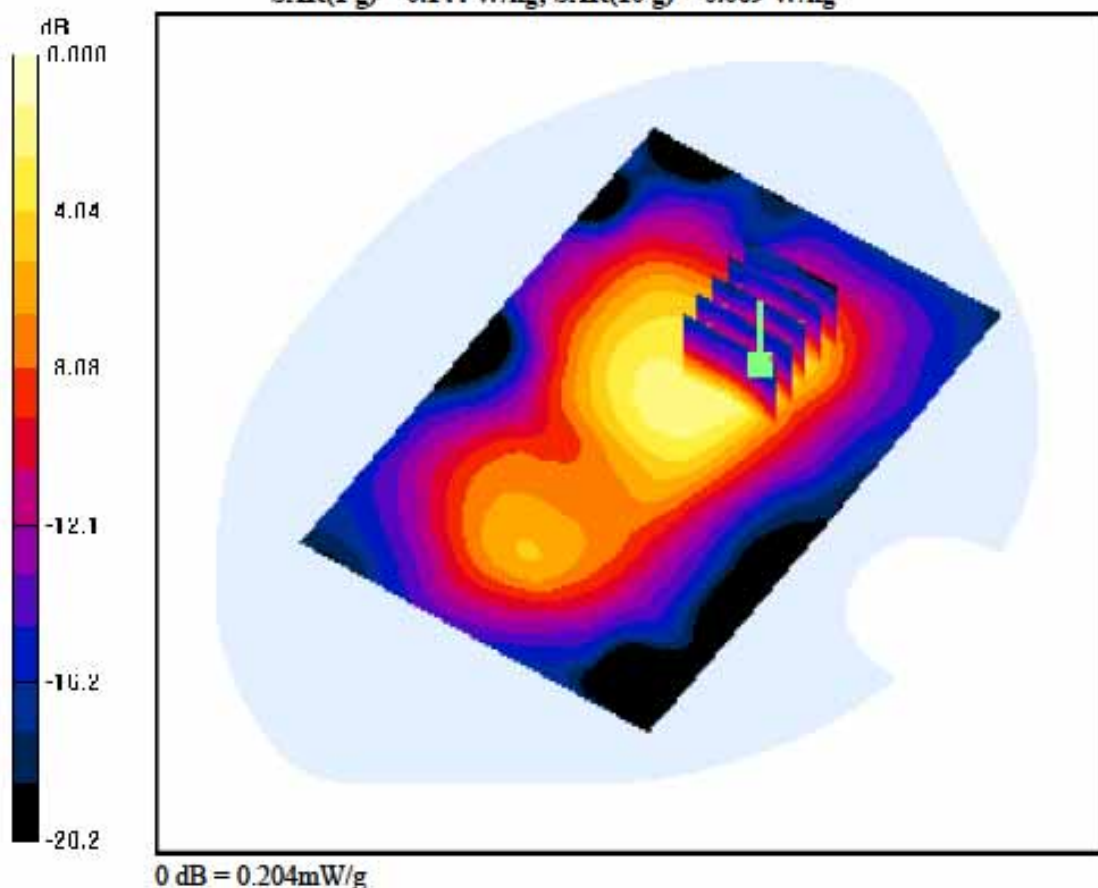

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.03, 7.03, 7.03); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-17; Ambient Temp: 22.3; Tissue Temp: 22.8

1cm space from Body, Left, W-LAN(802.11b) Ch. 6, Ant Internal

Area Scan (61x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.138 dB
Peak SAR (extrapolated) = 0.328 W/kg
SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.080 W/kg

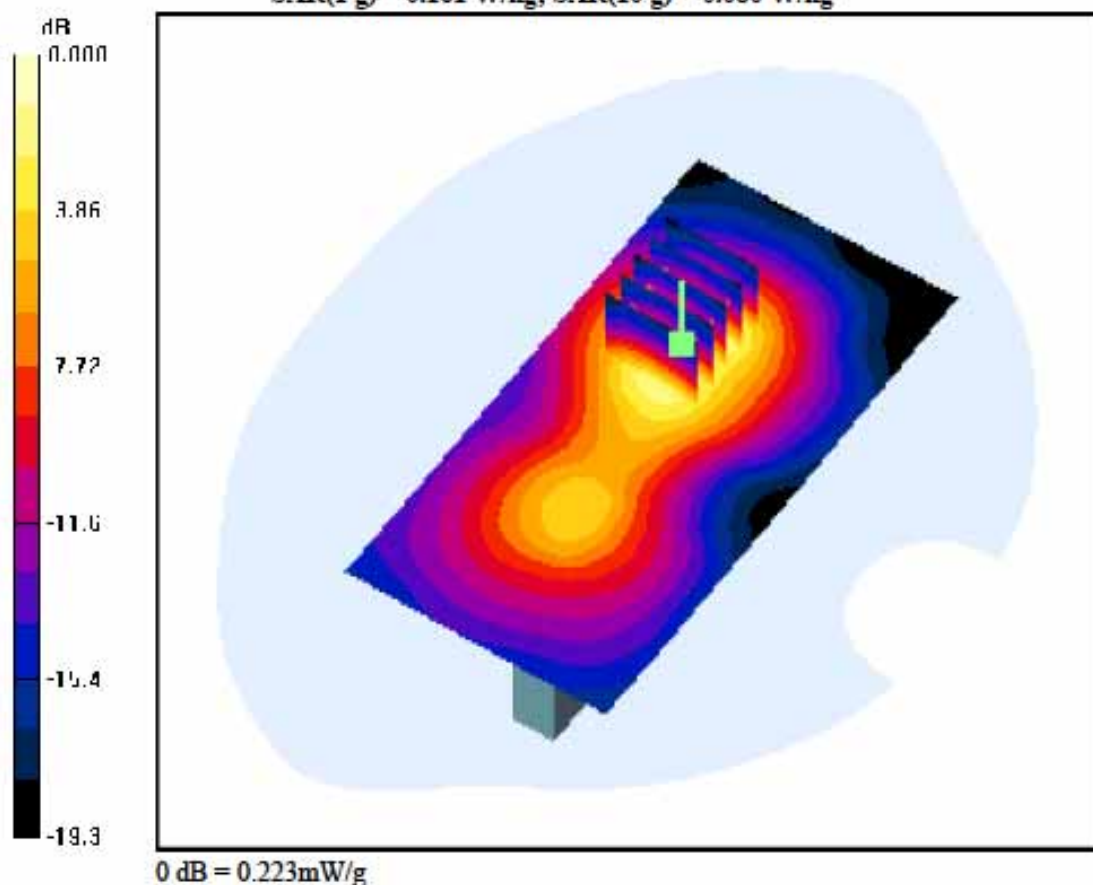

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.916 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-13; Ambient Temp: 22.5; Tissue Temp: 22.7

Right Touch, GSM850 Ch. 251, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.091 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.292 W/kg

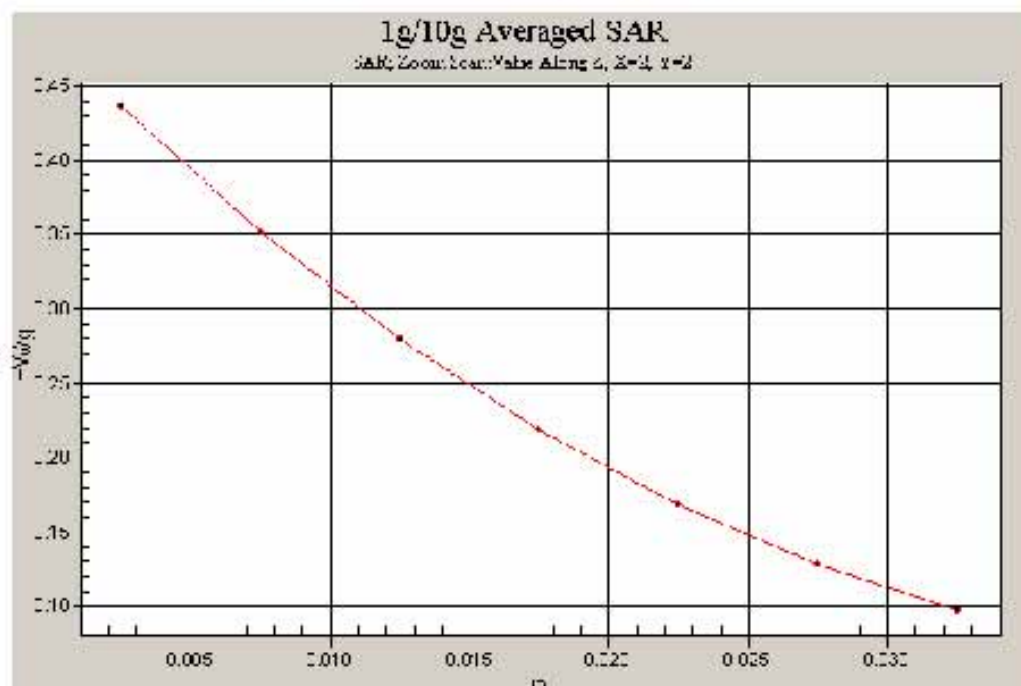

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15
 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 55.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-06-13; Ambient Temp: 22.5; Tissue Temp: 22.7

1cm space from Body, Rear, GSM850 GPRS Class 10 Ch. 251, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.051 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.583 W/kg

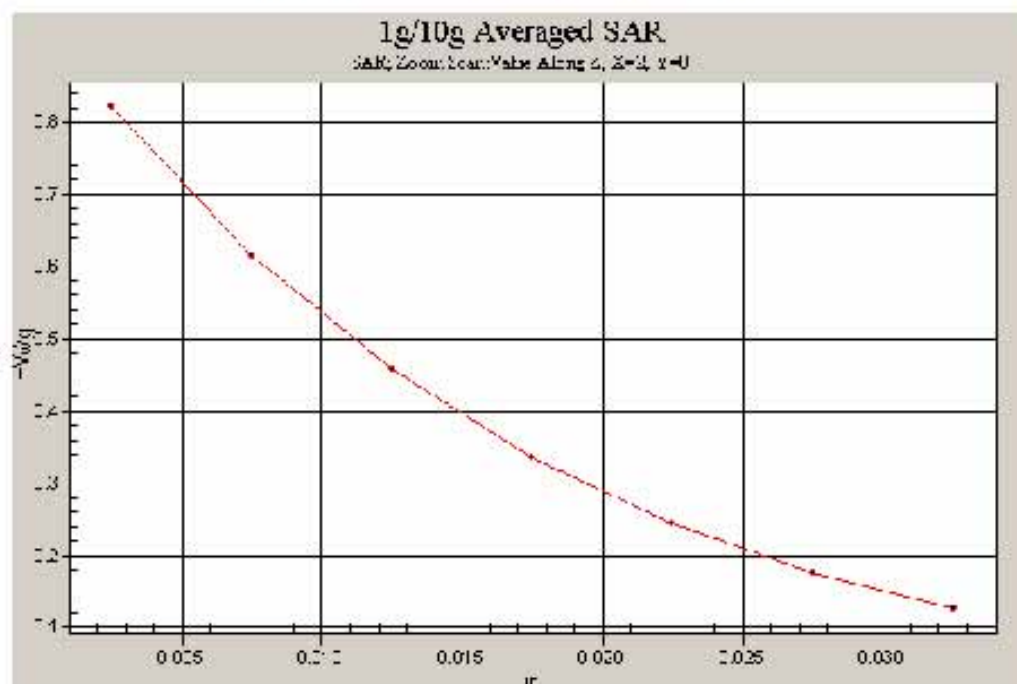

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

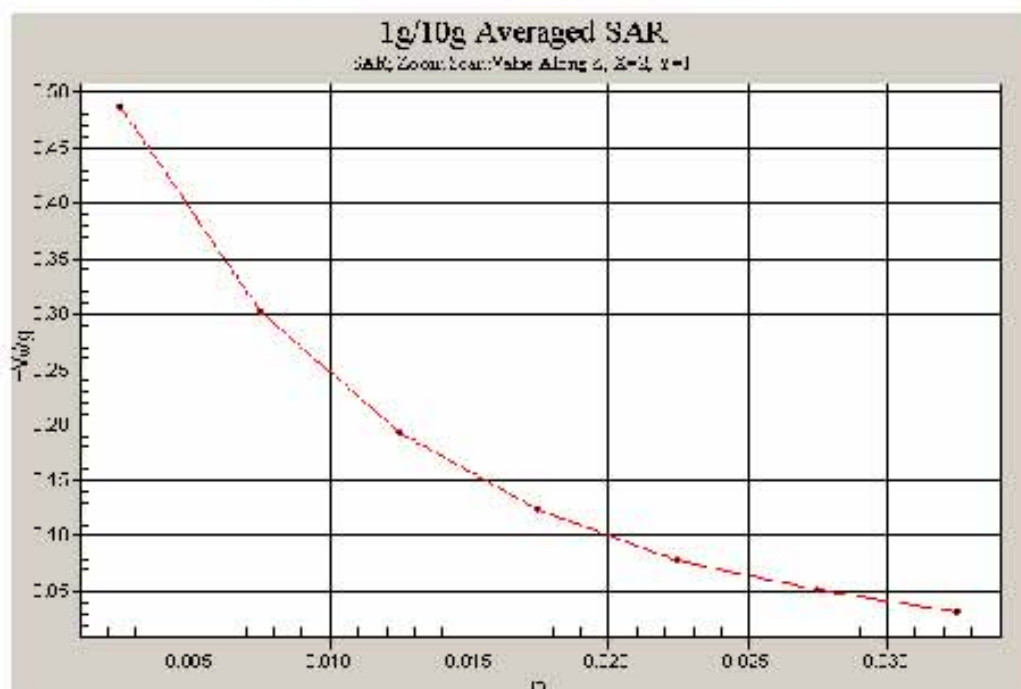Phantom section: Left Section**DASY4 Configuration:****Probe:** EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519**Phantom:** SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224**Measurement SW:** DASY4, V4.7 Build 80; **Postprocessing SW:** SEMCAD, V1.8 Build 186**Date:** 2011-06-15; **Ambient Temp:** 22.2; **Tissue Temp:** 22.6**Left Touch, PCS1900 Ch. 512, Ant Internal, Standard Battery****Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm**Power Drift** = -0.249 dB**Peak SAR (extrapolated)** = 0.643 W/kg**SAR(1 g)** = 0.403 W/kg; **SAR(10 g)** = 0.236 W/kg

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-15; Ambient Temp: 22.2; Tissue Temp: 22.6

1cm space from Body, Rear, PCS1900 GPRS Class 8 Ch. 512, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.295 W/kg

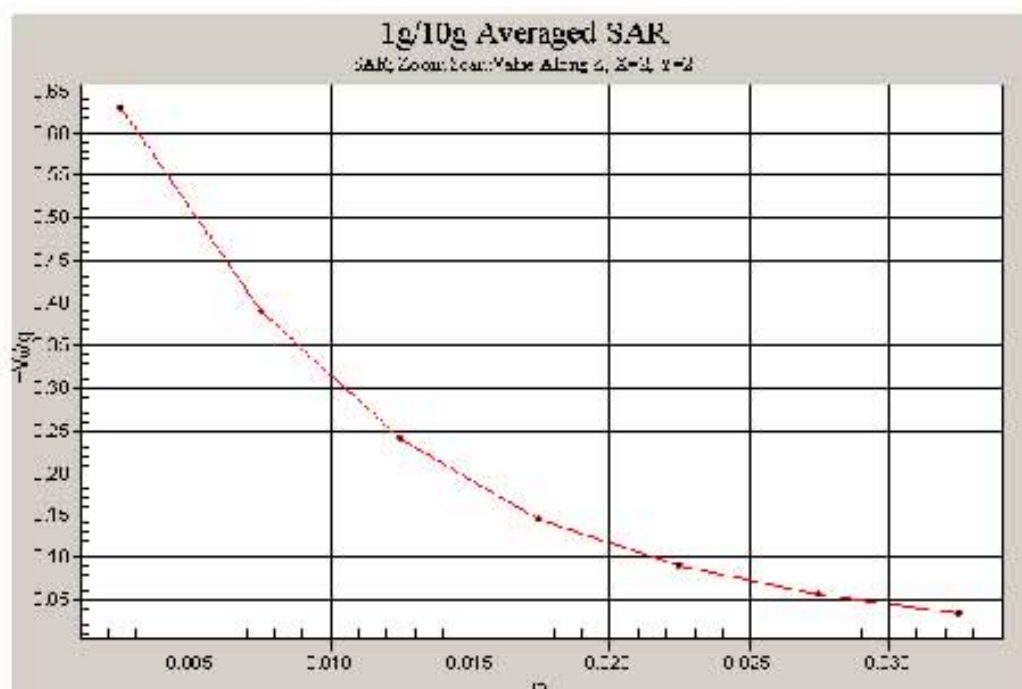

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.918 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

Left Touch, WCDMA850 Ch. 4233, Ant Internal, Standard Battery**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.427 W/kg

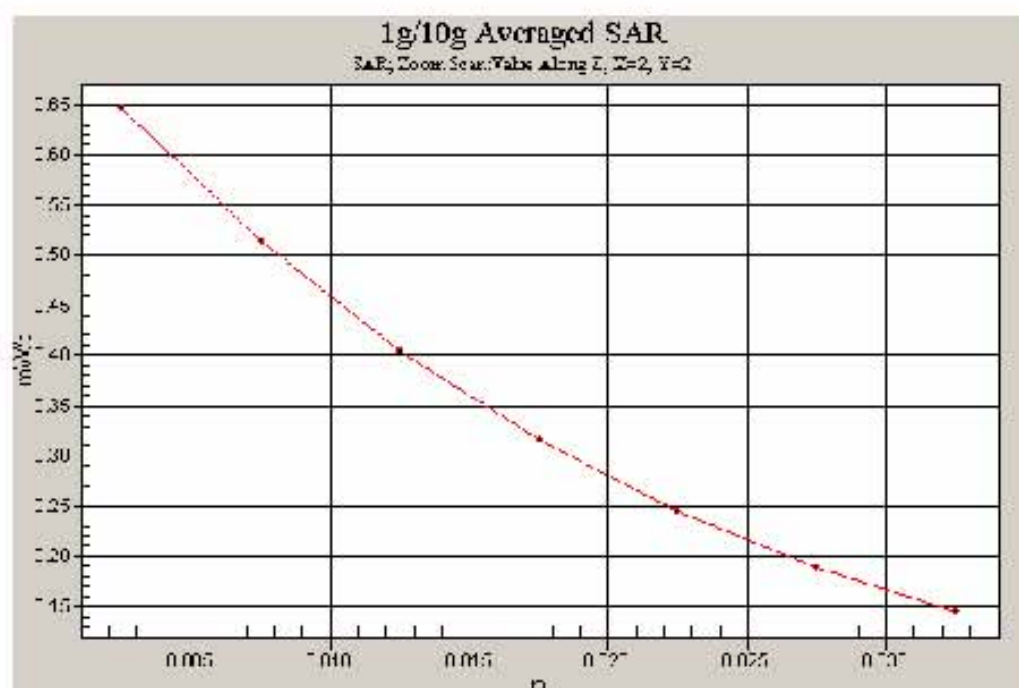

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.997 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section**DASY4 Configuration:**

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-14; Ambient Temp: 22.1; Tissue Temp: 22.4

1cm space from Body, Rear, WCDMA850 Ch. 4233, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.973 W/kg; SAR(10 g) = 0.711 W/kg

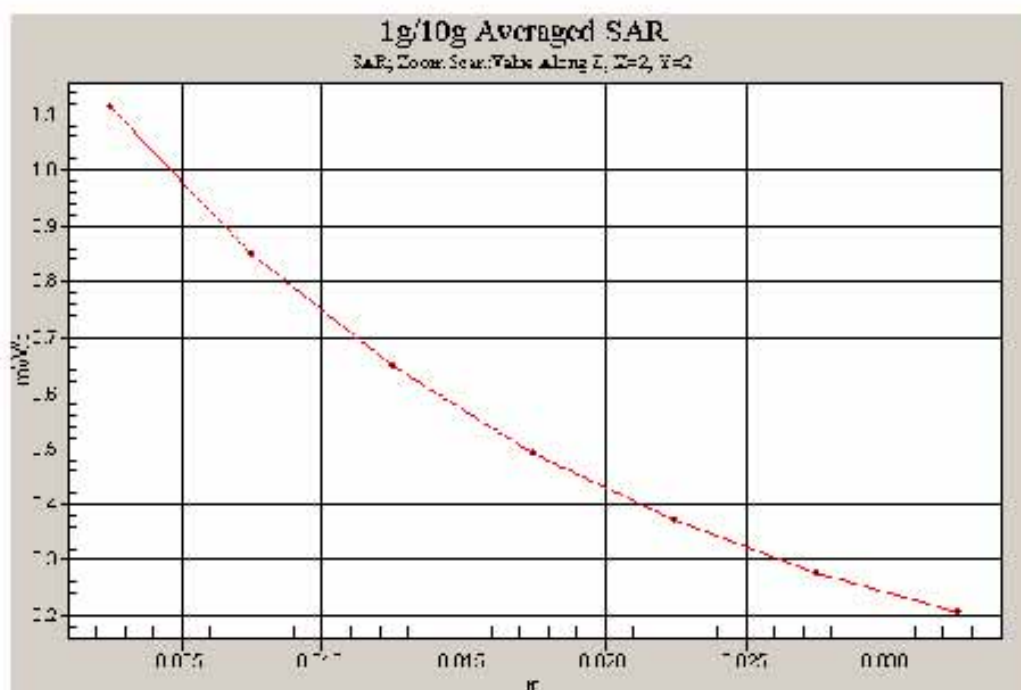

DIGITAL EMC CO., LTD**DUT: LG-C660h; Type: Bar**

Communication System: WCDMA 1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-16; Ambient Temp: 22.0; Tissue Temp: 22.5

Left Touch, WCDMA1900 Ch. 9262, Ant Internal, Standard Battery

Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.681 W/kg

