



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 24 & 22 Certification

Applicant Name:
LG Electronics USA
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
July 11 - 13, 2006
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0607050571-G

FCC ID:	BEJCU400
APPLICANT:	LG ELECTRONICS USA

Application Type: Certification
FCC Classification: Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §24(E), §22(H); §2
EUT Type: Dual-Band Dual-Mode GSM/EDGE/WCDMA Phone w/ Bluetooth
Model(s): CU400
Tx Frequency Range: 824.20 - 848.80MHz (Cellular GSM) / 1850.20 - 1909.80MHz (PCS GSM)
Rx Frequency Range: 869.20 - 893.80MHz (Cellular GSM) / 1930.20 - 1989.80MHz (PCS GSM)
Max. RF Output Power: 2.000 W ERP Cellular GSM (33.010 dBm) /
1.837 W EIRP PCS GSM (32.640 dBm)

Max. SAR Measurement: 0.661 W/kg Cell. GSM Head SAR; 0.998 W/kg Cell. GSM Body SAR
0.699 W/kg PCS GSM Head SAR; 0.524 W/kg PCS GSM Body SAR

Emission Designator(s): 293KGXW (Cellular GSM) / 270KGXW (PCS GSM) / 242KG7W (EDGE)
Test Device Serial No.: identical prototype [S/N: 606KPED091060]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Power output listed is ERP for Part 22 and EIRP for Part 24. SAR compliance for body-worn operating configuration is based on a separation distance of 1.5 cm between the back of the unit and the body of the user. End-users must be informed of the body-worn operating requirements for satisfying RF exposure compliance. Belt clips or holsters may not contain metallic components.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President




PCTEST™ PT. 22/24 GSM TEST REPORT	FCC MEASUREMENT REPORT (GSM)			Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 1 of 25

TABLE OF CONTENTS


1.0	SCOPE	3
2.0	INTRODUCTION	4
2.1	TESTING FACILITY	4
2.2	MEASUREMENT PROCEDURE	4
3.0	INSERTS	5
4.0	DESCRIPTION OF TESTS	6
4.1	OCCUPIED BANDWIDTH EMISSION LIMITS	6
4.2	CELLULAR - BASE FREQUENCY BLOCKS	6
4.3	CELLULAR - MOBILE FREQUENCY BLOCKS	6
4.4	PCS - BASE FREQUENCY BLOCKS	7
4.5	PCS - MOBILE FREQUENCY BLOCKS	7
4.6	SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	8
4.7	FREQUENCIES	8
4.8	RADIATED SPURIOUS AND HARMONIC EMISSIONS	8
4.9	FREQUENCY STABILITY / TEMPERATURE VARIATION	9
5.0	EFFECTIVE RADIATED POWER	10
5.1	EFFECTIVE RADIATED POWER OUTPUT DATA	10
6.0	EQUIVALENT ISOTROPIC RADIATED POWER	11
6.1	EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA	11
7.0	RADIATED MEASUREMENTS	12
7.1	CELLULAR GSM RADIATED MEASUREMENTS	12
7.2	PCS GSM RADIATED MEASUREMENTS	15
8.0	FREQUENCY STABILITY	18
8.1	FREQUENCY STABILITY (CELLULAR GSM)	18
8.2	FREQUENCY STABILITY (PCS GSM)	20
9.0	PLOT(S) OF EMISSIONS	22
10.0	TEST EQUIPMENT	23
11.0	SAMPLE CALCULATIONS	24
12.0	CONCLUSION	25
ATTACHMENT A:	TEST PLOTS	
ATTACHMENT B:	TEST SETUP PHOTOGRAPHS	
ATTACHMENT C:	EXTERNAL PHOTOGRAPHS	
ATTACHMENT D:	INTERNAL PHOTOGRAPHS	

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 2 of 25

1.0 SCOPE



Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.



§2.1033 General Information

Applicant Name: LG Electronics USA
Address: 1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

- FCC ID: BEJCU400
- Quantity: Quantity production is planned
- Emission Designators: 293KGXW (Cellular GSM) / 270KGXW (PCS GSM) / 242KG7W (EDGE)
- Tx Freq. Range: 824.20 - 848.80MHz (Cellular GSM)
1850.20 - 1909.80MHz (PCS GSM)
- Rx Freq. Range: 869.20 - 893.80MHz (Cellular GSM)
1930.20 - 1989.80MHz (PCS GSM)
- Max. Power Rating: 2.000 W ERP Cellular GSM (33.010 dBm) /
1.837 W EIRP PCS GSM (32.640 dBm)
- FCC Classification(s): PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth
- Modulation(s): GMSK / 8PSK
- Frequency Tolerance: $\pm 0.00025\%$ (2.5 ppm)
- FCC Rule Part(s): § 24(E), §22(H)
- Dates of Tests: July 11 - 13, 2006
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 0607050571-G
- Deviation from measurement procedure - None

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 3 of 25

2.0 INTRODUCTION

2.1 Testing Facility

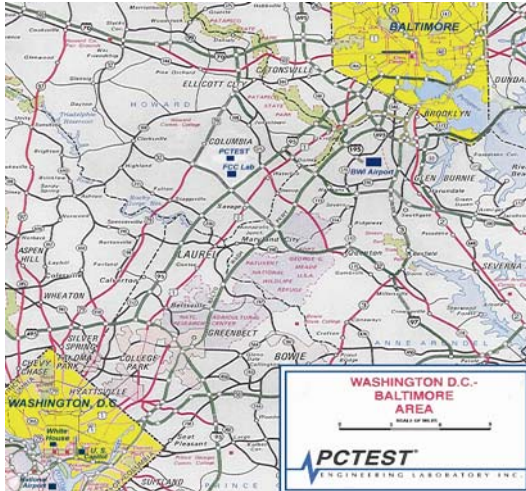


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

These measurement tests were conducted at PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

2.2 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure2). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

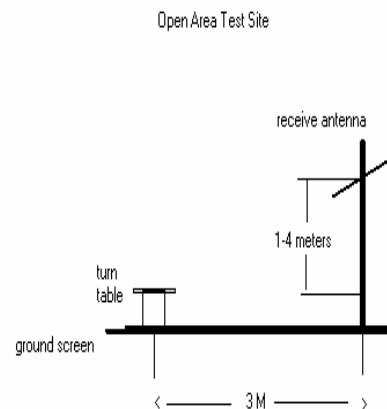


Figure 2. Diagram of 3-meter outdoor test range

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 4 of 25

3.0 INSERTS

Function of Active Devices (Confidential)

Block & Schematic Diagrams (Confidential)

Operating Instructions

Parts List & Tune-Up Procedure (Confidential)

Description of Freq. Stabilization Circuit (Confidential)

Description for Suppression of Spurious Radiation, for Limiting Modulation, and Harmonic Suppression Circuits (Confidential)

** These exhibits are not included*


PCTEST™ PT. 22/24 GSM TEST REPORT	 FCC MEASUREMENT REPORT (GSM)			Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 5 of 25

4.0 DESCRIPTION OF TESTS


4.1 Occupied Bandwidth Emission Limits

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

4.2 Cellular - Base Frequency Blocks

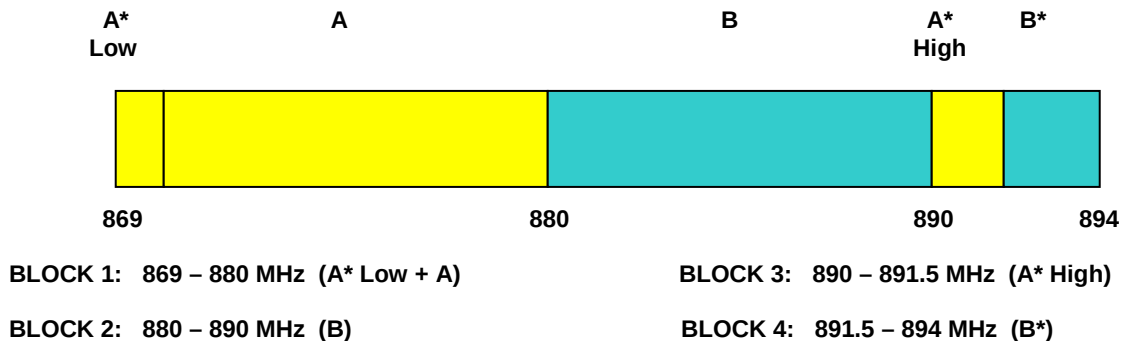


4.3 Cellular - Mobile Frequency Blocks

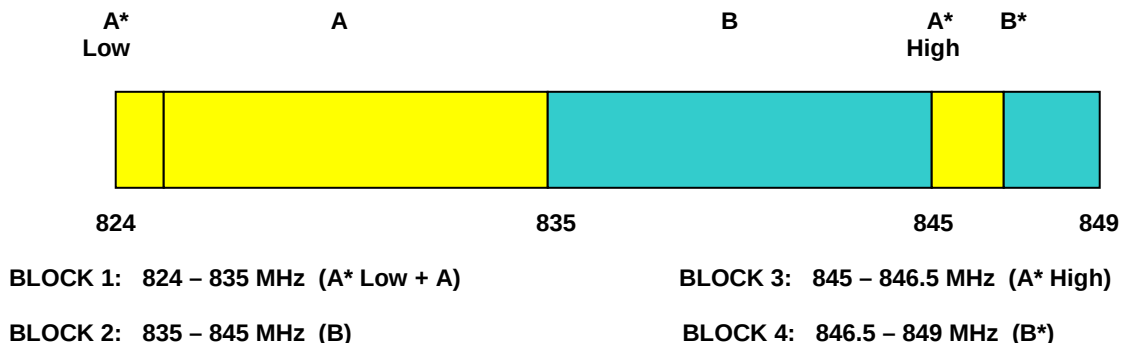

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 6 of 25

4.4 PCS - Base Frequency Blocks

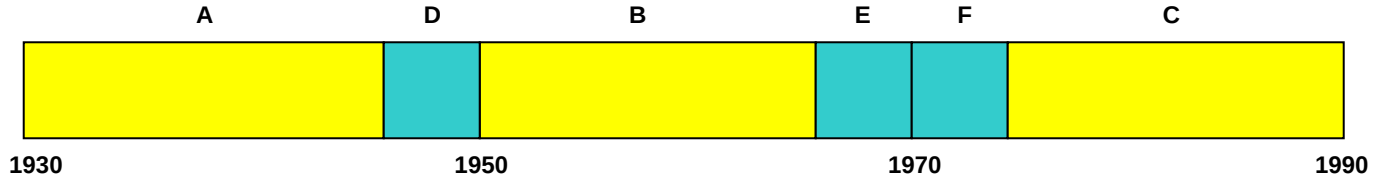

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)


BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

4.5 PCS - Mobile Frequency Blocks

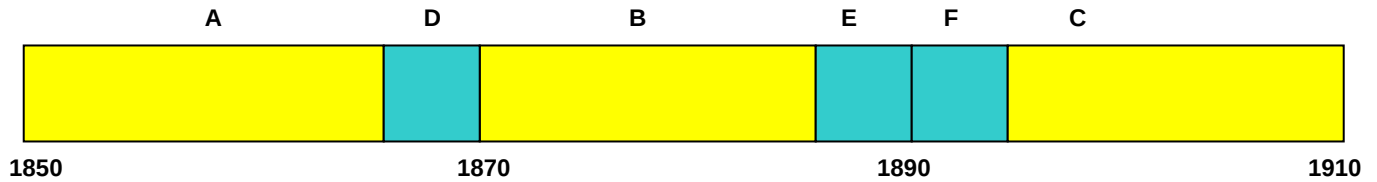

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 7 of 25

4.6 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10th harmonic.

At the input terminals of the spectrum analyzer, an isolator (RF circulator with one port terminated in 50 Ω) and an 870 MHz to 890 MHz band-pass filter is connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The rejection of the band-pass filter to signals in the 825 – 845 MHz range is adequate to limit the transmit energy from the test transceiver which appears to a level which will allow the analyzer to measure signals less than –90 dBm. Calibration of the test receiver is performed in the 870 – 890 MHz range to insure accuracy to allow variation in the band-pass filter insertion loss to be calibrated.

4.7 Frequencies

At the input terminals of the spectrum analyzer, an isolator (RF pad) and a high-pass filter are connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The high-pass filter (signals below 1.6 GHz) is to limit the fundamental frequency from interfering with the measurement of low-level spurious and harmonic emissions and to ensure that the preamplifier is not saturated.

4.8 Radiated Spurious and Harmonic Emissions

Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band. The spectrum is measured from 9 kHz up to the 10th harmonic.

PCTEST™ PT. 22/24 GSM TEST REPORT			FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 8 of 25	

4.9 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (22°C to 25°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (usually 14-16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE: The EUT is tested down to the battery endpoint.

PCTEST™ PT. 22/24 GSM TEST REPORT		 FCC MEASUREMENT REPORT (GSM)			Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth		FCC ID: BEJCU400	Page 9 of 25

5.0 EFFECTIVE RADIATED POWER

5.1 Effective Radiated Power Output Data

POWER: High (GSM Mode)

Freq. Tuned (MHz)	MODE	REF. LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)	BATTERY
824.20	GSM850	-8.413	V	1.932	32.860	Standard
836.60	GSM850	-10.303	V	1.297	31.130	Standard
848.80	GSM850	-8.573	V	2.000	33.010	Standard
836.60	EDGE850	-12.672	H	0.778	28.911	Standard

Note: Standard batteries were used to test this phone.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band.

PCTEST™ PT. 22/24 GSM TEST REPORT	 FCC MEASUREMENT REPORT (GSM)				Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth		FCC ID: BEJCU400	Page 10 of 25

6.0 EQUIVALENT ISOTROPIC RADIATED POWER

6.1 Equivalent Isotropic Radiated Power Output Data

Radiated measurements at 3 meters

Supply Voltage: 3.7 VDC

Modulation: PCS GSM

FREQ. (MHz)	MODE	REF. LEVEL (dBm)	POL (H/V)	Azimuth (o angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	GSM1900	-10.441	H	95	32.640	1.837	Standard
1880.00	GSM1900	-11.321	H	95	31.930	1.560	Standard
1909.80	GSM1900	-10.961	H	95	32.460	1.762	Standard
1880.00	EDGE1900	-13.486	H	95	29.935	0.985	Standard

Note: Standard batteries were used to test this phone.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band.

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 11 of 25

7.0 RADIATED MEASUREMENTS

7.1 Cellular GSM Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz
 CHANNEL: 128
 MEASURED OUTPUT POWER: 33.010 dBm = 2.000 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W)$: 46.01 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-42.63	6.10	-36.53	V	69.5
2472.60	-42.15	6.70	-35.45	V	68.5
3296.80	-39.59	6.80	-32.79	V	65.8
4121.00	-45.38	6.50	-38.88	V	71.9
4945.20	-48.18	7.00	-41.18	H	74.2

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band.

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 12 of 25

7.1 Cellular GSM Radiated Measurements (Cont'd)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MEASURED OUTPUT POWER: 33.010 dBm = 2.000 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 46.01 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-39.83	6.10	-33.73	V	66.7
2509.80	-40.26	6.70	-33.56	V	66.6
3346.40	-42.80	6.80	-36.00	V	69.0
4183.00	-45.71	6.50	-39.21	H	72.2
5019.60	-46.80	7.00	-39.80	V	72.8

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band.

PCTEST™ PT. 22/24 GSM TEST REPORT	 PCTEST SOLUTIONS		FCC MEASUREMENT REPORT (GSM)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 13 of 25	

7.1 Cellular GSM Radiated Measurements (Cont'd)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MEASURED OUTPUT POWER: 33.010 dBm = 2.000 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 46.01 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-35.64	6.10	-29.54	V	62.5
2546.40	-44.26	6.70	-37.56	V	70.6
3395.20	-42.71	6.80	-35.91	V	68.9
4244.00	-46.35	6.50	-39.85	V	72.9
5092.80	-46.14	7.00	-39.14	V	72.1

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band.

PCTEST™ PT. 22/24 GSM TEST REPORT	 FCC MEASUREMENT REPORT (GSM)				Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth		FCC ID: BEJCU400	Page 14 of 25

7.2 PCS GSM Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MEASURED OUTPUT POWER: 32.640 dBm = 1.837 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 45.64 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-44.70	6.10	-38.60	H	71.2
5550.60	-45.25	6.70	-38.55	H	71.2
7400.80	-47.17	6.80	-40.37	V	73.0
9251.00	-85.68	6.50	-79.18	H	111.8
11101.20	-84.38	7.00	-77.38	H	110.0

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band.

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)				Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth		FCC ID: BEJCU400		Page 15 of 25

7.2 PCS GSM Radiated Measurements (Cont'd)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 32.640 dBm = 1.837 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 45.64 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-44.25	6.10	-38.15	H	70.8
5640.00	-44.03	6.70	-37.33	H	70.0
7520.00	-49.52	6.80	-42.72	V	75.4
9400.00	-85.78	6.50	-79.28	V	111.9
11280.00	-83.78	7.00	-76.78	H	109.4

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band.

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)			Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth		FCC ID: BEJCU400	Page 16 of 25

7.2 PCS GSM Radiated Measurements (Cont'd)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz
 CHANNEL: 810
 MEASURED OUTPUT POWER: 32.640 dBm = 1.837 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 45.64 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-44.99	6.10	-38.89	H	71.5
5729.40	-35.97	6.70	-29.27	H	61.9
7639.20	-49.45	6.80	-42.65	V	75.3
9549.00	-85.68	6.50	-79.18	H	111.8
11458.80	-83.98	7.00	-76.98	H	109.6

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested using a PCL of 0 in the PCS Band and a PCL of 5 in the Cellular Band.

PCTEST™ PT. 22/24 GSM TEST REPORT	 FCC MEASUREMENT REPORT (GSM)				Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth		FCC ID: BEJCU400	Page 17 of 25

8.0 FREQUENCY STABILITY

8.1 Frequency Stability (Cellular GSM)

OPERATING FREQUENCY: 836,600,009 Hz


CHANNEL: 190

REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	836,600,009	0.00	0.000000
100 %		-30	836,600,051	-41.83	-0.000005
100 %		-20	836,600,068	-58.56	-0.000007
100 %		-10	836,599,984	25.10	0.000003
100 %		0	836,599,950	58.56	0.000007
100 %		10	836,600,059	-50.20	-0.000006
100 %		20	836,600,076	-66.93	-0.000008
100 %		25	836,600,026	-16.73	-0.000002
100 %		30	836,599,925	83.66	0.000010
100 %		40	836,600,084	-75.29	-0.000009
100 %		50	836,600,059	-50.20	-0.000006
100 %		60	836,599,950	58.56	0.000007
85 %	3.15	20	836,599,942	66.93	0.000008
115 %	4.26	20	836,600,034	-25.10	-0.000003
BATT. ENDPOINT	3.08	20	836,600,068	-58.56	-0.000007

8.1 Frequency Stability (Cellular GSM) (Cont'd)

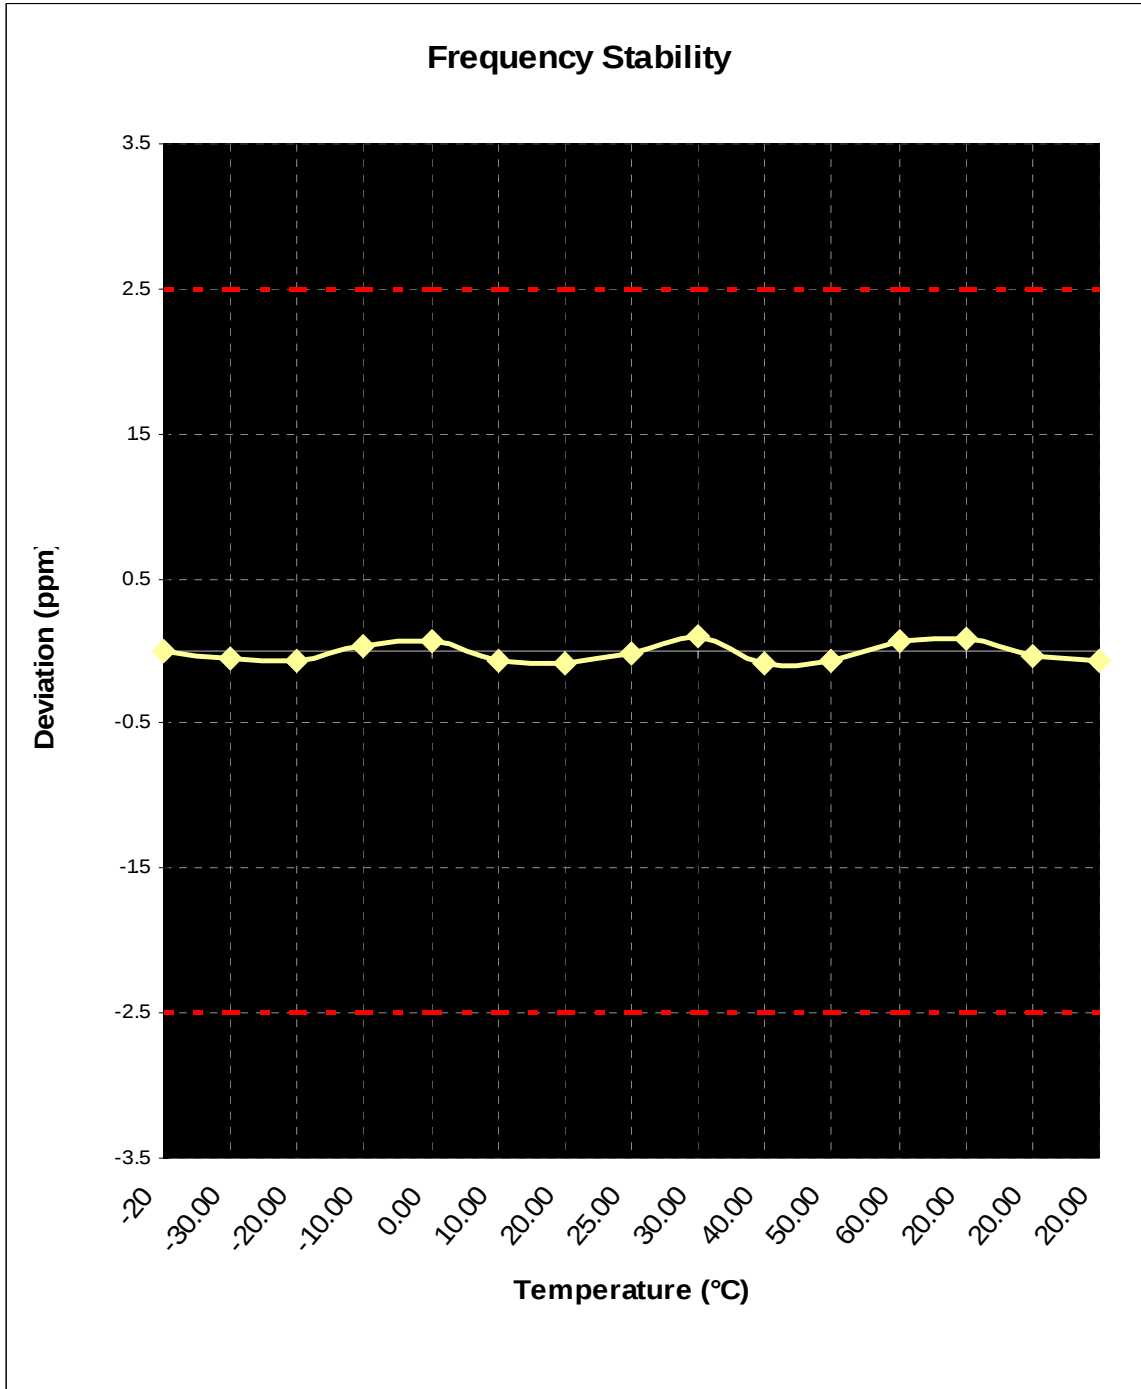

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)			Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 19 of 25	

8.2 Frequency Stability (PCS GSM)

OPERATING FREQUENCY: 1,880,000,002 Hz

CHANNEL: 661


REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	1,880,000,002	0.00	0.000000
100 %		-30	1,879,999,889	112.80	0.000006
100 %		-20	1,880,000,096	-94.00	-0.000005
100 %		-10	1,880,000,134	-131.60	-0.000007
100 %		0	1,879,999,946	56.40	0.000003
100 %		10	1,880,000,152	-150.40	-0.000008
100 %		20	1,880,000,077	-75.20	-0.000004
100 %		25	1,879,999,833	169.20	0.000009
100 %		30	1,880,000,058	-56.40	-0.000003
100 %		40	1,880,000,134	-131.60	-0.000007
100 %		50	1,879,999,908	94.00	0.000005
100 %		60	1,879,999,758	244.40	0.000013
85 %	3.15	20	1,880,000,209	-206.80	-0.000011
115 %	4.26	20	1,880,000,134	-131.60	-0.000007
BATT. ENDPOINT	3.10	20	1,879,999,927	75.20	0.000004

PCTEST™ PT. 22/24 GSM TEST REPORT	 FCC MEASUREMENT REPORT (GSM)				Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth		FCC ID: BEJCU400	Page 20 of 25

8.2 Frequency Stability (PCS GSM) (Cont'd)

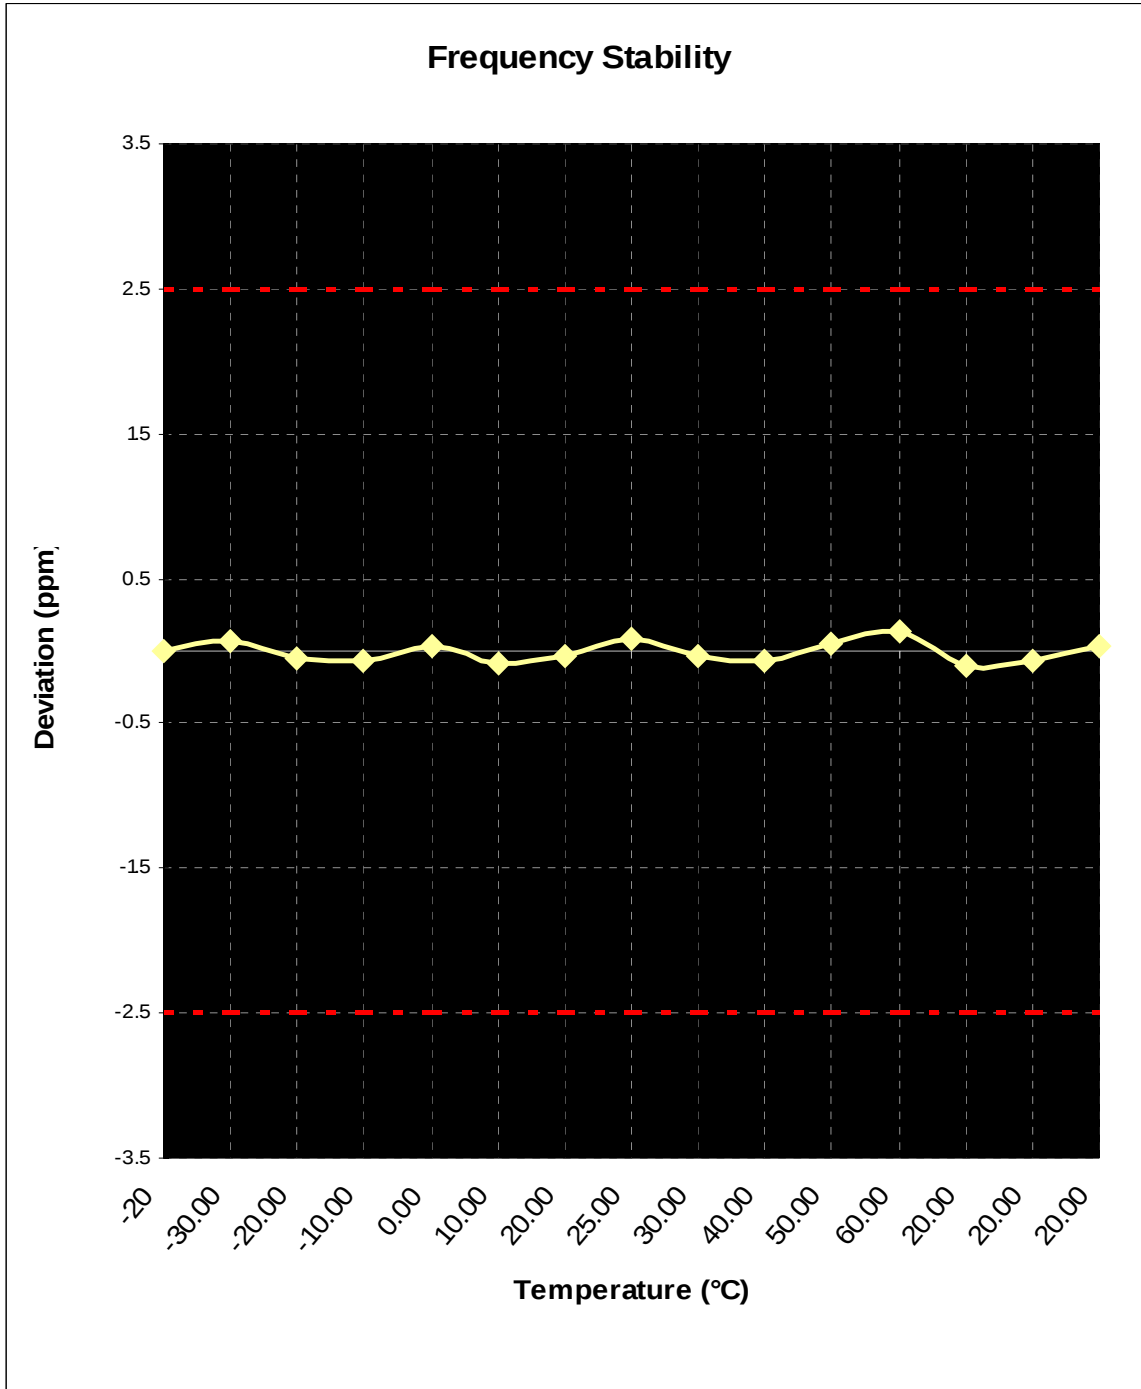

PCTEST™ PT. 22/24 GSM TEST REPORT			FCC MEASUREMENT REPORT (GSM)			Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth		FCC ID: BEJCU400	Page 21 of 25	

9.0 PLOT(S) OF EMISSIONS

(SEE ATTACHMENT A)

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 22 of 25

10.0 TEST EQUIPMENT

TYPE	MODEL	CAL. DUE DATE	CAL. INTERVAL	SERIAL No.
Microwave Spectrum Analyzer	Agilent E4448A (3Hz-50GHz)	09/19/06	Annual	US42510244
Spectrum Analyzer/Tracking Generator	HP 8591A (9kHz-1.8GHz)	06/02/07	Annual	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/06	Annual	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/06	Annual	3051A00187
Signal Generator	HP 8640D (500Hz-1GHz)	12/07/07	Annual	3613A00315
Signal Generator	Rohde & Schwarz (0.1-1GHz)	09/22/06	Annual	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30MHz-1GHz)	04/12/07	Annual	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30MHz-1GHz)	03/11/07	Annual	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/06	Annual	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/06	Annual	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/07	Annual	0194-04082
RG58 Coax Test Cable	No.167			n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)			3531A00115
Broadband Amplifier (2)	HP 8447D			1145A00470, 1937A03348
Broadband Amplifier	HP 8447F			2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)			2820A00300
Horn Antenna (2)	EMCO Model 3115 (1-18GHz)			9704-5182, 9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)			9203-2178
Biconical Antenna (3)	Eaton 94455-1			1295, 1332, 1277
Log-Spiral Antenna (2)	Ailtech/Eaton 93490-1			0227, 1104
Log-Spiral Antenna	Singer 93490-1			147
Roberts Dipoles	Compliance Design (1 set) A100			5118
Ailtech Dipoles	DM-105A (1set)			33448-111
EMCO LISN (3)	3816/2, 3816/2, 3725/2			1077, 1079, 2099
50-ohm Terminator	n/a			n/a
Microwave Preamp 40dB Gain	HP 83017A (0.5-26.5GHz)			3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)			n/a
Ailtech/Eaton Receiver	NM37/57A-SL			0792-03271
Spectrum Analyzer	HP 8591A			3034A01395
Modulation Analyzer	HP 8901A			2432A03467
NTSC Pattern Generator	Leader 408			0377433
Noise Figure Meter	HP 8970B, Ailtech 7510			3106A02189, TE31700
Noise Generator	Ailtech 7010			1473
Microwave Survey Meter	Holaday Model 1501 (2.45GHz)			80931
Digital Thermometer	Extech Instruments 421305			426966
Attenuator	HP 8495A (0-70dB) DC-4GHz			
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)			
Shielded Screen Room	RF Lindgren Model 26-2/2-0	N/A		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81	N/A		R2437 (PCT278)
Environmental Chamber	Associated Systems 1025			PCT285
OATS	n/a	12/31/2006	Tri-annual	

Table 10-1. Test Equipment

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 23 of 25

11.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered



W = Combination (Audio/Data)

PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 24 of 25



12.0 CONCLUSION

The data collected shows that the LG Electronics Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth FCC ID: BEJCU400 complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.



PCTEST™ PT. 22/24 GSM TEST REPORT		FCC MEASUREMENT REPORT (GSM)		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 25 of 25

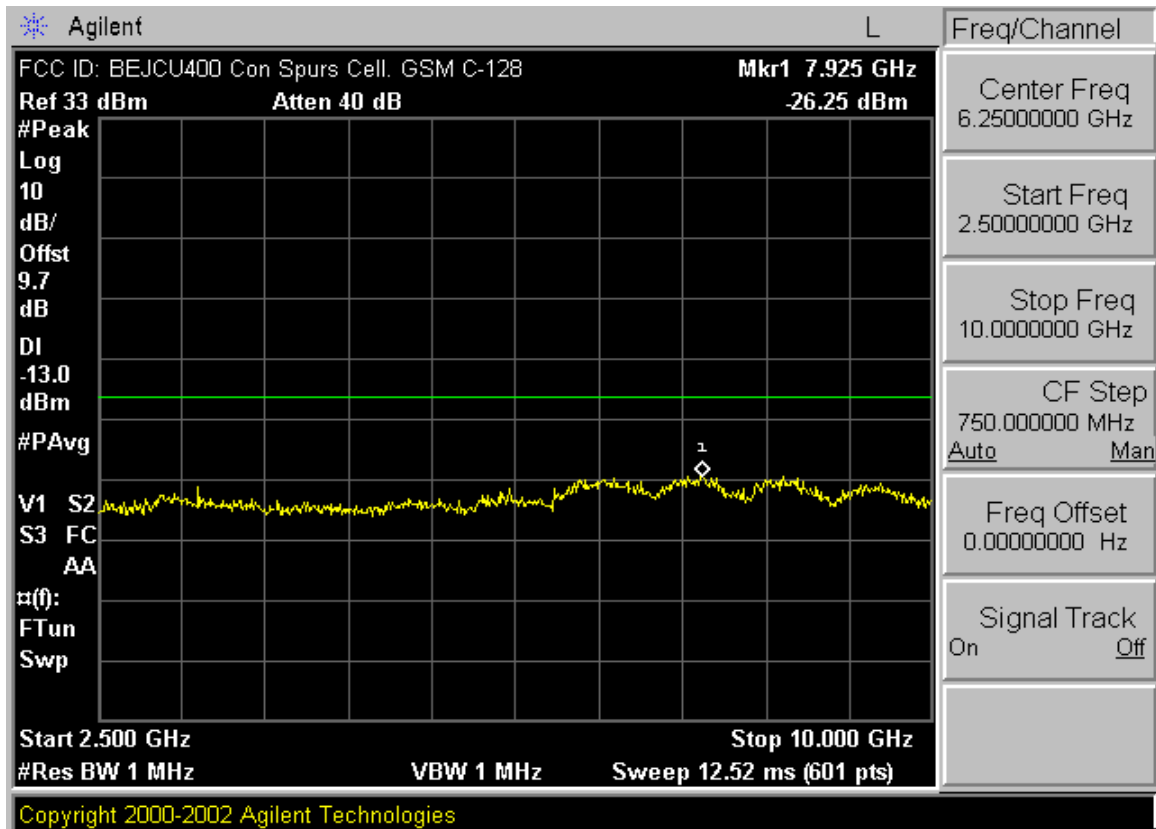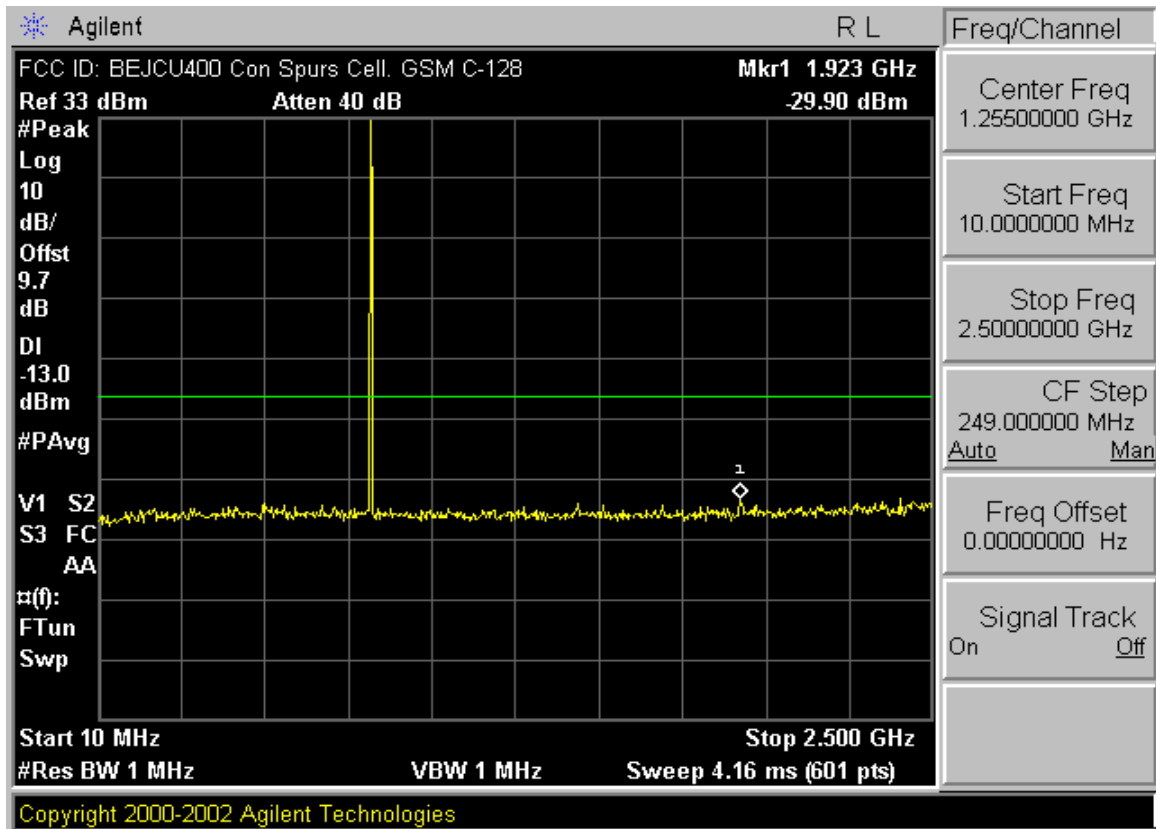



PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 1 of 10

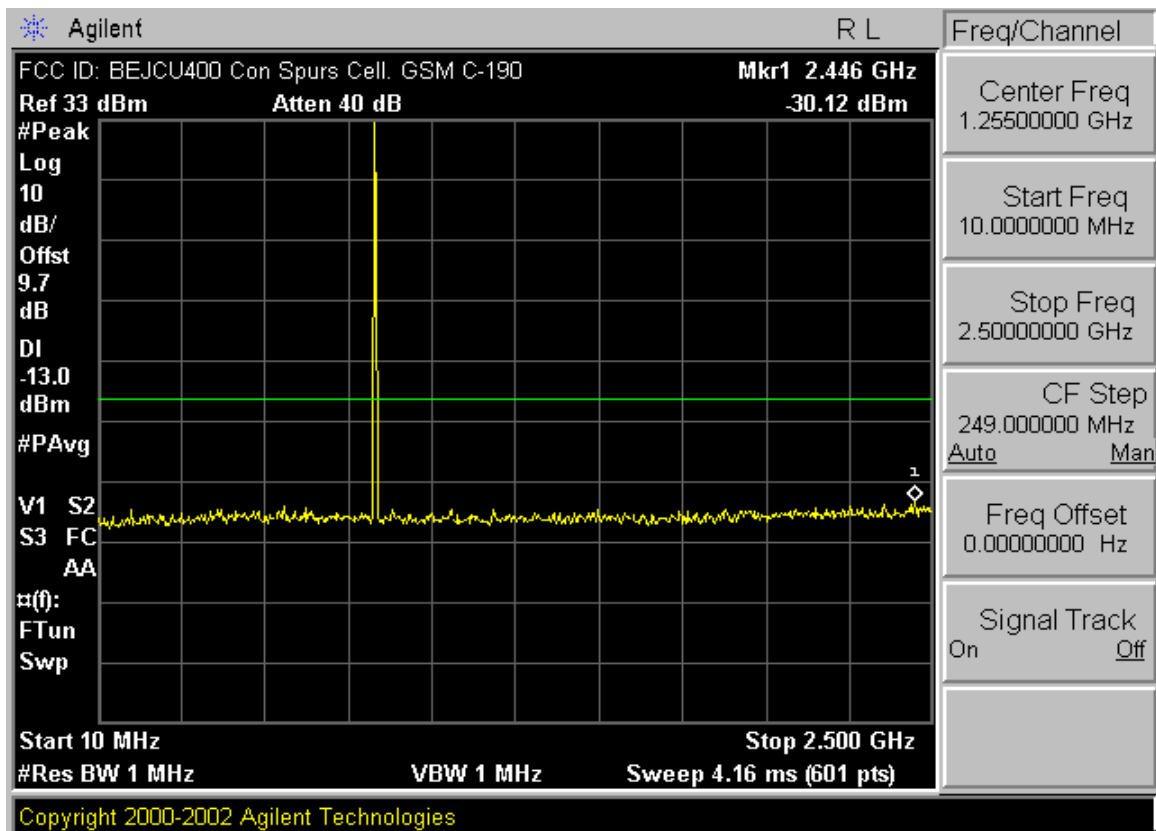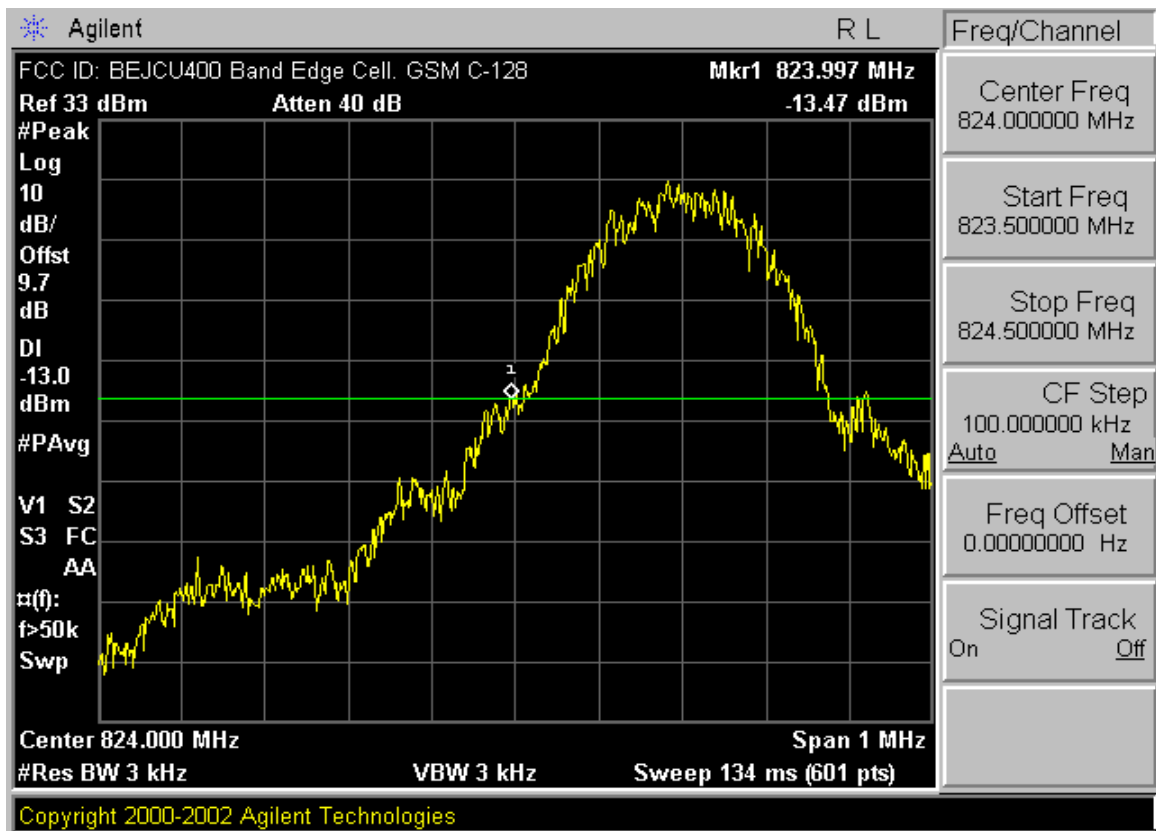



PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 2 of 10

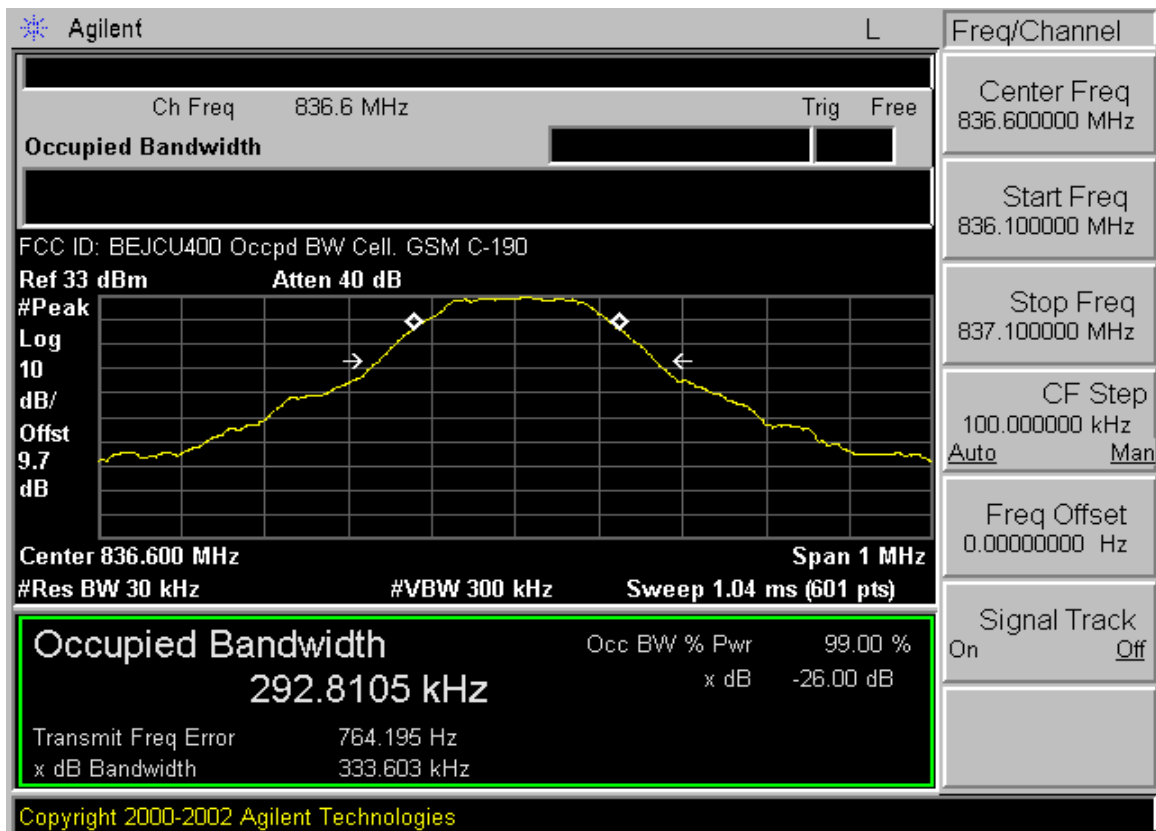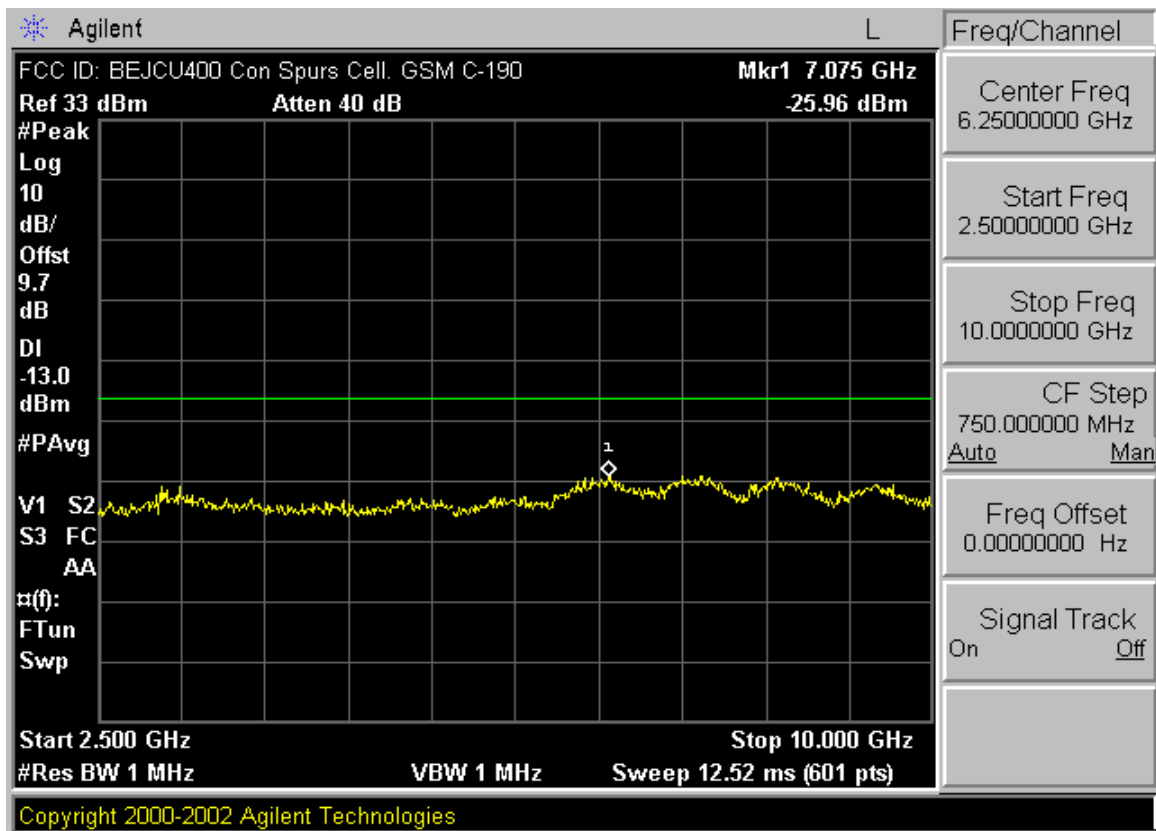



PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 3 of 10

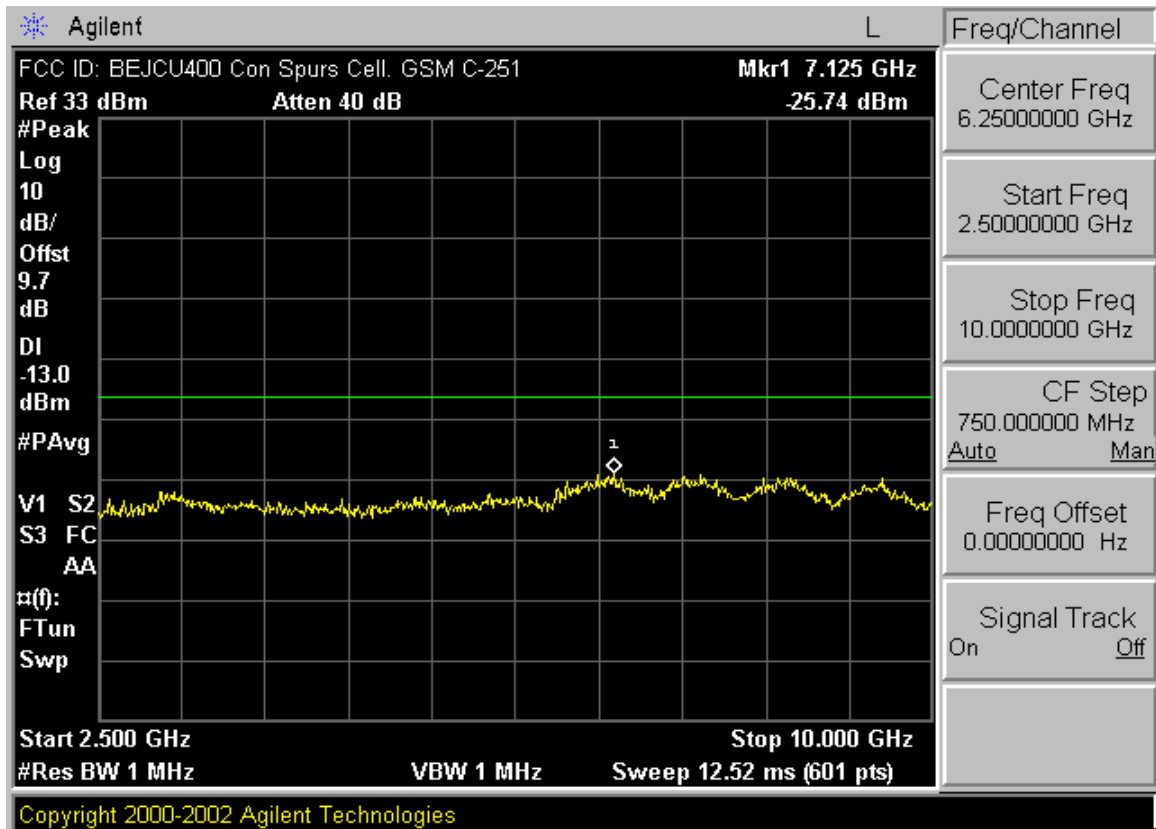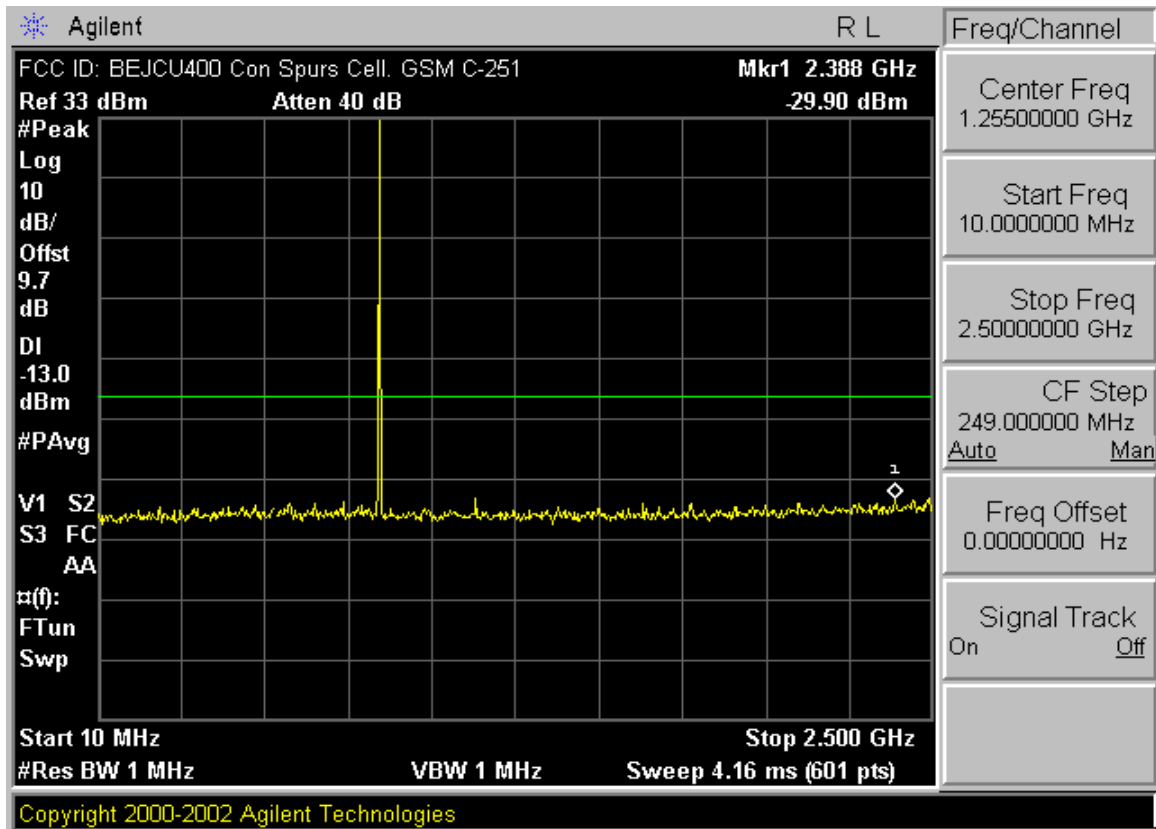



PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 4 of 10

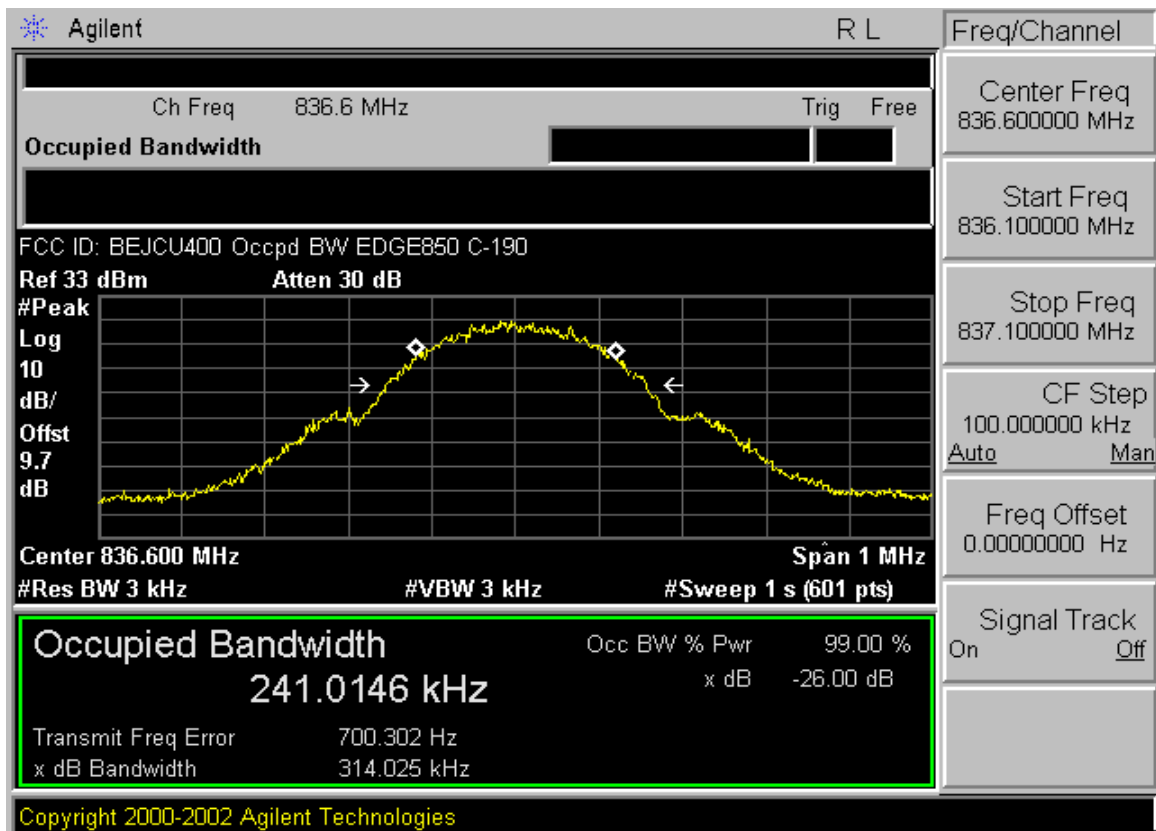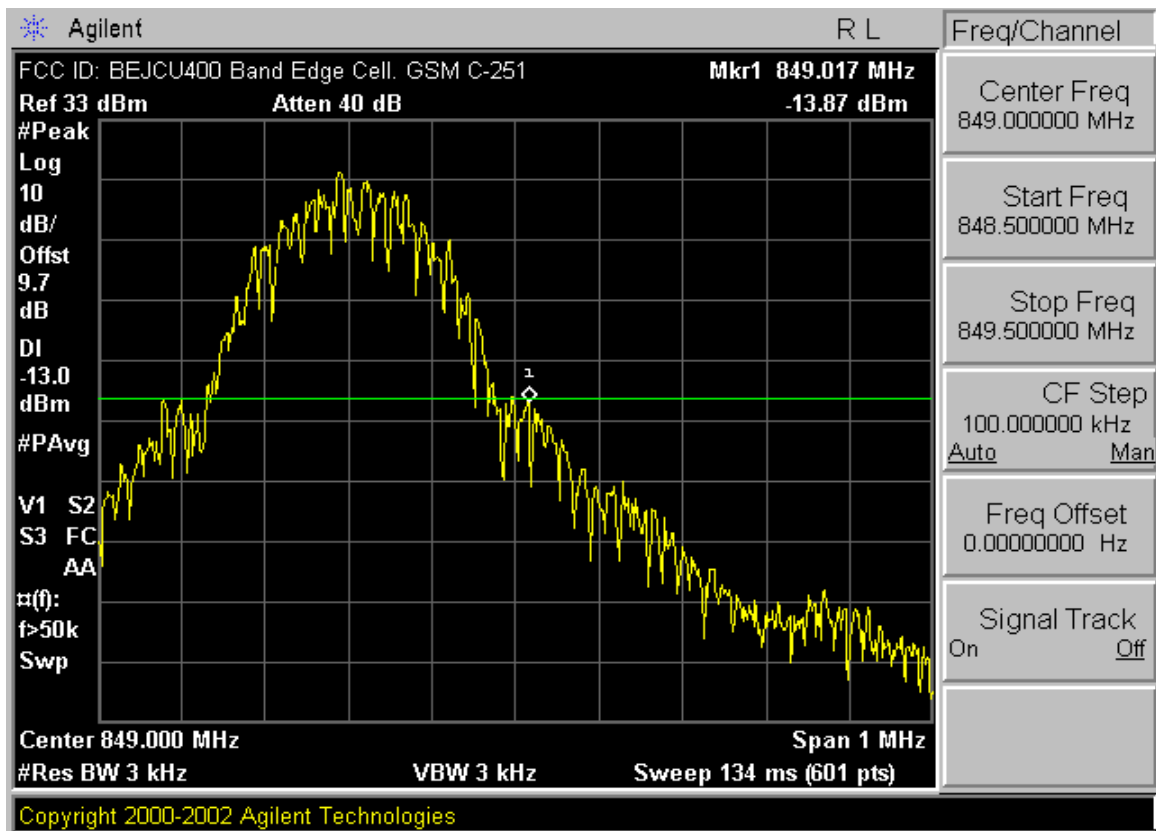



PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 5 of 10

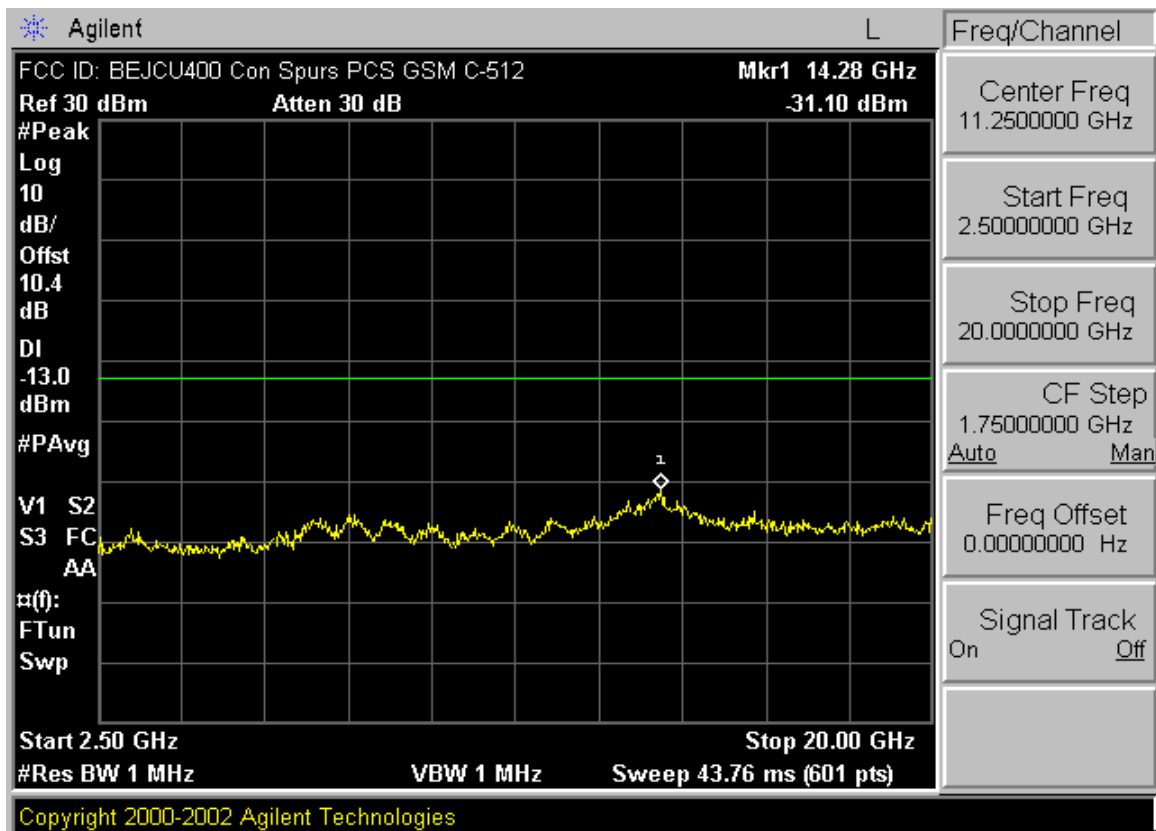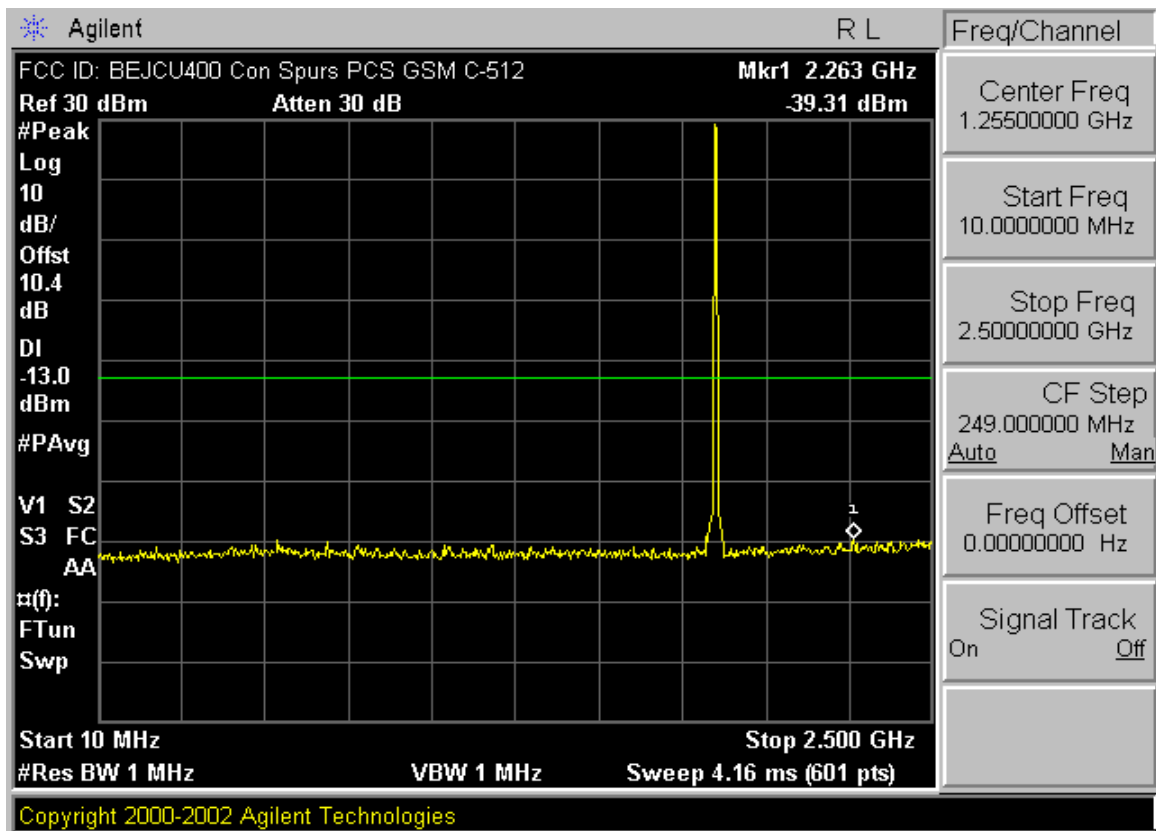



PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 6 of 10

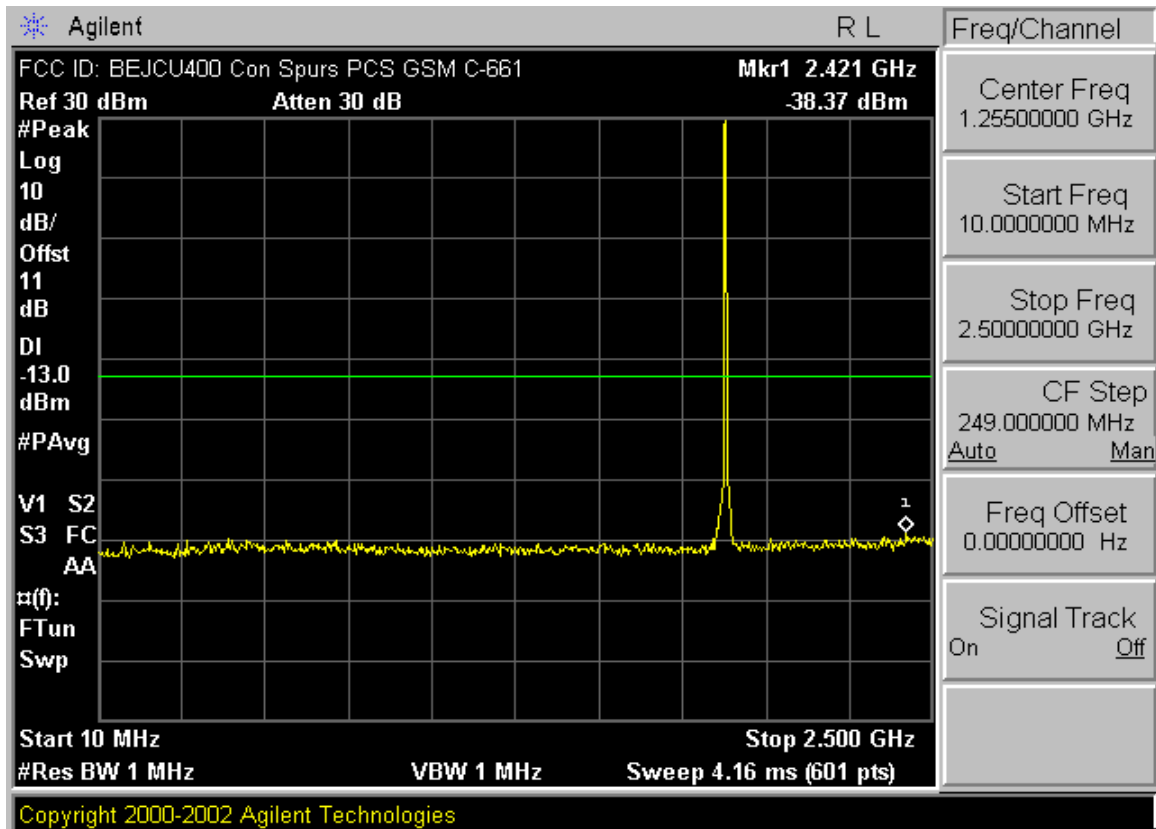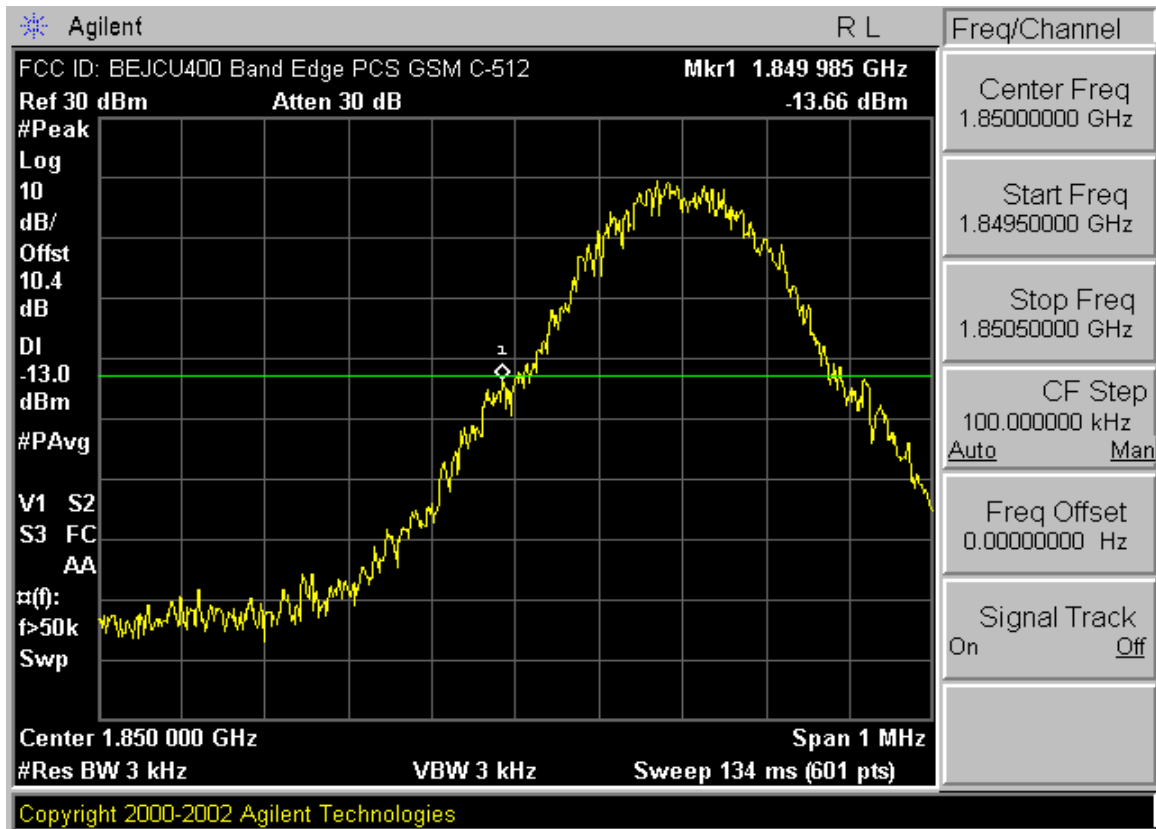



PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE			Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 7 of 10	

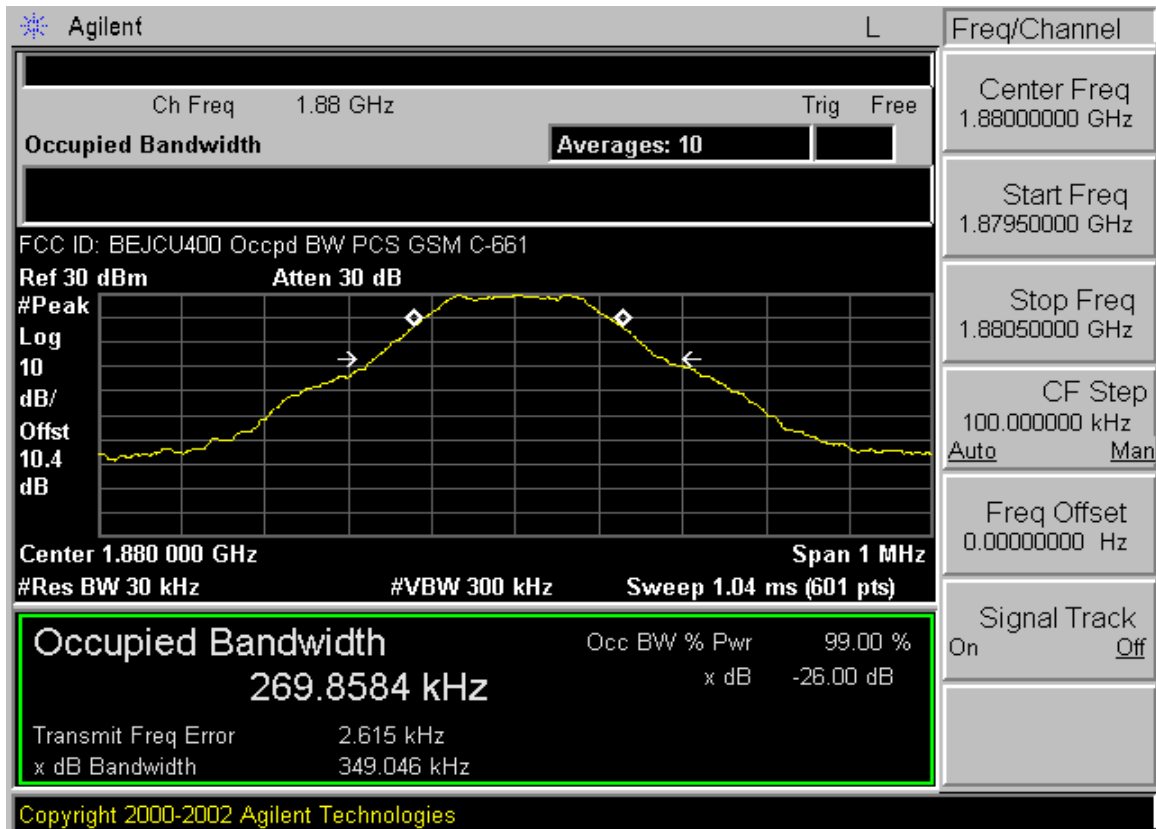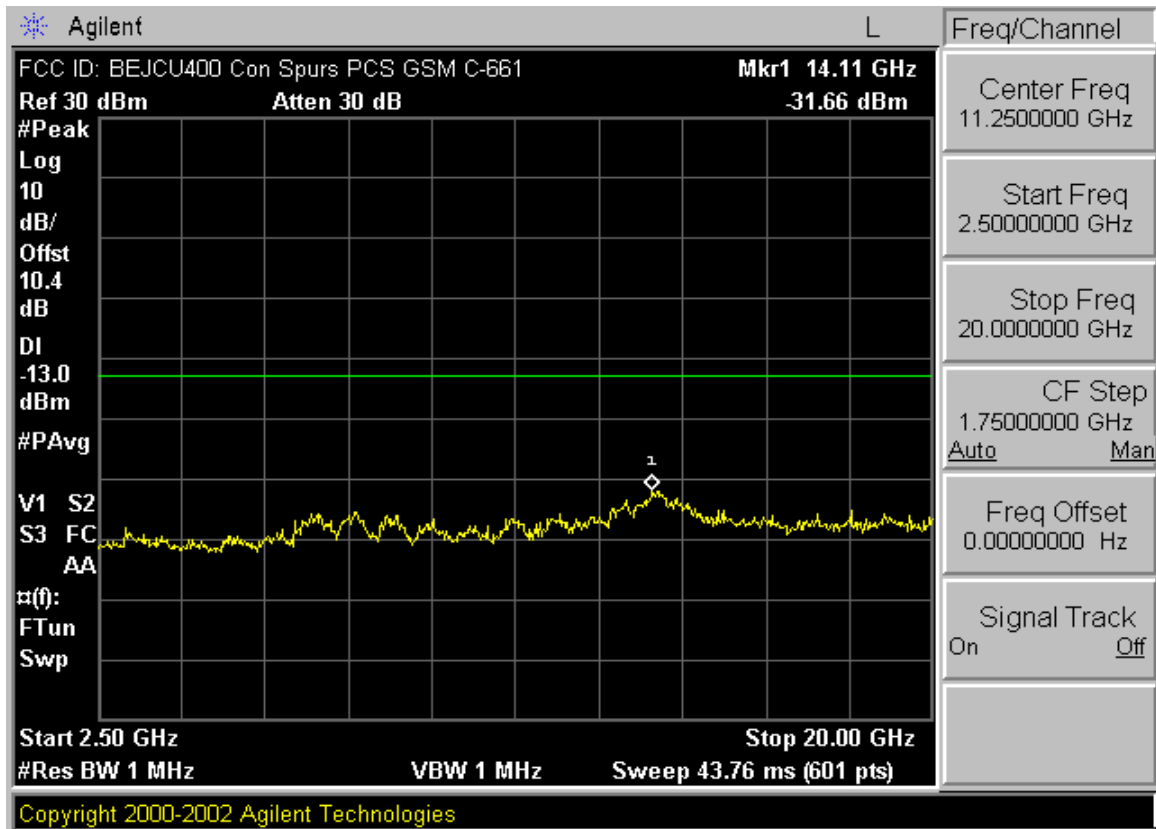

PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 8 of 10

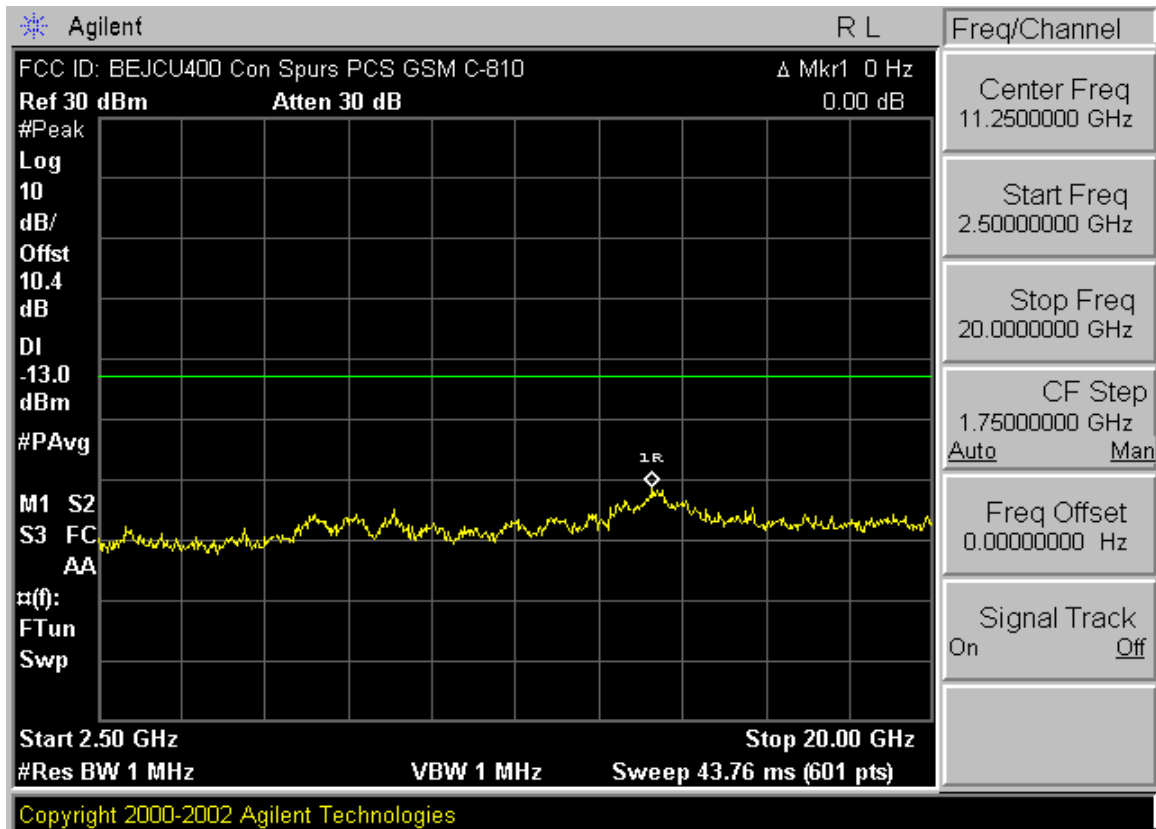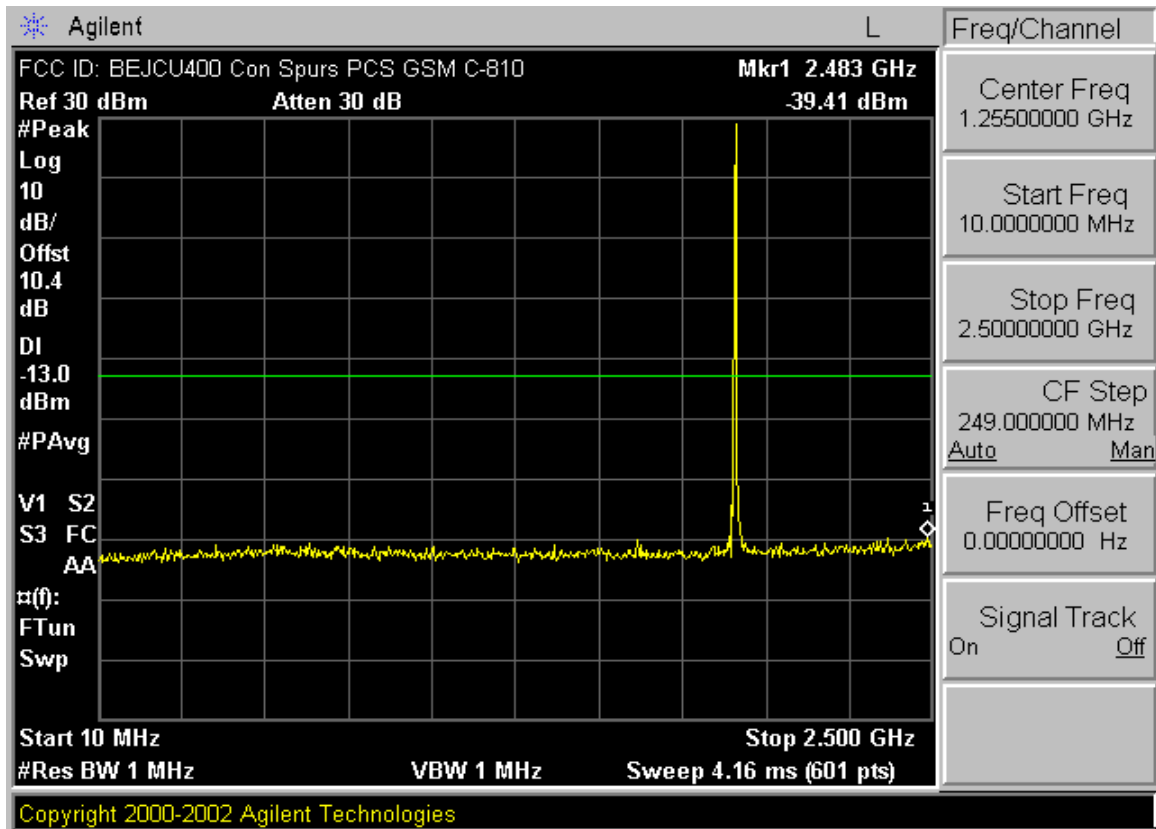

PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE			Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 9 of 10	

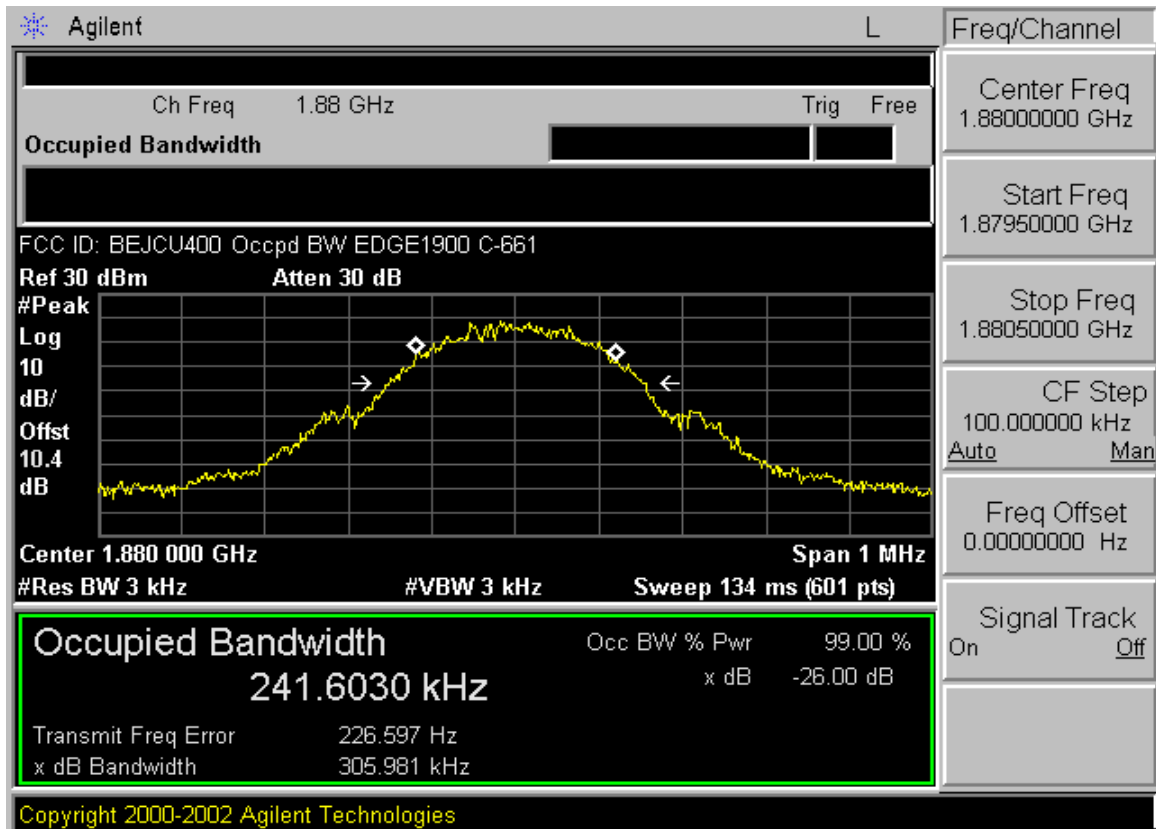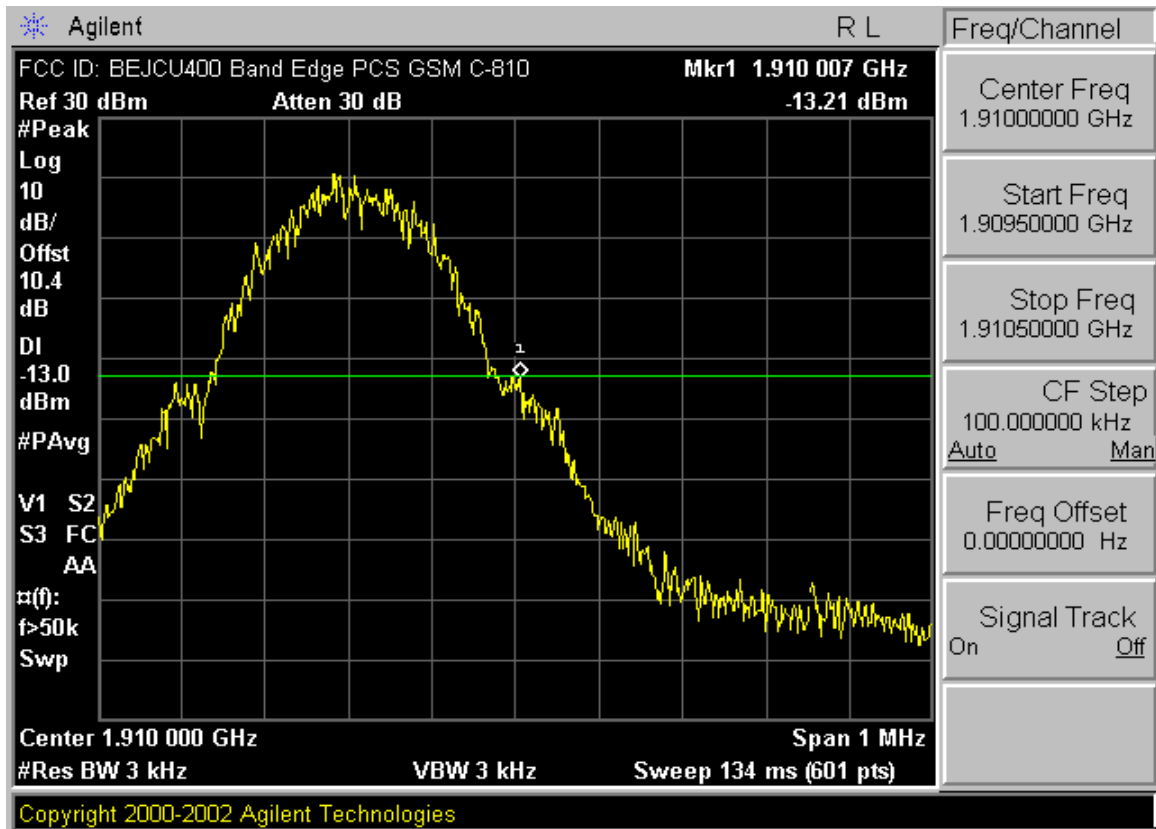

PCTEST™ PT. 22/24 CONDUCTED PLOTS		GSM/EDGE MODE		Reviewed by: Quality Manager
Test Report S/N: 0607050571-G	Test Dates: July 11 - 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth	FCC ID: BEJCU400	Page 10 of 10