

FCC EVALUATION REPORT FOR CERTIFICATION

Applicant: LG Electronics USA.**1000 Sylvan Avenue,****Englewood Cliffs New Jersey United States 07632,****Attn: Kyung-Su Han / Director****Date of Issue: Jun. 08, 2018****Order Number: GETEC-C1-18-186****Test Report Number: GETEC-E3-18-011****Test Site: GUMI UNIVERSITY EMC CENTER****FCC Registration Number: (269701)****FCC ID. : BEJD179NAA****Applicant : LG Electronics USA.**

Rule Part(s)	: FCC Part 18
Equipment Class	: Industrial, Scientific, and Medical equipment
EUT Type	: Household Electric Oven
Type of Authority	: Certification
Model Name	: LC389PC
Trade Name	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in MP-5 (1986).

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

**Sang Hyun Park / Associate Engineer
GUMI UNIVERSITY EMC CENTER**

Reviewed by,

**Hyoung Seop Kim, Technical Manager
GUMI UNIVERSITY EMC CENTER**



CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT / CABLES USED	7
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP	11
5.3 MEASUREMENT UNCERTAINTY.....	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED.....	12
5.6 TEST DATA FOR CONDUCTED EMISSION	12
6. RADIATED EMISSION	14
6.1 OPERATING ENVIRONMENT	14
6.2 TEST SET-UP	14
6.3 MEASUREMENT UNCERTAINTY.....	15
6.4 LIMIT	16
6.5 TEST EQUIPMENT USED.....	17
6.6 TEST DATA FOR RADIATED EMISSION	17
7. INPUT POWER.....	20
7.1 OPERATING ENVIRONMENT	20
7.2 TEST SET-UP	20
7.3 TEST EQUIPMENT USED.....	20
7.4 TEST DATA FOR INPUT POWER.....	20
8. RF POWER OUTPUT MEASUREMENT ACCORDING TO MP-5	21
8.1 OPERATING ENVIRONMENT	21
8.2 TEST SET-UP	21
8.3 TEST EQUIPMENT USED.....	21
8.4 TEST DATA FOR RF POWER OUTPUT MEASUREMENT ACCORDING TO MP-5	21
9. FREQUENCY MEASUREMENT	22
9.1 OPERATING ENVIRONMENT	22
9.2 TEST EQUIPMENT USED.....	22
9.3 TEST DATA FOR FREQUENCY MEASUREMENT	22
10. POWER DENSITY SAFETY CHECK	25
10.1 TEST SET-UP	25
10.2 TEST EQUIPMENT USED.....	25
10.3 TEST DATA FOR POWER DENSITY SAFETY CHECK.....	25



11. SAMPLE CALCULATIONS	26
11.1 EXAMPLE 1 :	26
11.2 EXAMPLE 2 :	26
12. RECOMMENDATION & CONCLUSION.....	27

APPENDIX A – ATTESTATION STATEMENT

APPENDIX B – LABELLING

APPENDIX C – BLOCK DIAGRAM

APPENDIX D – SCHEMATIC DIAGRAM

APPENDIX E – TEST SETUP PHOTOGRAPH


APPENDIX F – EXTERNAL PHOTOGRAPH

APPENDIX G – INTERNAL PHOTOGRAPH

APPENDIX H – USER’S MANUAL

APPENDIX I – OPERATIONAL DESCRIPTION

APPENDIX J – APPLICATION LETTER

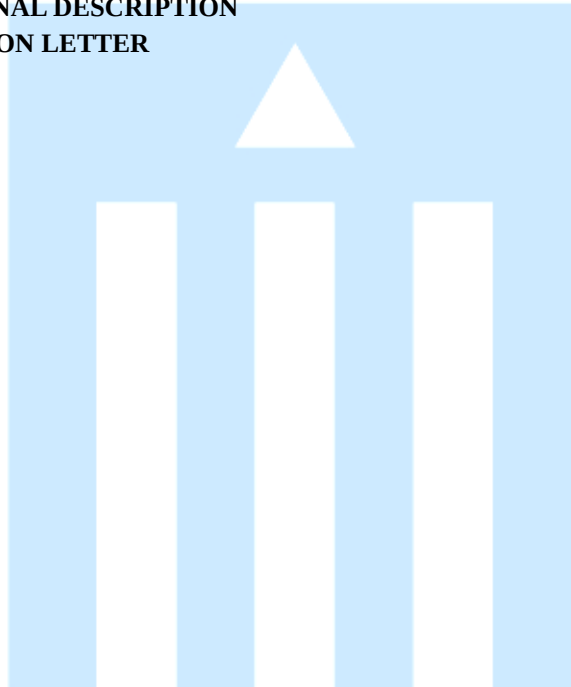



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics USA.

Applicant Address: 1000 Sylvan Avenue,

Englewood Cliffs New Jersey United States 07632

Manufacturer: LG Electronics Inc. Kitchen package division

Manufacturer Address: 170, Sungsanpaechong-ro, Seongsan-gu, Changwon-si,

Gyeongsangnam-di, 642-711, Korea

Contact Person: Seung-Ho Shin/Senior Research Engineer

Telephone Number: +82-55-260-3966

● FCC ID	BEJD179NAA
● EUT Type	Household Electric Oven
● Equipment Class	Industrial, Scientific, and Medical equipment
● Model Name	LC389PC
● Trade Name	LG
● Serial Number	Prototype
● Rule Part(s)	FCC Part 18
● Type of Authority	Certification
● Test Procedure(s)	MP-5 (1986)
● Dates of Test	Apr. 16, 2018 ~ May 30, 2018
● Place of Test	GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea.
● Test Report Number	GETEC-E3-18-011
● Date of Issue	Jun. 08, 2018

EUT Type: Household Electric Oven

FCC ID.: BEJD179NAA





2. Introduction

The measurement procedure described in FCC methods of measurements of radio noise emissions from industrial, scientific, and medical equipment (MP-5: 1986) was used in determining radiated and conducted emissions emanating from **LG Electronics USA. Household Electric Oven (Model Name:LC389PC)**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea.

This test site is one of the highest point of Gumi UNIVERSITY at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2014)

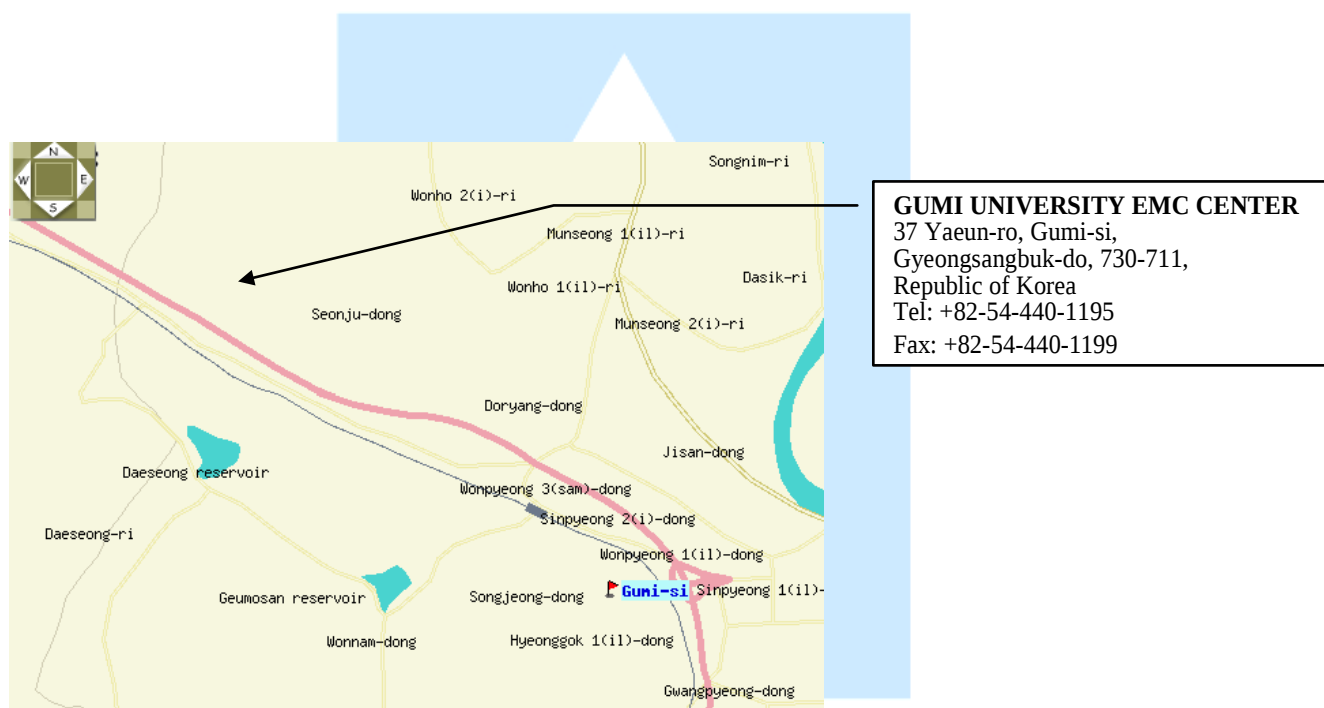


Fig 1. The map above shows the Gumi UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics USA.**

Household Electric Oven(Model Name:LC389PC) FCC ID.: BEJD179NAA

1	Equipment Class	ISM Consumer Device, Part 18
2	Equipment name	Household Electric Oven
3	Trade name	LG
4	Model number	LC389PC, Buyer-LWC3063BD, LWC3063ST, LWC3063BM
5	Manufacturer	LG Electronics Inc. 170, Seongsanpaechong-Ro, Seongsan-Gu, Changwon-Si, Gyeongsangnam-Do, 51533, Korea
6	FCC ID	BEJD179NAA
7	Serial number & Manufacturer data	Proto type, not provided yet
8	Date of original grant	NA
9	Rated RF power output	950 W
10	Rated power consumption Microwave mode	1650 W
11	Rated current Microwave mode	14 A
12	Overall dimensions (inch)	29-3/4 x 43 7/8 x 24 7/15 (W x H x D)
13	Cavity dimensions (inch)	Upper MWO 12-11/15 x 8-5/14 x 17-5/16 (W x H x D) Lower Oven 24-10/19 x 17 7/11 x 19 2/15 (W x H x D)
14	Cavity volume	Upper MWO 1.7 cu.ft , Lower Oven 4.7cu.ft
15	Magnetron	2M246
16	Mode of Stirrer	Turntable
17	Measurement facility	LG
18	Frequency range in MHz	2450 ±50 MHz

- For model name information, refer to "Appendix J = application letter"

EUT Type: Household Electric Oven

FCC ID.: BEJD179NAA





3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -

See "Appendix D – Test Setup Photographs" for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -

3.2.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and AC power source	2.30 m Unshielded

3.3 Modification Item(s)

- None



4. Description of tests


4.1 Test Condition

The EUT was operated at maximum (continuous) RF output power. The loads consisted of water in a glass beaker in the amounts specified in the test procedure.

The test conditions of the noted test mode(s) in this test report are;

- Test Voltage / Frequency : AC 120 V / 60 Hz
- Test Mode(s)

- **Conducted Emission**
 - Continuous RF output mode
- **Radiated Emission**
 - Continuous RF output mode

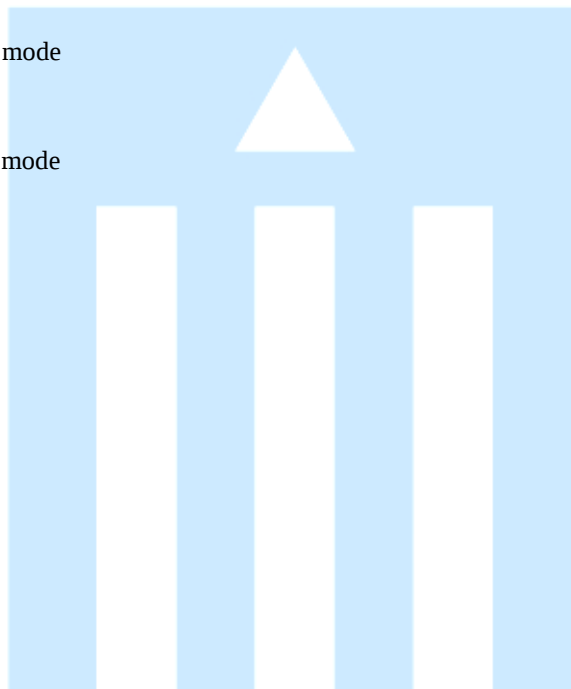



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.

(FCC Test Firm Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.4 m in height and 0.8 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

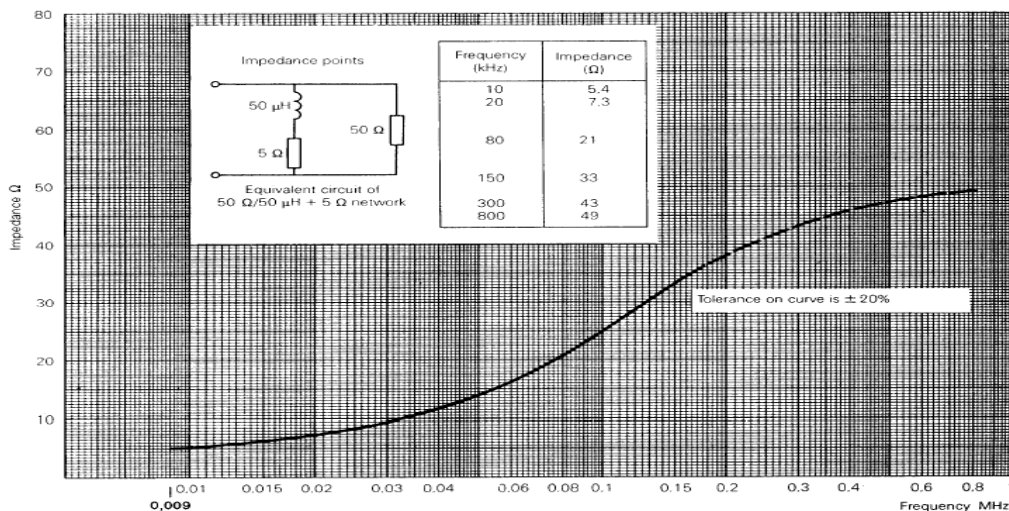


Fig 2. Impedance of LISN



4.3 Radiated Emission

Exploratory Radiated measurements were conducted at the 3 m or 10 m semi anechoic chamber in order to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Final measurements of below 1 GHz were made at 3 m or 10 m Chamber (FCC Test Firm Registration No.: 269701) or Open area test site (FCC Test Firm Registration No.: 269701) that complies with CISPR 16

Above 1 GHz final measurements were conducted at the 3m Chamber (FCC Test Firm Registration No.: 269701) only.

For measurements above 1GHz, the bottom side of 3 m chamber was installed with absorbers in order to meet SVSWR Limit.

Exploratory measurements were scanned using Peak mode of EMI Test receiver and final measurements were measured with Quasi-Peak mode (Below 1 GHz) and Average mode (Above 1 GHz).

The measurements were performed by rotating the EUT 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

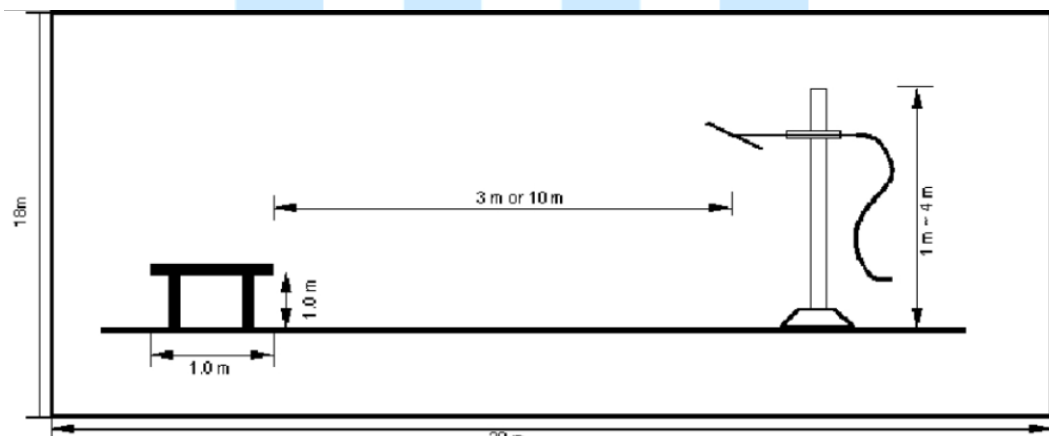


Fig 3. Dimensions of test site (Below 1 GHz)

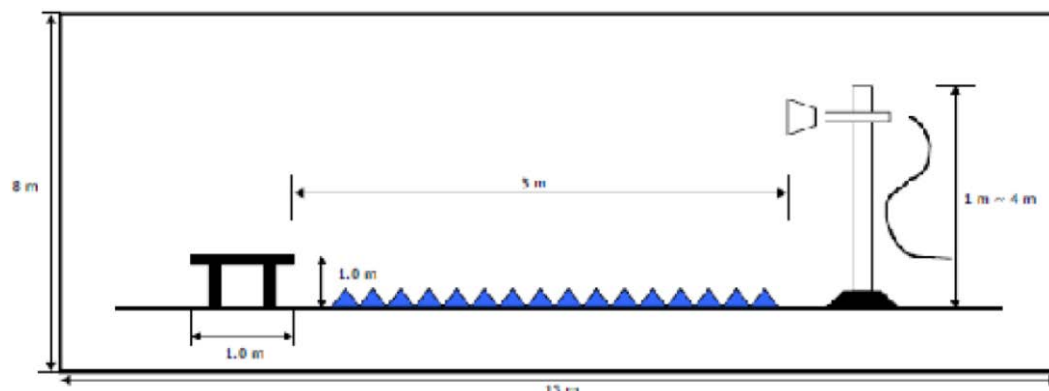


Fig 4. Dimensions of test site (Above 1 GHz)



5. Conducted Emission

5.1 Operating Environment

Temperature : 25.6 °C
Relative Humidity : 48.7 % R.H.
Air Pressure : 100.2 kPa

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.4 m heights above the floor, 0.8 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.85 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	100237	Apr. 16, 2019
□ - ENV216	Rohde & Schwarz	LISN	100172	Apr. 12, 2019
□ - ENV216	Rohde & Schwarz	LISN	100173	Apr. 12, 2019
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	Apr. 17 2019
■ - VTSD 9561-F	SCHWARZBECK	Pulse Limiter	193	Jul. 18, 2018
■ - EMC 32	Rohde & Schwarz	Software	Ver.8.53	N/A

5.6 Test data for Conducted Emission

- Test Date : May 30, 2018
- Resolution Bandwidth : 9 kHz
- Frequency Range : 0.15 MHz ~ 30 MHz
- Line : L1: Live, N: Neutral



- Operating condition: Continuous RF output mode

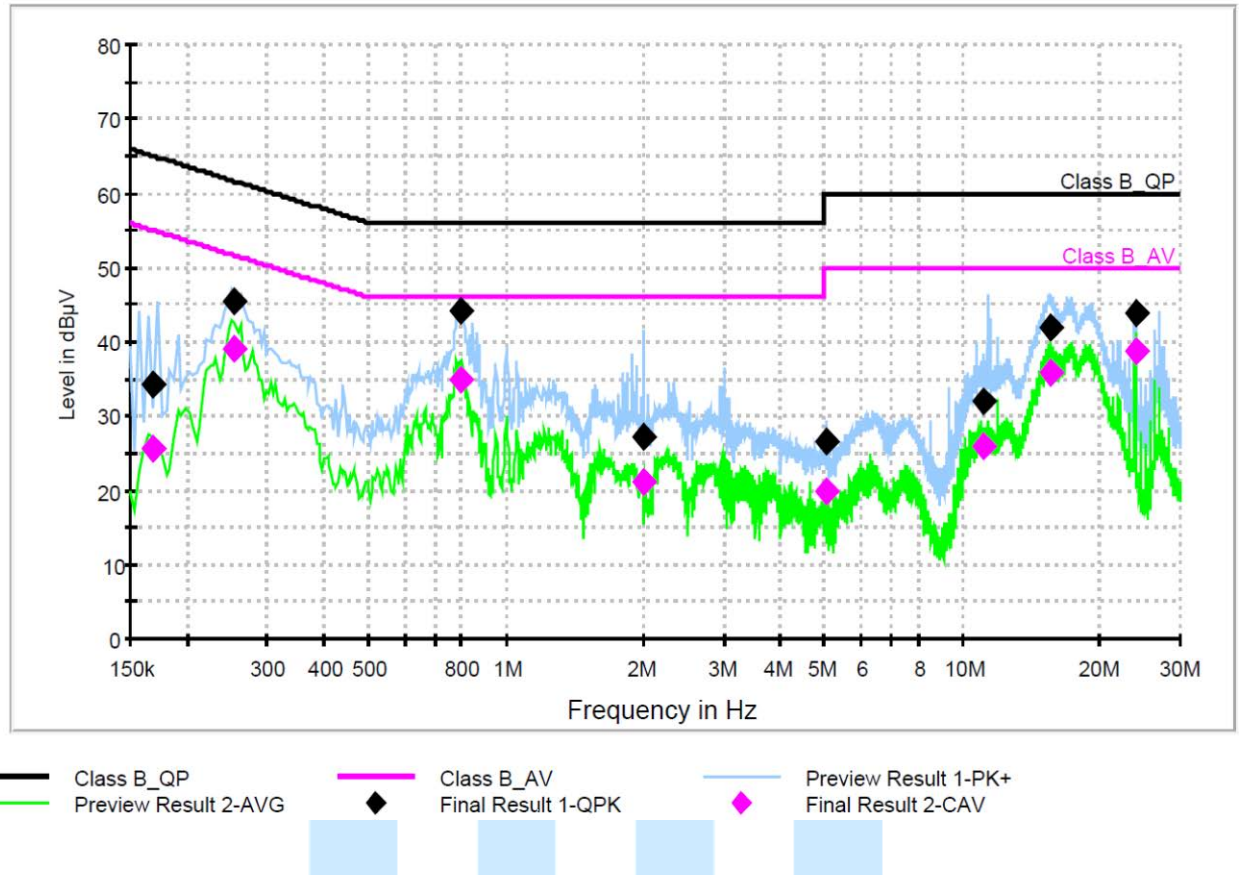

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.167979	34.2	1000.0	9.000	GND	L1	10.7	30.9	65.1	
0.255011	45.4	1000.0	9.000	GND	L1	10.7	16.2	61.6	
0.794337	44.1	1000.0	9.000	GND	N	10.8	11.9	56.0	
1.990908	27.1	1000.0	9.000	GND	L1	10.9	28.9	56.0	
5.022576	26.5	1000.0	9.000	GND	L1	11.1	33.5	60.0	
11.130375	31.9	1000.0	9.000	GND	N	11.4	28.1	60.0	
15.558499	42.0	1000.0	9.000	GND	N	11.6	18.0	60.0	
23.912607	44.0	1000.0	9.000	GND	L1	11.8	16.0	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.167979	25.5	1000.0	9.000	GND	L1	10.7	29.6	55.1	
0.255011	39.0	1000.0	9.000	GND	L1	10.7	12.6	51.6	
0.794337	34.9	1000.0	9.000	GND	N	10.8	11.1	46.0	
1.990908	21.1	1000.0	9.000	GND	L1	10.9	24.9	46.0	
5.022576	20.0	1000.0	9.000	GND	L1	11.1	30.0	50.0	
11.130375	25.9	1000.0	9.000	GND	N	11.4	24.1	50.0	
15.558499	36.0	1000.0	9.000	GND	N	11.6	14.0	50.0	
23.912607	38.8	1000.0	9.000	GND	L1	11.8	11.2	50.0	

< Fig 5. Graph of continuous disturbance >

EUT Type: Household Electric Oven

FCC ID.: BEJD179NAA






6. Radiated Emission

6.1 Operating Environment

Temperature : 21.8 °C
Relative Humidity : 33.8 % R.H.
Air Pressure : 101.3 kPa

6.2 Test Set-up

A preliminary and final measurement was at 3 m & 10 m anechoic chamber.
The EUT was placed on a non-conductive turntable approximately 1.0 m above the ground plane.
The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.
This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

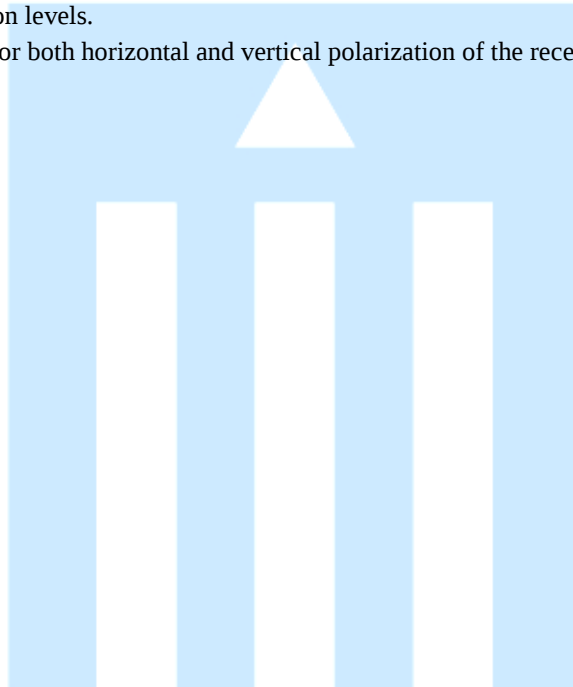



6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(3 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	5.01 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	5.01 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	5.10 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.10 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	4.53 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 18 000 MHz, 3 m)	4.55 dB	Confidence level of approximately 95 % ($k = 2$)
Test Items(10 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 10 m, Vertical)	3.50 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Horizontal)	3.73 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Vertical)	3.67 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Horizontal)	3.64 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	4.39 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 18 000 MHz, 3 m)	4.50 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



6.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (μV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	<u>Any non-ISM frequency</u>	<u>Below 500</u> 500 or more	<u>15</u> $15 \times \text{SQRT}(\text{power}/500)$	<u>300</u> ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 (2)	1,600 (2)
Medical diathermy	Any ISM frequency Any non-ISM frequency	Any Any	25 15	300 300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/F(\text{kHz})$ $2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz Above 1,600 kHz	Any Any	$24,000/F(\text{kHz})$ 15	30 30
Induction cooking ranges	Below 90 kHz On or above 90 kHz	Any Any	1,500 300	⁴ 30 ⁴ 30

Notes:

- * Limit (at 300 m) = $25 * (\text{RF Power}/500)^{1/2}$ [μV/m]
- * Field Strength below 1,000 MHz (at 300 m) [μV/m] = $10^{[(\text{Field strength at } 10\text{m(dBuV/m)}-29.5)/20]}$
- * Field Strength above 1,000 MHz (at 300 m) [μV/m] = $K * 10^{[(\text{Field strength at } 3\text{m(dBuV/m)})/20]}$



6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	Apr. 16, 2019
□ - ESU40	Rohde & Schwarz	EMI Test Receiver	100266	Apr. 17, 2019
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	Sep. 29, 2018
■ - 3160-09	ETS LINDGREN	Horn ANT	218457	Feb. 01, 2019
■ - MCU066	matur GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	matur GmbH	Turntable	1390307	N/A
■ - AM 4.0	matur GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	Apr. 18, 2019
■ - SCU-F1826-G47-BZ42-CSS(F)	Rohde & Schwarz	Preamplifier	10003	Apr. 18, 2019
■ - WHKX3.0/18G-10SS	WAINWRIGHT INSTRUMENTS	High pass filter	SN31	Apr. 12, 2019
■ - ESR7	Rohde & Schwarz	EMI Test Receiver	101382	Apr. 17, 2019
■ - VULB9160	Schwarzbeck	Broad Band Test Antenna	3099	Sep. 29, 2019
■ - TK-PA06S	Testek	Low Noise Amplifier	170038-L	Apr. 18, 2019
■ - CO3000	Innco system GmbH	Position Controller	CO03000/779/ 33050314/L	N/A
■ - DT3000	Innco system GmbH	Turntable	1280314	N/A
■ - MA4000-EP	Innco system GmbH	Antenna Mast	4420314	N/A

6.6 Test data for Radiated Emission


- Test Date : Apr. 17 ~ 18. 2018
- Measurement Distance : 3 m, 10 m
- Note : -

- Measurement

Frequency range	30 MHz ~ 1 GHz @ 10 m	Above 1 GHz @ 3m
Detector mode	Quasi peak	Peak / Average
Resolution bandwidth	120 kHz	1 MHz



-, 30 MHz ~ 1 GHz

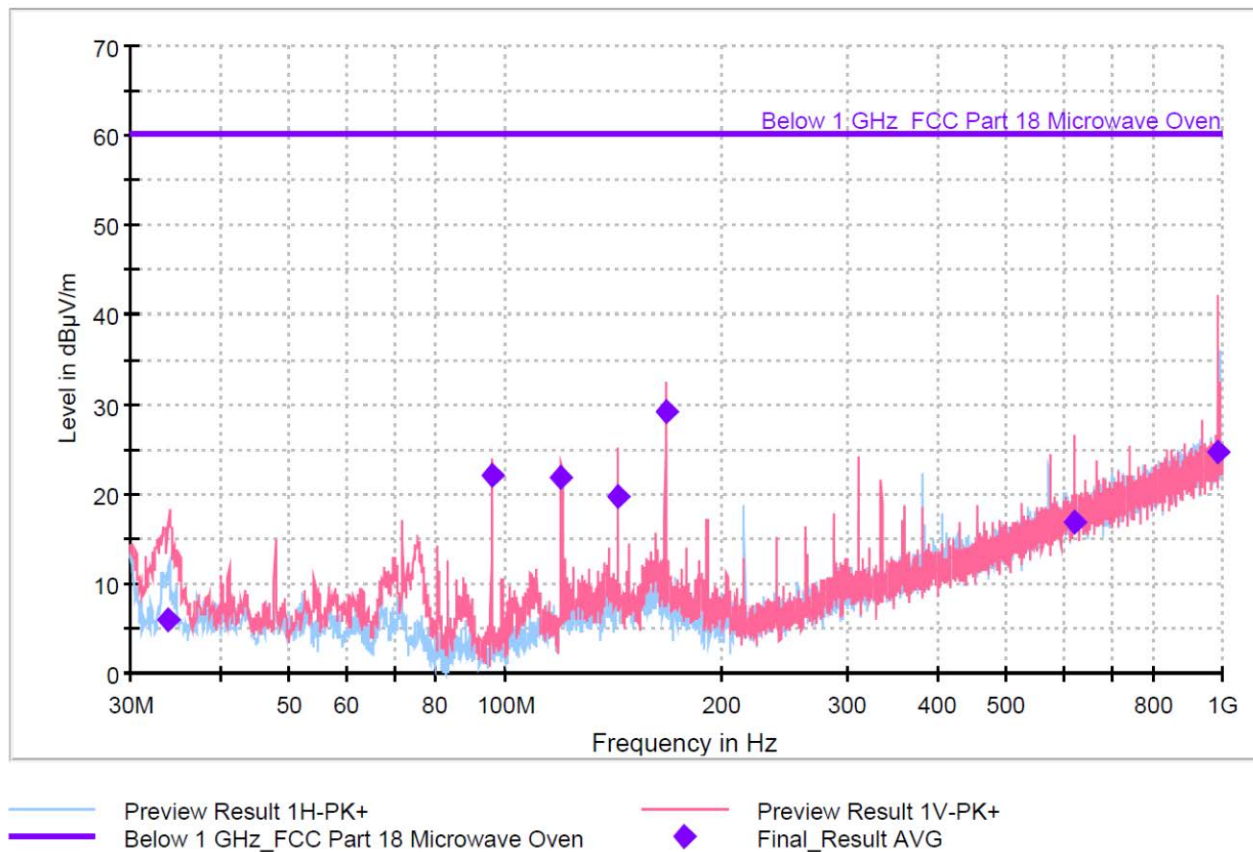

Final Result

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.758	5.89	60.22	54.33	1000.0	120.000	332.1	V	100.0	-21.7
95.829	22.08	60.22	38.14	1000.0	120.000	125.0	V	187.0	-24.9
119.767	21.75	60.22	38.47	1000.0	120.000	100.0	V	282.0	-21.6
143.730	19.65	60.22	40.57	1000.0	120.000	109.9	V	-33.0	-20.2
167.206	29.09	60.22	31.13	1000.0	120.000	106.0	V	295.0	-20.2
620.964	16.96	60.22	43.26	1000.0	120.000	324.8	V	117.0	-9.2
987.589	24.60	60.22	35.62	1000.0	120.000	125.0	V	255.0	-2.8

< Fig 6. Radiated emission result (30 MHz ~ 1 000 MHz) >



-. 1 GHz ~ 26 GHz

Freq [GHz]	Pol.	Load [mL]	Load Location	Reading [dB μ V]	Limit [dB μ V/m] @ 3m	Margin [dB]	Height (cm)	Azimuth
2.381	V	300	Rt. Front	48.53	70.68	22.15	150	30
2.523	H	700	Rt. Front	34.75	70.68	35.93	100	160
11.086	V	300	Center	62.89	70.68	7.79	110	210
11.116	H	300	Rt. Front	61.53	70.68	9.15	100	0
19.584	H	700	Center	58.81	70.68	11.87	160	340
19.635	V	700	Rt. Front	61.28	70.68	9.40	120	80

Notes:

- 1) Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 mL, of water were used. Each load was tested both with the beaker located in the center of the oven and with it in the corner.
- 2) Load for all other measurements: 700 mL of water, with the beaker located in the center of the oven.
- 3) The tests were made with average detector for frequency range of 1 GHz to 26 GHz.



7. Input Power

7.1 Operating Environment

Temperature : 27.2 °C
Relative Humidity : 24.2 % R.H.
Air Pressure : 101.0 kPa

7.2 Test Set-up

Test input power was measured using Wattmeter. A 275 mL water load in a polypropylene beaker is placed in the center of the oven. The 275 mL water was chosen for its compatibility with UL procedure to determine input ratings. The oven was operated at the rated input and full output power for 6 minutes.

7.3 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - 360AMX	Pacific	AC power source	0438	Apr. 19, 2019
■ - PM6000	Voltech	Power analyzer	100006700132	Feb. 27, 2019

7.4 Test data for Input Power

-. Test Date : Apr. 16, 2018
-. Test condition : Continuous RF output mode (Load: 275 mL)
-. Measurement

Mode	Input Voltage	Current [A]	Power Consumption [W]	Manufacturer Rating [A]
Microwave	AC 120 V, 60 Hz	14.81	1 667	14.0



8. RF Power Output Measurement according to MP-5

8.1 Operating Environment

Temperature : 27.4 °C
Relative Humidity : 24.0 % R.H.
Air Pressure : 101.0 kPa

8.2 Test Set-up

The Calorimetric Method was used to determine maximum output power. A 1 000 mL water load was placed in the center of the oven. A mercury thermometer was used to measure temperature rise. The test method was described in MP-5

8.3 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - 360AMX	Pacific	AC power source	0438	Apr. 19, 2019
■ - PM6000	Voltech	Power analyzer	100006700132	Feb. 27, 2019

8.4 Test data for RF Power Output Measurement according to MP-5

-. Test Date : Apr. 16, 2018
-. Test condition : Continuous RF output mode (Load: 1 000 mL)
-. Measurement

$$\text{Power [W]} = \frac{(4.187 \text{ Joules/Cal}) \times (\text{Volume in mL}) \times (\text{Temperature Rise})}{\text{Time in Seconds}}$$

Quantity of Water	Starting Temperature	Final Temperature	Elapsed Time
1 000 mL	23.4 °C	50.2 °C	120 Sec

$$\text{Power [W]} = \frac{4.187 \times 1\,000 \times 26.8}{120}$$

Power [W] = 935.1 Watts



9. Frequency Measurement

9.1 Operating Environment

Temperature : 24.8 °C
Relative Humidity : 56.6 % R.H.
Air Pressure : 100.2 kPa

9.2 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
□ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	Apr. 16, 2019
■ - ESU40	Rohde & Schwarz	EMI Test Receiver	100266	Apr. 17, 2019
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	Sep. 29, 2018
□ - 3160-09	ETS LINDGREN	Horn ANT	218457	Feb. 01, 2019
■ - MCU066	matur GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	matur GmbH	Turntable	1390307	N/A
■ - AM 4.0	matur GmbH	Antenna Mast	1390308	N/A
□ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	Apr. 18, 2019
□ - SCU-F1826-G47-BZ42-CSS(F)	Rohde & Schwarz	Preamplifier	10003	Apr. 18, 2019


9.3 Test data for Frequency Measurement

9.3.1 Line Voltage Variation Test


- Test Date : May. 30, 2018
- Test condition : Continuous RF output mode
- Test Voltage : AC 96 V, 60 Hz and AC 150 V, 60 Hz
- Load : 1 000 mL
- Fundamental Frequency : 2 450 MHz
- Limit : $2.4 \text{ GHz} < f < 2.5 \text{ GHz}$
- Measurement : Maximum Frequency Observed – 2.474 GHz
Minimum Frequency Observed – 2.460 GHz

9.3.2 Load Variation Test


- Test Date : May. 30, 2018
- Test condition : Continuous RF output mode
- Test Voltage : AC 120 V, 60 Hz
- Initial Load : 1 000 mL
- Final Load : 200 mL
- Fundamental Frequency : 2 450 MHz
- Limit : $2.4 \text{ GHz} < f < 2.5 \text{ GHz}$
- Measurement : Maximum Frequency Observed – 2.465 GHz
Minimum Frequency Observed – 2.461 GHz

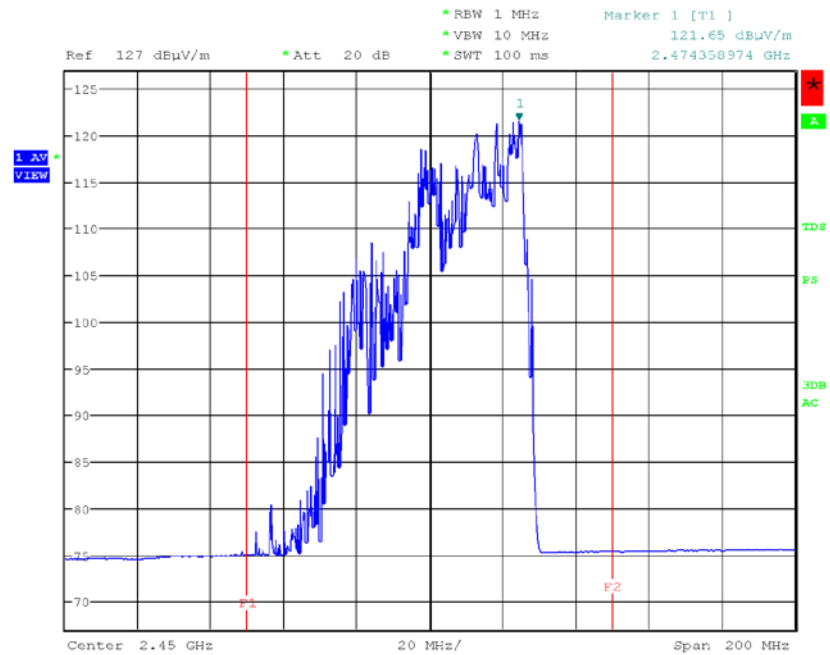


< Fig 7. Frequency Measurements (Maximum Frequency Observed: 2.474 GHz) >

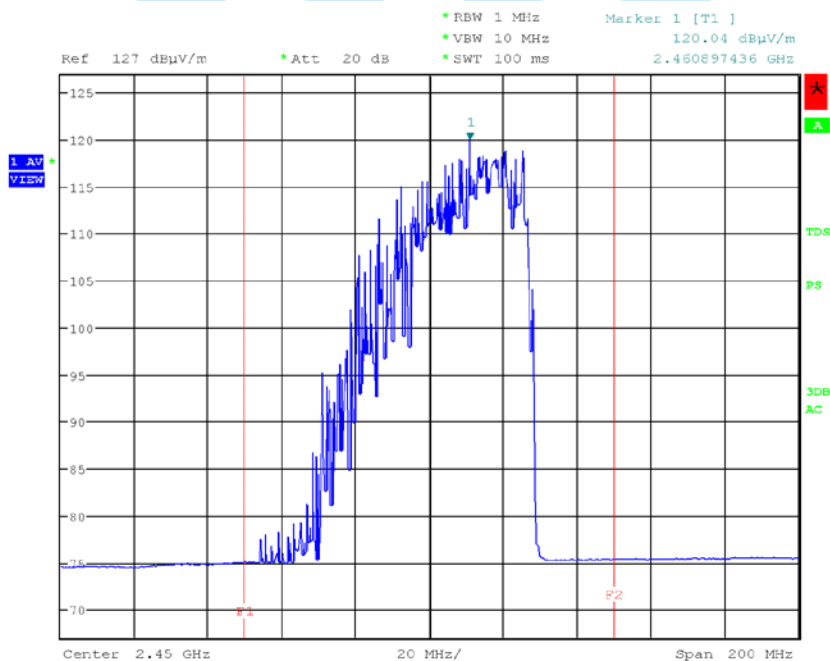

< Fig 8. Frequency Measurements (Minimum Frequency Observed: 2.460 GHz) >

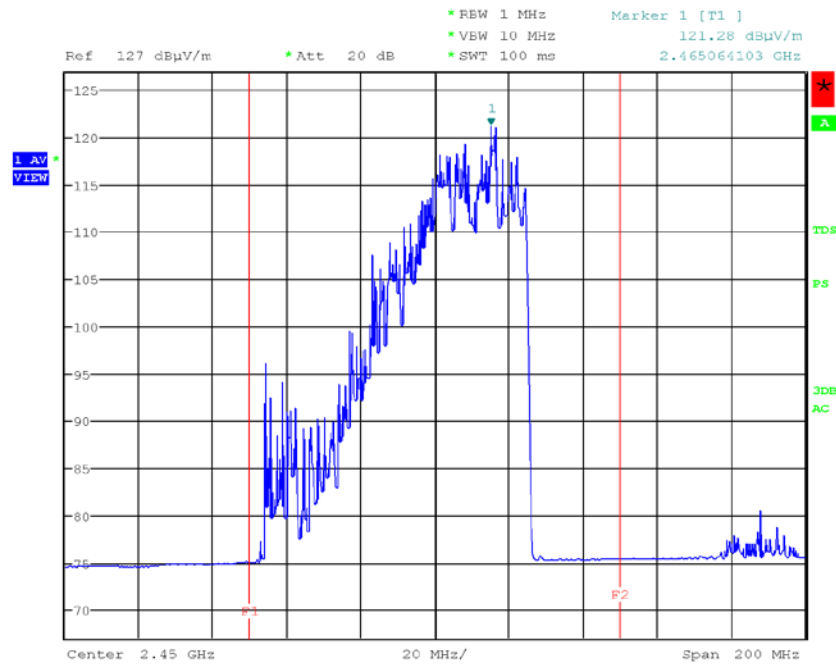

< Fig 9. Frequency Measurements (Maximum Frequency Observed: 2.465 GHz) >

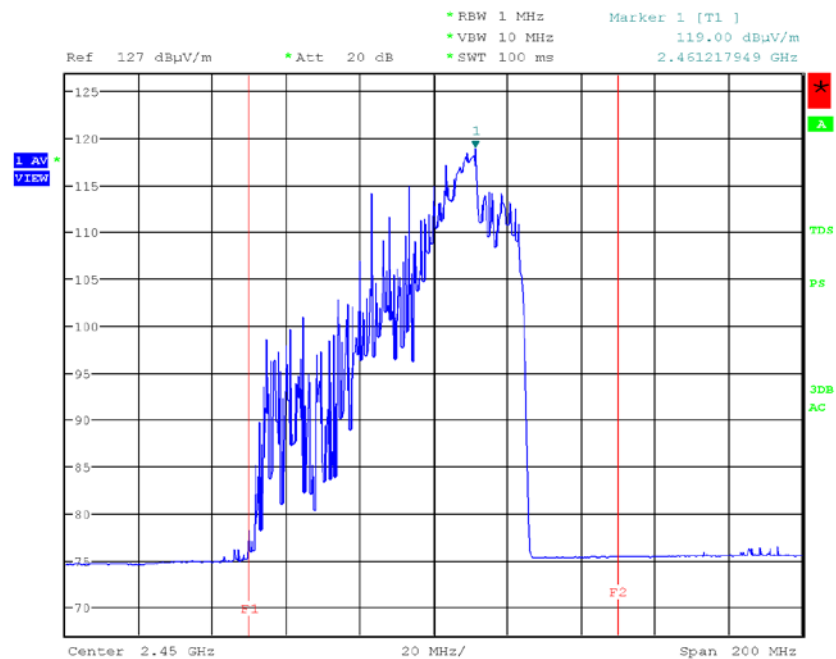

< Fig 10. Frequency Measurements (Minimum Frequency Observed: 2.461 GHz) >



10. Power Density Safety Check

10.1 Test Set-up

The power density was checked to ensure that the power is not greater than 1.0 mW/cm^2 at any location of the oven. The 1.0 mW/cm^2 is in accordance with CDRH and UL923 standard.

A microwave survey meter was placed on all sides, door and viewing, bottom, top and rear.

The leakage microwave did not exceed the specified limits.

10.2 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - Holaday	ETS LINDGREN	Microwave Survey Meter	FJZ431 HA	Jun. 05, 2018

10.3 Test data for Power Density Safety Check

-. Test date: May 21, 2018

-. Measurement

Maximum Leakage Microwave Observed: 0.19 mW/cm^2

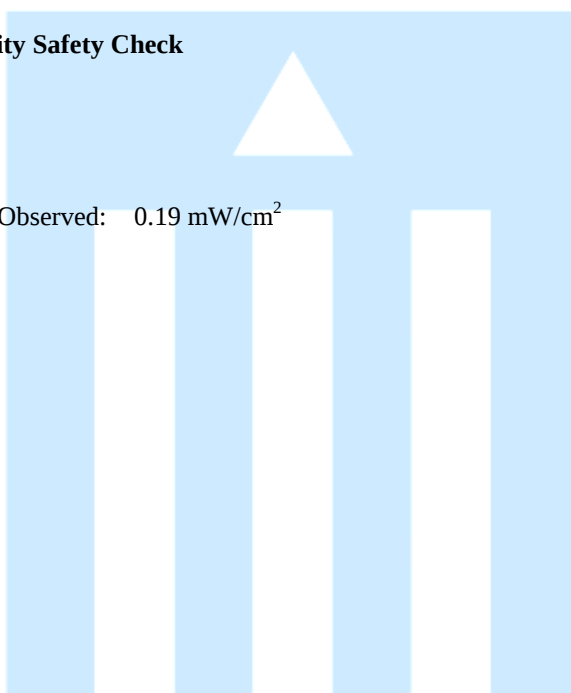



11. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

11.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV
	= 8.8 dB

11.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$
	= 3.2 dB



12. Recommendation & Conclusion

The data collected shows that the **LG Electronics USA. Household Electric Oven(Model Name:LC389PC)** was complies with §18.305, 18.307, 18.309 and 18.311 of the FCC Rules.

- The end -

