



FCC TEST REPORT

According to

47 CFR, Part 2, Part 15 and CISPR PUB. 22

Applicant	: LG Electronics USA
Address	: 1000 Sylvan Avenue Englewood Cliffs New Jersey United States
Equipment	: LCD Monitor
Model No.	: E2242CA,E2242SA
FCC ID	: BEJE2242SA

This is a series report. The original report No. is SEFD1203070-D.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **CerpPASS Technology Corp.** the test report shall not be reproduced except in full.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



Contents

1. Summary of Test Procedure and Test Result	5
2. Test Configuration of Equipment under Test.....	6
2.1. Manufacturer	6
2.2. Feature of Equipment under Test	6
2.3. Test Manner	8
2.4. Description of Support Unit	9
2.5. General Information of Test	10
2.6. Measurement Uncertainty	10
3. Test of Conducted Emission	11
3.1. Test Limit	11
3.2. Test Procedures.....	11
3.3. Typical test Setup	12
3.4. Measurement equipment.....	12
3.5. Test Result and Data	13
4. Test of Radiated Emission	15
4.1. Test Limit	15
4.2. Test Procedures.....	16
4.3. Typical test Setup	16
4.4. Measurement equipment.....	17
4.5. Test Result and Data (30MHz ~ 1000MHz).....	18
4.6. Test Result and Data (1000MHz ~ 18000MHz).....	20



History of this test report

☐ ORIGINAL.

☐ Additional attachment as following record:

Attachment No.	Date	Description
SEFD1201003	Jan 09, 2012	First edition
SEFD1201003-B	Feb 20,2012	Second edition (Update the shell appearance and add one panel: On page 7)
SEFD1201003-D	Mar 20, 2012	Third edition (Add two panel)
SEFD1203070-A	May 02, 2012	Fourth edition (Add two panel)
SEFD1203070-B	May 09, 2012	Fifth edition (Add a panel)
SEFD1203070-C	May 18, 2012	Sixth edition (Add a panel)
SEFD1205064-A	May 29, 2012	Seventh edition(Update PCB: size become small, Layout change)
SEFD1203070-D	Jul 19, 2012	Eighth edition (Add a panel)
SEFD1205110-A	Aug 15, 2012	Nineth edition(Add two adapters)



FCC TEST REPORT

According to

47 CFR, Part 2, Part 15 and CISPR PUB. 22

Applicant	: LG Electronics USA
Address	: 1000 Sylvan Avenue Englewood Cliffs New Jersey United States
Equipment	: LCD Monitor
Model No.	: E2242CA,E2242SA
FCC ID	: BEJE2242SA

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 – 2003** and the energy emitted by this equipment was ***passed*** **CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission class B limits. Testing was carried out on Aug 14, 2012 at ***CerpPASS Technology Corp.***

Signature

Miro Chueh/ Technical director



1. Summary of Test Procedure and Test Result

Test Item	Normative References	Test Result
Conducted Emission	ANSI C63.4-2003 FCC Part 15 Subpart B	PASS
Radiated Emission	ANSI C63.4-2003 FCC Part 15 Subpart B	PASS



2. Test Configuration of Equipment under Test

2.1. Manufacturer

LG Electronics Nanjing Display Co.,Ltd.

No.346,Yaoxin Road Economic & Technical Development Zone Nanjing China

2.2. Feature of Equipment under Test

LCD Monitor	Model No:	E2242CA,E2242SA
Adapter #1	Manufacturer:	Lien Chang Electronic Enterprise Co.,Ltd.
	Model No.:	LCAP21
	Input Rating:	100-240V~ 50-60Hz,1.1 A
	Output Rating:	19V  1.3A
DC Cable	Non-shielded, 1.5m with one ferrite cores bonded	
Adapter #2	Manufacturer:	SHENZHEN HONOR ELECTRONIC CO.,LTD.
	Model No.:	ADS-40SG-19-3 19025G
	Input Rating:	100-240V~ 50/60Hz,1.0A
	Output Rating:	19V  1.3A
DC Cable	Non-shielded, 1.5m	
Adapter #3	Manufacturer:	SHENZHEN HONOR ELECTRONIC CO.,LTD.
	Model No.:	ADS-40FSG-19 19025G***-1(*** can be PG,PBR,PI,PCU,PB-2 (direct plug-in type) represents different plug types, ADS-40FSG-19 19025GPG-1 was selected as the test model)
	Input:	100-240V~ 50/60Hz 1.0A max
	Output:	19V  1.3A
DC Cable	Non-Shielded, 1.5m	
Adapter #4	Manufacturer:	Lien Chang Electronic Enterprise Co.,Ltd.
	Model No.:	LCAP26-* (* can be A,E,I,B direct plug-in type) represents different plug types, LCAP26-E was selected as the test model)
	Input:	100-240V~50-60Hz 1.1A
	Output:	19V  1.3A
DC Cable	Non-Shielded, 1.5m	
VGA Cable	Shielded, 1.5m	
Power Supply cable	Non-Shielded, 1.5m	
※ the EUT Photos of 36~39,41-42 Just a publicity.		
Remark:	E2242CA and E2242SA are identical except the model name. This is only to satisfy the different requirements of the client.	



Panel Manufacturer	Panel Model No.
AU Optronics	M215HW03
CHIMEI INNOLUX	M215HGE
LG Electronics Inc	LGM215AC01
BOE	HM215WU1
LG Electronics Inc	LGM215AB01

Add two panel:

Panel Manufacturer	Panel Model No.
LGE	LGM215AP01
LGE	LGM215AP11

Add a panel:

Panel Manufacturer	Panel Model No.
BOE	HT215F01

Add a panel:

Panel Manufacturer	Panel Model No.
LG Electronics Inc	LM215WF4

Add a panel:

Panel Manufacturer	Panel Model No.
LG Electronics Inc	LM215AL01

Add two adapter

Adapter #5	Manufacturer:	LG Innotek Co.,Ltd.
	Model No.:	PSAB-L203A
	Input:	100-240V~50-60Hz 1.1A
	Output:	19V $\overline{\text{---}}$ 1.3A
DC Cable	Non-shielded, 1.5m, with one ferrite cores bonded	
Adapter #6	Manufacturer:	LG Innotek Co.,Ltd.
	Model No.:	PSAB-L202*(* can be A,B,C,D direct plug-in type) represents different plug types, PSAB-L202A was selected as the test model)
	Input:	100-240V~ 50/60Hz 1.1A
	Output:	19V $\overline{\text{---}}$ 1.3A
DC Cable	Non-shielded, 1.5m, with one ferrite cores bonded	



2.3. Test Manner

Test Software

- a During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b The complete test system included the PC, USB Printer, USB Keyboard, USB Mouse, and EUT for EMI test.
- c During the test, setup up the EUT and all system, turn on the power of all Equipments, run the EMC test software "H", set the contrast control to maximum, set the brightness control to maximum, use white letters on a black background to represent all colors, make the EUT at the test mode and it is normal operation, and then test.

The pre-test modes

Test Mode 1: Full system (VGA mode 1920*1080@60Hz)With Adapter#5

Test Mode 2: Full system (VGA mode 1024*768@75Hz) With Adapter#5

Test Mode 3: Full system (VGA mode 720*400@70Hz) With Adapter#5

Test Mode 4: Full system (VGA mode 1920*1080@60Hz)With Adapter#6

Test Mode 5: Full system (VGA mode 1024*768@75Hz) With Adapter#6

Test Mode 6: Full system (VGA mode 720*400@70Hz) With Adapter#6

Select the worst case of the pre-test modes as the final test mode

Test Mode 1: Full system (VGA mode 1920*1080@60Hz)With Adapter#5

**2.4. Description of Support Unit**

No.	Device	Manufacturer	Model No.	Description
1	PC	Dell	DCSM	Graphic: ASUS EAH6570
2	Printer	Epson	EX3	N/A
3	USB Keyboard	DELL	SK-8115	N/A
4	USB Mouse	DELL	G0K02XYK	N/A

No.	Cable	Quantity	Description
A	VGA Cable	1	Shielded, 1.5m
B	USB Cable	1	Shielded, 1.8m, with one ferrite core bonded
C	USB Cable	1	Shielded, 1.2m
D	Parallel Cable	1	Shielded, 1.8m

**2.5. General Information of Test**

Test Site:	CerpPASS Technology Corp.
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-1945 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz
Frequency Range Investigated :	Conducted Emission Test: from 150kHz to 30 MHz Radiated Emission Test: from 30 MHz to 1,000 MHz Radiated Emission Test: from 1GHz to 18GHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 3 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

LABORATORY ACCREDITATION**2.6. Measurement Uncertainty**

Conducted Emission		
The measurement uncertainty is evaluated as ± 2.71 dB.		
Radiated Emission		
(30MHz -1000MHz)	Horizontal	The measurement uncertainty is evaluated as ± 3.59 dB.
	Vertical	The measurement uncertainty is evaluated as ± 3.89 dB
(1G-18GHz)	Horizontal	The measurement uncertainty is evaluated as ± 2.31 dB.
	Vertical	The measurement uncertainty is evaluated as ± 2.15 dB.



3. Test of Conducted Emission

3.1. Test Limit


Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

3.2. Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

3.3. Typical test Setup

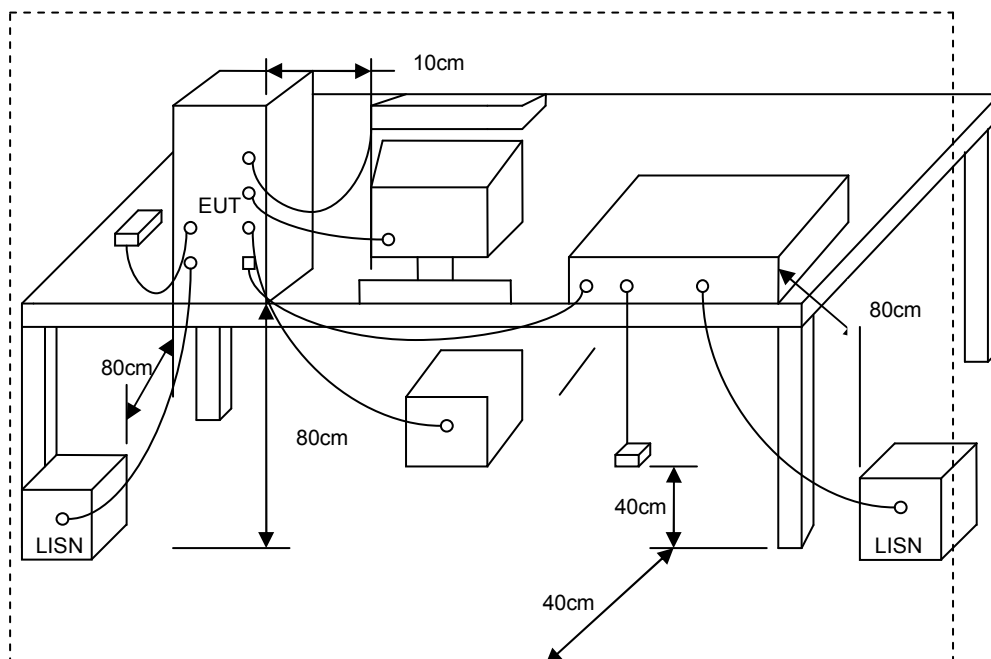


3.4. Measurement equipment

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2012.03.12	2013.03.11
AMN	R&S	ESH2-Z5	100182	2012.03.12	2013.03.11
Two-Line V-Network	R&S	ENV216	100325	2012.03.12	2013.03.11
ISN	FCC	FCC-TLISN-T2-02	20379	2011.12.09	2012.12.08
ISN	FCC	FCC-TLISN-T4-02	20380	2011.12.09	2012.12.08
ISN	FCC	FCC-TLISN-T8-02	20381	2011.12.09	2012.12.08
ISN	TESEQ	ISN ST08	30175	2011.09.14	2012.09.13
Current Probe	R&S	EZ-17	100303	2012.03.12	2013.03.11
Passive Voltage Probe	R&S	ESH2-Z3	100026	2012.03.12	2013.03.11
Attenuator	R&S	ESH3-Z2	100529	2012.03.12	2013.03.11
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2012.03.12	2013.03.11



3.5. Test Result and Data

Test Mode :	Test Mode 1: Full system (VGA mode 1920*1080@60Hz)With Adapter#5		
AC Power :	AC 120V/60Hz	Phase :	LINE
Temperature :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date:	2012/08/14

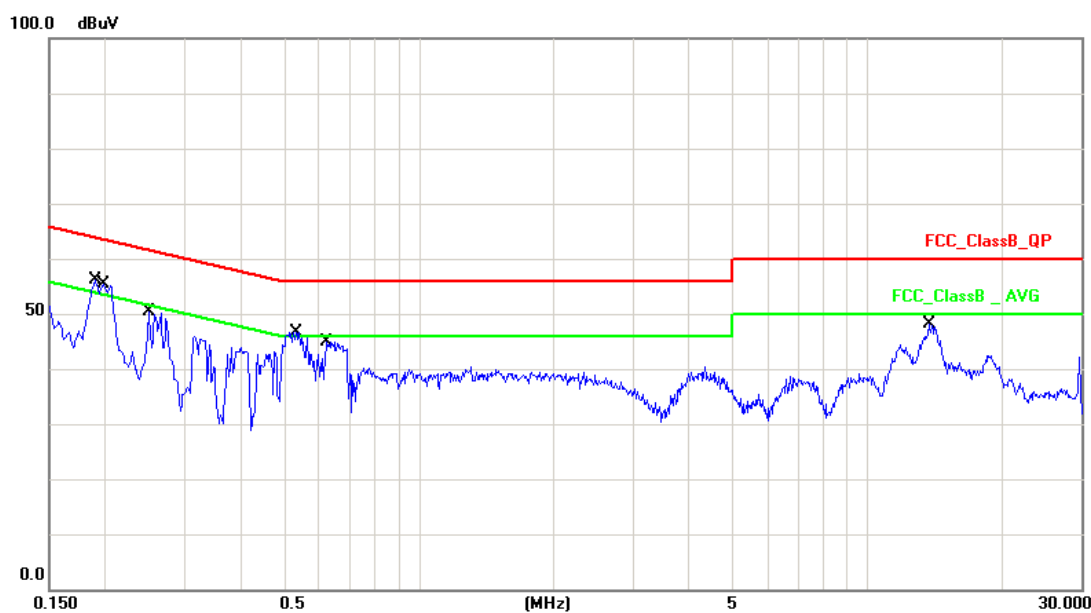


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1900	9.87	41.95	51.82	64.03	-12.21	QP
2	0.1900	9.87	26.69	36.56	54.03	-17.47	AVG
3	0.1986	9.87	40.81	50.68	63.66	-12.98	QP
4	0.1986	9.87	27.90	37.77	53.66	-15.89	AVG
5	0.2500	9.86	36.51	46.37	61.75	-15.38	QP
6	0.2500	9.86	22.22	32.08	51.75	-19.67	AVG
7	0.5340	9.85	34.10	43.95	56.00	-12.05	QP
8	0.5340	9.85	19.52	29.37	46.00	-16.63	AVG
9	0.6260	9.85	32.16	42.01	56.00	-13.99	QP
10	0.6260	9.85	17.91	27.76	46.00	-18.24	AVG
11	13.7620	9.80	31.44	41.24	60.00	-18.76	QP
12	13.7620	9.80	25.45	35.25	50.00	-14.75	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Test Mode 1: Full system (VGA mode 1920*1080@60Hz)With Adapter#5		
AC Power :	AC 120V/60Hz	Phase :	NEUTRAL
Temperature :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date:	2012/08/14

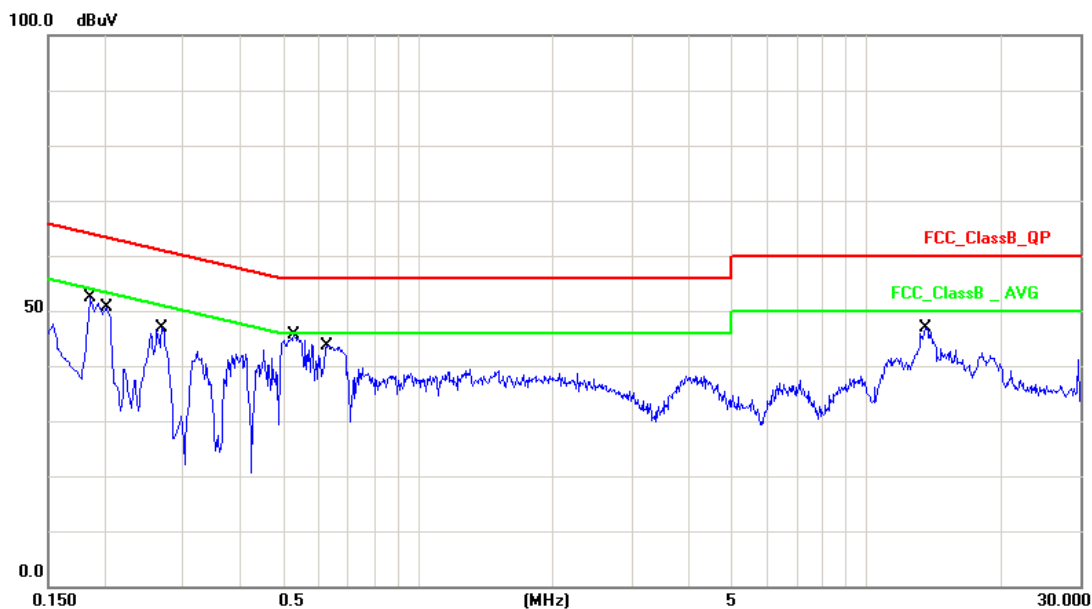

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	9.50	39.09	48.59	64.21	-15.62	QP
2	0.1860	9.50	21.09	30.59	54.21	-23.62	AVG
3	0.2020	9.50	38.68	48.18	63.52	-15.34	QP
4	0.2020	9.50	28.87	38.37	53.52	-15.15	AVG
5	0.2700	9.50	33.67	43.17	61.12	-17.95	QP
6	0.2700	9.50	22.07	31.57	51.12	-19.55	AVG
7	0.5299	9.50	33.66	43.16	56.00	-12.84	QP
8	0.5299	9.50	19.15	28.65	46.00	-17.35	AVG
9	0.6300	9.50	32.12	41.62	56.00	-14.38	QP
10	0.6300	9.50	17.81	27.31	46.00	-18.69	AVG
11	13.5940	9.91	31.07	40.98	60.00	-19.02	QP
12	13.5940	9.91	25.52	35.43	50.00	-14.57	AVG

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Cerpass



4. Test of Radiated Emission

4.1. Test Limit

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-2003. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 3.2. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (m)	Level (dBuV/m)	Level (dBuV/m)
30 - 88	3	40(QP)	N/A
88 - 216	3	43(QP)	N/A
216-960	3	46(QP)	N/A
960-1000	3	54(QP)	N/A
1000-18000	3	74(PK)	54(AV)

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37





4.2. Test Procedures

- a. The EUT was placed on a Rota table top 0.8 meter above ground.
- b. The EUT and its simulators are placed on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- c. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.
- d. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.
- e. Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120KHz and the frequency range from 1GHz to 18GHz using a receiver bandwidth of 1MHz.

4.3. Typical test Setup

Below 1GHz Test Setup

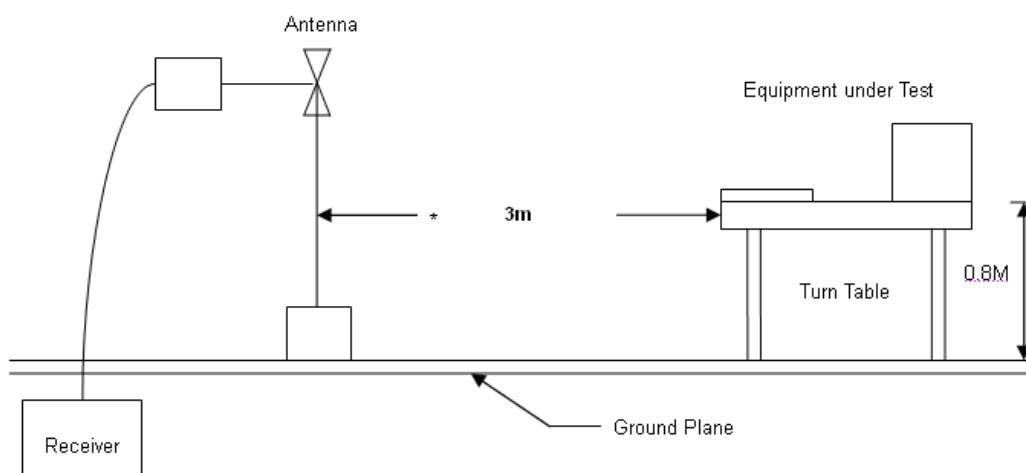


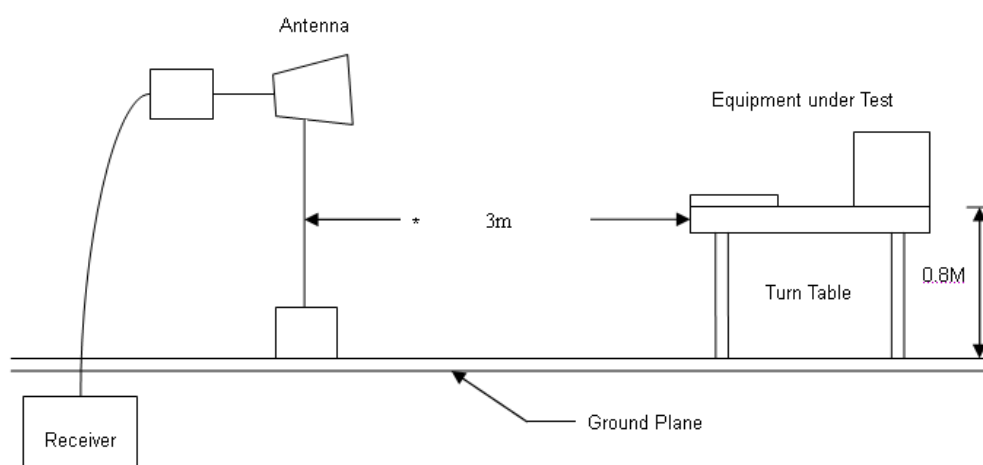**Above 1GHz Test Setup****4.4. Measurement equipment**

Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
EMI Test Receiver	R&S	ESCI	100563	2012.03.12	2013.03.11
H64 Preamplifier	HP	8447F	3113A05582	2012.03.12	2013.03.12
Preamplifier	Agilent	8449B	3008A02342	2012.03.12	2013.03.11
Ultra Broadband Antenna	R&S	HL562	100362	2012.05.03	2013.05.02
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2012.05.03	2013.05.02
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-348	2011.09.23	2012.09.23
Spectrum Analyzer	R&S	FSP40	100324	2012.03.12	2013.03.12
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2012.03.12	2013.03.11

**4.5. Test Result and Data (30MHz ~ 1000MHz)**

Test Mode :	Test Mode 1: Full system (VGA mode 1920*1080@60Hz)With Adapter#5		
AC Power :	AC 120V/60Hz	Ant. Polarization:	Horizontal
Temp :	23°C	Humidity :	52%
Pressure(mbar) :	1002	Date :	2012/08/14

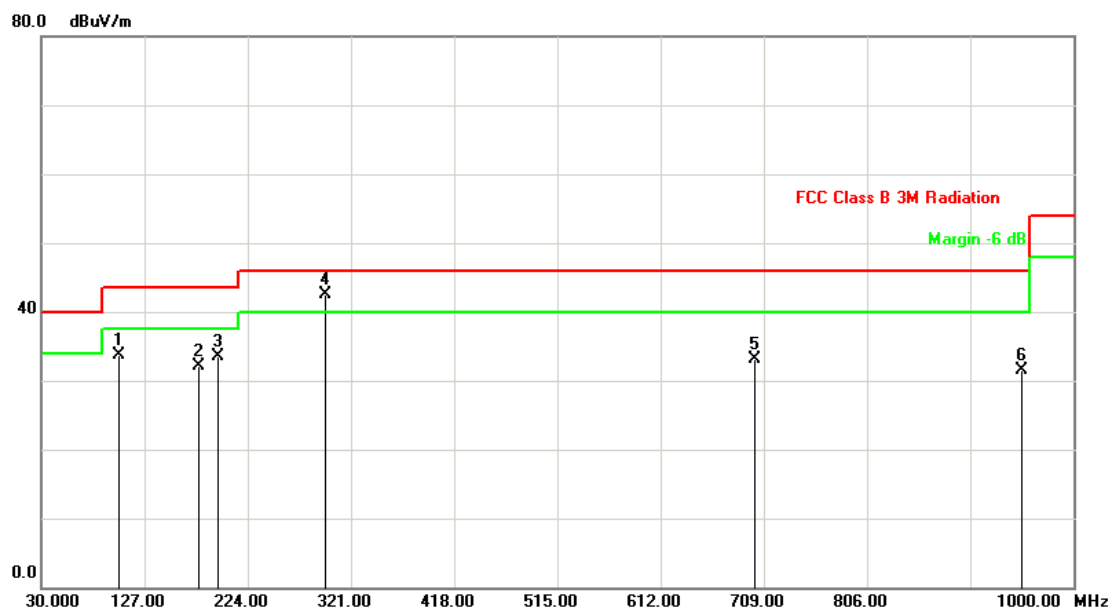


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	103.7199	-14.27	47.89	33.62	43.50	-9.88	QP	200	268
2	178.4099	-14.83	46.88	32.05	43.50	-11.45	QP	200	268
3	195.8700	-15.44	48.95	33.51	43.50	-9.99	QP	100	36
4	296.7500	-11.03	53.59	42.56	46.00	-3.44	QP	100	150
5	700.2698	-0.53	33.55	33.02	46.00	-12.98	QP	200	33
6	951.5000	3.71	27.85	31.56	46.00	-14.44	QP	200	128

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Test Mode 1: Full system (VGA mode 1920*1080@60Hz)With Adapter#5		
AC Power :	AC 120V/60Hz	Ant. Polarization:	Vertical
Temp :	23°C	Humidity :	52%
Pressure(mbar) :	1002	Date :	2012/08/14

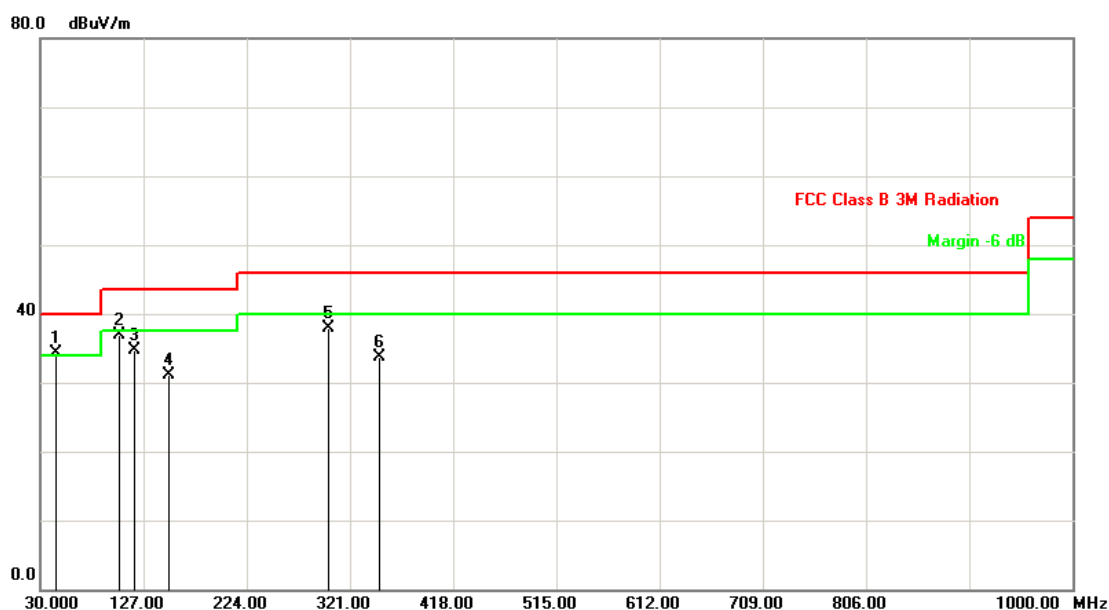


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	44.5500	-14.03	48.26	34.23	40.00	-5.77	QP	100	103
2	103.7200	-14.27	51.11	36.84	43.50	-6.66	QP	100	321
3	118.2700	-13.72	48.41	34.69	43.50	-8.81	QP	100	321
4	151.2500	-15.45	46.47	31.02	43.50	-12.48	QP	100	153
5	300.6300	-10.89	48.78	37.89	46.00	-8.11	QP	200	19
6	348.1600	-9.25	42.90	33.65	46.00	-12.35	QP	100	191

Note: Measurement Level = Reading Level + Correct Factor



4.6. Test Result and Data (1000MHz ~ 18000MHz)

Test Mode :	Test Mode 1: Full system (VGA mode 1920*1080@60Hz)With Adapter#5		
AC Power :	AC 120V/60Hz	Ant. Polarization:	Horizontal
Temp :	23℃	Humidity :	52%
Pressure(mbar) :	1002	Date :	2012/08/14

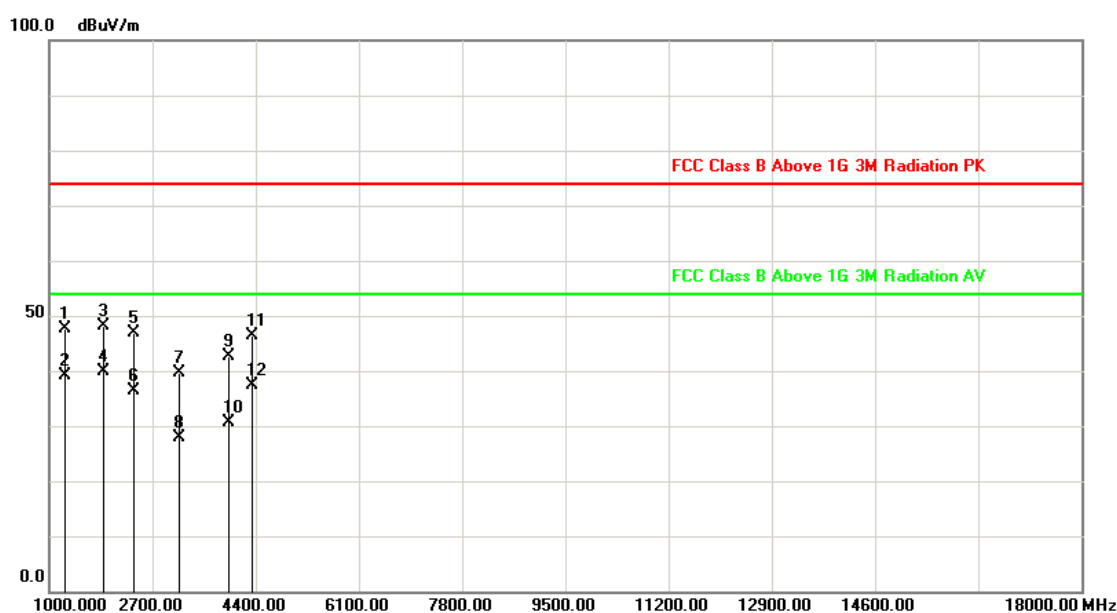


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1205.000	-6.02	50.64	44.62	74.00	-29.38	peak	100	123
2	1205.000	-6.02	38.63	32.61	54.00	-21.39	AVG	100	123
3	1685.000	-4.01	45.63	41.62	74.00	-32.38	peak	100	156
4	1685.000	-4.01	33.52	29.51	54.00	-24.49	AVG	100	156
5	1995.000	-2.72	44.24	41.52	74.00	-32.48	peak	100	184
6	1995.000	-2.72	28.34	25.62	54.00	-28.38	AVG	100	184
7	2305.000	-1.68	41.52	39.84	74.00	-34.16	peak	100	236
8	2305.000	-1.68	28.52	26.84	54.00	-27.16	AVG	100	236
9	3705.000	3.27	36.57	39.84	74.00	-34.16	peak	200	12
10	3705.000	3.27	22.34	25.61	54.00	-28.39	AVG	200	12
11	4435.000	5.44	36.18	41.62	74.00	-32.38	peak	200	51
12	4435.000	5.44	25.12	30.56	54.00	-23.44	AVG	200	51

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Test Mode 1: Full system (VGA mode 1920*1080@60Hz)With Adapter#5		
AC Power :	AC 120V/60Hz	Ant. Polarization:	Vertical
Temp :	23°C	Humidity :	52%
Pressure(mbar) :	1002	Date :	2012/08/14

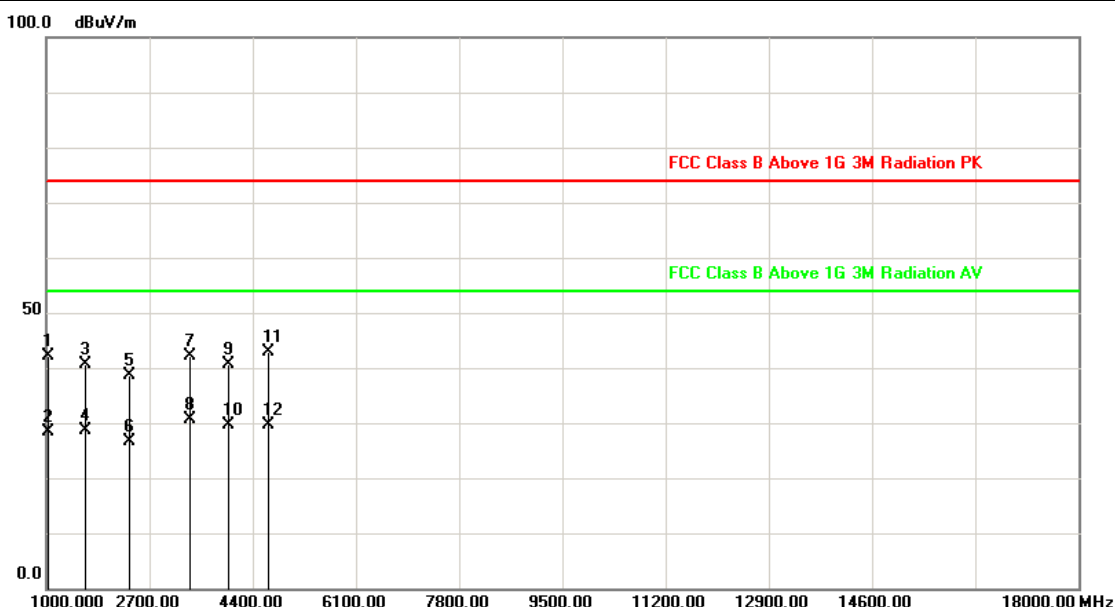

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1025.000	-6.77	48.90	42.13	74.00	-31.87	peak	100	123
2	1025.000	-6.77	35.09	28.32	54.00	-25.68	AVG	100	123
3	1655.000	-4.14	44.65	40.51	74.00	-33.49	peak	100	152
4	1655.000	-4.14	32.83	28.69	54.00	-25.31	AVG	100	152
5	2365.000	-1.48	40.10	38.62	74.00	-35.38	peak	100	23
6	2365.000	-1.48	28.07	26.59	54.00	-27.41	AVG	100	23
7	3365.000	2.00	40.05	42.05	74.00	-31.95	peak	100	136
8	3365.000	2.00	28.56	30.56	54.00	-23.44	AVG	100	136
9	3995.000	4.34	36.19	40.53	74.00	-33.47	peak	100	12
10	3995.000	4.34	25.28	29.62	54.00	-24.38	AVG	100	12
11	4665.000	6.02	36.82	42.84	74.00	-31.16	peak	200	156
12	4665.000	6.02	23.63	29.65	54.00	-24.35	AVG	200	156

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Seben