

Attachment 2. – SAR Test Plots

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

Left Touch, GSM850 Ch. 128, Ant Internal, Standard Battery**Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.198 W/kg

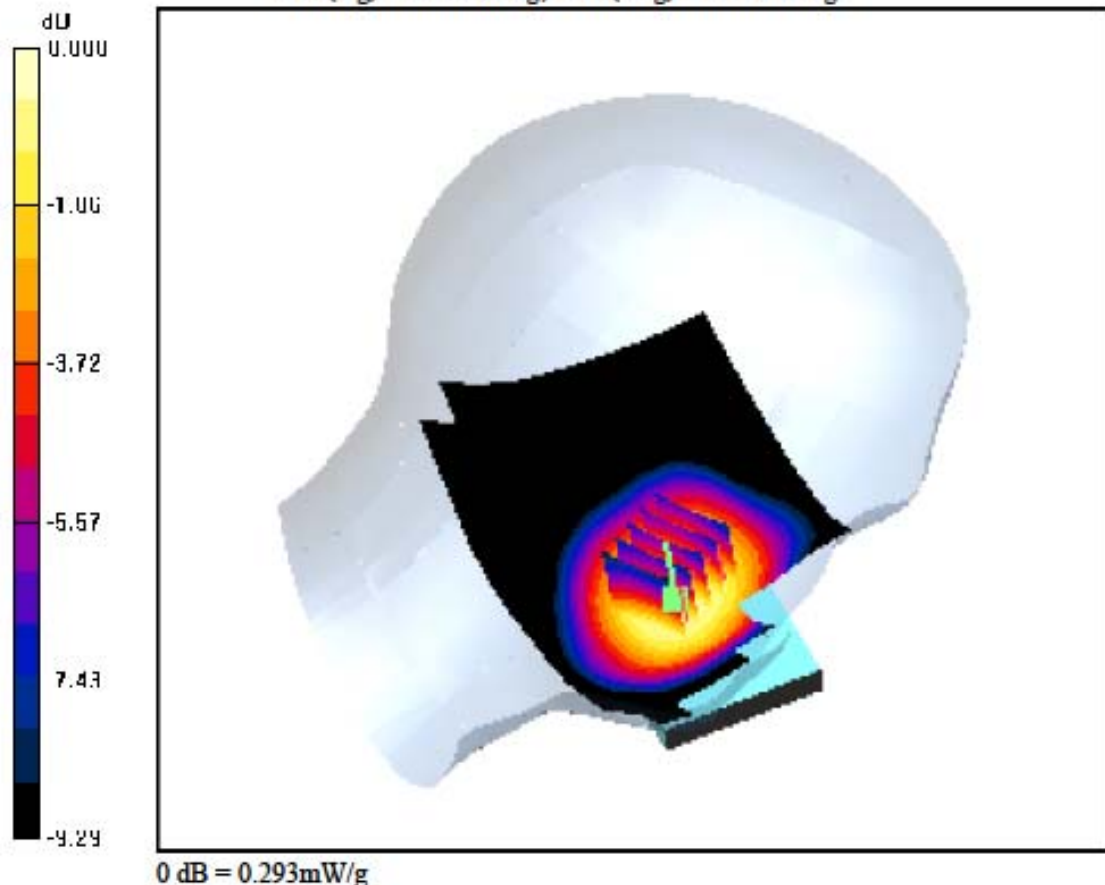

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

Left Touch, GSM850 Ch. 190, Ant Internal, Standard Battery**Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.271 W/kg

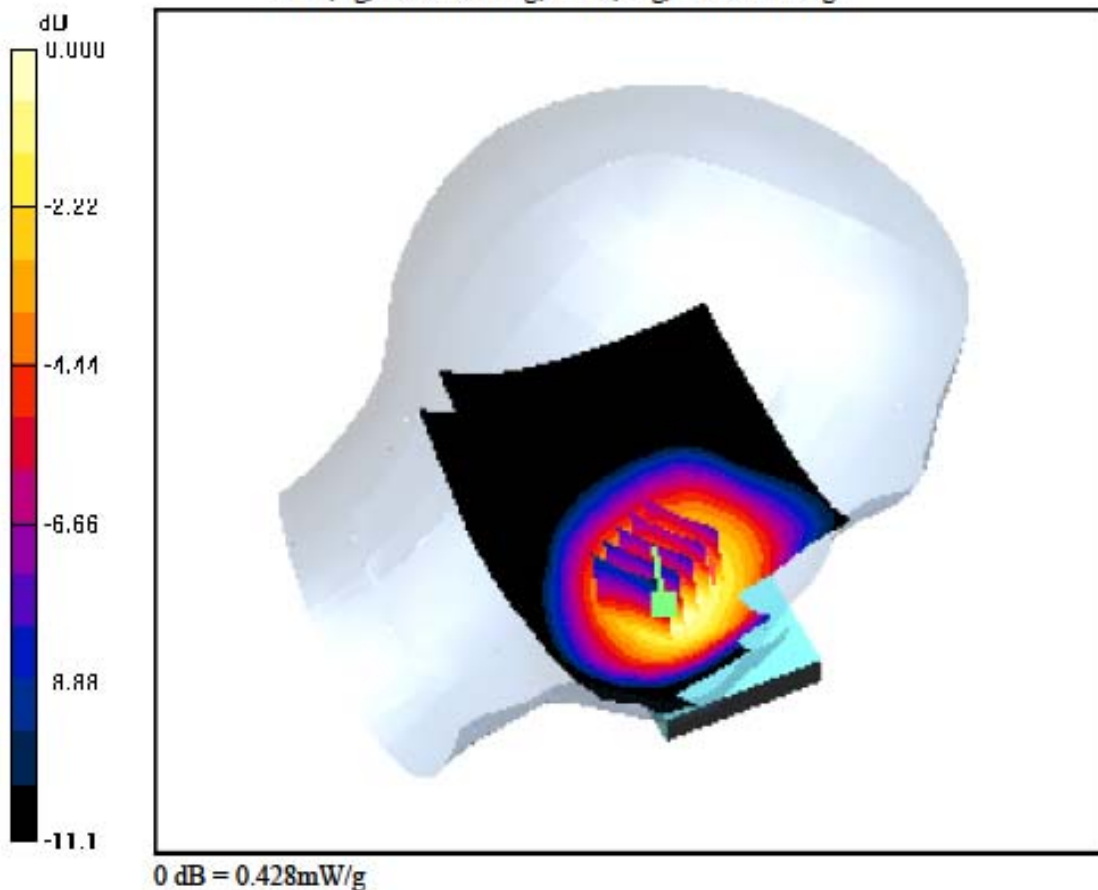

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 848.833 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

Left Touch, GSM850 Ch. 251, Ant Internal, Standard Battery**Area Scan (81x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.344 W/kg

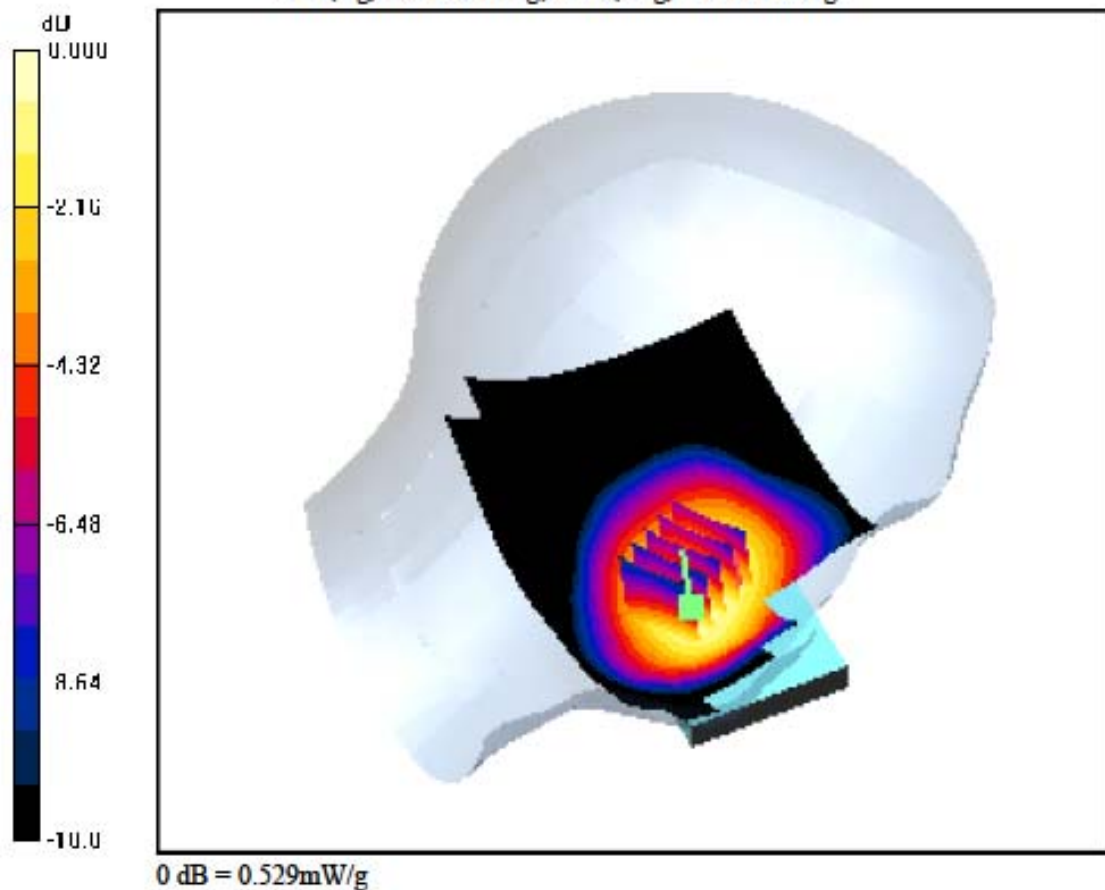

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery**Area Scan (81x111x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.203 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.269 W/kg

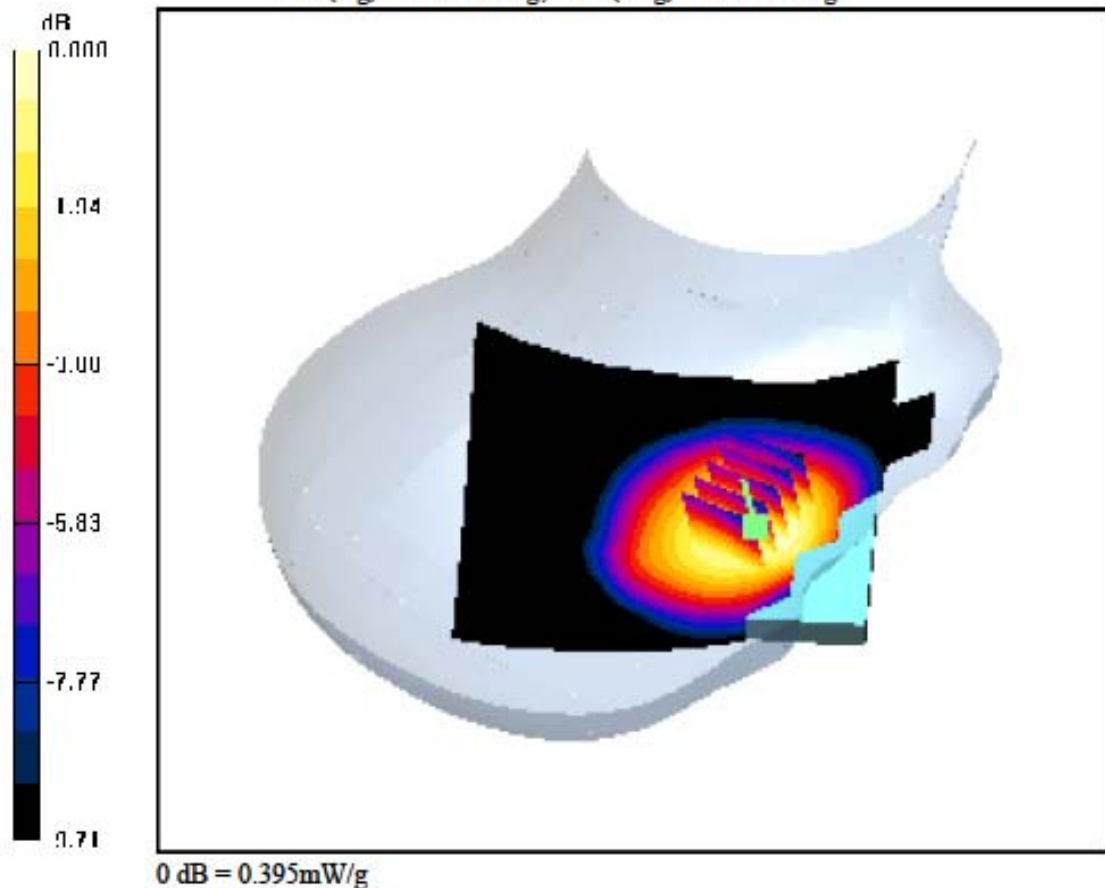

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

Left Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.083 dB
Peak SAR (extrapolated) = 0.243 W/kg
SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.141 W/kg

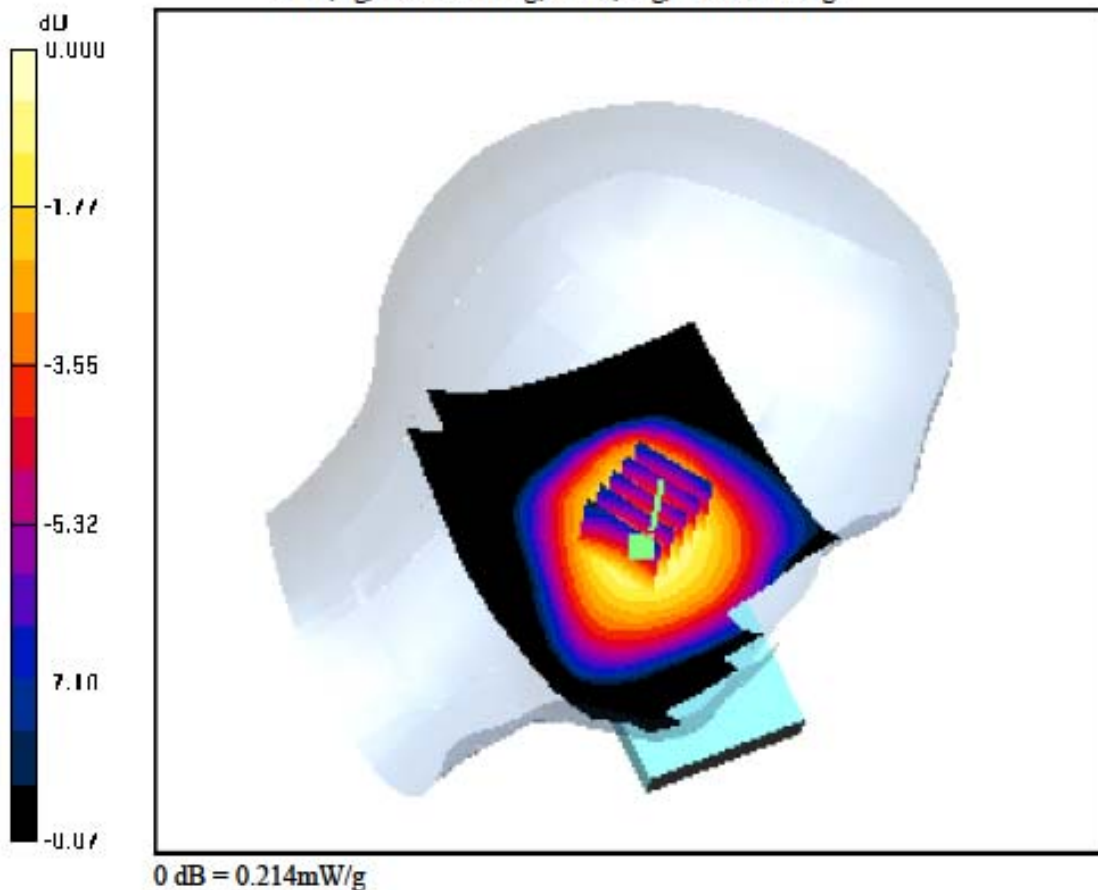

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

Right Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (81x111x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.055 dB
Peak SAR (extrapolated) = 0.309 W/kg
SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.189 W/kg

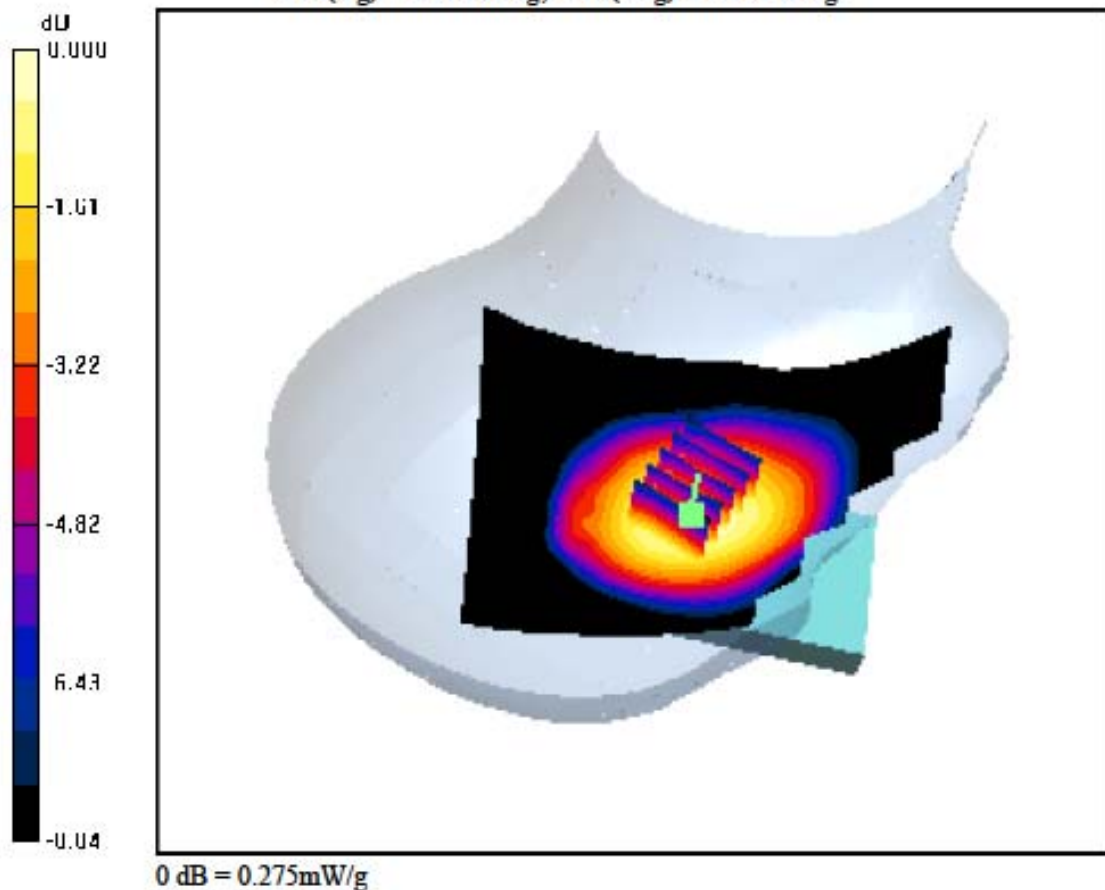

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1850.33$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-28; Ambient Temp: 22.2; Tissue Temp: 22.4

Left Touch, PCS1900 Ch. 512, Ant Internal, Standard Battery**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.316 W/kg

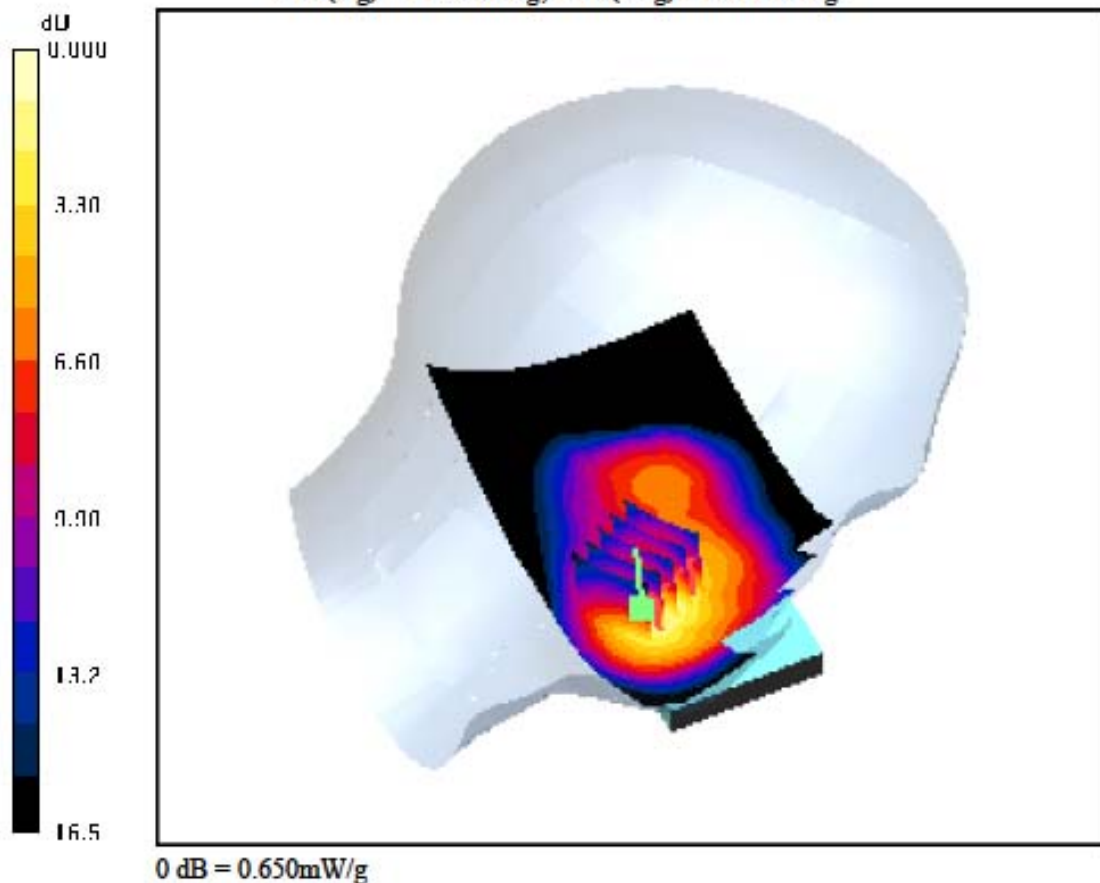

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-28; Ambient Temp: 22.2; Tissue Temp: 22.4

Left Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.358 W/kg

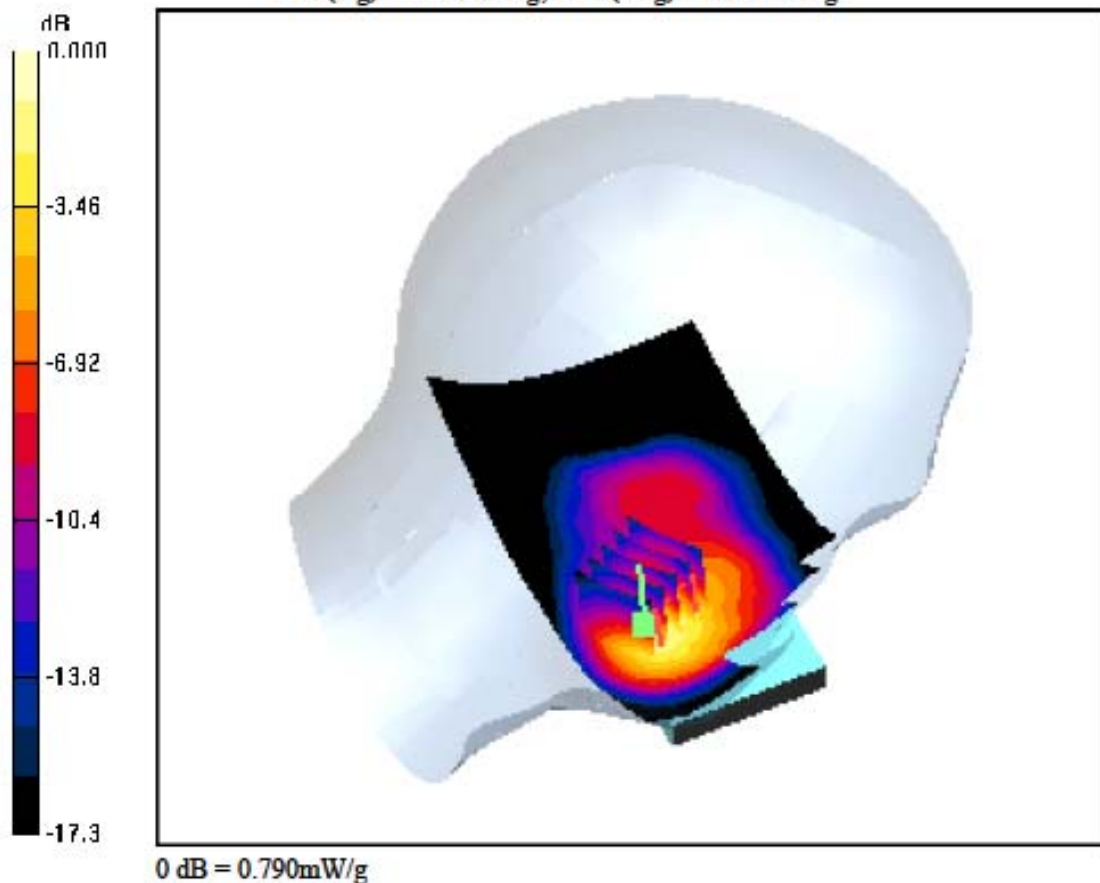

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-28; Ambient Temp: 22.2; Tissue Temp: 22.4

Left Touch, PCS1900 Ch. 810, Ant Internal, Standard Battery**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.336 W/kg

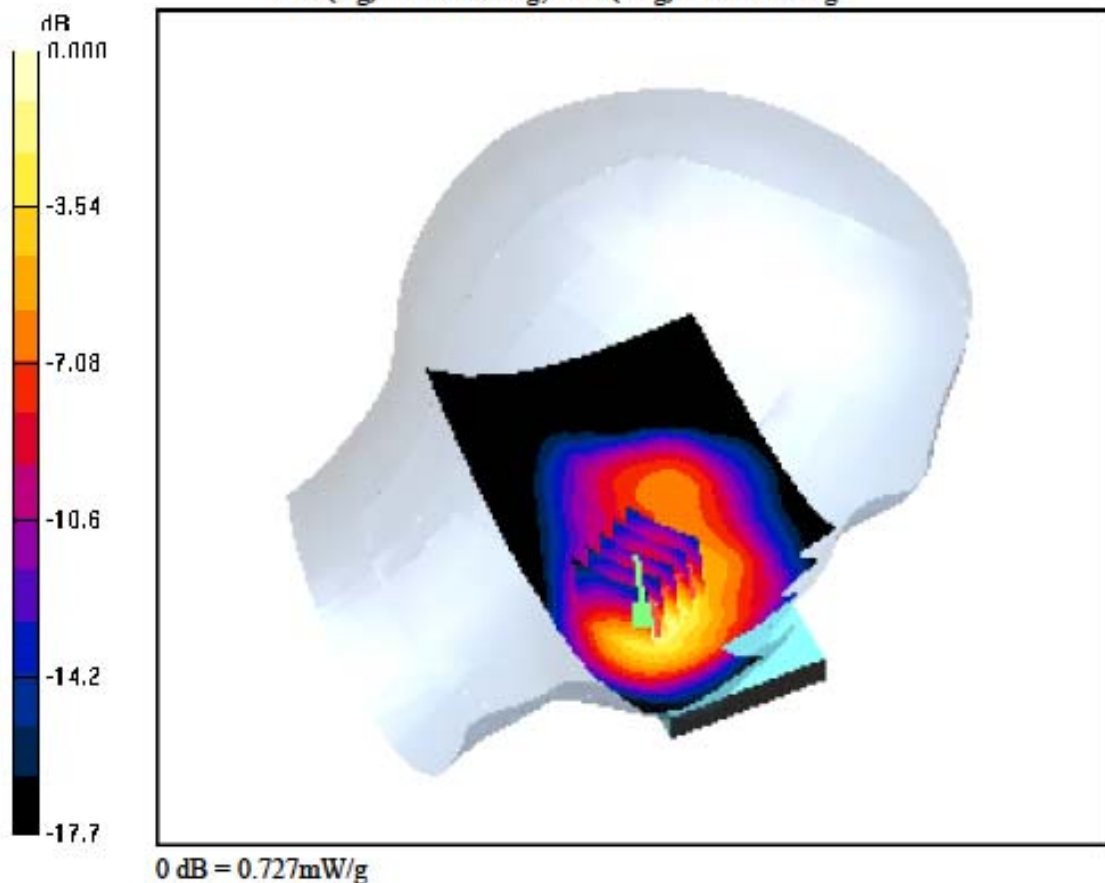

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-28; Ambient Temp: 22.2; Tissue Temp: 22.4

Right Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.292 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.179 W/kg

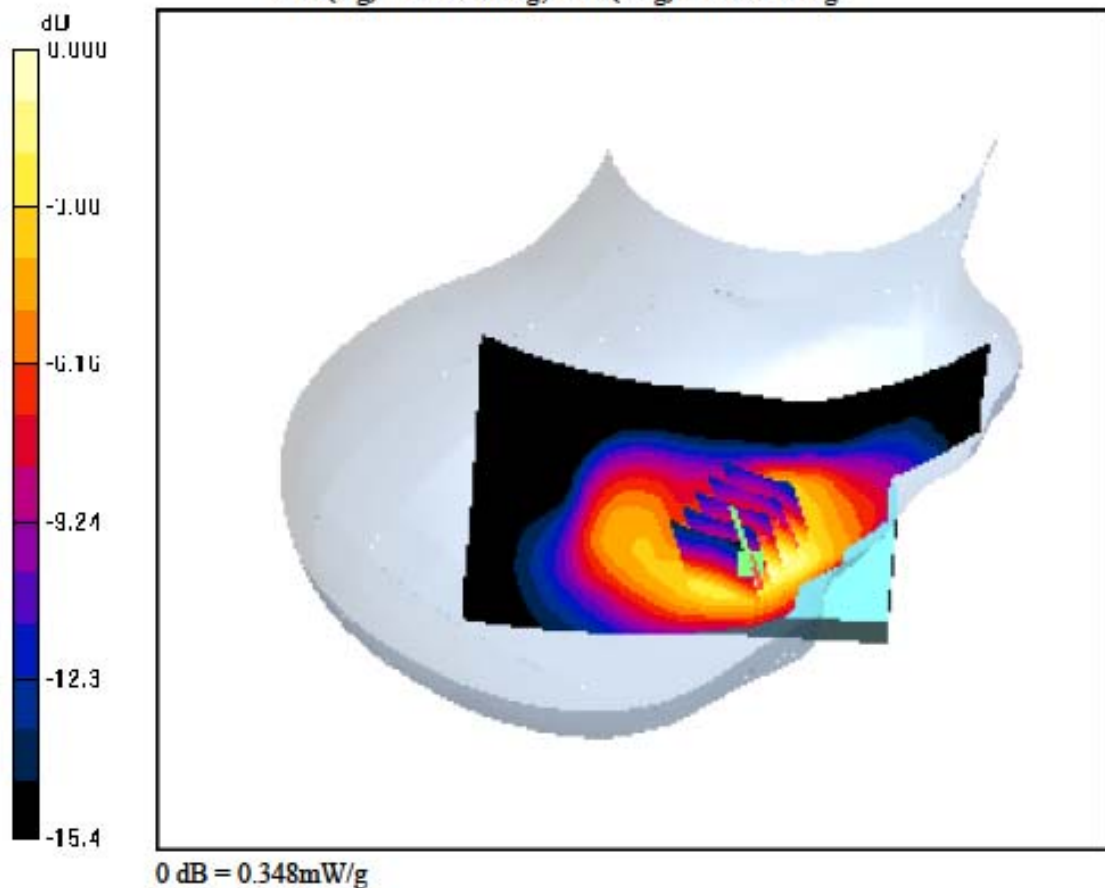

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-28; Ambient Temp: 22.2; Tissue Temp: 22.4

Left Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.210 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.142 W/kg

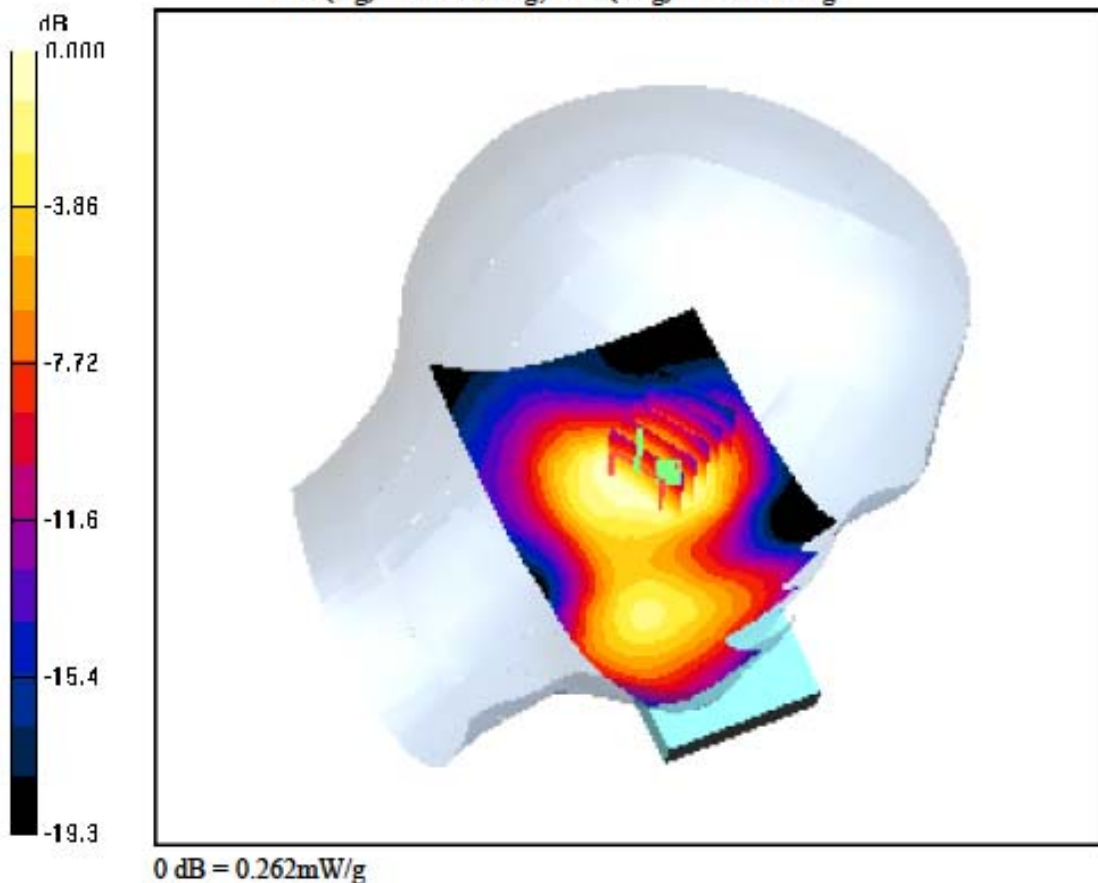

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-28; Ambient Temp: 22.2; Tissue Temp: 22.4

Right Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.027 dB
Peak SAR (extrapolated) = 0.333 W/kg
SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.132 W/kg

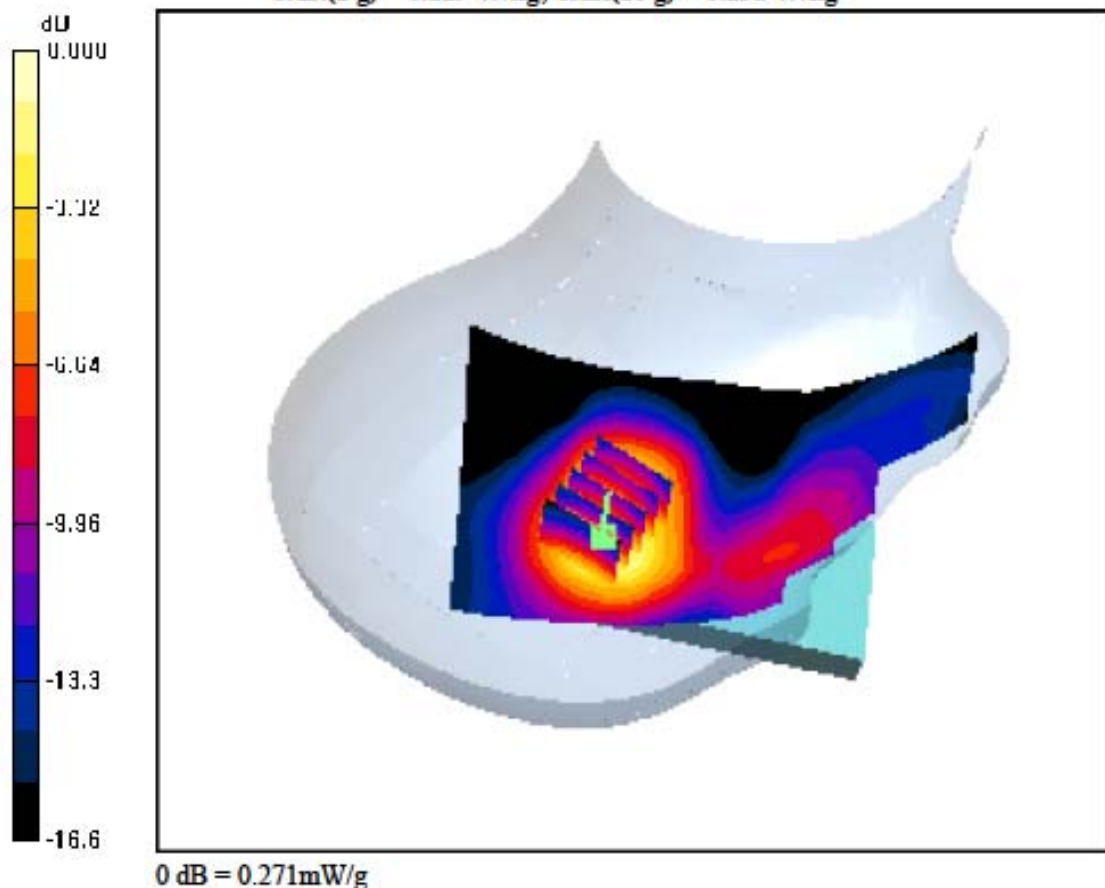

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-30; Ambient Temp: 22.3; Tissue Temp: 22.6

Left Touch, WCDMA850 Ch. 4182, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.163 W/kg

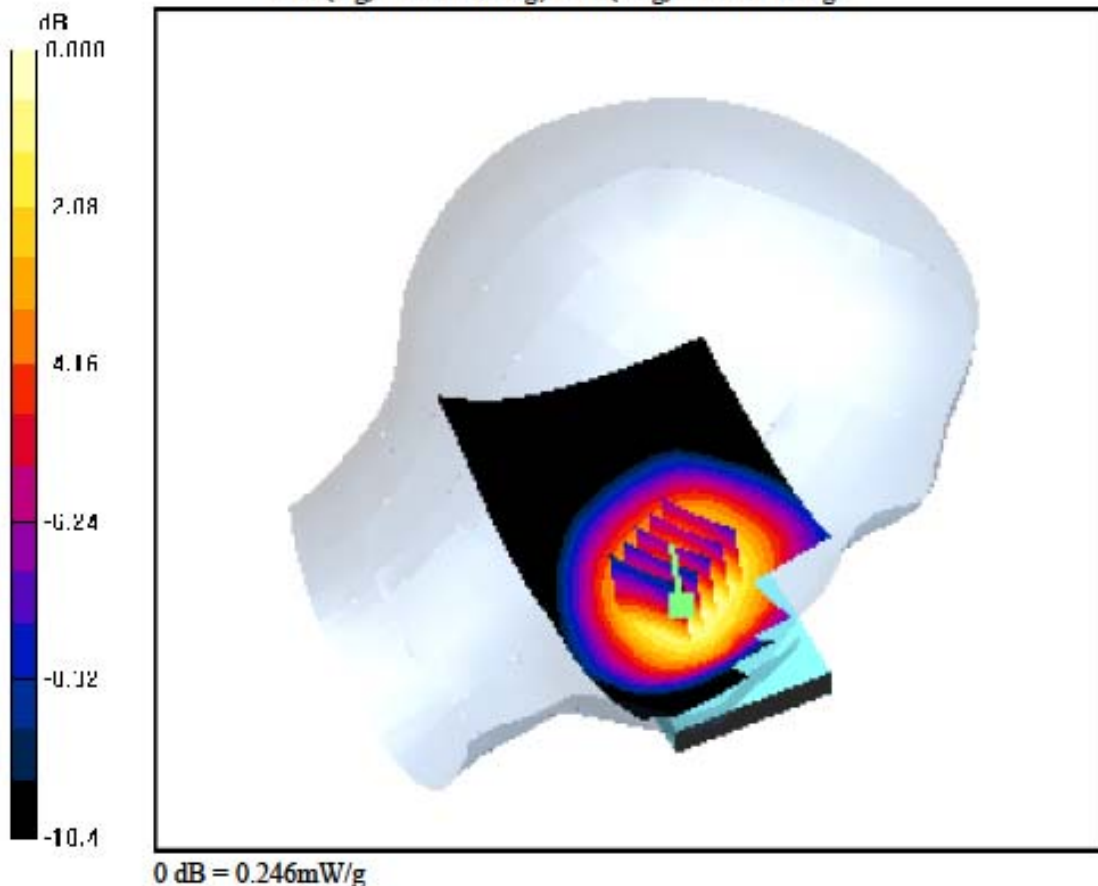

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.879$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-30; Ambient Temp: 22.3; Tissue Temp: 22.6

Right Touch, WCDMA850 Ch. 4132, Ant Internal, Standard Battery**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.170 W/kg

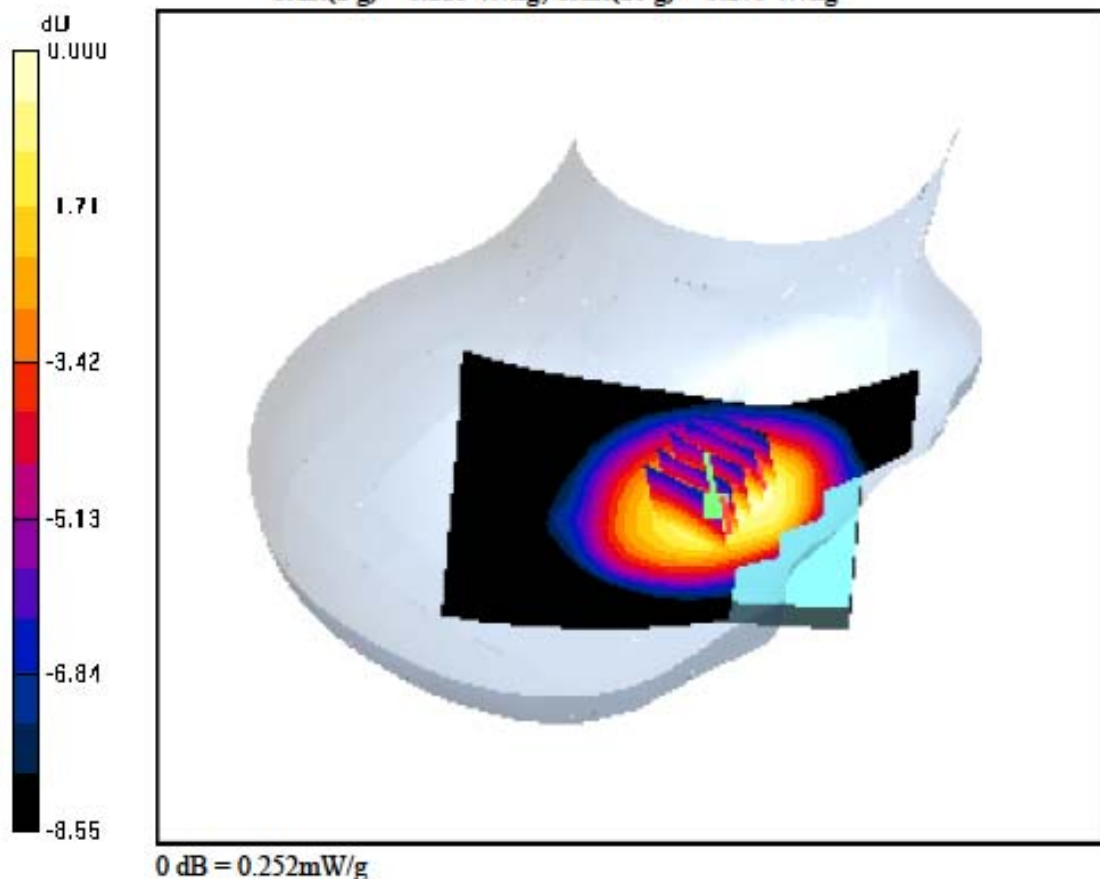

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-30; Ambient Temp: 22.3; Tissue Temp: 22.6

Right Touch, WCDMA850 Ch. 4182, Ant Internal, Standard Battery**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.283 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.167 W/kg

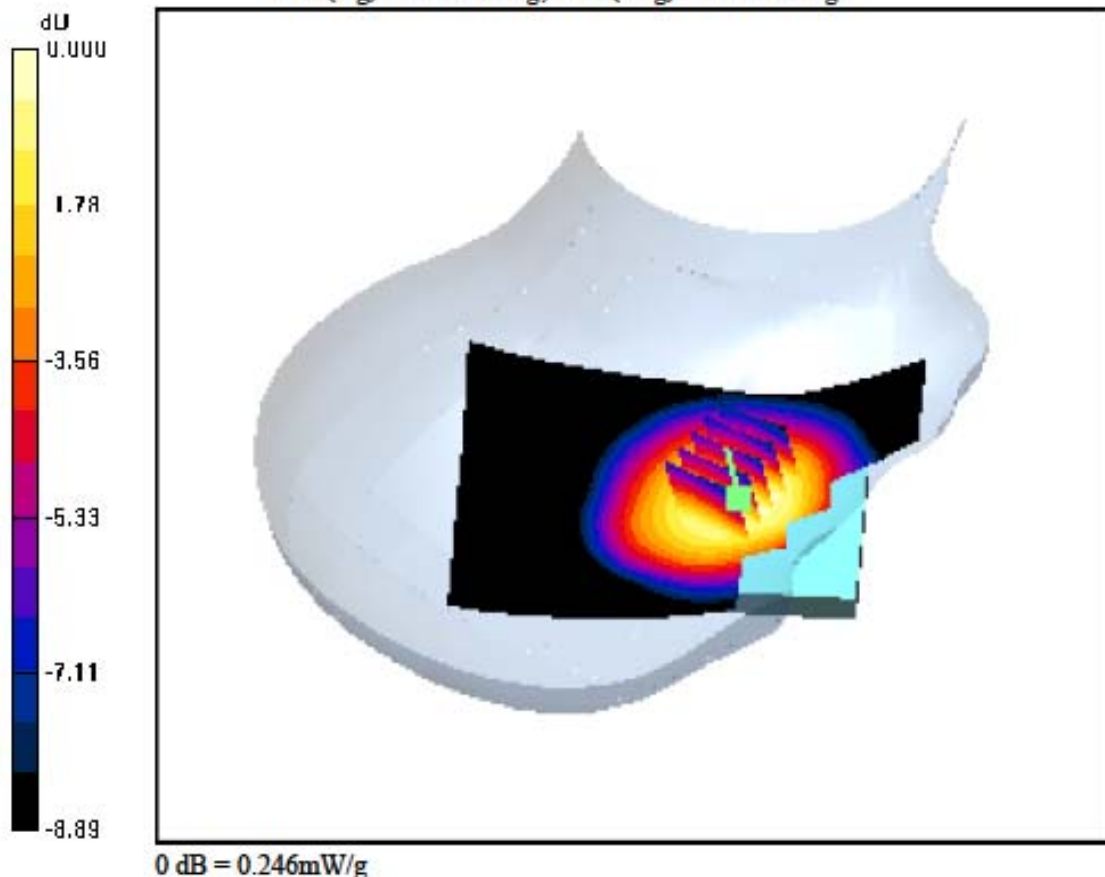

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.667$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-30; Ambient Temp: 22.3; Tissue Temp: 22.6

Right Touch, WCDMA850 Ch. 4233, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.219 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.165 W/kg

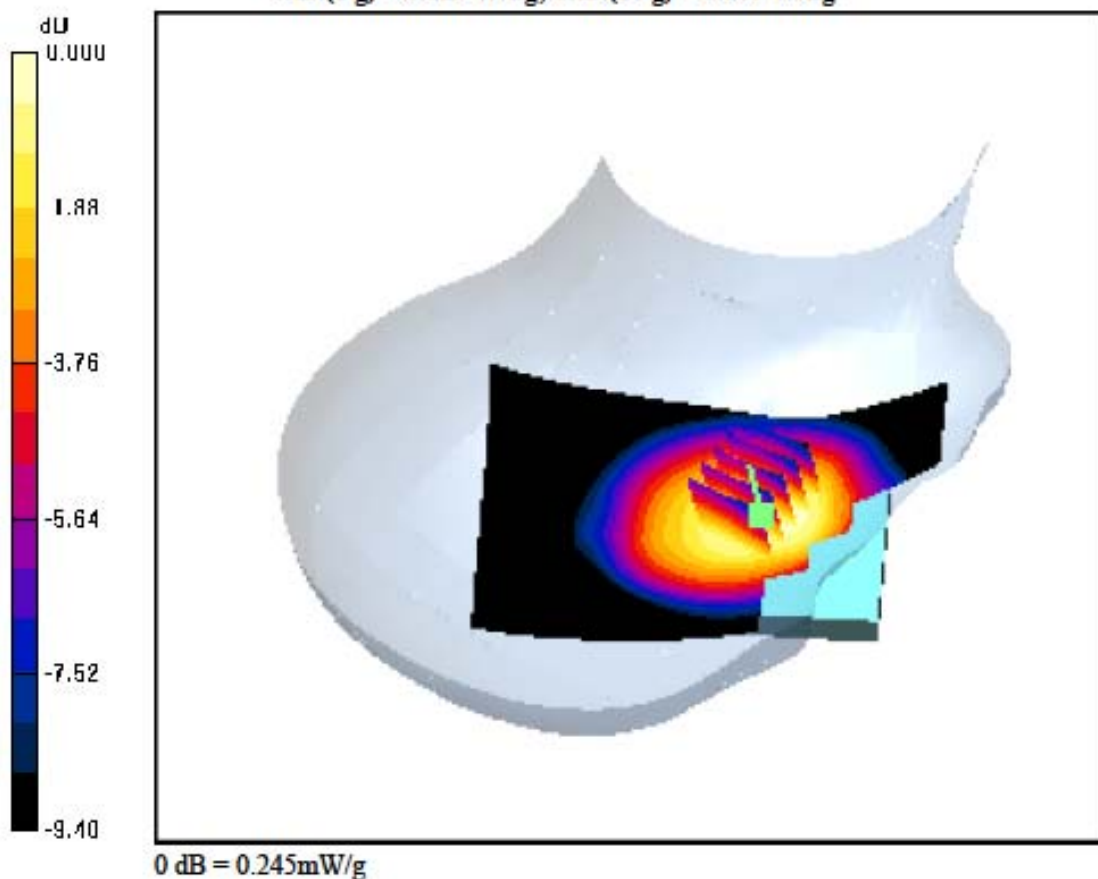

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-06-30; Ambient Temp: 22.3; Tissue Temp: 22.6

Left Tilt, WCDMA850 Ch. 4182, Ant Internal, Standard Battery**Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.116 W/kg

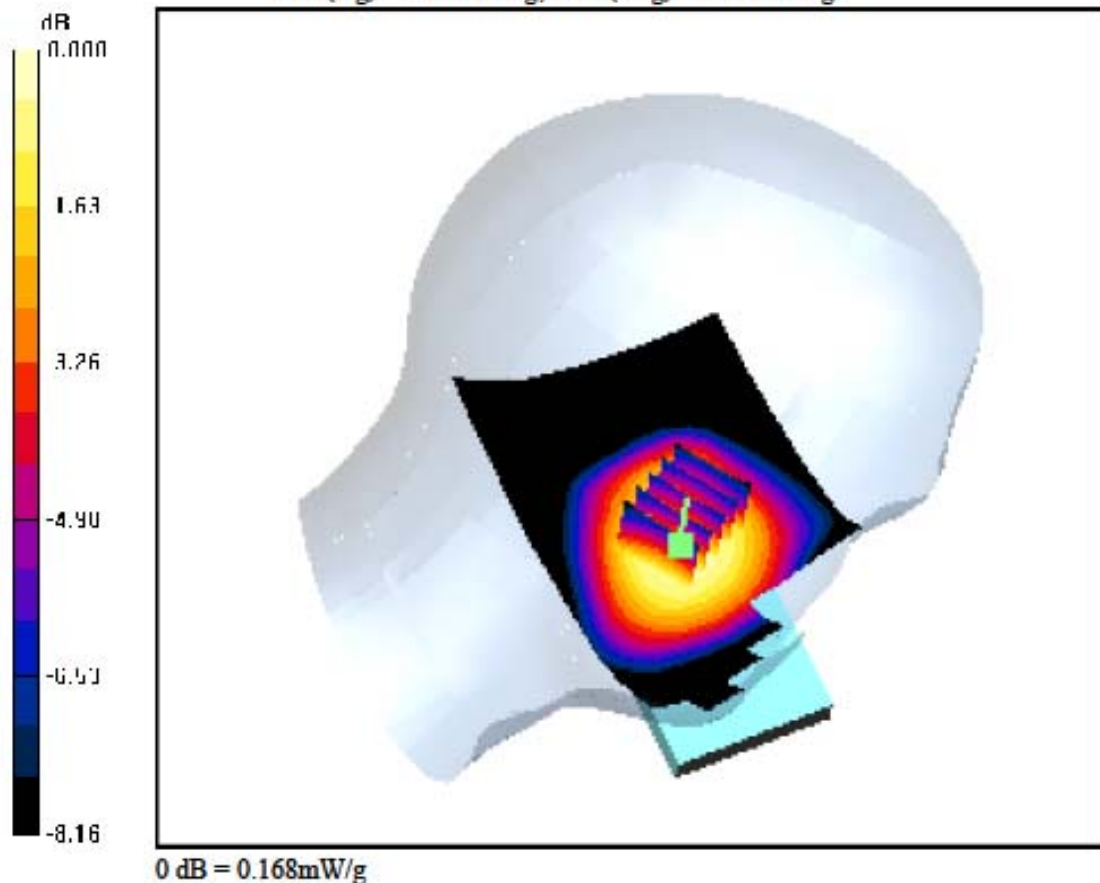

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: WCDMA 850 ; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-06-30; Ambient Temp: 22.3; Tissue Temp: 22.6

Right Tilt, WCDMA850 Ch. 4182, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.109 W/kg

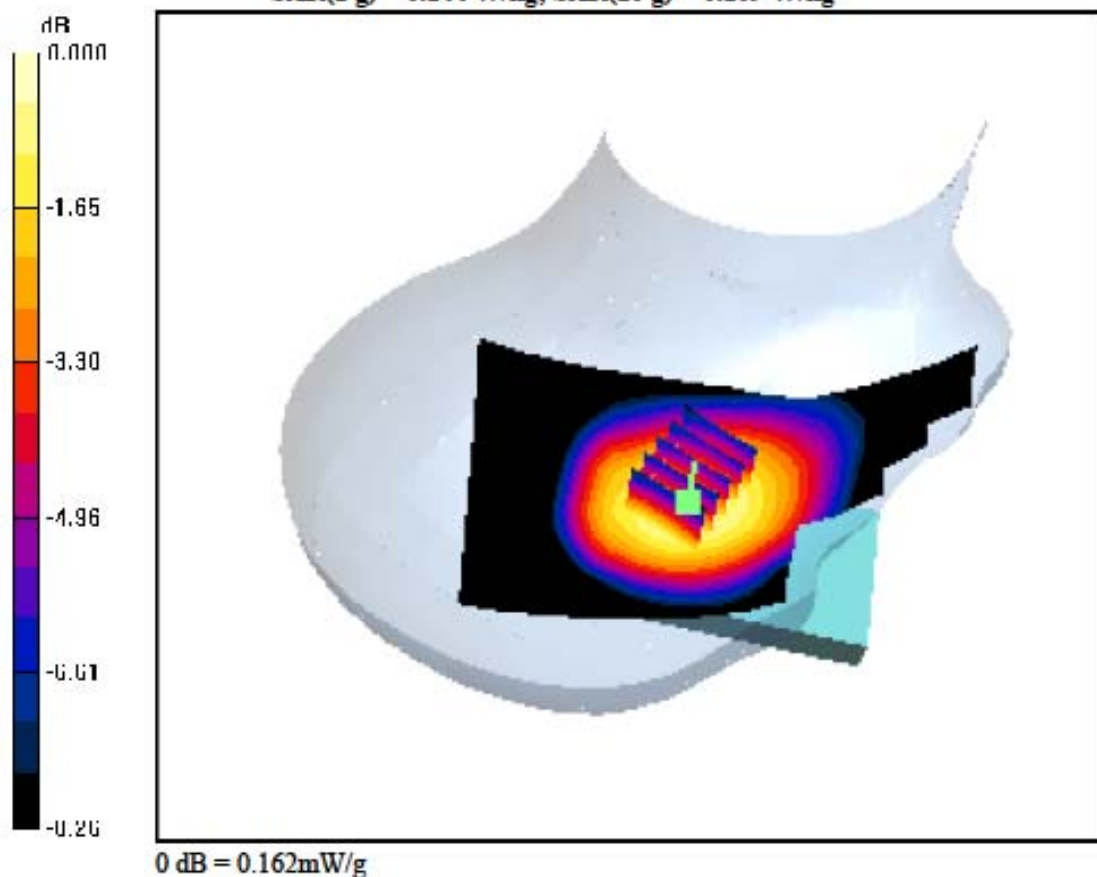

DIGITAL EMC CO., LTD

DUT: LG-E510f; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.84 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.4, 7.4, 7.4); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-18; Ambient Temp: 22.4; Tissue Temp: 22.5

Left Touch, W-LAN(802.11b) Ch. 6, Ant Internal, Standard Battery


Area Scan (81x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.322 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.036 W/kg

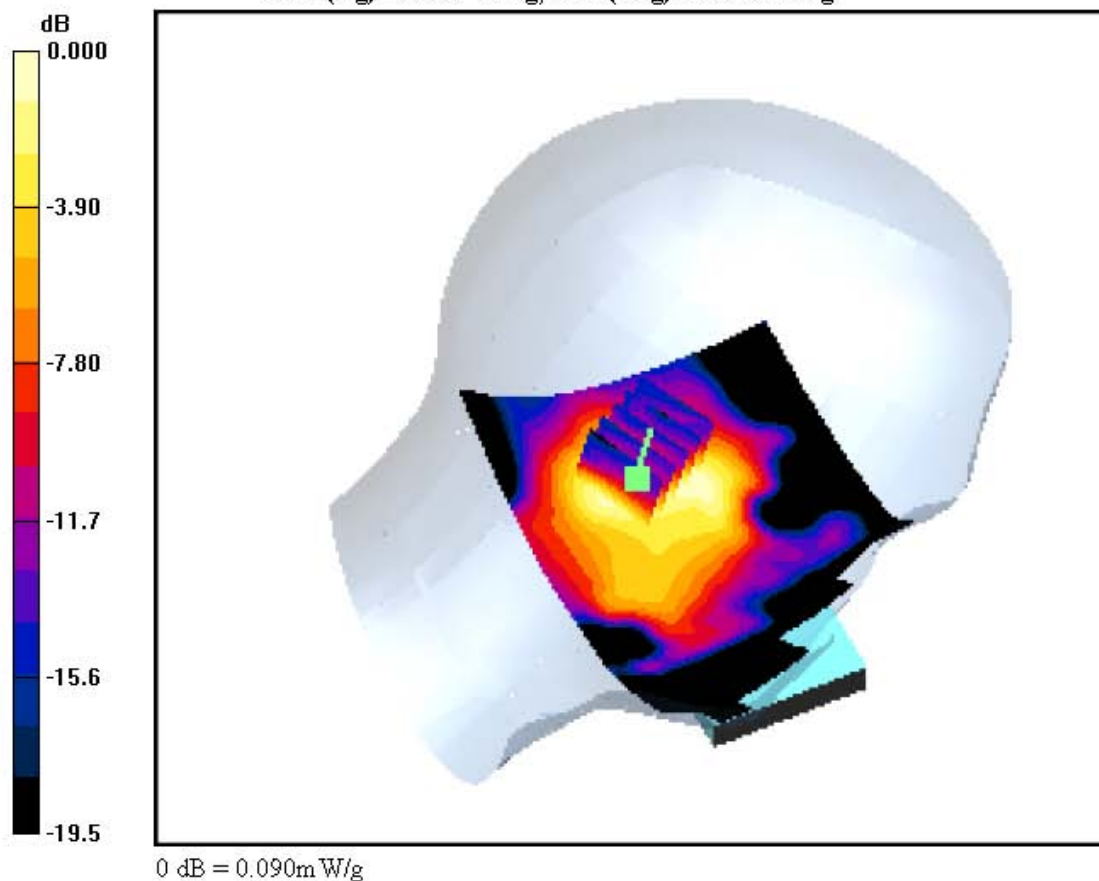

DIGITAL EMC CO., LTD

DUT: LG-E510f; Type: Bar

Communication System: W-LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.8 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.4, 7.4, 7.4); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-18; Ambient Temp: 22.4; Tissue Temp: 22.5

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.056 W/kg

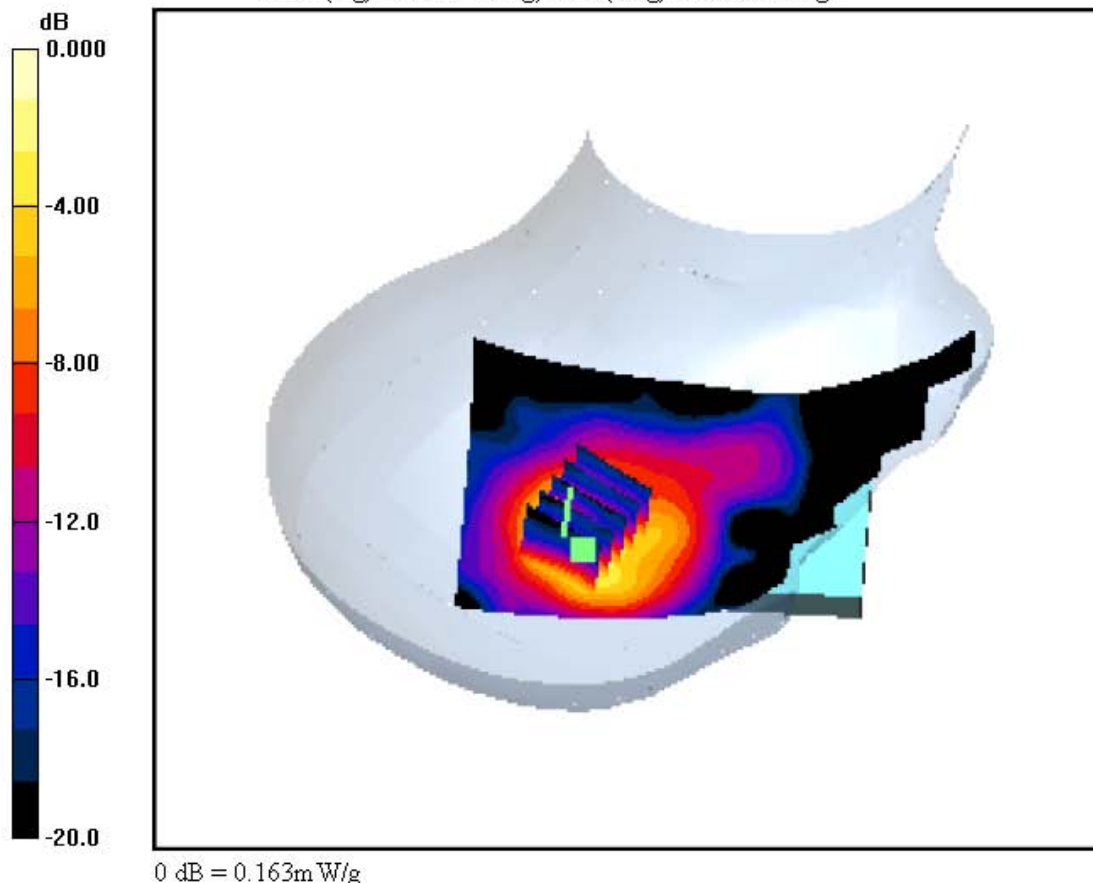

DIGITAL EMC CO., LTD

DUT: LG-E510f; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.84 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.4, 7.4, 7.4); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-18; Ambient Temp: 22.4; Tissue Temp: 22.5

Right Touch, W-LAN(802.11b) Ch. 6, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.243 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.063 W/kg

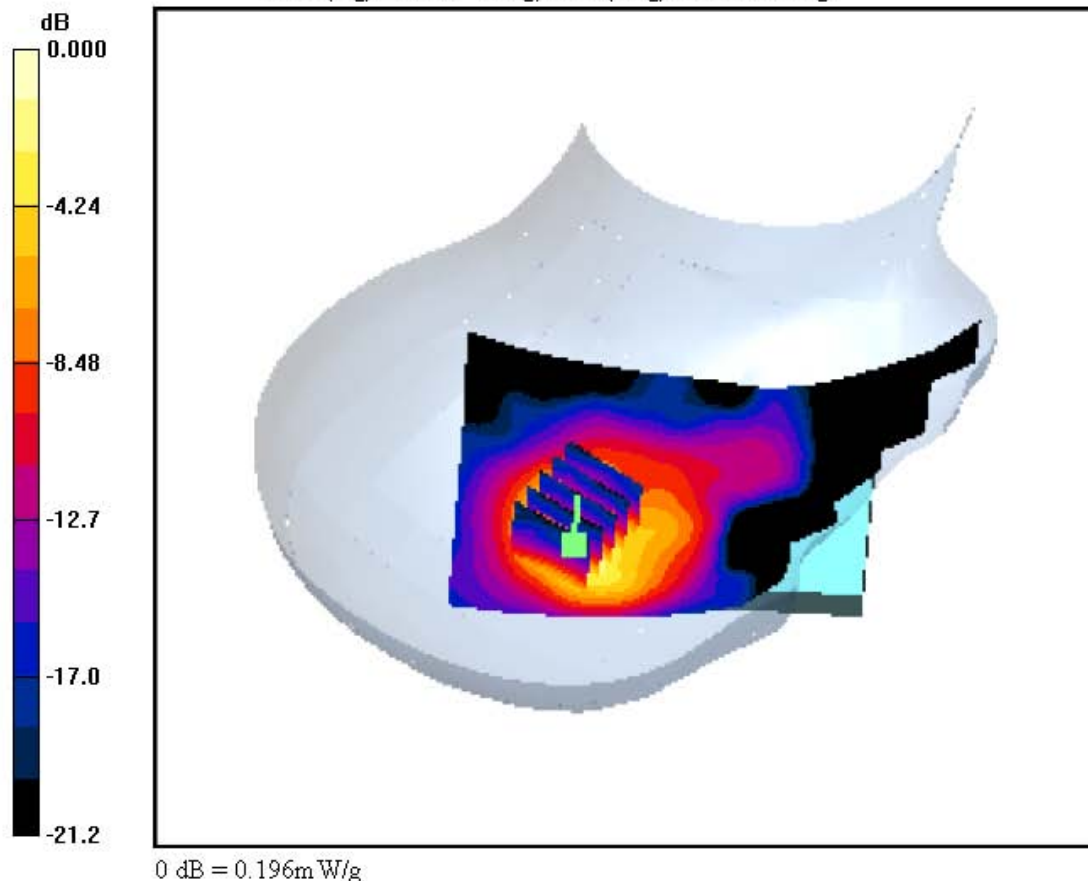

DIGITAL EMC CO., LTD

DUT: LG-E510f; Type: Bar

Communication System: W-LAN; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.86 \text{ mho/m}$; $\epsilon_r = 38.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.4, 7.4, 7.4); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-18; Ambient Temp: 22.4; Tissue Temp: 22.5

Right Touch, W-LAN(802.11b) Ch. 11, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.056 W/kg

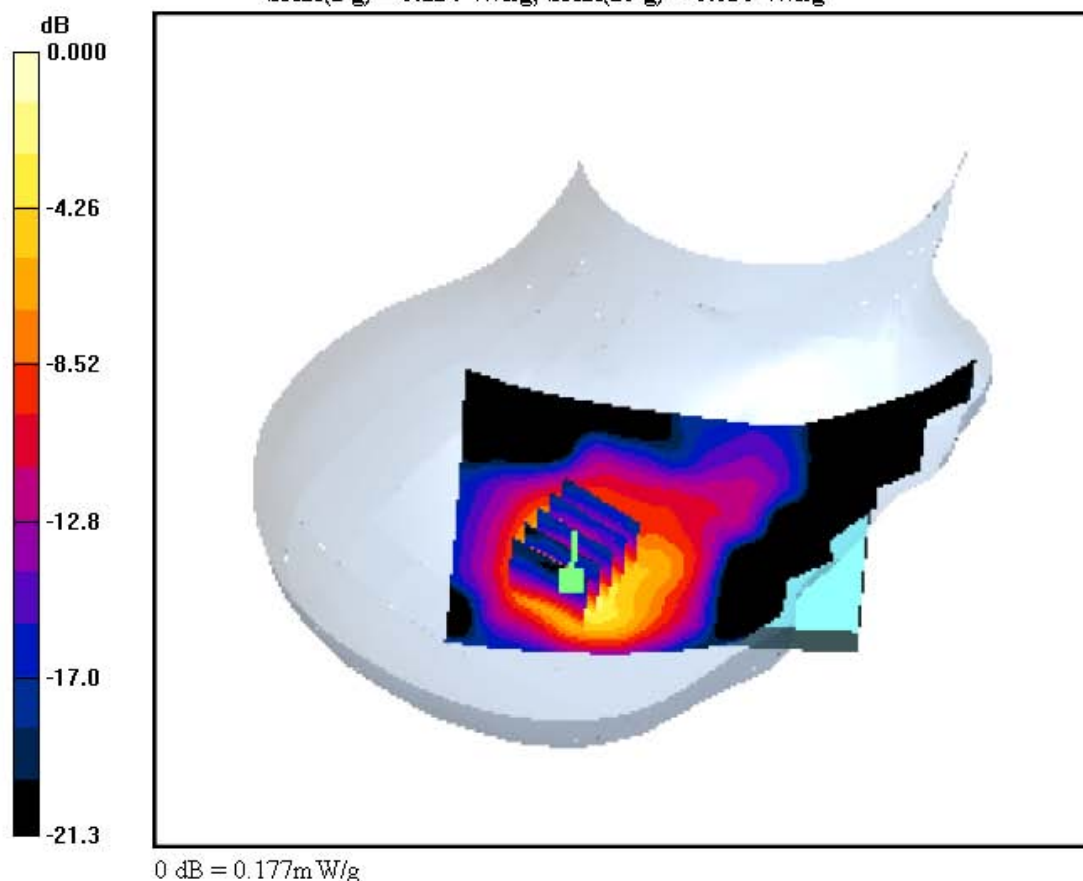

DIGITAL EMC CO., LTD

DUT: LG-E510f; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.84 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.4, 7.4, 7.4); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-18; Ambient Temp: 22.4; Tissue Temp: 22.5

Left Tilt, W-LAN(802.11b) Ch. 6, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.334 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.029 W/kg

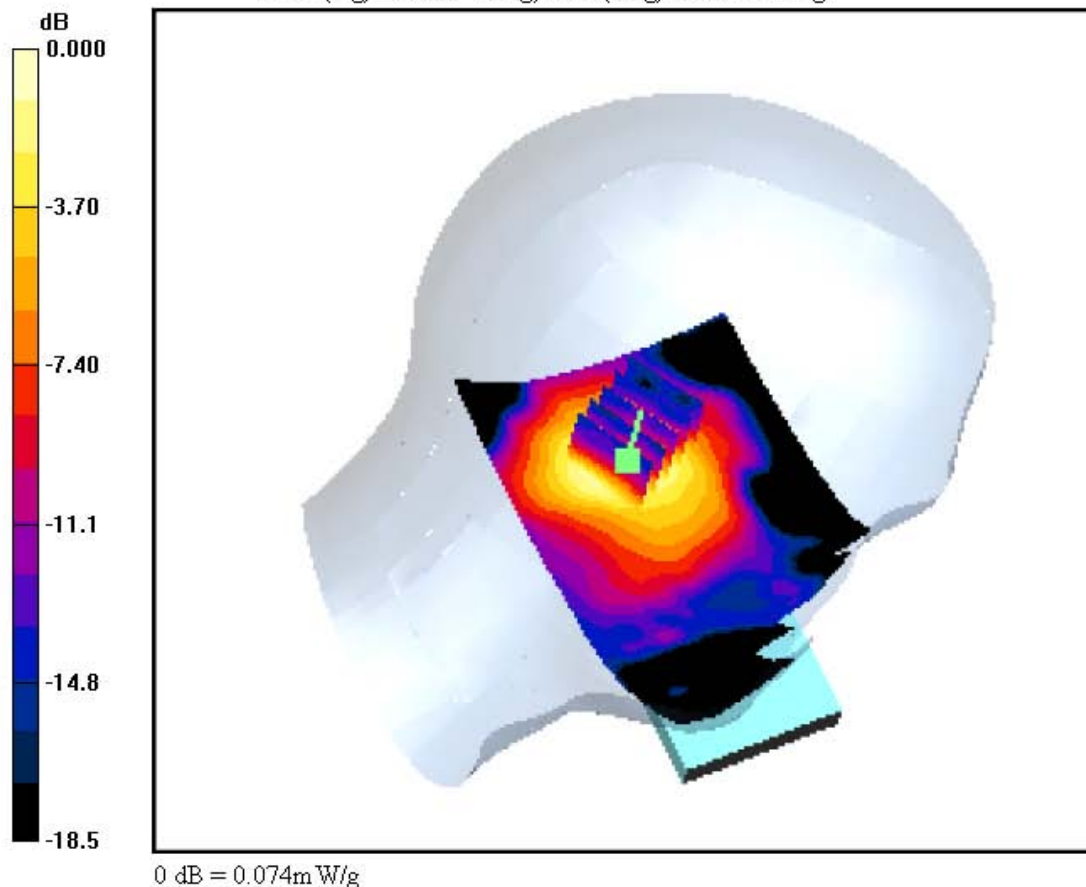

DIGITAL EMC CO., LTD

DUT: LG-E510f; Type: Bar

Communication System: W-LAN; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.84 \text{ mho/m}$; $\epsilon_r = 38.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.4, 7.4, 7.4); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-07-18; Ambient Temp: 22.4; Tissue Temp: 22.5

Right Tilt, W-LAN(802.11b) Ch. 6, Ant Internal, Standard Battery


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.122 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.034 W/kg

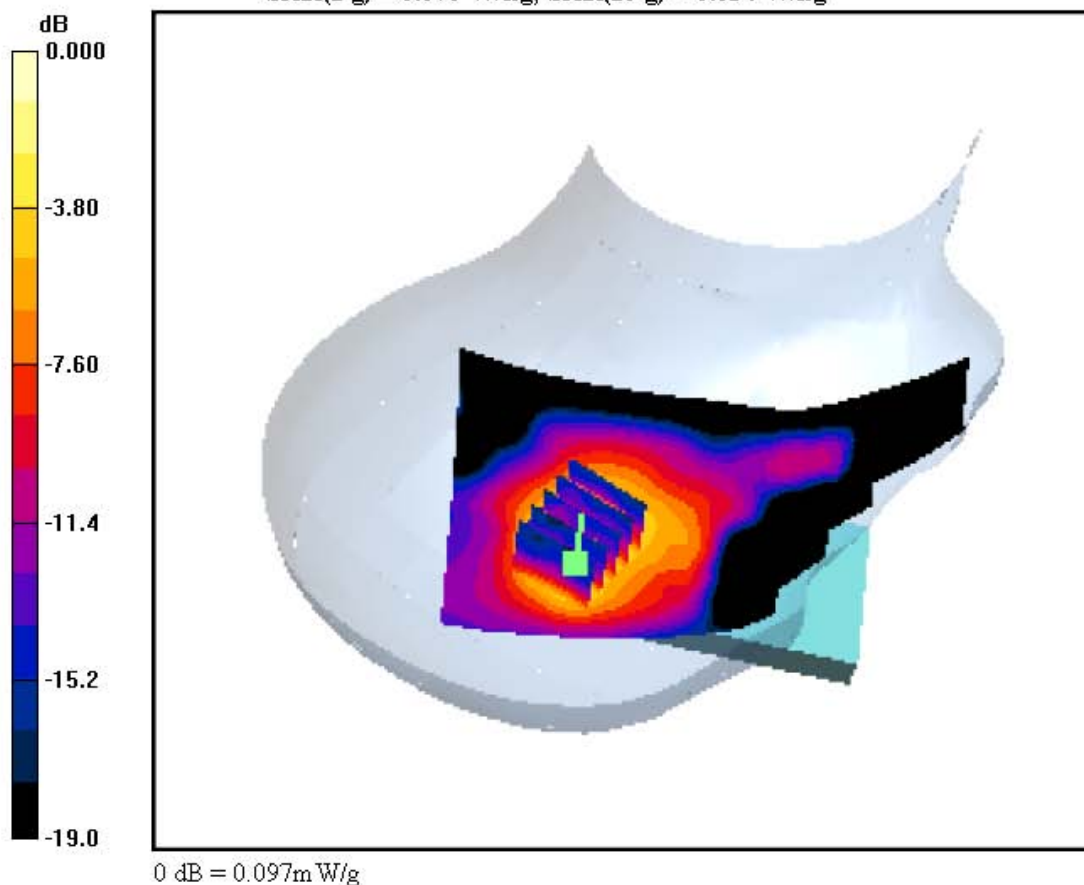

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Bottom, GSM850 GPRS Class 12 Ch. 190, Ant Internal


Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.151 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.089 W/kg

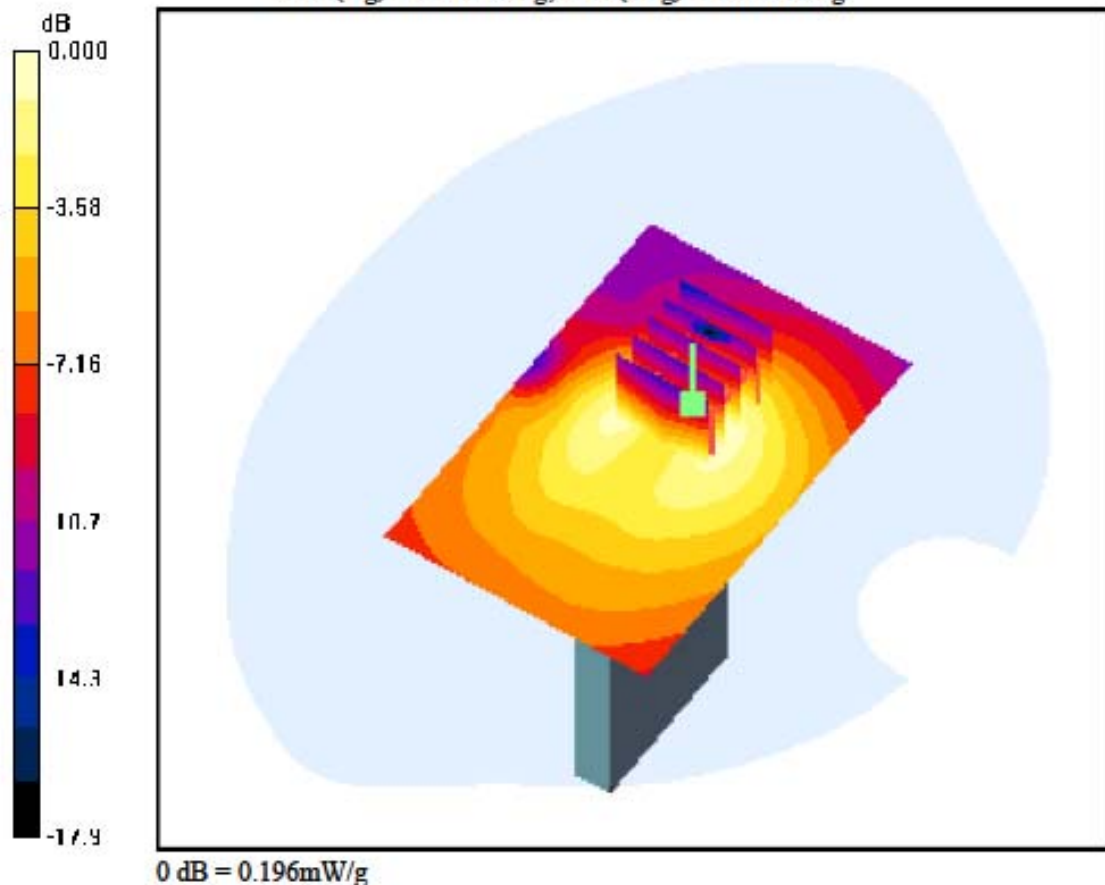

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Front, GSM850 GPRS Class 12 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.568 W/kg; SAR(10 g) = 0.422 W/kg

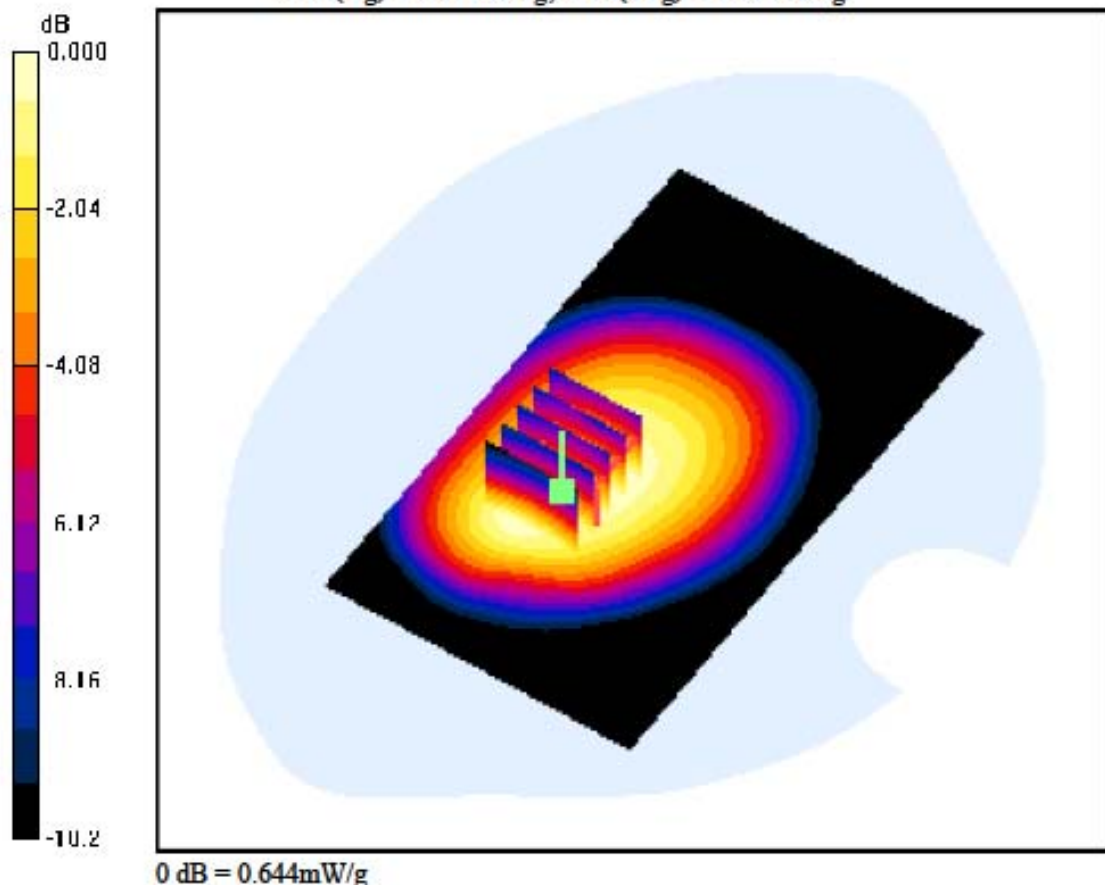

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 Ch. 128, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.624 W/kg

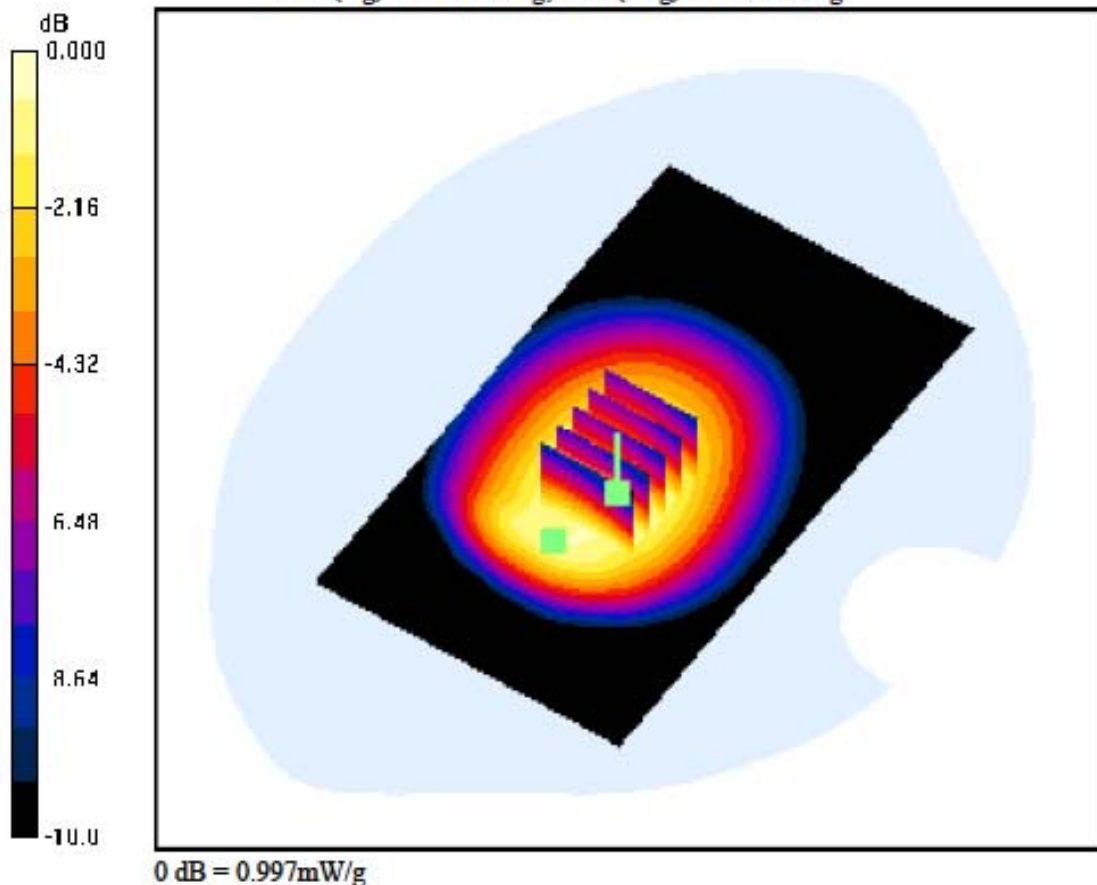

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 Ch. 128, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.499 W/kg

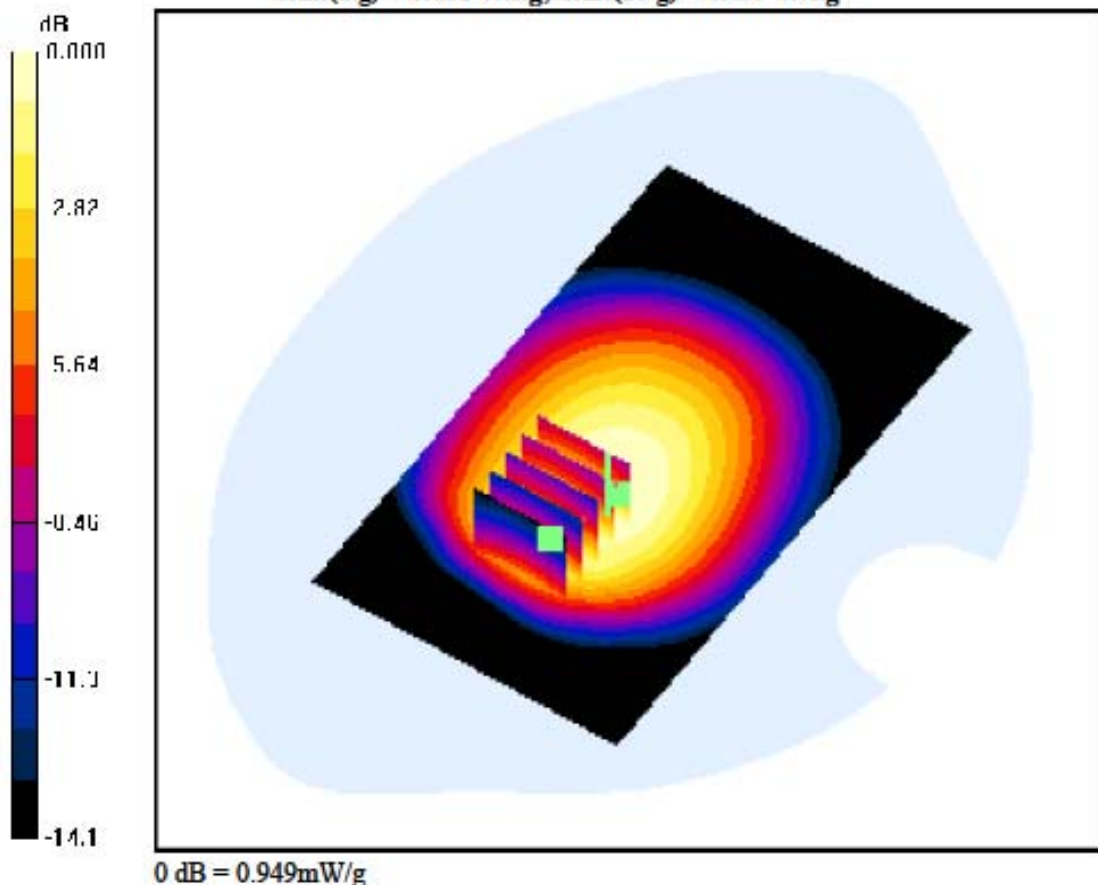

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.067 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.592 W/kg

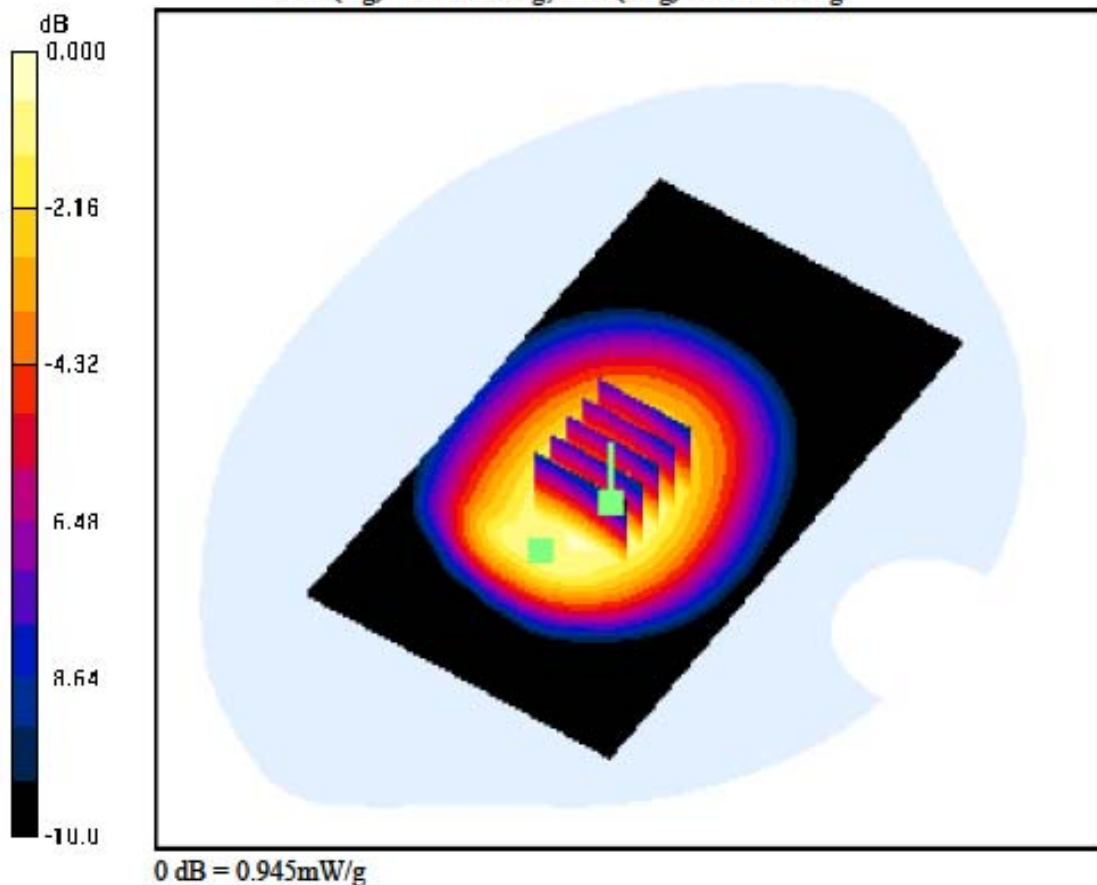

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 Ch. 190, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.067 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.464 W/kg

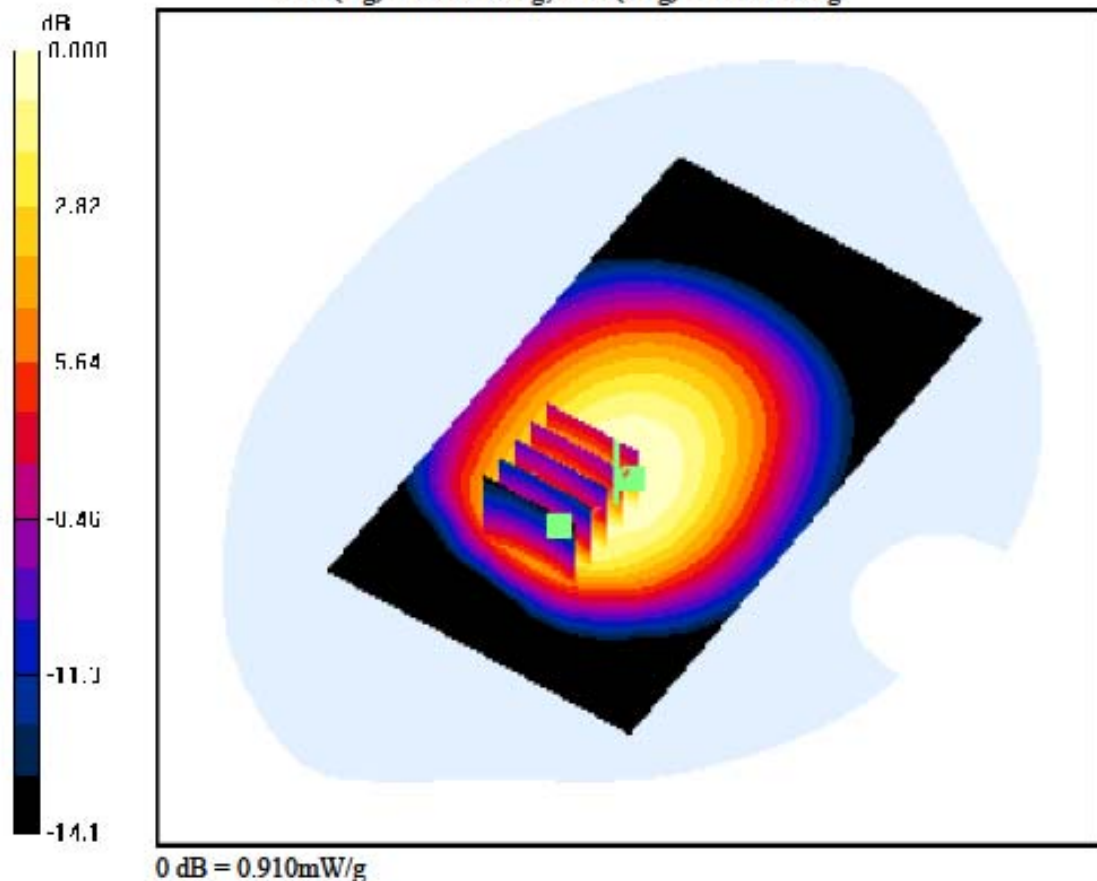

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 Ch. 251, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.466 W/kg

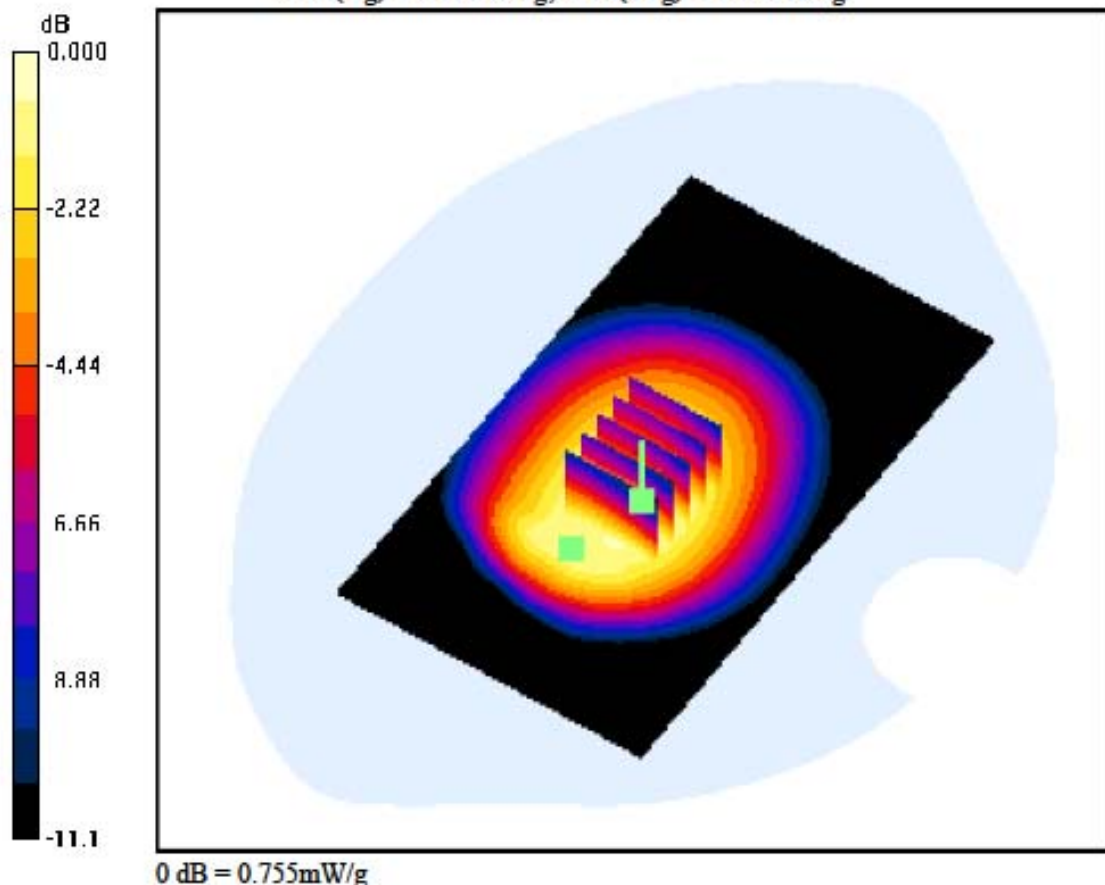

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 Ch. 251, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.854 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.357 W/kg

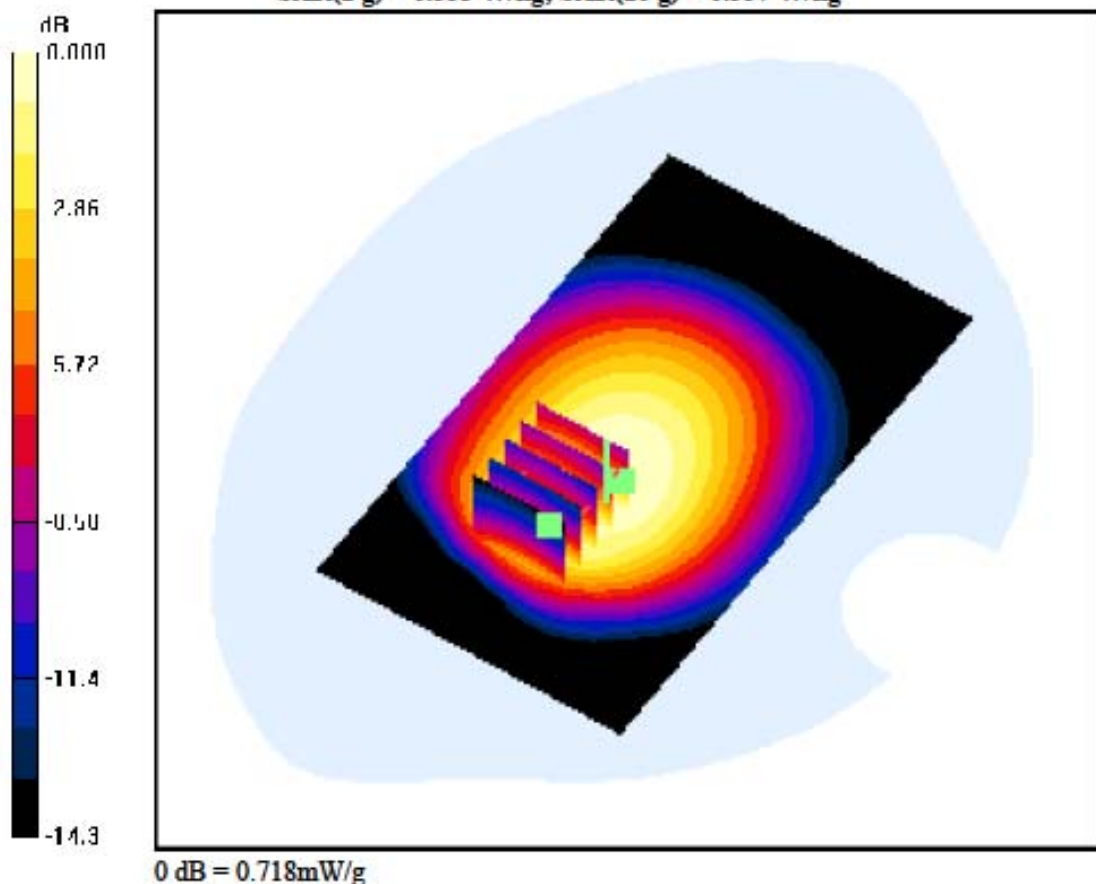

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 8 Ch. 128, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.607 W/kg

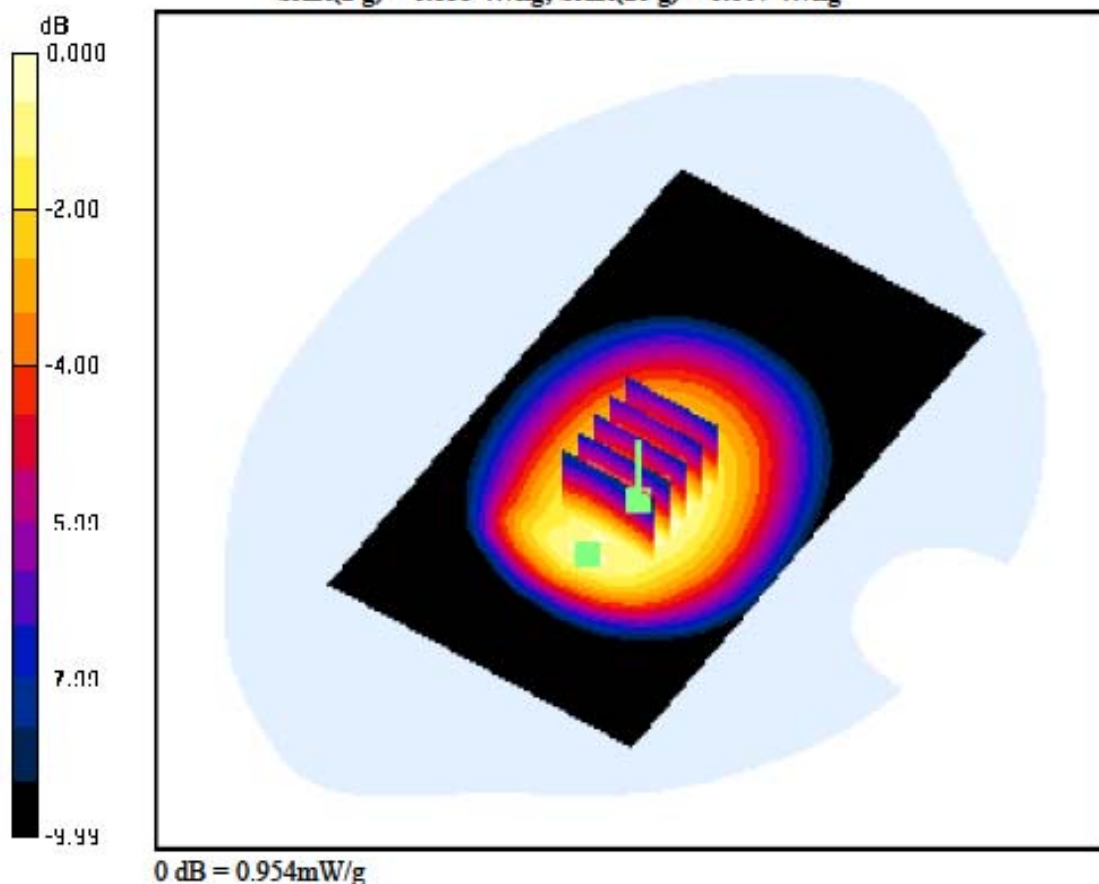

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 8 Ch. 128, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.057 dB
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.490 W/kg

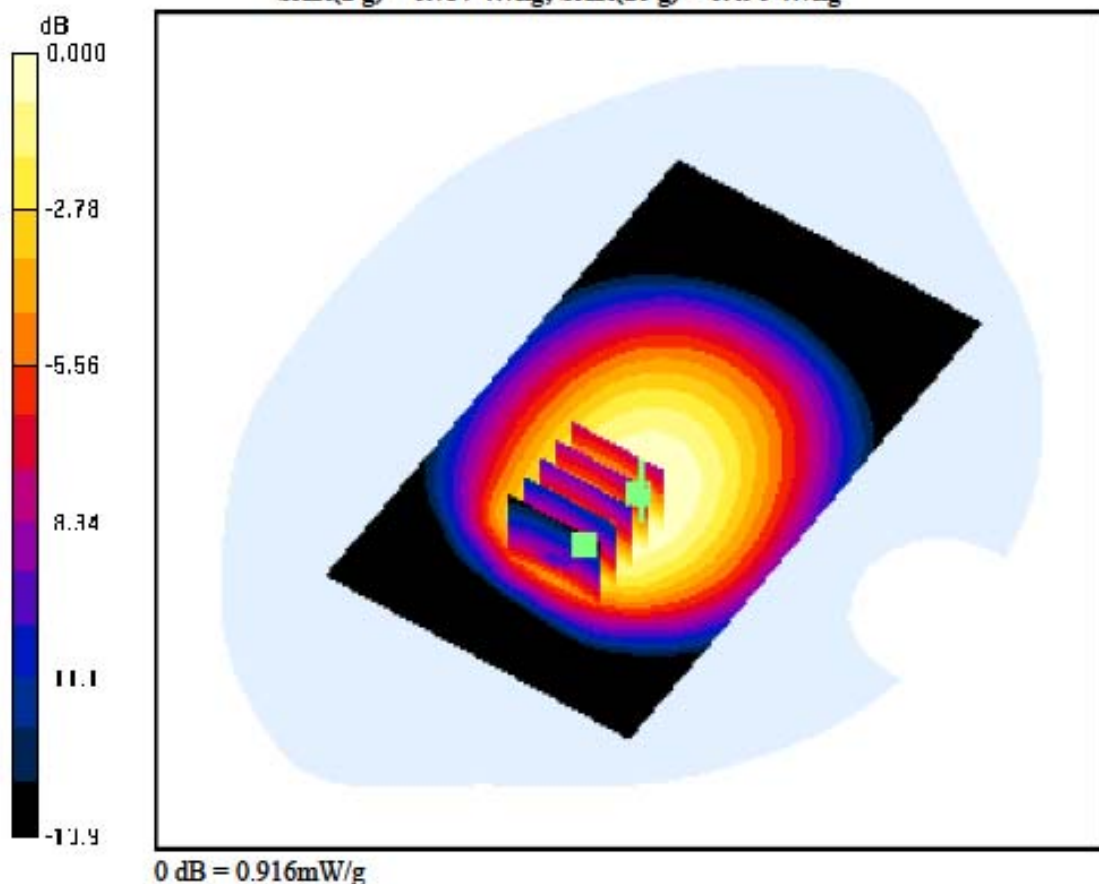

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 8 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.801 W/kg; SAR(10 g) = 0.569 W/kg

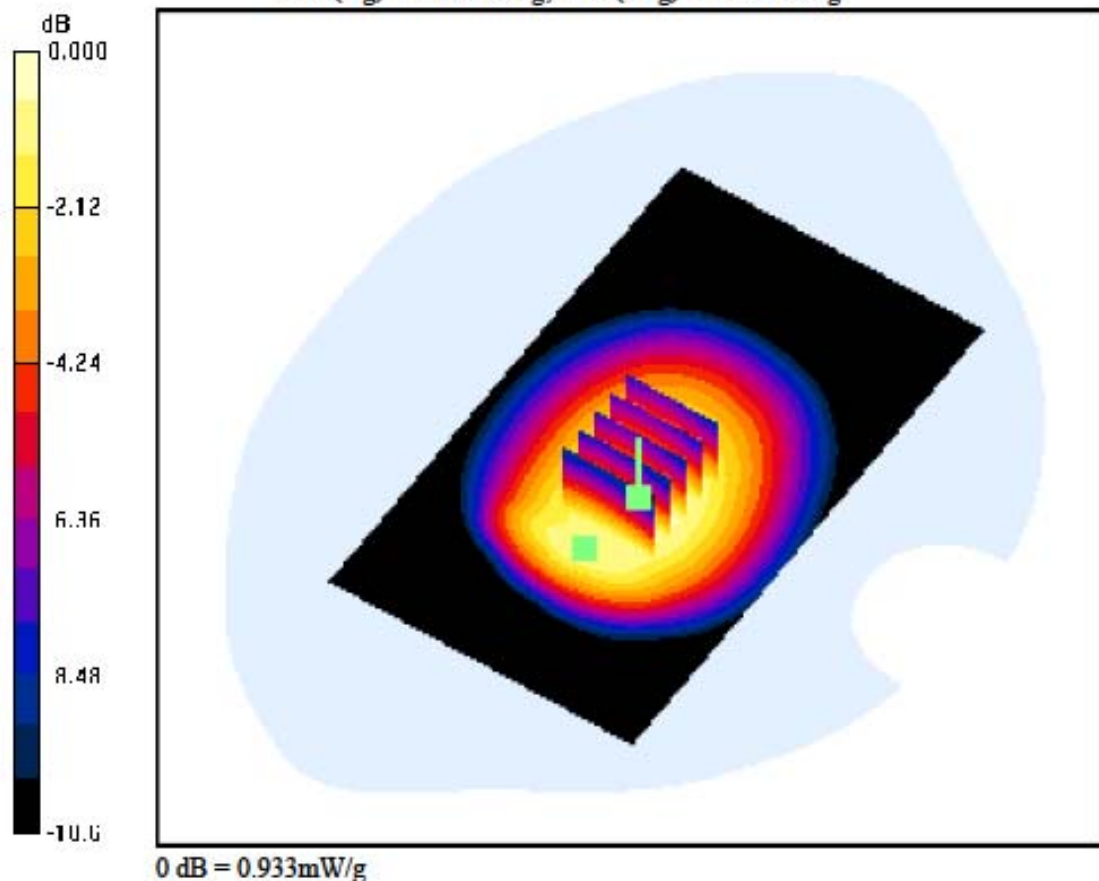

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 8 Ch. 190, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 1:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.462 W/kg

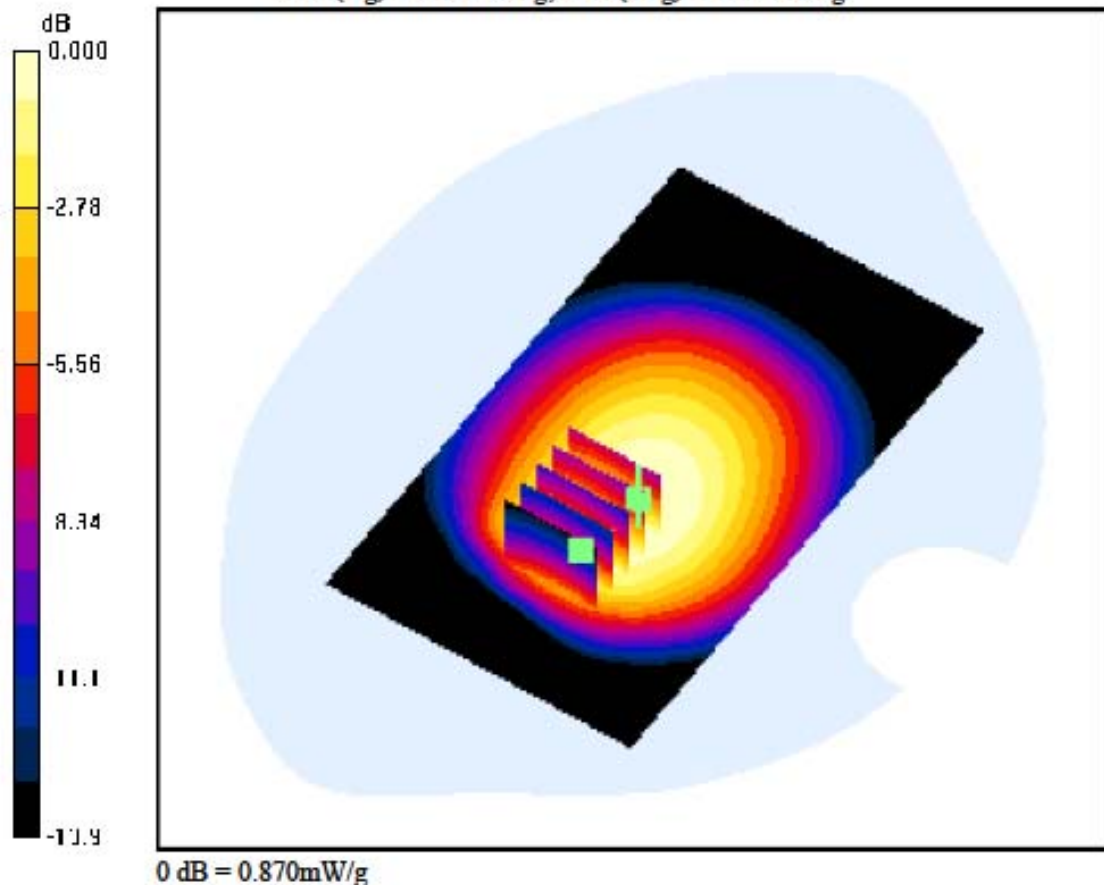

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 8 Ch. 251, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.456 W/kg

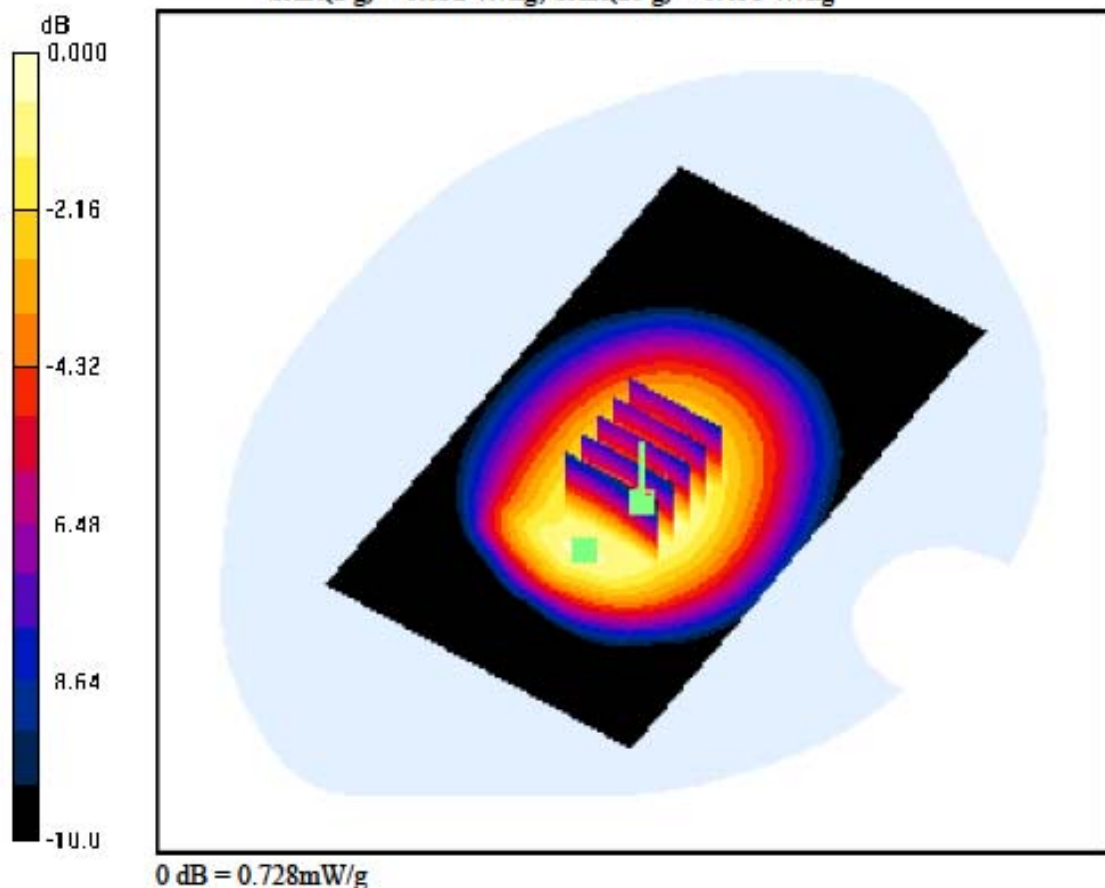

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 8 Ch. 251, Ant Internal**Area Scan (71x121x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ **Zoom Scan (5x5x7)/Cube 1:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.357 W/kg

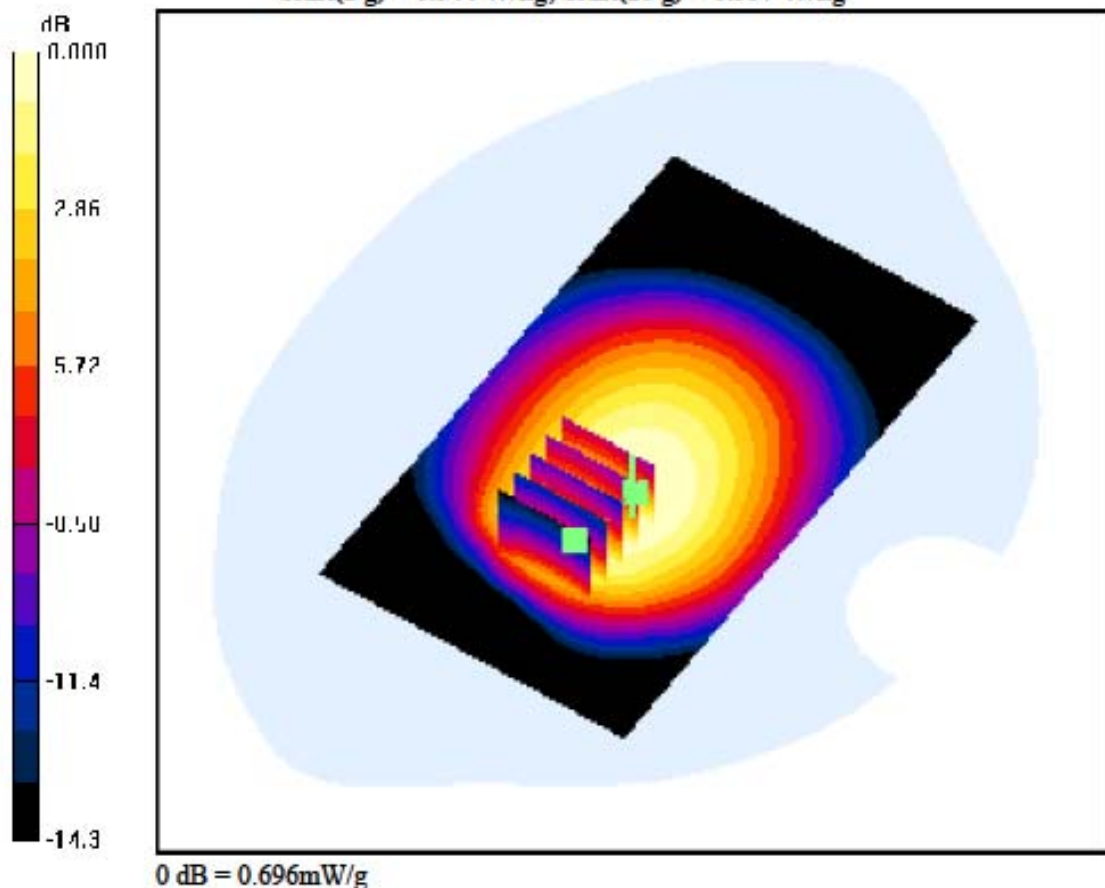

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 10 Ch. 128, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.076 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.633 W/kg

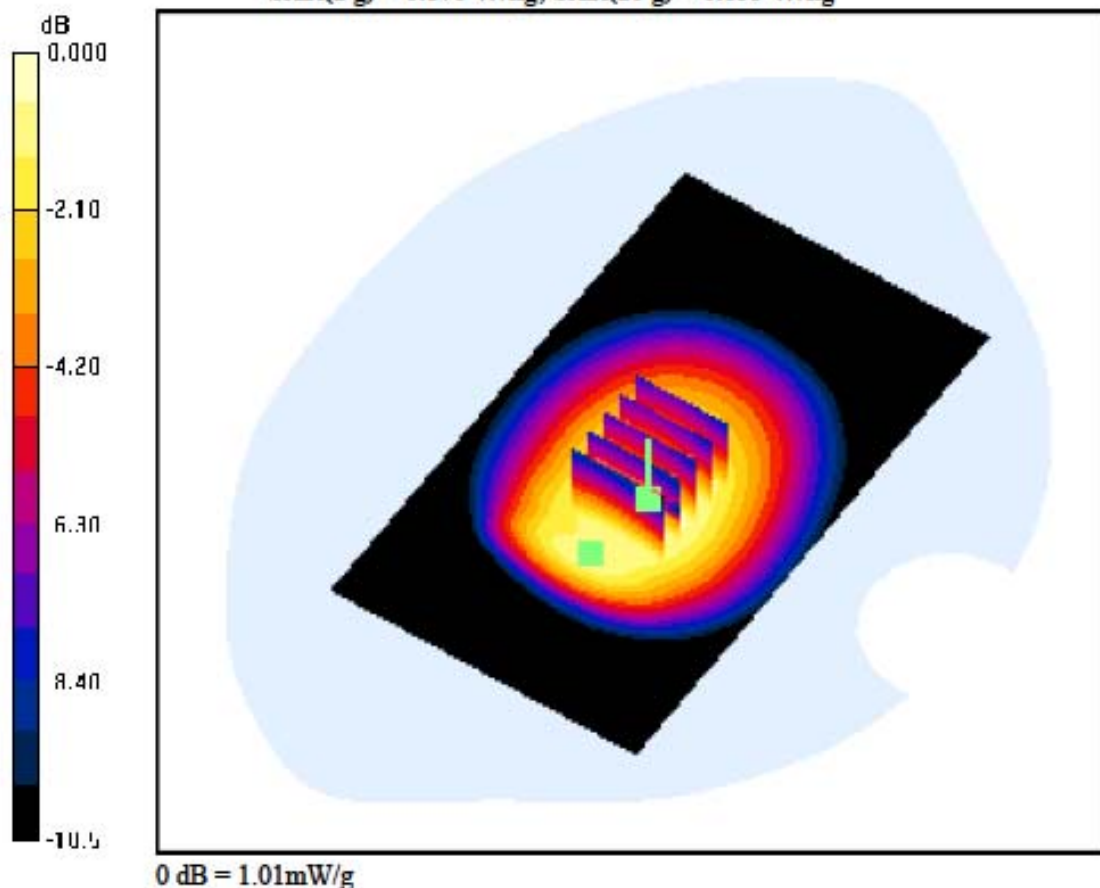

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 10 Ch. 128, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.076 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.487 W/kg

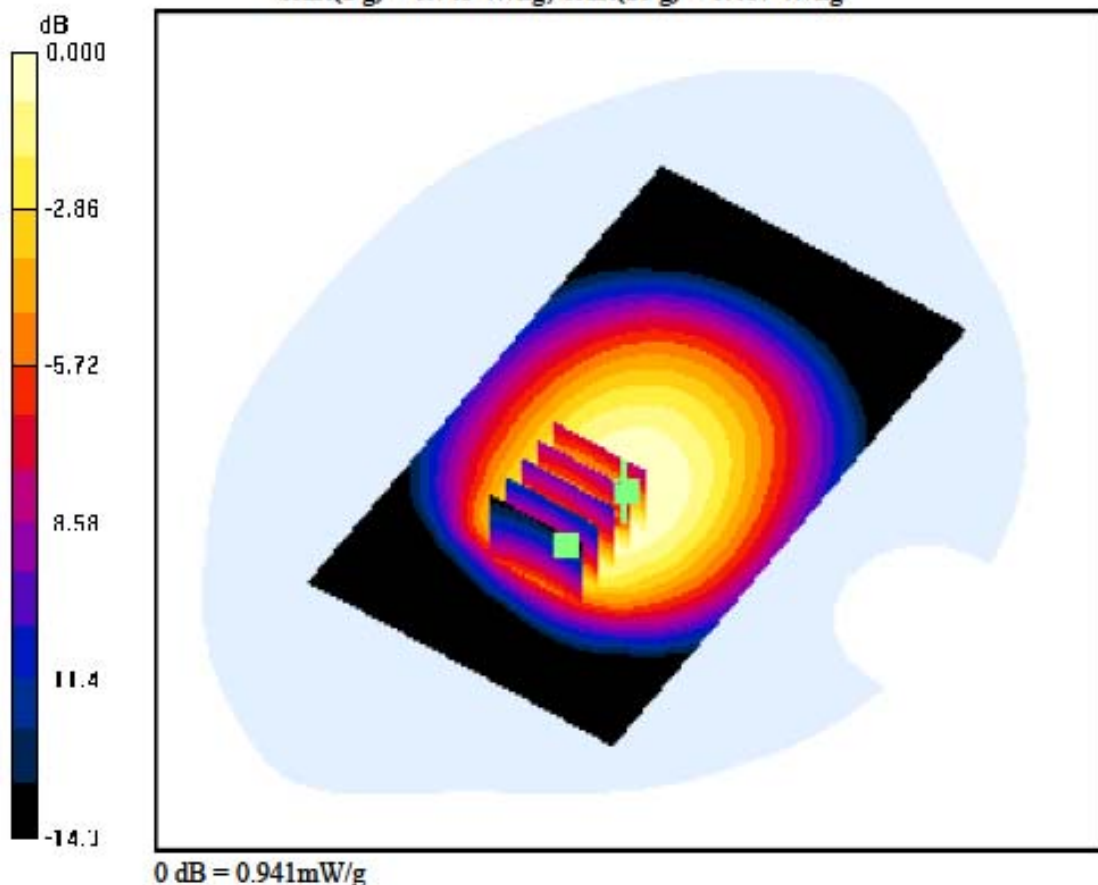

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 10 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.083 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.880 W/kg; SAR(10 g) = 0.637 W/kg

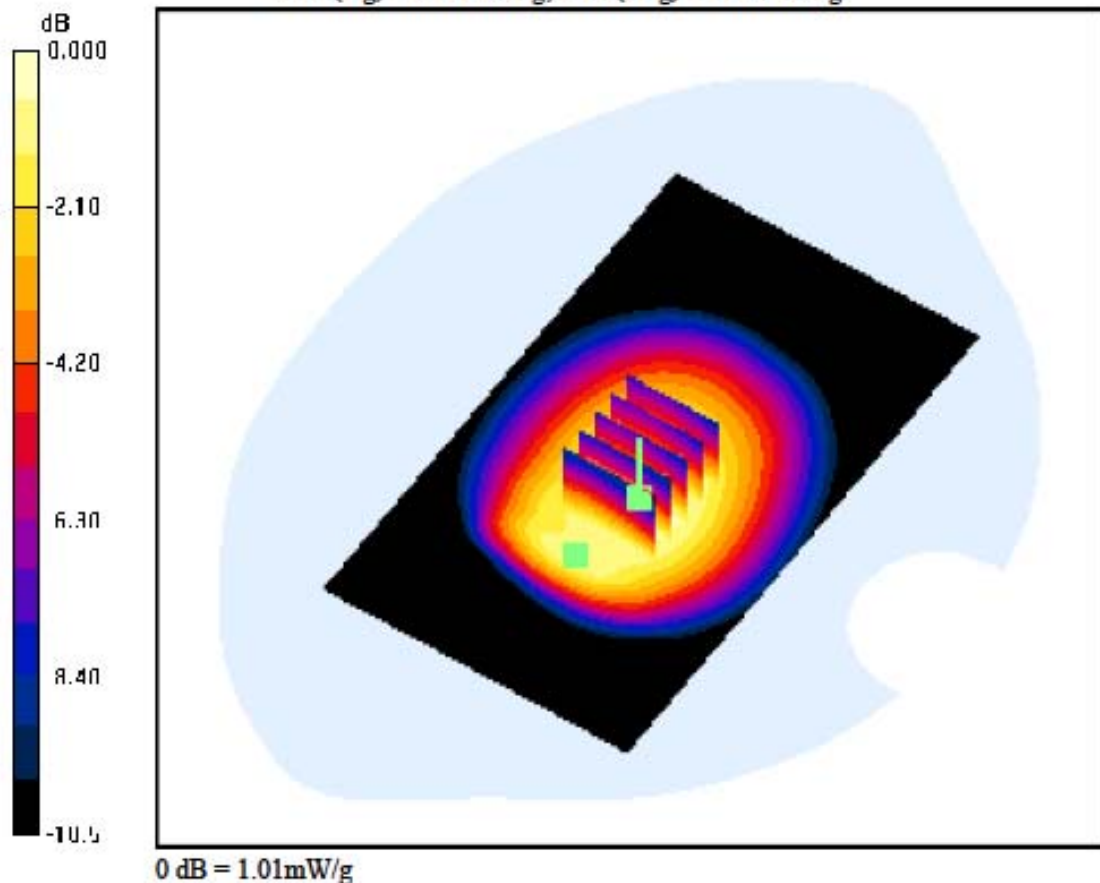

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 10 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.083 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.478 W/kg

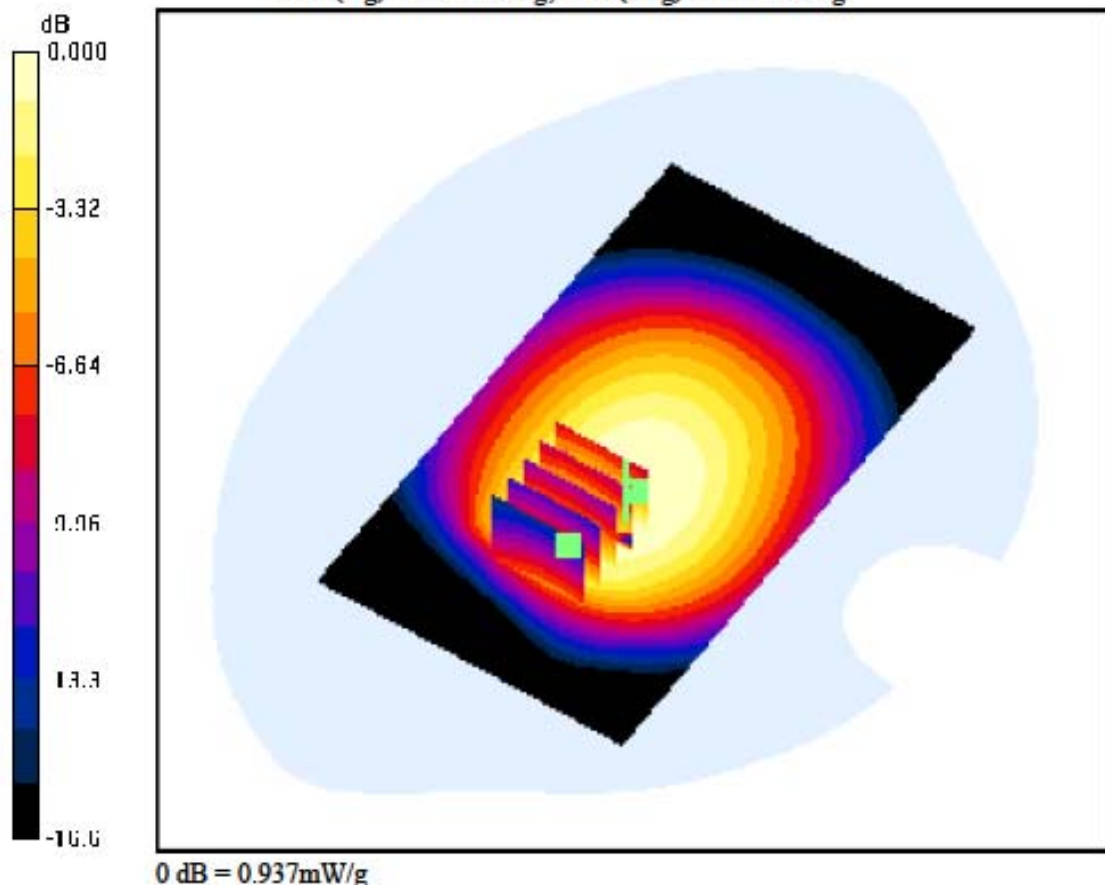

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 10 Ch. 251, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Power Drift = -0.074 dB
Peak SAR (extrapolated) = 0.907 W/kg
SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.481 W/kg

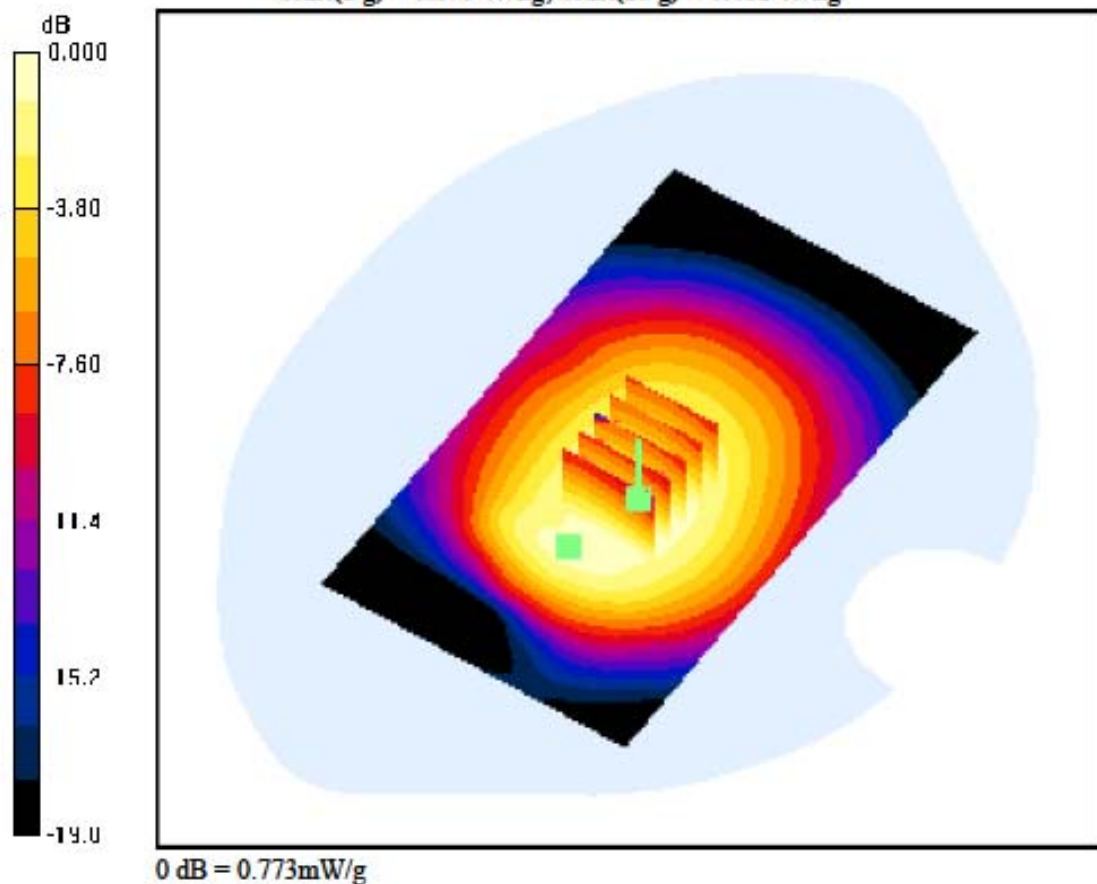

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.991 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 10 Ch. 251, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.379 W/kg

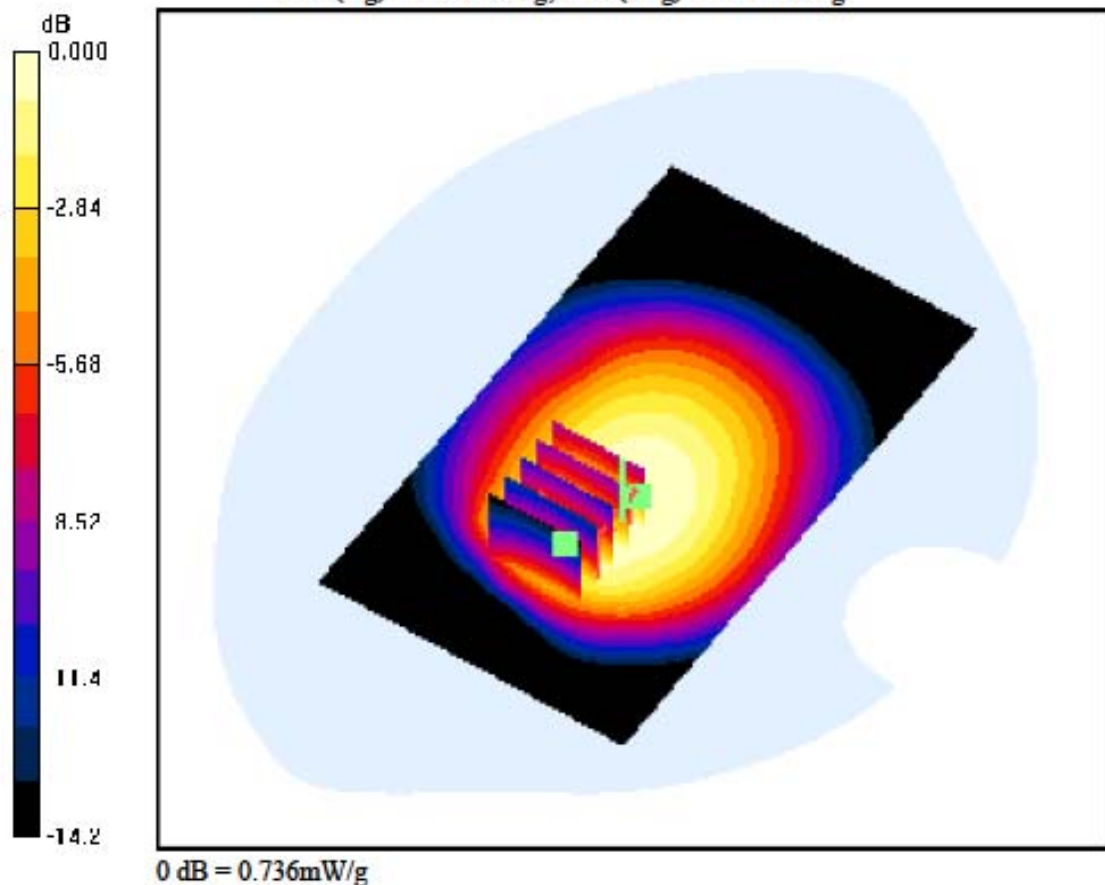

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 128, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.817 W/kg

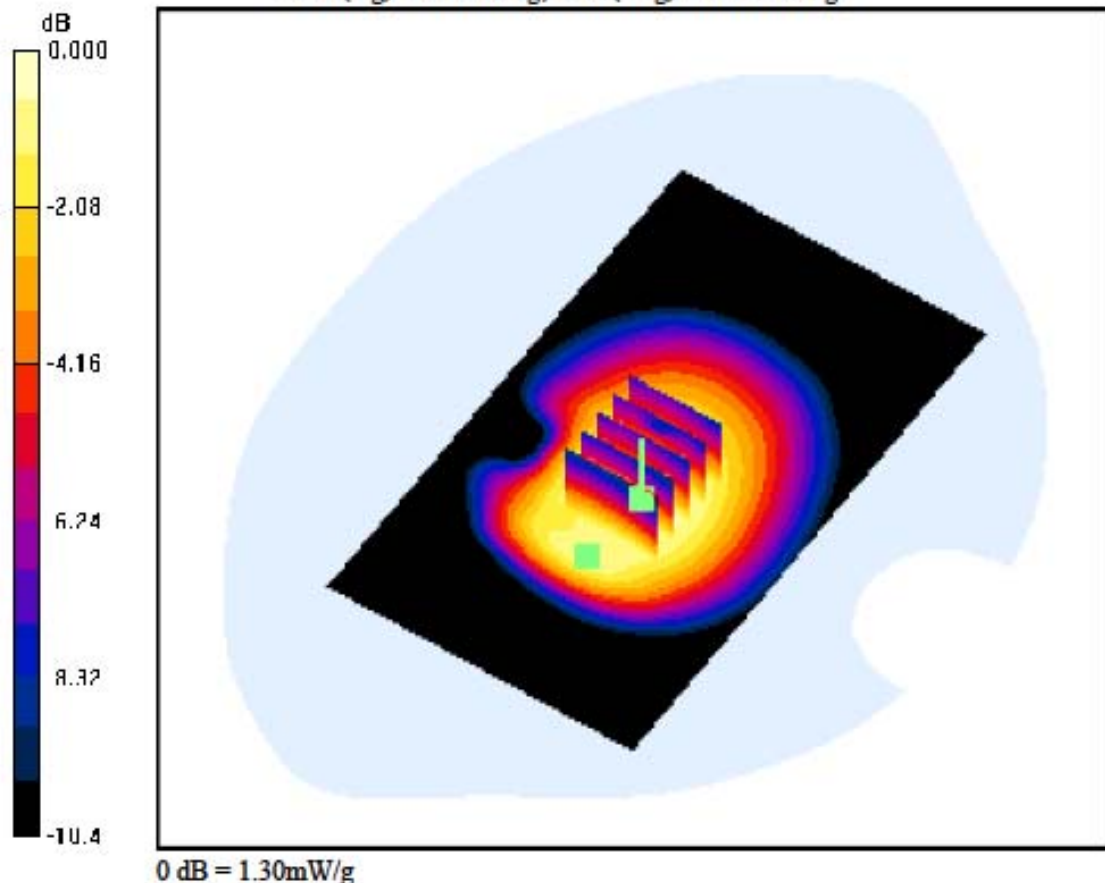

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.937 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 128, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.625 W/kg

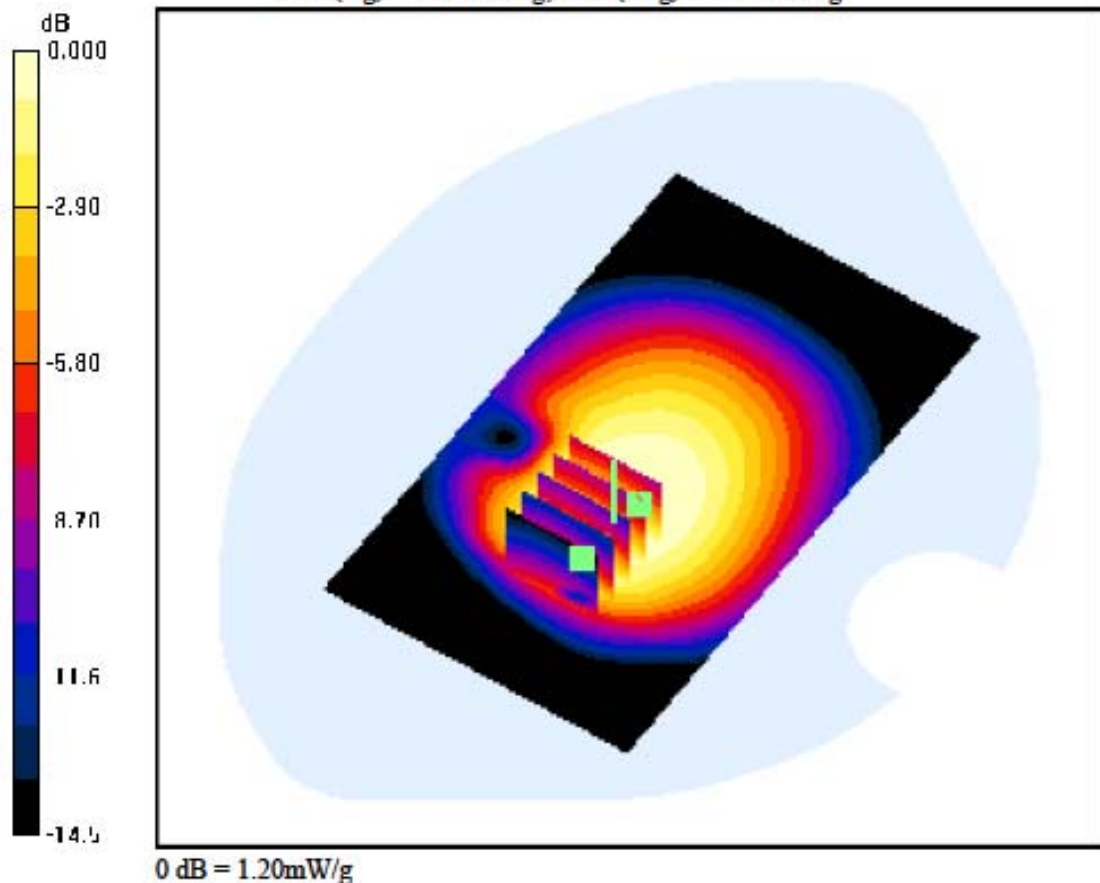

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 190, Ant Internal


Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.008 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.815 mW/g

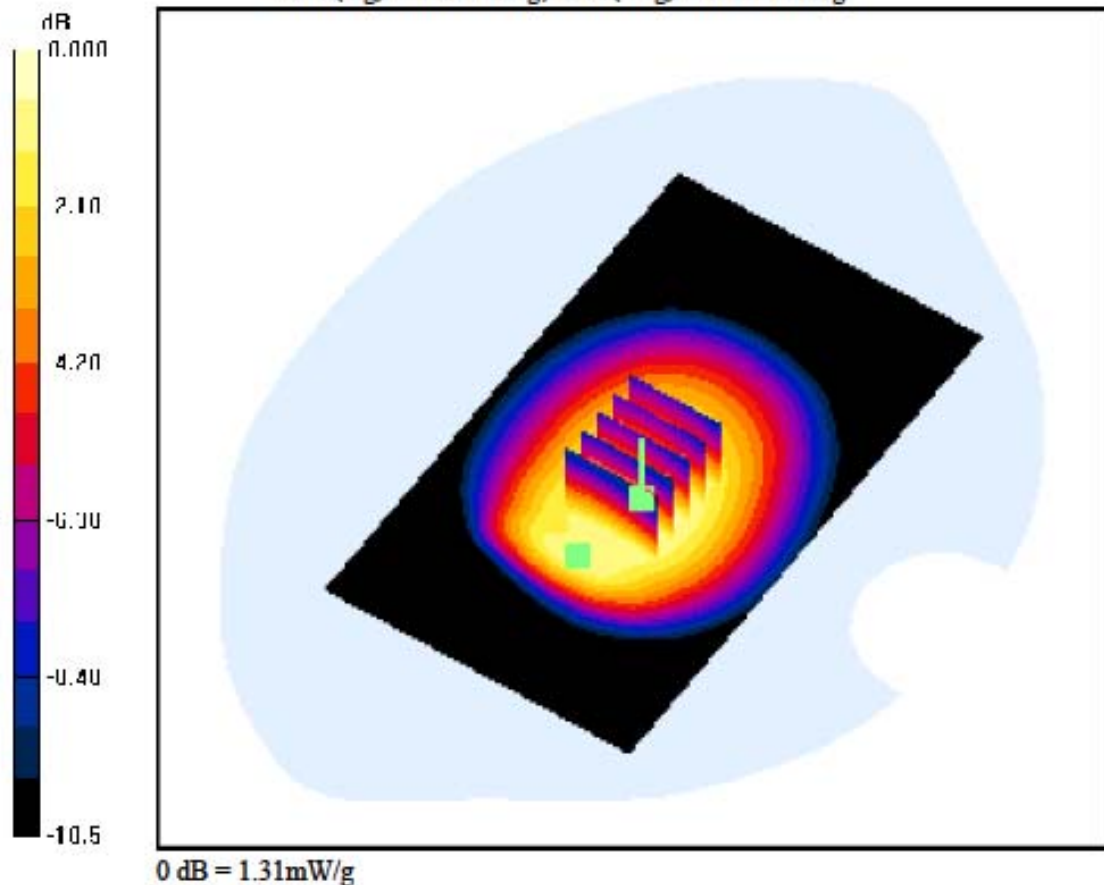

DIGITAL EMC CO., LTD**DUT: LG-E510f; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Date: 2011-06-27; Ambient Temp: 22.3; Tissue Temp: 22.4

1cm space from Body, Rear, GSM850 GPRS Class 11 Ch. 190, Ant Internal

Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.008 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.614 W/kg

