

HCT CO., LTD.



PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL: +82 31 639 8539 FAX: +82 31 639 8525 www.hct.co.kr

EMI REPORT (Certification)

LG Electronics Inc.

**60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea**

Date of Issue: March 25, 2009

Test report No.: HCT-EF09-0314

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJGT505

Classification / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B
Equipment type : Cellular/PCS GSM/EDGE Phone with Bluetooth and WLAN
Trade name / Model(s) : LG Electronics Inc. / GT505
Port / Connector(s) : DC input port / Ear phone port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See test report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

Report prepared by
: Yong Hyun Lee
Test engineer of EMC Tech. Part

Approved by
: Nam Wook Kang
Manager of EMC Tech. Part

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	3
1.1 Product description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested system details.....	4
1.4 Cable description.....	4
1.5 Noise suppression parts on cable. (I/O cable)	4
1.6 Test methodology.....	5
1.7 Test facility.....	5
1.8 Frequency range of radiated measurements	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 Configuration of tested system.....	6
3. PRELIMINARY TEST.....	7
3.1 Conducted Emission test.....	7
3.2 Radiated Emission test.....	7
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY.....	8
4.1 Conducted Emission test.....	9
4.2 Radiated Emission test.....	13
5. FIELD STRENGTH CALCULATION.....	14
6. TEST EQUIPMENT.....	15
7. CONCLUSION.....	16

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product description

The **LG Electronics Inc. Model: GT505, Cellular/PCS GSM/EDGE Phone with Bluetooth and WLAN**. Its basic purpose is used for communications.

Its transmits from GSM 850 (824.20 MHz to 848.80 MHz), GSM 1 900 (1 850.20 MHz to 1 909.80 MHz), Bluetooth (2 402 MHz to 2 480 MHz) WLAN (2 402 MHz to 2 480 MHz) and receives from GSM 850 (869.20 MHz to 893.80 MHz), GSM 1 900 (1 930.20 MHz to 1 989.80 MHz), Bluetooth (2 402 MHz to 2 480 MHz), WLAN (2 402 MHz to 2 480 MHz).

Model	GT505
FCC ID	BEJGT505
E.U.T type	Cellular/PCS GSM/ EDGE Phone with Bluetooth and WLAN
TX frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 2 402 MHz to 2 480 MHz (WLAN) 2 402 MHz to 2 480 MHz (Bluetooth)
RX frequency	869.20 MHz to 893.80 MHz (GSM850) 1930.20 MHz to 1 989.80 MHz (GSM1900) 2 402 MHz to 2 480 MHz (Bluetooth) 2 402 MHz to 2 480 MHz (WLAN)

1.2 Related submittal(s) / Grant(s)

Original submittal only.

1.3 Tested system details

All equipment descriptions used in the tested system (including inserted cards) are:

Device type	Manufacturer	Model number/ Part number	FCC ID / DoC	Connected to
Cellular/PCS GSM /EDGE Phone with Bluetooth and WLAN	LG	GT505	BEJGT505	Notebook PC, TA
Travel adaptor	DONGDO	STA-U34ED	-	E.U.T
Notebook PC	TOSHIBA	PSMA2K-01D002	DoC	E.U.T, TA
Notebook PC adaptor	DELTA	SADP-65KB B	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2	DoC	Notebook PC
Ear phone	I-SOUND	SGEY0003727	-	E.U.T
USB cable	KSD	SGDY0014301	-	E.U.T, PC

1.4 Cable description

Product name	Port	Power cord shielded (Y/N)	I/O cable shielded (Y/N)	Length (M)
Cellular/PCS GSM /EDGE Phone with Bluetooth and WLAN	DC in	N	-	(P)1.5
	Ear jack	-	N	(D)1.1
	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

1.5 Noise suppression parts on cable. (I/O cable)

Product name	Port	Ferrite bead (Y/N)	Location	Metal hood (Y/N)	Location
Cellular/PCS GSM /EDGE Phone with Bluetooth and WLAN	DC in	N	-	Y	E.U.T end
	Ear jack	N	-	Y	E.U.T end
	USB data	N	-	Y	Both end
Notebook PC	USB (Mouse)	Y	Notebook PC end	Y	Notebook PC end

1.6 Test methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Icheon-si, Kyoungki-do, 467-701, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the commission and accepted dated July 6, 2006(Registration Number: 90661)

1.8 Frequency range of radiated measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of test system

Power Line Conducted test : E.U.T was connected to LISN, all other supporting equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of tested system]

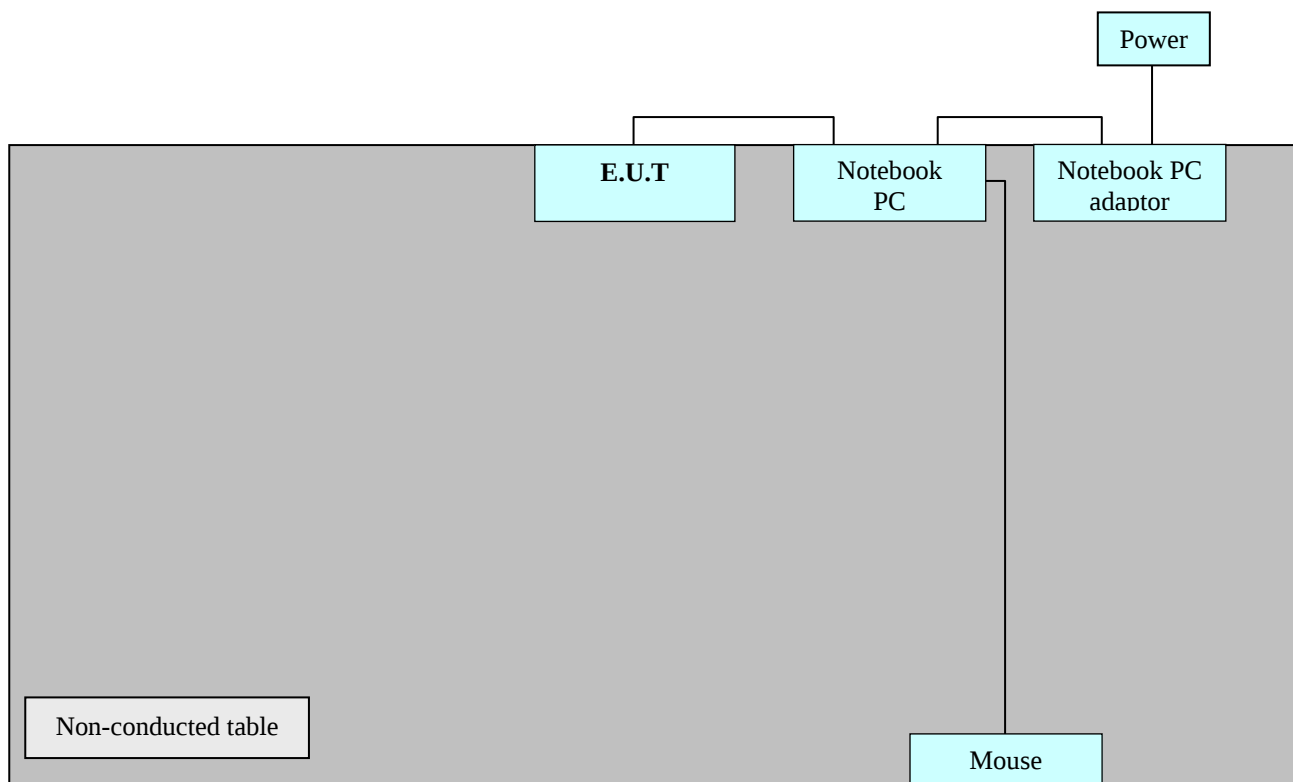

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission test

During preliminary tests, the following operating mode was investigated

Operation mode	The worst operating condition
GSM Idle (850, 1 900)	
Camera	
MP3	
Bluetooth	
WLAN	
Data communication	○

3. 2 Radiated Emission test

During preliminary test, the following operation mode was investigated

Operation mode	The worst operating condition
GSM Idle (850, 1 900)	
Camera	
MP3	
Bluetooth	
WLAN	
Data communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 9.0 dB
Operating condition	: Data communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 11.3 °C
Humidity level	: 34.3 %
Test date	: March 12, 2009

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
0.2026	53.3	HOT	Quasi-Peak	64.0	10.2
4.7400	35.0	HOT	Average	46.0	11.0
0.2026	54.5	NEUTRAL	Quasi-Peak	64.0	9.0
5.0000	36.9	NEUTRAL	Average	46.0	9.1


HCT

EMC TEST LAB.

EUT: GT505
Manufacturer: LG
Operating Condition: Data communication Mode
Test Site: SHIELD ROOM
Operator: YH, LEE
Test Specification: CISPR 22 CLASS B
Comment: H

SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None

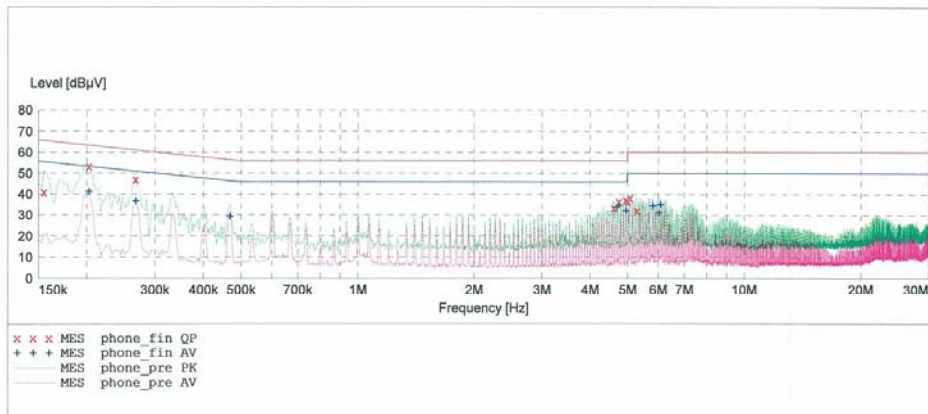

MEASUREMENT RESULT: "phone_fin QP"

3/12/2009 4:43PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.155100	41.00	10.1	66	24.7	---	---
0.202600	53.30	10.1	64	10.2	---	---
0.267600	47.10	10.1	61	14.1	---	---
4.604000	33.40	10.6	56	22.6	---	---
4.740000	36.70	10.6	56	19.3	---	---
4.940000	37.30	10.7	56	18.7	---	---
5.008000	36.60	10.7	60	23.4	---	---
5.076000	38.30	10.7	60	21.7	---	---
5.272000	32.20	10.7	60	27.8	---	---

MEASUREMENT RESULT: "phone_fin AV"

3/12/2009 4:43PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.202600	41.50	10.1	54	12.0	---	---
0.267600	37.10	10.1	51	14.1	---	---
0.467600	29.60	10.2	47	16.9	---	---

MEASUREMENT RESULT: "phone_fin AV"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
4.672000	34.00	10.6	46	12.0	---	---
4.740000	35.00	10.6	46	11.0	---	---
4.940000	32.30	10.7	46	13.7	---	---
5.808000	34.80	10.8	50	15.2	---	---
6.008000	31.30	10.8	50	18.7	---	---
6.076000	35.40	10.8	50	14.6	---	---


HCT

EMC TEST LAB.

EUT: GT505
 Manufacturer: LG
 Operating Condition: Data communication Mode
 Test Site: SHIELD ROOM
 Operator: YH, LEE
 Test Specification: CISPR 22 CLASS B
 Comment: N

SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	

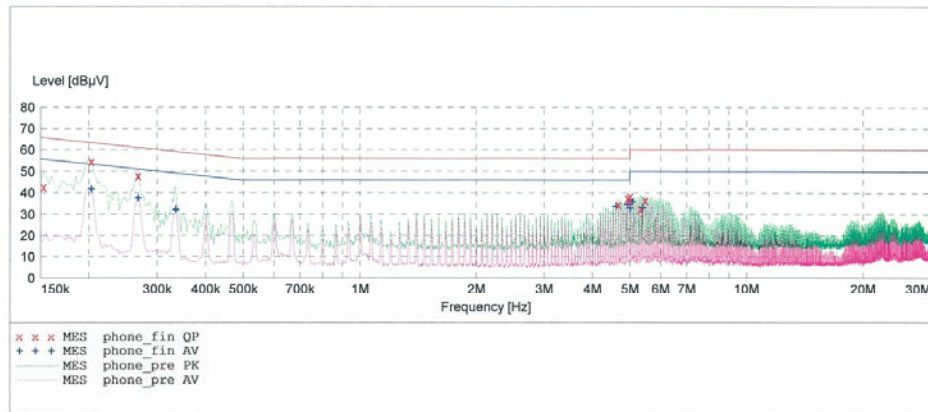

MEASUREMENT RESULT: "phone_fin QP"

3/12/2009 4:40PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.152600	42.90	10.1	66	22.9	---	---
0.202600	54.50	10.1	64	9.0	---	---
0.267600	48.00	10.1	61	13.2	---	---
4.664000	34.60	10.6	56	21.4	---	---
4.932000	37.60	10.7	56	18.4	---	---
5.000000	38.30	10.7	56	17.7	---	---
5.000000	36.20	10.7	56	19.8	---	---
5.332000	32.70	10.7	60	27.3	---	---
5.468000	36.60	10.7	60	23.4	---	---

MEASUREMENT RESULT: "phone_fin AV"

3/12/2009 4:40PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.202600	42.10	10.1	54	11.4	---	---
0.267600	37.80	10.1	51	13.4	---	---
0.335100	32.50	10.1	49	16.8	---	---

MEASUREMENT RESULT: "phone_fin AV"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
4.600000	33.90	10.6	46	12.1	---	---
4.932000	35.00	10.7	46	11.0	---	---
5.000000	36.90	10.7	46	9.1	---	---
5.000000	33.10	10.7	46	12.9	---	---
5.068000	36.10	10.7	50	13.9	---	---
5.400000	33.40	10.7	50	16.6	---	---

4.2 Radiated Emission test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to	: FCC PART 15 Subpart B
Result	: Passed by 9.4 dB
Operating condition	: Data communication mode
Detector	: Quasi-Peak (6 dB Bandwidth: 120 kHz)
Temperature	: 11.3 °C
Humidity level	: 34.3 %
Test date	: March 12, 2009

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
62.5	15.2	11.7	1.8	V	28.7	40.0	11.3
171.3	18.9	12.1	3.1	V	34.1	43.5	9.4
173.4	15.4	12.0	3.1	H	30.5	43.5	13.0
334.1	15.6	13.8	4.4	H	33.8	46.0	12.2
336.0	16.9	13.8	4.4	H	35.1	46.0	10.9

*** Note)**

For measurement over 1 GHz, noise level was more than 10 dB below the limit.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission limits]

Frequency of emission (MHz)	Field strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model number</u>	<u>Next CAL date</u>
EMI Test Receiver	Rohde & Schwarz	ES140	2009.10.31
EMI Test Receiver	Rohde & Schwarz	ESCI	2009.06.01
LISN	EMCO	703125	2009.05.04
LISN	Rohde & Schwarz	ESH2-Z5	2009.04.18
LISN	Rohde & Schwarz	ESH3-Z5	2009.06.13
LISN	EMCO	3816/2SH	2009.06.05
Attenuator	Rohde & Schwarz	ESH3-Z2	2009.10.30
Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
Communication Antenna	TDK	LPDA-0802	-
Antenna Position Tower	HD	240/520/00	-
Base Station	Rohde & Schwarz	CMU 200	2010.02.17
Horn Antenna	Schwarzbeck	BBHA 9120D	2010.03.26
RF-Amplifier	MITEQ	AMF-6D-00101800-35.20P.PS	2009.04.25
Bluetooth Base Station	TESCOM	TC-3000A	2010.01.09

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Model: GT505, Cellular/PCS GSM / EDGE Phone with Bluetooth and WLAN. FCC ID: BEJGT505** complies with §15.107 and §15.109 of the FCC rules.