



HCT.CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8535

FCC Class II Permissive Change

Applicant Name:

LG Electronics, Inc.

Date of Issue:

October 22 , 2009

Location:

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,
Kyoungki-do, Korea

Address:

60-39, Gasan-dong, Gumchon-gu, Seoul 153-023,
Korea

Test Report No.: HCTR0910FR10

HCT FRN: 0005866421

IC Recognition No.: IC 5944A-1

FCC ID:	BEJGW525G
IC:	2703C-GW525G
APPLICANT:	LG Electronics, Inc.

Application Type:

FCC Class II Permissive Change

FCC Model(s):

GW525g

IC Model(s):

GW525g

EUT Type:

Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth

Tx Frequency:

824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.4 - 1 907.6 MHz (WCDMA1900)

Rx Frequency:

869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 (WCDMA850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.4 - 1 987.6 MHz (WCDMA1900)

Max. RF Output Power:

0.995 W ERP GSM850 (29.98 dBm) / 0.610 W EIRP GSM1900 (27.85 dBm)
0.288 W ERP EDGE850 (24.59 dBm) / 0.364 W EIRP EDGE1900 (25.61 dBm)
0.166 W ERP WCDMA850(22.19 dBm) / 0.207 W EIRP WCDMA1900(23.15 dBm)

Emission Designator(s):

247KGXW (GSM850) 246KGXW (GSM1900)
247KG7W (GSM850 EDGE) 249KG7W (GSM1900 EDGE)
4M16F9W (WCDMA850) 4M17F9W (WCDMA1900)

FCC Classification:

Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s):


§22, §24, §2

IC Rule:


RSS-132, RSS-133, RSS-GEN

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)


Report prepared by
: Jong Seok Lee

Test engineer of RF Team


Approved by
: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC Class II Permissive Change Test Report				www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	IC: 2703C-GW525G

Table of Contents

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
2.1. EUT DESCRIPTION	4
2.2. MEASURING INSTRUMENT CALIBRATION	4
2.3. TEST FACILITY	4
3. DESCRIPTION OF TESTS	5
3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power	5
3.2 Peak- to- Average Ratio	6
3.3 Occupied bandwidth.	7
3.4 Spurious and Harmonic Emissions at Antenna Terminal	8
3.5 Radiated Spurious and Harmonic Emissions	9
3.6 Frequency stability / variation of ambient temperature	10
4. LIST OF TEST EQUIPMENT	11
5. SUMMARY OF TEST RESULTS	12
6. SAMPLE CALCULATION	13
7. TEST DATA	14
7.1 Conducted Output Power	14
7.2 Peak-to-Average Ratio	15
7.3 Occupied Bandwidth	16
7.4 Conducted Spurious Emissions	17
7.4.1 Band Edge	17
7.5 Effective Radiated Power Output (GSM / WCDMA)	18
7.6 Equivalent Isotropic Radiated Power (GSM / WCDMA)	19
7.7 Radiated Spurious Emissions	20
7.7.1 Radiated Spurious Emissions (GSM850)	20
7.7.2 Radiated Spurious Emissions (GSM1900)	21
7.7.3 Radiated Spurious Emissions (WCDMA850)	22
7.7.4 Radiated Spurious Emissions (WCDMA1900)	23
7.8 Frequency stability / variation of ambient temperature	23
7.8.1 FREQUENCY STABILITY (GSM850)	23
7.8.2 FREQUENCY STABILITY (GSM1900)	23
7.8.3 FREQUENCY STABILITY (WCDMA850)	23
7.8.4 FREQUENCY STABILITY (WCDMA1900)	23
8. TEST PLOTS	23



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics, Inc.

Address: 60-39, Gasan-dong, Gumchon-gu, Seoul 153-023, Korea

FCC ID: BEJGW525G

IC: 2703C-GW525G

Application Type: FCC Class II Permissive Change

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §22, §24, §2

EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth

Model(s): FCCID: GW525g
IC: GW525g

Battery Model Name: LGIP-340N(Standard)

Power Rating: 3.7 V, 950mAh, 3.6Wh

Type: Lithium-Ion Polymer Battery

Tx Frequency: 824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.4 - 1 907.6 MHz (WCDMA1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 (WCDMA850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.4 - 1 987.6 MHz (WCDMA1900)

Max. RF Output Power: 0.995 W ERP GSM850 (29.98 dBm) / 0.610 W EIRP GSM1900 (27.85 dBm)
0.288 W ERP EDGE850 (24.59 dBm) / 0.364 W EIRP EDGE1900 (25.61 dBm)
0.166 W ERP WCDMA850(22.19 dBm) / 0.207 W EIRP WCDMA1900(23.15 dBm)

Emission Designator(s): 247KGXW (GSM850) 246KGXW (GSM1900)
247KG7W (GSM850 EDGE) 249KG7W (GSM1900 EDGE)
4M16F9W (WCDMA850) 4M17F9W (WCDMA1900)

Antenna Specification Manufacturer: E.M.W. ANTENNA Co., LTD.
Antenna type: Internal Antenna
Peak Gain : 2.861 dBi

Date(s) of Tests: September 28, 2009

FCC Class II Permissive Change Test Report				www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	IC: 2703C-GW525G



2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics, Inc. GW525g Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth consists of GSM850, GSM1900, GPRS Class12, EDGE, WCDMA850, WCDMA1900 and HSDPA.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009(Registration Number: 90661)

FCC Class II Permissive Change Test Report				www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	IC: 2703C-GW525G

3. DESCRIPTION OF TESTS

3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power

Test Set-up

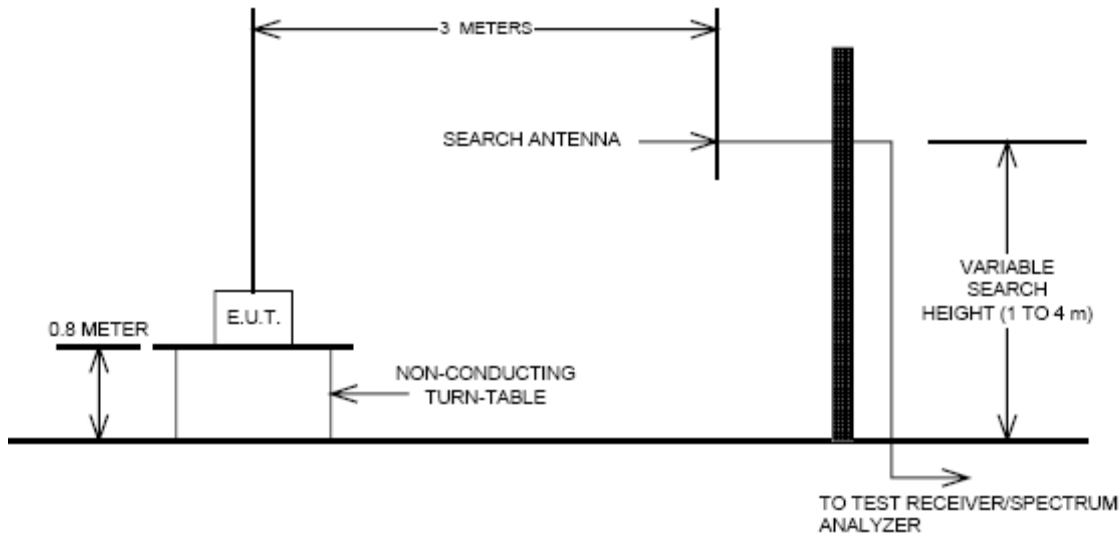

Test Procedure

Radiated emission measurements were performed at an open Site.

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



3.2 Peak- to- Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

FCC Class II Permissive Change Test Report				www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	IC: 2703C-GW525G

3.3 Occupied bandwidth.

Test set-up



(Configuration of conducted Emission measurement)

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.



3.4 Spurious and Harmonic Emissions at Antenna Terminal.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

FCC Class II Permissive Change Test Report				www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	IC: 2703C-GW525G

3.5 Radiated Spurious and Harmonic Emissions

Test Set-up



The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The open field test site is situated in open field with ground screen whose site attenuation characteristics meet ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable wooden platform mounted at three from the antenna mast.

- 1) The unit mounted on a wooden table 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10th harmonic of the fundamental frequency.

Test Procedure

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC Class II Permissive Change Test Report				
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G

3.6 Frequency stability / variation of ambient temperature

Test Set-up



* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
R&S	ESI40/ Spectrum Analyzer	831564/003	Annual	10/31/2009
Agilent	E4416A/ Power Meter	GB41291412	Annual	01/21/2010
Agilent	E9327A/ Power Sensor	MY4442009	Annual	07/28/2010
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/10/2010
MITEQ	AMF-60-0010 1800-35-20P / AMP	1200937	Annual	05/20/2010
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	06/29/2010
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	06/29/2010
Agilent	775D/ Dual Directional Coupler	12922	Annual	12/24/2009
Agilent	11636B/ Power Divider	11377	Annual	12/24/2009
Digital	EP-3010/ Power Supply	3110117	Annual	01/07/2010
Schwarzbeck	UHAP/ Dipole Antenna	585	Biennial	02/13/2011
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	02/13/2011
Korea Engineering	KR-1005L / Chamber	KRAB07063-2CH	Annual	12/31/2009
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	03/26/2010
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	12/23/2009

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	IC Rule	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	RSS-GEN, Section 4.6.1	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	RSS-132, Section 4.5 (Cell) RSS-133, Section 6.5 (PCS) RSS-GEN, Section 4.9	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
2.1046	-	Conducted Output Power	-		PASS
24.232(d)	-	Peak- to- Average Ratio	< 13 dB		PASS
2.1055, 22.355, 24.235	RSS-132, Section 4.3 RSS-133, Section 6.3 RSS-GEN, Section 4.7	Frequency stability / variation of ambient temperature	< 2.5 ppm		PASS
22.913(a)(2) 24.232(c)	RSS-GEN, Section 4.8 RSS-132, Section 4.4 (ERP, Cell) RSS-133, Section 6.4 (EIRP, PCS)	Effective Radiated Power	< 7 Watts max. ERP < 6.3 Watts max. ERP (IC)	RADIATED	PASS
		Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	RSS-132, Section 4.5 (Cell) RSS-133, Section 6.5 (PCS) RSS-GEN, Section 4.9	Radiated Spurious and Harmonic Emissions	< 43 + 10log10 (P[Watts]) for all out-of band emissions		PASS



6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)	Level(dBm)	LEVEL(dBm)				W	dBm
GSM850	128	824.20	-11.56	34.28	-8.32	1.17	H	0.30	24.79

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info


W = Combination (Audio/Data)

FCC Class II Permissive Change Test Report					www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth		FCC ID: BEJGW525G	IC: 2703C-GW525G

7. TEST DATA

7.1 Conducted Output Power

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

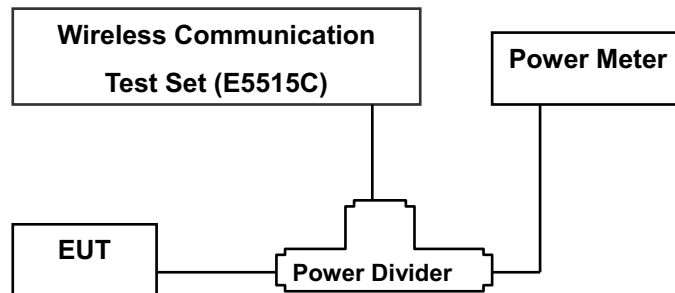

Test Result

Band	Channel	Voice	GPRS Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)
GSM 850	128	32.07	32.02	31.95	30.85	28.79
	190	32.09	32.06	31.98	30.82	28.77
	251	32.13	32.08	32.01	30.81	28.76
GSM 1900	512	29.70	29.68	29.60	29.55	27.63
	661	29.87	29.85	29.75	29.66	27.80
	810	29.89	29.87	29.76	29.64	27.71

(GSM Conducted Maximum Output Powers)

Band	Channel	EDGE Data			
		EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 850	128	25.70	25.92	24.82	23.22
	190	25.66	25.89	24.83	23.28
	251	25.51	25.75	24.73	22.92
GSM 1900	512	24.79	24.80	25.05	23.98
	661	24.85	24.86	25.13	23.88
	810	24.91	24.92	25.16	23.84

(GSM EDGE Conducted Output Powers)



Band	Channel	HSDPA INACTIVE		HSDPA ACTIVE
		12.2kbps RMC (dBm)	12.2kbps AMR (dBm)	12.2kbps RMC (dBm)
WCDMA 850	4132	22.32	22.30	20.45
	4183	22.25	22.23	20.41
	4233	22.20	22.16	20.42
WCDMA 1900	9262	22.42	22.32	20.57
	9400	22.03	22.02	20.28
	9538	22.07	22.06	20.26

(WCDMA Conducted Output Powers)

Note : Detecting mode is average.

7.2 Peak-to-Average Ratio

- Plots of the EUT's Peak- to- Average Ratio are shown Page 33, 37.

7.3 Occupied Bandwidth

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	245.8939
	190	836.60	242.4311
	251	848.80	246.5014
GSM850 EDGE	251	848.80	247.0734
GSM1900	512	1850.20	245.8235
	661	1880.00	244.6586
	810	1909.80	246.1871
GSM1900 EDGE	810	1909.80	249.0716
WCDMA850	4132	826.40	4.1615
	4183	836.60	4.1591
	4233	846.60	4.1448
WCDMA1900	9262	1852.40	4.1379
	9400	1880.00	4.1688
	9538	1907.60	4.1399

- Plots of the EUT's Occupied Bandwidth are shown Page 29 ~ 32, 34 ~ 36.

7.4 Conducted Spurious Emissions

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	7.0000	-30.41
	190	8.0125	-29.94
	251	7.5125	-30.28
GSM1900	512	14.1600	-28.01
	661	14.2400	-27.39
	810	13.2800	-27.03
WCDMA850	4132	7.1000	-40.40
	4183	6.9625	-41.16
	4233	7.0375	-40.41
WCDMA1900	9262	13.6530	-37.67
	9400	14.0570	-38.20
	9538	13.867	-38.07

- Plots of the EUT's Conducted Spurious Emissions are shown Page 45 ~ 57.

7.4.1 Band Edge

- Plots of the EUT's Band Edge are shown Page 37 ~ 45.



7.5 Effective Radiated Power Output (GSM / WCDMA)

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-9.28	36.56	-8.32	1.17	H	0.51	27.07
190	836.60	-8.00	38.49	-8.22	1.19	H	0.81	29.08
251	848.80	-7.82	39.30	-8.12	1.20	H	1.00	29.98
EDGE 251	848.80	-13.21	33.91	-8.12	1.20	H	0.29	24.59

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
4132	826.40	-16.29	29.66	-8.30	1.17	H	0.10	20.19
4183	836.60	-16.92	29.57	-8.22	1.19	H	0.10	20.16
4233	846.60	-15.48	31.53	-8.14	1.20	H	0.17	22.19

Note: Standard batteries are the only options for this phone

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. **The worst case of the EUT is in 90 degree horizontal polarization in GSM850 and WCDMA850 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM850 and WCDMA850 mode.**

The EDGE mode testing were performed using 2Tx because 2Tx is highest power in EDGE mode.

FCC Class II Permissive Change Test Report					www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth		FCC ID: BEJGW525G	IC: 2703C-GW525G



7.6 Equivalent Isotropic Radiated Power (GSM / WCDMA)

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
512	1,850.20	-11.89	19.72	10.05	1.91	V	0.61	27.85
661	1,880.00	-13.46	18.36	10.05	1.95	V	0.44	26.46
810	1,909.80	-13.47	18.43	10.06	1.97	V	0.45	26.52
EDGE 512	1,850.20	-14.13	17.77	10.06	1.97	V	0.39	25.86

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
9262	1,852.40	-16.60	15.01	10.05	1.91	V	0.21	23.15
9400	1,880.00	-17.60	14.22	10.05	1.95	V	0.17	22.32
9538	1,907.60	-17.21	14.71	10.06	1.97	V	0.19	22.80

Note: Standard batteries are the only options for this phone

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. **The worst case of the EUT is in 90 degree horizontal polarization in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in vertical polarization in GSM1900 and WCDMA1900 mode.**

The EDGE mode testing were performed using 3Tx because 3Tx is highest power in EDGE mode.

FCC Class II Permissive Change Test Report					www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth		FCC ID: BEJGW525G	IC: 2703C-GW525G



7.7 Radiated Spurious Emissions

7.7.1 Radiated Spurious Emissions (GSM850)

■ MEASURED OUTPUT POWER: 29.98 dBm = 0.995 W
■ MODULATION SIGNAL: GSM850
■ DISTANCE: 3 meters
■ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 42.98 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-42.97	7.09	-53.50	1.73	V	-48.14	-78.12
	2,472.60	-29.77	8.12	-36.88	2.28	V	-31.04	-61.02
	3,296.80	-47.84	9.72	-55.42	2.57	H	-48.27	-78.25
190 (836.6)	1,673.20	-42.46	7.23	-53.22	1.79	V	-47.78	-77.76
	2,509.80	-25.86	8.14	-32.99	2.33	V	-27.18	-57.16
	3,346.40	-48.55	9.99	-56.58	2.66	H	-49.25	-79.23
251 (848.8)	1,697.60	-43.18	7.41	-53.79	1.83	V	-48.21	-78.19
	2,546.40	-27.13	8.21	-34.41	2.34	V	-28.54	-58.52
	3,395.20	-51.49	9.91	-59.12	2.85	H	-52.06	-82.04

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for
all channel.



7.7.2 Radiated Spurious Emissions (GSM1900)

■ MEASURED OUTPUT POWER: 27.85 dBm = 0.610 W
■ MODULATION SIGNAL: GSM1900
■ DISTANCE: 3 meters
■ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 40.85 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-42.23	12.46	-48.50	2.73	V	-38.77	-66.62
	5,550.60	-40.60	12.70	-42.18	3.60	H	-33.08	-60.93
	7,400.80	-46.39	11.36	-37.51	3.88	H	-30.03	-57.88
661 (1880.0)	3,760.00	-42.64	12.47	-48.61	2.73	V	-38.87	-66.72
	5,640.00	-39.70	10.60	-39.20	3.60	H	-32.20	-60.05
	7,520.00	-45.86	11.33	-36.76	3.88	H	-29.31	-57.16
810 (1909.8)	3,819.60	-42.72	12.49	-48.60	2.73	V	-38.84	-66.69
	5,729.40	-40.18	12.80	-41.49	3.60	H	-32.29	-60.14
	7,639.20	-46.81	11.30	-37.48	3.88	H	-30.06	-57.91

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for
all channel.

7.7.3 Radiated Spurious Emissions (WCDMA850)

☐ MEASURED OUTPUT POWER: 22.19 dBm = 0.166 W
☐ MODULATION SIGNAL: WCDMA850
☐ DISTANCE: 3 meters
☐ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 35.19 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4132 (826.4)	1,652.80	-30.07	7.09	-40.63	1.73	V	-35.27	-57.46
	2,479.20	-37.36	8.12	-44.48	2.28	V	-38.64	-60.83
	3,305.60	-50.05	9.72	-57.61	2.57	V	-50.46	-72.65
4183 (836.6)	1,673.20	-31.55	7.23	-42.31	1.79	V	-36.87	-59.06
	2,509.80	-45.10	8.14	-52.23	2.33	V	-46.42	-68.61
	3,346.40	-50.89	9.99	-58.92	2.66	V	-51.59	-73.78
4233 (846.6)	1,693.20	-26.51	7.41	-37.17	1.83	V	-31.59	-53.78
	2,539.80	-33.49	8.21	-40.75	2.34	V	-34.88	-57.07
	3,386.40	-47.52	9.91	-55.17	2.85	V	-48.11	-70.30

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for
 all channel.



7.7.4 Radiated Spurious Emissions (WCDMA1900)

- MEASURED OUTPUT POWER: 23.15 dBm = 0.207 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 36.15 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262	3,704.80	-44.56	12.46	-50.80	2.73	V	-41.07	-64.22
	5,557.20	-38.90	12.71	-40.51	3.60	H	-31.40	-54.55
	7,409.60	-56.77	11.36	-47.88	3.88	V	-40.40	-63.55
9400	3,760.00	-44.82	12.47	-50.79	2.73	V	-41.05	-64.20
	5,640.00	-45.07	12.75	-46.72	3.60	H	-37.57	-60.72
	7,520.00	-56.81	11.33	-47.71	3.88	V	-40.26	-63.41
9538	3,815.20	-44.15	12.46	-50.02	2.73	V	-40.29	-63.44
	5,722.80	-45.98	12.79	-47.31	3.60	H	-38.12	-61.27
	7,630.40	-57.01	11.30	-47.69	3.88	V	-40.27	-63.42

- NOTES:** 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for
all channel.




7.8 Frequency stability / variation of ambient temperature

7.8.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 190
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 600 022	22.46	0.000 003	0.027
100%		-30	836 599 993	-7.19	-0.000 001	-0.009
100%		-20	836 599 998	-2.37	0.000 000	-0.003
100%		-10	836 600 016	16.02	0.000 002	0.019
100%		0	836 599 990	-10.00	-0.000 001	-0.012
100%		+10	836 600 034	34.41	0.000 004	0.041
100%		+20	836 600 026	25.69	0.000 003	0.031
100%		+30	836 599 994	-5.68	-0.000 001	-0.007
100%		+40	836 600 023	22.64	0.000 003	0.027
100%		+50	836 600 001	0.93	0.000 000	0.001
115%	4.255	+20	836 600 020	20.10	0.000 002	0.024
Batt. Endpoint	3.400	+20	836 599 988	-11.90	-0.000 001	-0.014

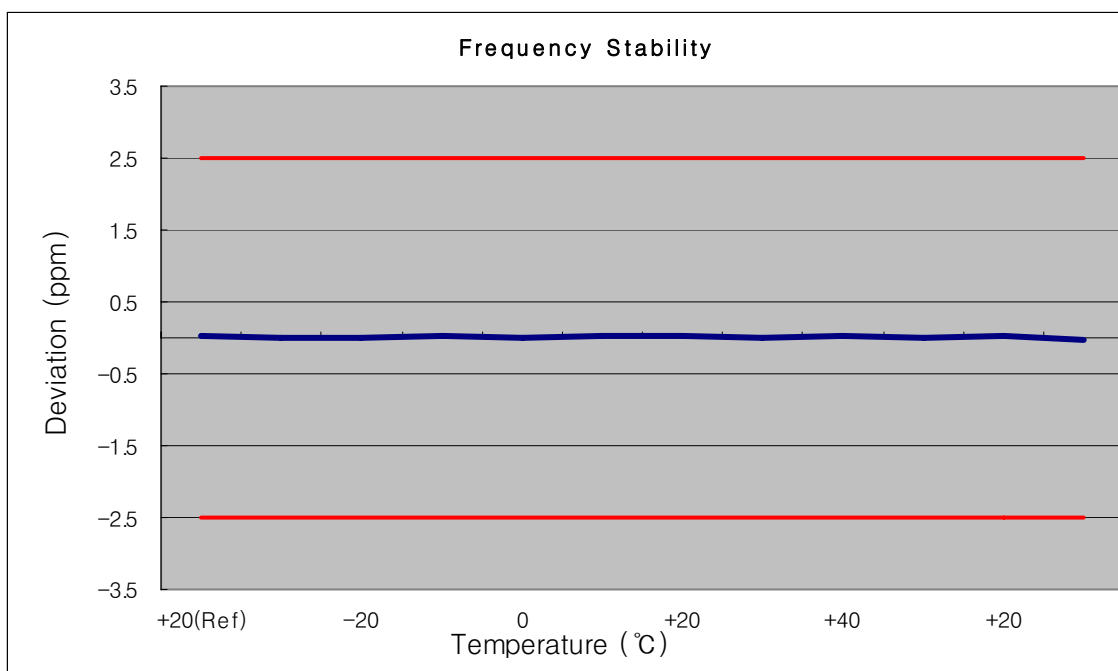

7.8.2 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY: 1880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1880 000 029	28.50	0.000 002	0.015
100%		-30	1880 000 044	44.03	0.000 002	0.023
100%		-20	1880 000 052	51.53	0.000 003	0.027
100%		-10	1880 000 019	18.65	0.000 001	0.010
100%		0	1880 000 032	32.23	0.000 002	0.017
100%		+10	1880 000 005	4.96	0.000 000	0.003
100%		+20	1880 000 029	29.11	0.000 002	0.015
100%		+30	1880 000 044	44.15	0.000 002	0.023
100%		+40	1880 000 012	11.79	0.000 001	0.006
100%		+50	1880 000 046	45.81	0.000 002	0.024
115%	4.255	+20	1880 000 006	6.17	0.000 000	0.003
Batt. Endpoint	3.400	+20	1880 000 009	8.68	0.000 000	0.005

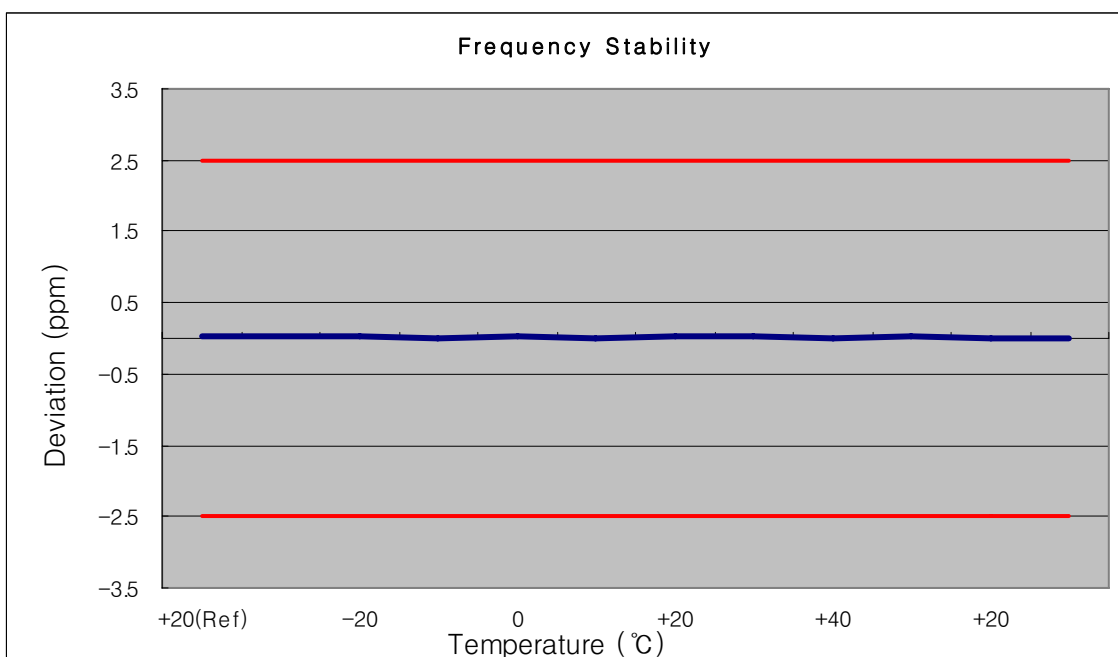

7.8.3 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 600 006	5.67	0.000 007	0.007
100%		-30	836 600 008	7.78	0.000 009	0.009
100%		-20	836 599 996	-3.77	-0.000 005	-0.005
100%		-10	836 600 005	4.66	0.000 006	0.006
100%		0	836 599 998	-1.96	-0.000 002	-0.002
100%		+10	836 600 006	6.44	0.000 008	0.008
100%		+20	836 599 998	-2.01	-0.000 002	-0.002
100%		+30	836 600 006	5.58	0.000 007	0.007
100%		+40	836 599 998	-2.33	-0.000 003	-0.003
100%		+50	836 600 005	4.65	0.000 006	0.006
115%	4.255	+20	836 600 008	7.65	0.000 009	0.009
Batt. Endpoint	3.400	+20	836 600 002	2.45	0.000 003	0.003

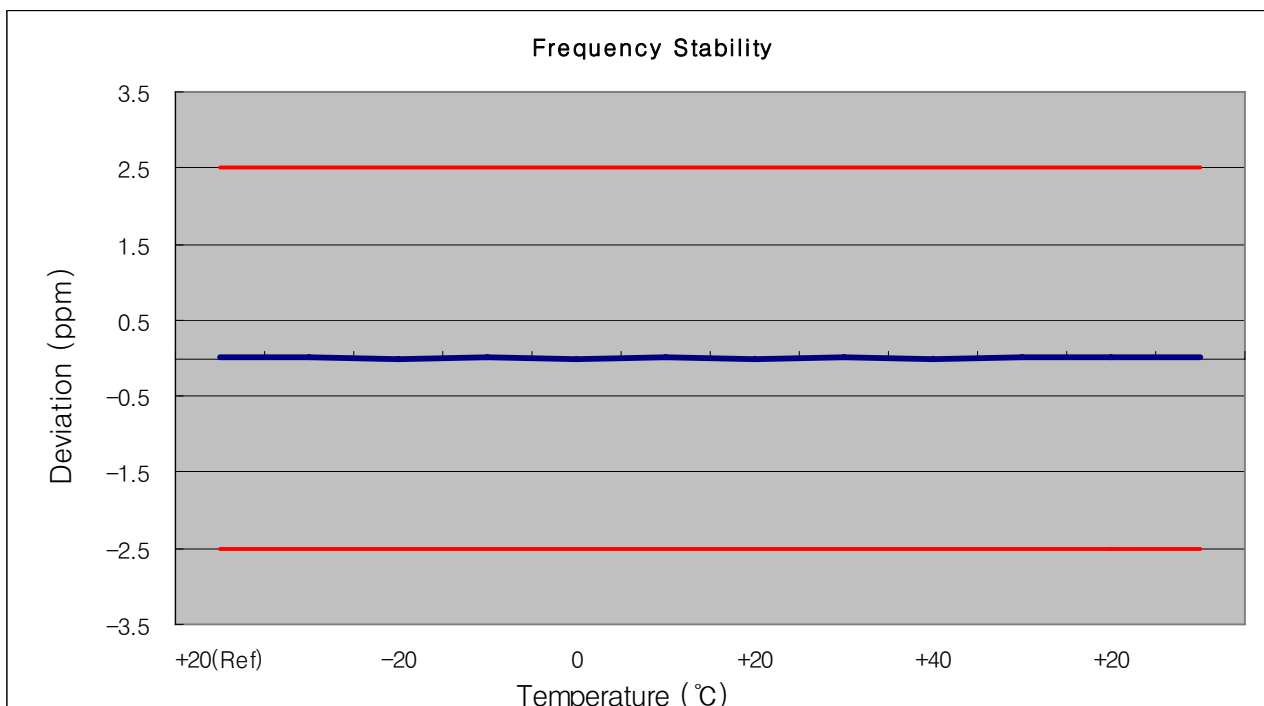

7.8.4 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 9400
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1,879,999,981	-19.10	-0.000001	-0.010
100%		-30	1,880,000,010	9.77	0.000001	0.005
100%		-20	1,880,000,004	4.48	0.000000	0.002
100%		-10	1,879,999,985	-14.76	-0.000001	-0.008
100%		0	1,879,999,992	-7.74	0.000000	-0.004
100%		+10	1,879,999,998	-2.29	0.000000	-0.001
100%		+20	1,880,000,004	4.45	0.000000	0.002
100%		+30	1,879,999,982	-18.42	-0.000001	-0.010
100%		+40	1,879,999,988	-12.47	-0.000001	-0.007
100%		+50	1,879,999,991	-8.63	0.000000	-0.005
115%	4.255	+20	1,879,999,998	-2.45	0.000000	-0.001
Batt. Endpoint	3.400	+20	1,880,000,004	4.27	0.000000	0.002

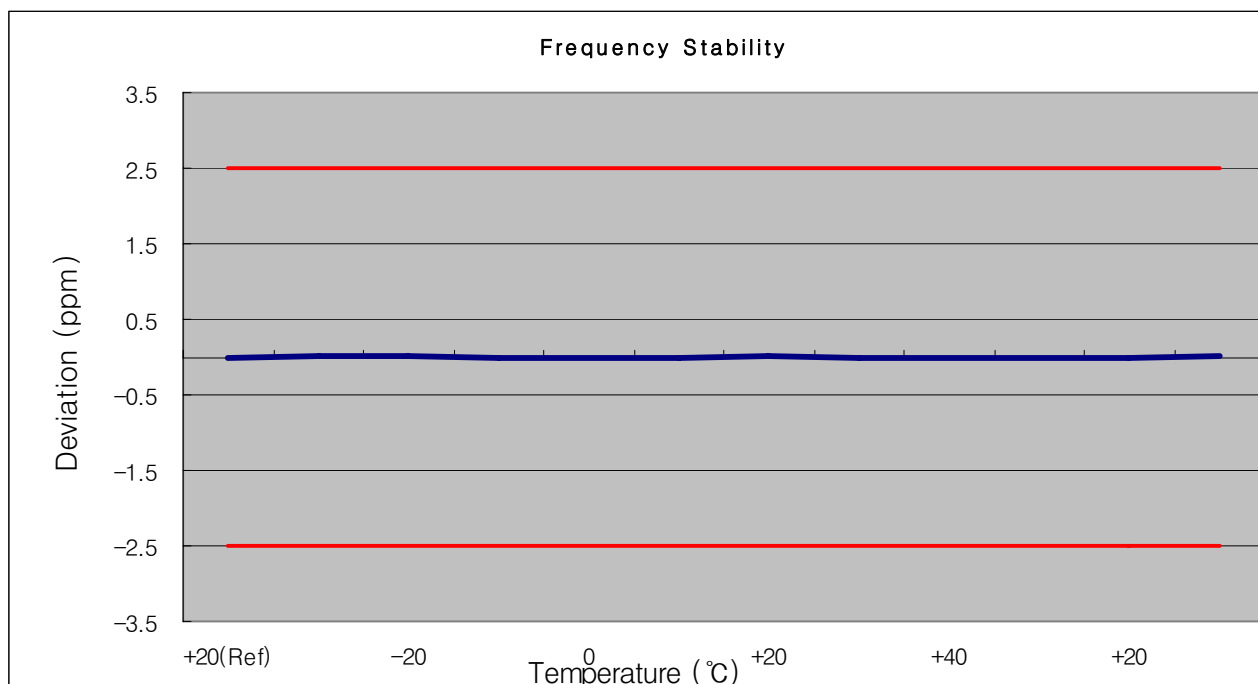




8. TEST PLOTS

FCC Class II Permissive Change Test Report				www.hct.co.kr
Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	IC: 2703C-GW525G

■ GSM850 MODE (128 CH.) Occupied Bandwidth




■ GSM850 MODE (190 CH.) Occupied Bandwidth

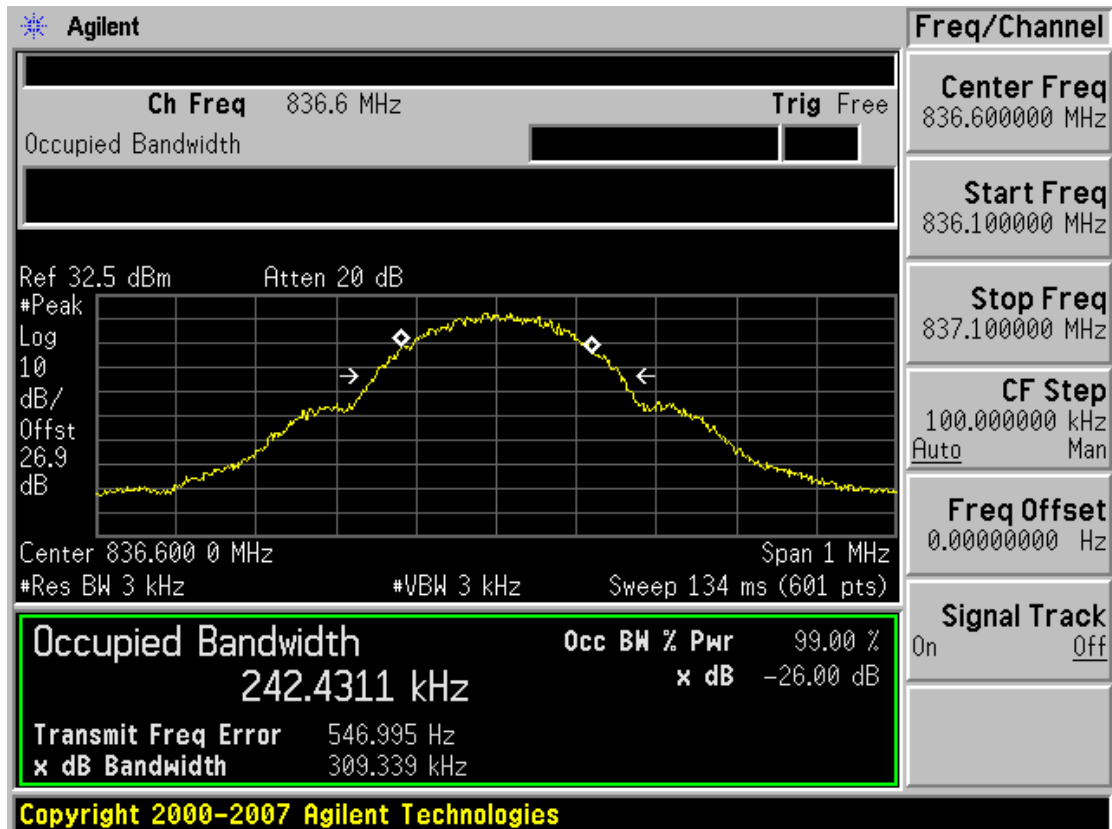


■ GSM850 MODE (251 CH.) Occupied Bandwidth




■ GSM850 EDGE (251 CH.) Occupied Bandwidth

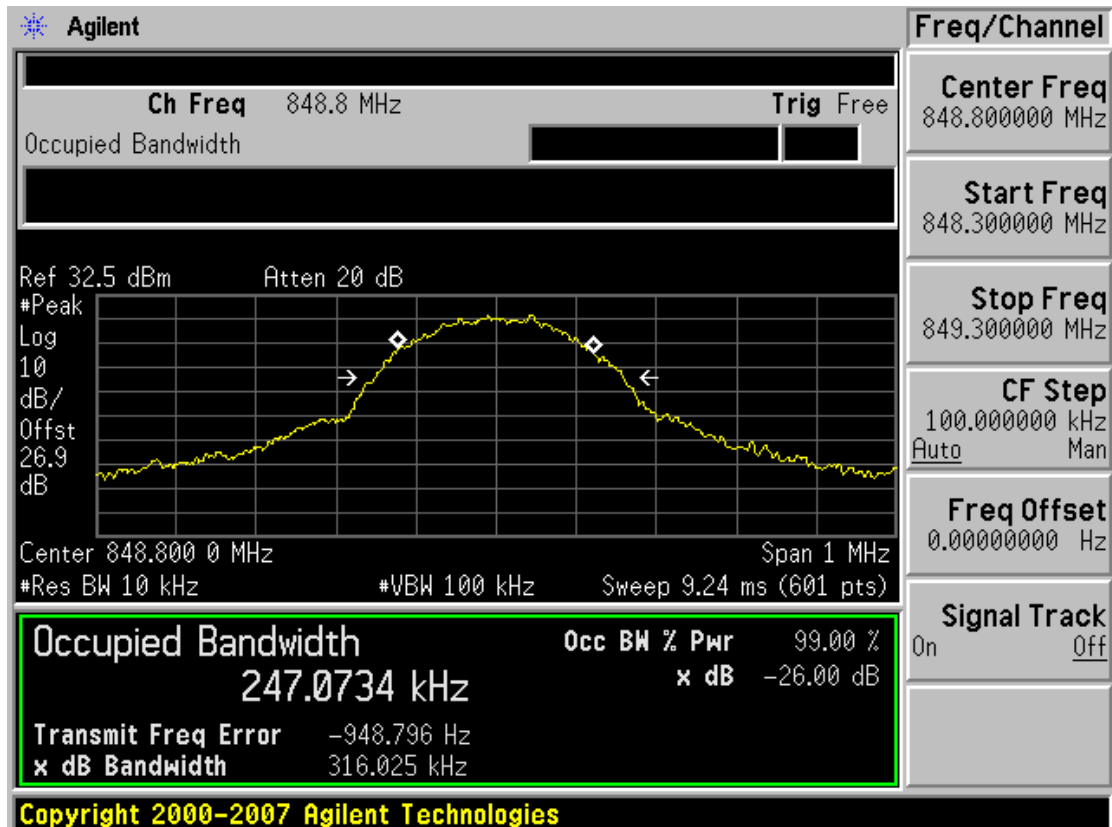

■ GSM1900 MODE (512 CH.) Occupied Bandwidth

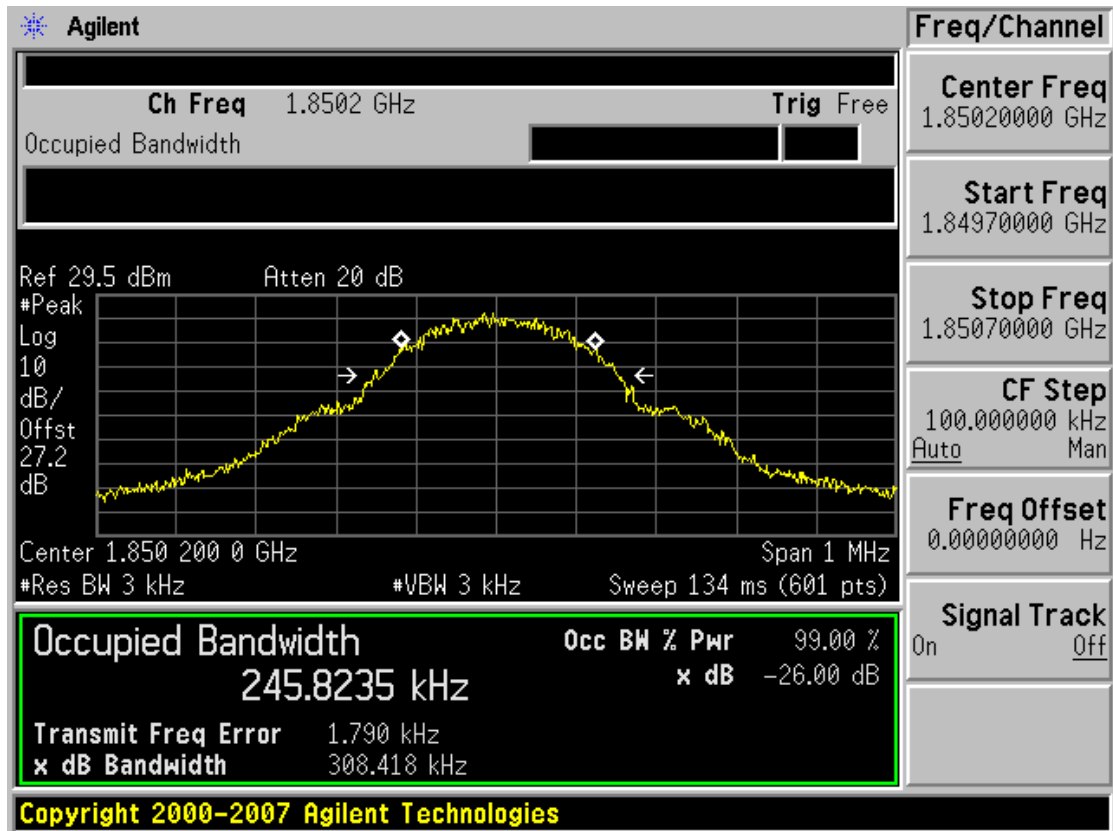


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

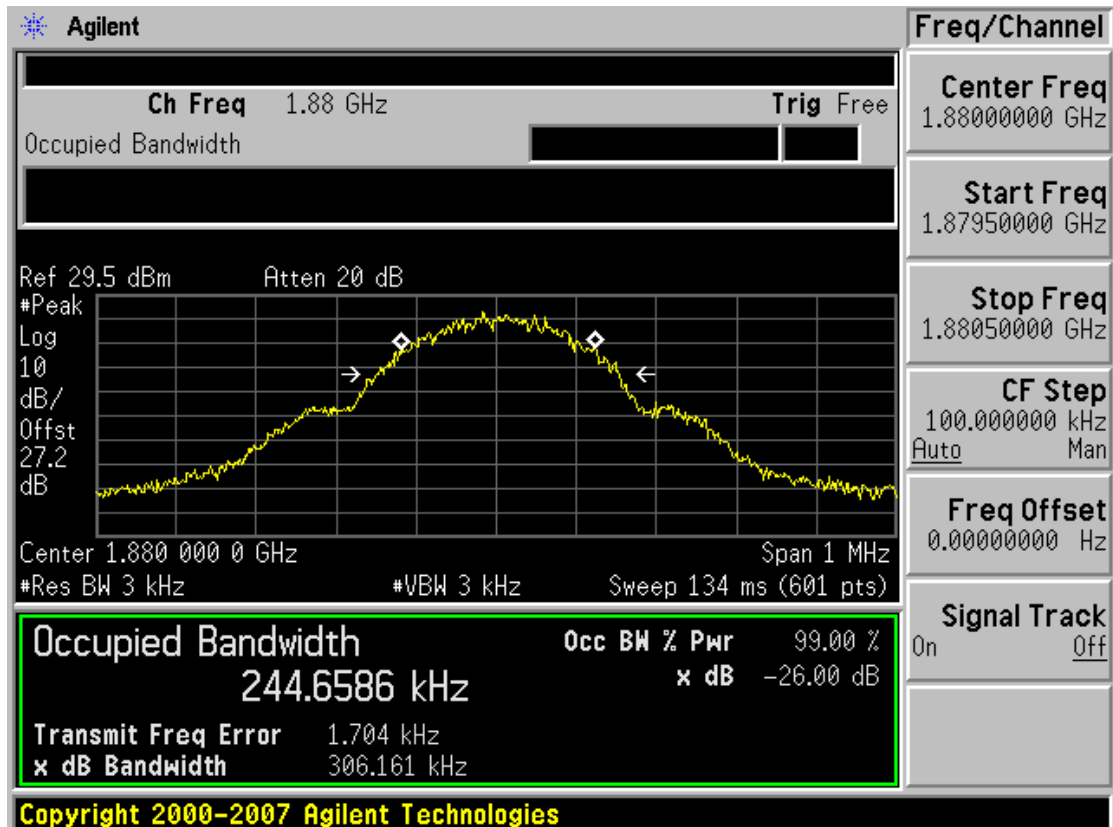


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ GSM1900 MODE (810 CH.) Occupied Bandwidth

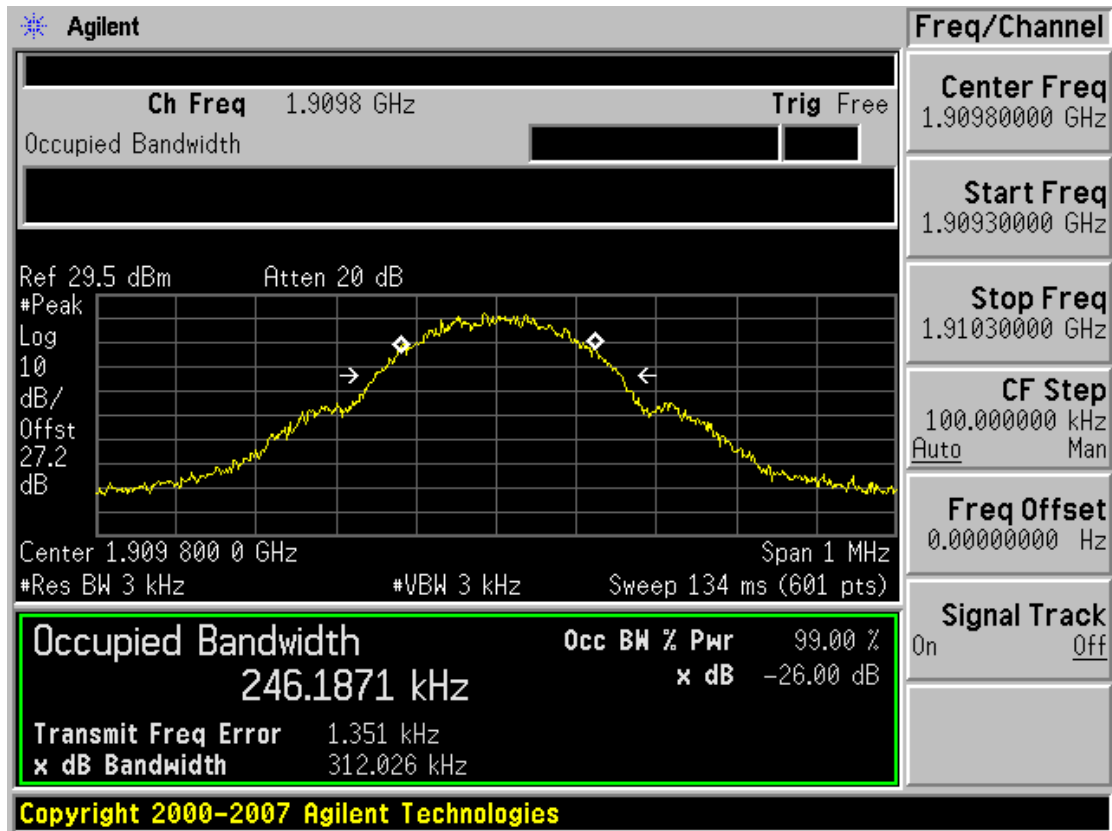


■ GSM1900 EDGE (810 CH.) Occupied Bandwidth

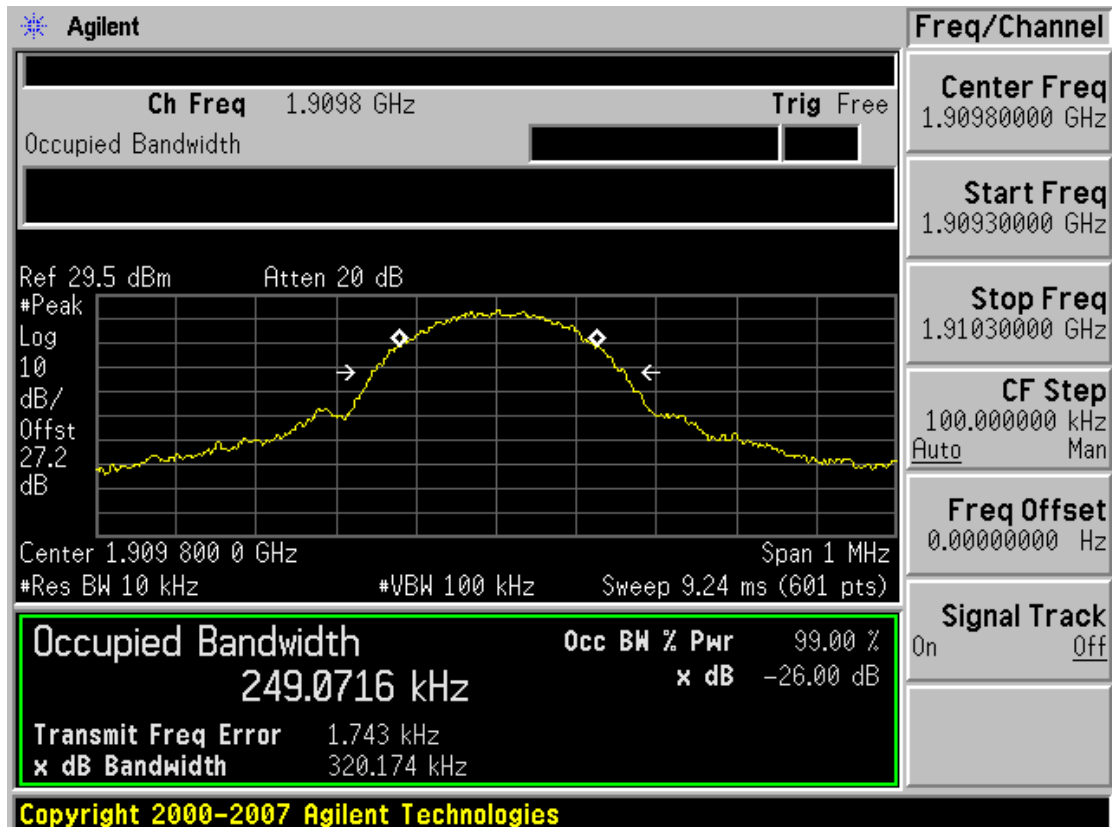


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ PCS MODE (661 CH.) Peak-to-Average Ratio

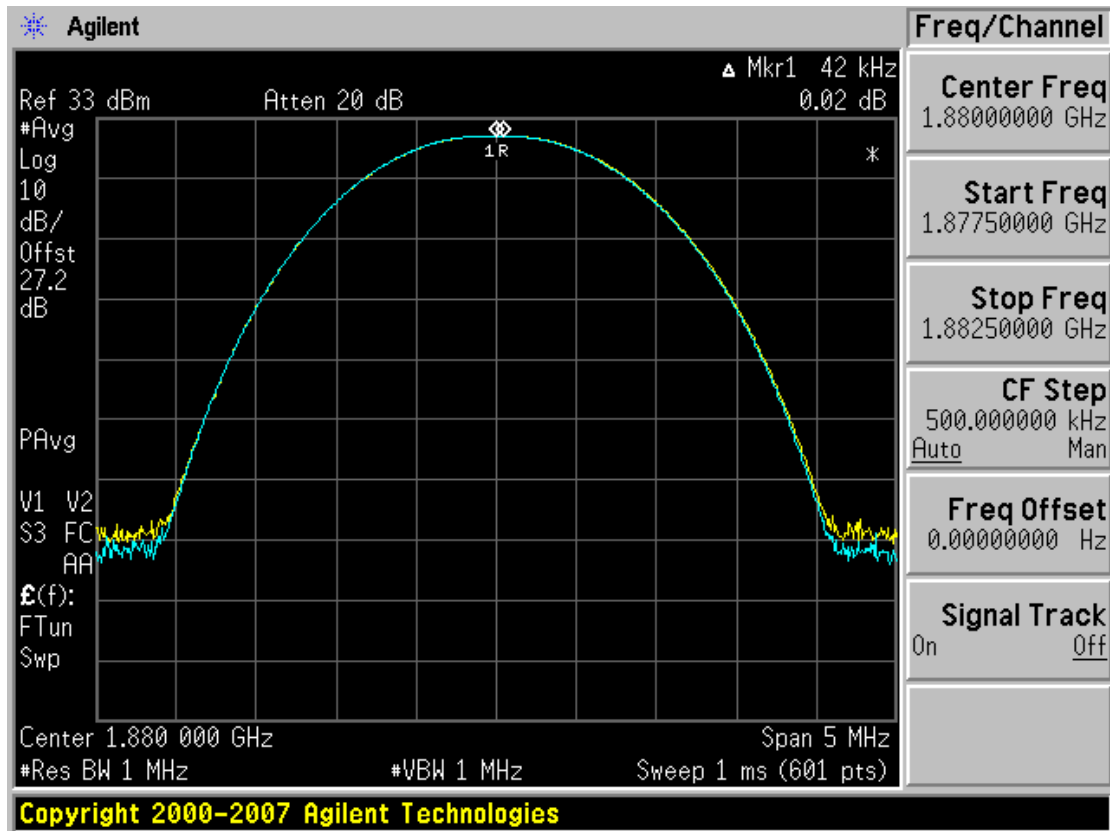


■ PCS EDGE MODE (661 CH.) Peak-to-Average Ratio

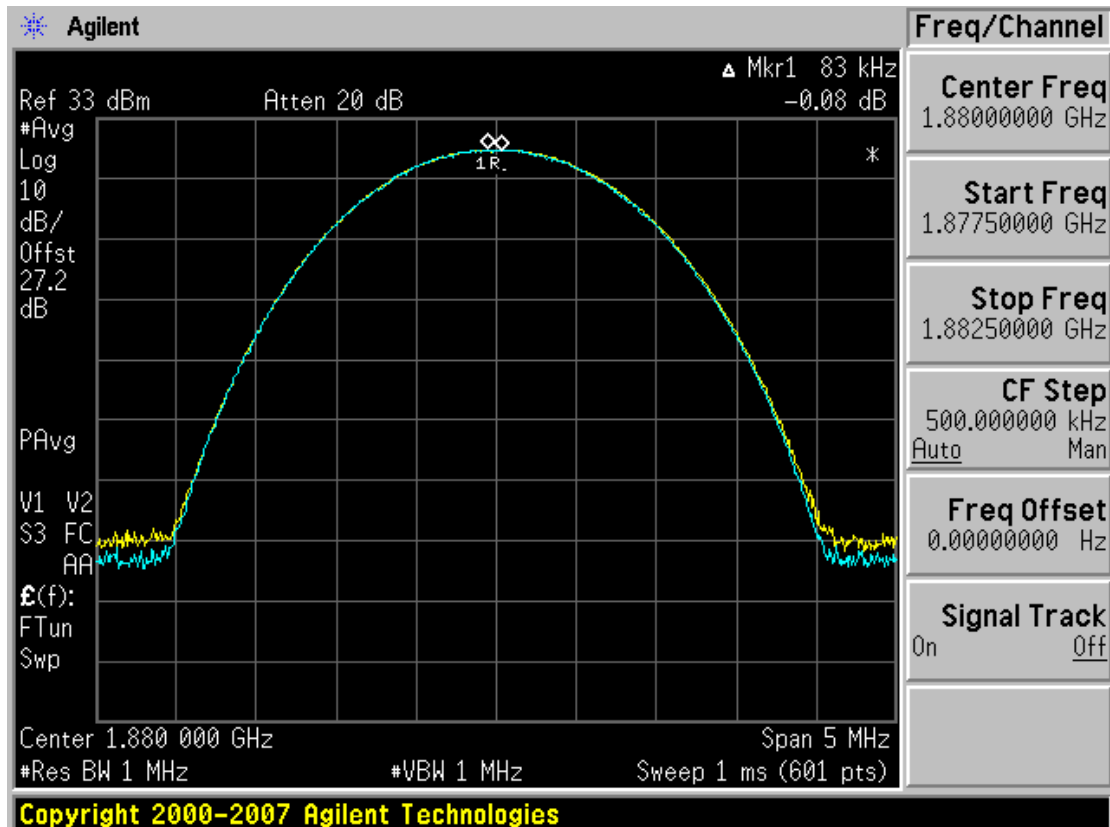


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

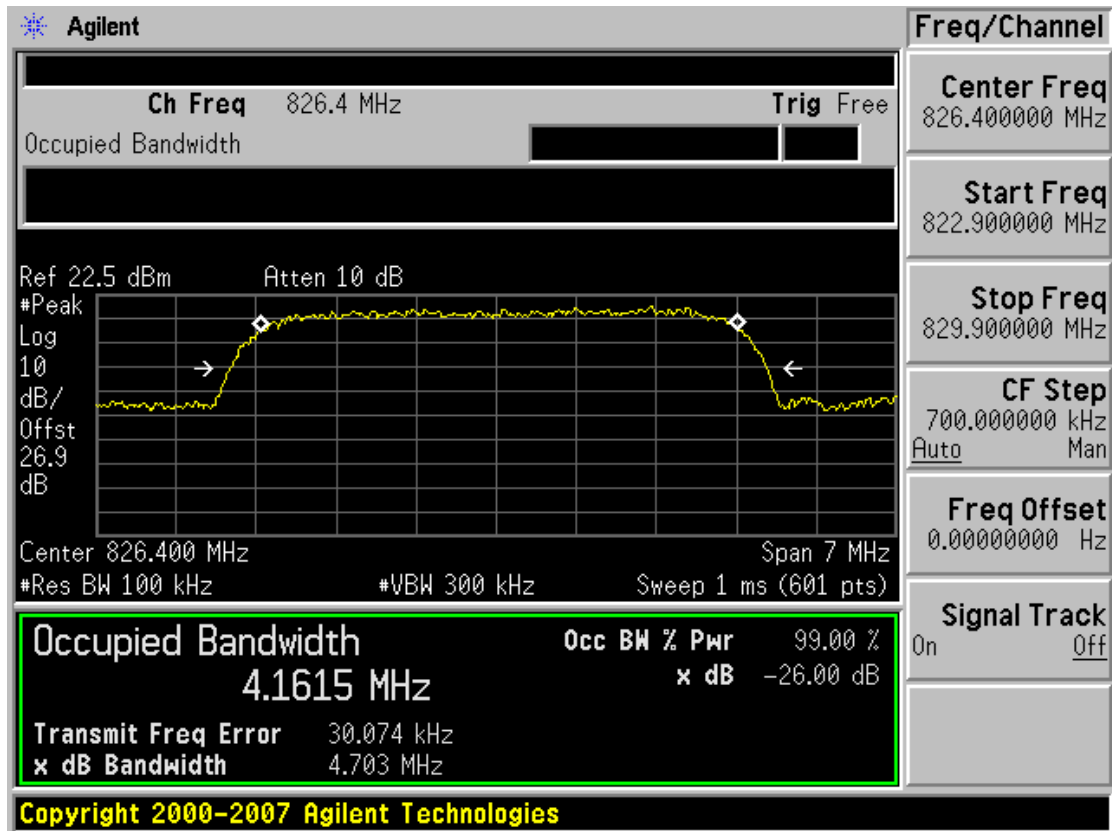


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

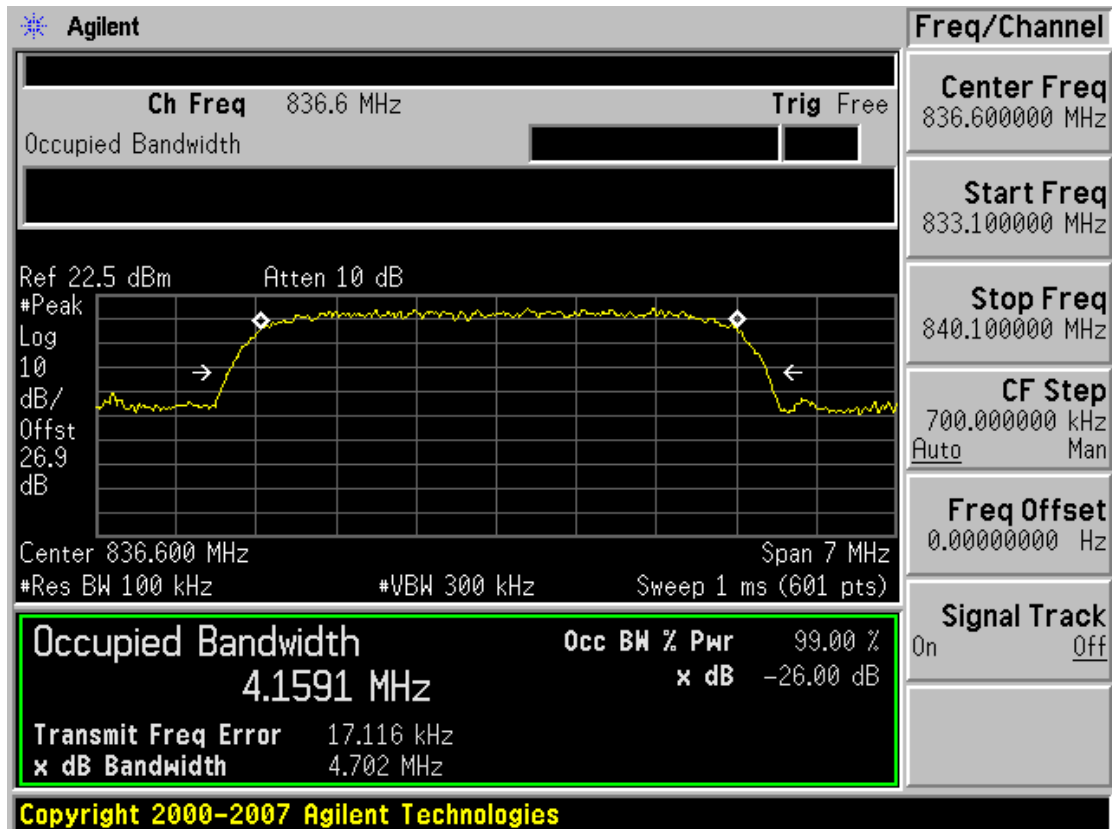


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

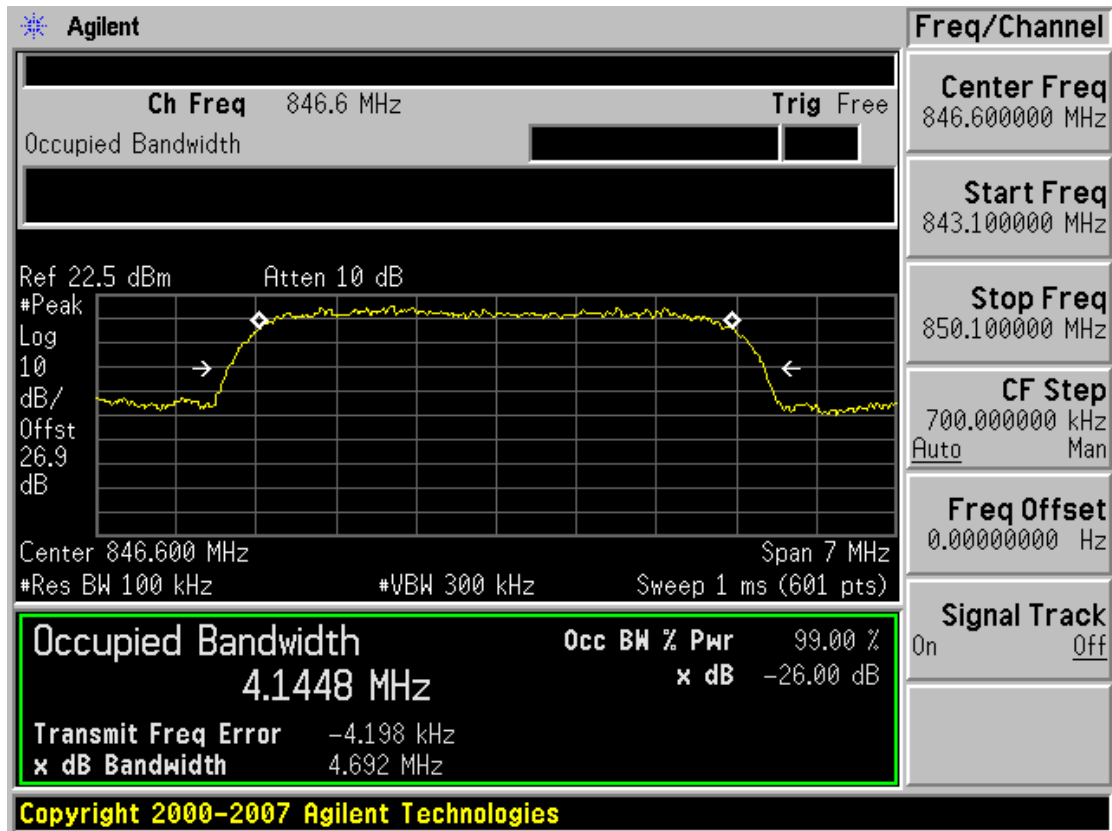


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

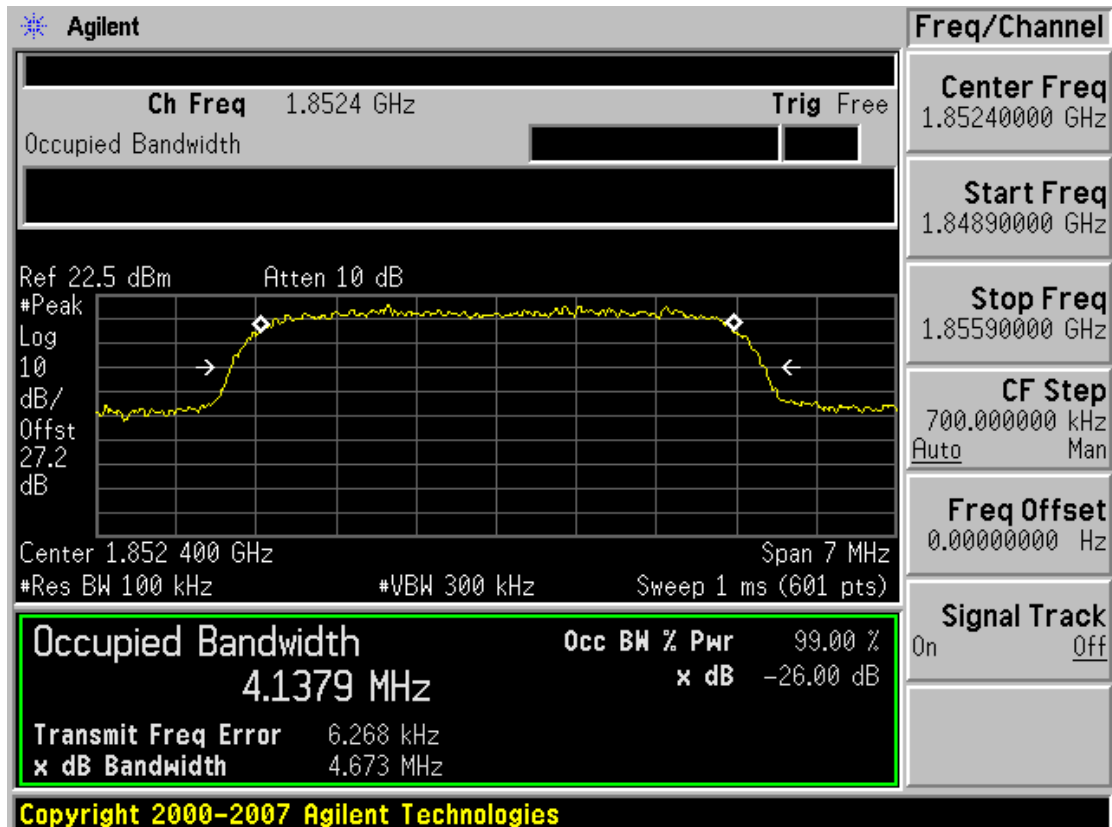


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

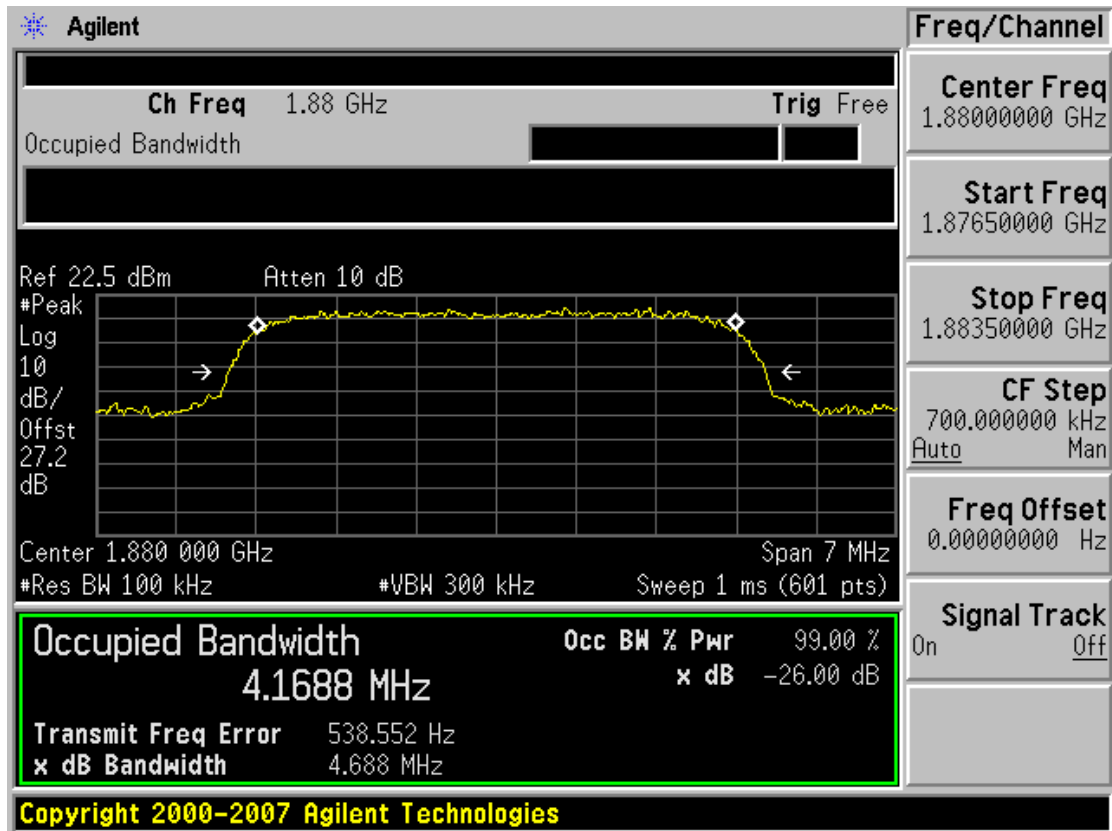


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

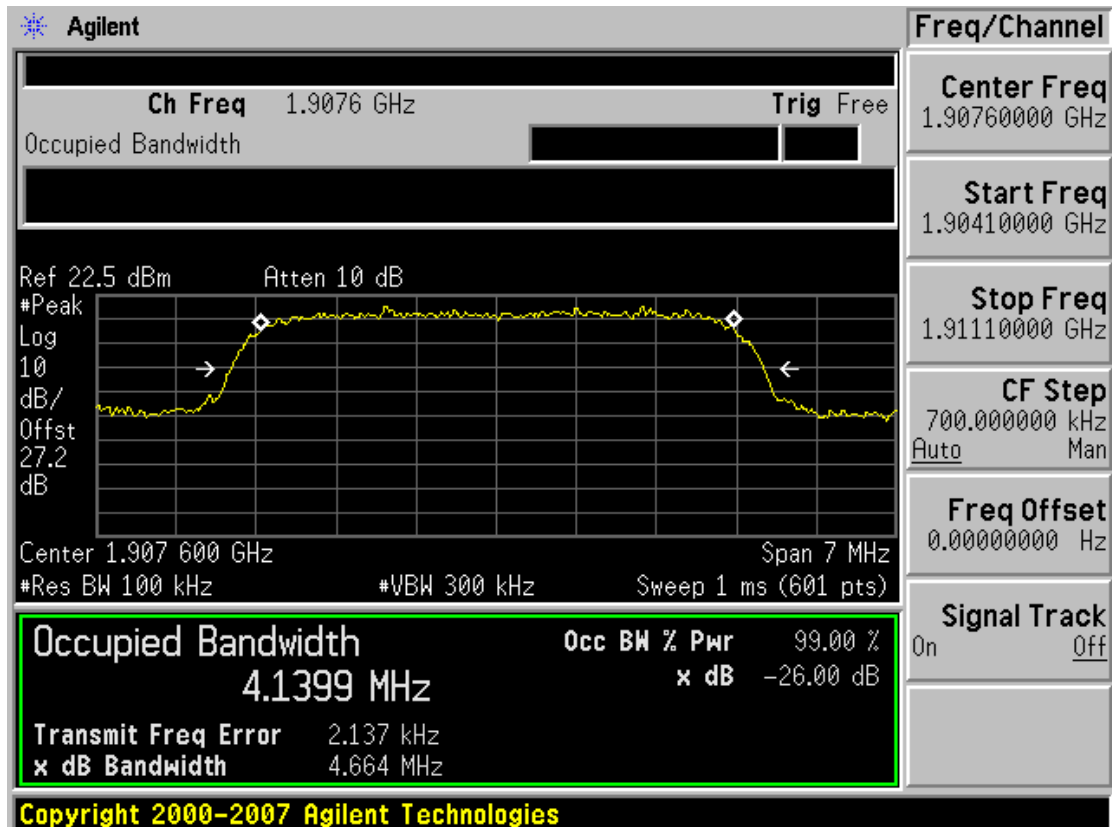


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

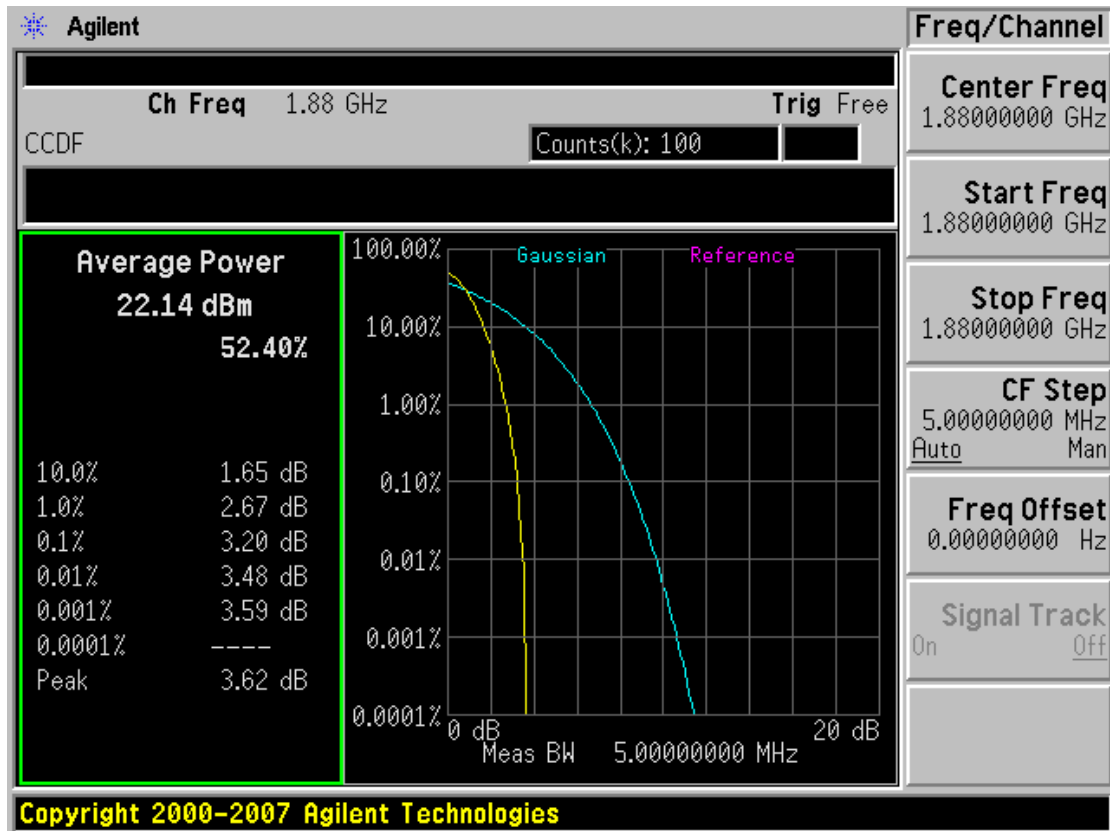


■ GSM850 MODE (128 CH.) Block Edge

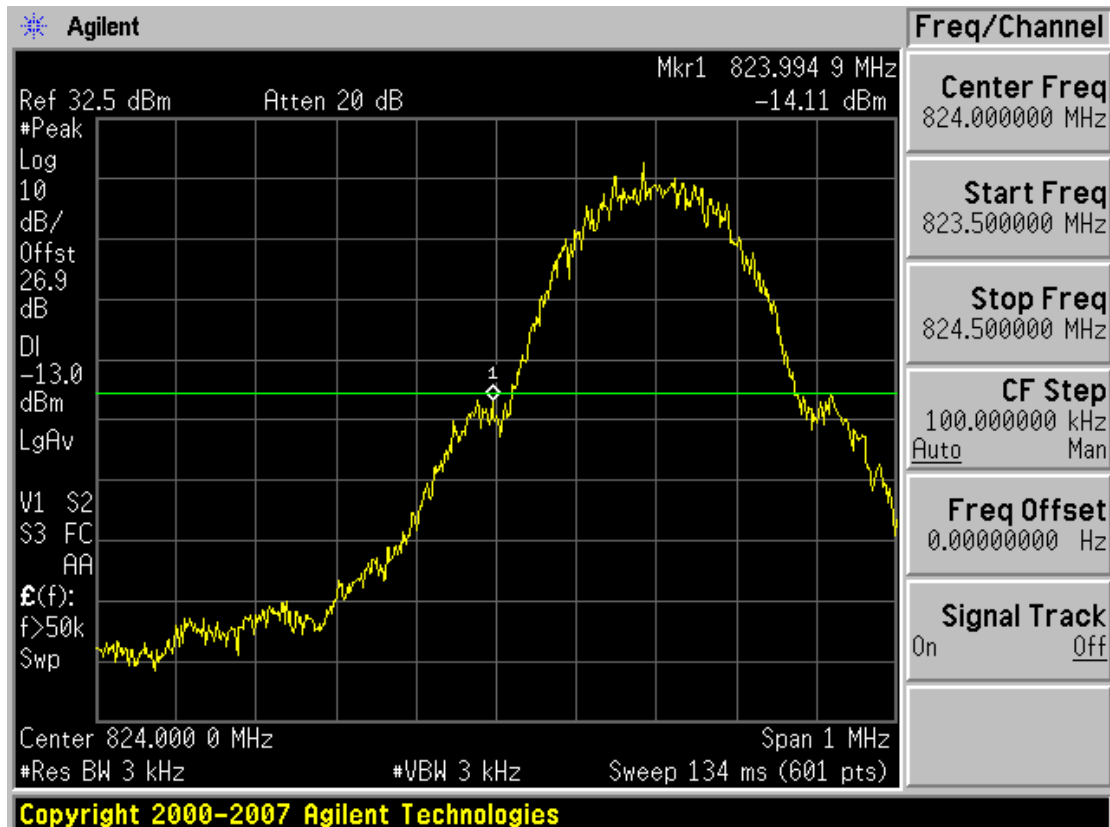


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ GSM850 MODE (251 CH.) Block Edge

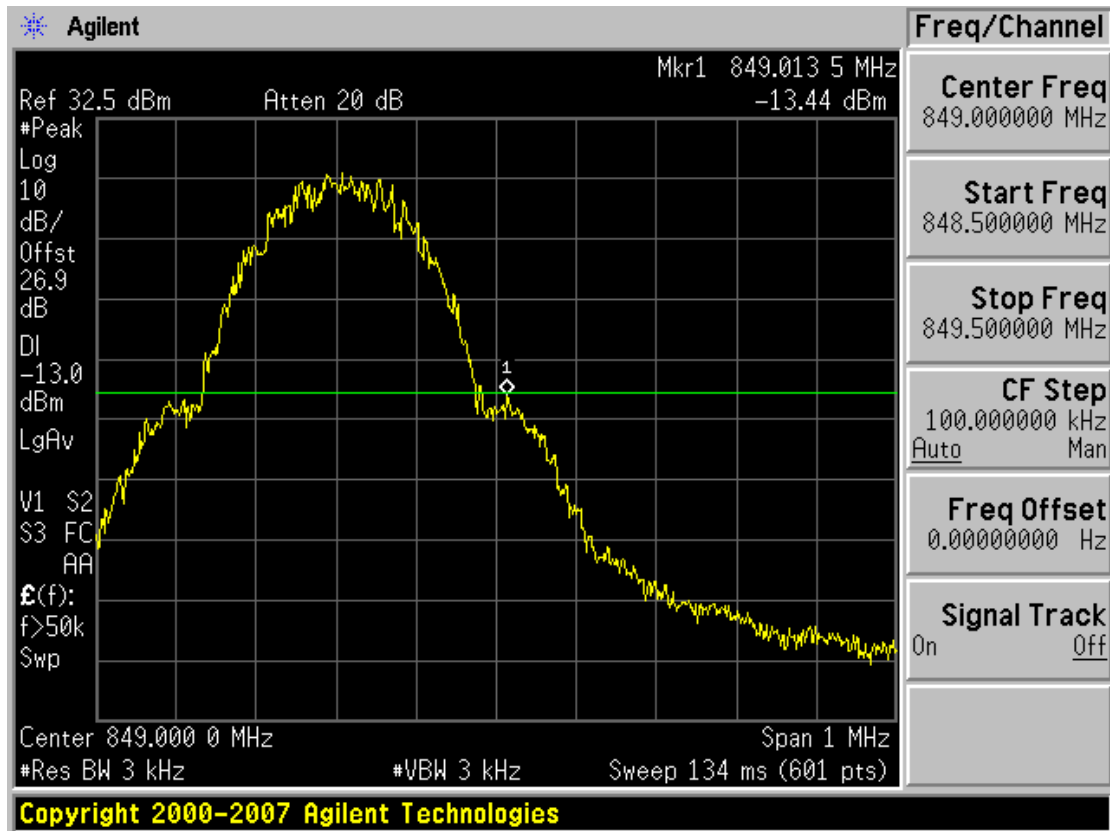


■ EDGE MODE (128 CH.) Block Edge

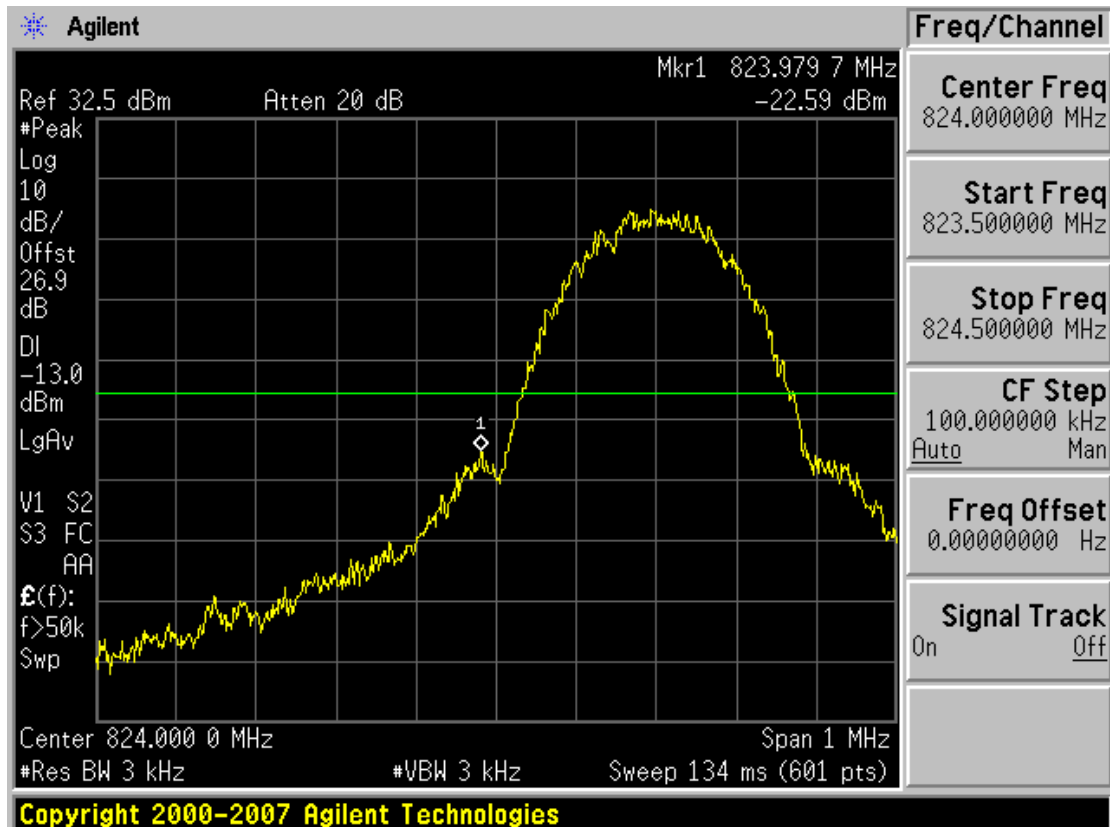


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ EDGE MODE (251 CH.) Block Edge

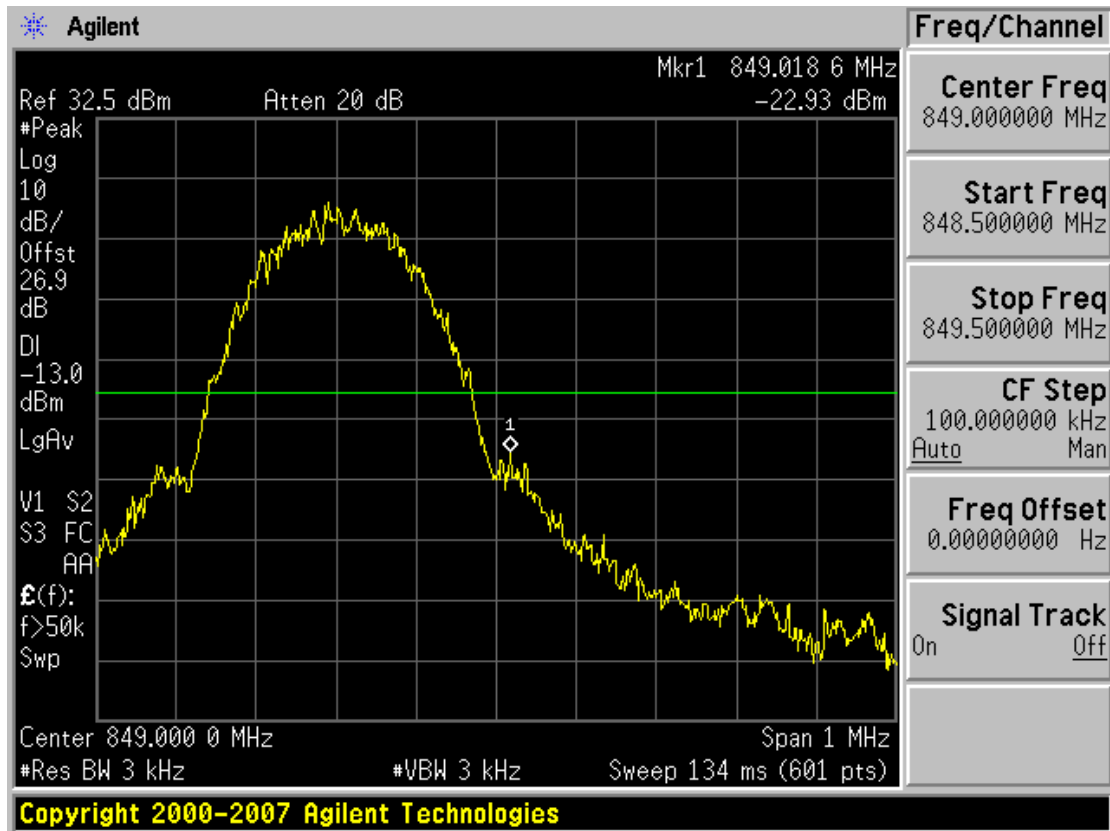


■ GSM1900 MODE (512 CH.) Block Edge

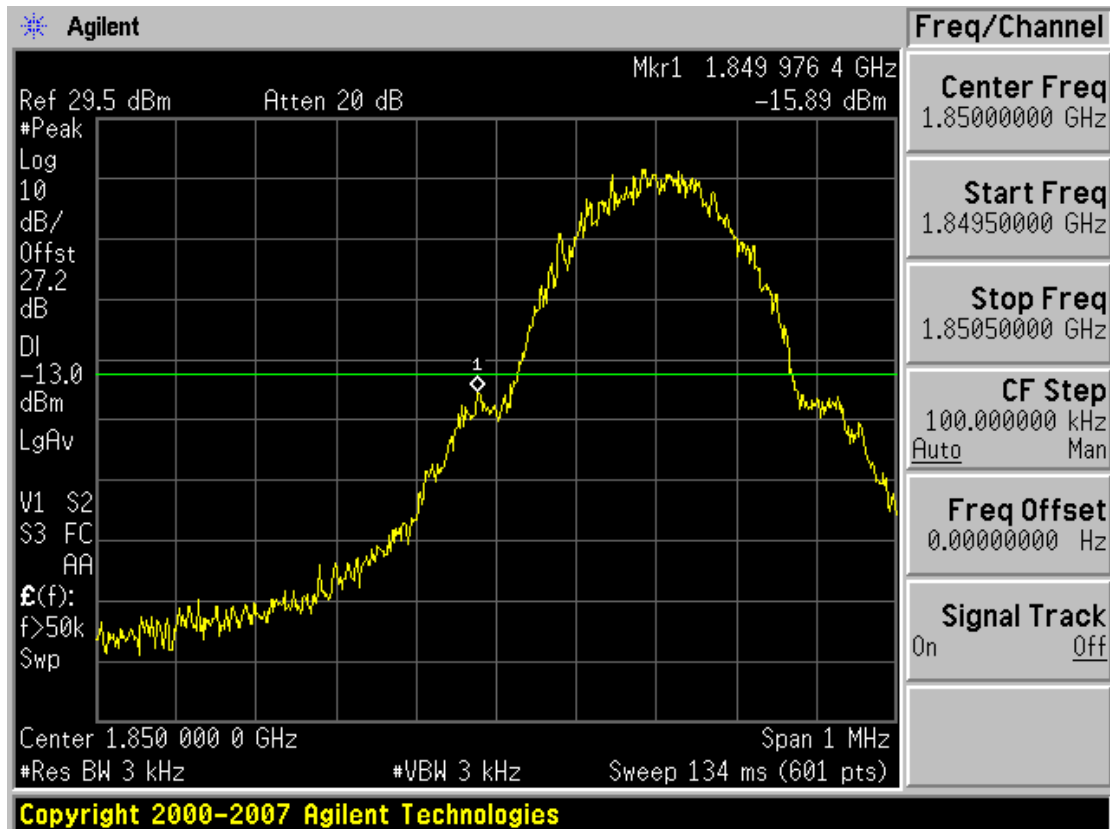


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ GSM1900 MODE (810 CH.) Block Edge

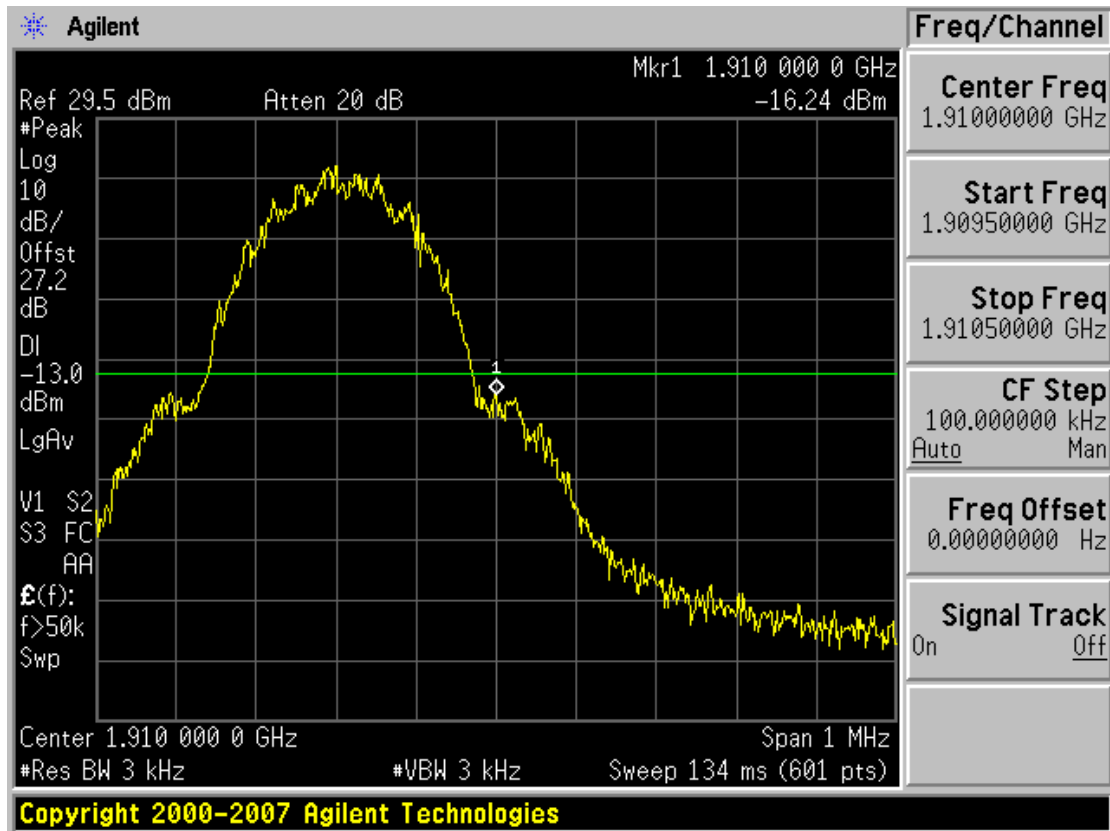


■ EDGE MODE (512 CH.) Block Edge

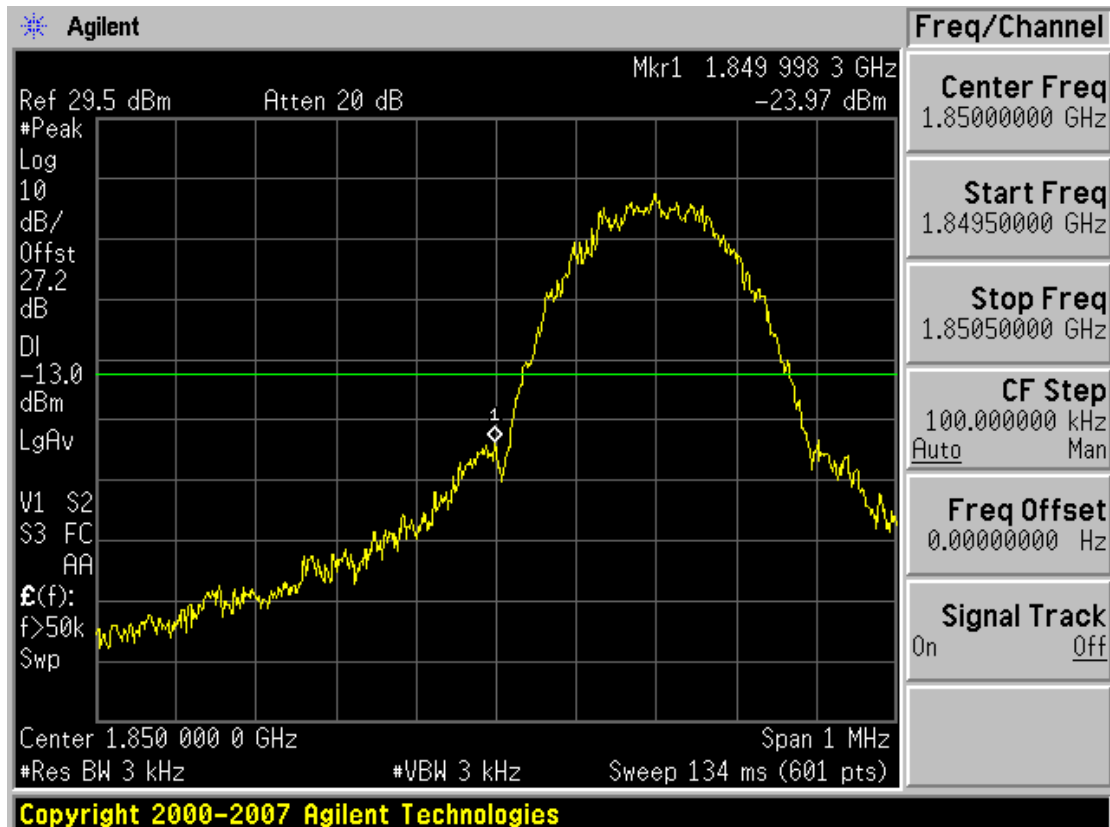


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	-------------------------------------	---	----------------------	--------------------------------------

■ EDGE MODE (810 CH.) Block Edge

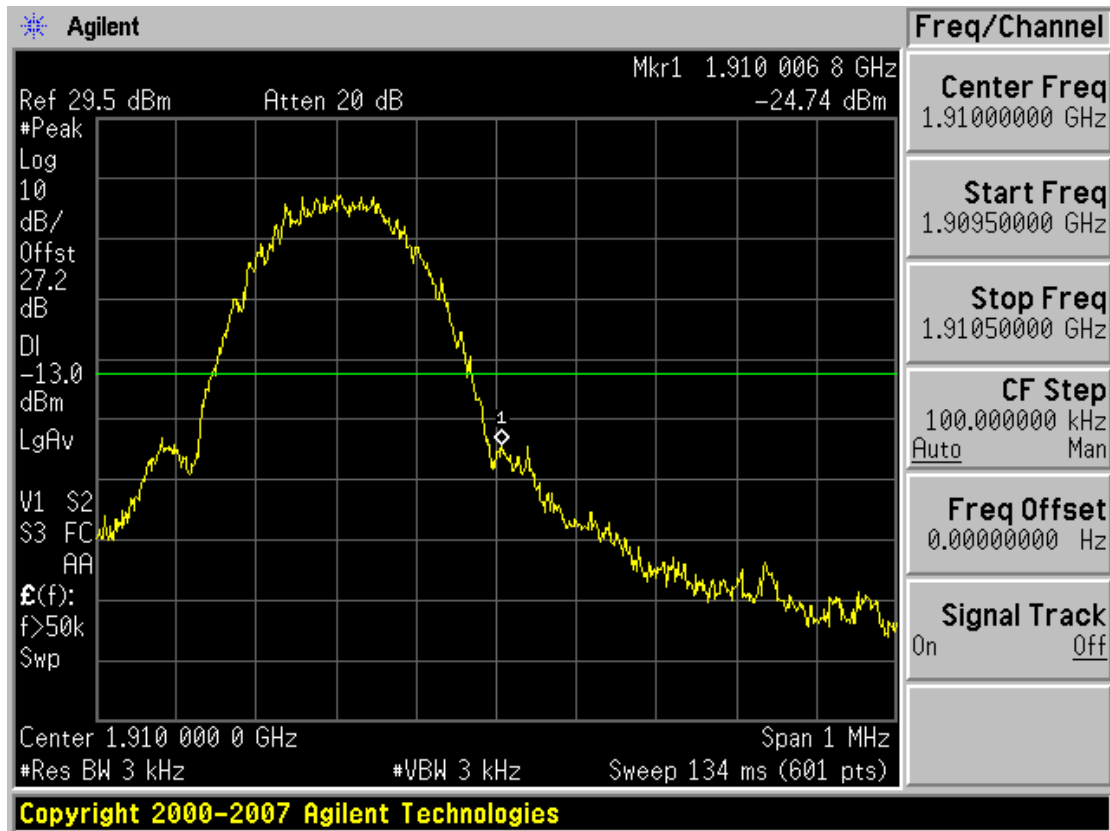


■ WCDMA850 MODE (4132 CH.) Block Edge

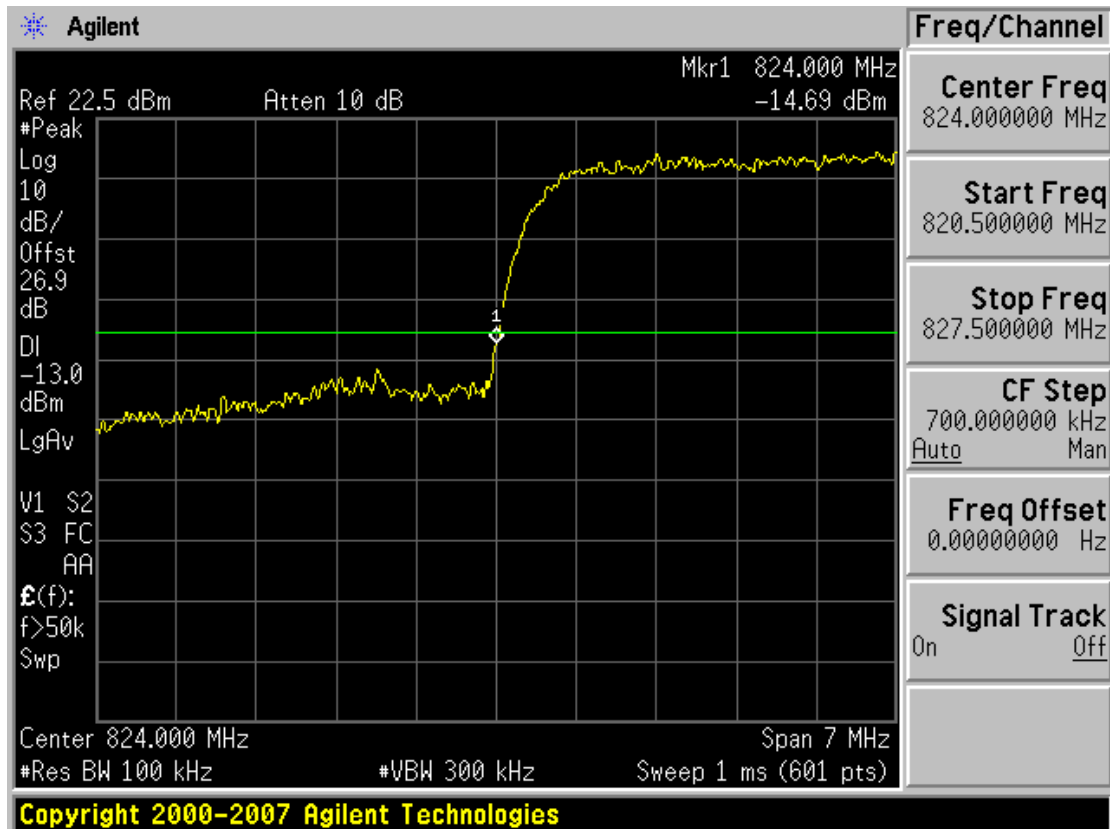


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------


■ WCDMA850MODE (4233 CH.) Block Edge

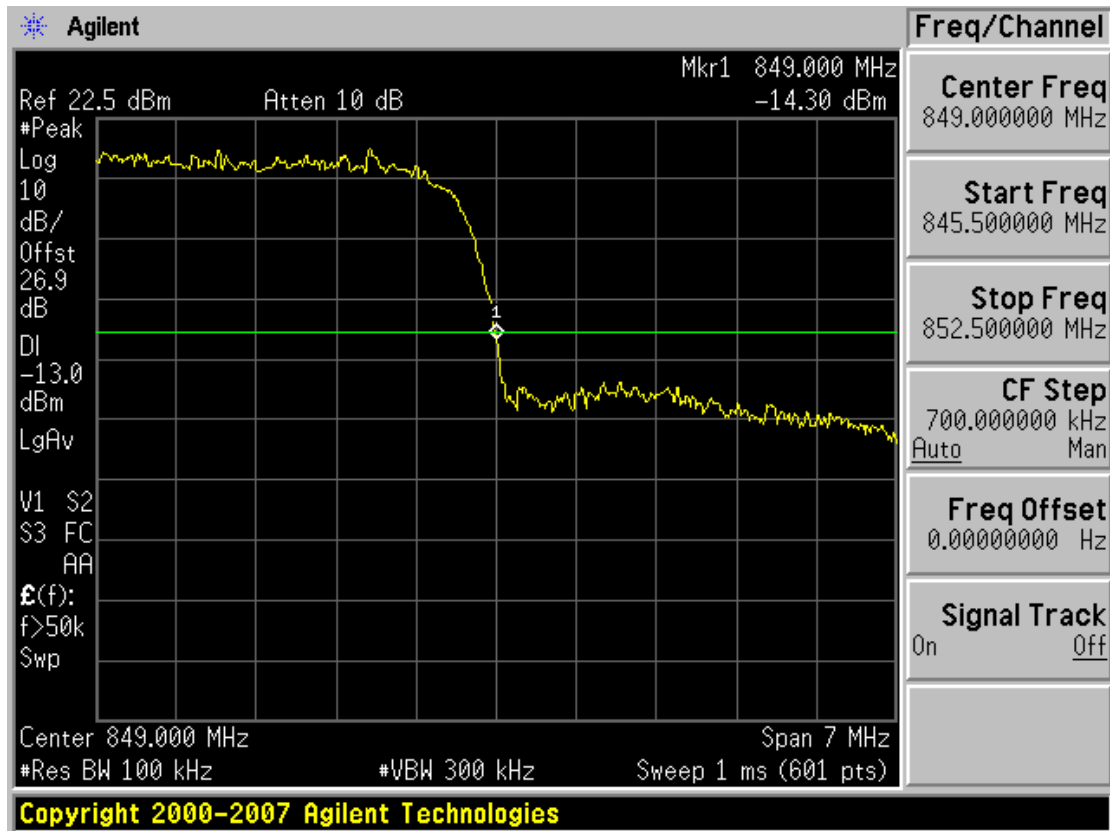


■ WCDMA850 MODE (4132 CH.) – 4 MHz Span

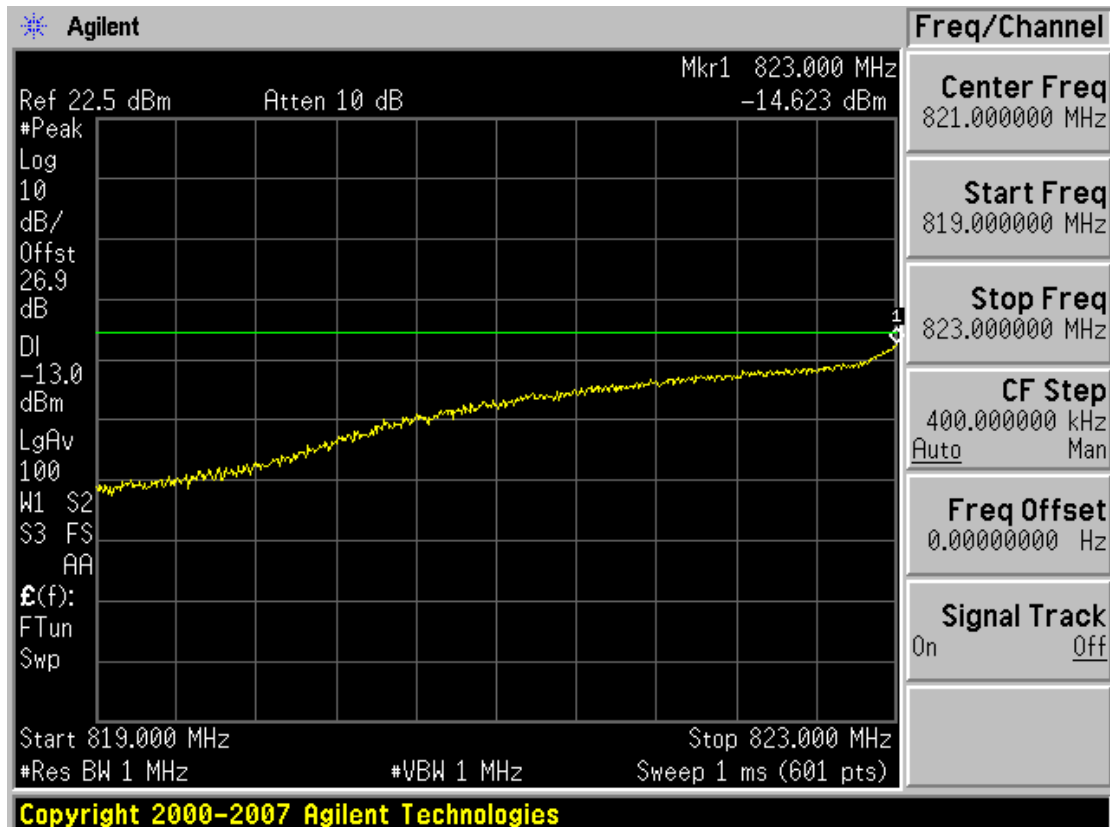


■ WCDMA850MODE (4233 CH.) – 4 MHz Span

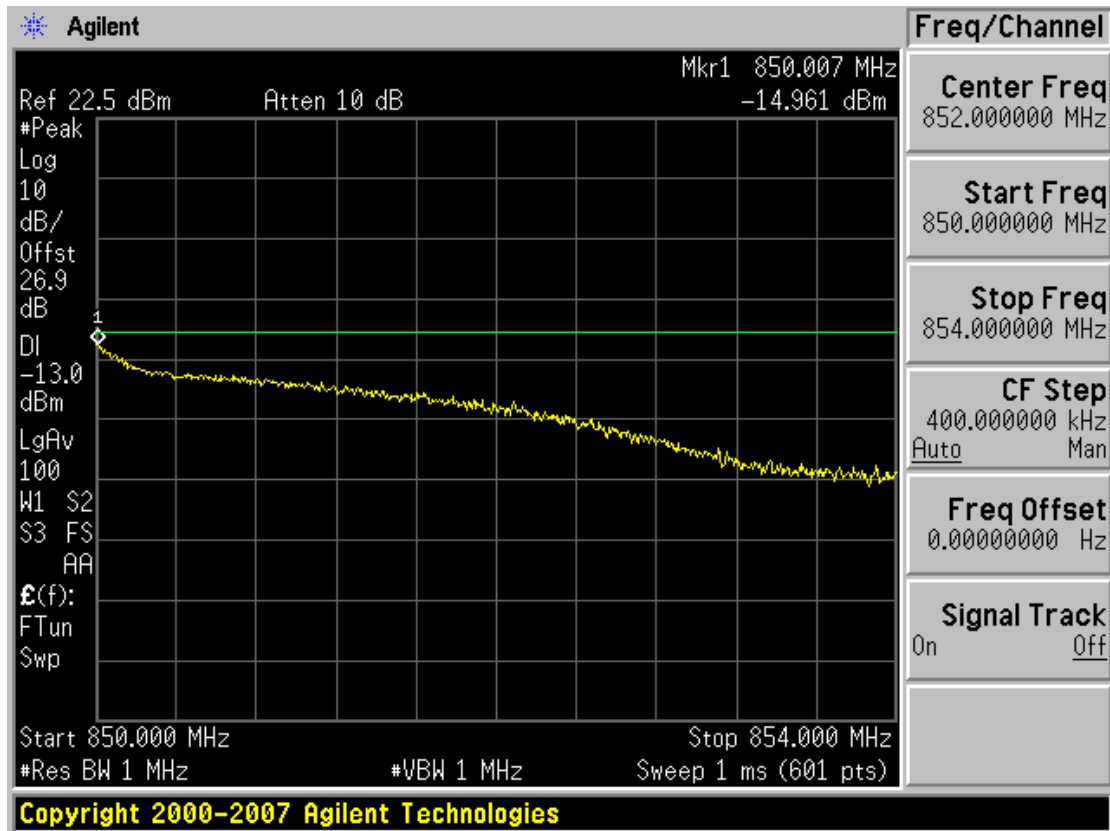


■ WCDMA1900 MODE (9262 CH.) Block Edge

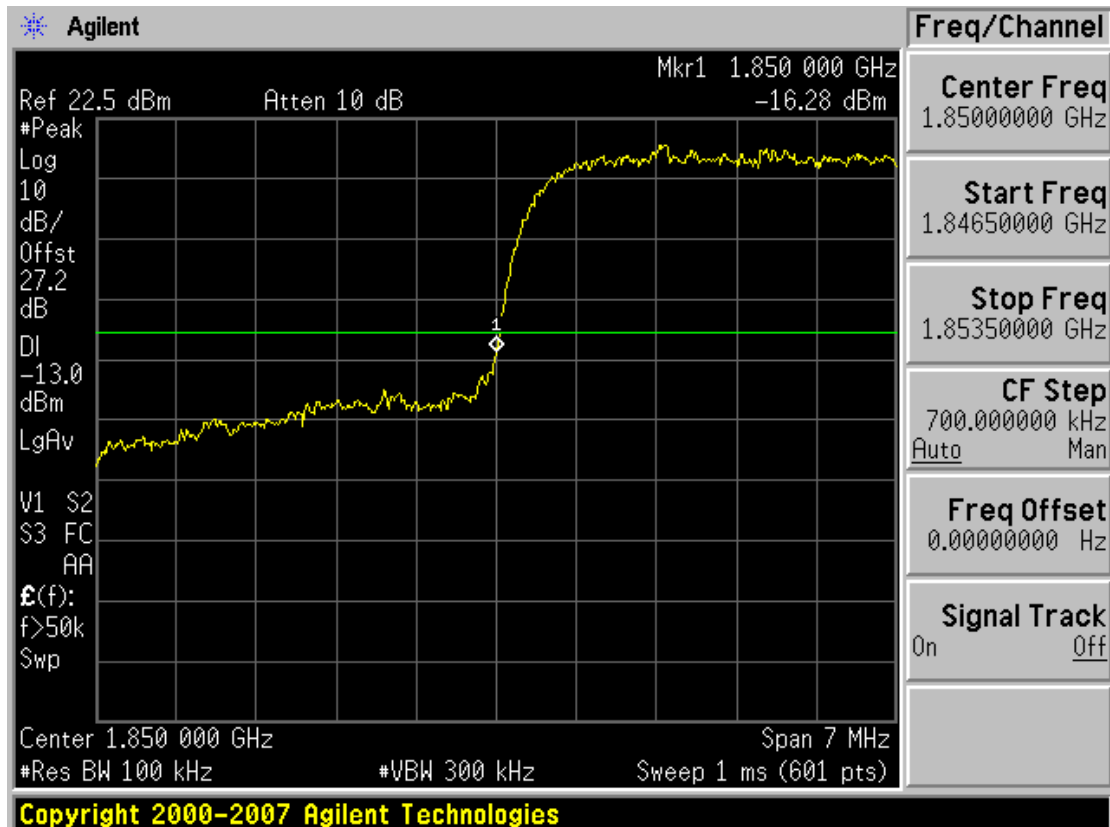

■ WCDMA1900 MODE (9538 CH.) Block Edge

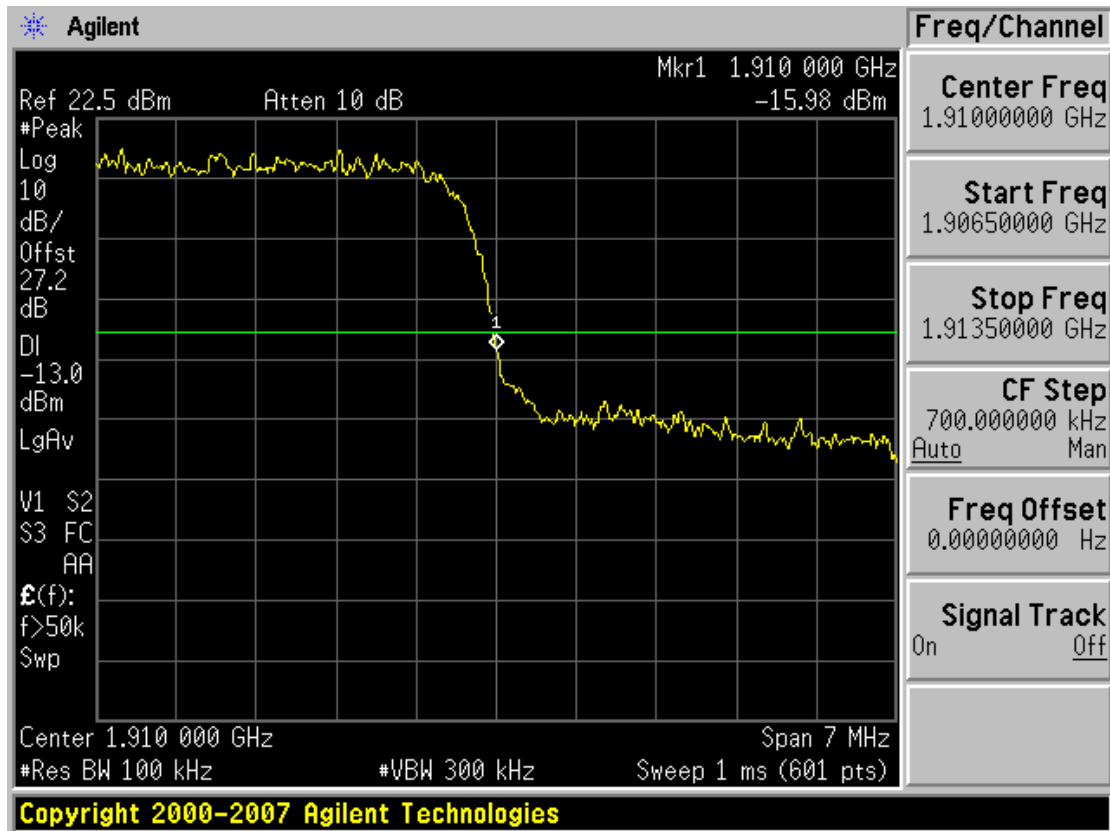


■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span

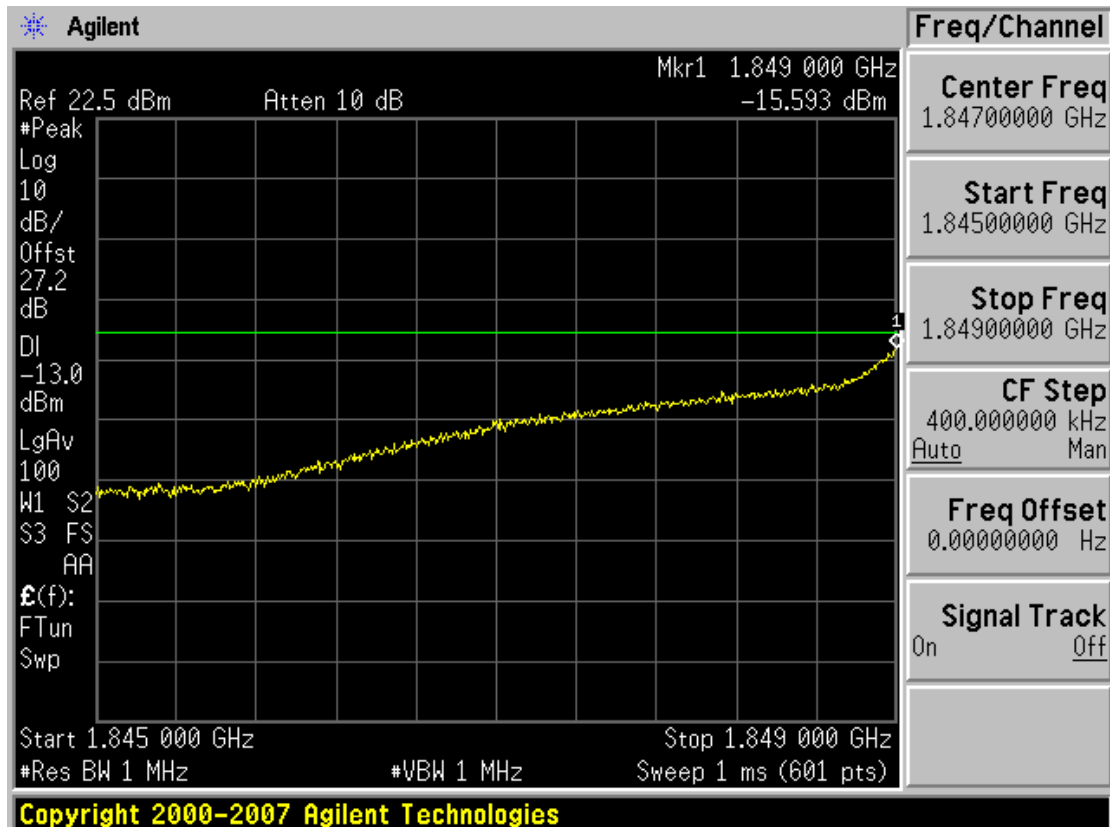


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------


■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span

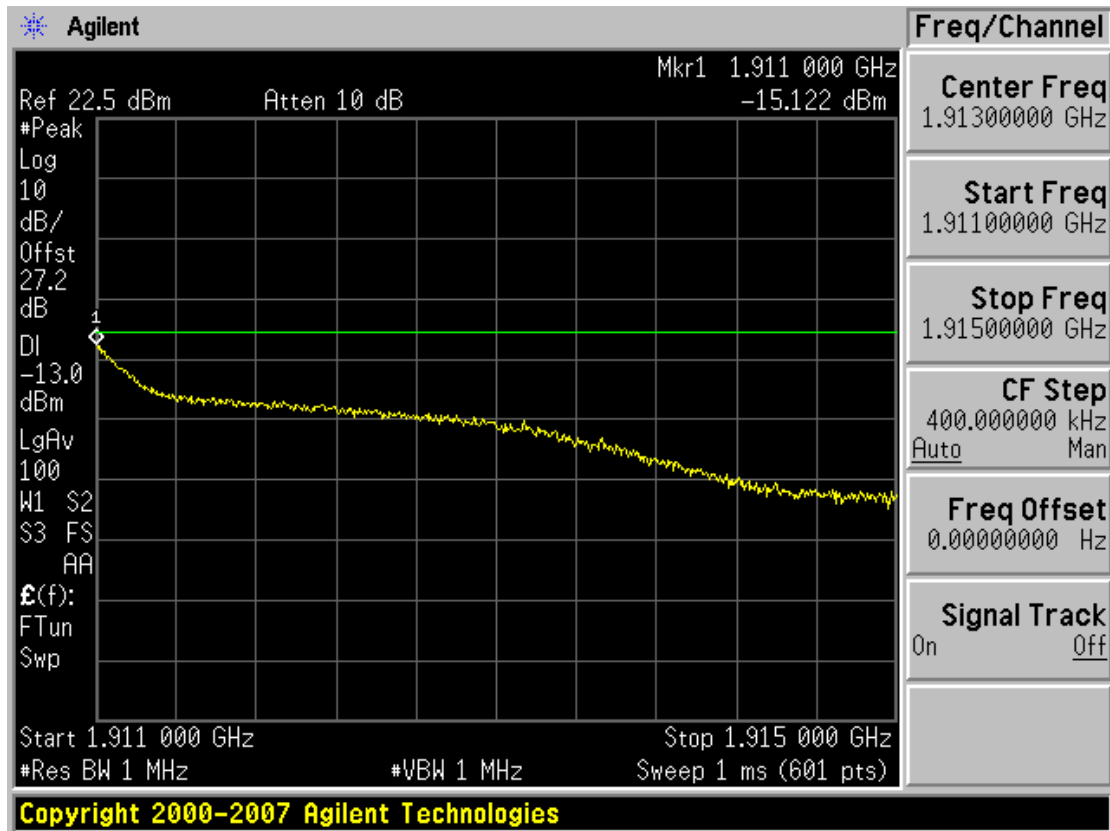


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

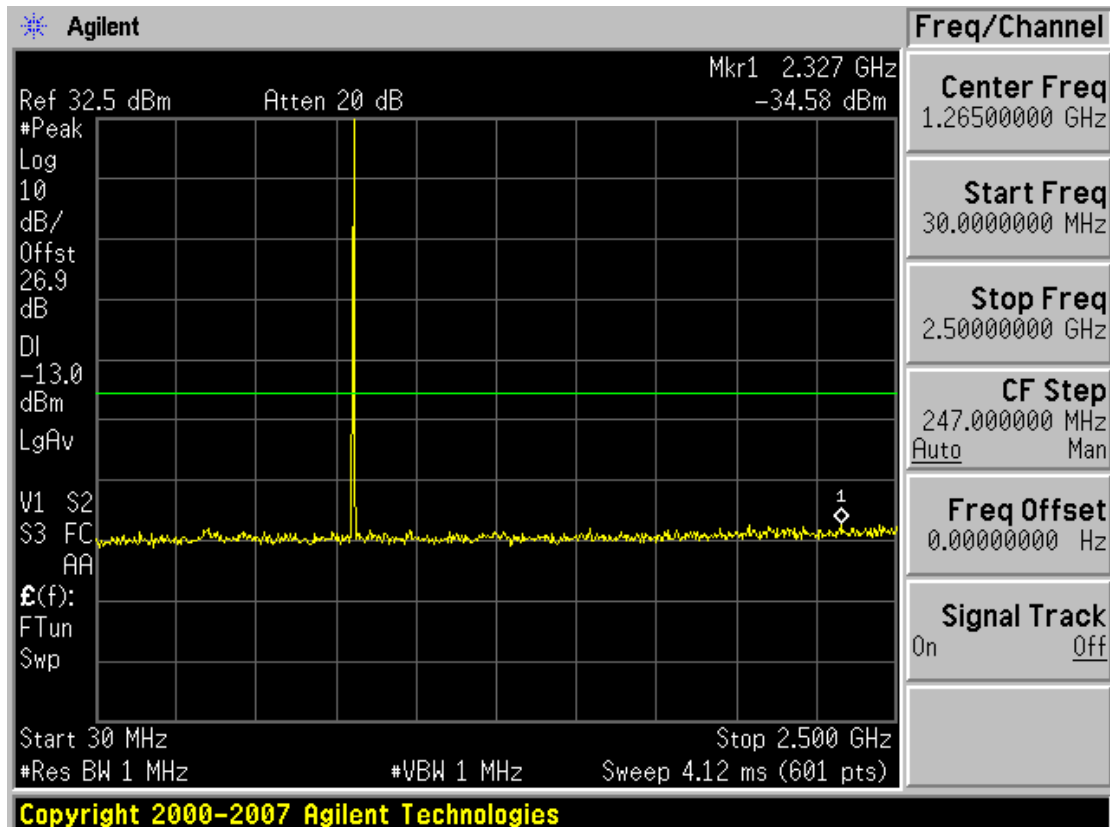


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

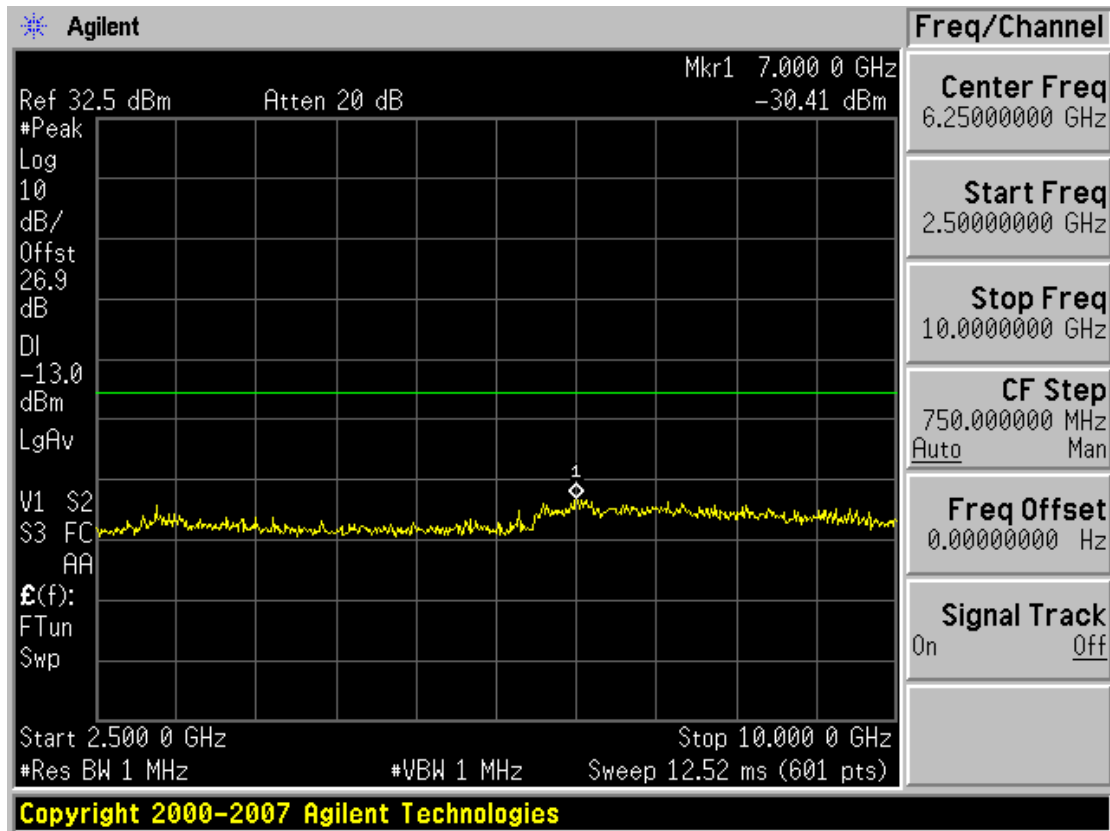


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

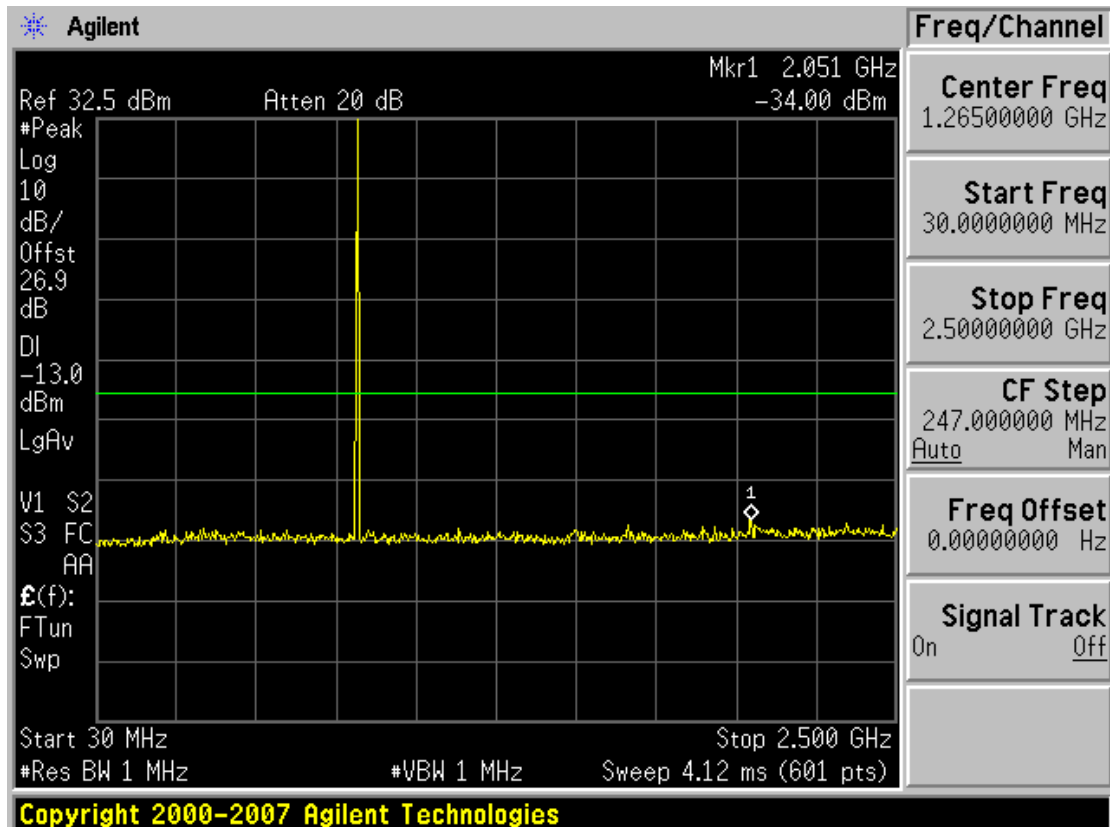


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2

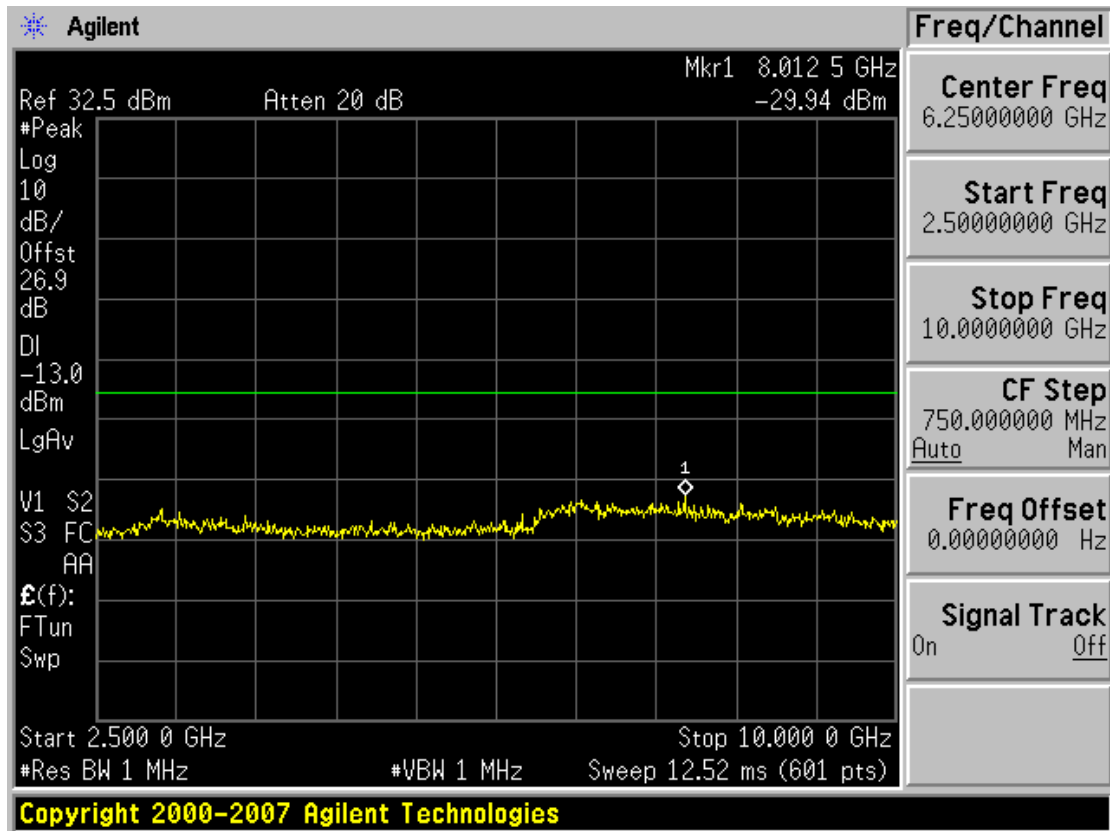


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

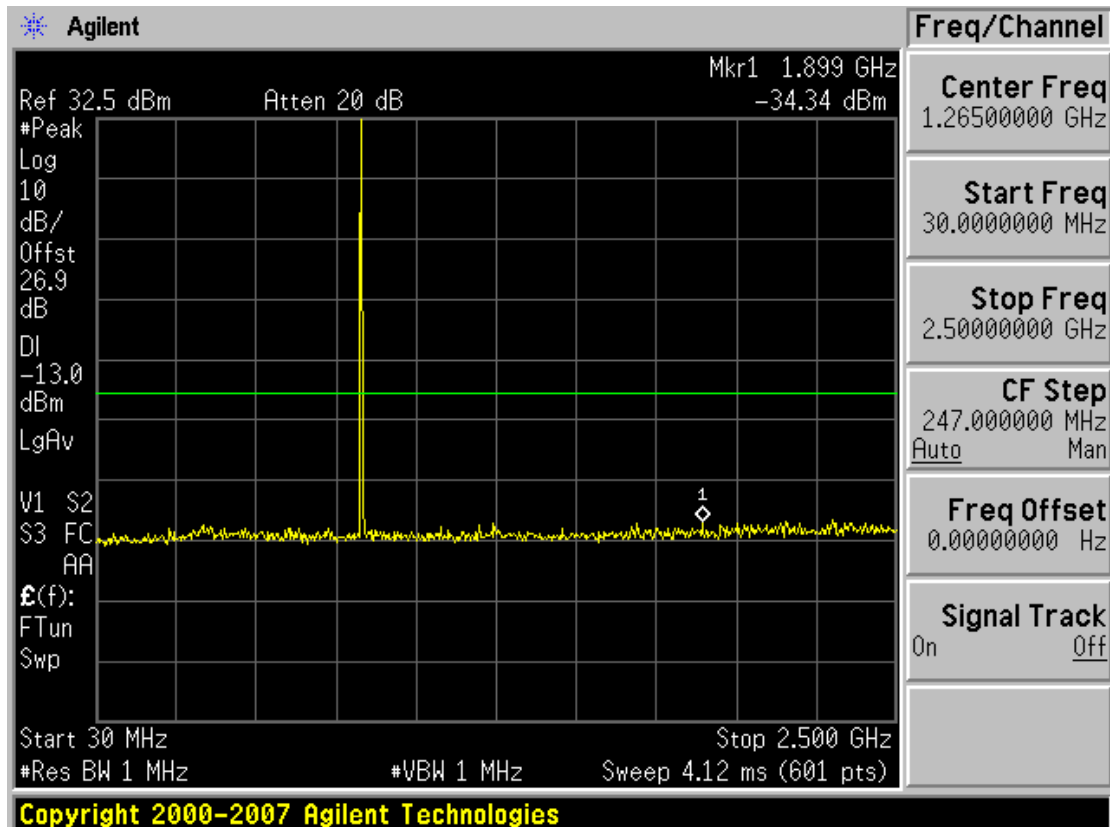

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

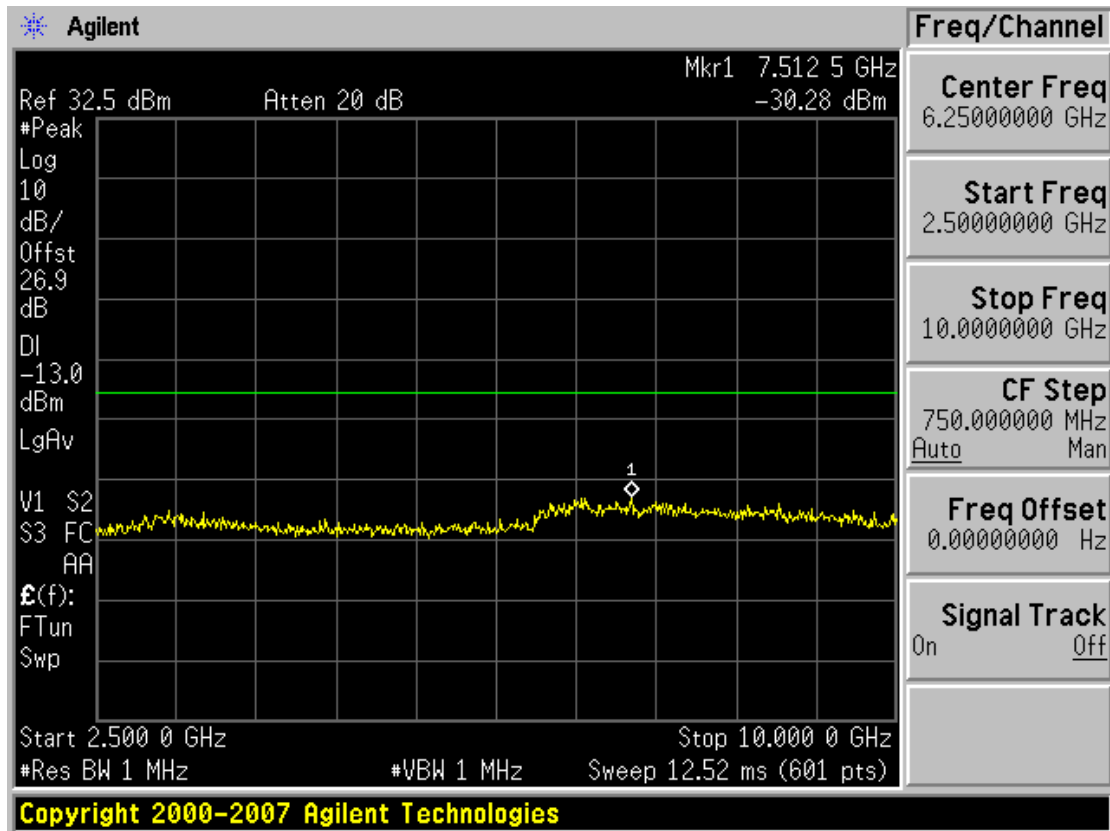


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

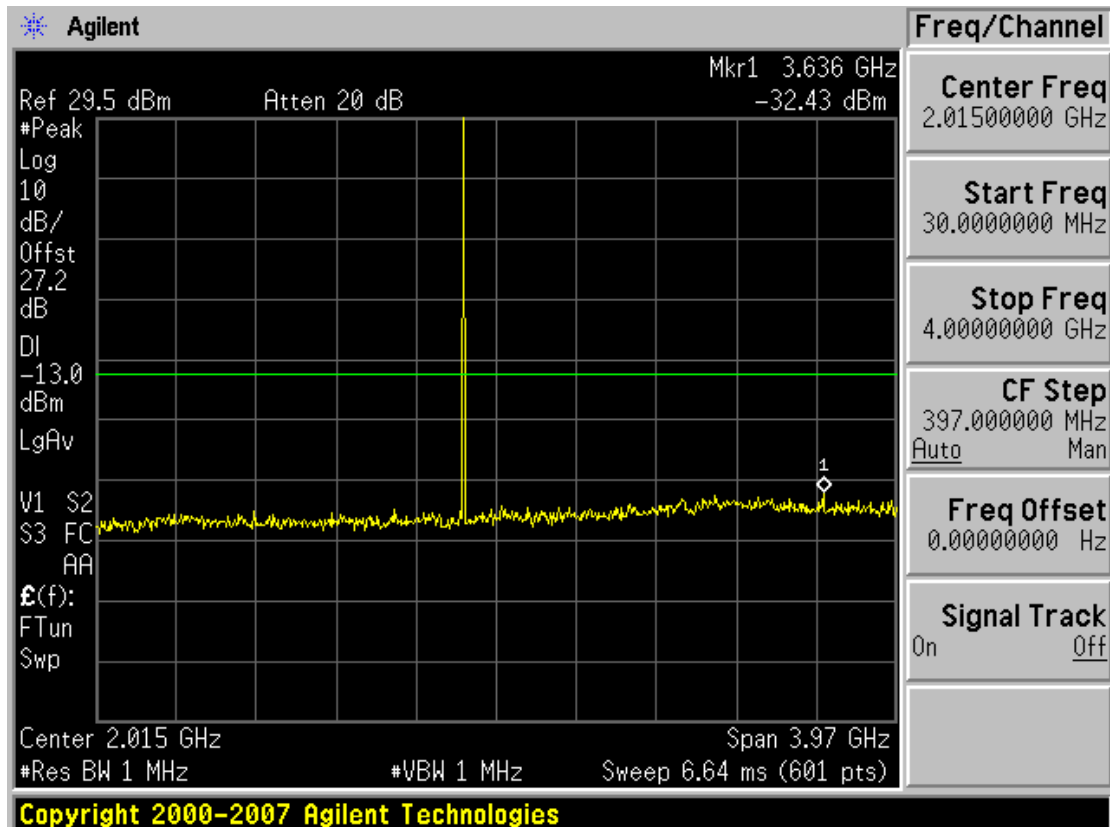


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

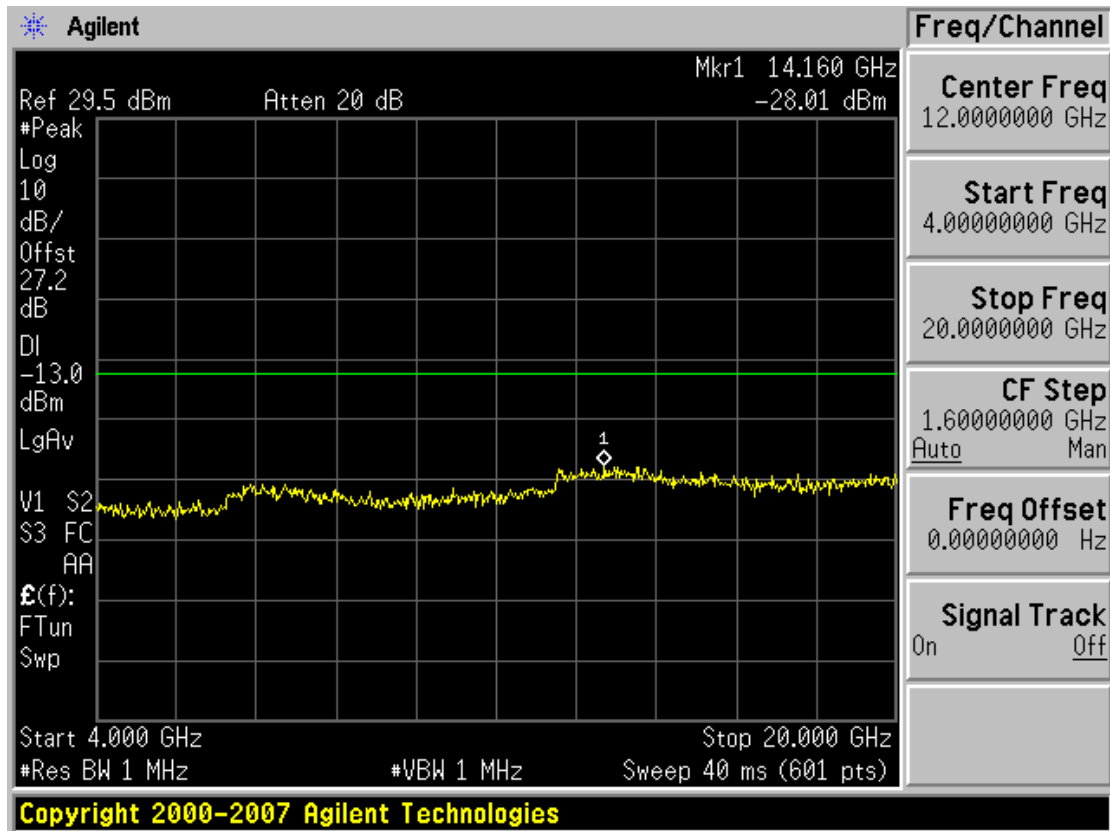


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions1

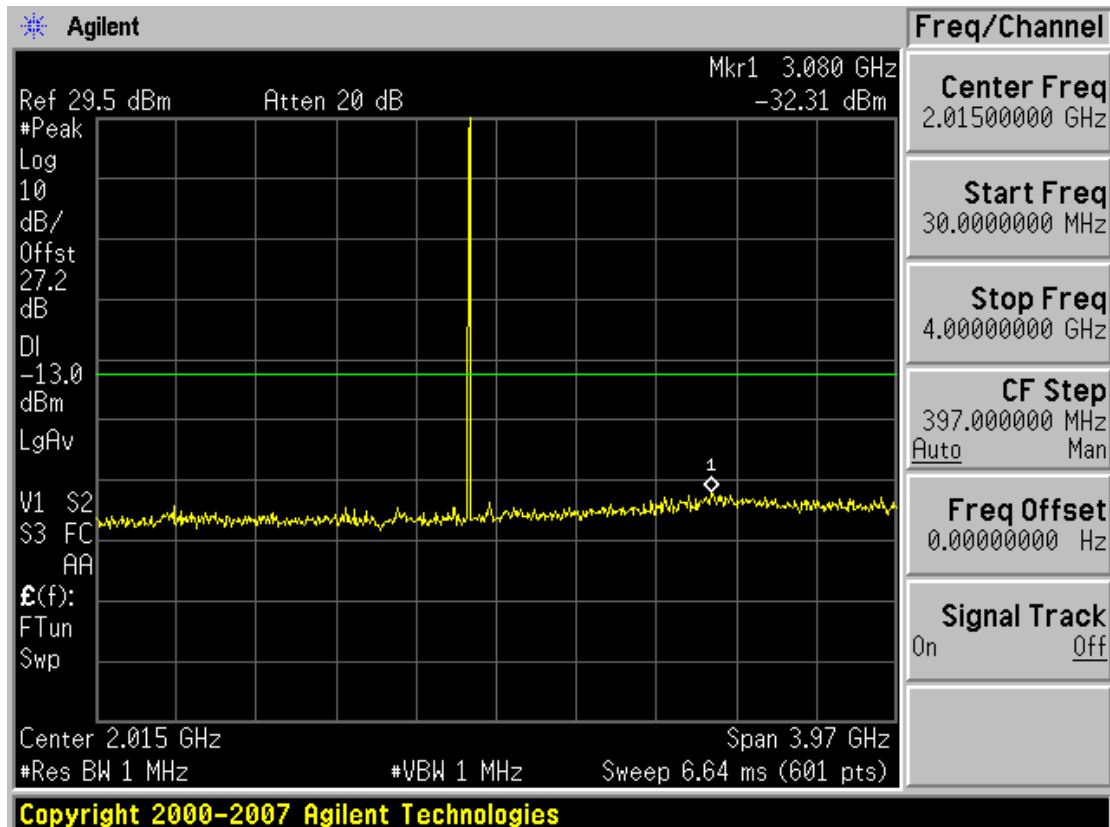


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

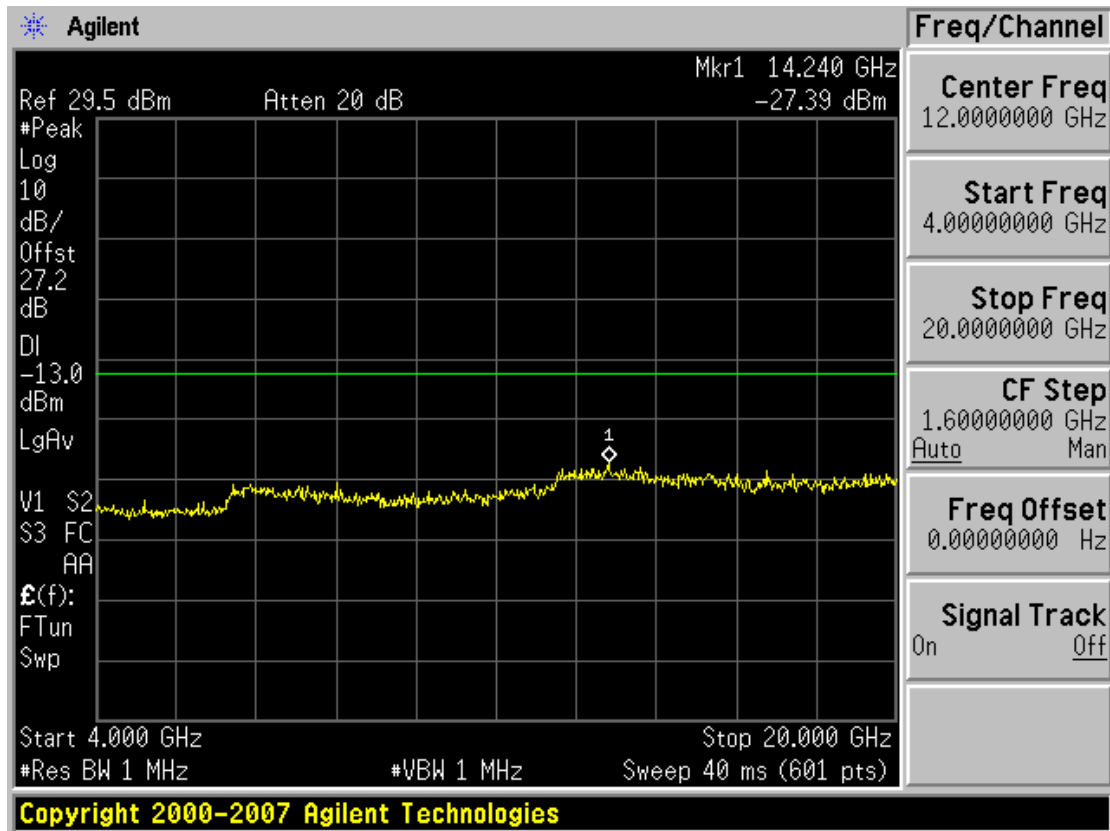


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

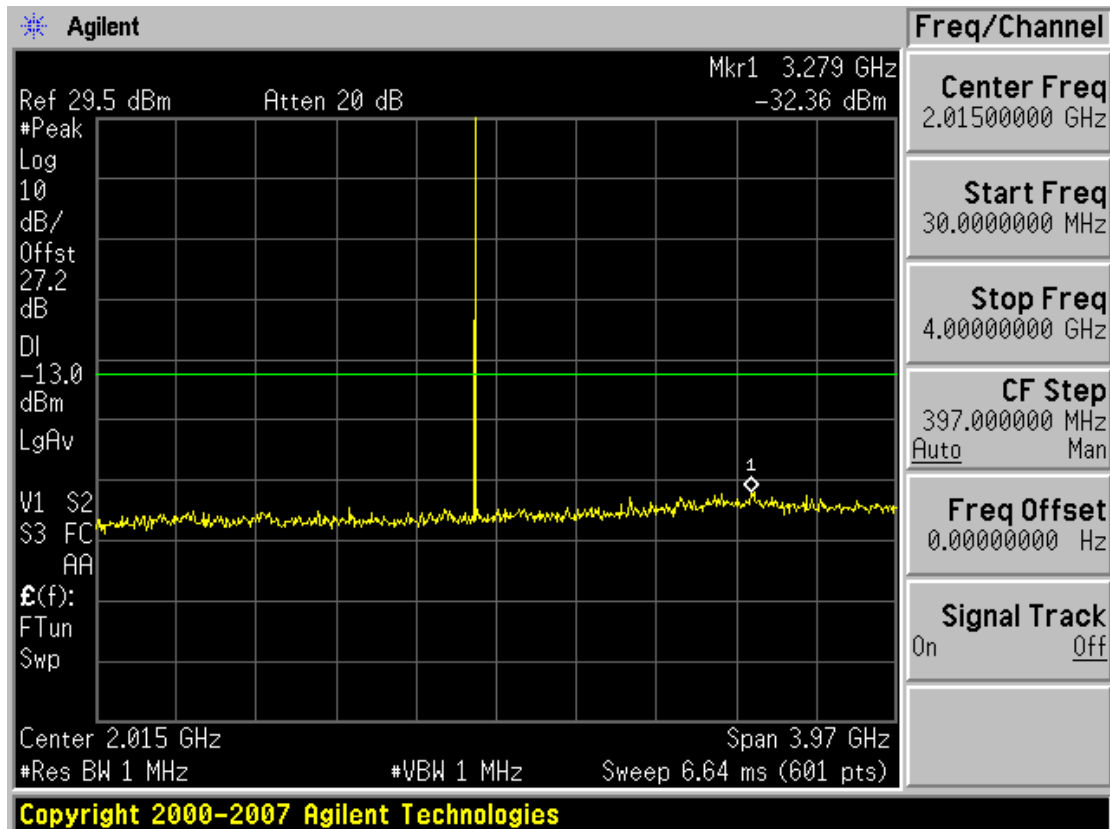


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

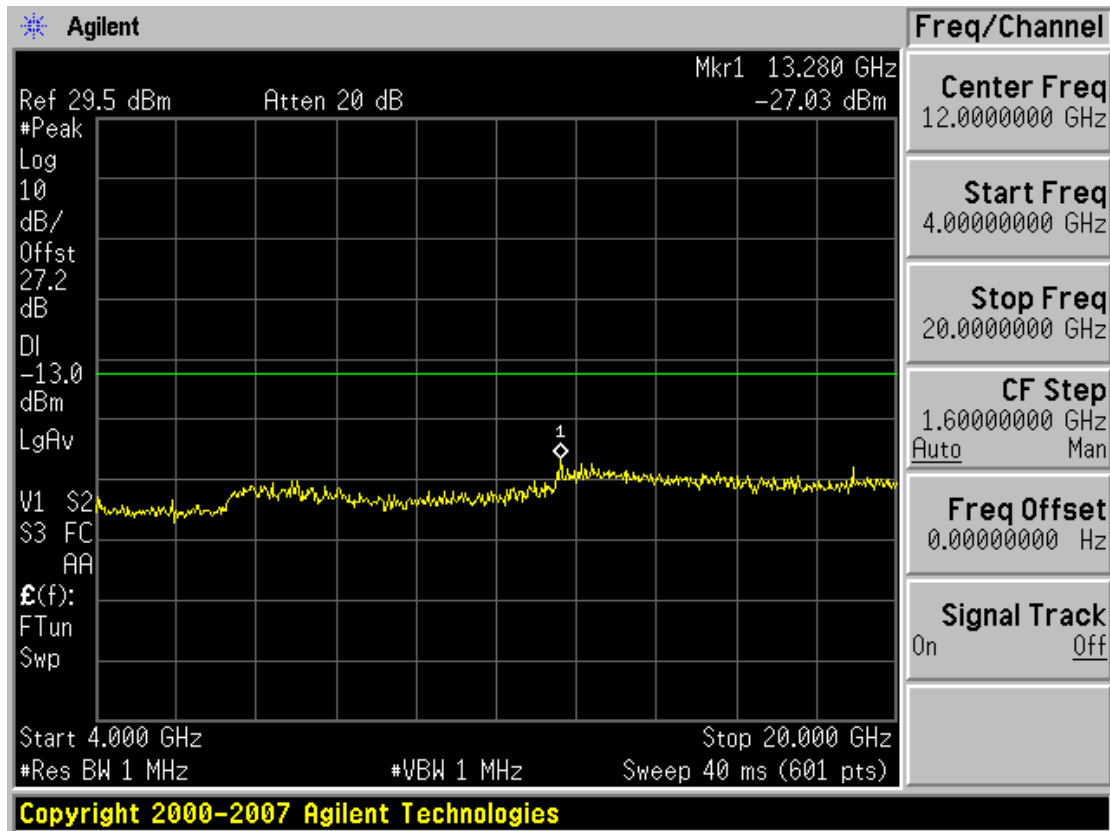


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions1

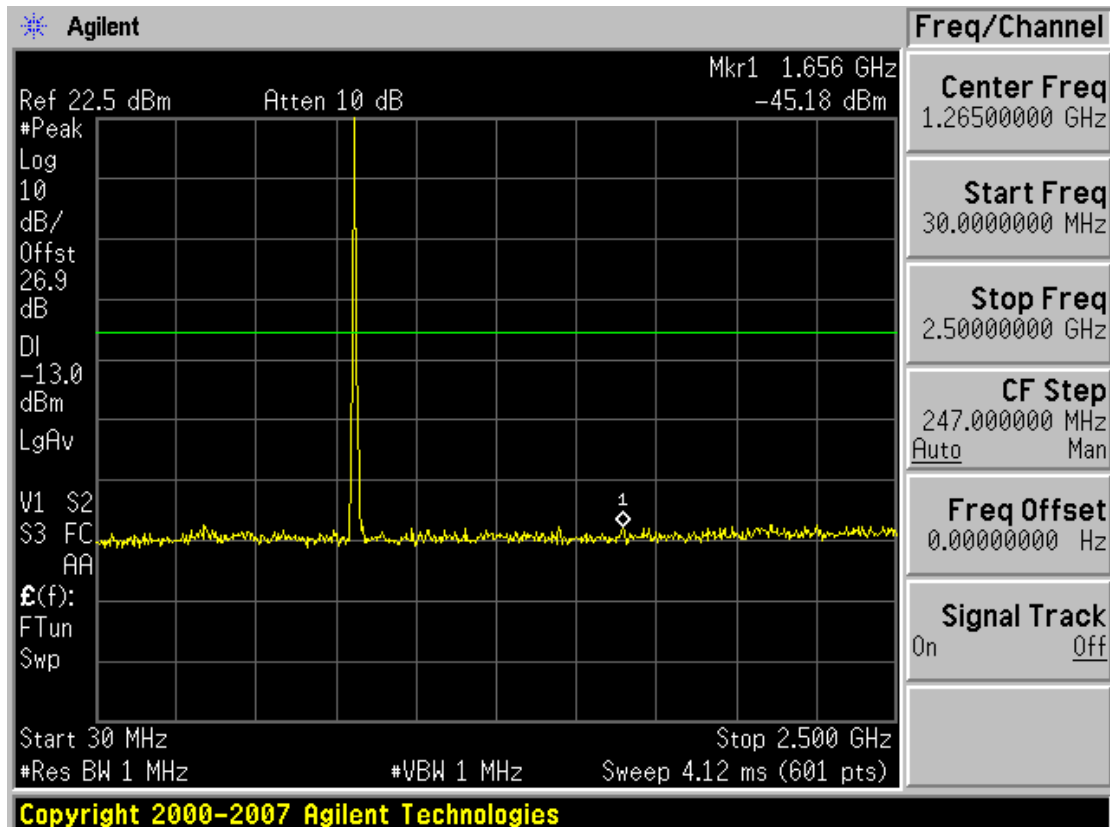


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions2

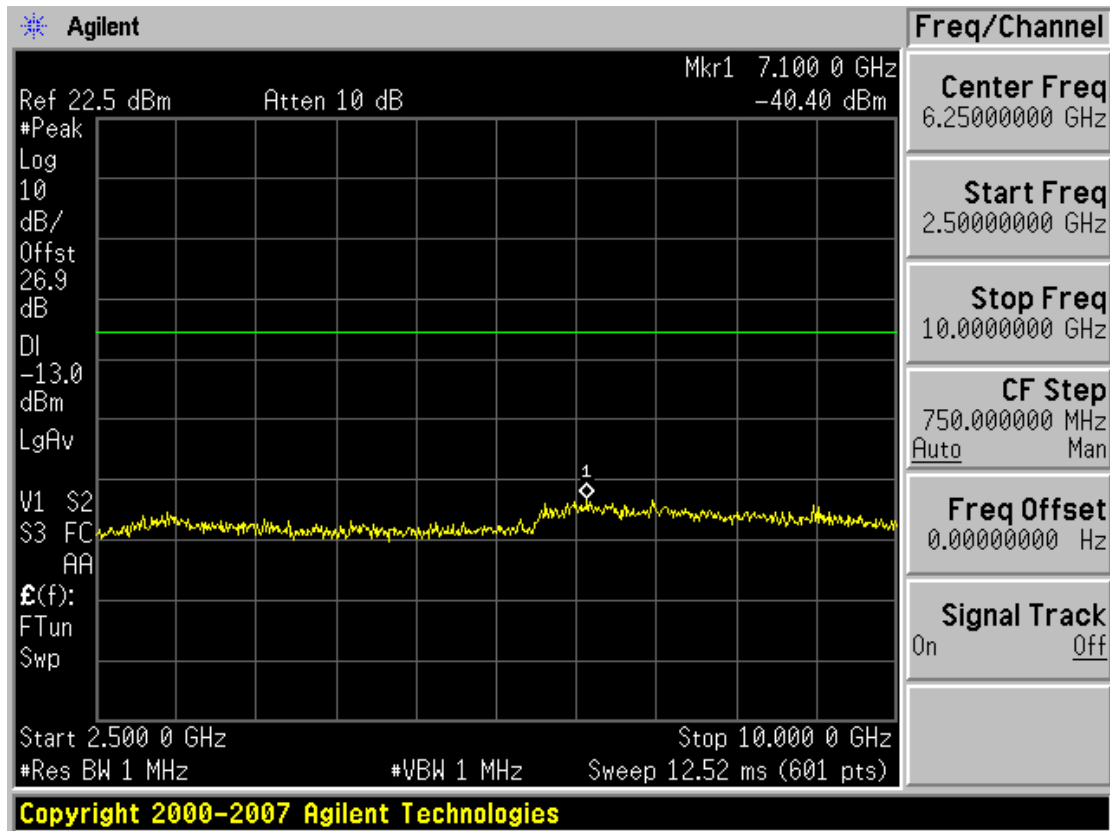


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions1

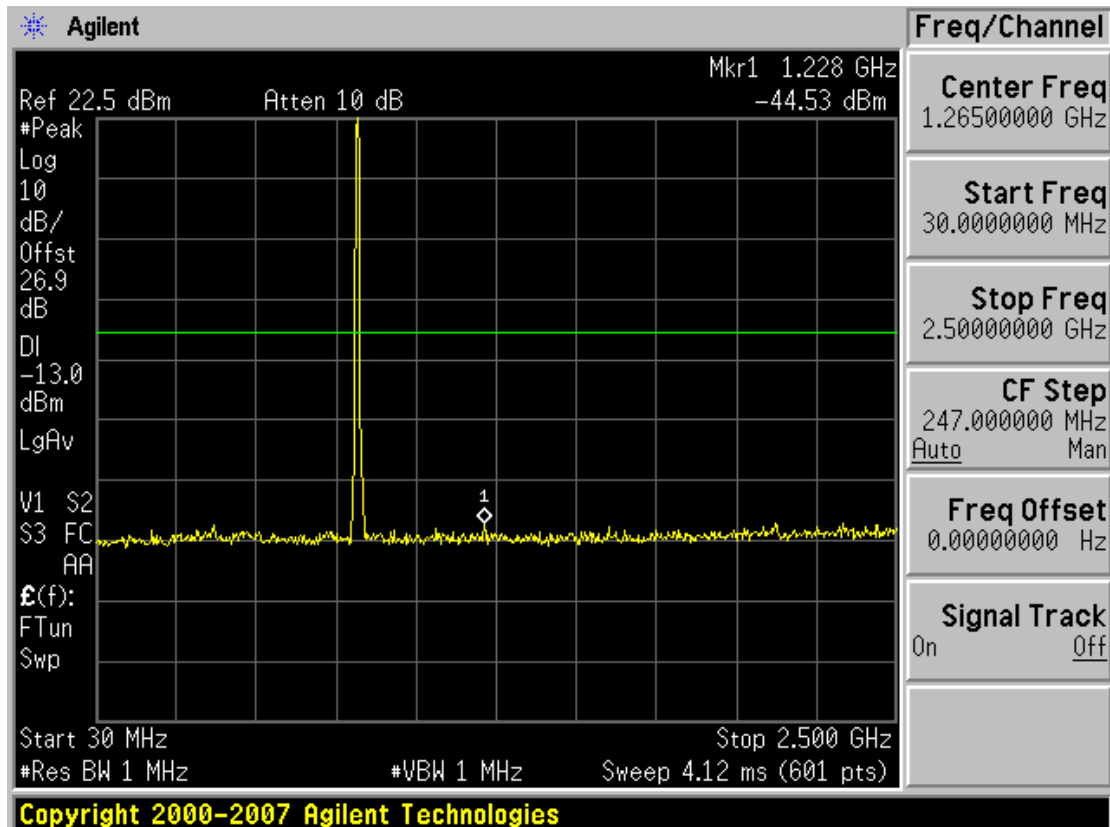


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions2

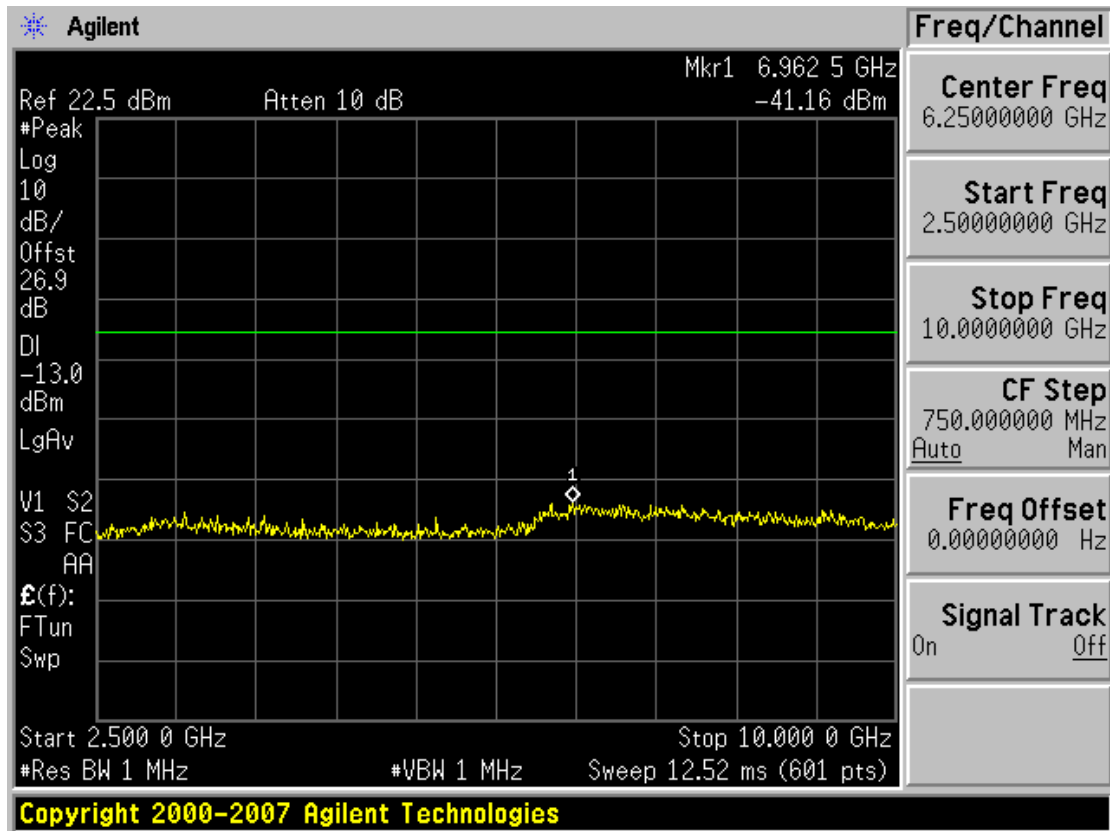


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions1

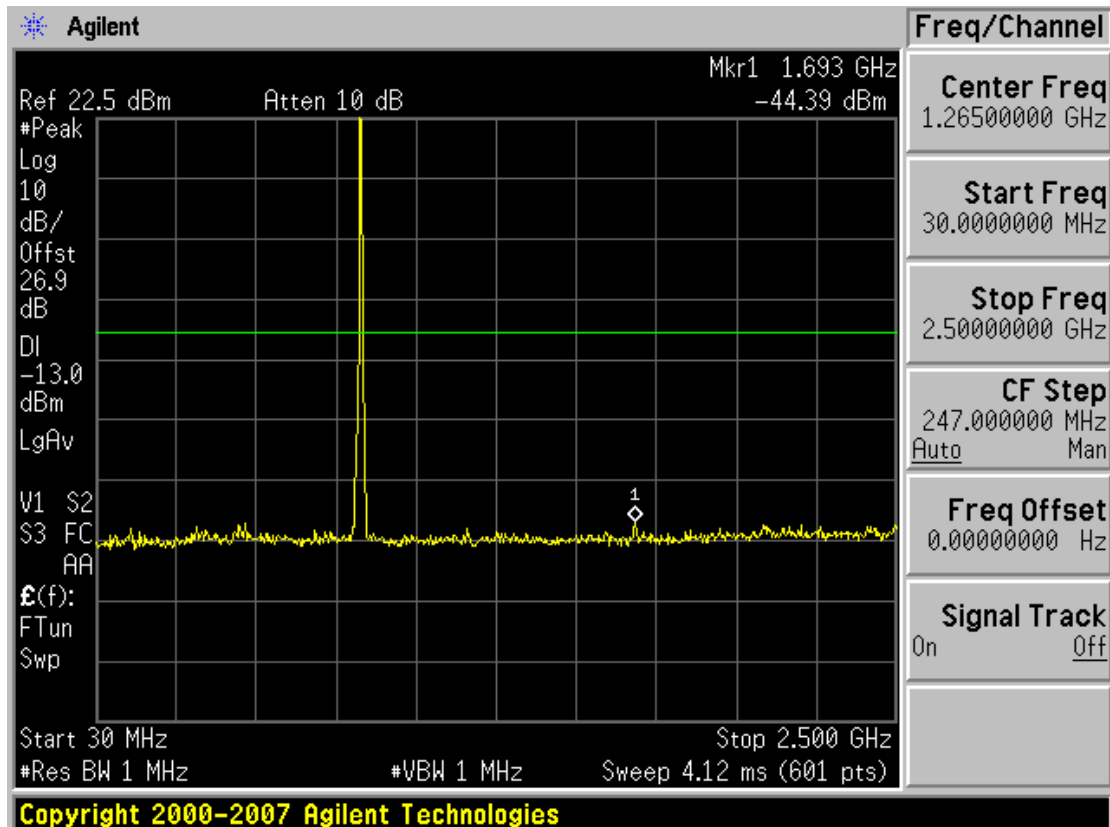

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions2

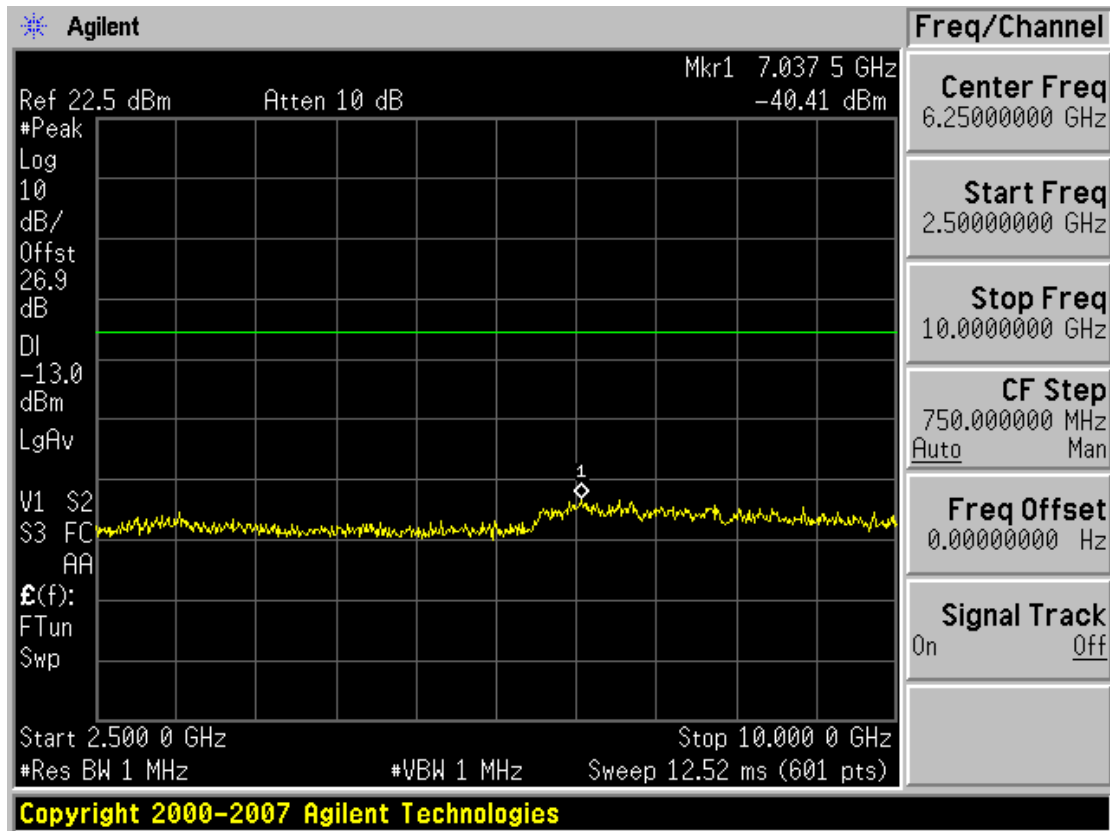


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

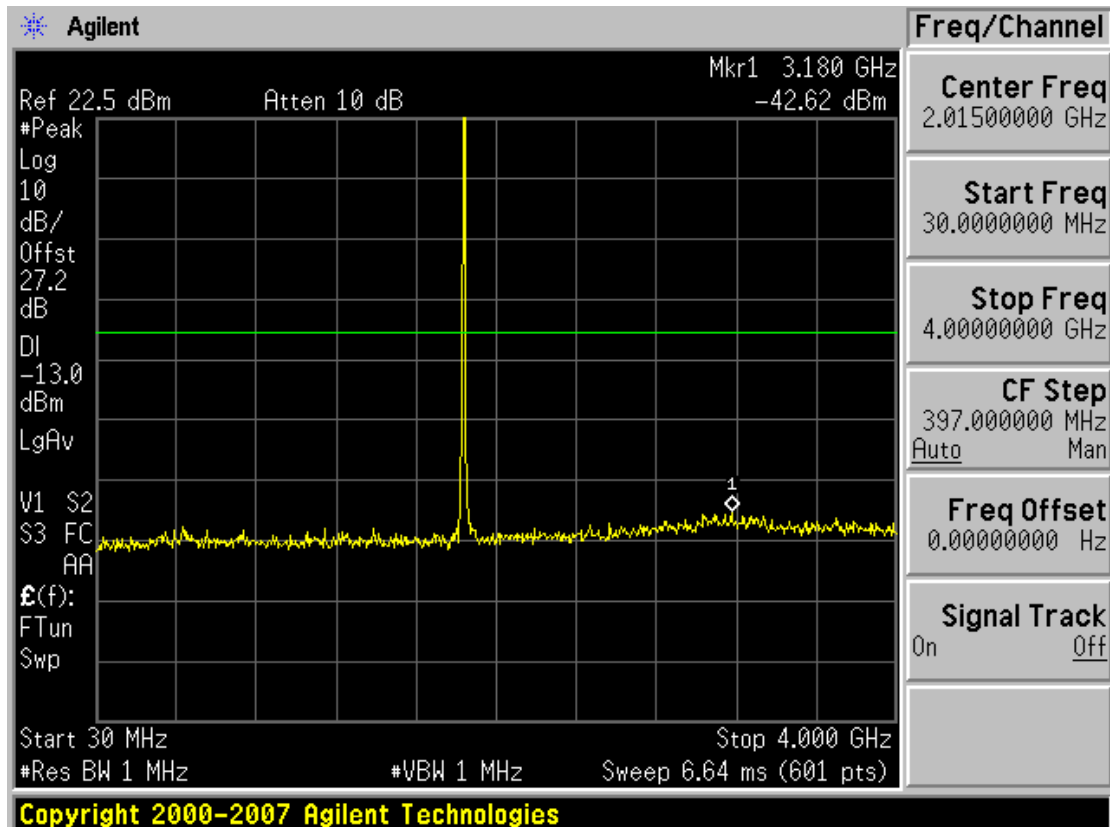


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22 , 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	-------------------------------------	---	----------------------	--------------------------------------

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

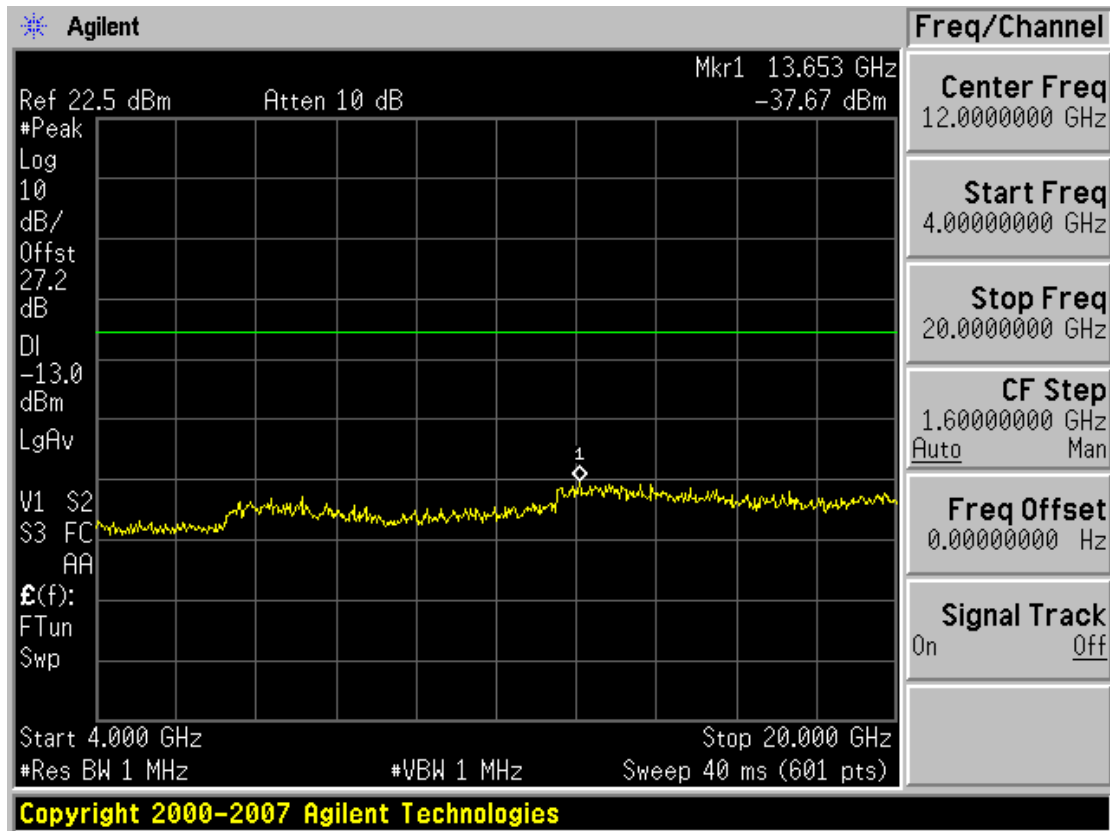


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

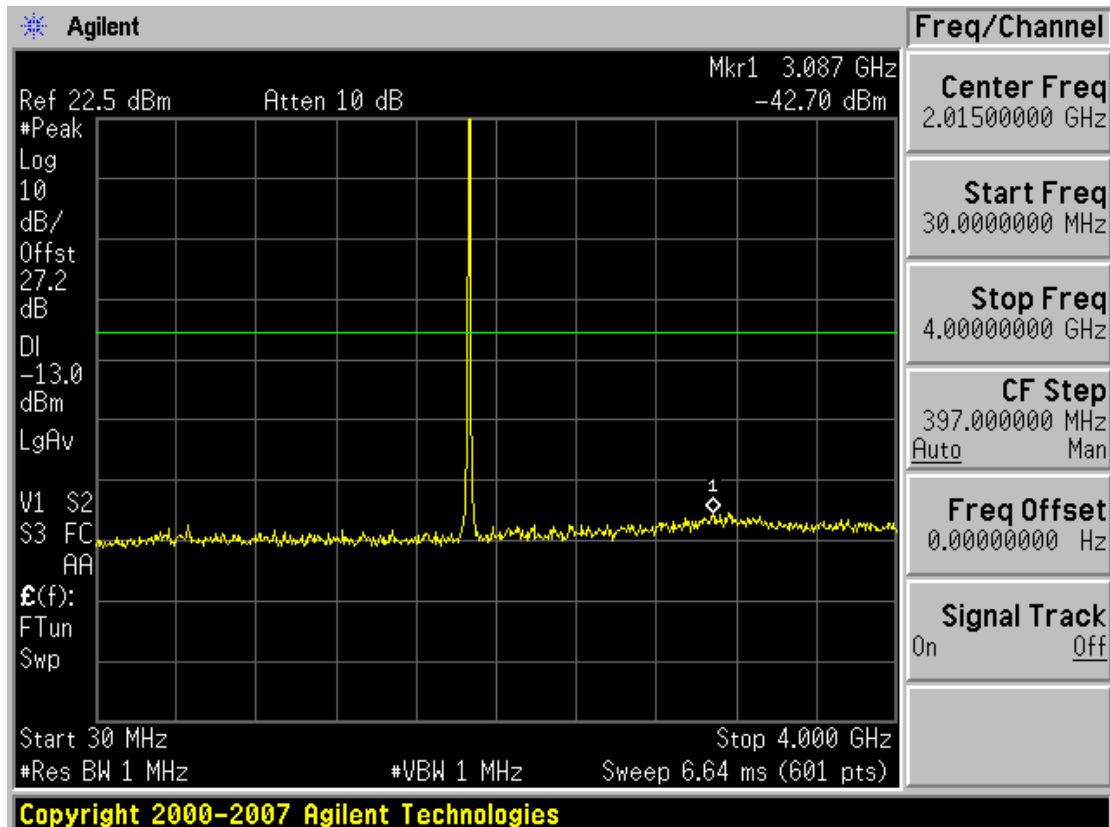


FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2

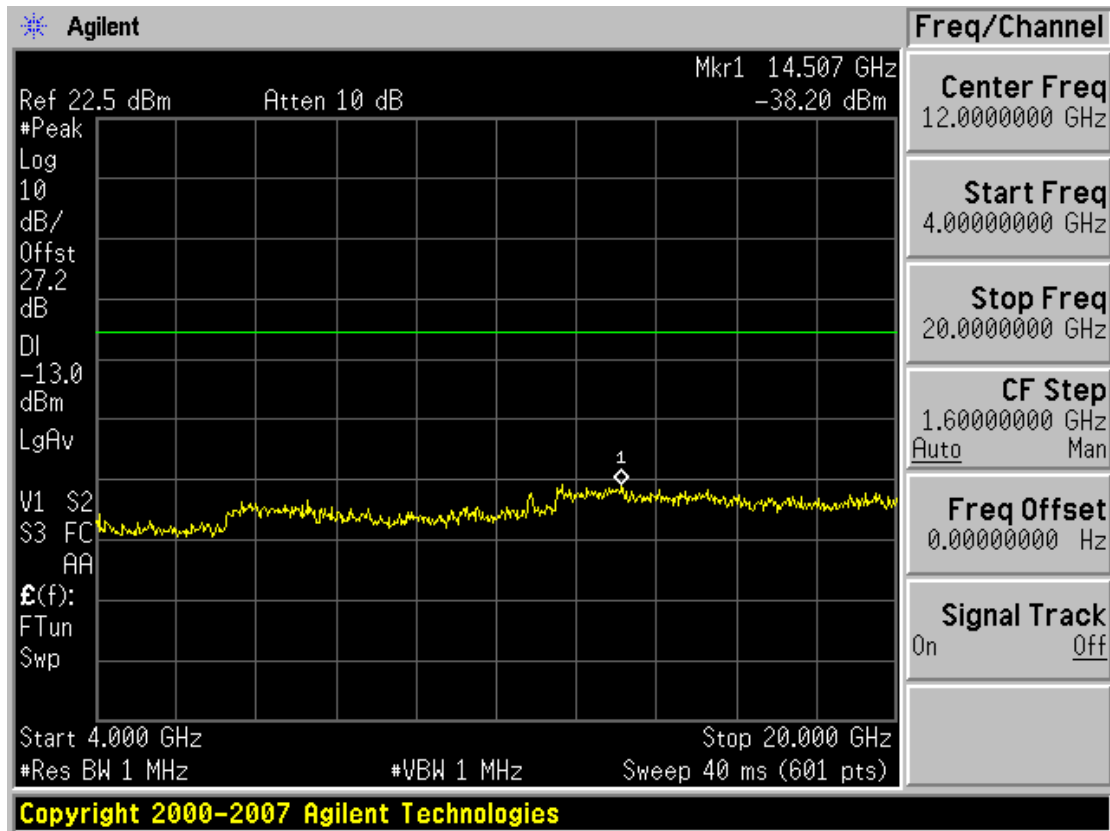

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

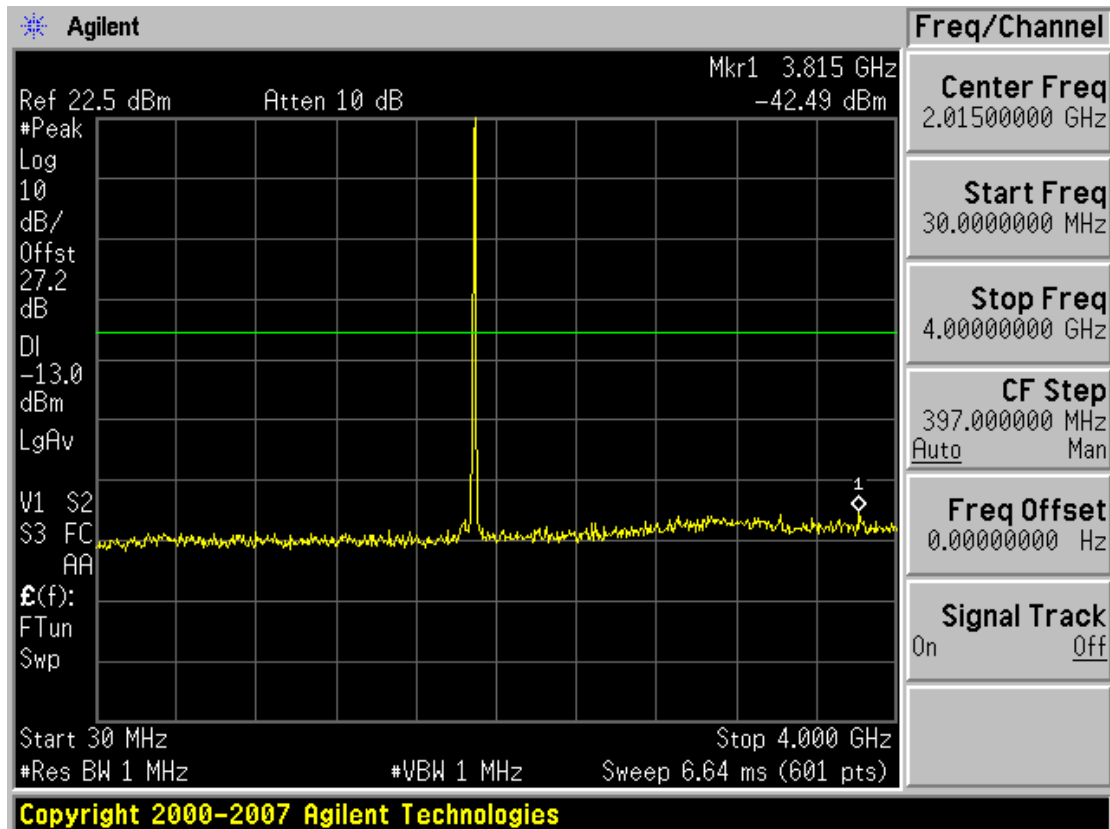

FCC Class II Permissive Change Test Report

Test Report No. HCTR0910FR10	Date of Issue: October 22, 2009	EUT Type: Cellular/ PCS GSM/ WCDMA/ EDGE Phone with Bluetooth	FCC ID: BEJGW525G	www.hct.co.kr IC: 2703C-GW525G
---------------------------------	------------------------------------	---	----------------------	--------------------------------------

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

