



HCT CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8535

FCC Certification

Applicant Name:
LG Electronics, Inc.

Address:
60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea

Date of Issue:

March 17, 2010

Location:

HCT CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,
Kyungki-do, Korea

Test Report No.: HCTR1003FR08

HCT FRN: 0005866421

IC Recognition No.: IC 5944A-1

FCC ID : BEJGX500

APPLICANT : LG Electronics, Inc.

Model(s): GX500
EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN
Tx Frequency: 824.20 – 848.80 MHz (GSM850)
1 850.20 – 1 909.80 MHz (GSM1900)
Rx Frequency: 869.20 – 893.80 MHz (GSM850)
1 930.20 – 1 989.80 MHz (GSM1900)
Sim1 0.550 W ERP GSM850 (27.40 dBm) / 0.891 W EIRP GSM1900 (29.50 dBm)
Max. RF Output Power: 0.282 W ERP GSM850 EDGE (24.50 dBm)
0.800 W EIRP GSM1900 EDGE (29.03 dBm)
Sim2 0.568 W EIRP GSM1900 (27.54 dBm)
Max. RF Output Power: 0.418 W EIRP GSM1900 EDGE (26.21 dBm)
Sim1 247KGXW (GSM850), 247KGXW (GSM1900)
Emission Designator(s): 246KG7W (GSM850 EDGE), 246KG7W(GSM1900 EDGE)
Sim2 247KGXW (GSM1900)
Emission Designator(s): 240KG7W(GSM1900 EDGE)
FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s): §22, §24, §2

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report prepared by

: Jong Seok Lee

Test engineer of RF Team

Approved by

: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 1 of 56

Table of Contents

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
2.1. EUT DESCRIPTION.....	4
2.2. MEASURING INSTRUMENT CALIBRATION	4
2.3. TEST FACILITY	4
3. DESCRIPTION OF TESTS	5
3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power.....	5
3.2 Peak- to- Average Ratio	6
3.3 Occupied bandwidth.	7
3.4 Spurious and Harmonic Emissions at Antenna Terminal.....	8
3.5 Radiated Spurious and Harmonic Emissions	9
3.6 Frequency stability / variation of ambient temperature	10
4. LIST OF TEST EQUIPMENT	11
5. SUMMARY OF TEST RESULTS	12
6. SAMPLE CALCULATION	13
7. TEST DATA	14
7.1 Conducted Output Power	14
7.2 Peak-to-Average Ratio	15
7.3 Occupied Bandwidth.....	15
7.4 Conducted Spurious Emissions	16
7.4.1 Band Edge	17
7.5 Effective Radiated Power Output (E.R.P)(GSM850)	18
7.6 Equivalent Isotropic Radiated Power (E.I.R.P.) (GSM1900)	19
7.7 Radiated Spurious Emissions.....	21
7.7.1 Radiated Spurious Emissions (GSM850 Mode)	21
7.7.2 Radiated Spurious Emissions (GSM1900 Mode)	22
7.8 Frequency stability / variation of ambient temperature	24
7.8.1 FREQUENCY STABILITY (GSM850)	24
7.8.2 FREQUENCY STABILITY (GSM1900)	25
8. TEST PLOTS.....	27



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics, Inc.

Address: 60-39, Gasan-dong, Gumchon-gu, Seoul, 153-023, Korea

FCC ID: BEJGX500

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §22, §24, §2

EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN

Model(s): GX500

Battery Model Name: LGIP-400N(Standard)

Power Rating: 3.7 V, 1500 mAh, 5.6 Wh

Type: Lithium-Ion Polymer Battery

Tx Frequency: 824.20 – 848.80 MHz (GSM850)
1 850.20 – 1 909.80 MHz (GSM1900)

Rx Frequency: 869.20 – 893.80 MHz (GSM850)
1 930.20 – 1 989.80 MHz (GSM1900)

Sim1 Max. RF Output Power: 0.550 W ERP GSM850 (27.40 dBm) / 0.891 W EIRP GSM1900 (29.50 dBm)
0.282 W ERP GSM850 EDGE (24.50 dBm)
0.800 W EIRP GSM1900 EDGE (29.03 dBm)

Sim2 Max. RF Output Power: 0.568 W EIRP GSM1900 (27.54 dBm)
0.418 W EIRP GSM1900 EDGE (26.21 dBm)

Sim1 Emission Designator(s): 245KGXW (GSM850), 247KGXW (GSM1900)
246KG7W (GSM850 EDGE), 247KG7W(GSM1900 EDGE)

Sim2 Emission Designator(s): 245KGXW (GSM850), 247KGXW (GSM1900)
246KG7W (GSM850 EDGE), 247KG7W(GSM1900 EDGE)

Antenna Specification Manufacturer: E.M.W. ANTENNA Co., Ltd.
Antenna type: Internal Antenna
Peak Gain: 1.871 dBi (Sim1), -0.642 dBi (Sim2)

Date(s) of Tests: February 17, 2010 ~ February 26, 2010

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 3 of 56



2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics, Inc. GX500 Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN consists of GSM850, GSM1900, GPRS Class12 and GPRS mode Class B(GPRS and GSM, but not simultaneously) and EDGE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009(Registration Number: 90661)

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 4 of 56

3. DESCRIPTION OF TESTS

3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power

Test Set-up

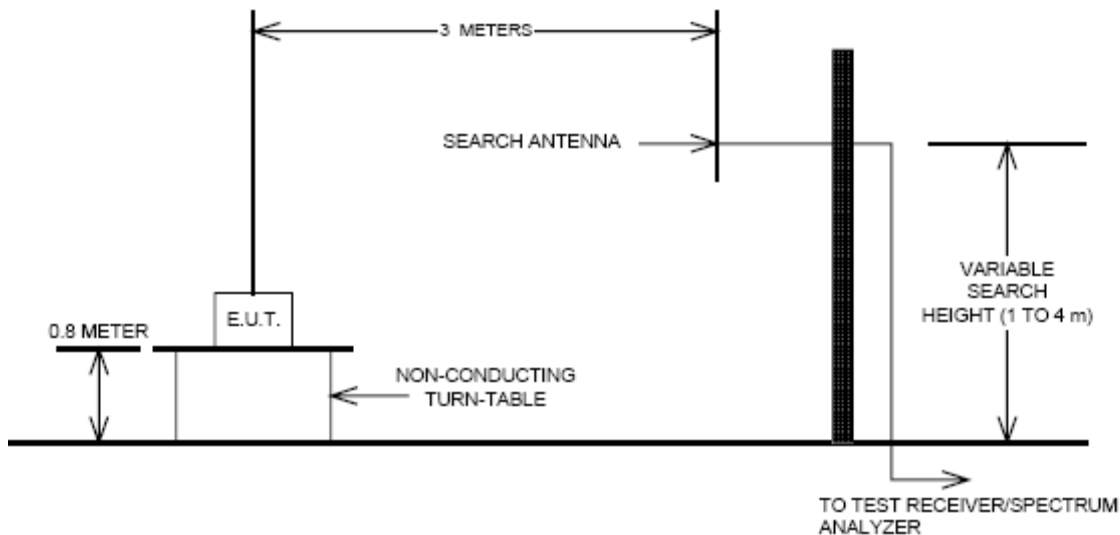

Test Procedure

Radiated emission measurements were performed at an open Site.

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



3.2 Peak- to- Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 6 of 56



3.3 Occupied bandwidth.

Test set-up



(Configuration of conducted Emission measurement)
Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 7 of 56



3.4 Spurious and Harmonic Emissions at Antenna Terminal.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 30 MHz to 10 GHz. (GSM1900 Mode: 30 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 8 of 56

3.5 Radiated Spurious and Harmonic Emissions

Test Set-up



The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The open field test site is situated in open field with ground screen whose site attenuation characteristics meet ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable wooden platform mounted at three from the antenna mast.

- 1) The unit mounted on a wooden table 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10th harmonic of the fundamental frequency.

Test Procedure

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

3.6 Frequency stability / variation of ambient temperature

Test Set-up



* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.



4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
R&S	ESI40/ Spectrum Analyzer	831564/003	Annual	10/30/2010
Agilent	E4416A/ Power Meter	GB41291412	Annual	01/14/2011
Agilent	E9327A/ Power Sensor	MY4442009	Annual	07/28/2010
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/10/2011
MITEQ	AMF-60-0010 1800-35-20P / AMP	1200937	Annual	05/20/2010
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	06/29/2010
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	06/29/2010
Agilent	775D/ Dual Directional Coupler	12922	Annual	12/24/2010
Agilent	11636B/ Power Divider	11377	Annual	12/24/2010
Digital	EP-3010/ Power Supply	3110117	Annual	01/08/2011
Schwarzbeck	UHAP/ Dipole Antenna	585	Biennial	02/13/2011
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	02/13/2011
Korea Engineering	KR-1005L / Chamber	KRAB07063-2CH	Annual	12/28/2010
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	03/26/2010
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	12/23/2010



5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10 \log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
2.1046	Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS
	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10 \log_{10} (P[\text{Watts}])$ for all out-of band emissions		PASS



6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)	Level(dBm)	LEVEL(dBm)				W	dBm
GSM850	251	848.80	-7.58	28.59	2.83	1.20	H	1.05	30.22

$$\text{ERP} = \text{SubstituteLEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered


W = Combination (Audio/Data)

7. TEST DATA

7.1 Conducted Output Power

A base station simulator was used to establish communication with the EUT.

The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

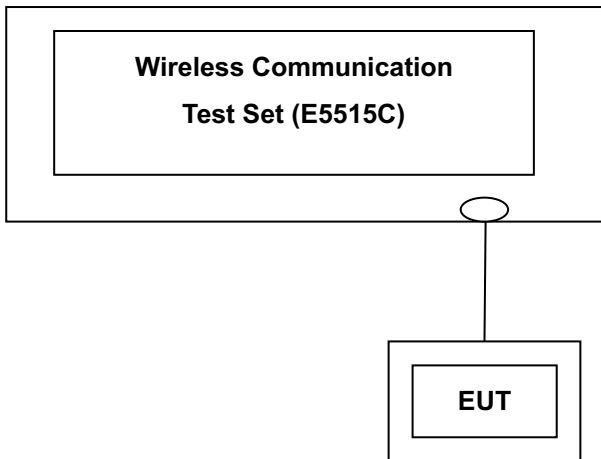

Sim1

Band	Channel	Voice	GPRS Data				EDGE Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)	EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 850	128	32.63	32.64	32.62	30.80	28.80	26.43	26.85	27.29	27.74
	190	32.62	32.62	32.60	30.79	28.79	26.65	26.97	27.50	27.89
	251	32.60	32.59	32.58	30.76	28.77	26.65	26.97	27.40	27.89
GSM 1900	512	29.77	29.74	29.72	29.67	27.62	25.75	25.92	26.38	27.04
	661	29.64	29.56	29.54	29.49	27.46	25.76	25.82	26.37	27.05
	810	29.90	29.84	29.82	29.76	27.73	25.69	25.91	26.65	27.02

(GSM Conducted Maximum Output Powers)

Sim2

Band	Channel	Voice	GPRS Data				EDGE Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)	EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 1900	512	30.12	30.01	29.99	29.93	28.05	25.99	25.89	25.71	25.49
	661	29.85	29.73	29.71	29.66	27.83	25.68	25.6	25.43	25.23
	810	29.91	29.80	29.78	29.72	27.91	25.46	25.38	25.22	25.01

(GSM Conducted Maximum Output Powers)

Note : Detecting mode is average.

7.2 Peak-to-Average Ratio

Sim1

- Plots of the EUT's Peak- to- Average Ratio are shown Page 32.

Sim2

- Plots of the EUT's Peak- to- Average Ratio are shown Page 49.

7.3 Occupied Bandwidth

Sim1

Band	Channel	Frequency(MHz)	Data (kHz)
GSM850	128	824.20	243.57
	190	836.60	246.59
	251	848.80	246.67
GSM850 EDGE	251	848.80	246.27
GSM1900	512	1850.20	246.08
	661	1880.00	246.64
	810	1909.80	244.74
GSM1900 EDGE	661	1880.00	246.37

- Plots of the EUT's Occupied Bandwidth are shown Page 28 ~ 31.

Sim2

Band	Channel	Frequency(MHz)	Data (kHz)
GSM1900	512	1850.20	243.83
	661	1880.00	242.07
	810	1909.80	246.60
GSM1900 EDGE	810	1909.80	239.73

- Plots of the EUT's Occupied Bandwidth are shown Page 47 ~ 48.

7.4 Conducted Spurious Emissions

Sim1

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	7.8125	-30.20
	190	6.9500	-30.47
	251	6.6750	-30.90
GSM1900	512	14.2400	-27.65
	661	14.3470	-27.21
	810	14.2130	-27.63

- Plots of the EUT's Conducted Spurious Emissions are shown Page 41~ 46.

Sim2

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM1900	512	13.3070	-27.34
	661	14.4000	-27.58
	810	14.2930	-27.71

- Plots of the EUT's Conducted Spurious Emissions are shown Page 54~ 56.



7.4.1 Band Edge

Sim1

- Plots of the EUT's Band Edge are shown Page 33 ~ 40.

Sim2

- Plots of the EUT's Band Edge are shown Page 50 ~ 53.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 17 of 56



7.5 Effective Radiated Power Output (E.R.P)(GSM850)

Sim1 (GSM850 Mode)

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-11.25	34.59	-8.32	1.17	V	0.32	25.10
	190	836.60	-10.50	35.99	-8.22	1.19	V	0.45	26.58
	251	848.80	-10.40	36.72	-8.12	1.20	V	0.55	27.40
GSM850(EDGE)	251	848.80	-13.30	33.82	-8.12	1.20	V	0.28	24.50

Note: Standard batteries are the only options for this phone

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in y plane in GSM850 mode. Also worst case of detecting Antenna is in vertical polarization in GSM850 mode.

Note : The EDGE mode testing were performed using 4Tx because 4Tx is highest power in EDGE mode.



7.6 Equivalent Isotropic Radiated Power (E.I.R.P.) (GSM1900)

Sim1 (GSM1900 Mode)

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
GSM1900	512	1,850.20	-10.77	20.84	10.05	1.91	H	0.79	28.97
	661	1,880.00	-10.42	21.40	10.05	1.95	H	0.89	29.50
	810	1,909.80	-10.77	21.13	10.06	1.97	H	0.84	29.22
GSM1900(EDGE)	661	1,880.00	-10.89	20.93	10.05	1.95	H	0.80	29.03

Sim2 (GSM1900 Mode)

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
GSM1900	512	1,850.20	-12.20	19.41	10.05	1.91	H	0.57	27.54
	661	1,880.00	-13.15	18.67	10.05	1.95	H	0.48	26.77
	810	1,909.80	-12.50	19.40	10.06	1.97	H	0.56	27.49
GSM1900(EDGE)	810	1,909.80	-13.78	18.12	10.06	1.97	H	0.42	26.21

Note: Standard batteries are the only options for this phone

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 19 of 56



terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in x plane in GSM1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 mode.

The EDGE mode testing were performed using 4Tx (Sim1) and 1TX(Sim2) because 4Tx(Sim1) and 1TX(Sim2) is highest power in EDGE mode.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 20 of 56



7.7 Radiated Spurious Emissions

7.7.1 Radiated Spurious Emissions (GSM850 Mode)

Sim1

■ MEASURED OUTPUT POWER: 27.40 dBm = 0.550 W
■ MODULATION SIGNAL: GSM850
■ DISTANCE: 3 meters
■ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 40.40 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128	1,648.40	-37.57	8.57	-49.58	1.73	H	-42.74	-70.14
	2,472.60	-42.95	11.10	-53.04	2.28	H	-44.22	-71.62
	3,296.80	-47.74	11.65	-57.25	2.57	V	-48.17	-75.57
	4,121.00	-49.27	12.65	-57.27	2.95	V	-47.57	-74.97
190	1,673.20	-38.68	8.57	-50.78	1.79	H	-44.00	-71.40
	2,509.80	-45.69	11.15	-55.83	2.33	H	-47.01	-74.41
	3,346.40	-48.44	11.77	-58.25	2.66	V	-49.14	-76.54
	4,183.00	-50.57	12.65	-58.30	2.92	H	-48.57	-75.97
251	1,697.60	-39.02	8.57	-50.79	1.83	H	-44.05	-71.45
	2,546.40	-45.14	11.15	-55.36	2.34	H	-46.55	-73.95
	3,395.20	-49.78	11.77	-59.27	2.85	V	-50.35	-77.75
	4,244.00	-51.46	12.69	-58.65	3.10	H	-49.06	-76.46

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



7.7.2 Radiated Spurious Emissions (GSM1900 Mode)

Sim1

☒ MEASURED OUTPUT POWER: 29.50 dBm = 0.891 W
☒ MODULATION SIGNAL: GSM1900
☒ DISTANCE: 3 meters
☒ LIMIT: - (43 + 10 log₁₀ (W)) = -42.50 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512	3,700.40	-45.94	12.25	-52.00	2.73	H	-42.48	-71.98
	5,550.60	-50.72	12.59	-52.19	3.60	V	-43.20	-72.70
	7,400.80	-	-	-	-	-	-	-
661	3,760.00	-46.01	12.25	-51.76	2.73	V	-42.24	-71.74
	5,640.00	-51.40	12.51	-52.81	3.60	V	-43.90	-73.40
	7,520.00	-	-	-	-	-	-	-
810	3,819.60	-46.60	12.37	-52.36	2.73	H	-42.72	-72.22
	5,729.40	-54.36	12.43	-55.30	3.60	H	-46.47	-75.97
	7,639.20	-	-	-	-	-	-	-



Sim2

☐ MEASURED OUTPUT POWER: 27.54 dBm = 0.568 W
☐ MODULATION SIGNAL: GSM1900
☐ DISTANCE: 3 meters
☐ LIMIT: - (43 + 10 log₁₀ (W)) = -40.54 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512	3,700.40	-32.25	12.25	-38.31	2.73	H	-28.79	-56.33
	5,550.60	-55.38	12.59	-56.85	3.60	H	-47.86	-75.40
	7,400.80	-	-	-	-	-	-	-
661	3,760.00	-33.50	12.25	-39.25	2.73	H	-29.73	-57.27
	5,640.00	-	-	-	-	-	-	-
	7,520.00	-	-	-	-	-	-	-
810	3,819.60	-33.00	12.37	-38.76	2.73	H	-29.12	-56.66
	5,729.40	-51.66	12.43	-52.60	3.60	V	-43.77	-71.31
	7,639.20	-	-	-	-	-	-	-

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.




7.8 Frequency stability / variation of ambient temperature

7.8.1 FREQUENCY STABILITY (GSM850)

Sim1

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 190
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700 4.255	+20(Ref)	1879 999 944	0	0.000 000	0.000
100%		-30	1879 999 945	-55.02	-0.000 003	-0.029
100%		-20	1879 999 955	-44.56	-0.000 002	-0.024
100%		-10	1879 999 970	-29.8	-0.000 002	-0.016
100%		0	1879 999 956	-43.55	-0.000 002	-0.023
100%		+10	1879 999 970	-29.91	-0.000 002	-0.016
100%		+30	1879 999 950	-50.43	-0.000 003	-0.027
100%		+40	1879 999 933	-66.81	-0.000 004	-0.036
100%		+50	1879 999 984	-15.89	-0.000 001	-0.008
115%		+20	1879 999 947	-53.01	-0.000 003	-0.028
Batt. Endpoint	3.400	+20	1879 999 958	-42.21	-0.000 002	-0.022

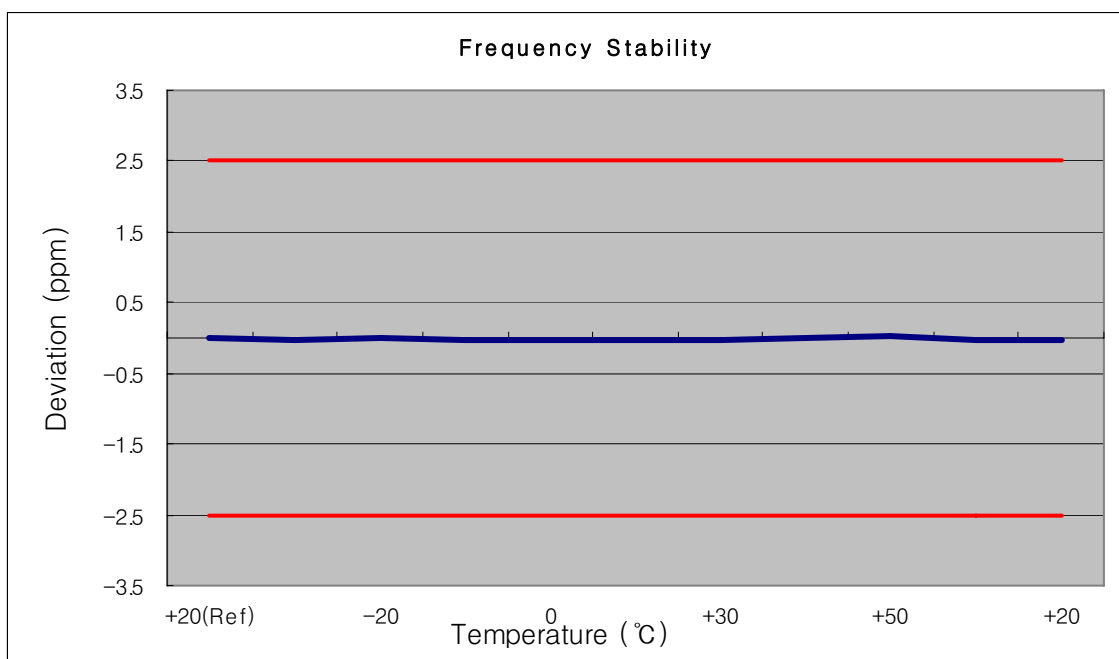




7.8.2 FREQUENCY STABILITY (GSM1900)

Sim1

OPERATING FREQUENCY: 1880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700 4.255	+20(Ref)	1879 999 958	0	0.000 000	0.000
100%		-30	1879 999 954	-45.98	-0.000 002	-0.024
100%		-20	1879 999 959	-41.09	-0.000 002	-0.022
100%		-10	1879 999 962	-38.32	-0.000 002	-0.020
100%		0	1879 999 949	-50.61	-0.000 003	-0.027
100%		+10	1879 999 977	-22.56	-0.000 001	-0.012
100%		+30	1879 999 944	-55.9	-0.000 003	-0.030
100%		+40	1879 999 966	-33.87	-0.000 002	-0.018
100%		+50	1879 999 974	-25.68	-0.000 001	-0.014
115%		+20	1879 999 959	-40.71	-0.000 002	-0.022
Batt. Endpoint	3.400	+20	1879 999 960	-39.8	-0.000 002	-0.021

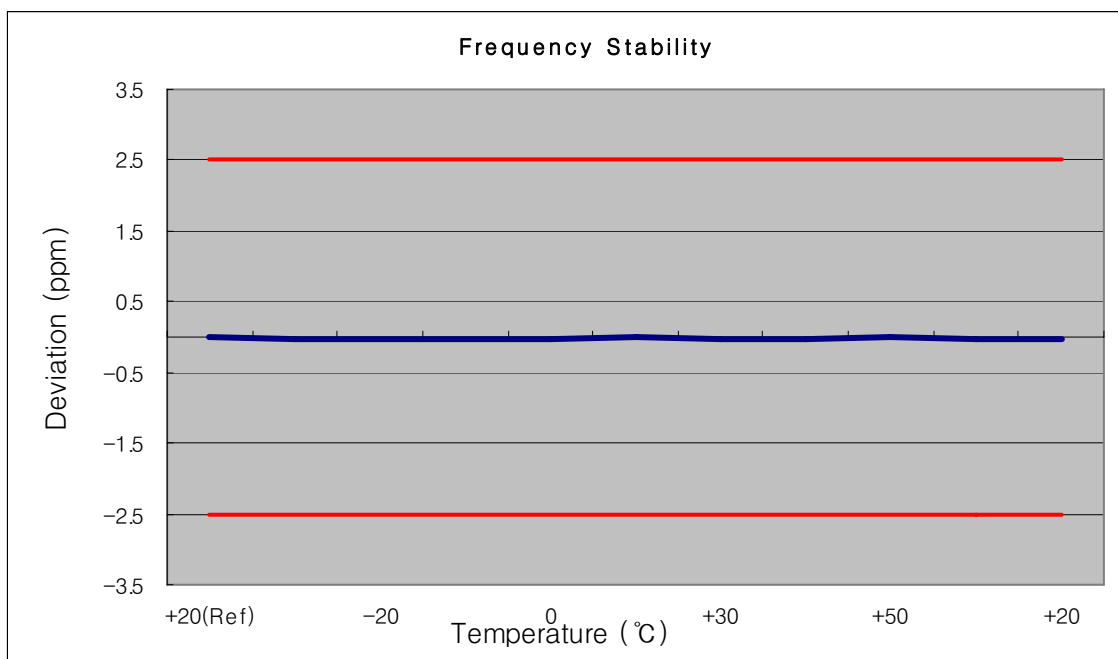




Sim2

OPERATING FREQUENCY: 1880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700 4.255	+20(Ref)	1879 999 944	0	0.000 000	0.000
100%		-30	1879 999 945	-55.02	-0.000 003	-0.029
100%		-20	1879 999 955	-44.56	-0.000 002	-0.024
100%		-10	1879 999 970	-29.8	-0.000 002	-0.016
100%		0	1879 999 956	-43.55	-0.000 002	-0.023
100%		+10	1879 999 970	-29.91	-0.000 002	-0.016
100%		+30	1879 999 950	-50.43	-0.000 003	-0.027
100%		+40	1879 999 933	-66.81	-0.000 004	-0.036
100%		+50	1879 999 984	-15.89	-0.000 001	-0.008
115%		+20	1879 999 947	-53.01	-0.000 003	-0.028
Batt. Endpoint	3.400	+20	1879 999 958	-42.21	-0.000 002	-0.022

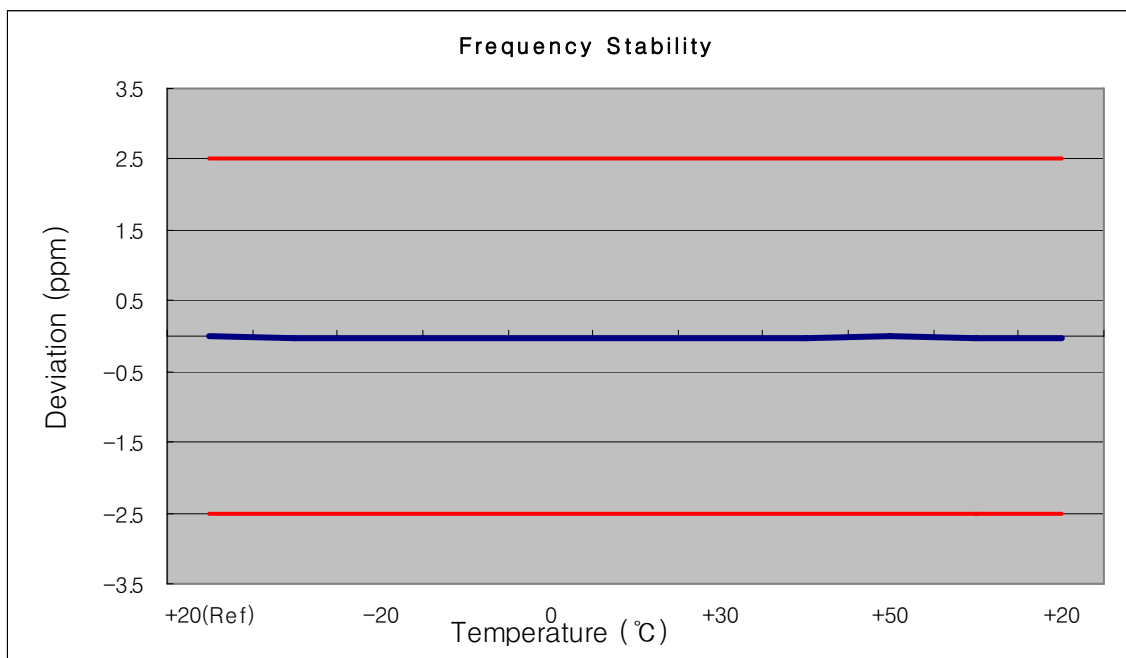




8. TEST PLOTS


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 27 of 56

Sim1


■ GSM850 MODE (128 CH.) Occupied Bandwidth

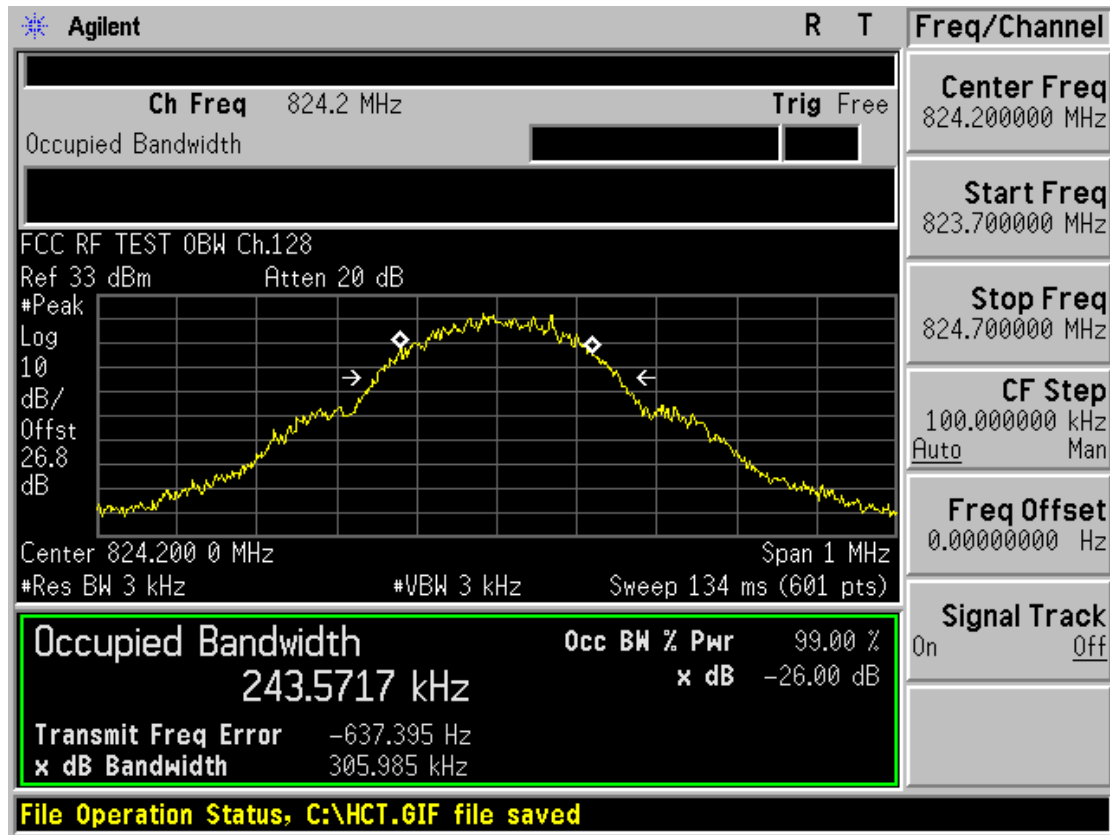


■ GSM850 MODE (190 CH.) Occupied Bandwidth

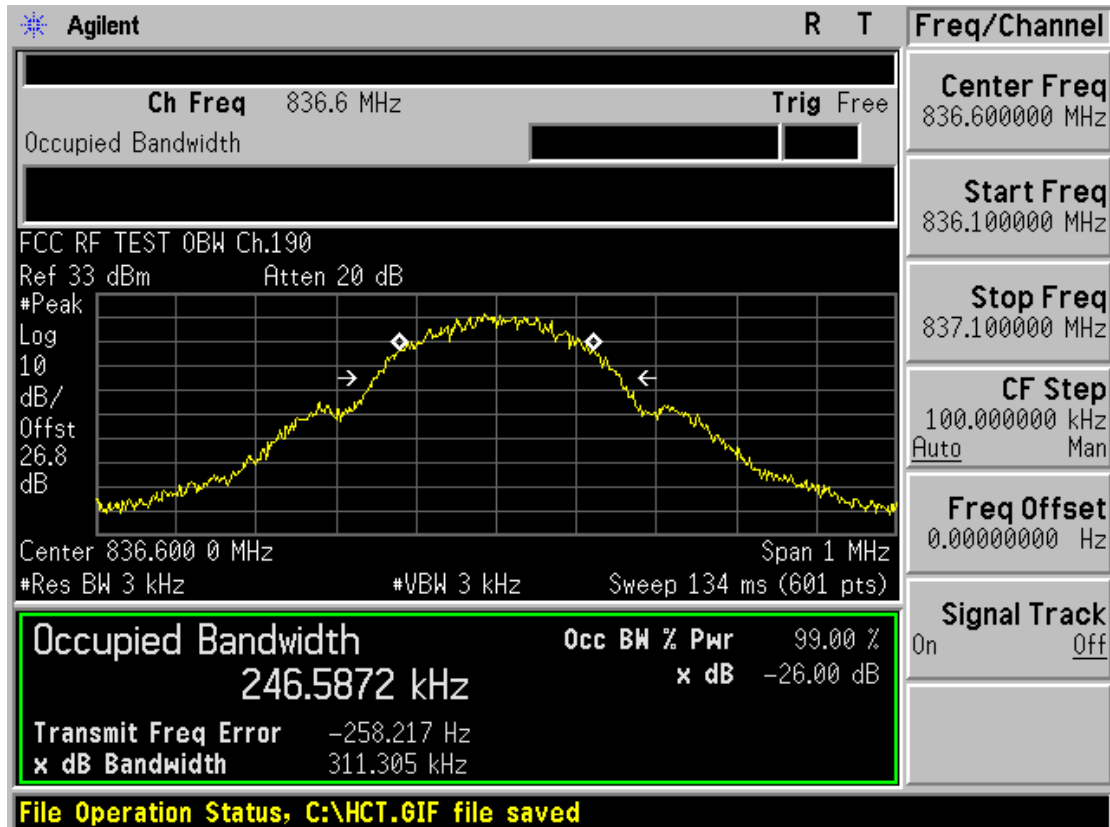

■ GSM850 MODE (251 CH.) Occupied Bandwidth

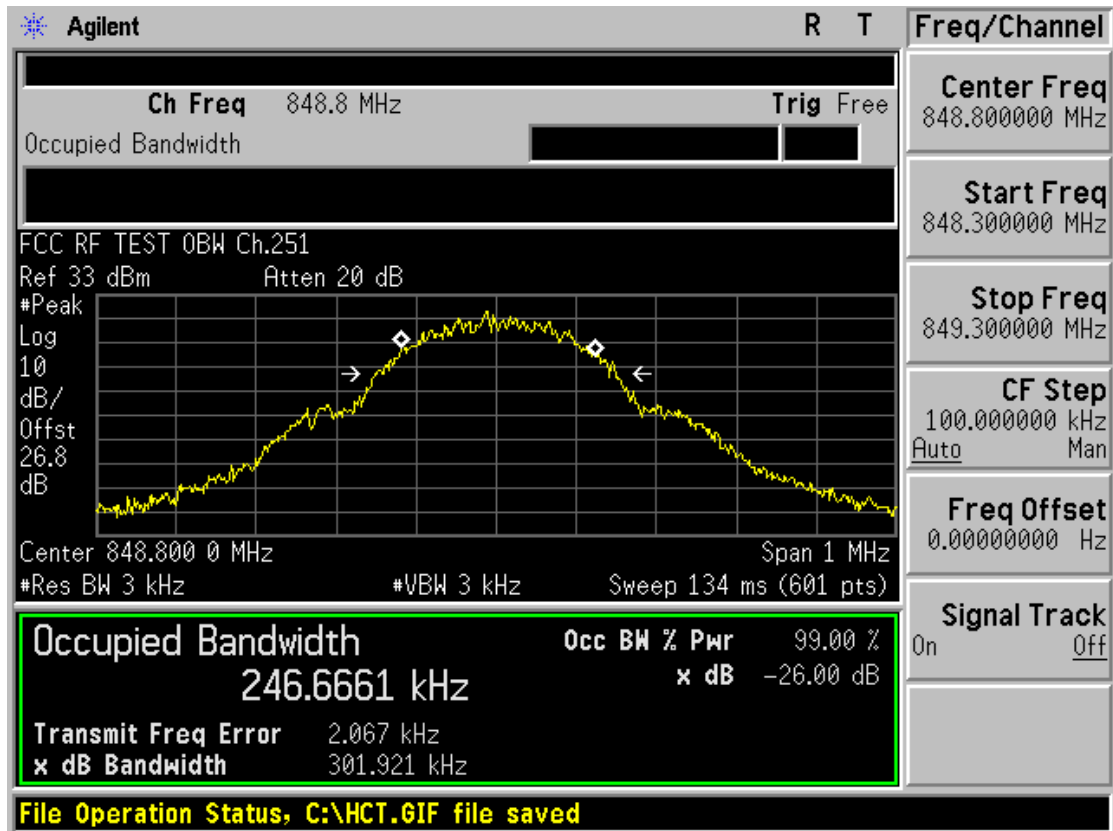

■ GSM850 EDGE MODE (251 CH.) Occupied Bandwidth

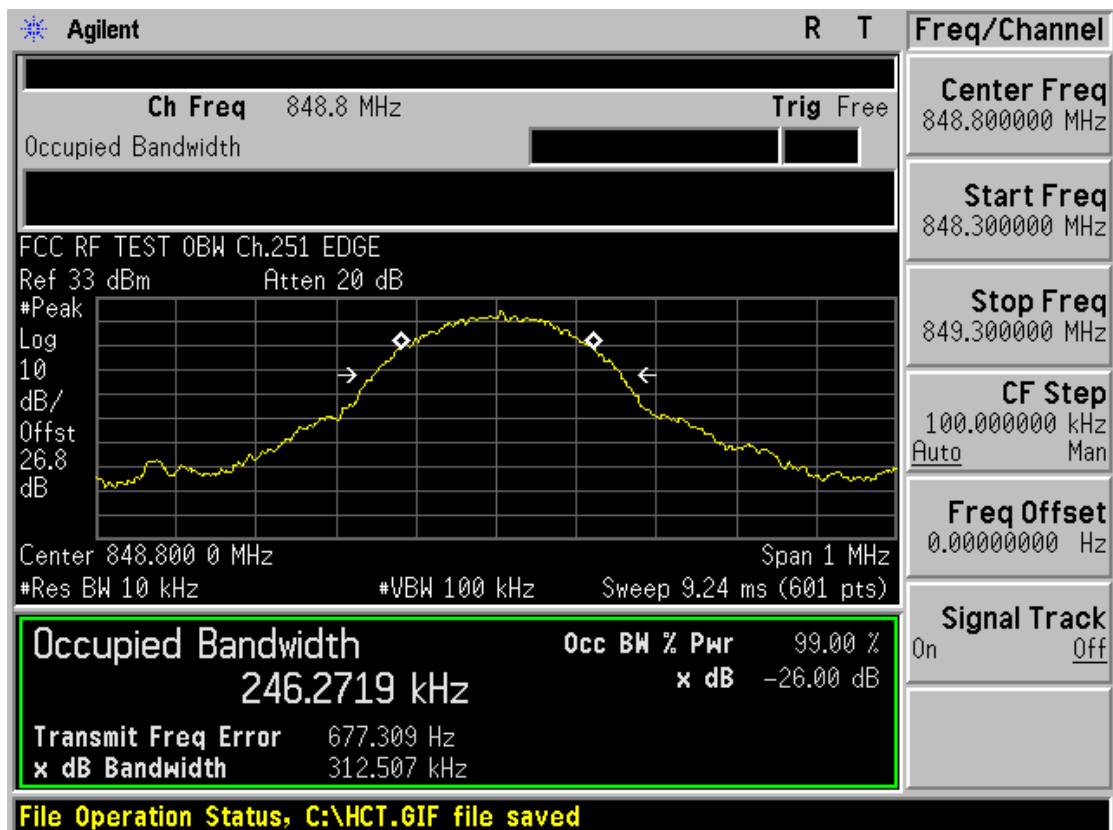


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 29 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

■ GSM1900 MODE (512 CH.) Occupied Bandwidth

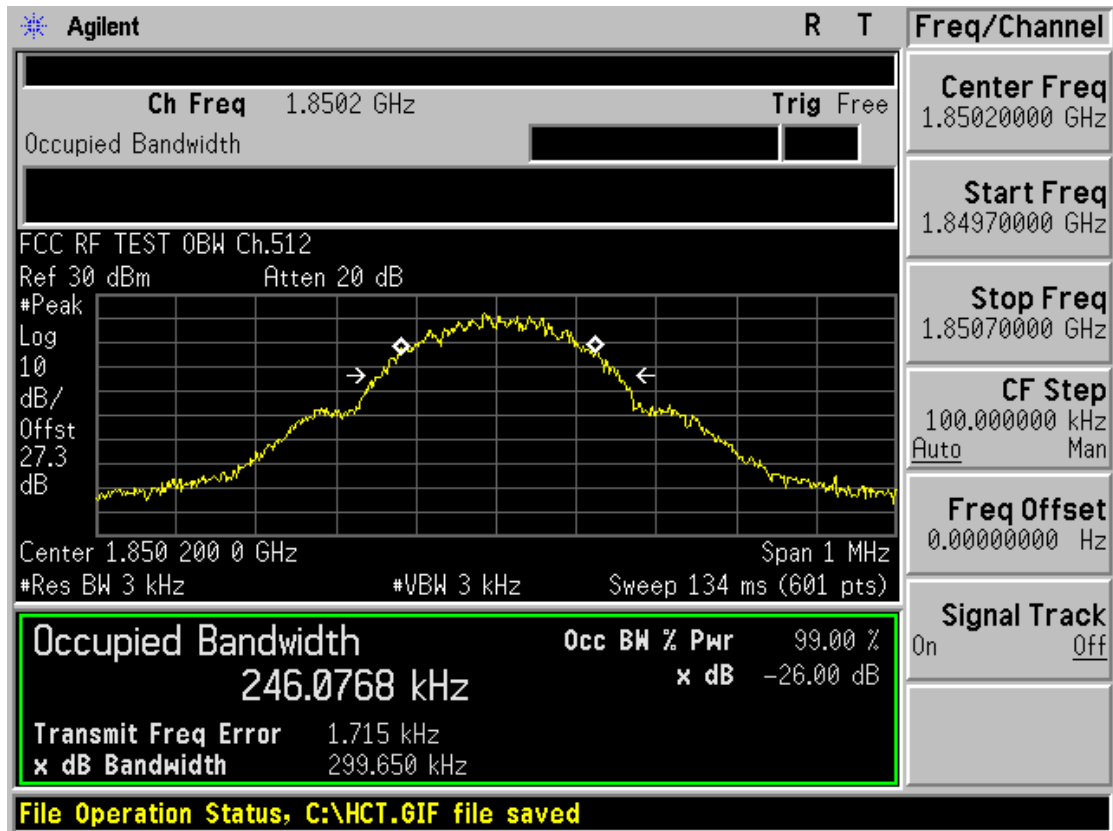

■ GSM1900 MODE (661 CH.) Occupied Bandwidth

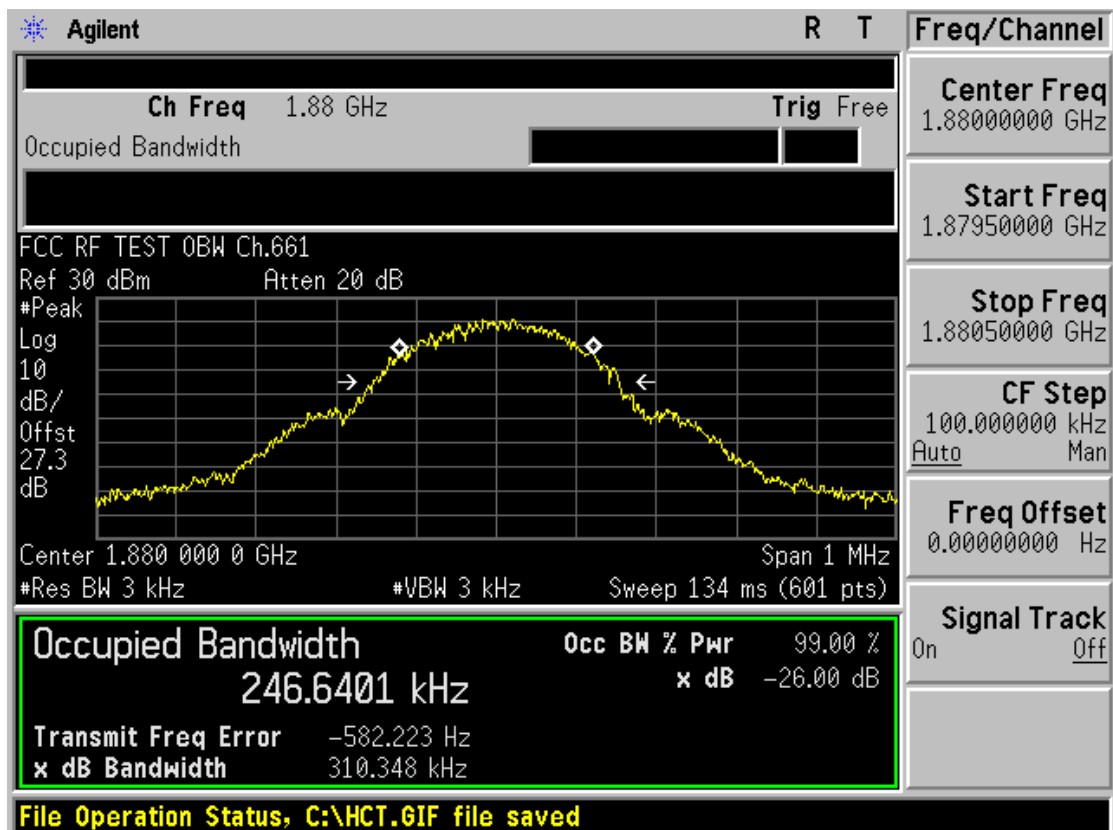


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 30 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

■ GSM1900 MODE (810 CH.) Occupied Bandwidth

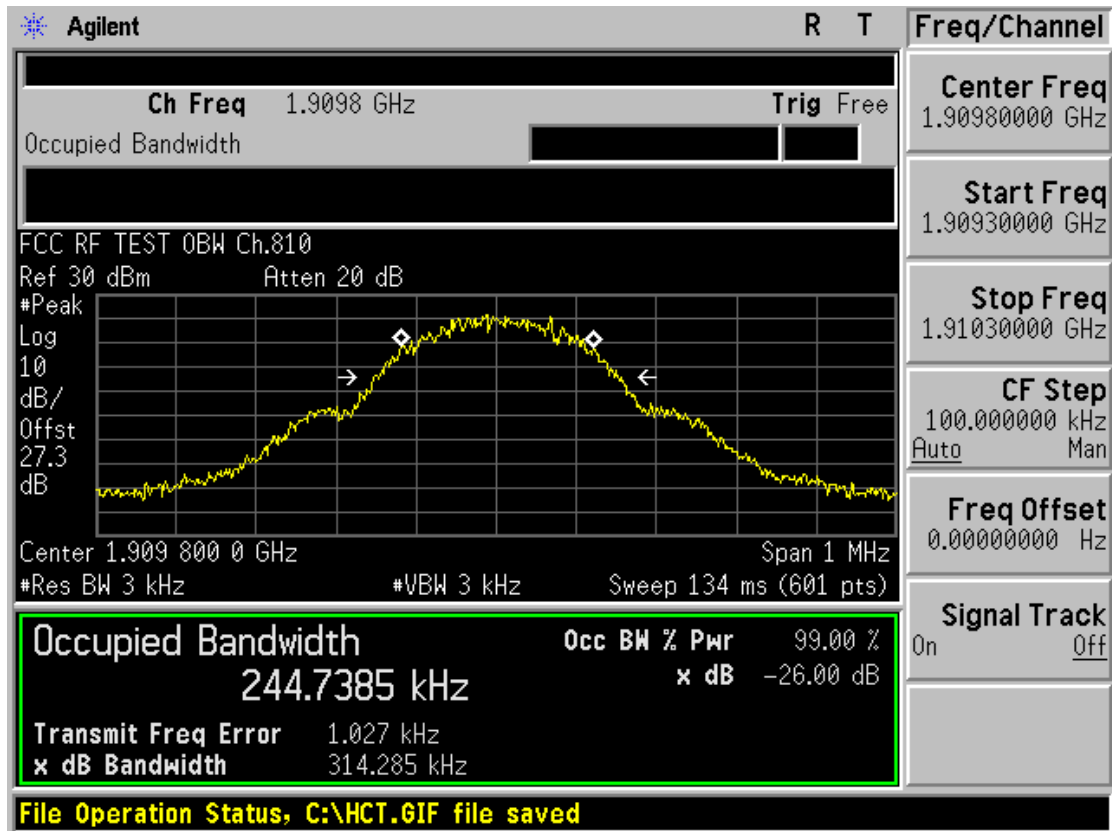

■ GSM1900 EDGE MODE (661 CH.) Occupied Bandwidth

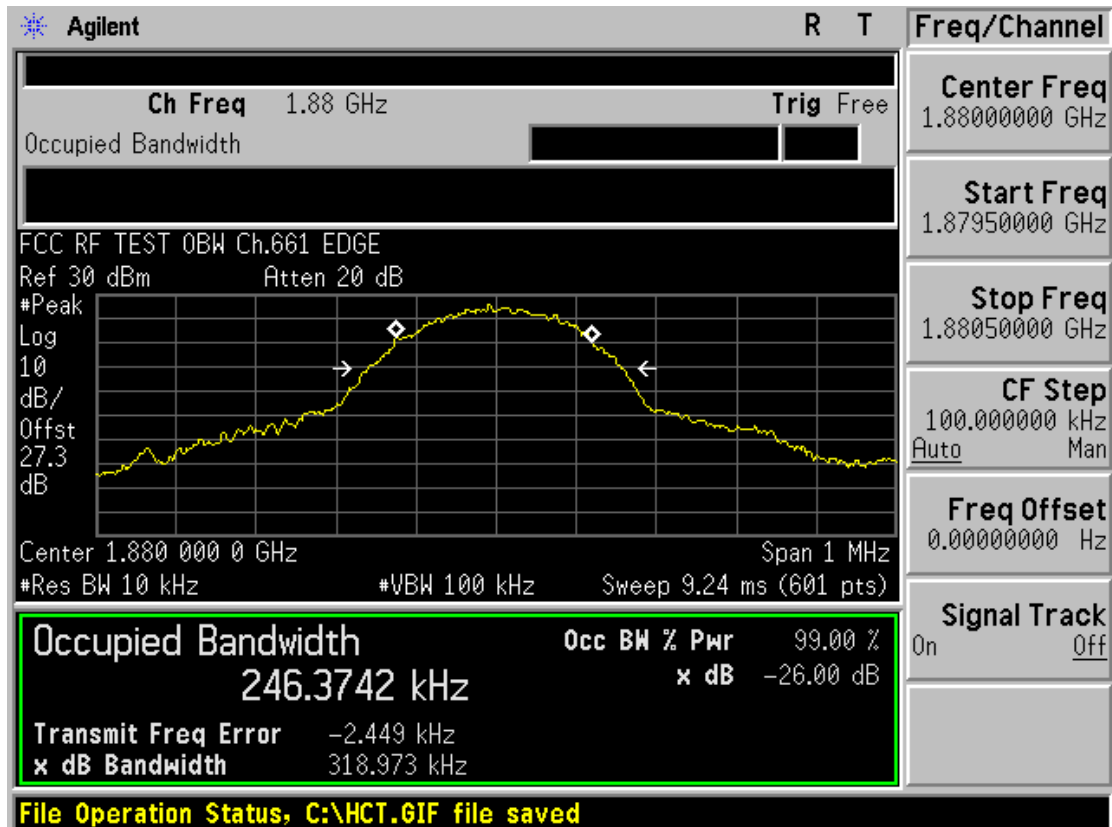


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 31 of 56
---------------------------------	----------------------------------	--	---------------------	---------------


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio

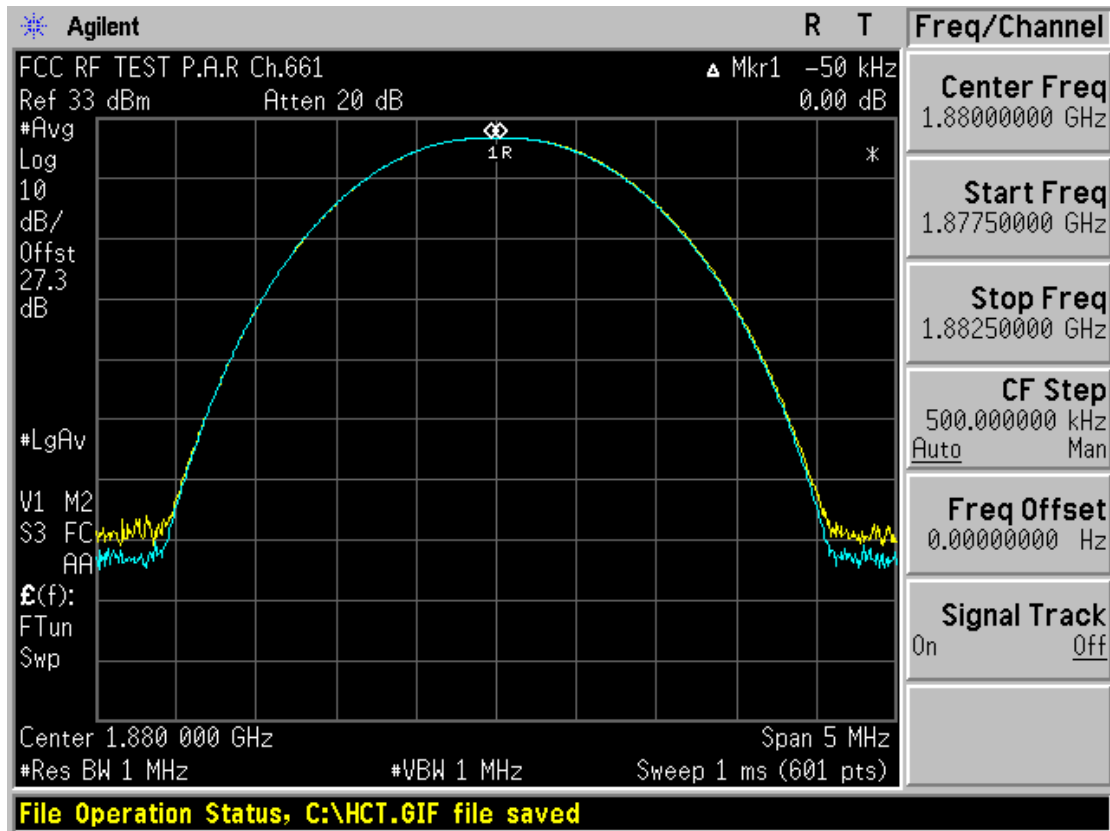


■ GSM1900 EDGE MODE (661 CH.) Peak-to-Average Ratio

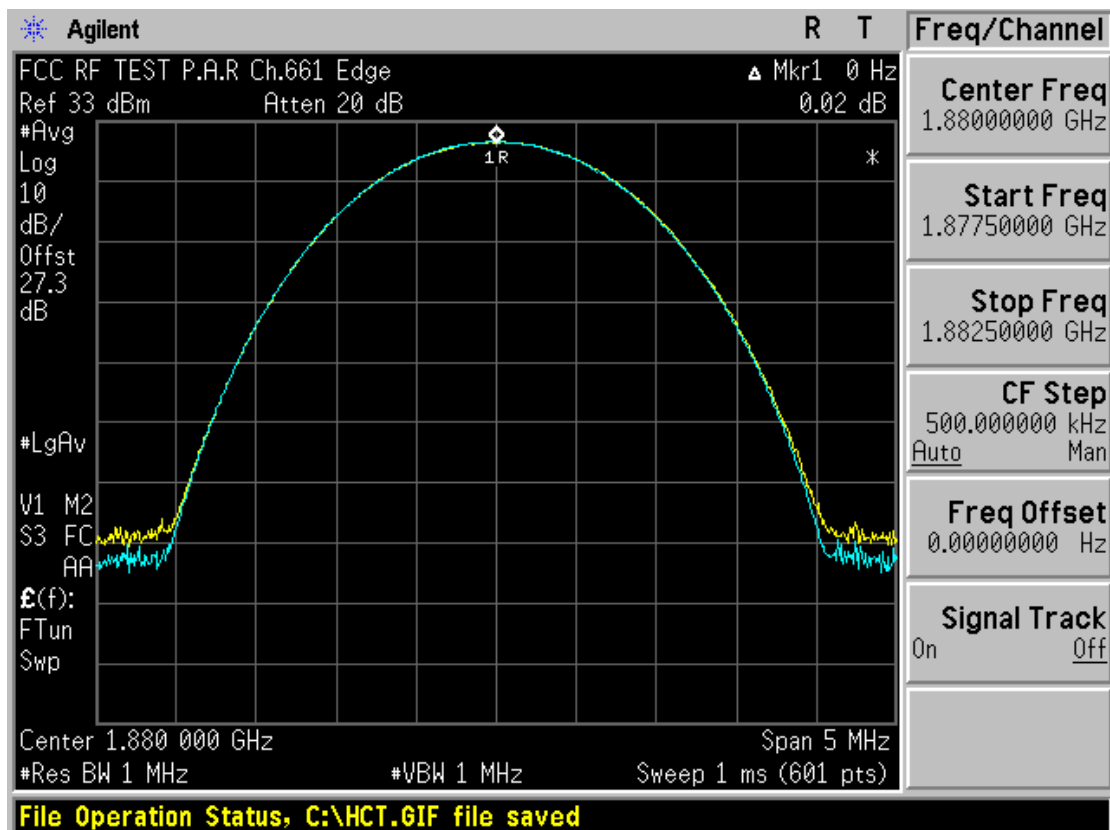


■ GSM850 MODE (128 CH.) Block Edge-1

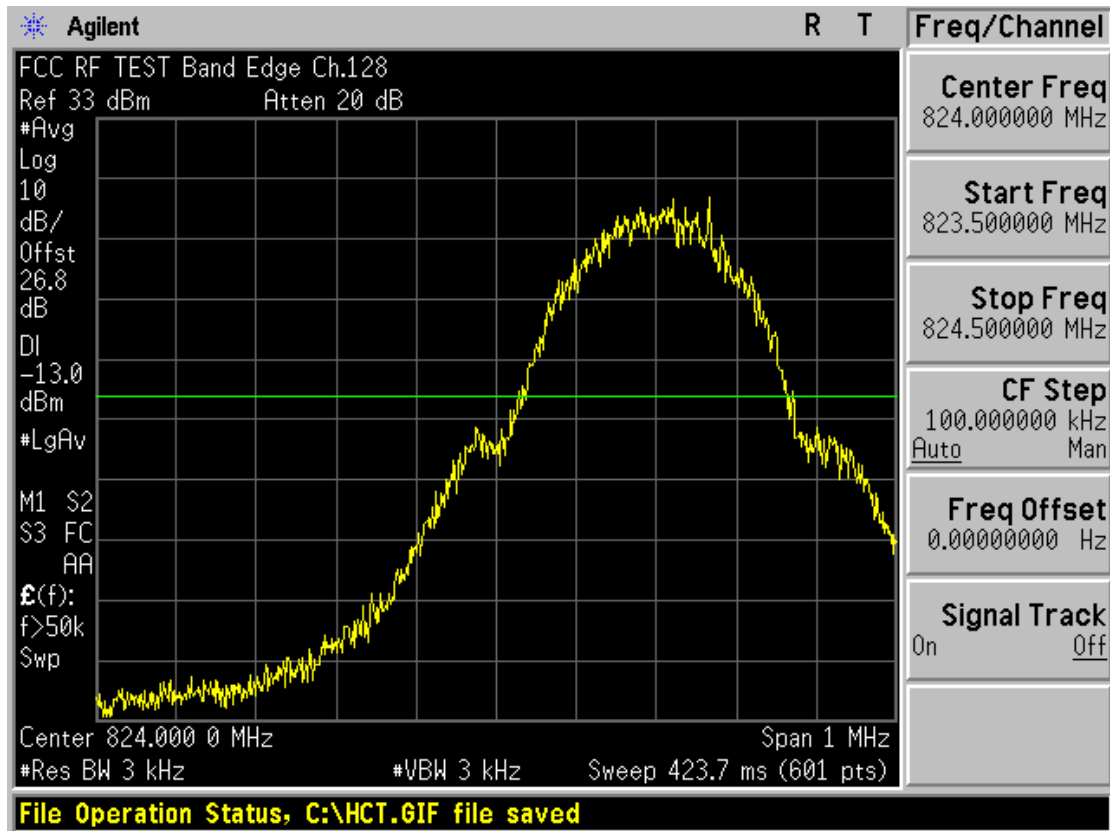


■ GSM850 MODE (128 CH.) Block Edge-2

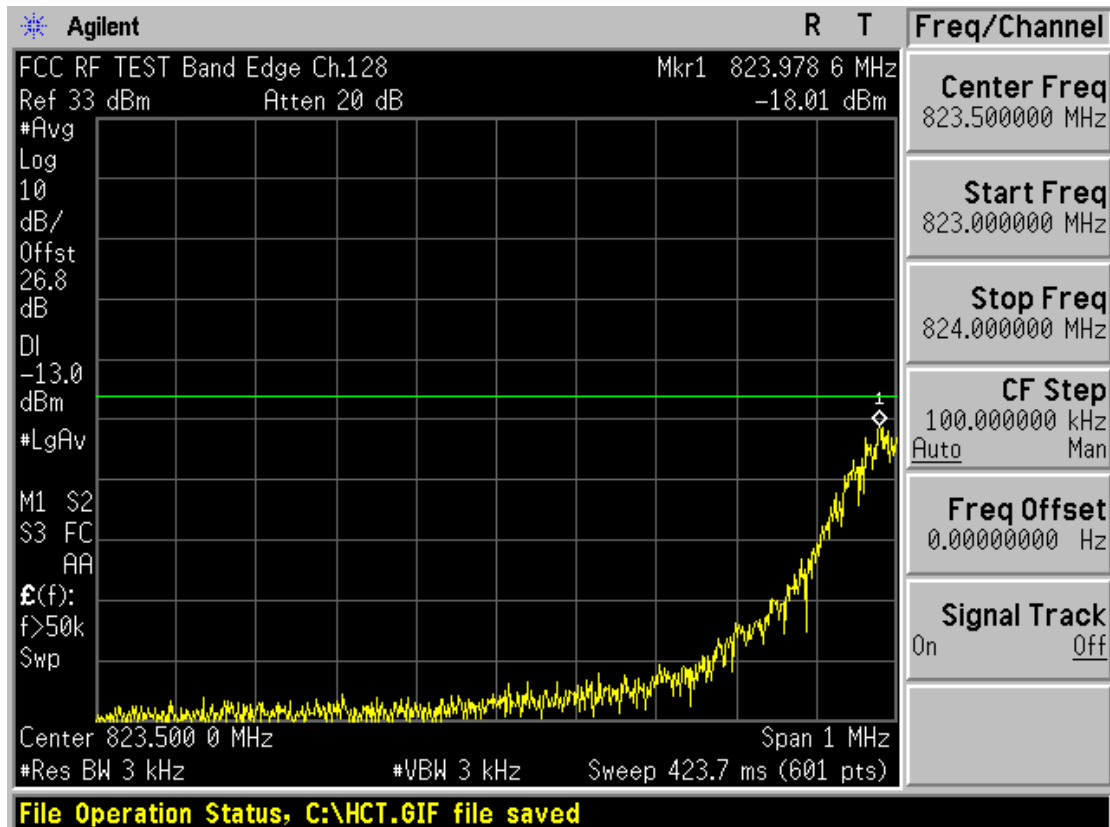


■ GSM850 MODE (251 CH.) Block Edge-1

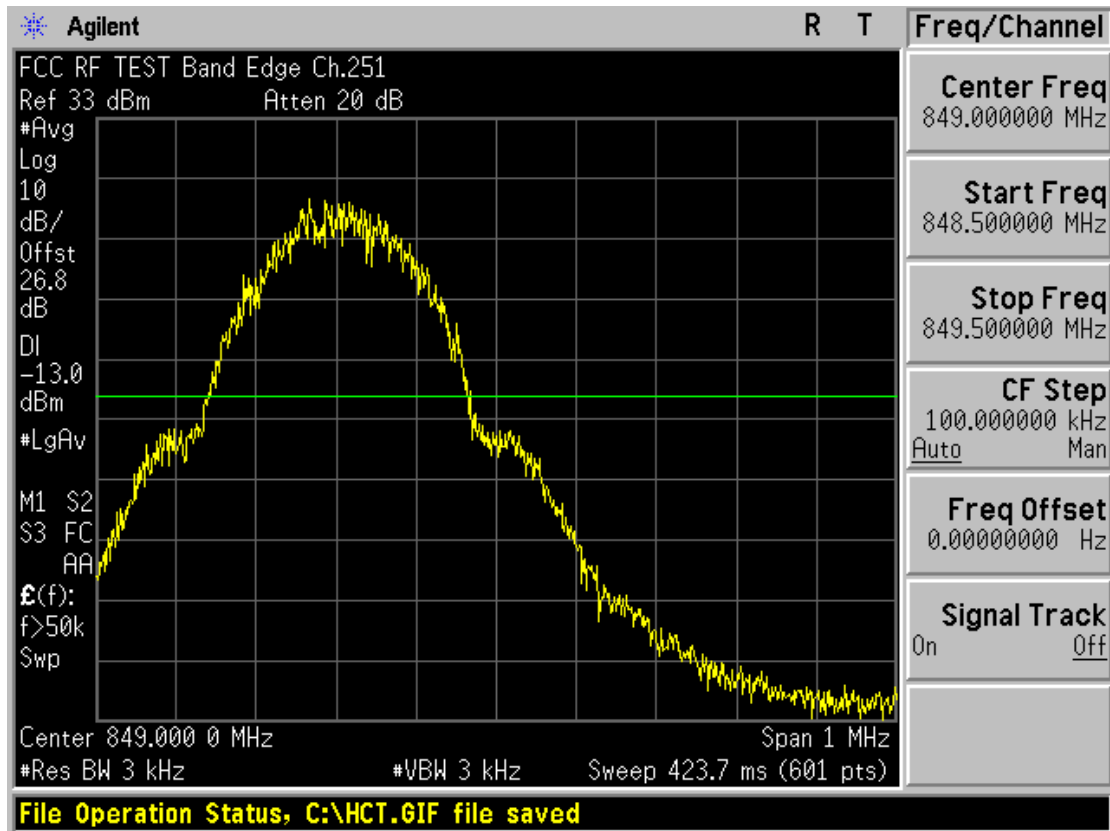

■ GSM850 MODE (251 CH.) Block Edge-2

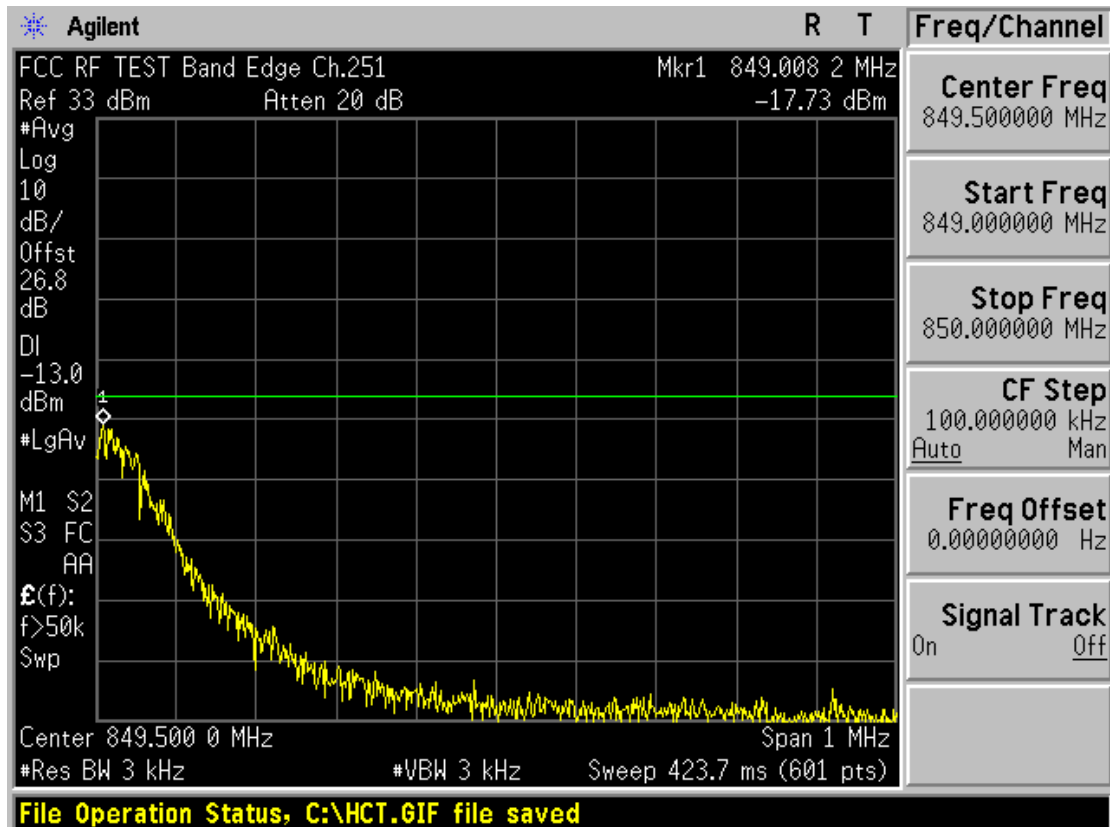


■ GSM850 EDGE MODE (128 CH.) Block Edge-1

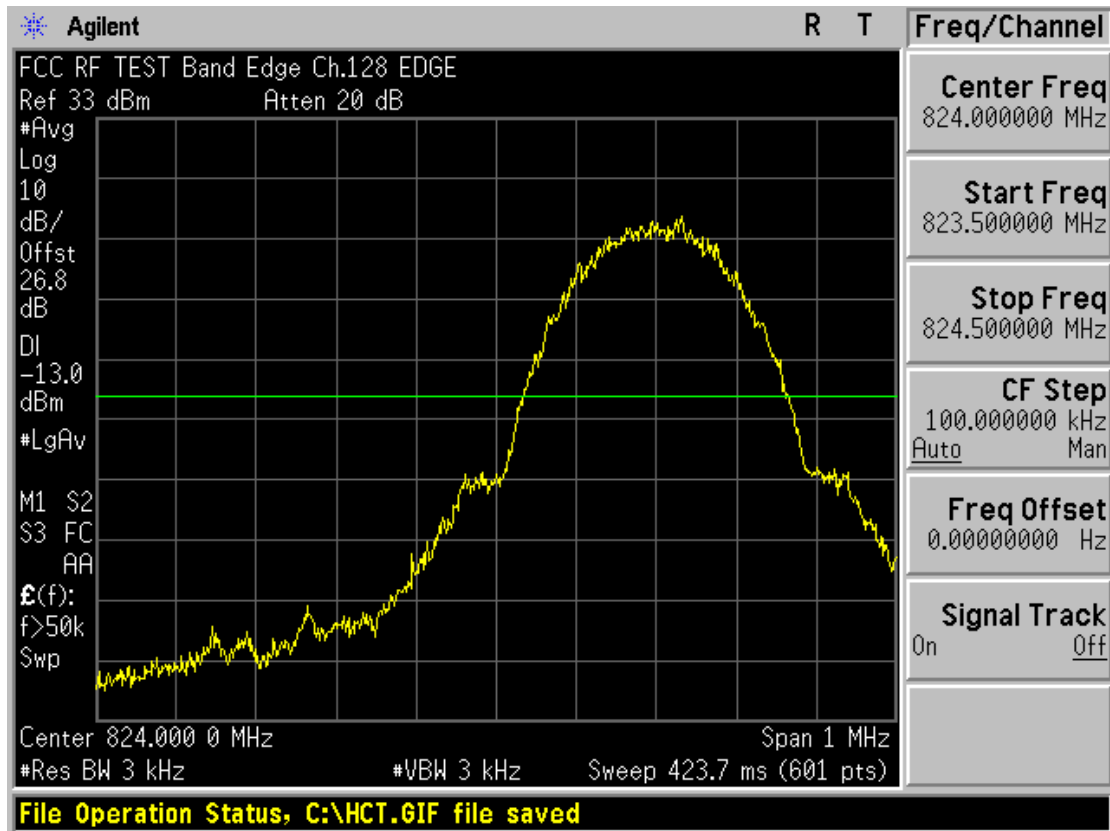


■ GSM850 EDGE MODE (128 CH.) Block Edge-2




■ GSM850 EDGE MODE (251 CH.) Block Edge-1

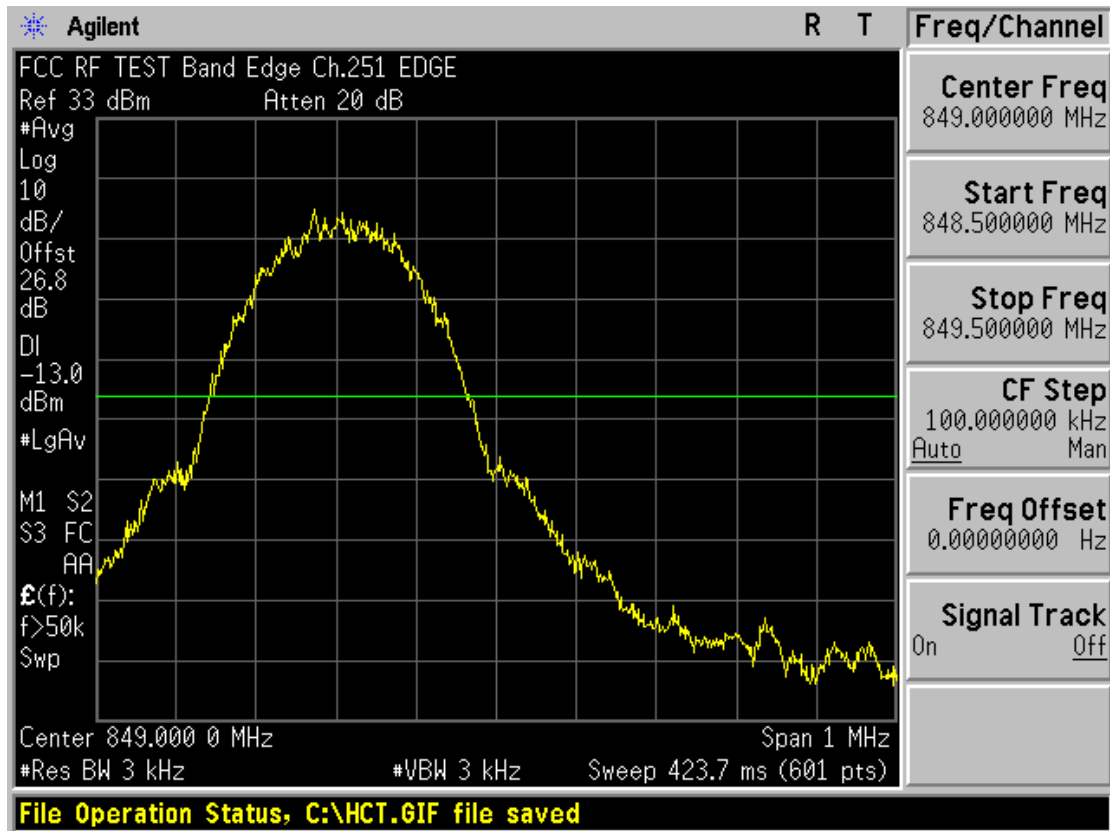


■ GSM850 EDGE MODE (251 CH.) Block Edge-2

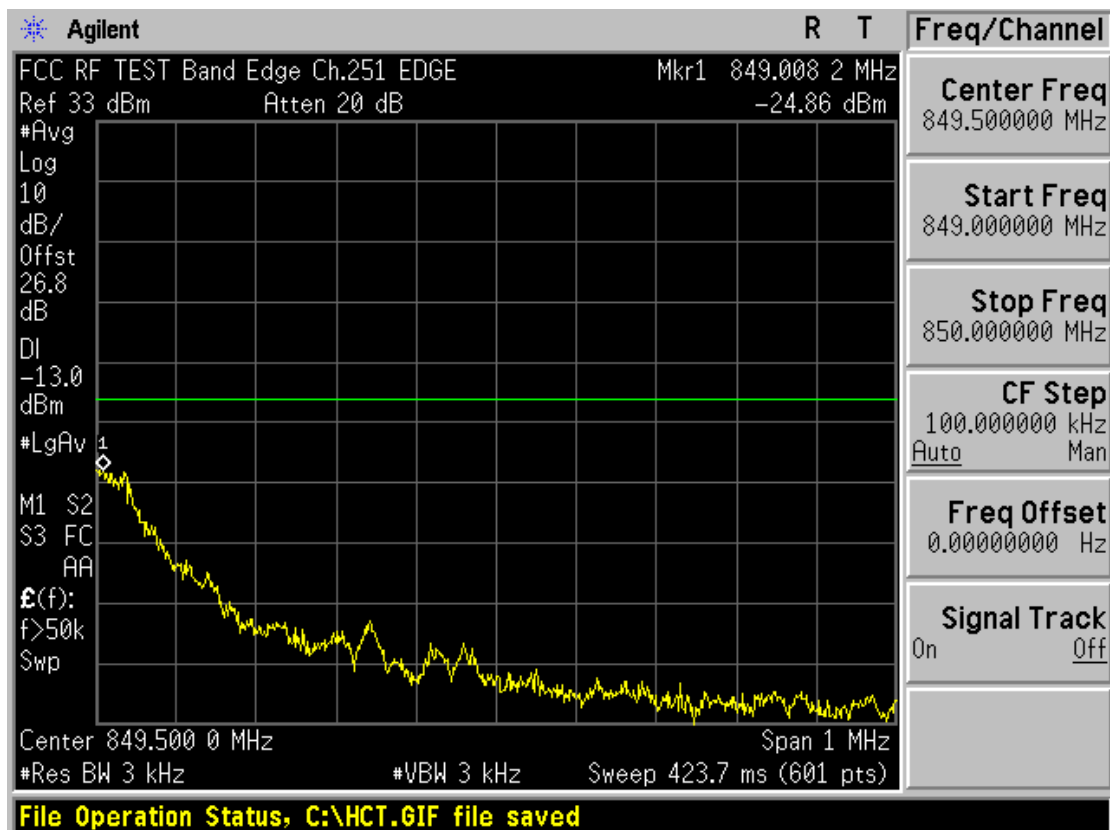


■ GSM1900 MODE (512 CH.) Block Edge-1

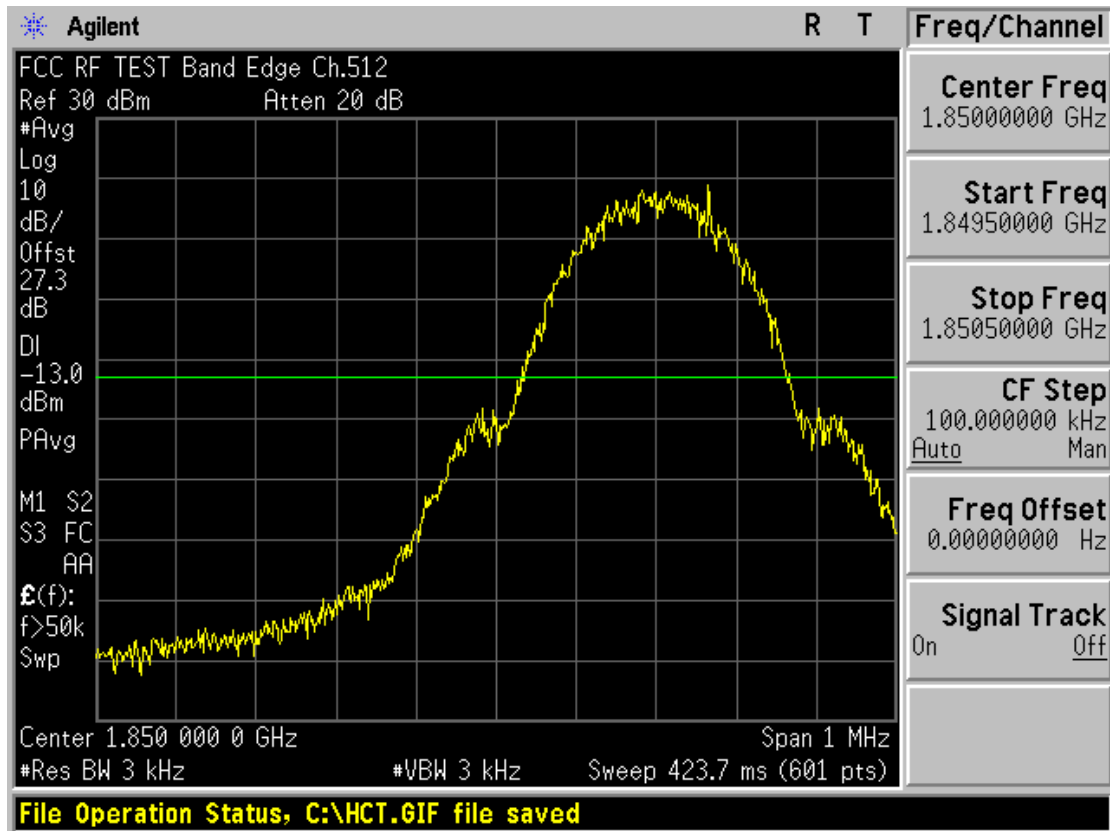


■ GSM1900 MODE (512 CH.) Block Edge-2

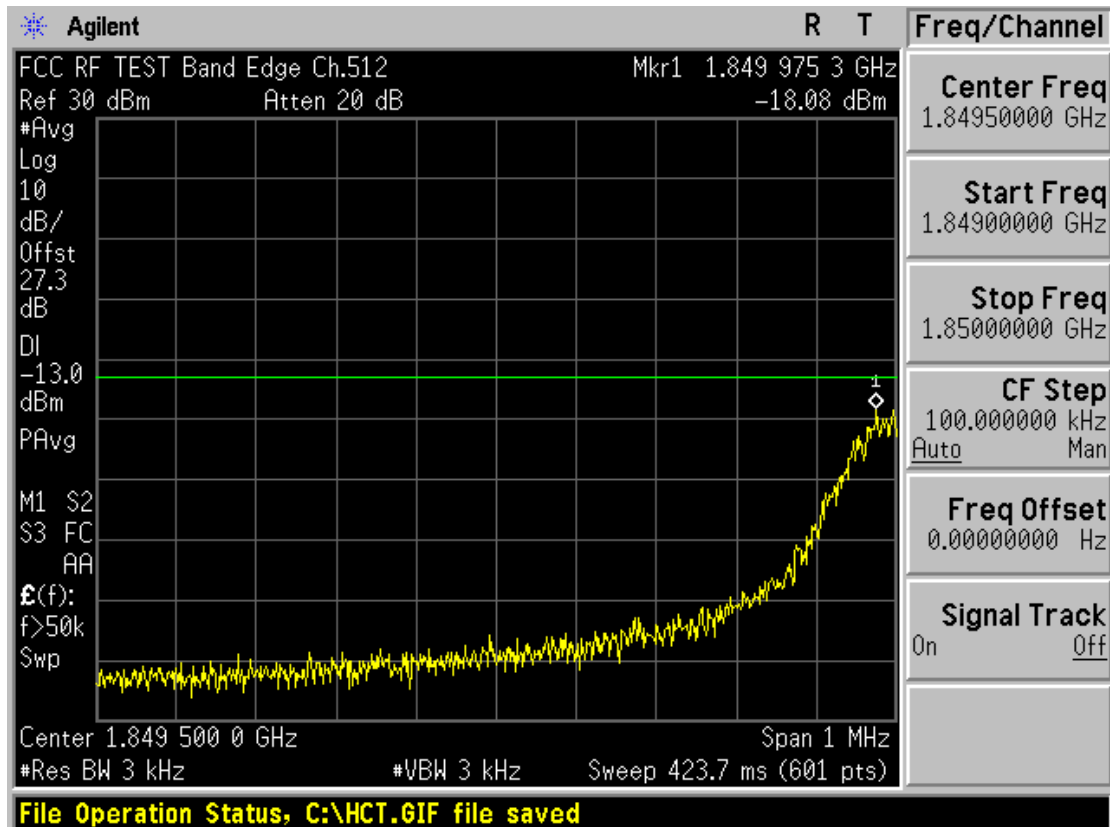


■ GSM1900 MODE (810 CH.) Block Edge-1

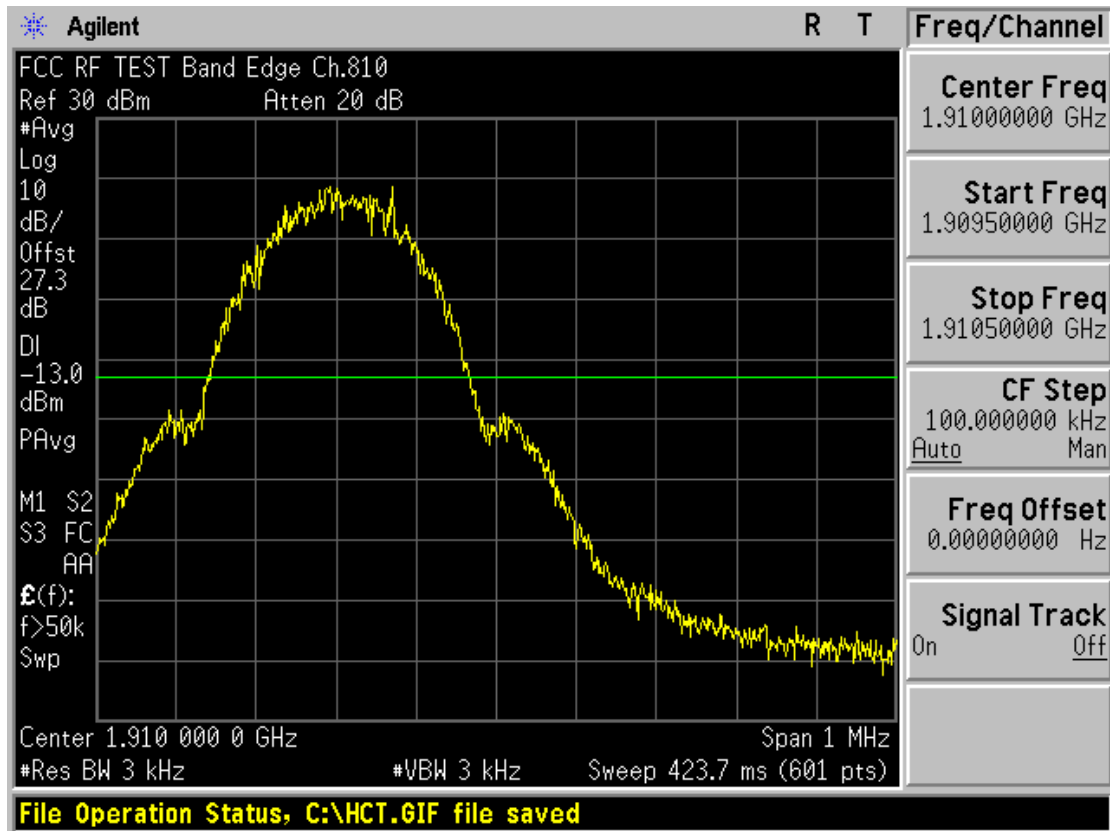


■ GSM1900 MODE (810 CH.) Block Edge-2

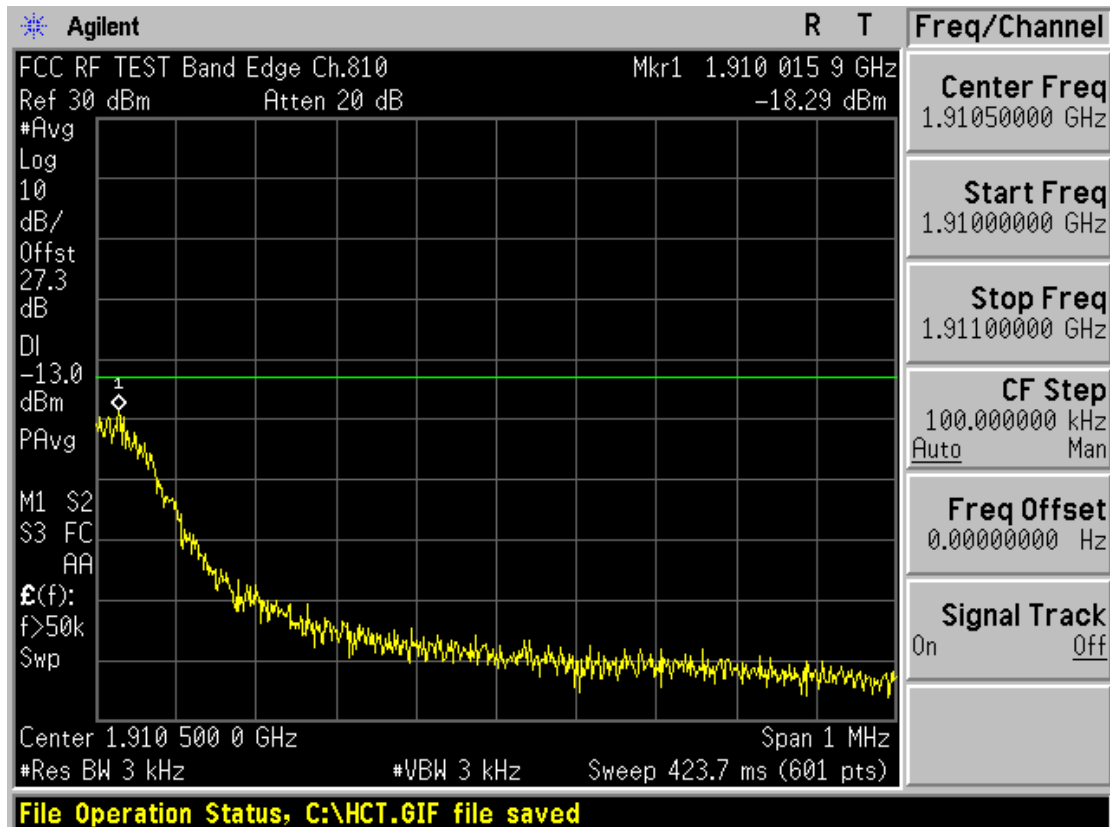


■ GSM1900 EDGE MODE (512 CH.) Block Edge -1

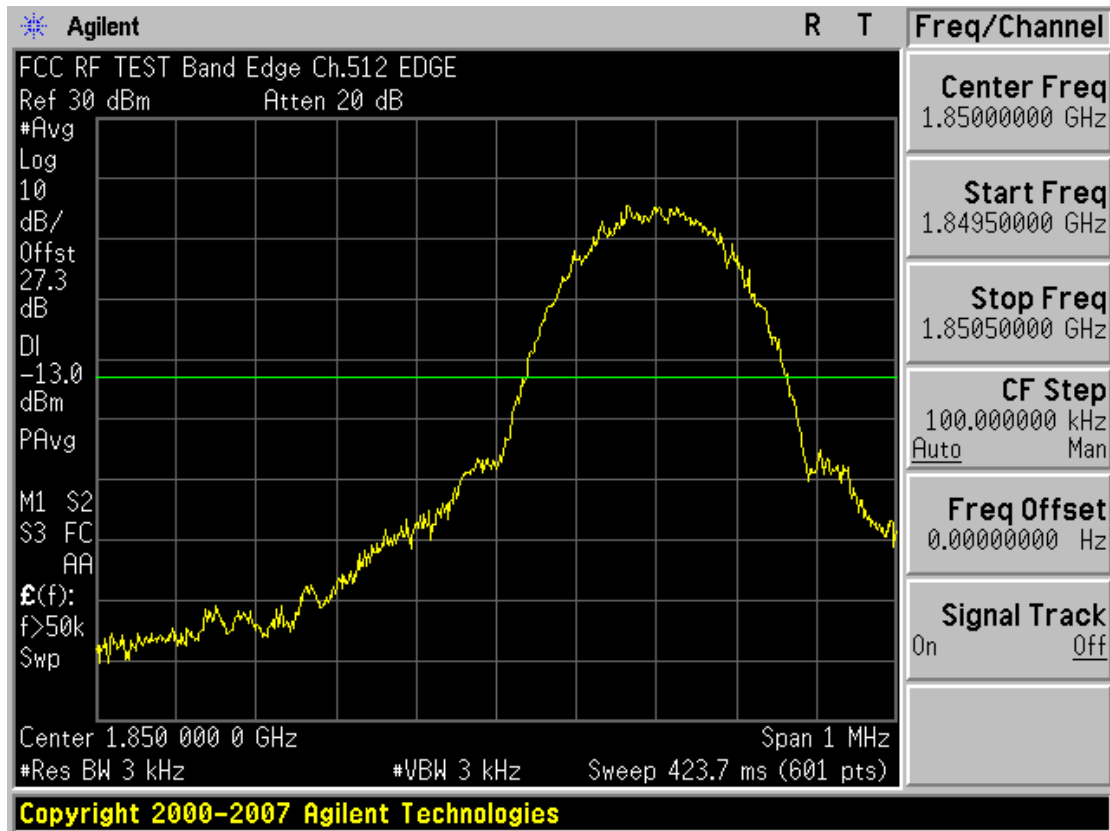


■ GSM1900 EDGE MODE (512 CH.) Block Edge-2

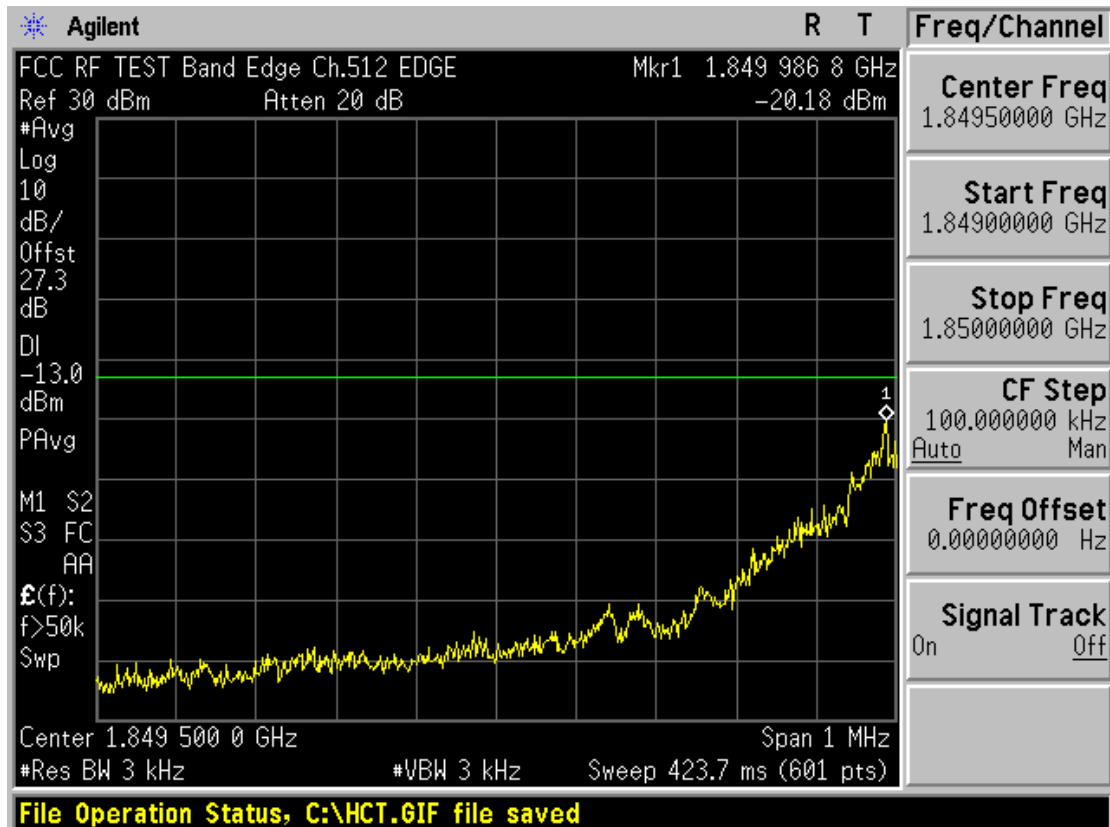


■ GSM1900 EDGE MODE (810 CH.) Block Edge-1

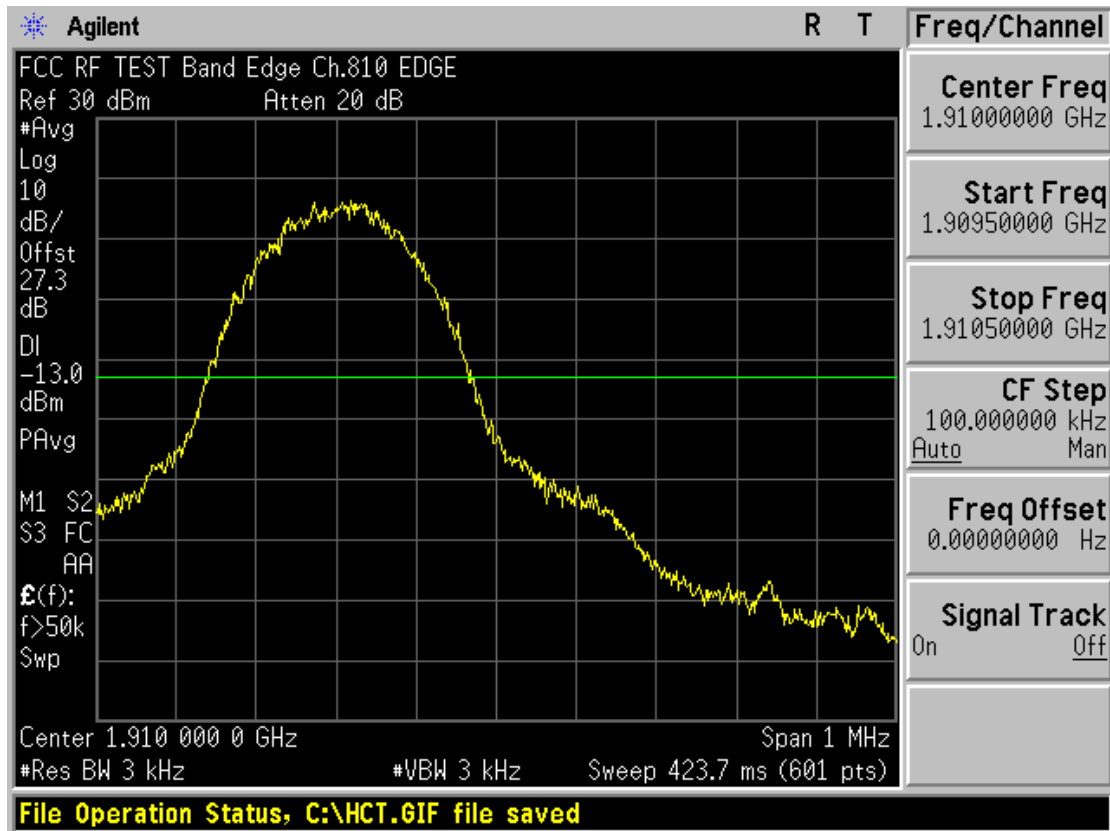


■ GSM1900 EDGE MODE (810 CH.) Block Edge-2

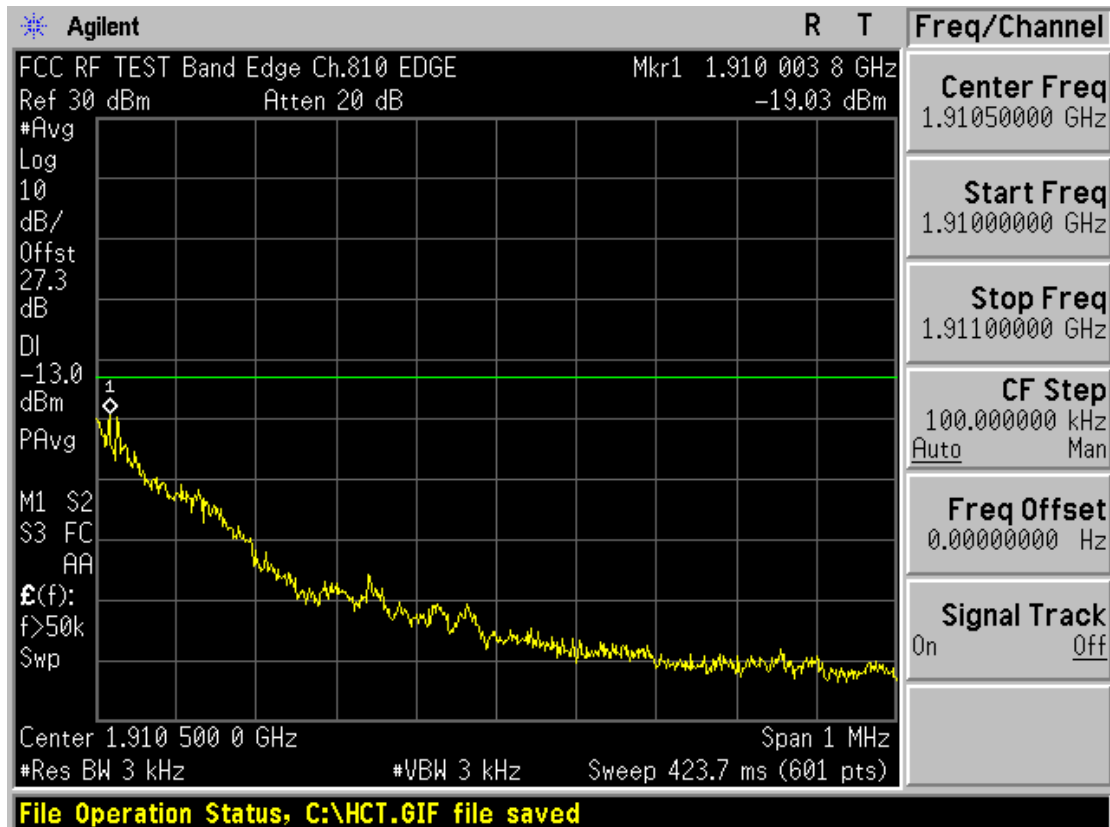

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions 1

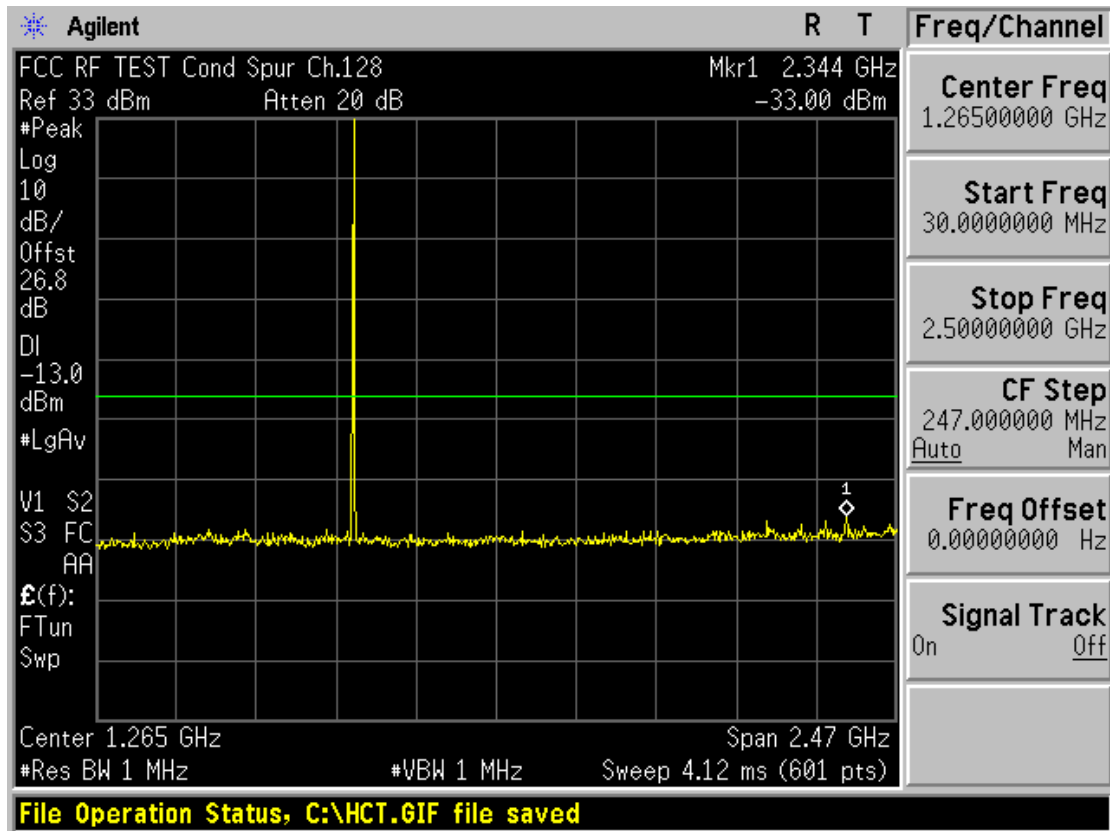

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions 2

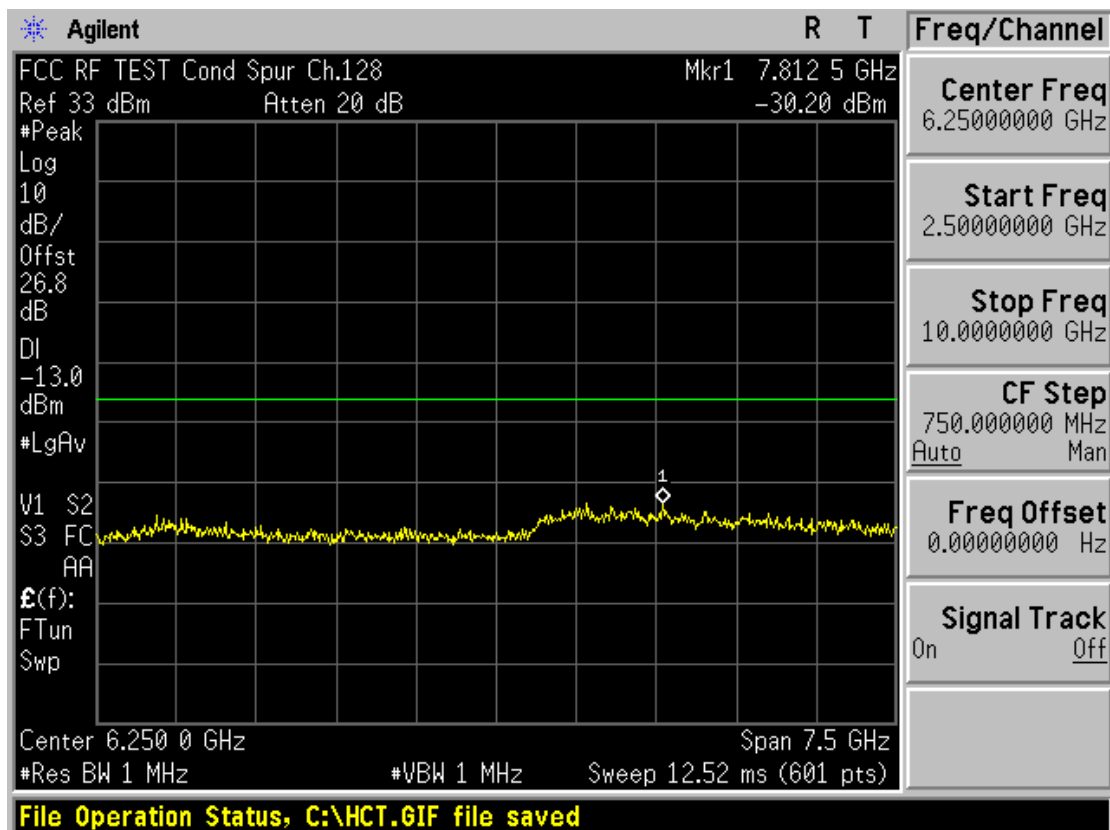


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 41 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions 1

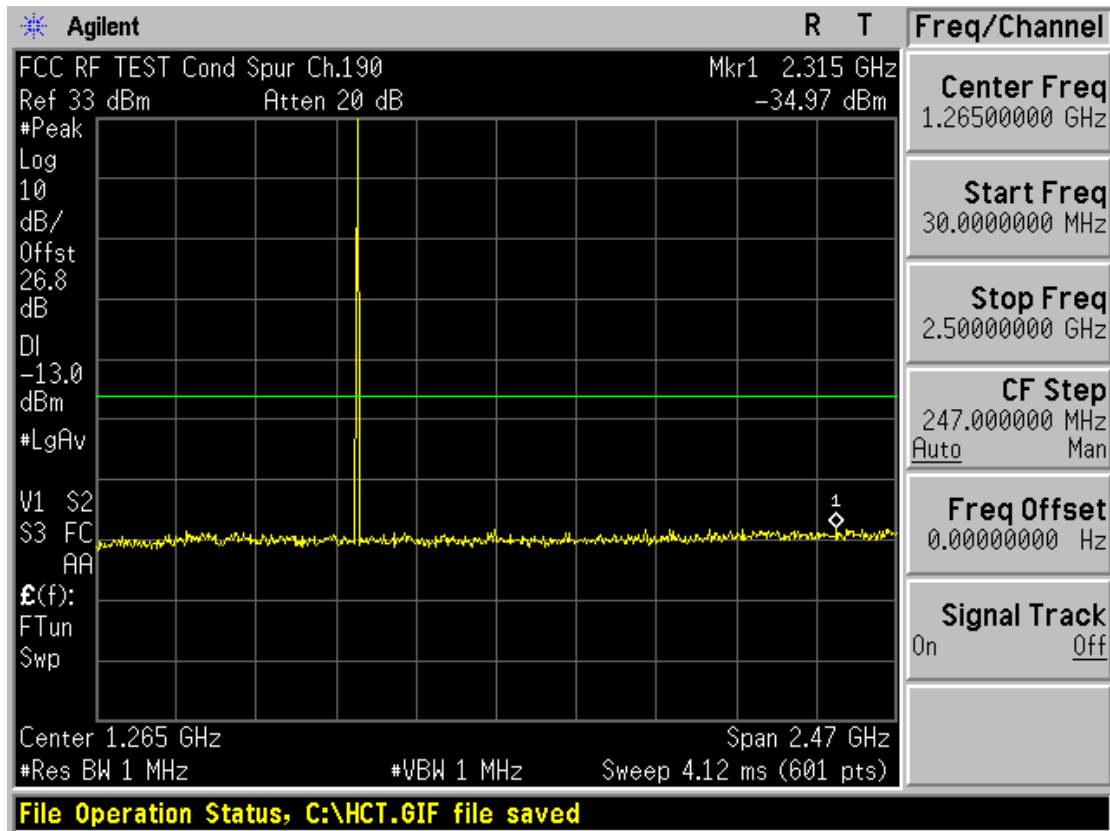

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions 2

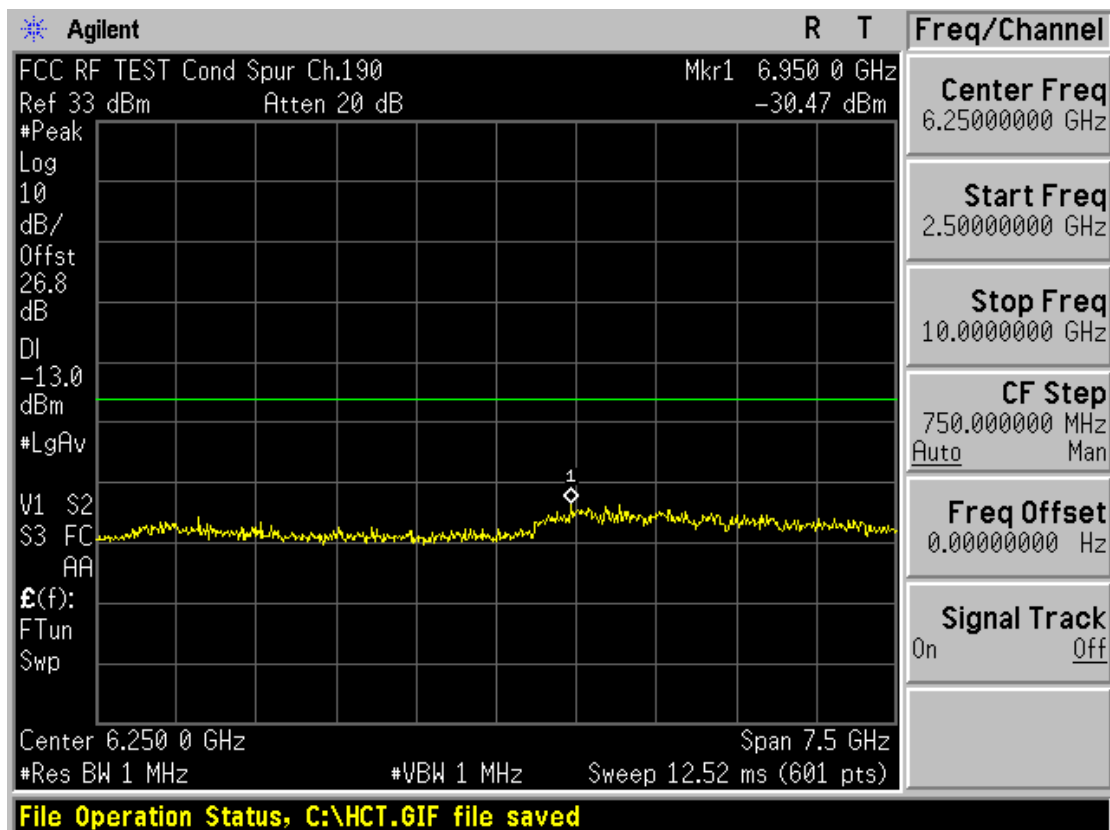


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 42 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions 1

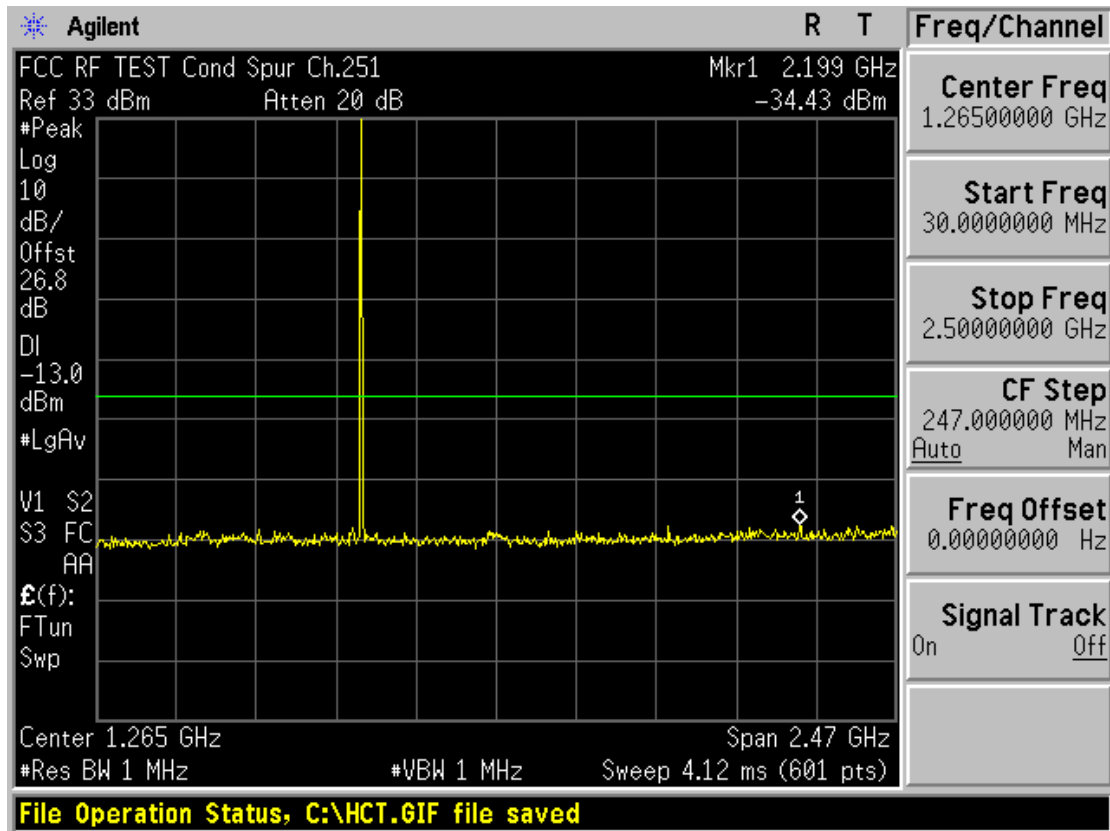

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions 2

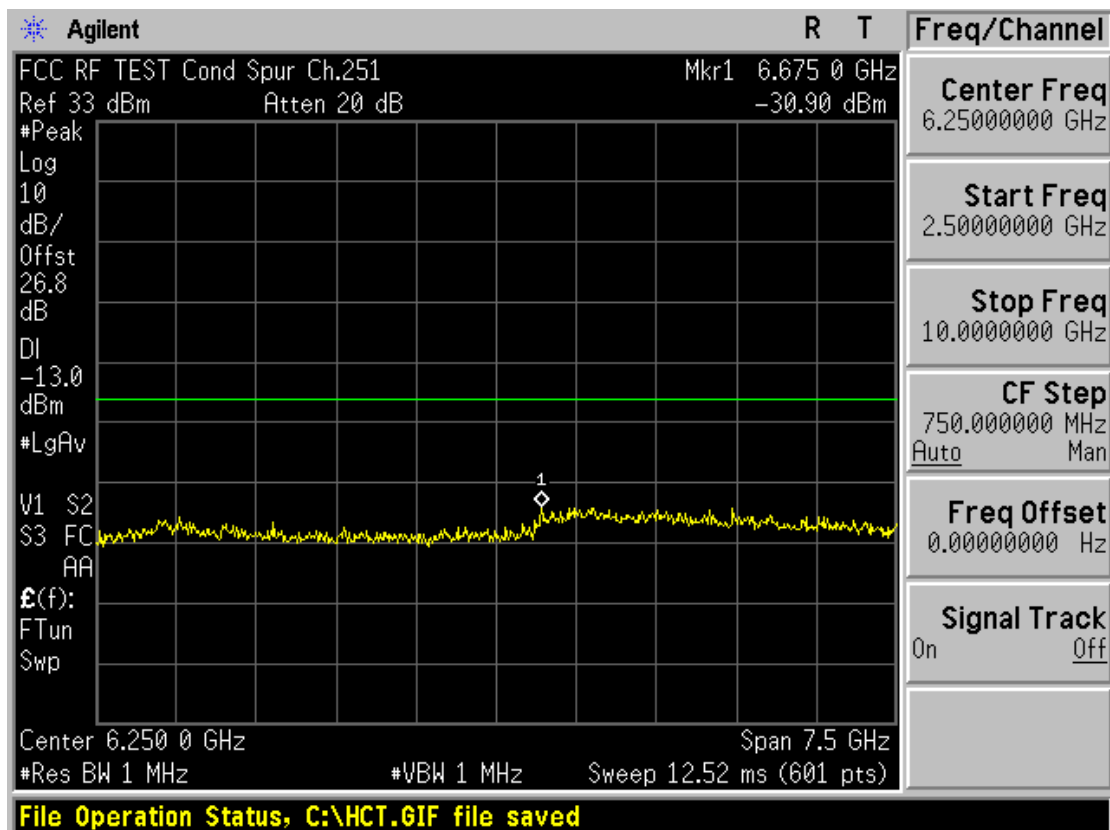


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 43 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions 1

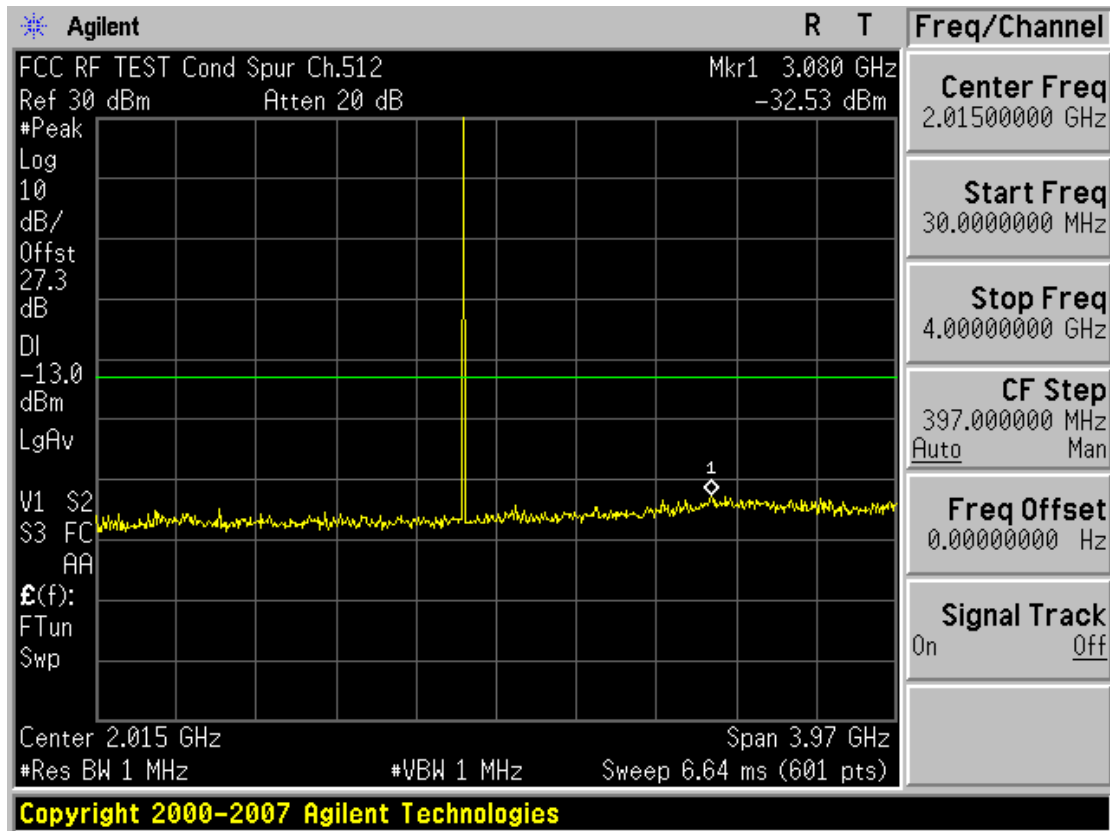

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions 2

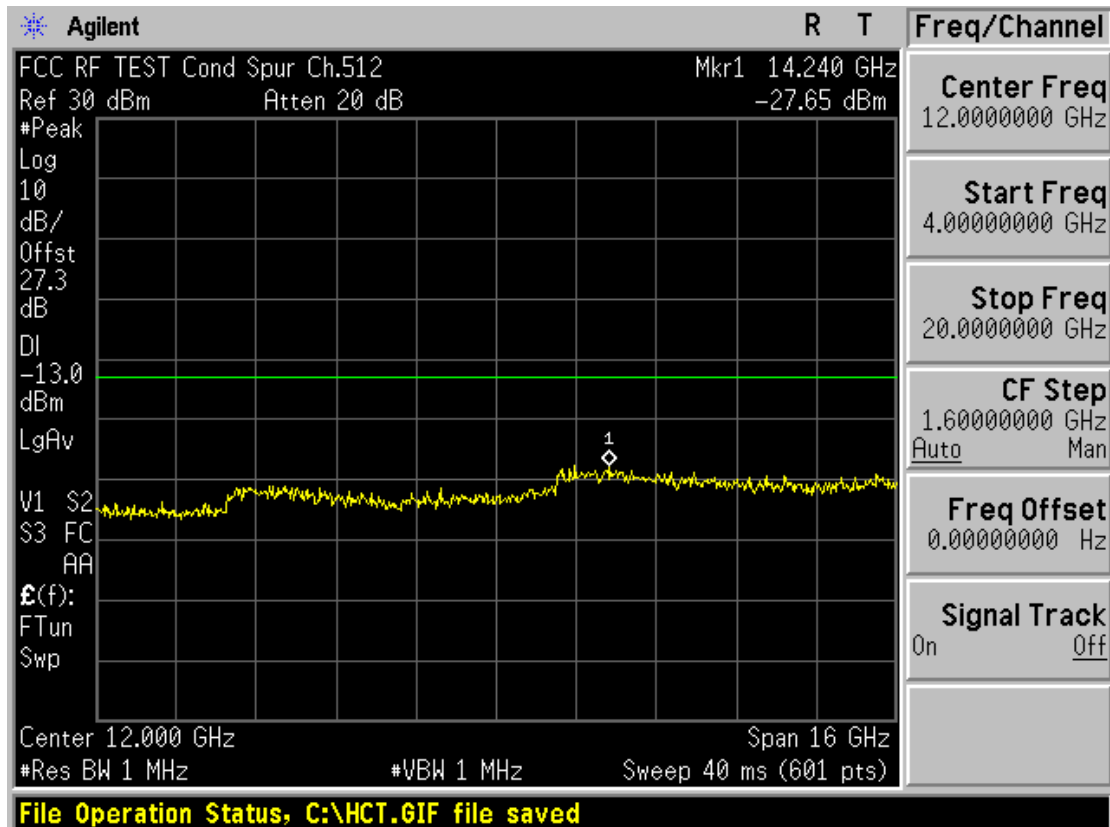


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 44 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions 1

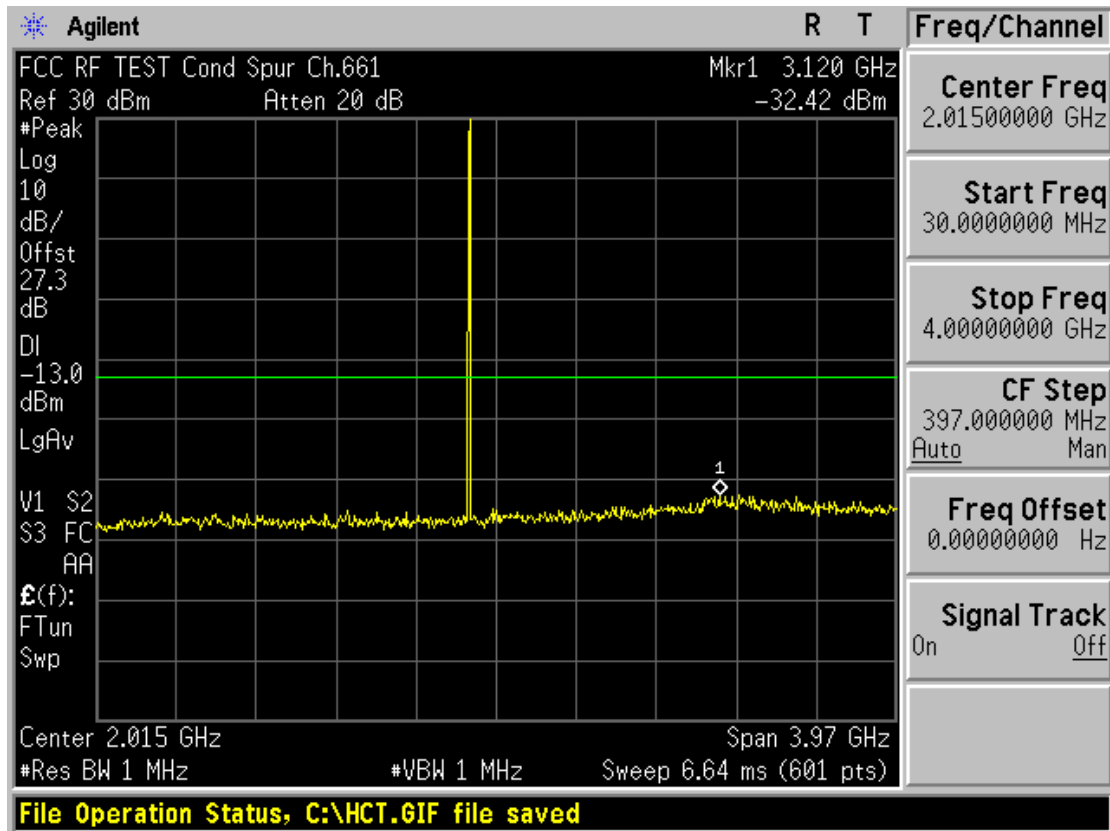

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions 2

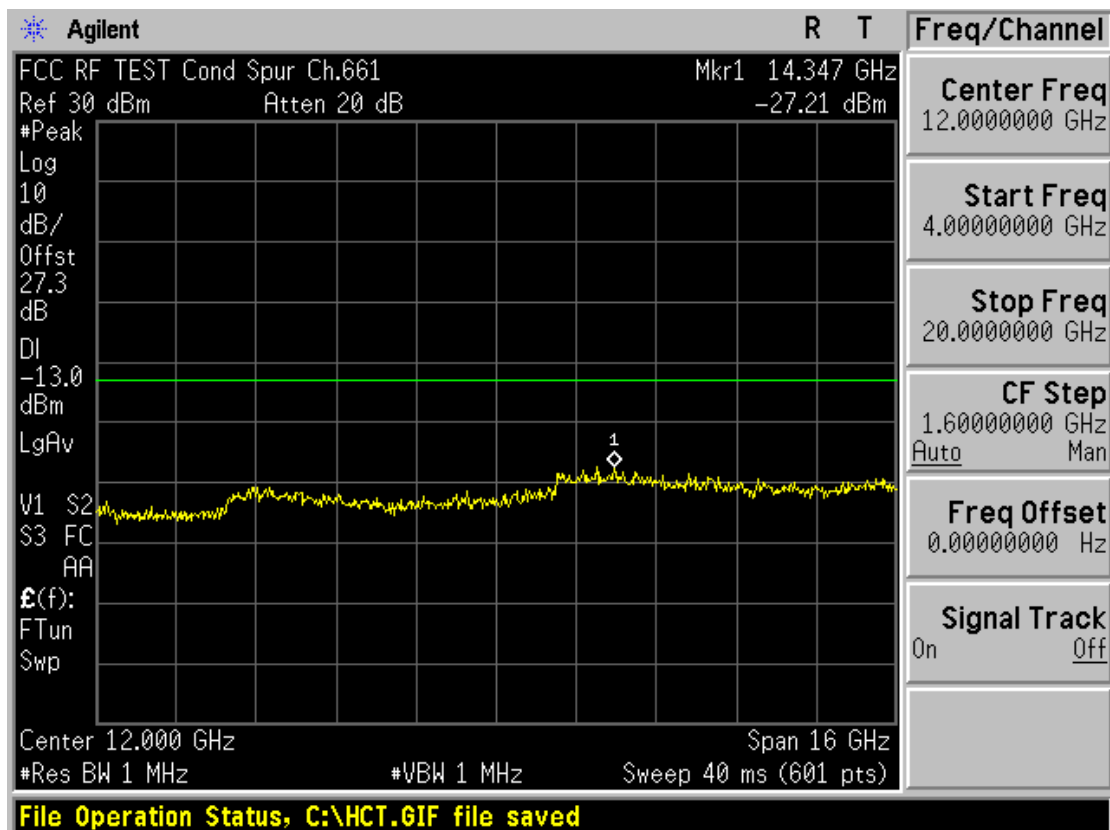


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 45 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions 1

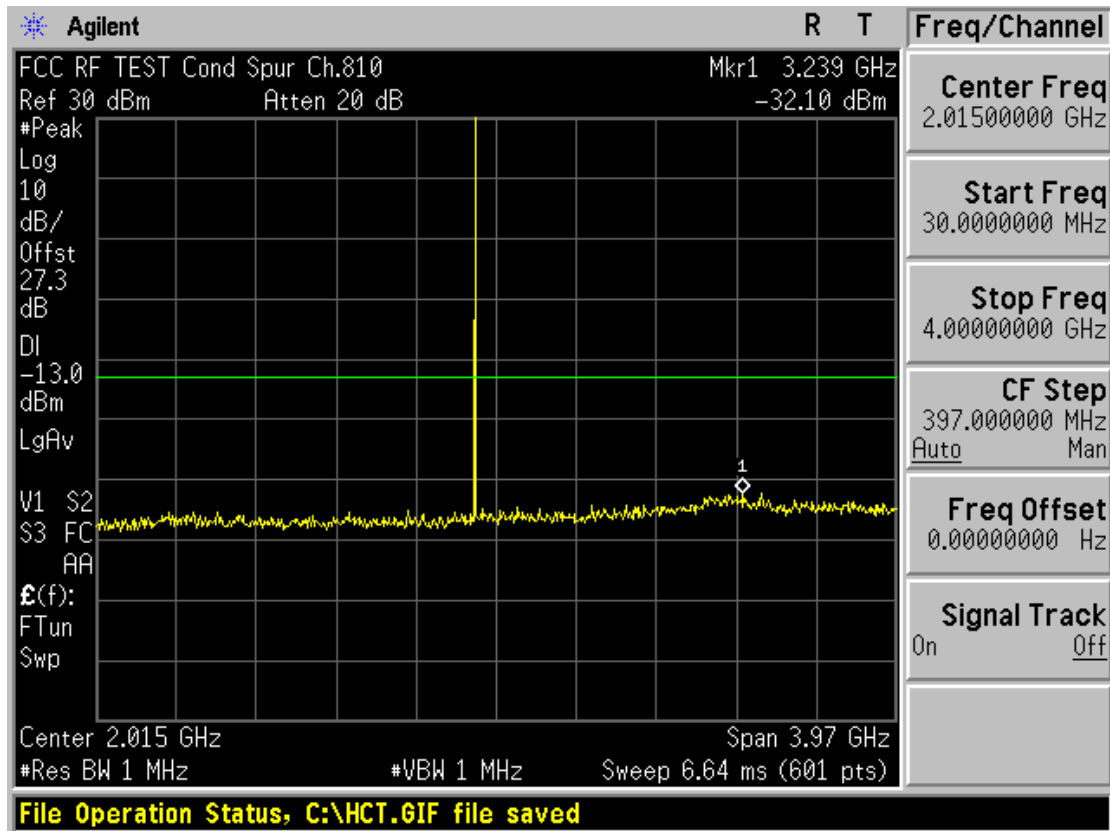

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions 2

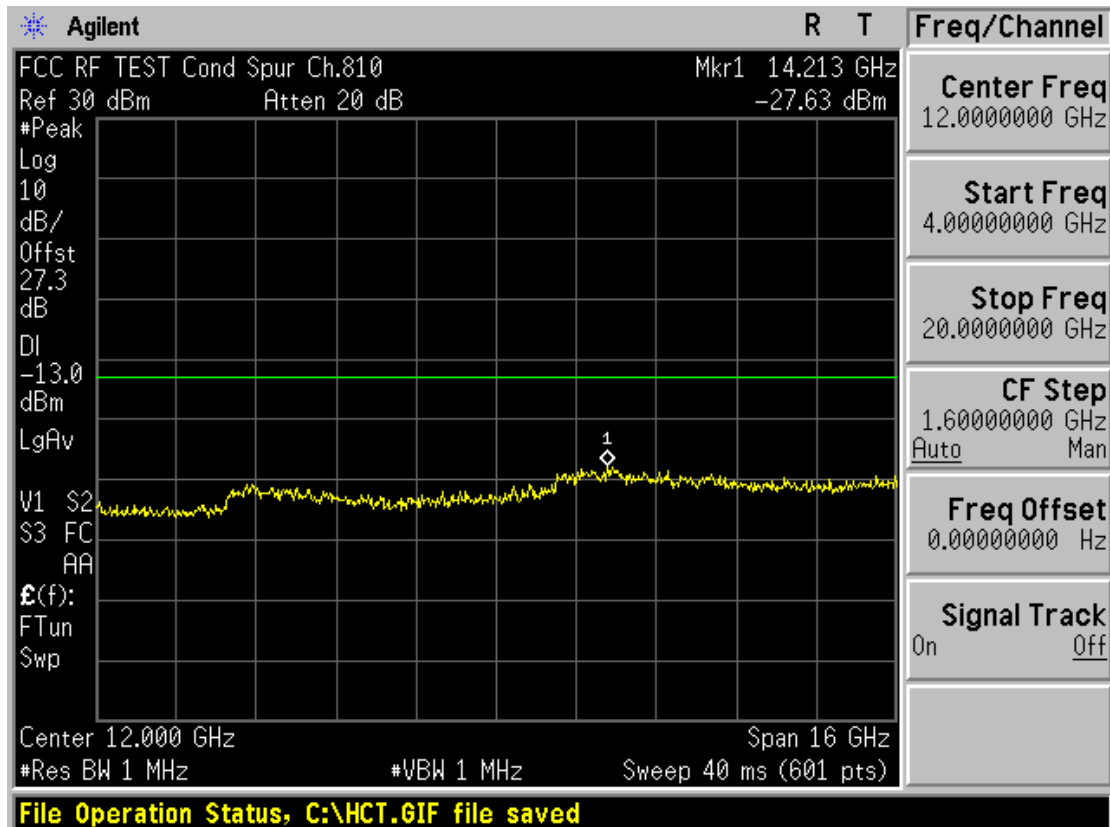

FCC CERTIFICATION REPORT

www.hct.co.kr


Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 46 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

Sim2


■ GSM1900 MODE (512 CH.) Occupied Bandwidth




■ GSM1900 MODE (661 CH.) Occupied Bandwidth

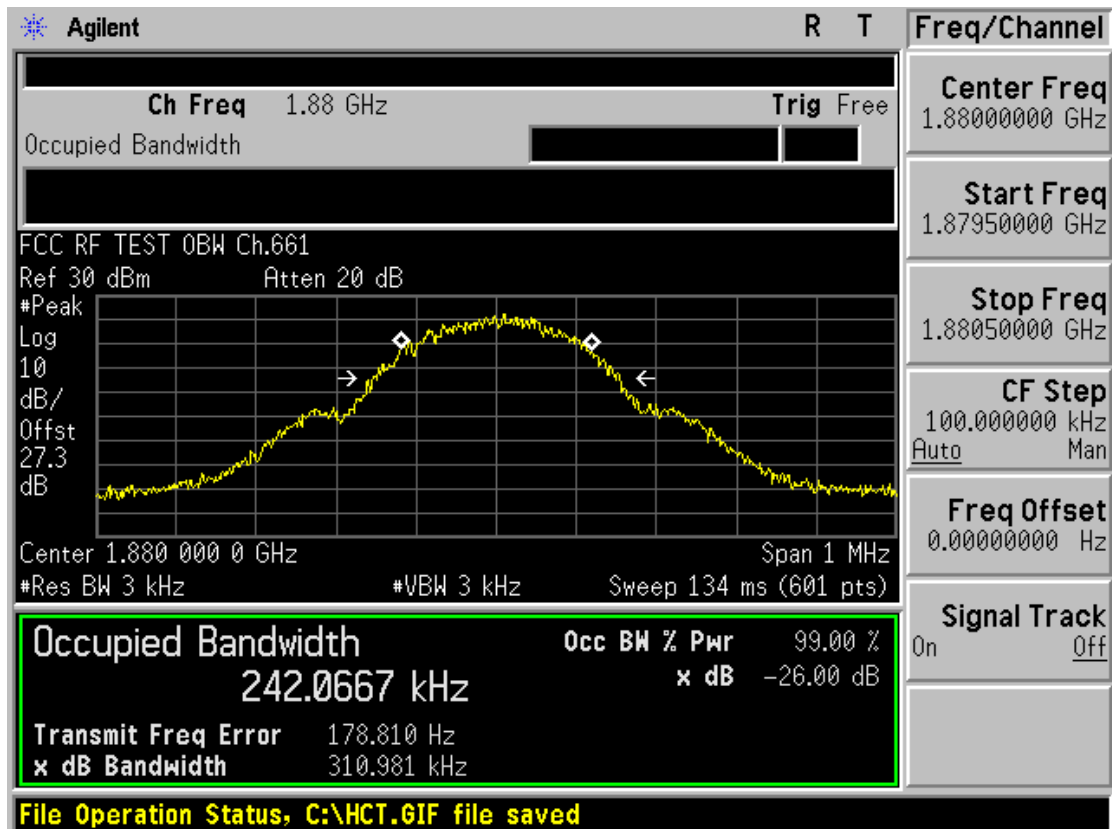

■ GSM1900 MODE (810 CH.) Occupied Bandwidth

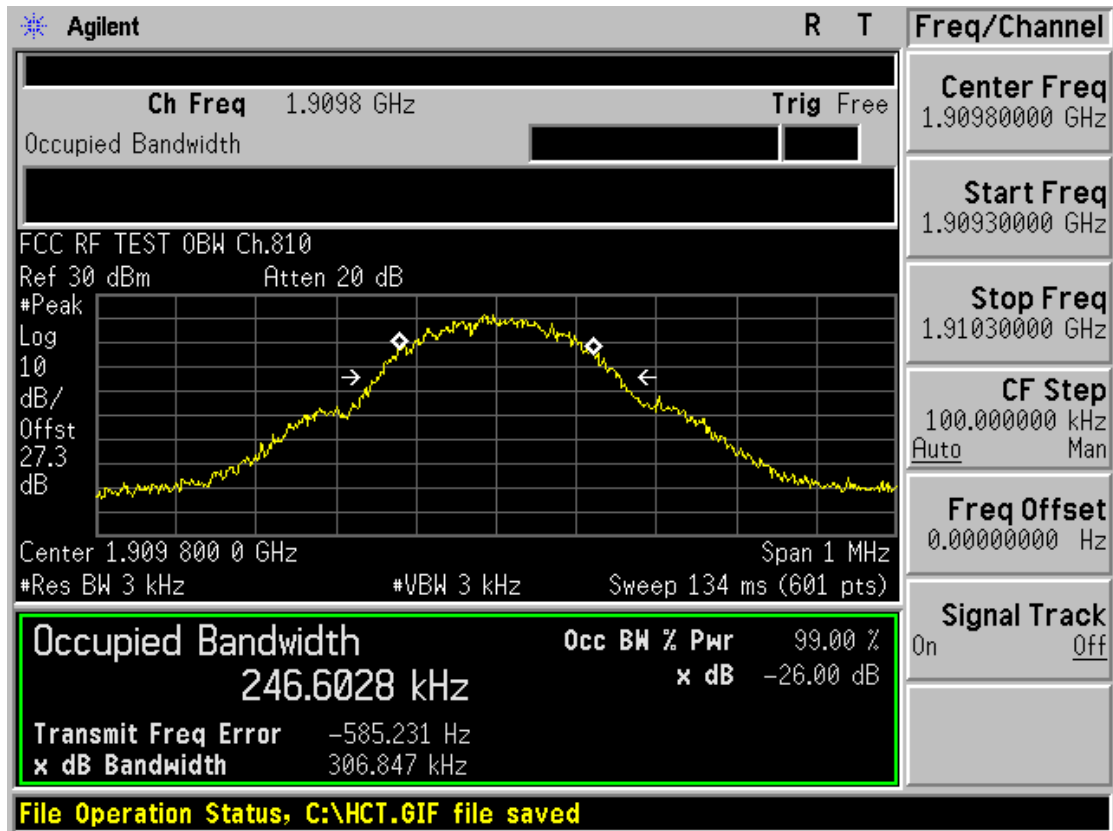

■ GSM1900 EDGE MODE (810 CH.) Occupied Bandwidth

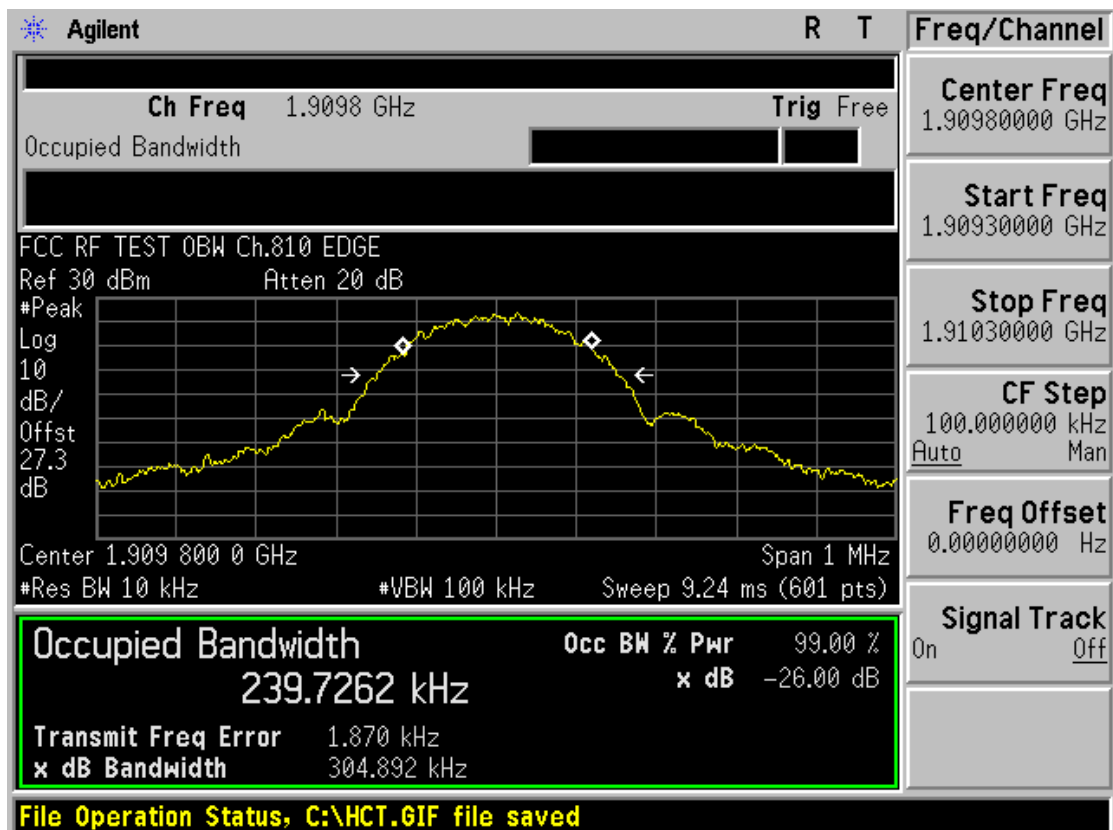


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 48 of 56
---------------------------------	----------------------------------	--	---------------------	---------------


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio

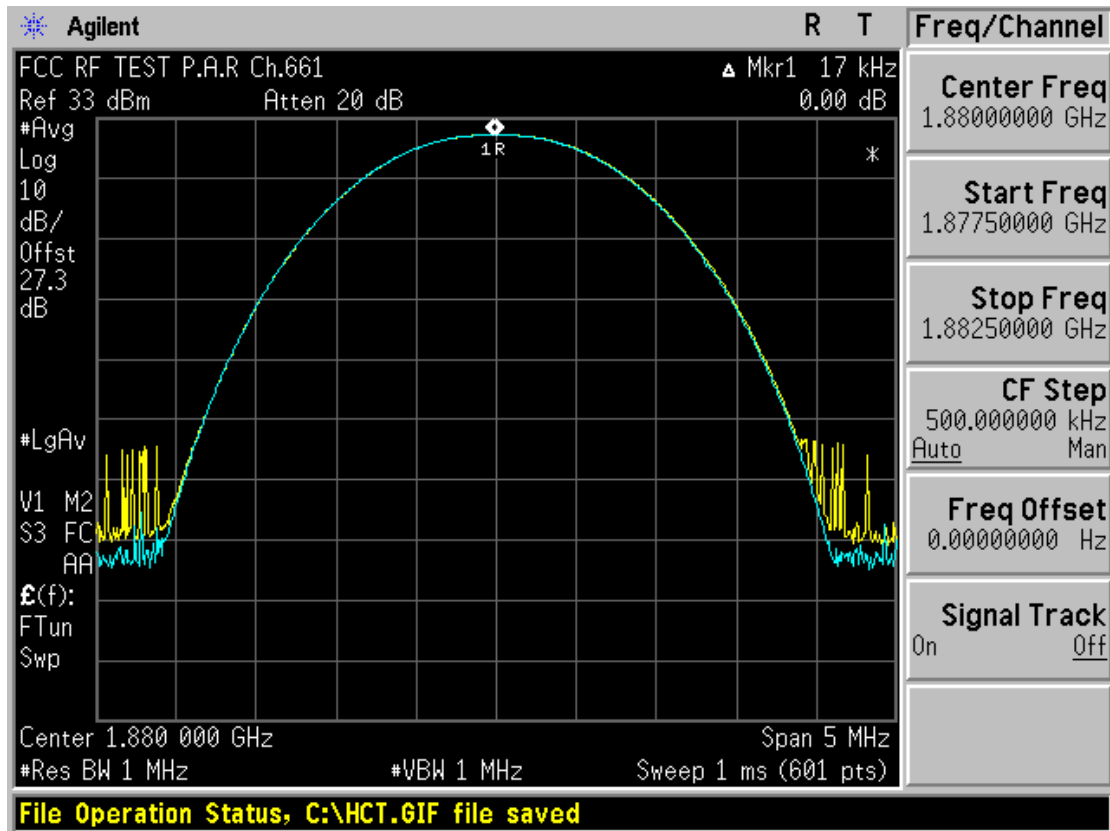

■ GSM1900 EDGE MODE (661 CH.) Peak-to-Average Ratio

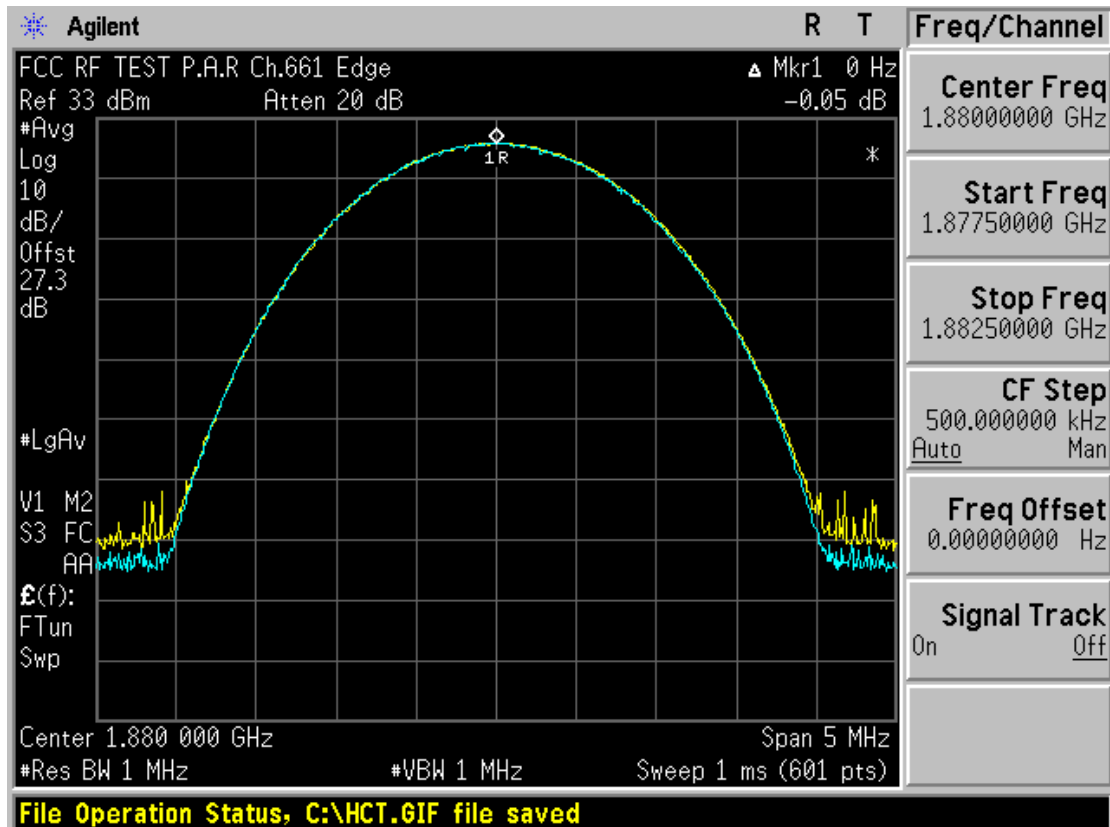

■ GSM1900 MODE (512 CH.) Block Edge-1

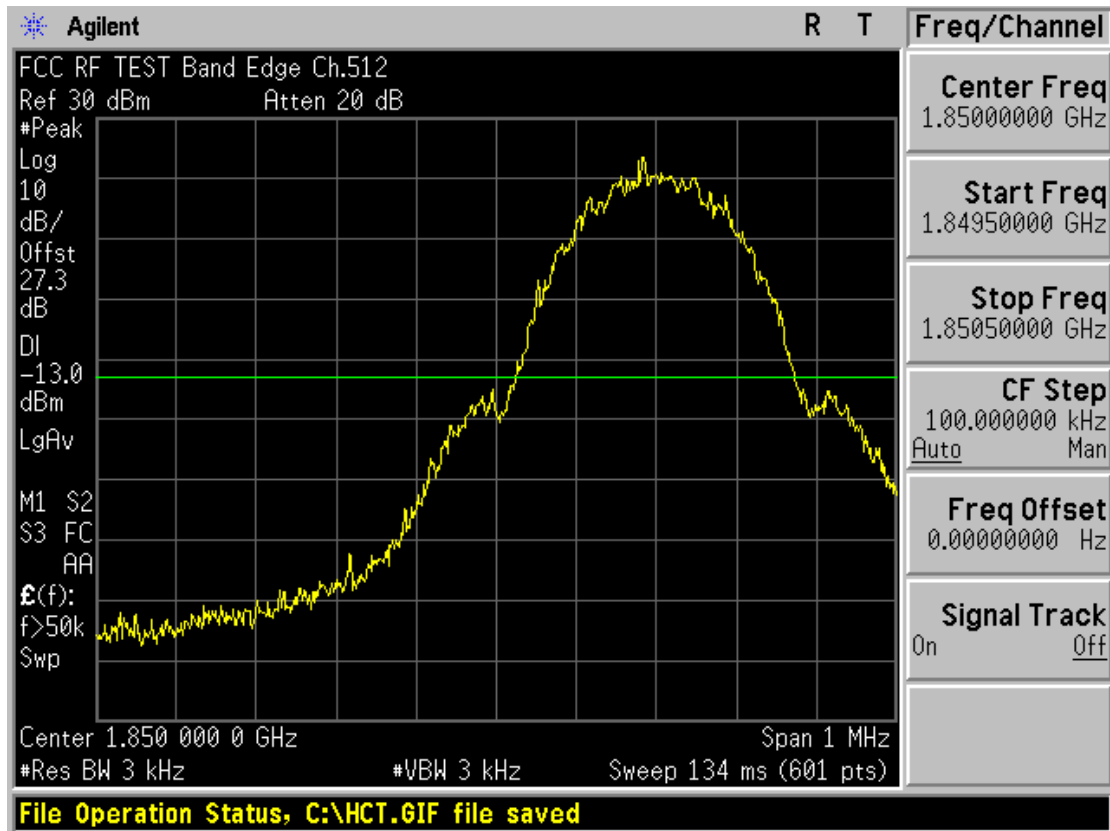

■ GSM1900 MODE (512 CH.) Block Edge-2




FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 50 of 56
---------------------------------	----------------------------------	--	---------------------	---------------


■ GSM1900 EDGE MODE (512 CH.) Block Edge -1

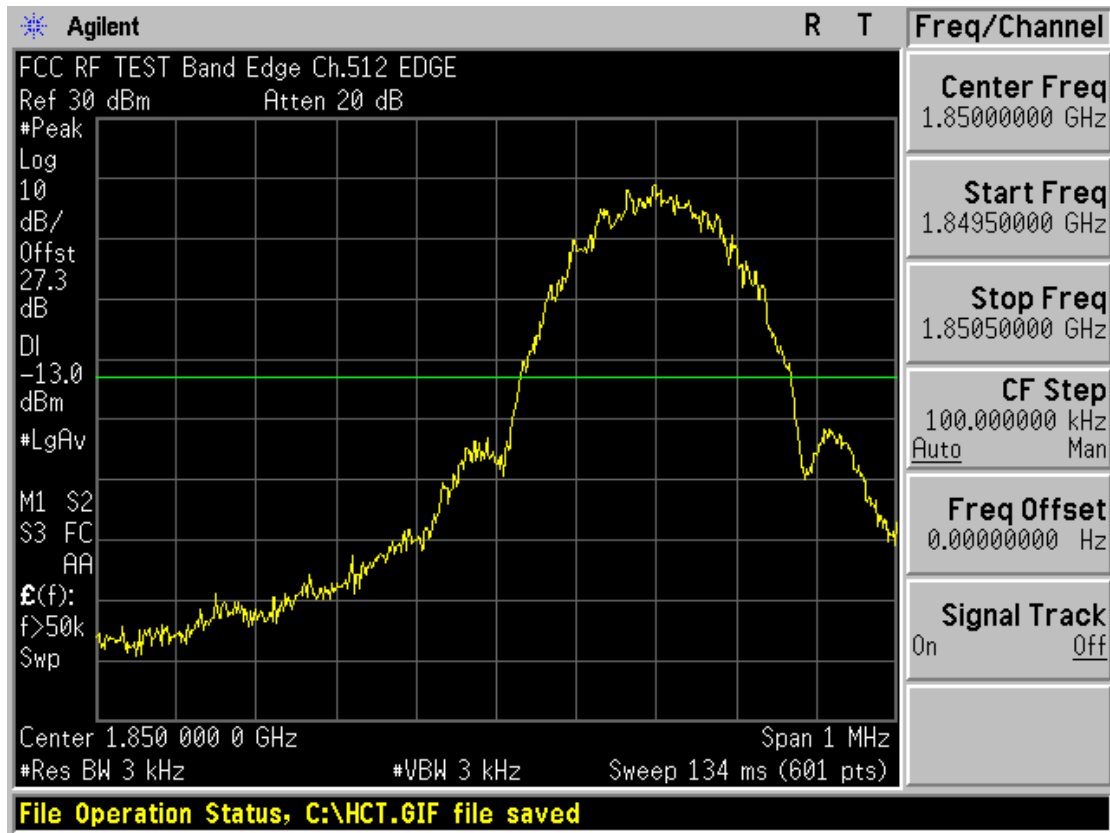


■ GSM1900 EDGE MODE (512 CH.) Block Edge-2

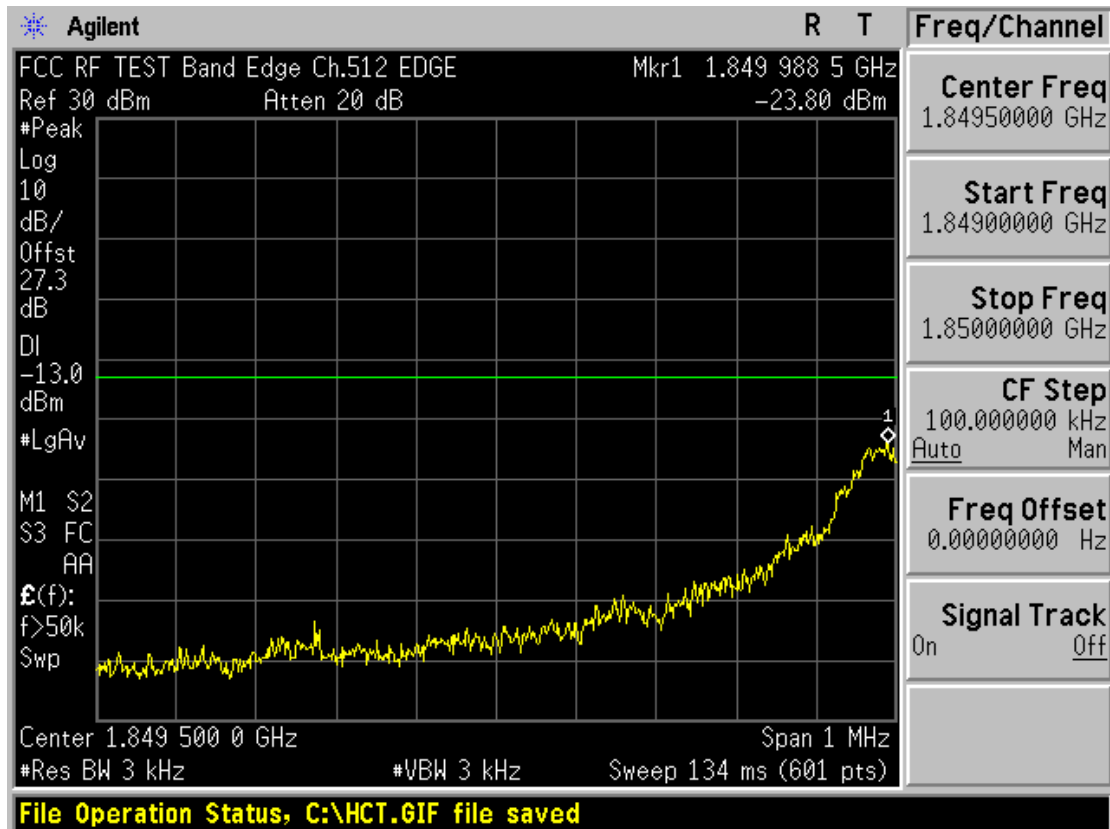

■ GSM1900 EDGE MODE (810 CH.) Block Edge-1

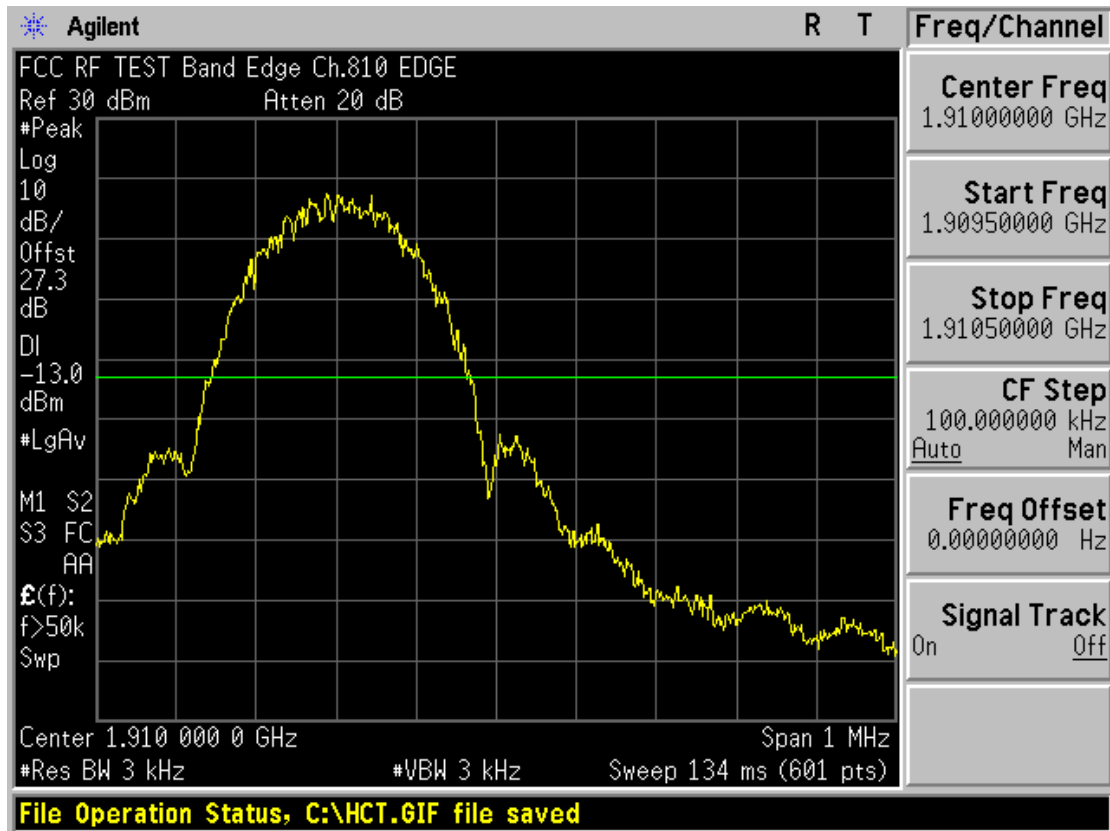

■ GSM1900 EDGE MODE (810 CH.) Block Edge-2

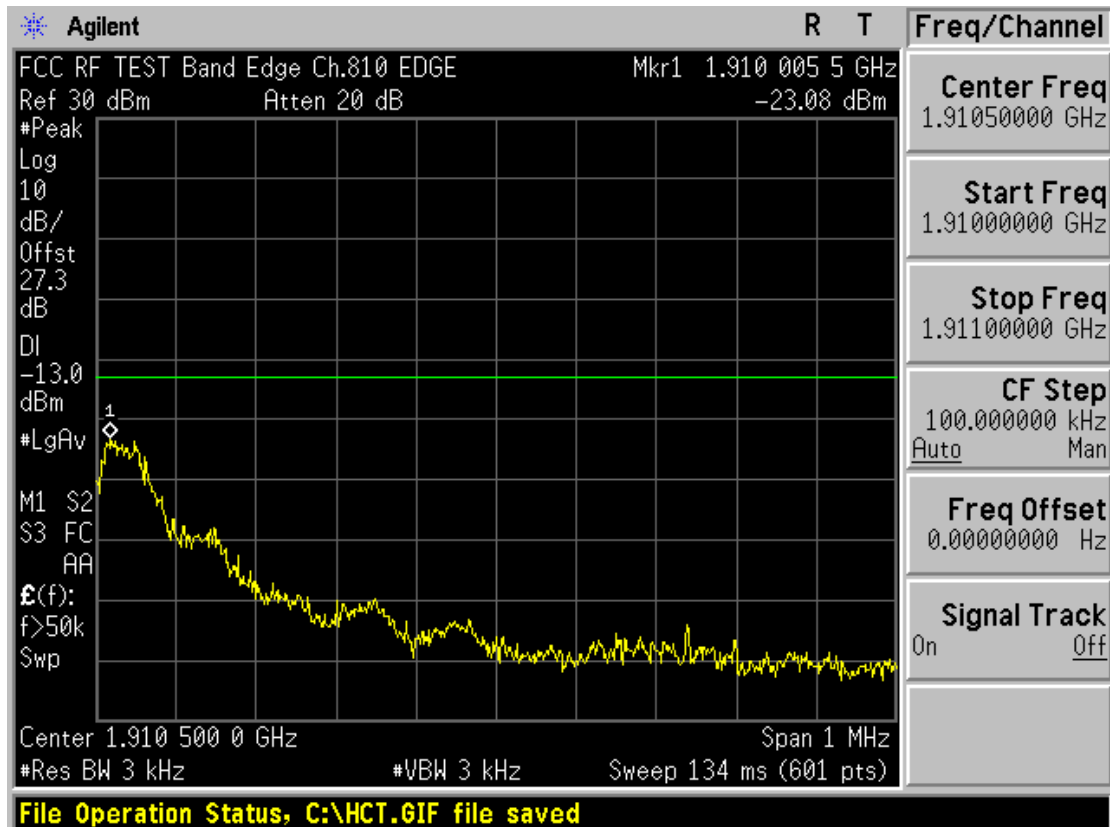

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.
HCTR1003FR08


Date of Issue:
March 17, 2010

EUT Type:
Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN


FCC ID:
BEJGX500

Page 53 of 56


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions 1

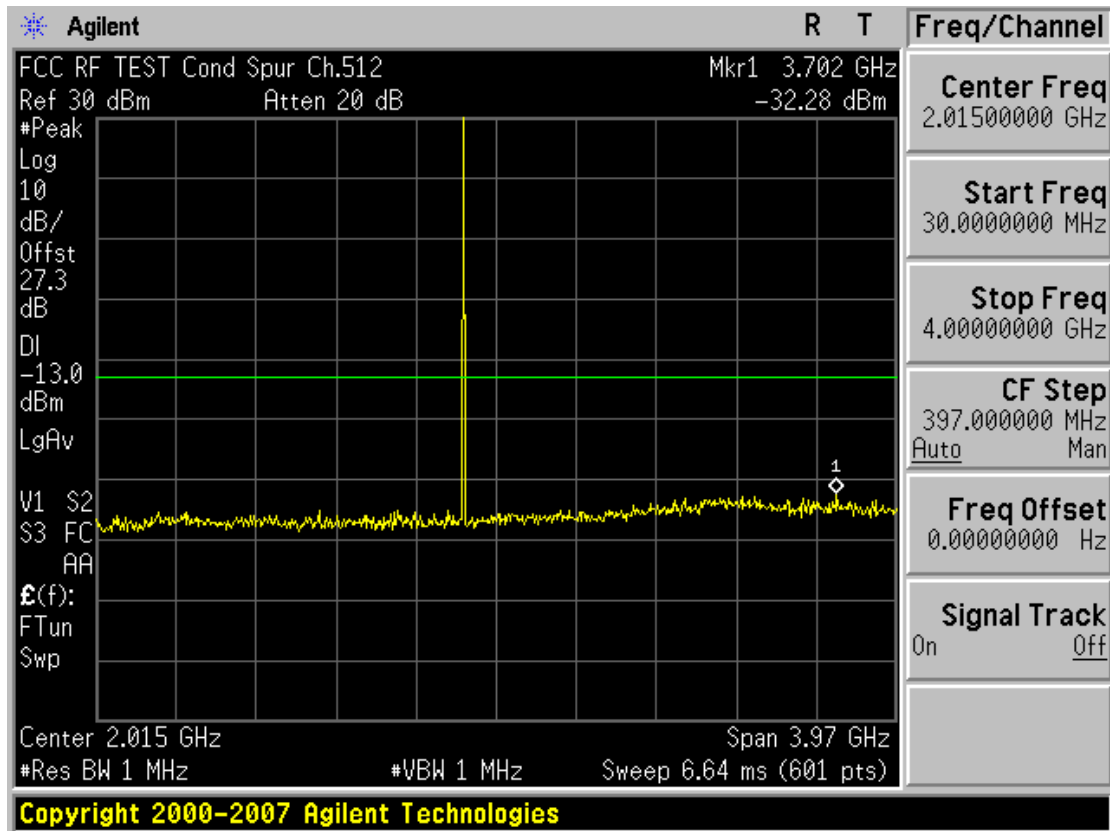


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions 2

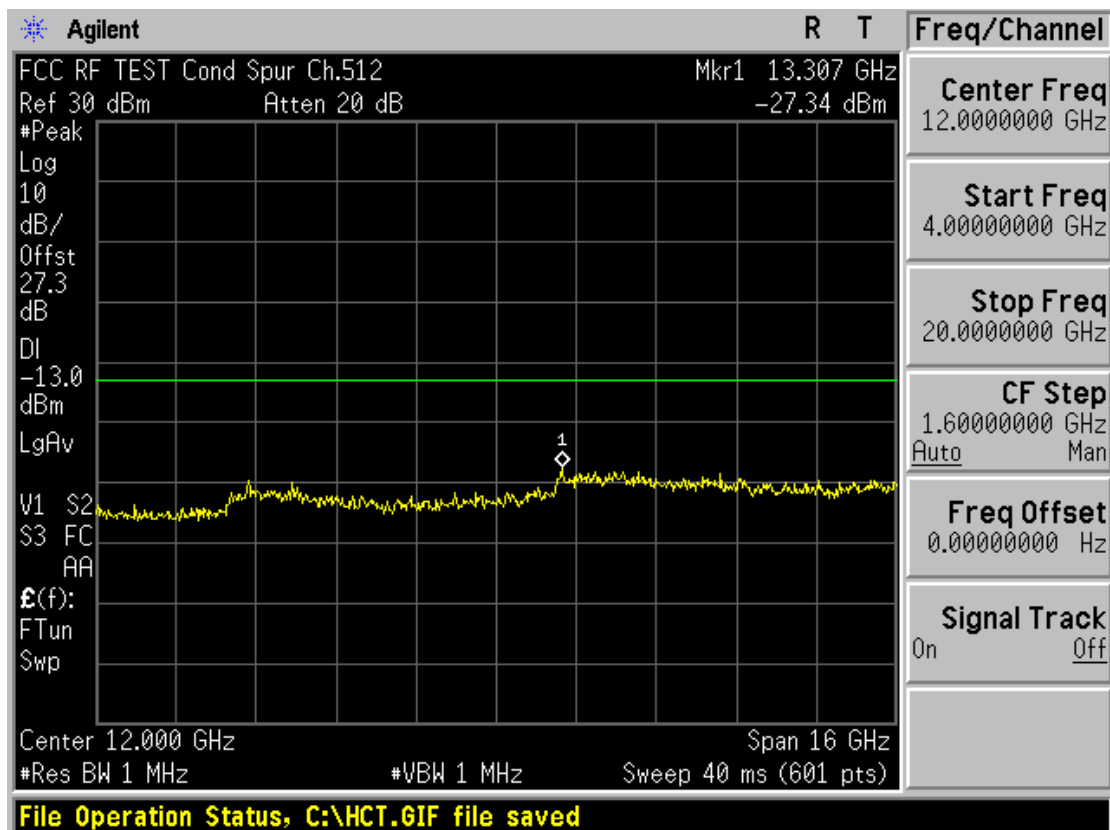

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions 1

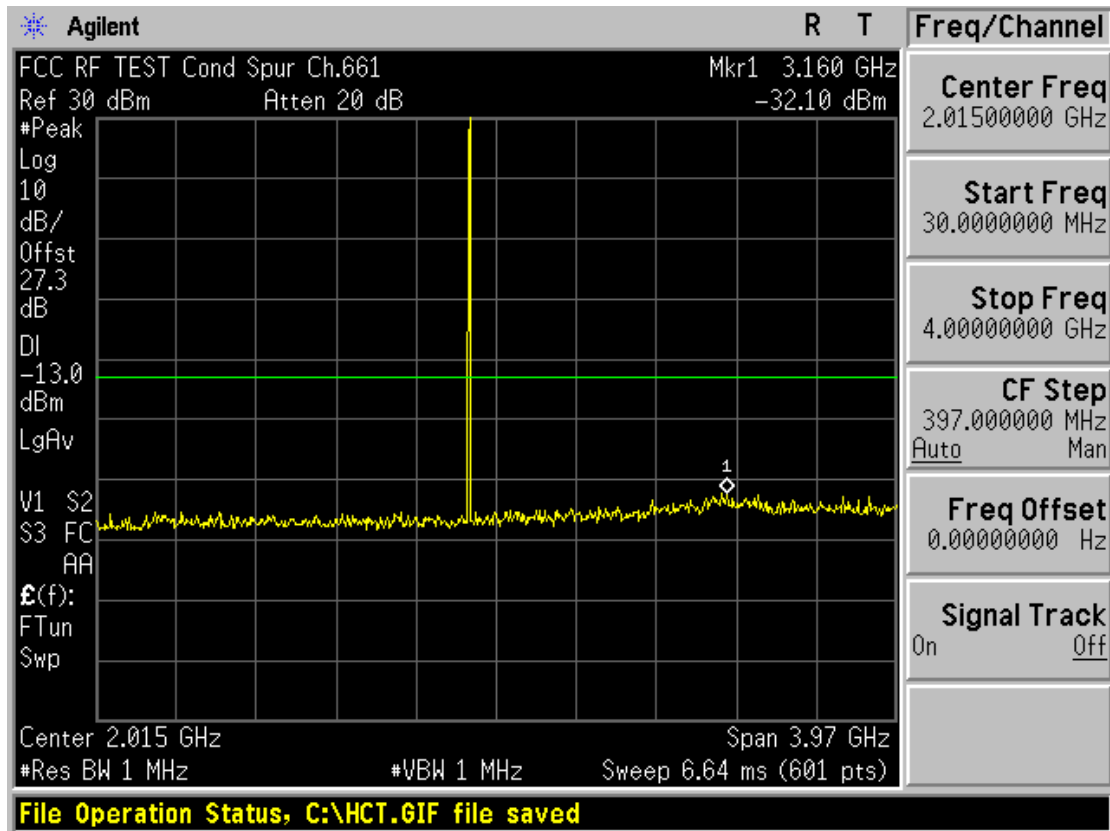

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions 2

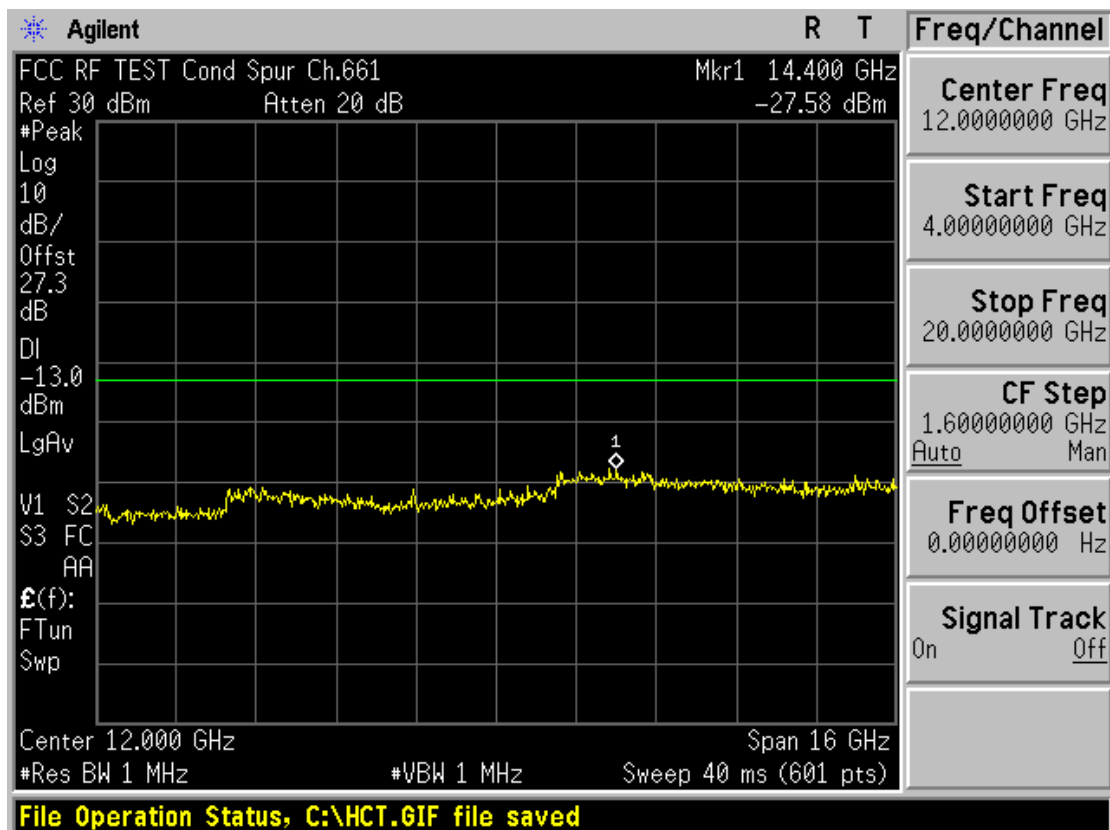


FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1003FR08	Date of Issue: March 17, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth & WLAN	FCC ID: BEJGX500	Page 55 of 56
---------------------------------	----------------------------------	--	---------------------	---------------

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions 1

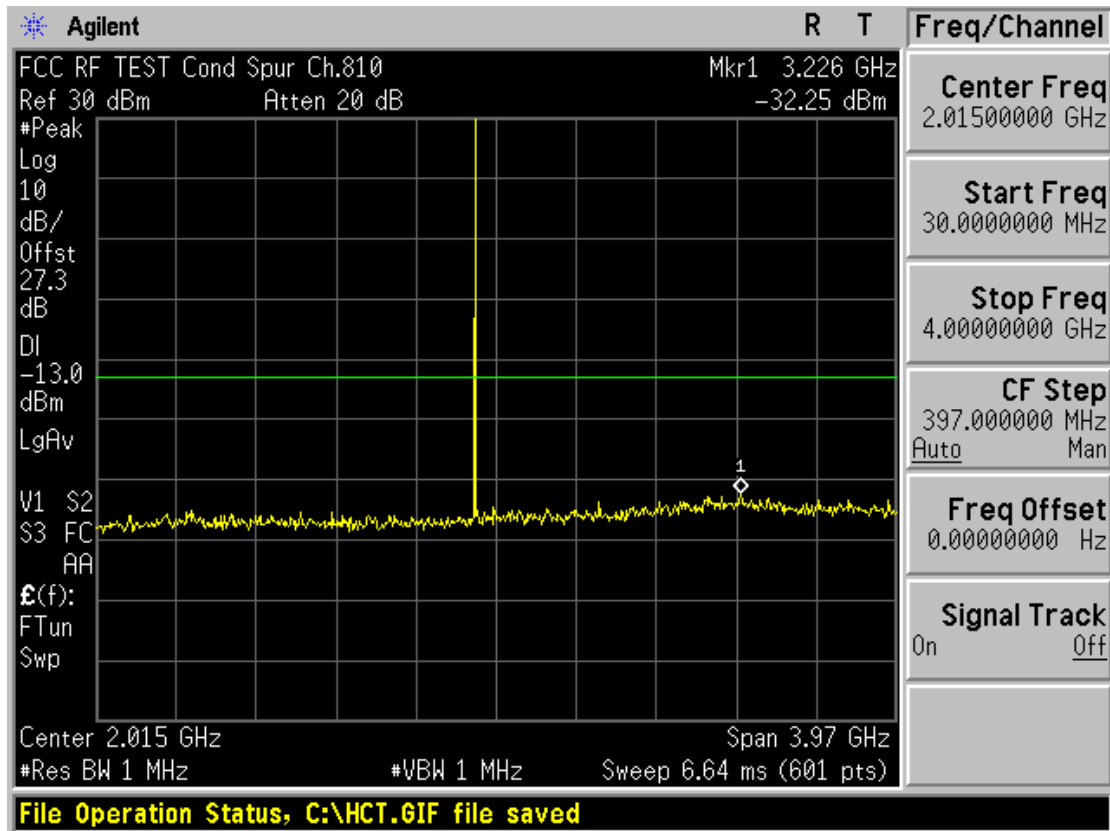

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions 2

