



HCT.CO., LTD.

Product Compliance Division, EMC Team

SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA

TEL : +82 31 639 8518 FAX : +82 31 639 8525

## CERTIFICATE OF COMPLIANCE

### FCC PART 15.247 Certification

**Applicant Name:**

LG Electronics Inc.

**Address:**

60-39, Kasan-dong, Keumchun-ku,  
Seoul 153-801, Korea

**Date of Testing:**

Feb. 21, 2008

**Test Site/Location:**

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,  
Kyungki-do, Korea

**Test Report No.:** HCT-R08-004

**HCT FRN:** 0005866421

**FCC ID:**

**BEJKM710D**

**APPLICANT:**

**LG Electronics Inc.**

**Model(s):**

KM710d

**Additional Model(s):**

KM710c, KM710

**EUT Type:**

Cellular/ PCS GSM/EDGE Phone with Bluetooth

**Max. RF Output Power:**

1.22 dBm(1.32 mW)

**Frequency Range:**

2402 - 2480 MHz (Bluetooth)

**Modulation type**

GFSK, PSK

**FCC Classification:**

FCC Part 15 Frequency Hopping Spread Spectrum Transceiver

**FCC Rule Part(s):**

Part 15 subpart C 15.247

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



**Report prepared by**

**: Youn Seok Jung**

**Test engineer of RF Part**



**Approved by**

**: Sang Jun Lee**

**Manager of RF Part**

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb. 21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 1 of 53                                     |

# Table of Contents

|                                               |     |
|-----------------------------------------------|-----|
| 1. GENERAL INFORMATION .....                  | 3   |
| 2. EUT DESCRIPTION .....                      | 3   |
| 3. TEST METHODOLOGY .....                     | 4   |
| 3.1 EUT CONFIGURATION .....                   | 4   |
| 3.2 EUT EXERCISE .....                        | 4   |
| 3.3 GENERAL TEST PROCEDURES .....             | 4   |
| 3.4 DESCRIPTION OF TEST MODES .....           | 4   |
| 4. INSTRUMENT CALIBRATION.....                | 5   |
| 5. FACILITIES AND ACCREDITATIONS .....        | 6   |
| 5.1 FACILITIES .....                          | 6   |
| 5.2 EQUIPMENT .....                           | 6   |
| 6. ANTENNA REQUIREMENTS .....                 | 7   |
| 7. FCC PART 15.247 REQUIREMENTS.....          | 8   |
| 7.1 PEAK POWER .....                          | 8   |
| 7.2 BAND EDGES MEASUREMENT .....              | 1 2 |
| 7.2.1 BAND EDGES MEASUREMENT (RADIATED))..... | 1 5 |
| 7.3 FREQUENCY SEPARATION .....                | 2 4 |
| 7.4 NUMBER OF HOPPING FREQUENCY .....         | 2 9 |
| 7.5 TIME OF OCCUPANCY (DWELL TIME).....       | 3 2 |
| 7.6 SPURIOUS EMISSIONS.....                   | 3 6 |
| 7.6.1 Conducted Spurious Measurement .....    | 3 6 |
| 7.6.2 Radiated Spurious Emissions .....       | 4 0 |
| 7.7 POWERLINE CONDUCTED EMISSIONS .....       | 4 8 |
| 8. LIST OF TEST EQUIPMENT .....               | 5 3 |



## 1. GENERAL INFORMATION

**Applicant:** LG Electronics Inc.  
60-39, Kasan-dong, Keumchun-ku,  
Seoul 153-802, Korea

**FCC ID:** BEJKM710D

**EUT:** PCS GSM/EDGE Phone with Bluetooth

**Model:** KM710d

**Date of Test:** Feb. 21, 2008

**Contact person:** Name: Eui –Soon Park  
Phone #: +82-2-2033-1113  
Fax #: +82-2-2033-1222

## 2. EUT DESCRIPTION

|                              |                                                                                        |
|------------------------------|----------------------------------------------------------------------------------------|
| <b>Product</b>               | Cellular/ PCS GSM/EDGE Phone with Bluetooth                                            |
| <b>Model Name</b>            | KM710d                                                                                 |
| <b>Power Supply</b>          | DC 3.7 V                                                                               |
| <b>Battery type</b>          | Standard                                                                               |
| <b>Frequency Range</b>       | 2402 ~ 2480 MHz                                                                        |
| <b>Transmit Power</b>        | 1.22 dBm(1.32 mW)                                                                      |
| <b>Modulation Type</b>       | GFSK(Normal), PSK(EDR)                                                                 |
| <b>Modulation Technique</b>  | FHSS                                                                                   |
| <b>Number of Channels</b>    | 79 Channels                                                                            |
| <b>Antenna Specification</b> | Manufacturer: KOMATECH Co., Ltd.<br>Antenna type: Internal Antenna<br>Gain : -4.88 dBi |



### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" were used in the measurement of the **LG Electronics Inc. Cellular/ PCS GSM/EDGE Phone with Bluetooth FCC ID: BEJKM710D**

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 4 of 53                                     |



#### 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 5 of 53                                     |



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 6, 2006(Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 6 of 53                                     |



## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 7 of 53                                     |

## 7. FCC PART 15.247 REQUIREMENTS


### 7.1 PEAK POWER

#### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For systems using digital modulation in the bands of 902 ~ 928 MHz, 2400 ~ 2483.5 MHz, and 5725 ~ 5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### Test Configuration

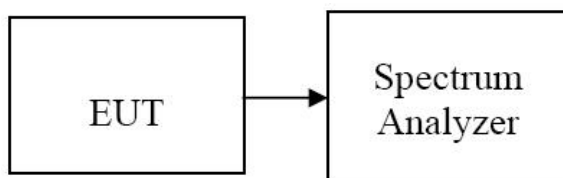

#### TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode.

1. Span = 2 MHz
2. RBW = 1 MHz
3. VBW = 1 MHz
4. Sweep = auto

#### TEST RESULTS

*No non-compliance noted*

#### Test Data

##### (Normal)


| Channel | Frequency<br>(MHz) | Output Power(GFSK) |      | Output Power(8DPSK) |      | Limit<br>(W) | Result |
|---------|--------------------|--------------------|------|---------------------|------|--------------|--------|
|         |                    | (dBm)              | (mW) | (dBm)               | (mW) |              |        |
| Low     | 2402               | 1.09               | 1.28 | -0.08               | 0.99 | 1            | PASS   |
| Mid     | 2441               | 1.22               | 1.32 | -0.44               | 0.90 |              | PASS   |
| High    | 2480               | 0.45               | 1.10 | -0.54               | 0.88 |              | PASS   |



## Test Plots


(GFSK)

### Peak Power ( Low CH )

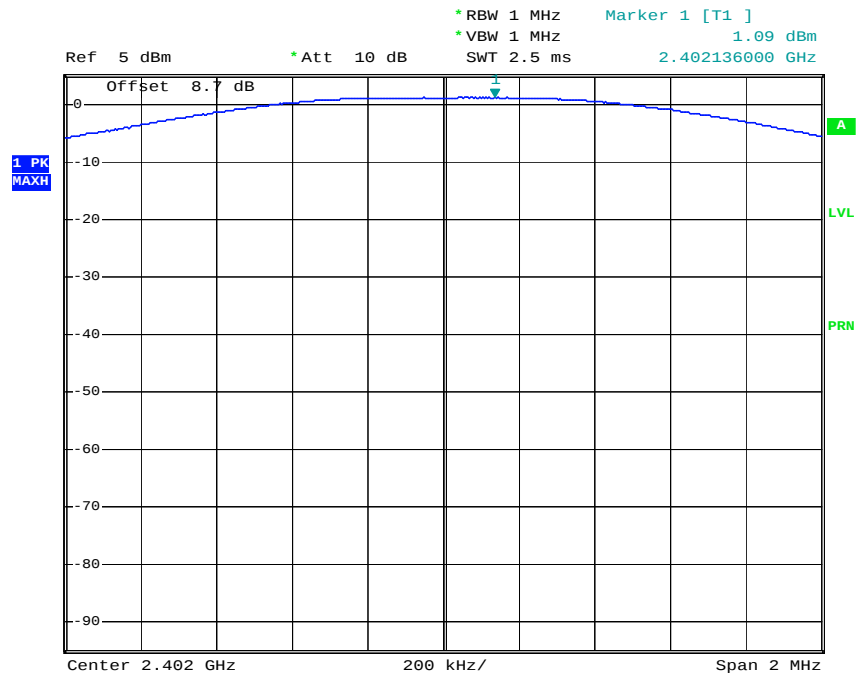

Date: 17.JAN.2008 14:34:16

### Peak Power ( Mid CH )

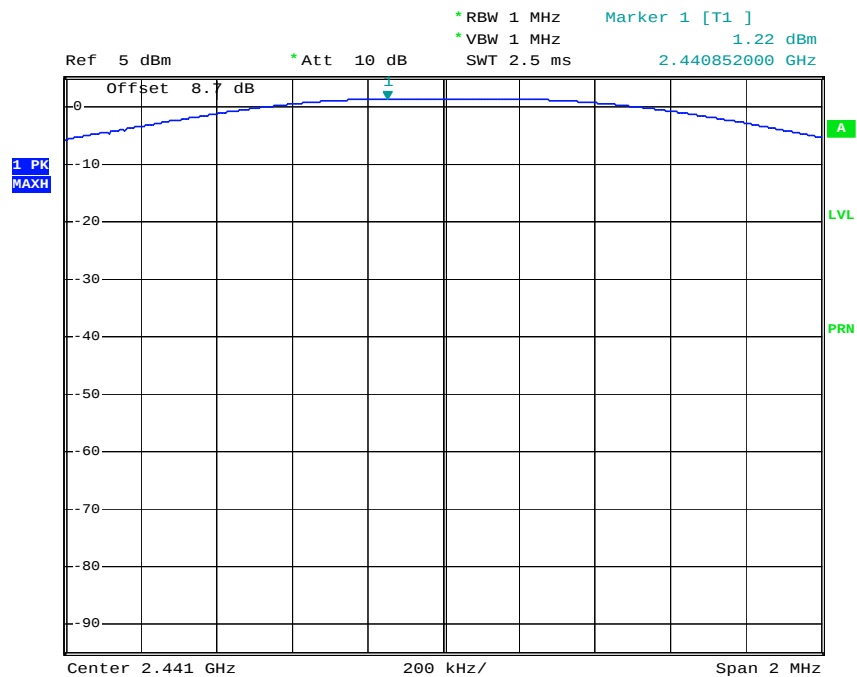


Date: 17.JAN.2008 14:34:46

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 9 of 53                                     |




## Peak Power ( High CH )

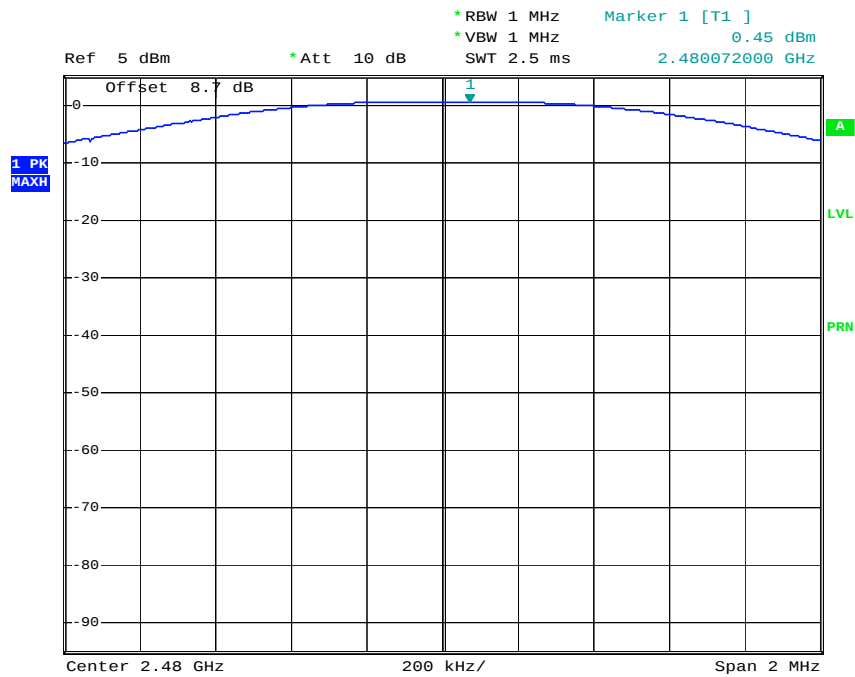

Date: 17.JAN.2008 14:35:22

(8DPSK)

## Peak Power ( Low CH )

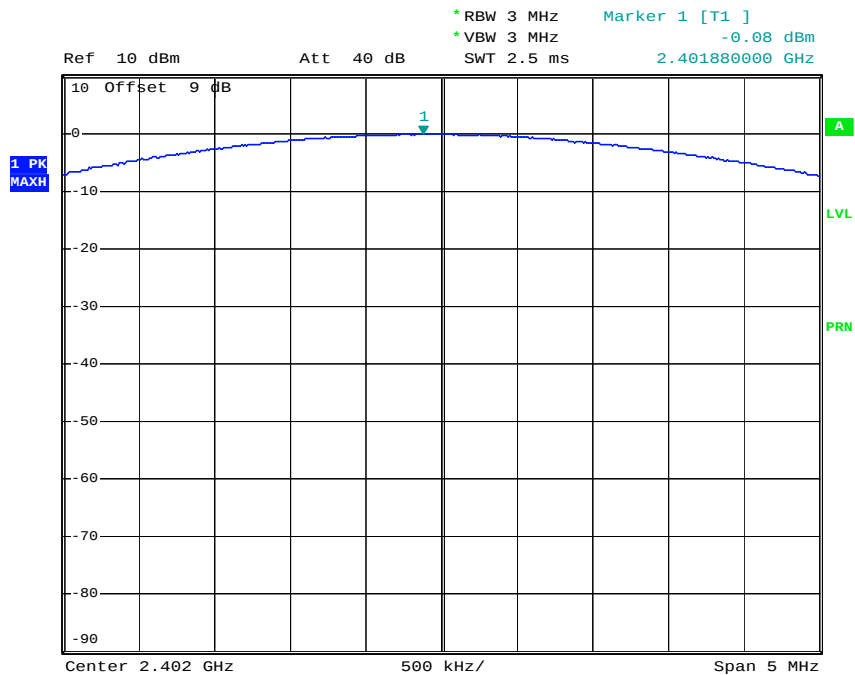


Date: 21.FEB.2008 15:24:38

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 10 of 53                                    |




## Peak Power ( Mid CH )

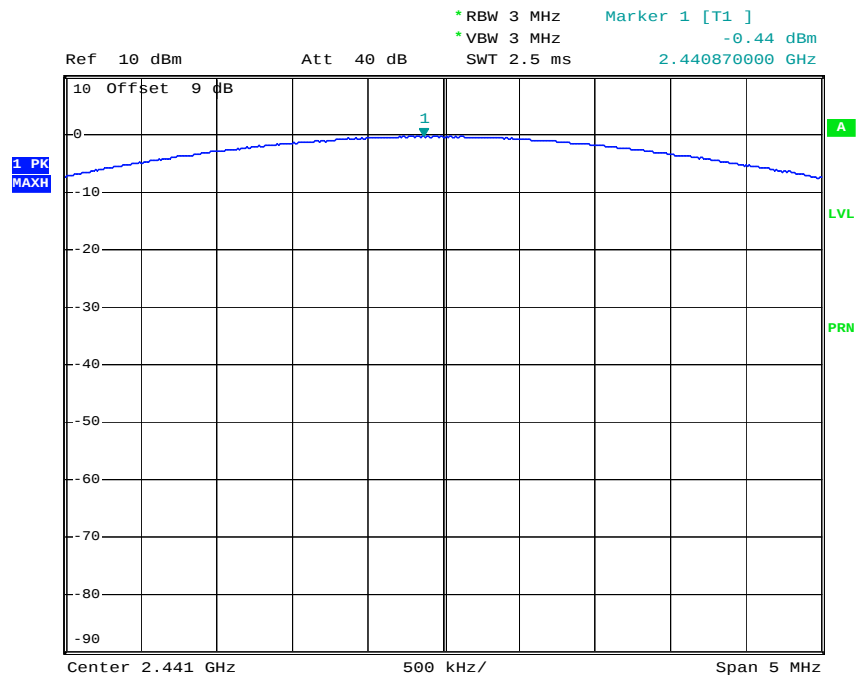

Date: 21.FEB.2008 15:23:42

## Peak Power ( High CH )

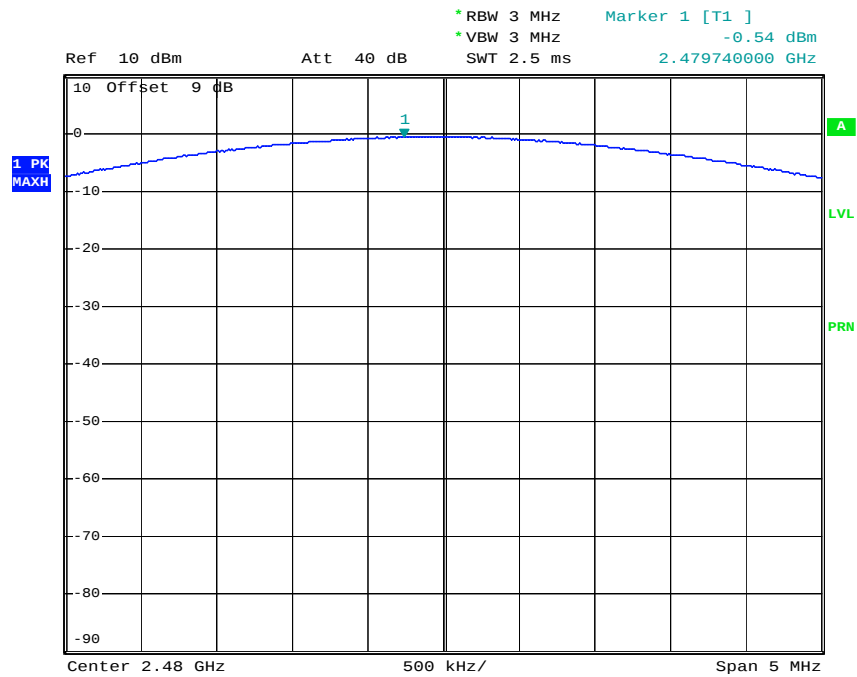

Date: 21.FEB.2008 15:22:42


|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 11 of 53                                    |

## 7.2 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### Test Configuration

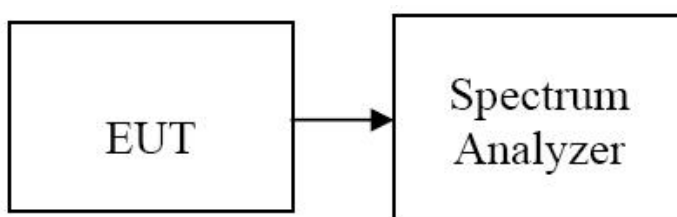

### TEST PROCEDURE

The spectrum analyzer is set to :

1. Span = 8 MHz
2. RBW = 100 KHz
3. VBW = 300 KHz
4. Sweep = auto


### TEST RESULTS

See attached.




## Test Data (GFSK)

### Band Edges (Low- CH)

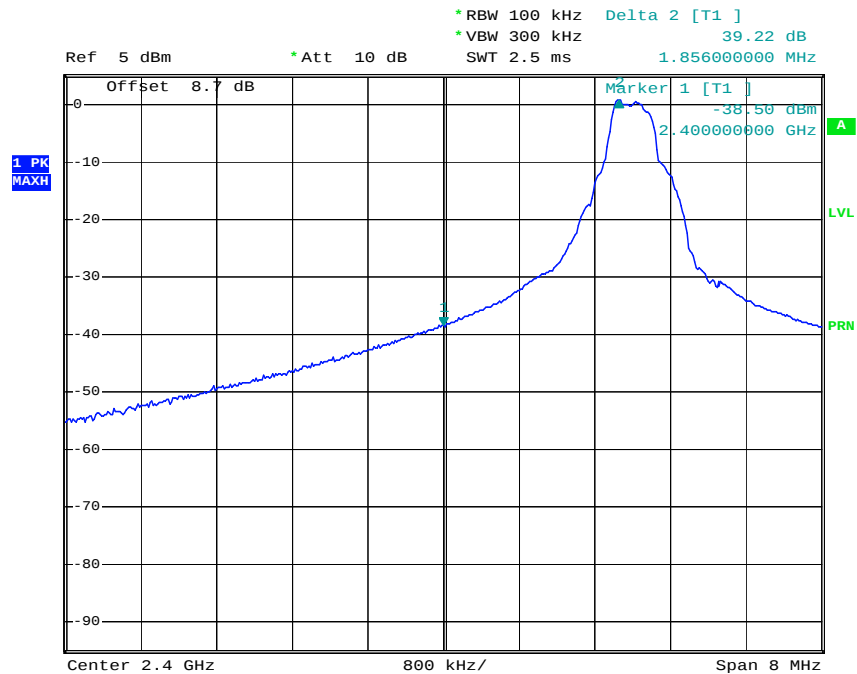

Date: 17.JAN.2008 14:38:16

### Band Edges (High-CH)

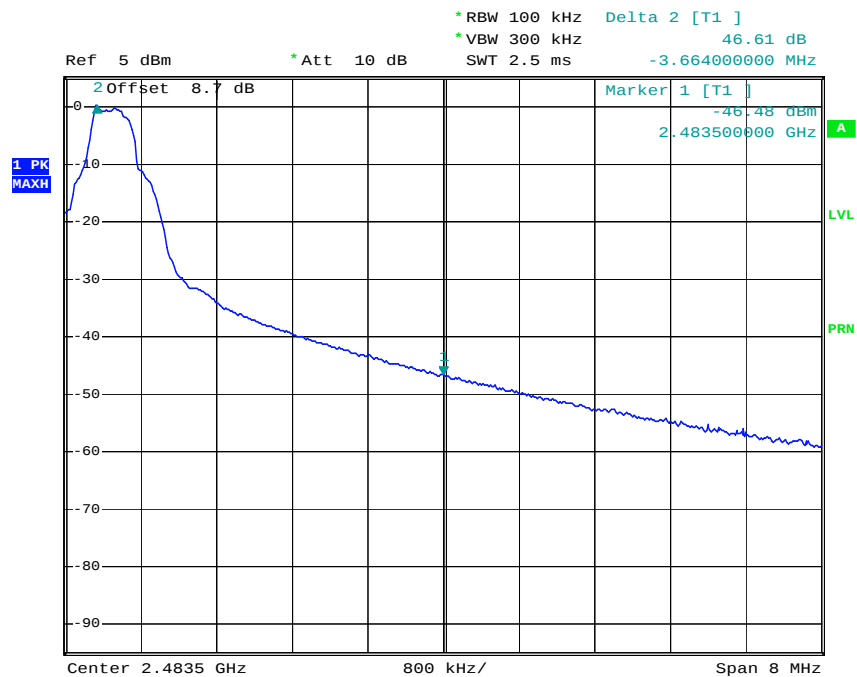


Date: 17.JAN.2008 14:37:10

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 13 of 53                                    |




## Test Data (8DPSK)

### Band Edges (Low- CH)

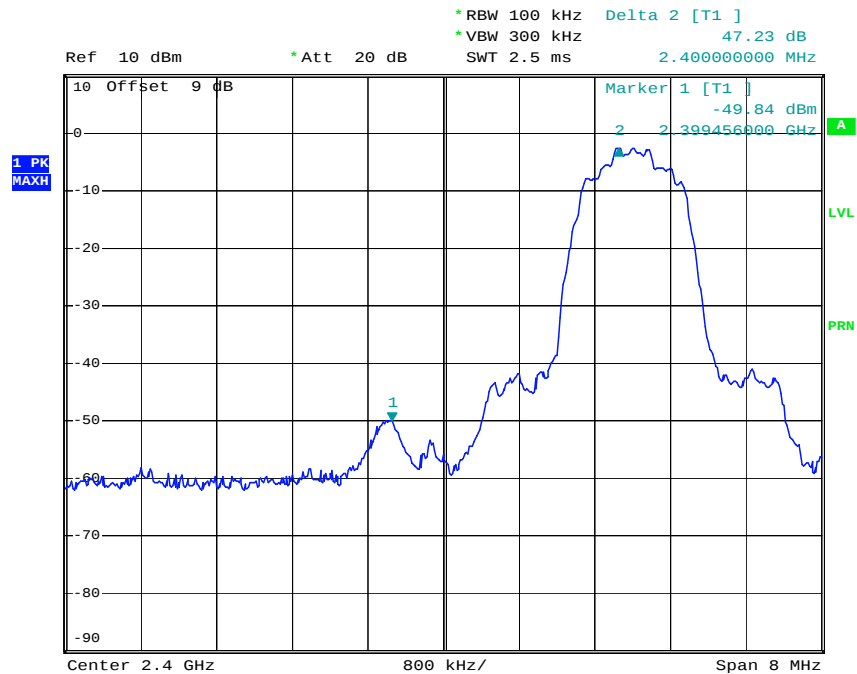

Date: 11.FEB.2008 12:13:41

### Band Edges (High-CH)

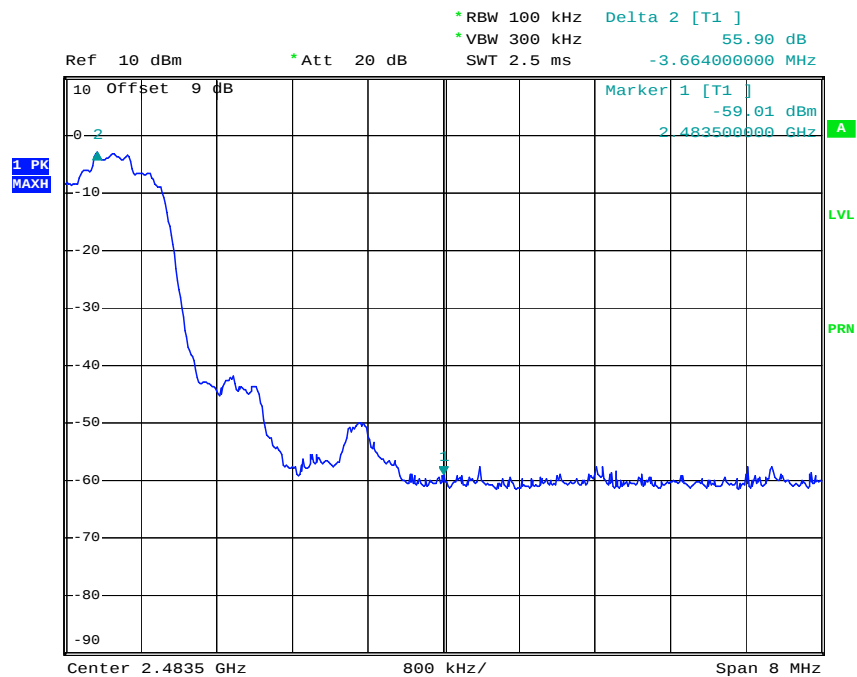

Date: 11.FEB.2008 12:12:17


|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 14 of 53                                    |

## 7.2.1 BAND EDGES MEASUREMENT (RADIATED))

### LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### Test Configuration

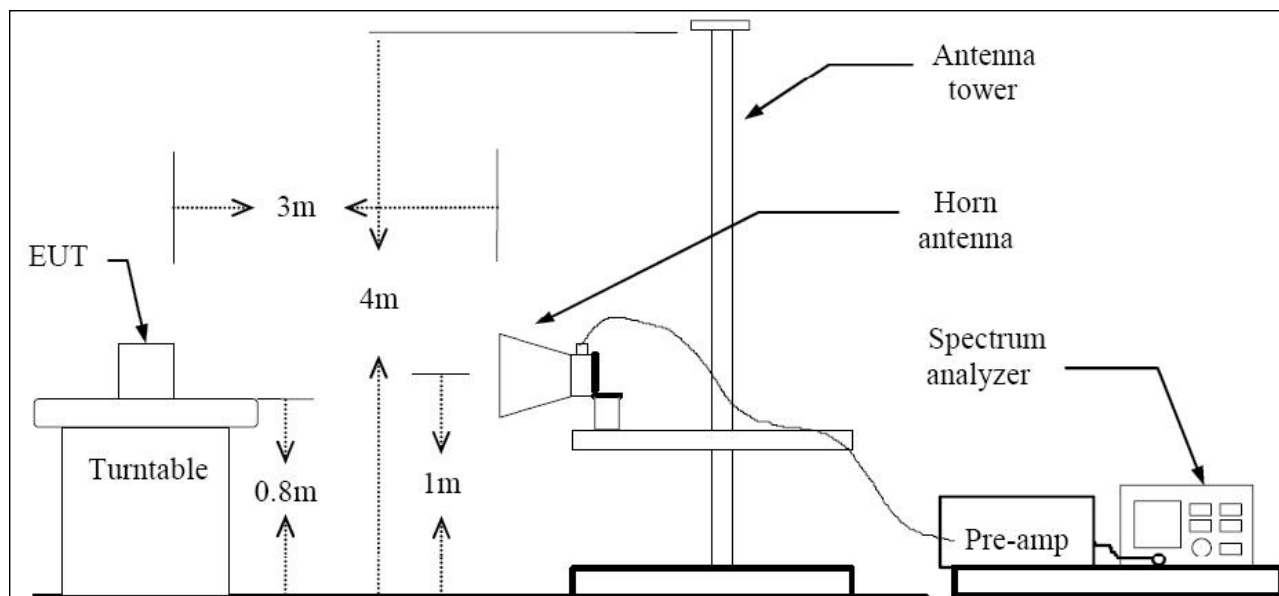

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW = VBW = 1 MHz / Sweep = AUTO
  - (b) AVERAGE: RBW = 1 MHz / VBW = 10 Hz / Sweep = AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.

### Test Data

| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 1 5 of 53                                   |




## Test Plots(GFSK)

(Low- CH)


Polarity: Vertical

Detector mode: Peak

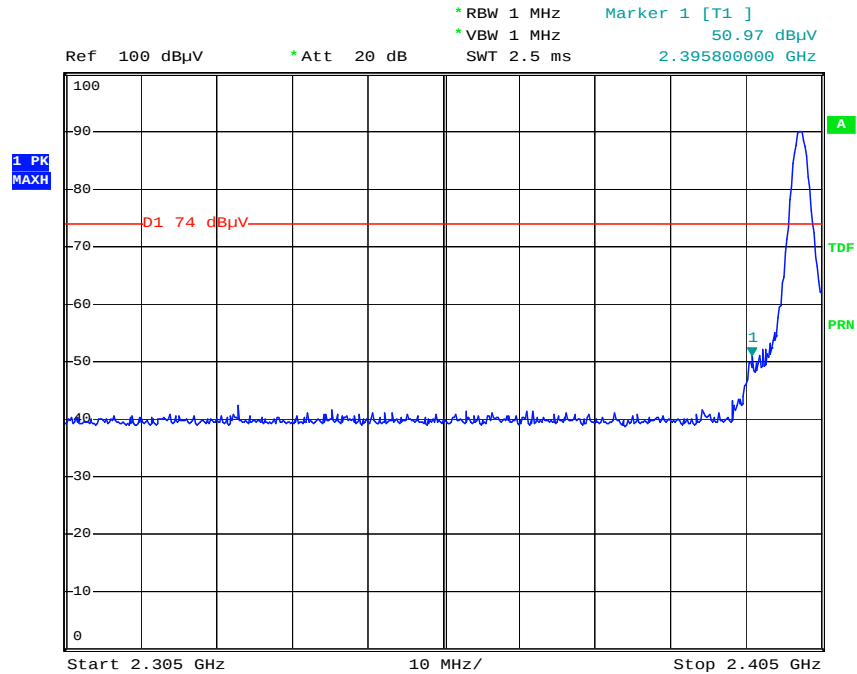

Date: 18. JAN. 2008 13:04:00

Detector mode: Average

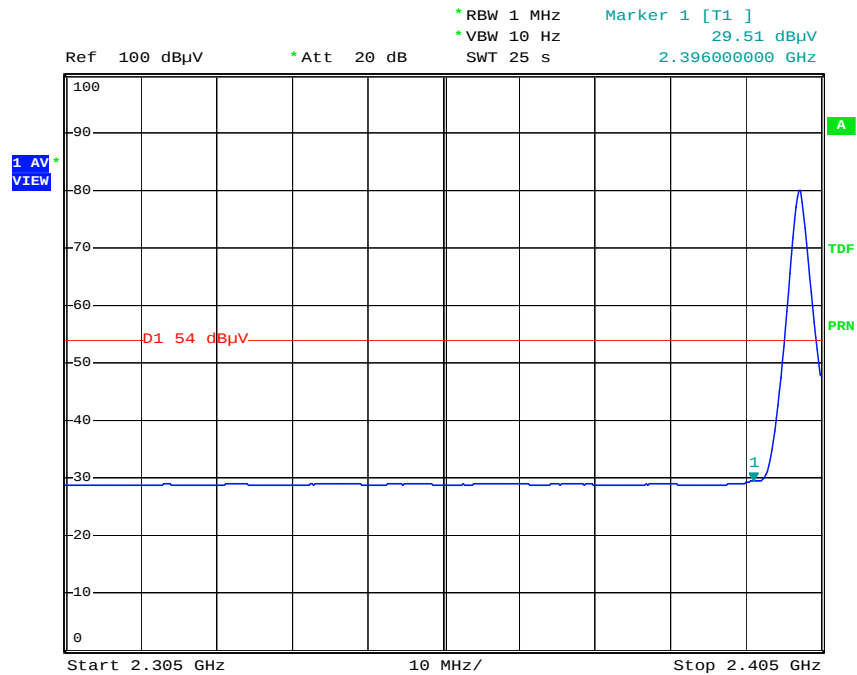

Date: 18. JAN. 2008 13:05:49


|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 16 of 53                                    |



(Low- CH)


Polarity: Horizontal

Detector mode: Peak

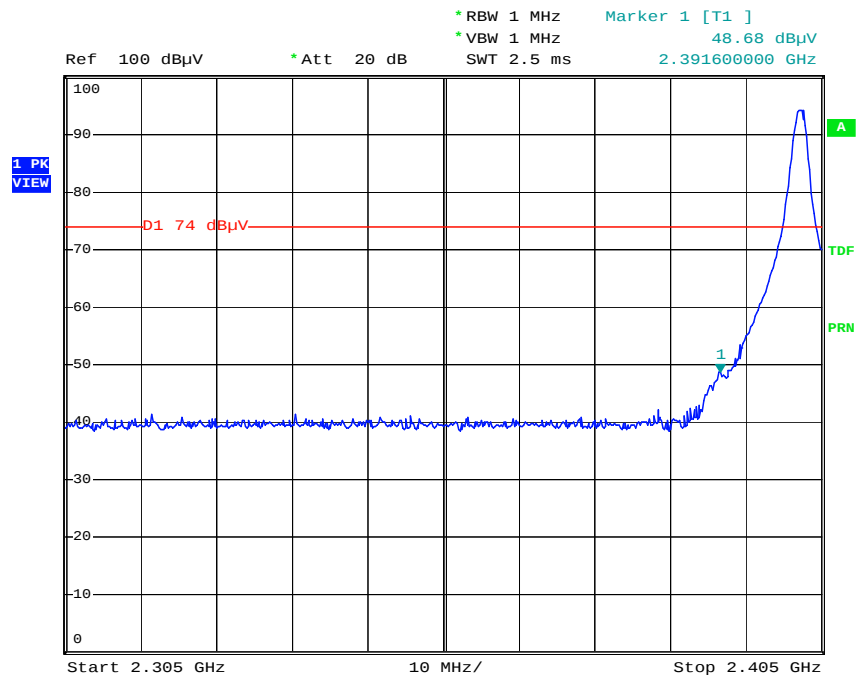

Date: 18. JAN. 2008 13:09:49

Detector mode: Average

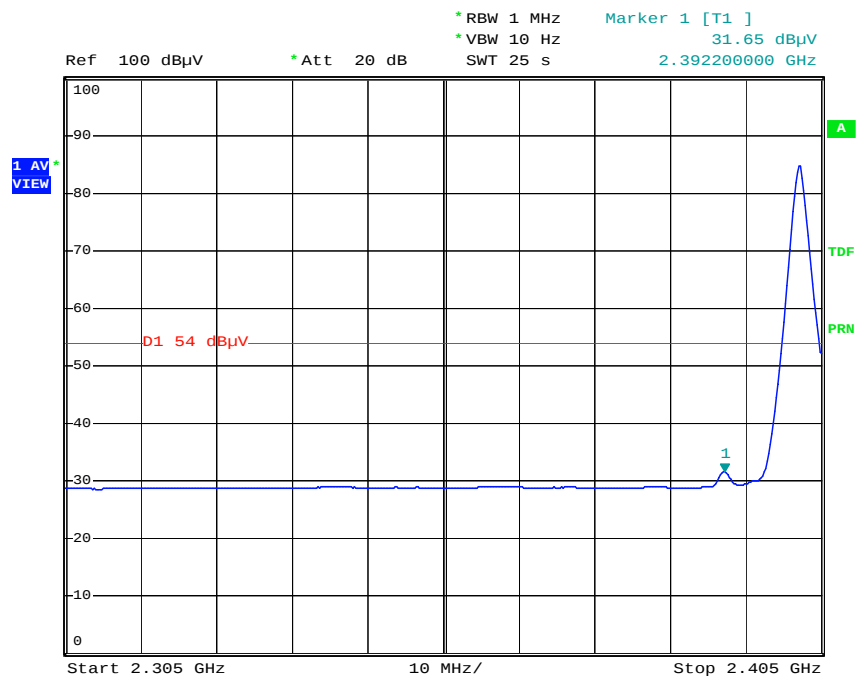

Date: 18. JAN. 2008 13:11:19


|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 17 of 53                                    |



## Test Plots, (High- CH)


Polarity: Vertical

Detector mode: Peak

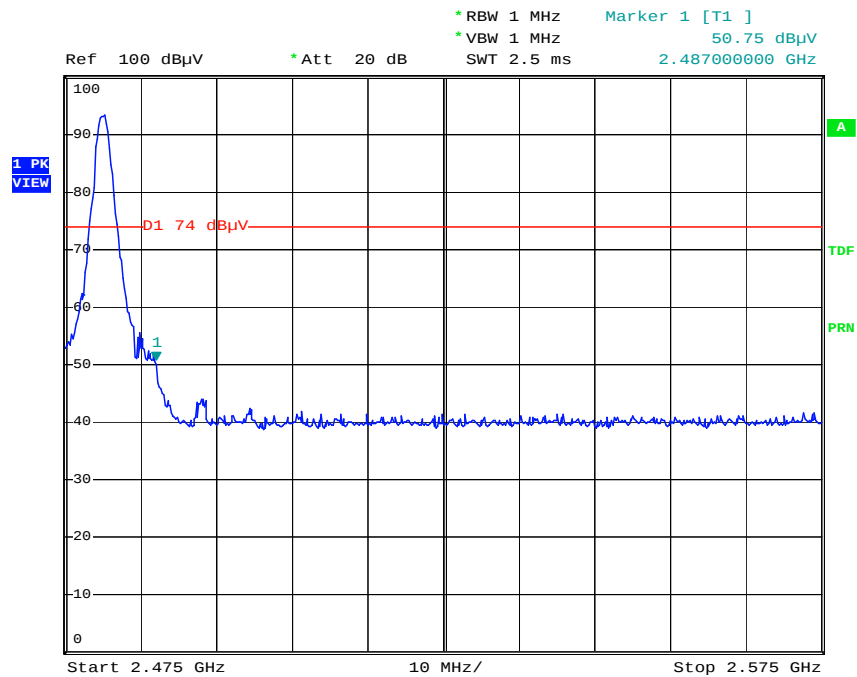

Date: 18. JAN. 2008 13:21:47

Detector mode: Average

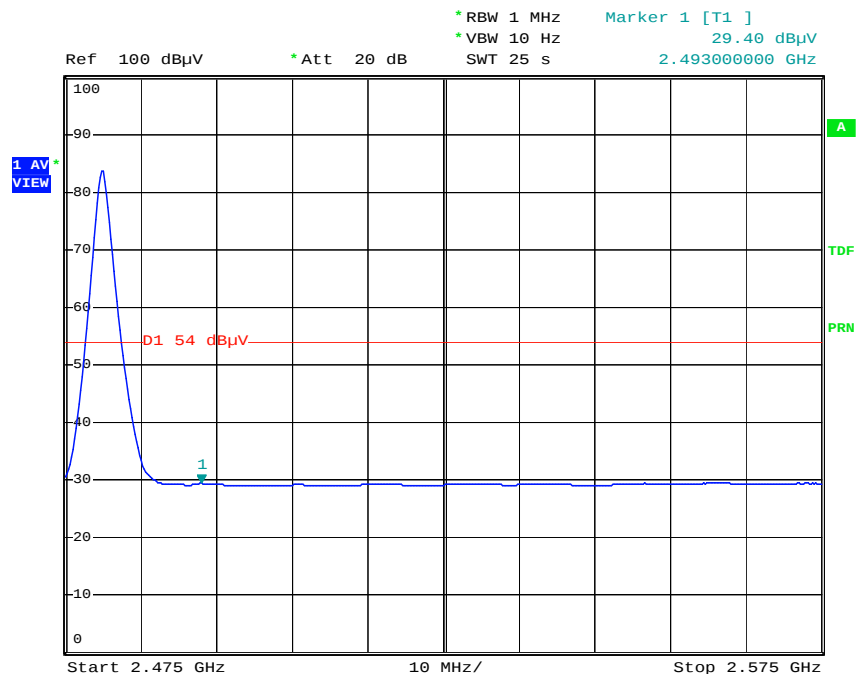

Date: 18. JAN. 2008 13:23:20


|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 18 of 53                                    |



(High- CH)


Polarity: Horizontal

Detector mode: Peak

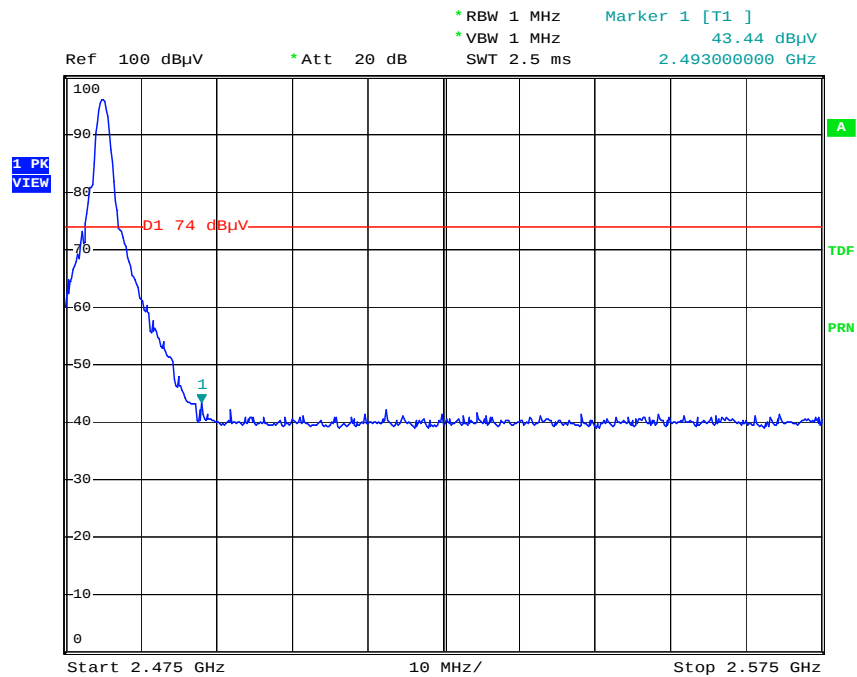

Date: 18. JAN. 2008 13:30:50

Detector mode: Average

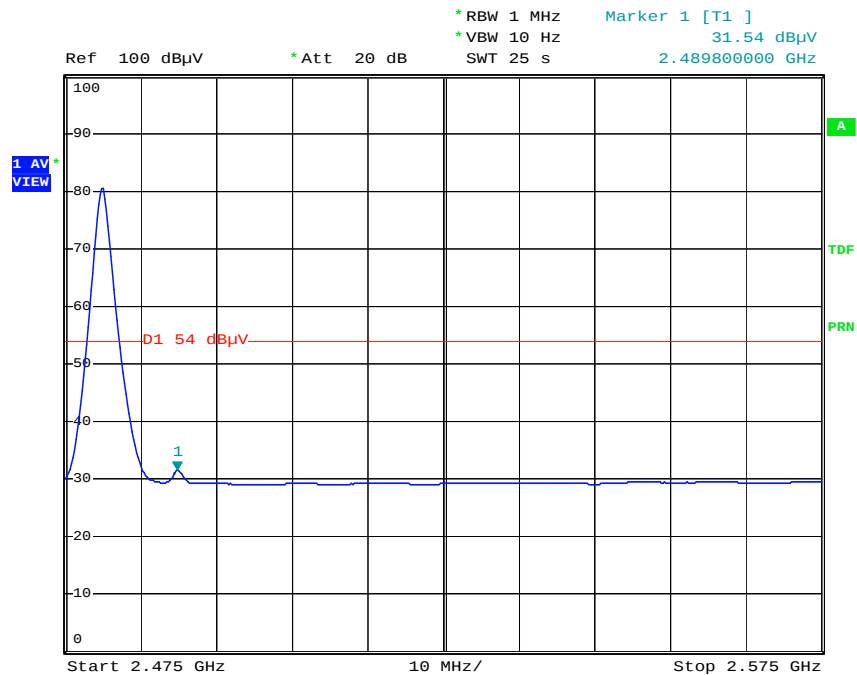

Date: 18. JAN. 2008 13:18:12

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 19 of 53                                    |




## Test Plots (8DPSK)


(Low- CH)

Polarity: Vertical

Detector mode: Peak

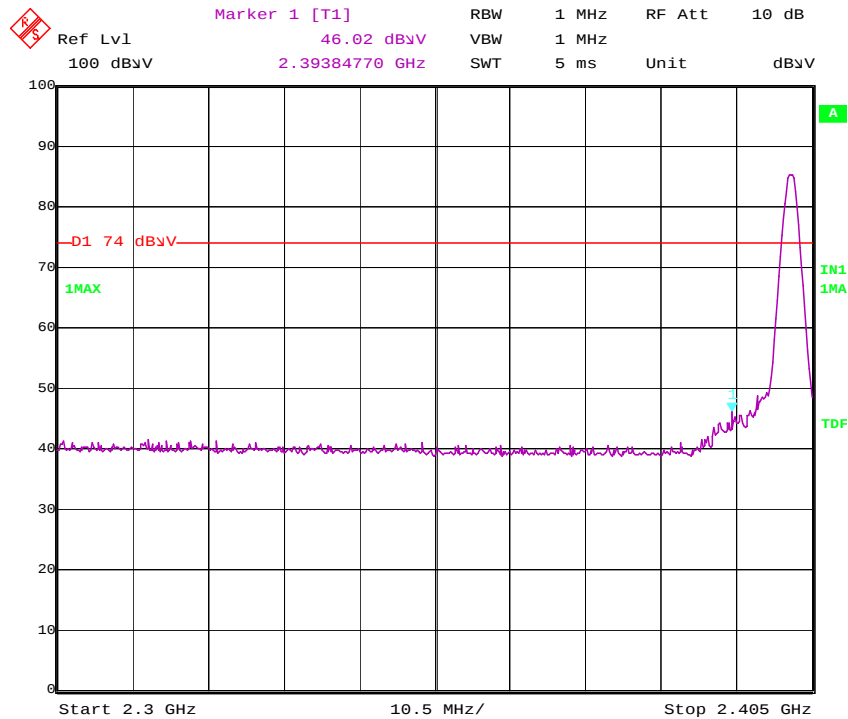

Detector mode: Average

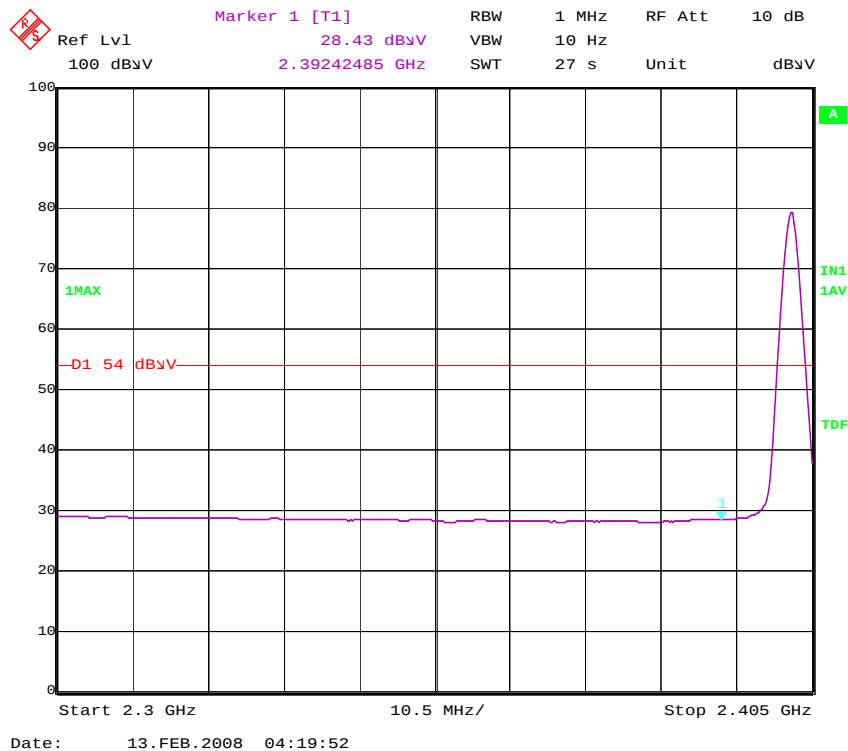


|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 20 of 53                                    |



(Low- CH)


Polarity: Horizontal

Detector mode: Peak

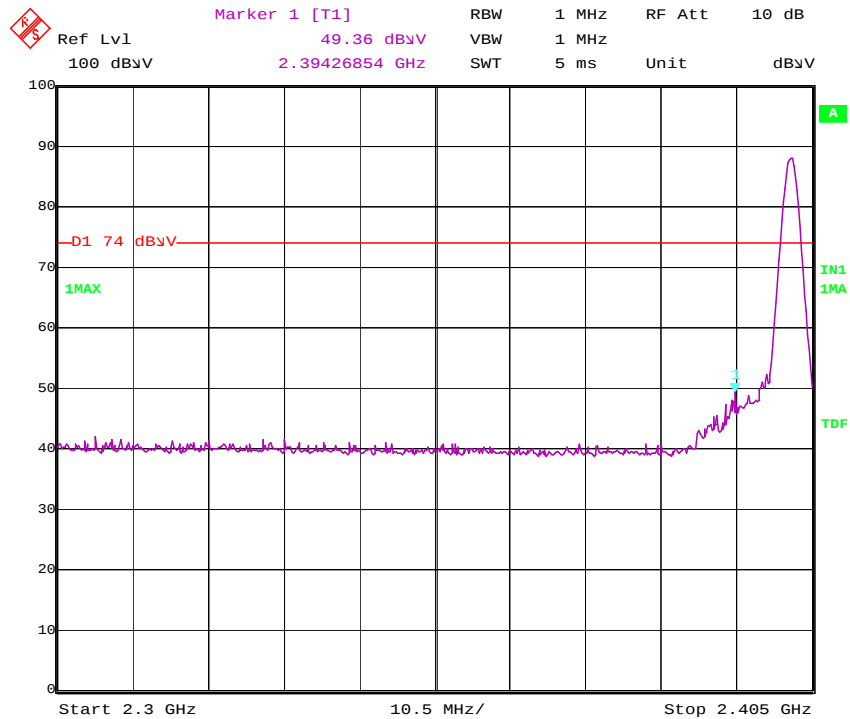

Date: 13.FEB.2008 04:08:32

Detector mode: Average

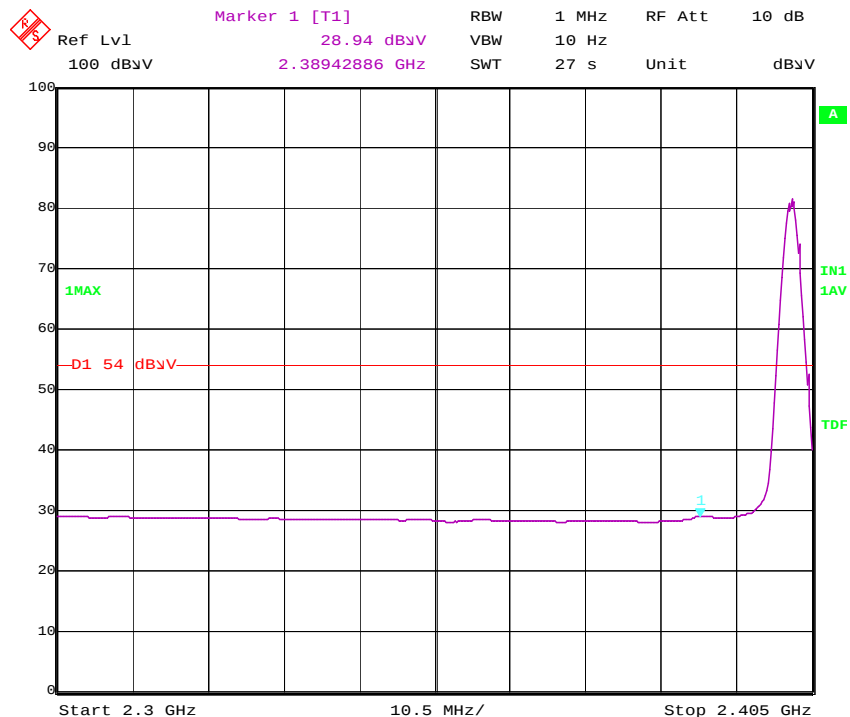

Date: 13.FEB.2008 04:11:46


|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 21 of 53                                    |




## Test Plots, (High- CH)

Polarity: Vertical

### Detector mode: Peak

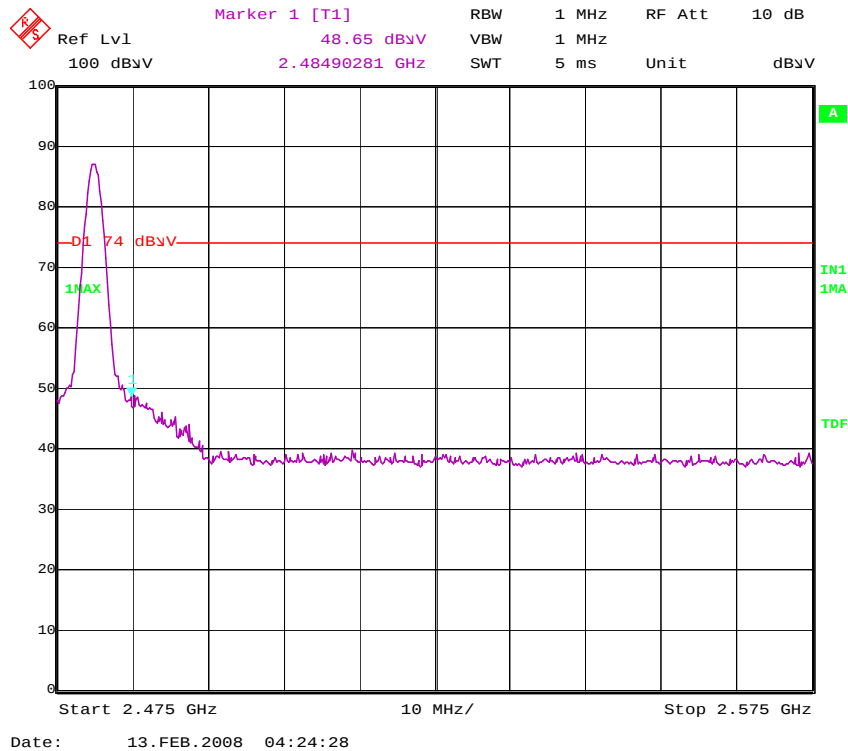

### Detector mode: Average

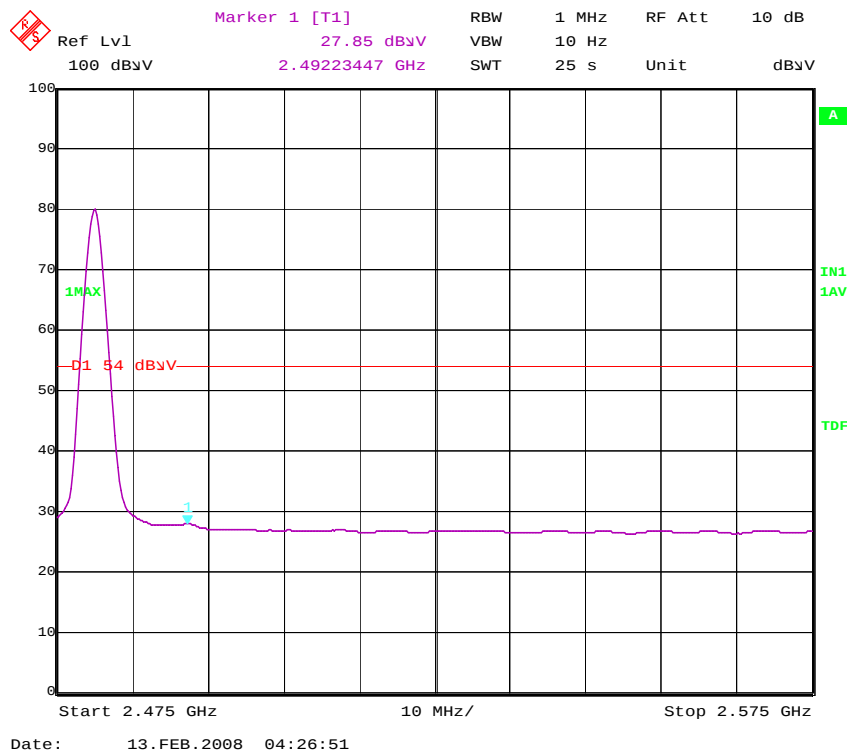


|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 2 2 of 53                                   |




(High- CH)

Polarity: Horizontal

Detector mode: Peak

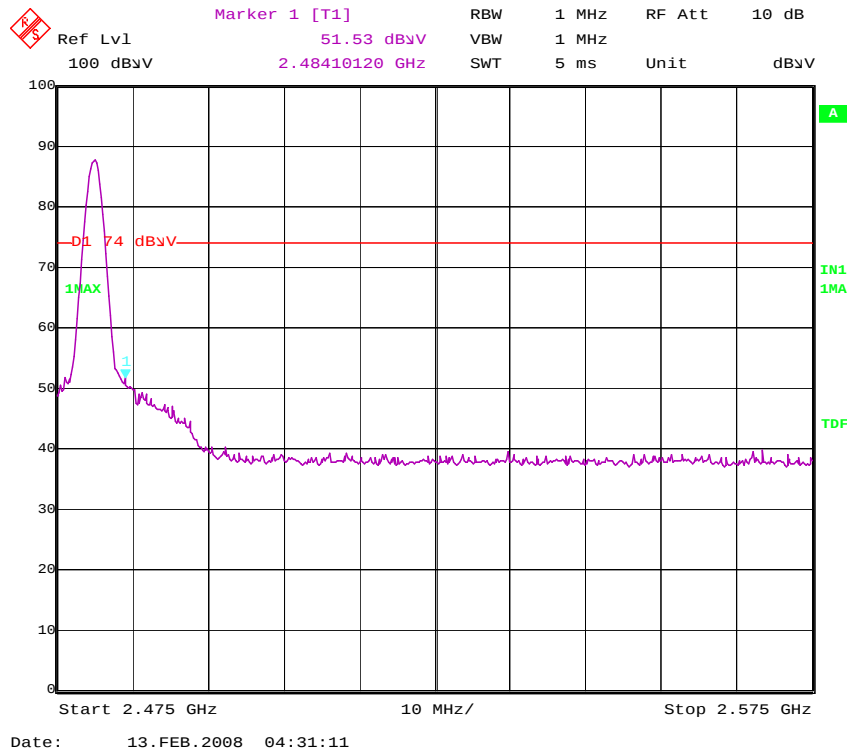

Detector mode: Average

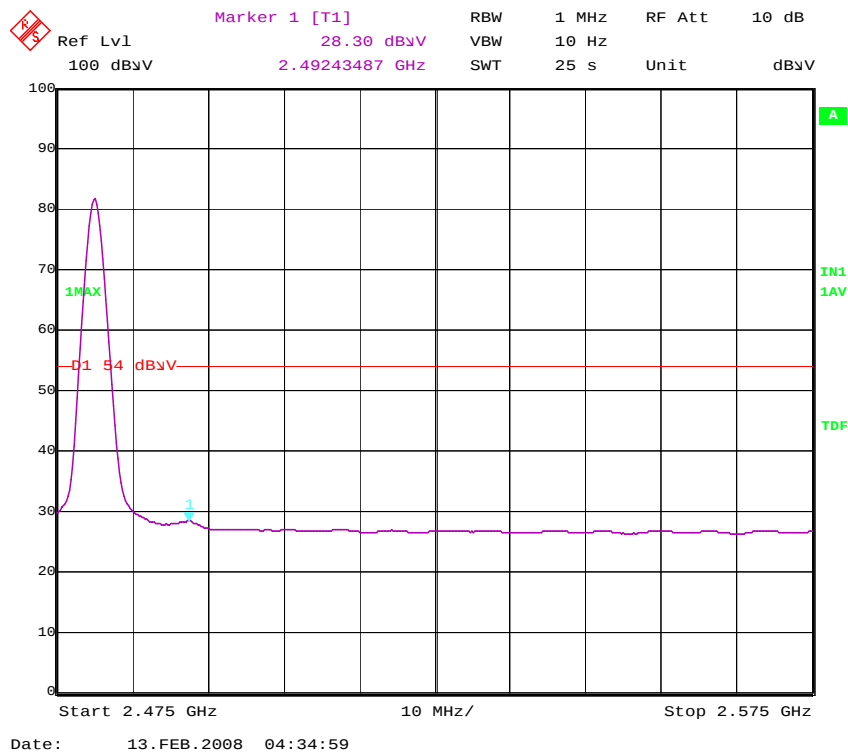


|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 2 3 of 53                                   |

## 7.3 FREQUENCY SEPARATION

### LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### Test Configuration

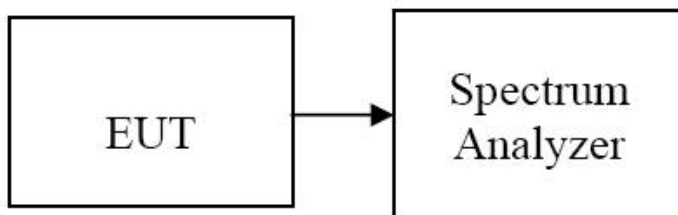

### TEST PROCEDURE

The spectrum analyzer is set to :

1. Span = 3 MHz
2. RBW = 30 KHz
3. VBW = 100 KHz
4. Sweep = auto

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

### TEST RESULTS


*No non-compliance noted*

### Test Data

| Channel Separation (KHz) |       | 20dB Bandwidth (KHz) |      |       | Limit (KHz) | Result |
|--------------------------|-------|----------------------|------|-------|-------------|--------|
| GFSK                     | 8DPSK | Channel              | GFSK | 8DPSK |             |        |
| 834                      | 996   | Low CH               | 796  | 1284  | >25         | Pass   |
|                          |       | Middle CH            | 792  | 1266  |             |        |
|                          |       | High CH              | 820  | 1272  |             |        |


## Test Plot

### Measurement of Channel Separation(GFSK)

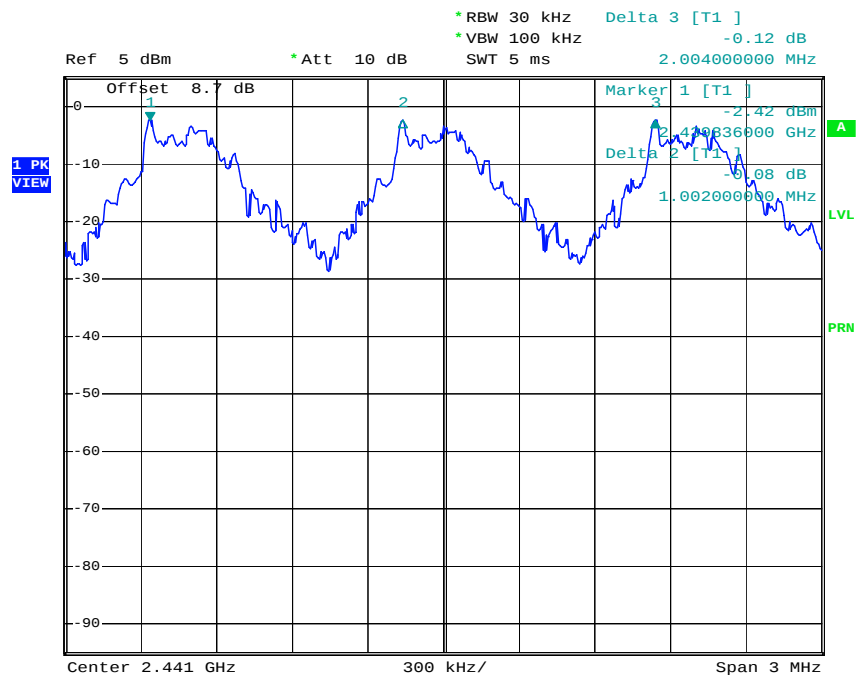

Date: 17.JAN.2008 14:42:17

### Measurement of Channel Separation(8DPSK)

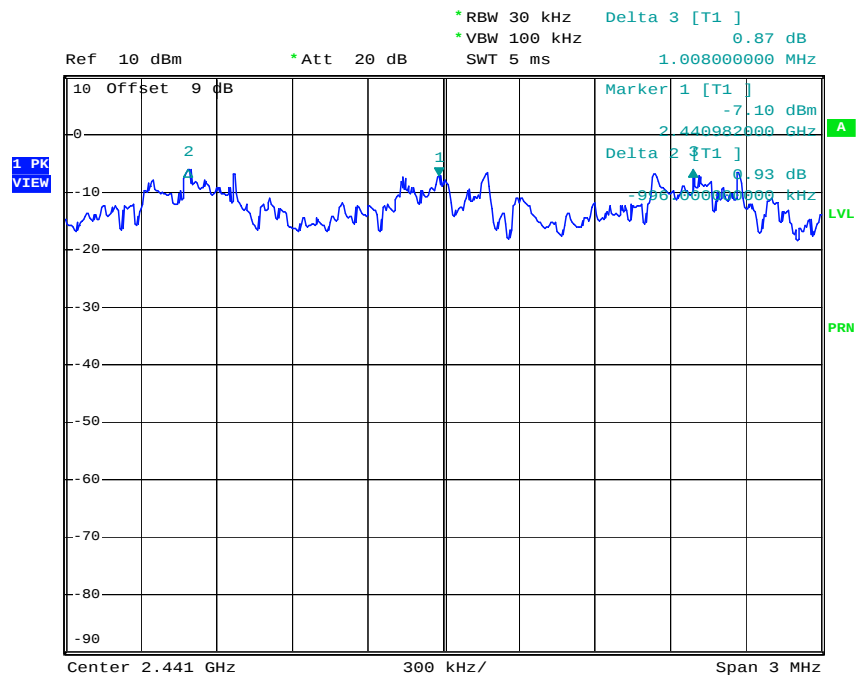


Date: 11.FEB.2008 12:17:00



## Test Plot (GFSK)


20 dB bandwidth

(Low CH)

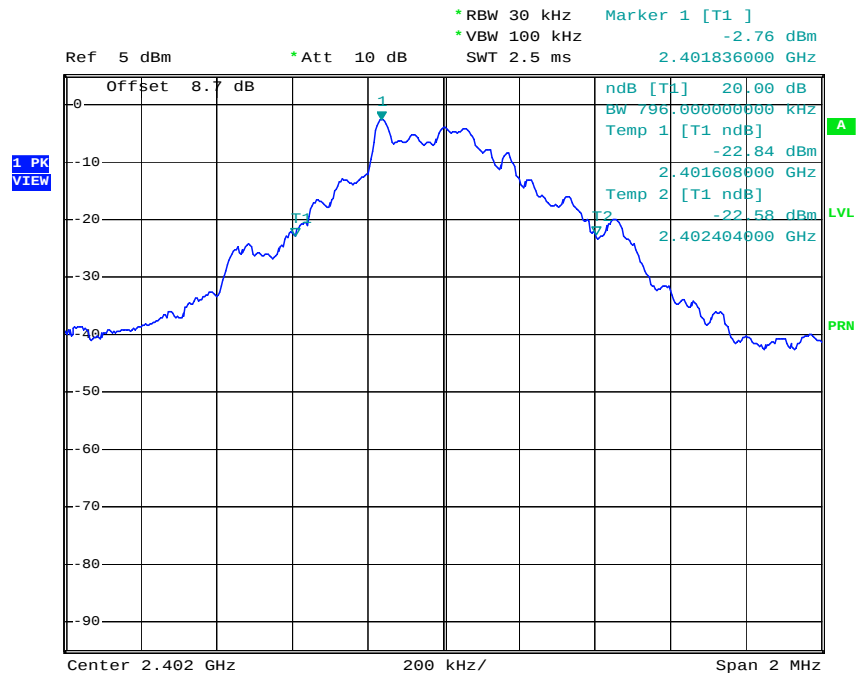

Date: 17.JAN.2008 14:48:29

( Mid CH)

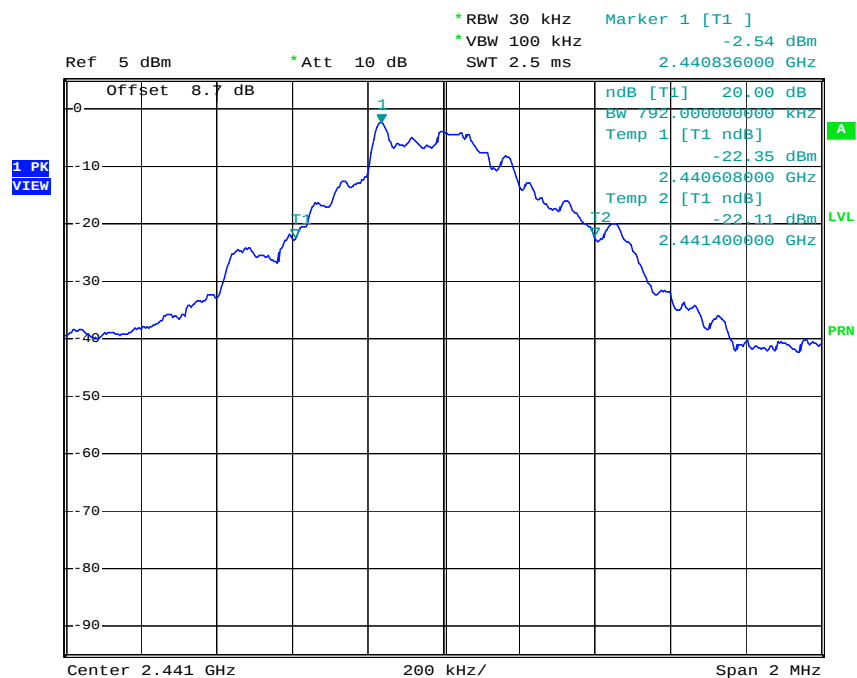


Date: 17.JAN.2008 14:49:17

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 26 of 53                                    |



(High CH)

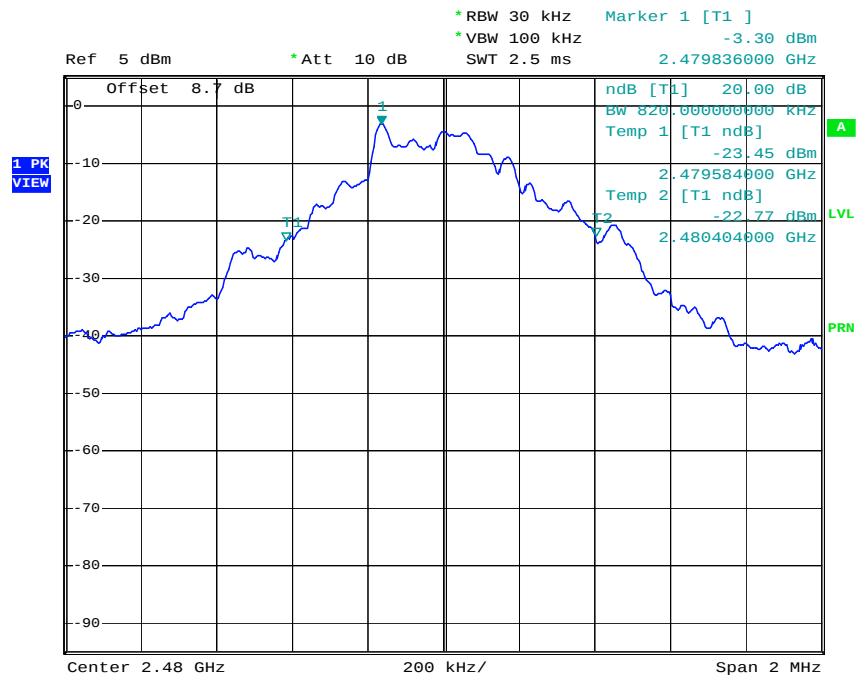


Date: 17.JAN.2008 14:50:03

Test Plot (8DPSK)

20 dB bandwidth

(Low CH)

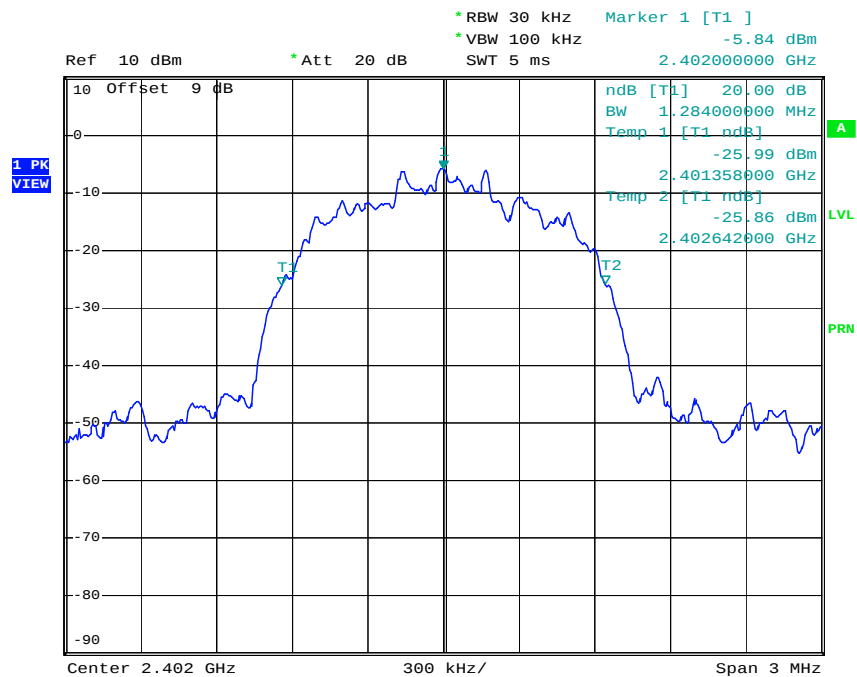


Date: 11.FEB.2008 12:22:45

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 27 of 53                                    |




( Mid CH)

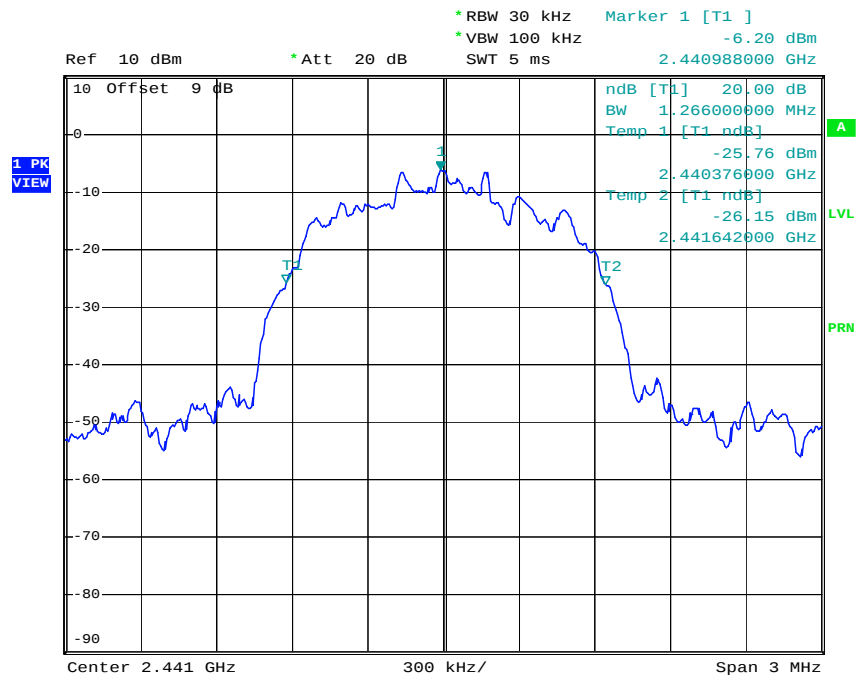

Date: 11.FEB.2008 12:23:45

(High CH)

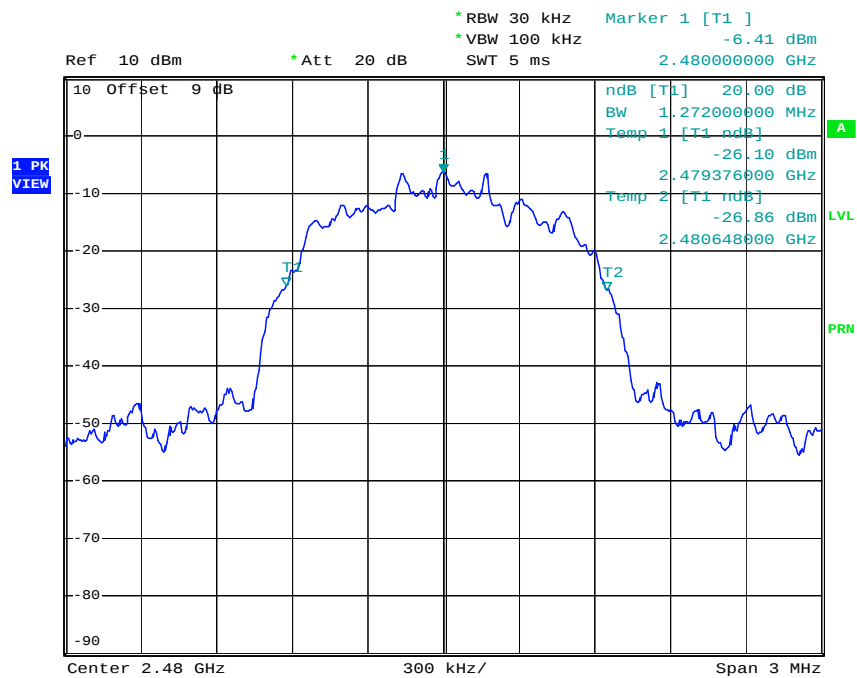

Date: 11.FEB.2008 12:24:33


|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 28 of 53                                    |

## 7.4 NUMBER OF HOPPING FREQUENCY

### LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

### Test Configuration

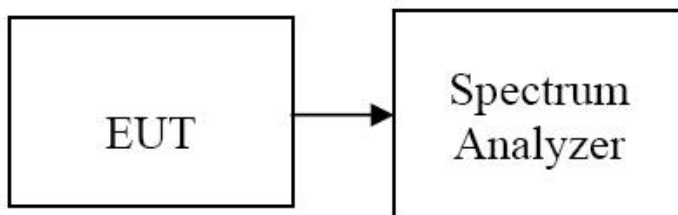

### TEST PROCEDURE

The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer was set to :

1. Span = the frequency band of operation ( Start = 2400 MHz, Stop = 2483.5 MHz )
2. RBW = 300 KHz
3. VBW = 300 KHz
4. Sweep = auto

The trace was allowed to stabilize.

### TEST RESULTS

*No non-compliance noted*

### Test Data


| Result (No. of CH) | Limit (No. of CH) | Result |
|--------------------|-------------------|--------|
| 79                 | >75               | Pass   |



## Test Plot


### Number of Channels (GFSK)

#### 2.4 GHz – 2.441 GHz

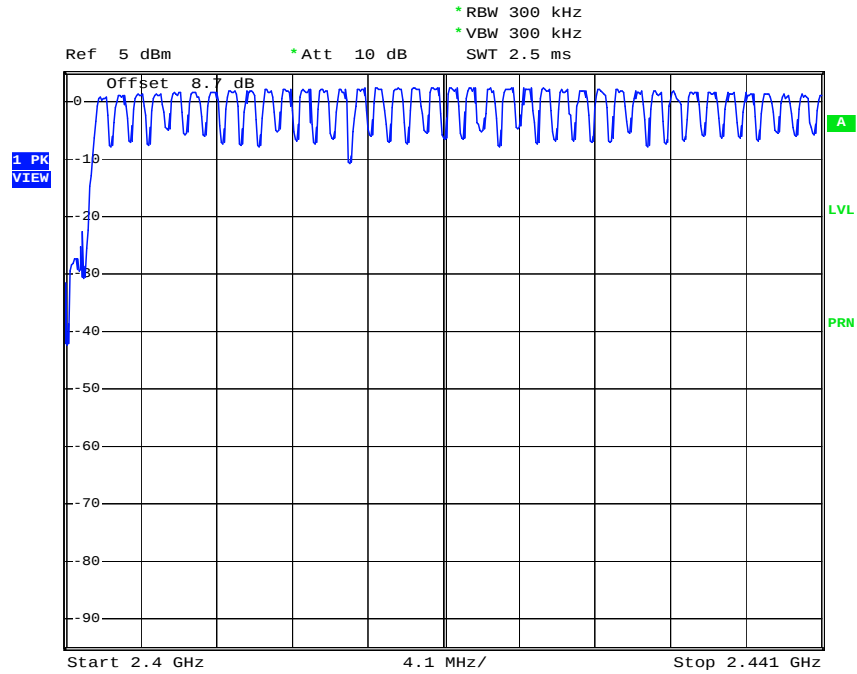

Date: 17.JAN.2008 14:45:02

#### 2.441 GHz – 2.4835 GHz

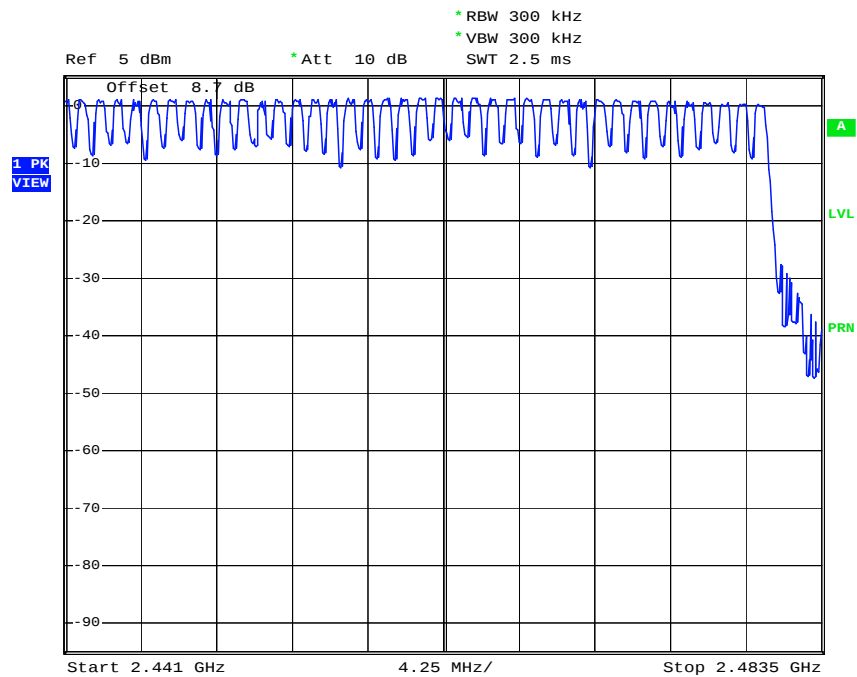


Date: 17.JAN.2008 14:47:09

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 30 of 53                                    |




## Number of Channels (8DPSK)

2.4 GHz – 2.441 GHz

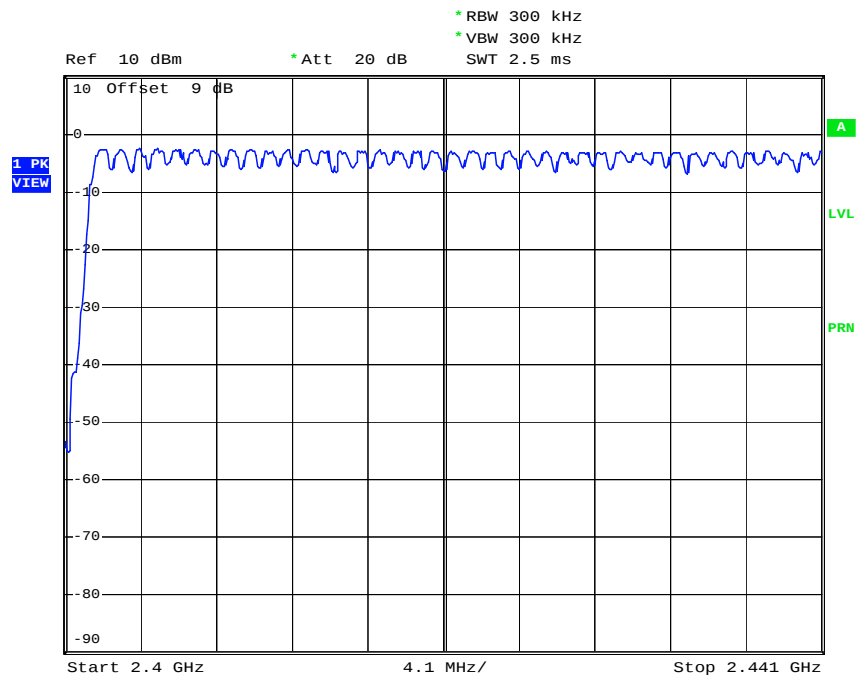

Date: 11.FEB.2008 12:19:33

2.441 GHz – 2.4835 GHz

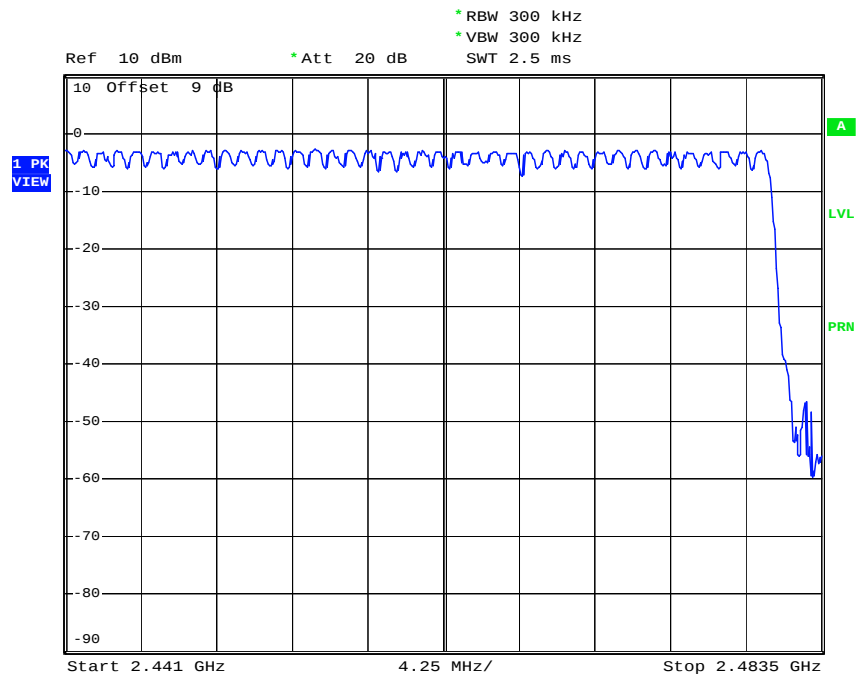

Date: 11.FEB.2008 12:21:45


|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 31 of 53                                    |

## 7.5 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### Test Configuration

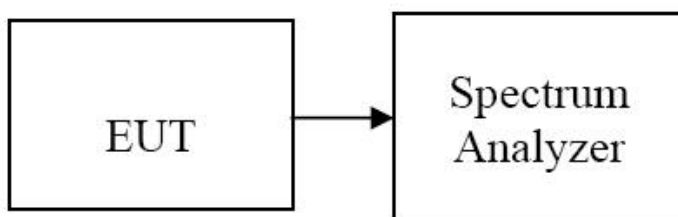

### TEST PROCEDURE

EUT was set to transmit the longest packet type (DH5)

1. Span = zero span
2. RBW = 1 MHz
3. VBW = 1 MHz
4. Sweep = as necessary to capture the entire dwell time per channel

The marker-delta function was used to determine the dwell time.

### TEST RESULTS

See the table.

**DH 5**(The longest packet type for GFSK)

CH Mid :  $2.920 * (1600/6)/79 * 31.6 = 311.46 \text{ (ms)}$

**3-DH 5**(The longest packet type for 8DPSK)

CH Mid :  $2.900 * (1600/6)/79 * 31.6 = 309.33 \text{ (ms)}$


| Channel | Pulse Time (ms) |       | Total of Dwell (ms) |        | Period Time (s) | Limit (ms) | Result |
|---------|-----------------|-------|---------------------|--------|-----------------|------------|--------|
|         | GFSK            | 8DPSK | GFSK                | 8DPSK  |                 |            |        |
| Low     | 2.920           | 2.910 | 311.46              | 310.40 | 31.6            | 400        | PASS   |
| Mid     | 2.920           | 2.900 | 311.46              | 309.33 | 31.6            |            | PASS   |
| High    | 2.920           | 2.910 | 311.46              | 310.40 | 31.6            |            | PASS   |



## Test Plots (GFSK)


DH 5

( Low CH )

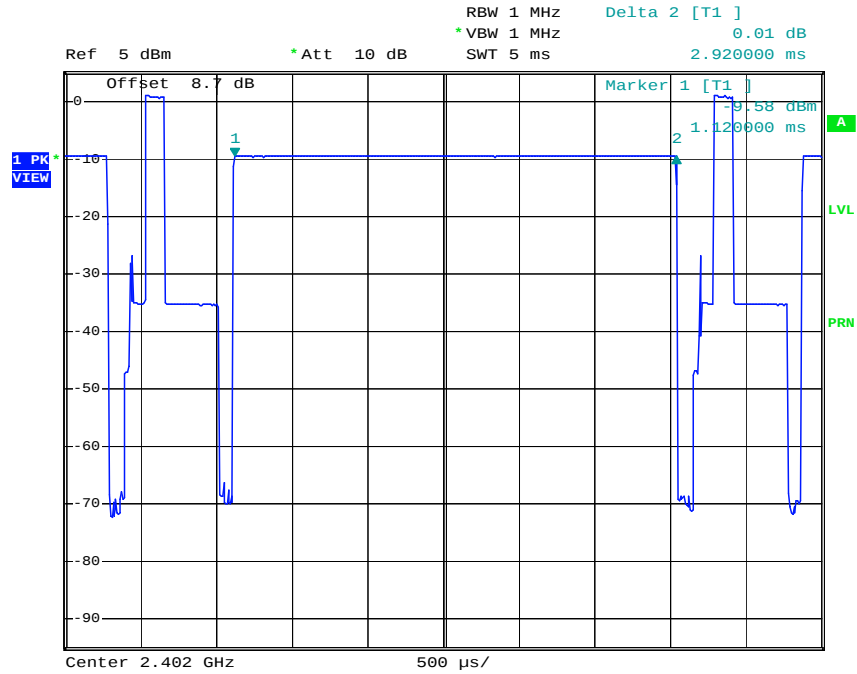

Date: 17.JAN.2008 14:53:08

( Mid CH )

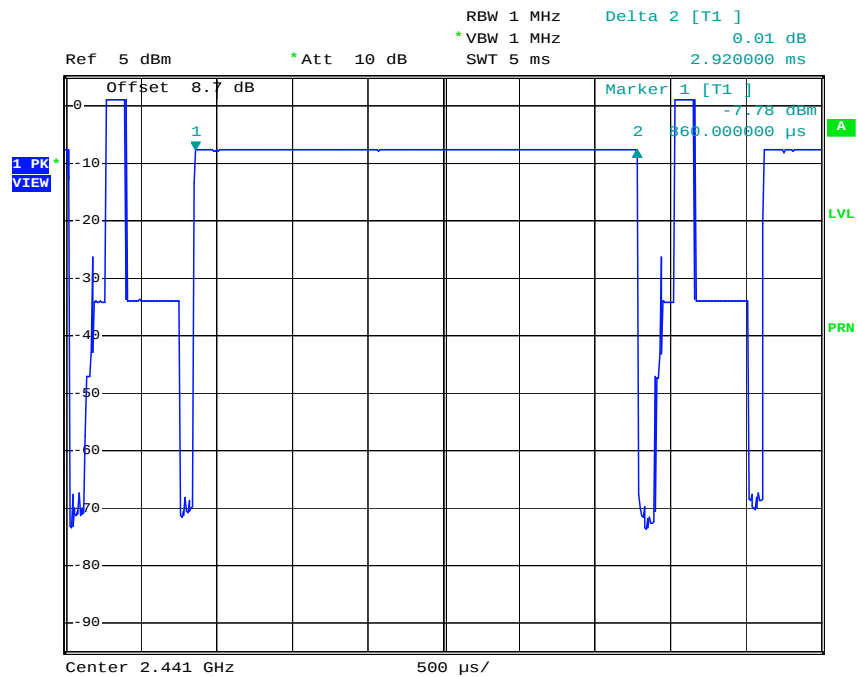


Date: 17.JAN.2008 14:52:13

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 33 of 53                                    |



(CH High)

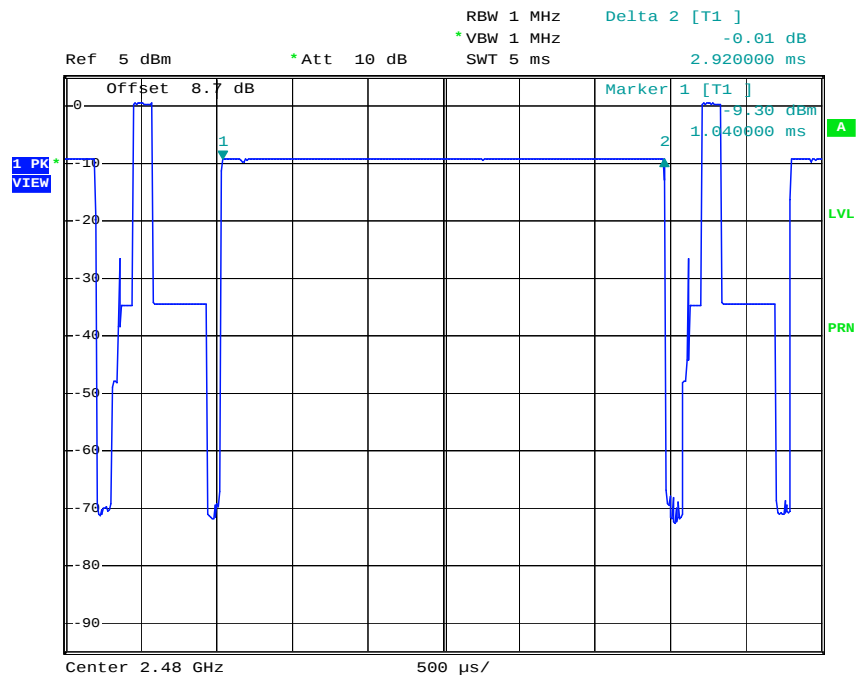


Date: 17.JAN.2008 14:51:08

Test Plots (8DPSK)

3-DH 5

( Low CH )

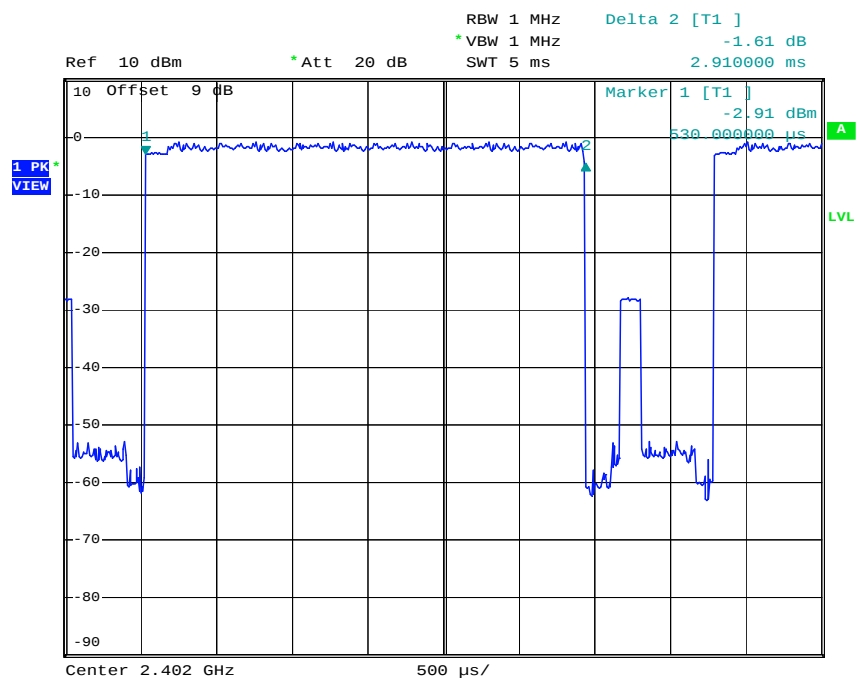


Date: 11.FEB.2008 12:27:04

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 3 4 of 53                                   |




( Mid CH )

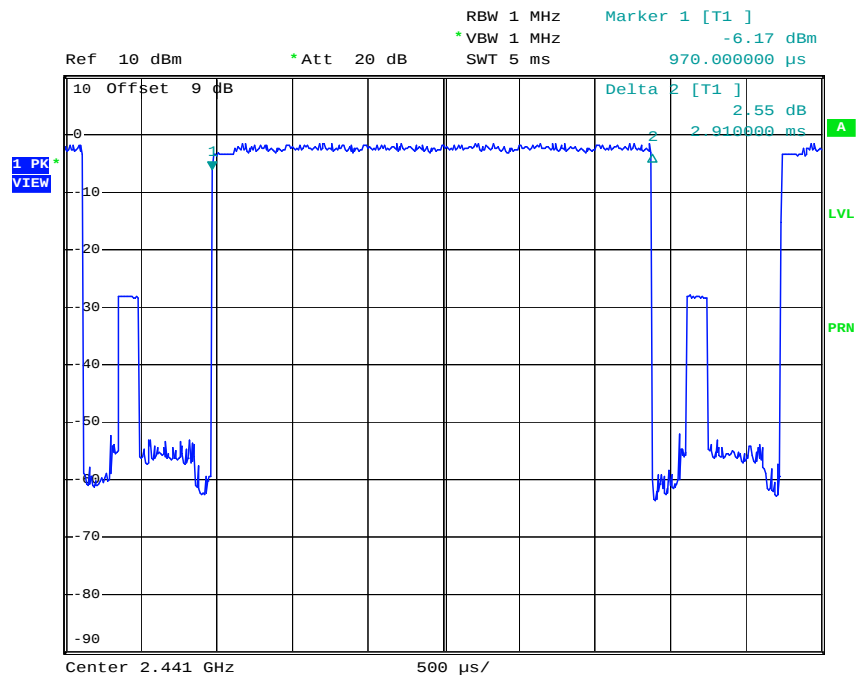

Date: 11.FEB.2008 12:28:38

( CH High )

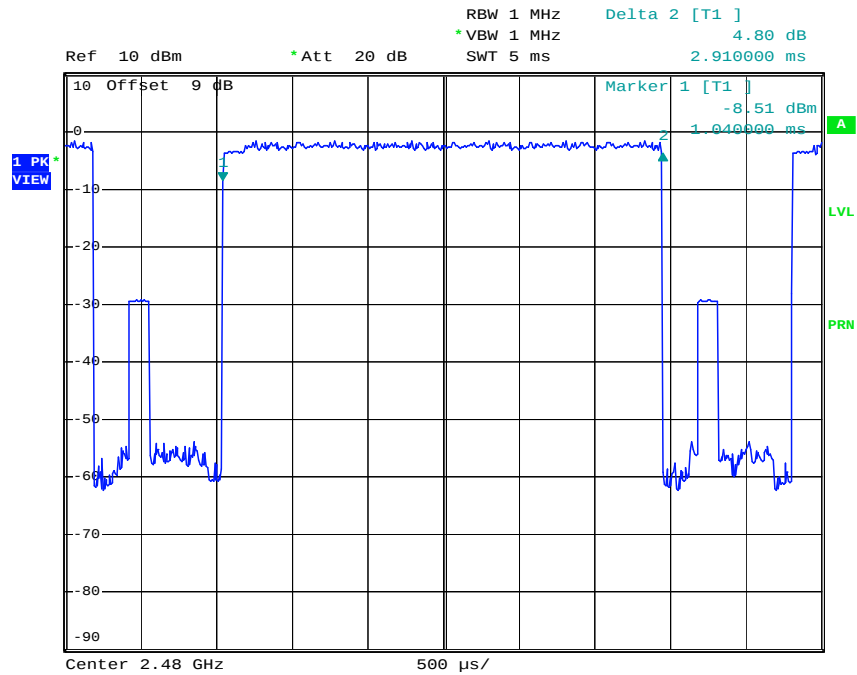

Date: 11.FEB.2008 12:29:38

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 3 5 of 53                                   |


## 7.6 SPURIOUS EMISSIONS

### 7.6.1 Conducted Spurious Measurement

#### LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### Test Configuration

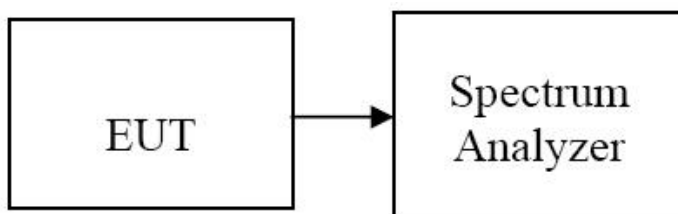

#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.


#### TEST RESULTS

*No non-compliance noted*




## Test Plots (GFSK)

( Low CH )

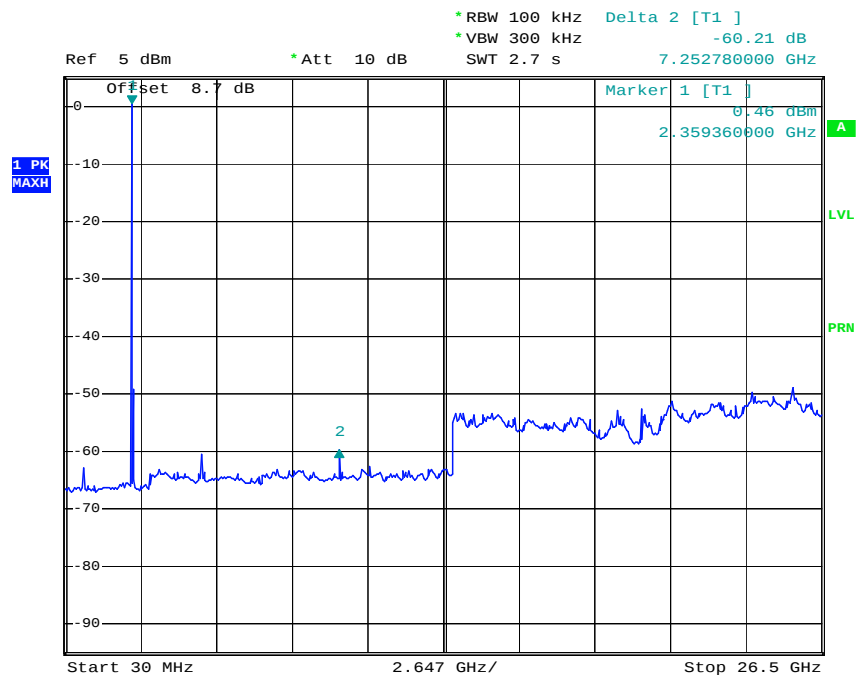

Date: 17.JAN.2008 14:59:44

(Mid CH)

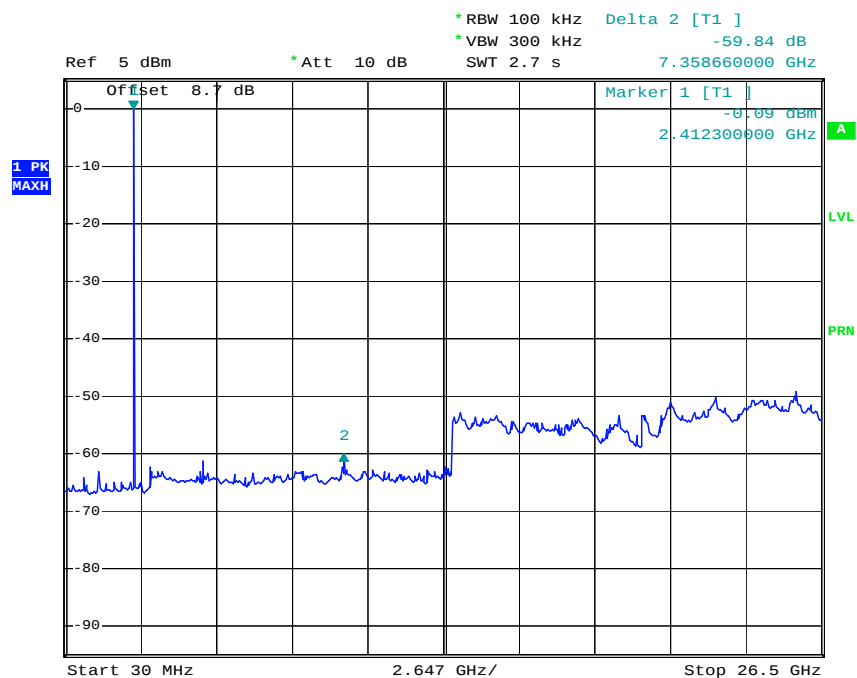

Date: 17.JAN.2008 15:03:14

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 37 of 53                                    |




( High CH )



Date: 17.JAN.2008 15:06:02

Test Plots (8DPSK)

( Low CH )

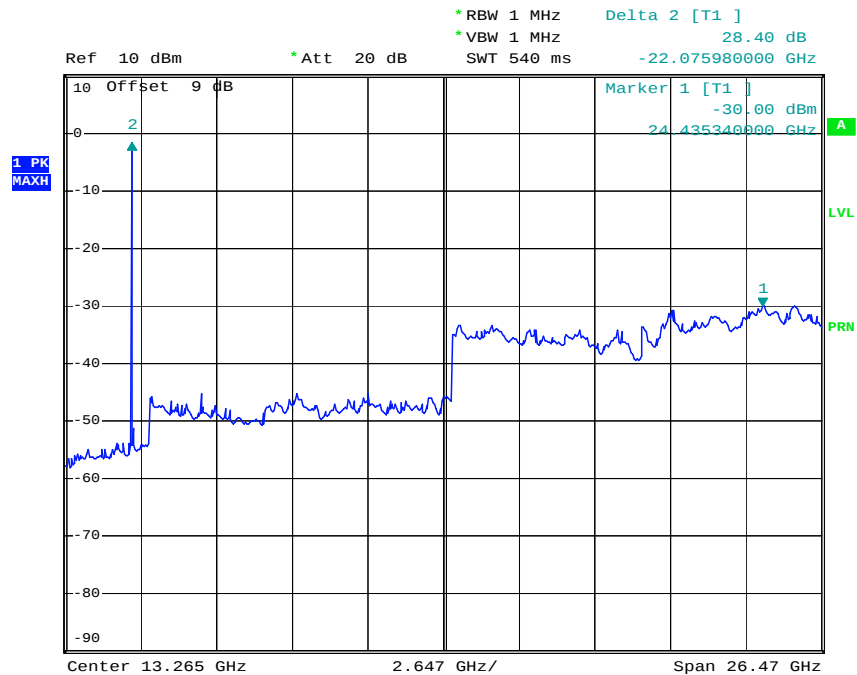


Date: 11.FEB.2008 12:38:55

|                                |                             |                                                          |                      |                                                  |
|--------------------------------|-----------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT    |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21, 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 38 of 53                                    |




(Mid CH )

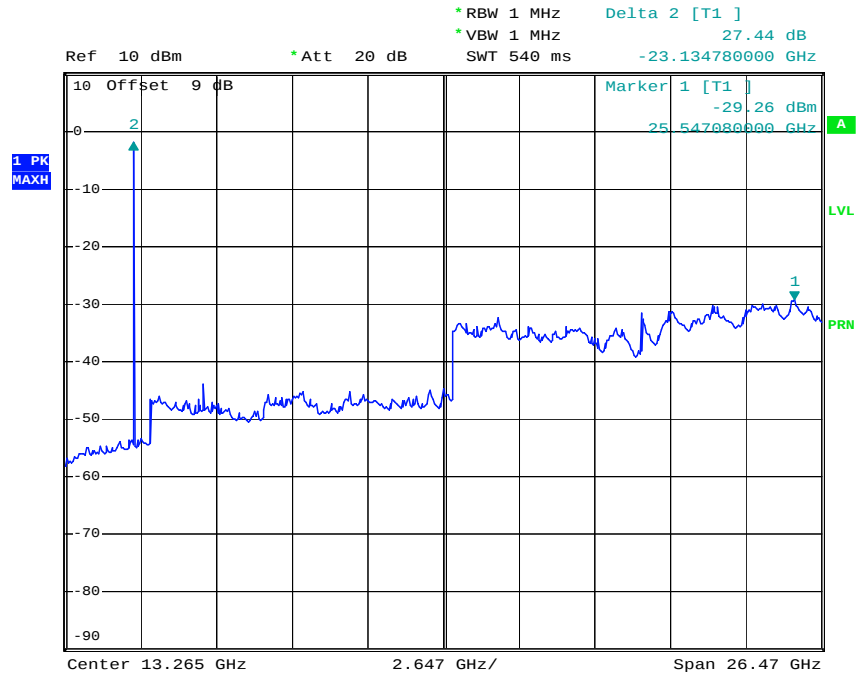

Date: 11.FEB.2008 12:41:05

( High CH )

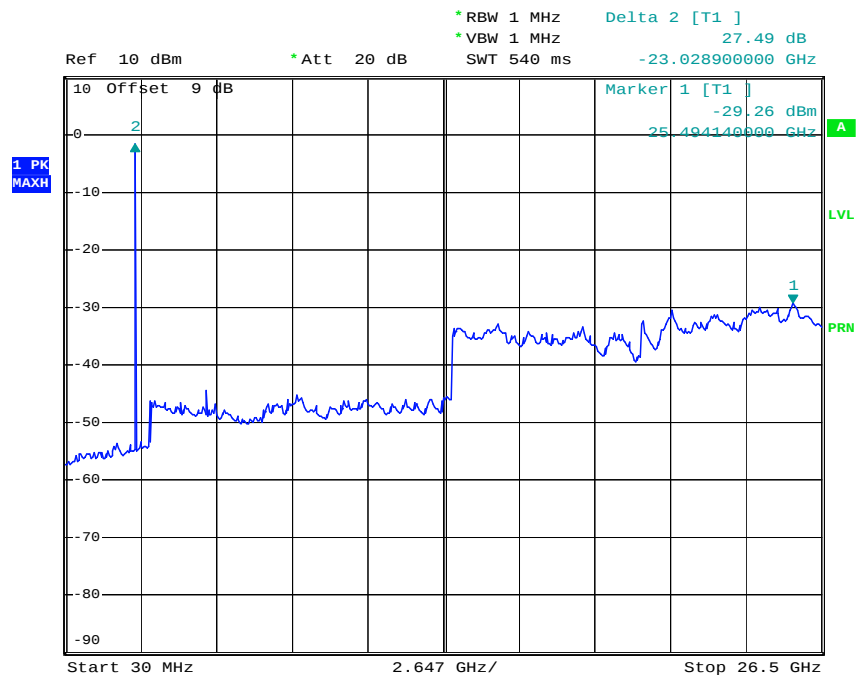

Date: 11.FEB.2008 12:31:32

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 3 9 of 53                                   |



## 7.6.2 Radiated Spurious Emissions


### LIMIT

1. 20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed


| Frequency (MHz) | Field Strength (mV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490   | 2400/F(KHz)           | 300                      |
| 0.490 – 1.705   | 24000/F(KHz)          | 30                       |
| 1.705 – 30      | 30                    | 30                       |
| 30-88           | 100                   | 3                        |
| 88-216          | 150                   | 3                        |
| 216-960         | 200                   | 3                        |
| Above 960       | 500                   | 3                        |

## Test Configuration


### Below 30 MHz

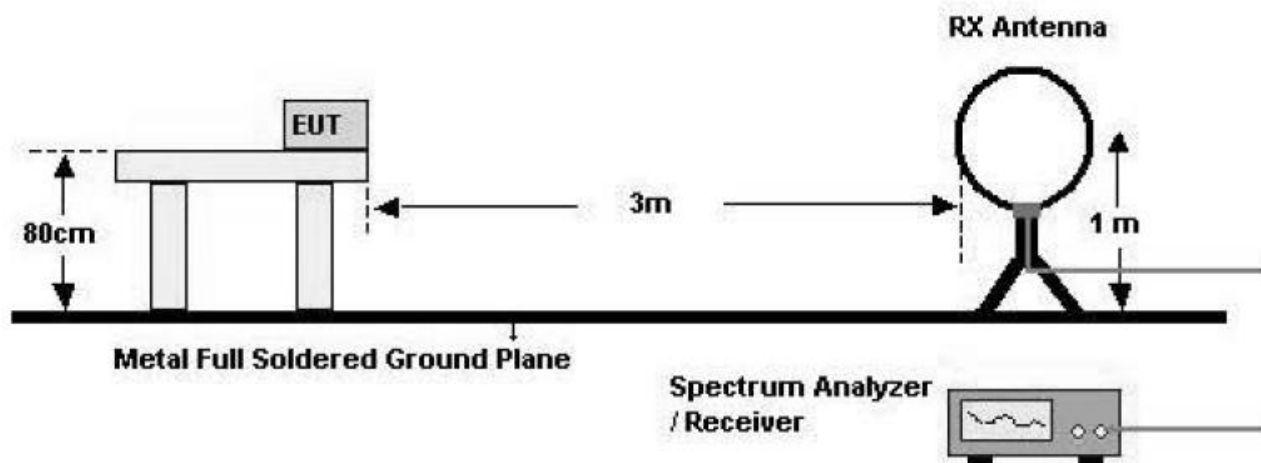

### 30 MHz - 1 GHz

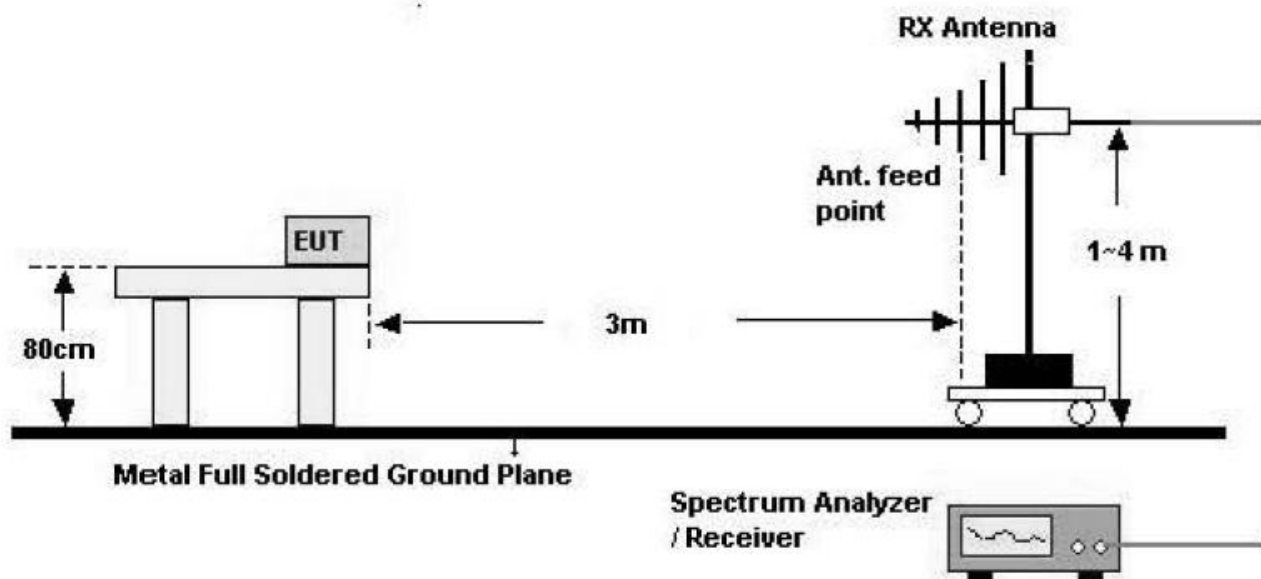

## Above 1 GHz

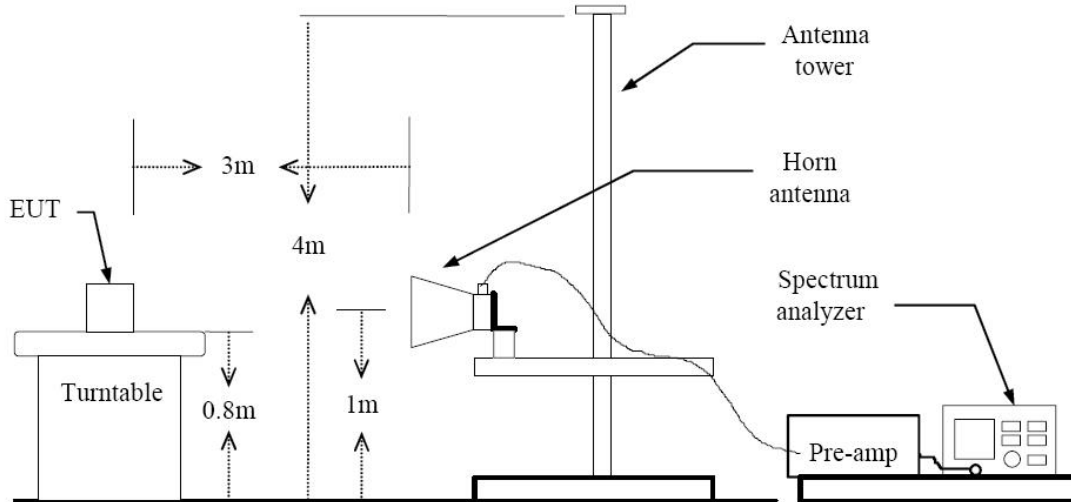

## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



## TEST RESULTS

**9 kHz – 30MHz**

**Operation Mode:** Normal Link (Standard Battery)

### Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 43 of 53                                    |



## TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link

| Frequency<br>MHz | Read Level<br>dBuV | Ant. Factor<br>dB/m | Cable Loss<br>dB | Factor<br>dB | ANT POL<br>(H/V) | Result Level<br>dBuV/m | Limit<br>dBuV/m |
|------------------|--------------------|---------------------|------------------|--------------|------------------|------------------------|-----------------|
| 55.4             | 25.90              | 12.10               | 1.70             | V            | 39.70            | 40                     | 0.3             |
| 240.0            | 23.90              | 10.90               | 3.70             | V            | 38.50            | 46                     | 7.5             |
| 300.0            | 19.40              | 12.60               | 4.20             | V            | 36.20            | 46                     | 9.8             |
|                  |                    |                     |                  |              |                  |                        |                 |

### Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Quasi peak detector mode.
- 3.



## Above 1 GHz

**Operation Mode:** CH Low (GFSK)

| Frequency<br>[MHz] | Level<br>[dBm] | AN. CL.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Detect |
|--------------------|----------------|-----------------|-------------------|-------------------|-------------------|----------------|--------|
| 4804               | -119.23        | 34.90           | H                 | 47.13             | 74                | 26.87          | PK     |
| 4804               | -106.20        | 34.90           | H                 | 34.10             | 54                | 19.90          | AV     |
| 9608               | -120.05        | 40.07           | H                 | 53.12             | 74                | 20.88          | PK     |
| 9608               | -106.95        | 40.07           | H                 | 40.02             | 54                | 13.98          | AV     |

### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz - 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

**Operation Mode:** CH Mid (GFSK)

| Frequency<br>[MHz] | Level<br>[dBm] | AN. CL.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Detect |
|--------------------|----------------|-----------------|-------------------|-------------------|-------------------|----------------|--------|
| 4882               | -119.30        | 35.10           | H                 | 47.40             | 74                | 26.60          | PK     |
| 4882               | -107.78        | 35.10           | H                 | 35.88             | 54                | 18.12          | AV     |
| 9764               | -120.74        | 40.28           | H                 | 54.02             | 74                | 19.98          | PK     |
| 9764               | -107.62        | 40.28           | H                 | 40.90             | 54                | 13.10          | AV     |

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
  - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.



**Operation Mode:** CH High (GFSK)

| Frequency<br>[MHz] | Level<br>[dBm] | AN. CL.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Detect |
|--------------------|----------------|-----------------|-------------------|-------------------|-------------------|----------------|--------|
| 4960               | -119.91        | 35.30           | H                 | 48.21             | 74                | 25.79          | PK     |
| 4960               | -106.18        | 35.30           | H                 | 34.48             | 54                | 19.52          | AV     |
| 9920               | -116.30        | 44.89           | H                 | 54.19             | 74                | 19.81          | PK     |
| 9920               | -103.40        | 44.89           | H                 | 41.29             | 54                | 12.71          | AV     |

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MH.
  - b. AV Setting 1 GH z- 26 GHz, RBW = 1 MHz, VBW = 10 Hz.



## 7.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB $\mu$ V) |          |
|-----------------------|---------------------|----------|
|                       | Quasi-peak          | Average  |
| 0.15 to 0.50          | 66 to 56            | 56 to 46 |
| 0.50 to 5             | 56                  | 46       |
| 5 to 30               | 60                  | 50       |

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.



## Test Data

### Conducted emissions (Line 1)


HCT

#### EMC TEST LAB.

EUT: KM710d  
Manufacturer: LG  
Operating Condition: BLUETOOTH MODE  
Test Site: SHIELD ROOM  
Operator: DH. RYU  
Test Specification: CISPR 22 CLASS B  
Comment: H

#### SCAN TABLE: "CISPR 22 Voltage"

| Short Description: |           | CISPR 22 Voltage |          |            |           |            |
|--------------------|-----------|------------------|----------|------------|-----------|------------|
| Start              | Stop      | Step             | Detector | Meas. Time | IF Bandw. | Transducer |
| Frequency          | Frequency | Width            |          |            |           |            |
| 150.1 kHz          | 500.0 kHz | 2.5 kHz          | MaxPeak  | 10.0 ms    | 9 kHz     | None       |
|                    |           |                  | Average  |            |           |            |
| 500.0 kHz          | 5.0 MHz   | 4.0 kHz          | MaxPeak  | 10.0 ms    | 9 kHz     | None       |
|                    |           |                  | Average  |            |           |            |
| 5.0 MHz            | 30.0 MHz  | 4.0 kHz          | MaxPeak  | 10.0 ms    | 9 kHz     | None       |
|                    |           |                  | Average  |            |           |            |

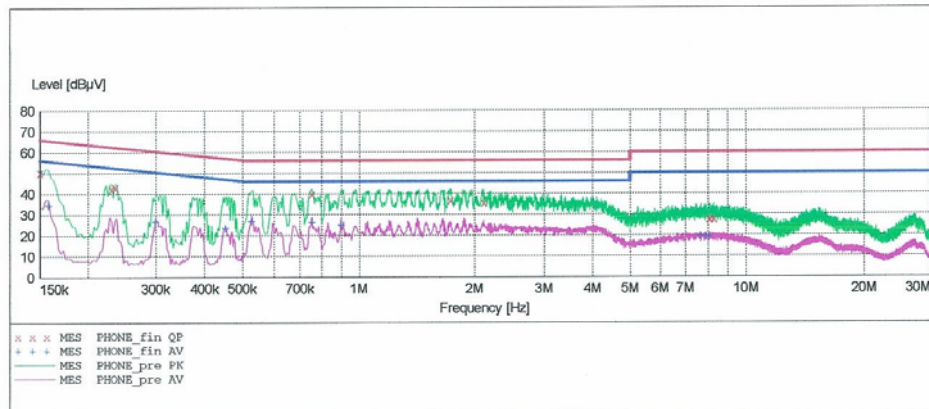

#### MEASUREMENT RESULT: "PHONE\_fin\_QP"

1/22/2008 8:12PM

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.150100         | 50.40         | 10.0         | 66            | 15.6         | ---  | --- |
| 0.230100         | 42.40         | 10.0         | 62            | 20.0         | ---  | --- |
| 0.235100         | 43.20         | 10.0         | 62            | 19.0         | ---  | --- |
| 0.752000         | 39.80         | 10.1         | 56            | 16.2         | ---  | --- |
| 1.728000         | 36.80         | 10.3         | 56            | 19.2         | ---  | --- |
| 2.104000         | 35.60         | 10.3         | 56            | 20.4         | ---  | --- |
| 8.060000         | 27.60         | 11.0         | 60            | 32.4         | ---  | --- |
| 8.084000         | 27.70         | 11.0         | 60            | 32.3         | ---  | --- |
| 8.300000         | 27.80         | 11.0         | 60            | 32.2         | ---  | --- |



**MEASUREMENT RESULT: "PHONE\_fin AV"**

1/22/2008 8:12PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.157600         | 34.50         | 10.0         | 56            | 21.0         | ---  | --- |
| 0.300100         | 26.70         | 10.0         | 50            | 23.5         | ---  | --- |
| 0.452600         | 23.60         | 10.1         | 47            | 23.2         | ---  | --- |
| 0.528000         | 26.90         | 10.1         | 46            | 19.1         | ---  | --- |
| 0.752000         | 26.30         | 10.1         | 46            | 19.7         | ---  | --- |
| 0.896000         | 24.90         | 10.1         | 46            | 21.1         | ---  | --- |
| 7.648000         | 19.60         | 10.9         | 50            | 30.4         | ---  | --- |
| 7.904000         | 19.60         | 11.0         | 50            | 30.4         | ---  | --- |
| 8.060000         | 19.40         | 11.0         | 50            | 30.6         | ---  | --- |

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 50 of 53                                    |


HCT

## EMC TEST LAB.

EUT: KM710d  
 Manufacturer: LG  
 Operating Condition: BLUETOOTH MODE  
 Test Site: SHIELD ROOM  
 Operator: DH. RYU  
 Test Specification: CISPR 22 CLASS B  
 Comment: N

### SCAN TABLE: "CISPR 22 Voltage"

| Short Description: |           |         | CISPR 22 Voltage |            |           |            |
|--------------------|-----------|---------|------------------|------------|-----------|------------|
| Start              | Stop      | Step    | Detector         | Meas. Time | IF Bandw. | Transducer |
| Frequency          | Frequency | Width   |                  |            |           |            |
| 150.1 kHz          | 500.0 kHz | 2.5 kHz | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average          |            |           |            |
| 500.0 kHz          | 5.0 MHz   | 4.0 kHz | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average          |            |           |            |
| 5.0 MHz            | 30.0 MHz  | 4.0 kHz | MaxPeak          | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average          |            |           |            |

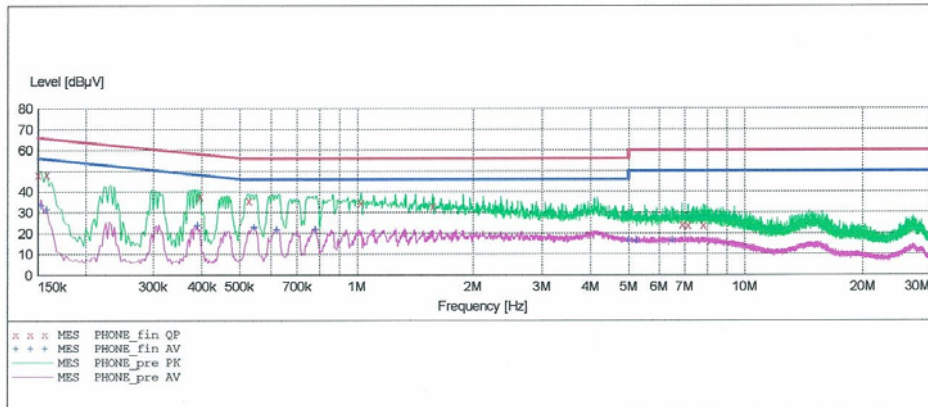

### MEASUREMENT RESULT: "PHONE\_fin QP"

1/22/2008 8:16PM

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.150100      | 48.30      | 10.0      | 66         | 17.7      | ---  | --- |
| 0.157600      | 48.30      | 10.0      | 66         | 17.3      | ---  | --- |
| 0.395100      | 37.90      | 10.0      | 58         | 20.0      | ---  | --- |
| 0.528000      | 35.60      | 10.1      | 56         | 20.4      | ---  | --- |
| 1.024000      | 34.70      | 10.1      | 56         | 21.3      | ---  | --- |
| 1.572000      | 33.20      | 10.2      | 56         | 22.8      | ---  | --- |
| 6.888000      | 24.40      | 10.9      | 60         | 35.6      | ---  | --- |
| 7.132000      | 24.00      | 10.9      | 60         | 36.0      | ---  | --- |
| 7.812000      | 23.90      | 11.0      | 60         | 36.1      | ---  | --- |



## Conducted emissions (Line 2)

### MEASUREMENT RESULT: "PHONE\_fin AV"

1/22/2008 8:16PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.152600         | 33.70         | 10.0         | 56            | 22.2         | ---  | --- |
| 0.157600         | 31.70         | 10.0         | 56            | 23.9         | ---  | --- |
| 0.390100         | 23.90         | 10.0         | 48            | 24.2         | ---  | --- |
| 0.544000         | 23.00         | 10.1         | 46            | 23.0         | ---  | --- |
| 0.620000         | 22.00         | 10.1         | 46            | 24.0         | ---  | --- |
| 0.780000         | 22.10         | 10.1         | 46            | 23.9         | ---  | --- |
| 5.000000         | 16.70         | 10.6         | 46            | 29.3         | ---  | --- |
| 5.244000         | 16.40         | 10.7         | 50            | 33.6         | ---  | --- |
| 6.500000         | 16.70         | 10.8         | 50            | 33.3         | ---  | --- |

|                                |                              |                                                          |                      |                                                  |
|--------------------------------|------------------------------|----------------------------------------------------------|----------------------|--------------------------------------------------|
| HCT PT.15.247<br>TEST REPORT   | FCC CERTIFICATION REPORT     |                                                          |                      | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
| Test Report No.<br>HCT-R08-004 | Test Dates:<br>Feb.21 , 2008 | EUT Type:<br>Cellular/ PCS GSM/EDGE Phone with Bluetooth | FCC ID:<br>BEJKM710D | Page 52 of 53                                    |



## 8. LIST OF TEST EQUIPMENT

| Manufacturer          | Model / Equipment                  | Calibration Date | Cal Interval | Calibration Due | Serial No.   |
|-----------------------|------------------------------------|------------------|--------------|-----------------|--------------|
| Rohde & Schwarz       | ESCI/ EMI Test Receiver            | 08/24/2007       | Annual       | 08/24/2008      | 100033       |
| Rohde & Schwarz       | ESI 40/Receiver                    | 11/06/2007       | Annual       | 11/06/2008      | 831564103    |
| Rohde & Schwarz       | ESH2-Z5/ LISN                      | 04/20/2007       | Annual       | 04/20/2008      | 861741/013   |
| Rohde & Schwarz       | ESH3-Z6/ LISN                      | 04/11/2007       | Annual       | 03/16/2008      | 100329       |
| Schwarzbeck           | VULB 9160/ TRILOG Antenna          | 04/20/2007       | Annual       | 04/20/2008      | 9160-3150    |
| HD                    | MA240/ Antenna Position Tower      | N/A              | N/A          | N/A             | 556          |
| EMCO                  | 1050/ Turn Table                   | N/A              | N/A          | N/A             | 114          |
| HD GmbH               | HD 100/ Controller                 | N/A              | N/A          | N/A             | 13           |
| HD GmbH               | KMS 560/ SlideBar                  | N/A              | N/A          | N/A             | 12           |
| Rohde & Schwarz       | ESH3-Z2/ PULSE LIMITER             | 03/16/2007       | Annual       | 10/03/2008      | 375.8810.352 |
| MITEQ                 | AMF-60-0010 1800-35-20P            | 01/15/2008       | Annual       | 01/15/2009      | 1200937      |
| MITEQ                 | AMF-6D-01180-35-20P                | 02/24/2007       | Annual       | 02/24/2008      | 990893       |
| Schwarzbeck           | BBHA 9120D/ Horn Antenna           | 03/30/2007       | Annual       | 03/30/2008      | 147          |
| Schwarzbeck           | BBHA9170/ SHF-EHF Horn Antenna     | 03/20/2007       | Annual       | 03/20/2008      | BBHA9170342  |
| EMCO                  | 6502/Loop Antenna                  | 12/26/2007       | biennial     | 12/26/2009      | 9009-2536    |
| Rohde & Schwarz       | FSP30/Spectrum Analyzer            | 06/28/2007       | Annual       | 06/28/2008      | 839117/011   |
| Agilent               | E4416A /Power Meter                | 01/22/2008       | Annual       | 01/22/2009      | GB41291412   |
| Wainwright Instrument | WHF3.3/18G-10EF / High Pass Filter | 06/28/2007       | Annual       | 06/28/2008      | 1            |
| Hewlett Packard       | 11636B/Power Divider               | 01/14/2008       | Annual       | 01/14/2009      | 11377        |
| DIGITAL               | EP-3010 /DC POWER SUPPLY           | 01/10/2008       | Annual       | 01/10/2009      | 3110117      |