

RF TEST REPORT

Test item : Bluetooth module
Model No. : BM-LDS401
Order No. : DEMC1209-01896
Date of receipt : 2012-09-21
Test duration : 2012-09-24 ~ 2012-09-28
Date of issue : 2012-09-28
Use of report : FCC & IC Original Grant

Applicant : LG Electronics USA.
1000 Sylvan Avenue Englewood Cliffs, New Jersey, United States

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea


Test specification : FCC Part 15 Subpart C 247
RSS-210 Issue 8

Test environment : See appended test report

Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:




Engineer
S.K.Ryu

Witnessed by:



N/A

Reviewed by:



Technical Director
Harvey Sung

Table of Contents

1. General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	4
1.4 Declaration by the manufacturer	4
1.5. Information about the FHSS characteristics:	5
1.5.1. Pseudorandom Frequency Hopping Sequence	5
1.5.2. Equal Hopping Frequency Use	5
1.5.3. System Receiver Input Bandwidth.....	5
1.6. Test Equipment List	6
1.7. Summary of Test Results.....	7
1.8 Conclusion of worst-case and operation mode	8
1.9 Test report revision	8
2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	9
2.1. Test Setup.....	9
2.2. Limit	9
2.3. Test Procedures	10
2.3.1. Test Procedures for Radiated Spurious Emissions.....	10
2.3.2. Test Procedures for Conducted Spurious Emissions	10
2.4. Test Results.....	11
2.4.1. Radiated Emission.....	11
2.4.2. Conducted Spurious Emissions	14
3. Carrier Frequency Separation.....	29
3.1. Test Setup	29
3.2. Limit	29
4. Number of Hopping Frequencies.....	34
4.1. Test Setup	34
4.2. Limit	34
5. 20dBc BW.....	43
5.1. Test Setup.....	43
5.2. Limit	43
5.3. Test Procedure	43
5.4. Test Results.....	43
6. Time of Occupancy (Dwell Time).....	49
6.1. Test Setup.....	49
6.2. Limit	49
6.3. Test Procedure	49
6.4. Test Results.....	49
7. Maximum Peak Output Power Measurement	54
7.1. Test Setup.....	54

7.2. Limit	54
7.3. Test Procedure.....	54
7.4. Test Results.....	55
8. Transmitter AC Power Line Conducted Emission	61
8.1. Test Setup.....	61
8.2. Limit	61
8.3. Test Procedures.....	61
8.4. Test Results.....	62
9. Antenna Requirement	64
10. Occupied Bandwidth (99%).....	65

1. General Information

1.1 Testing Laboratory

Digital EMC Co., Ltd.

683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

www.digitalemc.com

Telephone : + 82-31-321-2664

FAX : + 82-31-321-1664

1.2 Details of Applicant

Applicant : LG Electronics USA.

Address : 1000 Sylvan Avenue Englewood Cliffs, New Jersey, United States

Contact person : Jacob Cho

Phone No. : +201-816-2003

1.3 Description of EUT

Product	Bluetooth module
Model Name	BM-LDS401
Serial Number	Identical prototype
Power Supply	DC 3.3V
Frequency Range	2402 ~ 2480MHz
Modulation Technique	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channels	79
Antenna Type	Internal Antenna
Antenna Gain	PK : 5.07 dBi

1.4. Declaration by the manufacturer

- N/A

1.5. Information about the FHSS characteristics:

1.5.1. Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s.

1.5.2. Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

1.5.3. System Receiver Input Bandwidth

Each channel bandwidth is 1MHz

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	E4440A	11/10/11	12/10/11	US45303022
MXA Signal Analyzer	Agilent	N9020A	12/01/09	13/01/09	MY49100833
Spectrum Analyzer	Rohde Schwarz	FSQ26	12/01/09	13/01/09	200445
Digital Multimeter	H.P	34401A	12/03/05	13/03/05	3146A13475, US36122178
Signal Generator	Rohde Schwarz	SMR20	12/03/05	13/03/05	101251
Vector Signal Generator	Rohde Schwarz	SMJ100A	12/01/09	13/01/09	100148
Thermo hygrometer	BODYCOM	BJ5478	12/01/13	13/01/13	090205-2
DC Power Supply	HP	6622A	12/03/05	13/03/05	3448A03760
High-pass filter	Wainwright	WHNX3.0	12/09/17	13/09/17	9
BILOG ANTENNA	SCHAFFNER	CBL6112D	10/12/21	12/12/21	2737
HORN ANT	ETS	3115	12/02/20	14/02/20	6419
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
Amplifier (22dB)	H.P	8447E	12/01/09	13/01/09	2945A02865
Amplifier (30dB)	Agilent	8449B	12/03/05	13/03/05	3008A00370
EMI TEST RECEIVER	R&S	ESU	12/03/05	13/03/05	100014
EMI TEST RECEIVER	R&S	ESCI	12/03/06	13/03/06	100364
CVCF	KIKUSUI	PCR1000L	12/09/15	13/09/15	14110610
LISN	R&S	ESH2-Z5	12/09/18	13/09/18	828739/006
RFI/Field intensity Meter	KYORITSU	KNM-2402	12/07/02	13/07/02	4N-170-3

1.7. Summary of Test Results

FCC Part RSS-210 & GEN	Parameter	Limit (Using in 2400 ~ 2483.5MHz)	Test Condition	Status Note 1
I. Transmit mode (TX)				
15.247(a) RSS-210(A8.1)	Carrier Frequency Separation	>= 20dB BW or >= Two-Thirds of the 20dB BW	Conducted	C
	Number of Hopping Frequencies	>= 15 hops		C
	20 dB Bandwidth	None		C
	Dwell Time	=< 0.4 seconds		C
15.247(b) RSS-210(A8.4)	Transmitter Output Power	=< 1Watt , if CHs >= 75 Others =<0.125W		C
15.247(d) RSS-210(A8.5)	Band-edge /Conducted	The radiated emission to any 100 kHz of out-band shall be at least 20dB below the highest in-band spectral density.		C
	Conducted Spurious Emissions		C	
15.205, 15.209 RSS-210(A8.5)	Radiated Spurious Emissions	FCC 15.209 Limits	Radiated	C Note.2
15.207 RSS-Gen(7.2.4)	AC Conducted Emissions	EN 55022	AC Line Conducted	C
15.203 RSS-Gen(7.1.2)	Antenna Requirements	FCC 15.203	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: This test item was performed in each axis. And the worst case data were reported.				

1.8 Conclusion of worst-case and operation mode

The EUT has three type of modulation (GFSK, $\pi/4$ DQPSK and 8DPSK).

Therefore all applicable requirements were tested with all the modulations.

The field strength of spurious emission was measured in three orthogonal EUT positions(X-axis, Y-axis and Z-axis).

Tested frequency information,

- Hopping Function: Enable

	TX Frequency (MHz)	RX Frequency (MHz)
Hopping Band	2402 ~ 2480	2402 ~ 2480

- Hopping Function: Disable

	TX Frequency (MHz)	RX Frequency (MHz)
Lowest Channel	2402	2402
Middle Channel	2441	2441
Highest Channel	2480	2480

1.9 Test report revision

Test Report No.	Date	Description
DRTFCC1209-0567	Sep. 28, 2012	Final version for approval

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

2.1. Test Setup

Refer to the APPENDIX I.

2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	37.5 ~ 38.25	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	608 ~ 614	3345.8 ~ 3358		
		960 ~ 1240			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the DA 00-705 and ANSI C63.4:2003

2.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE ;

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

2.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The reference level of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=300 kHz.
3. The conducted spurious emission was performed using the spectrum analyzer's spurious measurement function from 30 MHz to 25 GHz with the 11 sub measurement ranges.(Detail ranges are listed on the measurement plots)
The following spectrum settings was used for each measurement ranges.
RBW=100 kHz, VBW=300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD.

2.4. Test Results

Ambient temperature : 23 ~ 25 °C
Relative humidity : 40 ~ 41 %

2.4.1. Radiated Emission

30MHz ~ 25GHz Data(Modulation: GFSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2382.400	H	X	PK	56.85	-4.73	N/A	52.12	74.00	21.88
2382.000	H	X	AV	48.86	-4.73	N/A	44.13	54.00	9.87
4803.700	V	Z	PK	53.94	2.23	-30.78	25.39	74.00	48.61
4804.067	V	Z	AV	46.82	2.23	-30.78	18.27	54.00	35.73
9608.265	V	Z	PK	50.63	11.28	-30.78	31.13	74.00	42.87
9608.130	V	Z	AV	42.35	11.28	-30.78	22.85	54.00	31.15

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.125	V	Z	PK	51.84	2.92	-30.78	23.98	74.00	50.02
4882.100	V	Z	AV	44.39	2.92	-30.78	16.53	54.00	37.47
9764.120	V	Z	PK	51.57	11.28	-30.78	32.07	74.00	41.93
9764.130	V	Z	AV	42.80	11.28	-30.78	23.30	54.00	30.70

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.555	H	X	PK	65.56	-4.66	N/A	60.90	74.00	13.10
2483.500	H	X	AV	43.12	-4.66	N/A	38.46	54.00	15.54
4959.710	V	Z	PK	50.86	2.67	-30.78	22.75	74.00	51.25
4960.090	V	Z	AV	43.11	2.67	-30.78	15.00	54.00	39.00
9920.237	V	Z	PK	50.17	11.39	-30.78	30.78	74.00	43.22
9920.130	V	Z	AV	41.01	11.39	-30.78	21.62	54.00	32.38

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor

- Time to cycle through all channels = $\Delta t = \tau_{[ms]} \times 79 \text{ channels} = 228.31\text{ms}$, where τ = pulse width

- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 1$

- Worst Case Dwell Time = $\tau_{[ms]} \times H' = 2.89\text{ms}$

- Duty Cycle Correction = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})_{[dB]} = -30.78 \text{ dB}$

30MHz ~ 25GHz Data(Modulation: $\pi/4$ DQPSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2381.730	H	X	PK	55.85	-4.73	N/A	51.12	74.00	22.88
2382.000	H	X	AV	44.93	-4.73	N/A	40.20	54.00	13.80
4803.683	V	Z	PK	54.16	2.23	-30.78	25.61	74.00	48.39
4804.083	V	Z	AV	43.63	2.23	-30.78	15.08	54.00	38.92
9607.915	V	Z	PK	50.70	11.28	-30.78	31.20	74.00	42.80
9608.110	V	Z	AV	42.55	11.28	-30.78	23.05	54.00	30.95

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.815	V	Z	PK	51.61	2.92	-30.78	23.75	74.00	50.25
4882.090	V	Z	AV	41.27	2.92	-30.78	13.41	54.00	40.59
9764.143	V	Z	PK	50.89	11.28	-30.78	31.39	74.00	42.61
9764.150	V	Z	AV	43.00	11.28	-30.78	23.50	54.00	30.50

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.780	H	X	PK	56.54	-4.66	N/A	51.88	74.00	22.12
2483.600	H	X	AV	45.18	-4.66	N/A	40.52	54.00	13.48
4959.920	V	Z	PK	50.59	2.67	-30.78	22.48	74.00	51.52
4960.100	V	Z	AV	40.04	2.67	-30.78	11.93	54.00	42.07
9919.860	V	Z	PK	49.84	11.39	-30.78	30.45	74.00	43.55
9920.133	V	Z	AV	41.12	11.39	-30.78	21.73	54.00	32.27

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor

- Time to cycle through all channels = $\Delta t = \tau_{[ms]} \times 79 \text{ channels} = 228.31\text{ms}$, where τ = pulse width

- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 1$

- Worst Case Dwell Time = $\tau_{[ms]} \times H' = 2.89\text{ms}$

- Duty Cycle Correction = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})_{[dB]} = -30.78 \text{ dB}$

30MHz ~ 25GHz Data(Modulation: 8DPSK)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2382.000	H	X	PK	55.82	-4.73	N/A	51.09	74.00	22.91
2382.130	H	X	AV	44.94	-4.73	N/A	40.21	54.00	13.79
4803.892	V	Z	PK	54.44	2.23	-30.78	25.89	74.00	48.11
4804.075	V	Z	AV	54.73	2.23	-30.78	26.18	54.00	27.82
9607.995	V	Z	PK	50.84	11.28	-30.78	31.34	74.00	42.66
9608.155	V	Z	AV	42.51	11.28	-30.78	23.01	54.00	30.99

▪ Middle Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.995	V	Z	PK	52.07	2.92	-30.78	24.21	74.00	49.79
4882.065	V	Z	AV	41.35	2.92	-30.78	13.49	54.00	40.51
9763.897	V	Z	PK	51.28	11.28	-30.78	31.78	74.00	42.22
9765.140	V	Z	AV	43.20	11.28	-30.78	23.70	54.00	30.30

▪ Highest Channel

Frequency (MHz)	ANT Pol	The worst case EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.555	H	X	PK	57.27	-4.66	N/A	52.61	74.00	21.39
2483.510	H	X	AV	45.14	-4.66	N/A	40.48	54.00	13.52
4960.130	V	Z	PK	50.63	2.67	-30.78	22.52	74.00	51.48
4960.093	V	Z	AV	40.12	2.67	-30.78	12.01	54.00	41.99
9920.003	V	Z	PK	50.60	11.39	-30.78	31.21	74.00	42.79
9920.100	V	Z	AV	41.29	11.39	-30.78	21.90	54.00	32.10

Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,



DCF = Duty Cycle Correction Factor

- Time to cycle through all channels = $\Delta t = \tau_{[ms]} \times 79 \text{ channels} = 228.31\text{ms}$, where τ = pulse width

- $100\text{ms} / \Delta t_{[ms]} = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 1$


- Worst Case Dwell Time = $\tau_{[ms]} \times H' = 2.89\text{ms}$

- Duty Cycle Correction = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})_{[dB]} = -30.78 \text{ dB}$

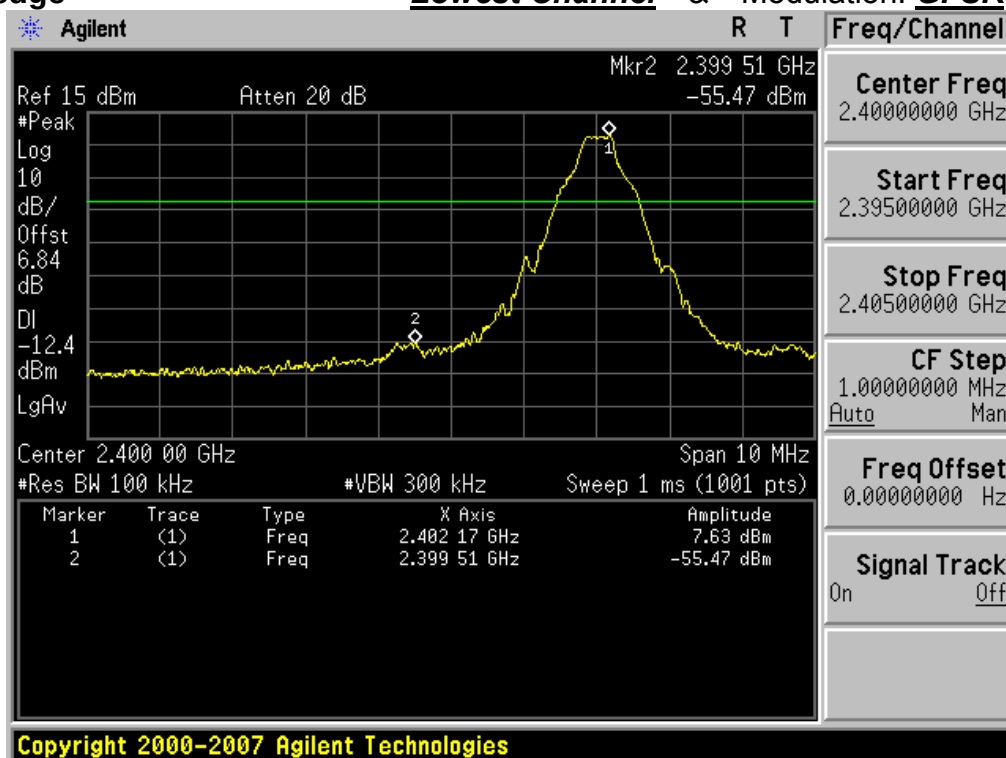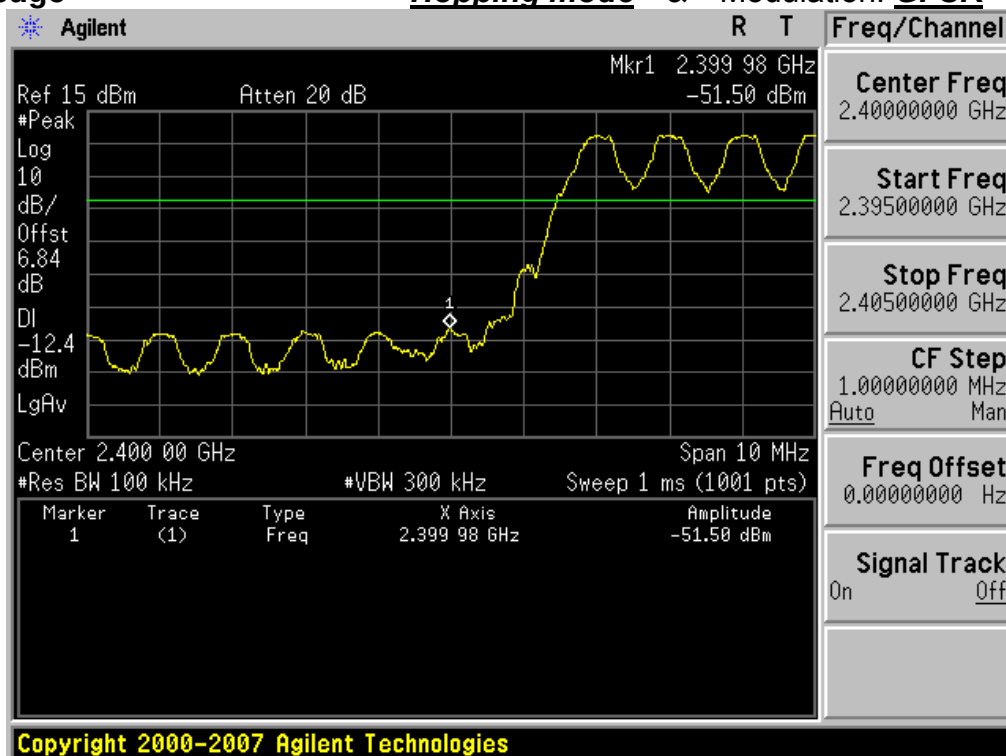2.4.2. Conducted Spurious Emissions**Low Band-edge****Lowest Channel** & Modulation: **GFSK****Low Band-edge****Hopping mode** & Modulation: **GFSK**

Conducted Spurious Emissions


Lowest Channel & Modulation: **GFSK**

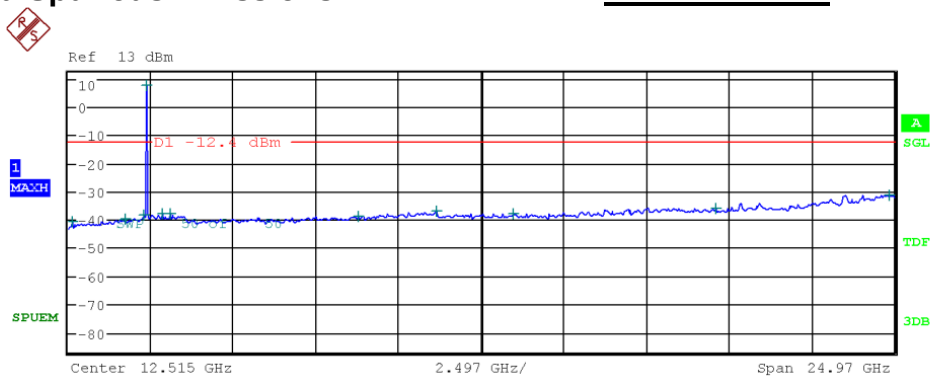

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	140.580000 M	-40.89	-200.00
1.000 G	2.000 G	100.00 k	1.748000 G	-40.05	-200.00
2.000 G	2.400 G	100.00 k	2.319720 G	-38.22	-200.00
2.400 G	2.483 G	100.00 k	2.402004 G	7.40	-200.00
2.483 G	3.000 G	100.00 k	2.870462 G	-37.85	-200.00
3.000 G	6.000 G	100.00 k	3.097667 G	-38.12	-200.00
6.000 G	9.000 G	100.00 k	8.813000 G	-38.74	-200.00
9.000 G	12.000 G	100.00 k	11.139000 G	-36.80	-200.00
12.000 G	15.000 G	100.00 k	13.490000 G	-37.71	-200.00
15.000 G	20.000 G	100.00 k	19.609444 G	-35.98	-200.00
20.000 G	25.000 G	100.00 k	24.826111 G	-31.19	-200.00


Reference for limit



Middle Channel & Modulation: GFSK

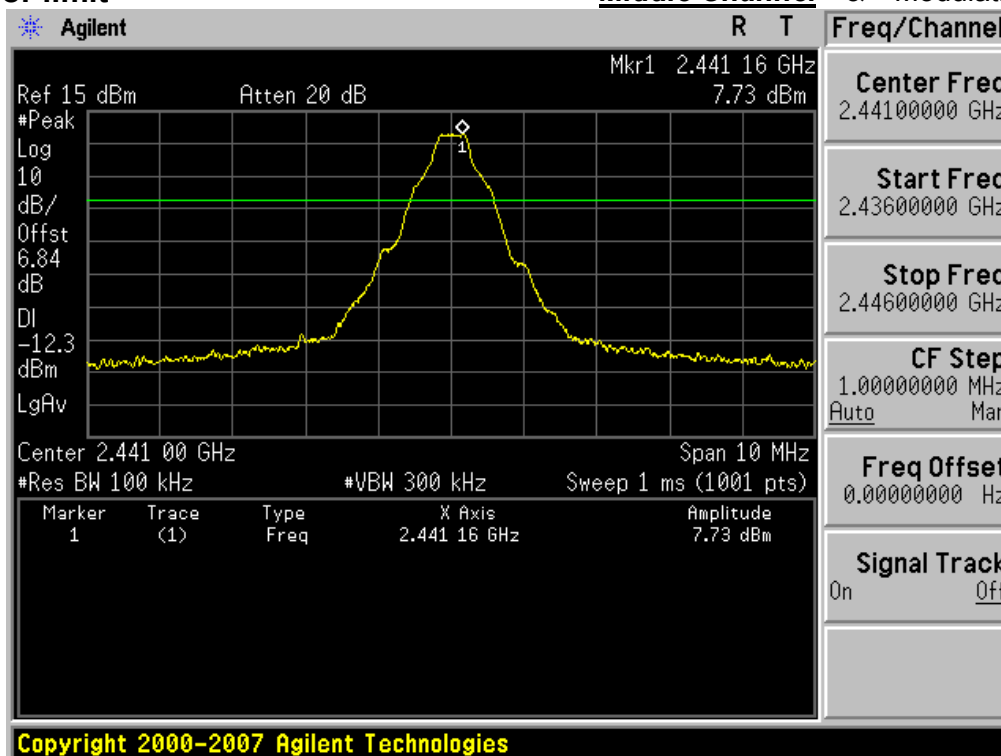

Conducted Spurious Emissions


Middle Channel & Modulation: GFSK

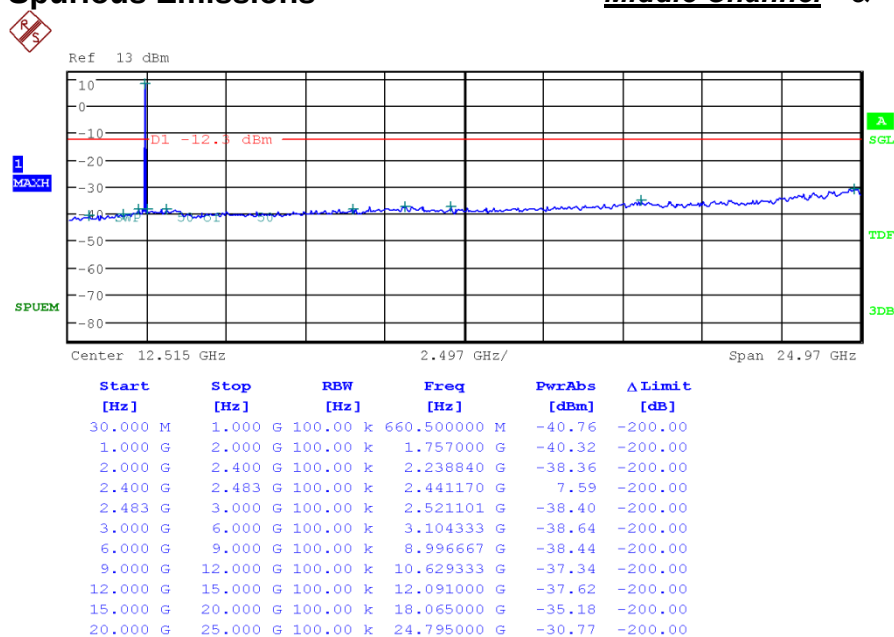

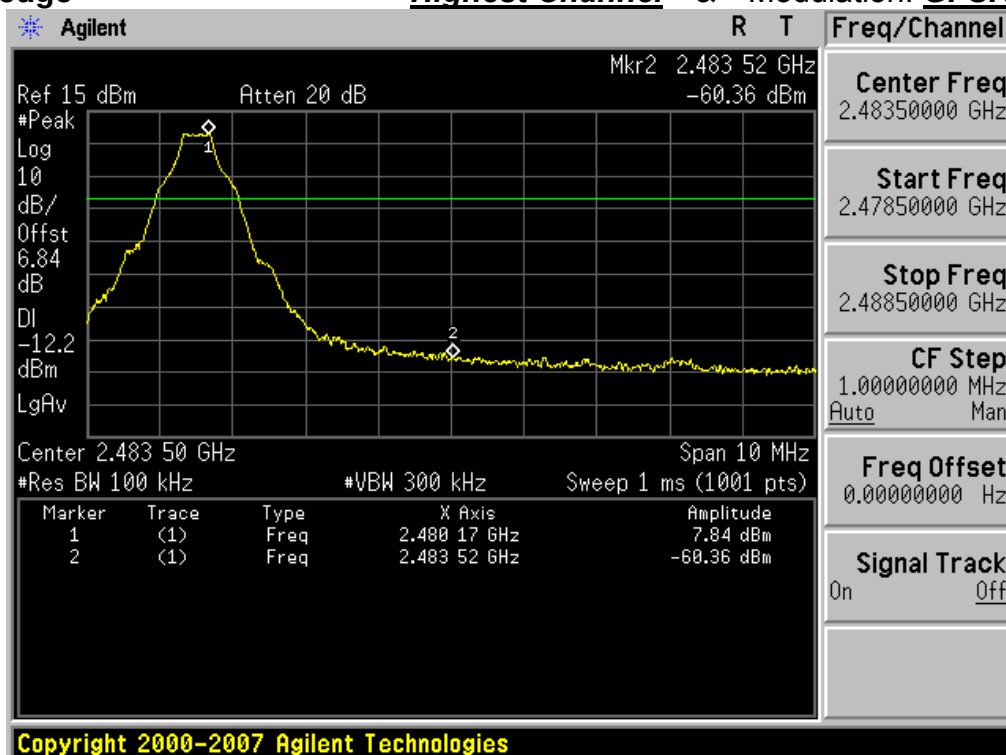
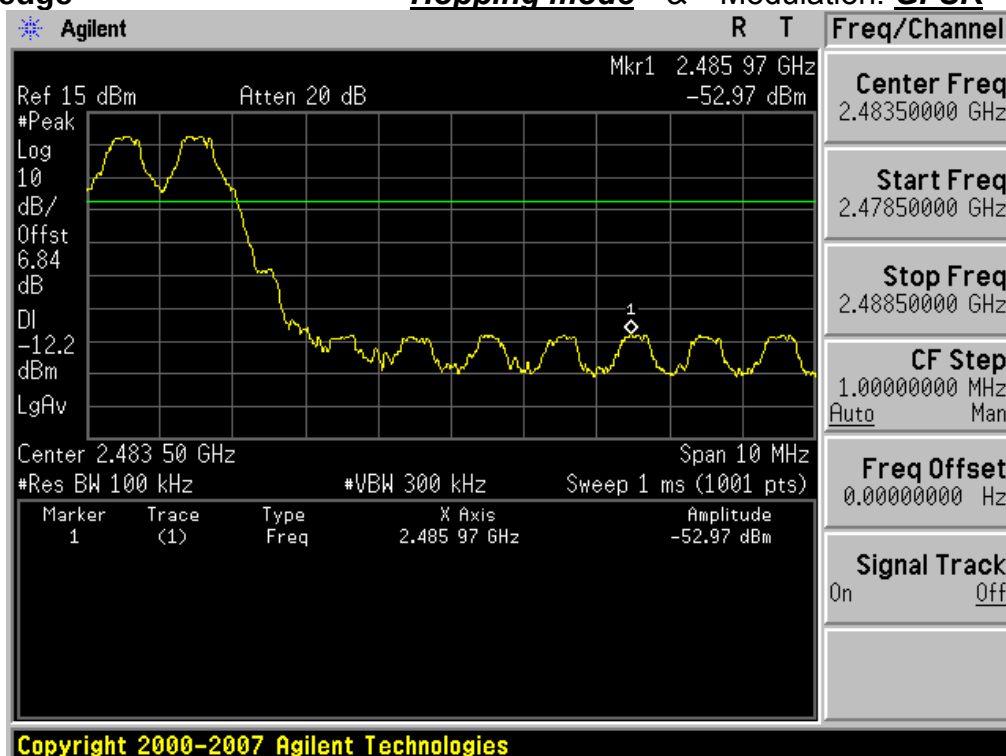
High Band-edge**Highest Channel** & Modulation: **GFSK****High Band-edge****Hopping mode** & Modulation: **GFSK**

Conducted Spurious Emissions

Highest Channel & Modulation: **GFSK**

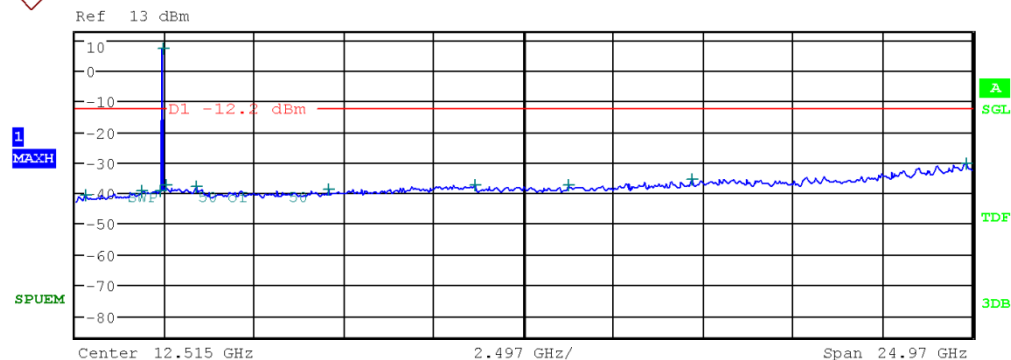


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	301.600000 M	-40.68	-200.00
1.000 G	2.000 G	100.00 k	1.890000 G	-39.21	-200.00
2.000 G	2.400 G	100.00 k	2.398800 G	-39.42	-200.00
2.400 G	2.483 G	100.00 k	2.480068 G	7.63	-200.00
2.483 G	3.000 G	100.00 k	2.567999 G	-37.31	-200.00
3.000 G	6.000 G	100.00 k	3.399333 G	-37.90	-200.00
6.000 G	9.000 G	100.00 k	7.058333 G	-38.88	-200.00
9.000 G	12.000 G	100.00 k	11.161000 G	-37.48	-200.00
12.000 G	15.000 G	100.00 k	13.763000 G	-37.48	-200.00
15.000 G	20.000 G	100.00 k	17.181667 G	-35.37	-200.00
20.000 G	25.000 G	100.00 k	24.830000 G	-30.47	-200.00

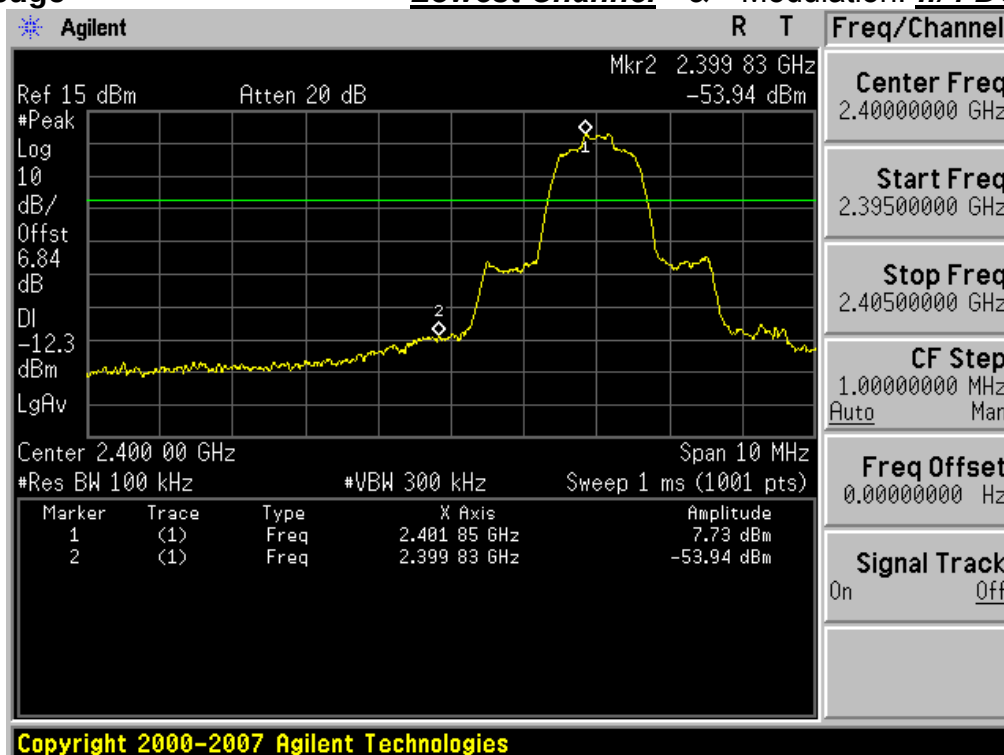
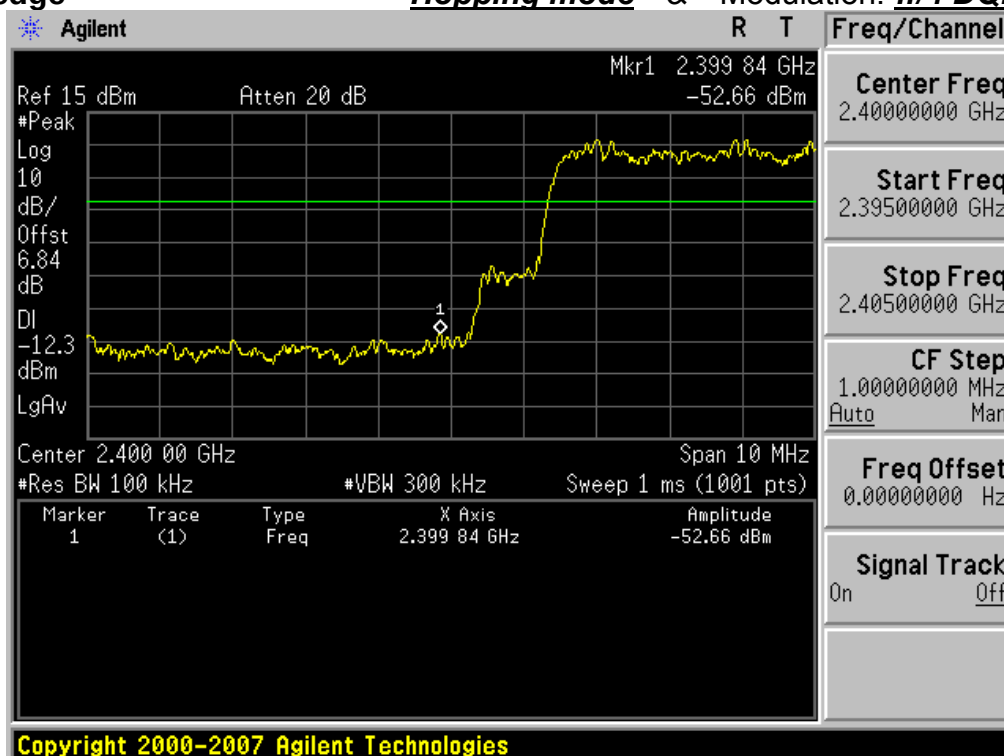
Low Band-edge**Lowest Channel & Modulation: $\pi/4$ DQPSK****Low Band-edge****Hopping mode & Modulation: $\pi/4$ DQPSK**



Conducted Spurious Emissions

Lowest Channel & Modulation: $\pi/4$ DQPSK

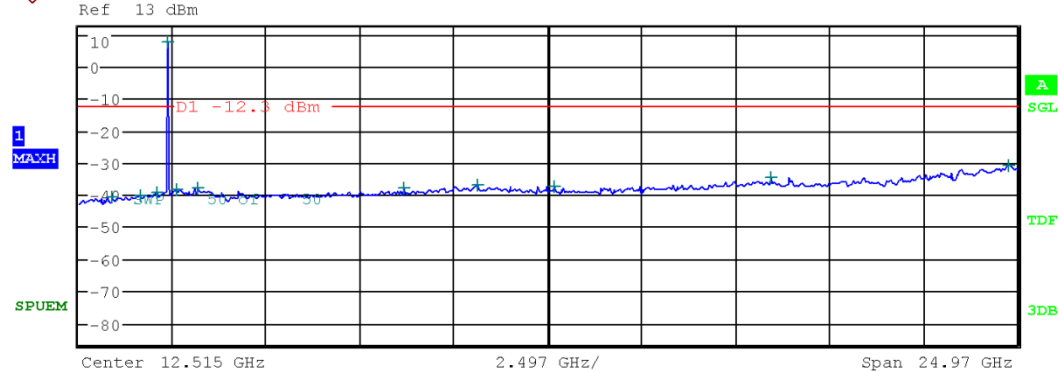


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	891.360000 M	-40.81	-200.00
1.000 G	2.000 G	100.00 k	1.653000 G	-40.28	-200.00
2.000 G	2.400 G	100.00 k	2.101960 G	-39.23	-200.00
2.400 G	2.483 G	100.00 k	2.402004 G	7.47	-200.00
2.483 G	3.000 G	100.00 k	2.632717 G	-38.44	-200.00
3.000 G	6.000 G	100.00 k	3.176667 G	-37.79	-200.00
6.000 G	9.000 G	100.00 k	8.669000 G	-37.86	-200.00
9.000 G	12.000 G	100.00 k	10.632333 G	-36.90	-200.00
12.000 G	15.000 G	100.00 k	12.665333 G	-37.51	-200.00
15.000 G	20.000 G	100.00 k	18.420000 G	-34.73	-200.00
20.000 G	25.000 G	100.00 k	24.772222 G	-30.68	-200.00

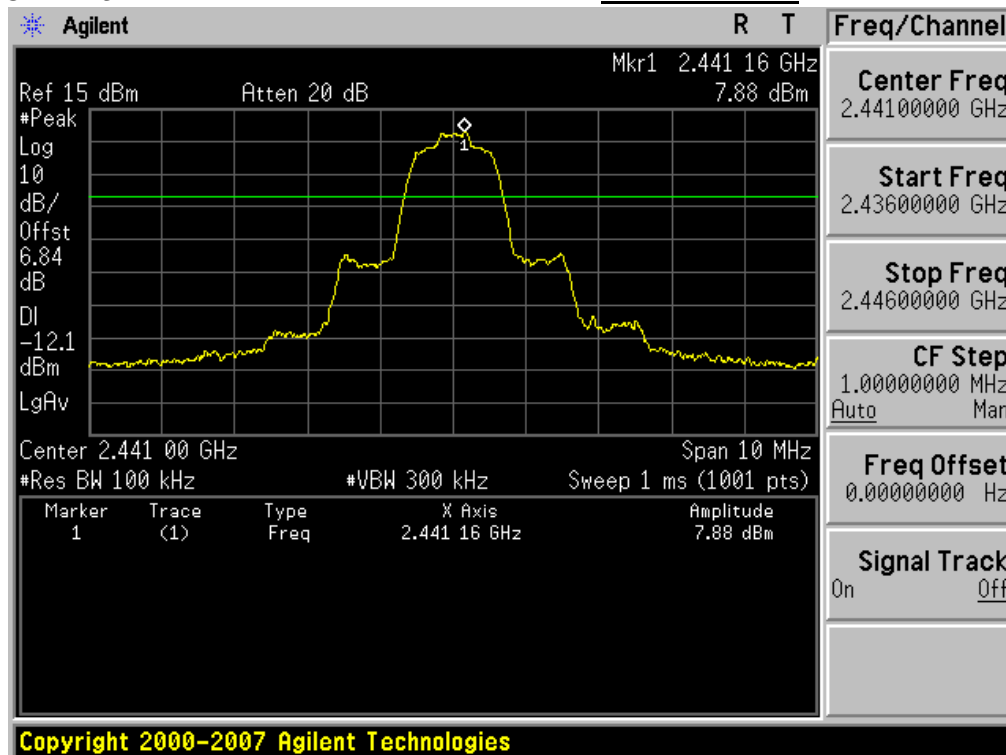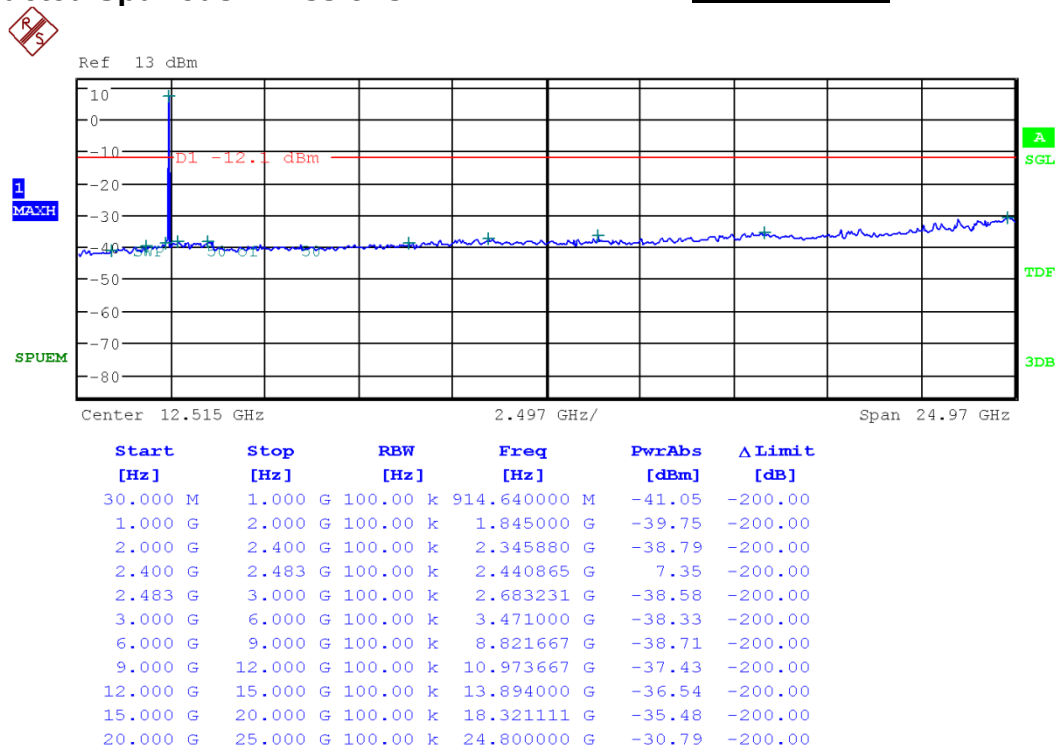Reference for limit**Middle Channel** & Modulation: **$\pi/4$ DQPSK****Conducted Spurious Emissions****Middle Channel** & Modulation: **$\pi/4$ DQPSK**

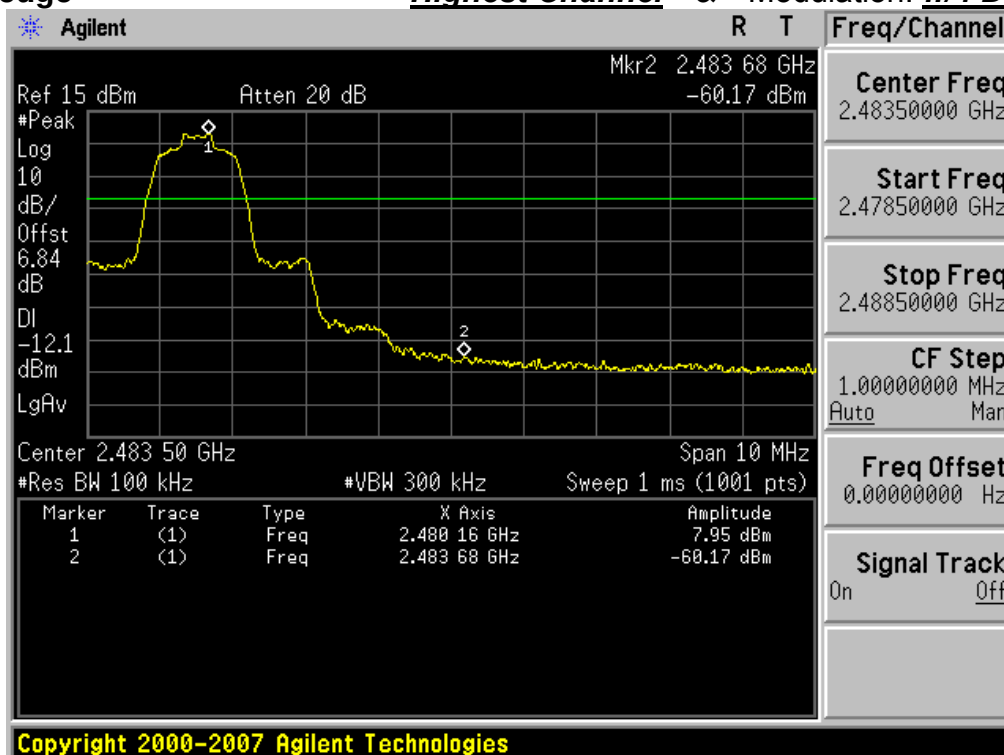
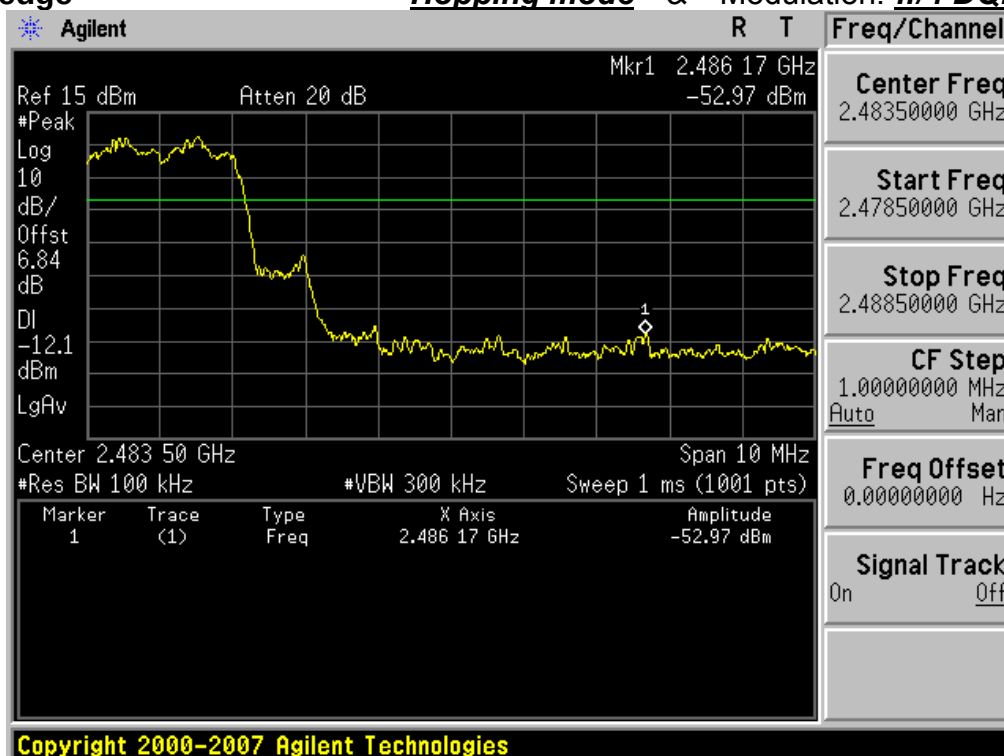
High Band-edge**Highest Channel & Modulation: $\pi/4$ DQPSK****High Band-edge****Hopping mode & Modulation: $\pi/4$ DQPSK**

Conducted Spurious Emissions

Highest Channel & Modulation: **$\pi/4$ DQPSK**

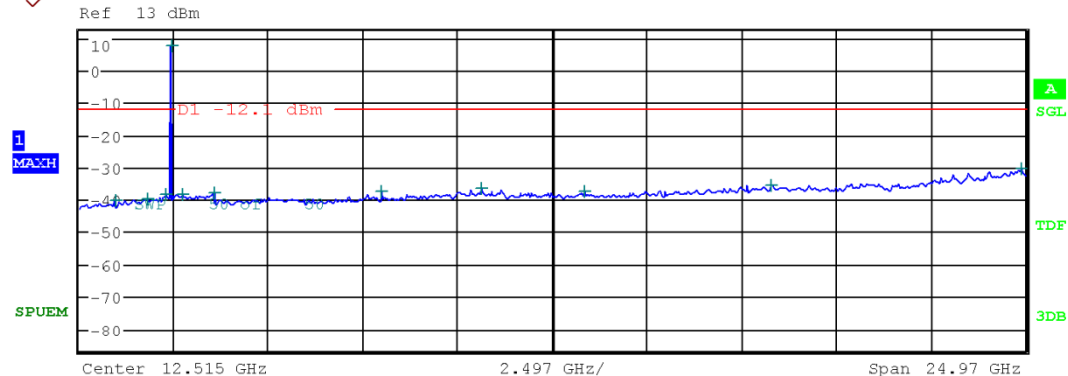


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	982.540000 M	-40.45	-200.00
1.000 G	2.000 G	100.00 k	1.832000 G	-39.78	-200.00
2.000 G	2.400 G	100.00 k	2.293680 G	-38.61	-200.00
2.400 G	2.483 G	100.00 k	2.480006 G	7.62	-200.00
2.483 G	3.000 G	100.00 k	2.740149 G	-38.50	-200.00
3.000 G	6.000 G	100.00 k	3.588333 G	-38.08	-200.00
6.000 G	9.000 G	100.00 k	7.984667 G	-37.52	-200.00
9.000 G	12.000 G	100.00 k	10.625333 G	-36.74	-200.00
12.000 G	15.000 G	100.00 k	13.365667 G	-37.59	-200.00
15.000 G	20.000 G	100.00 k	18.285556 G	-35.62	-200.00
20.000 G	25.000 G	100.00 k	24.892778 G	-30.38	-200.00

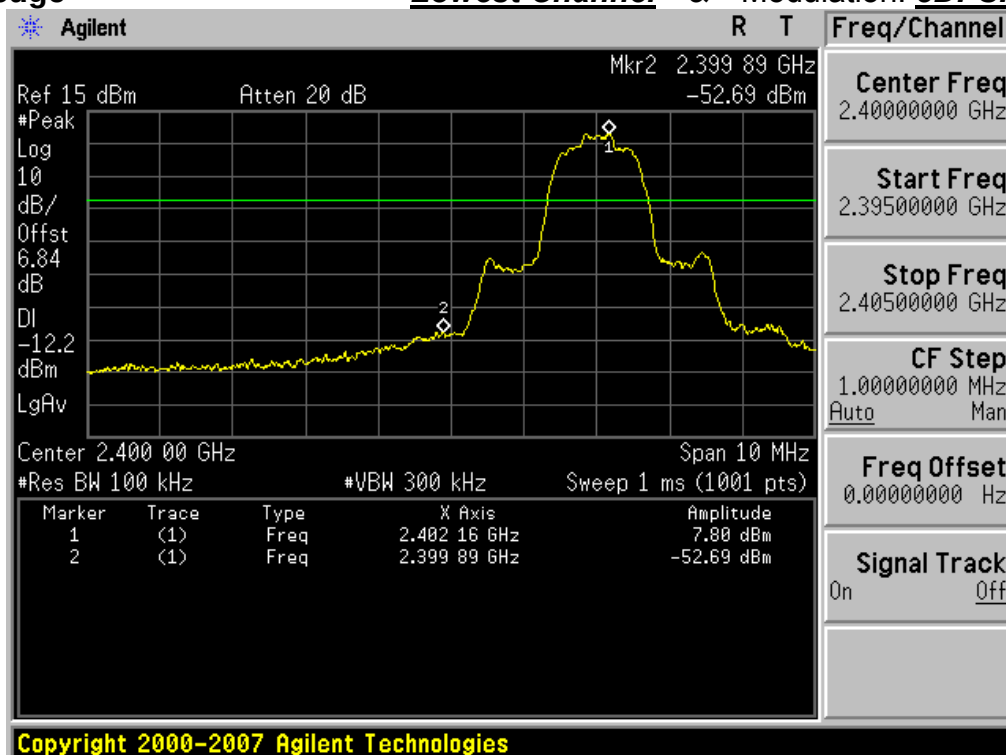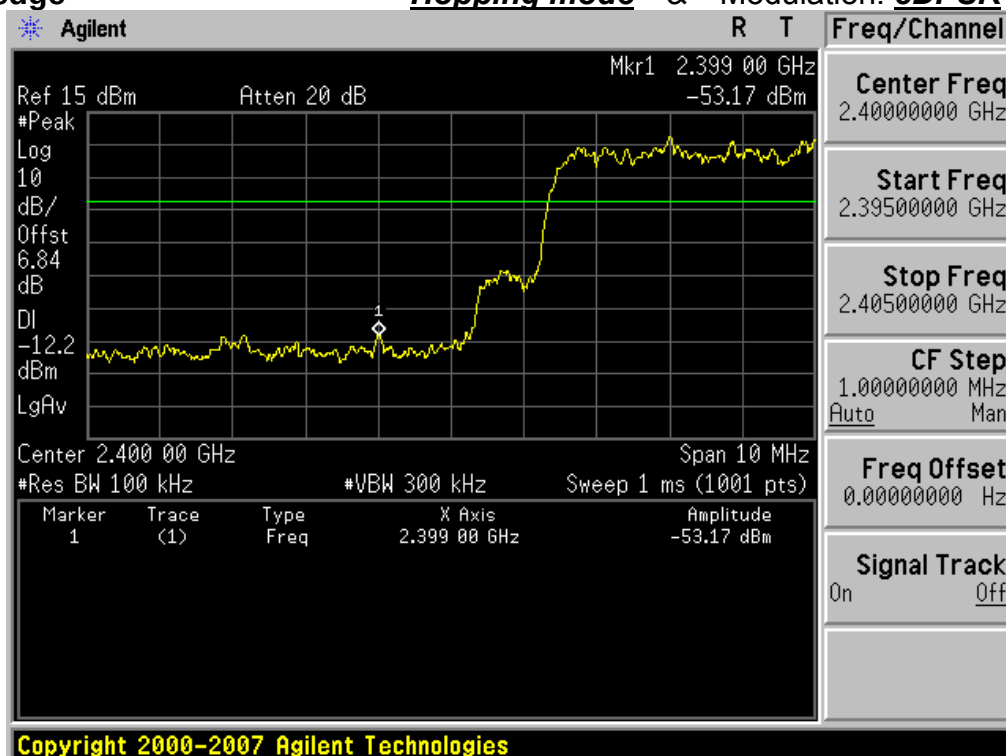Low Band-edge**Lowest Channel & Modulation: 8DPSK****Low Band-edge****Hopping mode & Modulation: 8DPSK**

Conducted Spurious Emissions


Lowest Channel & Modulation: 8DPSK

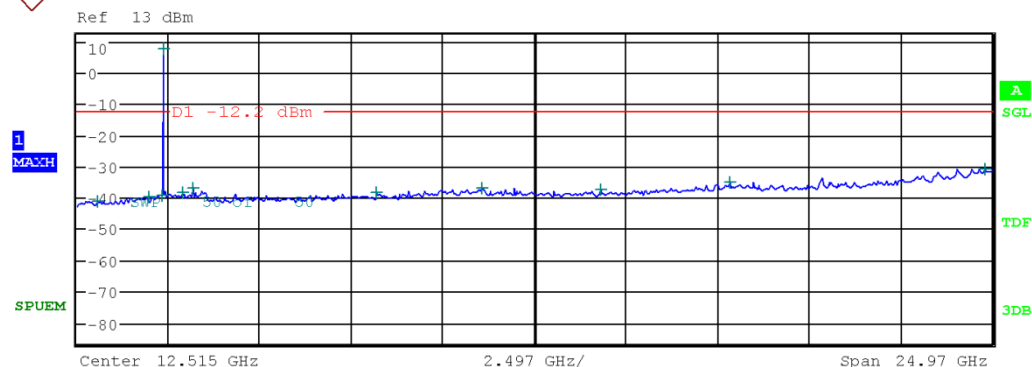

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	580.960000 M	-41.04	-200.00
1.000 G	2.000 G	100.00 k	1.983000 G	-39.70	-200.00
2.000 G	2.400 G	100.00 k	2.345840 G	-39.30	-200.00
2.400 G	2.483 G	100.00 k	2.402017 G	7.67	-200.00
2.483 G	3.000 G	100.00 k	2.922990 G	-38.41	-200.00
3.000 G	6.000 G	100.00 k	3.202667 G	-36.87	-200.00
6.000 G	9.000 G	100.00 k	8.176667 G	-38.60	-200.00
9.000 G	12.000 G	100.00 k	11.086333 G	-37.00	-200.00
12.000 G	15.000 G	100.00 k	14.321667 G	-37.50	-200.00
15.000 G	20.000 G	100.00 k	17.845556 G	-34.92	-200.00
20.000 G	25.000 G	100.00 k	24.803889 G	-30.70	-200.00


Reference for limit



Middle Channel & Modulation: **8DPSK**

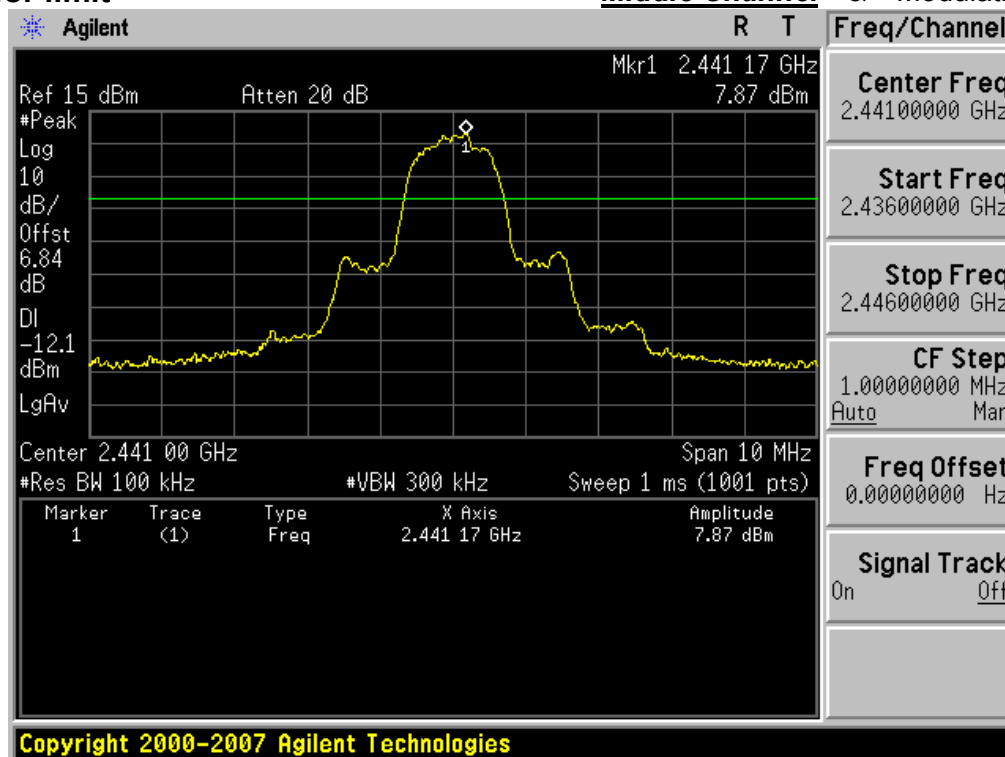

Conducted Spurious Emissions


Middle Channel & Modulation: **8DPSK**

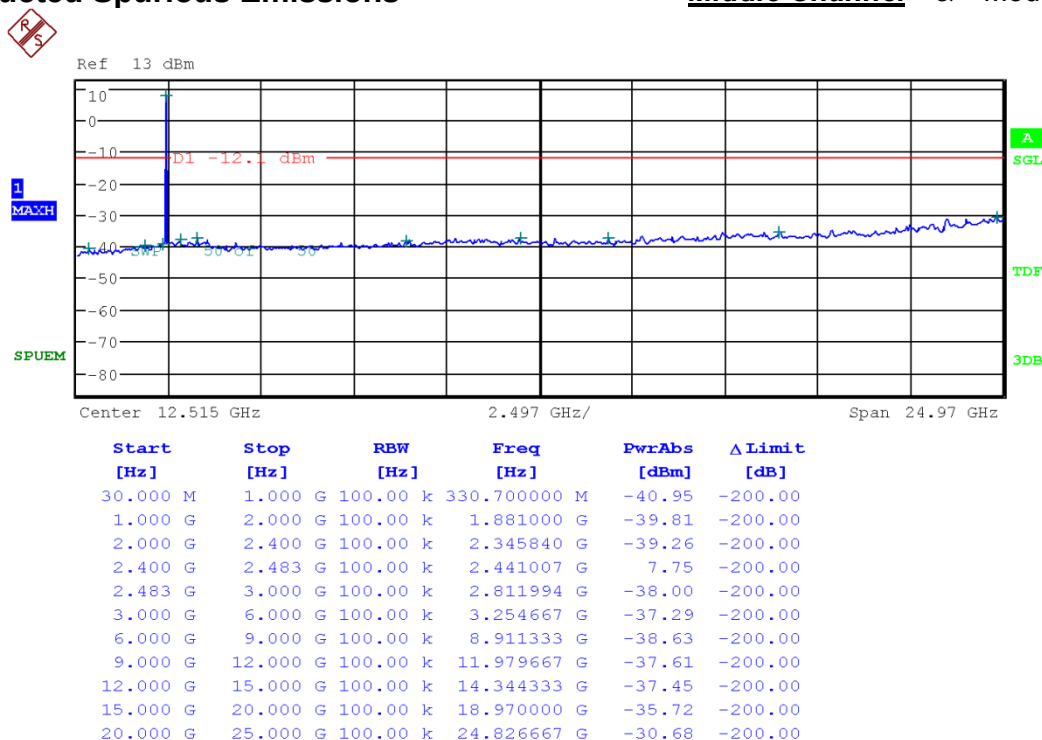

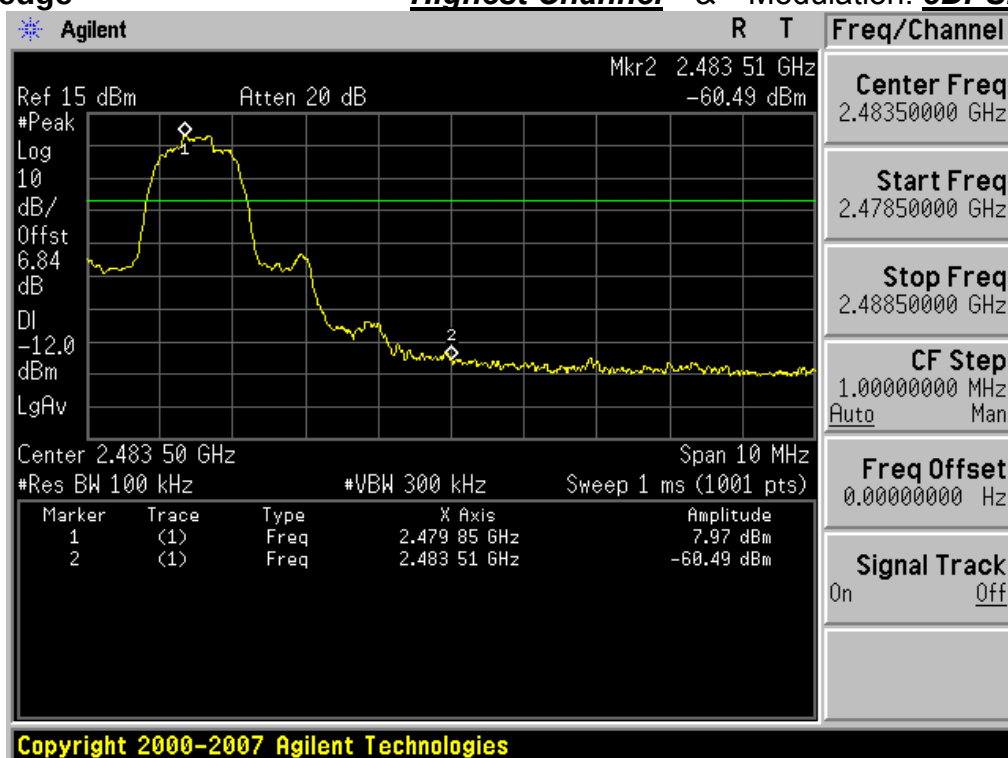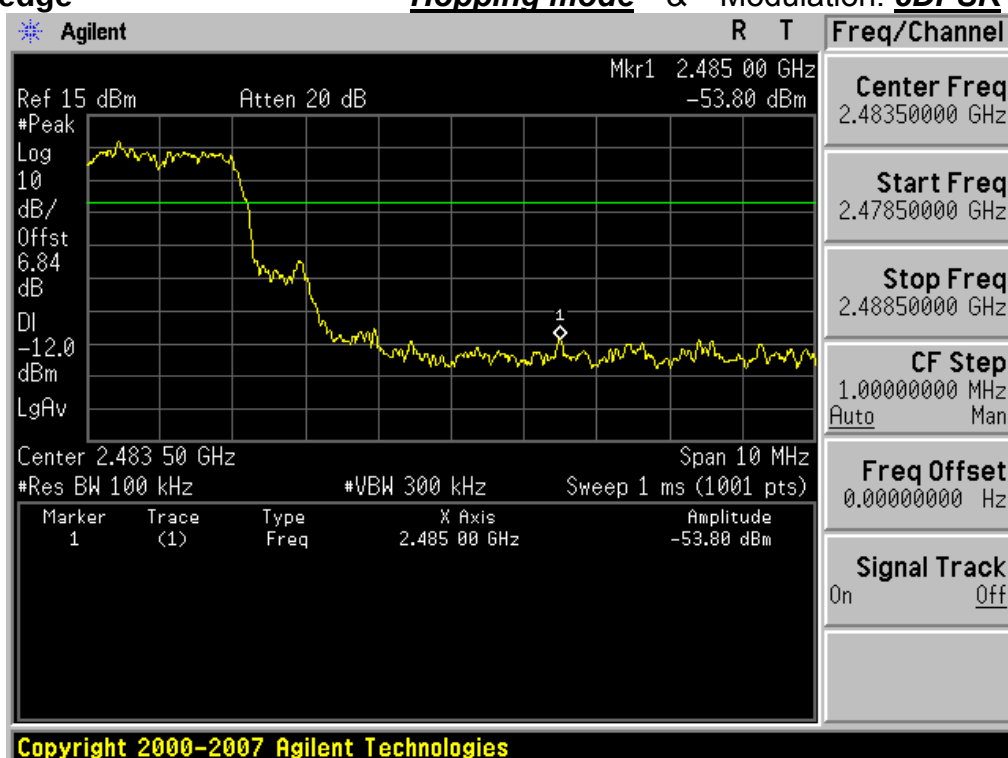High Band-edge**Highest Channel** & Modulation: **8DPSK****High Band-edge****Hopping mode** & Modulation: **8DPSK**

Conducted Spurious Emissions

Highest Channel & Modulation: **8DPSK**

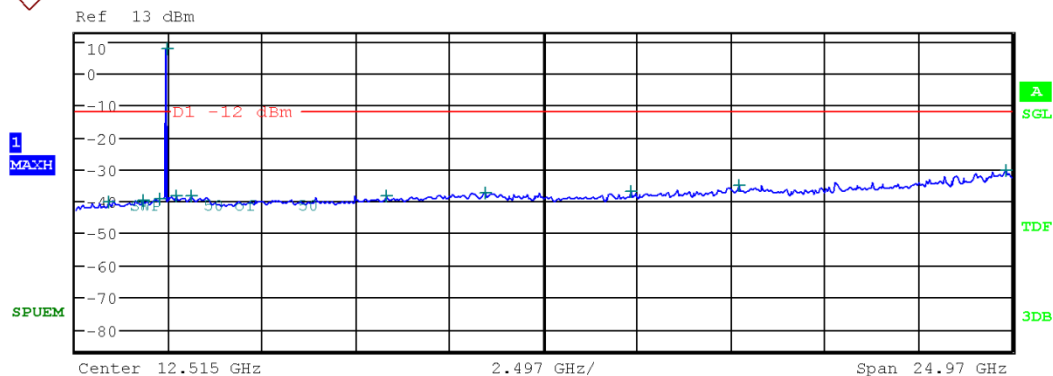

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	100.00 k	901.060000 M	-40.49	-200.00
1.000 G	2.000 G	100.00 k	1.847000 G	-39.73	-200.00
2.000 G	2.400 G	100.00 k	2.276520 G	-39.17	-200.00
2.400 G	2.483 G	100.00 k	2.480152 G	7.83	-200.00
2.483 G	3.000 G	100.00 k	2.705182 G	-38.43	-200.00
3.000 G	6.000 G	100.00 k	3.122667 G	-38.36	-200.00
6.000 G	9.000 G	100.00 k	8.297333 G	-38.27	-200.00
9.000 G	12.000 G	100.00 k	10.943333 G	-37.48	-200.00
12.000 G	15.000 G	100.00 k	14.845000 G	-37.23	-200.00
15.000 G	20.000 G	100.00 k	17.732222 G	-34.89	-200.00
20.000 G	25.000 G	100.00 k	24.848333 G	-30.37	-200.00

3. Carrier Frequency Separation

3.1. Test Setup

Refer to the APPENDIX I.

3.2. Limit

Limit: $\geq 20\text{dB BW}$ or $\geq \text{Two-Thirds of the } 20\text{dB BW}$

- Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = wide enough to capture the peaks of two adjacent channels

RBW = 1% of the span

Sweep = auto

VBW $\geq$ RBW

Detector function = peak

Trace = max hold

- Measurement Data: **Comply**

- FH mode

Hopping Mode	Test Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	Test Case 1	2441.027	2440.025	1.002
	Test Case 2	2441.006	2442.011	1.005
	Test Case 3	2441.015	2442.017	1.002

- AFH mode

Hopping Mode	Test Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (MHz)
Enable	Test Case 1	2410.982	2409.980	1.002
	Test Case 2	2411.021	2412.023	1.002
	Test Case 3	2411.009	2410.007	1.002

Note 1: See next pages for actual measured spectrum plots.


- Minimum Standard:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


Carrier Frequency Separation (FH)

Hopping mode: Enable & Test Case 1

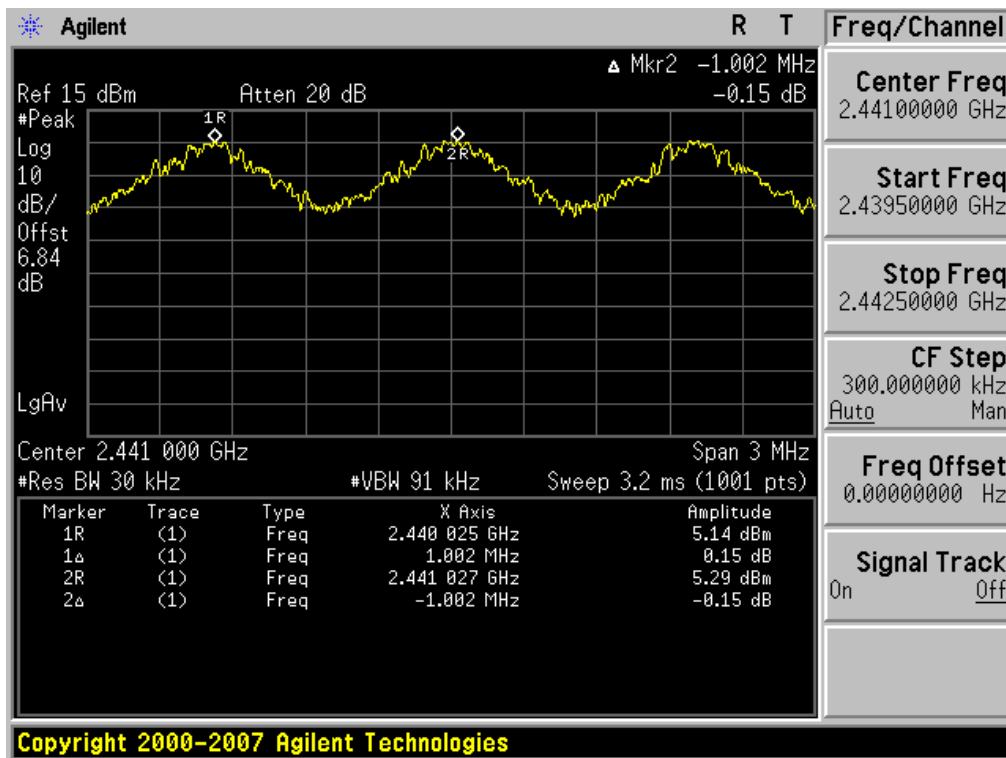


Carrier Frequency Separation (FH)

Hopping mode: Enable & Test Case 2

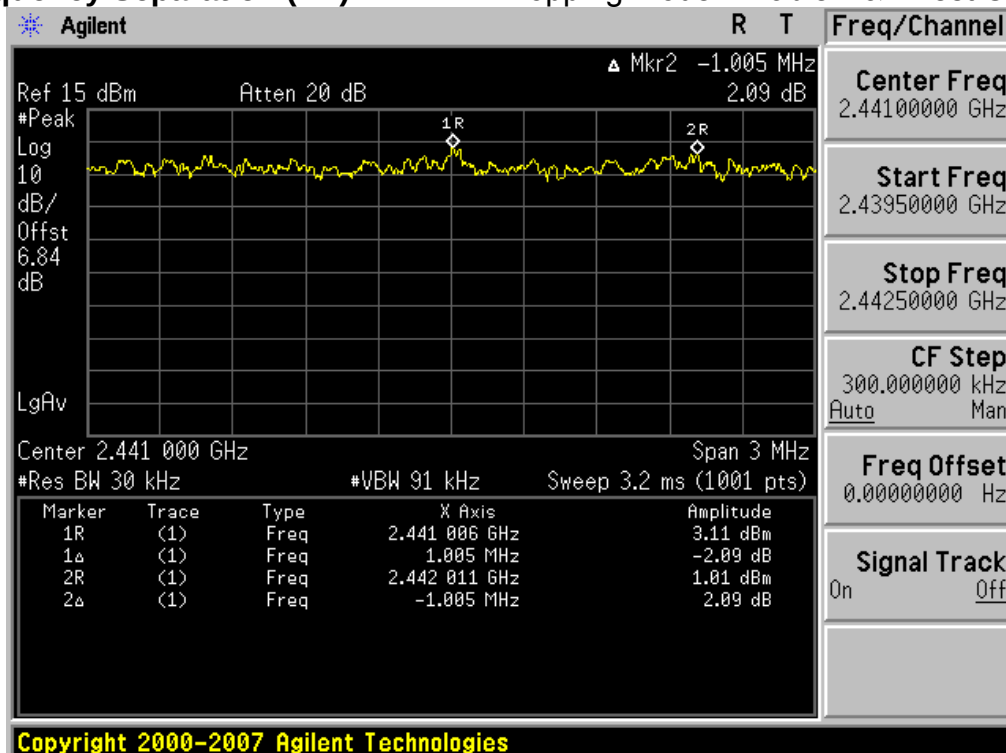


Carrier Frequency Separation (FH)

Hopping mode: Enable & Test Case 3

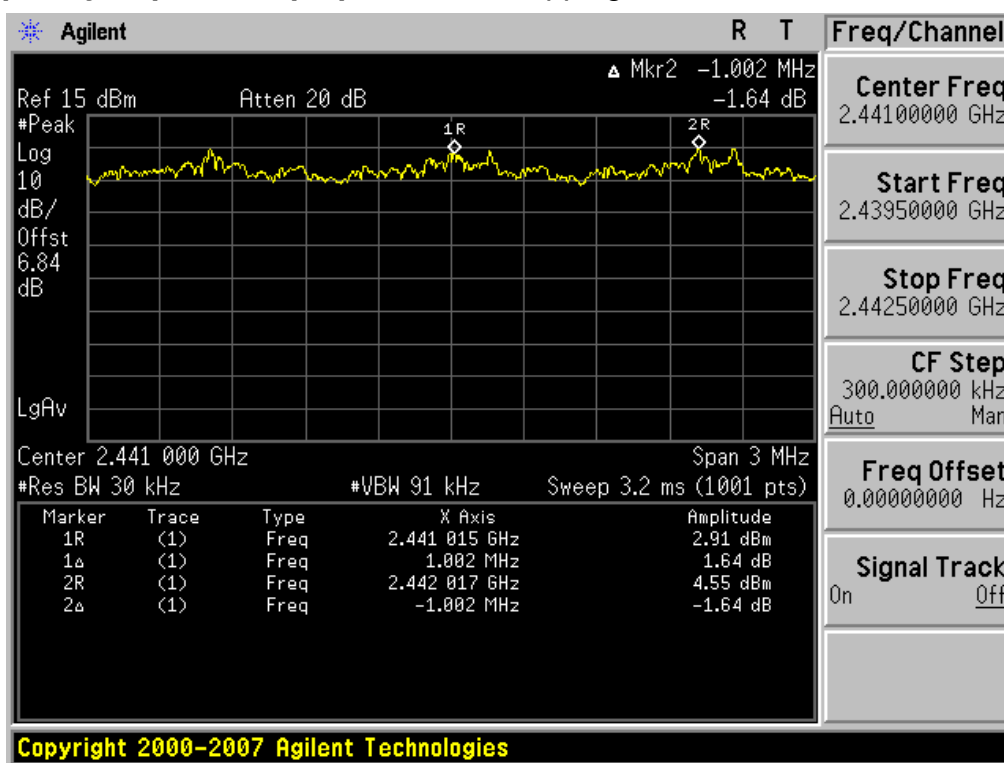


Carrier Frequency Separation (AFH)

Hopping mode: Enable & Test Case 1

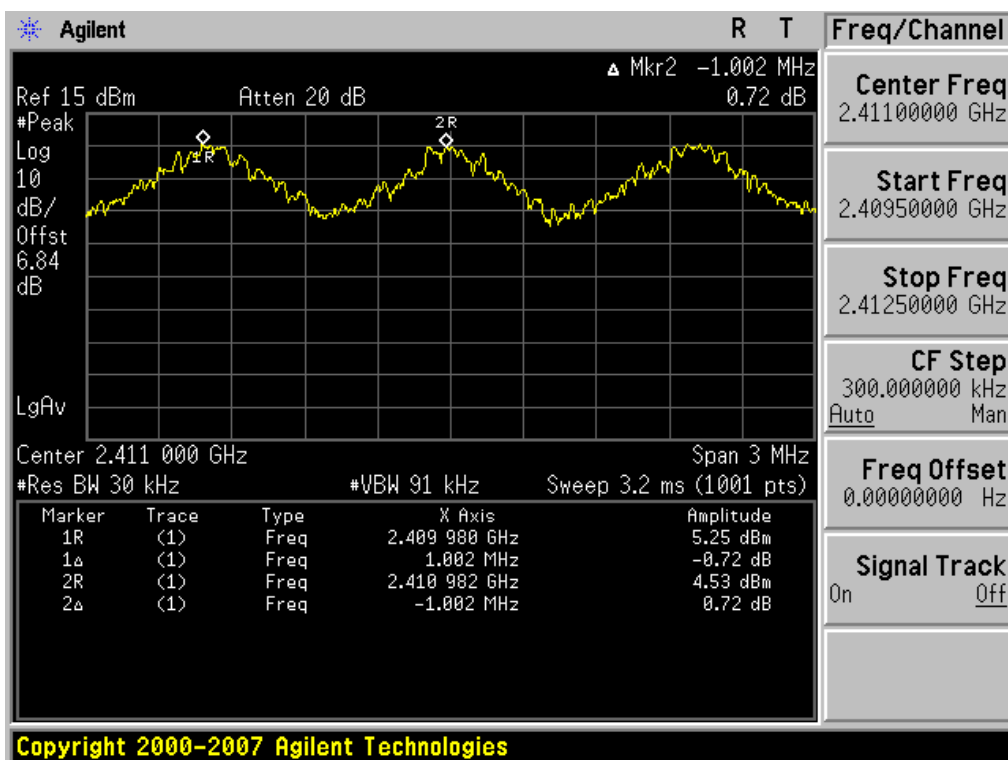**Carrier Frequency Separation (AFH)**


Hopping mode: Enable & Test Case 2

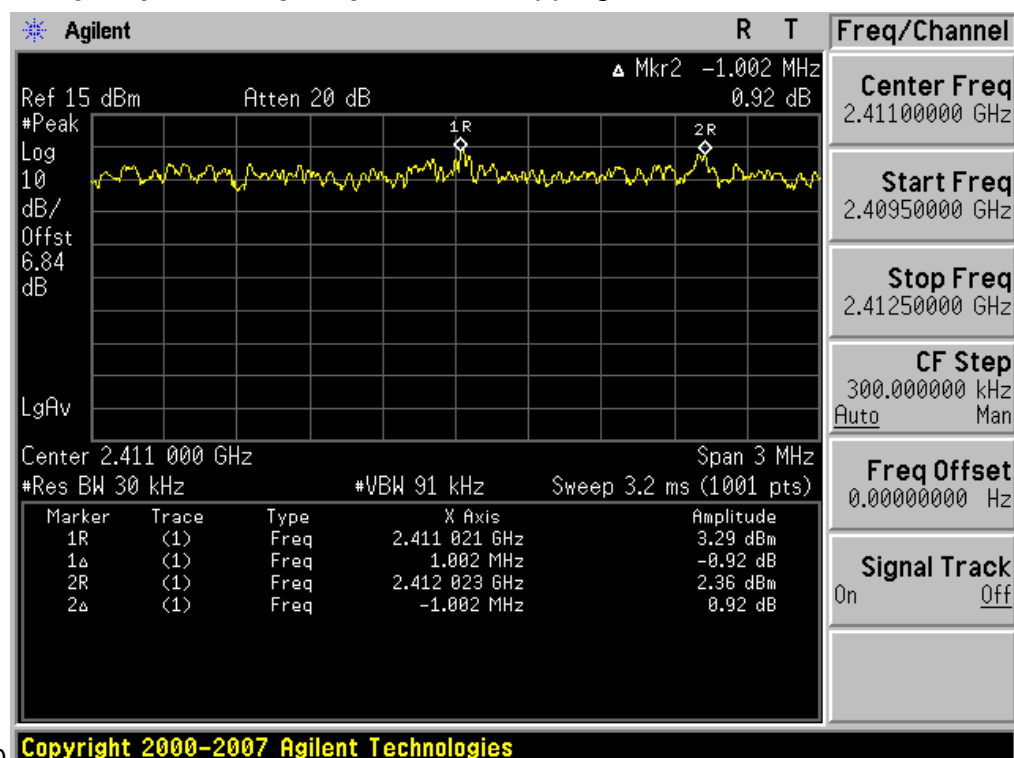

10

Carrier Frequency Separation (AFH)

Hopping mode: Enable & Test Case 3

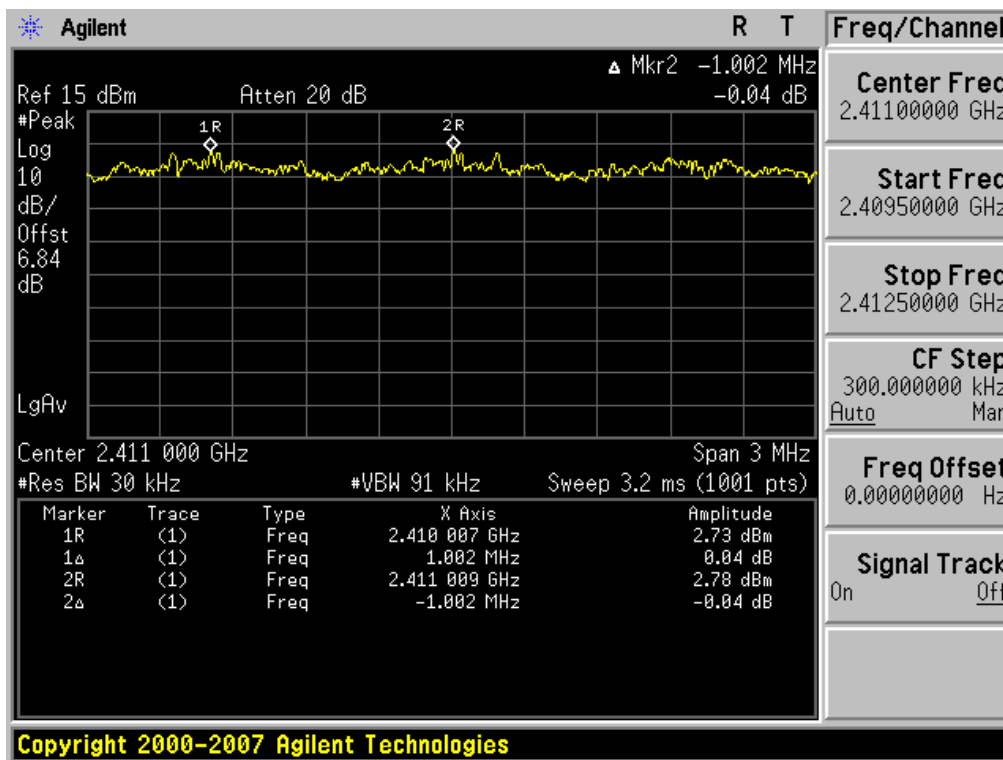

4. Number of Hopping Frequencies

4.1. Test Setup

Refer to the APPENDIX I.

4.2. Limit

Limit: ≥ 15 hops

- Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to:

Span = 25MHz Plot 1: Start Frequency = 2389.5MHz, Stop Frequency = 2414.5 MHz
 Plot 2: Start Frequency = 2414.5MHz, Stop Frequency = 2439.5 MHz
 Plot 3: Start Frequency = 2439.5MHz, Stop Frequency = 2464.5 MHz
 Plot 4: Start Frequency = 2464.5MHz, Stop Frequency = 2489.5 MHz

RBW = 1% of the span or more

Sweep = auto

VBW = $\geq$ RBW

Detector function = peak

Trace = max hold

- Measurement Data: **Comply**

- FH mode

Hopping mode	Test mode	Test Result (Total Hops)
Enable	Test Case 1	79
	Test Case 2	79
	Test Case 3	79

- AFH mode

Hopping mode	Test mode	Test Result (Total Hops)
Enable	Test Case 1	20
	Test Case 2	20
	Test Case 3	20


Note 1: See next pages for actual measured spectrum plots.

- Minimum Standard:

At least 15 hops


Number of Hopping Frequencies 1(FH)

Hopping mode: Enable & Test Case 1

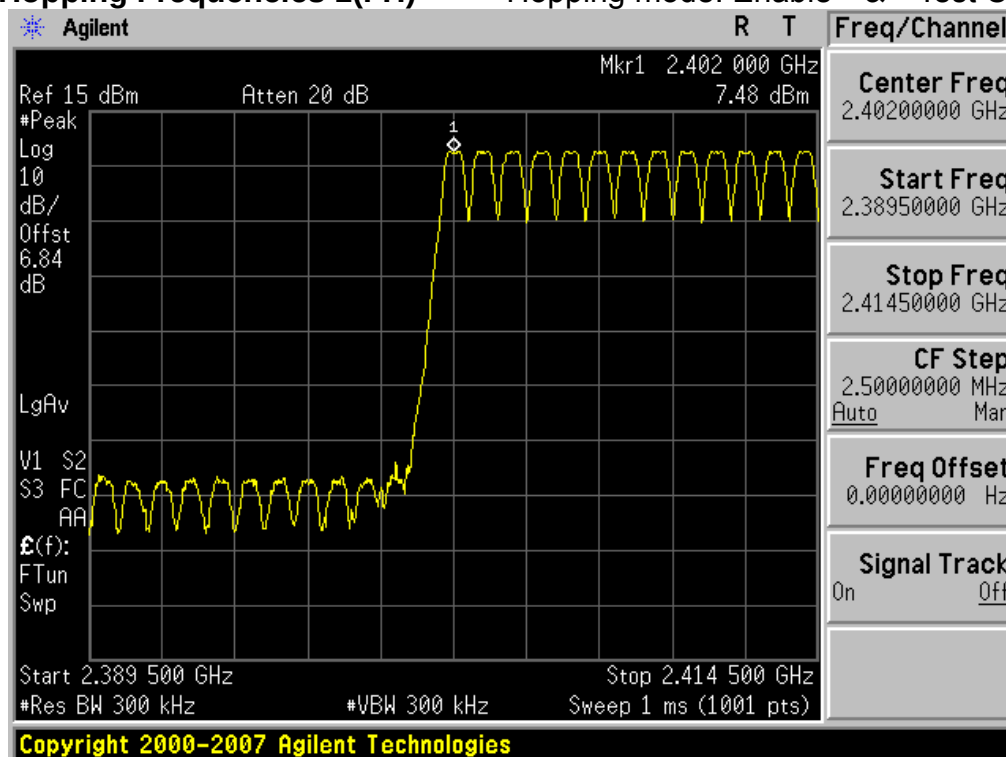


Number of Hopping Frequencies 2(FH)

Hopping mode: Enable & Test Case 1

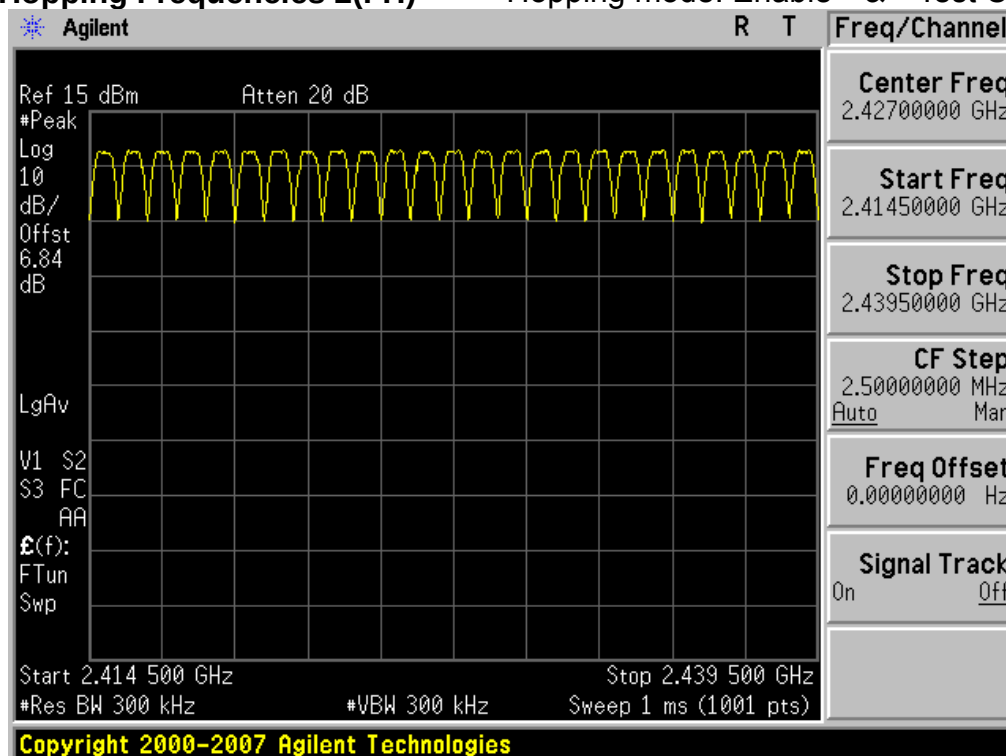


Number of Hopping Frequencies 3(FH)

Hopping mode: Enable & Test Case 1

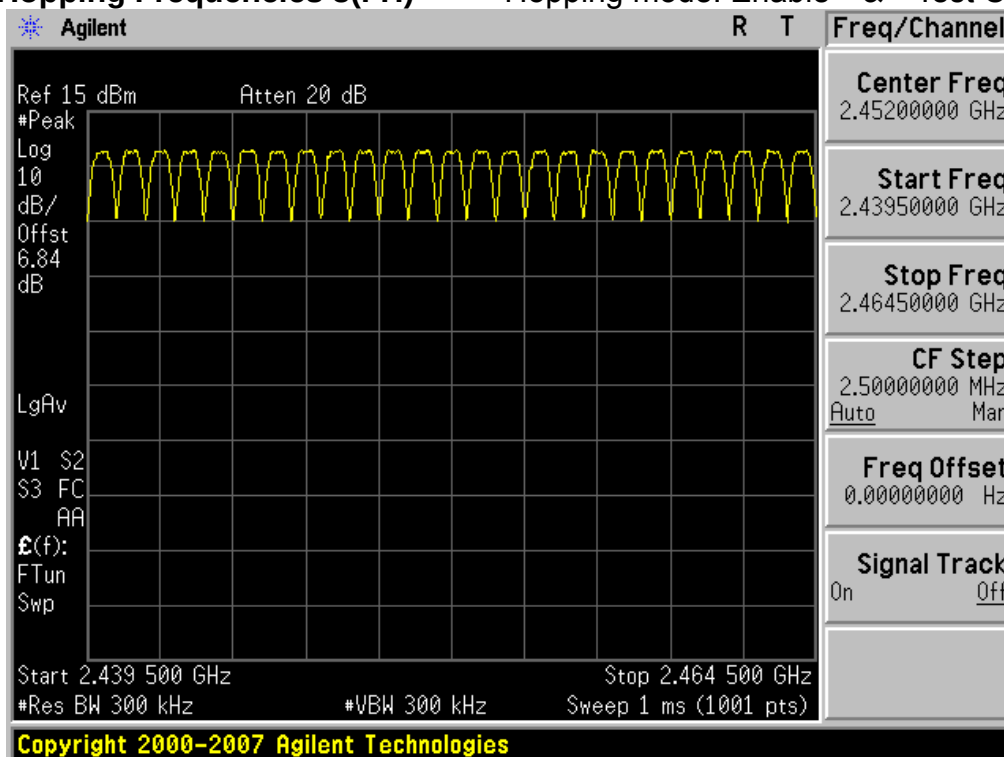


Number of Hopping Frequencies 4(FH)

Hopping mode: Enable & Test Case 1

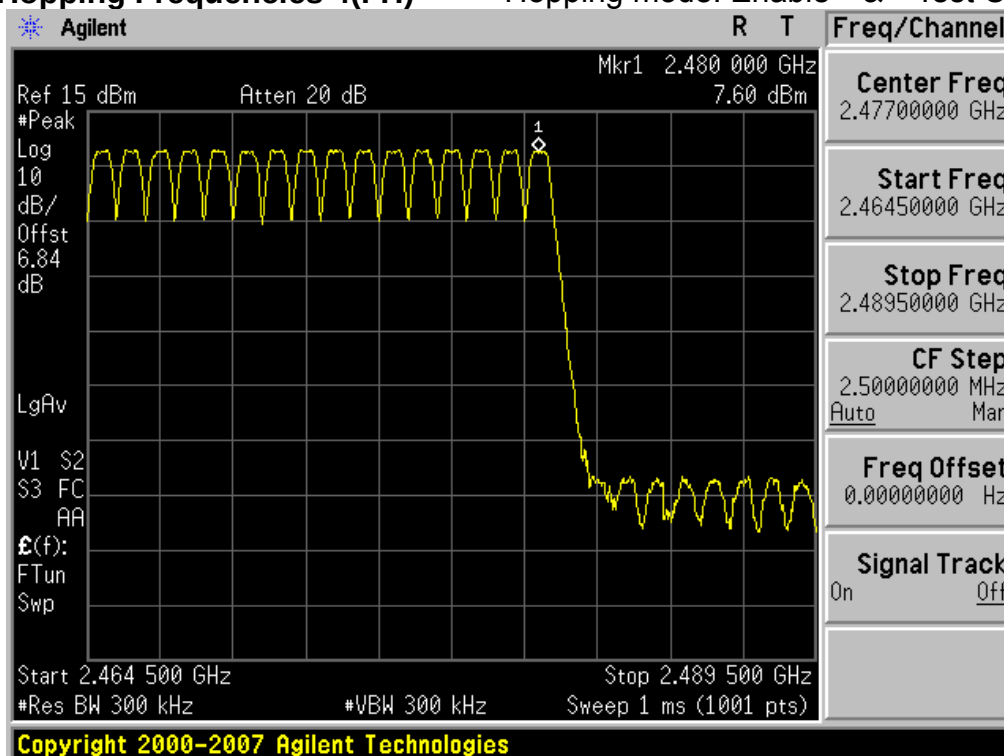


Number of Hopping Frequencies 1(FH)

Hopping mode: Enable & Test Case 2

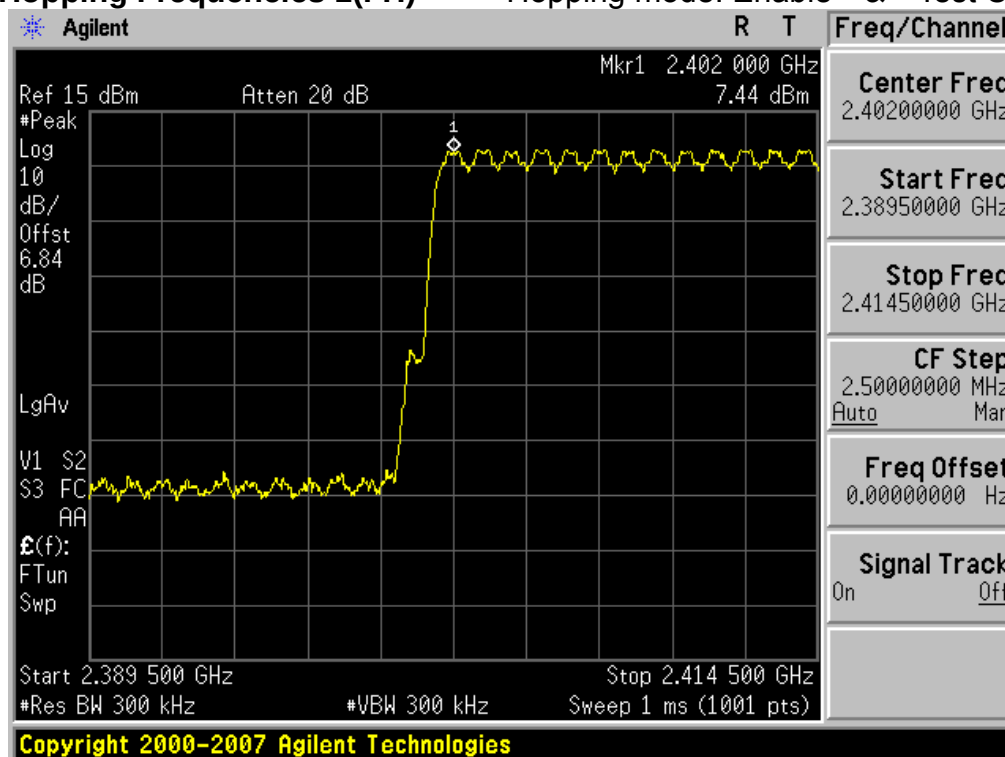


Number of Hopping Frequencies 2(FH)

Hopping mode: Enable & Test Case 2

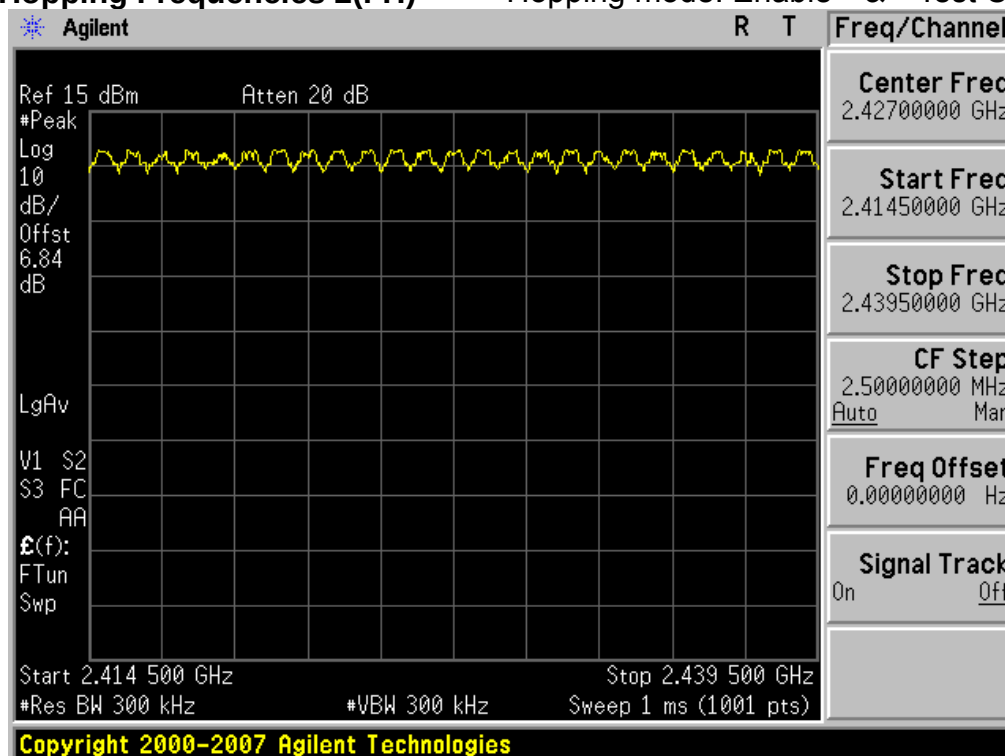


Number of Hopping Frequencies 3(FH)

Hopping mode: Enable & Test Case 2

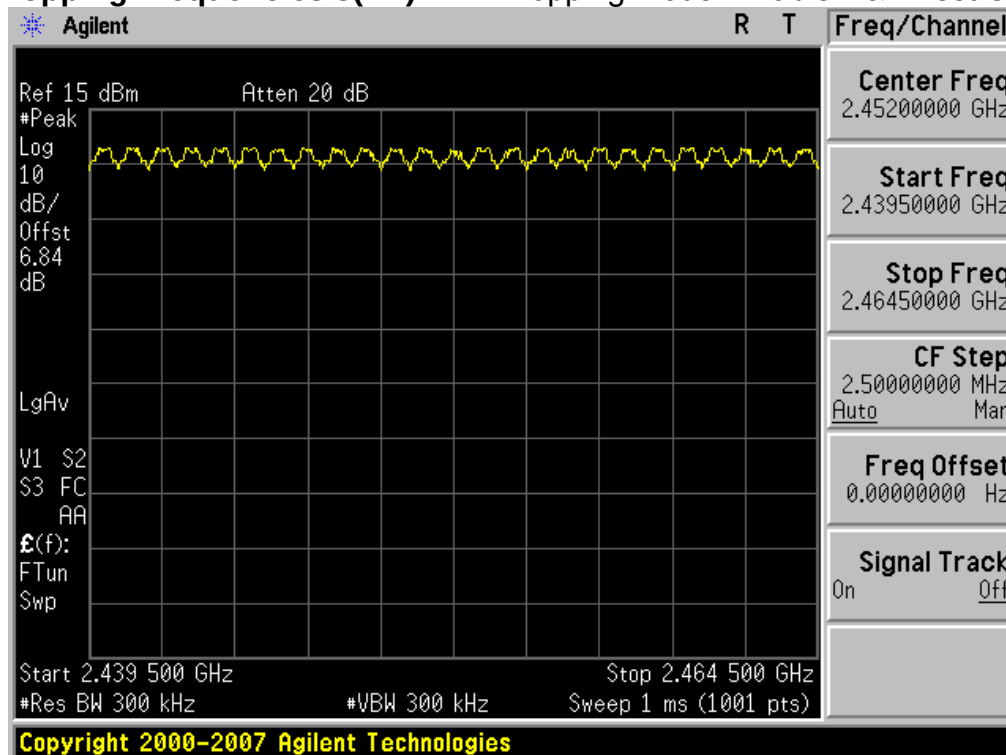
**Number of Hopping Frequencies 4(FH)**

Hopping mode: Enable & Test Case 2

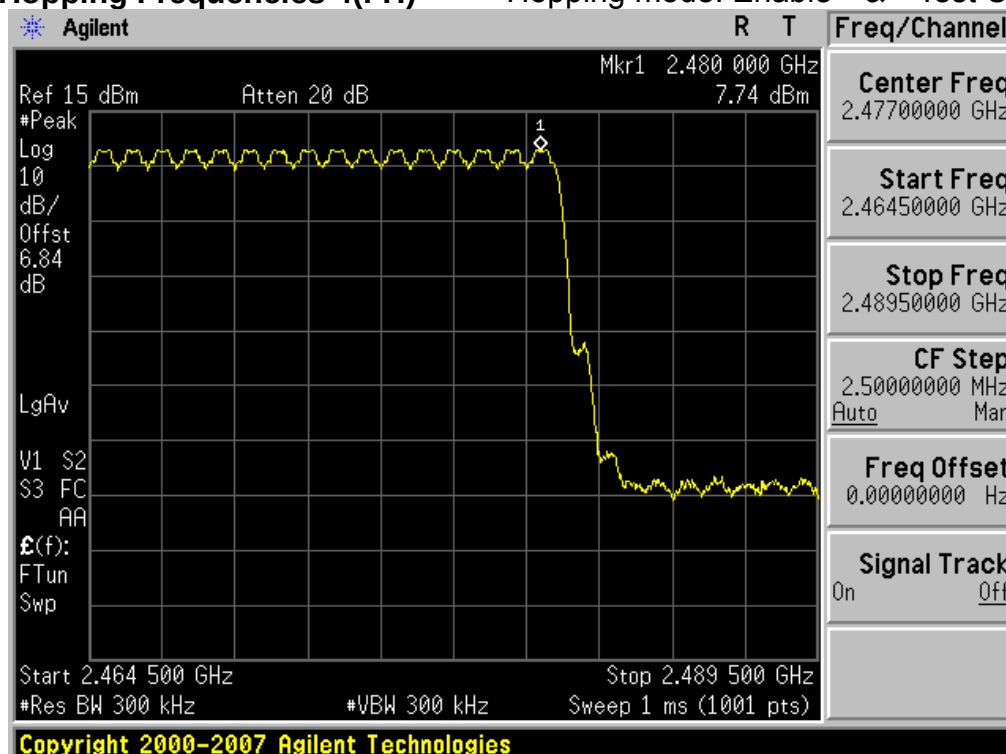


Number of Hopping Frequencies 1(FH)

Hopping mode: Enable & Test Case 3

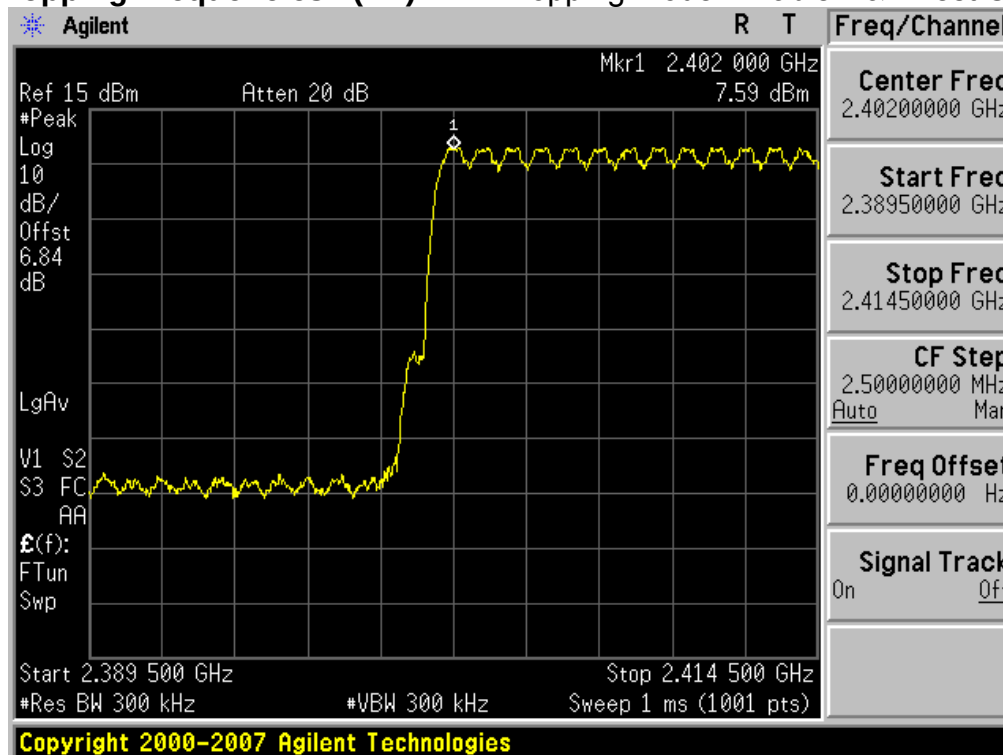


Number of Hopping Frequencies 2(FH)

Hopping mode: Enable & Test Case 3

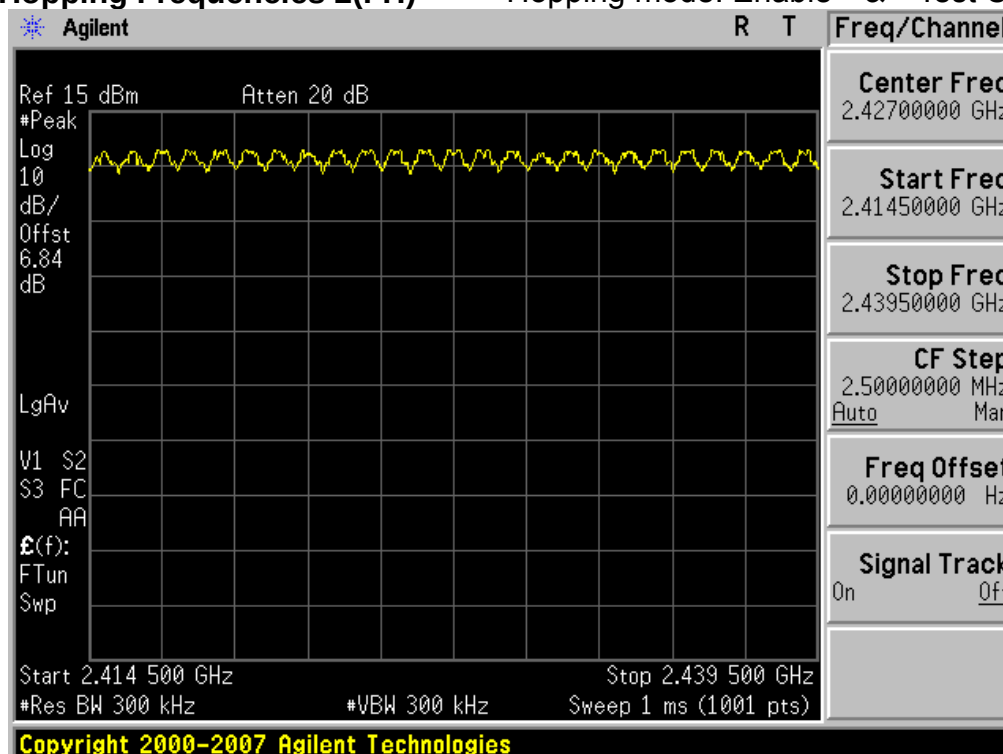


Number of Hopping Frequencies 3(FH)

Hopping mode: Enable & Test Case 3

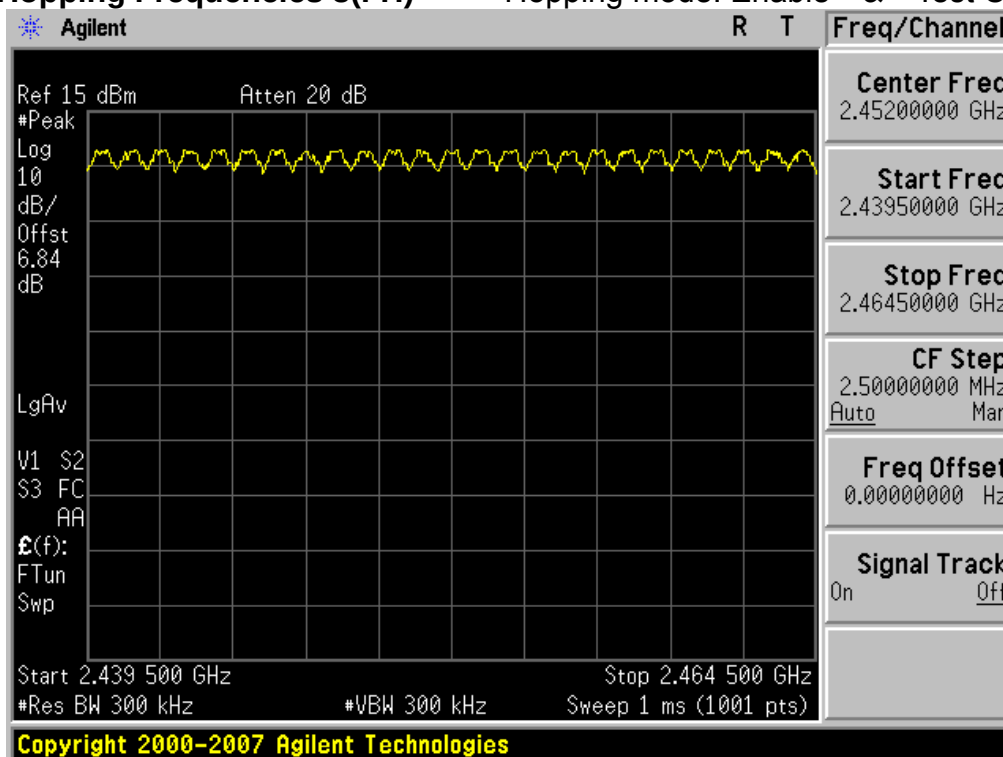


Number of Hopping Frequencies 4(FH)


Hopping mode: Enable & Test Case 3

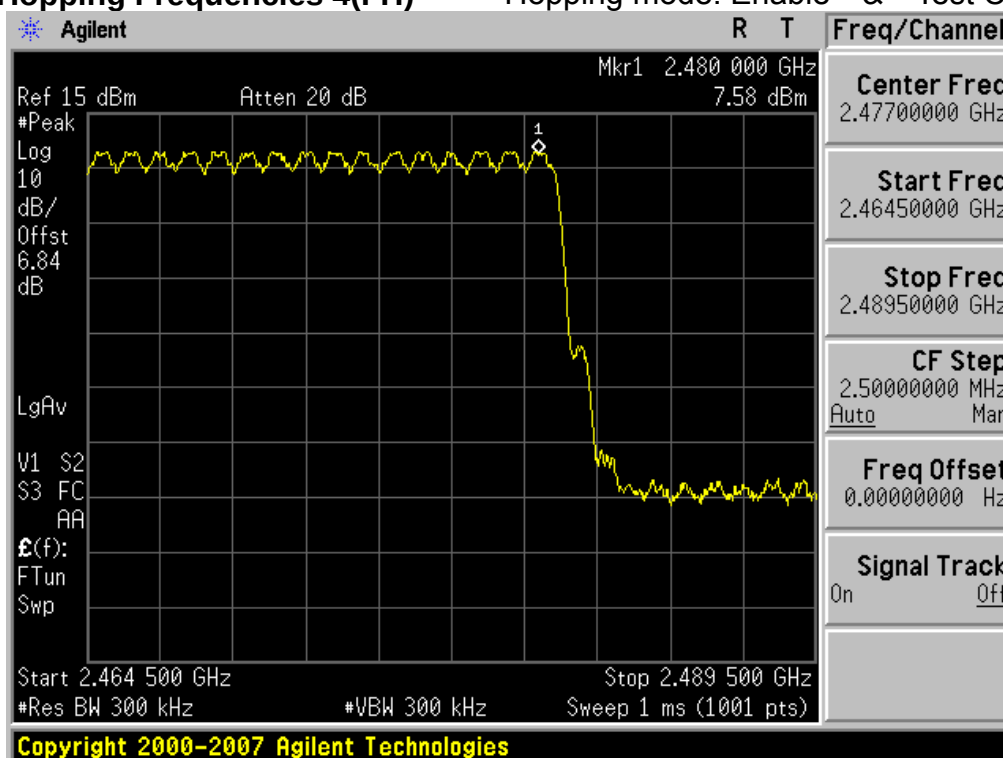


Number of Hopping Frequencies 1(AFH) Hopping mode: Enable & Test Case 1

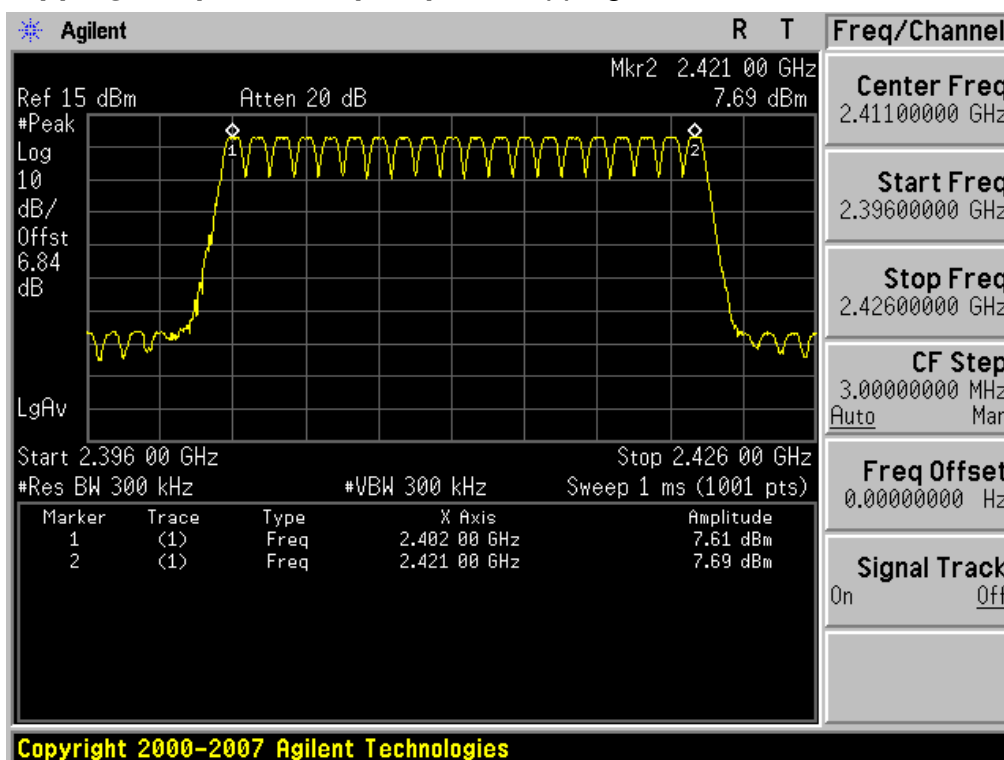

Number of Hopping Frequencies 1(AFH) Hopping mode: Enable & Test Case 2

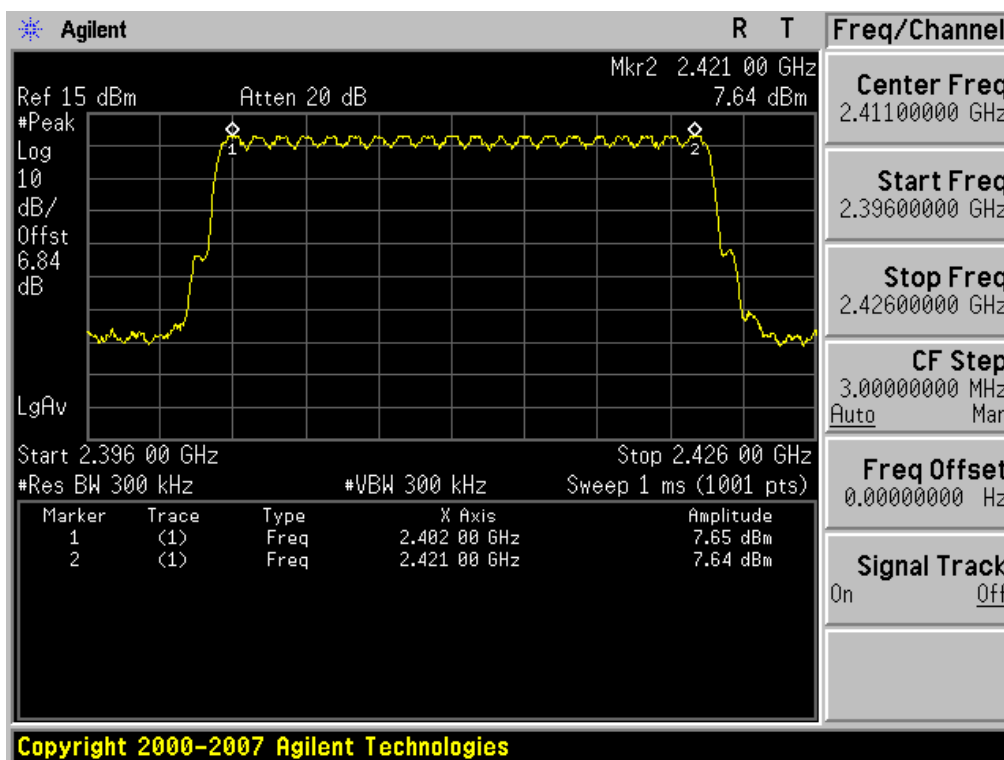

Number of Hopping Frequencies 1(AFH) Hopping mode: Enable & Test Case 3

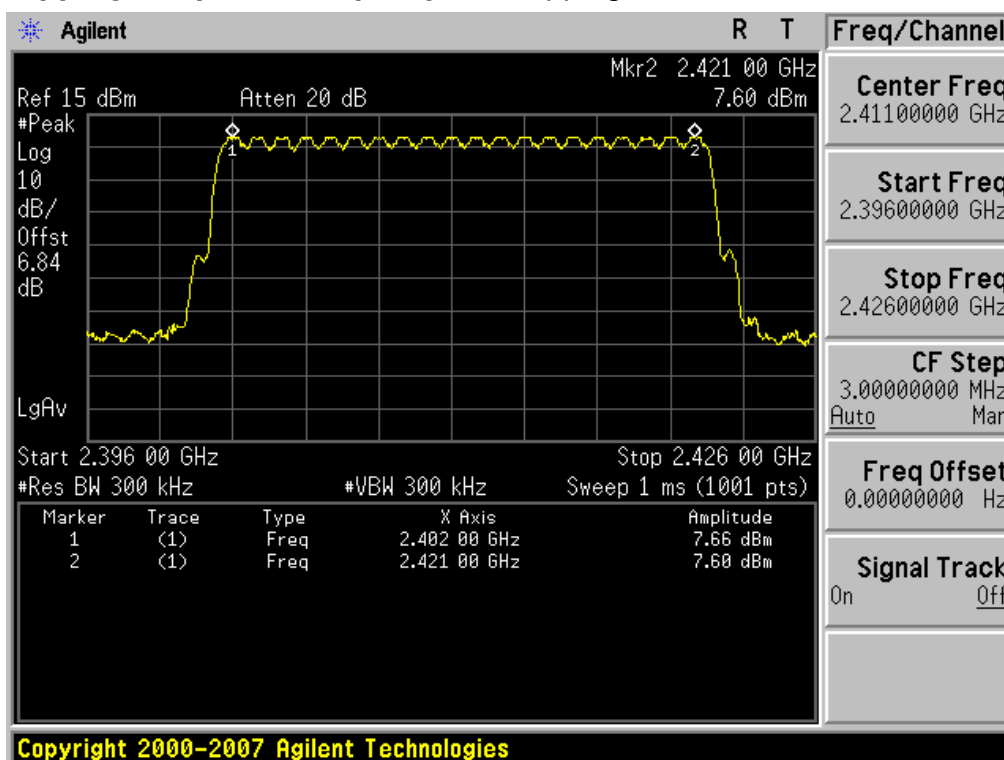

5. 20dBc BW

5.1. Test Setup

Refer to the APPENDIX I.

5.2. Limit

Limit: Not Applicable

5.3. Test Procedure

1. The 20dBc bandwidth were measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$, Span = 3 MHz.


5.4. Test Results

Ambient temperature : 25 °C
Relative humidity : 54 %

Modulation	Tested Channel	20dBc BW (MHz)
<u>GFSK</u>	Lowest	0.897
	Middle	0.907
	Highest	0.924
<u>$\pi/4$ DQPSK</u>	Lowest	1.325
	Middle	1.318
	Highest	1.310
<u>8DPSK</u>	Lowest	1.263
	Middle	1.274
	Highest	1.270

Note 1: See next pages for actual measured spectrum plots.

20dBc Bandwidth**Lowest Channel** & Modulation: **GFSK****20dBc Bandwidth****Middle Channel** & Modulation: **GFSK**

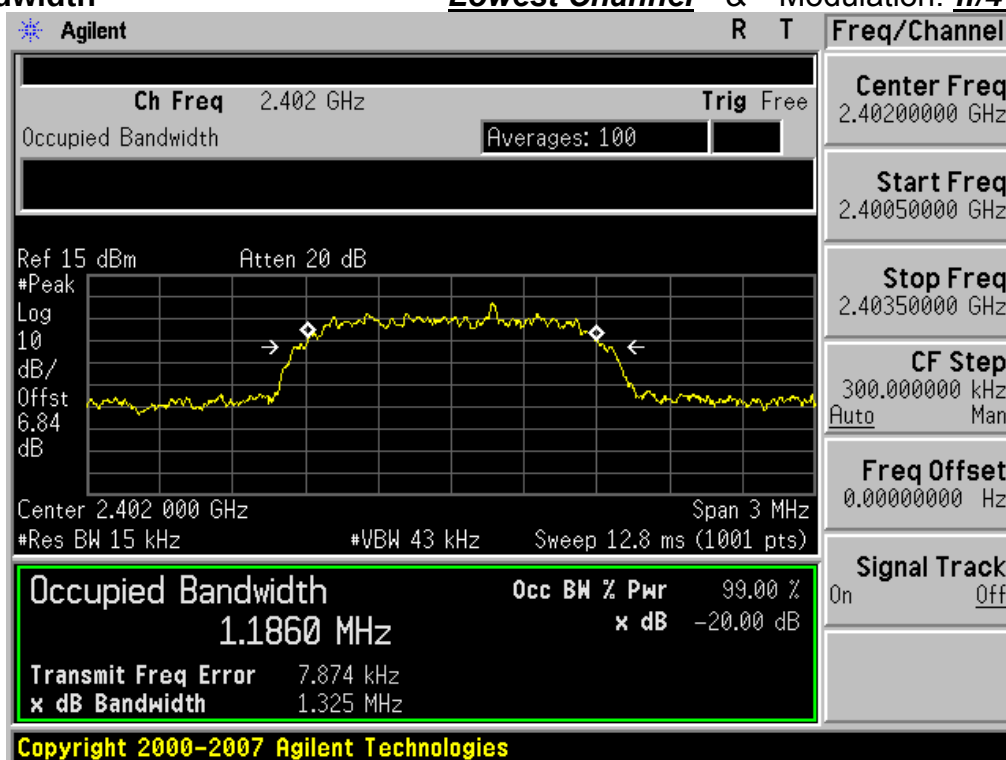20dBc Bandwidth**Highest Channel** & Modulation: **GFSK****20dBc Bandwidth****Lowest Channel** & Modulation: **$\pi/4$ DQPSK**

20dBc Bandwidth

Middle Channel & Modulation: $\pi/4$ DQPSK




20dBc Bandwidth

Highest Channel & Modulation: $\pi/4$ DQPSK




20dBc Bandwidth

Lowest Channel & Modulation: **8DPSK**

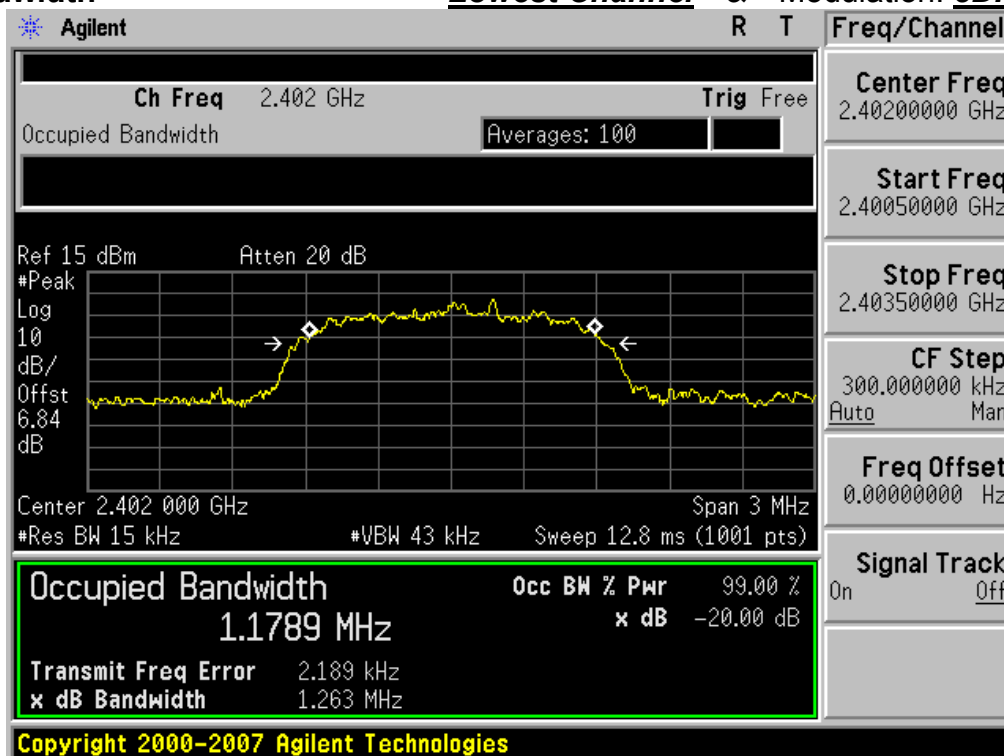


20dBc Bandwidth

Middle Channel & Modulation: **8DPSK**

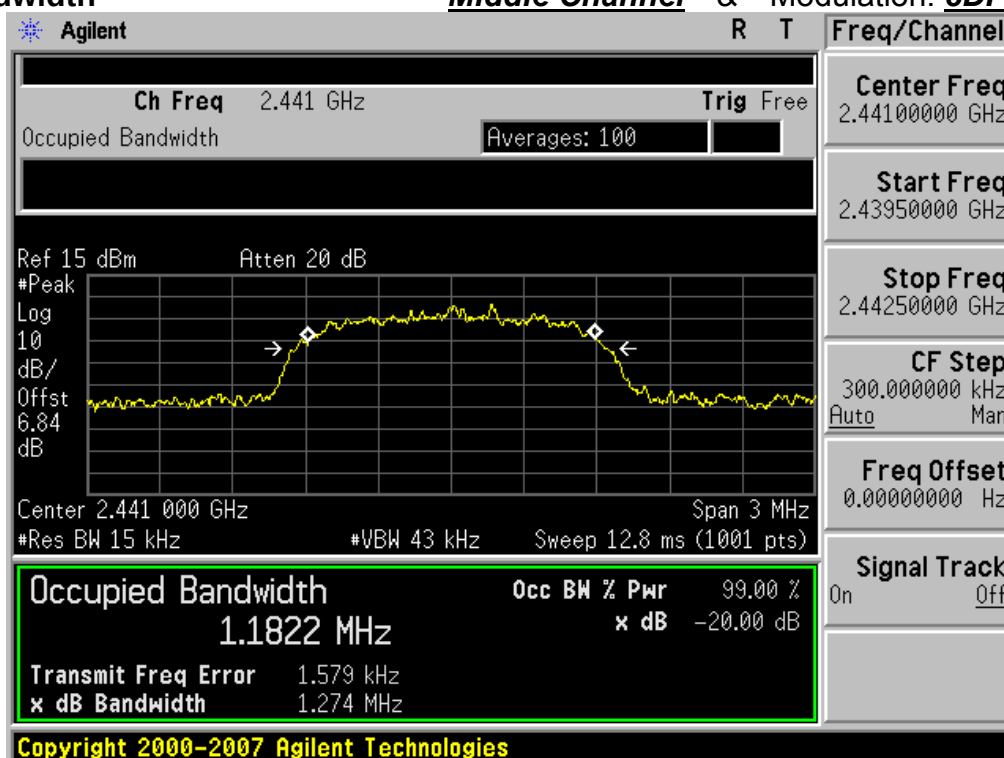

20dBc Bandwidth

Highest Channel & Modulation: **8DPSK**

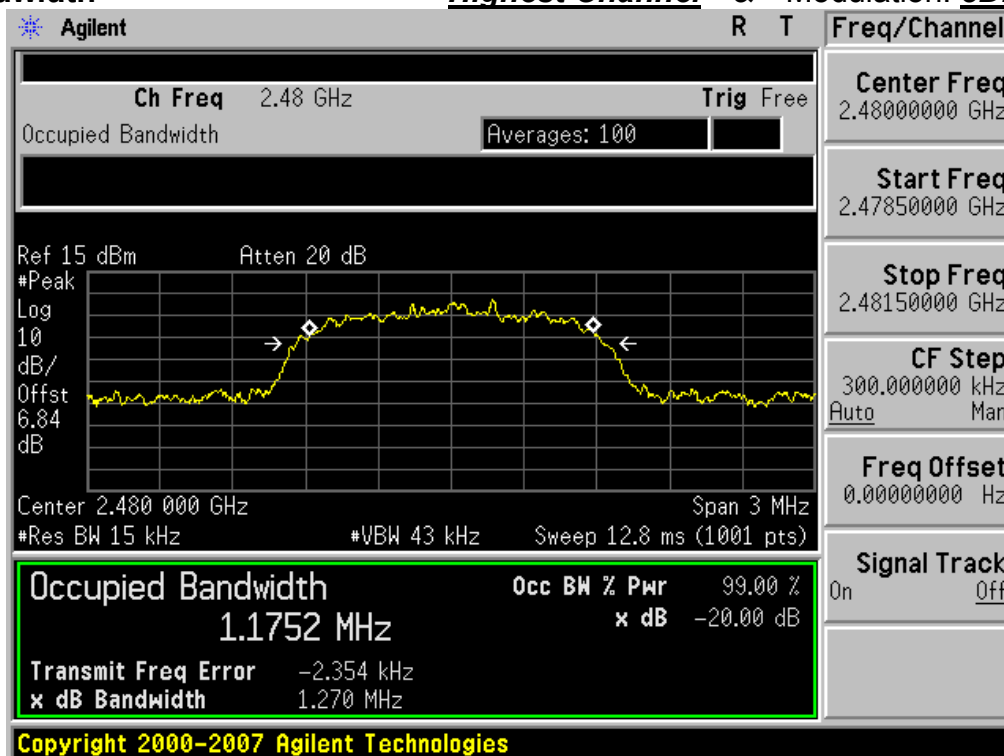

6. Time of Occupancy (Dwell Time)

6.1. Test Setup

Refer to the APPENDIX I.

6.2. Limit

Limit: Not Applicable

6.3. Test Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

RBW = 1 MHz

Trace = max hold

Span = zero

VBW = $\geq$ RBW

Detector function = peak

6.4. Test Results

Ambient temperature : 25 °C

Relative humidity : 54 %

- FH mode

Hopping mode	Packet Type	Number of hopping Channels	Burst On Time (ms)	Period (ms)	Test Result (s)
Enable	DH 5	79	2.89	3.75	0.308
	2 DH 5	79	2.89	3.75	0.308
	3 DH 5	79	2.89	3.75	0.308

- AFH mode

Hopping mode	Packet Type	Number of hopping Channels	Burst On Time (ms)	Period (ms)	Test Result (s)
Enable	DH 5	20	2.89	3.75	0.308
	2 DH 5	20	2.89	3.75	0.308
	3 DH 5	20	2.89	3.75	0.308


Note 1: Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event.

DWELL TIME = $(0.4 \times \text{Number of hopping Channels}) \times \text{Burst On time} / (\text{period} \times \text{Number of hopping Channels})$

Note 2: See next pages for actual measured spectrum plots.


Time of Occupancy (FH)

Hopping mode: Enable & Test Case 1

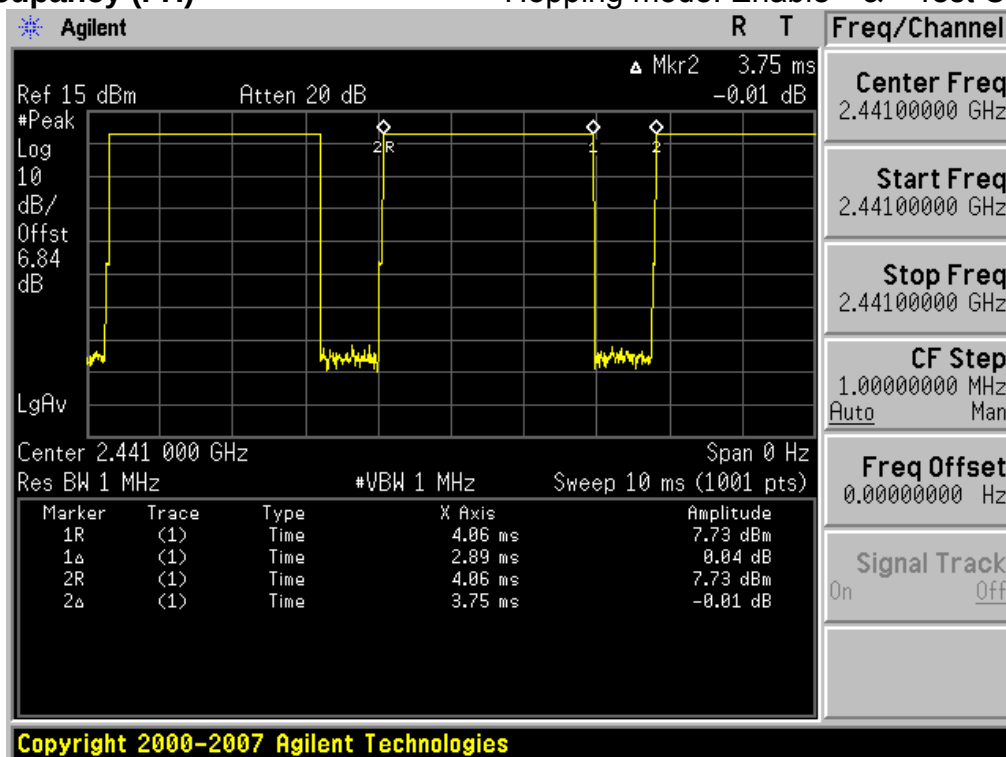


Time of Occupancy (FH)

Hopping mode: Enable & Test Case 2

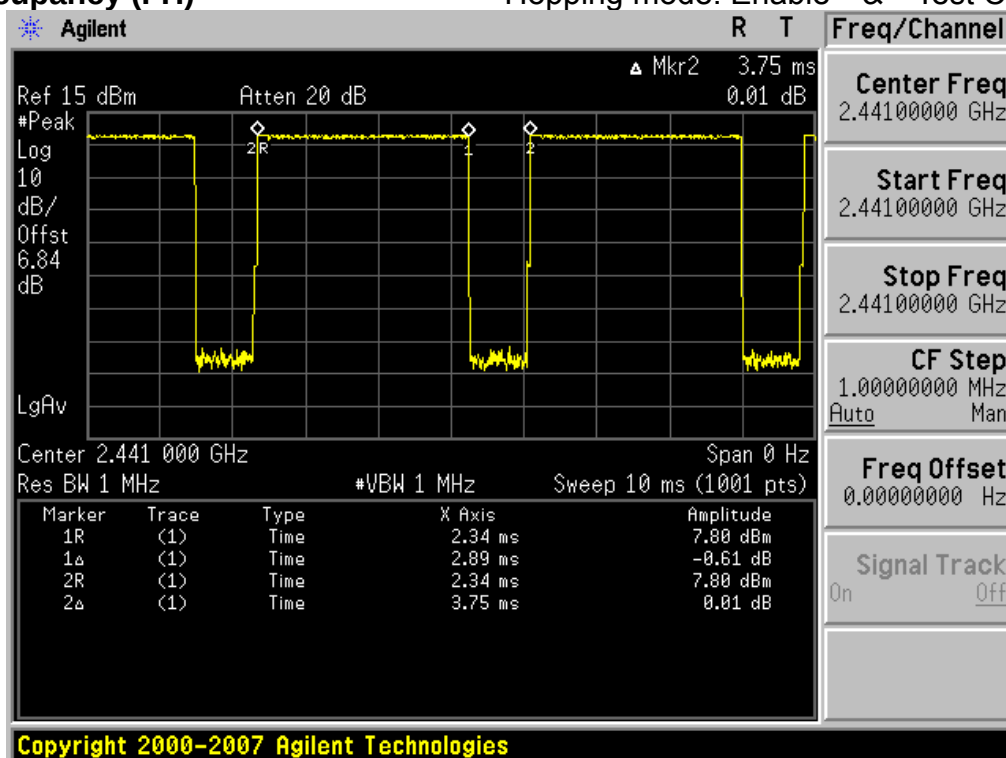


Time of Occupancy (FH)

Hopping mode: Enable & Test Case 3

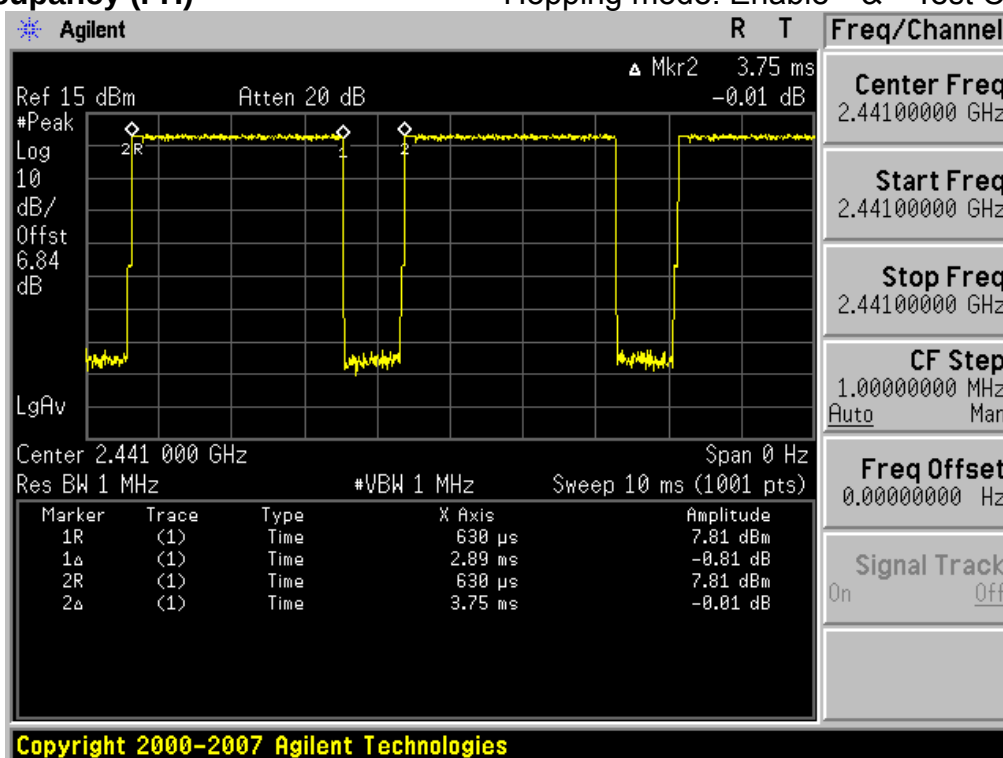


Time of Occupancy (AFH)

Hopping mode: Enable & Test Case 1

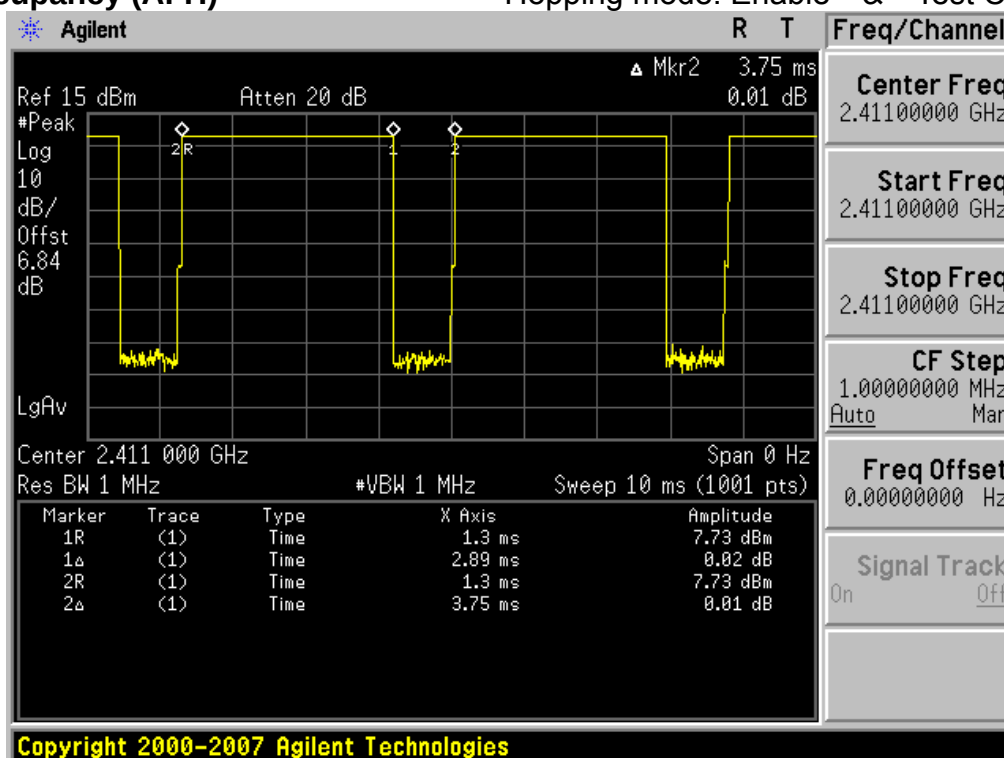


Time of Occupancy (AFH)

Hopping mode: Enable & Test Case 2

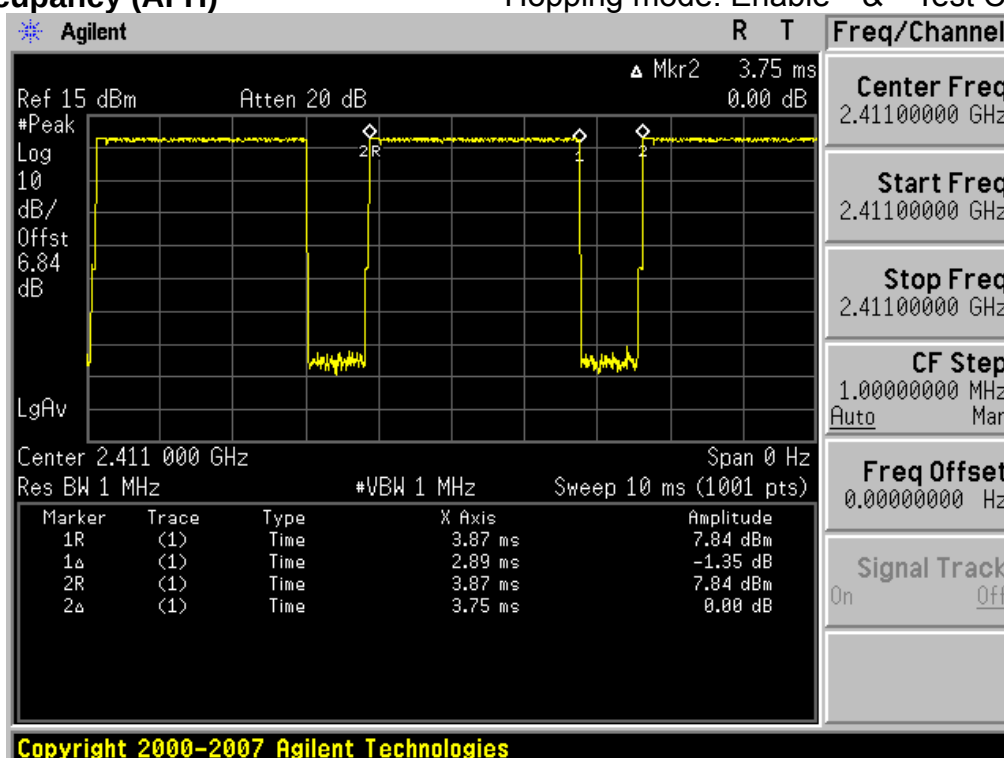

Time of Occupancy (AFH)

Hopping mode: Enable & Test Case 3

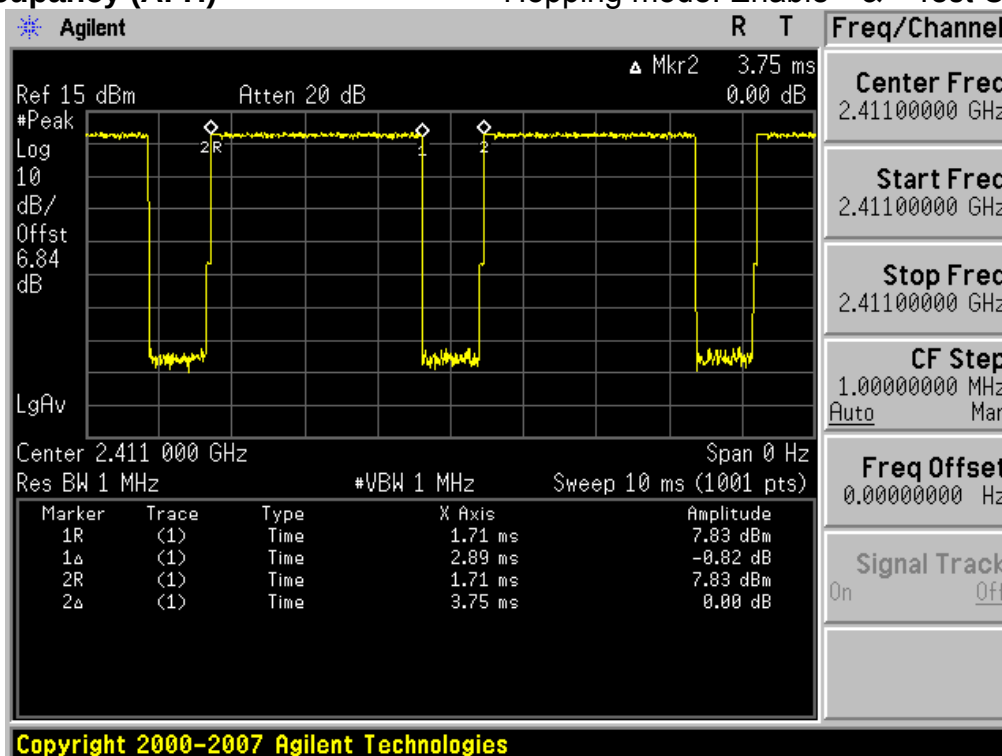

7. Maximum Peak Output Power Measurement

7.1. Test Setup

Refer to the APPENDIX I.

7.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

7.3. Test Procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 20dB BW
VBW $\geq$ RBW
Sweep = auto
Detector function = peak
Trace = max hold

7.4. Test Results


Ambient temperature : 22 °C
Relative humidity : 33 %

Modulation	Tested Channel	Peak Output Power	
		dBm	mW
<u>GFSK</u>	Lowest	7.86	6.109
	Middle	7.99	6.295
	Highest	8.03	6.353
<u>$\pi/4$ DQPSK</u>	Lowest	8.64	7.311
	Middle	8.73	7.464
	Highest	8.75	7.499
<u>8DPSK</u>	Lowest	9.06	8.054
	Middle	9.21	8.337
	Highest	9.29	8.492

Note 1: See next pages for actual measured spectrum plots.


Peak Output Power



Lowest Channel & Modulation: GFSK

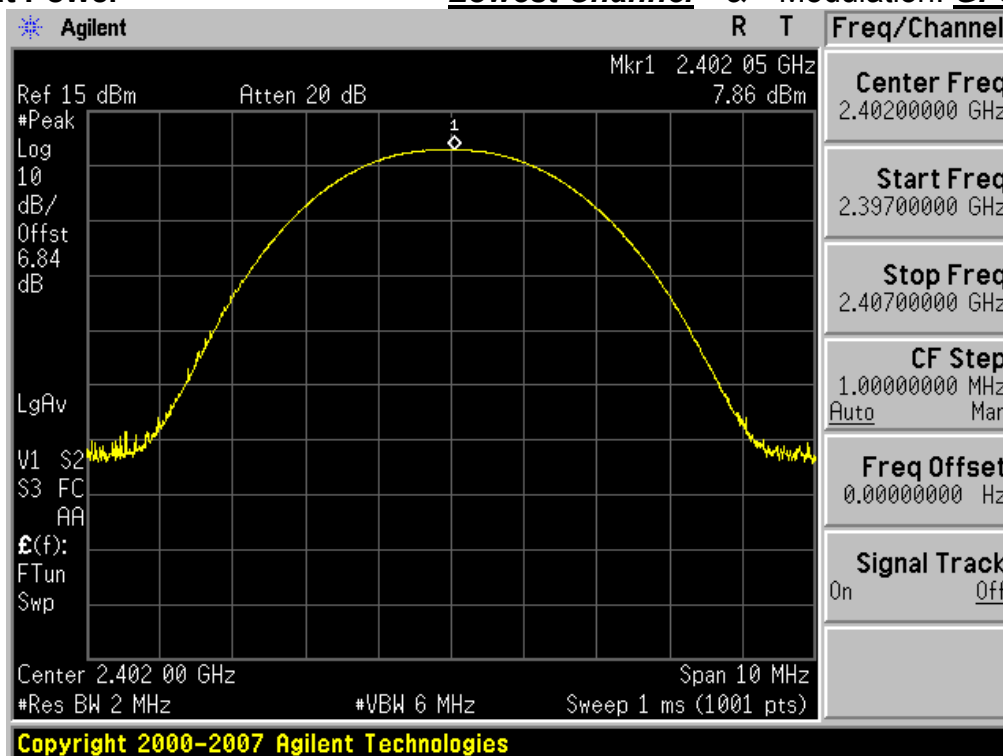


Peak Output Power

Middle Channel & Modulation: GFSK

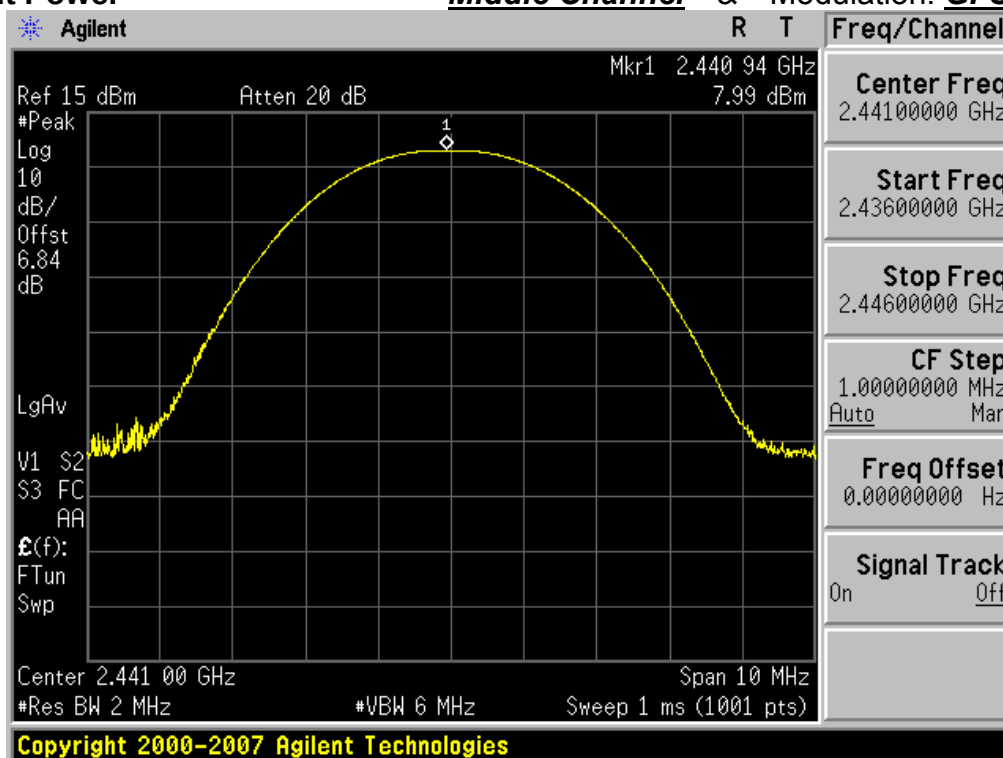


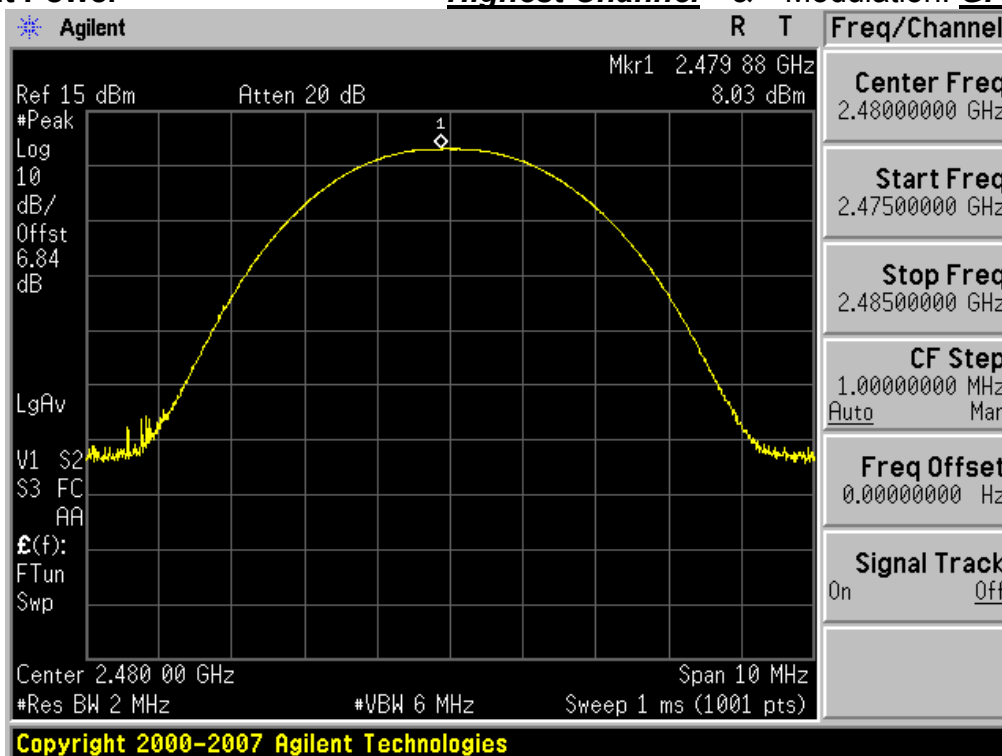
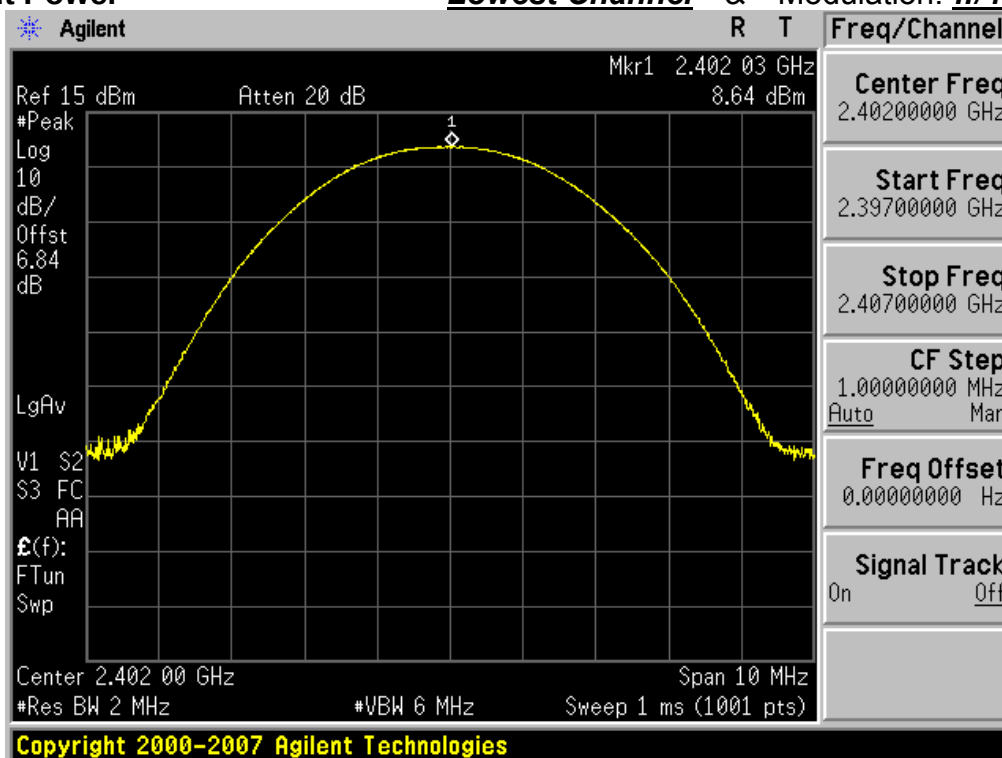
Peak Output Power**Highest Channel** & Modulation: **GFSK****Peak Output Power****Lowest Channel** & Modulation: **$\pi/4$ DQPSK**


Peak Output Power

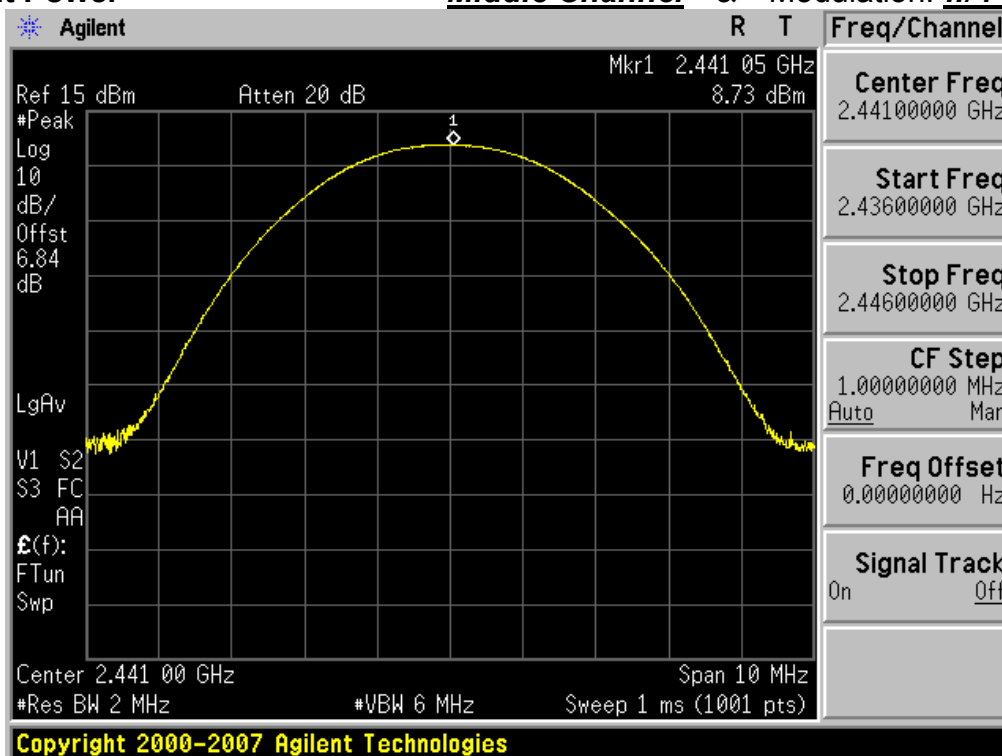Middle Channel & Modulation: $\pi/4$ DQPSK

Peak Output Power

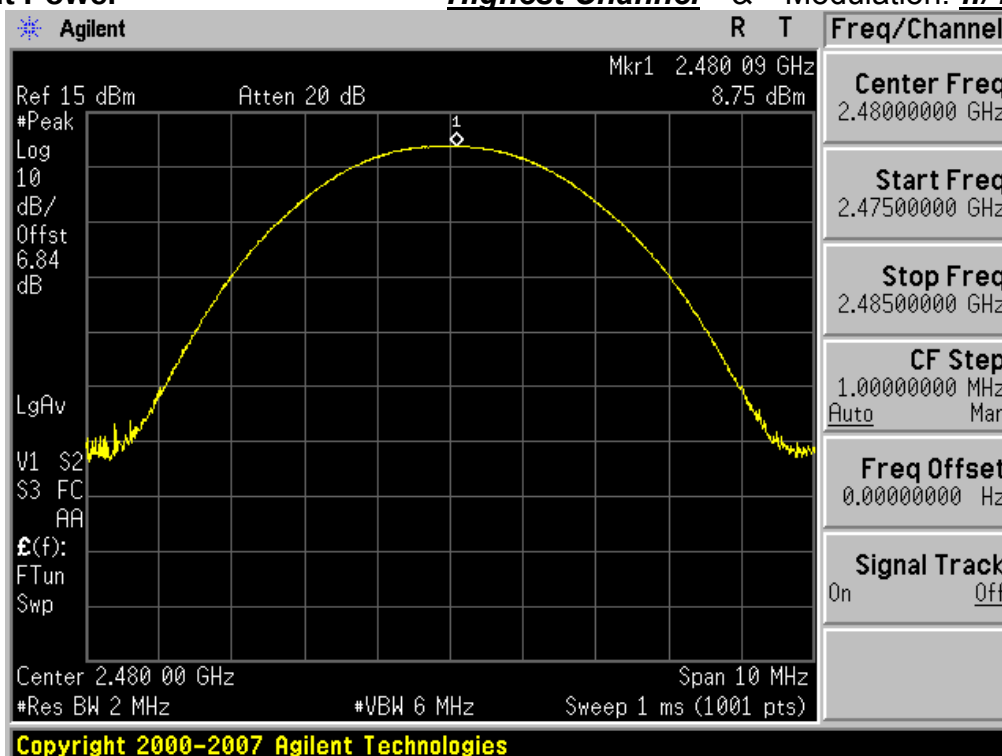Highest Channel & Modulation: $\pi/4$ DQPSK

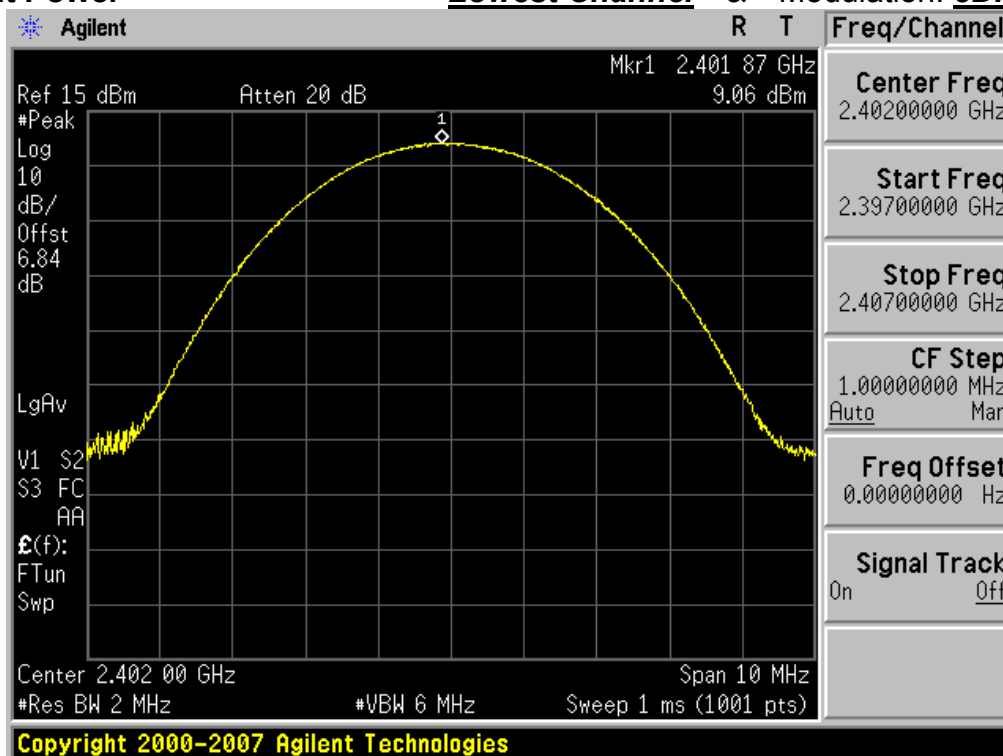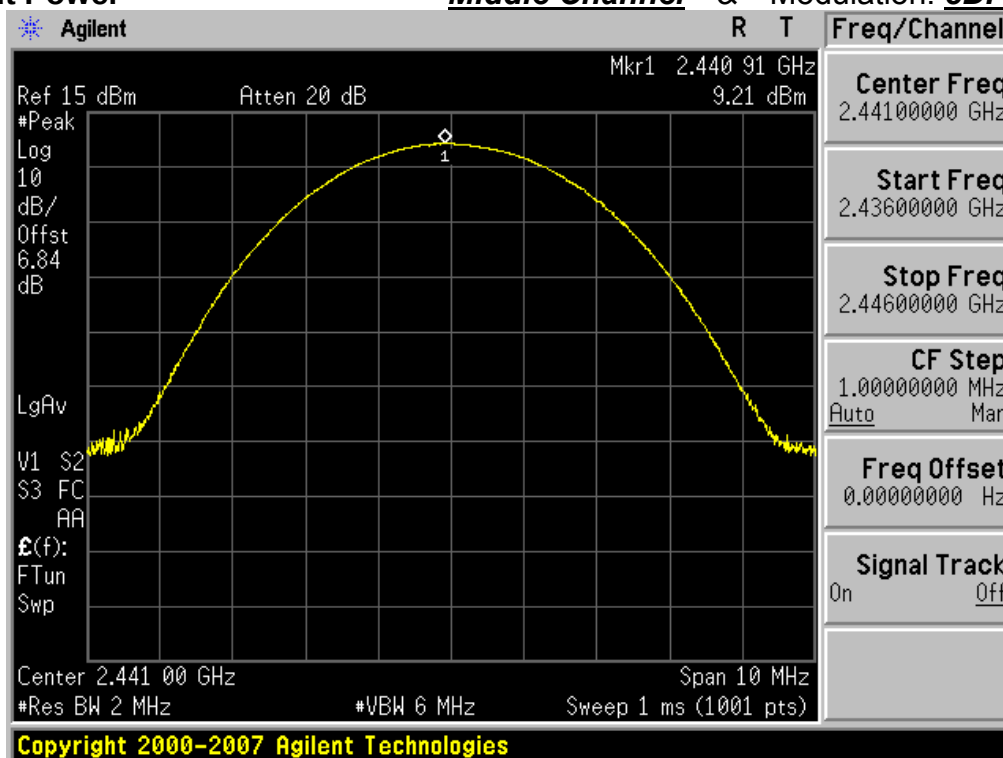Peak Output Power**Lowest Channel** & Modulation: **8DPSK****Peak Output Power****Middle Channel** & Modulation: **8DPSK**

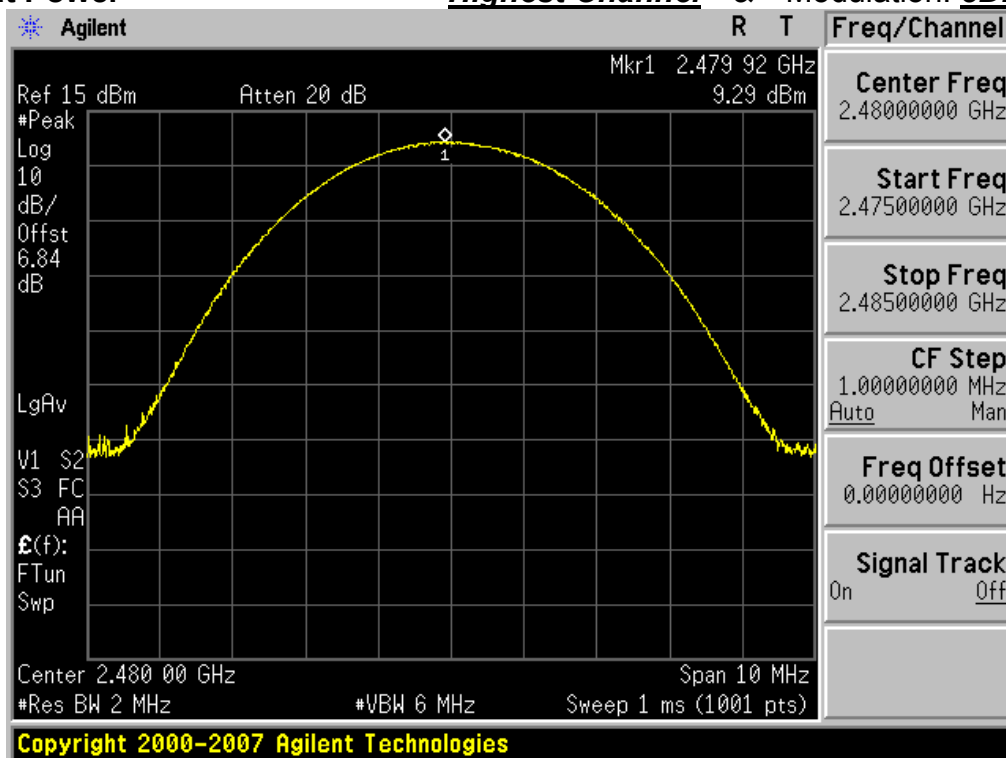Peak Output Power**Highest Channel** & Modulation: **8DPSK**

8. Transmitter AC Power Line Conducted Emission

8.1. Test Setup

Refer to test setup photo.

8.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3. Test Procedures

Conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4. Test Results

AC Line Conducted Emissions (Graph) & Modulation: **GFSK**



Results of Conducted Emission



Digital EMC
Date : 2012-09-28

Model No. : BM-LDS401
Type :
Serial No. : Identical prototype
Test Condition : BT

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 23 °C 43 % R.H.
Operator : S.K RYU

Memo : Hopping Mode

LIMIT : CISPR22_B QP
CISPR22_B AV

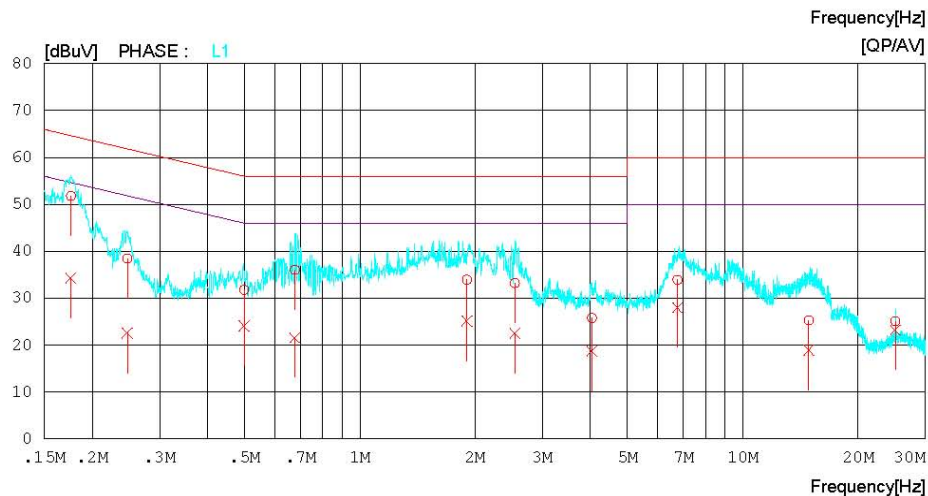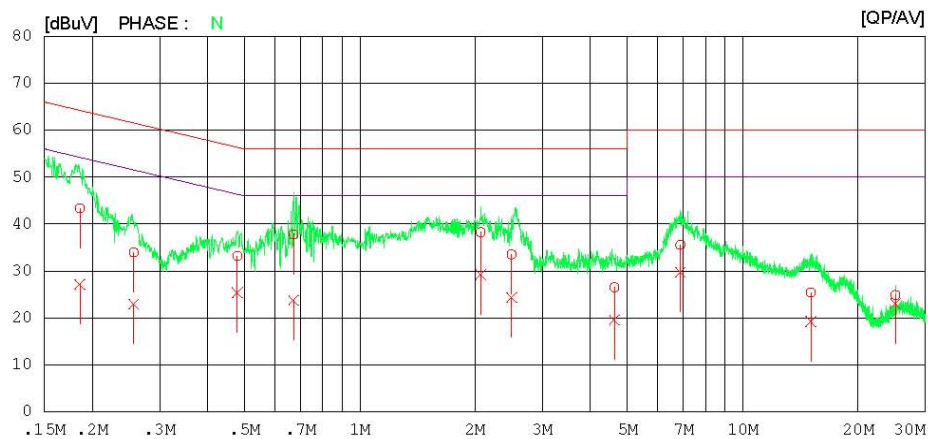

AC Line Conducted Emissions (List) & Modulation: **GFSK**Results of Conducted EmissionDigital EMC
Date : 2012-09-28

Model No. : BM-LDS401 Reference No. :
 Type : Power Supply : 120 V 60 Hz
 Serial No. : Identical prototype Temp/Humi. : 23 'C 43 % R.H.
 Test Condition : BT Operator : S.K RYU

Memo : Hopping Mode

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.18586	43.1	26.9	0.2	43.3	27.1	64.2	54.2	20.9	27.1	N
2	0.25669	33.7	22.7	0.2	33.9	22.9	61.5	51.5	27.6	28.6	N
3	0.47854	33.0	25.2	0.2	33.2	25.4	56.4	46.4	23.2	21.0	N
4	0.67179	37.6	23.5	0.2	37.8	23.7	56.0	46.0	18.2	22.3	N
5	2.06900	37.9	28.9	0.3	38.2	29.2	56.0	46.0	17.8	16.8	N
6	2.48900	33.2	24.0	0.3	33.5	24.3	56.0	46.0	22.5	21.7	N
7	4.62500	26.1	19.2	0.4	26.5	19.6	56.0	46.0	29.5	26.4	N
8	6.87100	35.0	29.2	0.5	35.5	29.7	60.0	50.0	24.5	20.3	N
9	15.06350	24.5	18.3	0.9	25.4	19.2	60.0	50.0	34.6	30.8	N
10	25.05650	23.6	21.8	1.3	24.9	23.1	60.0	50.0	35.1	26.9	N
11	0.17600	51.6	34.1	0.2	51.8	34.3	64.7	54.7	12.9	20.4	L1
12	0.24734	38.2	22.4	0.2	38.4	22.6	61.8	51.8	23.4	29.2	L1
13	0.49868	31.6	23.9	0.2	31.8	24.1	56.0	46.0	24.2	21.9	L1
14	0.67668	35.8	21.4	0.2	36.0	21.6	56.0	46.0	20.0	24.4	L1
15	1.90450	33.7	24.8	0.3	34.0	25.1	56.0	46.0	22.0	20.9	L1
16	2.54150	32.9	22.3	0.3	33.2	22.6	56.0	46.0	22.8	23.4	L1
17	4.03750	25.4	18.3	0.4	25.8	18.7	56.0	46.0	30.2	27.3	L1
18	6.75250	33.4	27.5	0.5	33.9	28.0	60.0	50.0	26.1	22.0	L1
19	14.87950	24.4	18.0	0.9	25.3	18.9	60.0	50.0	34.7	31.1	L1
20	25.05650	23.8	21.9	1.3	25.1	23.2	60.0	50.0	34.9	26.8	L1

9. Antenna Requirement

■ **Procedure:**

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

■ **Conclusion:** **Comply**

The antenna is permanently attached by soldering. (Refer to Internal Photo file.)

■ **Minimum Standard:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

10. Occupied Bandwidth (99%)

- **Procedure: (RSS-Gen Issue 3)**
- The 99% power bandwidth was measured with a calibrated spectrum analyzer.
- Spectrum analyzer plots are included on the following pages.

- **Measurement Data: Comply**

Test Mode	Tested Channel	Test Results (MHz)
Test Case 1	Lowest	0.900
	Middle	0.890
	Highest	0.894
Test Case 2	Lowest	1.185
	Middle	1.183
	Highest	1.186
Test Case 3	Lowest	1.197
	Middle	1.199
	Highest	1.193


Note 1: See next pages for actual measured spectrum plots.

- **Minimum Standard:**

N/A

Occupied Bandwidth (99%)

Lowest Frequency & Test Case 1

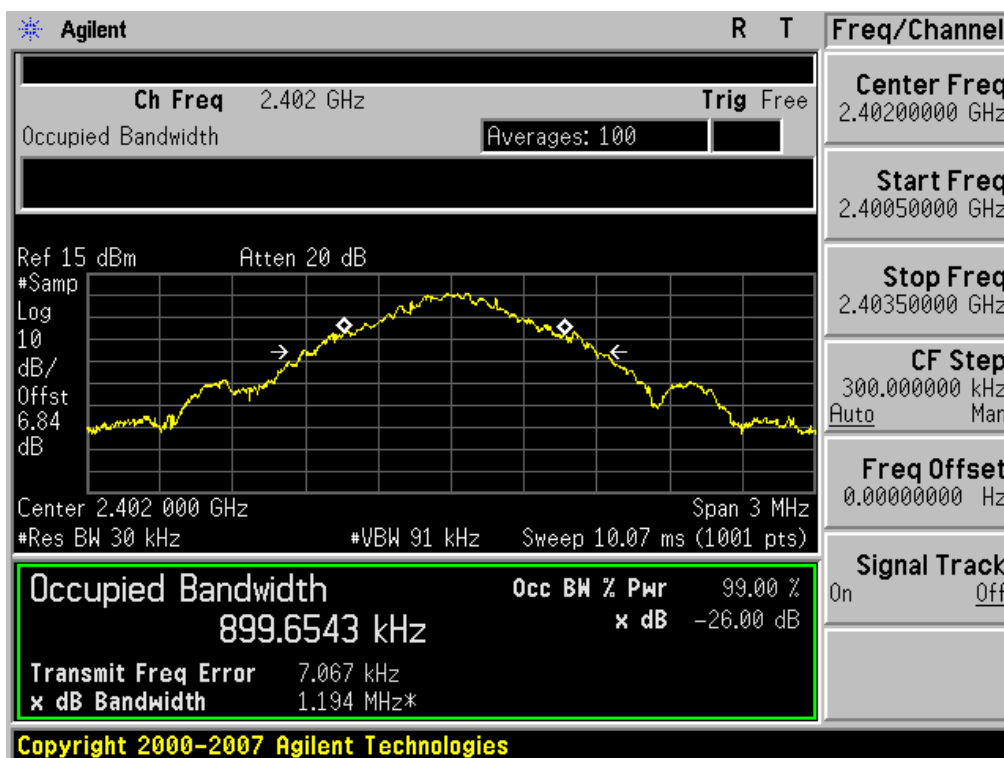


Occupied Bandwidth (99%)

Middle Frequency & Test Case 1




Occupied Bandwidth (99%)

Highest Frequency & Test Case 1

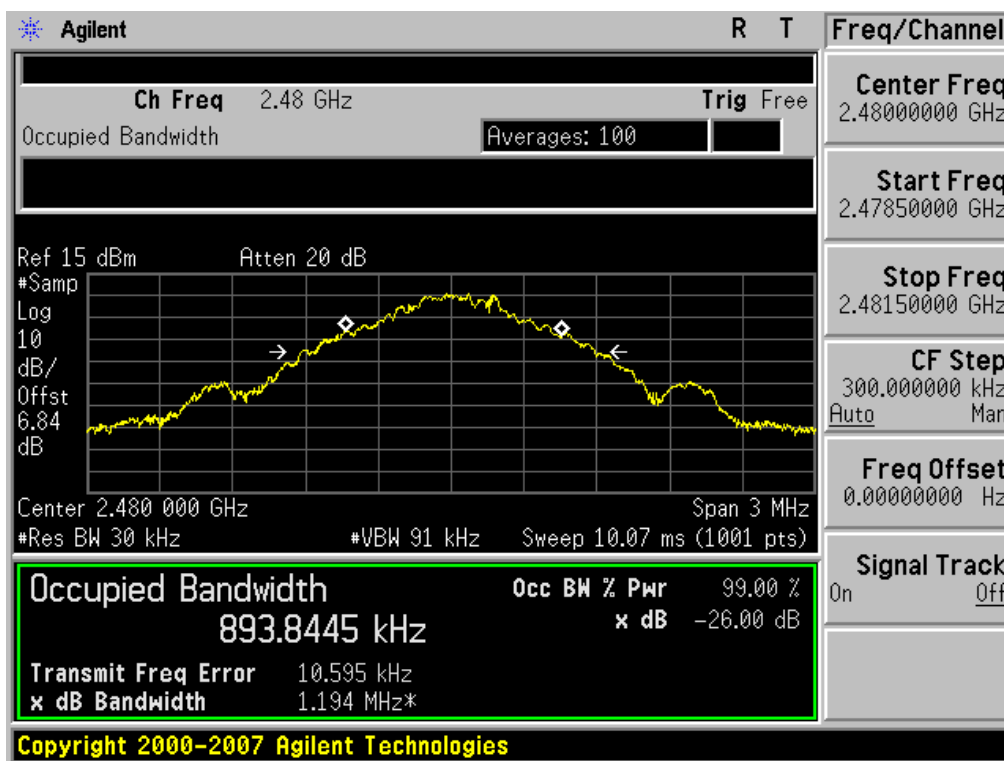


Occupied Bandwidth (99%)

Lowest Frequency & Test Case 2

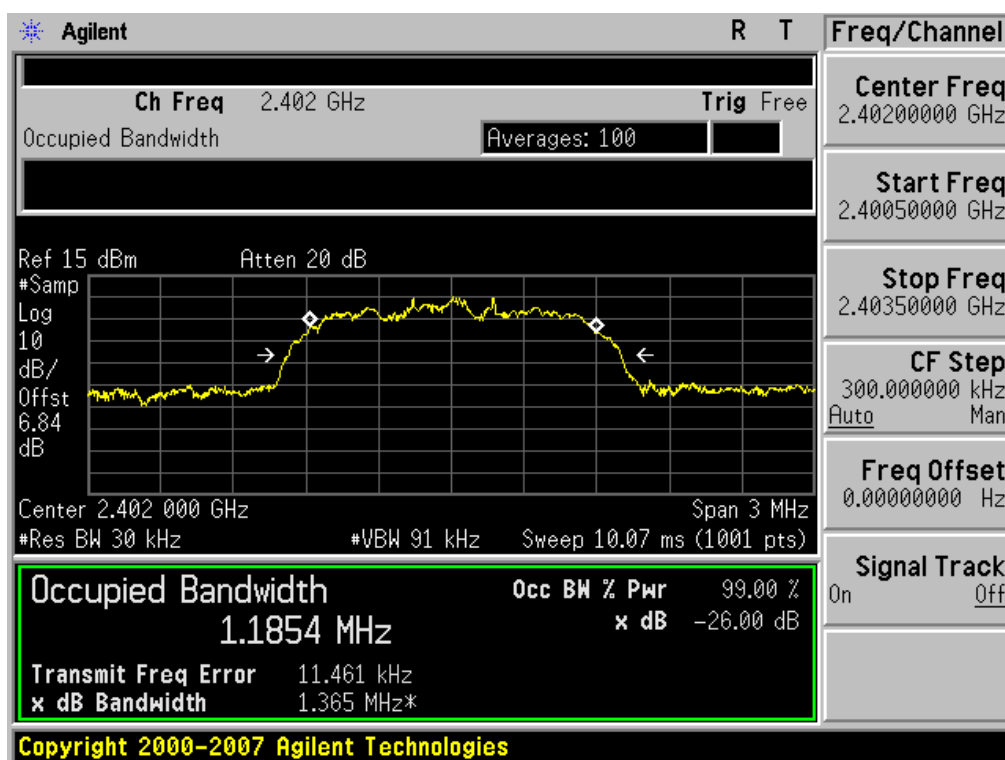


Occupied Bandwidth (99%)

Middle Frequency & Test Case 2

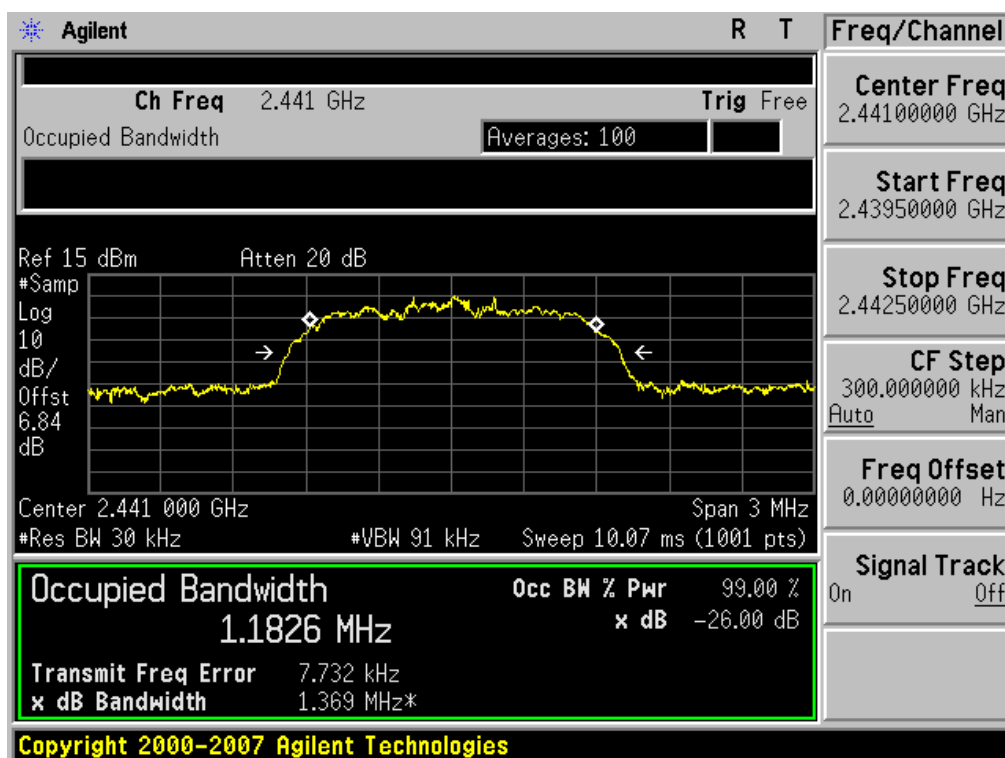


Occupied Bandwidth (99%)

Highest Frequency & Test Case 2

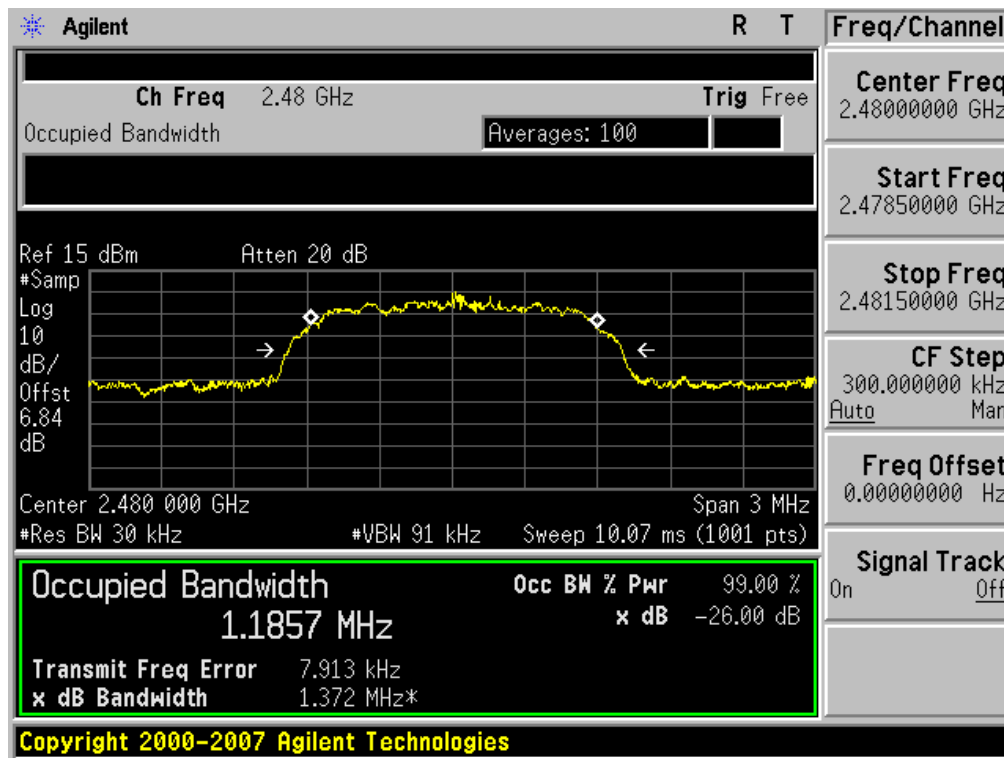


Occupied Bandwidth (99%)

Lowest Frequency & Test Case 3

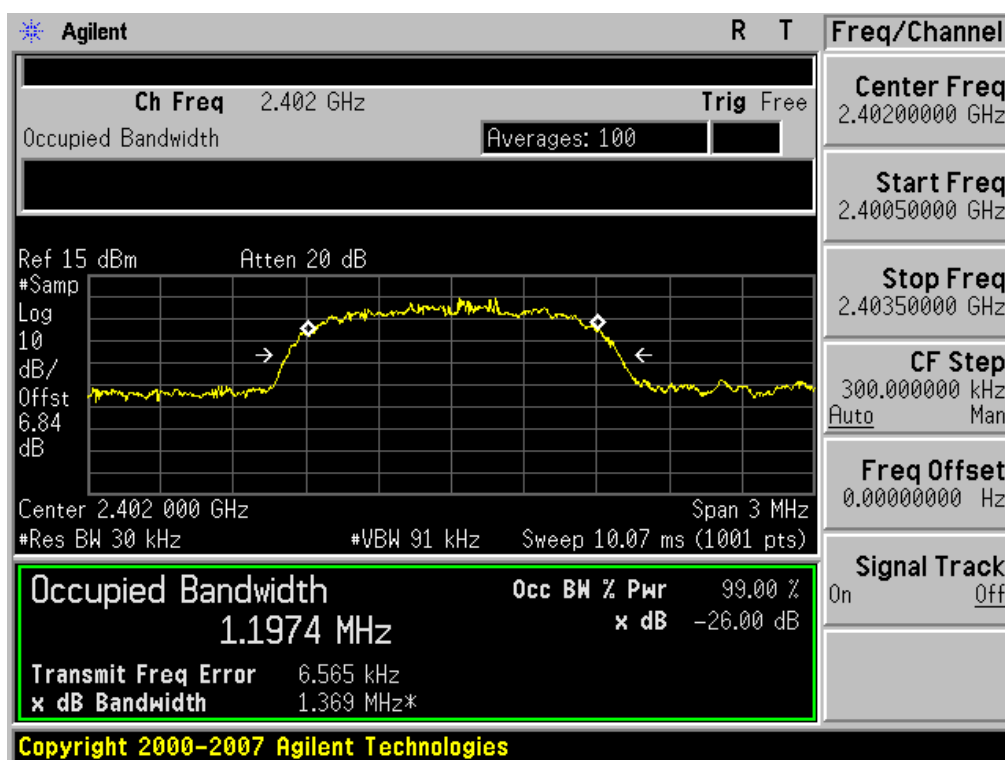

Occupied Bandwidth (99%)

Middle Frequency & Test Case 3

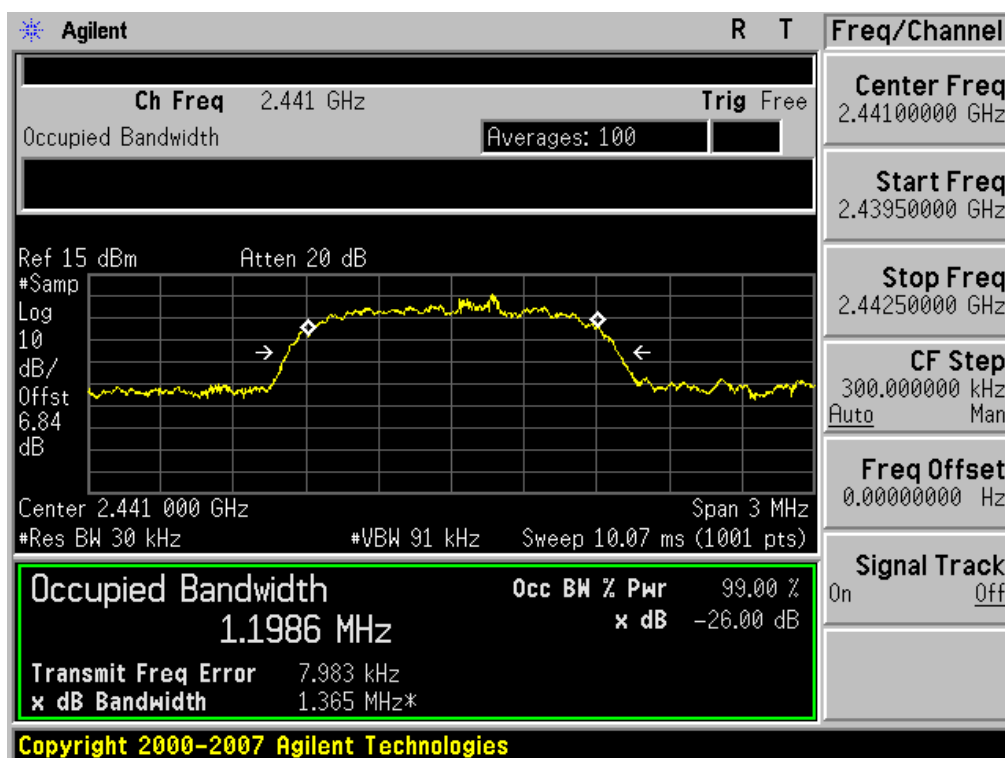

Occupied Bandwidth (99%)

Highest Frequency & Test Case 3

