


## ***FCC EVALUATION REPORT FOR CERTIFICATION***

**Manufacturer: LG Electronics USA****1000 Sylvan Avenue,****Englewood Cliffs New Jersey United States 07632****Attn: Mr. Kyung-Su Han / Director****Date of Issue: April 19, 2017****Order Number: GETEC-C1-17-087****Test Report Number: GETEC-E3-17-002****Test Site: GUMI UNIVERSITY EMC CENTER****(Test firm Registration Number: 269701)****FCC ID. : BEJLGS610TX****Applicant : LG Electronics USA**

|                          |                                                              |
|--------------------------|--------------------------------------------------------------|
| <b>Rule Part(s)</b>      | <b>: FCC Part 15 Subpart C-Intentional Radiator § 15.247</b> |
| <b>Equipment Class</b>   | <b>: FCC Part 15 Spread Spectrum Transmitter (DSS)</b>       |
| <b>EUT Type</b>          | <b>: DUST RF MODULE</b>                                      |
| <b>Type of Authority</b> | <b>: Certification</b>                                       |
| <b>Model Name</b>        | <b>: EAT63613801</b>                                         |
| <b>Trade Name</b>        | <b>: LG Electronics</b>                                      |

**This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10 (2013)**

**I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.**

**Tested by,****Reviewed by,**

**Soon-Hoon Jeong, Senior Engineer  
GUMI UNIVERSITY EMC CENTER**



**Jae-Hoon Jeong, Technical Manager  
GUMI UNIVERSITY EMC CENTER**



## CONTENTS

|                                           |    |
|-------------------------------------------|----|
| 1. GENERAL INFORMATION .....              | 4  |
| 2. INTRODUCTION .....                     | 5  |
| 3. PRODUCT INFORMATION .....              | 6  |
| 3.1 DESCRIPTION OF EUT.....               | 6  |
| 3.2 SUPPORT EQUIPMENT / CABLES USED ..... | 7  |
| 3.3 MODIFICATION ITEM(S).....             | 7  |
| 4. ANTENNA REQUIREMENT - §15.203 .....    | 8  |
| 4.1 DESCRIPTION OF ANTENNA.....           | 8  |
| 5. DESCRIPTION OF TESTS.....              | 8  |
| 5.1 TEST CONDITION.....                   | 8  |
| 6. SUMMARY OF TEST RESULTS .....          | 9  |
| 7. 20 DB BANDWIDTH .....                  | 10 |
| 7.1 OPERATING ENVIRONMENT .....           | 10 |
| 7.2 TEST SET-UP .....                     | 10 |
| 7.3 LIMITS .....                          | 10 |
| 7.4 TEST EQUIPMENT USED.....              | 10 |
| 7.5 TEST RESULT .....                     | 10 |
| 8. MAXIMUM PEAK OUTPUT POWER .....        | 20 |
| 8.1 OPERATING ENVIRONMENT .....           | 20 |
| 8.2 TEST SET-UP (LAYOUT) .....            | 20 |
| 8.3 LIMIT .....                           | 20 |
| 8.4 TEST EQUIPMENT USED.....              | 20 |
| 8.5 TEST RESULT .....                     | 20 |
| 9. CARRIER FREQUENCY SEPARATION .....     | 21 |
| 9.1 OPERATING ENVIRONMENT .....           | 21 |
| 9.2 TEST SET-UP (LAYOUT) .....            | 21 |
| 9.3 LIMIT .....                           | 21 |
| 9.4 TEST EQUIPMENT USED.....              | 21 |
| 9.5 TEST RESULT .....                     | 21 |
| 10. NUMBER OF HOPPING FREQUENCY IES ..... | 31 |
| 10.1 OPERATING ENVIRONMENT .....          | 31 |
| 10.2 TEST SET-UP (LAYOUT) .....           | 31 |
| 10.3 LIMIT .....                          | 31 |
| 10.4 TEST EQUIPMENT USED.....             | 31 |
| 10.5 TEST RESULT .....                    | 31 |
| 11. TIME OF OCCUPANCY (DWELL TIME).....   | 33 |
| 11.1 OPERATING ENVIRONMENT .....          | 33 |
| 11.2 TEST SET-UP (LAYOUT) .....           | 33 |
| 11.3 LIMIT .....                          | 33 |
| 11.4 TEST EQUIPMENT USED.....             | 33 |
| 11.5 TEST RESULT .....                    | 33 |



|                                                   |           |
|---------------------------------------------------|-----------|
| <b>12. CONDUCTED SPURIOUS EMISSIONS .....</b>     | <b>36</b> |
| 12.1 OPERATING ENVIRONMENT .....                  | 36        |
| 12.2 TEST SET-UP (LAYOUT) .....                   | 36        |
| 12.3 LIMIT .....                                  | 36        |
| 12.4 TEST EQUIPMENT USED.....                     | 36        |
| 12.5 TEST RESULT .....                            | 36        |
| <b>13. BAND EDGE(OUT OF BAND EMISSIONS).....</b>  | <b>39</b> |
| 13.1 OPERATING ENVIRONMENT .....                  | 39        |
| 13.2 TEST SET-UP (LAYOUT) .....                   | 39        |
| 13.3 LIMIT .....                                  | 39        |
| 13.4 TEST EQUIPMENT USED.....                     | 39        |
| 13.5 TEST RESULT .....                            | 39        |
| <b>14. AC POWER LINE CONDUCTED EMISSION .....</b> | <b>42</b> |
| 14.1 OPERATING ENVIRONMENT .....                  | 43        |
| 14.2 TEST SET-UP .....                            | 43        |
| 14.3 MEASUREMENT UNCERTAINTY.....                 | 43        |
| 14.4 LIMIT .....                                  | 44        |
| 14.5 TEST EQUIPMENT USED.....                     | 44        |
| 14.6 TEST DATA FOR CONDUCTED EMISSION .....       | 44        |
| <b>15. RADIATED EMISSION .....</b>                | <b>45</b> |
| 15.1 OPERATING ENVIRONMENT .....                  | 47        |
| 15.2 TEST SET-UP.....                             | 47        |
| 15.3 MEASUREMENT UNCERTAINTY .....                | 47        |
| 16.4 LIMIT .....                                  | 48        |
| 16.5 TEST EQUIPMENT USED.....                     | 48        |
| 16.6 TEST DATA FOR RADIATED EMISSION .....        | 49        |
| <b>17. SAMPLE CALCULATIONS.....</b>               | <b>55</b> |
| 17.1 EXAMPLE 1 : .....                            | 55        |
| 17.2 EXAMPLE 2 : .....                            | 55        |
| <b>18. RECOMMENDATION &amp; CONCLUSION.....</b>   | <b>56</b> |

APPENDIX A – ATTESTATION STATEMENT  
APPENDIX B – ID SAMPLE LABEL & LOCATION  
APPENDIX C – BLOCK DIAGRAM  
APPENDIX D – SCHEMATIC DIAGRAM  
APPENDIX E – TEST SET-UP PHOTOGRAPHS  
APPENDIX F – EXTERNAL PHOTOGRAPHS  
APPENDIX G – INTERNAL PHOTOGRAPHS  
APPENDIX H – USER’S MANUAL  
APPENDIX I – OPERATIONAL DESCRIPTION  
APPENDIX J – ANTENNA SPECIFICATION  
APPENDIX K – PART LIST  
APPENDIX L – RF EXPOSURE EVALUATION  
APPENDIX M– MODULAR APPROVAL LETTER  
APPENDIX N– DECLARATION LETTER



**Scope:** Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

## 1. General Information

**Applicant:** LG Electronics USA

**Applicant Address:** 1000 Sylvan Avenue, Englewood Cliffs New jersey United Sates 07632

**Contact Person:** Mr. Kyung-Su Han / Director

**Telephone Number:** 201-472-2623

|                      |                                                                                                                                                  |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| ● FCC ID.            | BEJLGS610TX                                                                                                                                      |
| ● Equipment Class    | FCC Part 15 Spread Spectrum Transmitter (DSS)                                                                                                    |
| ● EUT Type           | DUST RF MODULE                                                                                                                                   |
| ● Model Name         | EAT63613801                                                                                                                                      |
| ● Trade Name         | LG Electronics                                                                                                                                   |
| ● Serial Number      | Prototype                                                                                                                                        |
| ● Rule Part(s)       | FCC Part 15 Subpart C-Intentional Radiator § 15.247                                                                                              |
| ● Type of Authority  | Certification                                                                                                                                    |
| ● Test Procedure(s)  | ANSI C63.10 (2013)                                                                                                                               |
| ● Dates of Test      | March 08 ~ April 18, 2017                                                                                                                        |
| ● Place of Test      | <b>GUMI UNIVERSITY EMC CENTER</b> (FCC Test firm Registration No.: 269701)<br>37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea |
| ● Test Report Number | GETEC-E3-17-002                                                                                                                                  |
| ● Dates of Issue     | April 28, 2017                                                                                                                                   |



## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.10-2013) was used in determining radiated and conducted emissions emanating from **LG Electronics USA DUST RF MODULE (Model Name: EAT63613801) FCC ID.: BEJLGS610TX**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea.

This test site is one of the highest point of GUMI UNIVERSITY at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of FCC §2.948 according to ANSI C63.10 (2013)

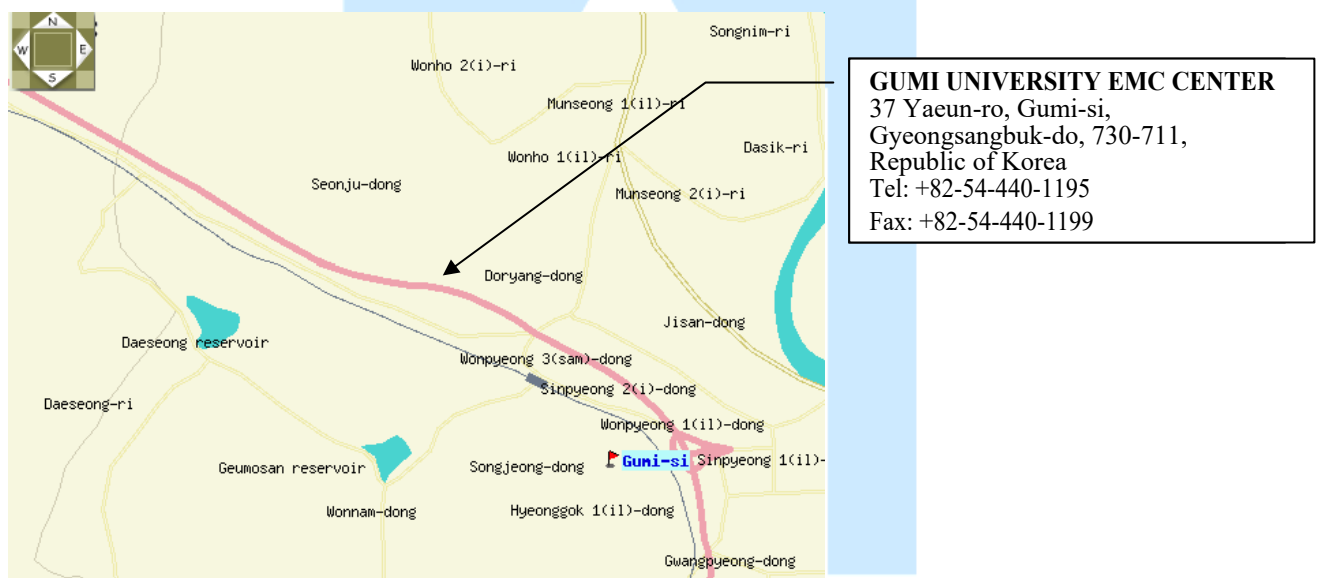


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



### 3. Product Information

#### 3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics USA**  
**DUST RF MODULE (Model Name: EAT63613801) FCC ID.: BEJLGS610TX**

|                         |                                                      |
|-------------------------|------------------------------------------------------|
| - Model Name            | : EAT63613801                                        |
| - EUT Type              | : DUST RF MODULE                                     |
| - Power supply          | : DC 3 V (AA 1.5 V battery X 2EA)                    |
| - Frequency Range       | : 2 405 MHz ~ 2 476 MHz                              |
| - Transmit Power        | : 6 dBm                                              |
| - Tolerance             | : $\pm 1.0$ dB                                       |
| - Modulation Technique  | : GFSK                                               |
| - Number of Channels    | : 16                                                 |
| - Type of antenna       | : Integral antenna                                   |
| - Antenna specification | : Antenna type : PCB Pattern<br>Peak Gain : 1.22 dBi |
| - H/W VERSION           | : P1349A                                             |
| - S/W VERSION           | : V1.0                                               |

#### 3.2 Frequency list

| Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|-------------|----------------|-------------|----------------|
| 1           | 2405           | 9           | 2440           |
| 2           | 2409           | 10          | 2445           |
| 3           | 2413           | 11          | 2450           |
| 4           | 2417           | 12          | 2455           |
| 5           | 2422           | 13          | 2460           |
| 6           | 2426           | 14          | 2465           |
| 7           | 2430           | 15          | 2470           |
| 8           | 2435           | 16          | 2476           |

#### ※ 15.247 (a) (1) Requirements for device which use Frequency hopping system

The 15.247 (a) (1) Requirements was declaration by manufacturer.

1. The hopping sequence is pseudorandom.
2. All channels are used equally on average.
3. The receiver input bandwidth approximately equal the transmit bandwidth.
4. The receiver hop in sequence with the transmit signal.



### 3.3 Support Equipment / Cables used

#### 3.2.1 Used Support Equipment

| Description                 | Manufacturer                         | Model Name | S/N & FCC ID               |
|-----------------------------|--------------------------------------|------------|----------------------------|
| Control board for test mode | Ohsung Electronics Co., Ltd.         | Prototype  | S/N: None<br>FCC ID.: None |
| AC/DC Adaptor               | Dongdo Electronics(Yantai) Co., Ltd. | MCS-01KD   | S/N: None<br>FCC ID.: None |

See “Appendix E– Test Setup Photographs” for actual system test set-up

#### 3.3.2 System configuration

| Description | Manufacturer | Model Name | S/N & FCC ID. |
|-------------|--------------|------------|---------------|
| None        | -            | -          | -             |

#### 3.3.3 Used Cable(s)

| Cable Name | Condition                               | Description    |
|------------|-----------------------------------------|----------------|
| DC cable   | Connected between EUT and AC/DC Adaptor | 1.0 m shielded |

### 3.4 Modification Item(s)

- None



#### 4. Antenna Requirement - §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

##### 4.1 Description of Antenna

The **LG Electronics USA DUST RF MODULE** comply with the requirement of §15.203 with a built-in PCB pattern antenna permanently attached to the transmitter.

#### 5. Description of tests


##### 5.1 Test Condition

- Test Voltage / Frequency:

RF Test: DC 3 V

- Test Mode(s) are:

RF Test: Continuous RF transmitting mode

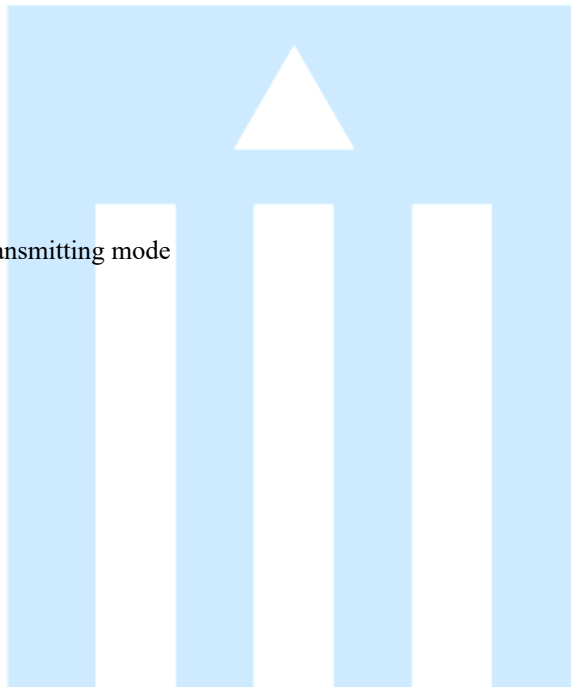



## 6. SUMMARY OF TEST RESULTS

| FCC Part Section(s)         | Test Description                    | Test Result |
|-----------------------------|-------------------------------------|-------------|
| § 15.247(a)(1)(ii) or (iii) | 20 dB Bandwidth                     | Pass        |
| § 15.247(b)(1)              | Conducted Maximum Peak Output Power | Pass        |
| §15.247(a)(1)               | Carrier Frequency Separation        | Pass        |
| §15.247(a)(1)(iii)          | Number of Hopping Frequencies       | Pass        |
| §15.247(a)(1)(iii)          | Time of Occupancy (dwell time)      | Pass        |
| §15.247(d)                  | Conducted Spurious Emissions        | Pass        |
| §15.247(d)                  | Band Edge(Out of Band Emissions)    | Pass        |
| §15.207(a)                  | AC Power line Conducted Emissions   | Pass        |
| §15.247(d), 15.205, 15.209  | Radiated Spurious Emissions         | Pass        |
| §15.247(d), 15.205, 15.209  | Radiated Restricted Band Edge       | Pass        |




## 7. 20 dB Bandwidth

### 7.1 Operating Environment

Temperature : 23.4 °C  
Relative Humidity : 37.6 % R.H.

### 7.2 Test Set-up

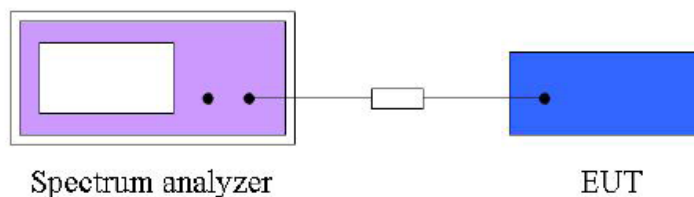

### 7.3 Limits

For frequency hopping system operating in the 2 400 MHz ~ 2 483.5 MHz, If the 20 dB bandwidth of hopping channel is greater than 25 kHz, two-thirds 20 dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 7.4 Test Equipment used

| Model Name | Manufacturer    | Description       | Serial Number | Due to Calibration |
|------------|-----------------|-------------------|---------------|--------------------|
| ■ - FSP    | Rohde & Schwarz | EMI Test Receiver | 101431        | Dec. 08, 2017      |
| ■ - 8493C  | Agilent         | 6 dB Attenuator   | 59907         | May. 13, 2017      |

### 7.5 Test Result

- Test Date : April 17, 2017  
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(1) (ii) or (iii)  
- Test Procedure : ANSI 63.10(2013), DA 00-705  
- Modulation : GFSK  
- Power Source : DC 3.0 V

Spectrum Parameter set following ANSI 63.10(2013)


Span = approximately between two times and five times the OBW  
RBW = 1%~5% of the 20 dB bandwidth  
VBW = 3 X RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold



| Channel | 20 dB Bandwidth (MHz) | Channel | 20 dB Bandwidth (MHz) |
|---------|-----------------------|---------|-----------------------|
| 1       | 2.52                  | 9       | 1.81                  |
| 2       | 2.41                  | 10      | 1.86                  |
| 3       | 1.83                  | 11      | 1.90                  |
| 4       | 1.90                  | 12      | 1.85                  |
| 5       | 1.90                  | 13      | 1.88                  |
| 6       | 1.90                  | 14      | 1.84                  |
| 7       | 1.89                  | 15      | 1.85                  |
| 8       | 1.86                  | 16      | 1.90                  |


### -Test Result Plot

#### Channel bandwidth used Plot on Configuration 1 CH (2 405 MHz)

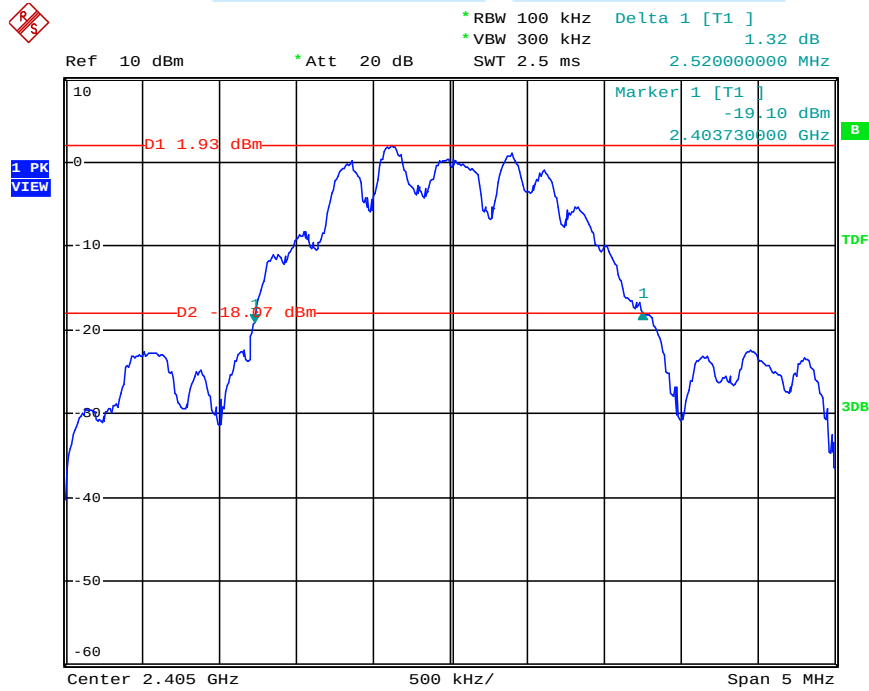




### Channel bandwidth used Plot on Configuration 2 CH (2 409 MHz)

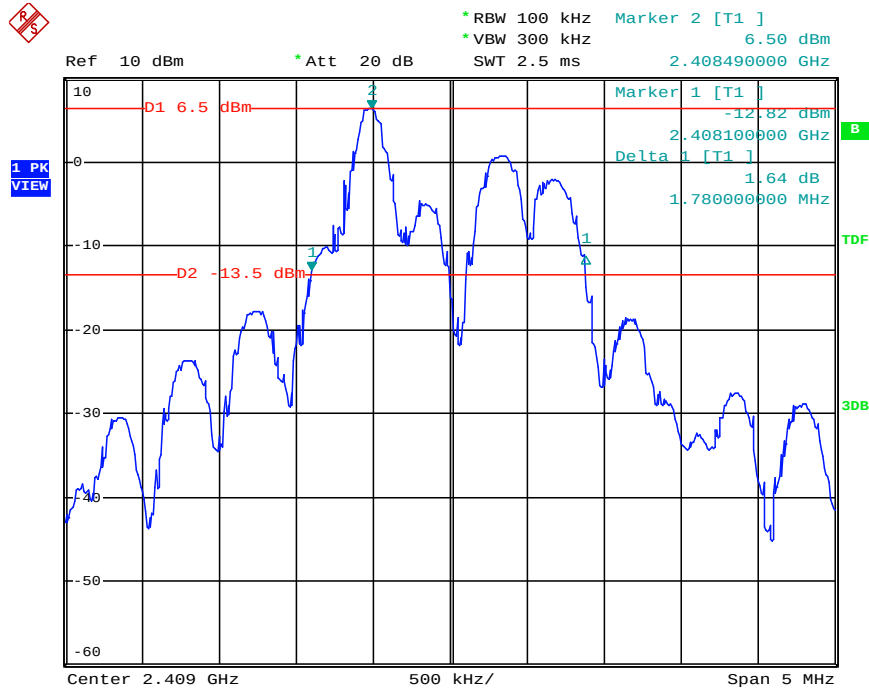


### Channel bandwidth used Plot on Configuration 3 CH (2 413 MHz)

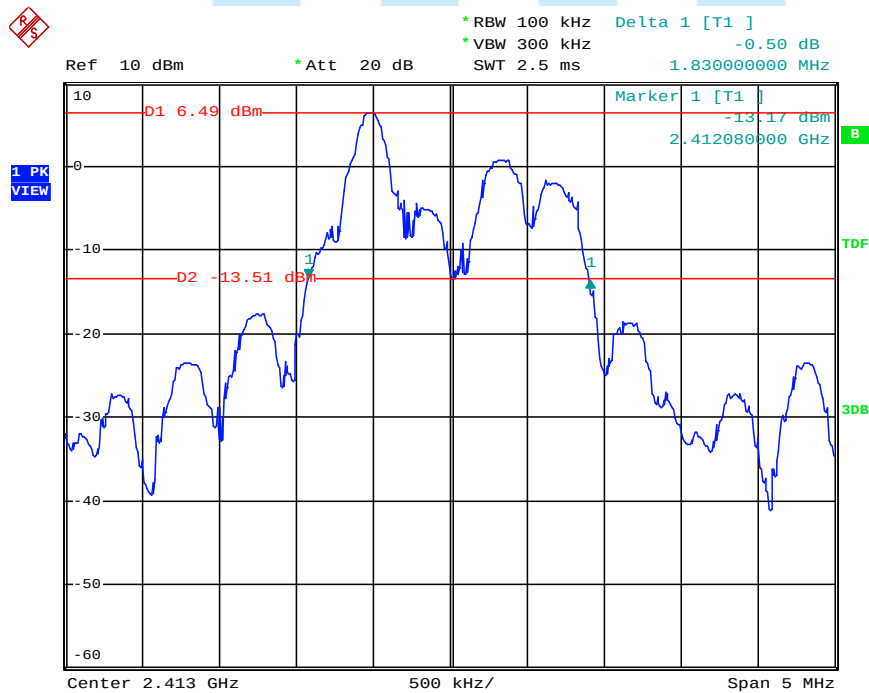




### Channel bandwidth used Plot on Configuration 4 CH (2 417 MHz)

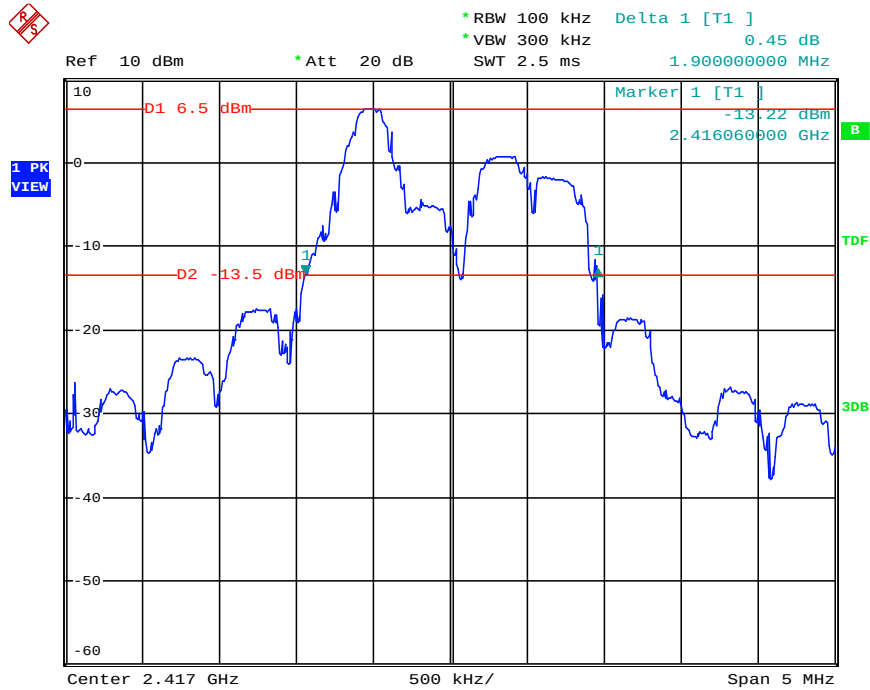


### Channel bandwidth used Plot on Configuration 5 CH (2 422 MHz)

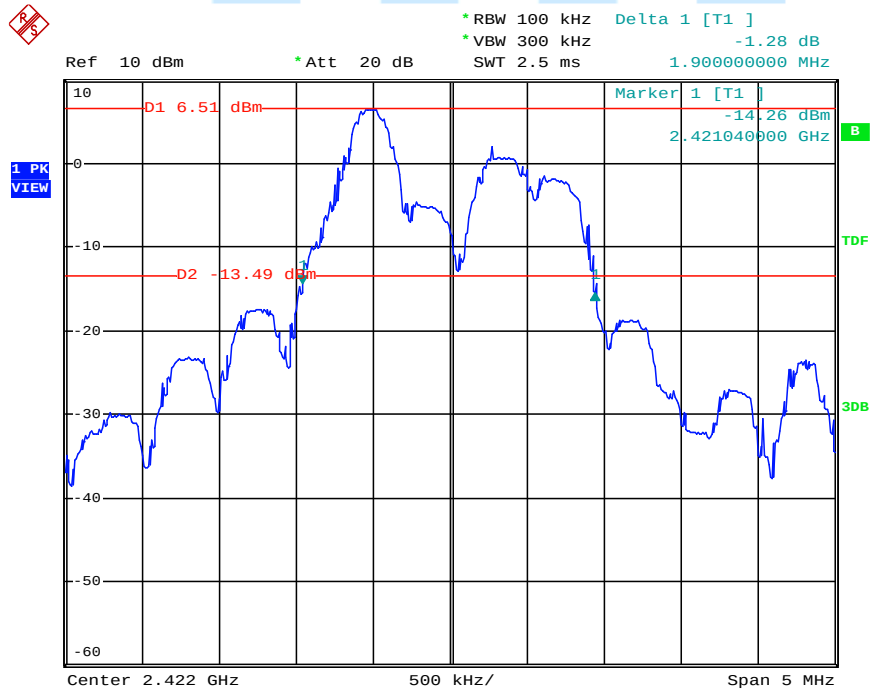




### Channel bandwidth used Plot on Configuration 6 CH (2 426 MHz)

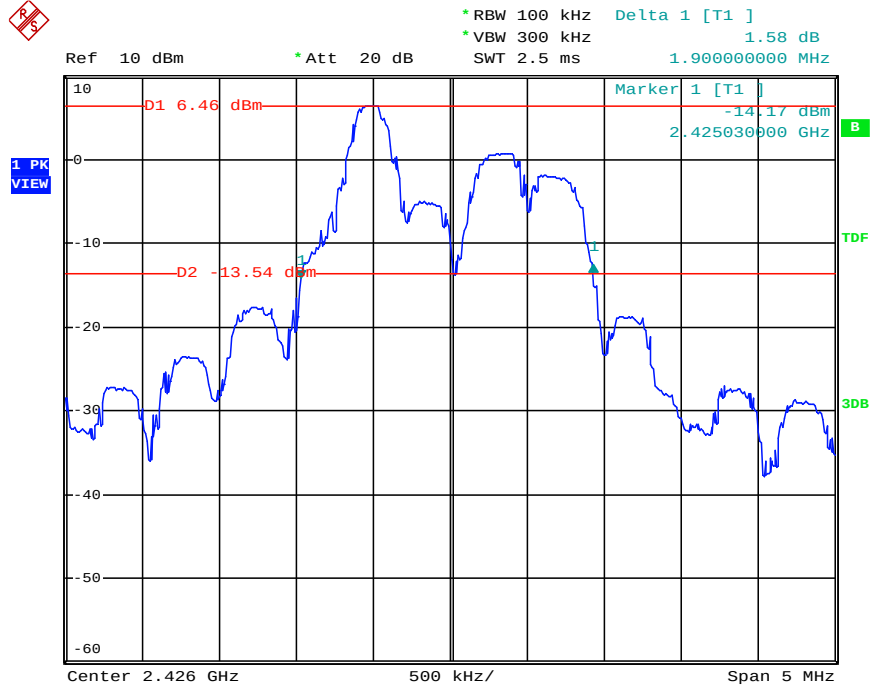


### Channel bandwidth used Plot on Configuration 7 CH (2 430 MHz)

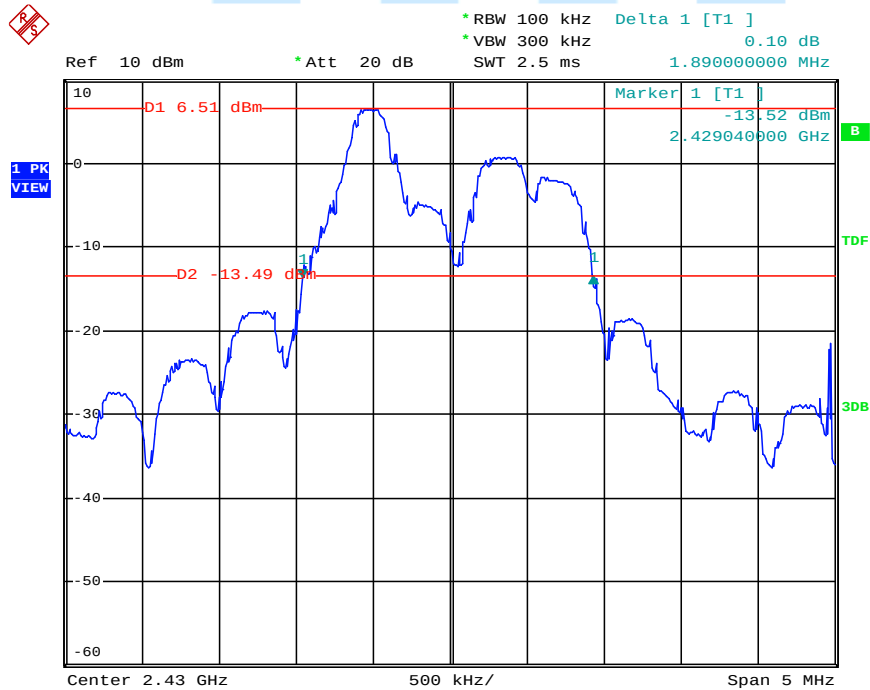




### Channel bandwidth used Plot on Configuration 8 CH (2 435 MHz)

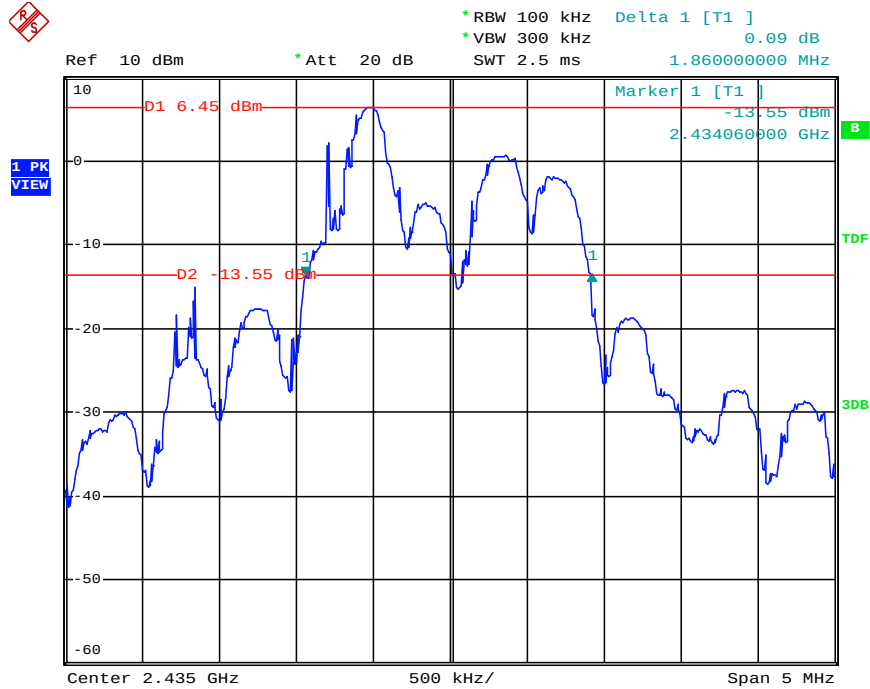


### Channel bandwidth used Plot on Configuration 9 CH (2 440 MHz)

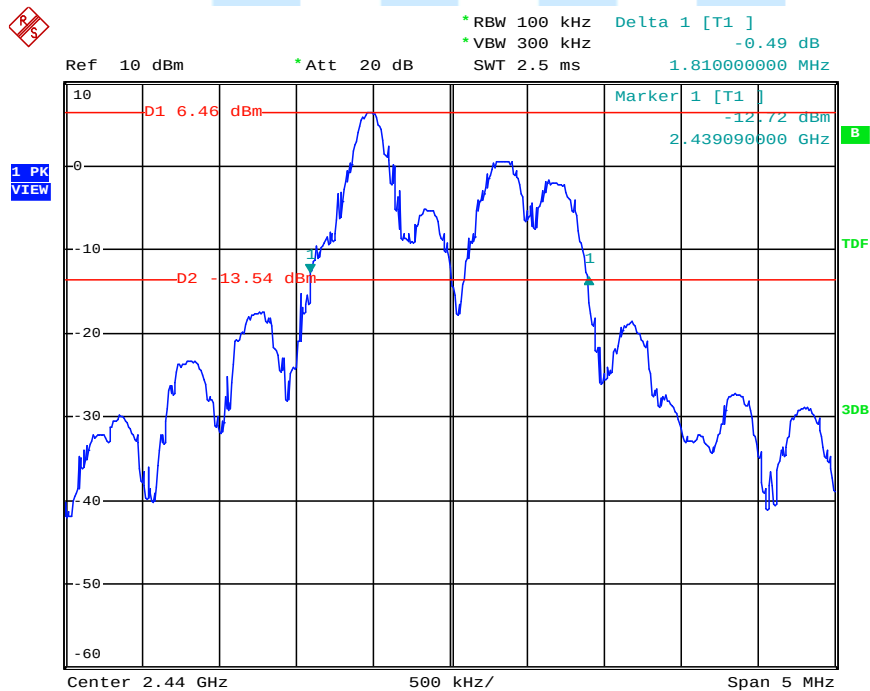




### Channel bandwidth used Plot on Configuration 10 CH (2 445 MHz)

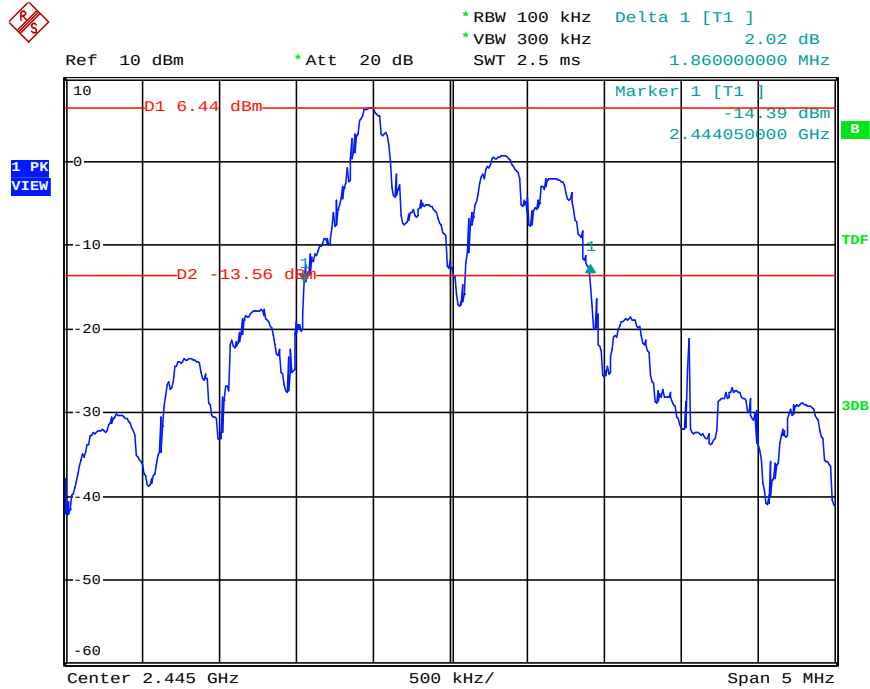


### Channel bandwidth used Plot on Configuration 11 CH (2 450 MHz)

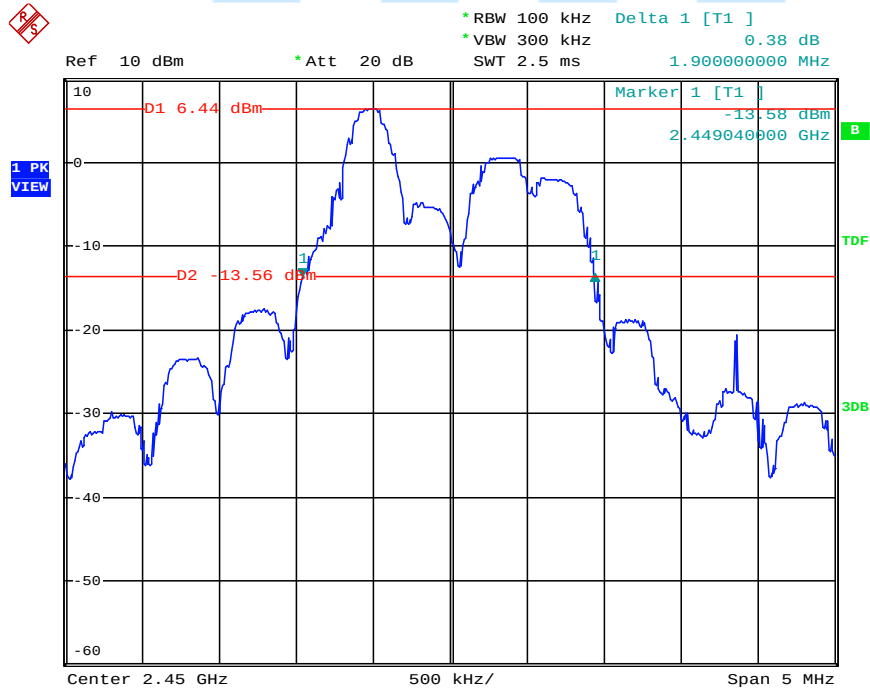




### Channel bandwidth used Plot on Configuration 12 CH (2 455 MHz)

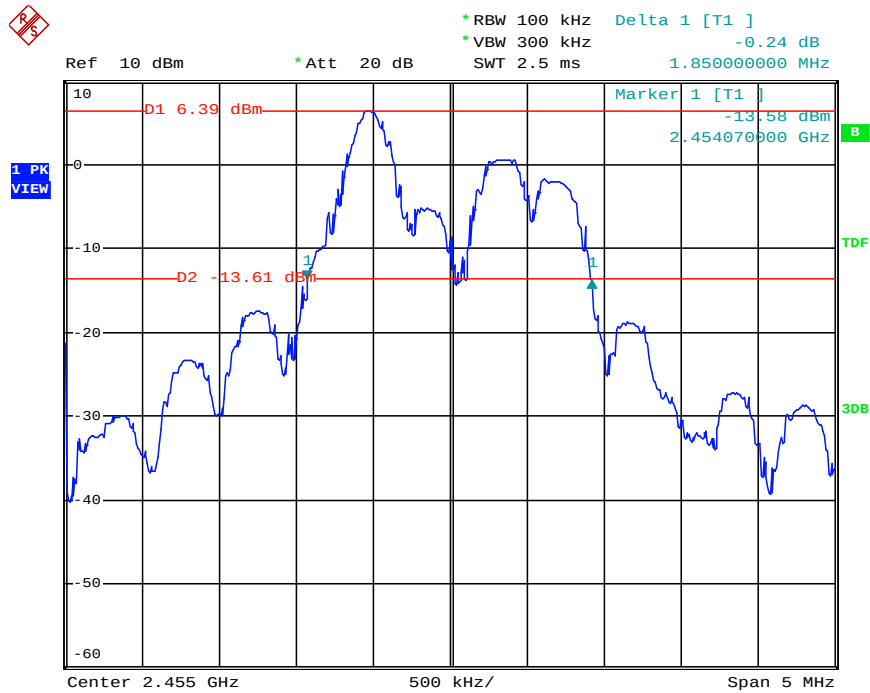


### Channel bandwidth used Plot on Configuration 13 CH (2 460 MHz)

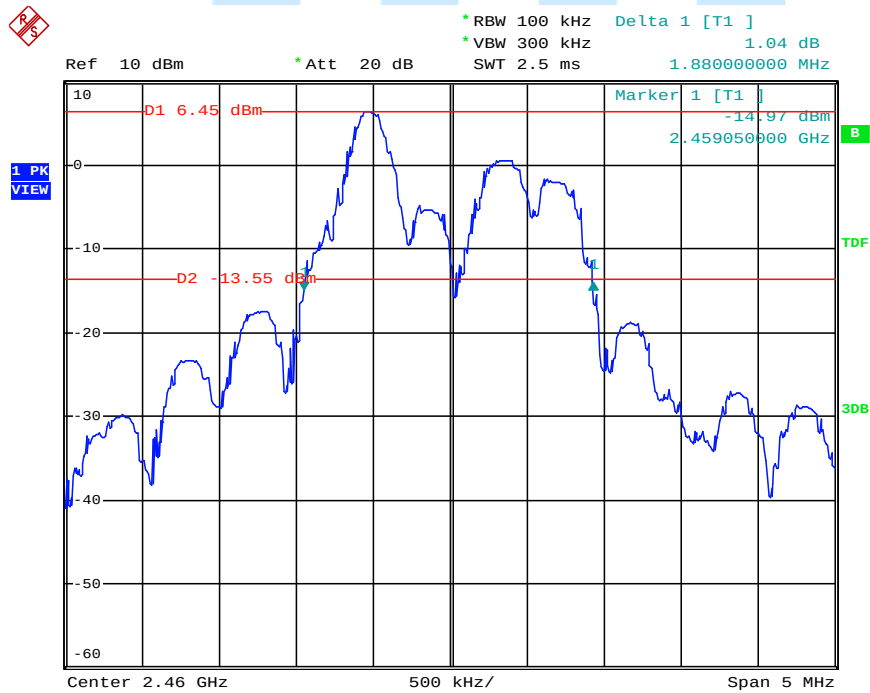




### Channel bandwidth used Plot on Configuration 14 CH (2 465 MHz)


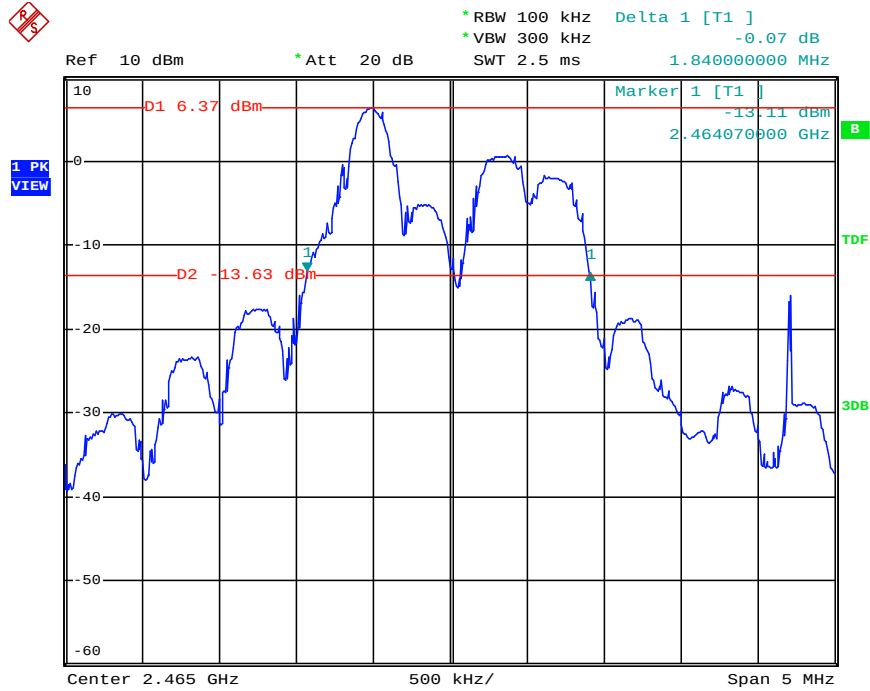


### Channel bandwidth used Plot on Configuration 15 CH (2 470 MHz)

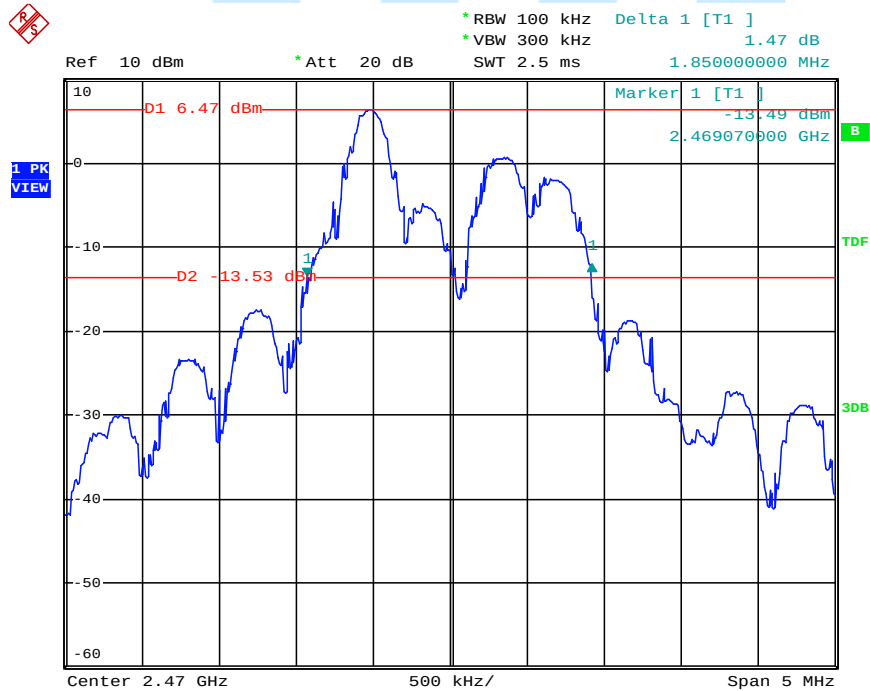



### Channel bandwidth used Plot on Configuration 16 CH (2 476 MHz)

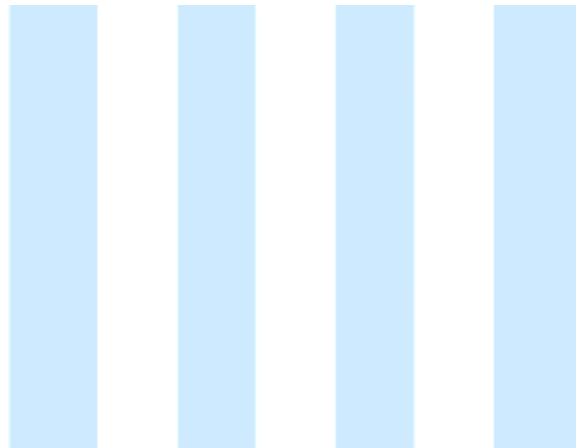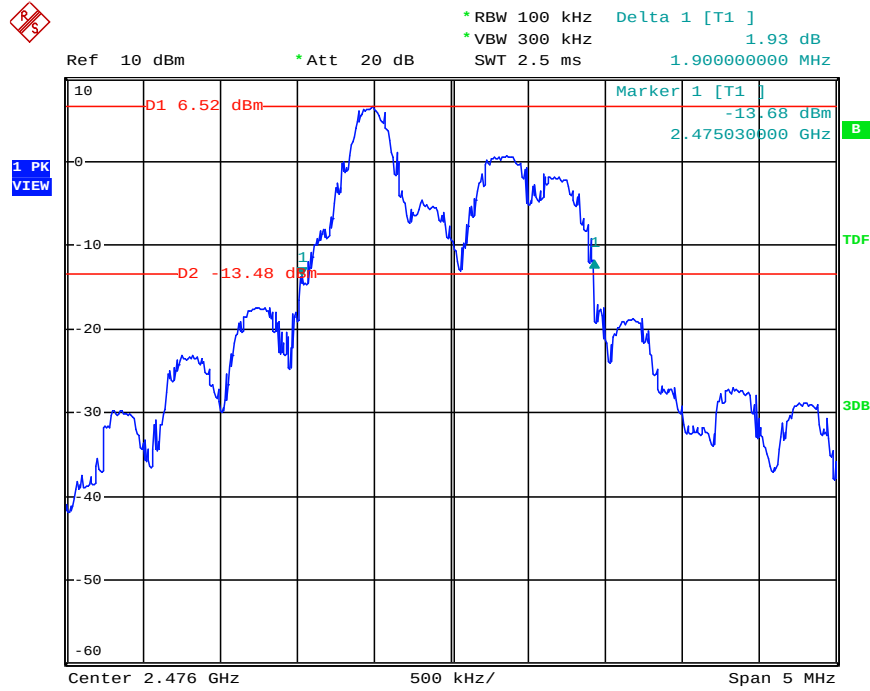




## 8. MAXIMUM PEAK OUTPUT POWER

### 8.1 Operating Environment

Temperature : 22.2 °C  
Relative Humidity : 36.2 % R.H.

### 8.2 Test Set-up (Layout)

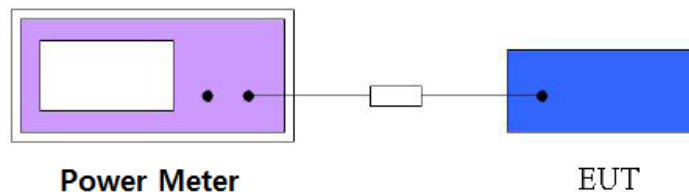

### 8.3 Limit

The maximum peak output power of the intentional radiator shall not exceed the following :

- §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band : 1Watt.

### 8.4 Test Equipment used

| Model Name  | Manufacturer    | Description              | Serial Number | Due to Calibration |
|-------------|-----------------|--------------------------|---------------|--------------------|
| ■ - NRV-Z32 | Rohde & Schwarz | Peak Power sensor        | 100049        | Dec. 06, 2017      |
| ■ - NRVD    | Rohde & Schwarz | Dual Channel Power Meter | 837794/048    | Apr. 19, 2017      |
| ■ - NRP-Z51 | Rohde & Schwarz | Power sensor             | 1138.0005.02  | Apr. 20, 2017      |

### 8.5 Test Result

- Test Date : April 18, 2017  
- Reference Standard : Part 15 Subpart C, Sec. 15.247(b)(1)  
- Modulation : GFSK  
- Power Source : DC 3.0 V

| Channel | Channel frequency (MHz) | Average output power <sup>1)</sup> (dBm) | Peak output power (dBm) | Peak output power (mW) | Limit (mW) | Result   |
|---------|-------------------------|------------------------------------------|-------------------------|------------------------|------------|----------|
| 1       | 2 405                   | 6.54                                     | 6.58                    | 4.55                   | 125        | Complies |
| 11      | 2 450                   | 6.53                                     | 6.56                    | 4.53                   | 125        | Complies |
| 16      | 2 476                   | 6.54                                     | 6.59                    | 4.56                   | 125        | Complies |

Note: 1) The Average output power is reference data for RF Exposure




## 9. Carrier Frequency Separation

### 9.1 Operating Environment

Temperature : 23.1 °C  
Relative Humidity : 36.4 % R.H.

### 9.2 Test Set-up (Layout)

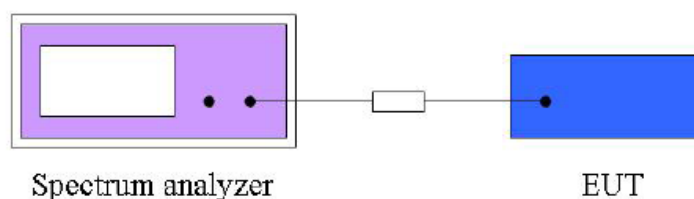

### 9.3 Limit

§15.247(a)(1) Frequency hopping system operating in 2 400 – 2 483.5 Mhz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater.

### 9.4 Test Equipment used

| Model Name | Manufacturer    | Description       | Serial Number | Due to Calibration |
|------------|-----------------|-------------------|---------------|--------------------|
| ■ - FSP    | Rohde & Schwarz | EMI Test Receiver | 101431        | Dec. 08, 2017      |
| ■ - 8493C  | Agilent         | 6 dB Attenuator   | 59907         | May. 13, 2017      |

### 9.5 Test Result

- Test Date : April 18, 2017  
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(1)  
- Modulation : GFSK  
- Power Source : DC 3.0 V

Spectrum Parameter set following ANSI 63.10(2013)

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW)  $\leq$  RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.




### Result table of Carrier Frequency Separation

| Channel | Frequency separation (MHz) | Limits(MHz)<br>[25 kHz or 2/3 of 20 dB bandwidth] | Result   |
|---------|----------------------------|---------------------------------------------------|----------|
| 1-2     | 3.87                       | > 1.68                                            | Complies |
| 2-3     | 4.01                       | > 1.61                                            | Complies |
| 3-4     | 4.00                       | > 1.22                                            | Complies |
| 4-5     | 5.00                       | > 1.27                                            | Complies |
| 5-6     | 4.04                       | > 1.27                                            | Complies |
| 6-7     | 4.04                       | > 1.27                                            | Complies |
| 7-8     | 4.98                       | > 1.26                                            | Complies |
| 8-9     | 5.00                       | > 1.24                                            | Complies |
| 9-10    | 5.02                       | > 1.21                                            | Complies |
| 10-11   | 5.00                       | > 1.24                                            | Complies |
| 11-12   | 5.02                       | > 1.27                                            | Complies |
| 12-13   | 5.00                       | > 1.23                                            | Complies |
| 13-14   | 5.00                       | > 1.25                                            | Complies |
| 14-15   | 5.02                       | > 1.23                                            | Complies |
| 15-16   | 6.00                       | > 1.23                                            | Complies |


### -Test Result Plot

#### Channel Separation (full channel)

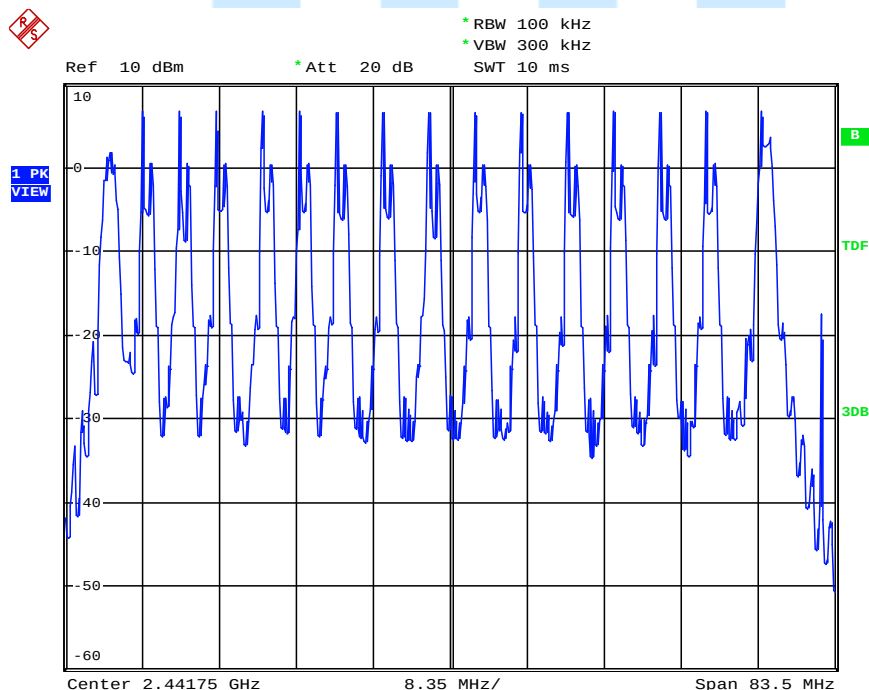




### Channel Separation (1CH ~ 2 CH)

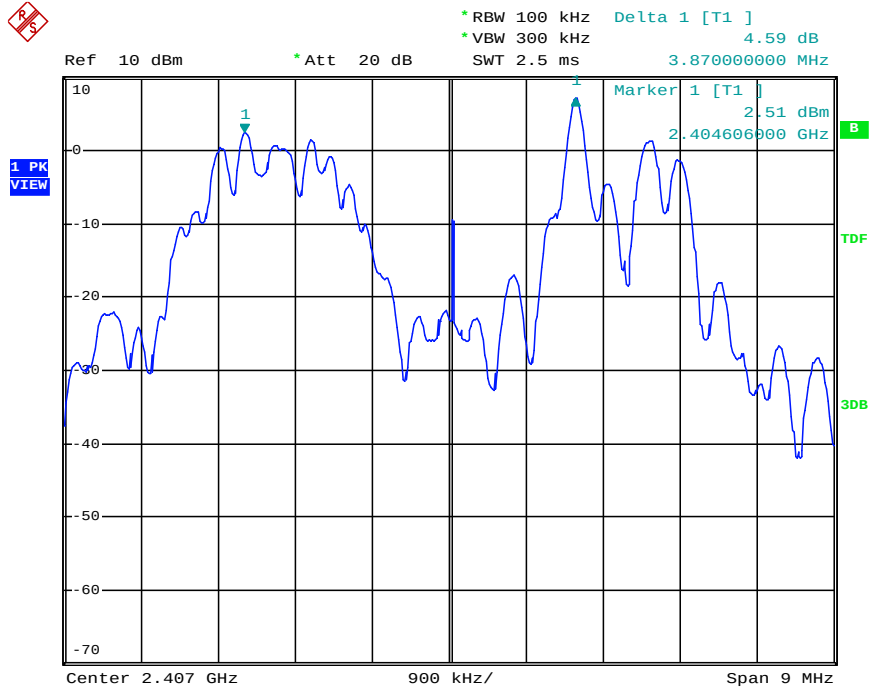


### Channel Separation (2CH ~ 3 CH)

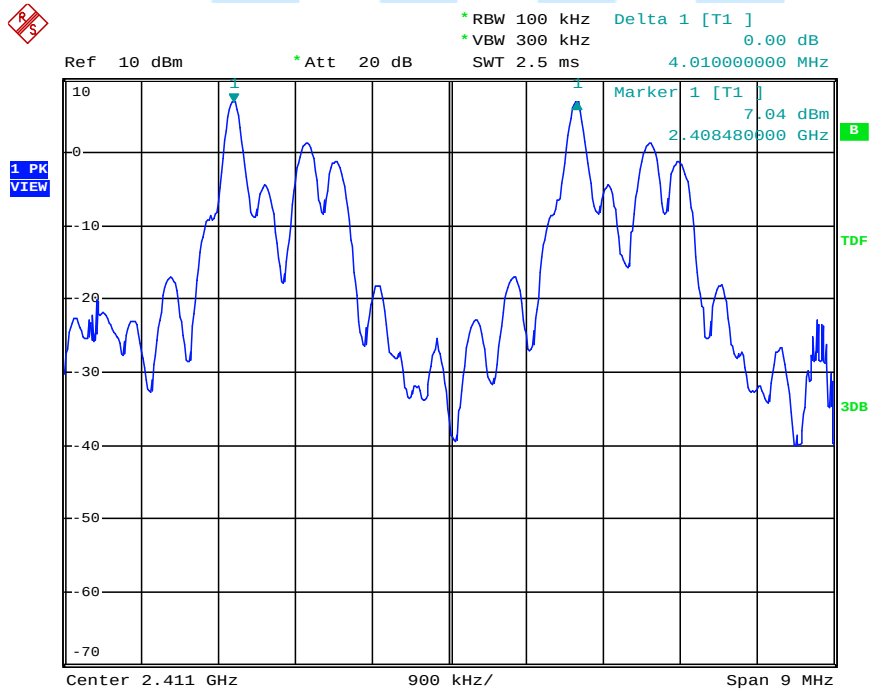




### Channel Separation (3 CH ~ 4 CH)

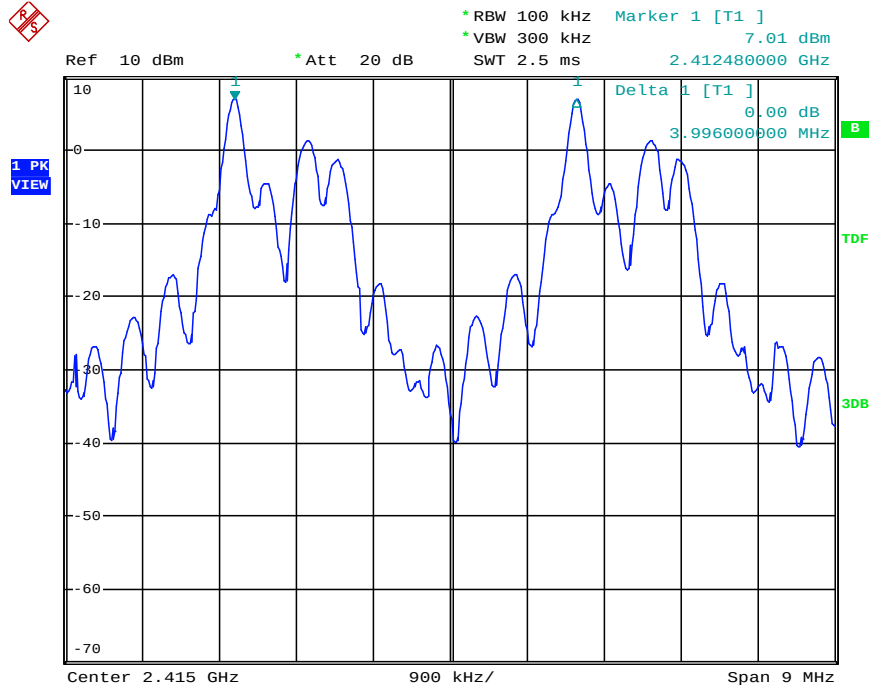


### Channel Separation (4 CH ~ 5 CH)

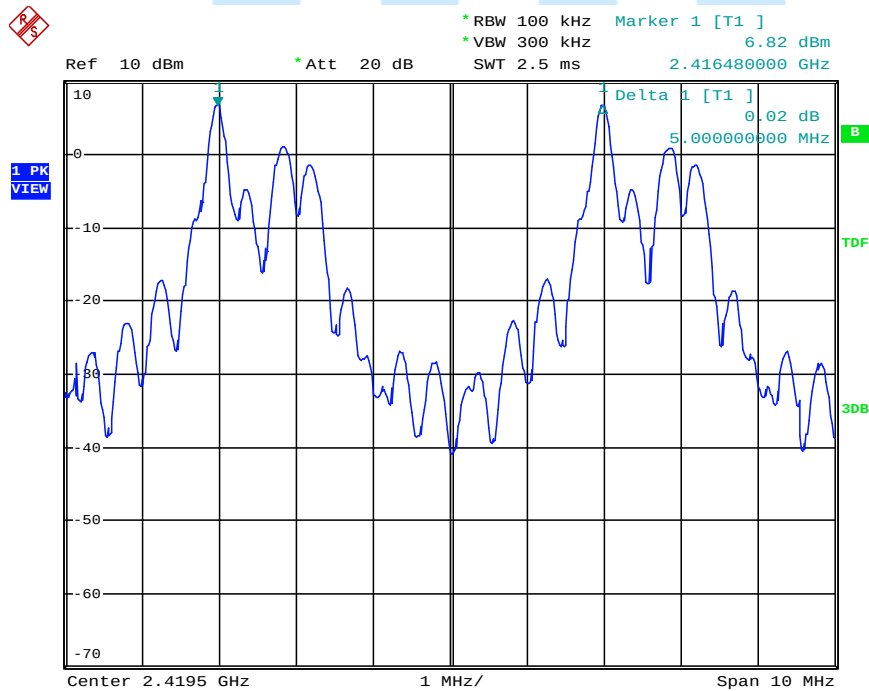




### Channel Separation (5 CH ~ 6 CH)

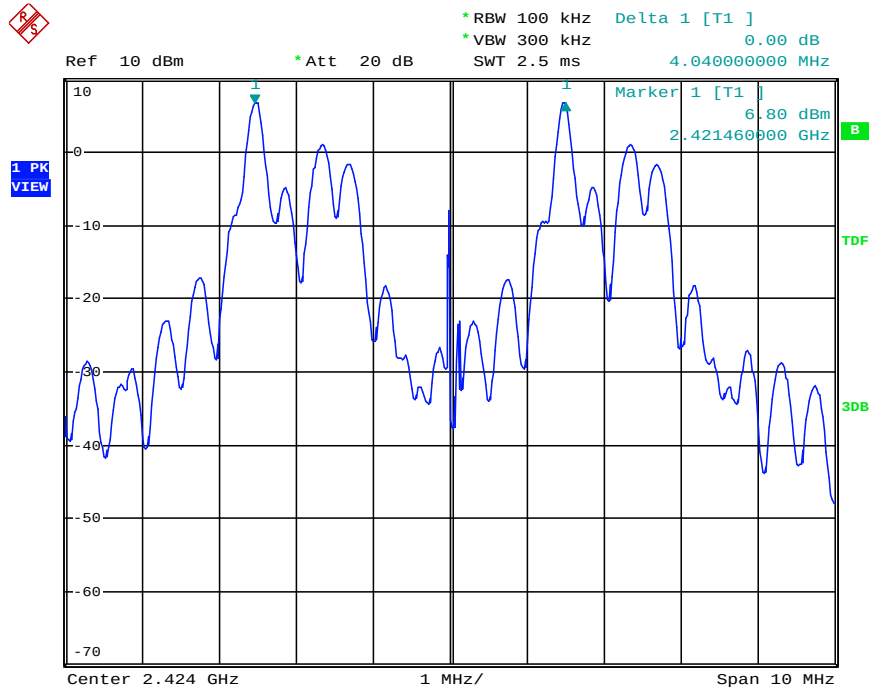


### Channel Separation (6 CH ~ 7 CH)

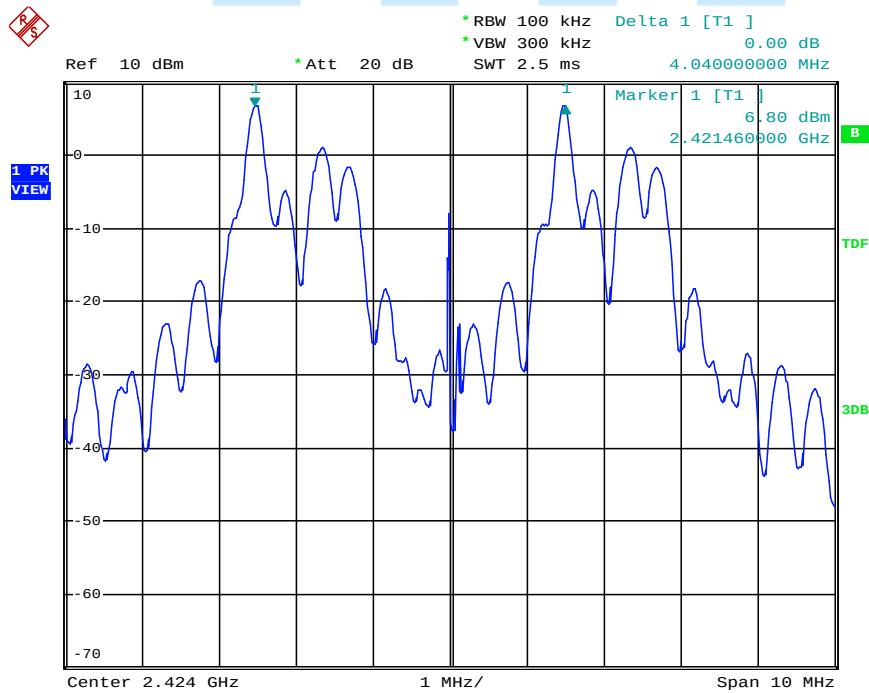




### Channel Separation (7 CH ~ 8 CH)

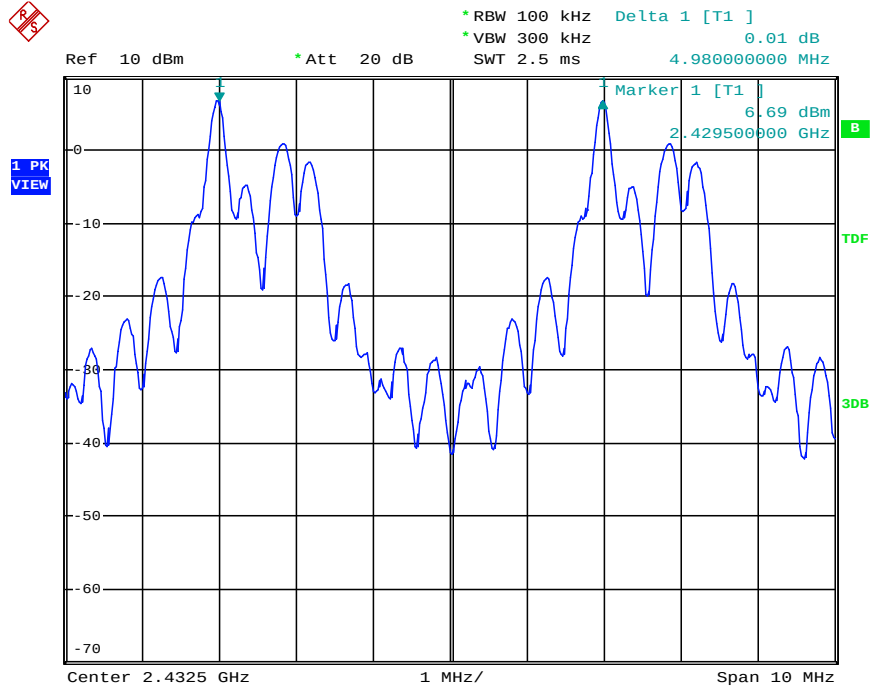


### Channel Separation (8 CH ~ 9 CH)

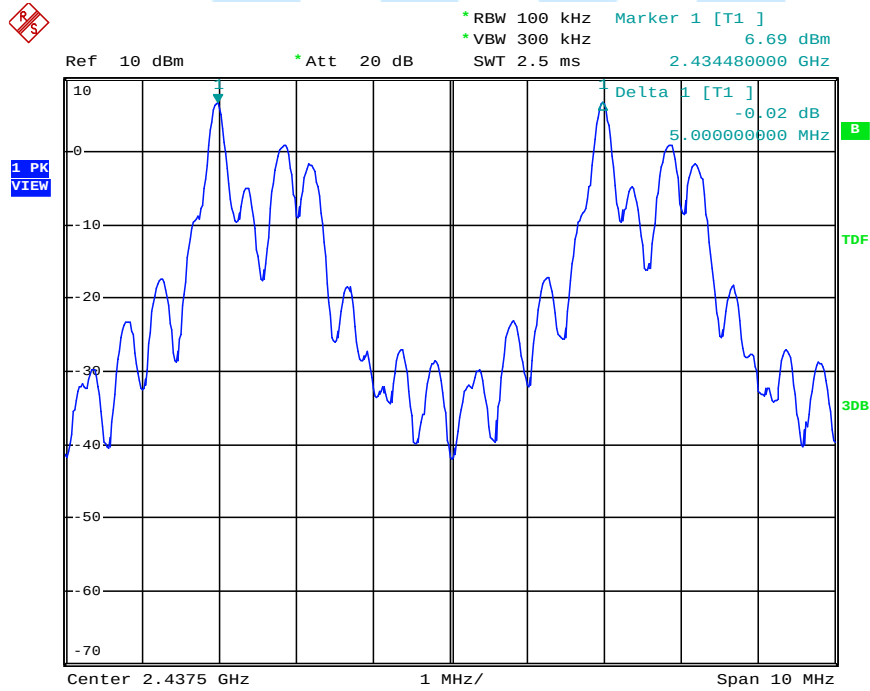




### Channel Separation (9 CH ~ 10 CH)

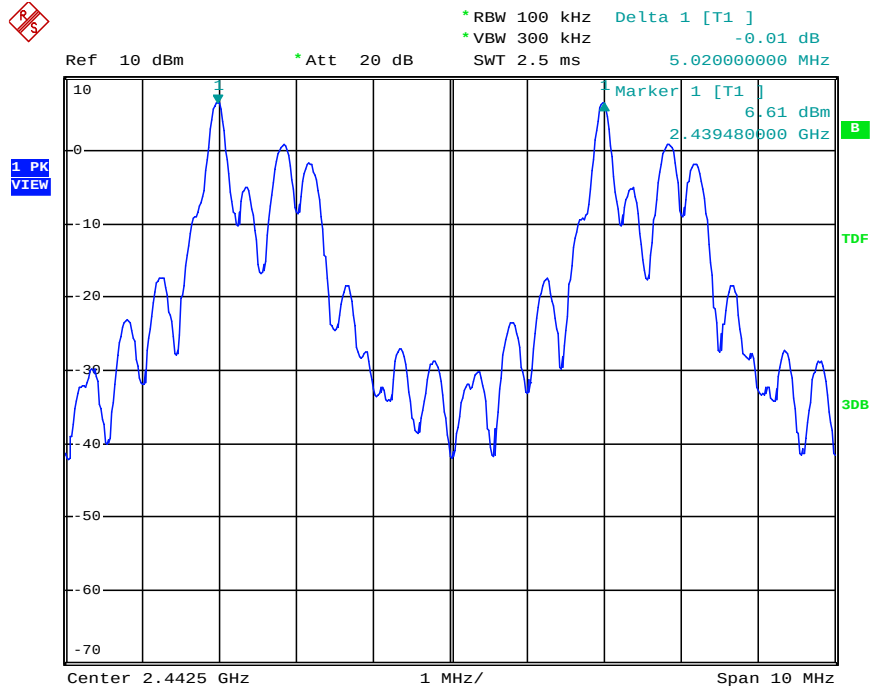


### Channel Separation (10 CH ~11 CH)

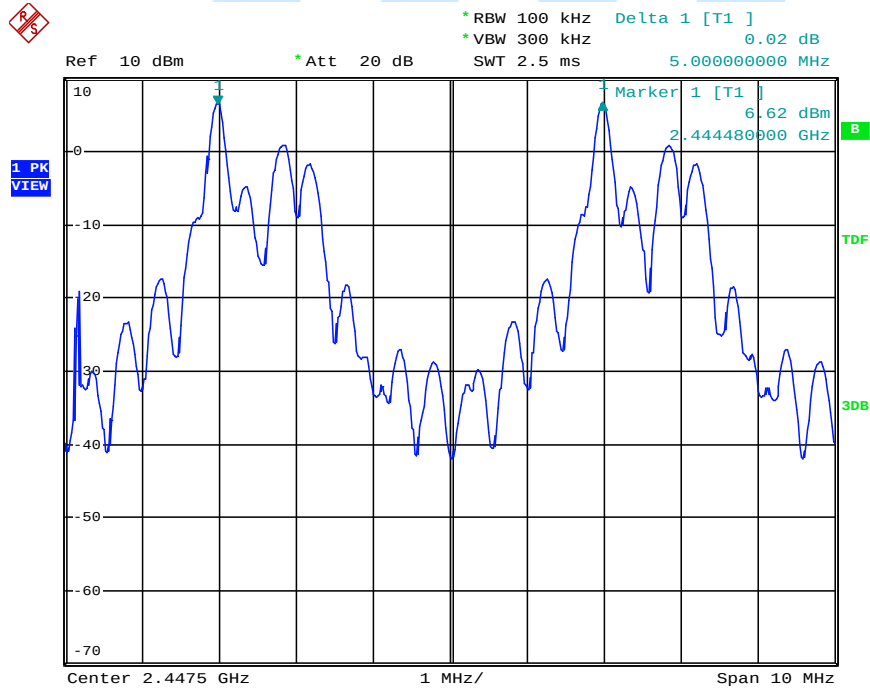




### Channel Separation (11 CH ~ 12 CH)

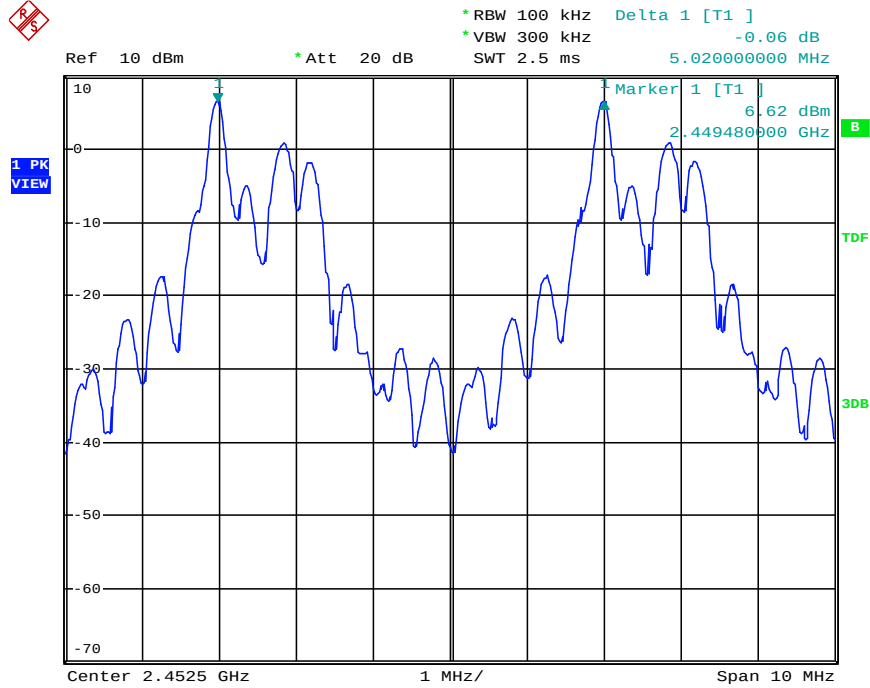


### Channel Separation (12 CH ~ 13 CH)

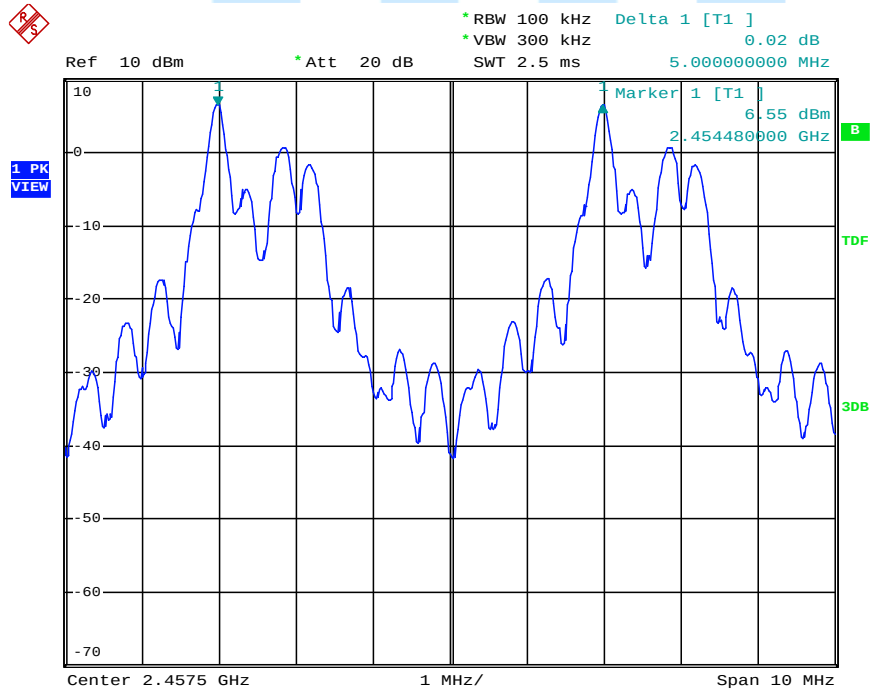




### Channel Separation (13 CH ~ 14 CH)

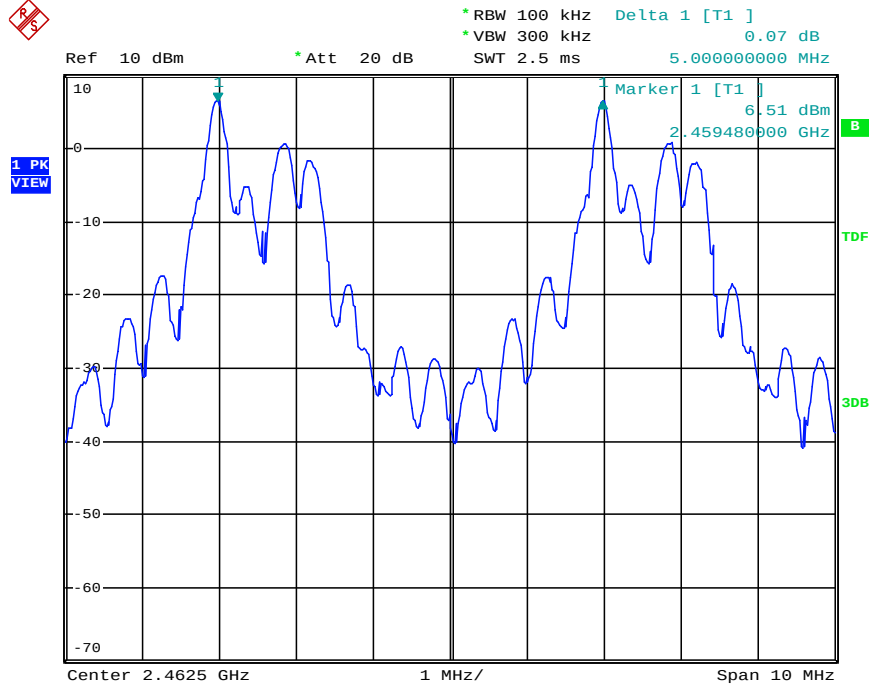


### Channel Separation (14 CH ~15 CH)

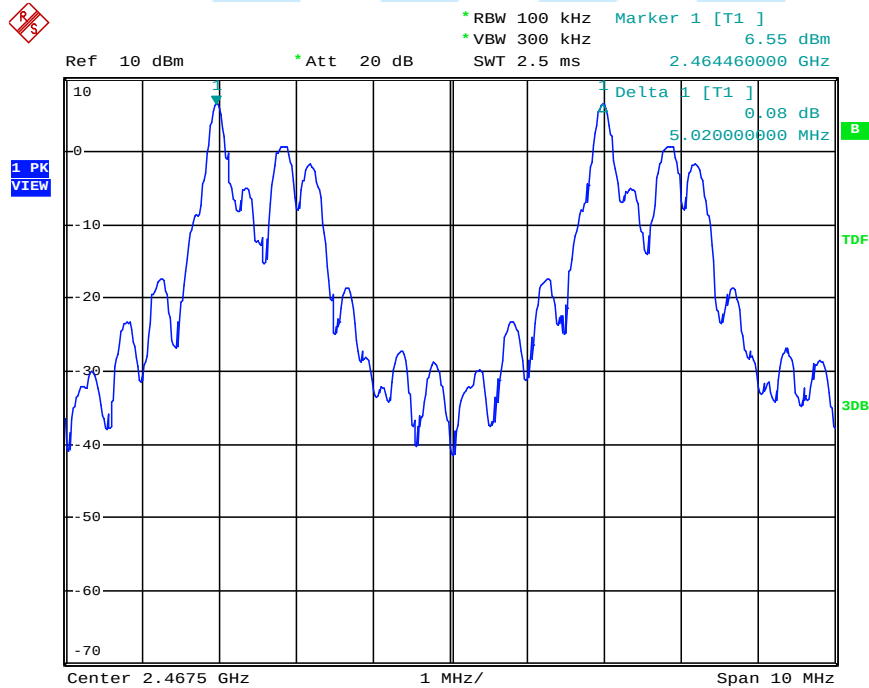



### Channel Separation (15 CH ~ 16 CH)

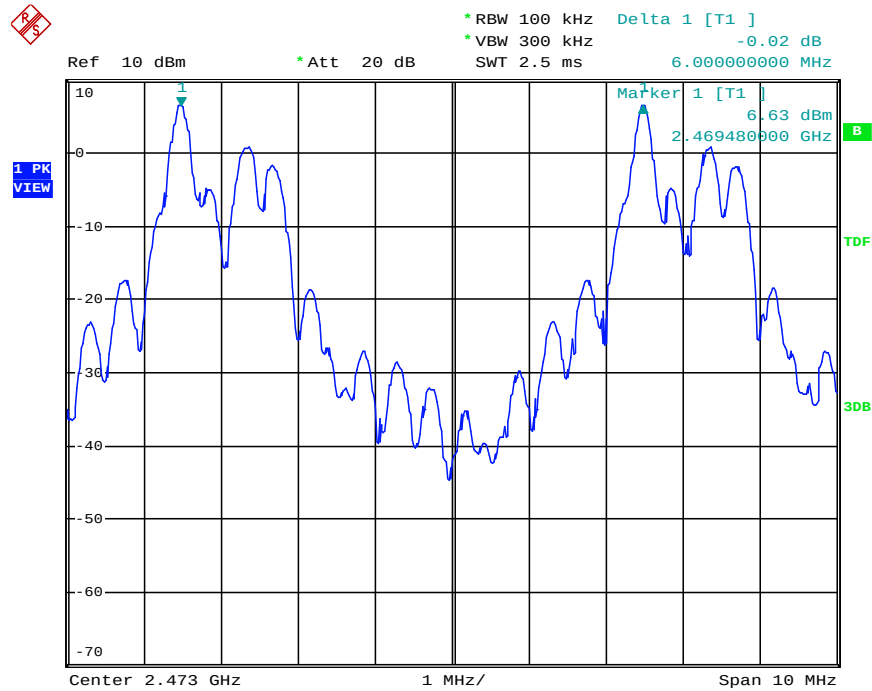




## 10. NUMBER OF HOPPING FREQUENCIES

### 10.1 Operating Environment

Temperature : 23.6 °C  
Relative Humidity : 36.7 % R.H.

### 10.2 Test Set-up (Layout)

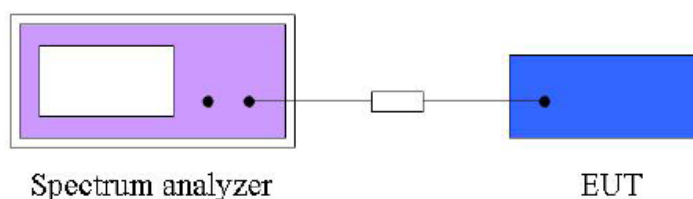

### 10.3 Limit

At least 15 channels frequencies, and should be equally spaced

### 10.4 Test Equipment used

| Model Name | Manufacturer    | Description       | Serial Number | Due to Calibration |
|------------|-----------------|-------------------|---------------|--------------------|
| ■ - FSP    | Rohde & Schwarz | EMI Test Receiver | 101431        | Dec. 08, 2017      |
| ■ - 8493C  | Agilent         | 6 dB Attenuator   | 59907         | May. 13, 2017      |

### 10.5 Test Result

- Test Date : April 17, 2017  
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(1)(iii)  
- Modulation : GFSK  
- Power Source : DC 3.0 V

Spectrum Parameter set to following to ANSI 63.10(2013)

- Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- VBW  $\geq$  RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.




## Result table of Number of Hopping Frequencies

| Modulation | Total channel No. | Hopping channel No. | Limit | Result   |
|------------|-------------------|---------------------|-------|----------|
| GFSK       | 16                | 16                  | > 15  | Complies |

### -Test Result Plot

#### Channel Separation (full channel)

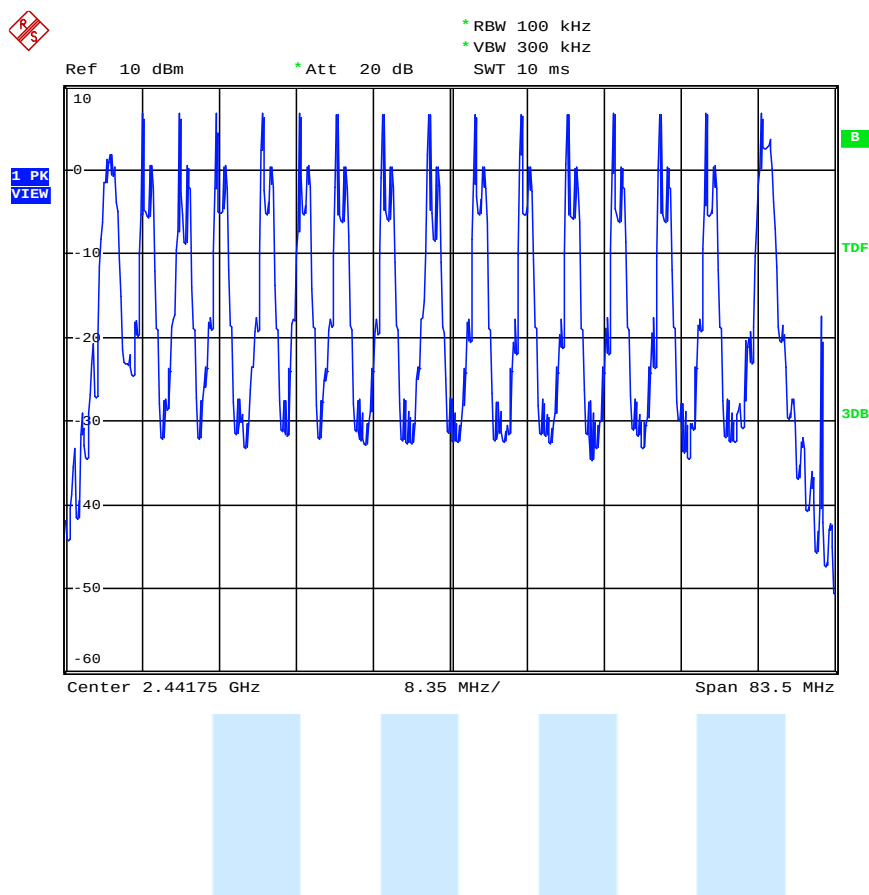




## 11. Time of Occupancy (dwell time)

### 11.1 Operating Environment

Temperature : 23.2 °C  
Relative Humidity : 36.4 % R.H.

### 11.2 Test Set-up (Layout)

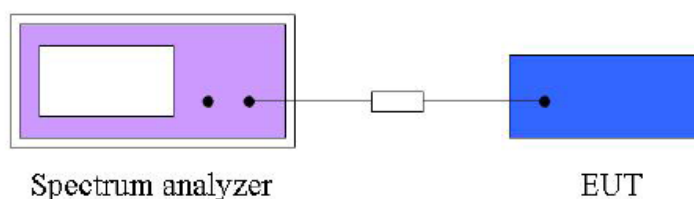

### 11.3 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 11.4 Test Equipment used

| Model Name | Manufacturer    | Description       | Serial Number | Due to Calibration |
|------------|-----------------|-------------------|---------------|--------------------|
| ■ - FSP    | Rohde & Schwarz | EMI Test Receiver | 101431        | Dec. 08, 2017      |
| ■ - 8493C  | Agilent         | 6 dB Attenuator   | 59907         | May. 13, 2017      |

### 11.5 Test Result

- Test Date : April 18, 2017  
- Reference Standard : Part 15 Subpart C, Sec. 15.247(a)(1)(iii)  
- Modulation : GFSK  
- Power Source : DC 3.0 V

Spectrum Parameter set to following to ANSI 63.10(2013)

- Span: Zero span, centered on a hopping channel  
- RBW:  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where  $T$  is the expected dwell time per channel.  
- VBW  $\geq$  RBW  
- Sweep = as necessary to capture the entire dwell time per hopping channel  
- Detector = peak  
- Trace = max hold.


The EUT's packet need 1 time slot for transmitting and 1 time slot for receiving. Then the System makes worst case 62/2 hops per second with 16 channels. So the system has each channel 1.94 times per second(62/2/16)

### Result table of Time of occupancy (dwell time)


| Frequency (MHz) | Pulse on time (ms) | Hops per second with channel | Period time | Occupancy time(ms) | Limit (ms) | Result   |
|-----------------|--------------------|------------------------------|-------------|--------------------|------------|----------|
| 2405            | 2.27               | 1.94                         | 6.4         | 28.15              | 400        | Complies |
| 2450            | 2.27               | 1.94                         | 6.4         | 28.15              | 400        | Complies |
| 2476            | 2.27               | 1.94                         | 6.4         | 28.15              | 400        | Complies |

※ Occupancy time(ms): Pulse on time x Hops per second with channel x Period time


### -Test Result Plot(Pulse on time)

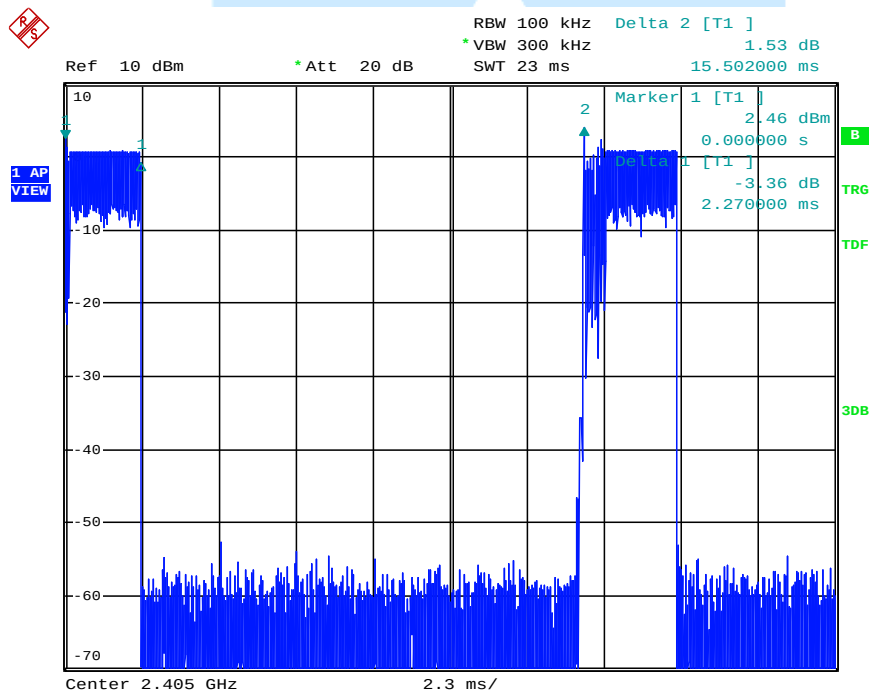

< Lowest Channel >

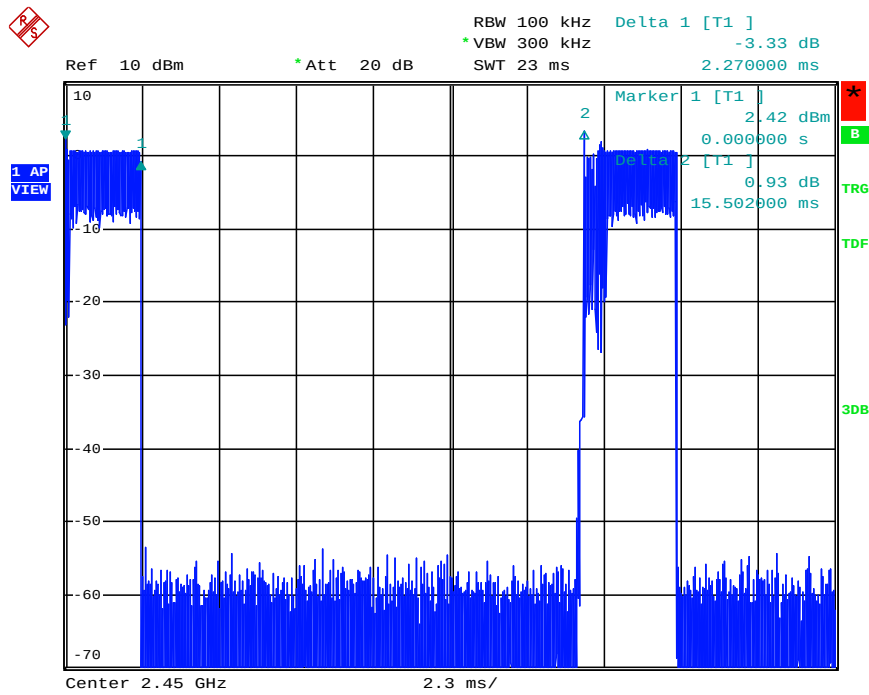

< Middle Channel >

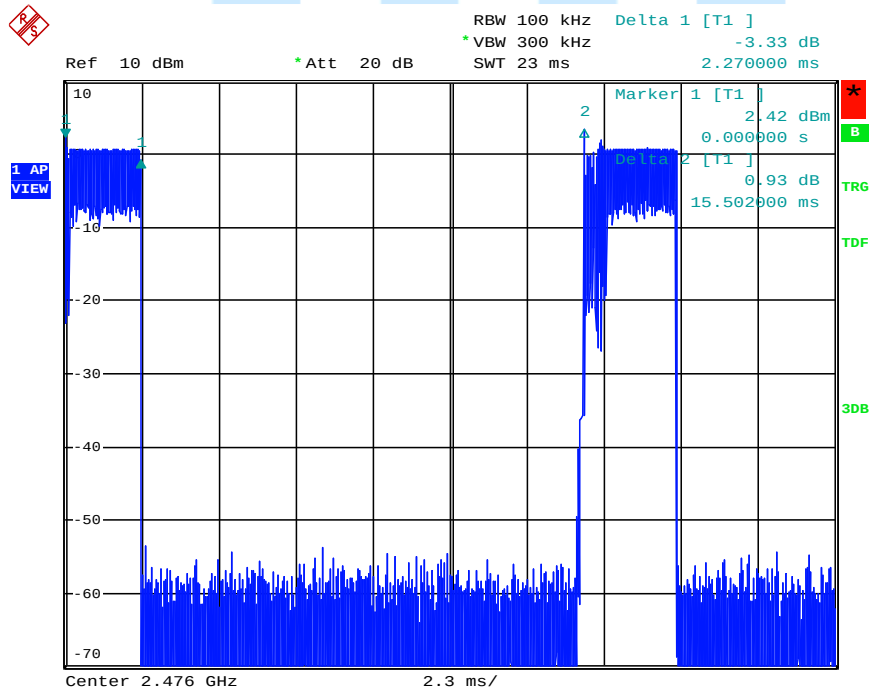

< Highest Channel >




## 12. Conducted Spurious Emissions

### 12.1 Operating Environment

Temperature : 23.5 °C  
Relative Humidity : 36.9 % R.H.

### 12.2 Test Set-up (Layout)

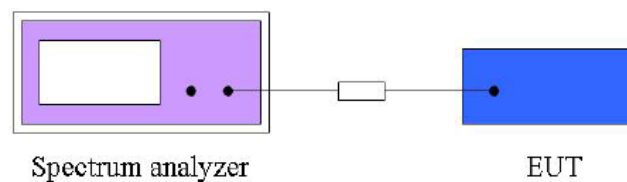

### 12.3 Limit

Below -20 dB of the highest emission level of operating band (in 100 kHz resolution band width)

### 12.4 Test Equipment used

| Model Name | Manufacturer    | Description       | Serial Number | Due to Calibration |
|------------|-----------------|-------------------|---------------|--------------------|
| ■ - FSP    | Rohde & Schwarz | EMI Test Receiver | 101431        | Dec. 08, 2017      |
| ■ - 8493C  | Agilent         | 6 dB Attenuator   | 59907         | May. 13, 2017      |

### 12.5 Test Result

- Test Date : April 17, 2018  
- Reference Standard : Part 15 Subpart C, Sec. 15.247(b)  
- Modulation : GFSK  
- Power Source : DC 3.0 V

The spectrum plots are attached on the following 3 images, Marker 1 indicates the highest level, D1 line indicates the 20 dB offset below Marker 1. It shows compliance with the requirement in part 15.247(d)

Spectrum Parameter set to following to ANSI 63.10(2013)


- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 5) Resolution bandwidth: 100 kHz.
- 6) Video bandwidth: 300 kHz.
- 4) Sweep time: Coupled.
- 7) Detector: Peak.
- 8) Trace: Max hold.




### Result table of Conducted Spurious emission


| Operating Frequency | Lower band (dBc) | Limits (dBc) | Result   |
|---------------------|------------------|--------------|----------|
| 2405                | -41.69           | -20.00       | Complies |
| 2450                | -37.86           |              | Complies |
| 2476                | -40.00           |              | Complies |

### -Test Result Plot(Pulse on time)

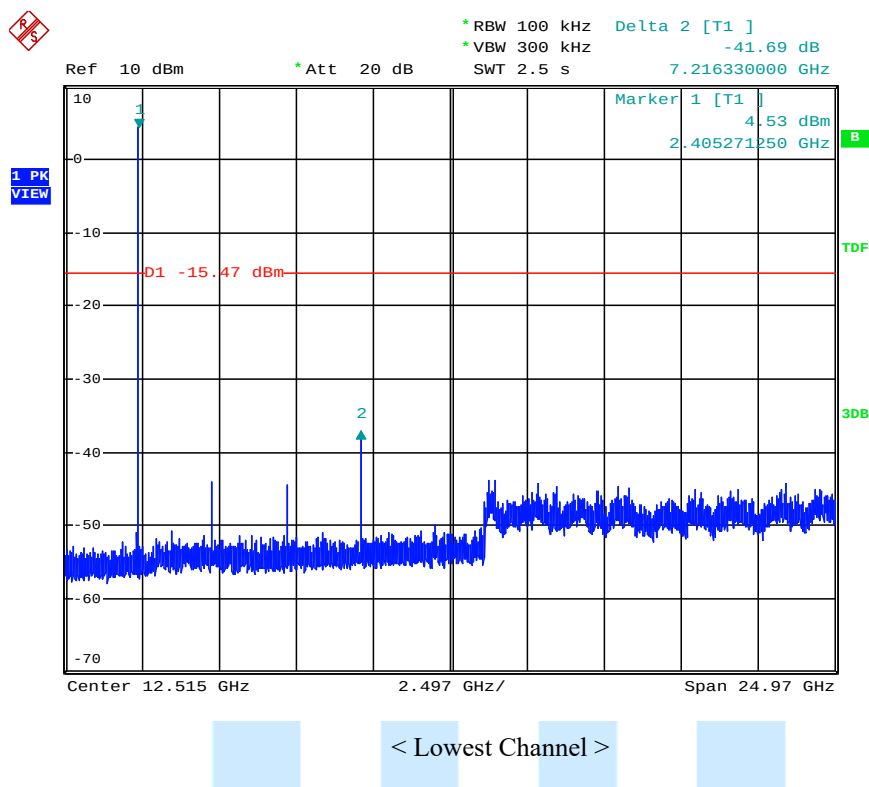

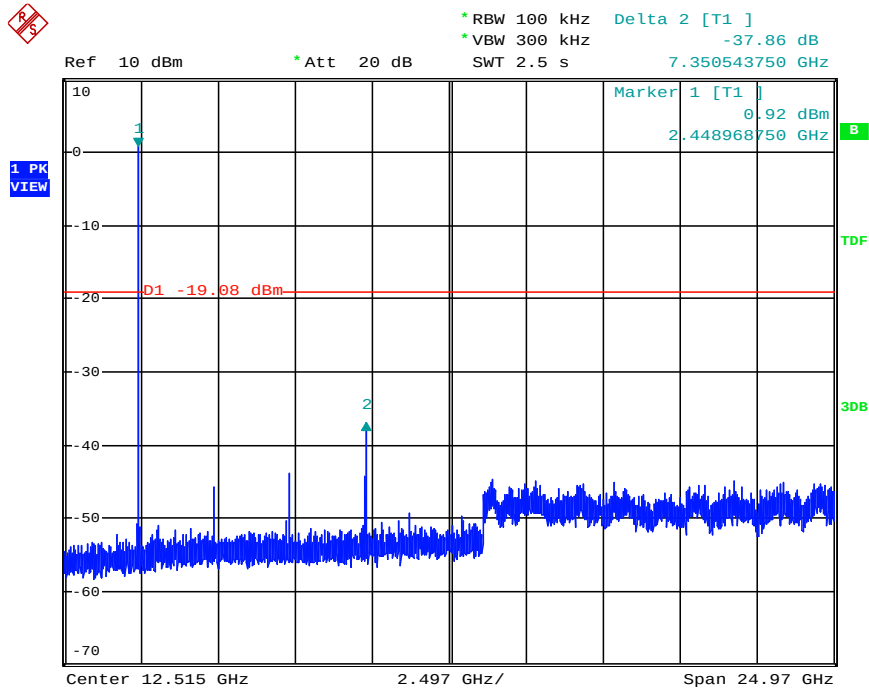

< Middle Channel >

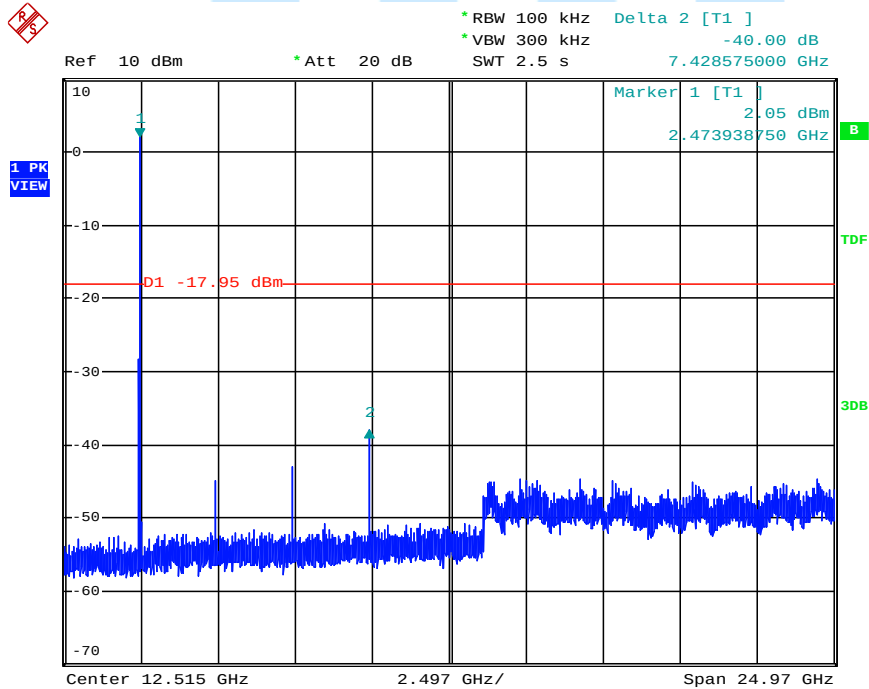

< Highest Channel >




### 13. Band Edge(Out of Band Emissions)

#### 13.1 Operating Environment

Temperature : 23.5 °C  
Relative Humidity : 36.8 % R.H.

#### 13.2 Test Set-up (Layout)

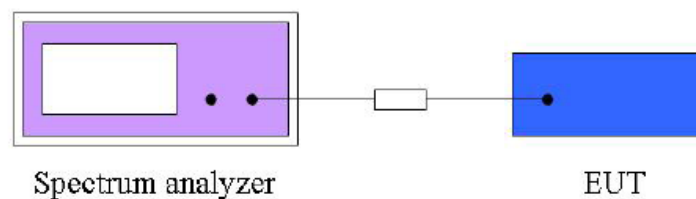

#### 13.3 Limit

Below -20 dB of the highest emission level of operating band (in 100 kHz resolution band width)

#### 13.4 Test Equipment used

| Model Name | Manufacturer    | Description       | Serial Number | Due to Calibration |
|------------|-----------------|-------------------|---------------|--------------------|
| ■ - FSP    | Rohde & Schwarz | EMI Test Receiver | 101431        | Dec. 08, 2017      |
| ■ - 8493C  | Agilent         | 6 dB Attenuator   | 59907         | May. 13, 2017      |

#### 13.5 Test Result

- Test Date : April 17, 2017  
- Reference Standard : Part 15 Subpart C, Sec. 15.247(b)  
- Modulation : GFSK  
- Power Source : DC 3.0 V

The spectrum plots are attached on the following 4 images, Marker 1 line indicates the highest level, D1 line indicates the 20 dB offset below Marker 1. It shows compliance with the requirement in part 15.247(d)

Spectrum Parameter set to following to ANSI 63.10(2013)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) Resolution bandwidth: 100 kHz.
- 6) Video bandwidth: 300 kHz.
- 7) Detector: Peak.
- 8) Trace: Max hold.




### Result table of Conducted Spurious emission

| Operating Frequency | Lower band (dBc) | Upper band (dBc) | Limits (dBc) | Result   |
|---------------------|------------------|------------------|--------------|----------|
| Non Hopping         | -44.13           | -48.35           | -20.00       | Complies |
| Hopping             | -46.10           | -50.90           | -20.00       | Complies |


### -Test Result Plot\_Band edge(Out of Band emission)

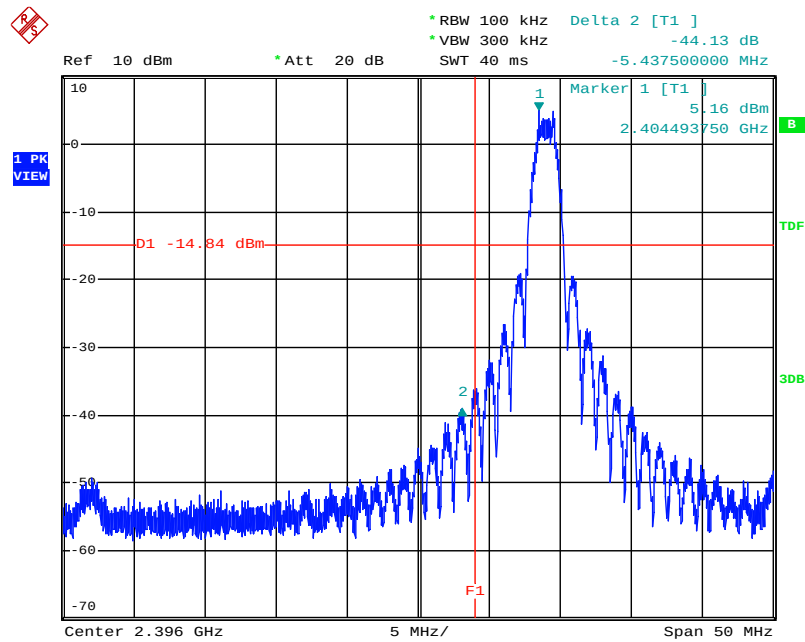


### < Lower band edge\_Lowest channel >

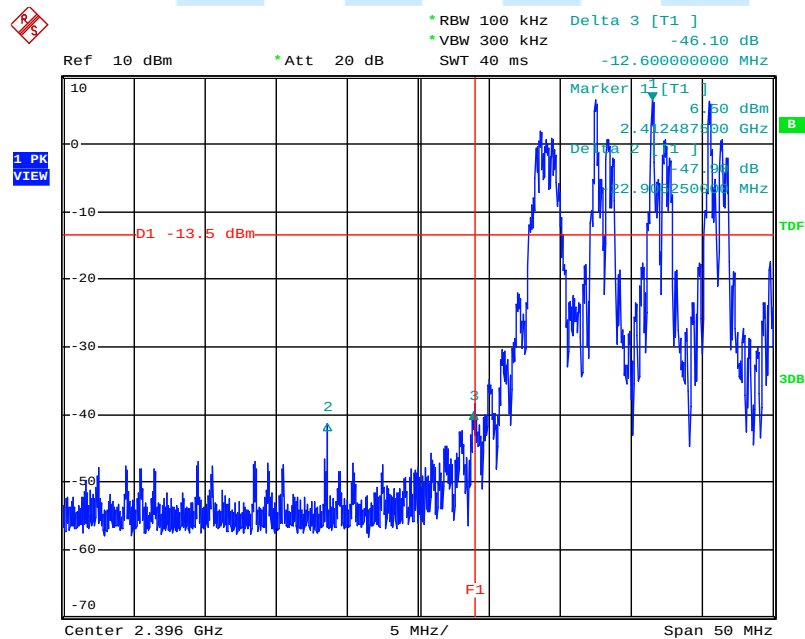

### < Lower band edge\_ frequency hopping >

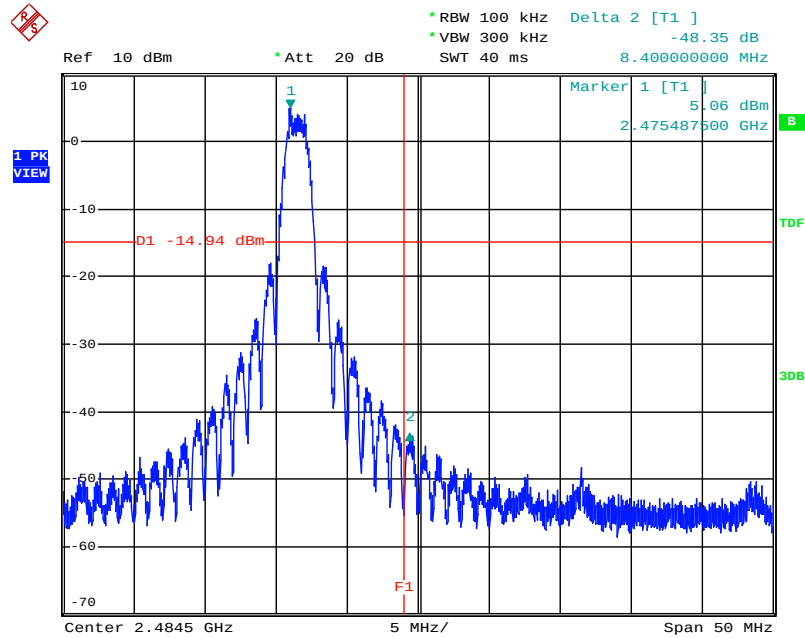

< Upper band edge\_Highest channel >

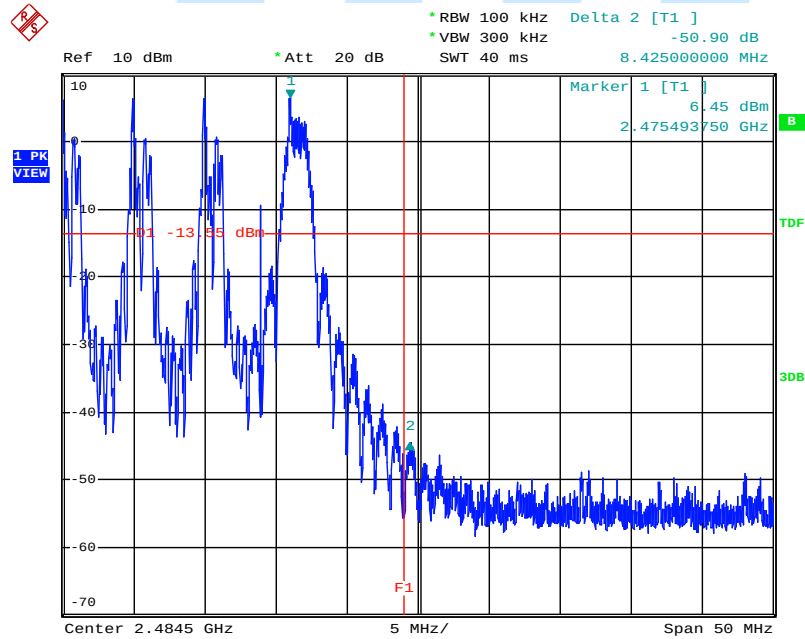

< Upper band edge \_ frequency hopping >



## 14. AC Power line Conducted emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

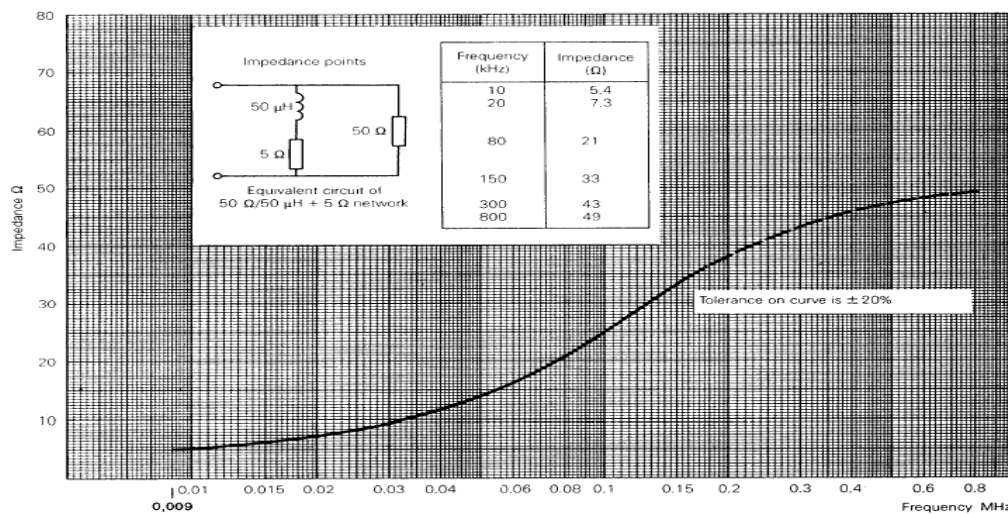


Fig 2. Impedance of LISN



### 14.1 Operating Environment

Temperature : 22.6 °C  
Relative Humidity : 37.9 %R.H.

### 14.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

### 14.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

| Test Items                            | Uncertainty | Remark                                             |
|---------------------------------------|-------------|----------------------------------------------------|
| Conducted emission (9 kHz ~ 150 kHz)  | 3.85 dB     | Confidence level of approximately 95 % ( $k = 2$ ) |
| Conducted emission (150 kHz ~ 30 MHz) | 3.32 dB     | Confidence level of approximately 95 % ( $k = 2$ ) |



#### 14.4 Limit

| RFI Conducted                                               | FCC Limit(dBμV/m) Class B |          |
|-------------------------------------------------------------|---------------------------|----------|
| Freq. Range                                                 | Quasi-Peak                | Average  |
| 150 kHz ~ 0.5 MHz                                           | 66 ~ 56*                  | 56 ~ 46* |
| 0.5 MHz ~ 5 MHz                                             | 56                        | 46       |
| 5 MHz ~ 30 MHz                                              | 60                        | 50       |
| *Limits decreases linearly with the logarithm of frequency. |                           |          |

#### 14.5 Test Equipment used

| Model Name | Manufacturer    | Description       | Serial Number | Due to Calibration |
|------------|-----------------|-------------------|---------------|--------------------|
| ■- ESCI    | Rohde & Schwarz | EMI test receiver | 100237        | Apr. 18, 2018      |
| ■-- ENV216 | Rohde & Schwarz | LISN              | 100172        | Apr. 19, 2018      |
| □- ENV216  | Rohde & Schwarz | LISN              | 100173        | Apr. 19, 2018      |
| □ - ISN T8 | TESEQ. GmbH     | ISN               | 24568         | Apr. 21, 2018      |

#### 14.6 Test data for Conducted Emission

- Test Date : Apr. 28, 2017
- Reference Standard : Part 15 Subpart C, Sec. 15.207
- Test Procedure(s) : ANSI C63.10 (2013)
- Operating Condition : RF transmitting mode
- Power source : AC 120 V / 60 Hz
- Frequency range : 0.15 MHz ~ 30 MHz
- Line : AC Power line(Live with Neutral)
- Comment :



## 15. Radiated Emission

Exploratory Radiated measurements were conducted at the 3m semi anechoic chamber in order to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Final measurements of below 1GHz were made at 3m or 10 m Chamber that complies with CISPR 16/ANSI C63.10. Above 1GHz final measurements were conducted at the 3m Chamber only.

For measurements above 1GHz, the bottom side of 3m chamber was installed with absorbers in order to meet SVSWR Limit.

Exploratory measurements were scanned using Peak mode of EMI Test receiver and final measurements were measured with Quasi-Peak mode (Below 1GHz) and Peak & Average mode (Above 1GHz).

The measurements were performed by rotating the EUT 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

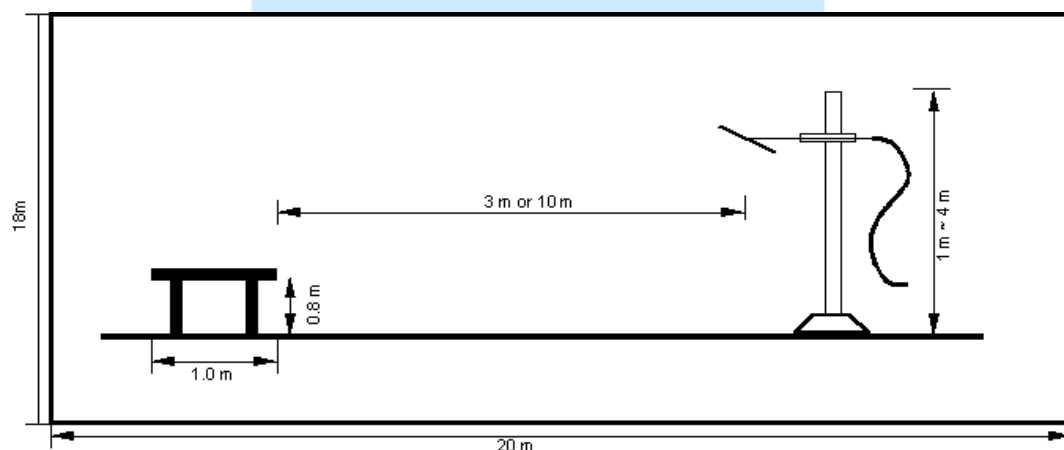


Fig 3. Dimensions of test site (Below 1GHz)


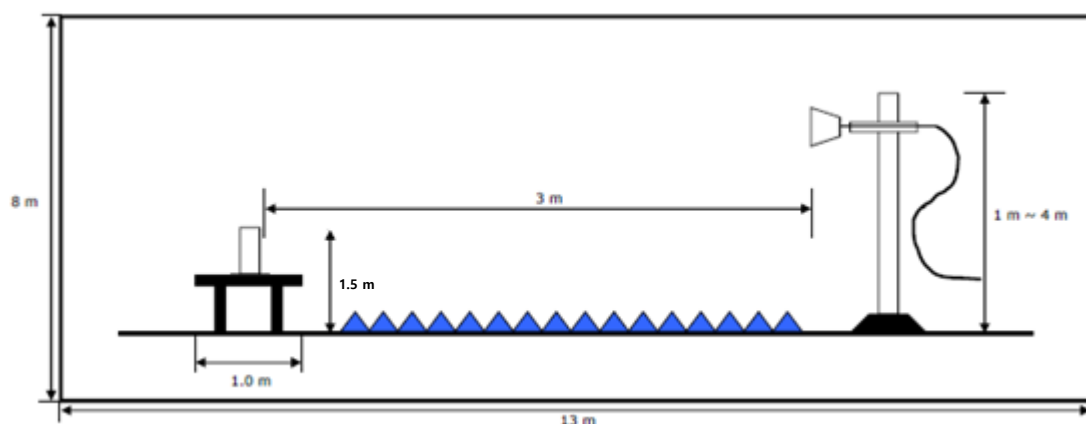


Fig 4. Dimensions of test site (Above 1GHz)



### Conducted Spurious Emission (0.15 MHz to 30 MHz)

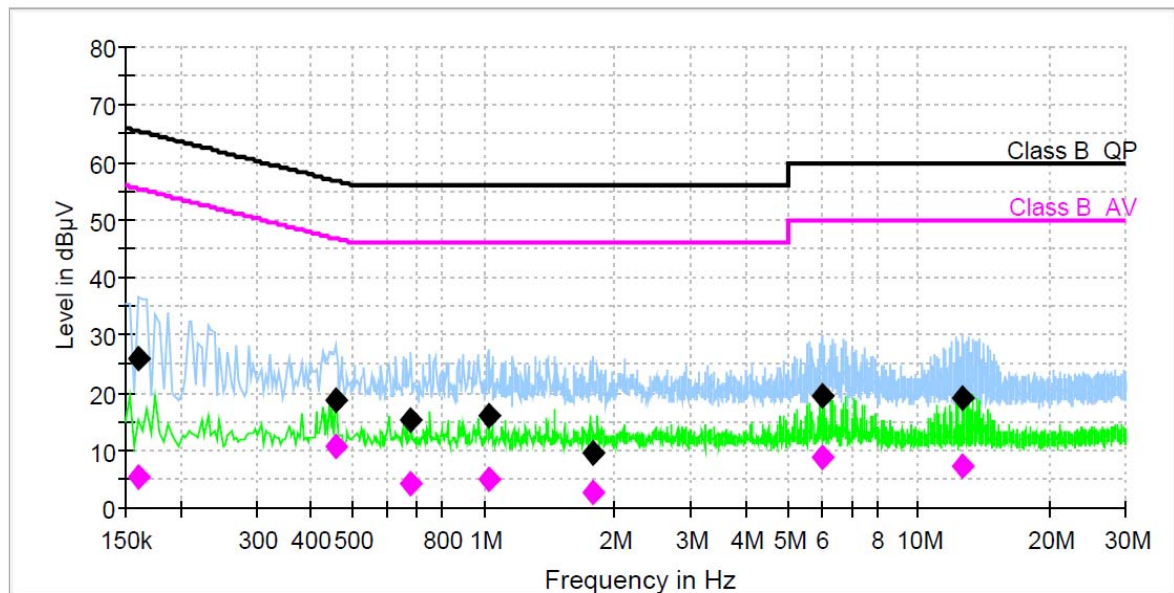

Class B\_QP      Class B\_AV      Preview Result 1-PK+  
Preview Result 2-AVG      Final Result 1-QPK      Final Result 2-CAV

#### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.161194        | 26.1             | 200.0           | 9.000           | Off    | N    | 9.6        | 39.3        | 65.4         |         |
| 0.455963        | 18.8             | 200.0           | 9.000           | Off    | L1   | 9.6        | 37.9        | 56.8         |         |
| 0.679838        | 15.3             | 200.0           | 9.000           | Off    | L1   | 9.7        | 40.7        | 56.0         |         |
| 1.023113        | 16.0             | 200.0           | 9.000           | Off    | L1   | 9.7        | 40.0        | 56.0         |         |
| 1.776825        | 9.4              | 200.0           | 9.000           | Off    | N    | 9.7        | 46.6        | 56.0         |         |
| 5.974481        | 19.3             | 200.0           | 9.000           | Off    | L1   | 9.8        | 40.7        | 60.0         |         |
| 12.638494       | 19.2             | 200.0           | 9.000           | Off    | L1   | 9.9        | 40.8        | 60.0         |         |

#### Final Result 2

| Frequency (MHz) | CAverage (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.161194        | 5.3             | 200.0           | 9.000           | Off    | N    | 9.6        | 50.1        | 55.4         |         |
| 0.455963        | 10.7            | 200.0           | 9.000           | Off    | L1   | 9.6        | 36.1        | 46.8         |         |
| 0.679838        | 4.3             | 200.0           | 9.000           | Off    | L1   | 9.7        | 41.7        | 46.0         |         |
| 1.023113        | 5.1             | 200.0           | 9.000           | Off    | L1   | 9.7        | 40.9        | 46.0         |         |
| 1.776825        | 2.5             | 200.0           | 9.000           | Off    | N    | 9.7        | 43.5        | 46.0         |         |
| 5.974481        | 8.6             | 200.0           | 9.000           | Off    | L1   | 9.8        | 41.4        | 50.0         |         |
| 12.638494       | 7.1             | 200.0           | 9.000           | Off    | L1   | 9.9        | 42.9        | 50.0         |         |



### 15.1 Operating environment

Temperature : 23.4 °C  
Relative humidity : 40.9 % R.H.

### 15.2 Test set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conducting table.

For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane.

For emission measurements above 1 GHz, the table height is 1.5 m.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 15.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

| Test items(Anechoic Chamber)                             | Uncertainty | Remark                                             |
|----------------------------------------------------------|-------------|----------------------------------------------------|
| Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)      | 4.78 dB     | Confidence level of approximately 95 % ( $k = 2$ ) |
| Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)    | 4.77 dB     | Confidence level of approximately 95 % ( $k = 2$ ) |
| Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)   | 5.06 dB     | Confidence level of approximately 95 % ( $k = 2$ ) |
| Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal) | 5.03 dB     | Confidence level of approximately 95 % ( $k = 2$ ) |
| Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m, V/H)      | 5.42 dB     | Confidence level of approximately 95 % ( $k = 2$ ) |
| Radiated emission (6 000 MHz ~ 18 000 MHz, 3 m, V/H)     | 5.64 dB     | Confidence level of approximately 95 % ( $k = 2$ ) |



#### 16.4 Limit

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-------------------|----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2 400/F (kHz)                    | 300                           |
| 0.490 ~ 1.705     | 2 400/F (kHz)                    | 30                            |
| 1.705 ~ 30.0      | 30                               | 30                            |
| 30 ~ 88           | 100                              | 3                             |
| 88 ~ 216          | 150                              | 3                             |
| 216 ~ 960         | 200                              | 3                             |
| Above 960         | 500                              | 3                             |

#### 16.5 Test Equipment used

| Model Name                    | Manufacturer           | Description            | Serial Number | Due to Calibration |
|-------------------------------|------------------------|------------------------|---------------|--------------------|
| ■ - ESU40                     | Rohde & Schwarz        | EMI Test Receiver      | 100266        | Jul. 20, 2017      |
| ■ - HFH2-Z2                   | Rohde & Schwarz        | Loop Antenna           | 100041        | Dec. 21, 2017      |
| ■ - VULB9160                  | Schwarzbeck            | Broadband Test Antenna | 3099          | Aug. 03. 2017      |
| ■ - BBHA9120D                 | Schwarzbeck            | Horn Antenna           | 207           | Oct. 14. 2017      |
| ■ - 3160-09                   | Schwarzbeck            | Horn Antenna           | LM3981        | Oct. 27. 2017      |
| ■ - MCU066                    | maturo GmbH            | Position Controller    | 1390306       | N/A                |
| ■ - TT2.5SI                   | maturo GmbH            | Turntable              | 1390307       | N/A                |
| ■ - AM 4.0                    | maturo GmbH            | Antenna Mast           | 1390308       | N/A                |
| ■ - AFS 44 00101800-25-10P-44 | MITEQ                  | Preamplifier           | 1258943       | Dec. 06. 2017      |
| ■ - SCU-F1826-G47-BZ42-CSS    | BONN Elektronik        | Preamplifier           | 10003         | Dec. 09. 2017      |
| ■ - WHKX3.0/18G-10SS          | WAINWRIGHT INSTRUMENTS | High pass filter       | SN31          | Apr. 19, 2017      |
| ■- EMC 32                     | Rohde & Schwarz        | Testing Software       | VER9.15       | N/A                |



### 16.6 Test data for Radiated Emission

- Test Date : March 08~15, 2017
- Reference Standard : Part 15 Subpart C, Sec. 15.247(d)
- Measuring Distance : 3 m
- Spectrum Resolution : 120 kHz / 1 MHz / 10 Hz / 100 kHz  
Bandwidth(6 dB)
- Detector mode : Peak detector mode / Quasi Peak detector mode
- Power Source : DC 3.0 V
- Note : Through three orthogonal axes were investigated and the worst case is report


### Radiated emission\_Spurious Emission (9 kHz to 30 MHz)

| Frequency<br>(MHz) | Measurement Level         |         |                                  |          |                          |                         |         | Limit<br>(dBμV/m) |         | Margin<br>(dB) |         | Positioning System |        |       |  |
|--------------------|---------------------------|---------|----------------------------------|----------|--------------------------|-------------------------|---------|-------------------|---------|----------------|---------|--------------------|--------|-------|--|
|                    | Reading Value<br>(dBμV/m) |         | AF                               | AMP / CL | Duty Cycle<br>collection | Test Result<br>(dBμV/m) |         |                   |         |                |         | Pol.               | Height | Angle |  |
|                    | Peak                      | Average | (dB/m)                           | (dB)     | (dB)                     | Peak                    | Average | Peak              | Average | Peak           | Average | (H/V)              | (cm)   | (°)   |  |
|                    |                           |         |                                  |          |                          |                         |         |                   |         |                |         |                    |        |       |  |
|                    |                           |         | The emission level was not found |          |                          |                         |         |                   |         |                |         |                    |        |       |  |
|                    |                           |         |                                  |          |                          |                         |         |                   |         |                |         |                    |        |       |  |
|                    |                           |         |                                  |          |                          |                         |         |                   |         |                |         |                    |        |       |  |

**The emission level was not found**



**Radiated emission\_Spurious Emission (30 MHz to 1 000 MHz): Highest channel (2 476 MHz)**

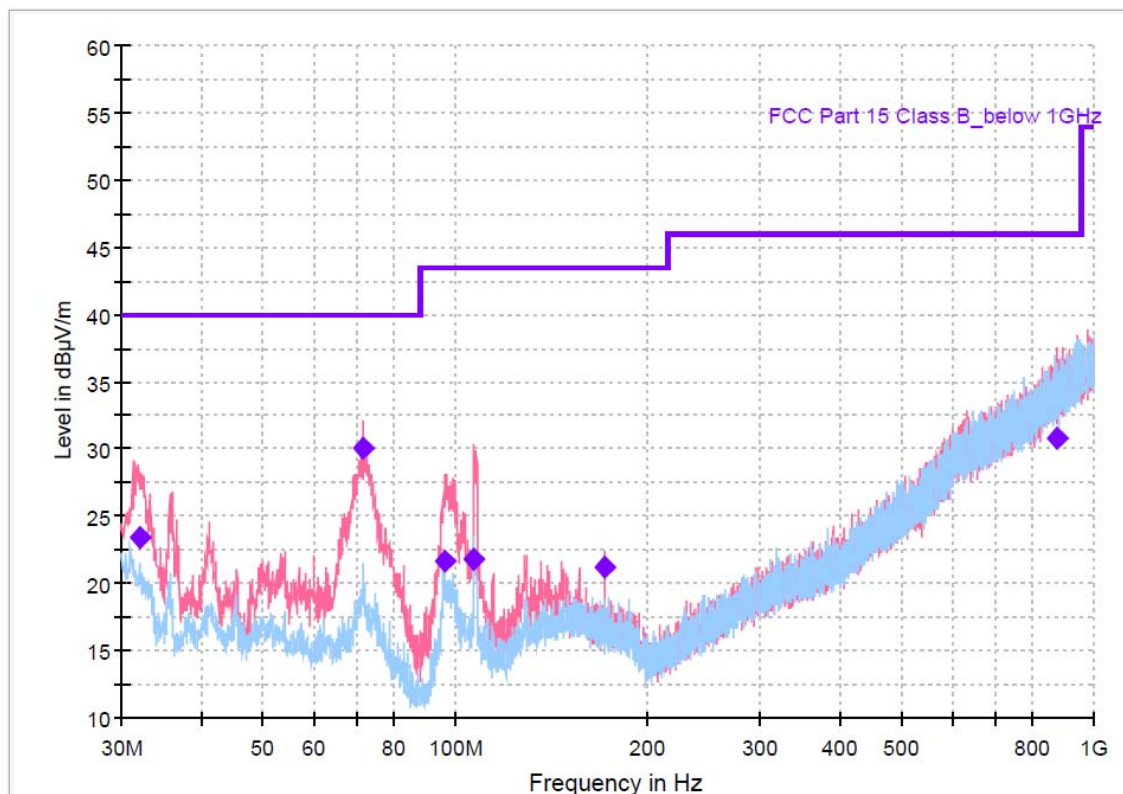

Preview Result 1V-PK+ Preview Result 1H-PK+ Final\_Result QPK  
FCC Part 15 Class B\_below 1GHz


**Final Result**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 32.018750       | 23.42              | 40.00          | 16.58       | 1000.0          | 120.000         | 107.0       | V   | 296.0         | 12.6       |
| 71.588750       | 30.02              | 40.00          | 9.98        | 1000.0          | 120.000         | 175.0       | V   | 218.0         | 11.3       |
| 96.450000       | 21.72              | 43.50          | 21.78       | 1000.0          | 120.000         | 125.0       | V   | 238.0         | 10.6       |
| 106.912500      | 21.78              | 43.50          | 21.72       | 1000.0          | 120.000         | 125.0       | V   | 353.0         | 11.8       |
| 171.841875      | 21.28              | 43.50          | 22.22       | 1000.0          | 120.000         | 125.0       | V   | 6.0           | 14.7       |
| 876.501875      | 30.87              | 46.00          | 15.13       | 1000.0          | 120.000         | 225.0       | V   | 173.0         | 31.2       |



### Radiated emission\_Spurious Emission (1 GHz to 25 GHz): Lowest channel (2 405 MHz)

| Frequency<br>(MHz) | Measurement Level         |         |        |          |                          |                         |         | Limit<br>(dBμV/m) |         | Margin<br>(dB) |         | Positioning System |        |       |
|--------------------|---------------------------|---------|--------|----------|--------------------------|-------------------------|---------|-------------------|---------|----------------|---------|--------------------|--------|-------|
|                    | Reading Value<br>(dBμV/m) |         | AF     | AMP / CL | Duty Cycle<br>collection | Test Result<br>(dBμV/m) |         |                   |         |                |         | Pol.               | Height | Angle |
|                    | Peak                      | Average | (dB/m) | (dB)     | (dB)                     | Peak                    | Average | Peak              | Average | Peak           | Average | (H/V)              | (cm)   | (°)   |
| 1162.31            | 49.38                     | 39.84   | 24.83  | -38.33   | -                        | 35.88                   | 26.34   | 74.00             | 54.00   | 38.12          | 27.66   | H                  | 125    | 260   |
| 2040.74            | 46.18                     | 34.07   | 25.78  | -37.20   | -                        | 34.76                   | 22.65   | 74.00             | 54.00   | 39.24          | 31.35   | H                  | 125    | 290   |
| 2684.93            | 47.33                     | 34.95   | 27.55  | -36.87   | -                        | 38.01                   | 25.63   | 74.00             | 54.00   | 35.99          | 28.37   | H                  | 114    | 5     |
| 2991.73            | 47.02                     | 34.52   | 28.02  | -36.59   | -                        | 38.45                   | 25.95   | 74.00             | 54.00   | 35.55          | 28.05   | H                  | 107    | 25    |
| 4809.40            | 66.88                     | 50.19   | 30.71  | -34.83   | -16.69                   | 62.76                   | 46.07   | 74.00             | 54.00   | 11.24          | 7.93    | V                  | 135    | 81    |
| 9622.50            | 6.00                      | 30.69   | 38.24  | -34.10   | -16.69                   | 51.52                   | 34.83   | 74.00             | 54.00   | 22.48          | 19.17   | H                  | 175    | 45    |

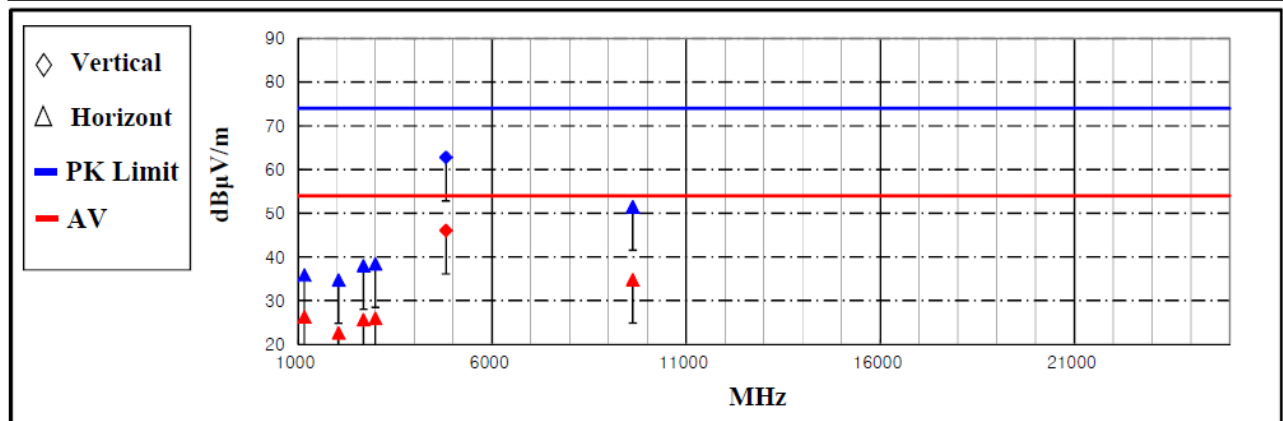

Note:

Emission level (dBμV/m) = 20 log × Emission level (μV/m).

Corrected reading: Reading Value + (AF + AMP/CL) = Test result

※ AF : Antenna factor, AMP/CL : preamplifier gain + cable loss + High pass filter(if use)


Duty cycle collection (dB) : 20log(dwell time / 100ms or T) dB = -16.69 dB

Pol.: H(Horizontal), V(Vertical)



**Radiated emission\_Spurious Emission (1 GHz to 25 GHz): Middle channel (2 450 MHz)**

| Frequency<br>(MHz) | Measurement Level         |         |        |          |                          |                         |         | Limit<br>(dBμV/m) |         | Margin<br>(dB) |         | Positioning System |        |       |
|--------------------|---------------------------|---------|--------|----------|--------------------------|-------------------------|---------|-------------------|---------|----------------|---------|--------------------|--------|-------|
|                    | Reading Value<br>(dBμV/m) |         | AF     | AMP / CL | Duty Cycle<br>collection | Test Result<br>(dBμV/m) |         |                   |         |                |         | Pol.               | Height | Angle |
|                    | Peak                      | Average | (dB/m) | (dB)     | (dB)                     | Peak                    | Average | Peak              | Average | Peak           | Average | (H/V)              | (cm)   | (°)   |
| 1162.30            | 49.38                     | 40.35   | 24.83  | -38.33   | -                        | 35.88                   | 26.85   | 74.00             | 54.00   | 38.12          | 27.15   | H                  | 131    | 250   |
| 1985.35            | 47.71                     | 35.47   | 25.63  | -37.33   | -                        | 36.01                   | 23.77   | 74.00             | 54.00   | 37.99          | 30.23   | V                  | 135    | 111   |
| 2514.47            | 50.49                     | 38.08   | 27.29  | -37.00   | -                        | 40.78                   | 28.37   | 74.00             | 54.00   | 33.22          | 25.63   | V                  | 154    | 300   |
| 2939.61            | 47.22                     | 34.35   | 27.94  | -36.59   | -                        | 38.57                   | 25.70   | 74.00             | 54.00   | 35.43          | 28.30   | H                  | 175    | 302   |
| 4901.40            | 66.54                     | 49.85   | 30.84  | -34.50   | -16.69                   | 62.88                   | 46.19   | 74.00             | 54.00   | 11.12          | 7.81    | V                  | 138    | 97    |
| 9798.60            | 52.50                     | 35.81   | 38.41  | -34.10   | -16.69                   | 56.81                   | 40.12   | 74.00             | 54.00   | 17.19          | 13.88   | V                  | 109    | 97    |

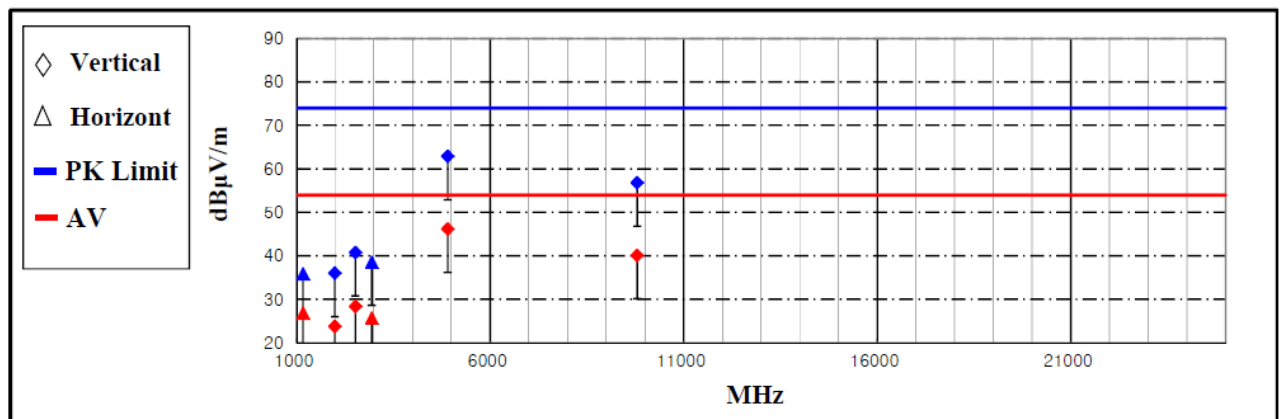

Note:

Emission level (dBμV/m) = 20 log × Emission level (μV/m).

Corrected reading: Reading Value + (AF + AMP/CL) = Test result

※ AF : Antenna factor, AMP/CL : preamplifier gain + cable loss + High pass filter(if use)


Duty cycle collection (dB) : 20log(dwell time / 100ms or T) dB = -16.69 dB

Pol.: H(Horizontal), V(Vertical)



**Radiated emission\_Spurious Emission (1 GHz to 25 GHz): Highest channel (2 476 MHz)**

| Frequency<br>(MHz) | Measurement Level         |         |        |          |                          |                         |         | Limit<br>(dBμV/m) |         | Margin<br>(dB) |         | Positioning System |        |       |
|--------------------|---------------------------|---------|--------|----------|--------------------------|-------------------------|---------|-------------------|---------|----------------|---------|--------------------|--------|-------|
|                    | Reading Value<br>(dBμV/m) |         | AF     | AMP / CL | Duty Cycle<br>collection | Test Result<br>(dBμV/m) |         |                   |         |                |         | Pol.               | Height | Angle |
|                    | Peak                      | Average | (dB/m) | (dB)     | (dB)                     | Peak                    | Average | Peak              | Average | Peak           | Average | (H/V)              | (cm)   | (°)   |
| 1162.11            | 49.21                     | 39.56   | 24.83  | -38.33   | -                        | 35.71                   | 26.06   | 74.00             | 54.00   | 38.29          | 27.94   | H                  | 169    | 261   |
| 2035.05            | 46.91                     | 34.17   | 25.76  | -37.20   | -                        | 35.47                   | 22.73   | 74.00             | 54.00   | 38.53          | 31.27   | H                  | 175    | 73    |
| 2508.72            | 49.97                     | 37.15   | 27.28  | -36.97   | -                        | 40.28                   | 27.46   | 74.00             | 54.00   | 33.72          | 26.54   | H                  | 175    | 301   |
| 2914.18            | 47.35                     | 34.33   | 27.90  | -36.59   | -                        | 38.66                   | 25.64   | 74.00             | 54.00   | 35.34          | 28.36   | H                  | 120    | 94    |
| 4951.30            | 62.38                     | 45.69   | 30.91  | -34.50   | -16.69                   | 58.79                   | 42.10   | 74.00             | 54.00   | 15.21          | 11.90   | H                  | 154    | 291   |
| 9906.50            | 53.42                     | 36.73   | 38.51  | -34.10   | -16.69                   | 57.83                   | 41.14   | 74.00             | 54.00   | 16.17          | 12.86   | V                  | 106    | 325   |

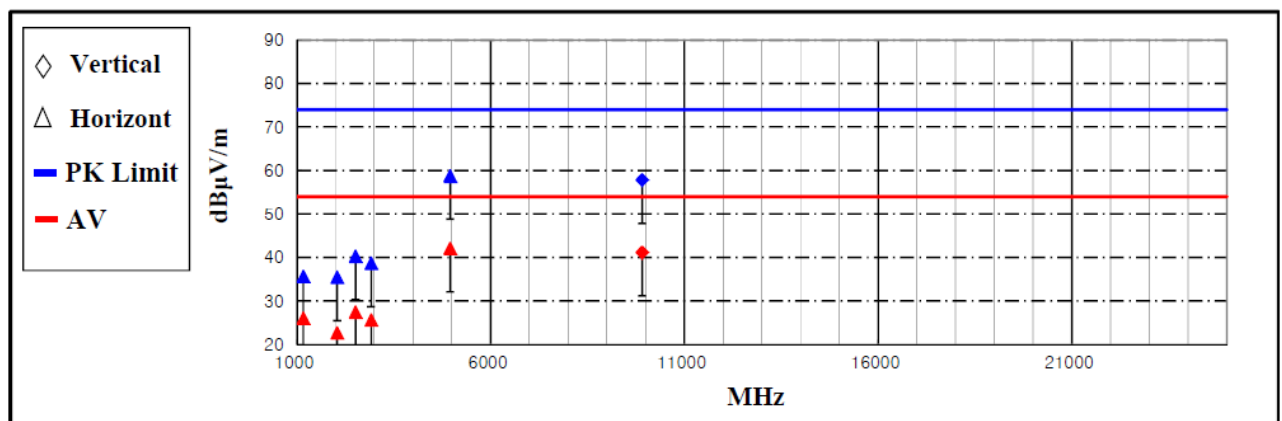

Note:

Emission level (dBμV/m) = 20 log × Emission level (μV/m).

Corrected reading: Reading Value + (AF + AMP/CL) = Test result

※ AF : Antenna factor, AMP/CL : preamplifier gain + cable loss + High pass filter(if use)

Duty cycle collection (dB) : 20log(dwelling time / 100ms or T) dB = -16.69 dB

Pol.: H(Horizontal), V(Vertical)



## Result of radiated emission (Band Edge)

Lowest channel (2 405 MHz)

| Frequency<br>(MHz) | Measurement Level         |         |       |          |                          |                         |       | Limit<br>(dBμV/m) |       | Margin<br>(dB) |       | Positioning System |        |       |
|--------------------|---------------------------|---------|-------|----------|--------------------------|-------------------------|-------|-------------------|-------|----------------|-------|--------------------|--------|-------|
|                    | Reading Value<br>(dBμV/m) |         | AF    | AMP / CL | Duty Cycle<br>collection | Test Result<br>(dBμV/m) |       |                   |       |                |       | Pol.               | Height | Angle |
|                    | Peak                      | Average |       |          |                          | (dB/m)                  | (dB)  | (dB)              | Peak  | Average        | Peak  |                    |        |       |
| 2389.10            | 58.02                     | 41.33   | 26.91 | -36.99   | -16.69                   | 47.94                   | 31.25 | 74.00             | 54.00 | 26.06          | 22.75 | H                  | 144    | 316   |

Highest channel (2 476 MHz)

| Frequency<br>(MHz) | Measurement Level         |         |        |          |                          |                         | Limit<br>(dBμV/m) |       | Margin<br>(dB) |       | Positioning System |        |       |     |
|--------------------|---------------------------|---------|--------|----------|--------------------------|-------------------------|-------------------|-------|----------------|-------|--------------------|--------|-------|-----|
|                    | Reading Value<br>(dBμV/m) |         | AF     | AMP / CL | Duty Cycle<br>collection | Test Result<br>(dBμV/m) |                   |       |                |       | Pol.               | Height | Angle |     |
|                    | Peak                      | Average | (dB/m) | (dB)     | (dB)                     | Peak                    | Average           | Peak  | Average        | (H/V) | (cm)               | (°)    |       |     |
| 2483.65            | 56.58                     | 40.58   | 27.21  | -36.95   | -16.69                   | 46.84                   | 30.84             | 74.00 | 54.00          | 27.16 | 23.16              | V      | 106   | 217 |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBμV/m) = 20 log Emission level (μV/m).

Corrected reading: Reading Value + (AF + AMP/CL) = Test result

※ AF : Antenna factor, AMP/CL : preamplifier gain + cable loss

Duty cycle collection (dB) : 20log(dwell time / 100ms or T) dB = -16.69 dB

Pol.: H(Horizontal), V(Vertical)



## 17. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

### 17.1 Example 1 :

#### ■ 20.3 MHz

|                                      |                                                           |
|--------------------------------------|-----------------------------------------------------------|
| Class B Limit                        | = 250 $\mu\text{V}$ = 48 dB $\mu\text{V}$                 |
| Reading                              | = 39.2 dB $\mu\text{V}$                                   |
| $10^{(39.2\text{dB}\mu\text{V}/20)}$ | = 91.2 $\mu\text{V}$                                      |
| Margin                               | = 48 dB $\mu\text{V}$ - 39.2 dB $\mu\text{V}$<br>= 8.8 dB |

### 17.2 Example 2 :

#### ■ 66.7 MHz

|                             |                                                                               |
|-----------------------------|-------------------------------------------------------------------------------|
| Class B Limit               | = 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$                 |
| Reading                     | = 31.0 dB $\mu\text{V}$                                                       |
| Antenna Factor + Cable Loss | = 5.8 dB                                                                      |
| Total                       | = 36.8 dB $\mu\text{V}/\text{m}$                                              |
| Margin                      | = 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$<br>= 3.2 dB |



## 18. Recommendation & Conclusion

The data collected shows that the **LG Electronics USA DUST RF MODULE (Model Name: EAT63613801)** was complies with §15.247 of the FCC Rules.

- The end -

