

8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

Not Applicable

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4 Test Results

AC Line Conducted Emissions (Graph) = Modulation : GFSK

Results of Conducted Emission

DTNC


Date : 2016-05-05

Order No. :
Model No. : LGSBWAC72
Serial No. :
Test Condition : EDR 3-DH5

Reference No. :
Power Supply :
Temp/Humi. : 24 'C 44 % R.H.
Operator : D.H.KANG

Memo : Bluetooth

LIMIT : FCC P15.207 QP
FCC P15.207 AV

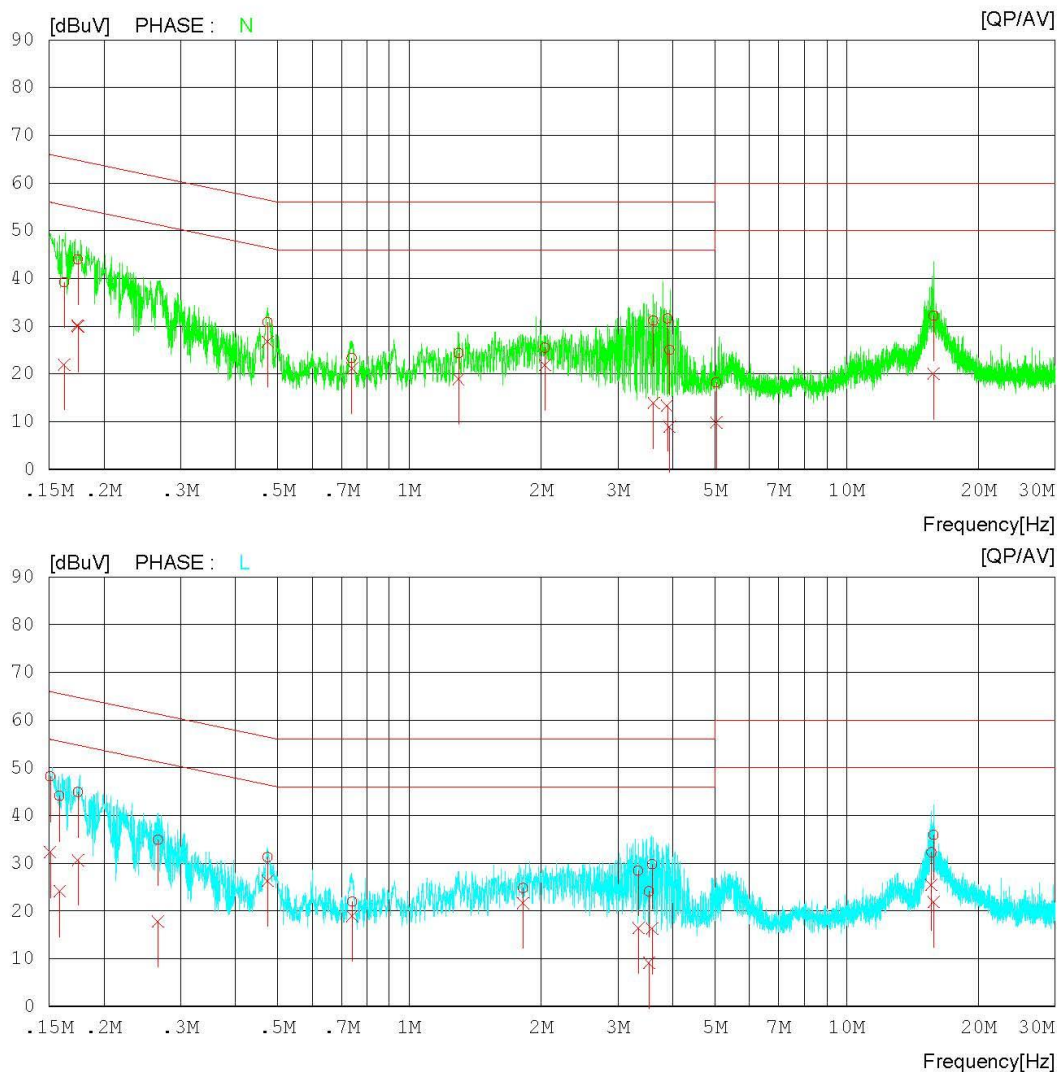

AC Line Conducted Emissions (List) = Modulation : GFSK

Results of Conducted Emission

DTNC

Date : 2016-05-05

Order No. :
 Model No. : LGSBWAC72
 Serial No. :
 Test Condition : EDR 3-DH5

Reference No. :
 Power Supply :
 Temp/Humi. : 24'C 44 % R.H.
 Operator : D.H.KANG

Memo : Bluetooth

LIMIT : FCC P15.207 QP
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16224	29.1	11.8	10.1	39.2	21.9	65.3	55.3	26.1	33.4	N
2	0.17438	33.9	20.1	10.1	44.0	30.2	64.7	54.7	20.7	24.5	N
3	0.17467	33.9	19.8	10.1	44.0	29.9	64.7	54.7	20.7	24.8	N
4	0.47463	20.7	16.6	10.1	30.8	26.7	56.4	46.4	25.6	19.7	N
5	0.73859	13.1	11.1	10.1	23.2	21.2	56.0	46.0	32.8	24.8	N
6	1.29640	14.1	8.7	10.2	24.3	18.9	56.0	46.0	31.7	27.1	N
7	2.04340	15.3	11.6	10.2	25.5	21.8	56.0	46.0	30.5	24.2	N
8	3.61480	20.9	3.7	10.2	31.1	13.9	56.0	46.0	24.9	32.1	N
9	3.88800	21.4	3.1	10.2	31.6	13.3	56.0	46.0	24.4	32.7	N
10	3.93120	14.8	-1.3	10.2	25.0	8.9	56.0	46.0	31.0	37.1	N
11	5.03580	7.9	-0.5	10.3	18.2	9.8	60.0	50.0	41.8	40.2	N
12	15.81740	21.6	9.4	10.6	32.2	20.0	60.0	50.0	27.8	30.0	N
13	0.15068	38.0	22.2	10.1	48.1	32.3	66.0	56.0	17.9	23.7	L
14	0.15850	33.9	14.0	10.1	44.0	24.1	65.5	55.5	21.5	31.4	L
15	0.17466	34.8	20.5	10.1	44.9	30.6	64.7	54.7	19.8	24.1	L
16	0.26616	24.7	7.6	10.1	34.8	17.7	61.2	51.2	26.4	33.5	L
17	0.47388	21.1	16.1	10.1	31.2	26.2	56.4	46.4	25.2	20.2	L
18	0.73969	11.7	8.8	10.1	21.8	18.9	56.0	46.0	34.2	27.1	L
19	1.81920	14.6	11.4	10.2	24.8	21.6	56.0	46.0	31.2	24.4	L
20	3.34000	18.2	6.2	10.2	28.4	16.4	56.0	46.0	27.6	29.6	L
21	3.59120	19.5	6.1	10.2	29.7	16.3	56.0	46.0	26.3	29.7	L
22	3.53240	13.8	-1.1	10.2	24.0	9.1	56.0	46.0	32.0	36.9	L
23	15.63700	21.4	14.6	10.8	32.2	25.4	60.0	50.0	27.8	24.6	L
24	15.82180	25.1	11.0	10.8	35.9	21.8	60.0	50.0	24.1	28.2	L

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: **Comply**

The internal antenna employs a unique antenna connector.

- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

10. Occupied Bandwidth (99 %)

10.1 Test Setup

Refer to the APPENDIX I.

10.2 Limit

Limit : Not Applicable

10.3 Test Procedure



The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately $3 \times \text{RBW}$.

Spectrum analyzer plots are included on the following pages.

10.4 Test Results


Test Mode	Tested Channel	Test Results (MHz)
<u>GFSK</u>	Lowest	0.900
	Middle	0.899
	Highest	0.903
<u>$\pi/4$DQPSK</u>	Lowest	1.187
	Middle	1.187
	Highest	1.187
<u>8DPSK</u>	Lowest	1.188
	Middle	1.187
	Highest	1.188

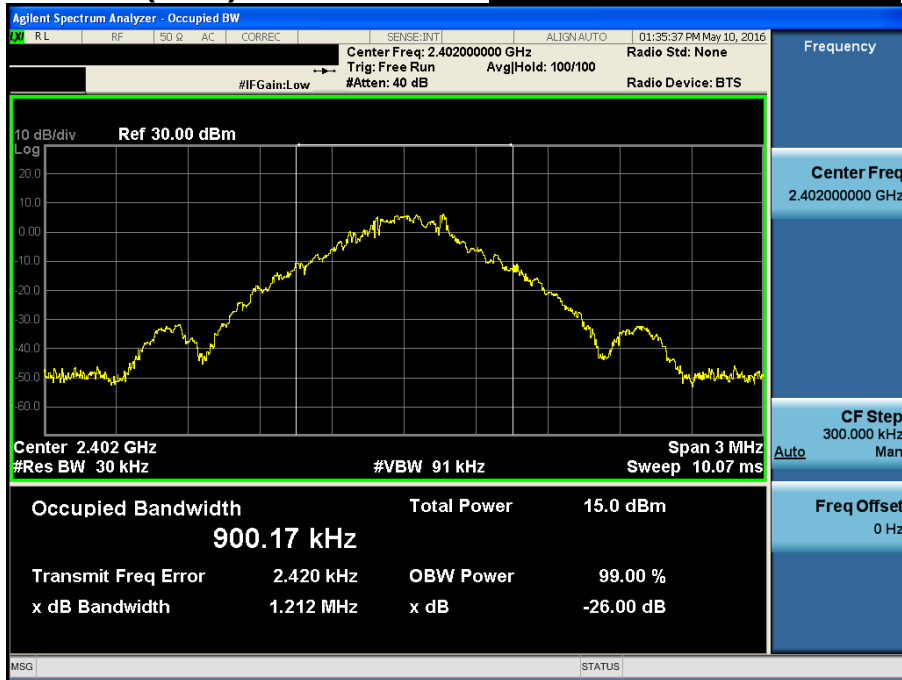
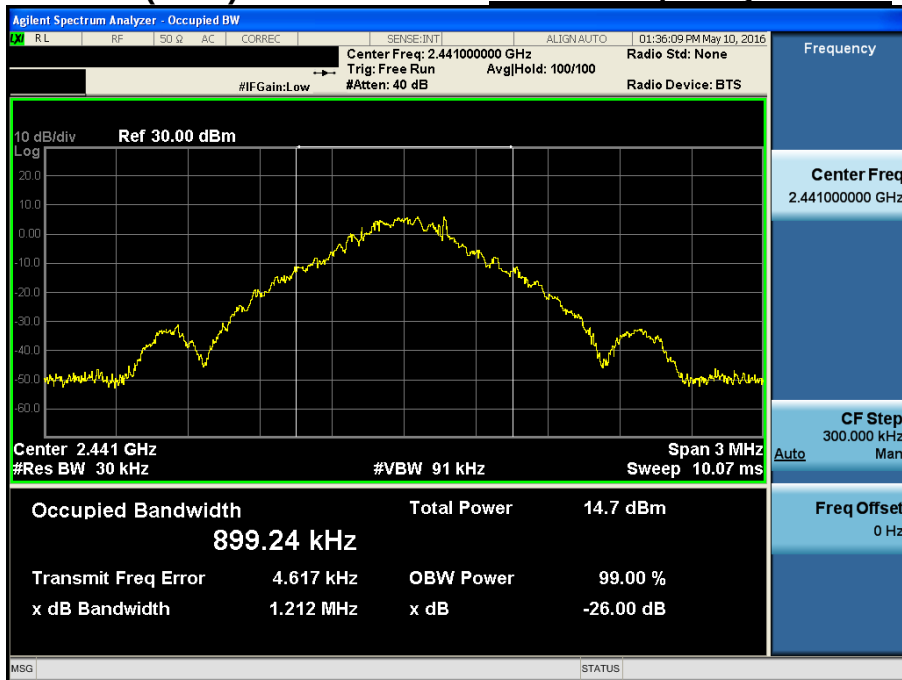
Occupied Bandwidth (99 %)***Lowest Frequency & GFSK*****Occupied Bandwidth (99 %)*****Middle Frequency & GFSK***



Occupied Bandwidth (99 %)

Highest Frequency & GFSK

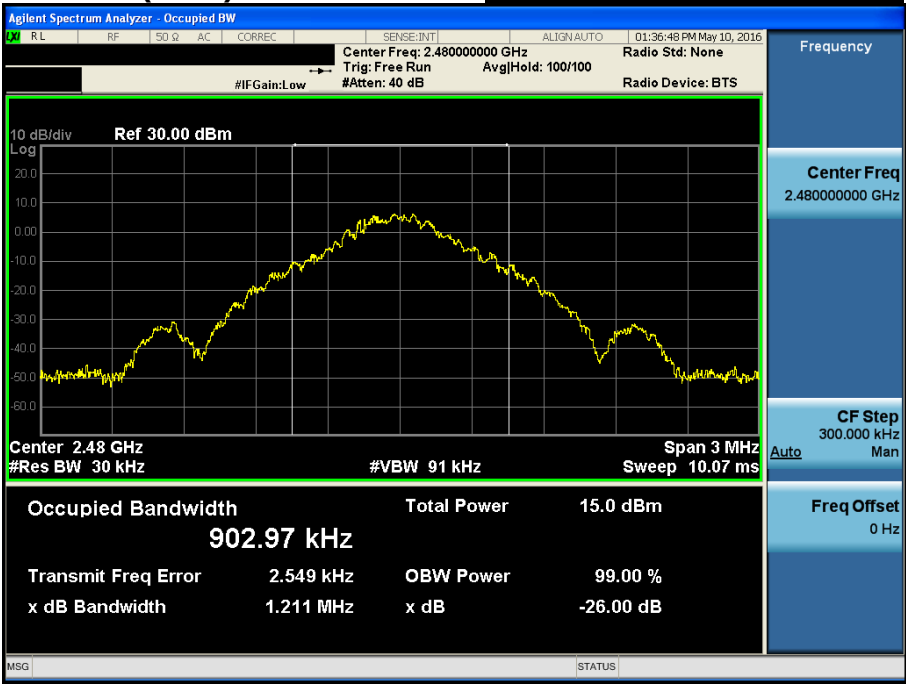


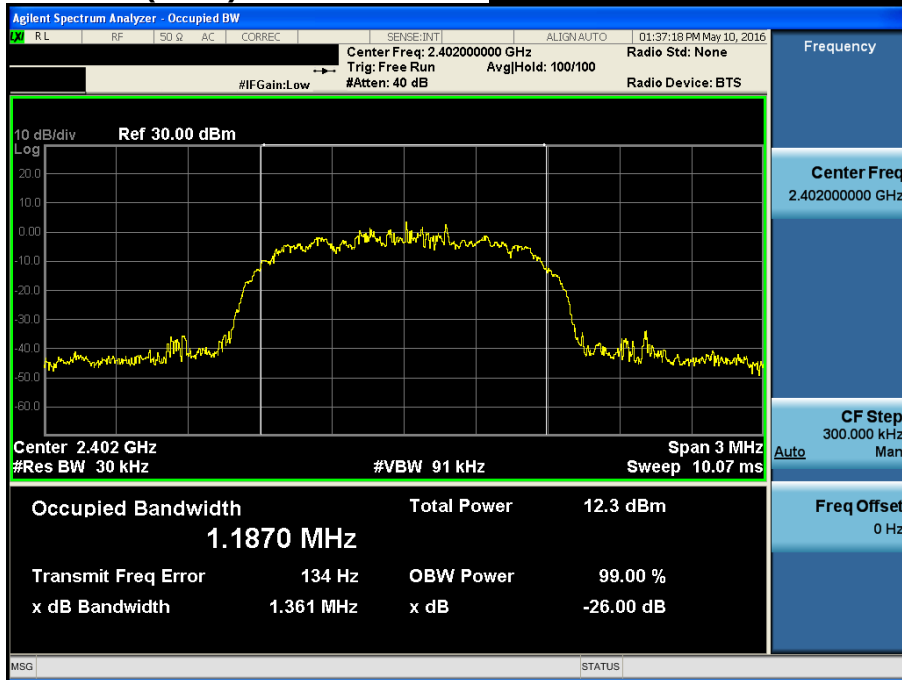
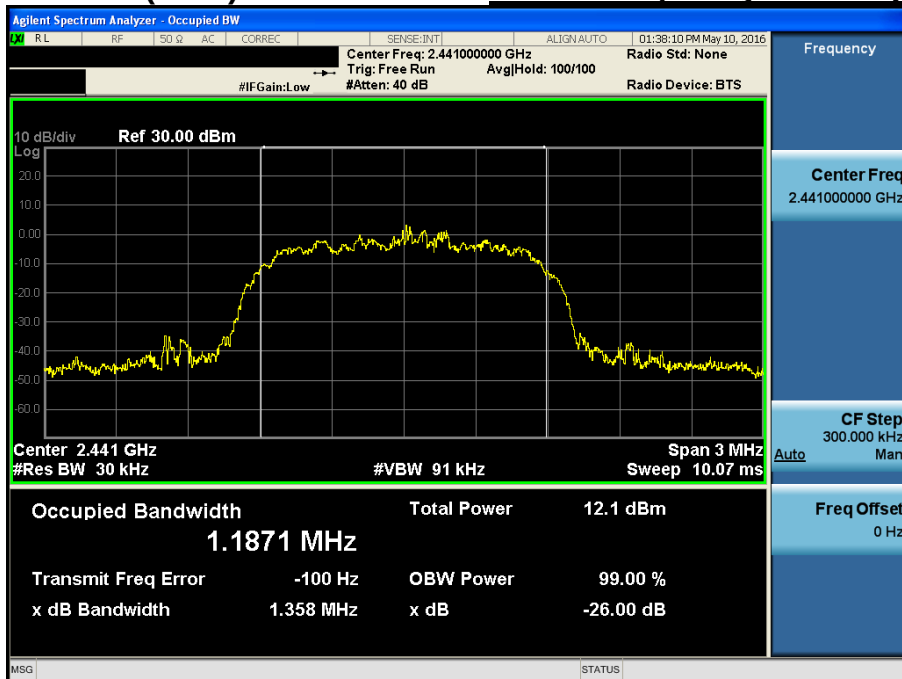
Occupied Bandwidth (99 %)***Lowest Frequency & $\pi/4$ DQPSK*****Occupied Bandwidth (99 %)*****Middle Frequency & $\pi/4$ DQPSK***



Occupied Bandwidth (99 %)

Highest Frequency & $\pi/4$ DQPSK

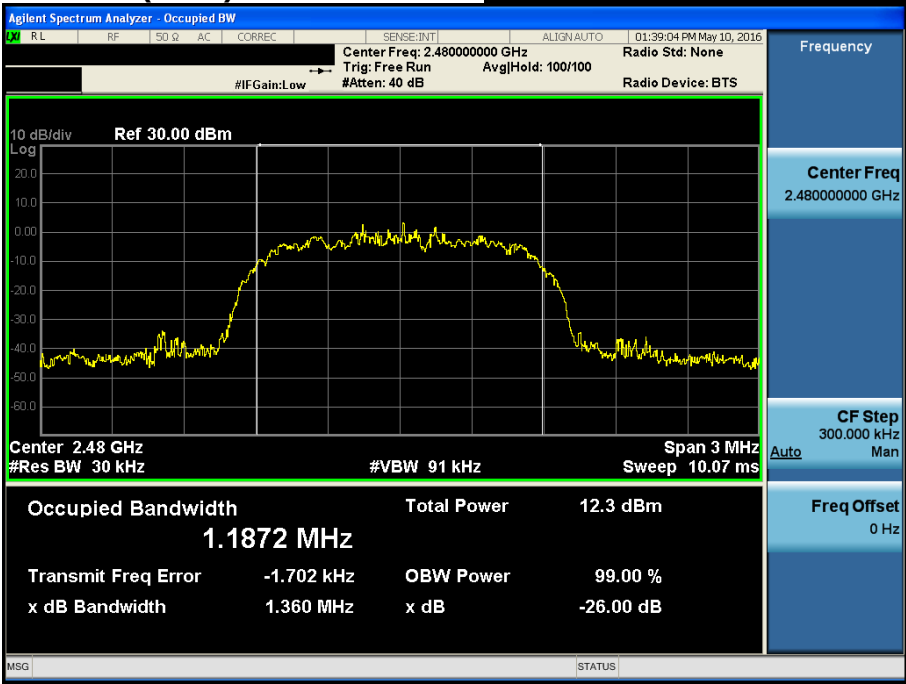


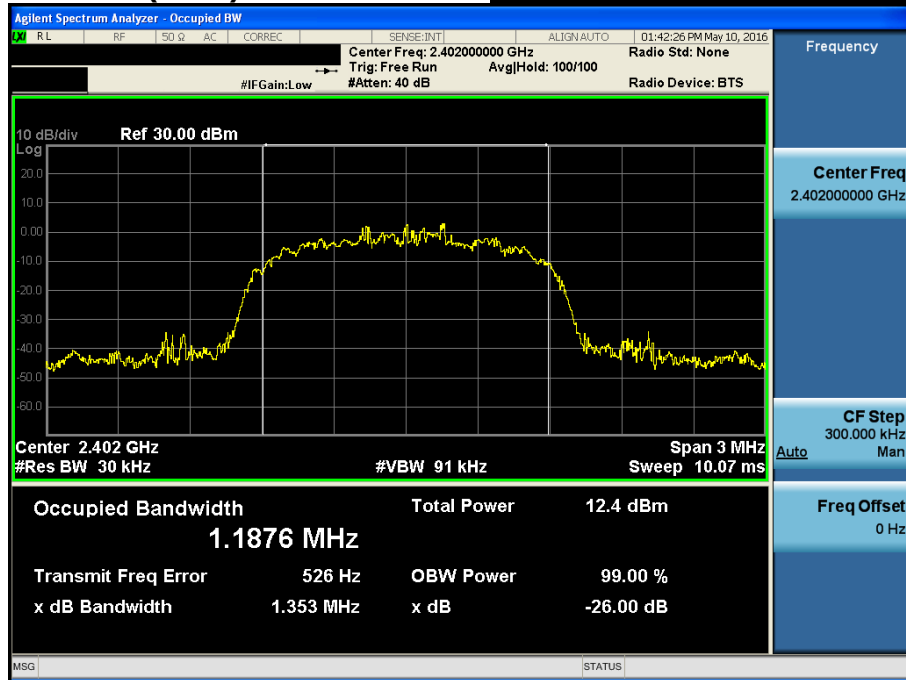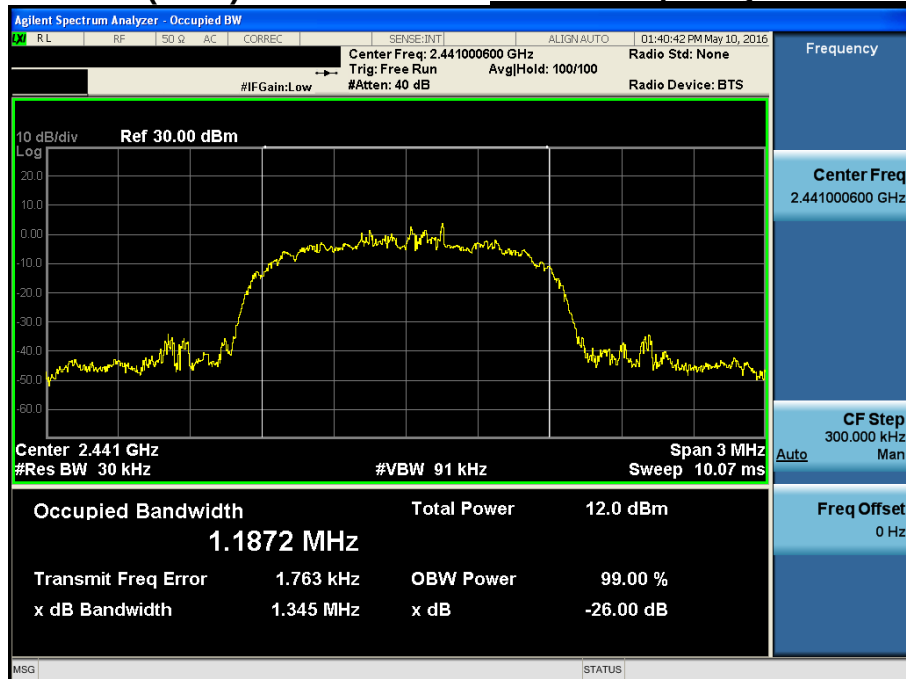Occupied Bandwidth (99 %)***Lowest Frequency & 8DPSK*****Occupied Bandwidth (99 %)*****Middle Frequency & 8DPSK***



Occupied Bandwidth (99 %)


Highest Frequency & 8DPSK

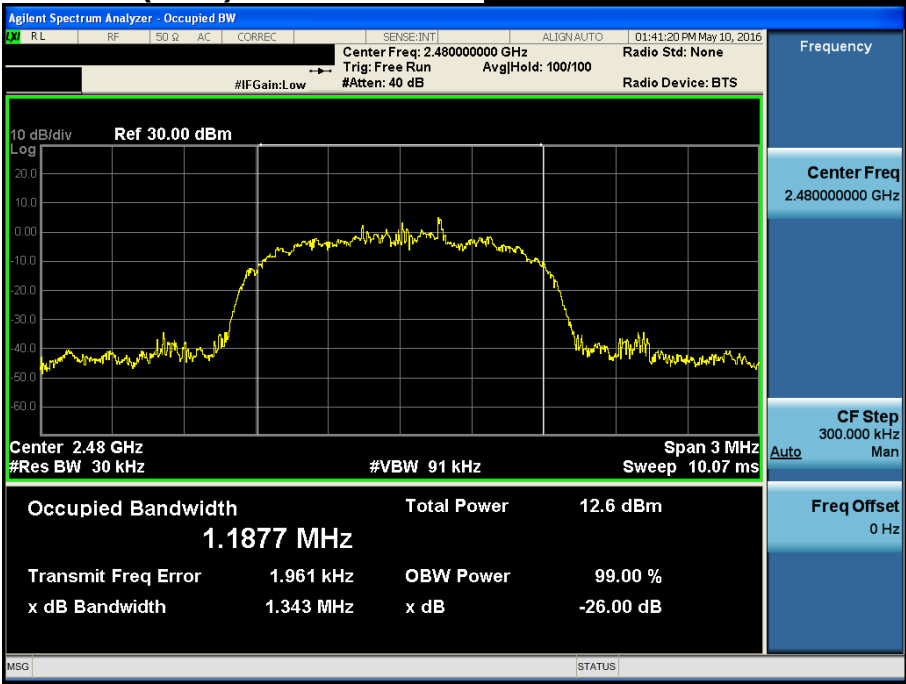


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

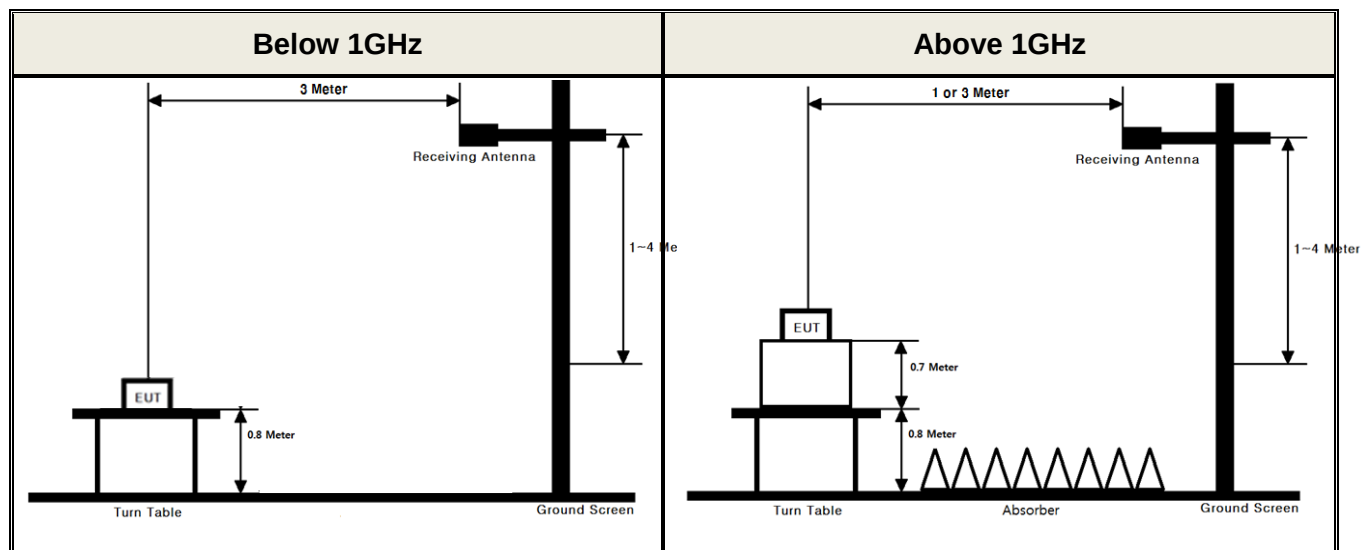

▪ Conducted Measurement

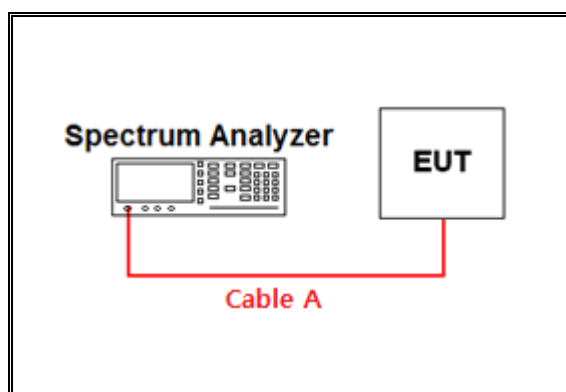

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	0.27	15	4.24
1	1.14	20	5.16
2402 & 2440 & 2480	1.76	25	6.69
5	3.65	-	-
10	3.61	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.


Path loss (S/A's Correction factor) = Cable A

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest & Y & Ver

Detector Mode : PK

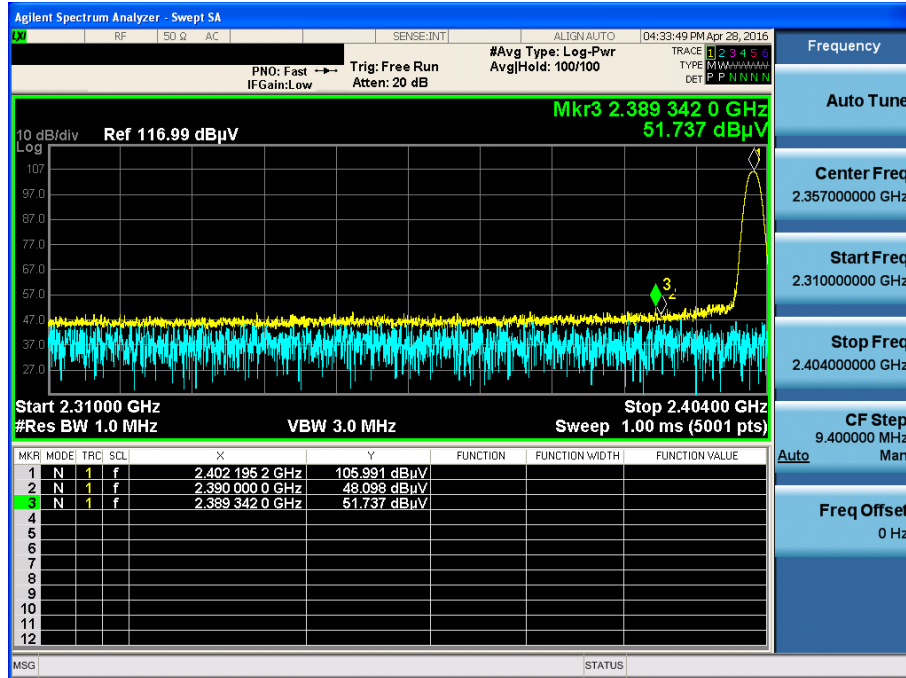

GFSK & Lowest & Y & Ver


Detector Mode : AV

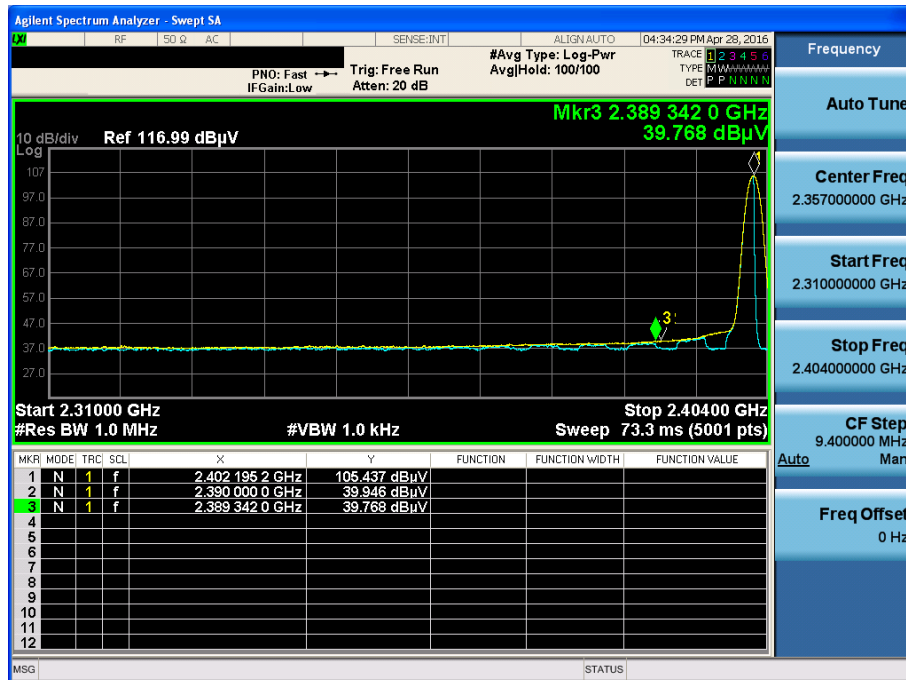




GFSK & Highest & Y & Ver

Detector Mode : PK

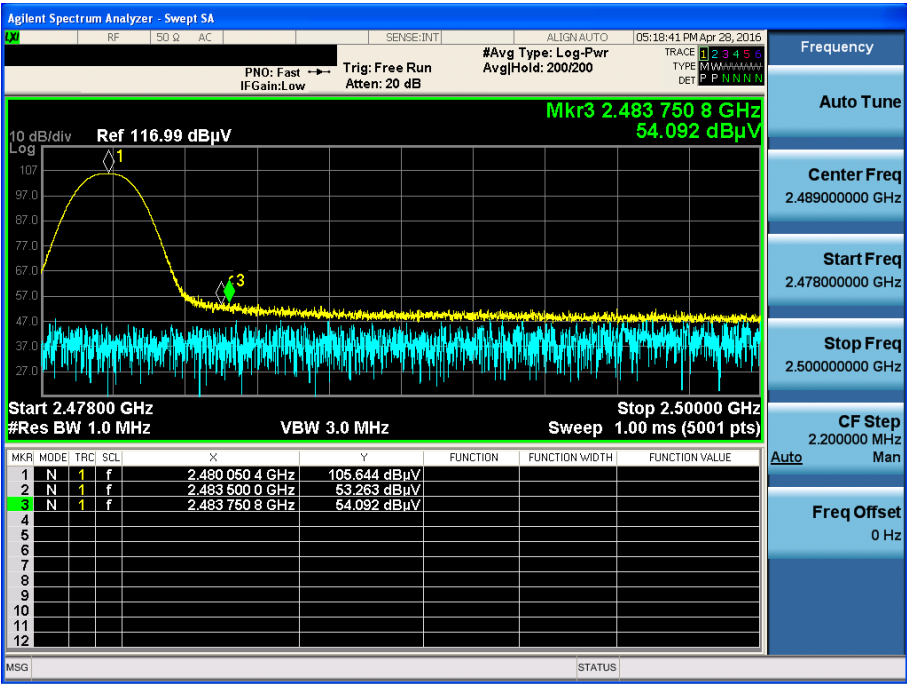


GFSK & Highest & Y & Ver

Detector Mode : AV

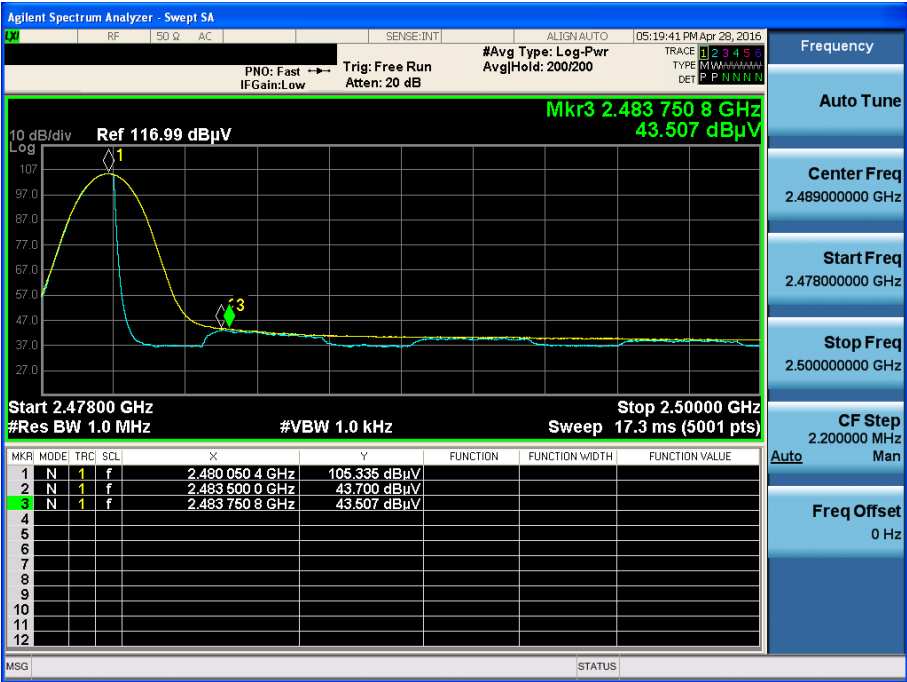


π /4DQPSK & Lowest & Y & Ver

Detector Mode : PK

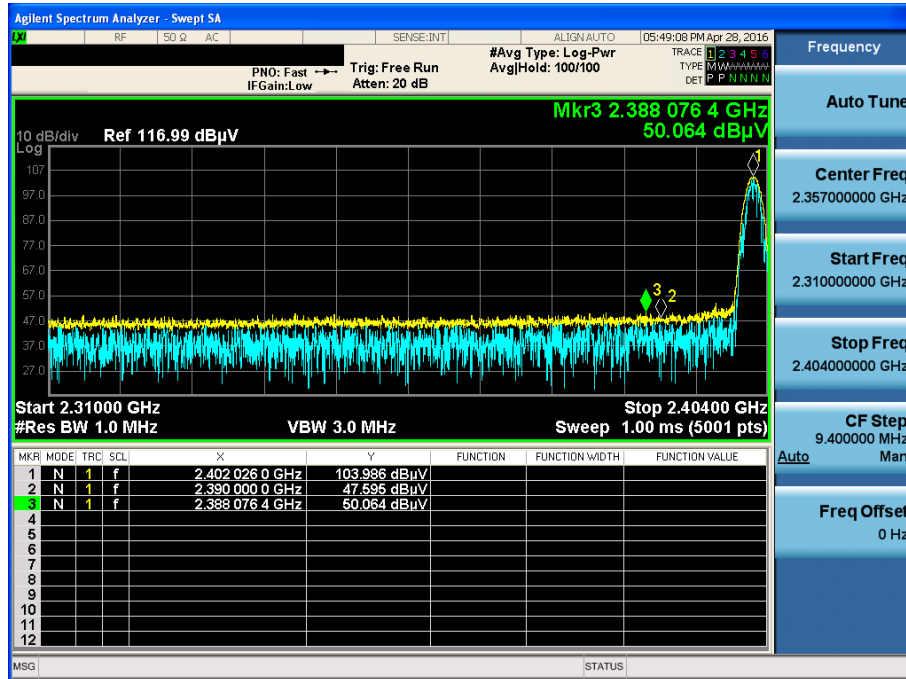
 π /4DQPSK & Lowest & Y & Ver

Detector Mode : AV

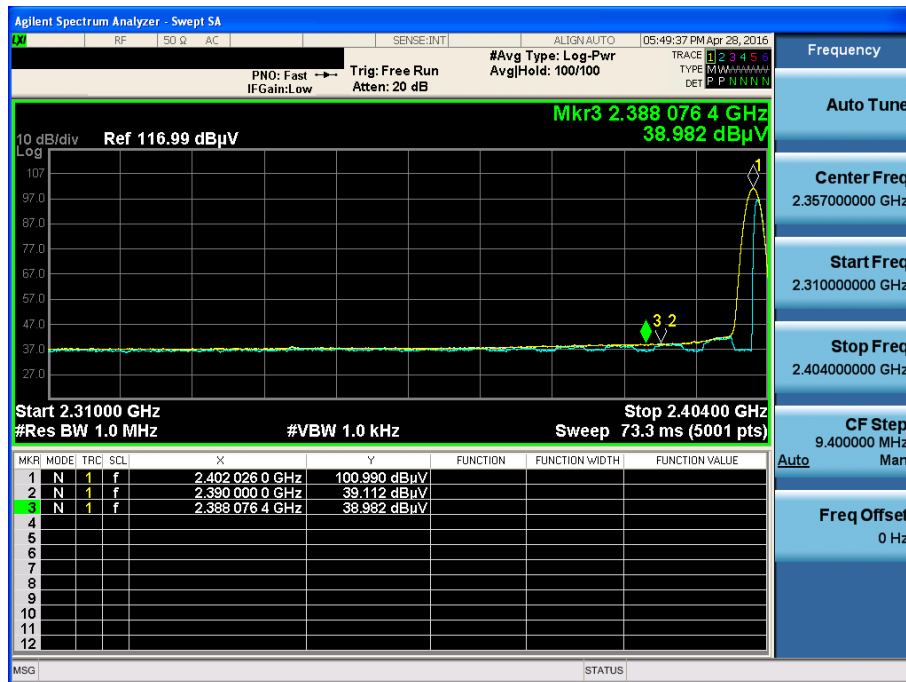


π /4DQPSK & Highest & Y & Ver

Detector Mode : PK

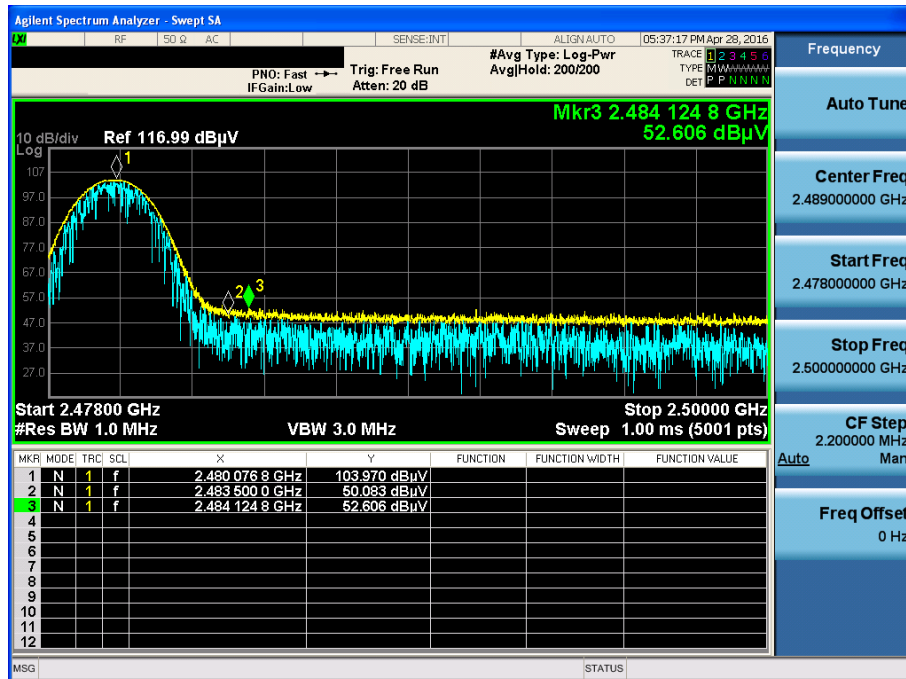
 π /4DQPSK & Highest & Y & Ver

Detector Mode : AV

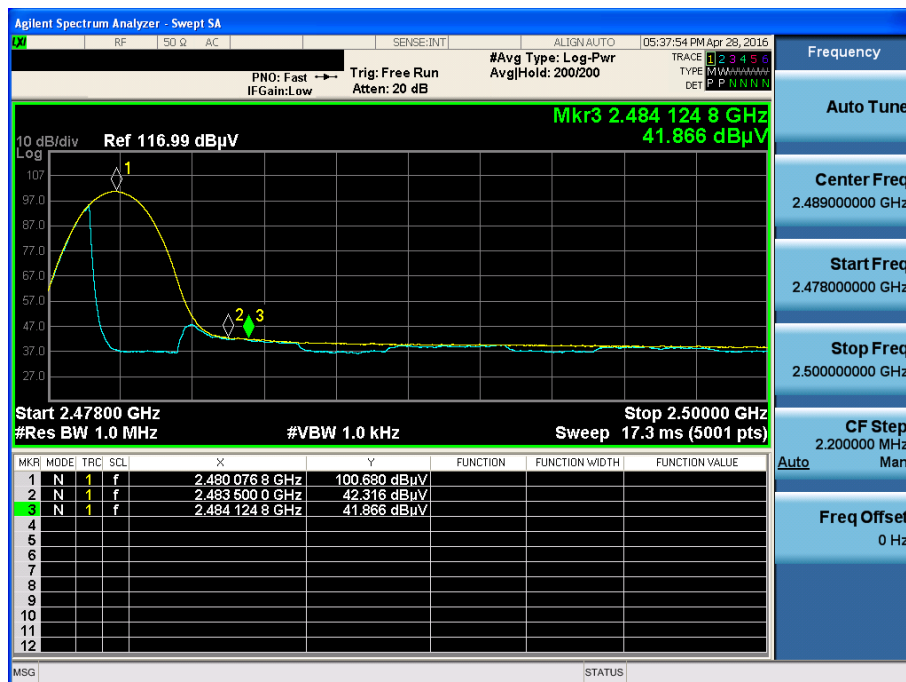


8DPSK & Lowest & Y & Ver

Detector Mode : PK

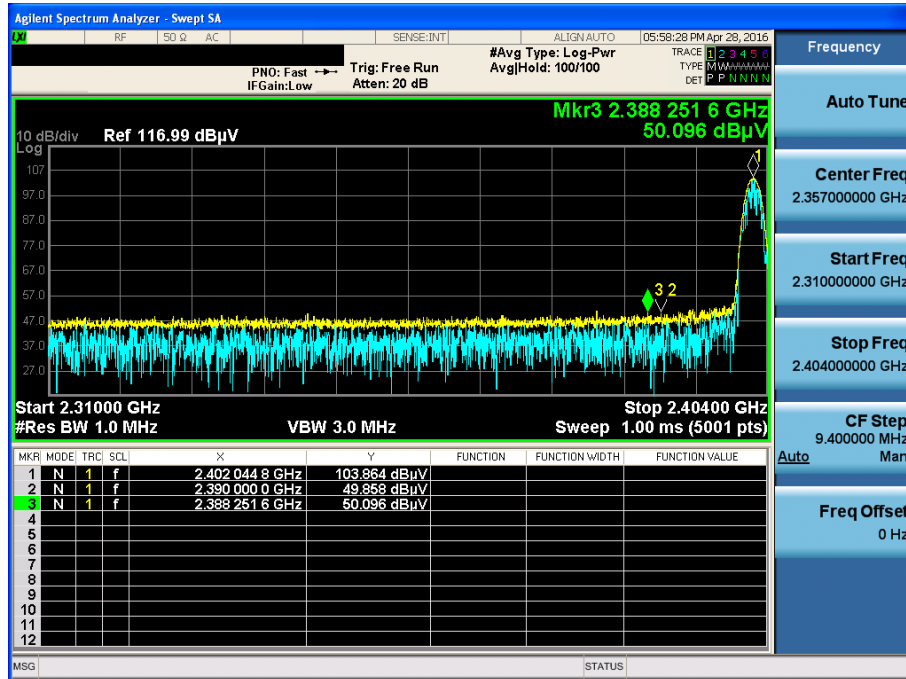


8DPSK & Lowest & Y & Ver

Detector Mode : AV

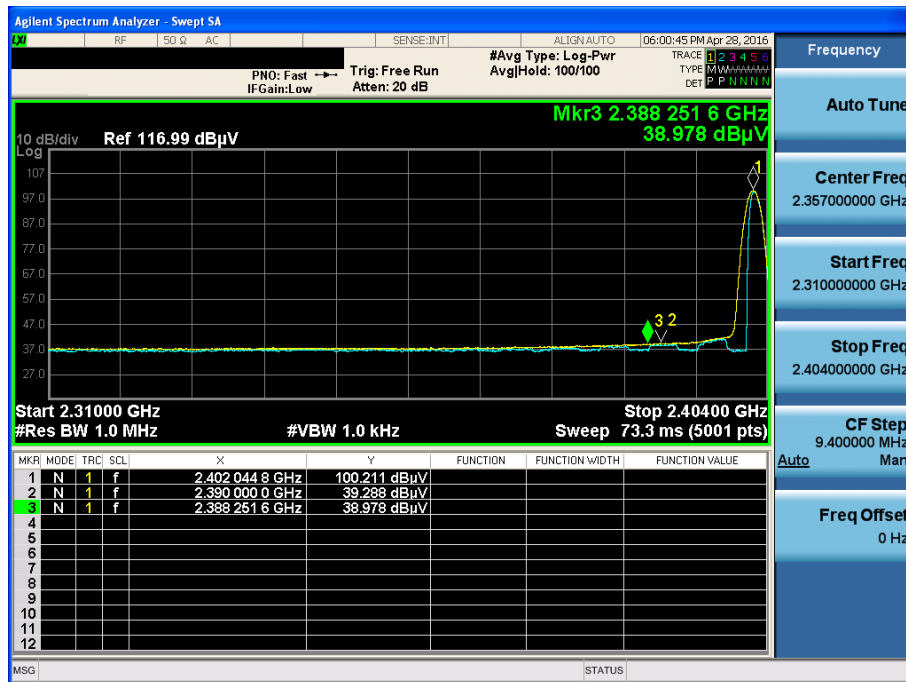


8DPSK & Highest & Y & Ver

Detector Mode : PK

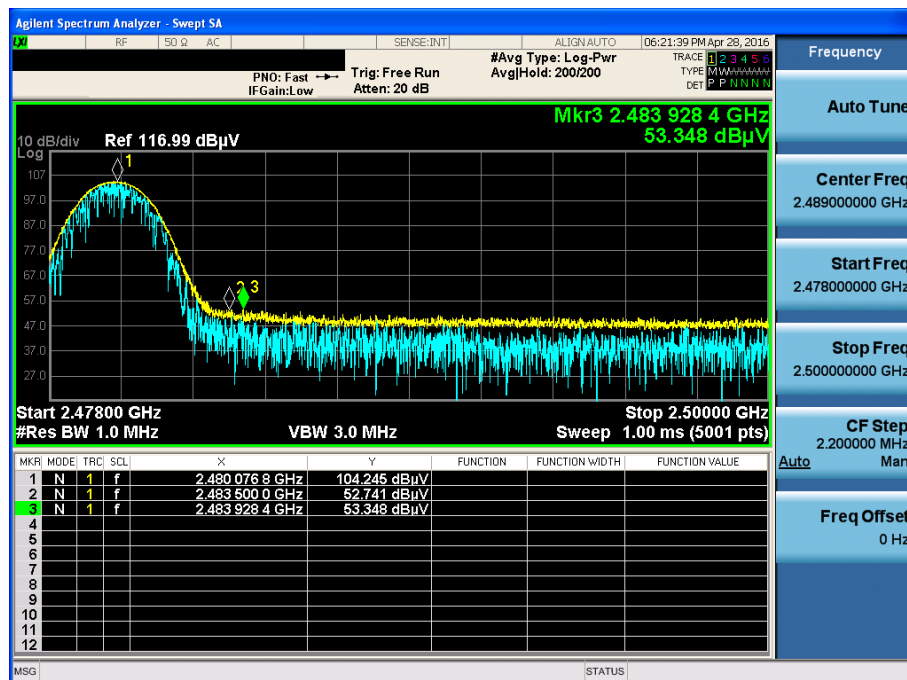


8DPSK & Highest & Y & Ver

Detector Mode : AV

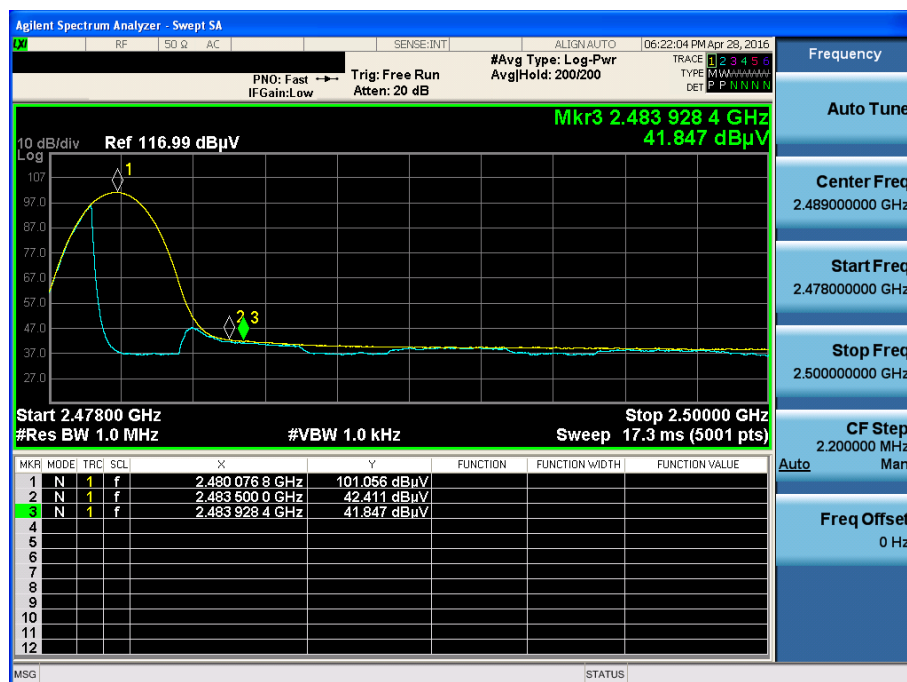


GFSK & Lowest & X & Hor

Detector Mode : PK

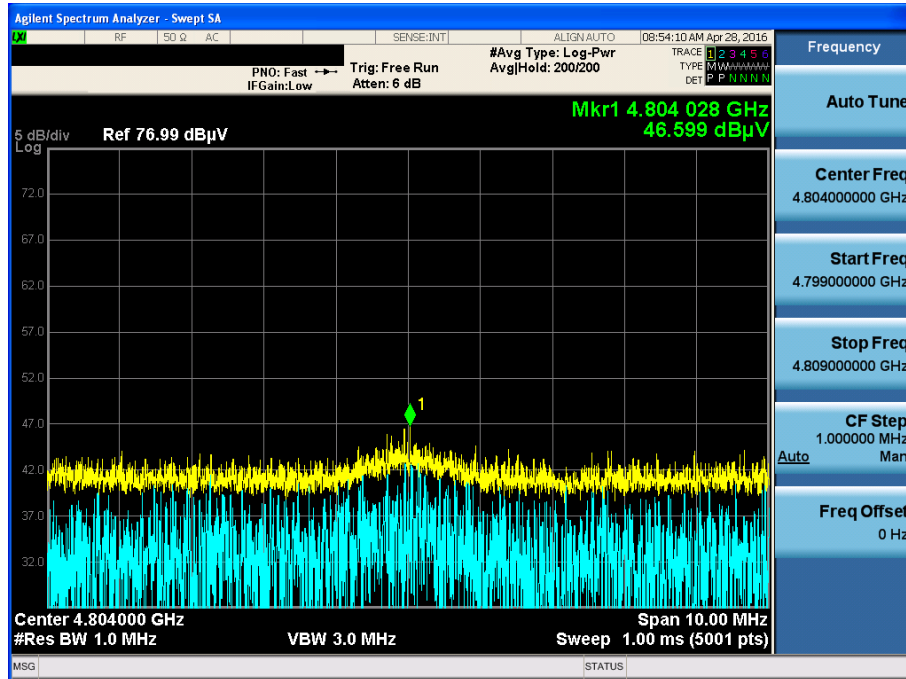


GFSK & Lowest & X & Hor

Detector Mode : AV

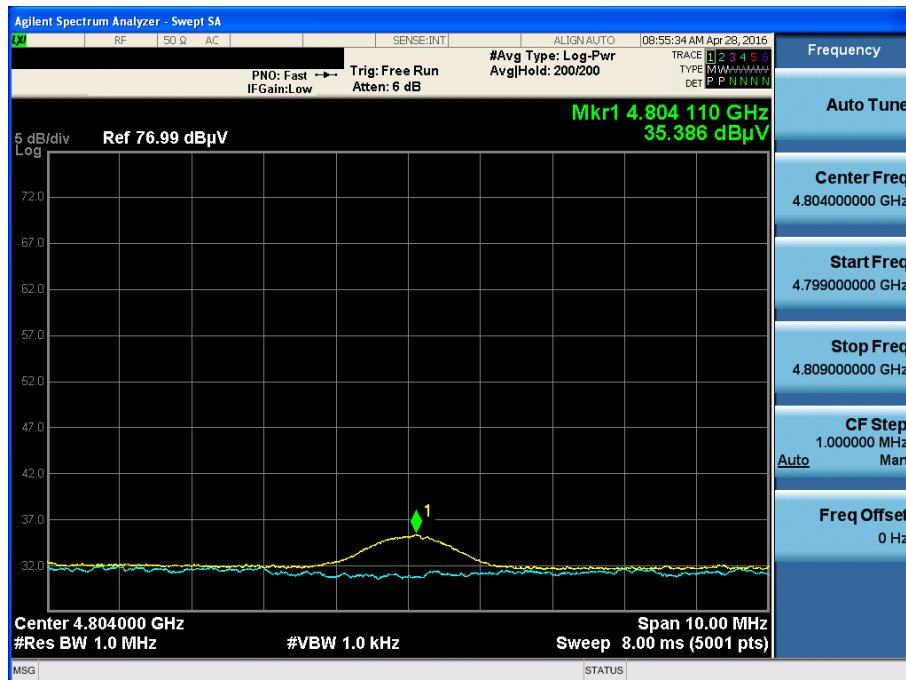


π /4DQPSK & Middle & X & Hor

Detector Mode : PK

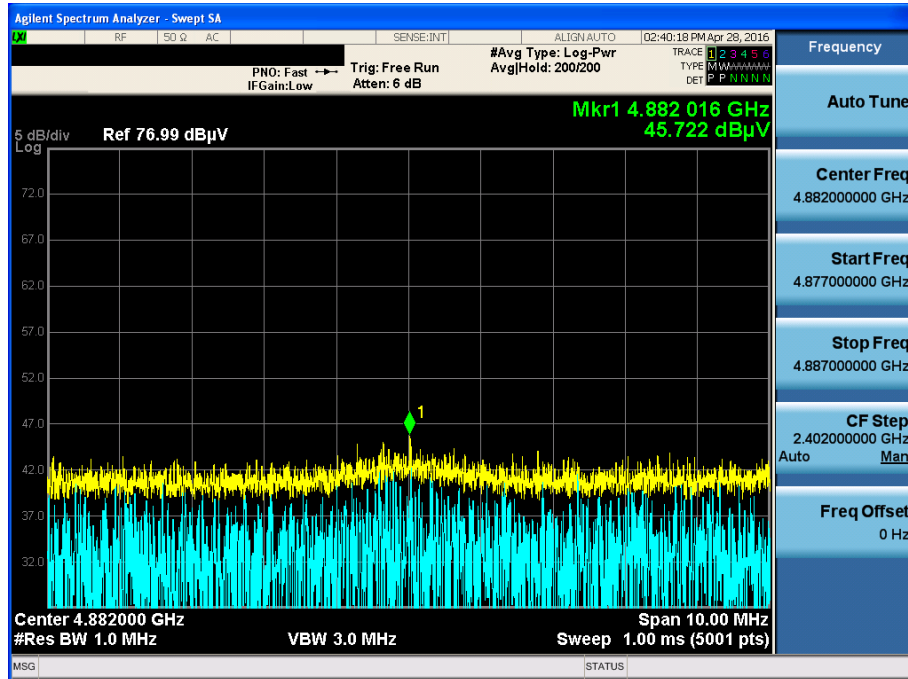
 π /4DQPSK & Middle & X & Hor

Detector Mode : AV

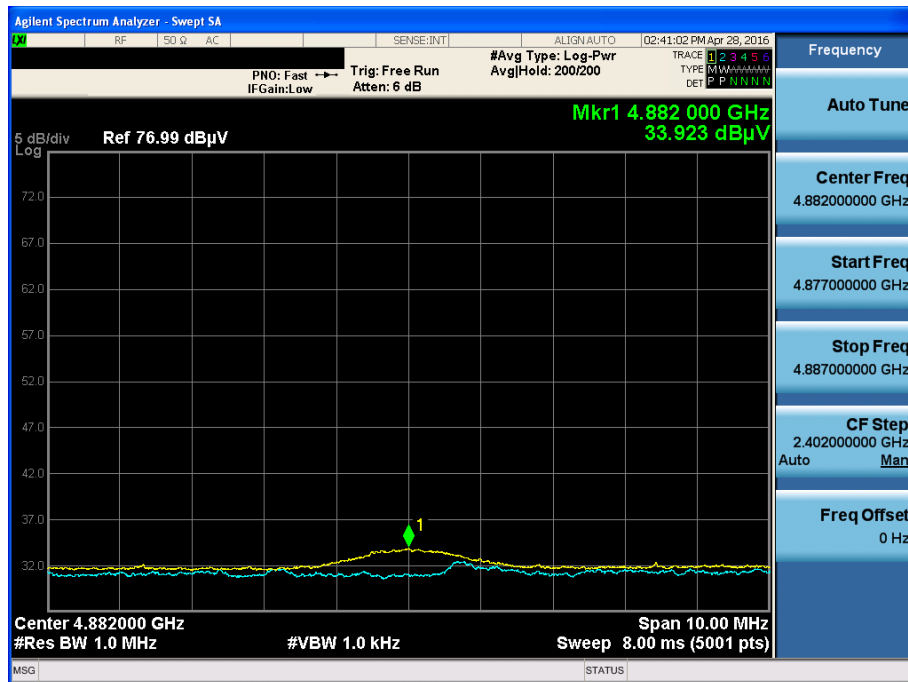

8DPSK & Middle & X & Hor

Detector Mode : PK

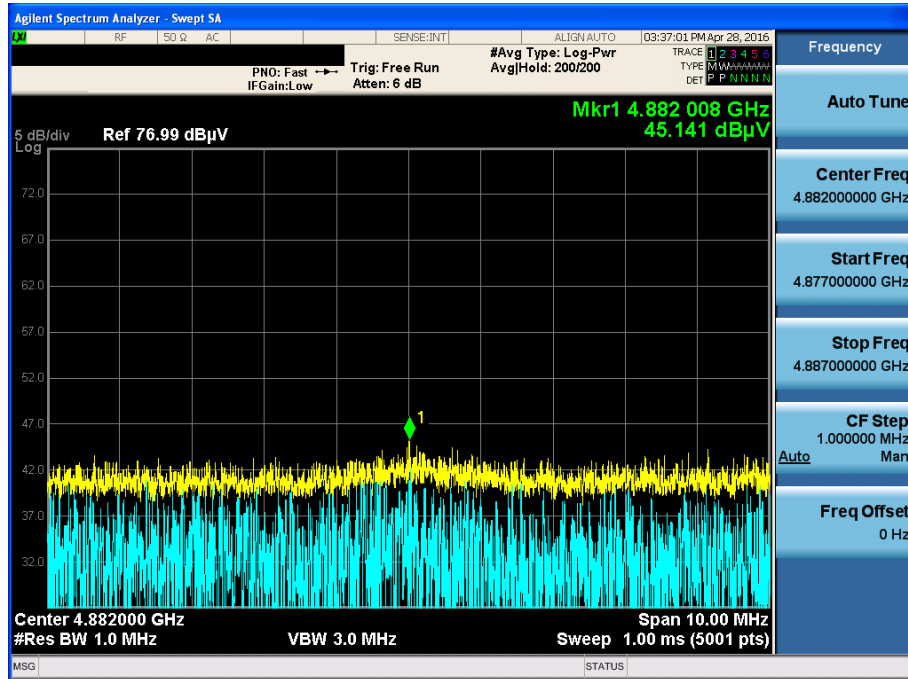

8DPSK & Middle & X & Hor

Detector Mode : AV

