

SPECIFICATIONS

PRODUCT NAME : WiFi Dual Band & BT Antenna

MODEL NAME : LGSBWAC92 Ant.

The information contained herein is the exclusive property of LG Innotek and shall not be distributed, reproduced or disclosed in whole or no in part without prior written permission of LG Innotek.

Designed	Checked	Approved	LG Innotek Co., Ltd.	
Y.U.Jeong				
2017.04.02	-		DOCUMENT No.	2018RF-LGE001
			PAGE	10

REG. DATE : 2018.04.02

SPECIFICATION
MODEL NAME : LGE DBDC (LGIT)

REV.NO : 1.0

REV. DATE : 2018.04.02

PAGE : 1 / 10

Change History of Revision

Revision	Date	Contents of Revision Change	Remark
1.0	2018.04.02	Wi-Fi & BT ANT Spec	Y.U.Jeong

REG. DATE : 2018.04.02

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2018.04.02

MODEL NAME : LGE DBDC (**LGIT**)

PAGE : 2 / 10

Table of Contents

No	Description	Page
1	ANT Features	3
2	Antenna Characteristics	4
	2.1 Network Data	5
	2.2 Efficiency	6
	2.3 Radiation Pattern	7
3	ANT Test Condition	7
4	ANT Dimension	8

REG. DATE : 2018.04.02

SPECIFICATION

REV.NO : 1.0

REV. DATE : 2018.04.02

MODEL NAME : LGE DBDC (LGIT)

PAGE : 3 / 10

1. ANT Features

- Dual Bands Wi-Fi & BT ANT
- Main Frequency: 2.45GHz, 5.5GHz
- Frequency range
: From 2.40 to 2.50GHz, 5GHz~6GHz
- Operating temperature range
: -35 to +95°C (typ.)
- Wi-Fi ANT Material : Metal press + Printed of FR-4
- BT ANT material : Printed of FR-4

2. Antenna Characteristics

- Dual Band ANT0

Antenna Performance				
Parameter	Min	Typ	Max	Unit
Frequency Range	2400	2450	2500	MHz
	5000	5500	6000	MHz
Directivity	-	Omni	-	-
Full Bands Average Gain	-	-2.5	-	dBi
Full Bands Peak Gain		-	1.5	
V.S.W.R	3:1	-	-	Under
Isolation			-10	dB under
Impedance		50		Ohm
Radiation Material		Metal		

REG. DATE : 2018.04.02

SPECIFICATION
MODEL NAME : LGE DBDC (LGIT)

REV.NO : 1.0

REV. DATE : 2018.04.02

PAGE : 4 / 10

- Dual Band ANT1

Antenna Performance				
Parameter	Min	Typ	Max	Unit
Frequency Range	2400	2450	2500	MHz
	5000	5500	6000	MHz
Directivity	-	Omni	-	-
Full Bands Average Gain	-	-2.44	-	dBi
Full Bands Peak Gain		-	1.5	
V.S.W.R	3:1	-	-	Under
Isolation			-10	dB under
Impedance		50		Ohm
Radiation Material		Metal		

- BT ANT

Antenna Performance				
Parameter	Min	Typ	Max	Unit
Frequency Range	2400	2450	2500	MHz
Directivity	-	Omni	-	-
Full Bands Average Gain	-	-3.52	-	dBi
Full Bands Peak Gain		-	0.49	
V.S.W.R	3:1	-	-	Under
Isolation			-20	dB under
Impedance		50		Ohm
Radiation Material		Printed		

REG. DATE : 2018.04.02

SPECIFICATION

MODEL NAME : LGE DBDC (LGIT)


REV.NO : 1.0

REV. DATE : 2018.04.02


PAGE : 5 / 10

2.1 Network Data

ANT 0_VSWR

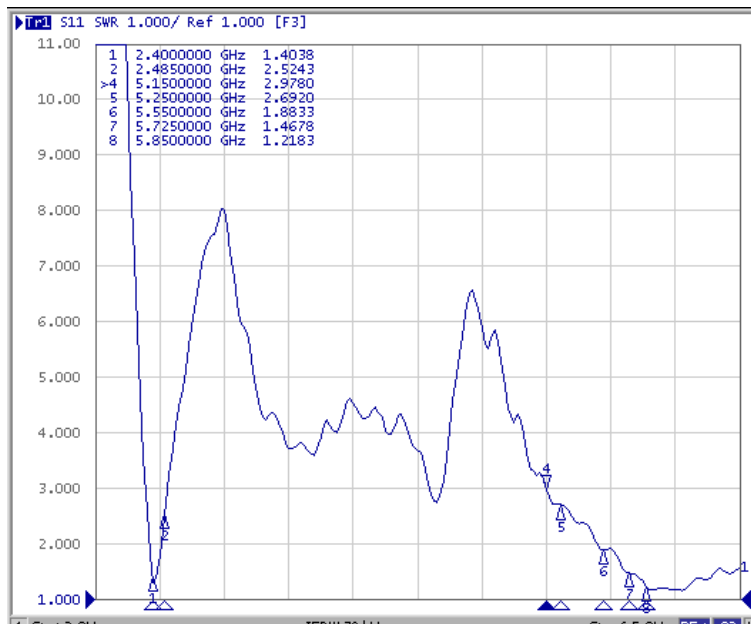

ANT 1_VSWR

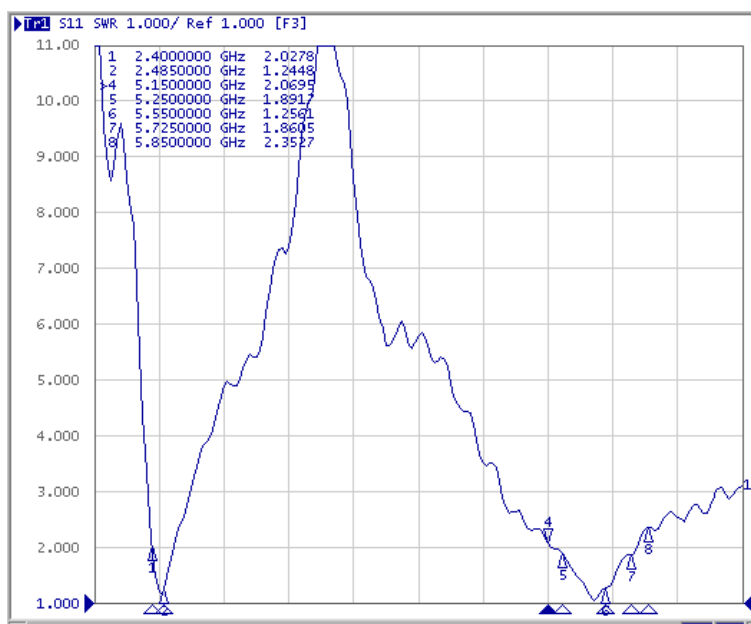

REG. DATE : 2018.04.02

SPECIFICATION


MODEL NAME : LGE DBDC (LGIT)

REV.NO : 1.0


REV. DATE : 2018.04.02

PAGE : 6 / 10

BT_VSWR

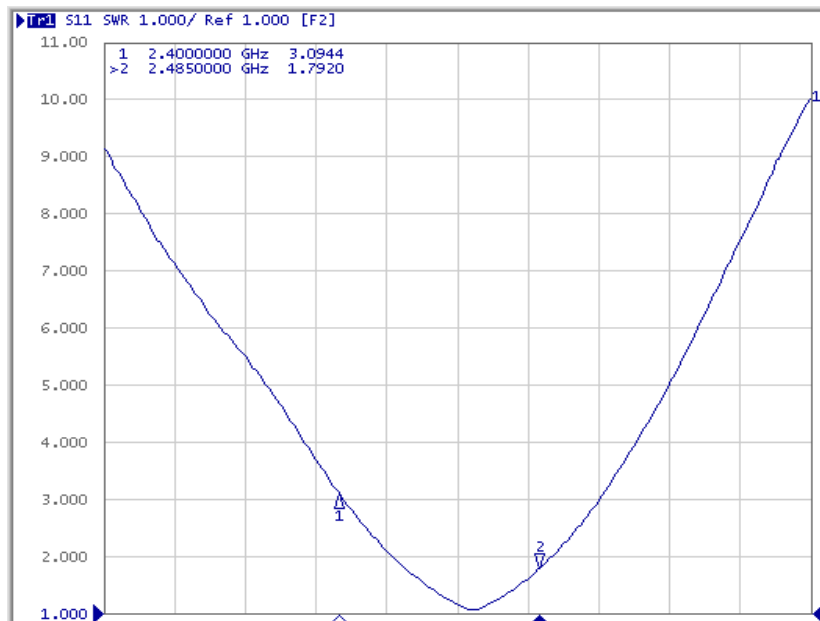

ANT 0 <->ANT 1_Isolation

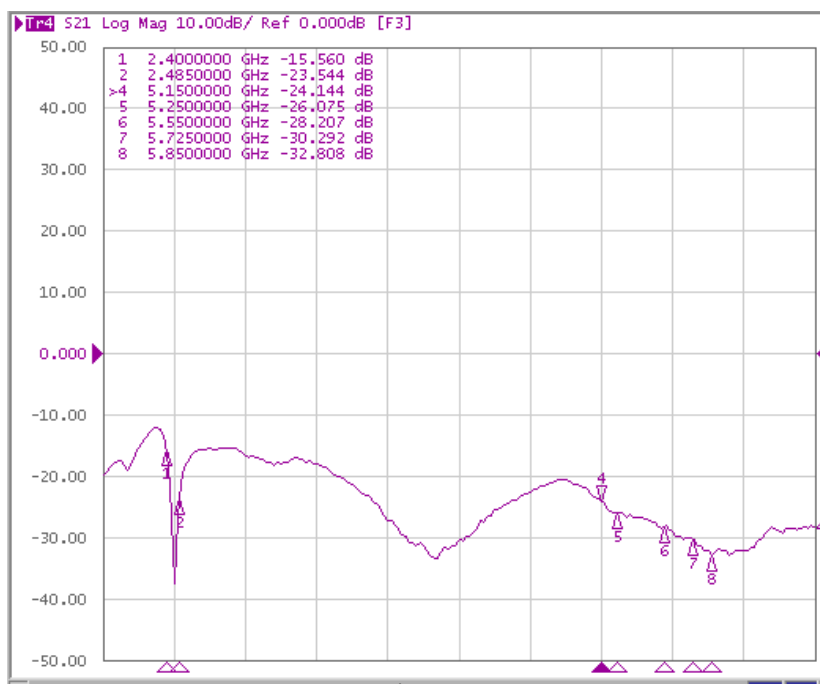

REG. DATE : 2018.04.02

SPECIFICATION


MODEL NAME : LGE DBDC (LGIT)

REV.NO : 1.0


REV. DATE : 2018.04.02

PAGE : 7 / 10

ANT 0 <-> BT_Isolation

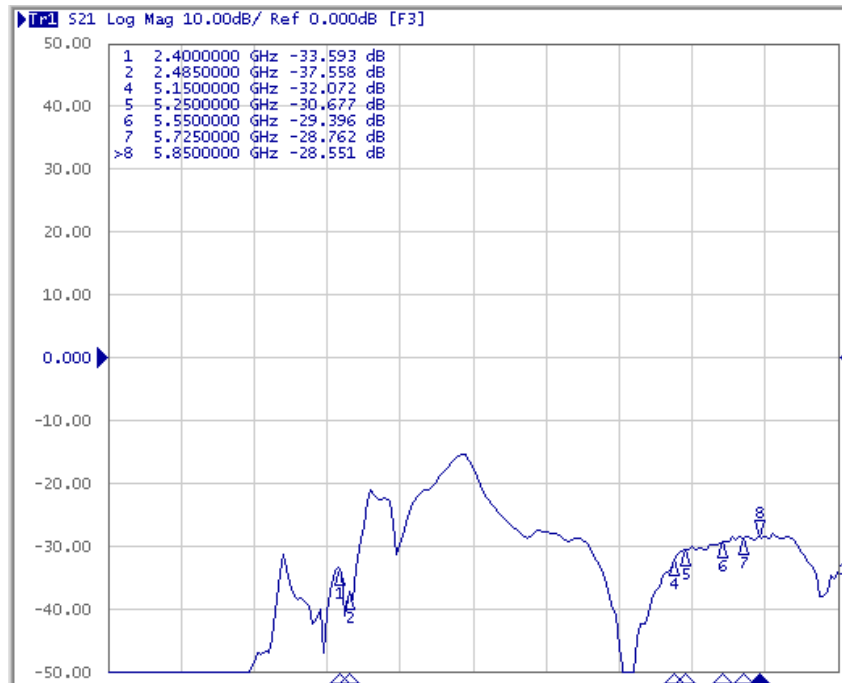

ANT 1 <-> BT_Isolation

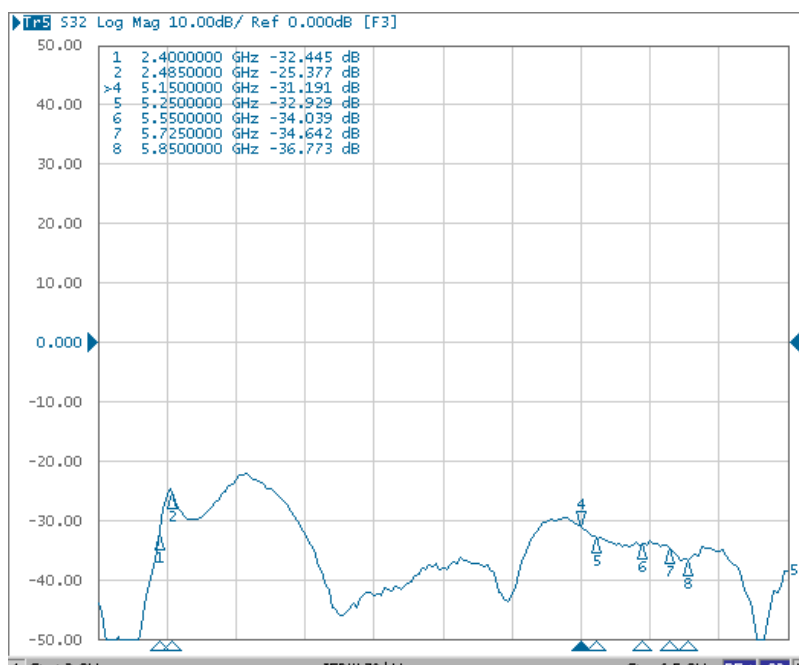

REG. DATE : 2018.04.02

SPECIFICATION

MODEL NAME : LGE DBDC (LGIT)

REV.NO : 1.0

REV. DATE : 2018.04.02

PAGE : 8 / 10

2.2. Efficiency

ANT0

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Frequency(MHz)	2412	2420	2450	2460	2485	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Efficiency(dB)	-4.20	-3.83	-2.69	-2.52	-2.74	-2.98	-1.82	-2.43	-2.52	-2.37	-2.71	-2.14	-2.42	-2.43	-2.56	-2.18	-2.27	-1.99	-2.19	-1.80
Efficiency(%)	38.01	41.44	53.88	56.04	53.21	50.34	65.72	57.12	55.94	57.95	53.61	61.15	57.26	57.13	55.47	60.57	59.33	63.30	60.40	66.08
TRG(dB)	-4.20	-3.83	-2.69	-2.52	-2.74	-2.98	-1.82	-2.43	-2.52	-2.37	-2.71	-2.14	-2.42	-2.43	-2.56	-2.18	-2.27	-1.99	-2.19	-1.80
TRG _{THETA} (dB)	-8.28	-7.73	-6.03	-5.79	-5.70	-3.40	-2.27	-3.12	-3.26	-3.15	-3.62	-3.38	-3.93	-4.13	-4.34	-3.62	-3.77	-3.62	-3.75	-3.33
TRG _{PHI} (dB)	-6.35	-6.09	-5.38	-5.28	-5.80	-13.37	-11.96	-10.77	-10.60	-10.20	-9.95	-8.17	-7.75	-7.32	-7.28	-7.67	-7.61	-7.03	-7.39	-7.07
UHRG(dB)	-7.52	-7.09	-5.87	-5.81	-6.09	-5.87	-4.72	-5.50	-5.44	-5.31	-5.72	-5.16	-5.57	-5.51	-5.70	-5.49	-5.61	-5.17	-5.48	-5.02
UHRG/TRG(%)	46.58	47.19	48.00	46.87	46.20	51.42	51.36	49.32	51.03	50.79	49.92	49.86	48.40	49.18	48.52	46.65	46.35	48.05	46.89	47.60
H-Plane	-9.16	-7.72	-6.19	-6.28	-6.00	-1.26	-0.44	-1.57	-1.99	-1.75	-2.52	-2.40	-2.78	-2.78	-2.89	-2.76	-3.14	-3.16	-3.32	-2.96
E1-Plane, AVG(dB)	-5.82	-5.17	-3.40	-3.14	-2.78	-4.88	-3.59	-4.15	-4.09	-4.72	-4.35	-4.00	-4.50	-5.12	-5.33	-3.56	-3.63	-3.78	-3.85	-3.82
E2-Plane, AVG(dB)	-11.05	-11.07	-10.75	-10.49	-10.00	-5.01	-3.60	-4.06	-4.15	-4.49	-4.80	-4.40	-4.97	-4.84	-5.30	-5.20	-5.08	-4.74	-4.78	-4.13
Peak Gain(dB)	-0.57	-0.38	0.48	1.01	1.37	1.46	1.47	1.48	1.48	1.50	1.45	1.48	1.47	1.50	1.49	1.47	1.48	1.41	1.44	1.44
Directivity(dB)	3.63	3.44	3.17	3.52	4.12	4.44	3.29	3.91	4.00	3.87	4.16	3.61	3.89	3.93	4.05	3.65	3.75	3.40	3.63	3.24
Minimum Gain(dB)	-15.16	-14.30	-11.84	-12.52	-14.43	-10.81	-10.78	-10.41	-11.40	-11.02	-12.38	-12.46	-13.69	-12.66	-10.22	-11.71	-14.75	-13.77	-13.55	-15.74
Test Condition	FS																			
Antenna Type																				
Average Efficiency	-2.50 dB, 56.20 %																			

ANT1

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Frequency(MHz)	2412	2420	2450	2460	2485	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Efficiency(dB)	-2.36	-2.61	-2.43	-2.07	-2.66	-2.59	-2.80	-2.82	-2.05	-1.79	-1.95	-1.83	-2.08	-2.26	-2.28	-2.59	-2.96	-2.98	-3.00	-3.11
Efficiency(%)	58.08	54.80	57.12	62.14	54.20	55.12	52.52	52.23	62.33	66.18	63.89	65.66	61.92	59.46	59.17	55.13	50.56	50.33	50.12	48.88
TRG(dB)	-2.36	-2.61	-2.43	-2.07	-2.66	-2.59	-2.80	-2.82	-2.05	-1.79	-1.95	-1.83	-2.08	-2.26	-2.28	-2.59	-2.96	-2.98	-3.00	-3.11
TRG _{THETA} (dB)	-6.29	-4.88	-5.30	-5.21	-5.86	-6.10	-6.40	-6.43	-5.45	-5.16	-5.11	-4.79	-5.63	-5.79	-5.86	-5.84	-6.21	-6.27	-6.69	-6.62
TRG _{PHI} (dB)	-4.61	-6.52	-5.60	-4.95	-5.48	-5.14	-5.28	-5.31	-4.70	-4.47	-4.81	-4.89	-4.61	-4.80	-4.79	-5.37	-5.75	-5.73	-5.42	-5.67
UHRG(dB)	-4.69	-4.77	-4.27	-4.02	-4.33	-4.02	-4.24	-4.19	-3.99	-3.76	-3.90	-3.72	-3.99	-4.40	-4.24	-4.17	-4.30	-4.37	-4.46	-4.42
UHRG/TRG(%)	58.41	60.83	65.49	63.84	68.03	71.97	71.75	73.03	64.06	63.60	63.79	64.74	64.52	61.11	63.70	69.45	73.43	72.67	71.39	73.90
H-Plane	-8.32	-7.54	-6.55	-6.70	-7.37	-9.29	-9.51	-8.03	-6.82	-5.06	-4.76	-5.16	-5.54	-8.12	-9.61	-9.15	-9.56	-9.74	-9.53	-9.35
E1-Plane, AVG(dB)	-5.33	-5.90	-5.98	-6.12	-6.13	-6.33	-5.40	-4.59	-4.73	-5.34	-5.14	-5.51	-5.58	-5.44	-5.46	-5.46	-5.64	-5.68	-7.08	-5.88
E2-Plane, AVG(dB)	-6.30	-4.69	-6.61	-6.62	-5.22	-6.15	-6.98	-6.54	-5.42	-5.66	-6.26	-5.74	-6.15	-8.29	-7.74	-7.41	-7.76	-7.84	-7.97	-8.40
Peak Gain(dB)	1.48	1.44	1.47	1.49	1.49	1.46	1.50	1.49	1.50	1.46	1.46	1.48	1.50	1.46	1.49	1.48	1.43	1.49	1.41	1.34
Directivity(dB)	3.84	4.05	3.90	3.56	4.15	4.05	4.30	4.31	3.55	3.25	3.41	3.30	3.58	3.72	3.77	4.07	4.39	4.47	4.41	4.44
Minimum Gain(dB)	-16.99	-10.79	-10.99	-11.26	-11.74	-14.77	-16.41	-16.64	-15.03	-14.07	-13.84	-15.20	-15.54	-13.35	-13.61	-18.73	-18.41	-17.59	-19.53	-17.20
Test Condition	FS																			
Antenna Type																				
Average Efficiency	-2.44 dB, 56.99 %																			

BT

	1	2	3	4	5	6	7	8	9	10
Frequency(MHz)	2412	2420	2430	2440	2445	2450	2460	2470	2480	2485
Efficiency(dB)	-3.89	-3.74	-3.68	-3.13	-2.85	-3.28	-3.39	-3.61	-3.77	-4.03
Efficiency(%)	40.86	42.31	42.89	48.66	51.92	47.01	45.79	43.55	41.94	39.51
TRG(dB)	-3.89	-3.74	-3.68	-3.13	-2.85	-3.28	-3.39	-3.61	-3.77	-4.03
TRG _{THETA} (dB)	-7.48	-7.20	-7.40	-6.16	-6.07	-6.22	-6.45	-6.63	-6.58	-6.77
TRG _{PHI} (dB)	-6.38	-6.34	-6.08	-6.12	-5.65	-6.36	-6.36	-6.61	-7.00	-7.34
UHRG(dB)	-5.66	-5.28	-5.05	-4.75	-4.81	-4.78	-4.73	-5.06	-5.15	-5.24
UHRG/TRG(%)	66.44	70.06	72.84	68.92	63.66	70.82	73.43	71.70	72.91	75.78
H-Plane	-8.60	-8.23	-9.28	-6.60	-7.48	-7.39	-7.32	-8.57	-8.74	-7.57
E1-Plane, AVG(dB)	-8.41	-7.92	-6.77	-5.70	-6.58	-6.34	-5.74	-6.43	-6.63	-6.73
E2-Plane, AVG(dB)	-6.51	-6.12	-5.87	-4.63	-4.86	-6.36	-5.79	-5.35	-5.31	-5.78
Peak Gain(dB)	0.25	0.30	0.40	0.48	0.48	0.48	0.49	0.40	0.41	0.33
Directivity(dB)	4.14	4.04	4.07	3.61	3.33	3.76	3.89	4.01	4.18	4.36
Minimum Gain(dB)	-14.86	-14.85	-14.97	-14.21	-12.34	-14.07	-14.84	-14.52	-14.62	-14.91
Test Condition	FS									
Antenna Type										
Average Efficiency	-3.52 dB, 44.44 %									

REG. DATE : 2018.04.02

SPECIFICATION


MODEL NAME : LGE DBDC (LGIT)

REV.NO : 1.0


REV. DATE : 2018.04.02

PAGE : 9 / 10


2.3. Radiation Pattern

ANT0



<2.45GHz>




<5.50GHz>

ANT1


<2.45GHz>




<5.50GHz>

BT


<2.45GHz>

3. ANT Test Condition

CTIA-OTA Test Chamber : 3x6x3m

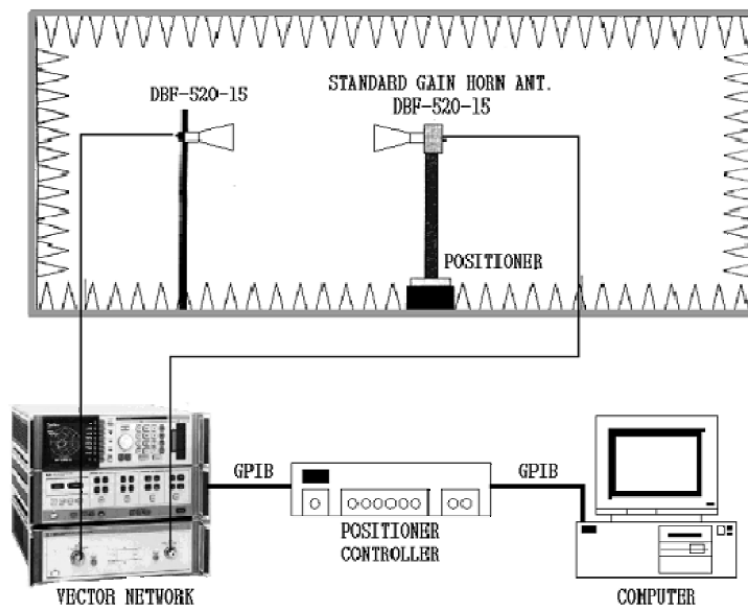

		DOCUMENT No : 2018RF-LGE001	
REG. DATE : 2018.04.02	SPECIFICATION MODEL NAME : LGE DBDC (LGIT)	REV.NO : 1.0	
REV. DATE : 2018.04.02		PAGE : 10 / 10	

4. ANT Dimensions

Wi-Fi Antenna.1



Wi-Fi Antenna.0

Bluetooth Tx Antenna