

TEST REPORT

FCC/IC BT Test for LGSBWAX12
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2009-FI007

DATE OF ISSUE
10 September 2020

Tested by
Jin Gwan Lee



Technical Manager
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.

Soo Chan Lee
SooChan Lee / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

고객비밀
CUSTOMER SECRET



TEST REPORT

FCC/IC BT Test for
LGSBWAX12

REPORT NO.

HCT-RF-2009-FI007

DATE OF ISSUE

September 10, 2020

Additional Model

-

Applicant

LG Electronics Inc.

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Eut Type Model Name

RF Module
LGSBWAX12

FCC ID IC

BEJLGSBWAX12
2703H-LGSBWAX12

Max. RF Output Power

10.748 dBm (11.88 mW)

Modulation type

GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)

FCC Classification

FCC Part 15 Spread Spectrum Transmitter

FCC Rule Part(s)

Part 15 subpart C 15.247

IC Rule Part(s)

RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	September 10, 2020	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

1. EUT DESCRIPTION	6
2. Requirements for Bluetooth transmitter(15.247)	7
3. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	9
4. INSTRUMENT CALIBRATION	9
5. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
6. ANTENNA REQUIREMENTS	10
7. MEASUREMENT UNCERTAINTY	11
8. DESCRIPTION OF TESTS	12
9. SUMMARY OF TEST RESULTS	36
10. TEST RESULT	37
10.1 PEAK POWER	37
10.2 BAND EDGES	43
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)	50
10.4 NUMBER OF HOPPING FREQUENCY	58
10.5 TIME OF OCCUPANCY (DWELL TIME)	62
10.6 SPURIOUS EMISSIONS	68
10.6.1 CONDUCTED SPURIOUS EMISSIONS	68
10.6.2 RADIATED SPURIOUS EMISSIONS	76
10.6.2.1 Basic Cable	76
10.6.2.2 FFC Cable	83
10.6.2.3 DBS Mode	86
10.6.3 RADIATED RESTRICTED BAND EDGES	88
10.6.3.1 Basic Cable	88
10.6.3.2 FFC Cable	91
10.7 RECEIVER SPURIOUS EMISSIONS	93
10.7.1 Basic Cable	93
10.7.2 FFC Cable	94

10.8 POWERLINE CONDUCTED EMISSIONS	95
10.8.1 Basic Cable	95
10.8.2 FFC Cable	99
11. LIST OF TEST EQUIPMENT	103
12. ANNEX A_ TEST SETUP PHOTO	105

1. EUT DESCRIPTION

Model	LGSBWAX12
Additional Model	-
EUT Type	RF Module
Power Supply	DC 3.30 V
Frequency Range	2402 MHz - 2480 MHz
Max. RF Output Power	10.748 dBm (11.88 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79Channels, Minimum 20 Channels(AFH)
Antenna Specification	Antenna type: Metal press Peak Gain : 1.19 dBi
Date(s) of Tests	July 02, 2020 ~ August 31, 2020
PMN (Product Marketing Number)	LGSBWAX12
HVIN (Hardware Version Identification Number)	ETWCHMBC01
FVIN (Firmware Version Identification Number)	MT7921_V1.0
HMN (Host Marketing Name)	N/A
EUT serial numbers	ETWCHMBC01-01, ETWCHMBC01-02, ETWCHMBC01-03, ETWCHMBC01-04
EUT Cable Type.	Basic Cable Type, FFC Cable Type

2. Requirements for Bluetooth transmitter(15.247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.

- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.

- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

- RSS-247 5.1 (a): The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the RSS-GEN issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting($RBW = 1 \text{ MHz}$, $VBW = 1/T \text{ Hz}$, where $T = \text{Pulse width}$).

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

According to RSS-GEN(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested..

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of

ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W.
For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

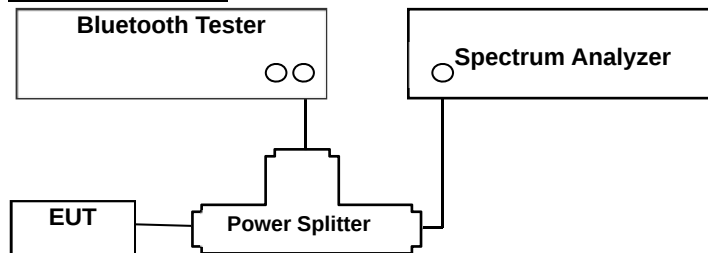

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013 & Procedure 10(b)(6)(i) in KDB 558074 v05r02)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW ≥ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

Sample Calculation


$$\begin{aligned} \text{Output Power} &= \text{Spectrum Reading Power} + \text{Power Splitter loss} + \text{Cable loss(2 ea)} \\ &= 10 \text{ dBm} + 6 \text{ dB} + 1.5 \text{ dB} = 17.5 \text{ dBm} \end{aligned}$$

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to § 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

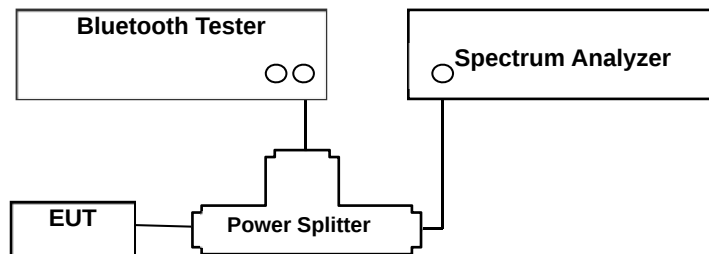

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to § 15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

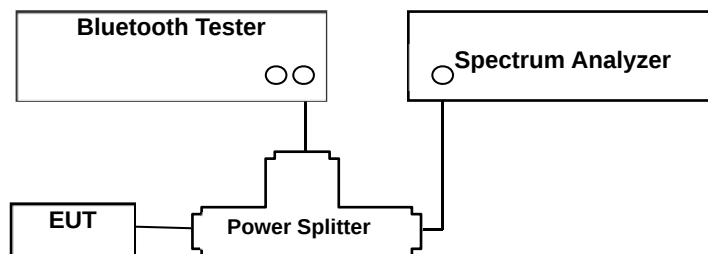

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW $\geq$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1% to 5% of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

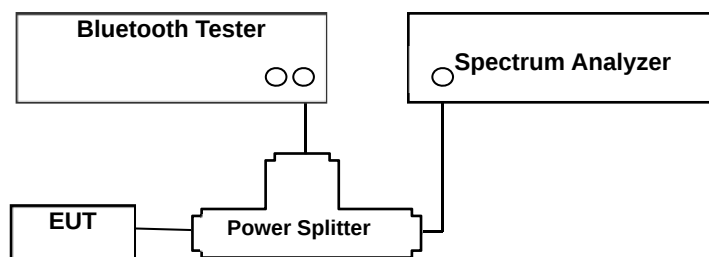

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW $\geq$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

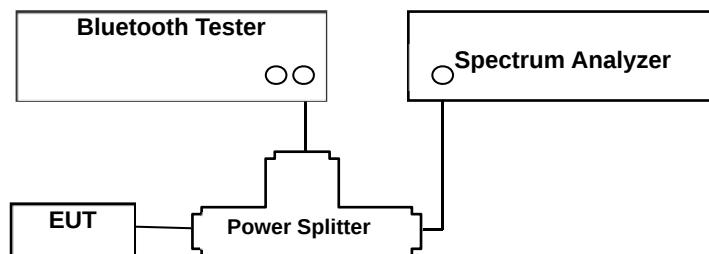

Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013 & Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)

(2) AFH Mode

- DH 5 (GFSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

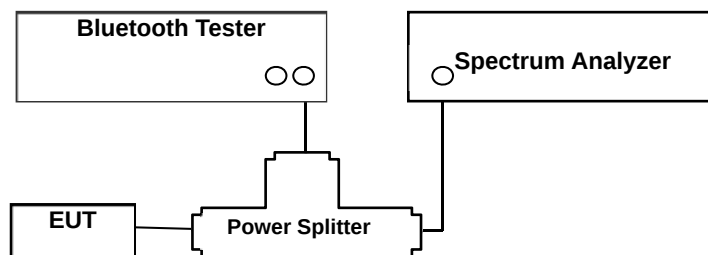

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	Factor(dB)
30	5.95
100	6.00
200	6.08
300	6.21
400	6.27
500	6.29
600	6.29
700	6.33
800	6.37
900	6.40
1000	6.44
2000	6.71
2400	7.03
2500	7.03
3000	6.92
4000	7.10
5000	7.30
6000	7.30
7000	7.41
8000	7.40
9000	7.59
10000	7.71
11000	7.84
12000	7.98
13000	8.07
14000	8.19
15000	8.30
16000	8.38
17000	8.50
18000	8.52
19000	8.51
20000	8.56
21000	8.59
22000	8.66
23000	8.82
24000	8.83
25000	8.85
26000	8.91

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Cable loss(2 EA) + Splitter loss(6 dB) + EUT Cable(For Conducted)

8.7. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30

IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	$6.37/F(\text{kHz})$	300
0.490 – 1.705	$63.7/F(\text{kHz})$	30
1.705 – 30	0.08	30

FCC&IC


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

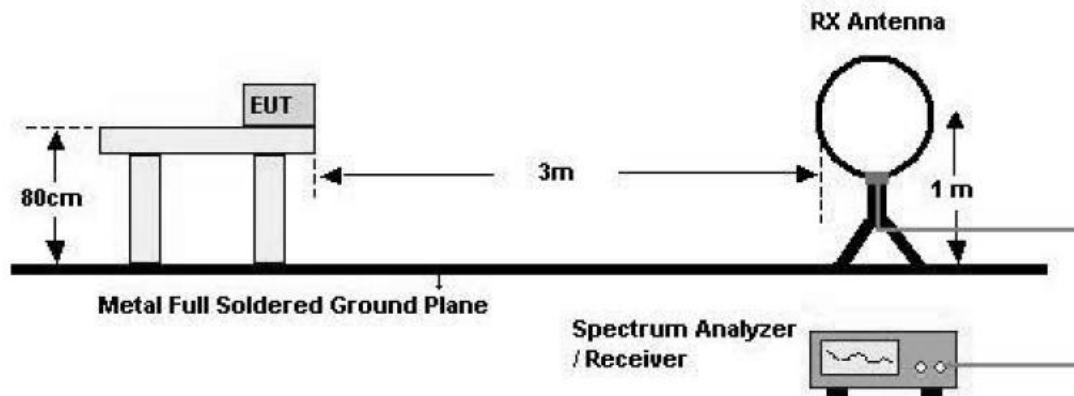

30 MHz - 1 GHz

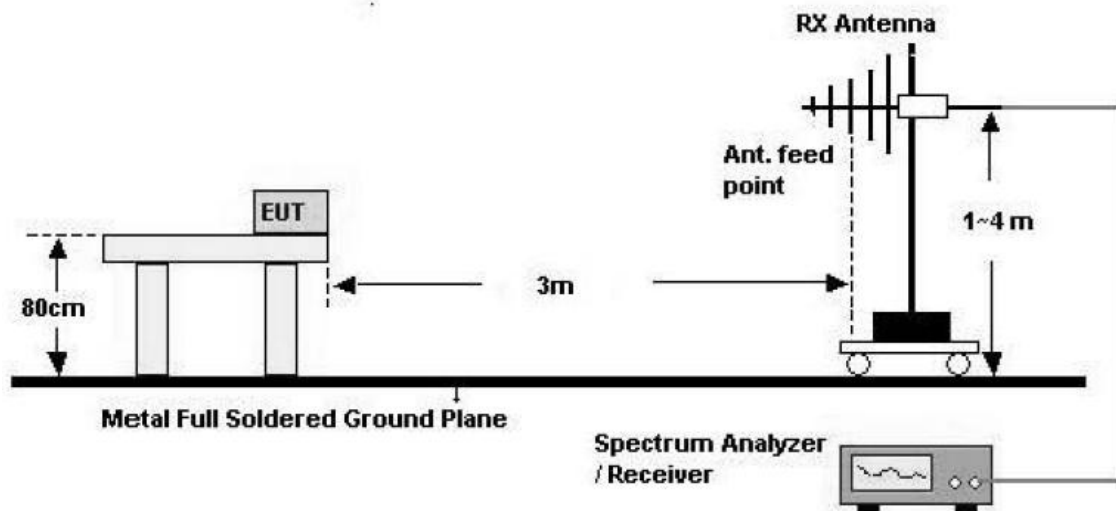

Above 1 GHz

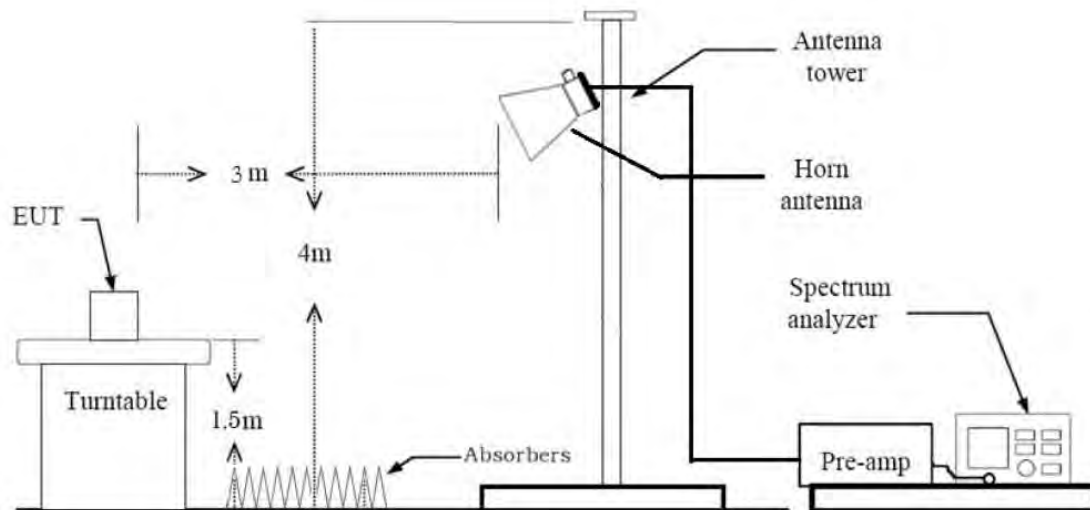

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting**(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.

3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
 - * Duty Cycle Correction(AFH) = $20\log (\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -24.7314 dB
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Distance extrapolation factor = $20\log (\text{test distance} / \text{specific distance})$ (dB)
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

13. Duty Cycle Correction Factor (79 channel hopping)

- a. Time to cycle through all channels = $\Delta t = \tau [\text{ms}] \times 79 \text{ channels} = 229.100 \text{ ms}$, where τ = pulse width
- b. $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, $H' = 1$
- c. Worst Case Dwell Time = $\tau [\text{ms}] \times H' = 2.9 \text{ ms}$
- d. Duty Cycle Correction = $20\log (\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -30.752 \text{ dB}$

14. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)

- a. Time to cycle through all channels = $\Delta t = \tau [\text{ms}] \times 20 \text{ channels} = 58.00 \text{ ms}$, where τ = pulse width
- b. $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, $H' = 2$
- c. Worst Case Dwell Time = $\tau [\text{ms}] \times H' = 5.800 \text{ ms}$
- d. Duty Cycle Correction (AFH) = $20\log (\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
 2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
 5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
 6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
 7. The unit was tested with its standard battery.
 8. Spectrum Setting
 - (1) Measurement Type (Peak):
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type (Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall be determined from the peak field strength after correcting for the worst-case duty cycle as described in Number.13 (On Page. 24)
- * Duty Cycle Correction (AFH) = $20\log (\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$

(3) Marker-delta method

- ANSI C63.10-2013(Section 6.10.6) Marker-delta method used.

(For 2388 ~ 2390MHz & 2483.5 ~ 2485.5MHz) Measure according to the following procedure

① Fundamental emission measurement

- Under 1GHz = RBW : 100kHz, VBW : 300kHz

- Above 1GHz = RBW : 1MHz, VBW : 3MHz (for Peak and Avg detector)

Note : Avg Result DCCF applied.

② Band edge and maximum fundamental emission levels are measured with a marker delta.

- Span encompass both Peak of the fundamental and band-edge under investigation.

- Set RBW to 1% of the total Span (At least 30 kHz)

- $VBW \geq 3 \times RBW$

③ subtract the ② from ① is the Result Field Strengths Level for Band edge

9. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

10. Total

[1] Normal (Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) – Amp Gain(A.G) + Attenuator(ATT)
+ Distance Factor(D.F)

[2] Normal (Avg)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) – Amp Gain(A.G) + Attenuator(ATT)
+ Distance Factor(D.F) + D.C.C.F

[3] Marker-delta (Peak)

① Fundamental emission measurement

= Fundamental Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) – Amp Gain(A.G)
+ Attenuator(ATT) + Distance Factor(D.F)

② marker delta. Value

③ (Total) = ① - ②

[4] Marker-delta (Avg)

① Fundamental emission measurement

= Fundamental Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) – Amp Gain(A.G)
+ Attenuator(ATT) + Distance Factor(D.F)

② marker delta. Value

③ (Total) = (① - ②) + D.C.C.F

11. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8.9. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

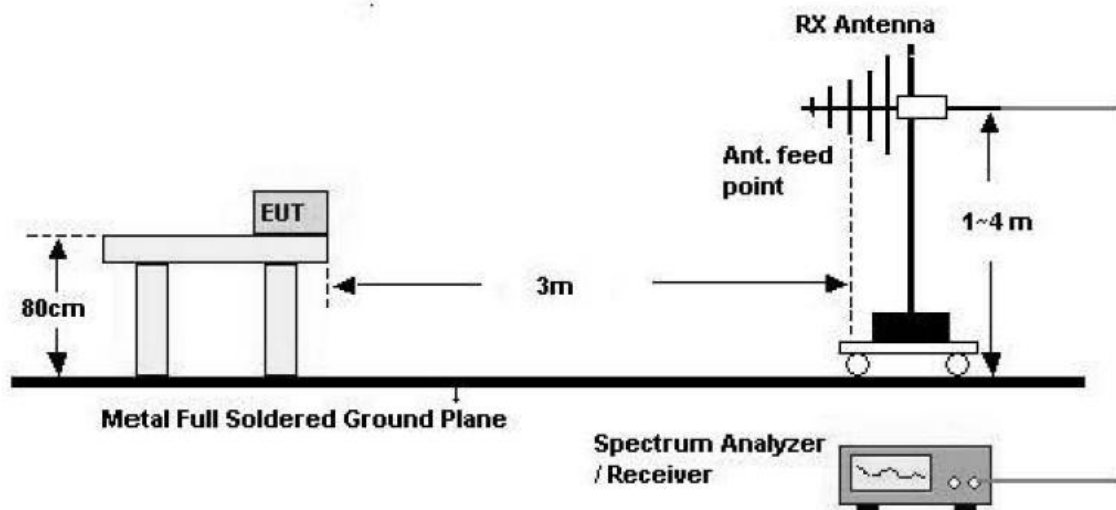

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq$ 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

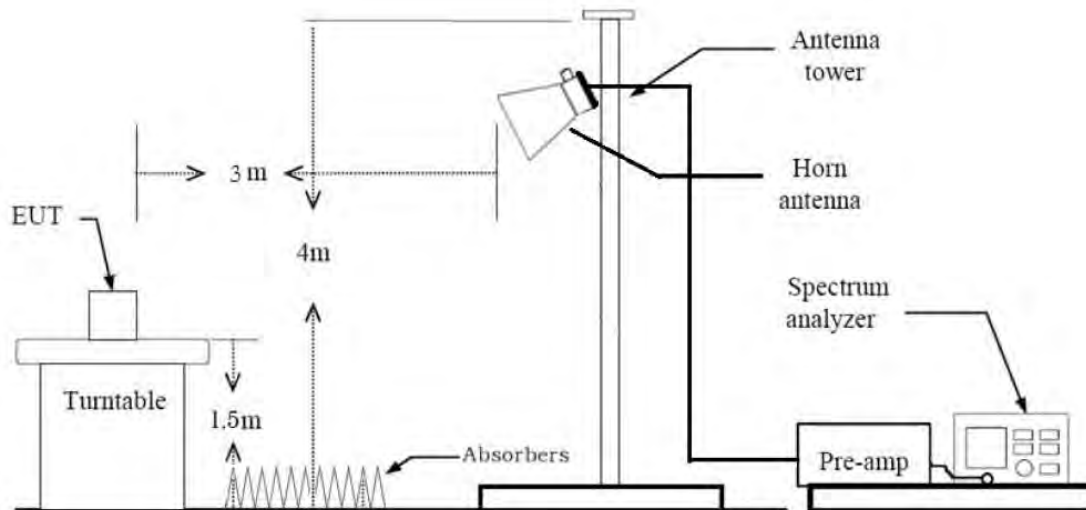

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

8.10. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook
 - Worstcase : Stand alone + Notebook
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
3. All data rate of operation were investigated and the test results are worst case in highest data rate of each mode.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook
 - Worstcase : Stand alone + Notebook
2. EUT Axis
 - Radiated Spurious Emissions : X
3. The following tables show the worst case configurations determined during testing.

Description	Bluetooth Emission	5 GHz Emission
Antenna	Ant 1 (BT Ant.)	Ant 1
Channel	78	52
Data Rate	1 Mbps	MCS 0
Mode	8DPSK : 3-DH5	802.11ax(HE20)(26 Tone)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook
 - Worstcase : Stand alone + Notebook

Conducted test

1. The EUT was configured with data rate of highest power.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
2. AFH & Non-AFH were tested and the worst case results are reported.
(Worst case : Non-AFH)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	IC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§ 15.247(a)(1)	RSS-247, 5.1	N/A	Conducted	PASS
Occupied Bandwidth	N/A	RSS-GEN, 6.7	N/A		N/A
Conducted Maximum Peak Output Power	§ 15.247(b)(1)	RSS-247, 5.1 b)	< 0.125 W		PASS
Carrier Frequency Separation	§ 15.247(a)(1)	RSS-247, 5.1 b)	> 25 kHz or >2/3 of the 20dB BW		PASS
Number of Hopping Frequencies	§ 15.247(a)(1)(iii)	RSS-247, 5.1 d)	≥ 15		PASS
Time of Occupancy	§ 15.247(a)(1)(iii)	RSS-247, 5.1 d)	< 400 ms		PASS
Conducted Spurious Emissions	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§ 15.207(a)	RSS-GEN, 8.8	cf. Section 8.8		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9 RSS-GEN, 8.10	cf. Section 8.7		PASS
Receiver Spurious Emissions	N/A	RSS-GEN, 7	cf. Section 8.9		PASS

10. TEST RESULT

10.1 PEAK POWER

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	7.852	6.10	125
Mid	2441	7.701	5.89	
High	2480	7.282	5.35	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	10.614	11.52	125
Mid	2441	10.748	11.88	
High	2480	10.459	11.11	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	10.371	10.89	125
Mid	2441	10.322	10.77	
High	2480	9.918	9.81	

Note:

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the splitter and cable combination.

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.


Actual value of loss for the splitter and cable combination is 7.03 dB at 2400 MHz
and is 7.03 dB at 2500 MHz.

So, 7.03 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

Test Plots (GFSK)
Peak Power (CH.0)




Test Plots (GFSK)
Peak Power (CH.39)

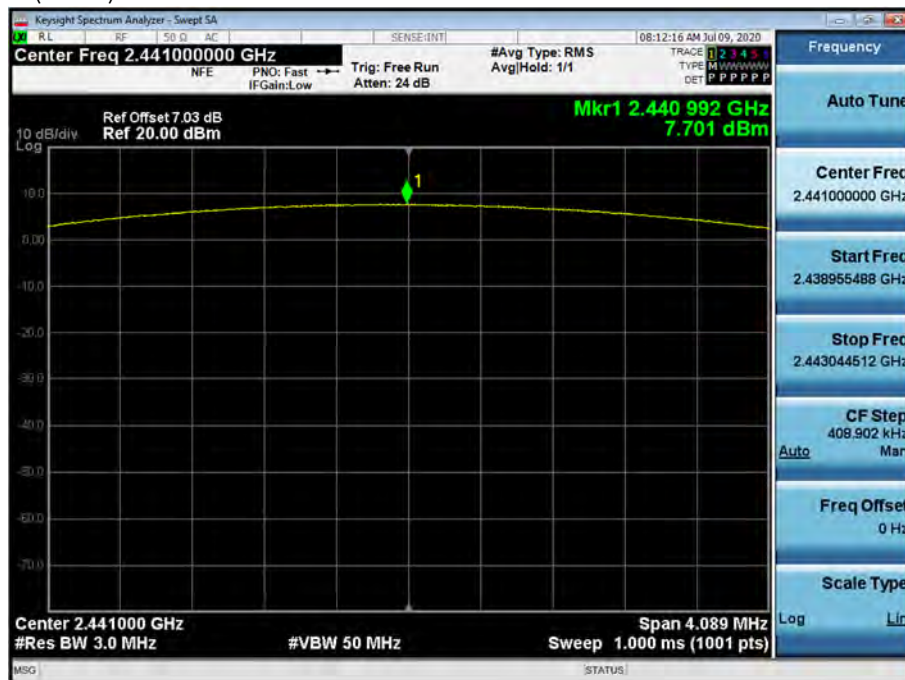

Test Plots (GFSK)
Peak Power (CH.78)



Test Plots (8DPSK)
Peak Power (CH.0)

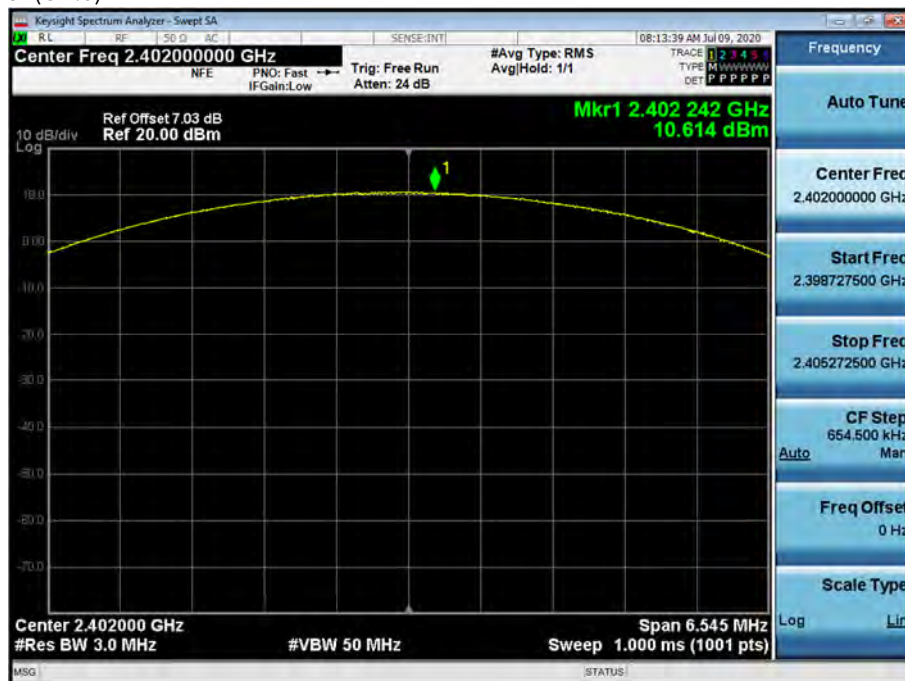


Test Plots (8DPSK)

Peak Power (CH.39)



Test Plots (8DPSK)

Peak Power (CH.78)

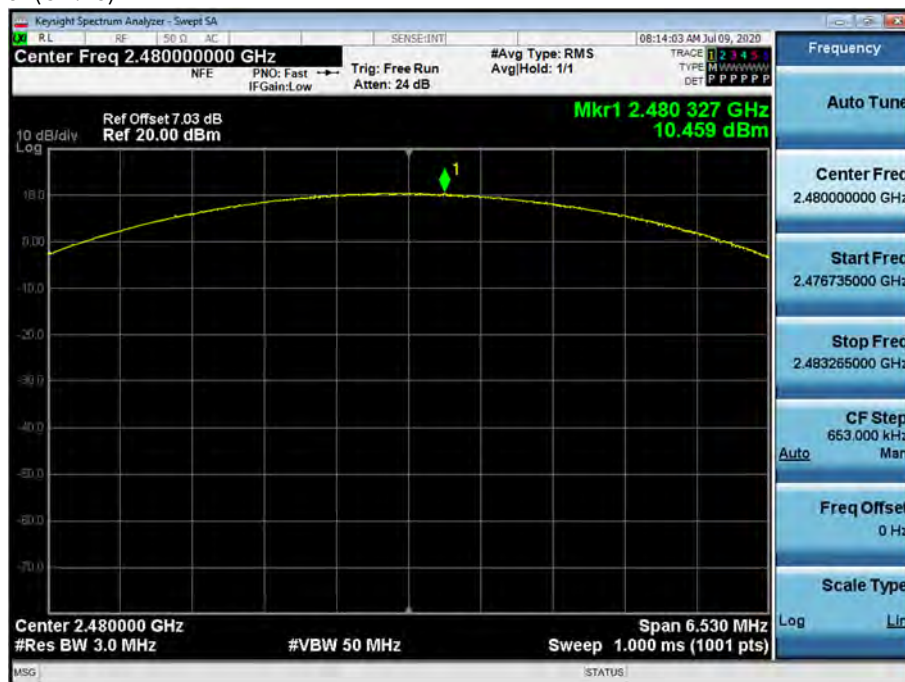

Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.0)



Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.39)



Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.78)



10.2 BAND EDGES

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	63.091	57.568	58.075	20
Upper	63.691	63.701	64.629	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	65.413	59.010	57.979	20
Upper	64.950	63.700	65.501	

Note :

1. Spectrum reading values are not plot data.


The power results in plot is already including the actual values of loss for the splitter and cable combination.

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.


Actual value of loss for the splitter and cable combination is 7.03 dB at 2400 MHz
and is 7.03 dB at 2500 MHz.

So, 7.03 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

Test Plots without hopping (GFSK)
Band Edges (CH.0)

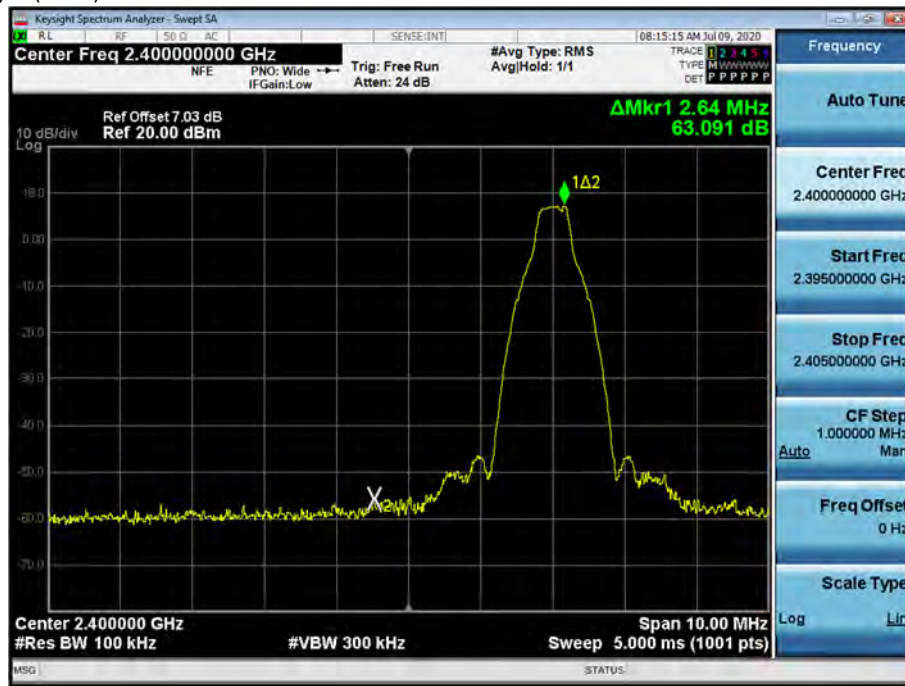


Test Plots without hopping (GFSK)
Band Edges (CH.78)

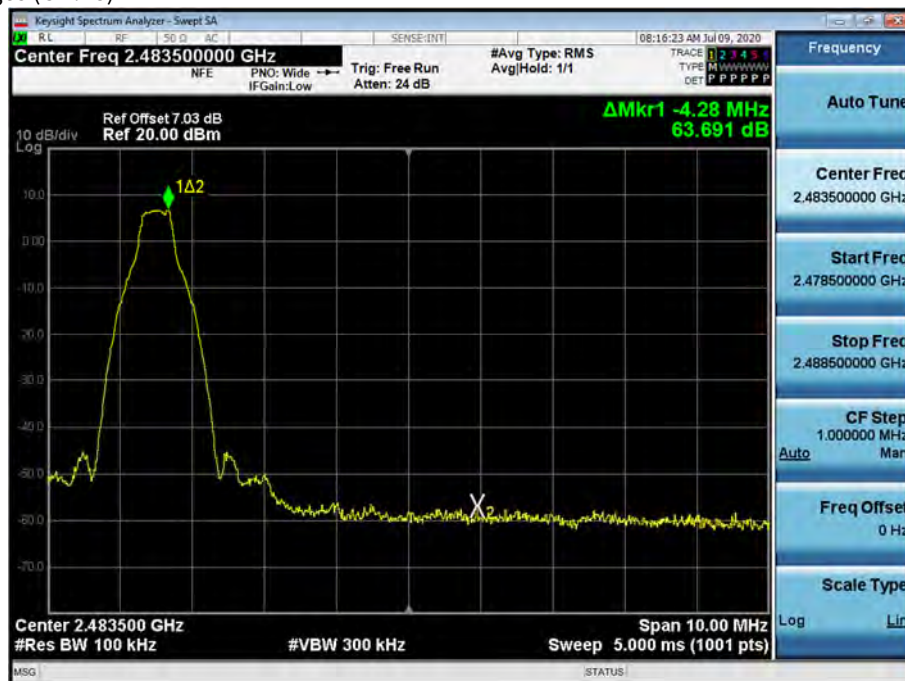

Test Plots without hopping (8DPSK)
Band Edges (CH.0)



Test Plots without hopping (8DPSK)
Band Edges (CH.78)

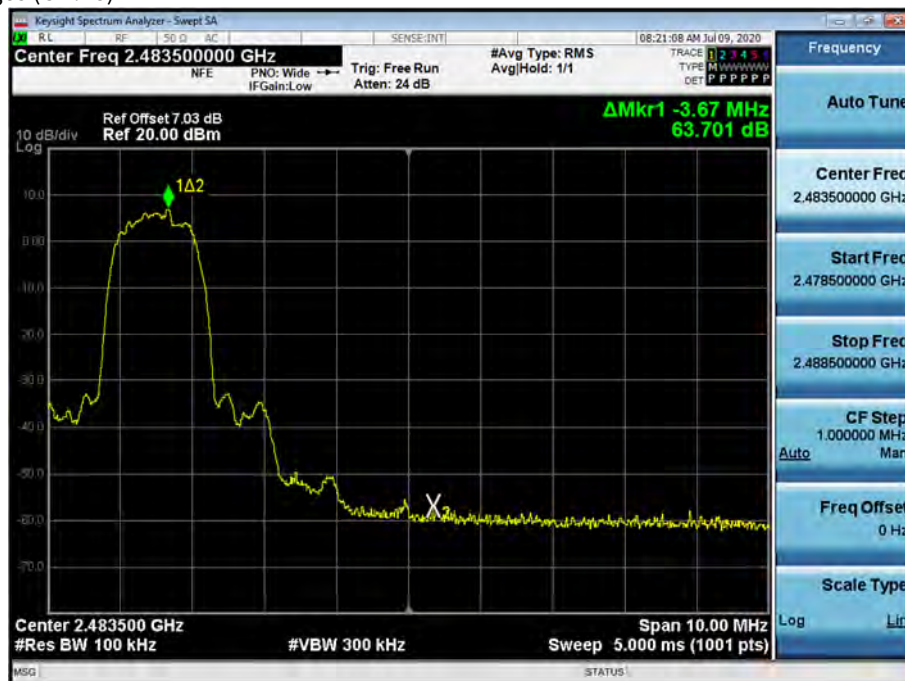


Test Plots without hopping ($\pi/4$ DQPSK)

Band Edges (CH.0)




Test Plots without hopping ($\pi/4$ DQPSK)


Band Edges (CH.78)

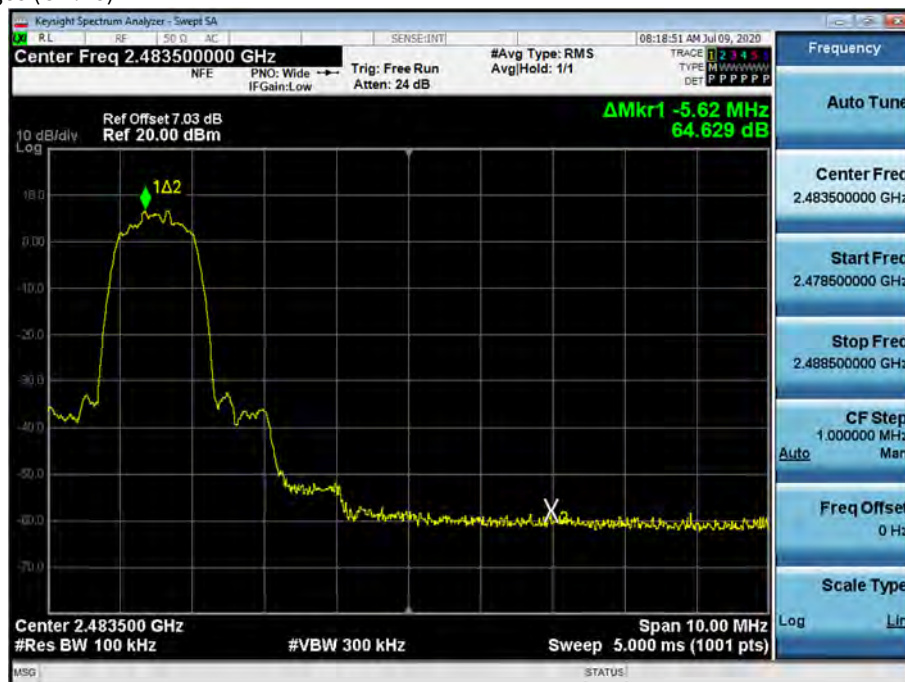

Test Plots with hopping (GFSK) Band Edges (CH.0)

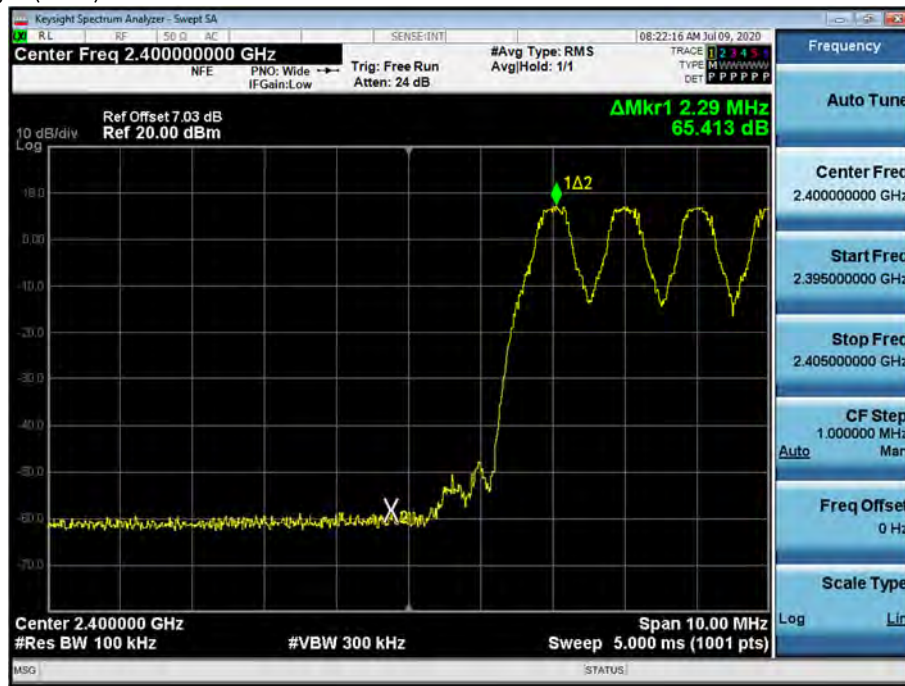


Test Plots with hopping (GFSK) Band Edges (CH.78)

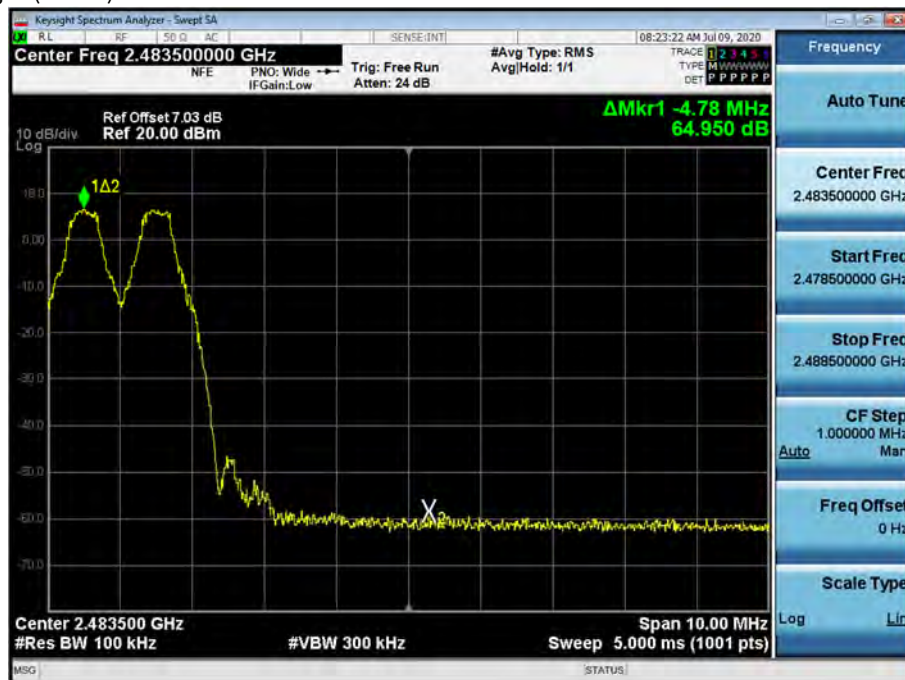


Test Plots with hopping (8DPSK)

Band Edges (CH.0)

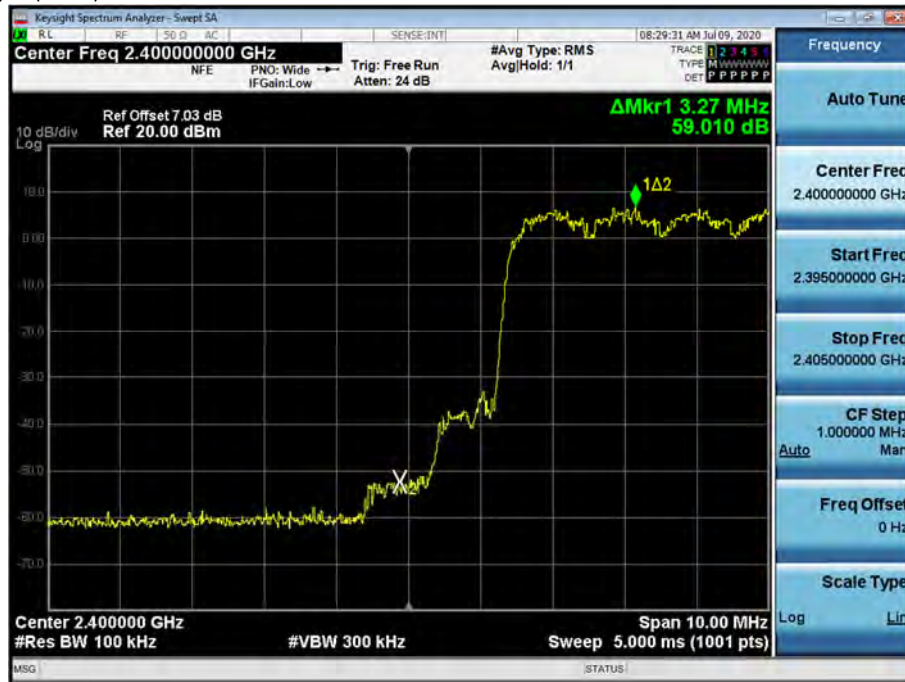

Test Plots with hopping (8DPSK)

Band Edges (CH.78)

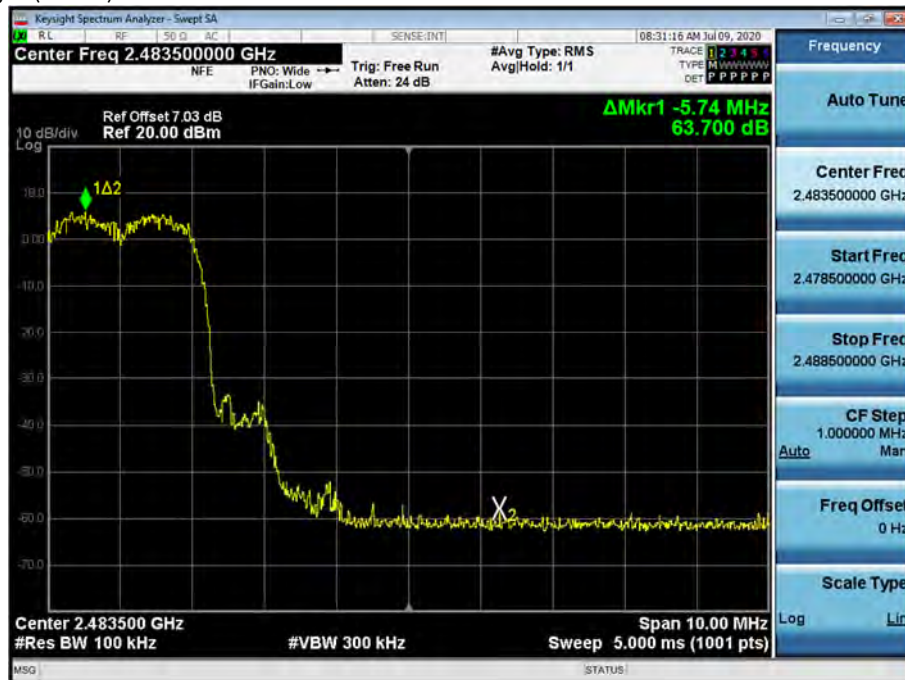


Test Plots with hopping ($\pi/4$ DQPSK)

Band Edges (CH.0)



Test Plots with hopping ($\pi/4$ DQPSK)

Band Edges (CH.78)

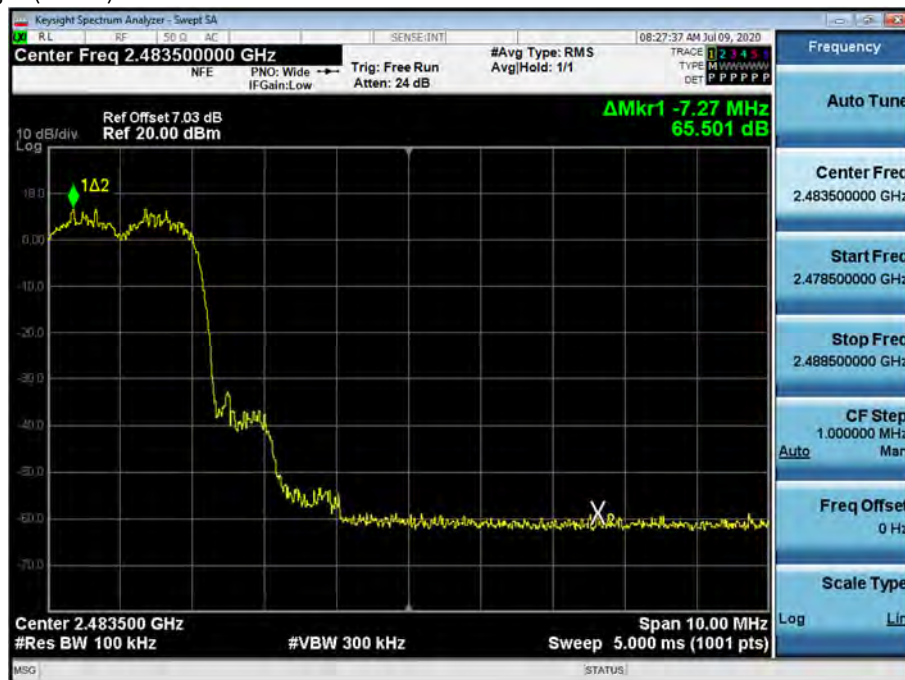

10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	750.41	1179.7	1173.8
CH.39	750.18	1179.1	1176.2
CH.78	750.08	1179.1	1174.7

20dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	841.8	1309	1293
CH.39	817.8	1306	1292
CH.78	816.5	1306	1292

Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
974	998	991	>25 kHz or >2/3 of the 20dB BW

Test Plots (GFSK)

Channel Separation




Test Plots (8DPSK)

Channel Separation



Test Plots ($\pi/4$ DQPSK)

Channel Separation

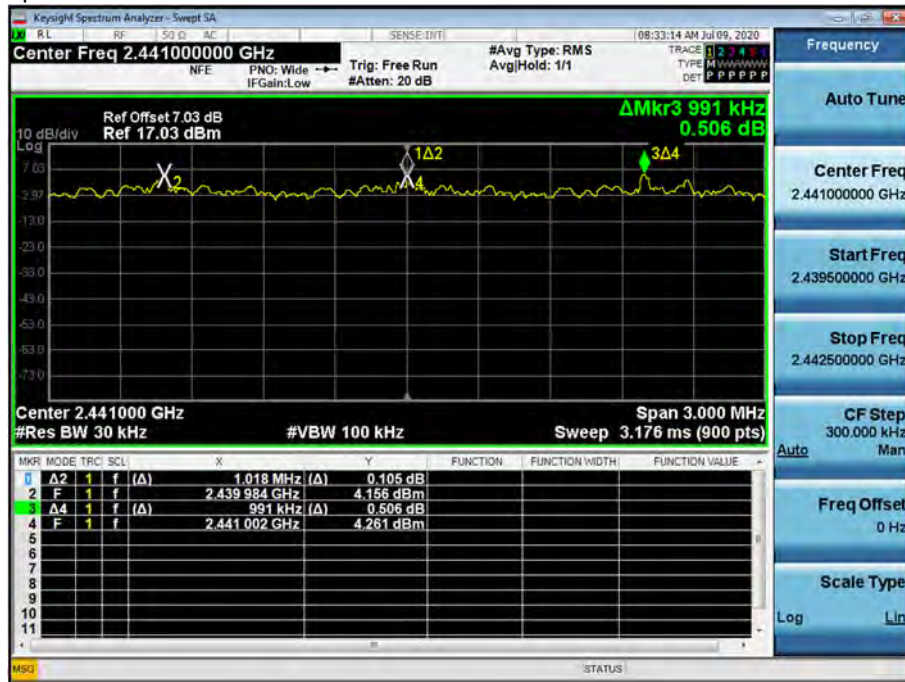


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)




Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

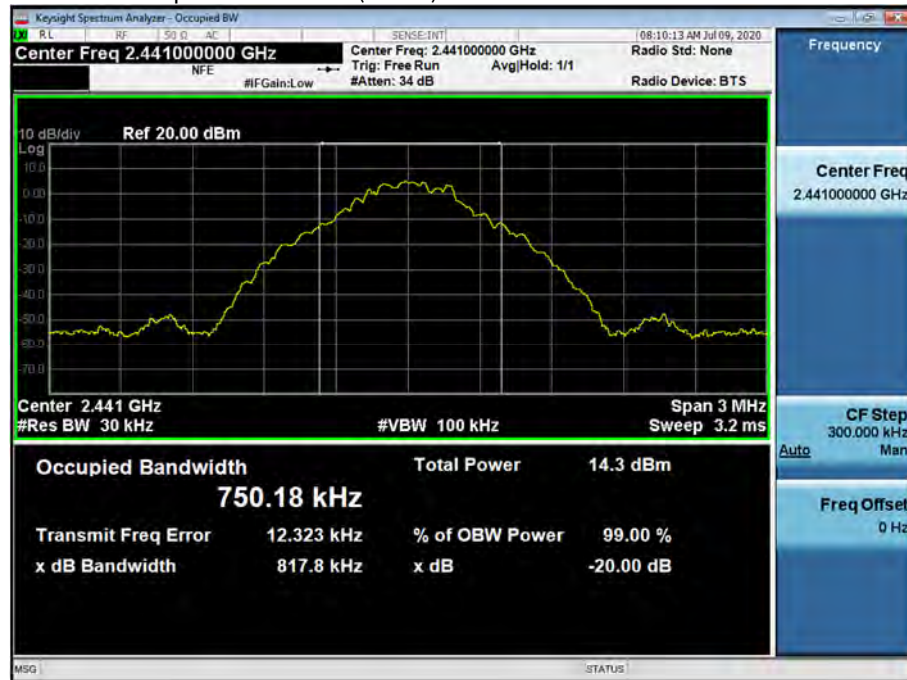

Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

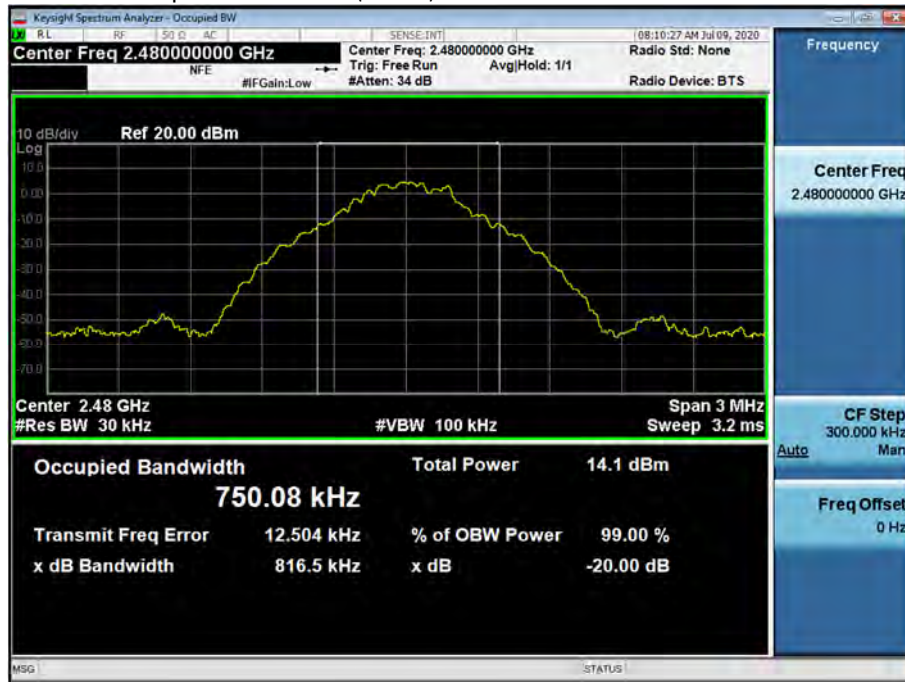

Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)



Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)




Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)



Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

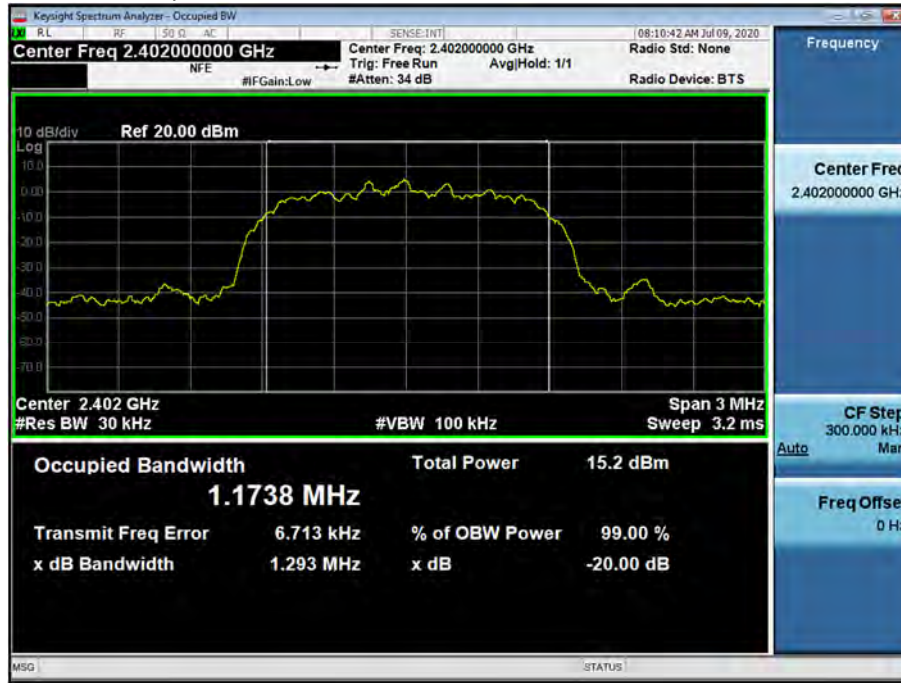

Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)



Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)



10.4 NUMBER OF HOPPING FREQUENCY

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

Note :

In case of AFH mode, minimum number of hopping channels is 20.

Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)



Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.4835 GHz)



Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)



Test Plots (8DPSK)

Number of Channels (2.441 GHz - 2.4835 GHz)



Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.4 GHz - 2.441 GHz)



Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.441 GHz - 2.4835 GHz)



10.5 TIME OF OCCUPANCY (DWELL TIME)

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.880	2.885	2.885
	Mid	2.880	2.885	2.885
	High	2.880	2.885	2.885

Non-AFH Mode


Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	307.20	307.73	307.73	31.6	400
	Mid	307.20	307.73	307.73	31.6	
	High	307.20	307.73	307.73	31.6	

AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	153.60	153.87	153.87	8.0	400
	Mid	153.60	153.87	153.87	8.0	
	High	153.60	153.87	153.87	8.0	

Test Plots (GFSK)

Dwell Time (CH.0)

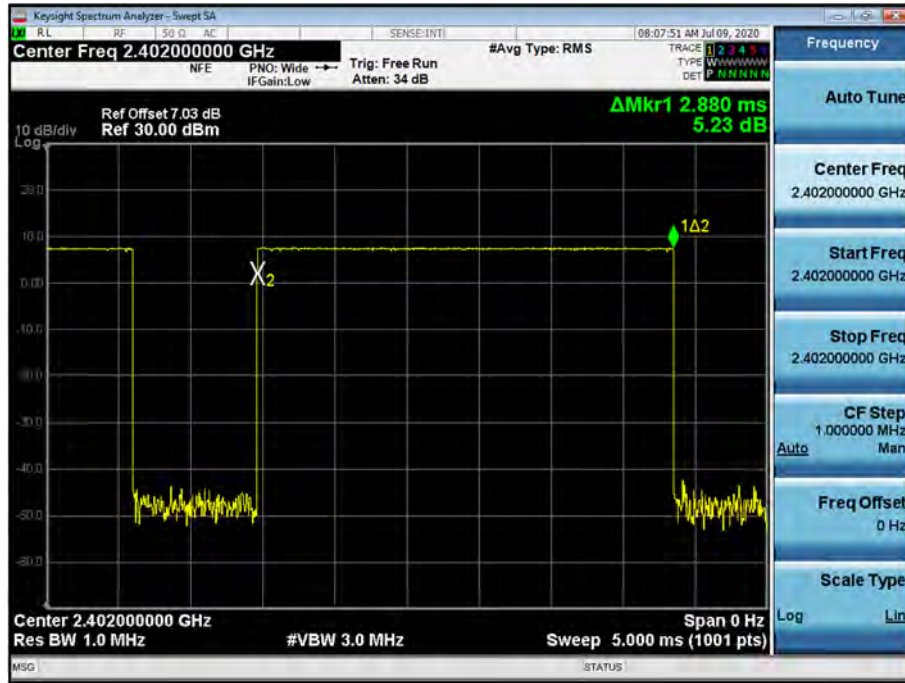


Test Plots (GFSK)

Dwell Time (CH.39)




Test Plots (GFSK)

Dwell Time (CH.78)

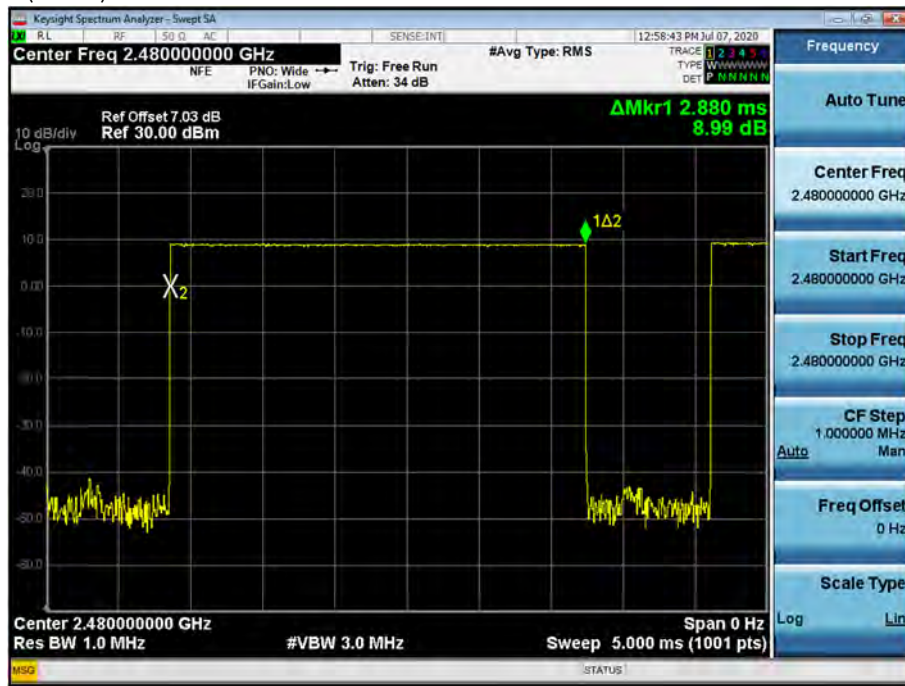


Test Plots (8DPSK)

Dwell Time (CH.0)

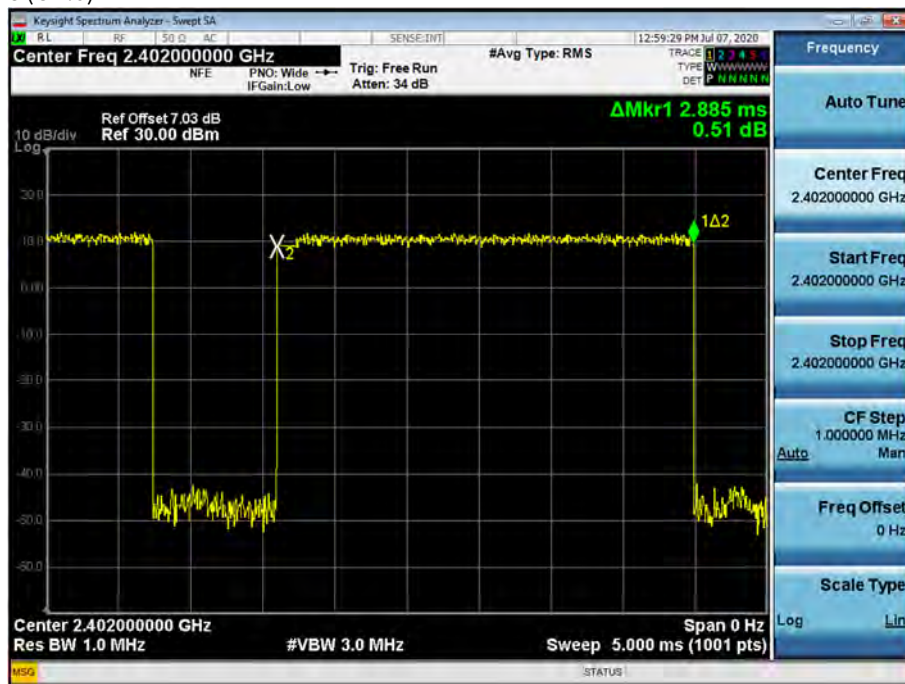


Test Plots (8DPSK)

Dwell Time (CH.39)

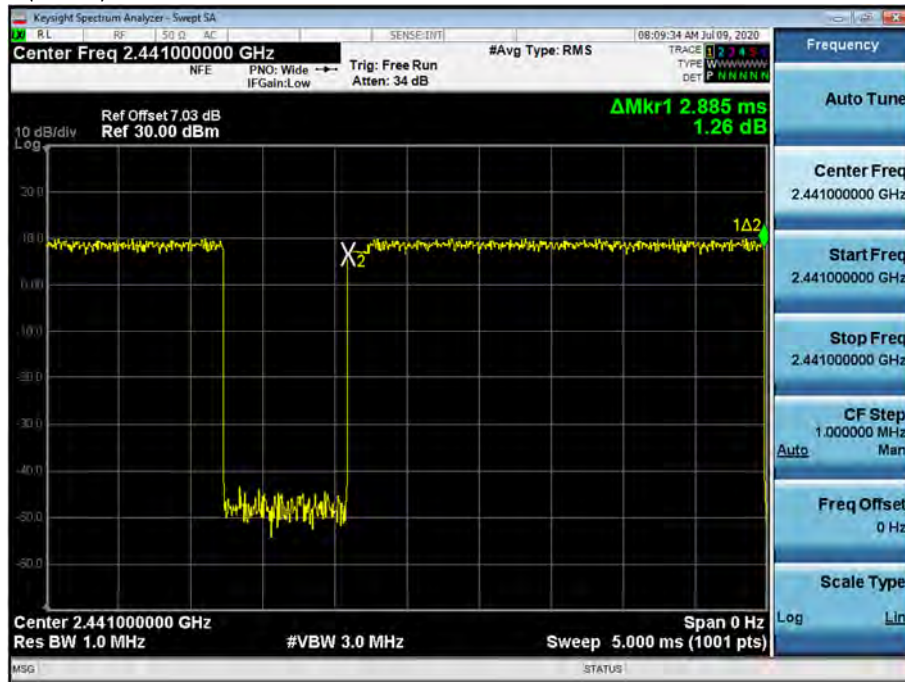


Test Plots (8DPSK)

Dwell Time (CH.78)

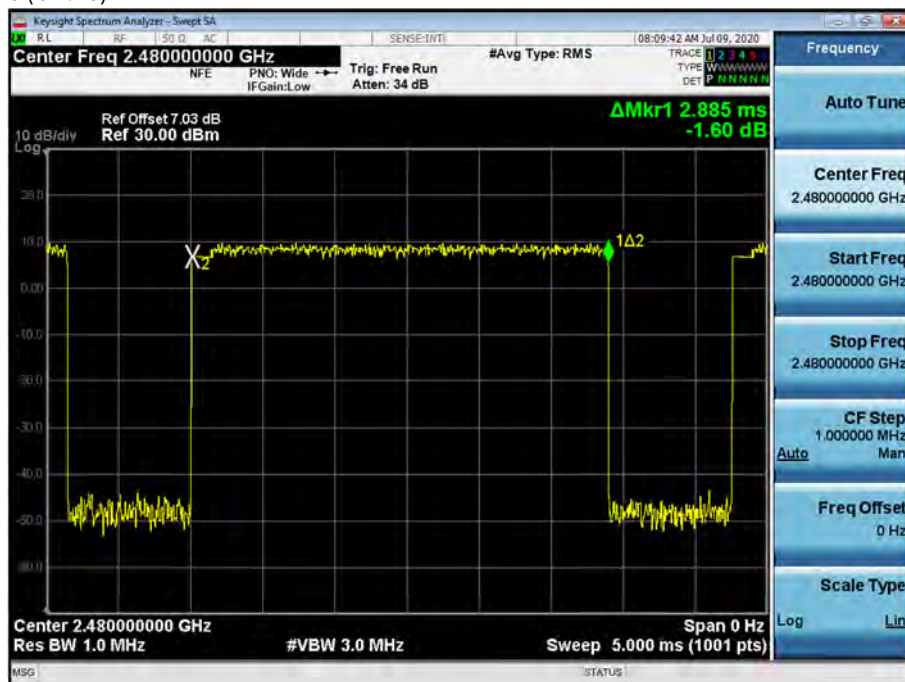


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

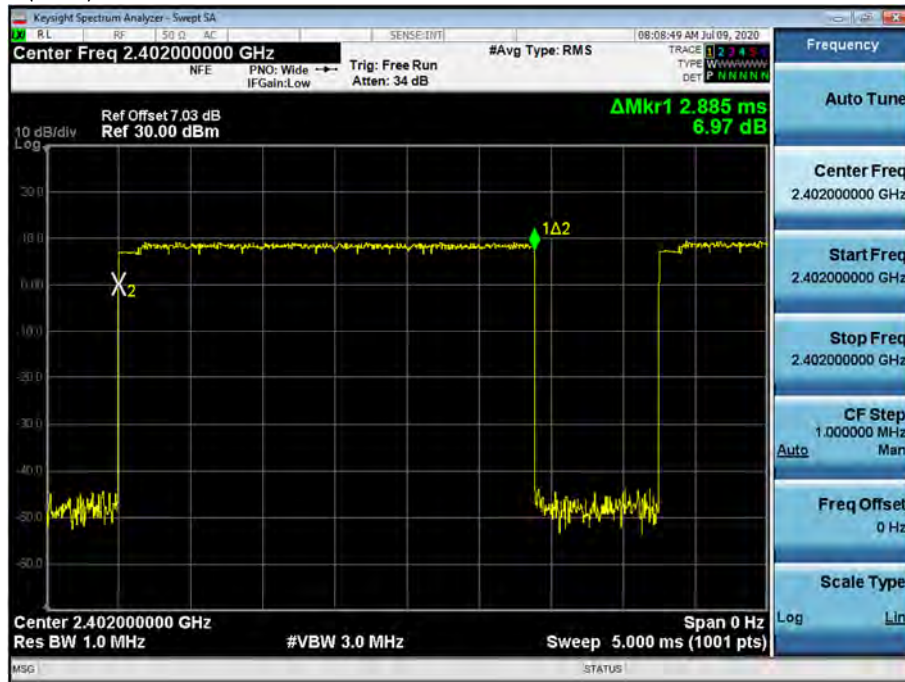


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

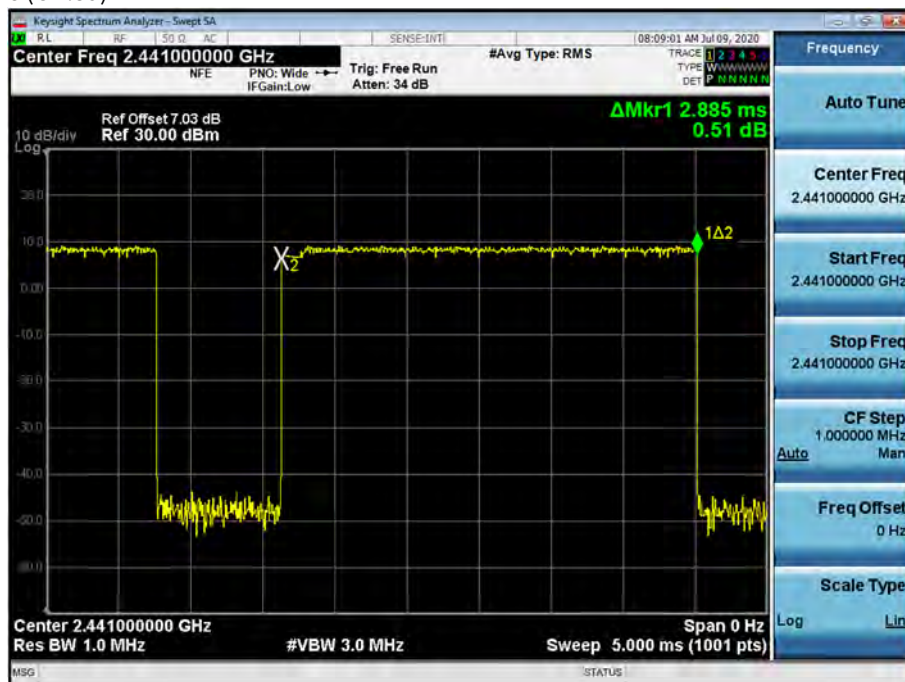

Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.78)

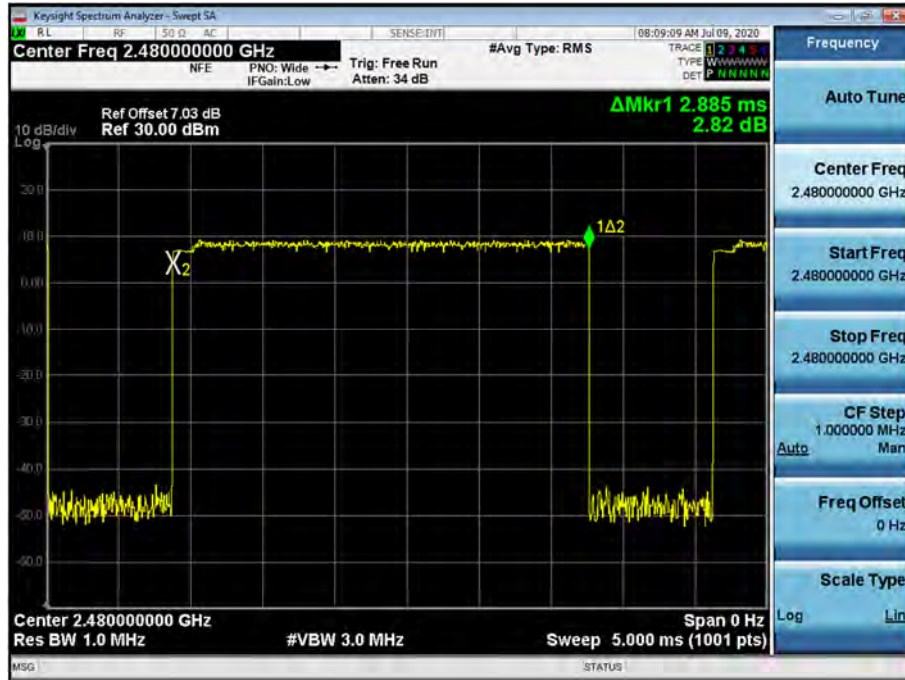

10.6 SPURIOUS EMISSIONS


10.6.1 CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.


Test Plots (8DPSK)- 30 MHz - 1 GHz

Spurious Emission (CH.39)

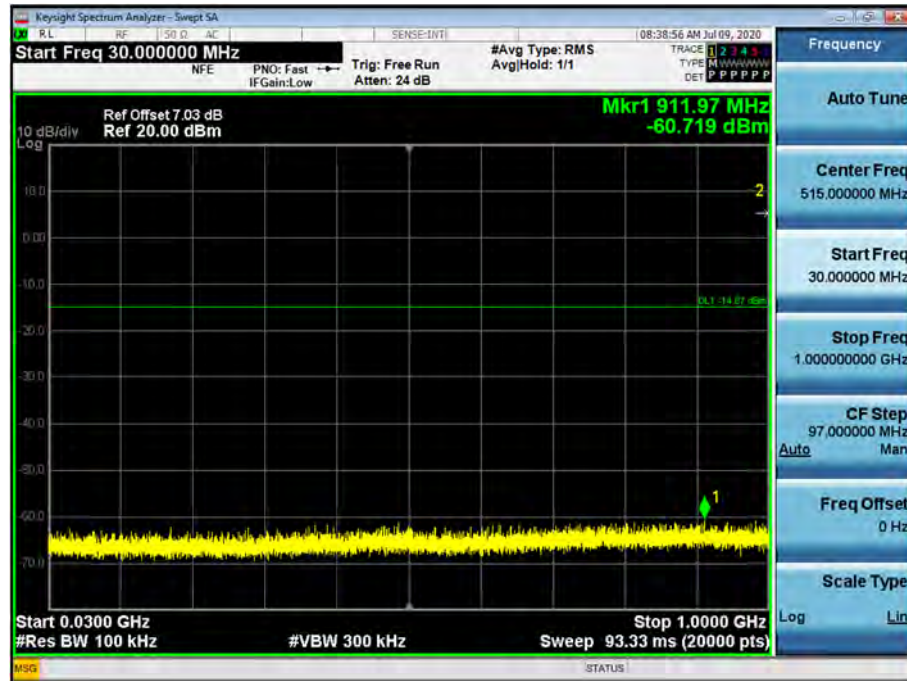


Test Plots (8DPSK)- 1 GHz – 3 GHz

Spurious Emission (CH.39)

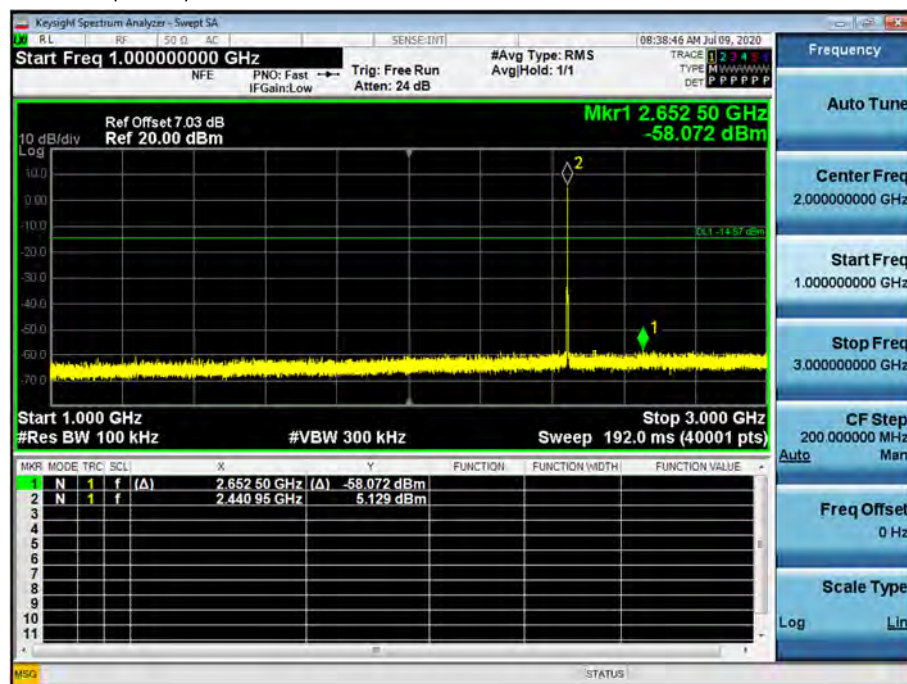


Test Plots (8DPSK)- 3 GHz - 5 GHz

Spurious Emission (CH.39)

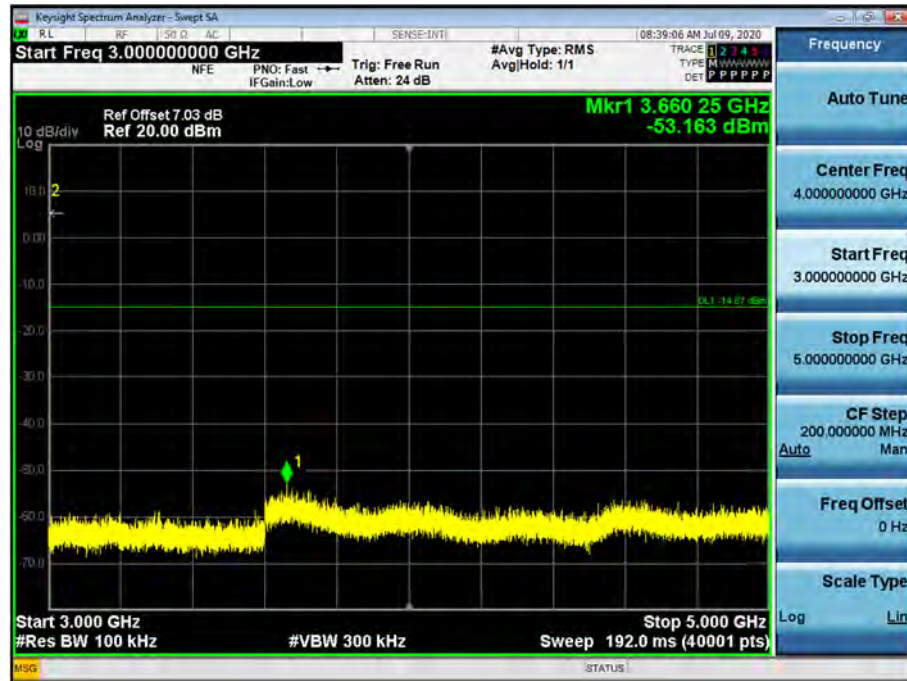


Test Plots (8DPSK)- 5 GHz - 7 GHz

Spurious Emission (CH.39)

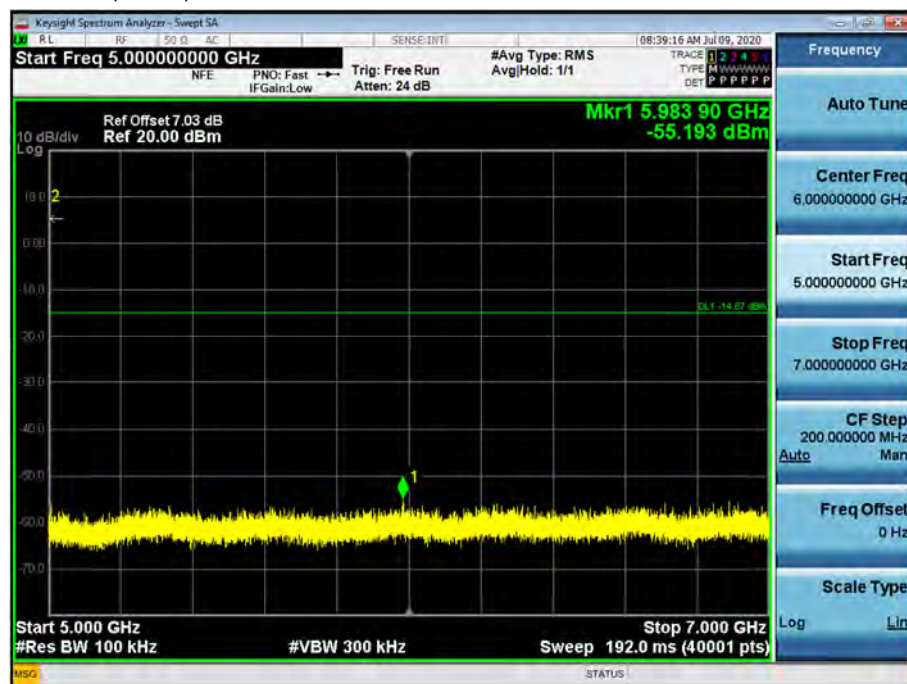


Test Plots (8DPSK)- 7 GHz - 9 GHz

Spurious Emission (CH.39)

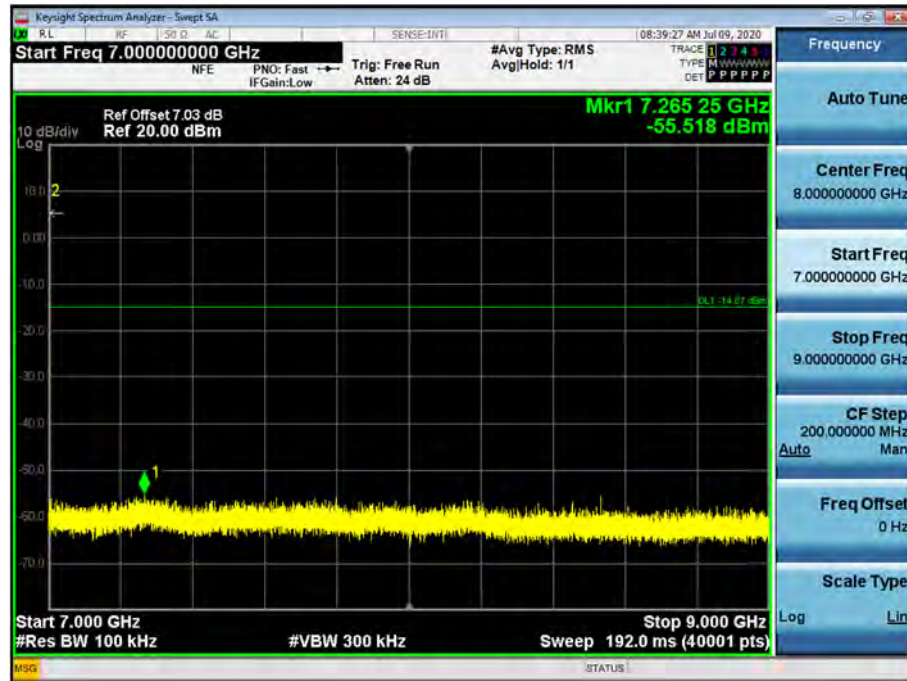


Test Plots (8DPSK)- 9 GHz - 11 GHz

Spurious Emission (CH.39)

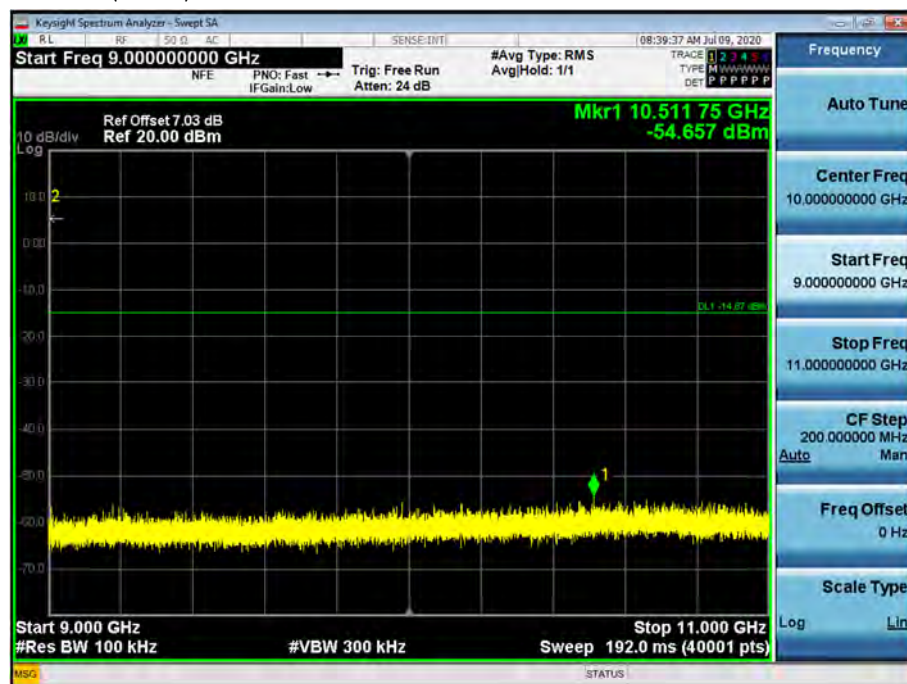


Test Plots (8DPSK) 11 GHz - 13 GHz

Spurious Emission (CH.39)

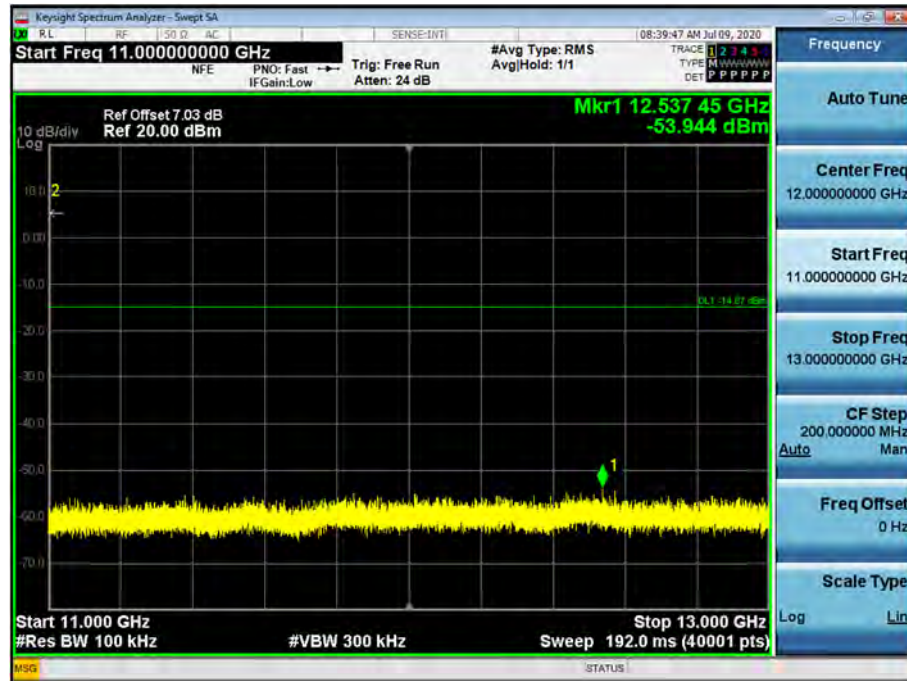


Test Plots (8DPSK)- 13 GHz – 15 GHz

Spurious Emission (CH.39)

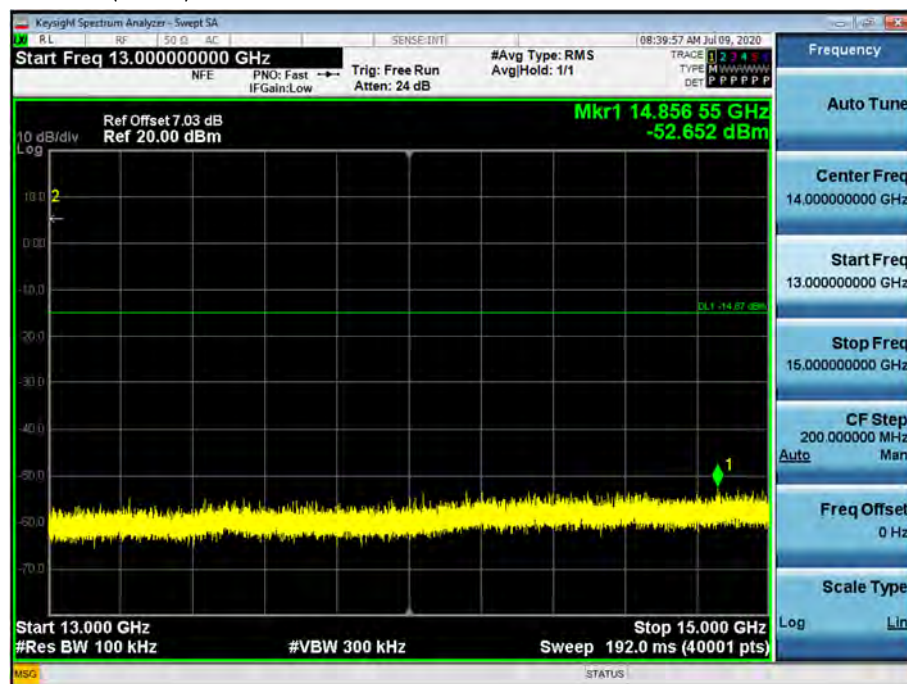


Test Plots (8DPSK)– 15 GHz - 17 GHz

Spurious Emission (CH.39)

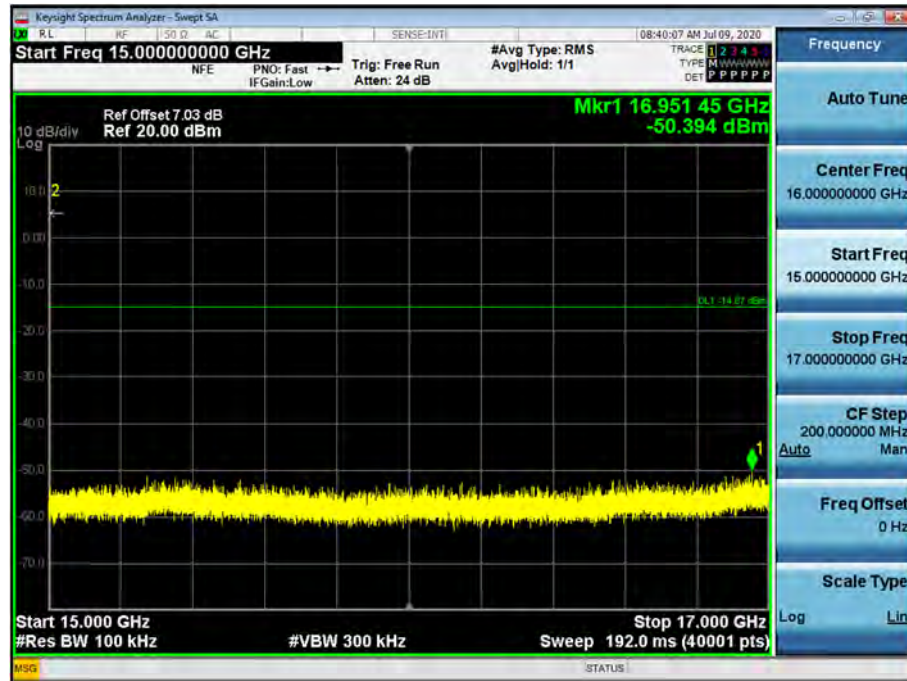


Test Plots (8DPSK)- 17 GHz - 19 GHz

Spurious Emission (CH.39)

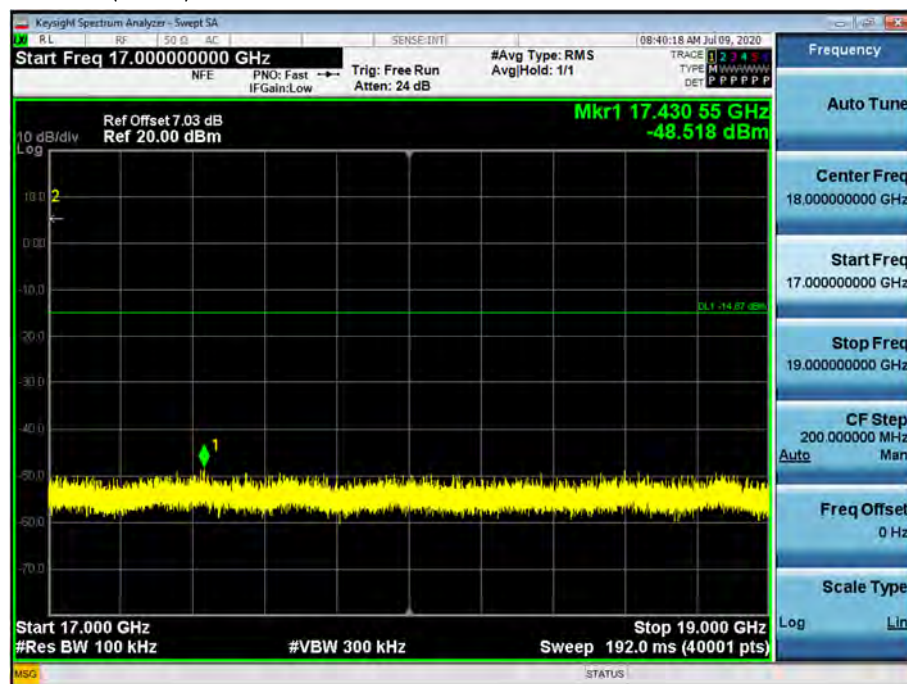


Test Plots (8DPSK)- 19 GHz - 21 GHz

Spurious Emission (CH.39)

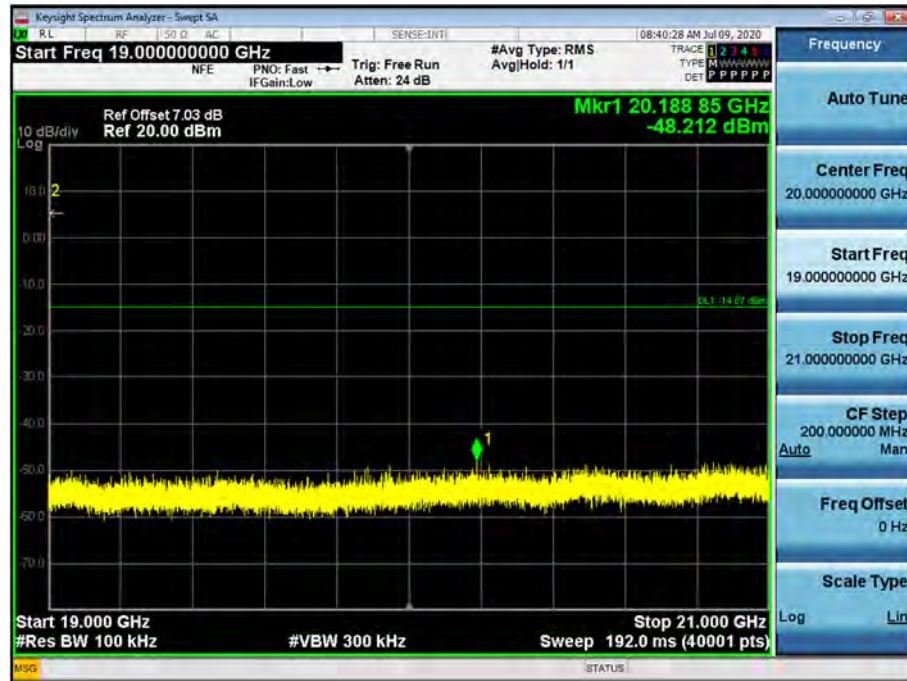


Test Plots (8DPSK)- 21 GHz - 23 GHz

Spurious Emission (CH.39)

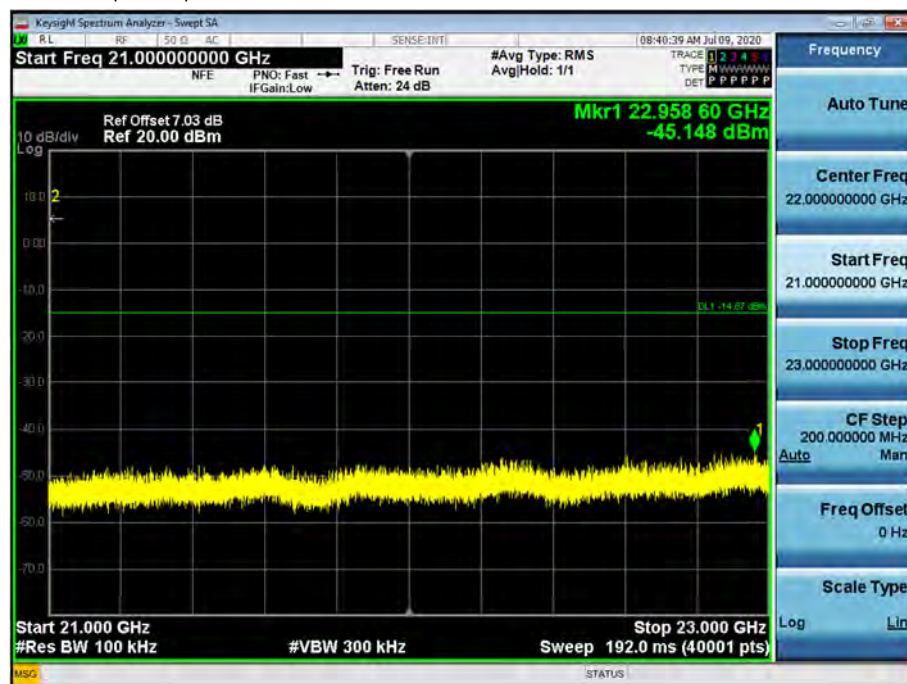

Test Plots (8DPSK)- 23 GHz - 25 GHz

Spurious Emission (CH.39)

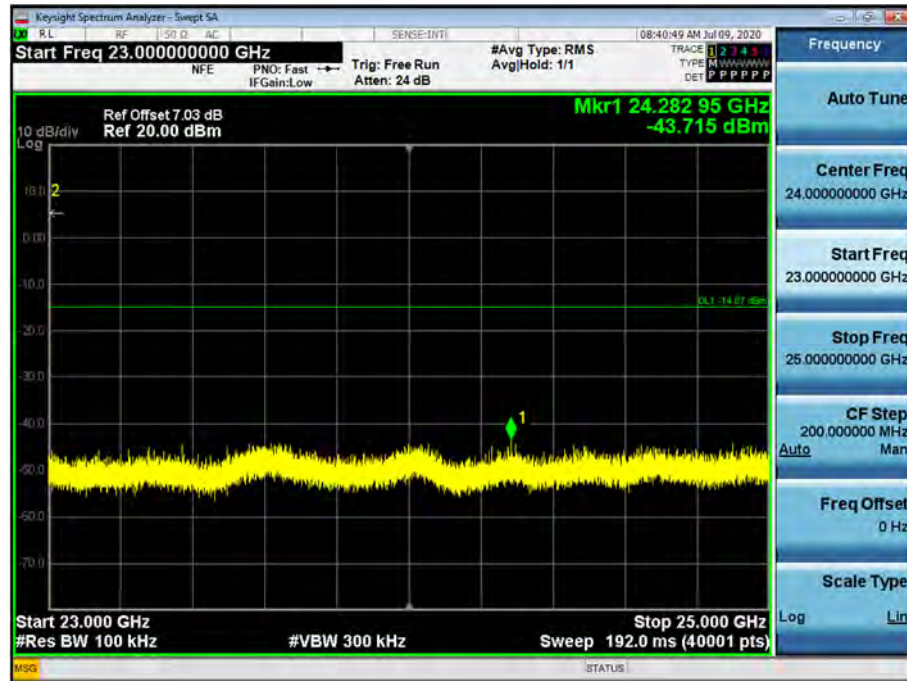

10.6.2 RADIATED SPURIOUS EMISSIONS

10.6.2.1 Basic Cable

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	43.56	2.17	V	45.73	73.98	28.25	PK
4804	29.85	2.17	V	32.02	53.98	21.96	AV
7206	40.24	8.97	V	49.21	73.98	24.77	PK
7206	27.03	8.97	V	36	53.98	17.98	AV
4804	44.21	2.17	H	46.38	73.98	27.60	PK
4804	31.85	2.17	H	34.02	53.98	19.96	AV
7206	40.17	8.97	H	49.14	73.98	24.84	PK
7206	27.01	8.97	H	35.98	53.98	18.00	AV

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	42.04	2.68	V	44.72	73.98	29.26	PK
4882	28.67	2.68	V	31.35	53.98	22.63	AV
7323	40.68	9.03	V	49.71	73.98	24.27	PK
7323	27.09	9.03	V	36.12	53.98	17.86	AV
4882	42.30	2.68	H	44.98	73.98	29.00	PK
4882	28.74	2.68	H	31.42	53.98	22.56	AV
7323	40.37	9.03	H	49.4	73.98	24.58	PK
7323	27.02	9.03	H	36.05	53.98	17.93	AV

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	41.25	1.54	V	42.79	73.98	31.19	PK
4960	29.44	1.54	V	30.98	53.98	23.00	AV
7440	39.93	9.82	V	49.75	73.98	24.23	PK
7440	26.40	9.82	V	36.22	53.98	17.76	AV
4960	42.41	1.54	H	43.95	73.98	30.03	PK
4960	30.04	1.54	H	31.58	53.98	22.40	AV
7440	39.91	9.82	H	49.73	73.98	24.25	PK
7440	26.38	9.82	H	36.2	53.98	17.78	AV

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	43.28	2.17	V	45.45	73.98	28.53	PK
4804	29.64	2.17	V	31.81	53.98	22.17	AV
7206	40.42	8.97	V	49.39	73.98	24.59	PK
7206	26.75	8.97	V	35.72	53.98	18.26	AV
4804	44.31	2.17	H	46.48	73.98	27.50	PK
4804	31.82	2.17	H	33.99	53.98	19.99	AV
7206	40.16	8.97	H	49.13	73.98	24.85	PK
7206	26.71	8.97	H	35.68	53.98	18.30	AV

Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	42.34	2.68	V	45.02	73.98	28.96	PK
4882	28.12	2.68	V	30.8	53.98	23.18	AV
7323	40.71	9.03	V	49.74	73.98	24.24	PK
7323	27.08	9.03	V	36.11	53.98	17.87	AV
4882	42.50	2.68	H	45.18	73.98	28.80	PK
4882	28.71	2.68	H	31.39	53.98	22.59	AV
7323	40.66	9.03	H	49.69	73.98	24.29	PK
7323	27.03	9.03	H	36.06	53.98	17.92	AV

Operation Mode: CH High ($\pi/4$ DQPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	42.99	1.54	V	44.53	73.98	29.45	PK
4960	29.29	1.54	V	30.83	53.98	23.15	AV
7440	40.67	9.82	V	50.49	73.98	23.49	PK
7440	26.46	9.82	V	36.28	53.98	17.70	AV
4960	43.86	1.54	H	45.4	73.98	28.58	PK
4960	29.91	1.54	H	31.45	53.98	22.53	AV
7440	40.39	9.82	H	50.21	73.98	23.77	PK
7440	26.28	9.82	H	36.1	53.98	17.88	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	43.27	2.17	V	45.44	73.98	28.54	PK
4804	30.11	2.17	V	32.28	53.98	21.70	AV
7206	40.64	8.97	V	49.61	73.98	24.37	PK
7206	27.00	8.97	V	35.97	53.98	18.01	AV
4804	43.99	2.17	H	46.16	73.98	27.82	PK
4804	31.83	2.17	H	34	53.98	19.98	AV
7206	40.63	8.97	H	49.6	73.98	24.38	PK
7206	26.39	8.97	H	35.36	53.98	18.62	AV

Operation Mode: CH Mid(8DPSK)


Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	42.18	2.68	V	44.86	73.98	29.12	PK
4882	28.49	2.68	V	31.17	53.98	22.81	AV
7323	40.20	9.03	V	49.23	73.98	24.75	PK
7323	26.80	9.03	V	35.83	53.98	18.15	AV
4882	42.32	2.68	H	45	73.98	28.98	PK
4882	28.68	2.68	H	31.36	53.98	22.62	AV
7323	40.07	9.03	H	49.1	73.98	24.88	PK
7323	26.22	9.03	H	35.25	53.98	18.73	AV

Operation Mode: CH High(8DPSK)


Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	42.87	1.54	V	44.41	73.98	29.57	PK
4960	29.47	1.54	V	31.01	53.98	22.97	AV
7440	39.82	9.82	V	49.64	73.98	24.34	PK
7440	26.27	9.82	V	36.09	53.98	17.89	AV
4960	43.57	1.54	H	45.11	73.98	28.87	PK
4960	29.74	1.54	H	31.28	53.98	22.70	AV
7440	39.27	9.82	H	49.09	73.98	24.89	PK
7440	26.10	9.82	H	35.92	53.98	18.06	AV

RESULT PLOTS


Radiated Spurious Emissions plot – Average Reading (GFSK, Ch.78 3rd Harmonic, X-V)

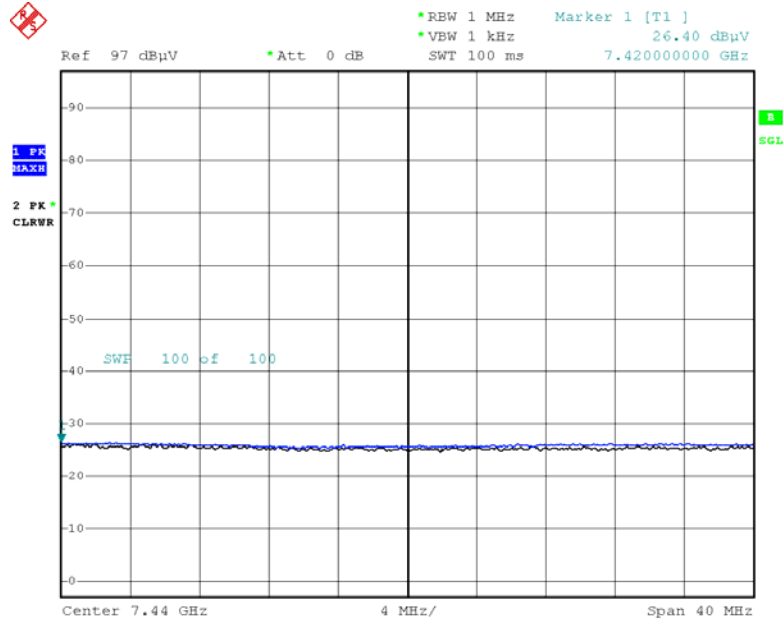

Radiated Spurious Emissions plot – Peak Reading (GFSK, Ch.78 3rd Harmonic, X-V)

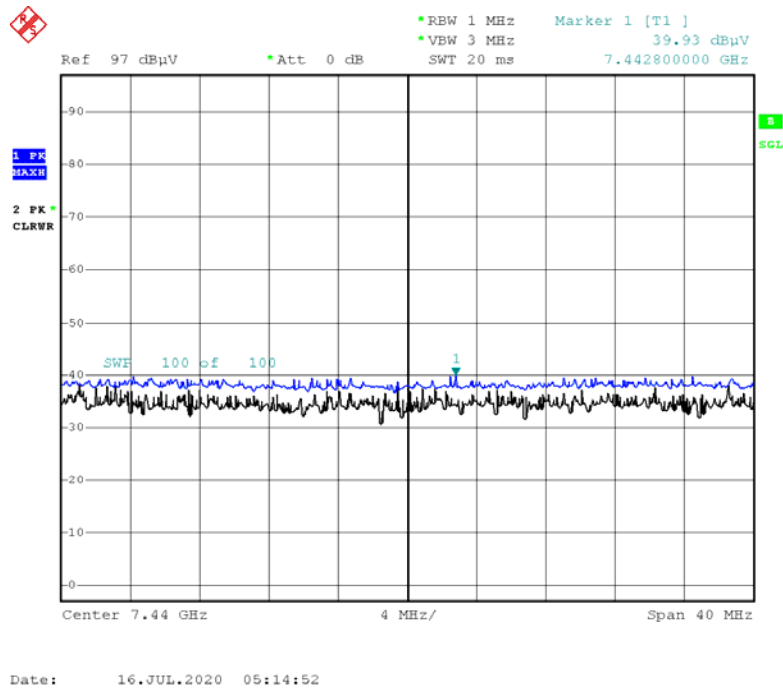


Radiated Spurious Emissions plot – Average Reading (8DPSK, Ch.78 3rd Harmonic, Y-V)

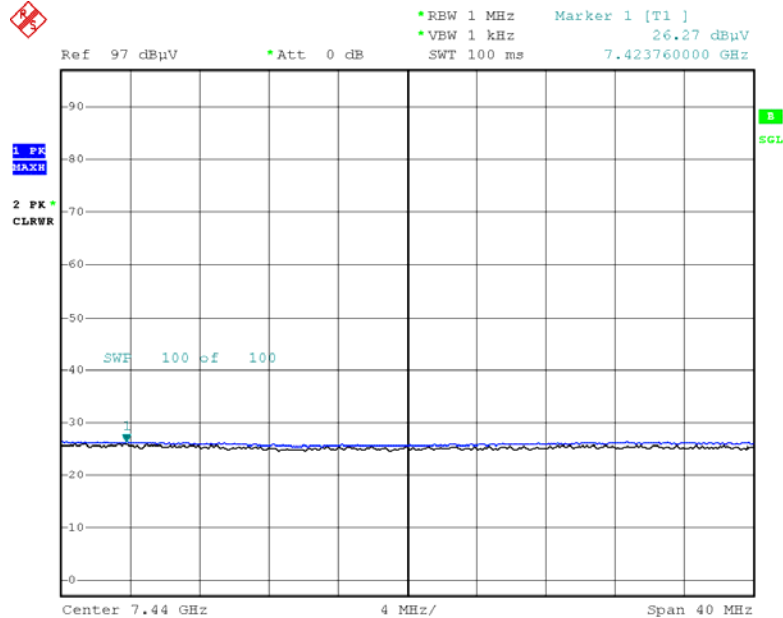


Date: 16.JUL.2020 06:58:05


Radiated Spurious Emissions plot – Peak Reading (8DPSK, Ch.78 3rd Harmonic, Y-V)

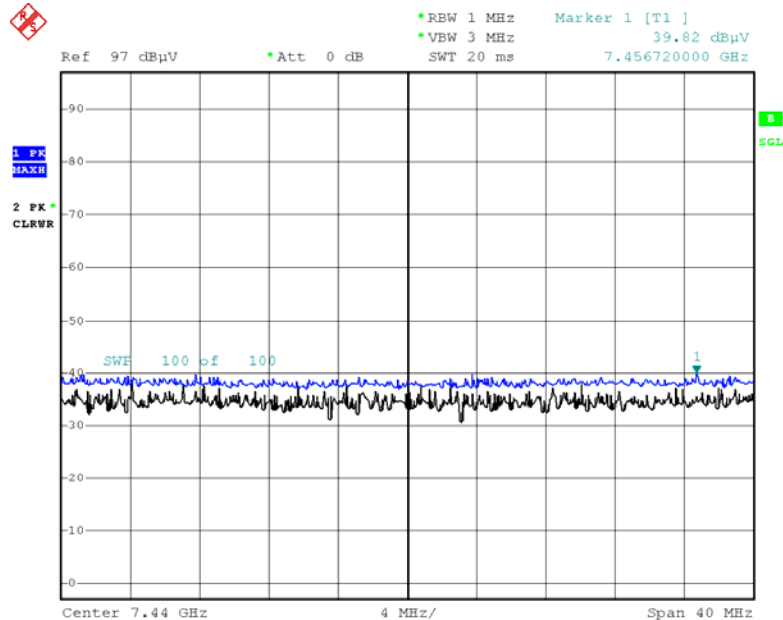

Date: 16.JUL.2020 06:58:20

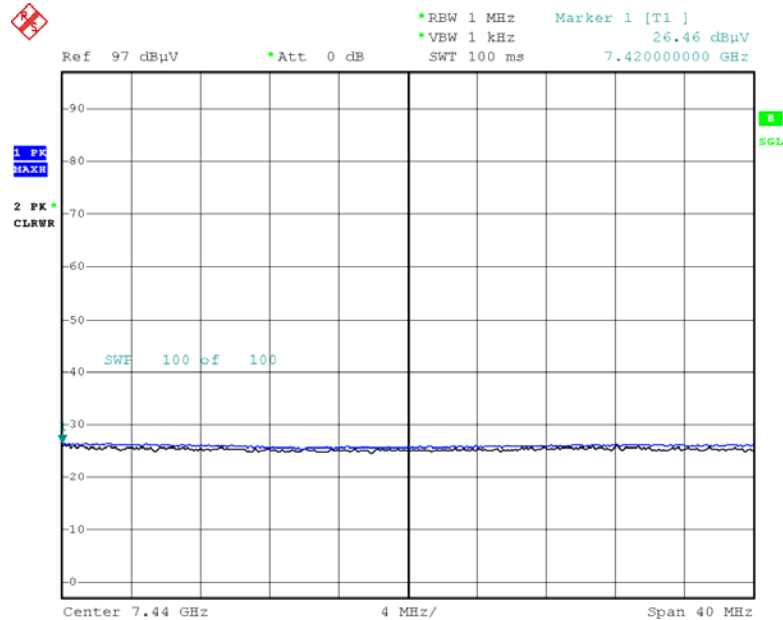Radiated Spurious Emissions plot – Average Reading ($\pi/4$ DQPSK, Ch.78 3rd Harmonic, Y-V)


Date: 16.JUL.2020 05:25:04

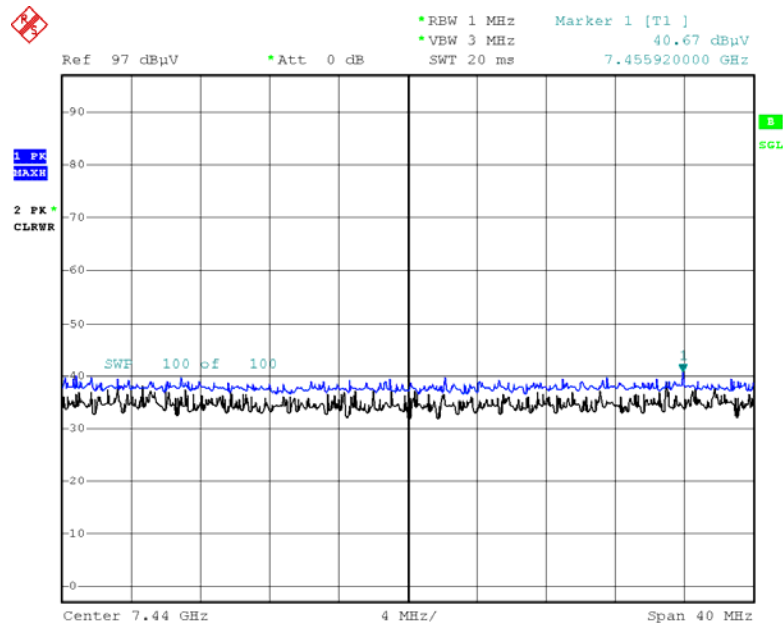Radiated Spurious Emissions plot – Peak Reading ($\pi/4$ DQPSK, Ch.78 3rd Harmonic, Y-V)


Date: 16.JUL.2020 05:25:14

Note:

Plot of worst case are only reported.

10.6.2.2 FFC Cable

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

Operation Mode: CH High(8DPSK)


Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	42.86	1.54	V	44.40	73.98	29.58	PK
4960	28.95	1.54	V	30.49	53.98	23.49	AV
7440	39.75	9.82	V	49.57	73.98	24.41	PK
7440	26.40	9.82	V	36.22	53.98	17.76	AV
4960	43.61	1.54	H	45.15	73.98	28.83	PK
4960	29.28	1.54	H	30.82	53.98	23.16	AV
7440	40.19	9.82	H	50.01	73.98	23.97	PK
7440	26.74	9.82	H	36.56	53.98	17.42	AV

Note:

1. The worst case of the basic cable only was tested.


RESULT PLOTS

Radiated Spurious Emissions plot – Average Reading (8DPSK, Ch.78 3rd Harmonic, X-H)

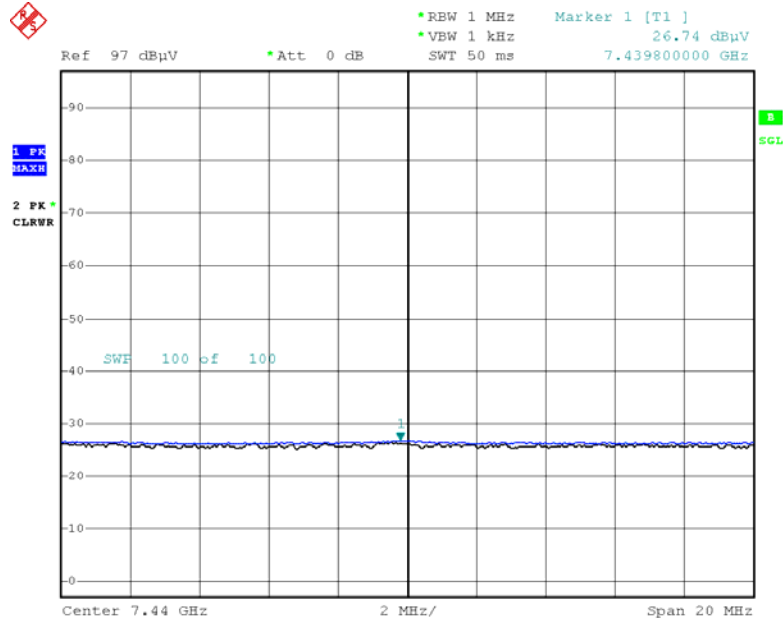

Date: 31.AUG.2020 09:14:51

Radiated Spurious Emissions plot – Peak Reading (8DPSK, Ch.78 3rd Harmonic, X-H)

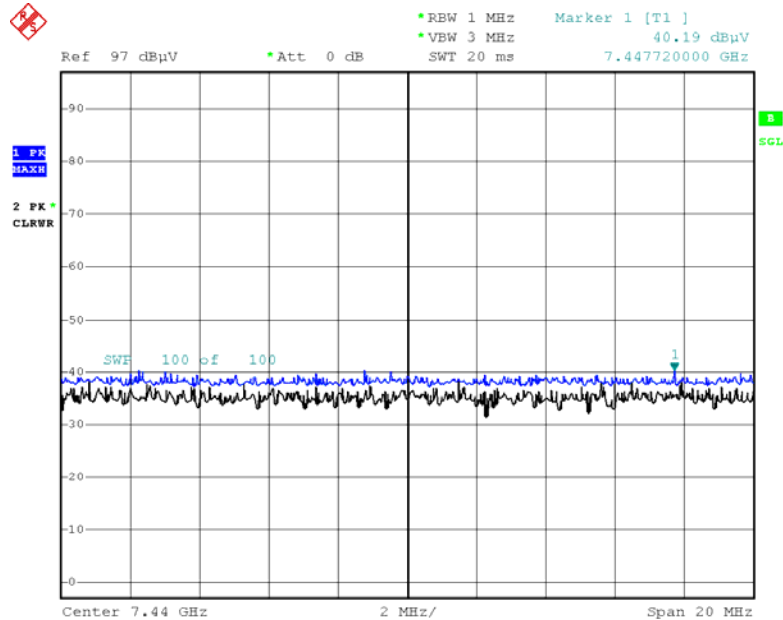

Date: 31.AUG.2020 09:15:01

Note:

Plot of worst case are only reported.

10.6.2.3 DBS Mode

Frequency Range : Above 1 GHz


Ant 1 : Bluetooth Ch 78 (8DPSK) & Ant 1 : 802.11ax(HE20) Ch 52

Operation Mode:	802.11ax(HE20) & 8DPSK
Transfer Rate (MCS Index):	MCS0 & 1 Mbps
Operating Frequency	5260 MHz & 2480
Channel No.	52 Ch & 78 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	52.17	1.54	V	53.71	73.98	20.27	PK
4960	43.55	1.54	V	45.09	53.98	8.89	AV
7440	40.54	9.82	V	50.36	73.98	23.62	PK
7440	26.80	9.82	V	36.62	53.98	17.36	AV
4960	53.12	1.54	H	54.66	73.98	19.32	PK
4960	44.12	1.54	H	45.66	53.98	8.32	AV
7440	40.50	9.82	H	50.32	73.98	23.66	PK
7440	26.81	9.82	H	36.63	53.98	17.35	AV


RESULT PLOTS

Radiated Spurious Emissions plot – Average Reading (8DPSK, Ch.78 2nd Harmonic, H)

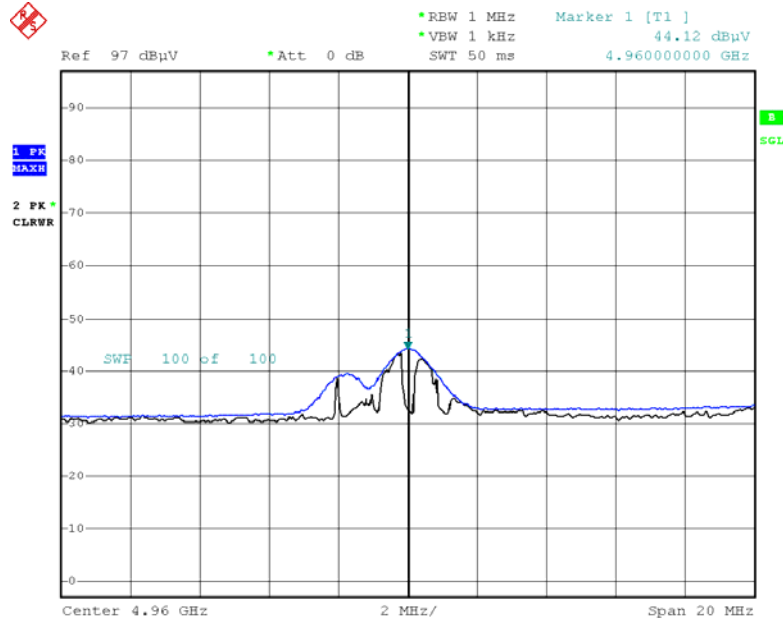

Date: 31.AUG.2020 05:59:30

Radiated Spurious Emissions plot – Peak Reading (8DPSK, Ch.78 2nd Harmonic, H)

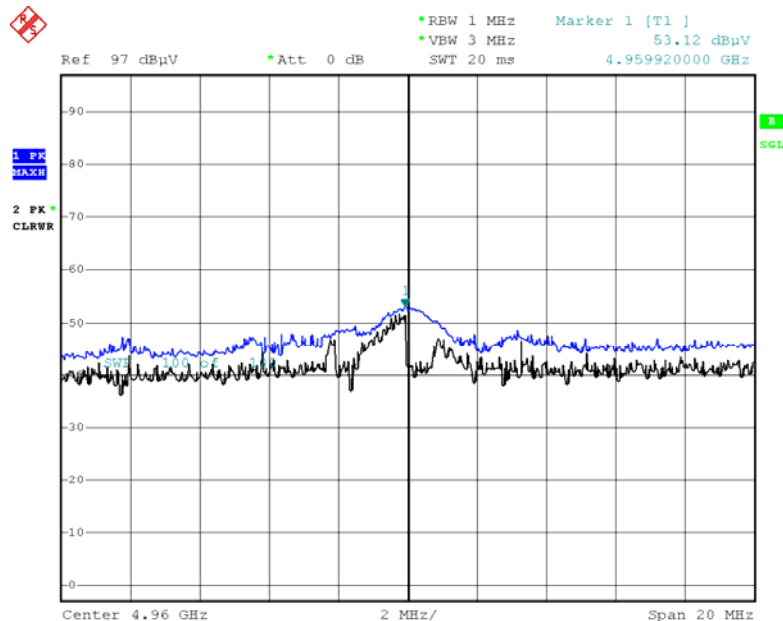

Date: 31.AUG.2020 05:59:53

Note:

Plot of worst case are only reported.

10.6.3 RADIATED RESTRICTED BAND EDGES

10.6.3.1 Basic Cable

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	18.67	35.60	H	54.27	73.98	19.72	PK
2390.0	1.99	35.60	H	37.59	53.98	16.39	AV
2390.0	18.41	35.60	V	54.01	73.98	19.97	PK
2390.0	2.00	35.60	V	37.60	53.98	16.38	AV
2483.5	19.17	35.96	H	55.13	73.98	18.85	PK
2483.5	3.16	35.96	H	39.13	53.98	14.85	AV
2483.5	18.77	35.96	V	54.73	73.98	19.25	PK
2483.5	3.34	35.96	V	39.30	53.98	14.68	AV

Operation Mode	EDR(π /4DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78


Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	19.46	35.60	H	55.06	73.98	18.93	PK
2390.0	2.26	35.60	H	37.86	53.98	16.12	AV
2390.0	19.03	35.60	V	54.63	73.98	19.35	PK
2390.0	1.82	35.60	V	37.42	53.98	16.56	AV
2483.5	19.43	35.96	H	55.39	73.98	18.59	PK
2483.5	3.92	35.96	H	39.88	53.98	14.10	AV
2483.5	19.06	35.96	V	55.02	73.98	18.96	PK
2483.5	3.55	35.96	V	39.51	53.98	14.47	AV

Operation Mode	EDR(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78


Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2390.0	19.53	35.60	H	55.13	73.98	18.85	PK
2390.0	2.10	35.60	H	37.70	53.98	16.28	AV
2390.0	18.76	35.60	V	54.36	73.98	19.62	PK
2390.0	2.02	35.60	V	37.62	53.98	16.36	AV
2483.5	20.22	35.96	H	56.18	73.98	17.80	PK
2483.5	4.01	35.96	H	39.98	53.98	14.00	AV
2483.5	18.42	35.96	V	54.38	73.98	19.60	PK
2483.5	3.34	35.96	V	39.30	53.98	14.68	AV

RESULT PLOTS

Radiated Restricted Band Edges plot – Average Reading (8DPSK, Ch.78, X-H)

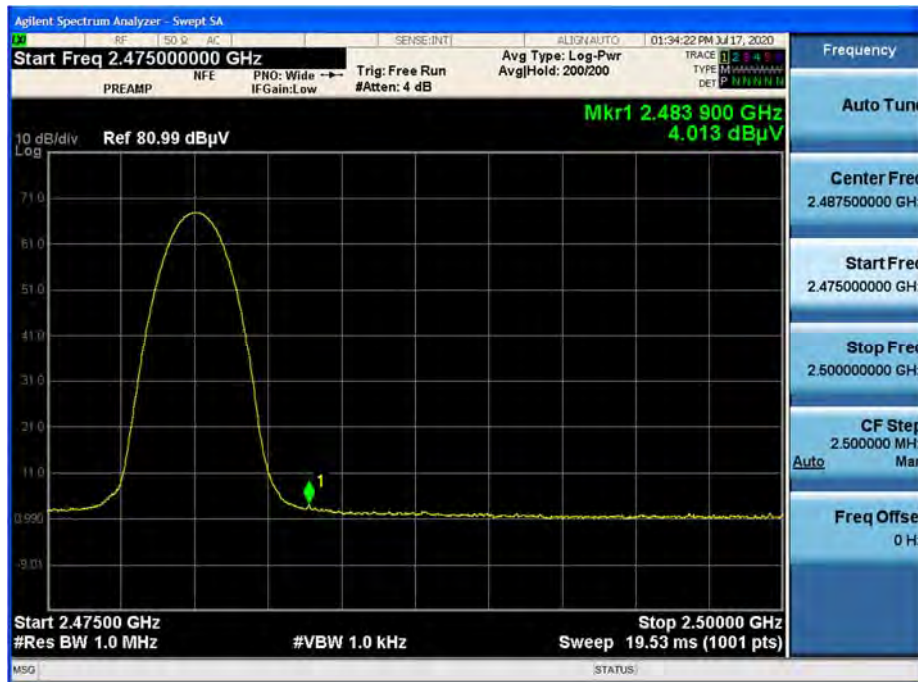

Radiated Restricted Band Edges plot – Peak Reading (8DPSK, Ch.78, X-H)

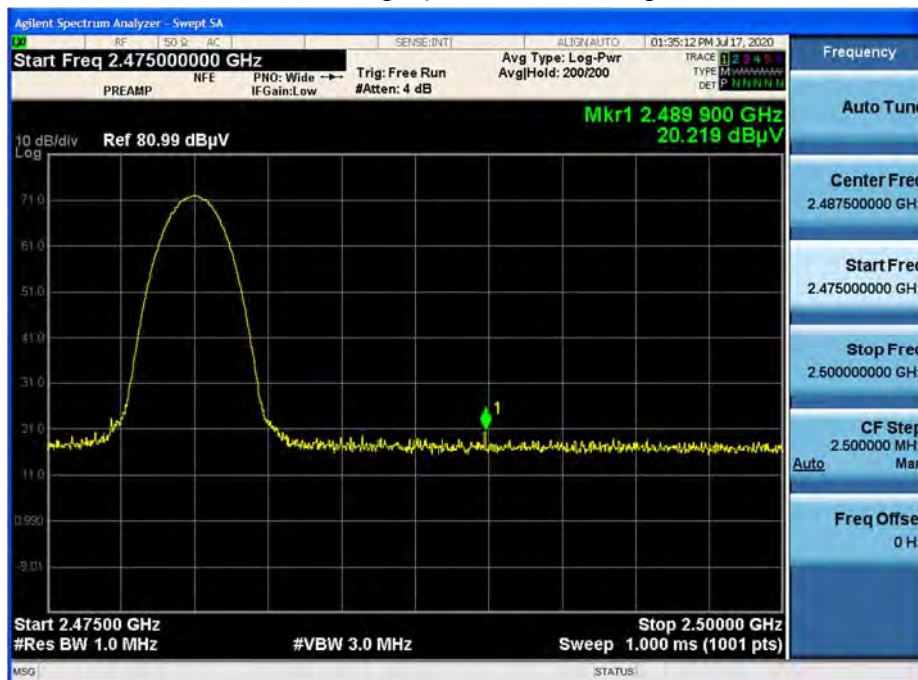

Note:

Plot of worst case are only reported.

10.6.3.2 FFC Cable

Operation Mode	EDR(8DPSK)
Operating Frequency	2480 MHz
Channel No	CH 78


Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect [dB]
2483.5	19.25	35.96	H	55.22	73.98	18.76	PK
2483.5	3.91	35.96	H	39.87	53.98	14.11	AV
2483.5	19.14	35.96	V	55.11	73.98	18.87	PK
2483.5	3.58	35.96	V	39.54	53.98	14.44	AV

Note:


1. The worst case of the basic cable only was tested.

RESULT PLOTS

Radiated Restricted Band Edges plot – Average Reading (8DPSK, Ch.78, X-H)

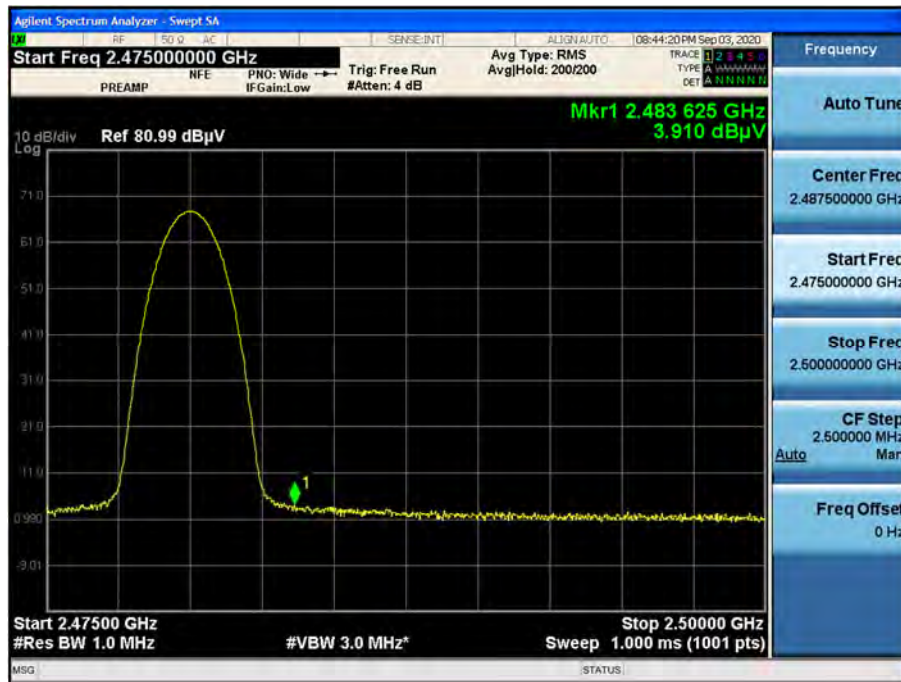

Radiated Restricted Band Edges plot – Peak Reading (8DPSK, Ch.78, X-H)

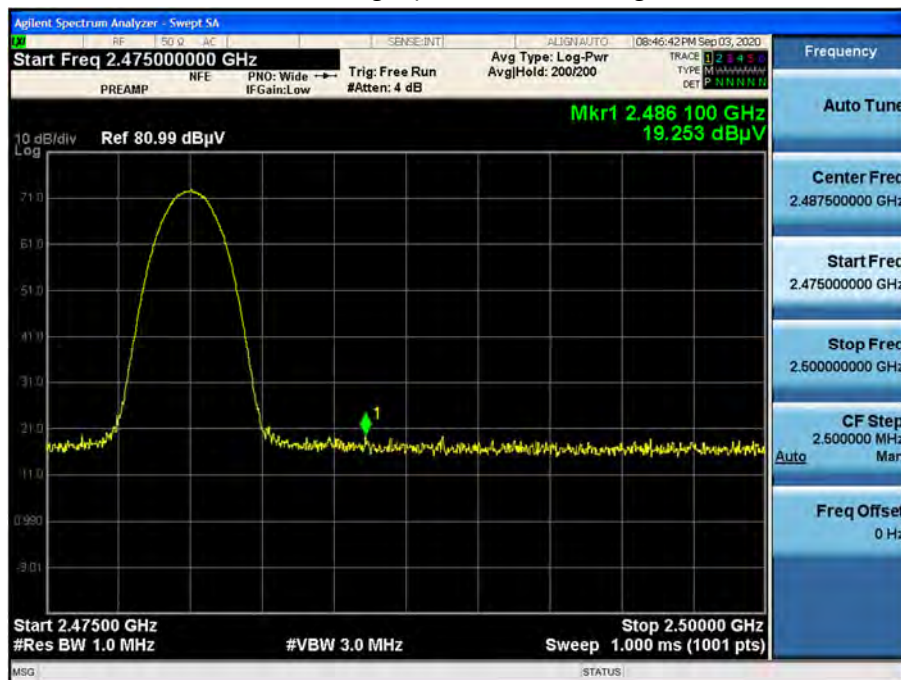

Note:

Plot of worst case are only reported.

10.7 RECEIVER SPURIOUS EMISSIONS

10.7.1 Basic Cable

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

10.7.2 FFC Cable

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The worst case of the basic cable only was tested.

10.8 POWERLINE CONDUCTED EMISSIONS

10.8.1 Basic Cable

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAX12
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BT_N

FCC CLASS B

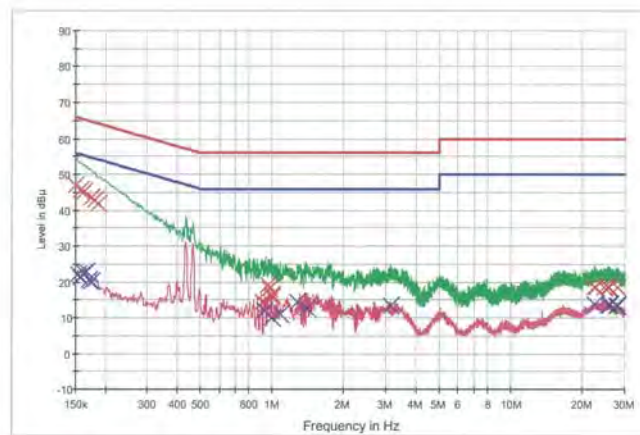

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG — X — Final Result 1-QPK — X — Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.0	9.000	On	N	9.7	19.0	56.0
0.158000	45.7	9.000	On	N	9.7	19.9	55.6
0.162000	45.1	9.000	On	N	9.7	20.2	55.4
0.174000	43.5	9.000	On	N	9.7	21.2	54.8
0.180000	42.9	9.000	On	N	9.7	21.6	54.5
0.188000	42.0	9.000	On	N	9.7	22.1	54.1
0.908000	14.3	9.000	On	N	9.7	41.7	56.0
0.938000	13.6	9.000	On	N	9.7	42.4	56.0
0.962000	19.2	9.000	On	N	9.7	36.8	56.0
0.980000	18.2	9.000	On	N	9.7	37.8	56.0
0.992000	16.3	9.000	On	N	9.7	39.7	56.0
0.996000	15.6	9.000	On	N	9.7	40.4	56.0
22.254000	18.5	9.000	On	N	10.0	41.5	60.0
22.722000	18.4	9.000	On	N	10.0	41.6	60.0
24.650000	18.5	9.000	On	N	10.0	41.5	60.0
25.544000	18.5	9.000	On	N	10.0	41.5	60.0
25.776000	18.6	9.000	On	N	10.0	41.4	60.0
27.956000	18.5	9.000	On	N	10.0	41.5	60.0

2020-08-25

오후 8:10:03

Test

2 / 2

Final Result 2

Frequency (MHz)	C Average (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	22.2	9.000	On	N	9.7	33.6	55.8
0.158000	21.3	9.000	On	N	9.7	34.3	55.6
0.162000	22.5	9.000	On	N	9.7	32.8	55.4
0.166000	22.8	9.000	On	N	9.7	32.3	55.2
0.170000	20.5	9.000	On	N	9.7	34.4	55.0
0.174000	20.3	9.000	On	N	9.7	34.5	54.8
0.932000	12.1	9.000	On	N	9.7	33.8	46.0
0.996000	10.0	9.000	On	N	9.7	36.0	46.0
1.082000	10.9	9.000	On	N	9.7	35.1	46.0
1.278000	14.5	9.000	On	N	9.7	31.5	46.0
1.398000	12.7	9.000	On	N	9.7	33.3	46.0
3.138000	13.4	9.000	On	N	9.8	32.6	46.0
22.294000	13.7	9.000	On	N	10.0	36.3	50.0
25.328000	13.4	9.000	On	N	10.0	36.6	50.0
25.728000	13.7	9.000	On	N	10.0	36.3	50.0
26.098000	13.6	9.000	On	N	10.0	36.4	50.0
27.704000	13.4	9.000	On	N	10.0	36.6	50.0
27.830000	13.3	9.000	On	N	10.0	36.7	50.0

2020-08-25

오후 8:10:03

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAX12
Manufacturer: LG
Test Site: SHIELD ROOM
Operating Conditions: BT_L1

FCC CLASS B

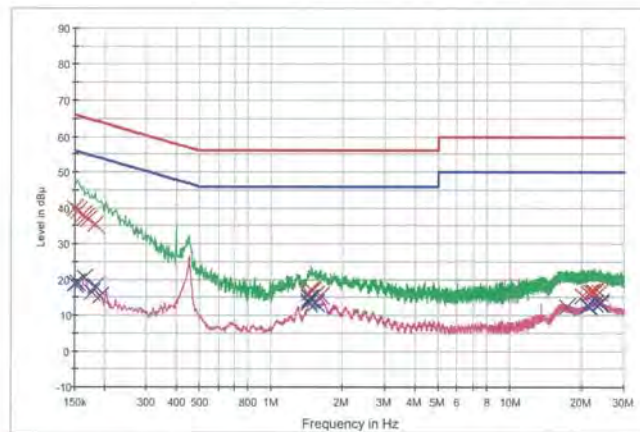

— FCC CLASS B_QP
— Preview Result 2-AVG
— FCC CLASS B_AV
— Final Result 1-QPK
— Preview Result 1-PK+
— Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	40.0	9.000	On	L1	9.7	26.0	66.0
0.156000	39.1	9.000	On	L1	9.7	26.5	65.7
0.162000	38.1	9.000	On	L1	9.7	27.3	65.4
0.166000	37.4	9.000	On	L1	9.7	27.7	65.2
0.170000	36.8	9.000	On	L1	9.7	28.2	65.0
0.182000	35.4	9.000	On	L1	9.7	29.0	64.4
1.434000	16.0	9.000	On	L1	9.8	40.0	56.0
1.466000	17.1	9.000	On	L1	9.8	38.9	56.0
1.472000	17.0	9.000	On	L1	9.8	39.0	56.0
1.482000	16.7	9.000	On	L1	9.8	39.3	56.0
1.530000	15.9	9.000	On	L1	9.8	40.1	56.0
1.620000	15.4	9.000	On	L1	9.8	40.6	56.0
20.072000	15.6	9.000	On	L1	10.0	44.4	60.0
21.248000	16.1	9.000	On	L1	10.0	43.9	60.0
21.842000	16.4	9.000	On	L1	10.0	43.6	60.0
22.272000	16.4	9.000	On	L1	10.0	43.6	60.0
22.620000	16.3	9.000	On	L1	10.0	43.7	60.0
23.666000	16.4	9.000	On	L1	10.0	43.6	60.0

2020-08-25

오후 8:21:08

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	18.8	9.000	On	L1	9.7	37.2	56.0
0.154000	19.0	9.000	On	L1	9.7	36.7	55.8
0.164000	20.6	9.000	On	L1	9.7	34.7	55.3
0.176000	16.4	9.000	On	L1	9.7	38.3	54.7
0.184000	16.0	9.000	On	L1	9.7	36.3	54.3
0.192000	15.4	9.000	On	L1	9.7	38.5	53.9
1.434000	13.4	9.000	On	L1	9.8	32.6	46.0
1.442000	14.1	9.000	On	L1	9.8	31.9	46.0
1.458000	14.6	9.000	On	L1	9.8	31.4	46.0
1.470000	14.5	9.000	On	L1	9.8	31.5	46.0
1.474000	14.6	9.000	On	L1	9.8	31.4	46.0
1.530000	13.5	9.000	On	L1	9.8	32.5	46.0
17.300000	12.4	9.000	On	L1	10.0	37.6	50.0
21.136000	12.6	9.000	On	L1	10.0	37.4	50.0
21.248000	12.7	9.000	On	L1	10.0	37.3	50.0
22.620000	13.3	9.000	On	L1	10.0	36.7	50.0
23.666000	13.3	9.000	On	L1	10.0	36.7	50.0
23.966000	13.3	9.000	On	L1	10.0	36.7	50.0

2020-08-25

오후 8:21:08

10.8.2 FFC Cable

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAX12
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BT_N

FCC CLASS B

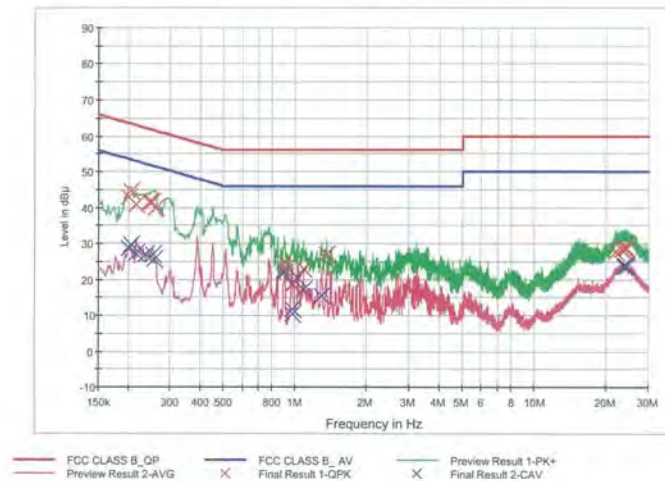

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.202000	43.0	9.000	On	N	9.7	20.6	63.5
0.206000	44.4	9.000	On	N	9.7	18.9	63.4
0.216000	41.0	9.000	On	N	9.7	22.0	63.0
0.246000	41.5	9.000	On	N	9.7	20.4	61.9
0.250000	41.7	9.000	On	N	9.7	20.1	61.8
0.260000	39.8	9.000	On	N	9.7	21.6	61.4
0.896000	22.8	9.000	On	N	9.7	33.2	56.0
0.902000	25.0	9.000	On	N	9.7	31.0	56.0
0.970000	18.7	9.000	On	N	9.7	37.3	56.0
0.974000	18.4	9.000	On	N	9.7	37.6	56.0
1.082000	22.9	9.000	On	N	9.7	33.1	56.0
1.354000	26.9	9.000	On	N	9.7	29.1	56.0
21.974000	27.7	9.000	On	N	10.1	32.3	60.0
23.198000	28.3	9.000	On	N	10.1	31.7	60.0
23.624000	28.7	9.000	On	N	10.1	31.3	60.0
23.764000	28.7	9.000	On	N	10.1	31.3	60.0
23.806000	28.6	9.000	On	N	10.1	31.4	60.0
24.278000	28.6	9.000	On	N	10.1	31.4	60.0

2020-09-07

오후 7:17:38

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.202000	28.5	9.000	On	N	9.7	25.0	53.5
0.206000	29.6	9.000	On	N	9.7	23.7	53.4
0.216000	27.2	9.000	On	N	9.7	25.8	53.0
0.238000	27.1	9.000	On	N	9.7	25.0	52.2
0.254000	26.9	9.000	On	N	9.7	24.7	51.6
0.258000	25.8	9.000	On	N	9.7	25.7	51.5
0.898000	21.7	9.000	On	N	9.7	24.3	46.0
0.970000	11.6	9.000	On	N	9.7	34.4	46.0
0.974000	10.4	9.000	On	N	9.7	35.6	46.0
1.022000	20.4	9.000	On	N	9.7	25.6	46.0
1.062000	17.2	9.000	On	N	9.7	28.8	46.0
1.266000	15.5	9.000	On	N	9.7	30.5	46.0
23.856000	23.8	9.000	On	N	10.1	26.2	50.0
23.872000	23.7	9.000	On	N	10.1	26.3	50.0
24.056000	23.7	9.000	On	N	10.1	26.3	50.0
24.168000	23.6	9.000	On	N	10.1	26.4	50.0
24.262000	23.5	9.000	On	N	10.1	26.5	50.0
24.278000	23.6	9.000	On	N	10.1	26.4	50.0

2020-09-07

오후 7:17:38

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAX12
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BT_L1

FCC CLASS B

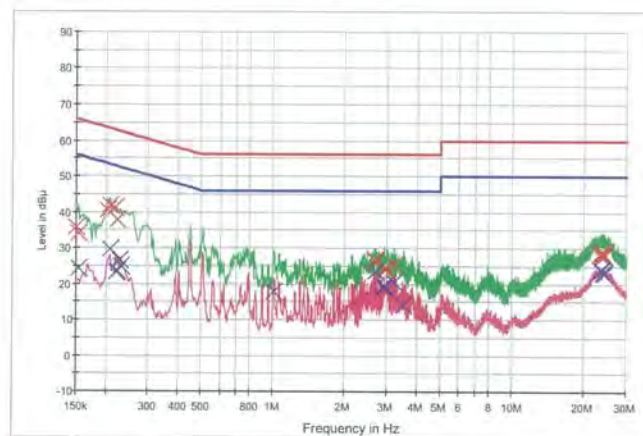

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 Preview Result 2-AVG Final Result 1-QPK Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	35.7	9.000	On	L1	9.8	30.3	66.0
0.154000	34.2	9.000	On	L1	9.8	31.6	65.8
0.204000	40.7	9.000	On	L1	9.8	22.8	63.4
0.208000	41.9	9.000	On	L1	9.8	21.4	63.3
0.218000	41.0	9.000	On	L1	9.8	21.9	62.9
0.222000	37.7	9.000	On	L1	9.8	25.1	62.7
2.654000	26.6	9.000	On	L1	9.8	29.4	56.0
2.700000	26.4	9.000	On	L1	9.8	29.6	56.0
2.704000	26.6	9.000	On	L1	9.8	29.4	56.0
2.936000	24.4	9.000	On	L1	9.8	31.6	56.0
2.990000	24.2	9.000	On	L1	9.8	31.8	56.0
3.214000	25.3	9.000	On	L1	9.8	30.7	56.0
23.234000	28.2	9.000	On	L1	10.1	31.8	60.0
23.770000	28.7	9.000	On	L1	10.1	31.3	60.0
23.794000	28.8	9.000	On	L1	10.1	31.2	60.0
23.866000	28.2	9.000	On	L1	10.1	31.8	60.0
24.044000	28.0	9.000	On	L1	10.1	32.0	60.0
24.218000	28.0	9.000	On	L1	10.1	32.0	60.0

2020-09-07

오후 7:30:08

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	24.4	9.000	On	L1	9.8	31.4	55.8
0.208000	29.5	9.000	On	L1	9.8	23.7	53.3
0.220000	23.4	9.000	On	L1	9.8	29.4	52.8
0.224000	23.5	9.000	On	L1	9.8	29.2	52.7
0.228000	26.5	9.000	On	L1	9.7	26.1	52.5
0.232000	25.1	9.000	On	L1	9.7	27.3	52.4
1.014000	17.7	9.000	On	L1	9.8	28.3	46.0
2.704000	23.5	9.000	On	L1	9.8	22.5	46.0
2.928000	18.7	9.000	On	L1	9.8	27.3	46.0
2.936000	19.5	9.000	On	L1	9.8	26.5	46.0
3.214000	20.6	9.000	On	L1	9.8	25.4	46.0
3.532000	14.0	9.000	On	L1	9.8	32.0	46.0
23.582000	23.8	9.000	On	L1	10.1	26.2	50.0
23.770000	23.9	9.000	On	L1	10.1	26.1	50.0
23.794000	23.8	9.000	On	L1	10.1	26.2	50.0
24.044000	23.3	9.000	On	L1	10.1	26.7	50.0
24.218000	22.9	9.000	On	L1	10.1	27.1	50.0
24.332000	23.0	9.000	On	L1	10.1	27.0	50.0

2020-09-07

오후 7:30:08

11. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/05/2020	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/18/2020	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	05/06/2020	Annual	MY53310623
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45101406
Agilent	N1921A / Power Sensor	03/23/2020	Annual	MY55220026
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/25/2020	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
Weinschel	2-20 / Attenuator(20 dB)	10/08/2019	Annual	BR0592
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/12/2020	Annual	100422

Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/19/2020	Biennial	3368
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/31/2018	Biennial	00895
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/11/2019	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/26/2019	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX WEINSCHTEL	CBLU1183540B-01/Broadband Bench Top LNA 56-10 / Attenuator(10 dB)	12/24/2019	Annual	N/A
CERNEX Api tech.	CBL06185030 / Broadband Low Noise Amplifier 18B-03 / Attenuator (3 dB)	12/24/2019	Annual	N/A
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/24/2019	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/24/2019	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/24/2019	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2009-FI007-P