



HCT.CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8525

## CERTIFICATE OF COMPLIANCE

### FCC Part 22 & 24 Certification

**Applicant Name:** LG Electronics Inc.

**Address:**

60-39, Gasan-dong, Gumchon-gu, Seoul,  
153-023, Korea

**Date of Issue:**

December 18, 2008

**Test Site/Location:**

HCT.CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,  
Kyungki-do, Korea

**Test Report No.:** HCT-RF08-1211

**HCT FRN:** 0005866421

**FCC ID : BEJLHU2100T**

**APPLICANT : LG Electronics Inc.**

**Application Type:** Certification  
**FCC Classification:** PCS Licensed Transmitter (PCB)  
**FCC Rule Part(s):** §22, §24, §2  
**EUT Type:** Cellular/PCS GSM/EDGE/WCDMA USB Modem  
**Model(s):** LHU-2100T  
**Tx Frequency:** 824.20 - 848.80 MHz (GSM850)  
826.4~846.6 MHz (WCDMA850)  
1 850.20 - 1 909.80 MHz (GSM1900)  
1 852.4 - 1 907.6 MHz (WCDMA1900)  
**Rx Frequency:** 869.20 - 893.80 MHz (GSM850)  
871.4 - 891.6 (WCDMA850)  
1 930.20 - 1 989.80 MHz (GSM1900)  
1 932.4 - 1 987.6 MHz (WCDMA1900)  
**Max. RF Output Power:** 0.986 W ERP GSM850 ( 29.94 dBm) / 1.125 W EIRP GSM1900 ( 30.51 dBm)  
0.596 W ERP EDGE850 ( 27.75 dBm) / 0.955 W EIRP EDGE1900 ( 29.80 dBm)  
0.430 W ERP WCDMA850( 26.33 dBm)/ 0.621 W EIRP WCDMA1900( 27.93 dBm)  
**Emission Designator(s):** 246KGXW (GSM850) 245KGXW (GSM1900)  
242KG7W (GSM850 EDGE) 245KG7W (GSM1900 EDGE)  
4M17F9W (WCDMA850) 4M18F9W (WCDMA1900)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by

: Jong Seok Lee

Test engineer of RF Part



Approved by

: Sang Jun Lee

Manager of RF Part

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

| 1 FCC CERTIFICATION REPORT       |                                     |                                                    |                        | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|----------------------------------|-------------------------------------|----------------------------------------------------|------------------------|--------------------------------------------------|
| Test Report No.<br>HCT-RF08-1211 | Date of Issue:<br>December 18, 2008 | EUT Type:<br>Cellular/PCS GSM/EDGE/WCDMA USB Modem | FCC ID:<br>BEJLHU2100T | Page 1 of 44                                     |

# Table of Contents

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| 1. GENERAL INFORMATION .....                                          | 3  |
| 2. INTRODUCTION.....                                                  | 4  |
| 2.1. EUT DESCRIPTION.....                                             | 4  |
| 2.2. MEASURING INSTRUMENT CALIBRATION .....                           | 4  |
| 2.3. TEST FACILITY .....                                              | 4  |
| 3. DESCRIPTION OF TESTS.....                                          | 5  |
| 3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power..... | 5  |
| 3.2 Occupied bandwidth.....                                           | 6  |
| 3.3 Spurious and Harmonic Emissions at Antenna Terminal.....          | 6  |
| 3.4 Radiated Spurious and Harmonic Emissions .....                    | 7  |
| 3.5 Frequency stability / variation of ambient temperature.....       | 8  |
| 5. SUMMARY OF TEST RESULTS .....                                      | 10 |
| 6. SAMPLE CALCULATION .....                                           | 11 |
| 7. TEST DATA .....                                                    | 12 |
| 7.1 Conducted Output Power.....                                       | 12 |
| 7.2 Effective Radiated Power Output(GSM / WCDMA) .....                | 15 |
| 7.3 Equivalent Isotropic Radiated Power (E.I.R.P.) (GSM / WCDMA)..... | 16 |
| 7.4 Radiated Spurious Emissions(GSM850 Mode) .....                    | 17 |
| 7.5 Radiated Spurious Emissions(GSM1900 Mode) .....                   | 18 |
| 7.6 Radiated Spurious Emissions(WCDMA850 Mode).....                   | 19 |
| 7.7 Radiated Spurious Emissions(WCDMA1900 Mode).....                  | 20 |
| 7.8 Frequency stability / variation of ambient temperature.....       | 21 |
| 7.8.1 FREQUENCY STABILITY (GSM850) .....                              | 21 |
| 7.8.2 FREQUENCY STABILITY (GSM1900) .....                             | 22 |
| 7.8.3 FREQUENCY STABILITY (WCDMA850).....                             | 23 |
| 7.8.4 FREQUENCY STABILITY (WCDMA1900).....                            | 24 |
| 8. TEST PLOTS.....                                                    | 25 |



# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics Inc.

**Address:** 60-39, Gasan-dong, Gumchon-gu, Seoul,  
153-023, Korea

**Contact:** Tel: +82-2-2033-1108 Fax: +82-2-2033-1222

**FCC ID:** BEJLHU2100T

**Application Type:** Certification

**FCC Classification:** PCS Licensed Transmitter (PCB)

**FCC Rule Part(s):** §22, §24, §2

**EUT Type:** Cellular/PCS GSM/EDGE/WCDMA USB Modem

**Model(s):** LHU-2100T

**Tx Frequency:** 824.20 - 848.80 MHz (GSM850)  
826.4~846.6 MHz (WCDMA835)  
1 850.20 – 1 909.80 MHz (GSM1900)  
1 852.4 – 1 907.6 MHz (WCDMA1900)

**Rx Frequency:** 869.20 - 893.80 MHz (GSM850)  
871.4 - 891.6 (WCDMA835)  
1 930.20 – 1 989.80 MHz (GSM1900)  
1 932.4 – 1 987.6 MHz (WCDMA1900)

**Max. RF Output Power:** 0.986 W ERP GSM850 ( 29.94 dBm) / 1.125 W EIRP GSM1900 ( 30.51 dBm)  
0.596 W ERP EDGE850 ( 27.75 dBm) / 0.955 W EIRP EDGE1900 ( 29.80 dBm)  
0.430 W ERP WCDMA850( 26.33 dBm)/ 0.621 W EIRP WCDMA1900( 27.93 dBm)

**Emission Designator(s):** 246KGXW (GSM850) 245KGXW (GSM1900)  
242KG7W (GSM850 EDGE) 245KG7W (GSM1900 EDGE)  
4M17F9W (WCDMA850) 4M18F9W (WCDMA1900)

**Antenna Specification** Manufacturer: LS Mtron Ltd.  
Antenna type: Internal Antenna  
Peak Gain : -0.418 dBi

**Date(s) of Tests:** December 02, 2008 ~ December 17, 2008

**Place of Tests:** HCT.CO., LTD.  
San 136-1 Ami-ri, Bubal-eup, Icheon-si,

**Report Serial No** HCT-RF08-1211

| FCC CERTIFICATION REPORT         |                                     |                                                    |                        | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|----------------------------------|-------------------------------------|----------------------------------------------------|------------------------|--------------------------------------------------|
| Test Report No.<br>HCT-RF08-1211 | Date of Issue:<br>December 18, 2008 | EUT Type:<br>Cellular/PCS GSM/EDGE/WCDMA USB Modem | FCC ID:<br>BEJLHU2100T | Page 3 of 44                                     |



## **2. INTRODUCTION**

### **2.1. EUT DESCRIPTION**

The LG Electronics Inc. LHU-2100T Cellular/PCS GSM/EDGE/WCDMA USB Modem consists of GSM850, GSM1900, GPRS12, EDGE, WCDMA850, WCDMA1900.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyongki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 6, 2006(Registration Number: 90661)


| FCC CERTIFICATION REPORT         |                                     |                                                    |                        | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|----------------------------------|-------------------------------------|----------------------------------------------------|------------------------|--------------------------------------------------|
| Test Report No.<br>HCT-RF08-1211 | Date of Issue:<br>December 18, 2008 | EUT Type:<br>Cellular/PCS GSM/EDGE/WCDMA USB Modem | FCC ID:<br>BEJLHU2100T | Page 4 of 44                                     |

## 3. DESCRIPTION OF TESTS

The EUT was connected to the host device using a USB cable during the Test.

### 3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power

#### Test Set-up

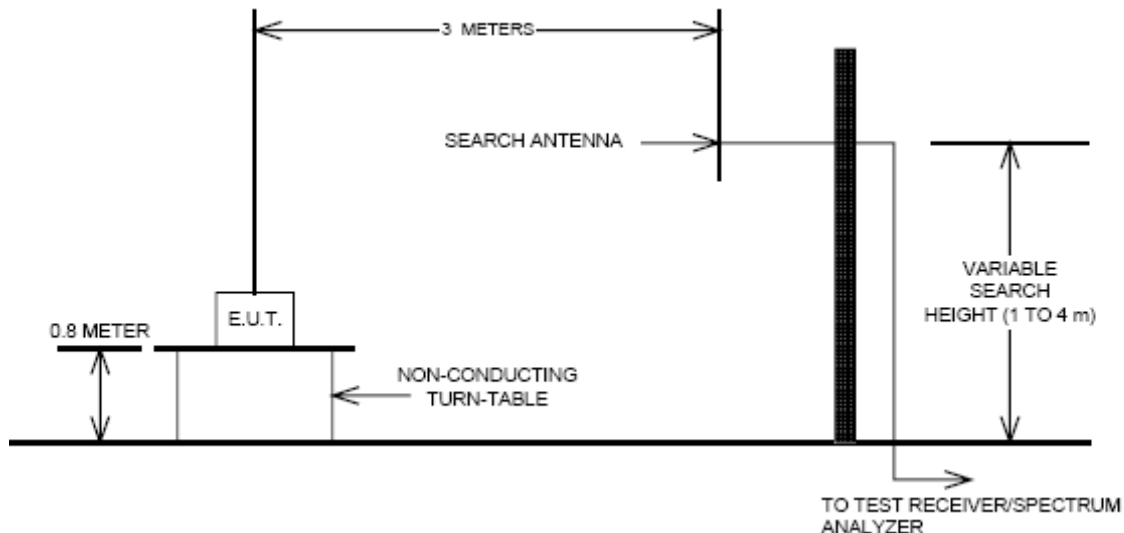

#### Test Procedure

Radiated emission measurements were performed at an open Site.


The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

### 3.2 Occupied bandwidth.

#### Test set-up

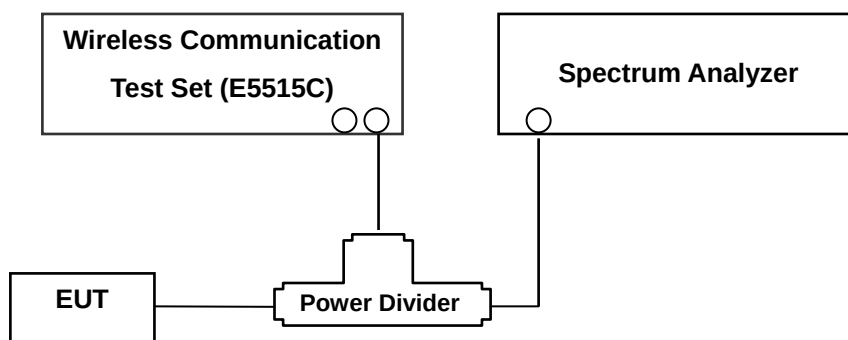

(Configuration of conducted Emission measurement)

#### Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

### 3.3 Spurious and Harmonic Emissions at Antenna Terminal.

#### Test Procedure


The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

### 3.4 Radiated Spurious and Harmonic Emissions

#### Test Set-up

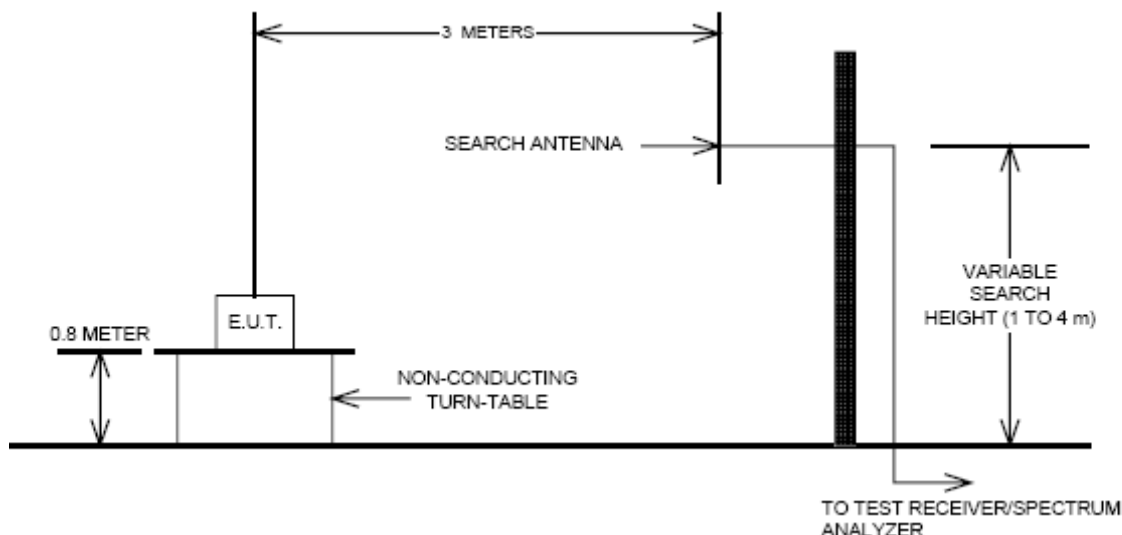

The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The open field test site is situated in open field with ground screen whose site attenuation characteristics meet ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable wooden platform mounted at three from the antenna mast.

- 1) The unit mounted on a wooden table 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10<sup>th</sup> harmonic of the fundamental frequency.

#### Test Procedure

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.


A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

| FCC CERTIFICATION REPORT         |                                     |                                                    |                        | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|----------------------------------|-------------------------------------|----------------------------------------------------|------------------------|--------------------------------------------------|
| Test Report No.<br>HCT-RF08-1211 | Date of Issue:<br>December 18, 2008 | EUT Type:<br>Cellular/PCS GSM/EDGE/WCDMA USB Modem | FCC ID:<br>BEJLHU2100T | Page 7 of 44                                     |

### 3.5 Frequency stability / variation of ambient temperature

#### Test Set-up

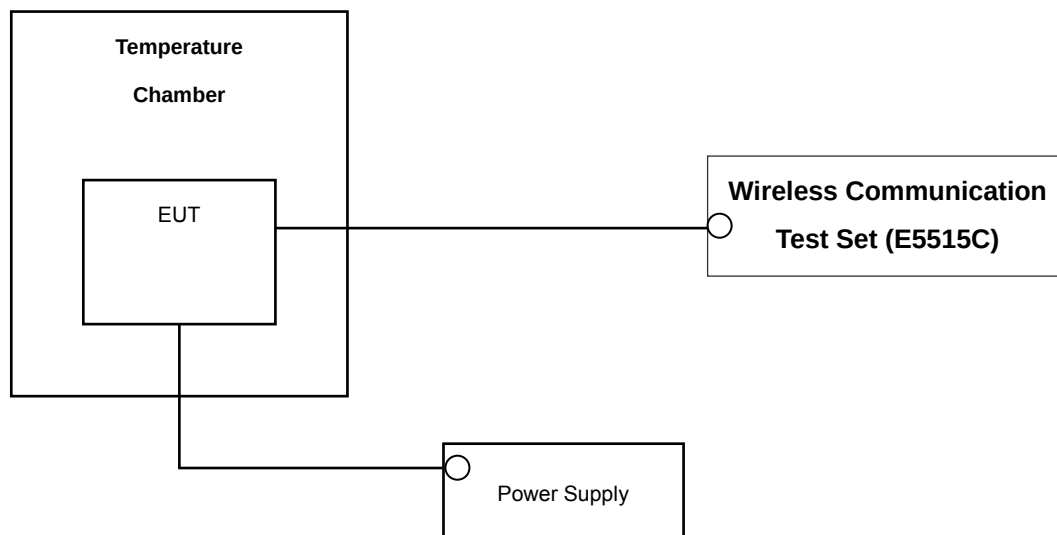

\* Nominal Operating Voltage

#### Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**



#### 4. LIST OF TEST EQUIPMENT

| Manufacture       | Model/ Equipment               | Serial Number | Calibration Interval | Calibration Due |
|-------------------|--------------------------------|---------------|----------------------|-----------------|
| R&S               | ESI40/ Spectrum Analyzer       | 831564/003    | Annual               | 10/31/2009      |
| Agilent           | E4416A/ Power Meter            | MY41291412    | Annual               | 01/29/2009      |
| Agilent           | E9327A/ Power Sensor           | MY4442009     | Annual               | 07/28/2009      |
| Agilent           | 8960 (E5515C)/ Base Station    | GB444400269   | Annual               | 02/11/2009      |
| MITEQ             | AMF-60-0010 1800-35-20P / AMP  | 1200937       | Annual               | 01/15/2009      |
| Wainwright        | WHK1.2/15G-10EF/H.P.F          | 2             | Annual               | 06/28/2009      |
| Wainwright        | WHK3.3/18G-10EF/H.P.F          | 1             | Annual               | 06/28/2009      |
| Agilent           | 775D/ Dual Directional Coupler | 12922         | Annual               | 01/15/2009      |
| Agilent           | 11636B/ Power Divider          | 11377         | Annual               | 01/07/2009      |
| Digital           | EP-3010/ Power Supply          | 3110117       | Annual               | 01/10/2009      |
| Schwarzbeck       | UHAP/ Dipole Antenna           | 557           | Annual               | 04/20/2009      |
| Schwarzbeck       | UHAP/ Dipole Antenna           | 558           | Annual               | 04/20/2009      |
| Korea Engineering | KR-1005L / Chamber             | KRAB07063-2CH | Annual               | 01/05/2009      |
| Schwarzbeck       | VULB9160/ TRILOG Antenna       | 3150          | Biennial             | 04/20/2009      |
| Schwarzbeck       | VULB9160/ TRILOG Antenna       | 3125          | Biennial             | 05/16/2009      |
| Schwarzbeck       | BBHA 9120D/ Horn Antenna       | 147           | Biennial             | 03/26/2010      |
| Schwarzbeck       | BBHA 9120D/ Horn Antenna       | 1201          | Biennial             | 05/02/2009      |
| Agilent           | E4440A/Spectrum Analyzer       | US45303008    | Annual               | 01/08/2009      |



## 5. SUMMARY OF TEST RESULTS

| FCC Part Section(s)             | Test Description                                                 | Test Limit                                                                         | Test Condition | Test Result |
|---------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------|-------------|
| 2.1049, 22.917(a),<br>24.238(a) | Occupied Bandwidth                                               | N/A                                                                                | CONDUCTED      | PASS        |
| 2.1051, 22.917(a),<br>24.238(a) | Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | $< 43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions |                | PASS        |
| 2.1046                          | Conducted Output Power                                           | N/A                                                                                |                | PASS        |
| 2.1055, 22.355,<br>24.235       | Frequency stability / variation of ambient temperature           | $< 2.5$ ppm                                                                        |                | PASS        |
| 22.913(a)(2)<br>24.232(c)       | Effective Radiated Power                                         | $< 7$ Watts max. ERP                                                               | RADIATED       | PASS        |
|                                 | Equivalent Isotropic Radiated Power                              | $< 2$ Watts max. EIRP                                                              |                | PASS        |
| 2.1053, 22.917(a),<br>24.238(a) | Radiated Spurious and Harmonic Emissions                         | $< 43 + \log_{10}(P[\text{Watts}])$ for all out-of band emissions                  |                | PASS        |



## 6. SAMPLE CALCULATION

### A. ERP Sample Calculation

| Mode   | Ch./ Freq. |            | Measured   | Substitute | Ant. Gain | C.L  | Pol. | ERP  |       |
|--------|------------|------------|------------|------------|-----------|------|------|------|-------|
|        | channel    | Freq.(MHz) | Level(dBm) | LEVEL(dBm) |           |      |      | W    | dBm   |
| GSM850 | 251        | 848.80     | -7.58      | 28.59      | 2.83      | 1.20 | H    | 1.05 | 30.22 |

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

### B. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz G = Phase Modulation X = Cases not otherwise covered W = Combination (Audio/Data)

#### WCDMA Emission Designator


**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz F = Frequency Modulation 9 = Composite Digital Info W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

## 7. TEST DATA

### 7.1 Conducted Output Power

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

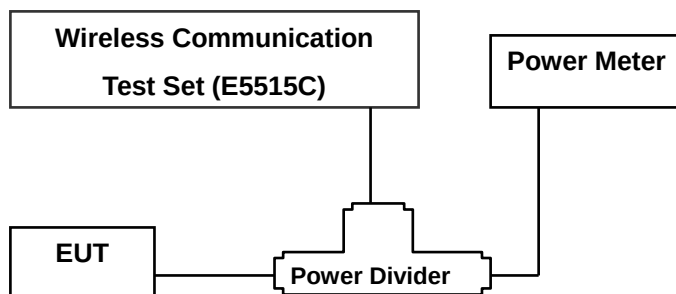

With USB Cable

| Band     | Channel | Voice     | GPRS                 |                      |                      |                      |
|----------|---------|-----------|----------------------|----------------------|----------------------|----------------------|
|          |         | GSM (dBm) | GPRS 1 TX Slot (dBm) | GPRS 2 TX Slot (dBm) | GPRS 3 TX Slot (dBm) | GPRS 4 TX Slot (dBm) |
| GSM 850  | 128     | 32.58     | 32.46                | 30.10                | 28.61                | 27.61                |
|          | 190     | 32.61     | 32.47                | 30.11                | 28.63                | 27.67                |
|          | 251     | 32.59     | 32.47                | 30.13                | 28.64                | 27.66                |
| GSM 1900 | 512     | 29.91     | 29.74                | 27.85                | 26.39                | 25.38                |
|          | 661     | 30.06     | 29.91                | 28.02                | 26.52                | 25.48                |
|          | 810     | 30.06     | 29.80                | 27.89                | 26.44                | 25.39                |

(GSM Conducted Output Powers)

| Band     | Channel | EDGE Data            |                      |                      |                      |
|----------|---------|----------------------|----------------------|----------------------|----------------------|
|          |         | EDGE 1 TX Slot (dBm) | EDGE 2 TX Slot (dBm) | EDGE 3 TX Slot (dBm) | EDGE 4 TX Slot (dBm) |
| GSM 850  | 128     | 27.23                | 24.76                | 23.24                | 22.14                |
|          | 190     | 27.27                | 24.81                | 23.25                | 22.26                |
|          | 251     | 27.23                | 24.75                | 23.20                | 22.18                |
| GSM 1900 | 512     | 26.52                | 24.06                | 22.57                | 21.50                |
|          | 661     | 26.65                | 24.17                | 22.65                | 21.60                |
|          | 810     | 26.64                | 24.18                | 22.64                | 21.61                |

(GSM EDGE Conducted Output Powers)



| Band          | Channel | HSDPA INACTIVE           | HSDPA ACTIVE             |
|---------------|---------|--------------------------|--------------------------|
|               |         | 12.2kbps<br>RMC<br>(dBm) | 12.2kbps<br>RMC<br>(dBm) |
| WCDMA<br>850  | 4132    | 23.34                    | 20.89                    |
|               | 4183    | 23.25                    | 20.57                    |
|               | 4233    | 23.53                    | 21.00                    |
| WCDMA<br>1900 | 9262    | 24.19                    | 21.52                    |
|               | 9400    | 23.70                    | 20.90                    |
|               | 9538    | 24.11                    | 21.30                    |

(WCDMA Conducted Output Powers)

# Without USB Cable

| Band     | Channel | Voice     | GPRS                 |                      |                      |                      |
|----------|---------|-----------|----------------------|----------------------|----------------------|----------------------|
|          |         | GSM (dBm) | GPRS 1 TX Slot (dBm) | GPRS 2 TX Slot (dBm) | GPRS 3 TX Slot (dBm) | GPRS 4 TX Slot (dBm) |
| GSM 850  | 128     | 32.55     | 32.44                | 30.07                | 28.59                | 27.63                |
|          | 190     | 32.59     | 32.49                | 30.10                | 28.60                | 27.69                |
|          | 251     | 32.60     | 32.47                | 30.11                | 28.62                | 27.63                |
| GSM 1900 | 512     | 29.88     | 29.77                | 27.82                | 26.36                | 25.35                |
|          | 661     | 30.03     | 29.89                | 28.04                | 26.50                | 25.44                |
|          | 810     | 30.04     | 29.78                | 27.87                | 26.47                | 25.41                |

(GSM Conducted Output Powers)

| Band     | Channel | EDGE Data            |                      |                      |                      |
|----------|---------|----------------------|----------------------|----------------------|----------------------|
|          |         | EDGE 1 TX Slot (dBm) | EDGE 2 TX Slot (dBm) | EDGE 3 TX Slot (dBm) | EDGE 4 TX Slot (dBm) |
| GSM 850  | 128     | 27.21                | 24.74                | 23.21                | 22.12                |
|          | 190     | 27.25                | 24.79                | 23.27                | 22.25                |
|          | 251     | 27.20                | 24.71                | 23.18                | 22.15                |
| GSM 1900 | 512     | 26.49                | 24.04                | 22.55                | 21.47                |
|          | 661     | 26.59                | 24.15                | 22.63                | 21.62                |
|          | 810     | 26.63                | 24.16                | 22.61                | 21.63                |

(GSM EDGE Conducted Output Powers)

| Band       | Channel | HSDPA INACTIVE     | HSDPA ACTIVE       |
|------------|---------|--------------------|--------------------|
|            |         | 12.2kbps RMC (dBm) | 12.2kbps RMC (dBm) |
| WCDMA 850  | 4132    | 23.30              | 20.87              |
|            | 4183    | 23.30              | 20.55              |
|            | 4233    | 23.51              | 21.03              |
| WCDMA 1900 | 9262    | 24.20              | 21.50              |
|            | 9400    | 23.68              | 20.91              |
|            | 9538    | 24.10              | 21.28              |

(WCDMA Conducted Output Powers)



## 7.2 Effective Radiated Power Output(GSM / WCDMA)

### (GSM850 Mode)

| Ch./ Freq.  |            | Measured<br>Level(dBm) | Substitute<br>LEVEL (dBm) | Ant. Gain | C.L  | Pol. | ERP  |       |
|-------------|------------|------------------------|---------------------------|-----------|------|------|------|-------|
| channel     | Freq.(MHz) |                        |                           |           |      |      | W    | dBm   |
| 128         | 824.20     | -9.33                  | 36.51                     | -8.32     | 1.17 | V    | 0.50 | 27.02 |
| 190         | 836.60     | -8.73                  | 37.76                     | -8.22     | 1.19 | V    | 0.68 | 28.35 |
| 251         | 848.80     | -7.86                  | 39.26                     | -8.12     | 1.20 | V    | 0.99 | 29.94 |
| EDGE<br>251 | 848.80     | -10.05                 | 37.07                     | -8.12     | 1.20 | V    | 0.60 | 27.75 |

### (WCDMA850 Mode)

| Ch./ Freq. |            | Measured<br>Level(dBm) | Substitute<br>LEVEL<br>(dBm) | Ant.<br>Gain | C.L  | Pol. | ERP  |       |
|------------|------------|------------------------|------------------------------|--------------|------|------|------|-------|
| channel    | Freq.(MHz) |                        |                              |              |      |      | W    | dBm   |
| 4,132      | 826.40     | -12.09                 | 23.32                        | 2.24         | 1.17 | V    | 0.27 | 24.39 |
| 4,175      | 836.40     | -10.94                 | 24.82                        | 2.51         | 1.19 | V    | 0.41 | 26.14 |
| 4,233      | 846.60     | -11.34                 | 24.76                        | 2.77         | 1.20 | V    | 0.43 | 26.33 |

Note: This unit was tested with a notebook computer.

#### NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

| FCC CERTIFICATION REPORT         |                                     |                                                    |                        | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|----------------------------------|-------------------------------------|----------------------------------------------------|------------------------|--------------------------------------------------|
| Test Report No.<br>HCT-RF08-1211 | Date of Issue:<br>December 18, 2008 | EUT Type:<br>Cellular/PCS GSM/EDGE/WCDMA USB Modem | FCC ID:<br>BEJLHU2100T | Page 15 of 44                                    |



### 7.3 Equivalent Isotropic Radiated Power (E.I.R.P.) (GSM / WCDMA)

#### (GSM1900 Mode)

| Ch./ Freq.  |            | Measured<br>Level(dBm) | Substitute<br>LEVEL<br>(dBm) | Ant.<br>Gain | C.L  | Pol. | EIRP |       |
|-------------|------------|------------------------|------------------------------|--------------|------|------|------|-------|
| channel     | Freq.(MHz) |                        |                              |              |      |      | W    | dBm   |
| 512         | 1,850.20   | -10.07                 | 21.54                        | 10.05        | 1.91 | H    | 0.93 | 29.67 |
| 661         | 1,880.00   | -9.41                  | 22.41                        | 10.05        | 1.95 | H    | 1.12 | 30.51 |
| 810         | 1,909.80   | -9.79                  | 22.11                        | 10.06        | 1.97 | H    | 1.05 | 30.20 |
| EDGE<br>661 | 1,880.00   | -10.12                 | 21.70                        | 10.05        | 1.95 | H    | 0.95 | 29.80 |

#### (WCDMA1900 Mode)

| Ch./ Freq. |            | Measured<br>Level(dBm) | Substitute<br>LEVEL<br>(dBm) | Ant.<br>Gain | C.L  | Pol. | EIRP |       |
|------------|------------|------------------------|------------------------------|--------------|------|------|------|-------|
| channel    | Freq.(MHz) |                        |                              |              |      |      | W    | dBm   |
| 9,262      | 1,852.40   | -12.03                 | 19.58                        | 10.05        | 1.91 | H    | 0.59 | 27.72 |
| 9,400      | 1,880.00   | -11.99                 | 19.83                        | 10.05        | 1.95 | H    | 0.62 | 27.93 |
| 9,538      | 1,907.60   | -13.65                 | 18.27                        | 10.06        | 1.97 | H    | 0.43 | 26.36 |

Note: This unit was tested with a notebook computer.

#### NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

| FCC CERTIFICATION REPORT         |                                     |                                                    |                        | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|----------------------------------|-------------------------------------|----------------------------------------------------|------------------------|--------------------------------------------------|
| Test Report No.<br>HCT-RF08-1211 | Date of Issue:<br>December 18, 2008 | EUT Type:<br>Cellular/PCS GSM/EDGE/WCDMA USB Modem | FCC ID:<br>BEJLHU2100T | Page 16 of 44                                    |



## 7.4 Radiated Spurious Emissions(GSM850 Mode)

■ MEASURED OUTPUT POWER: 29.94 dBm = 0.986 W

■ MODULATION SIGNAL: GSM850

■ DISTANCE: 3 meters

■ LIMIT:  $-(43 + 10 \log_{10}(W)) =$  -42.94 dBc  
dBc

| Ch. | Freq.(MHz) | <u>Measured Level</u><br>[dBm] | Ant. Gain | <u>Substitute</u><br><u>Level</u><br>[dBm] | C.L  | Pol. | ERP<br>(dBm) | dBc    |
|-----|------------|--------------------------------|-----------|--------------------------------------------|------|------|--------------|--------|
| 128 | 1,648.40   | -26.85                         | 7.09      | -37.38                                     | 1.73 | V    | -32.02       | -61.96 |
|     | 2,472.60   | -37.11                         | 8.12      | -44.22                                     | 2.28 | V    | -38.38       | -68.32 |
|     | 3,296.80   | -51.58                         | 9.72      | -59.16                                     | 2.57 | V    | -52.01       | -81.95 |
| 190 | 1,673.20   | -28.94                         | 7.23      | -39.70                                     | 1.79 | V    | -34.26       | -64.20 |
|     | 2,509.80   | -37.23                         | 8.14      | -44.36                                     | 2.33 | V    | -38.55       | -68.49 |
|     | 3,346.40   | -48.76                         | 9.99      | -56.79                                     | 2.66 | V    | -49.46       | -79.40 |
| 251 | 1,697.60   | -31.10                         | 7.41      | -41.71                                     | 1.83 | V    | -36.13       | -66.07 |
|     | 2,546.40   | -39.99                         | 8.21      | -47.27                                     | 2.34 | V    | -41.40       | -71.34 |
|     | 3,395.20   | -46.79                         | 9.91      | -54.42                                     | 2.85 | V    | -47.36       | -77.30 |

**NOTES:** Radiated Spurious Emission Measurements at 3 meters by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:



## 7.5 Radiated Spurious Emissions(GSM1900 Mode)

- MEASURED OUTPUT POWER: 30.51 dBm = 1.125 W
- MODULATION SIGNAL: GSM1900
- DISTANCE: 3 meters
- LIMIT: - (43 + 10 log<sub>10</sub> (W)) = - 43.51 dBc

| Ch. | Freq.(MHz) | <u>Measured Level</u><br>[dBm] | Ant. Gain | <u>Substitute</u><br><u>Level</u><br>[dBm] | C.L  | Pol. | ERP<br>(dBm) | dBc    |
|-----|------------|--------------------------------|-----------|--------------------------------------------|------|------|--------------|--------|
| 512 | 3,700.40   | -44.05                         | 10.31     | -50.32                                     | 2.73 | H    | -42.74       | -73.25 |
|     | 5,550.60   | -51.28                         | 10.55     | -52.86                                     | 3.60 | H    | -45.91       | -76.42 |
|     | 7,400.80   | -55.17                         | 9.21      | -46.29                                     | 3.88 | H    | -40.96       | -71.47 |
| 661 | 3,760.00   | -53.63                         | 10.32     | -59.60                                     | 2.73 | H    | -52.01       | -82.52 |
|     | 5,640.00   | -45.77                         | 10.60     | -47.42                                     | 3.60 | H    | -40.42       | -70.93 |
|     | 7,520.00   | -55.12                         | 9.18      | -46.02                                     | 3.88 | H    | -40.72       | -71.23 |
| 810 | 3,819.60   | -47.08                         | 10.34     | -52.96                                     | 2.73 | H    | -45.35       | -75.86 |
|     | 5,729.40   | -45.29                         | 10.65     | -46.60                                     | 3.60 | H    | -39.55       | -70.06 |
|     | 7,639.20   | -55.88                         | 9.15      | -46.55                                     | 3.88 | H    | -41.28       | -71.79 |

**NOTES:** Radiated Spurious Emission Measurements at 3 meters by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:



## 7.6 Radiated Spurious Emissions(WCDMA850 Mode)

- MEASURED OUTPUT POWER: 26.33 dBm = 0.430 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT:  $-(43 + 10 \log_{10}(W)) =$  - 39.33 dBc

| Ch.  | Freq.(MHz) | <u>Measured Level</u><br>[dBm] | Ant. Gain | <u>Substitute</u><br><u>Level</u><br>[dBm] | C.L  | Pol. | ERP<br>(dBm) | dBc    |
|------|------------|--------------------------------|-----------|--------------------------------------------|------|------|--------------|--------|
| 4132 | 1,652.80   | -53.20                         | 7.09      | -63.76                                     | 1.73 | H    | -58.40       | -84.73 |
|      | 2,479.20   | -55.79                         | 8.12      | -62.91                                     | 2.28 | H    | -57.07       | -83.40 |
|      | 3,305.60   | -55.69                         | 9.72      | -63.25                                     | 2.57 | H    | -56.10       | -82.43 |
| 4183 | 1,673.20   | -49.22                         | 7.23      | -59.98                                     | 1.79 | H    | -54.54       | -80.87 |
|      | 2,509.80   | -55.97                         | 8.14      | -63.10                                     | 2.33 | H    | -57.29       | -83.62 |
|      | 3,346.40   | -54.76                         | 9.99      | -62.79                                     | 2.66 | H    | -55.46       | -81.79 |
| 4233 | 1,693.20   | -52.78                         | 7.41      | -63.44                                     | 1.83 | H    | -57.86       | -84.19 |
|      | 2,539.80   | -54.57                         | 8.21      | -61.83                                     | 2.34 | H    | -55.96       | -82.29 |
|      | 3,386.40   | -54.74                         | 9.91      | -62.39                                     | 2.85 | H    | -55.33       | -81.66 |

**NOTES:** Radiated Spurious Emission Measurements at 3 meters by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:



## 7.7 Radiated Spurious Emissions(WCDMA1900 Mode)

- MEASURED OUTPUT POWER: 27.93 dBm = 0.621 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT: - (43 + 10 log<sub>10</sub> (W)) = - 40.93 dBc

| Ch.  | Freq.(MHz) | <u>Measured Level</u><br>[dBm] | Ant. Gain | <u>Substitute</u><br><u>Level</u><br>[dBm] | C.L  | Pol. | ERP<br>(dBm) | dBc    |
|------|------------|--------------------------------|-----------|--------------------------------------------|------|------|--------------|--------|
| 9262 | 3,704.80   | -46.97                         | 10.31     | -53.21                                     | 2.73 | H    | -45.63       | -73.56 |
|      | 5,557.20   | -56.14                         | 10.56     | -57.75                                     | 3.60 | H    | -50.79       | -78.72 |
|      | 7,409.60   | -55.78                         | 9.21      | -46.89                                     | 3.88 | H    | -41.56       | -69.49 |
| 9400 | 3,760.00   | -46.01                         | 10.32     | -51.98                                     | 2.73 | H    | -44.39       | -72.32 |
|      | 5,640.00   | -54.96                         | 10.60     | -56.61                                     | 3.60 | H    | -49.61       | -77.54 |
|      | 7,520.00   | -55.30                         | 9.18      | -46.20                                     | 3.88 | H    | -40.90       | -68.83 |
| 9538 | 3,815.20   | -47.88                         | 10.31     | -53.75                                     | 2.73 | H    | -46.17       | -74.10 |
|      | 5,722.80   | -54.57                         | 10.64     | -55.90                                     | 3.60 | H    | -48.86       | -76.79 |
|      | 7,630.40   | -56.06                         | 9.15      | -46.74                                     | 3.88 | H    | -41.47       | -69.40 |

**NOTES:** Radiated Spurious Emission Measurements at 3 meters by Substitution Method  
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:




## 7.8 Frequency stability / variation of ambient temperature

### 7.8.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY: 836,600,000 Hz  
 CHANNEL: 190  
 REFERENCE VOLTAGE: 3.7 VDC  
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 3.700       | +20(Ref)   | 836 599 994    | -5.88                | -0.000 001    | -0.007 |
| 100%           |             | -30        | 836 600 002    | 1.71                 | 0.000 000     | 0.002  |
| 100%           |             | -20        | 836 599 994    | -6.46                | -0.000 001    | -0.008 |
| 100%           |             | -10        | 836 600 005    | 4.82                 | 0.000 001     | 0.006  |
| 100%           |             | 0          | 836 600 003    | 2.97                 | 0.000 000     | 0.004  |
| 100%           |             | +10        | 836 599 995    | -4.59                | -0.000 001    | -0.005 |
| 100%           |             | +20        | 836 600 003    | 2.9                  | 0.000 000     | 0.003  |
| 100%           |             | +30        | 836 600 004    | 4.36                 | 0.000 001     | 0.005  |
| 100%           |             | +40        | 836 600 004    | 4.48                 | 0.000 001     | 0.005  |
| 100%           |             | +50        | 836 599 996    | -4.36                | -0.000 001    | -0.005 |
| 115%           | 4.255       | +20        | 836 600 006    | 6.17                 | 0.000 001     | 0.007  |
| Batt. Endpoint | 3.400       | +20        | 836 600 005    | 4.73                 | 0.000 001     | 0.006  |

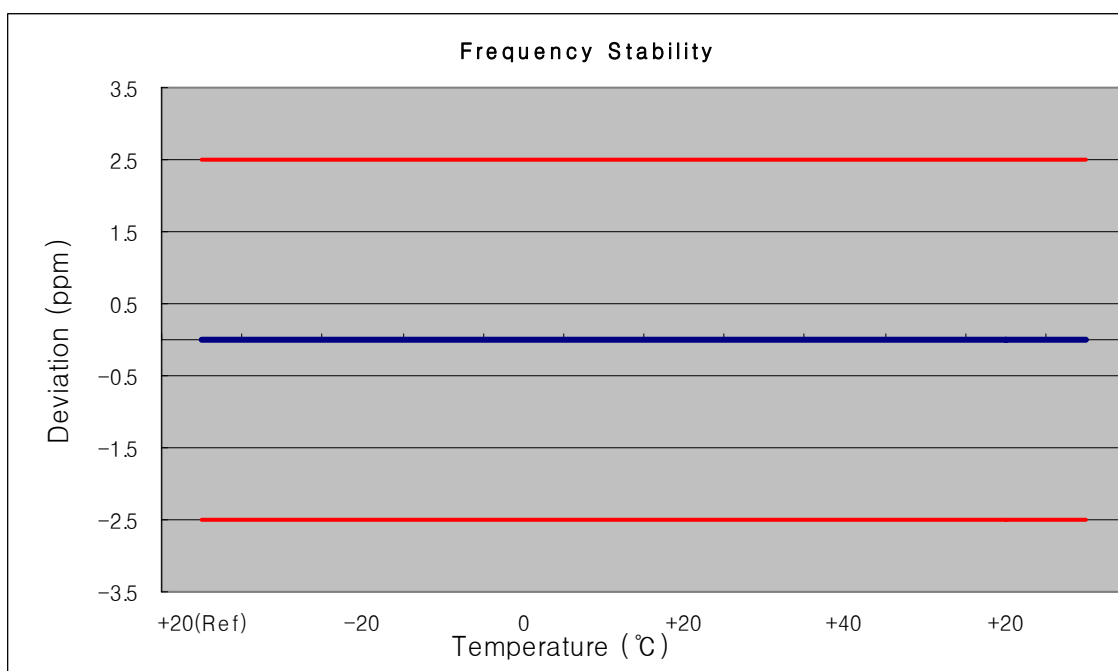




## 7.8.2 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY: 1880,000,000 Hz  
 CHANNEL: 661  
 REFERENCE VOLTAGE: 3.7 VDC  
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 3.700       | +20(Ref)   | 1879 999 967   | -33.09               | -0.000 002    | -0.018 |
| 100%           |             | -30        | 1879 999 967   | -32.81               | -0.000 002    | -0.017 |
| 100%           |             | -20        | 1879 999 981   | -19.07               | -0.000 001    | -0.010 |
| 100%           |             | -10        | 1879 999 963   | -37.45               | -0.000 002    | -0.020 |
| 100%           |             | 0          | 1879 999 965   | -34.85               | -0.000 002    | -0.019 |
| 100%           |             | +10        | 1879 999 975   | -25.09               | -0.000 001    | -0.013 |
| 100%           |             | +20        | 1879 999 980   | -20.01               | -0.000 001    | -0.011 |
| 100%           |             | +30        | 1879 999 971   | -28.55               | -0.000 002    | -0.015 |
| 100%           |             | +40        | 1879 999 984   | -16.49               | -0.000 001    | -0.009 |
| 100%           |             | +50        | 1879 999 989   | -10.69               | -0.000 001    | -0.006 |
| 115%           | 4.255       | +20        | 1879 999 970   | -29.65               | -0.000 002    | -0.016 |
| Batt. Endpoint | 3.400       | +20        | 1879 999 968   | -31.96               | -0.000 002    | -0.017 |

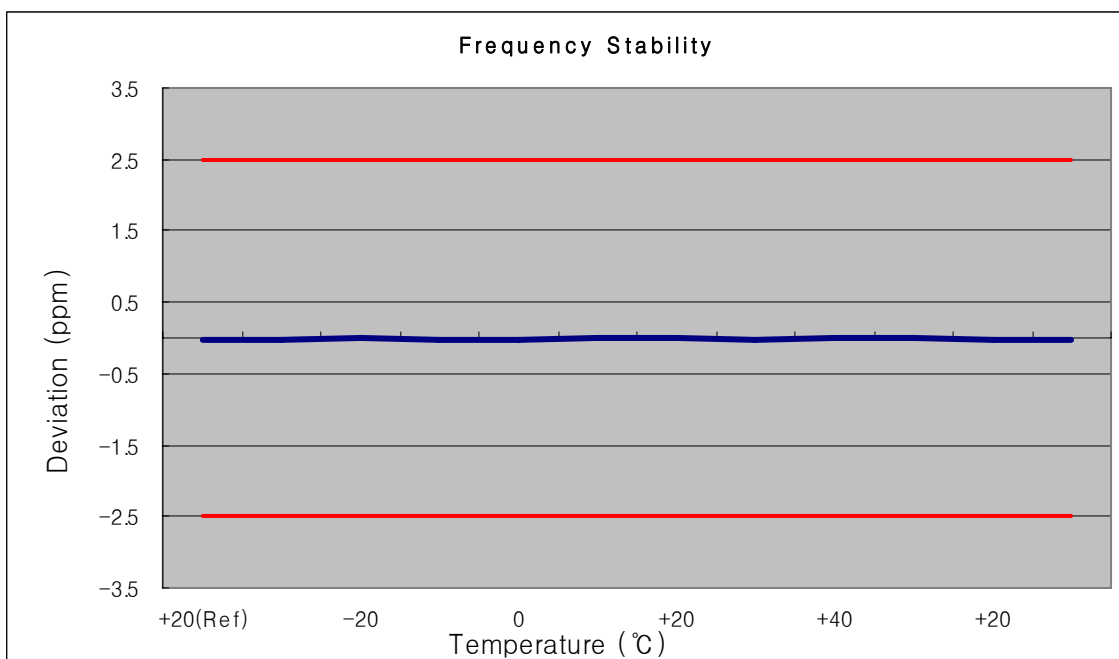




### 7.8.3 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY: 836,600,000 Hz  
 CHANNEL: 4183  
 REFERENCE VOLTAGE: 3.7 VDC  
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 3.700       | +20(Ref)   | 836 599 984    | -15.99               | -0.000 019    | -0.019 |
| 100%           |             | -30        | 836 599 993    | -7.22                | -0.000 009    | -0.009 |
| 100%           |             | -20        | 836 599 991    | -9.11                | -0.000 011    | -0.011 |
| 100%           |             | -10        | 836 599 984    | -15.92               | -0.000 019    | -0.019 |
| 100%           |             | 0          | 836 600 001    | 1.25                 | 0.000 001     | 0.001  |
| 100%           |             | +10        | 836 599 995    | -5.4                 | -0.000 006    | -0.006 |
| 100%           |             | +20        | 836 599 983    | -16.75               | -0.000 020    | -0.020 |
| 100%           |             | +30        | 836 600 003    | 2.55                 | 0.000 003     | 0.003  |
| 100%           |             | +40        | 836 599 979    | -20.51               | -0.000 025    | -0.025 |
| 100%           |             | +50        | 836 599 986    | -14.23               | -0.000 017    | -0.017 |
| 115%           | 4.255       | +20        | 836 599 981    | -19.46               | -0.000 023    | -0.023 |
| Batt. Endpoint | 3.400       | +20        | 836 599 986    | -13.54               | -0.000 016    | -0.016 |

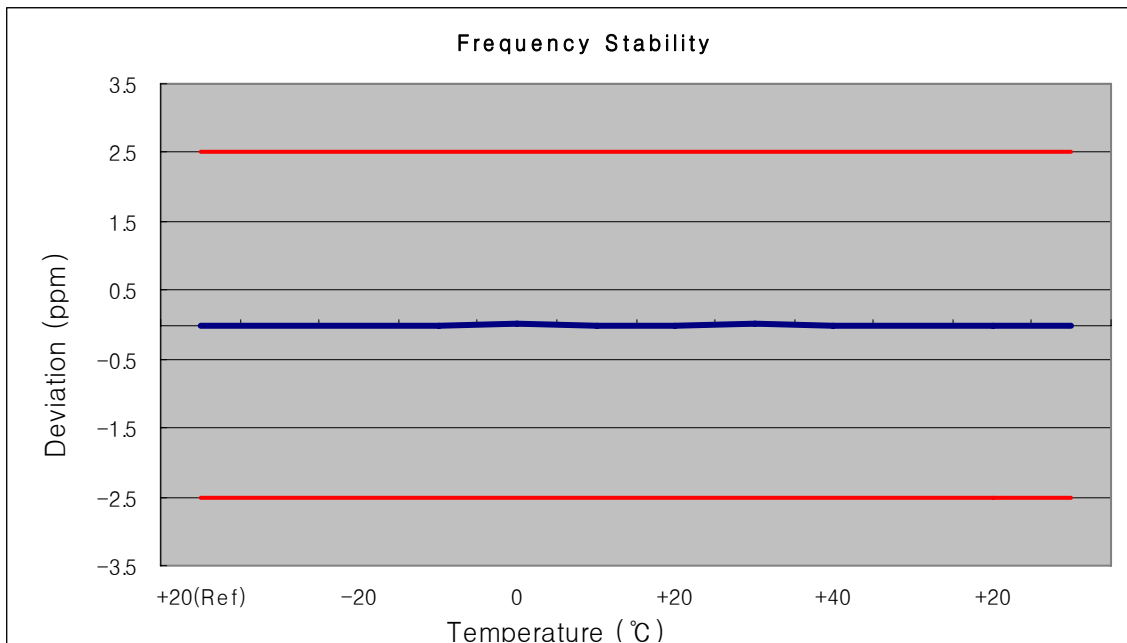




#### 7.8.4 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 9400  
 REFERENCE VOLTAGE: 3.7 VDC  
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100%           | 3.700       | +20(Ref)   | 1,879,999,982  | -18.43               | -0.000001     | -0.010 |
| 100%           |             | -30        | 1,879,999,965  | -34.83               | -0.000002     | -0.019 |
| 100%           |             | -20        | 1,879,999,963  | -36.79               | -0.000002     | -0.020 |
| 100%           |             | -10        | 1,879,999,977  | -22.84               | -0.000001     | -0.012 |
| 100%           |             | 0          | 1,879,999,966  | -33.58               | -0.000002     | -0.018 |
| 100%           |             | +10        | 1,880,000,002  | 1.78                 | 0.000000      | 0.001  |
| 100%           |             | +20        | 1,879,999,962  | -37.69               | -0.000002     | -0.020 |
| 100%           |             | +30        | 1,879,999,967  | -33.49               | -0.000002     | -0.018 |
| 100%           |             | +40        | 1,880,000,006  | 6.48                 | 0.000000      | 0.003  |
| 100%           |             | +50        | 1,879,999,964  | -36.5                | -0.000002     | -0.019 |
| 115%           | 4.255       | +20        | 1,879,999,972  | -28.32               | -0.000002     | -0.015 |
| Batt. Endpoint | 3.400       | +20        | 1,879,999,971  | -29.44               | -0.000002     | -0.016 |

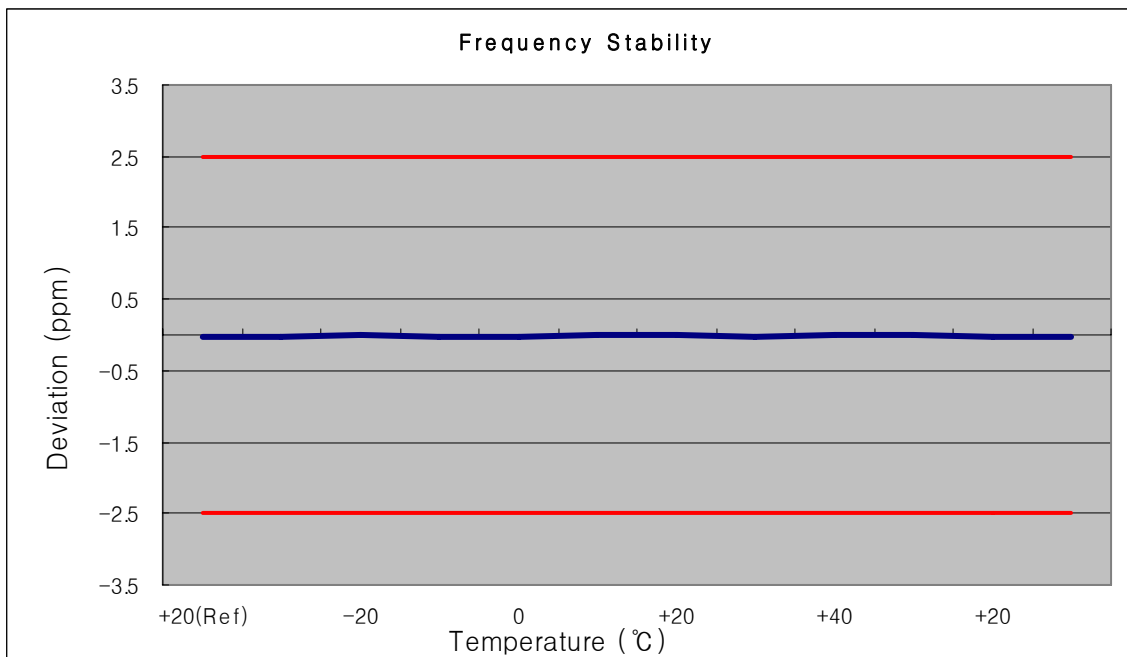





## 8. TEST PLOTS

| FCC CERTIFICATION REPORT         |                                     |                                                   |                        | <a href="http://www.hct.co.kr">www.hct.co.kr</a> |
|----------------------------------|-------------------------------------|---------------------------------------------------|------------------------|--------------------------------------------------|
| Test Report No.<br>HCT-RF08-1211 | Date of Issue:<br>December 18, 2008 | EUT Type:<br>Cellular/PCS GSM/EDGE/CDMA USB Modem | FCC ID:<br>BEJLHU2100T | Page 25 of 44                                    |


## ■ GSM850 MODE (128 CH.) Occupied Bandwidth

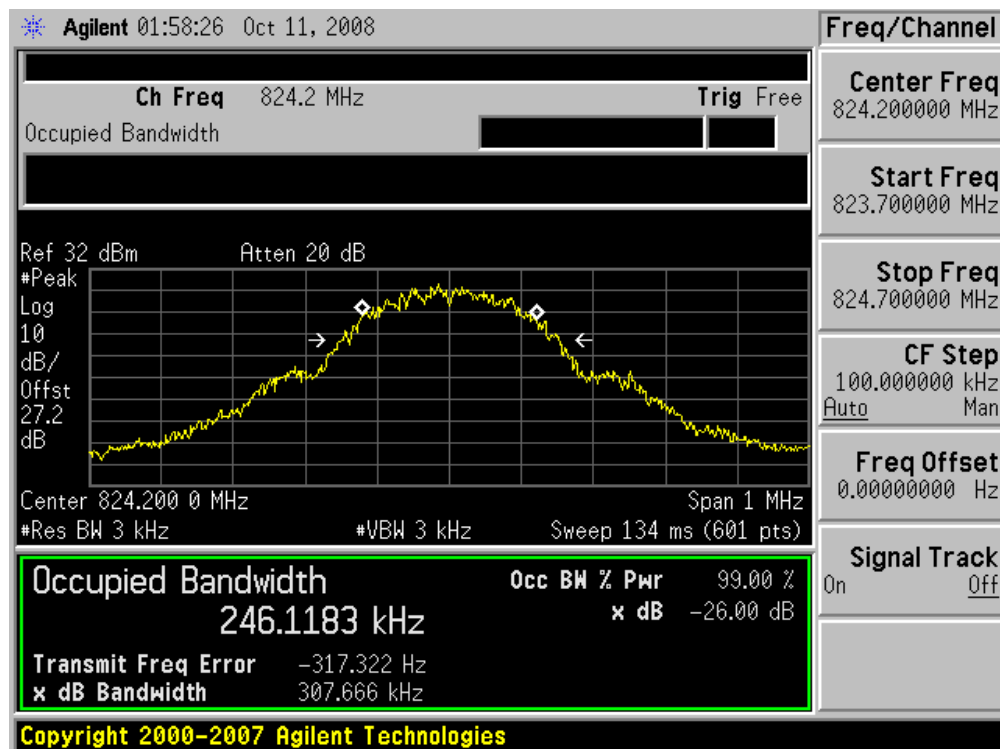


## ■ GSM850 MODE (190 CH.) Occupied Bandwidth

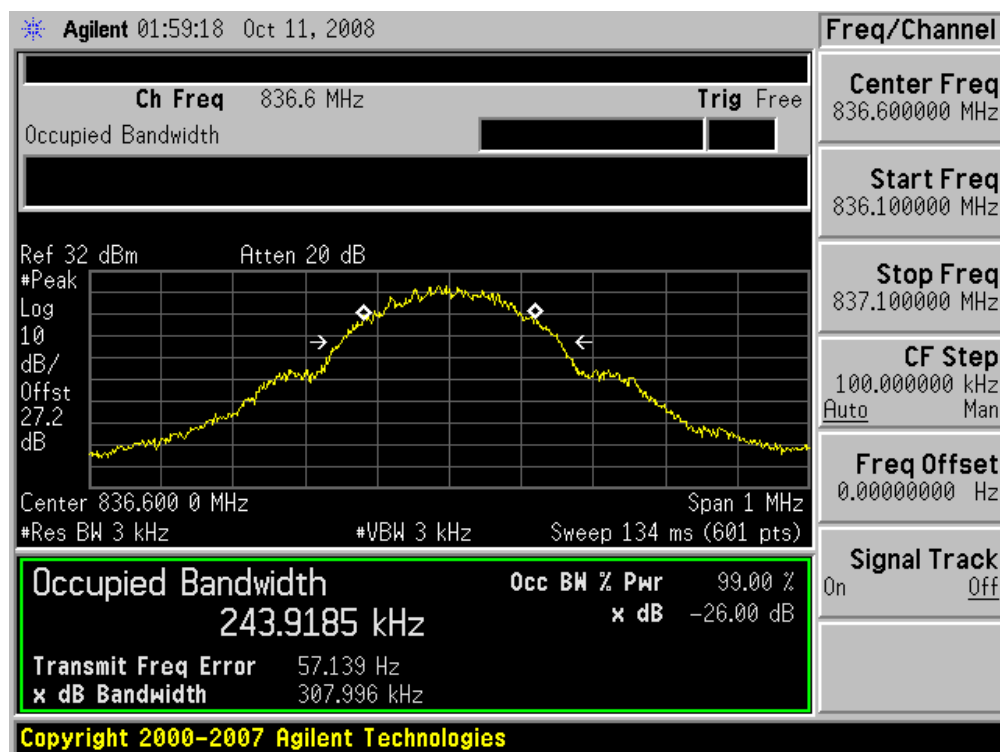


## ■ GSM850 MODE (251 CH.) Occupied Bandwidth

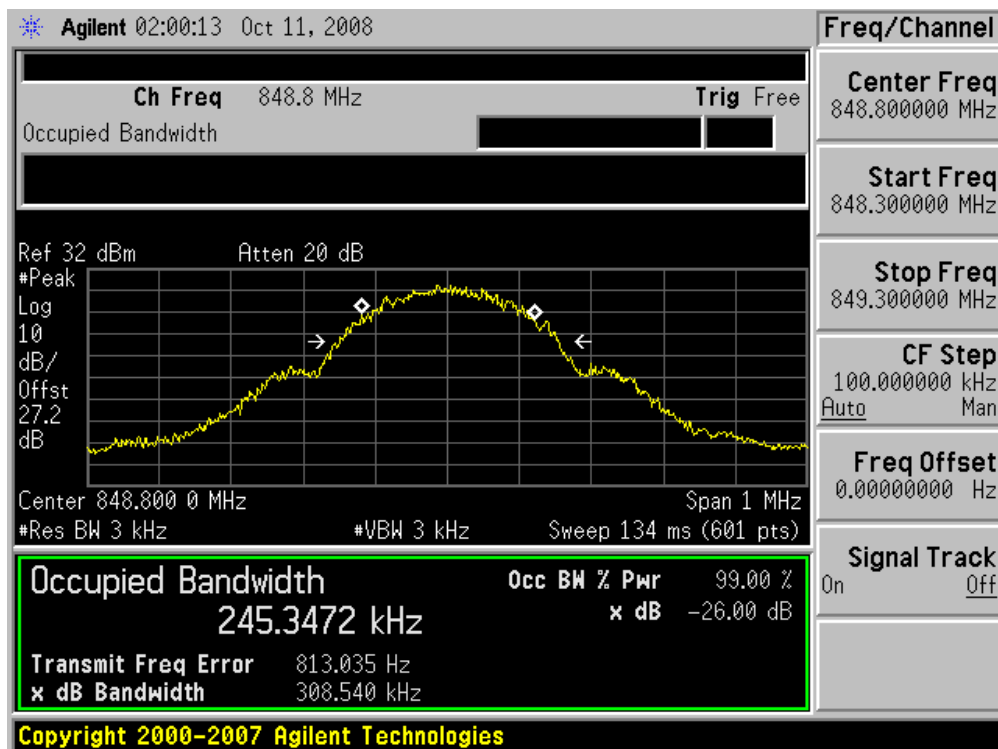


## ■ GSM850 EDGE (128 CH.) Occupied Bandwidth

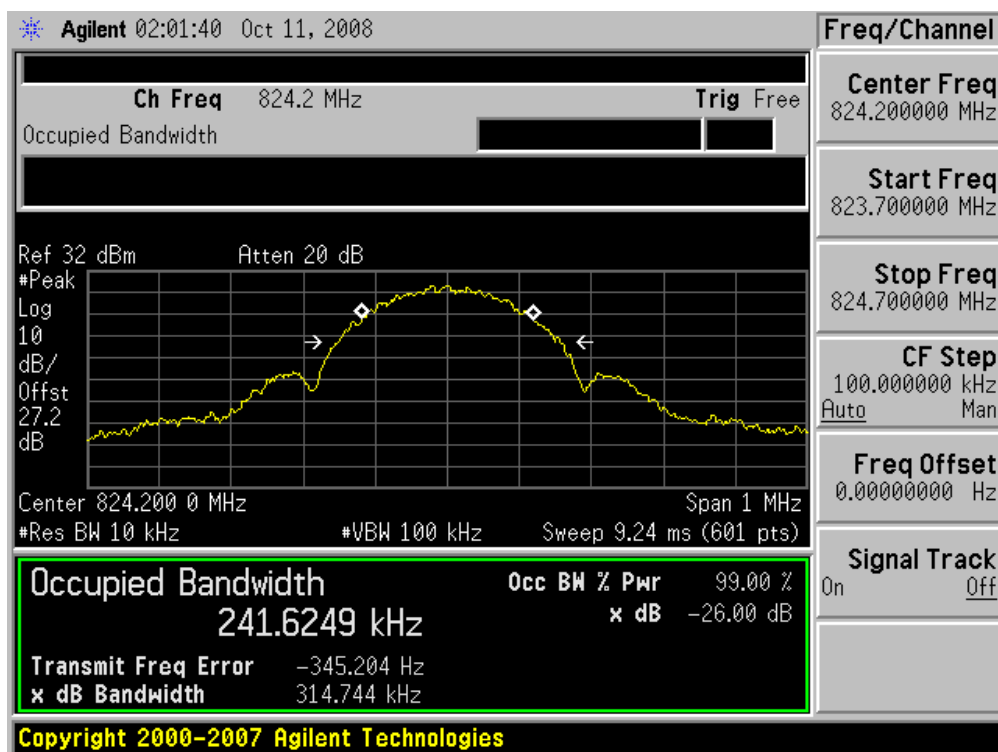


## ■ GSM1900 MODE (512 CH.) Occupied Bandwidth

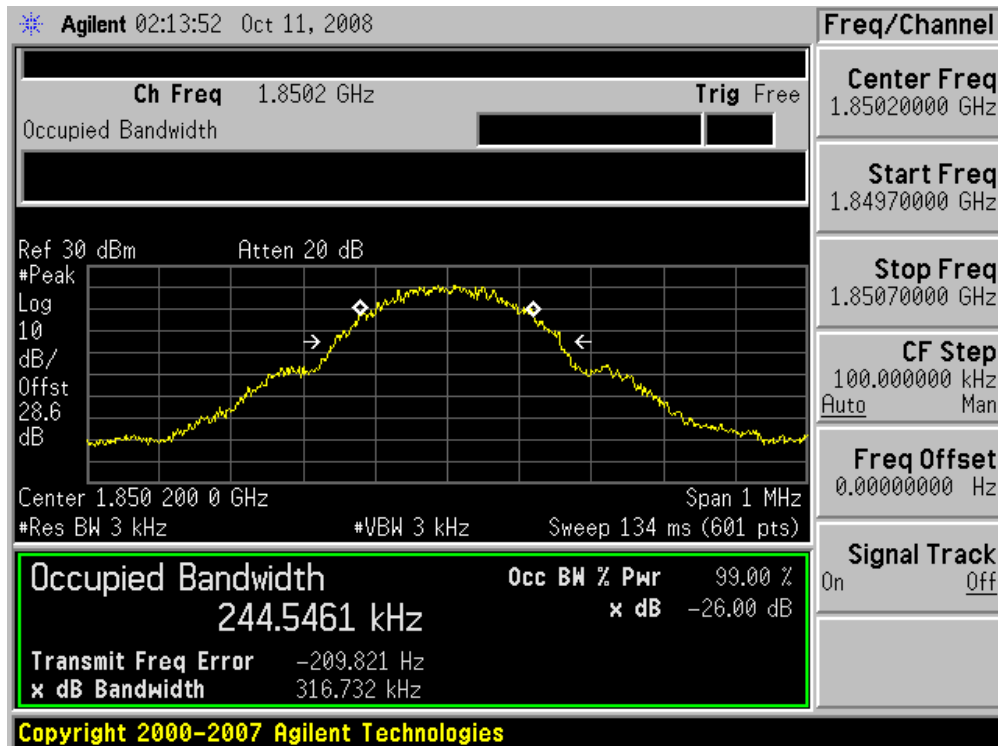


## ■ GSM1900 MODE (661 CH.) Occupied Bandwidth

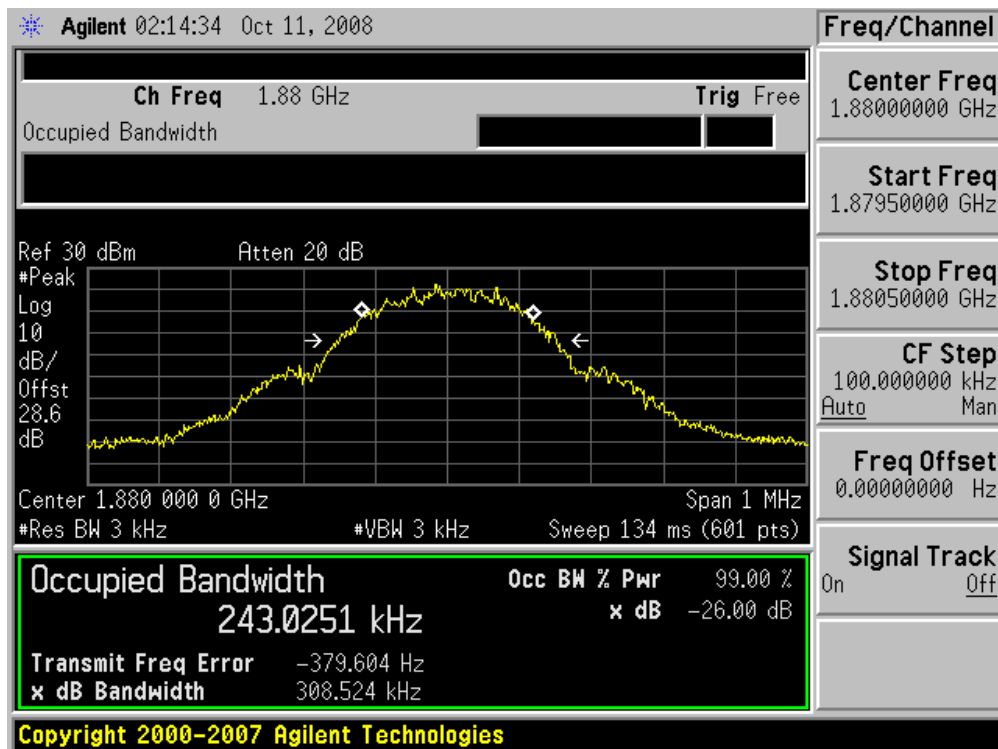


## ■ GSM1900 MODE (810 CH.) Occupied Bandwidth

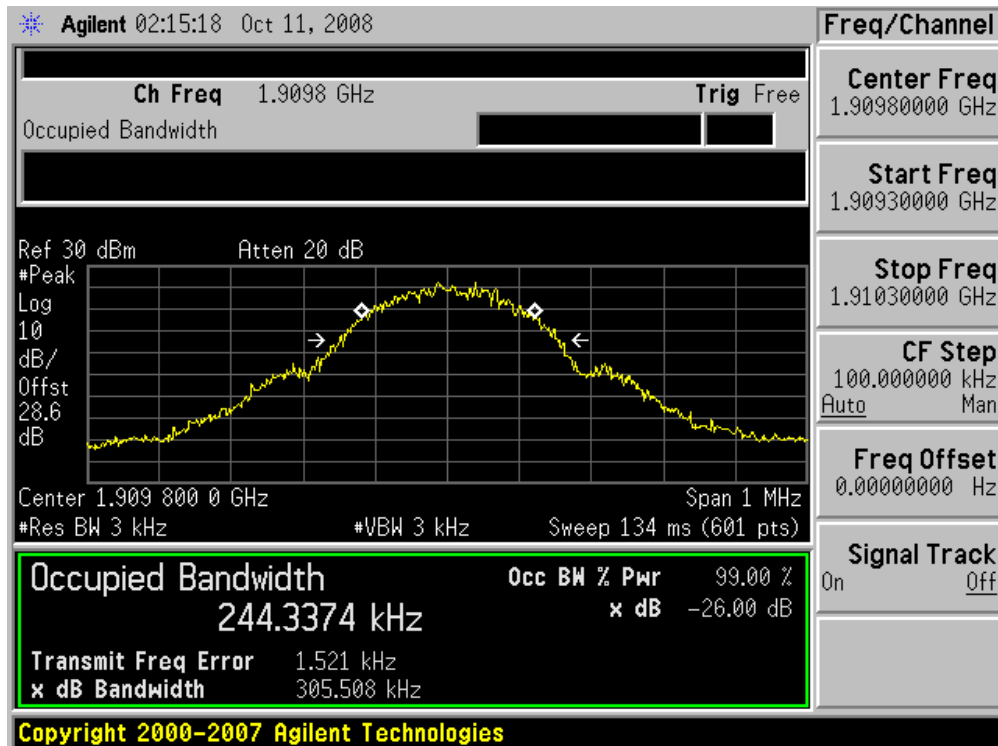


## ■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

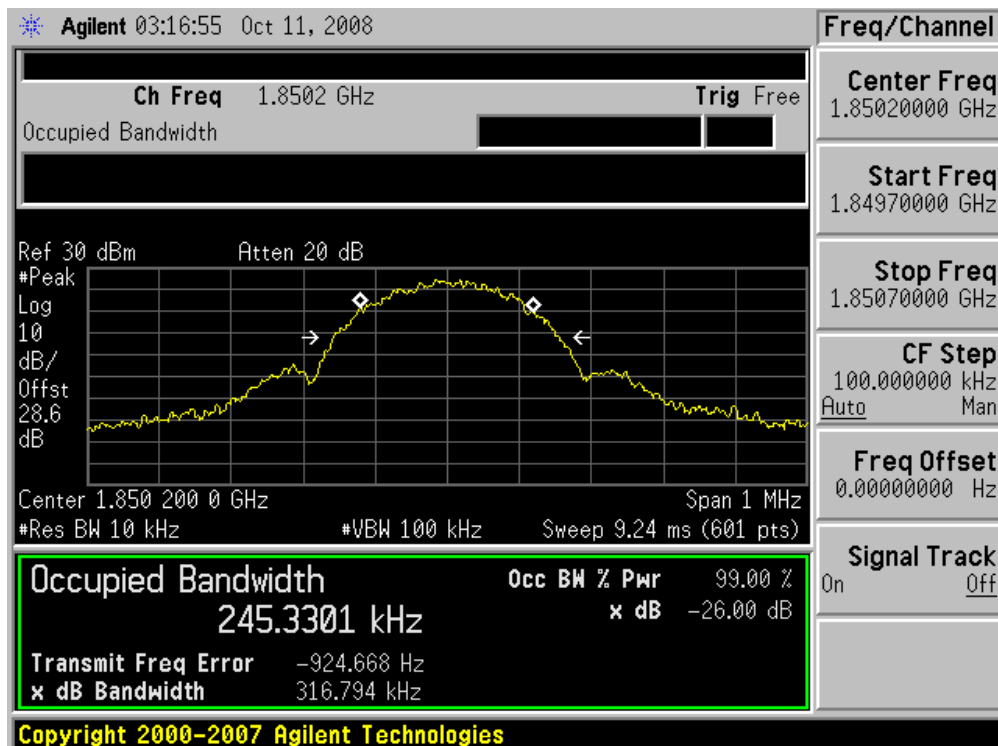


## ■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

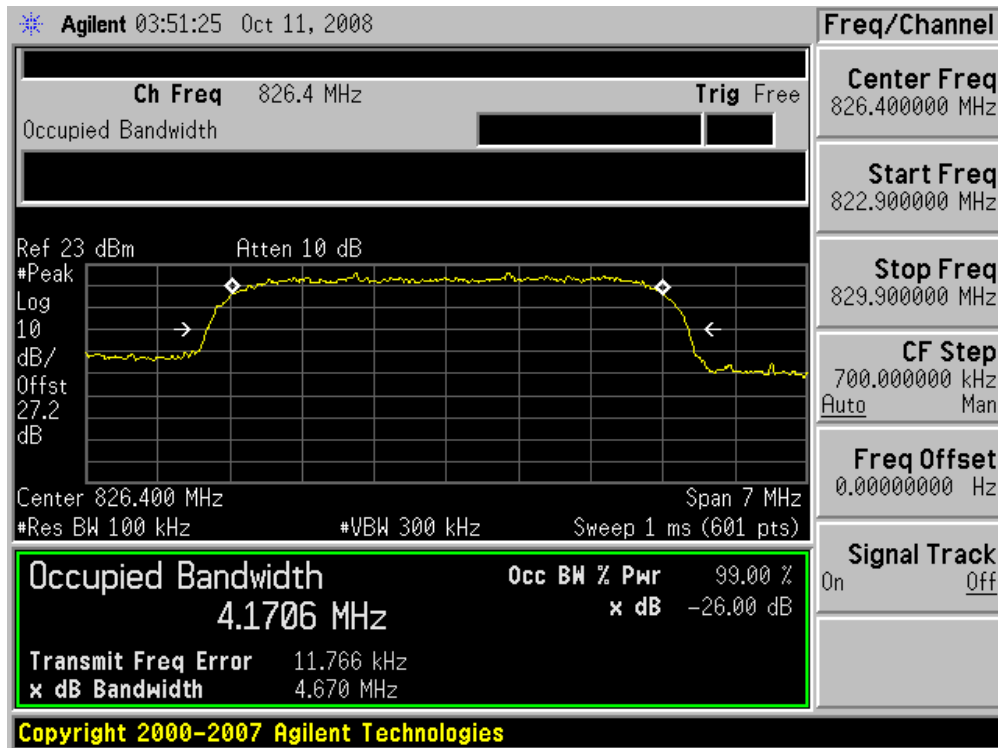


## ■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

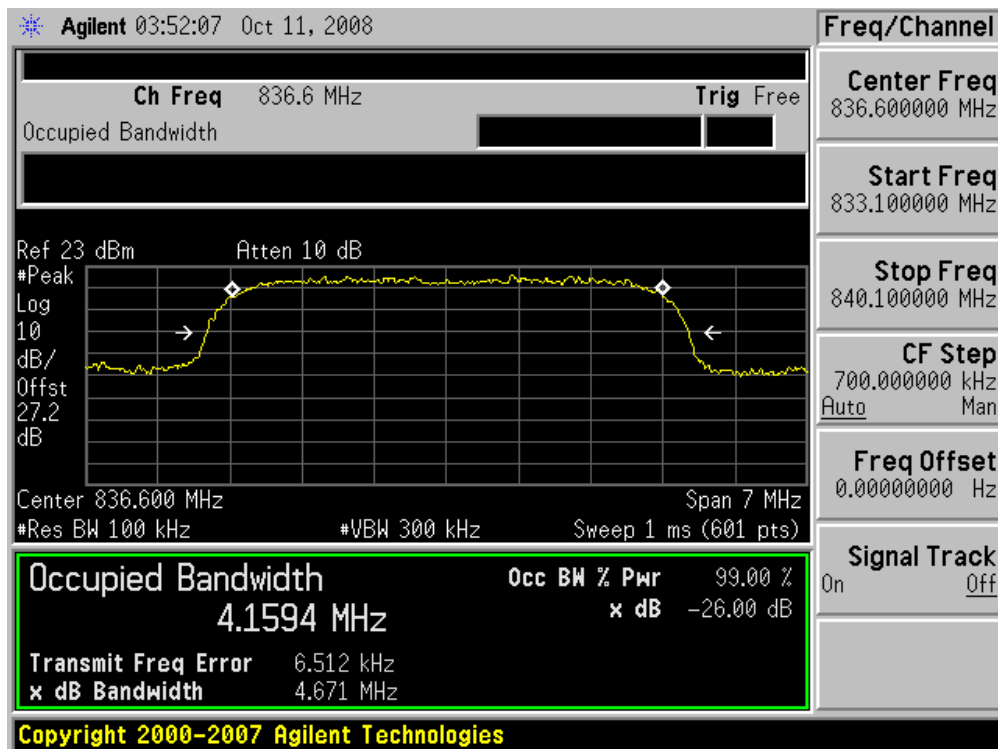


## ■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

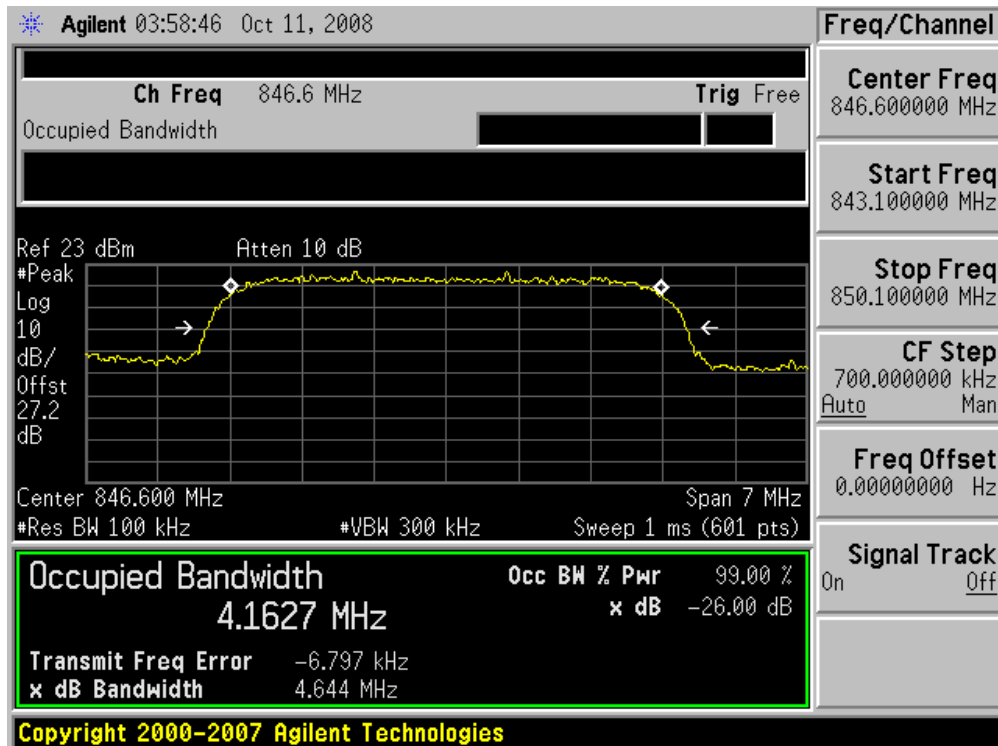


## ■ WCDMA 1900 MODE (9262 CH.) Occupied Bandwidth

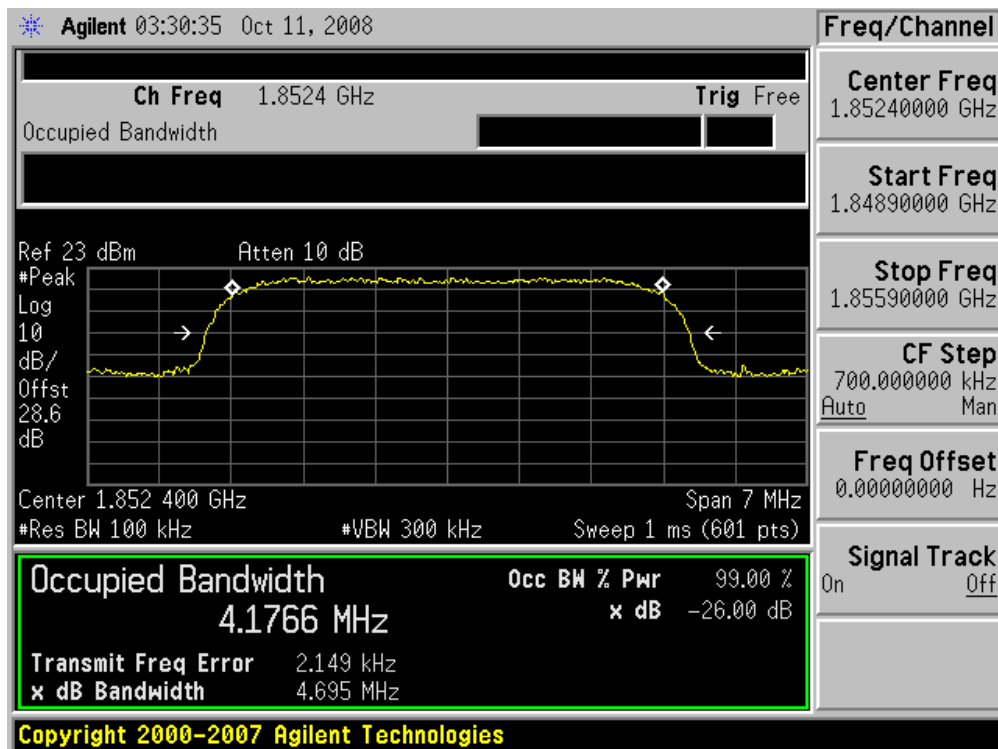


## ■ WCDMA 1900 MODE (9400 CH.) Occupied Bandwidth

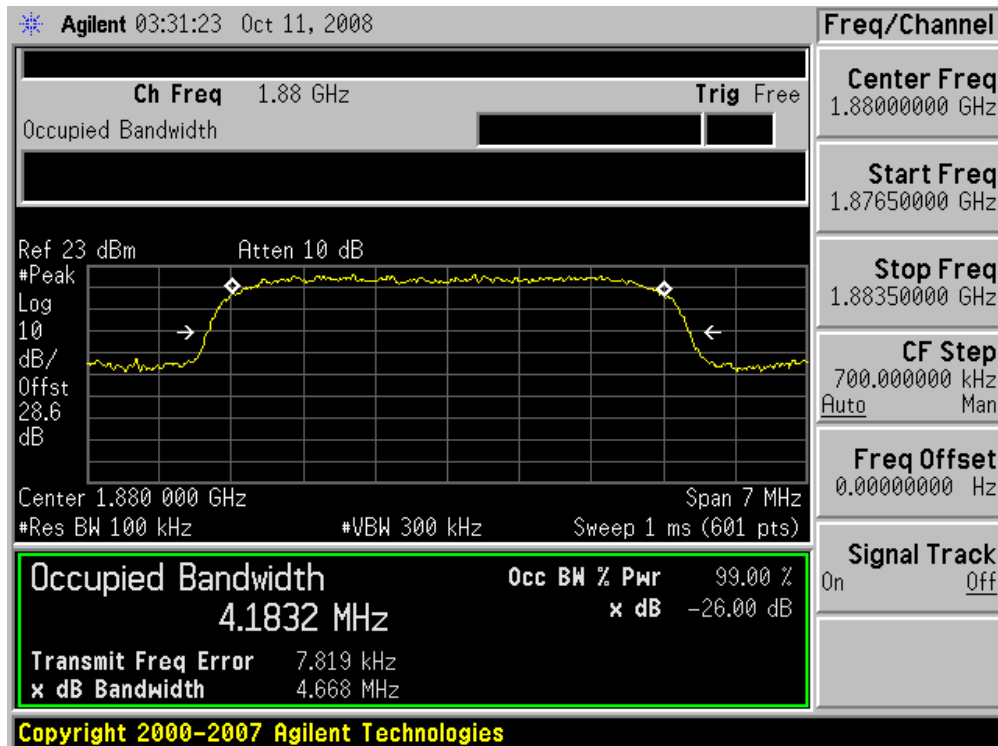


## ■ WCDMA 1900 MODE (9538 CH.) Occupied Bandwidth

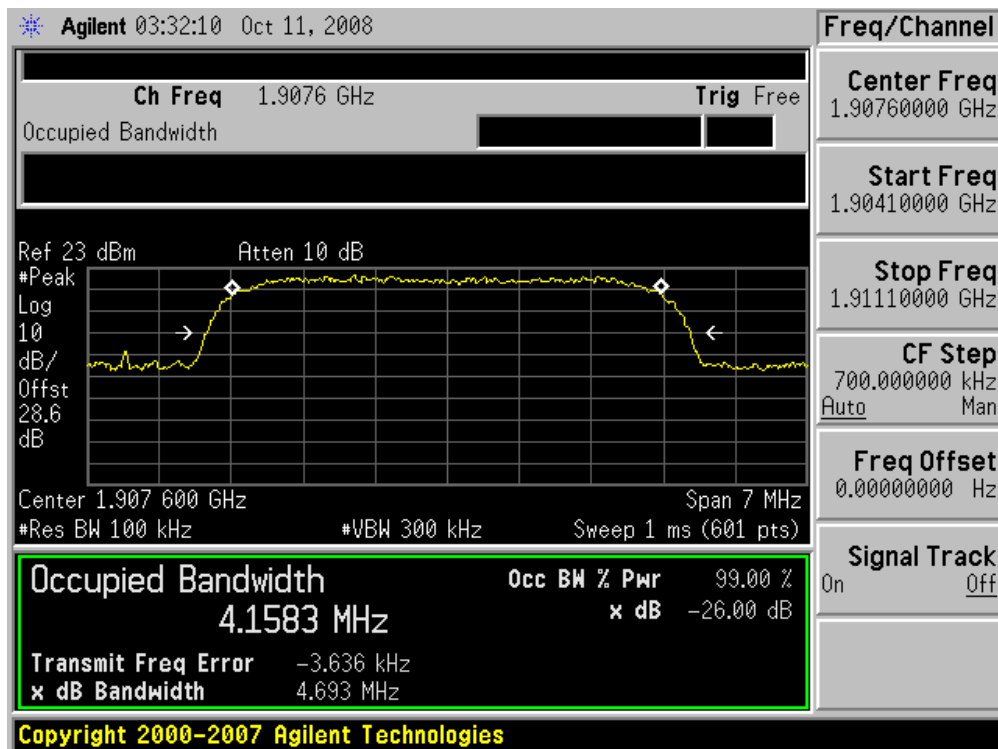


## ■ GSM850 MODE (128 CH.) Block Edge

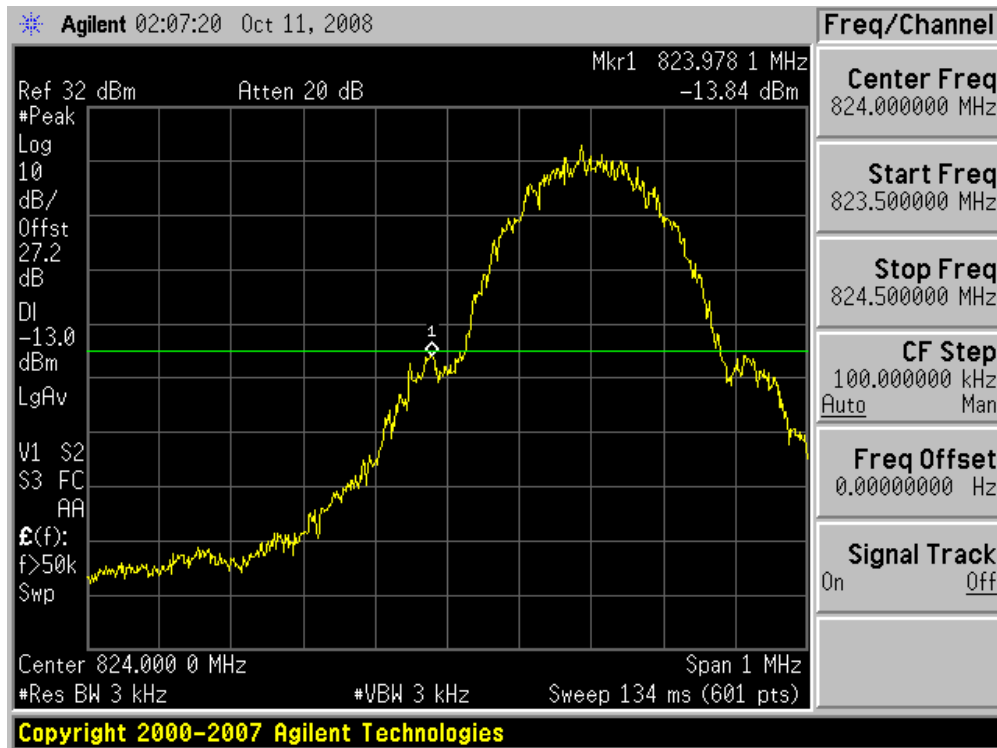


## ■ GSM850 MODE (251 CH.) Block Edge

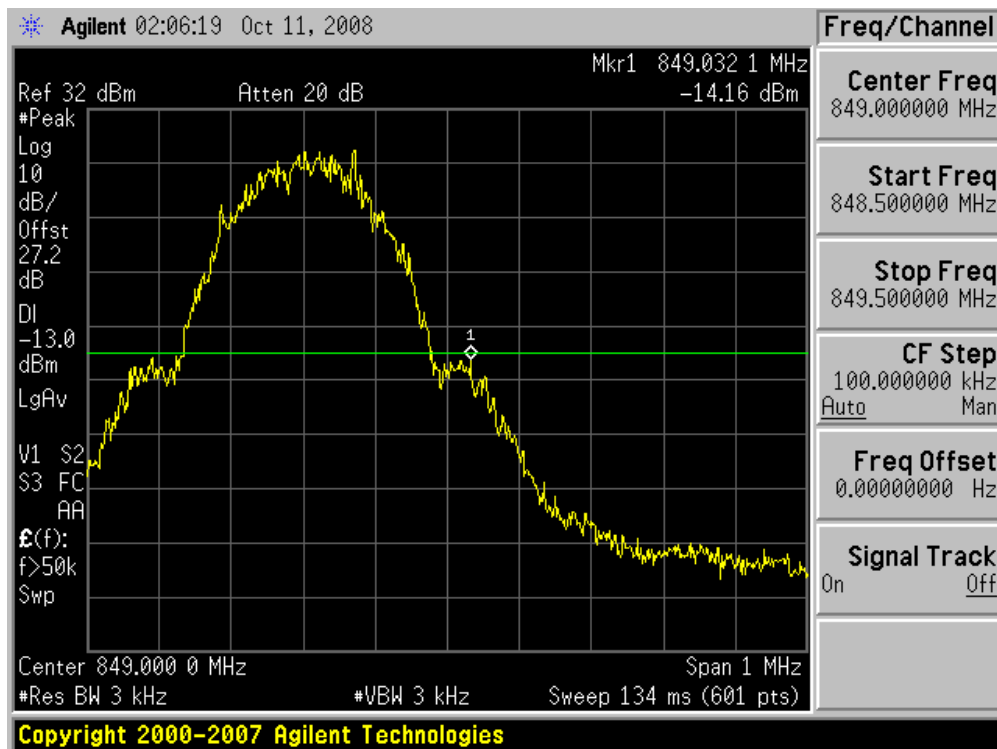


## ■ GSM850 EDGE MODE (128 CH.) Block Edge

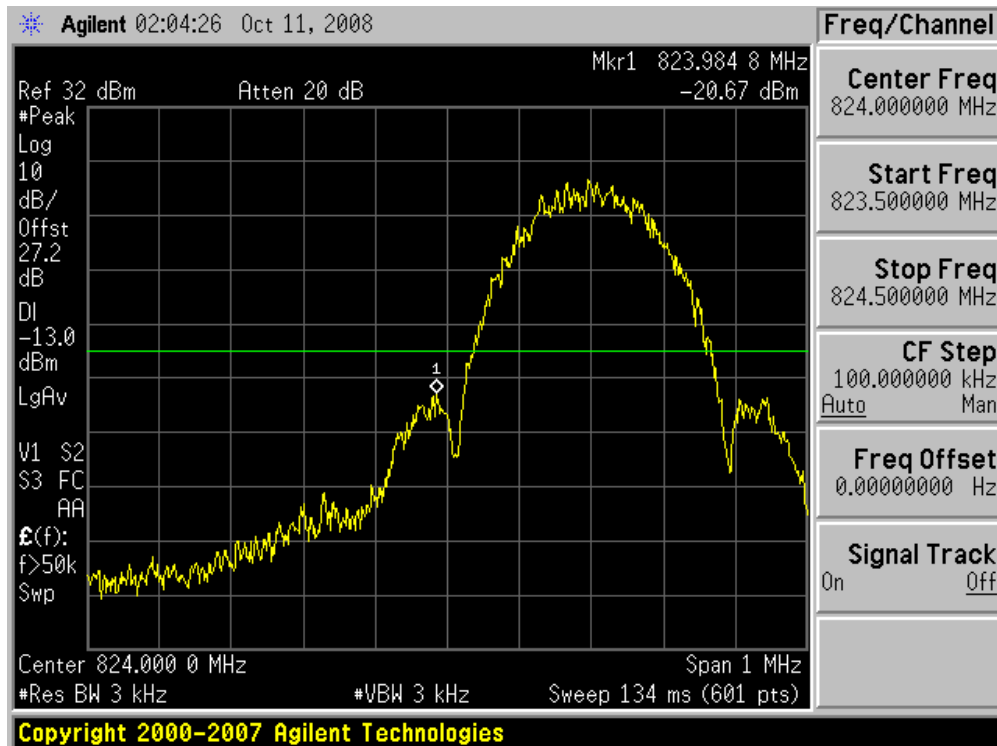


## ■ GSM850 EDGE MODE (251 CH.) Block Edge

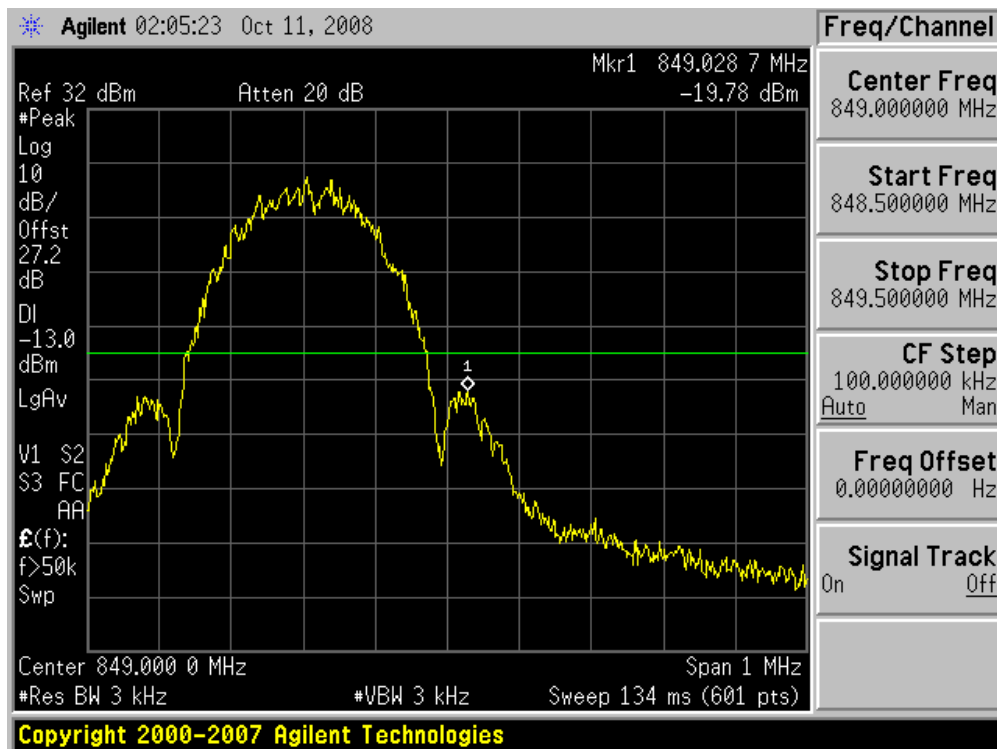


## ■ GSM1900 MODE (512 CH.) Block Edge

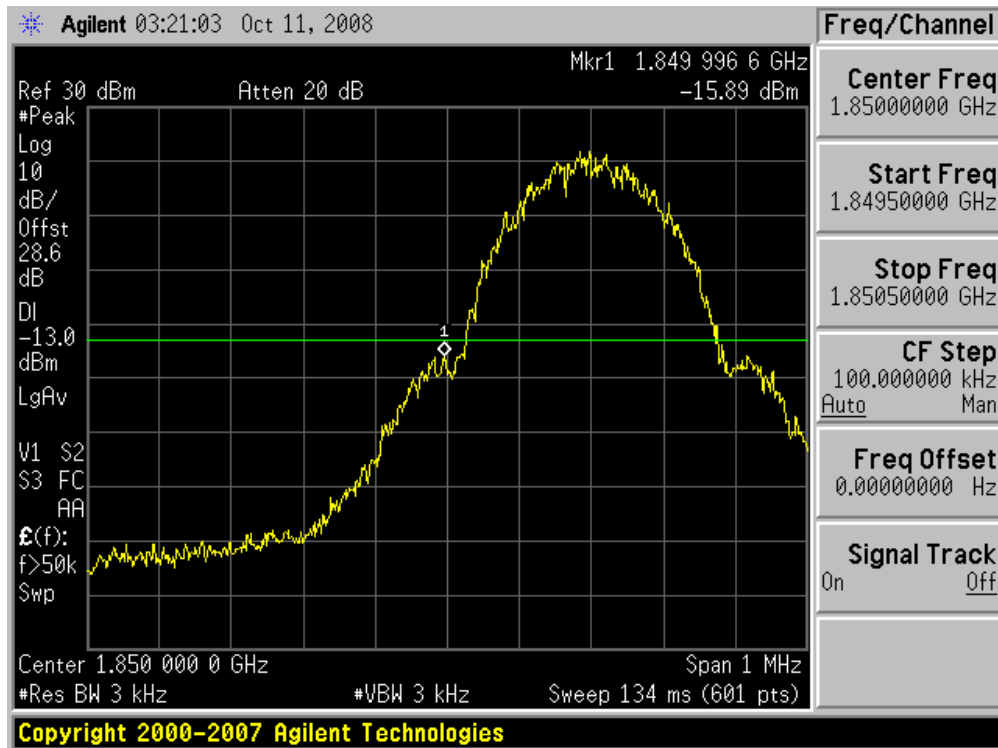


## ■ GSM1900 MODE (810 CH.) Block Edge

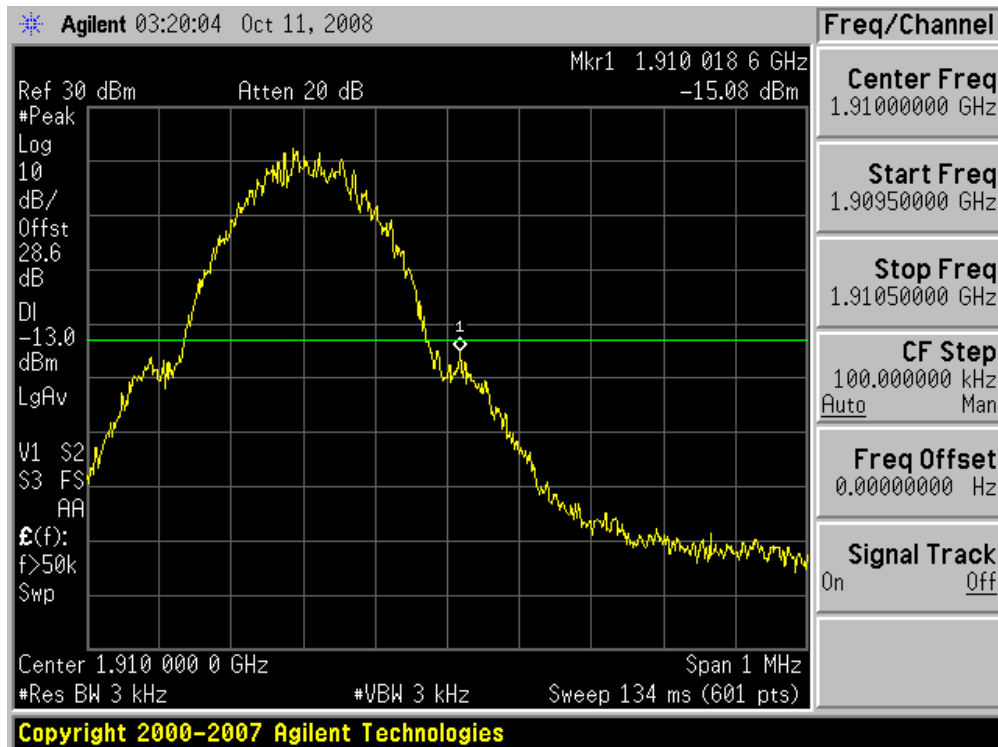


## ■ GSM1900 EDGE MODE (512 CH.) Block Edge

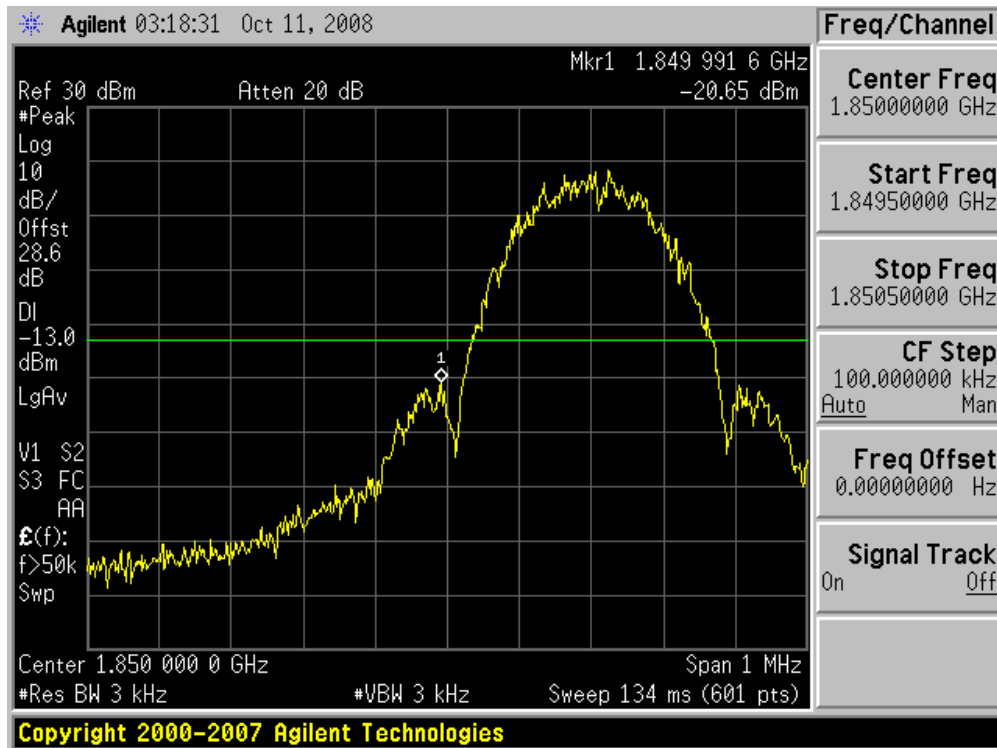


## ■ GSM1900 EDGE MODE (810CH.) Block Edge

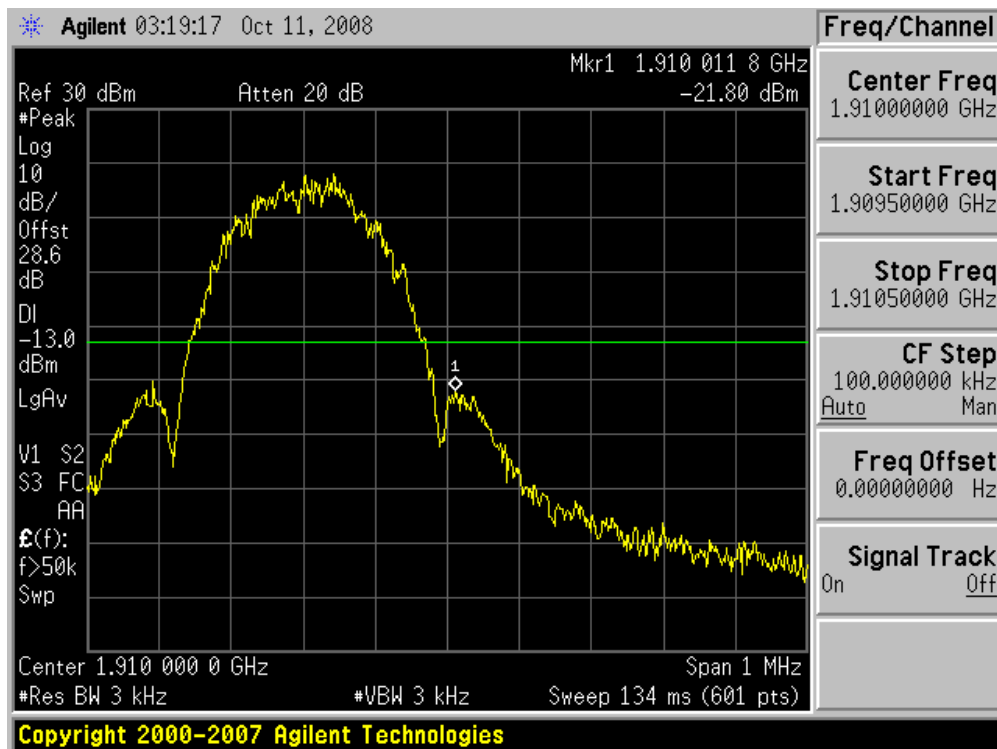


## ■ WCDMA850 MODE (4132 CH.) Block Edge

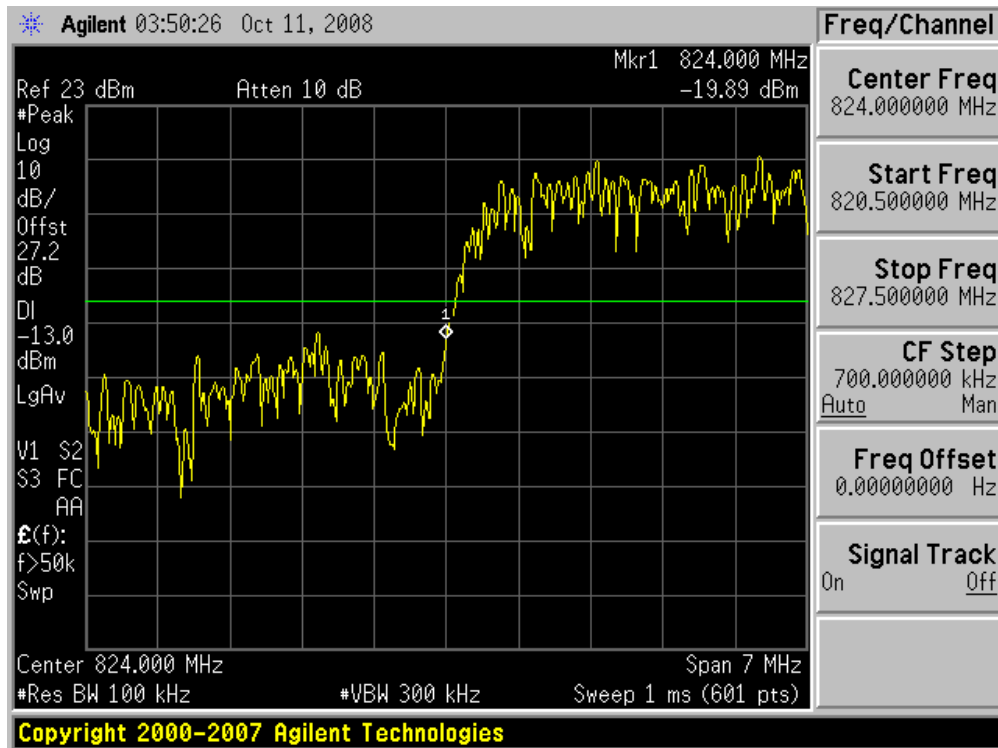


## ■ WCDMA850MODE (4233 CH.) Block Edge

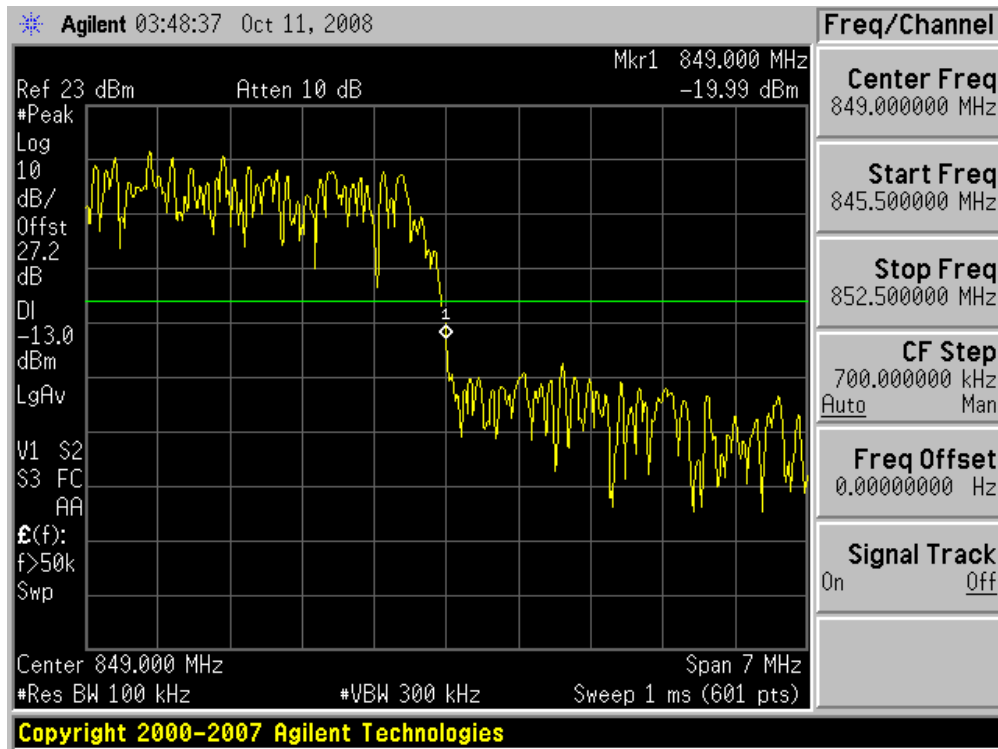


## ■ WCDMA 1900 MODE (9262 CH.) Block Edge

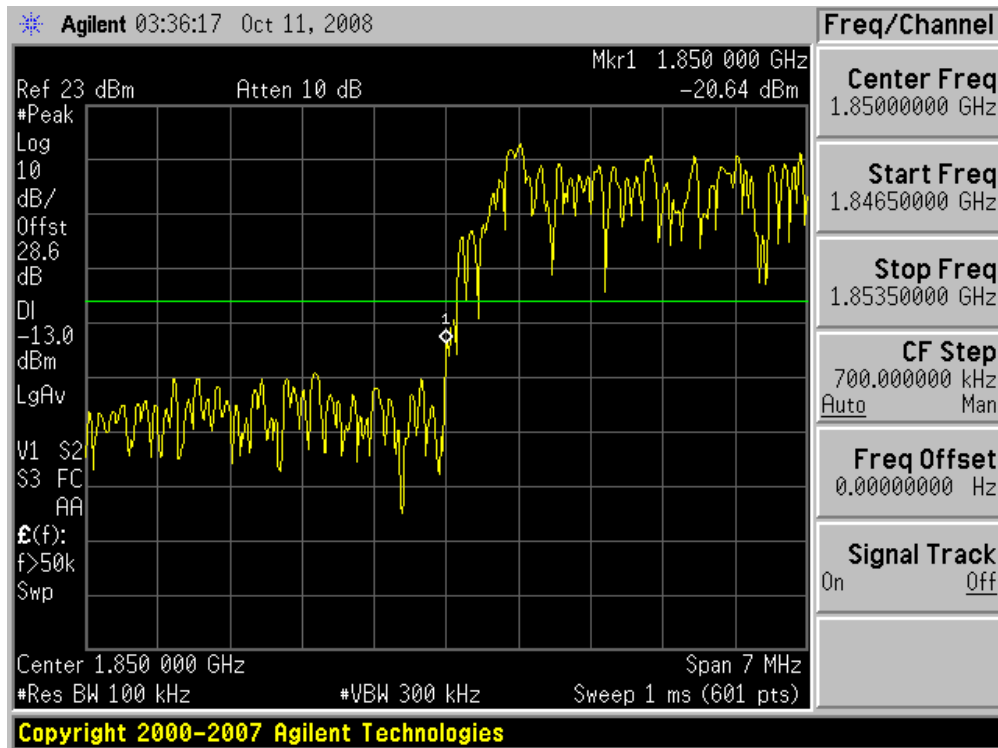


## ■ WCDMA 1900 MODE (9538 CH.) Block Edge

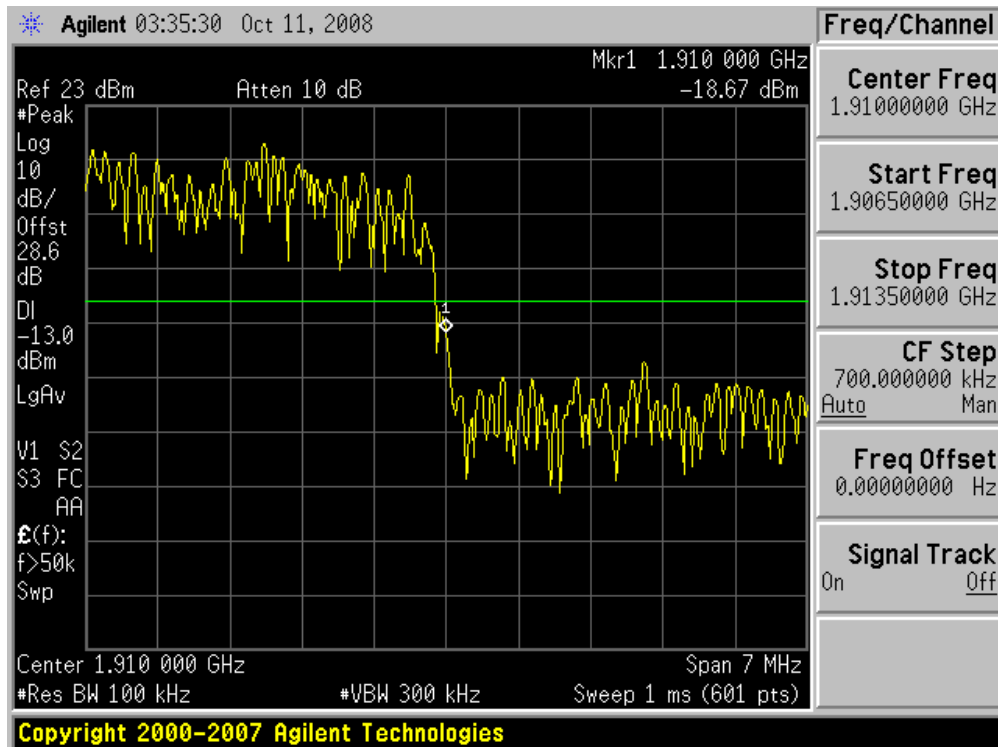


## ■ WCDMA 1900 MODE (9262 CH.) 4MHz Span

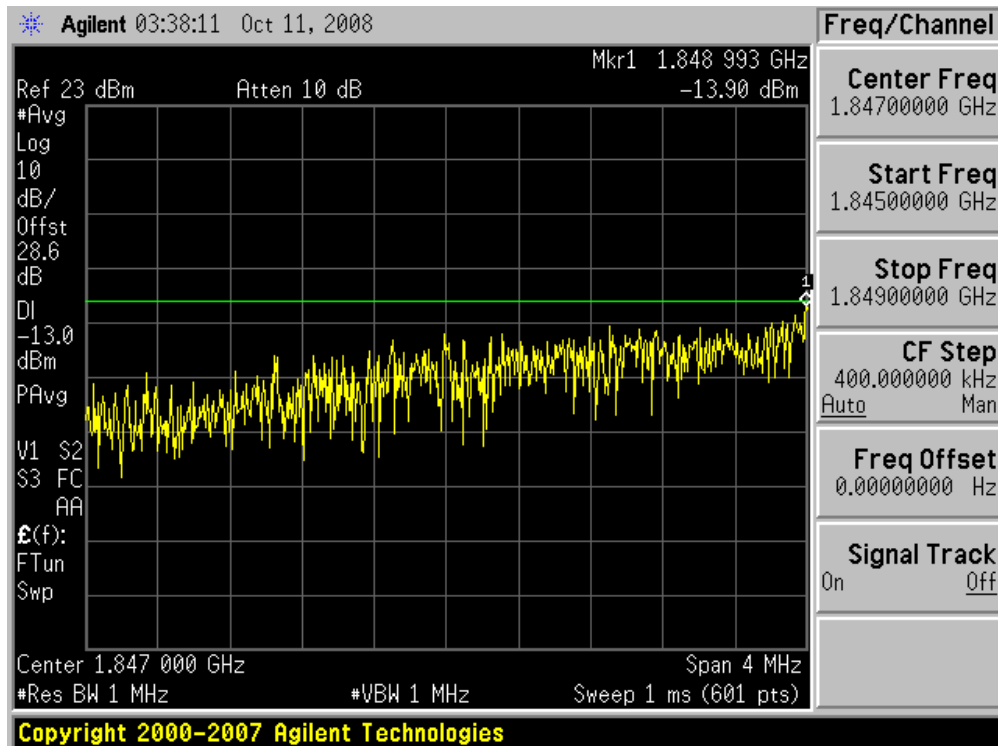


## ■ WCDMA 1900 MODE (9538 CH.) 4MHz Span

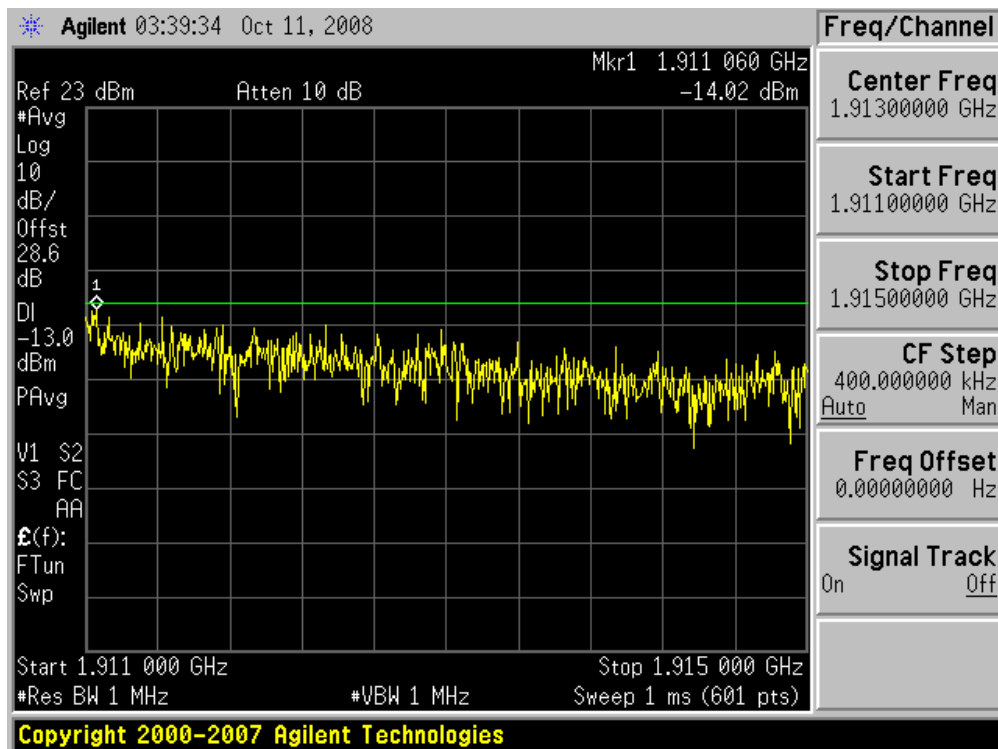


## ■ GSM850 MODE (128 CH.) Conducted Spurious Emissions

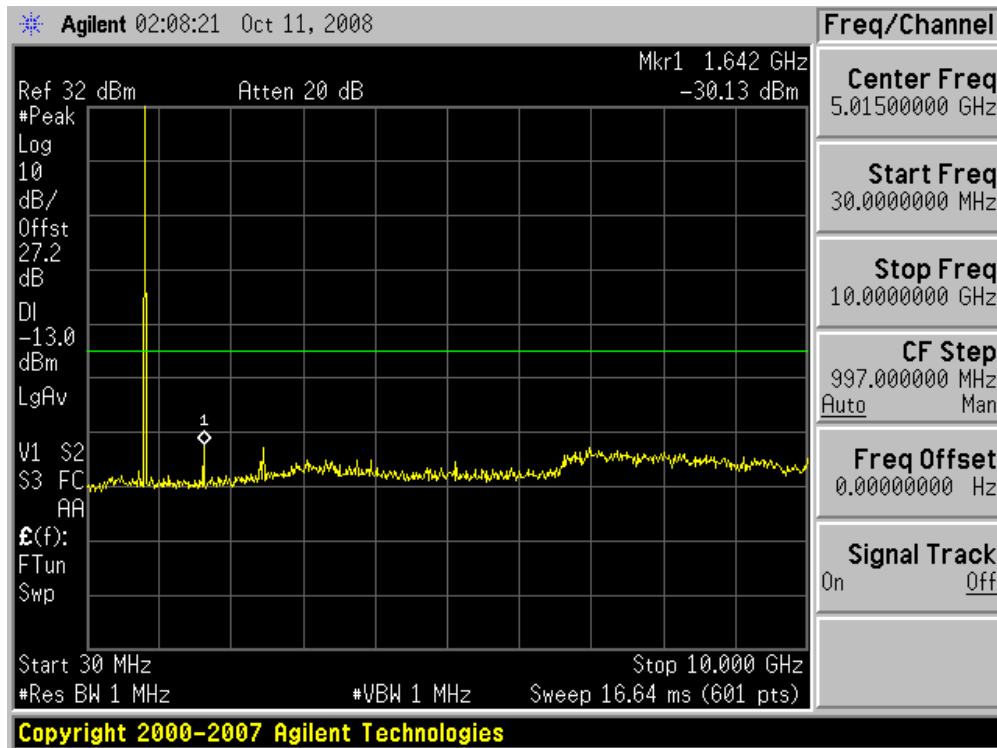


## ■ GSM850 MODE (190 CH.) Conducted Spurious Emissions

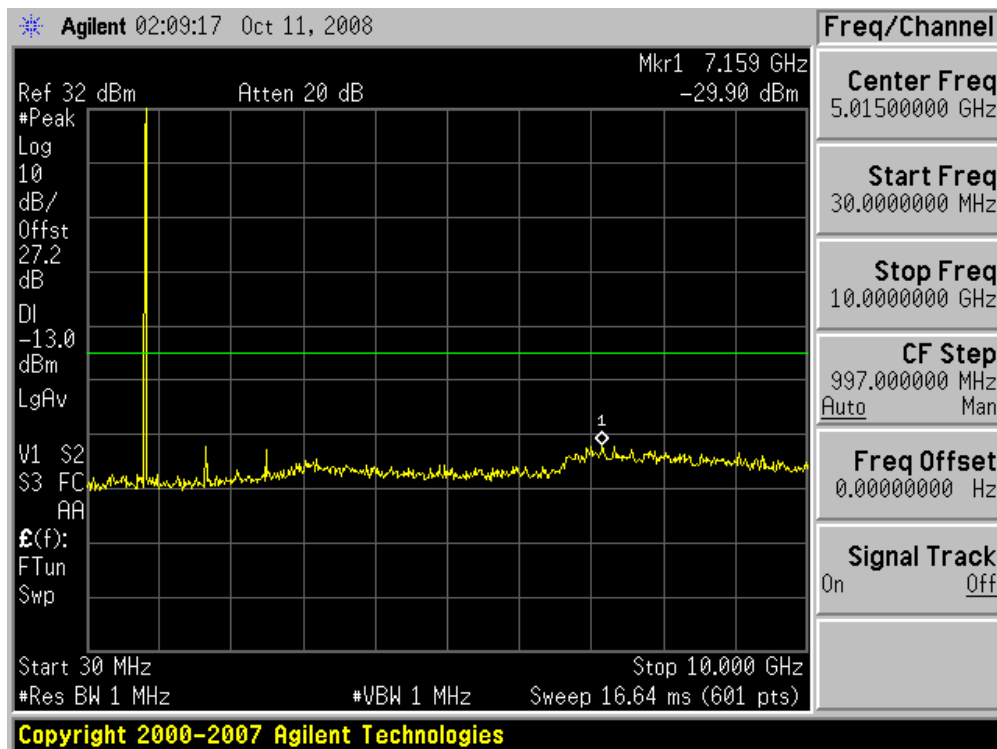


## ■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

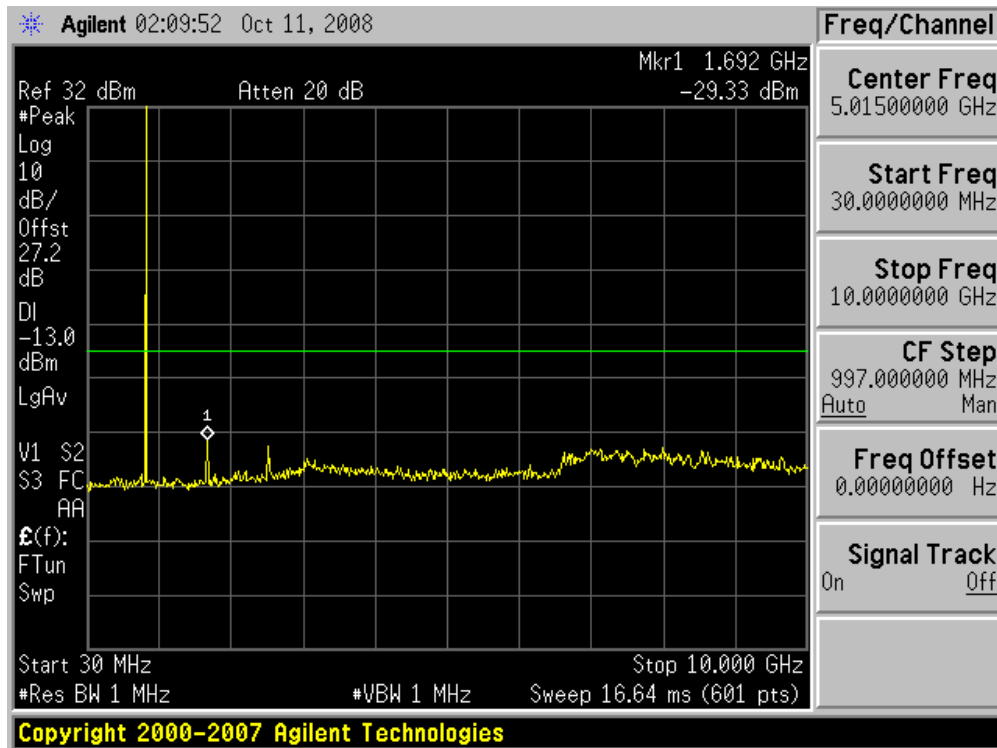


## ■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions

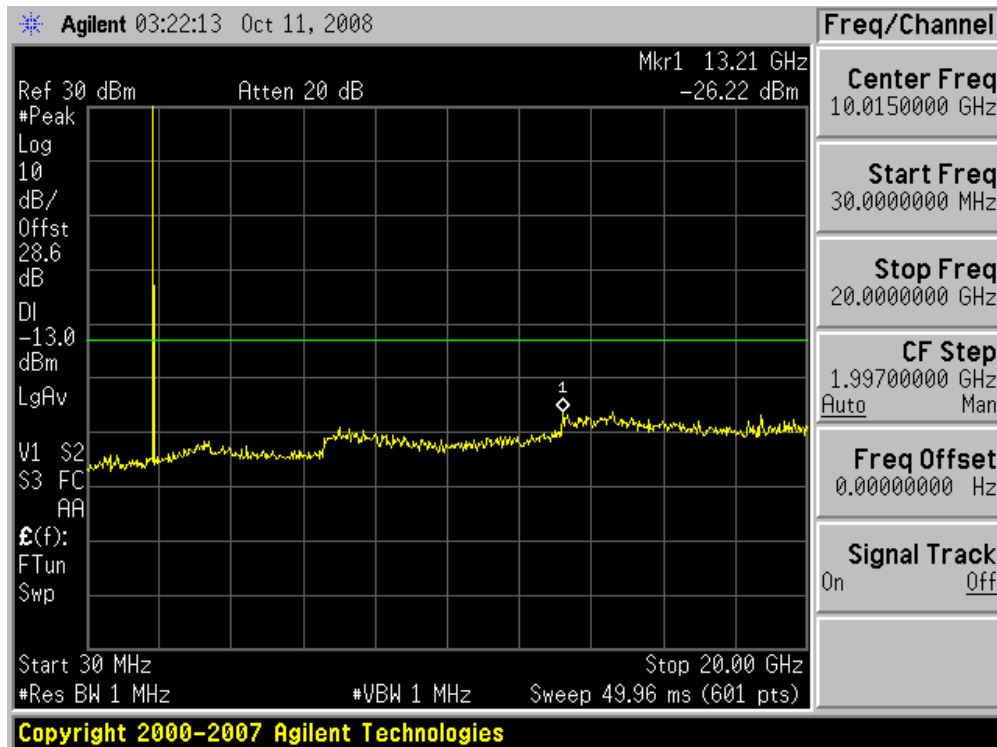


## ■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions

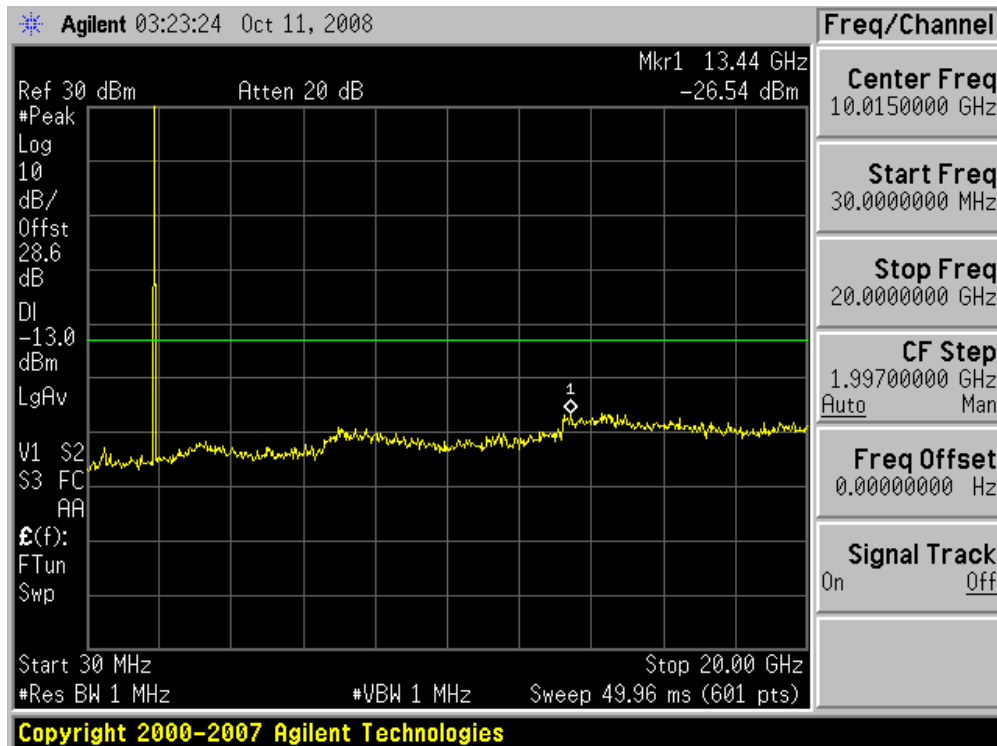


## ■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions

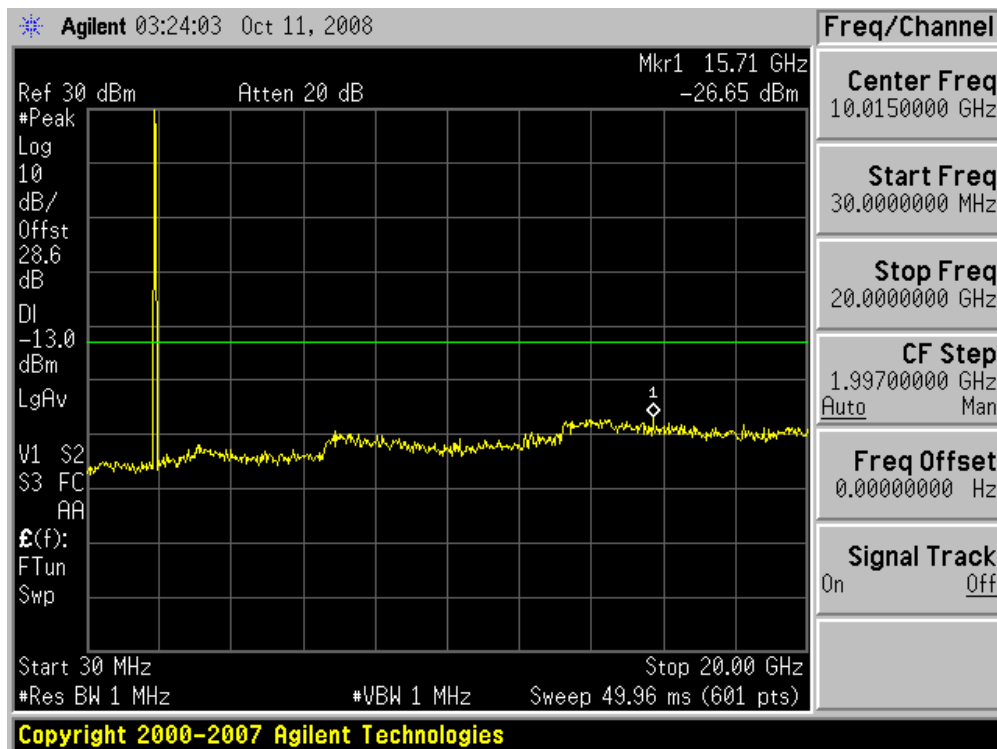


## ■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

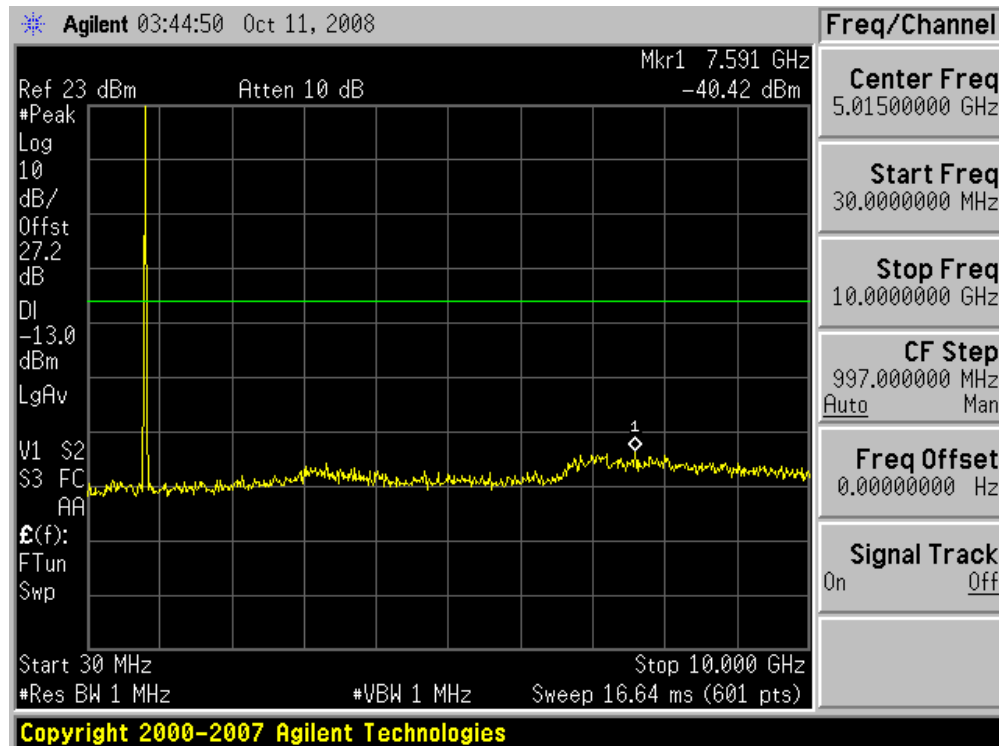


## ■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

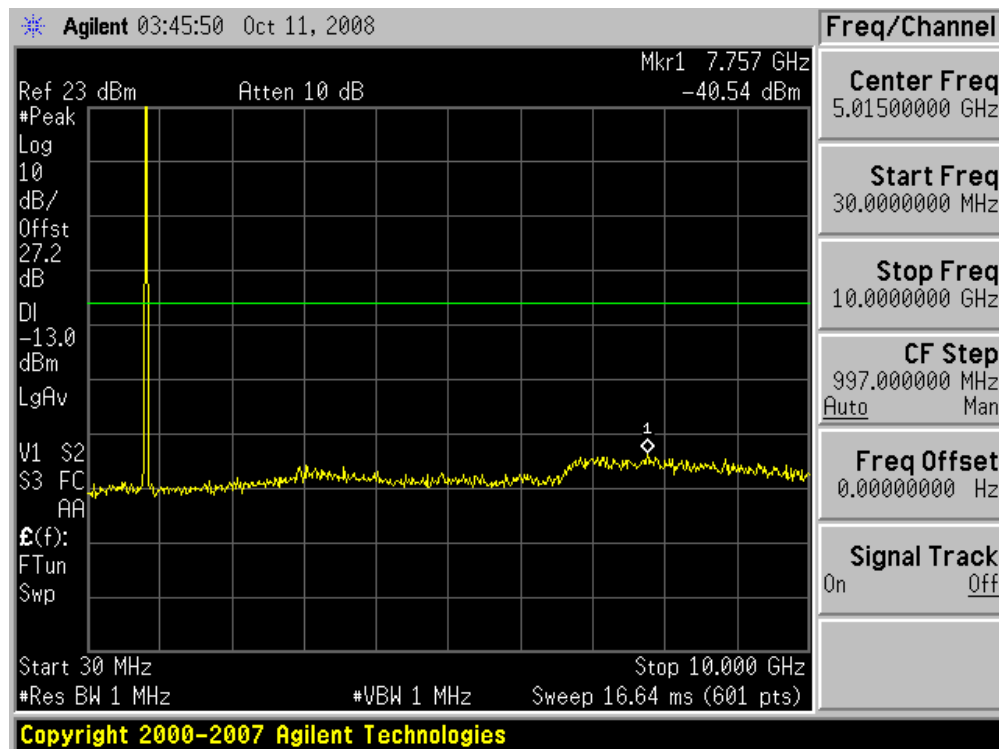


## ■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

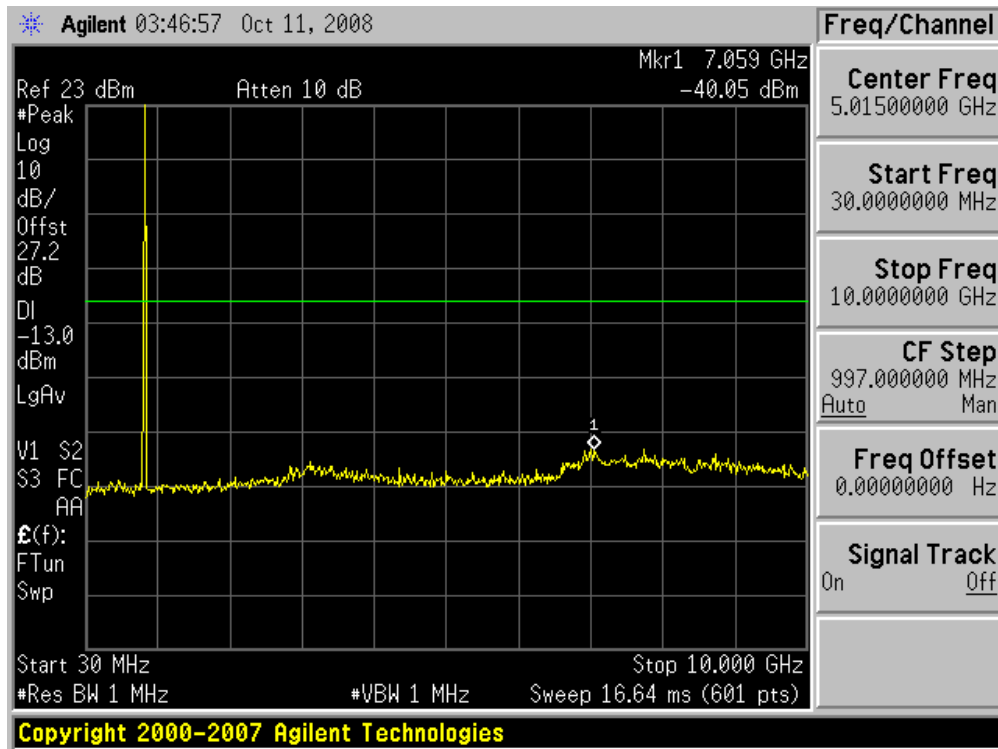

## ■ WCDMA 1900 MODE (9262 CH.) Conducted Spurious Emissions

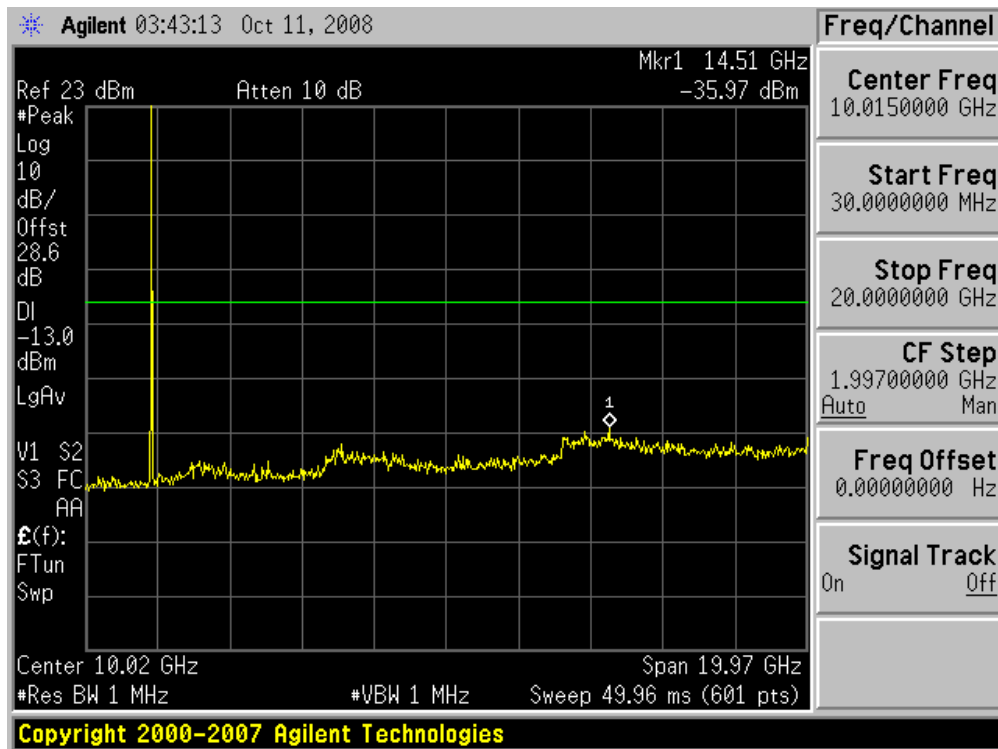

## ■ WCDMA 1900 MODE (9400 CH.) Conducted Spurious Emissions

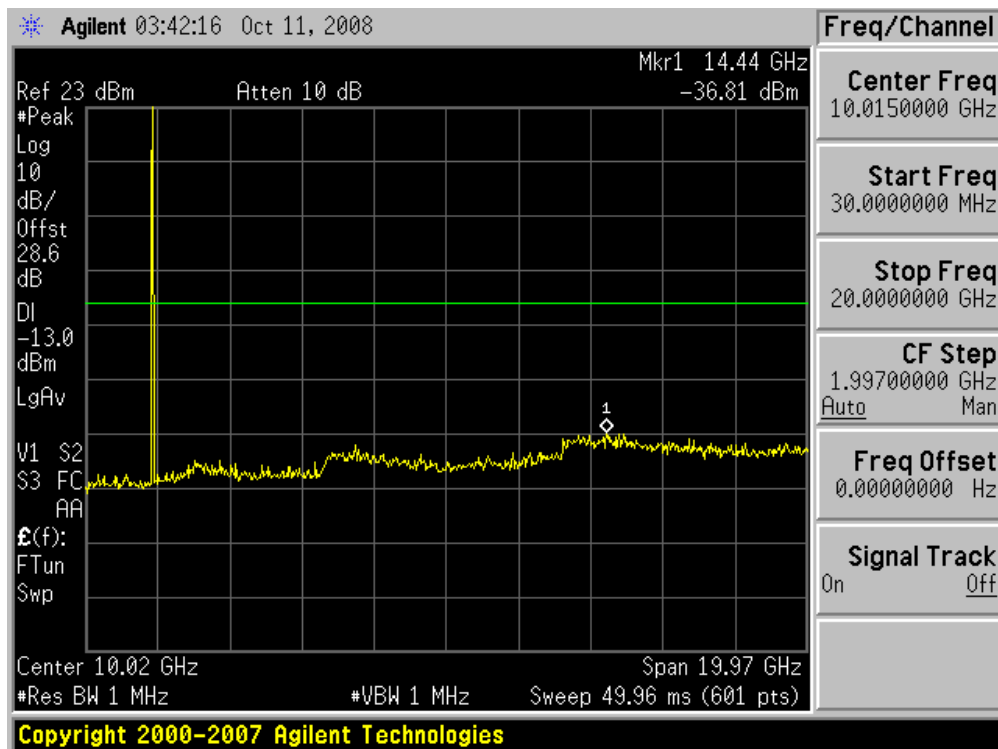

## ■ WCDMA 1900 MODE (9538 CH.) Conducted Spurious Emissions

