

# TEST REPORT

## Certification Of Compliance

Test Report No. : 00431-4529-C4050

### EQUIPMENT UNDER TEST

|                          |                                                                              |
|--------------------------|------------------------------------------------------------------------------|
| Equipment :              | Wireless Local Loop Telephone (CDMA)                                         |
| Type/Model :             | LST-255                                                                      |
| Manufacturer :           | LG Electronics Inc.                                                          |
| Applicant :              | LG Electronics Inc.                                                          |
| Address :                | 19-1, Cheongho-Ri, Jinwuy-Myun,<br>Pyungtaik-City, Kyunggi-Do, 451-713 Korea |
| FCC ID:                  | BEJLST255                                                                    |
| Regulation:              | FCC Part 22, Part 2                                                          |
| Test procedure:          | ANSI C63.4-2003, TIA/EIA603                                                  |
| Equipment Class:         | Intentional Radiators                                                        |
| Date of Receipt of EUT : | November 16, 2004                                                            |
| Date of Test :           | November 17~22, 2004                                                         |
| Date of issue :          | November 25, 2004                                                            |
| Test Result :            | PASS                                                                         |

### SUMMARY

This device has been verified to comply with the applicable requirements in the FCC Part 22 & Part2 and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003, TIA/EIA 603

※ The test results in this test report apply only to sample(s) tested.

Approved by



Kyeom-Soon Kim / General Manager  
Standards Group  
Quality and Reliability Center

Tested by



Y. S. Lee / Chief Research Engineer  
Standards Group  
Quality and Reliability Center

Reviewed by:



J. C. Lee / Chief Research Engineer  
Standards Group  
Quality and Reliability Center

This report may not be reproduced other than in full, except with the prior written approval by Quality and Reliability Center.

Address : LG Electronics Inc. Q & R Center, 36, Munlae-dong, 6-ga, Youngdungpo-gu, Seoul, Korea Tel:+82-2-2630-3090~4, Fax:+82-2-2630-3504

## ***CONTENTS***

|                                                                   | Page                |
|-------------------------------------------------------------------|---------------------|
| <b>1. GENERAL INFORMATION .....</b>                               | <b>3</b>            |
| 1.1 DESCRIPTIONS OF EQUIPMENT UNDER TEST (EUT) .....              | 3                   |
| 1.2 REGULATIONS APPLIED TO EUT .....                              | 3                   |
| 1.3 MEASUREMENT PROCEDURE .....                                   | 3                   |
| 1.4 MEASUREMENT PLACE .....                                       | 3                   |
| <b>2. TEST SITE.....</b>                                          | <b>3</b>            |
| 2.1 ANECHOIC CHAMBER .....                                        | 3                   |
| 2.2 A SHIELDED ENCLOSURE.....                                     | 3                   |
| <b>3. CALIBRATIONS OF MEASURING INSTRUMENTS.....</b>              | <b>4</b>            |
| <b>4. DESCRIPTION OF TEST CONDITION .....</b>                     | <b>4</b>            |
| 4.1 RF POWER OUTPUT .....                                         | 4                   |
| 4.2 OCCUPIED BANDWIDTH .....                                      | 6                   |
| 4.3 SPURIOUS EMISSION AT ANTENNA TERMINAL .....                   | 7                   |
| 4.4 FIELD STRENGTH OF SPURIOUS RADIATION .....                    | 7                   |
| 4.5 FREQUENCY STABILITY .....                                     | 9                   |
| <b>5. TEST DATA .....</b>                                         | <b>10</b>           |
| 5.1. RF POWER OUTPUT (§2.1046).....                               | 10                  |
| 5.2. OCCUPIED BANDWIDTH / 26dB EMISSION BANDWIDTH (§2.1049) ..... | 10                  |
| 5.3. SPURIOUS EMISSION AT ANTENNA TERMINAL (§2.1051).....         | 11                  |
| 5.4. FIELD STRENGTH OF SPURIOUS RADIATION (§2.1053).....          | 12                  |
| 5.5. FREQUENCY STABILITY (§2.1055).....                           | 13                  |
| <b>6. PREDICTION OF MPE LIMIT .....</b>                           | <b>14</b>           |
| 6.1. FRIIS FORMULA .....                                          | 14                  |
| 6.2. TEST RESULTS .....                                           | 14                  |
| <b>7. LIST OF INSTRUMENTS USED .....</b>                          | <b>15</b>           |
| <br><b>APPENDIX A: TEST GRAPH-----</b>                            | <br><b>1 Volume</b> |
| <br><b>APPENDIX B: TEST SET-UP PHOTOGRAPHS-----</b>               | <br><b>1 Volume</b> |
| <br><b>APPENDIX C: EUT PHOTOGRAPHS-----</b>                       | <br><b>1 Volume</b> |

## **1. GENERAL INFORMATION**

### **1.1 Descriptions of equipment under test (EUT)**

- 1.1.1 Manufacturer: LG Electronics Inc.  
19-1, Cheongho-Ri, Jinwuy-Myun, Pyungtaik-City, Kyunggi-Do,  
451-713 Korea
- 1.1.2 EUT Type: Wireless Local Loop Telephone (CDMA)
- 1.1.3 Model No.: LST-255
- 1.1.4 Serial No.: N/A
- 1.1.5 System characteristic and descriptions
  - 1) Output power: 24.1 dBm (ERP)
  - 2) Antenna type: Half wavelength antenna
  - 3) Emission Designator: 1M25F9W
  - 4) Transmitting of frequency range: 824.70 ~ 848.31 MHz.
  - 5) Receiving of frequency range : 869.70 ~ 893.31 MHz.

### **1.2 Regulations applied to EUT**

FCC Part 22 ; Part2

### **1.3 Measurement procedure**

ANSI C63.4-2003, TIA/EIA603

Both conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and TIA/EIA603

### **1.4 Measurement place**

**LG Electronics Inc. Quality and Reliability Center**  
36, Munlae-dong, 6-ga, Youngdungpo-gu, Seoul 150-096, Korea

## **2. TEST SITE**

### **2.1 Anechoic chamber**

Measurement of radiated emissions from EUT was made at anechoic chamber that has been in compliance with Federal Communications Commissions (FCC) according to ANSI C63.4-2003.

### **2.2 A shielded enclosure**

The measurement of conducted spurious emissions was made in a shielded enclosure providing sufficient shielding effectiveness.

### 3. CALIBRATIONS OF MEASURING INSTRUMENTS

All measurements were made with instruments calibrated according to the recommendation by manufacturer. Measurement of radiated emissions and conducted emissions were made with instruments conforming to American National Standards Institute, ANSI C63.4-2003. The calibration of measuring instrument, including any accessories that may affect test results, were performed according to the recommendation by manufacturer.

### 4. DESCRIPTION OF TEST CONDITION

#### 4.1 RF Power Output

- 1) On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the frequency of the transmitter.
- 3) The output of the test antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4) The transmitter shall be switched on, if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- 6) The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- 8) The maximum signal level detected by the measuring receiver shall be noted.

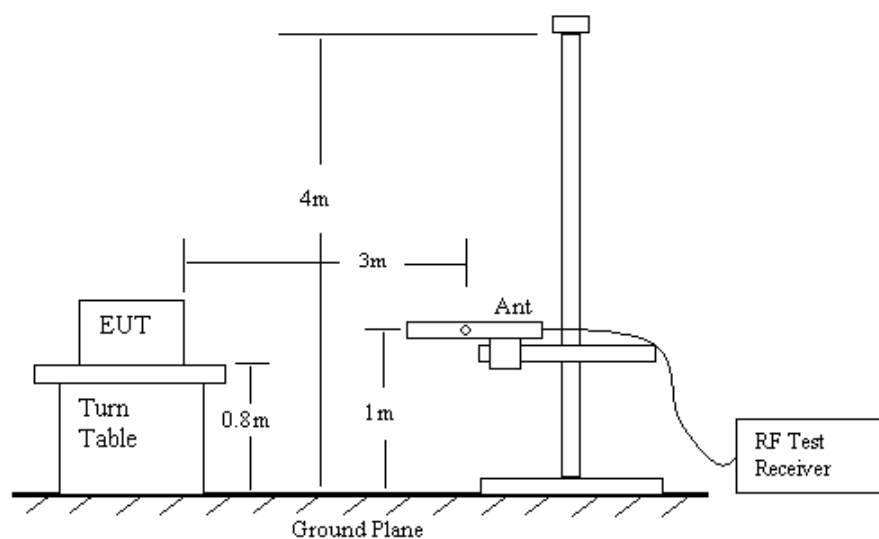


Figure1. Radiated Emission Measurement 30 to 1000 MHz

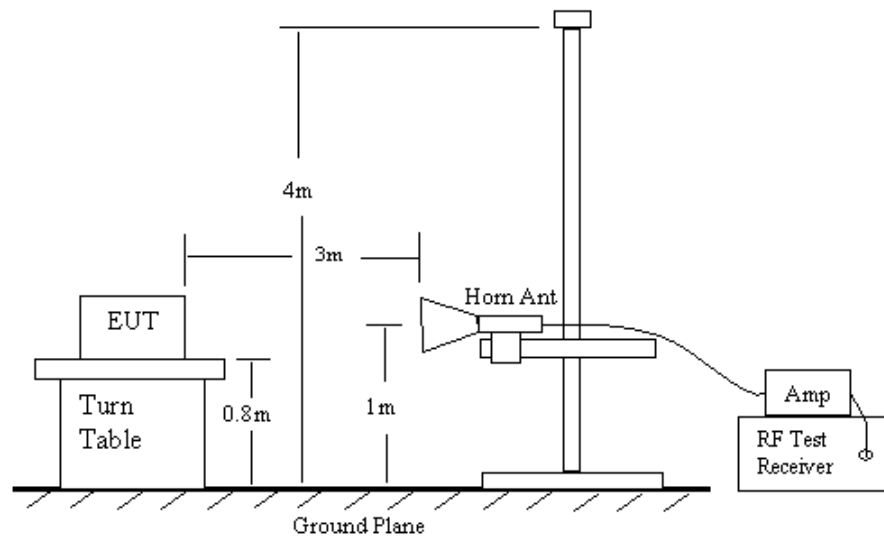


Figure2. Radiated Emission Above 1000 MHz

- 9) The transmitter shall be replaced by a tuned dipole (substitution antenna).
- 10) The substitution antenna shall be oriented for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- 11) The substitution antenna shall be connected to a calibrated signal generator.
- 12) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 14) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 15) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 16) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.
- 17) The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna if necessary.


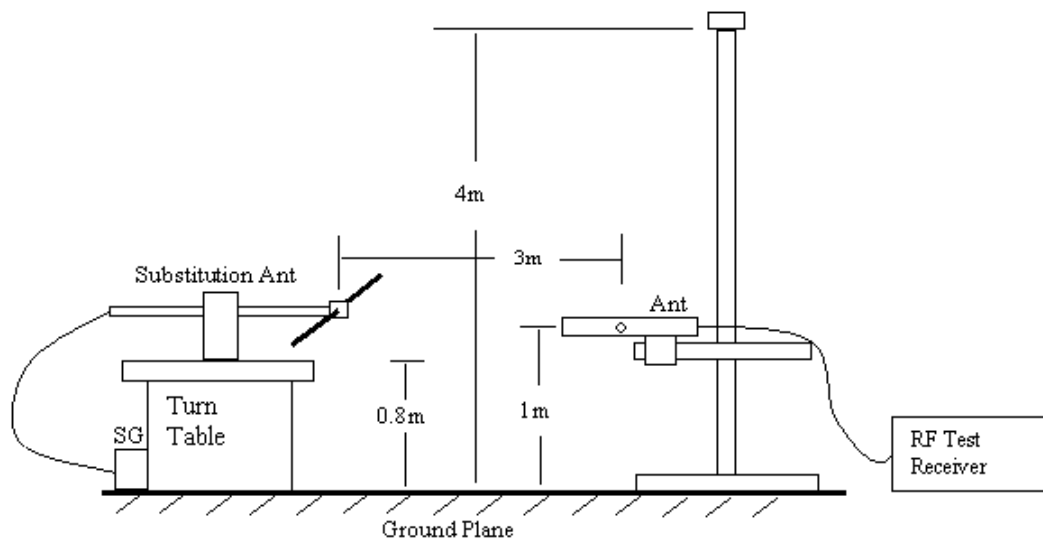


Figure3. Radiated Emission – Substitution Method


## 4.2 Occupied Bandwidth

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% of the Emission bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.




### 4.3 Spurious Emission at Antenna Terminal

- 1) EUT's RF output connector (made solely for the purpose of the test) is connected to the spectrum analyzer, and set as close as possible to the bottom of the block edge and one set as close as possible to the top of the block edge. Set the RES BW to 1% of the emission bandwidth to show compliance with the  $-13\text{dBm}$  limit, in the 1 MHz bands immediately outside and adjacent to the top and bottom edges of the frequency block.
- 2) For the Out-of-Band measurements a 1 MHz RES BW was used to scan from 30 MHz to  $5 \times f_0$  of the fundamental carrier for all frequency block. A display line was placed at  $-13\text{dBm}$  to show compliance for spurious, and harmonics.



- 3) 22.917(f): Mobile emissions in base frequency range. The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitter operated must be attenuated to a level not to exceed  $-80\text{dBm}$  at the transmit antenna connector.

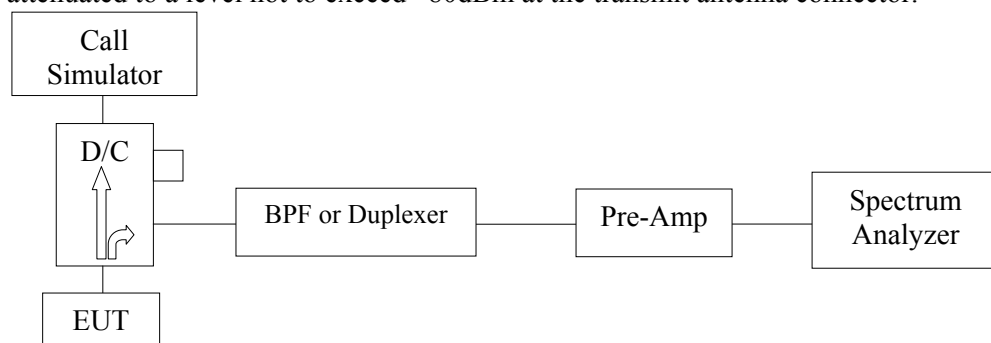

### 4.4 Field Strength of Spurious Radiation

- 1) On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2) The test antenna shall be oriented initially for vertical polarization located 3 m from the EUT to correspond to the frequency of the transmitter.
- 3) The output of the test antenna shall be connected to the measuring receiver and either a peak or average detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- 6) The transmitter shall than be rotated through  $360^\circ$  in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- 8) The maximum signal level detected by the measuring receiver shall be noted.

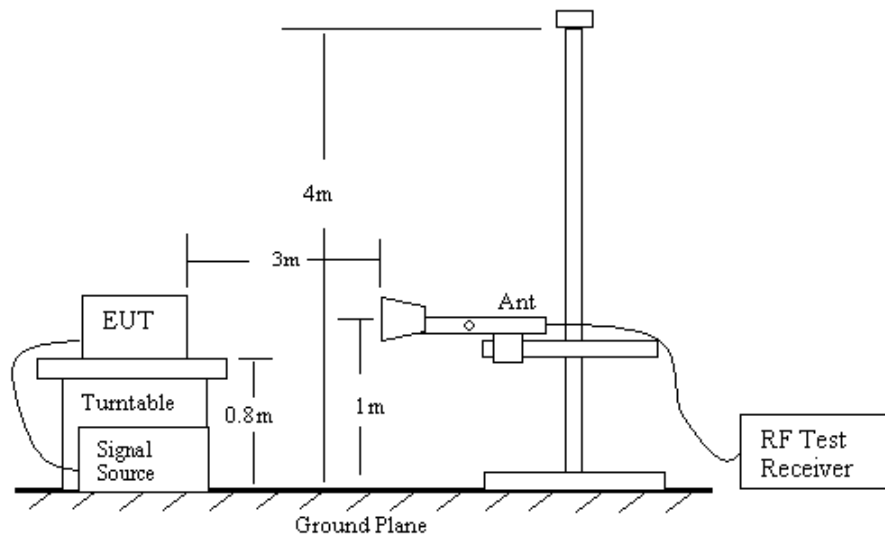


Figure4. Radiated Emission Measurement

- 9) The transmitter shall be replaced by a substitution antenna.
- 10) The substitution antenna shall be oriented for vertical polarization.
- 11) The substitution antenna shall be connected to a calibrated signal generator.
- 12) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

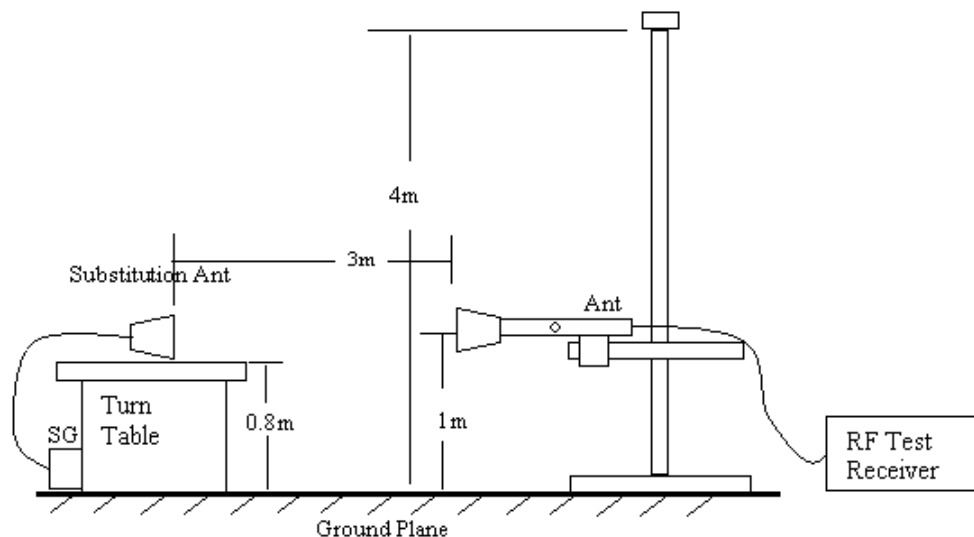


Figure5. Radiated Emission – Substitution Method set-up

- 14) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.

- 15) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 16) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.
- 17) The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna if necessary.

## 4.5 Frequency Stability

### 4.5.1 Frequency stability versus environmental temperature

- 1) Setup the configuration per figure 6 for frequencies measurement inside the environmental chamber. Set the temperature of the chamber to 20°C. Set SA Resolution Bandwidth low enough to obtain the desired frequency resolution and measure the EUT 20°C operating frequency as reference frequency.
- 2) Turn EUT off and set Chamber temperature to -30°C.
- 3) Allow sufficient time (approximately 20 to 30 minus after chamber reach the assigned temperature) for EUT to stabilize. Turn on EUT and measure the EUT operating frequency. Turn off EUT after the measurement.
- 4) Repeat step 3 with a 10°C increased per stage until the highest temperature of +50°C reached, record all measured frequencies on each temperature step.

### 4.5.2 Frequency stability versus input voltage

- 1) Setup the configuration per figure 6 and set chamber temperature to 20°C. Use a variable power supply to power the EUT and set output voltage to EUT nominal input voltage. Set SA Resolution Bandwidth low enough to obtain the desired frequency resolution and measure the EUT 20°C operating frequency as reference frequency.
- 2) Slowly reduce the EUT input voltage to specified extreme voltage variation ( $\pm 15\%$ ) and record the maximum frequency change.

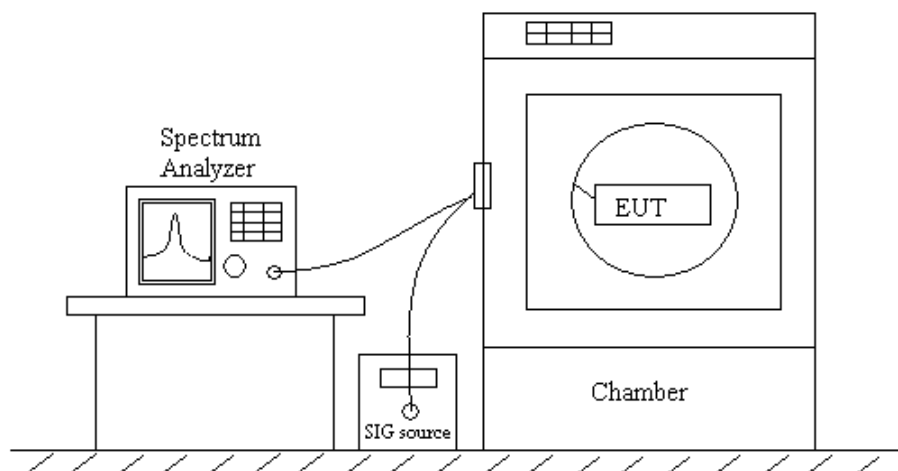


Figure6. Frequency Stability

## 5. TEST DATA

### 5.1. RF Power Output ( § 2.1046)

Product: Wireless Local Loop Telephone (CDMA)  
Model: LST-255

Serial No.: N/A  
Test Date: November 17, 2004

CDMA Output Power

| Freq.<br>(MHz)           | SG Reading<br>(dBm) | Amp.<br>Gain(dB) | CL<br>(dB) | Pol.<br>(H/V) | Ant.<br>Impedance<br>Matching(dB) | ERP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------------|---------------------|------------------|------------|---------------|-----------------------------------|--------------|----------------|----------------|
| Low Channel(CH#: 1013)   |                     |                  |            |               |                                   |              |                |                |
| 824.70                   | 12.8                | 24.0             | 2.8        | V             | 10.0                              | <b>24.0</b>  | 38.5           | -14.5          |
| Middle Channel(CH#: 363) |                     |                  |            |               |                                   |              |                |                |
| 835.89                   | 12.9                | 24.0             | 2.8        | V             | 10.0                              | <b>24.1</b>  | 38.5           | -14.4          |
| High Channel(CH#: 777)   |                     |                  |            |               |                                   |              |                |                |
| 848.31                   | 12.7                | 24.0             | 2.8        | V             | 10.0                              | <b>23.9</b>  | 38.5           | -14.6          |

NOTES: RBW = VBW = 3 MHz

**Result: Pass**

### 5.2. Occupied Bandwidth / 26dB Emission Bandwidth( § 2.1049)

Product: Wireless Local Loop Telephone (CDMA)  
Model: LST-255

Serial No.: N/A  
Test Date: November 16, 2004

| Channel | Frequency<br>(MHz) | Occupied BW<br>(MHz) | -26 dB Emission BW<br>(MHz) |
|---------|--------------------|----------------------|-----------------------------|
| 1013    | 824.70             | 1.273                | 1.387                       |
| 363     | 835.89             | 1.267                | 1.400                       |
| 777     | 848.31             | 1.272                | 1.393                       |

### 5.3. Spurious Emission at Antenna Terminal ( § 2.1051)

Product: Wireless Local Loop Telephone (CDMA)  
Model: LST-255

Serial No.: N/A  
Test Date: November 16, 2004

#### Band Edge

| Channel | Frequency (MHz) | SA Reading (dBm) | CL (dB) | Level (dBm)  | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------|---------|--------------|-------------|-------------|
| 1013    | 824.00          | -18.0            | 0.3     | <b>-17.7</b> | -13.0       | -4.7        |
| 777     | 849.00          | -16.6            | 0.3     | <b>-16.3</b> | -13.0       | -3.3        |

NOTES: RBW=15 kHz (above 1% of -26 dB Emission Bandwidth)

#### Out-of-Band

| Channel | Frequency (GHz) | SA Reading (dBm) | CL (dB) | Level (dBm)  | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------|---------|--------------|-------------|-------------|
| 1013    | 1.645           | -52.6            | 0.4     | <b>-52.2</b> | -13.0       | -39.2       |
| 363     | 1.670           | -49.0            | 0.4     | <b>-48.6</b> | -13.0       | -35.6       |
| 777     | 1.695           | -51.3            | 0.4     | <b>-50.9</b> | -13.0       | -37.9       |

NOTES: RBW = VBW = 1 MHz

#### CDMA Mobile Emission in Base Frequency Range

| Channel | Frequency (MHz) | SA Reading (dBm) | CL (dB) | Amp Gain(dB) | Level (dBm)   | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------|---------|--------------|---------------|-------------|-------------|
| 1013    | 893.17          | -104.6           | 2.2     | 24.0         | <b>-102.4</b> | -80.0       | -22.4       |
| 363     | 874.88          | -104.4           | 2.2     | 24.0         | <b>-102.2</b> | -80.0       | -22.2       |
| 777     | 887.00          | -104.4           | 2.2     | 24.0         | <b>-102.2</b> | -80.0       | -22.2       |

NOTES: RBW = 100 kHz, VBW=300 kHz

**Result: Pass**

#### 5.4. Field Strength of Spurious Radiation ( § 2.1053)

Product: Wireless Local Loop Telephone (CDMA)

Serial No.: N/A

Model: LST-255

Test Date: November 19, 2004

| Frequency (MHz)         | SG Reading (dBm) | CL (dB) | Pol. (H/V) | Gain (dBi) | Gain (dBd) | ERP (dBm)    | Limit (dBm) | Margin (dB) |
|-------------------------|------------------|---------|------------|------------|------------|--------------|-------------|-------------|
| Low Channel(CH#:1013)   |                  |         |            |            |            |              |             |             |
| 1649.40                 | -49.0            | 4.1     | V          | 8.1        | 6.0        | <b>-47.2</b> | -13.0       | -34.2       |
| 1649.40                 | -50.8            | 4.1     | H          | 8.1        | 6.0        | <b>-49.0</b> | -13.0       | -36.0       |
| 2474.10                 | -47.9            | 5.2     | V          | 9.4        | 7.3        | <b>-45.9</b> | -13.0       | -32.9       |
| 2474.10                 | -49.2            | 5.2     | H          | 9.4        | 7.3        | <b>-47.2</b> | -13.0       | -34.2       |
| Middle Channel(CH#:363) |                  |         |            |            |            |              |             |             |
| 1671.78                 | -47.6            | 4.2     | V          | 8.1        | 6.0        | <b>-45.9</b> | -13.0       | -32.9       |
| 1671.78                 | -49.6            | 4.2     | H          | 8.1        | 6.0        | <b>-47.9</b> | -13.0       | -34.9       |
| 2507.67                 | -46.6            | 5.3     | V          | 9.5        | 7.4        | <b>-44.6</b> | -13.0       | -31.6       |
| 2507.67                 | -48.2            | 5.3     | H          | 9.5        | 7.4        | <b>-46.2</b> | -13.0       | -33.2       |
| High Channel(CH#:777)   |                  |         |            |            |            |              |             |             |
| 1696.62                 | -48.2            | 4.2     | V          | 8.2        | 6.1        | <b>-46.4</b> | -13.0       | -33.4       |
| 1696.62                 | -50.6            | 4.2     | H          | 8.2        | 6.1        | <b>-48.8</b> | -13.0       | -35.8       |
| 2544.93                 | -46.5            | 5.3     | V          | 9.5        | 7.4        | <b>-44.5</b> | -13.0       | -31.5       |
| 2544.93                 | -52.1            | 5.3     | H          | 9.5        | 7.4        | <b>-50.1</b> | -13.0       | -37.1       |

**Result: Pass**

### 5.5. Frequency Stability ( § 2.1055)

Product: Wireless Local Loop Telephone (CDMA)

Serial No.: N/A

Model: LST-255

Test Date: November 18, 2004

| Reference Frequency: CDMA Middle Channel 835.890062 MHz @ 20℃<br>limit: to stay $\pm 2.5$ ppm = 2089.725 Hz |                                   |                                               |             |                             |
|-------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------|-------------|-----------------------------|
| Power Supply<br>(V <sub>AC</sub> )                                                                          | Environment<br>Temperature<br>(℃) | Frequency Deviation Measured with Time Elapse |             |                             |
|                                                                                                             |                                   | (MHz)                                         | Delta (ppm) | Limit (ppm)                 |
| 220                                                                                                         | 50                                | 835.889969                                    | 0.11        | $\pm 2.5$                   |
| 220                                                                                                         | 40                                | 835.889972                                    | 0.11        | $\pm 2.5$                   |
| 220                                                                                                         | 30                                | 835.889967                                    | 0.11        | $\pm 2.5$                   |
| <b>220</b>                                                                                                  | <b>20(Ref)</b>                    | <b>835.890062</b>                             | <b>0.00</b> | <b><math>\pm 2.5</math></b> |
| 220                                                                                                         | 10                                | 835.890063                                    | 0.00        | $\pm 2.5$                   |
| 220                                                                                                         | 0                                 | 835.889865                                    | 0.24        | $\pm 2.5$                   |
| 220                                                                                                         | -10                               | 835.890143                                    | -0.10       | $\pm 2.5$                   |
| 220                                                                                                         | -20                               | 835.889835                                    | 0.27        | $\pm 2.5$                   |
| 220                                                                                                         | -30                               | 835.889810                                    | 0.30        | $\pm 2.5$                   |
| 187(-15%)                                                                                                   | 20                                | 835.890035                                    | 0.03        | $\pm 2.5$                   |
| 253(+15%)                                                                                                   | 20                                | 835.889970                                    | 0.11        | $\pm 2.5$                   |
| BATT. End Point                                                                                             | N/A                               | N/A                                           | N/A         | N/A                         |

**Result: Pass**

## 6. Prediction of MPE Limit

### 6.1. Friis Formula

Friis transmission formula :  $S = (P_{out} \times G) / (4 \times \pi \times R^2)$

$$R = \sqrt{\frac{P_{out} \times G}{4\pi \times S}}$$

S = power density in mW/cm<sup>2</sup>

P<sub>out</sub> = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

Power density(S) is limit of MPE, **f/1500 mW/cm<sup>2</sup>**. If we know the maximum Gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

### 6.2. Test Results

#### 6.2.1 Antenna Gain

The maximum Gain measured in Fully Anechoic Chamber is 2.5dBi or 1.778(numeric).

#### 6.2.2 Output Power into Antenna & Distance at RF Exposure value(f/1500 mW/cm<sup>2</sup>)

| Channel | Frequency (MHz) | Maximum Output Power at Antenna Terminal(mW) | Distance (cm) |
|---------|-----------------|----------------------------------------------|---------------|
| 363     | 835.89          | 251.1886                                     | 7.986         |

Note: Power Density(S)= f/1500 = 835.89/1500 = 0.5573 mW/cm<sup>2</sup>

#### Calculation distance value

$$R = \sqrt{\frac{P_{out} \times G}{4\pi \times S}} = \sqrt{\frac{251.1886 \times 1.778}{4 \times 3.1416 \times 0.5573}} = \underline{\underline{7.986 \text{ (cm)}}}$$

## 7. LIST OF INSTRUMENTS USED

| Type                            | Maker    | Model                | Serial Number | Cal. Due Date |
|---------------------------------|----------|----------------------|---------------|---------------|
| Wireless Communication Test Set | Agilent  | 8960                 | GB43133078    | 21-Jul.-05    |
| PSA                             | Agilent  | E4440A               | MY44022892    | 04-Jul.-05    |
| Signal Generator                | R&S      | SMR40                | 100106        | 25-Aug.-05    |
| Tuned dipole Antenna            | S/B      | UHAP                 | 579           | 28-May-05     |
| Biconical Antenna               | S/B      | VHA 9103             | VHA91031341   | 28-May-05     |
| Log-periodic Antenna            | S/B      | VHALP9107            | 1667          | 21-Nov.-05    |
| Tx Horn Antenna                 | EMCO     | 3115                 | 9202-3805     | 15-Jun.-05    |
| Rx Horn Antenna                 | EMCO     | 3115                 | 9202-3804     | 15-Jun.-05    |
| HFP                             | ANDECHS  | WHK1.2/15G           | 8             | 26-Oct.-05    |
| Amplifier                       | MITQ     | AMF-4D-001180-24-10P | 832938        | 26-Oct.-05    |
| Amplifier                       | HP       | 8447F                | 2805A03092    | 02-Apr.-05    |
| DC Power Supply                 | TESTLINK | AK-1205D             | 00540903      | 14-Oct.-05    |
| Temperature Chamber             | ESPEC    | SH-641               | 92001096      | 13-May-05     |
| BPF                             | CELWAVE  | CDMA                 | 4000          | 10-Sep.-05    |
| Step Attenuator                 | R&S      | DPSP                 | 892-561/Q25   | 26-Apr.-05    |

Note : R&S: Rohde & Schwarz      S/B: Schwarzbeck      HP: Hewlett-Packard  
Cal Due Date: Next calibration due date